



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

300Mbps Wireless N ADSL2+ Modem Router

Model: DL4322; DL4322D

Trade Name:netis

Issued to

**NETIS SYSTEMS CO., LTD
4F&5F, R&DBuilding, Oriental Cyberport, High-TechIndustrial Park,
Nanshan, Shenzhen, China**

Issued by

**Compliance Certification Services Inc.
No.81-1, Lane 210, Bade 2nd Rd., LujhuTownship,
TaoyuanCounty 33841, Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235
<http://www.ccsrf.com>
service@ccsrf.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date		Revisions	Effect Page	Revised By
00	March 13, 2014		Initial Issue	ALL	Landy Huang



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS	14
7.1 6dB BANDWIDTH	14
7.2 PEAK POWER	25
7.3 AVERAGE POWER	27
7.4 BAND EDGES MEASUREMENT	29
7.5 PEAK POWER SPECTRAL DENSITY	46
7.6 SPURIOUS EMISSIONS	57
7.7 POWERLINE CONDUCTED EMISSIONS	89
8. APPENDIX I PHOTOGRAPHS OF TEST SETUP	92
9. APPENDIX 1: PHOTOGRAPHS OF EUT	96



1. TEST RESULT CERTIFICATION

Applicant: **NETIS SYSTEMS CO., LTD**
 4F&5F, R&D Building, Oriental Cyberport,
 High-Tech Industrial Park, Nanshan, Shenzhen, China

Manufacturer: **Shenzhen Netcore Industrial Ltd.**
 4F&5F, R&D Building, Oriental Cyberport,
 High-Tech Industrial Park, Nanshan, Shenzhen, China

Equipment Under Test: 300Mbps Wireless N ADSL2+ Modem Router

Trade Name: netis

Model: DL4322; DL4322D

Date of Test: March 6 ~ 12, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:



 Stan Lin
 Section Manager

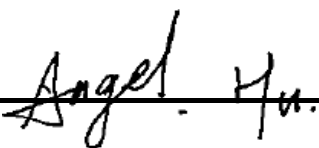

 Angel Hu
 Section Manager



2. EUT DESCRIPTION

Product	300Mbps Wireless N ADSL2+ Modem Router		
Trade Name	netis		
Model Number	DL4322; DL4322D		
Model Discrepancy	1. All the model numbers (list on this report) are identical, just for marketing purpose only except Antenna.		
	Model Number	Antenna	
	DL4322	Fixed	
	DL4322D	Detachable	
EUT Power Rating	12VDC, 0.5A		
Power Adapter	Tenpao	Model	NT120050UL
Power Adapter Rating	I/P: 100-240VAC, 50/60HZ, 0.2A O/P: 12VDC, 0.5A		
RF Module Manufacturer	Realtek	Model	RTL8192ER-CG
Operating Frequency Range	IEEE 802.11 b/g/HT20 mode: 2412 ~ 2462 MHz IEEE 802.11 HT40 mode: 2422 ~ 2452 MHz		
Transmit Power	IEEE 802.11b mode: 19.32dBm (0.0855W) IEEE 802.11g mode: 22.71dBm (0.1866W) IEEE 802.11n HT20 mode: 24.62dBm(0.2897W) IEEE 802.11n HT40 mode: 21.97dBm (0.1574W)		
Modulation Technique	IEEE 802.11b mode: DSSS (11, 5.5, 2, 1 Mbps) IEEE 802.11g mode: OFDM (54, 48, 36, 24, 18, 12, 11, 9, 6 Mbps) IEEE 802.11n HT20 mode: OFDM (130, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps) IEEE 802.11n HT40 mode: OFDM (270, 243, 216, 162, 135, 121.5, 108, 81, 54, 40.5, 27, 13.5Mbps)		
Antenna Specification	Chain 0: Dipole Antenna / Gain: 5.0dBi (For IEEE 802.11b/g) Chain 1: Dipole Antenna / Gain: 5.0dBi(For IEEE 802.11b/g) (MIMO: $5.0+10\log(2)=8.01$) (For IEEE 802.11n)		

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **T58DL4322R1** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 2, Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT is a 2Tx2R MIMO transmitter.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Yaxis), lie-down position (X, Zaxis). The worst emission was found in lie-down position (Zaxis) and the worst case was recorded.

IEEE 802.11b:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE 802.11g:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11n HT20:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/01/2015
Spectrum Analyzer	Agilent	N9010A	MY52220817	02/11/2015
Power meter	Anritsu	ML2495A	1033009	09/29/2014
Power Sensor	Anritsu	MA2411B	0917221	09/29/2014

3MSemi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/01/2015
Pre-Amplifier	HP	8447D	2944A06530	04/23/2014
Pre-Amplifier	EMEC	EM01M26G	060570	07/25/2014
Pre-Amplifier	MITEQ	AMF-6F-26040 0-40-8P	985646	08/08/2014
Pre-Amplifier	Agilent	8449B	3008A01738	04/23/2014
EMI Test Receiver	SCHAFFNER	SCR 3501	430	04/07/2014
Loop Antenna	EMCO	6502	2356	06/12/2014
Bilog Antenna	TESEQ	CBL 6112D	35378	09/11/2014
Horn Antenna	EMCO	3115	00022250	08/04/2014
Horn Antenna	EMCO	3116	00026370	12/29/2014
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.



Powerline Conducted Emissions Test Site#1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101338	01/16/2015
LISN	R&S	ENV216	101549	07/29/2014
LISN	FCC	FCC-LISN-50/25 0-16-2-07	06012	12/02/2014
ISN	TESEQ	ISN-T8	34371	03/05/2015
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

4.3 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Powerline Conducted Emission #1	±0.8830
3M Semi Anechoic Chamber / 30MHz ~ 200MHz	±3.5921
3M Semi Anechoic Chamber / 200MHz ~ 1GHz	±3.5657
3M Semi Anechoic Chamber / 1 ~ 8GHz	±2.5873
3M Semi Anechoic Chamber / 8 ~ 18GHz	±2.6646
3M Semi Anechoic Chamber / 18 ~ 26GHz	±2.9617
3M Semi Anechoic Chamber / 26 ~ 40GHz	±3.4250

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 163-1, Jhongsheng Rd., Sindien District, Taipei City 23151, Taiwan

No 11, Wugong 6th Rd, Wugu District, New Taipei City 24891, Taiwan (R.O.C)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, Taiwan, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.





Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 TESTING CERT #0824.01
USA	FCC MRA	3 meter Open Area Test Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-1930/1646
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS-Gen Issue 3	 IC 2324C-5

Note:No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

For Conducted emission measurement:							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	1706-A78	LV-L1870 06/09	FCC DoC	IBM	LAN Cable: Unshielded,10m	AC I/P: Unshielded,1.8m DC O/P: Unshielded,1.8m with a core

For Radiated Emission (Below 1GHz and Above 1GHz) and Power line conducted emission measurement:							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC (Remote)	1706-A78	LV-L1870 06/09	FCC DoC	IBM	LAN Cable: Unshielded,10m	AC I/P: Unshielded,1.8m DC O/P: Unshielded,1.8m with a core
2.	Notebook PC (Remote)	D400	0932RY	E2K24GBRL	DELL	LAN Cable: Unshielded,10m	AC I/P: Unshielded,1.8m DC O/P: Unshielded,1.8m with a core
3.	Notebook PC (Remote)	M285	NU2503544	FCC DoC	LEO	LAN Cable: Unshielded,10m	AC I/P: Unshielded,1.8m DC O/P: Unshielded,1.8m with a core
4.	Notebook PC (Remote)	S7110	DU4A00EG0944 P010	FCC DoC	Fujitsu	LAN Cable: Unshielded,10m	AC I/P: Unshielded,1.8m DC O/P: Unshielded,1.8m with a core
5.	Notebook PC (Remote)	TP00013A	LR-9XH2K	FCC DoC	Lenovo	LAN Cable: Unshielded,10m	AC I/P: Unshielded,1.8m DC O/P: Unshielded,1.8m with a core

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 30MHz or 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted



TEST DATA

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth(MHz)	Limit (kHz)	Result
Low	2412	10.10	>500	PASS
Mid	2437	10.10		PASS
High	2462	10.10		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth(MHz)	Limit (kHz)	Result
Low	2412	16.40	>500	PASS
Mid	2437	16.40		PASS
High	2462	16.40		PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Bandwidth(MHz)		Limit (kHz)	Result
		Chain 0	Chain 1		
Low	2412	17.65	17.65	>500	PASS
Mid	2437	17.65	17.70		PASS
High	2462	17.65	17.70		PASS

Test mode: IEEE 802.11n HT40 mode


Channel	Frequency (MHz)	Bandwidth(MHz)		Limit (kHz)	Result
		Chain 0	Chain 1		
Low	2422	35.83	35.58	>500	PASS
Mid	2437	35.50	35.58		PASS
High	2452	35.67	35.50		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

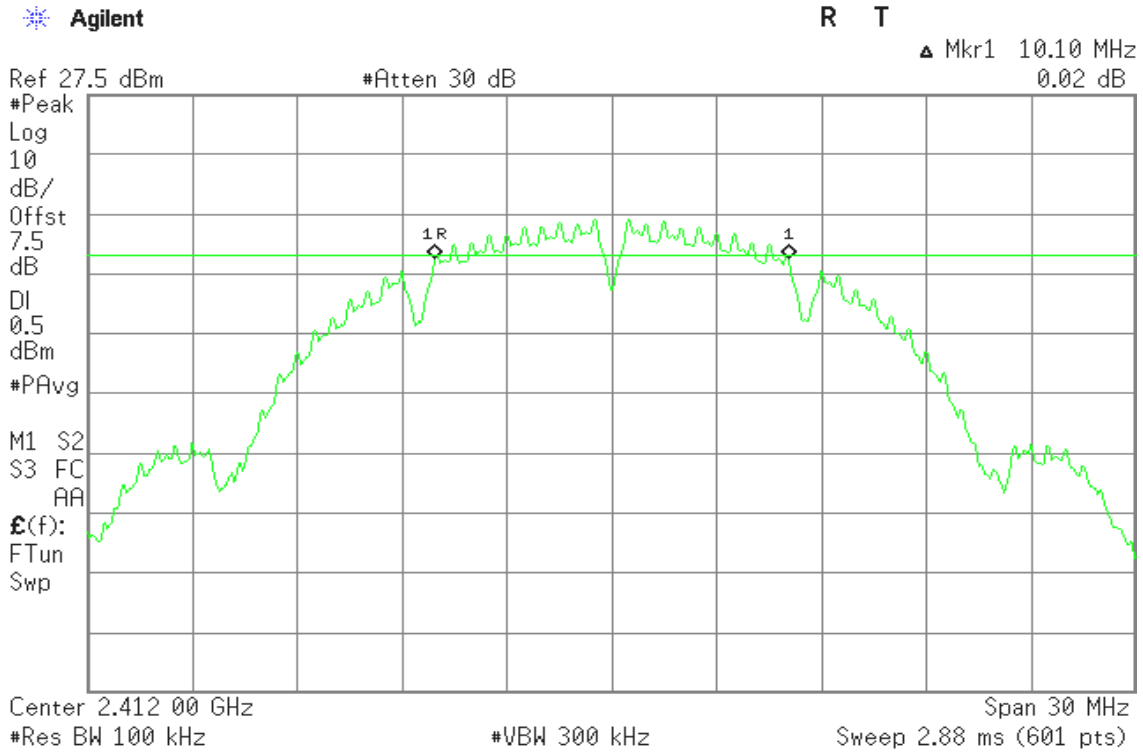


6dB Bandwidth (CH Mid)

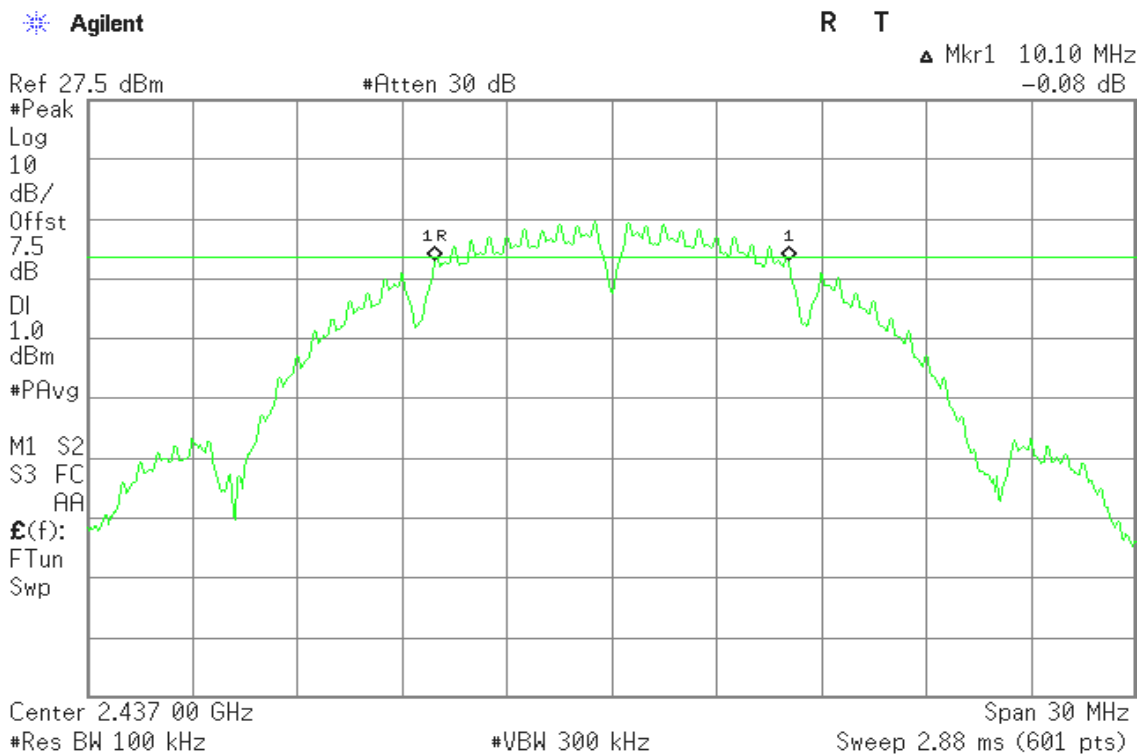




6dB Bandwidth (CH High)

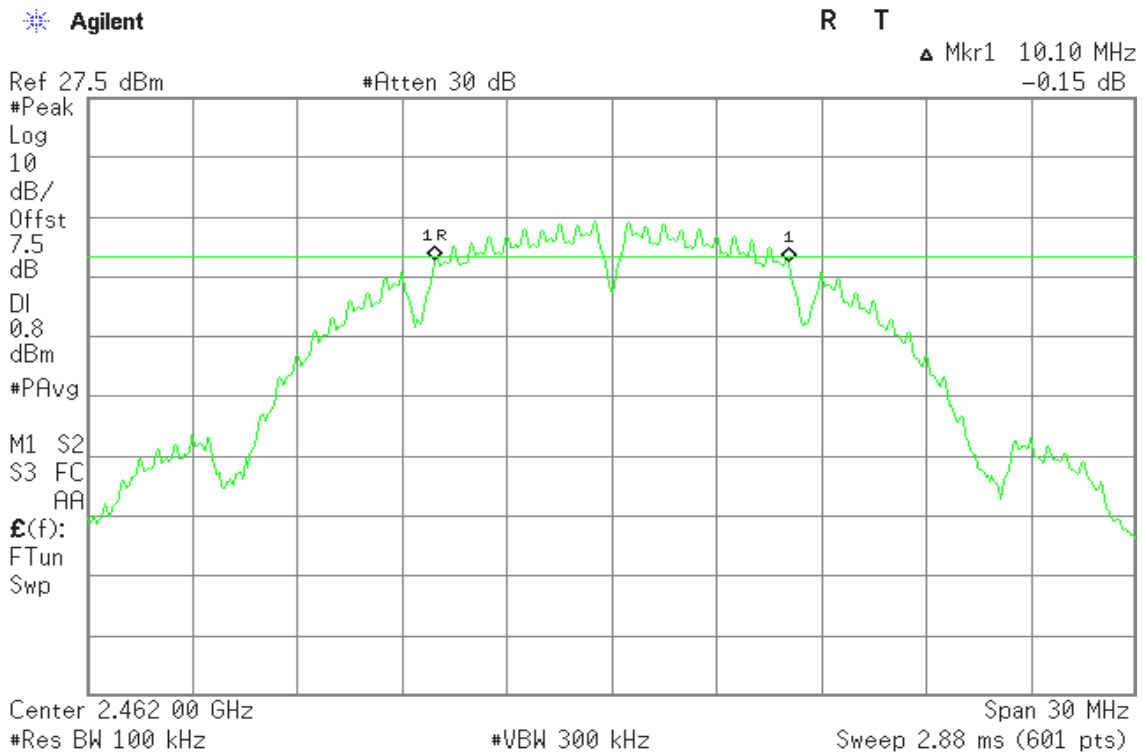


IEEE 802.11g mode

6dB Bandwidth (CH Low)

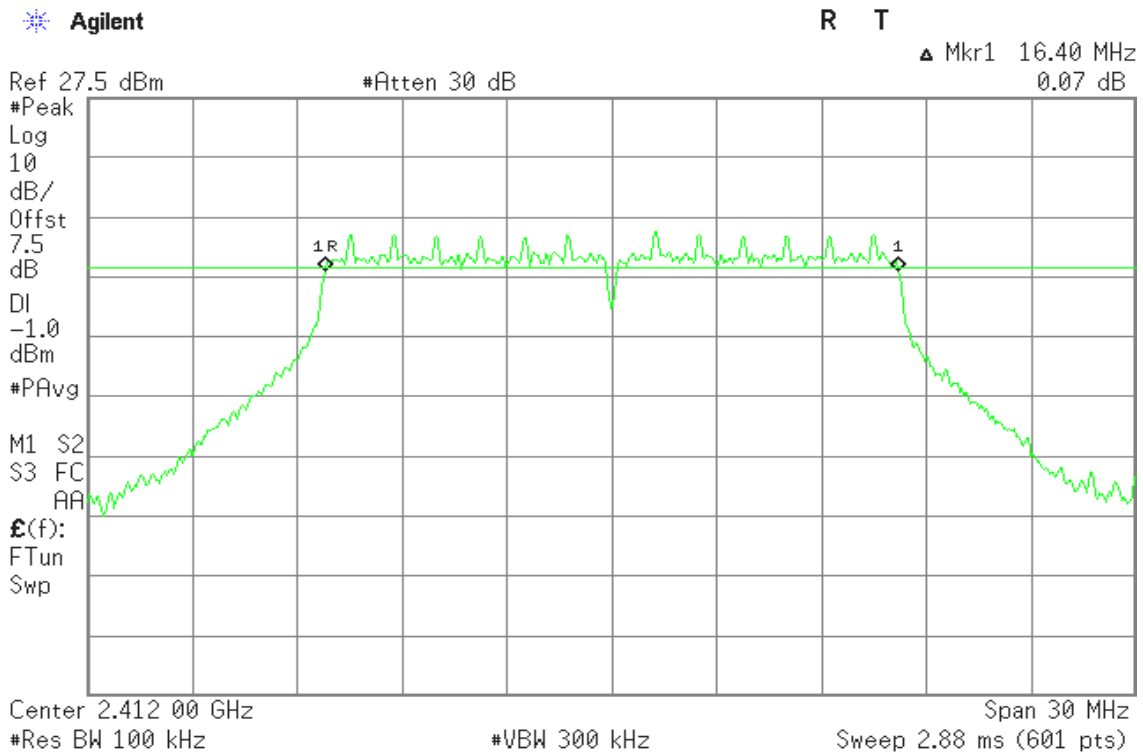




6dB Bandwidth (CH Mid)

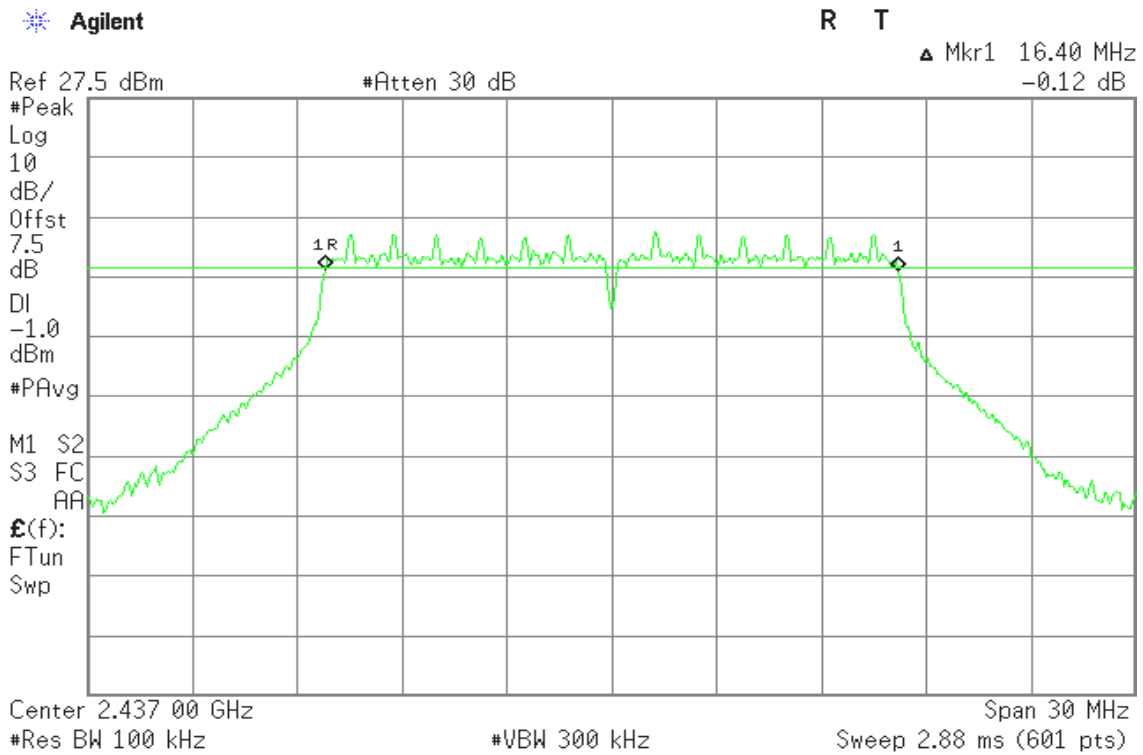


6dB Bandwidth (CH High)

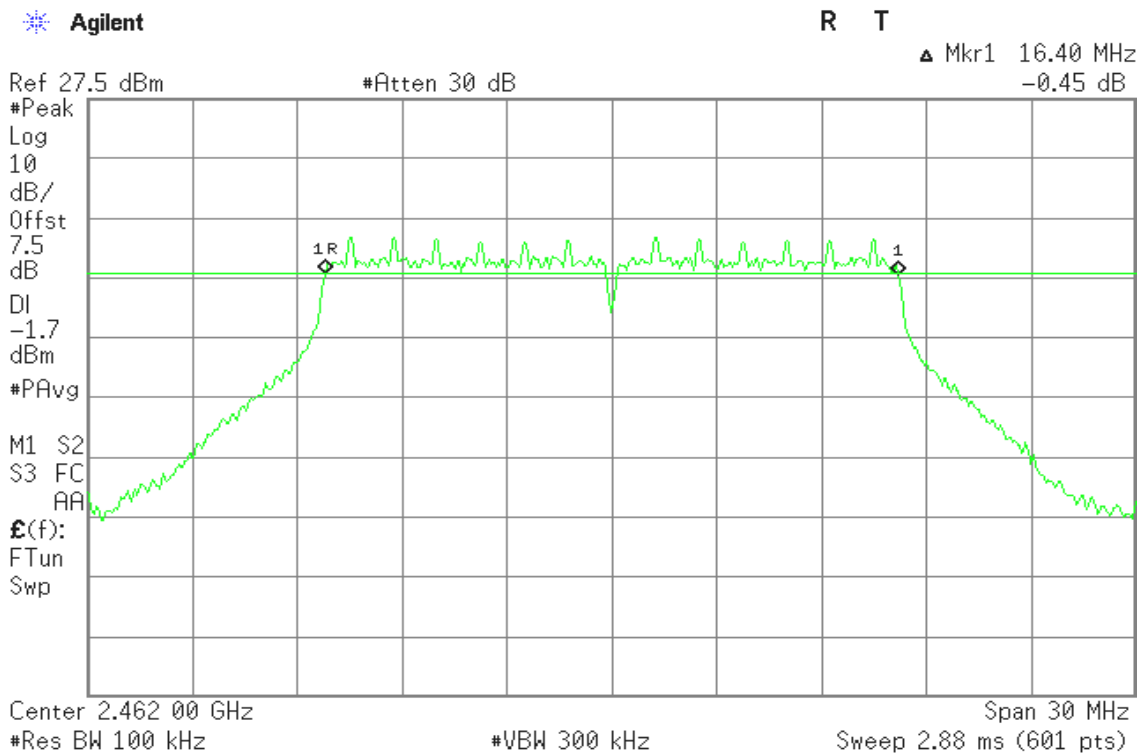




IEEE 802.11n HT20 mode / Chain 0

6dB Bandwidth (CH Low)

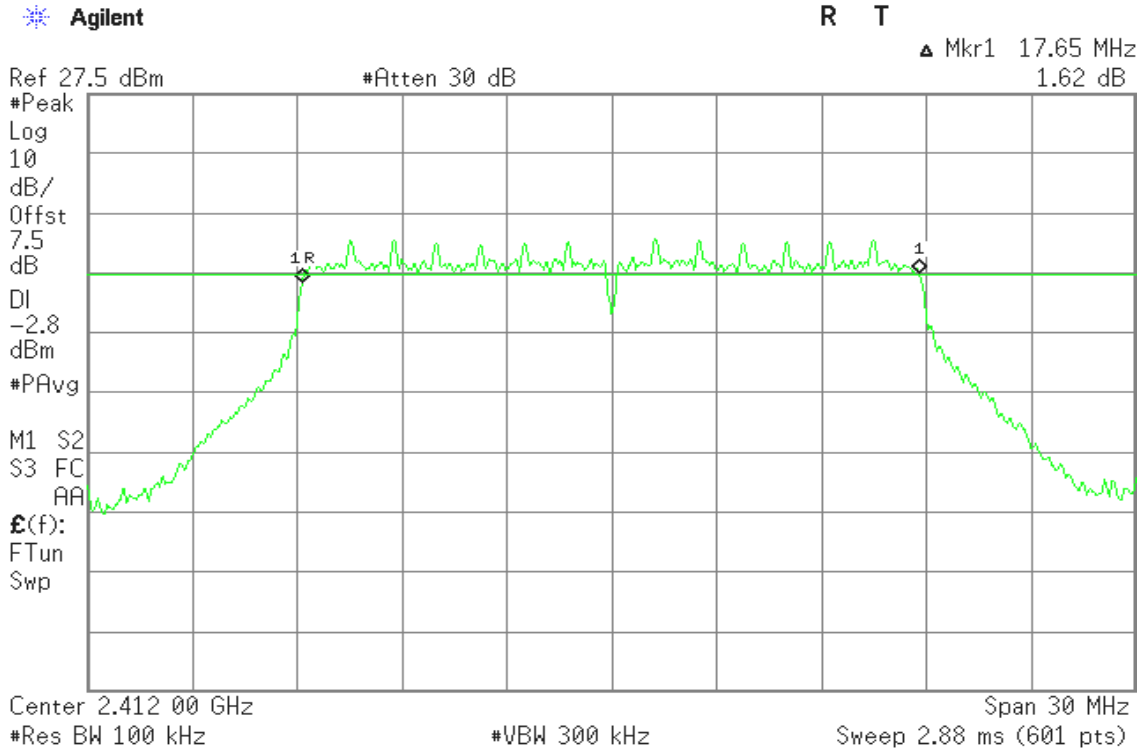


6dB Bandwidth (CH Mid)

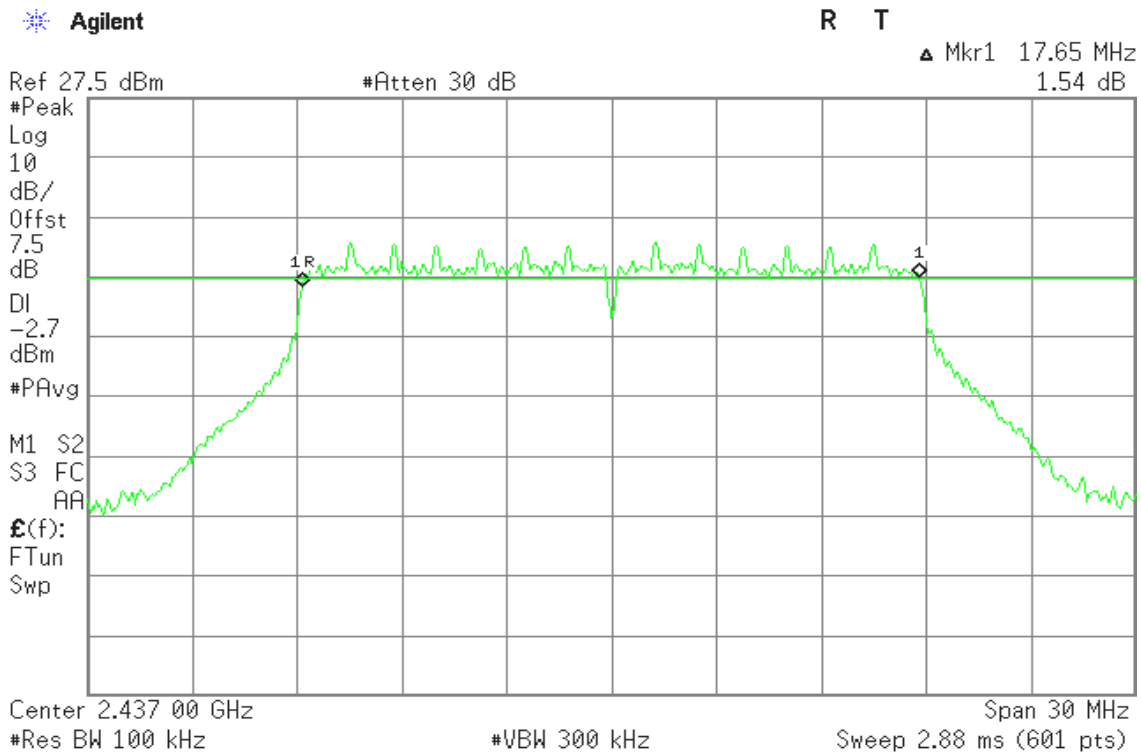




6dB Bandwidth (CH High)

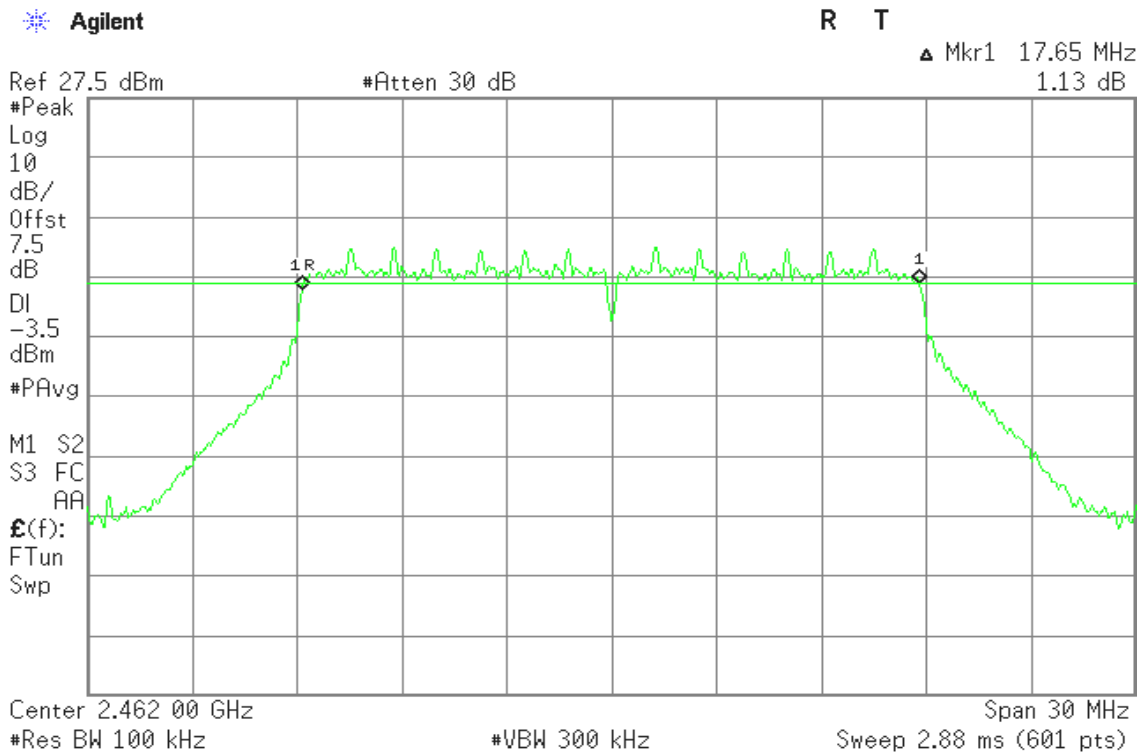


IEEE 802.11n HT20 mode / Chain 1

6dB Bandwidth (CH Low)

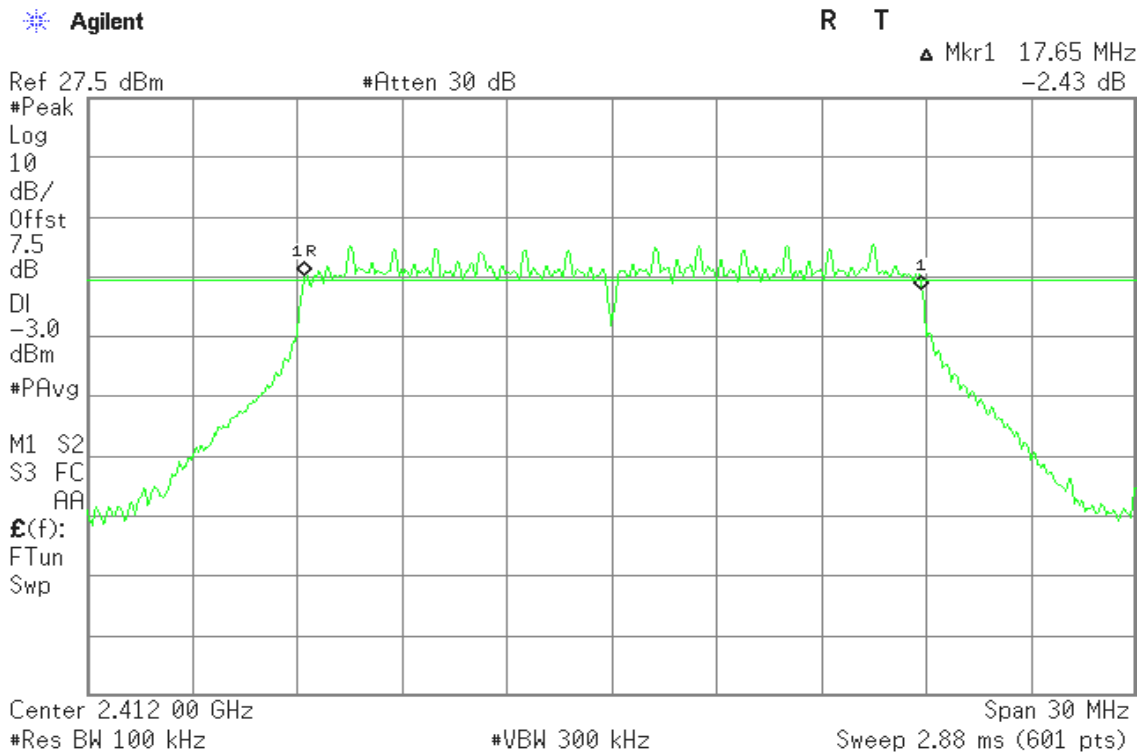




6dB Bandwidth (CH Mid)

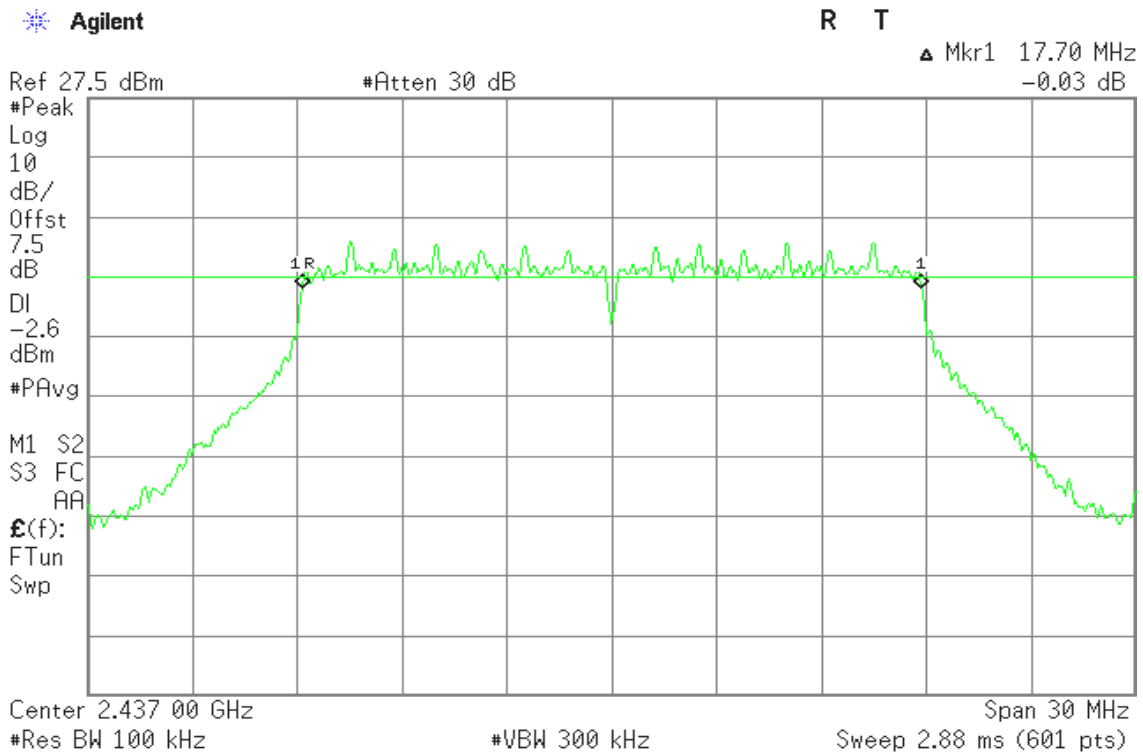


6dB Bandwidth (CH High)

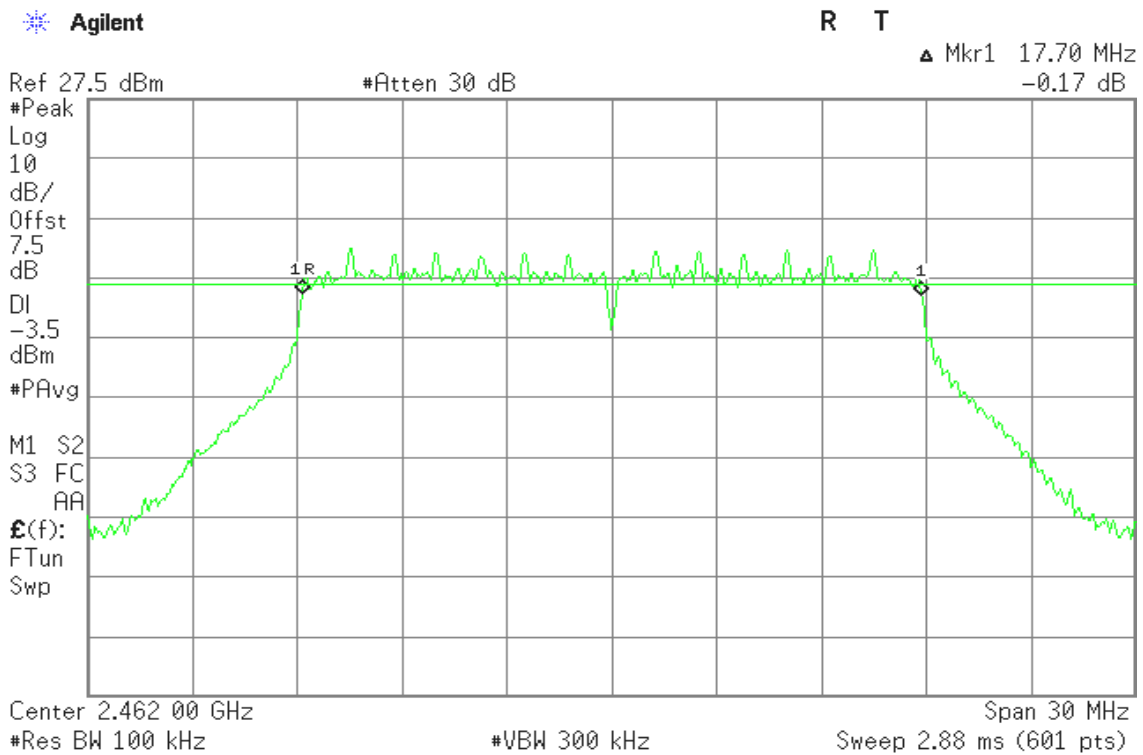




IEEE 802.11n HT40 mode / Chain 0

6dB Bandwidth (CH Low)

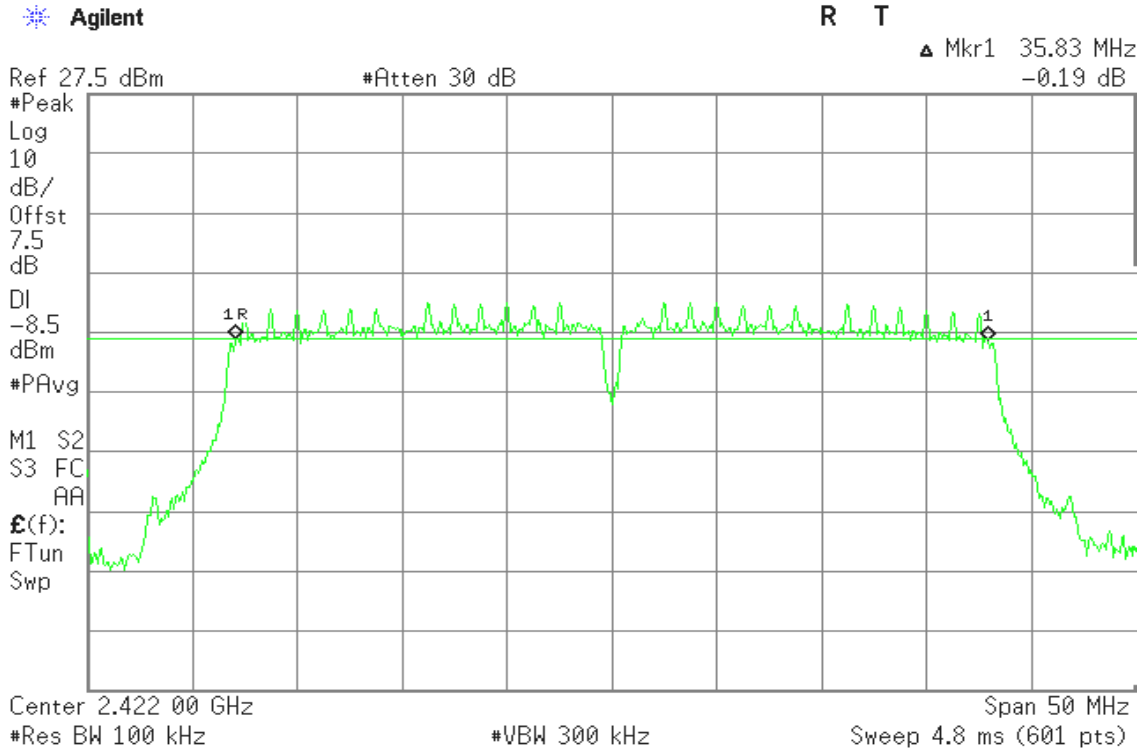


6dB Bandwidth (CH Mid)

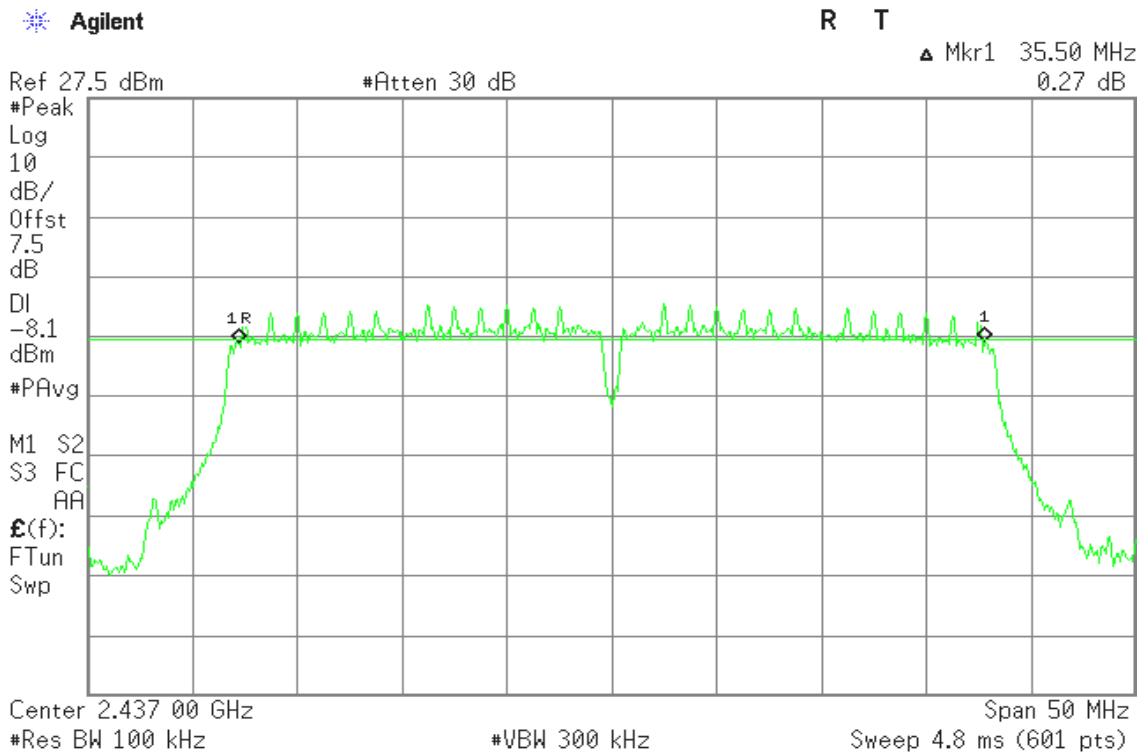




6dB Bandwidth (CH High)

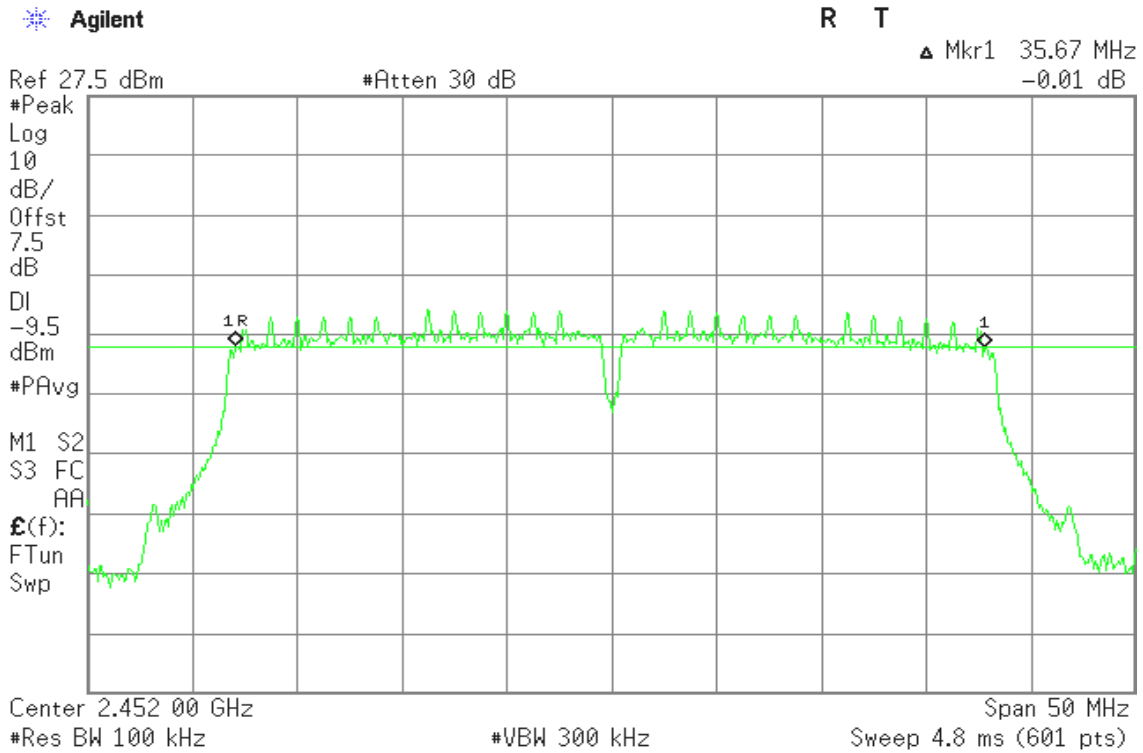


IEEE 802.11n HT40 mode / Chain 1

6dB Bandwidth (CH Low)

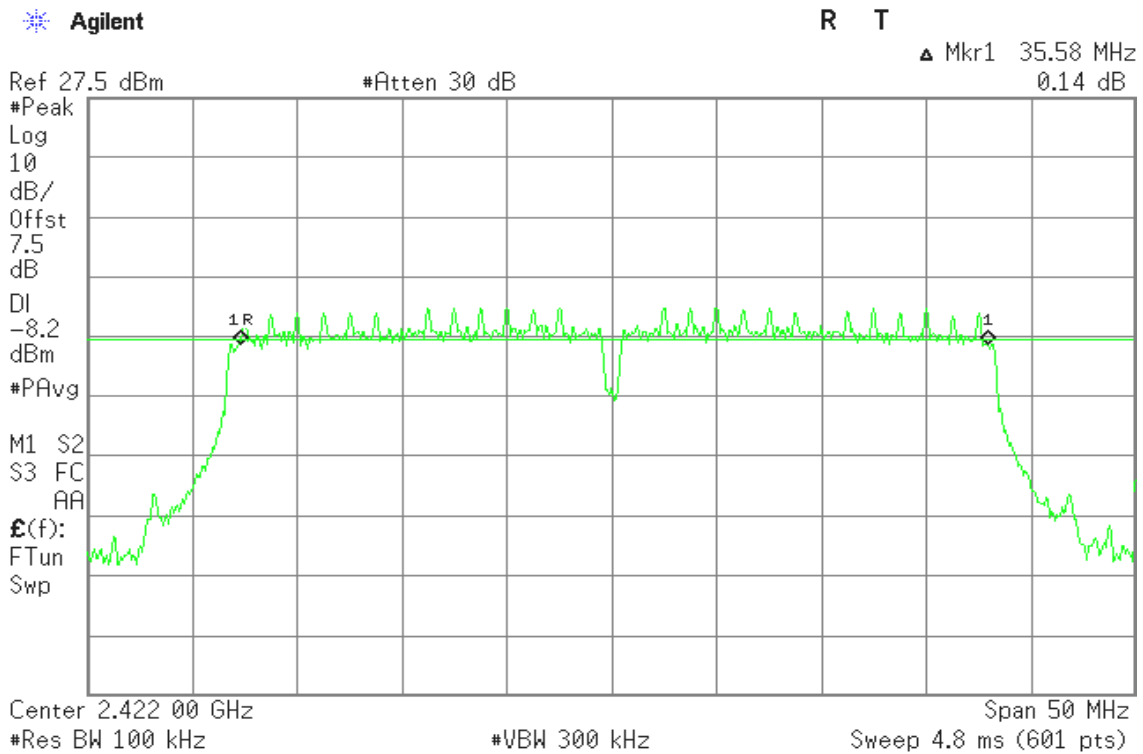




6dB Bandwidth (CH Mid)

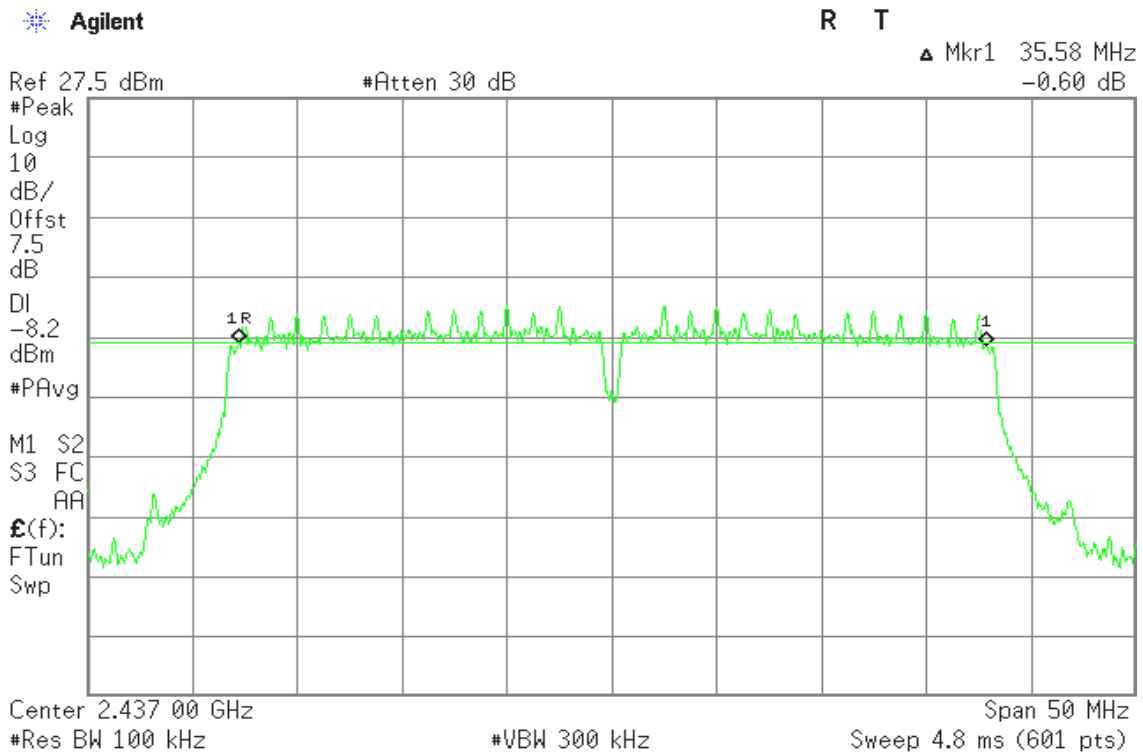

6dB Bandwidth (CH High)

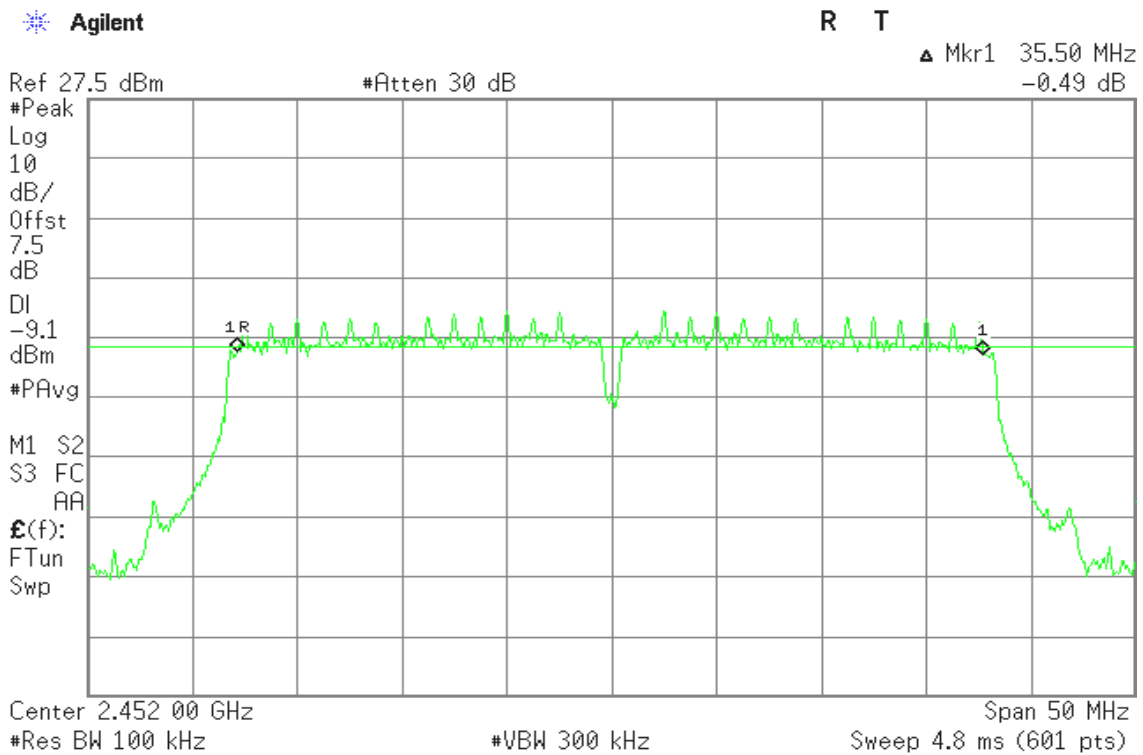




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- 3.

TEST CONFIGURATION



TEST PROCEDURE

Per KDB 558074v03r01

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



TEST DATA

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	18.87	0.0771	1	PASS
Mid	2437	19.32	0.0855		PASS
High	2462	19.00	0.0794		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	22.69	0.1858	1	PASS
Mid	2437	22.71	0.1866		PASS
High	2462	22.29	0.1694		PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)			Limit (W)	Result
		Chain 0	Chain 1	Total	Chain 0	Chain 1	Total		
Low	2412	22.05	21.12	24.62	0.1603	0.1294	0.2897	0.6295	PASS
Mid	2437	21.48	21.27	24.39	0.1406	0.1340	0.2746		PASS
High	2462	20.37	20.06	23.23	0.1089	0.1014	0.2103		PASS

Remark:

1. Total Output Power (w) = Chain 0 (10^{^(Output Power /10)/1000}) + Chain 1 (10^{^(Output Power /10)/1000})
2. The maximum antenna gain is 8.01dBi; therefore the reduction due to antenna gain is 2.01dBi, so the limit is 27.99dBm(0.0.6295W).

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)			Limit (W)	Result
		Chain 0	Chain 1	Total	Chain 0	Chain 1	Total		
Low	2422	18.98	18.83	21.92	0.0791	0.0764	0.1555	0.6295	PASS
Mid	2437	19.18	18.73	21.97	0.0828	0.0746	0.1574		PASS
High	2452	17.79	17.76	20.79	0.0601	0.0597	0.1198		PASS

Remark:

1. Total Output Power (w) = Chain 0 (10^{^(Output Power /10)/1000}) + Chain 1 (10^{^(Output Power /10)/1000})
2. The maximum antenna gain is 8.01dBi; therefore the reduction due to antenna gain is 2.01dBi, so the limit is 27.99dBm(0.0.6295W).




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION



TEST PROCEDURE

Per KDB 558074 v03r01

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



TEST DATA

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	15.95	0.0394
Mid	2437	16.39	0.0436
High	2462	15.86	0.0385

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	15.47	0.0352
Mid	2437	15.32	0.0340
High	2462	15.07	0.0321

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)		
		Chain 0	Chain 1	Total	Chain 0	Chain 1	Total
Low	2412	14.44	13.66	17.08	0.0278	0.0232	0.0510
Mid	2437	14.15	13.34	16.77	0.0260	0.0216	0.0476
High	2462	12.83	12.62	15.74	0.0192	0.0183	0.0375

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)		
		Chain 0	Chain 1	Total	Chain 0	Chain 1	Total
Low	2412	11.47	11.13	14.31	0.0140	0.0130	0.0270
Mid	2437	11.56	11.13	14.36	0.0143	0.0130	0.0273
High	2462	10.27	9.96	13.13	0.0106	0.0099	0.0205




7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

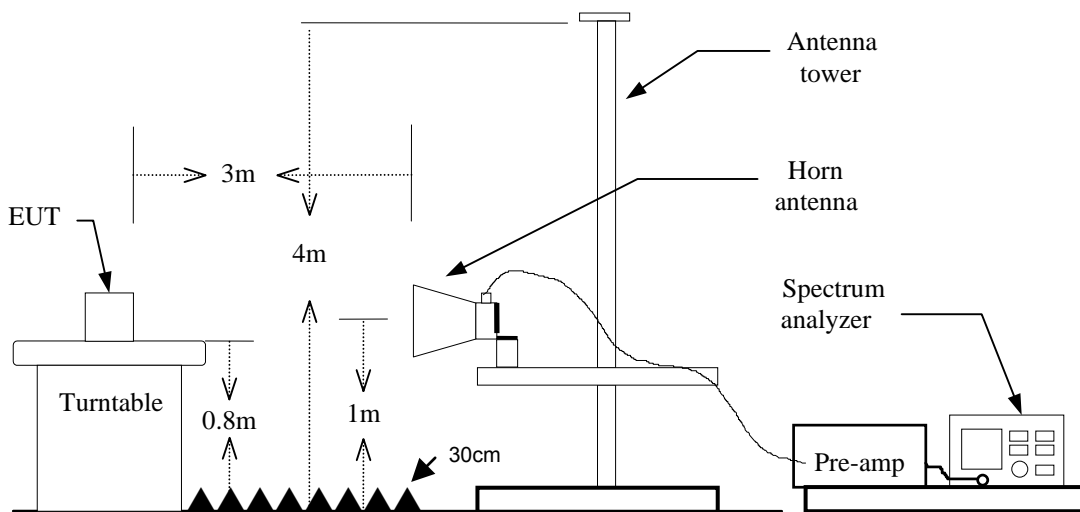

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=100ms
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Plot


Band Edges (IEEE 802.11b mode/ CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

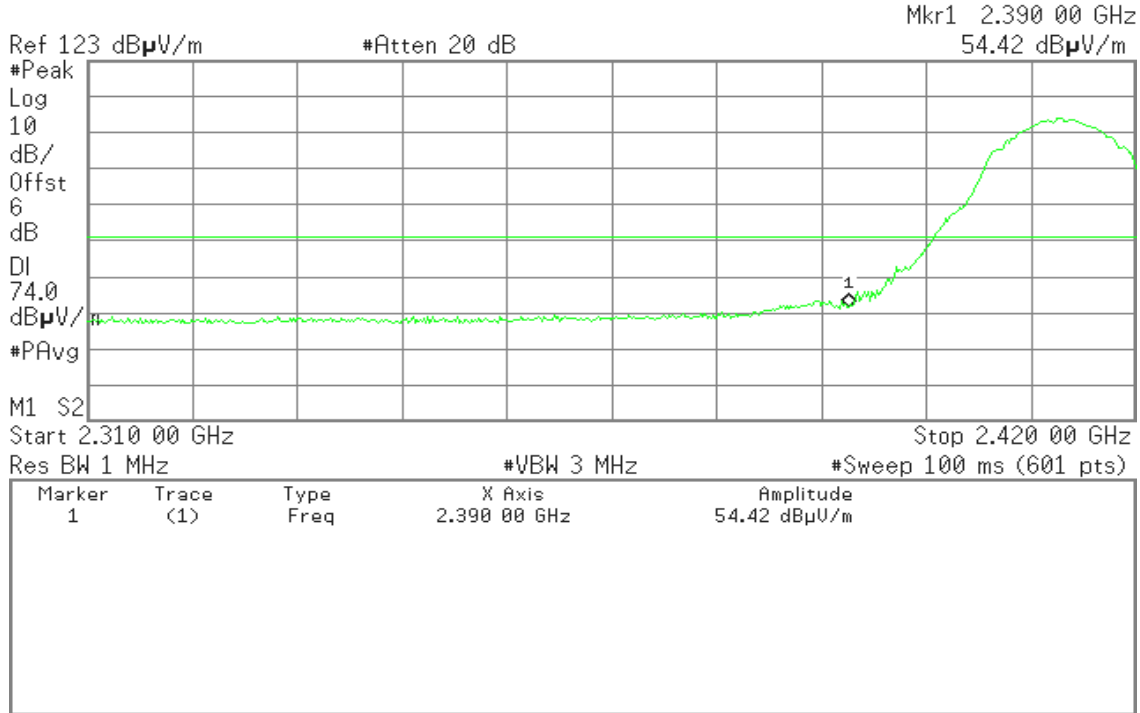


Detector mode: Average

Polarity: Vertical

Agilent

R T

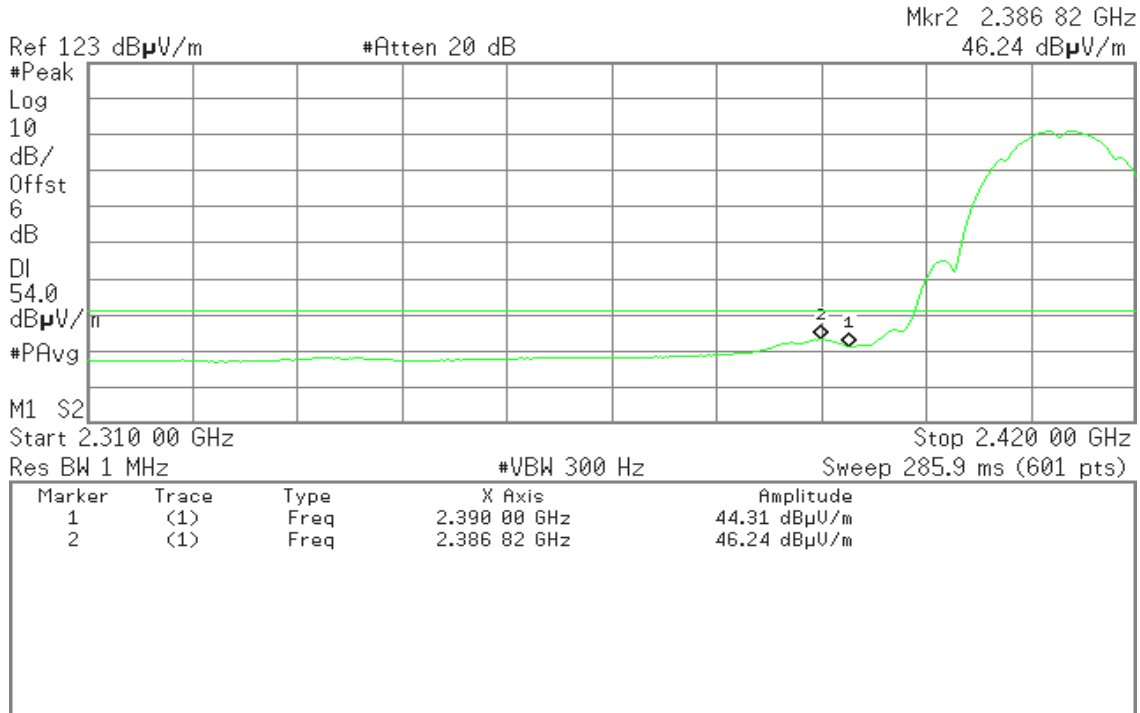




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

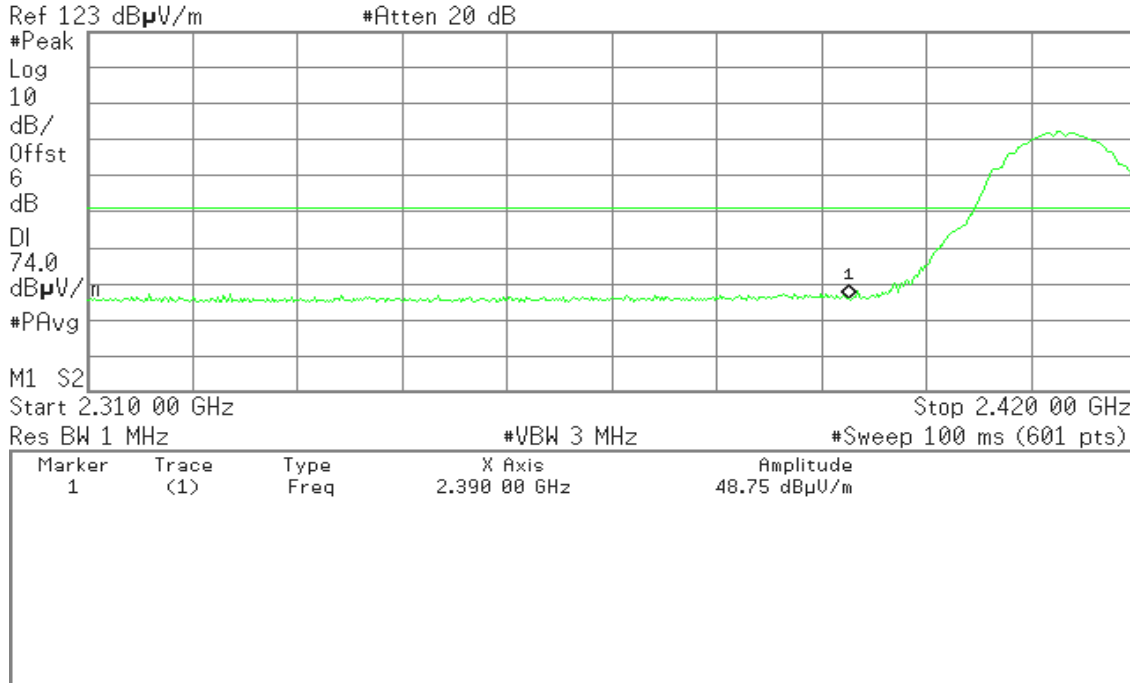


Detector mode: Average

Polarity: Horizontal

Agilent

R T

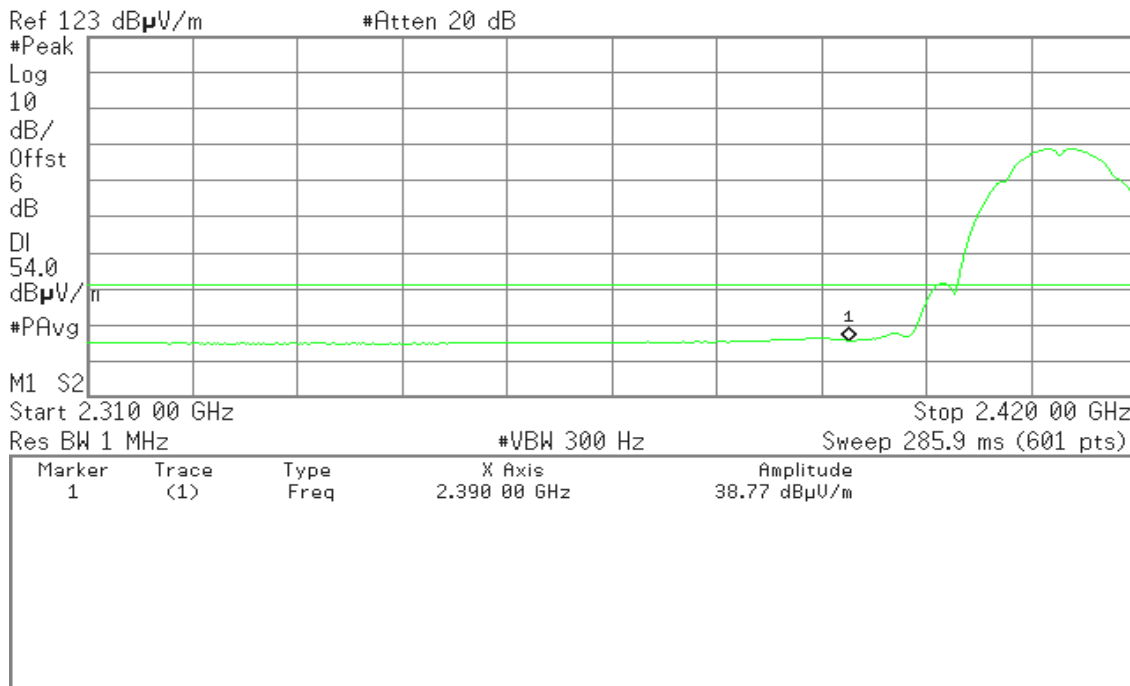



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr2 2.487 07 GHz
57.07 dBµV/m

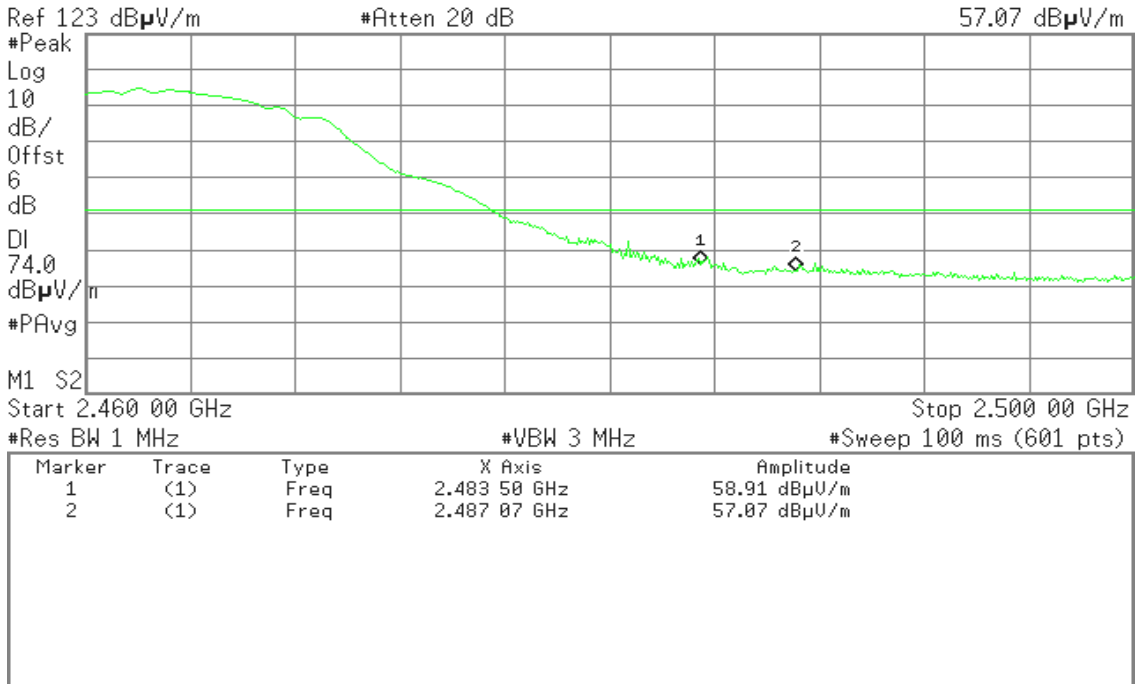


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr2 2.487 07 GHz
47.45 dBµV/m

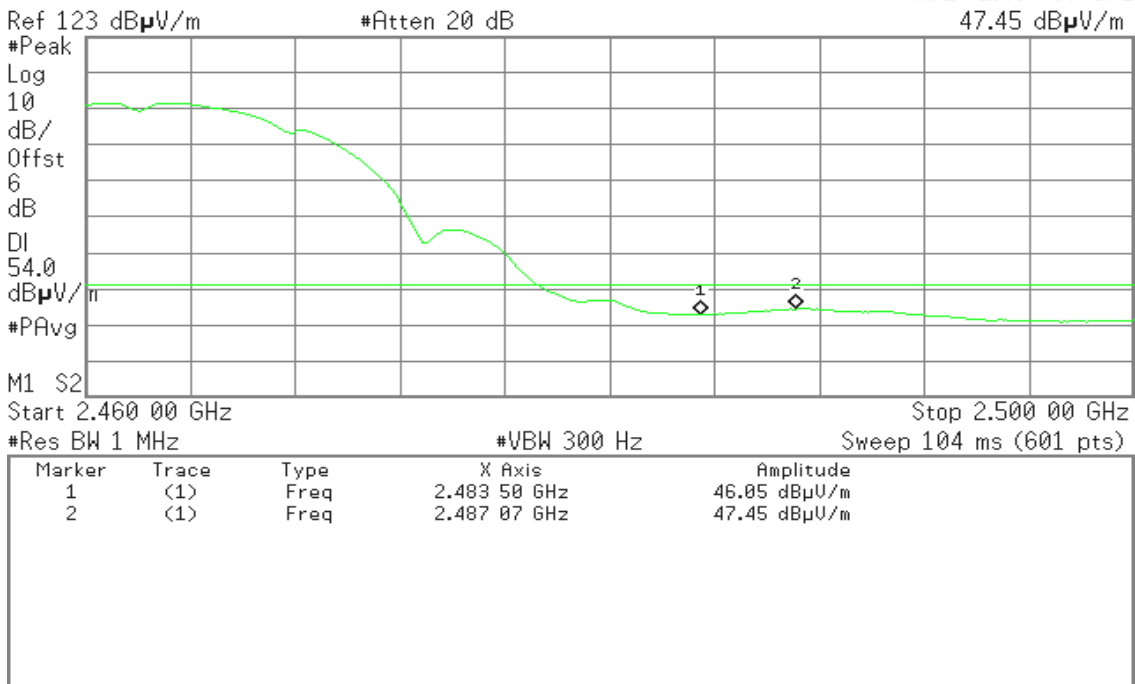




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

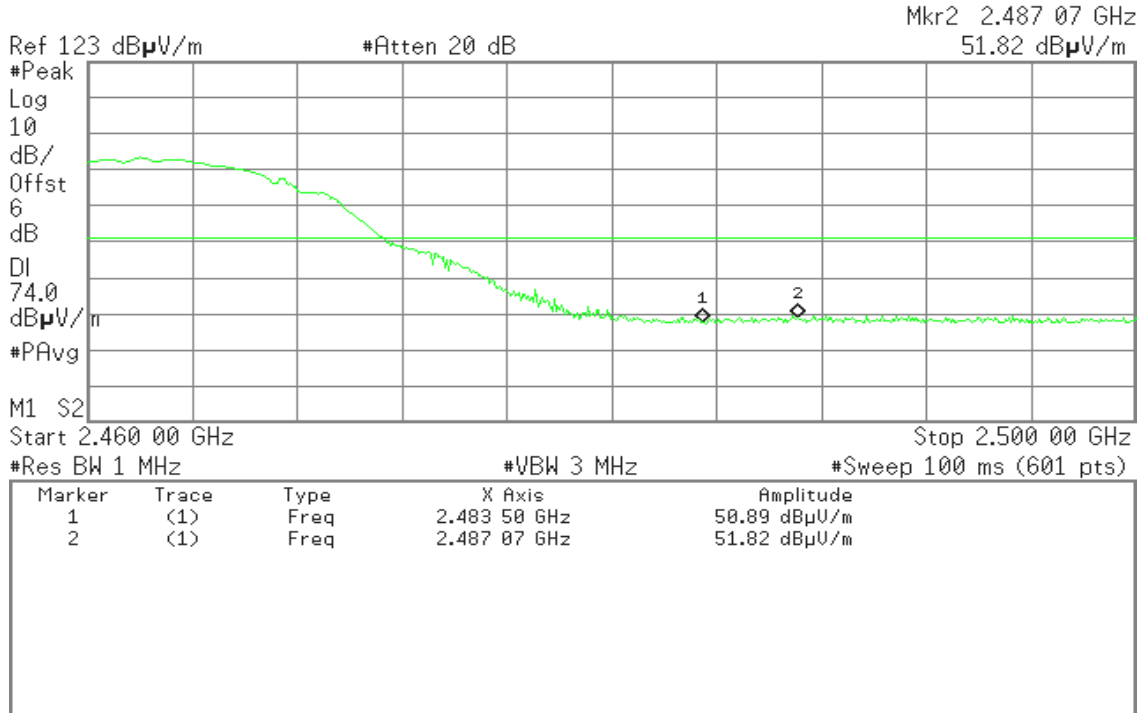


Detector mode: Average

Polarity: Horizontal

Agilent

R T

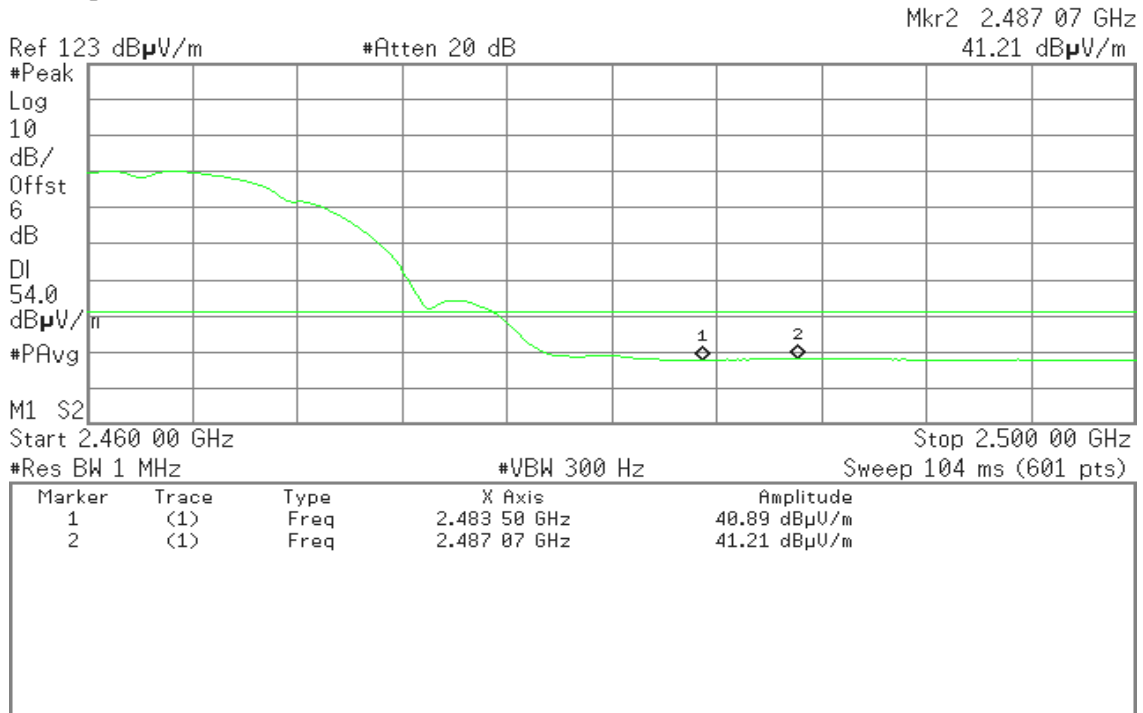



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.390 00 GHz
64.24 dBµV/m

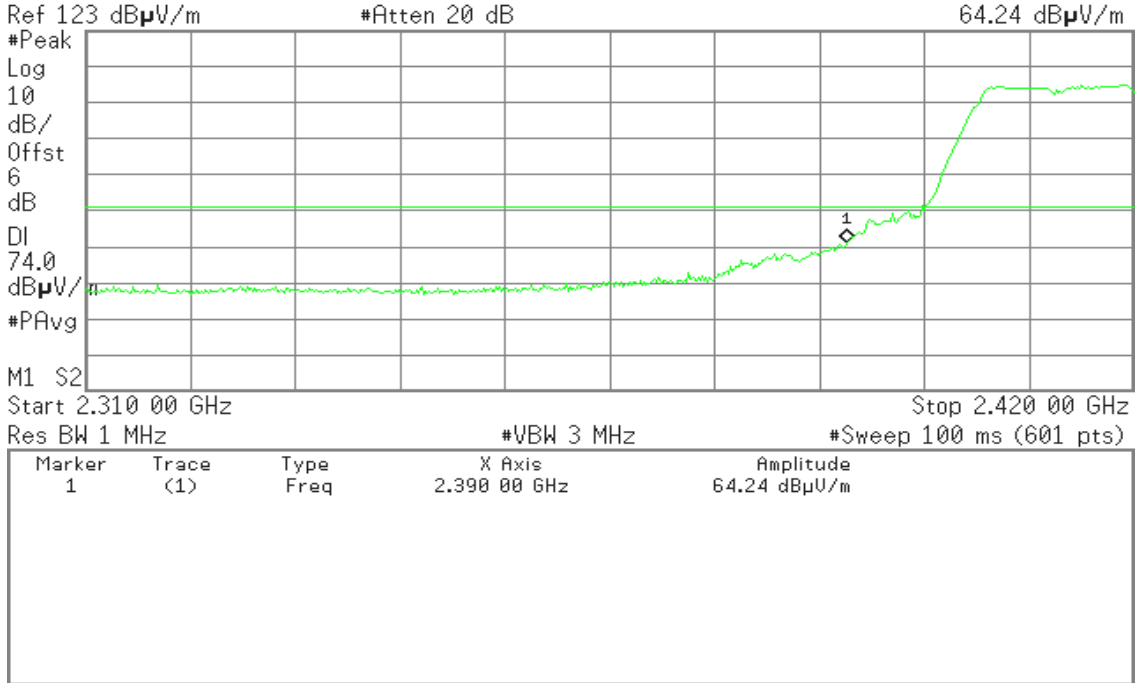


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.390 00 GHz
51.55 dBµV/m

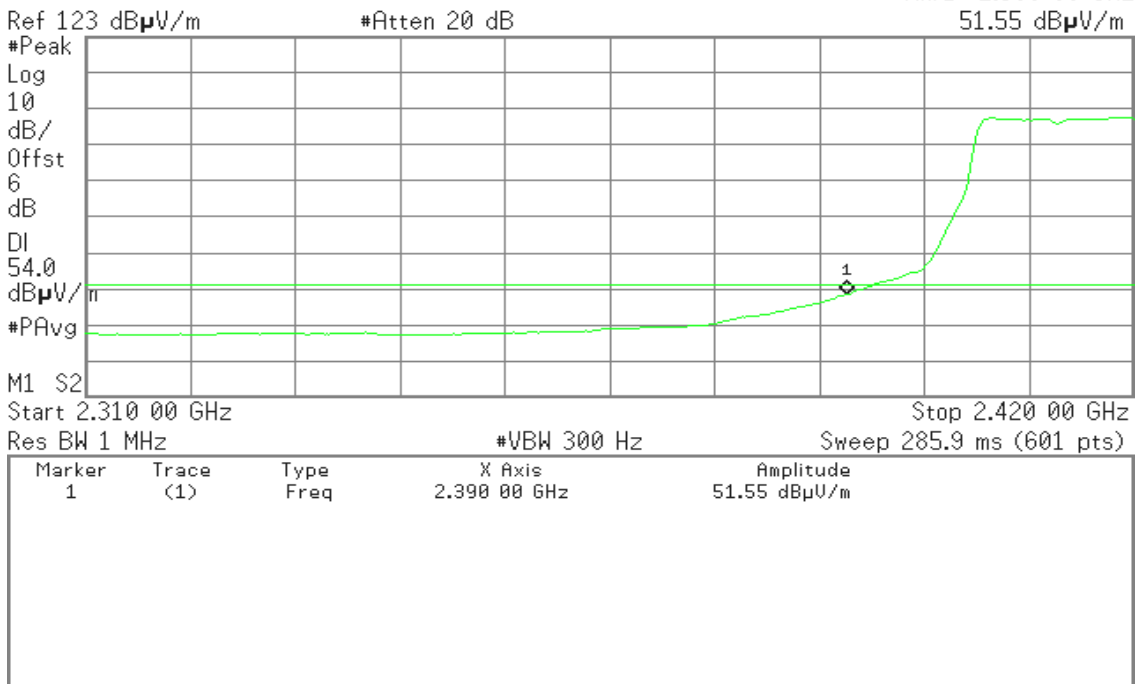




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

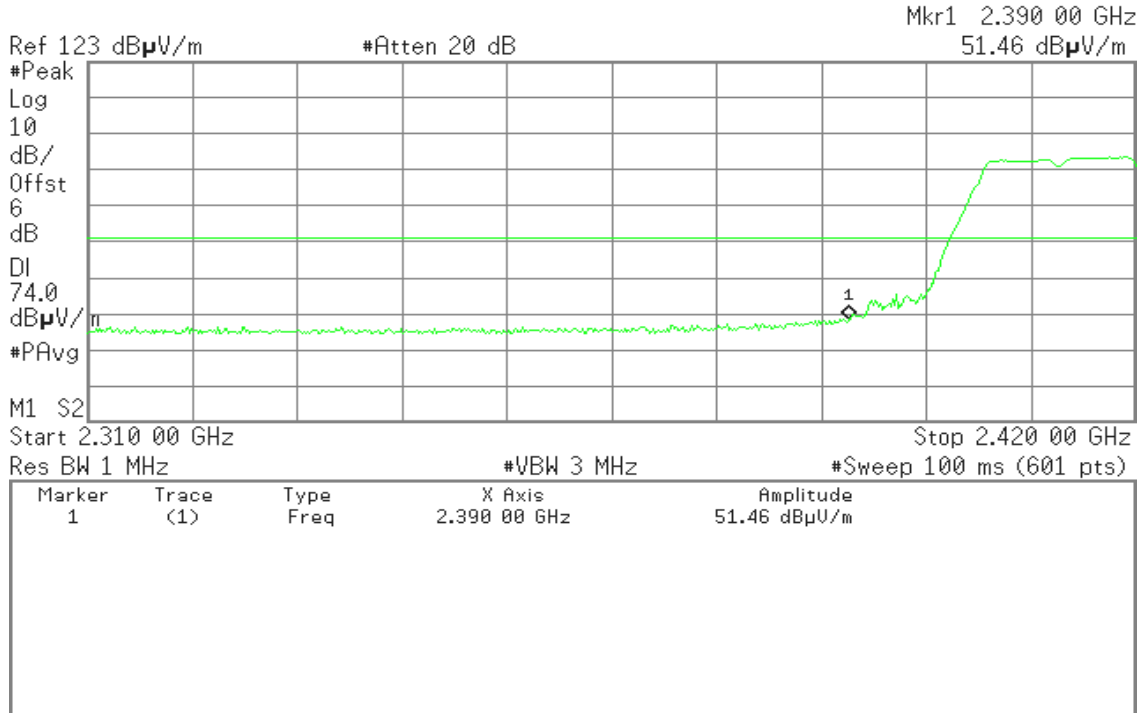


Detector mode: Average

Polarity: Horizontal

Agilent

R T

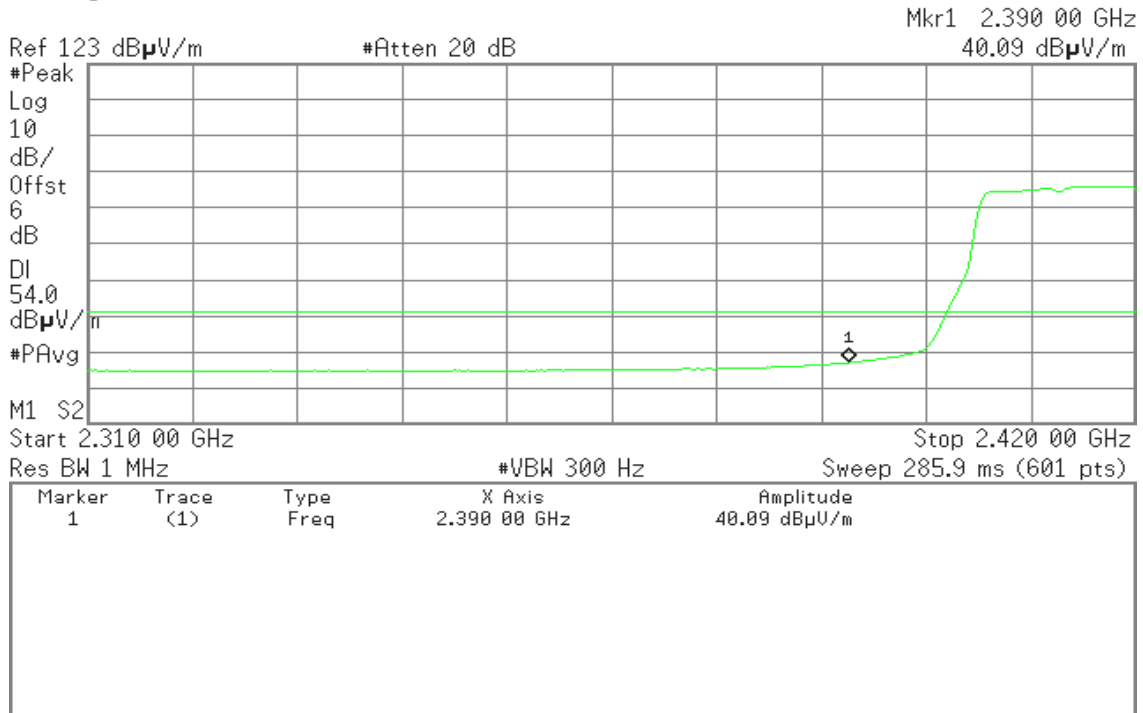



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr2 2.487 07 GHz
61.99 dBµV/m

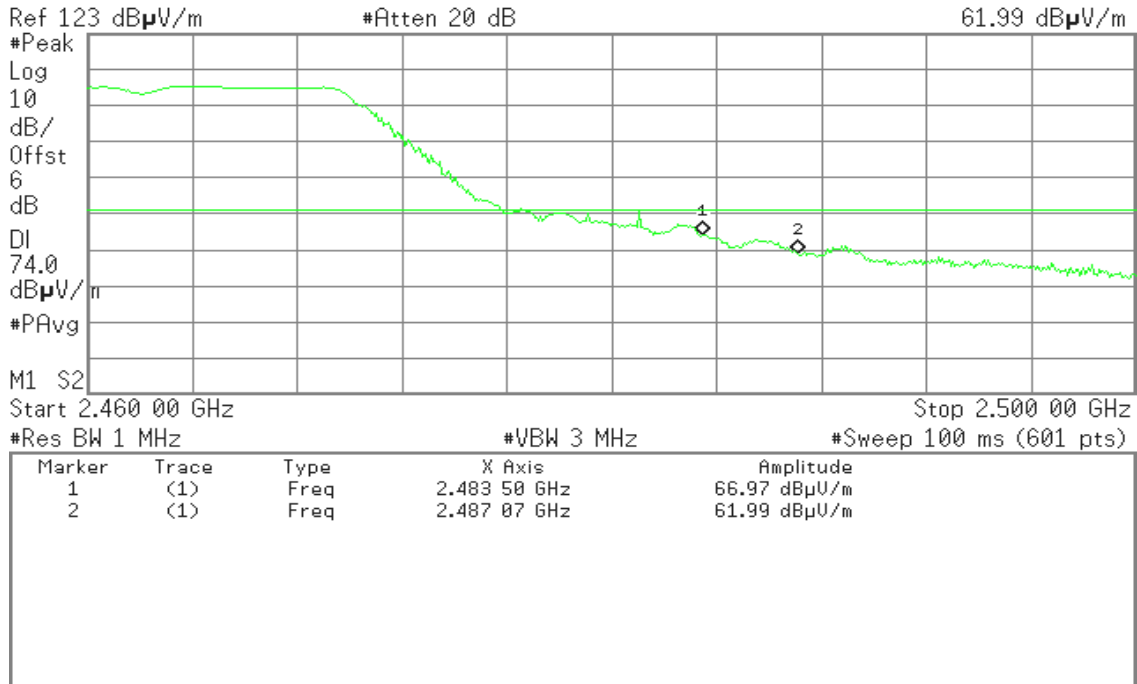


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr2 2.487 07 GHz
49.58 dBµV/m

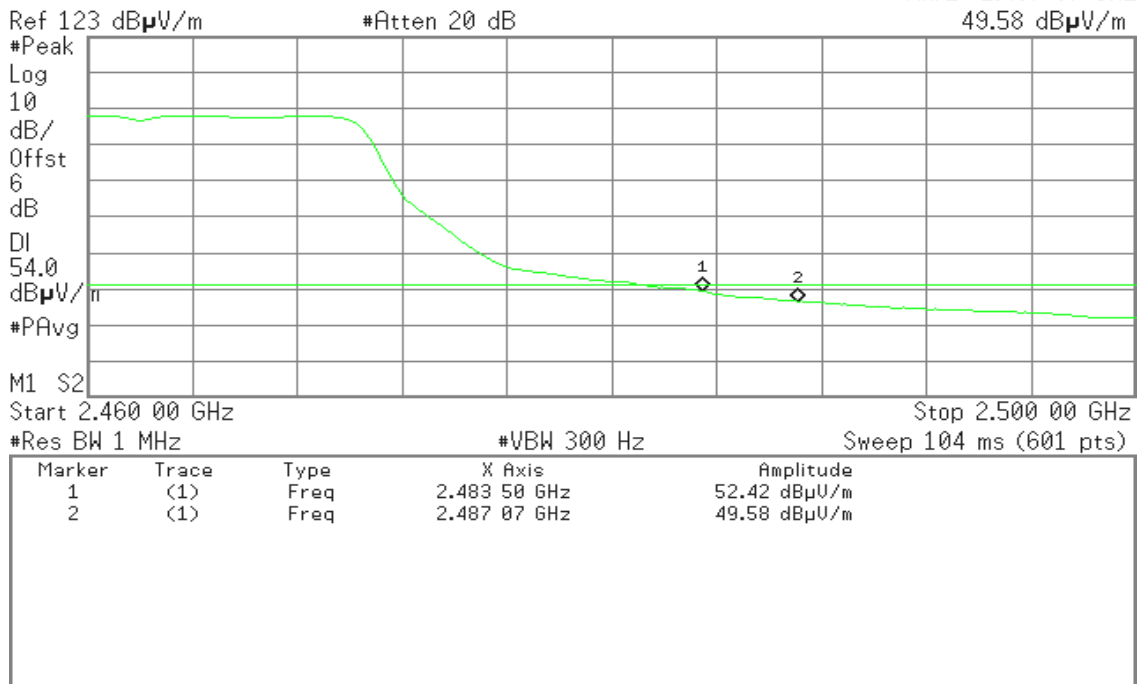




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

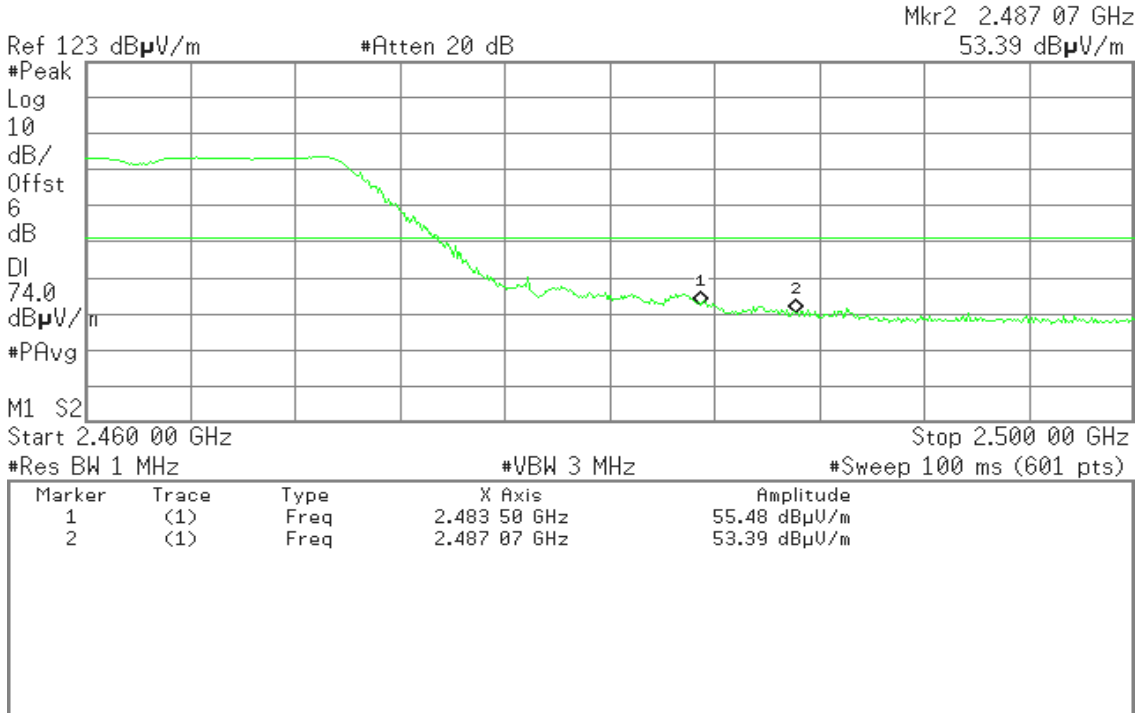


Detector mode: Average

Polarity: Horizontal

Agilent

R T

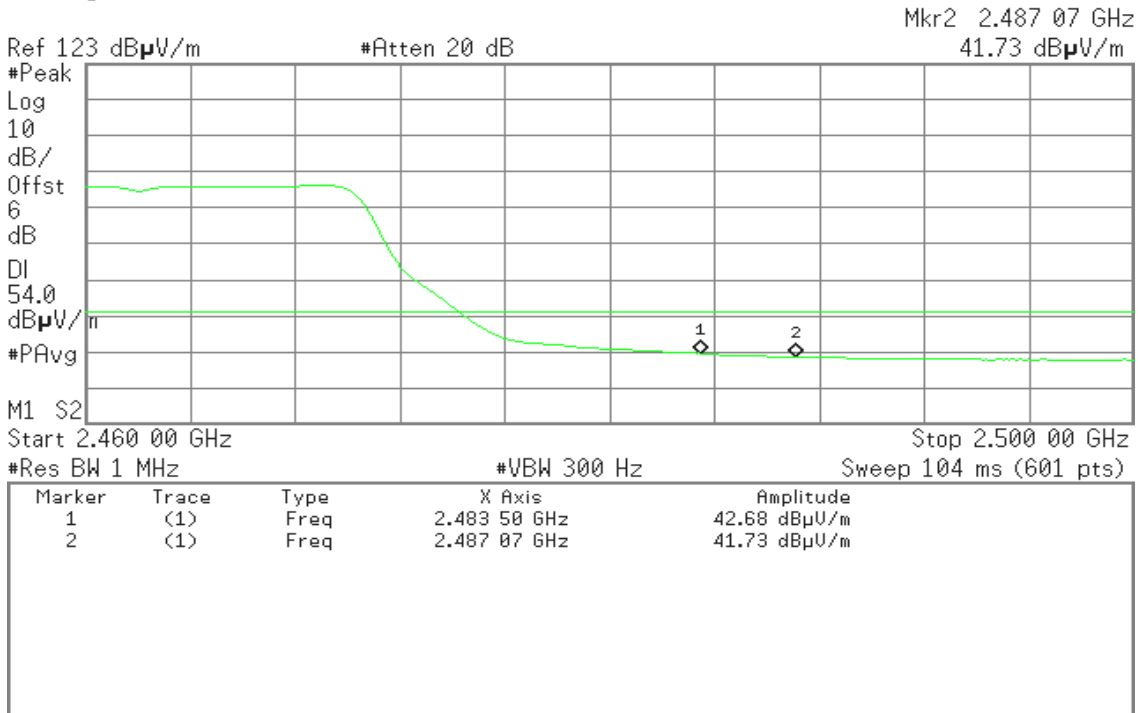




Band Edges (IEEE 802.11n HT20 mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

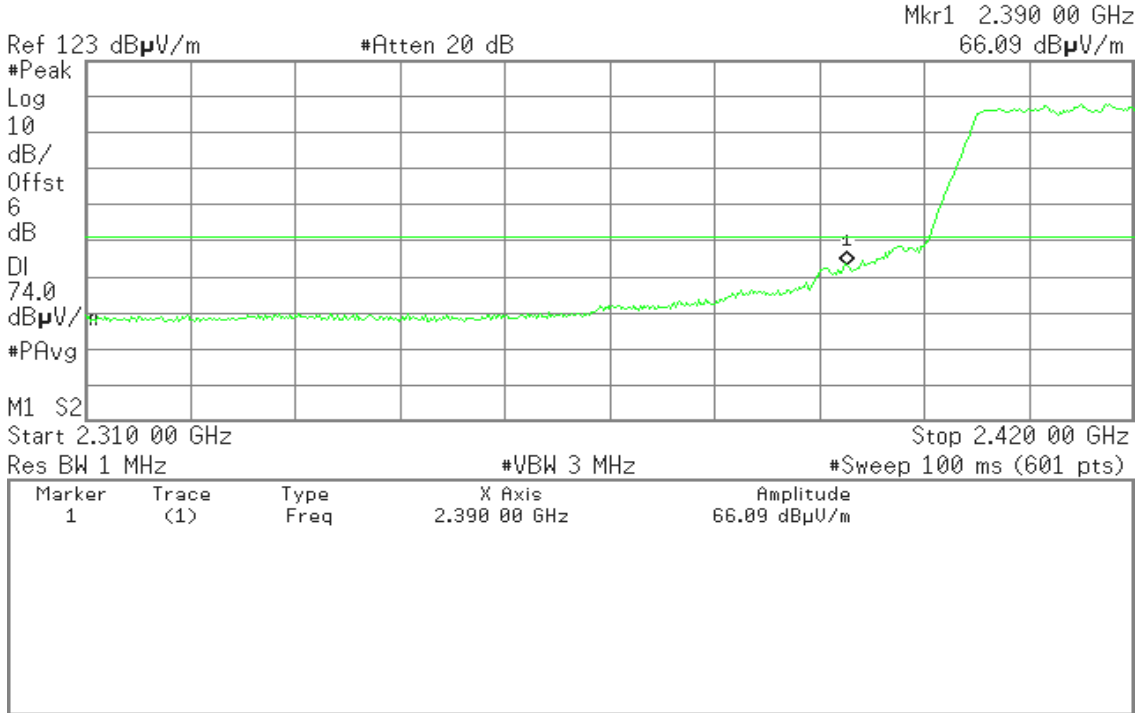


Detector mode: Average

Polarity: Vertical

Agilent

R T

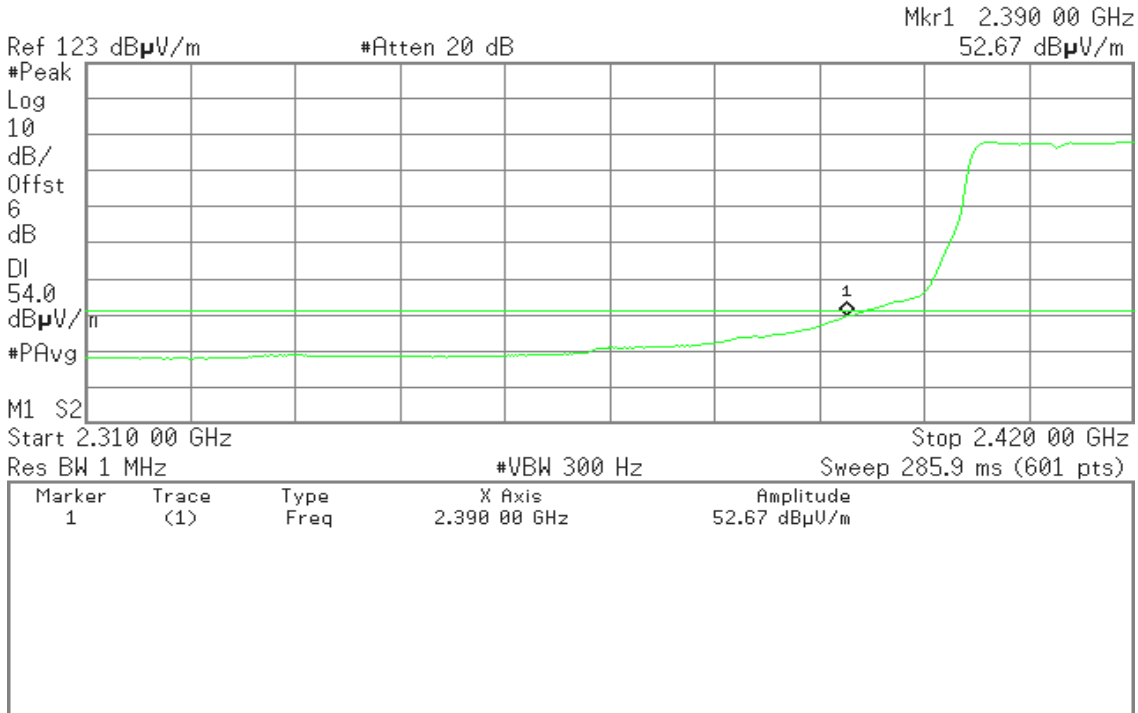




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

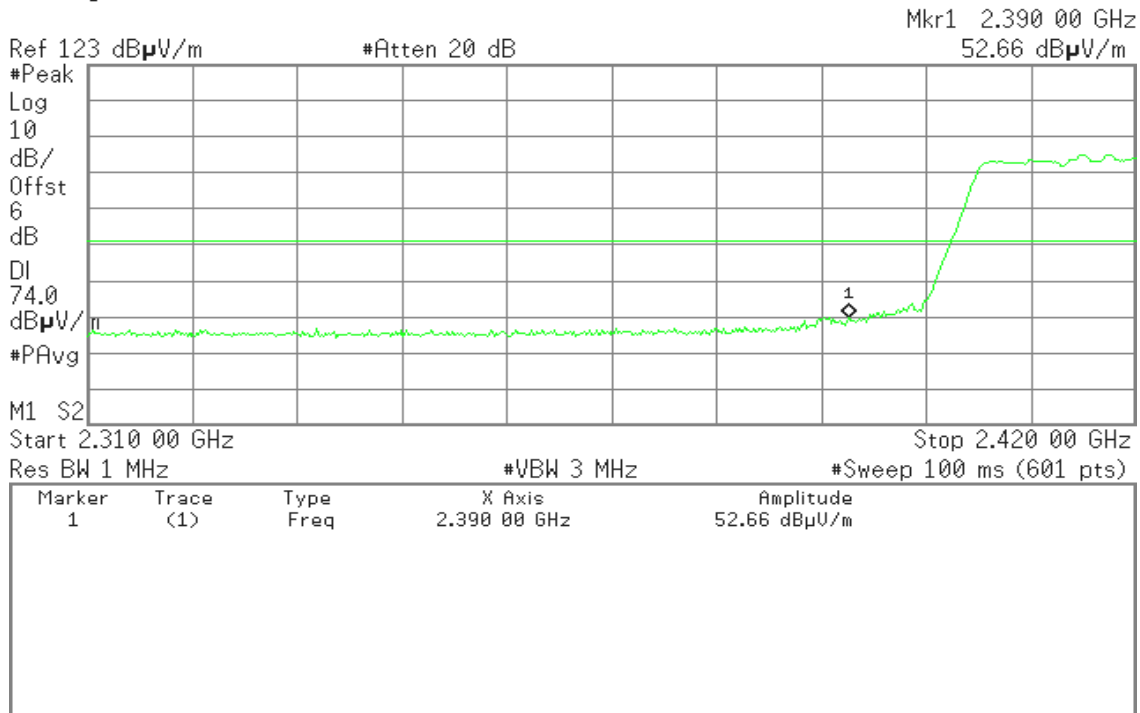


Detector mode: Average

Polarity: Horizontal

Agilent

R T

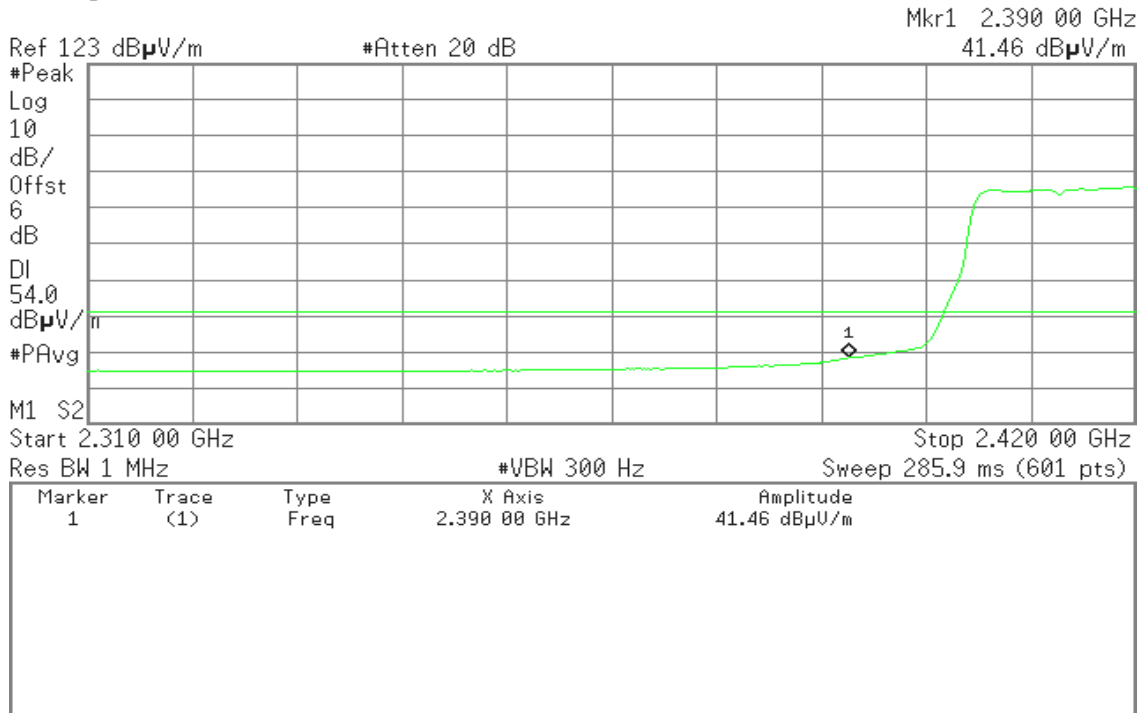




Band Edges (IEEE 802.11n HT20 mode / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

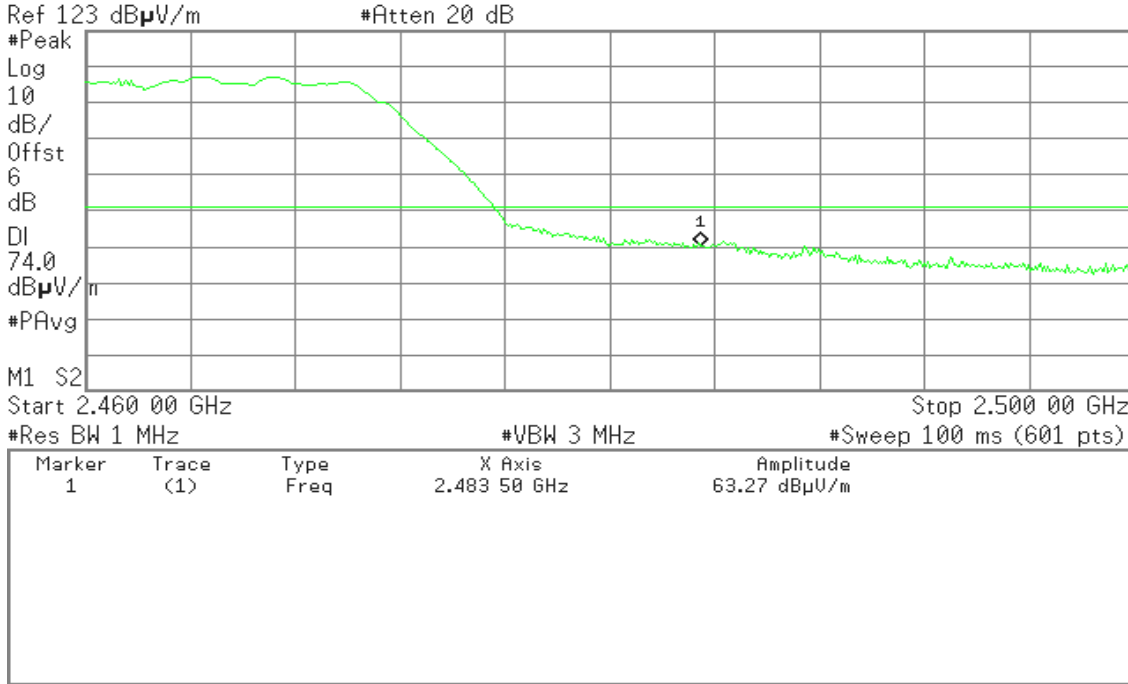


Detector mode: Average

Polarity: Vertical

Agilent

R T

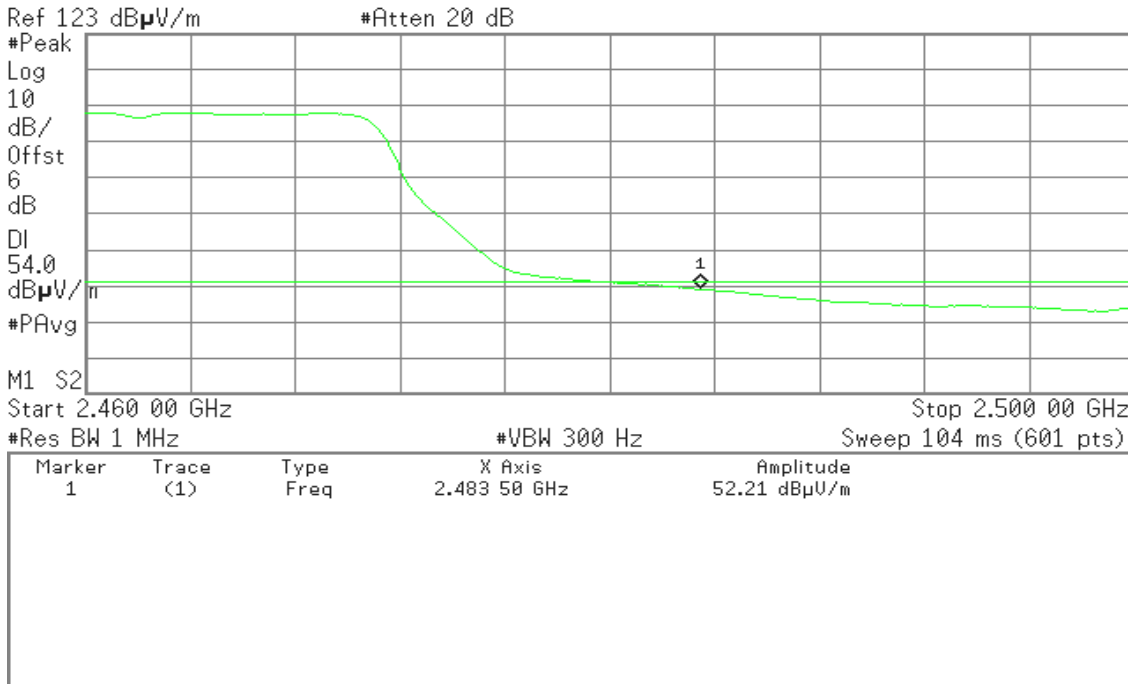




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

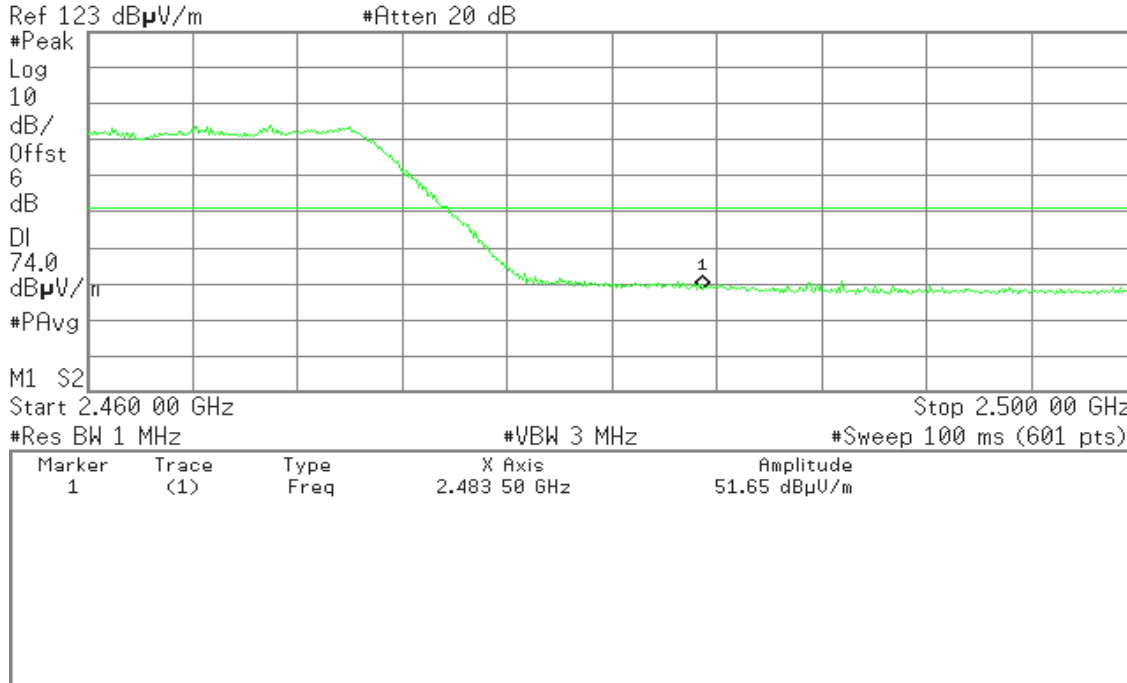


Detector mode: Average

Polarity: Horizontal

Agilent

R T

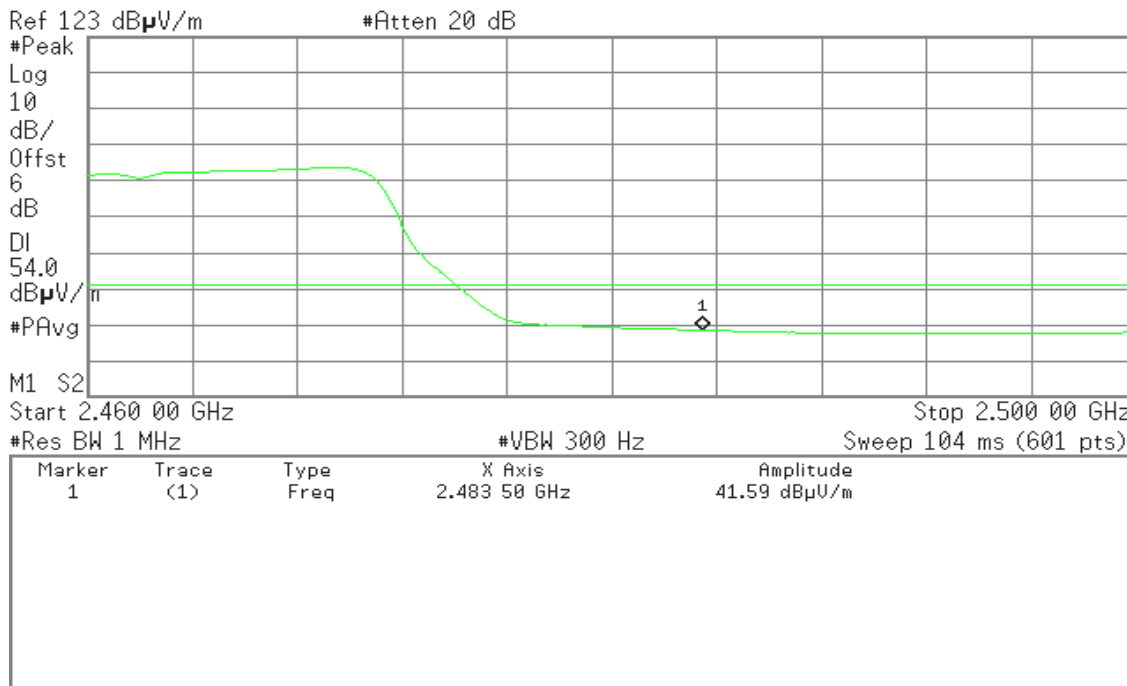



Band Edges (IEEE 802.11n HT40 mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr2 2.386 27 GHz
63.94 dBµV/m

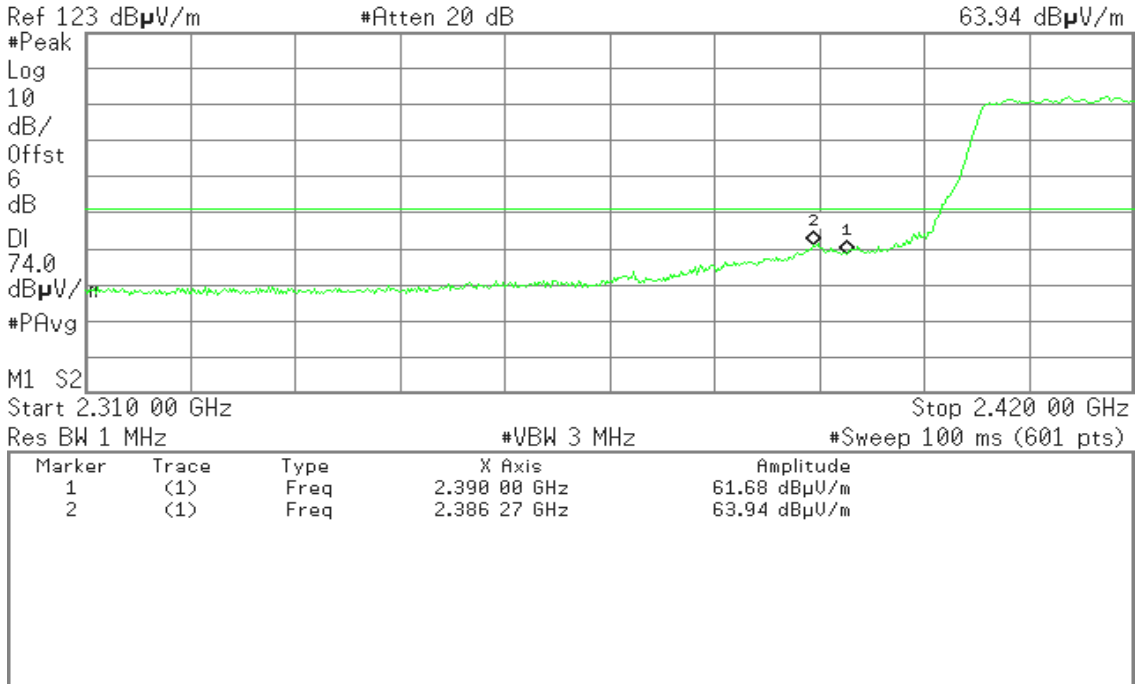


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr2 2.386 27 GHz
51.00 dBµV/m

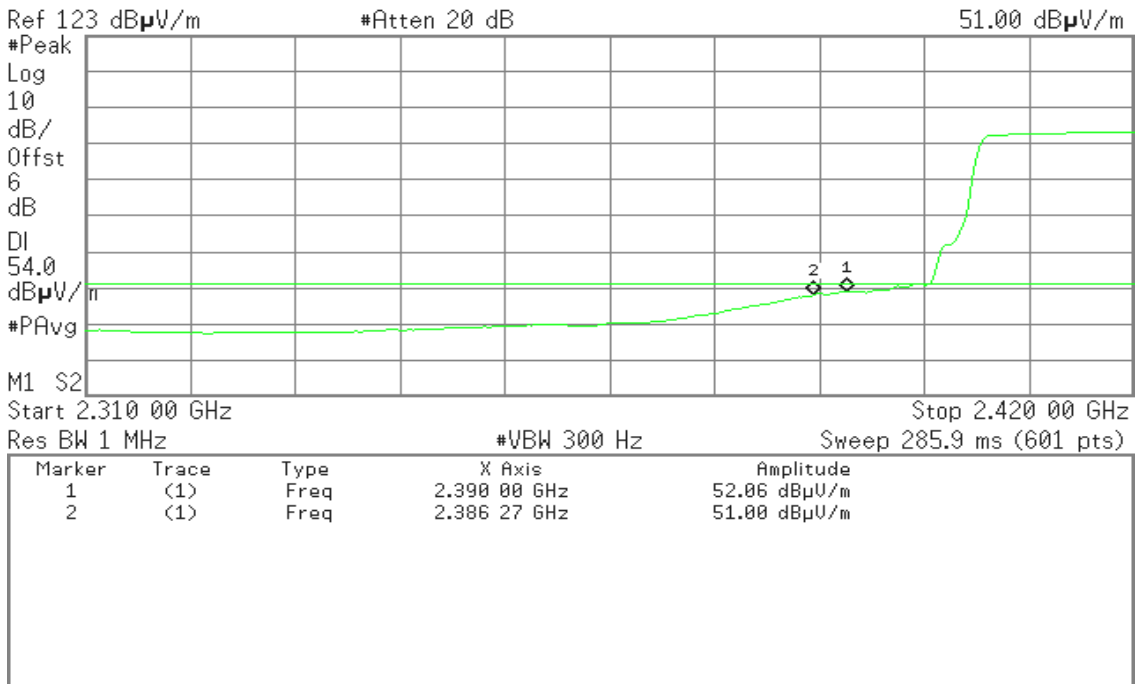




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

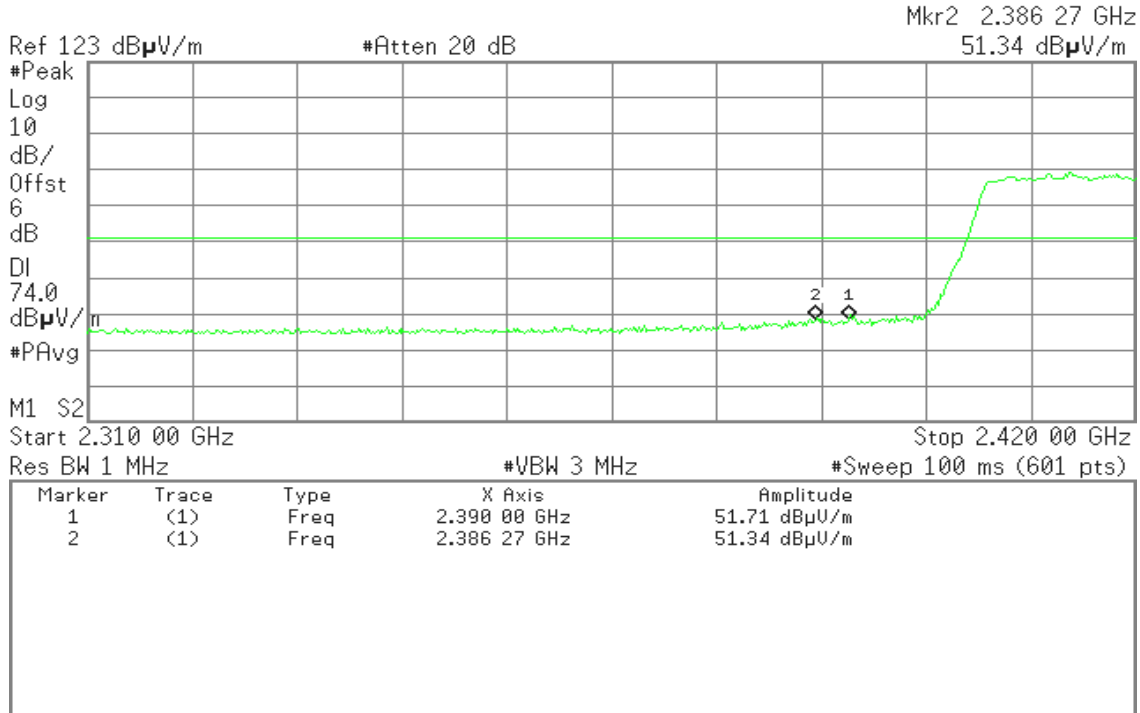


Detector mode: Average

Polarity: Horizontal

Agilent

R T

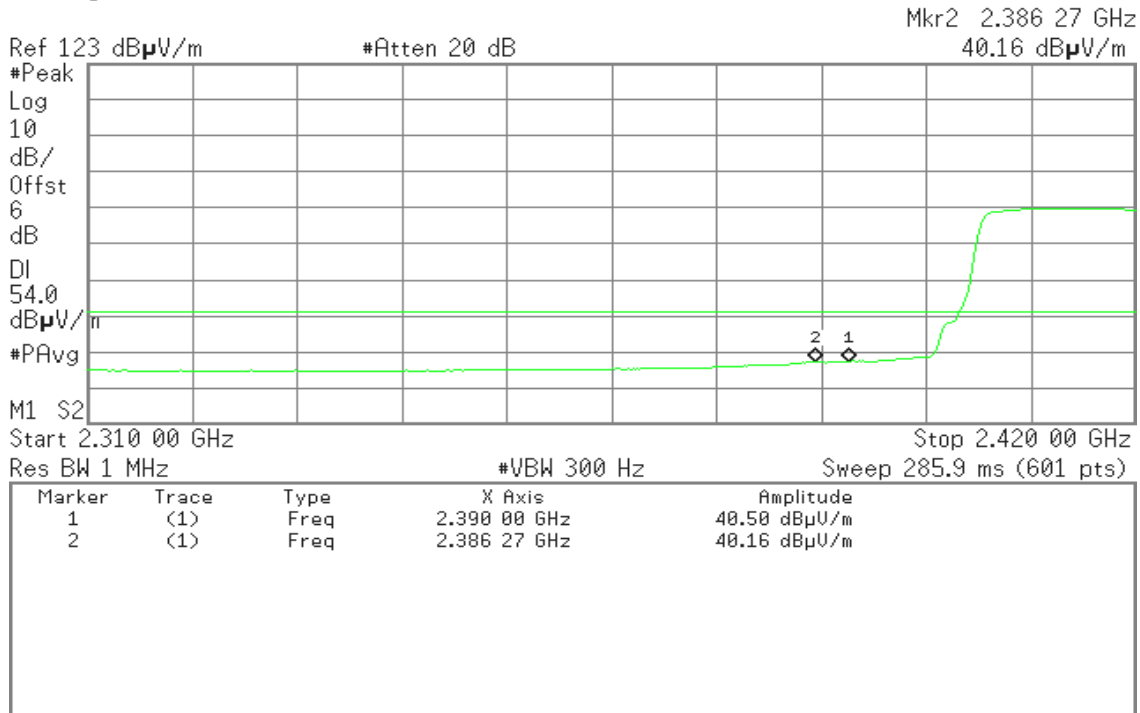




Band Edges (IEEE 802.11n HT40 mode / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

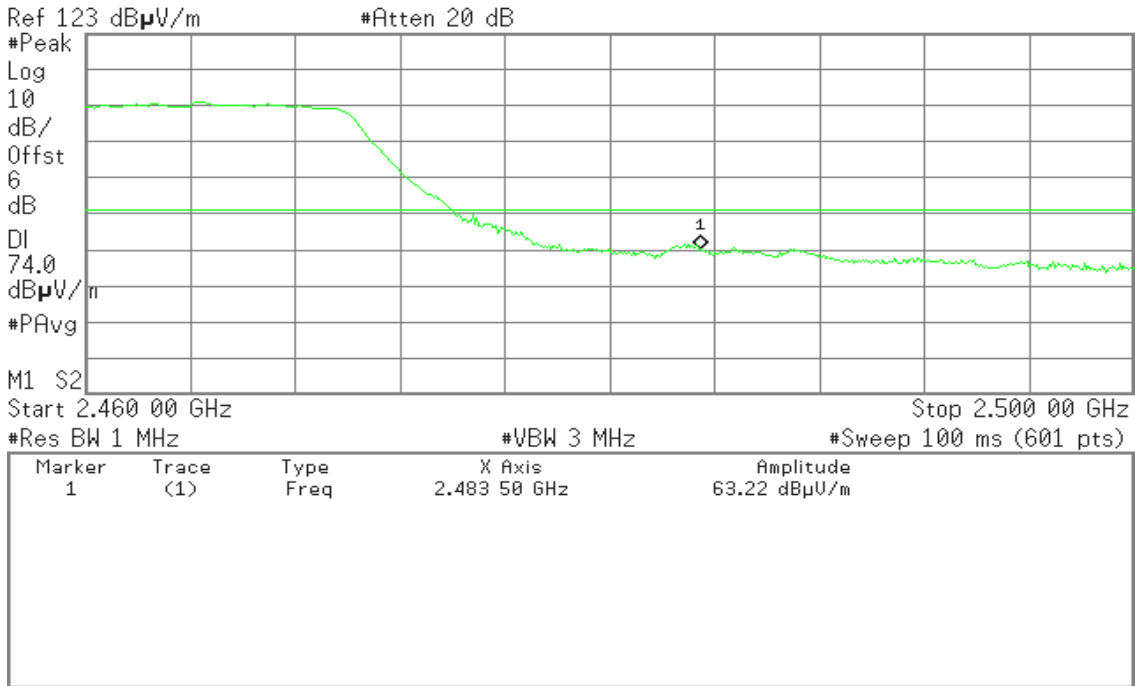


Detector mode: Average

Polarity: Vertical

Agilent

R T

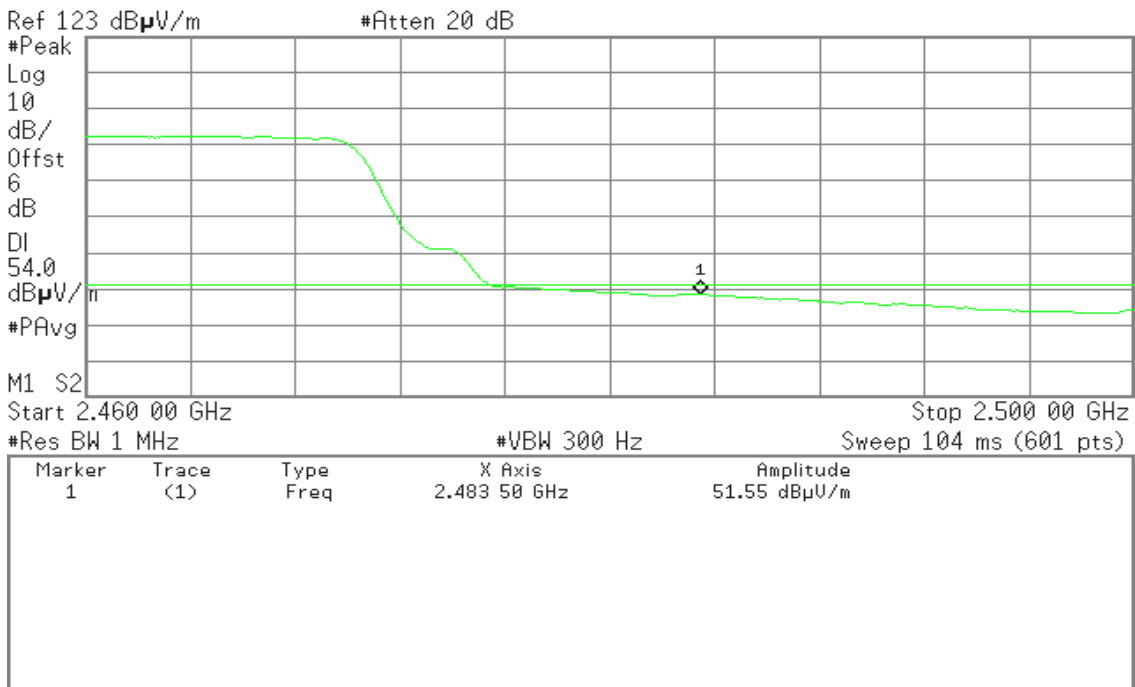




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

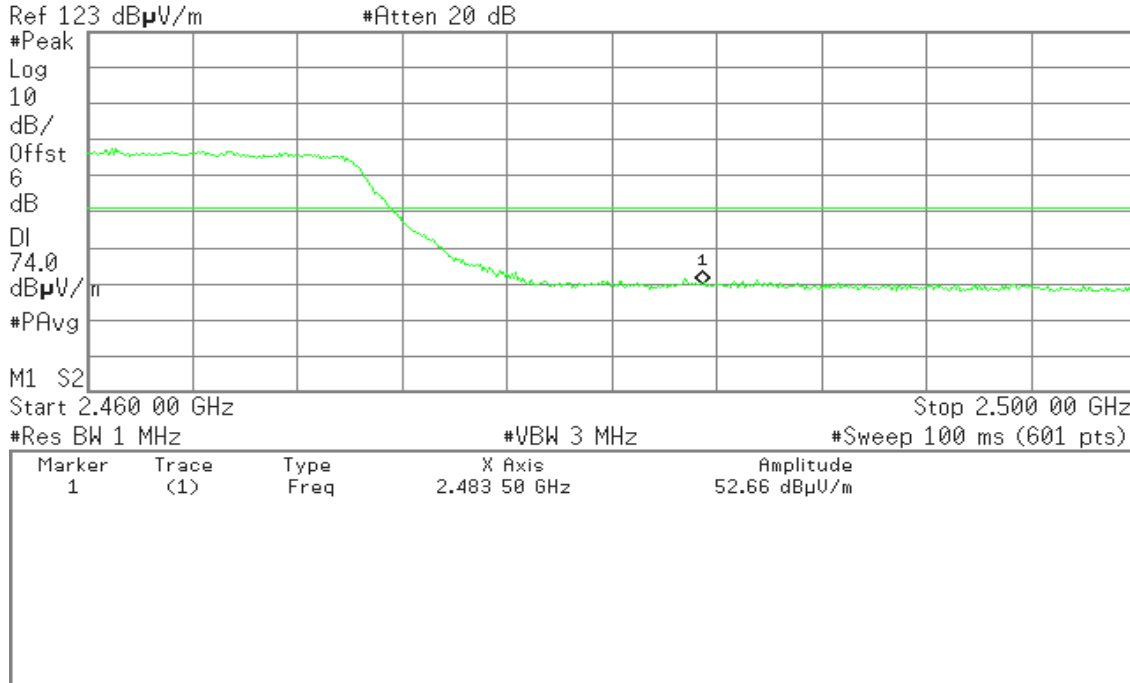


Detector mode: Average

Polarity: Horizontal

Agilent

R T

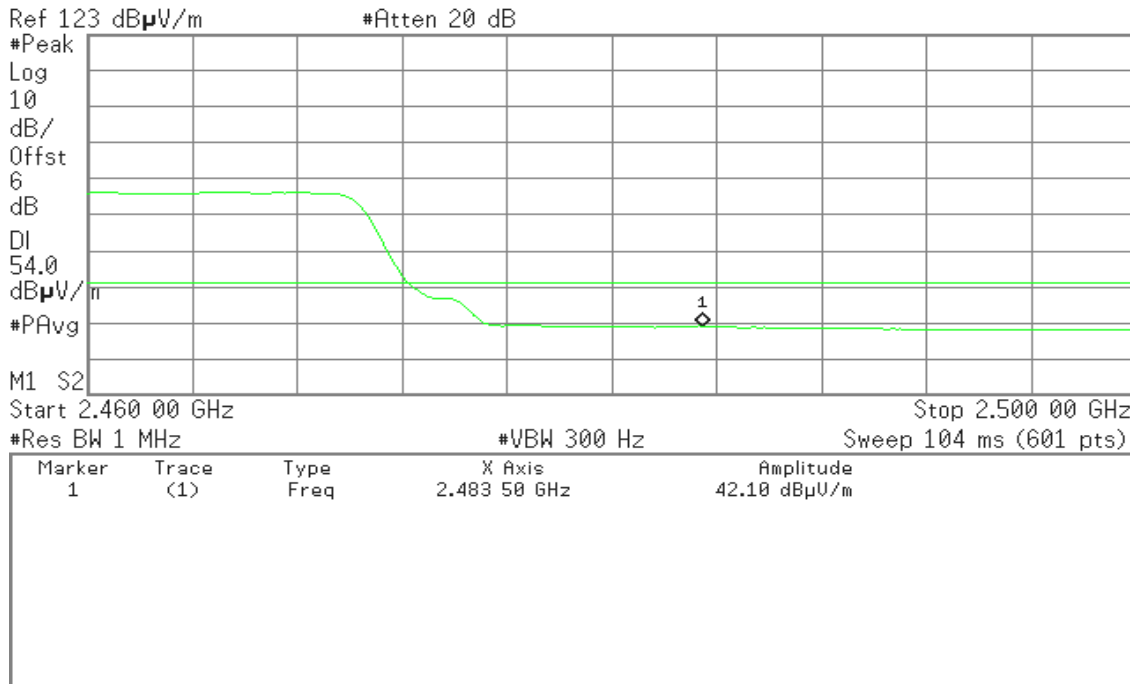




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST CONFIGURATION



TEST PROCEDURE

Per KDB 558074 v03r01

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

TEST RESULTS

No non-compliance noted



TEST DATA

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-5.32	8.00	PASS
Mid	2437	-6.17		
High	2462	-5.38		

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-11.46	8.00	PASS
Mid	2437	-11.44		
High	2462	-11.62		

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD(dBm)			Limit (dBm)	Result
		Chain 0	Chain 1	Total		
Low	2412	-12.11	-13.31	-9.66	5.99	PASS
Mid	2437	-11.13	-12.80	-8.87		PASS
High	2462	-13.56	-13.86	-10.70		PASS

Remark:

1. Total PPSD (dBm) = $10 \cdot \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$

2. The maximum antenna gain is 8.01dBi; therefore the reduction due to antenna gain is 2.01dBi, so the limit is 5.99dBm

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	PPSD(dBm)			Limit (dBm)	Result
		Chain 0	Chain 1	Total		
Low	2422	-18.16	-18.36	-15.25	5.99	PASS
Mid	2437	-17.84	-17.58	-14.70		PASS
High	2452	-18.63	-17.92	-15.25		PASS

Remark:

1. Total PPSD (dBm) = $10 \cdot \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$


2. The maximum antenna gain is 8.01dBi; therefore the reduction due to antenna gain is 2.01dBi, so the limit is 5.99dBm




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

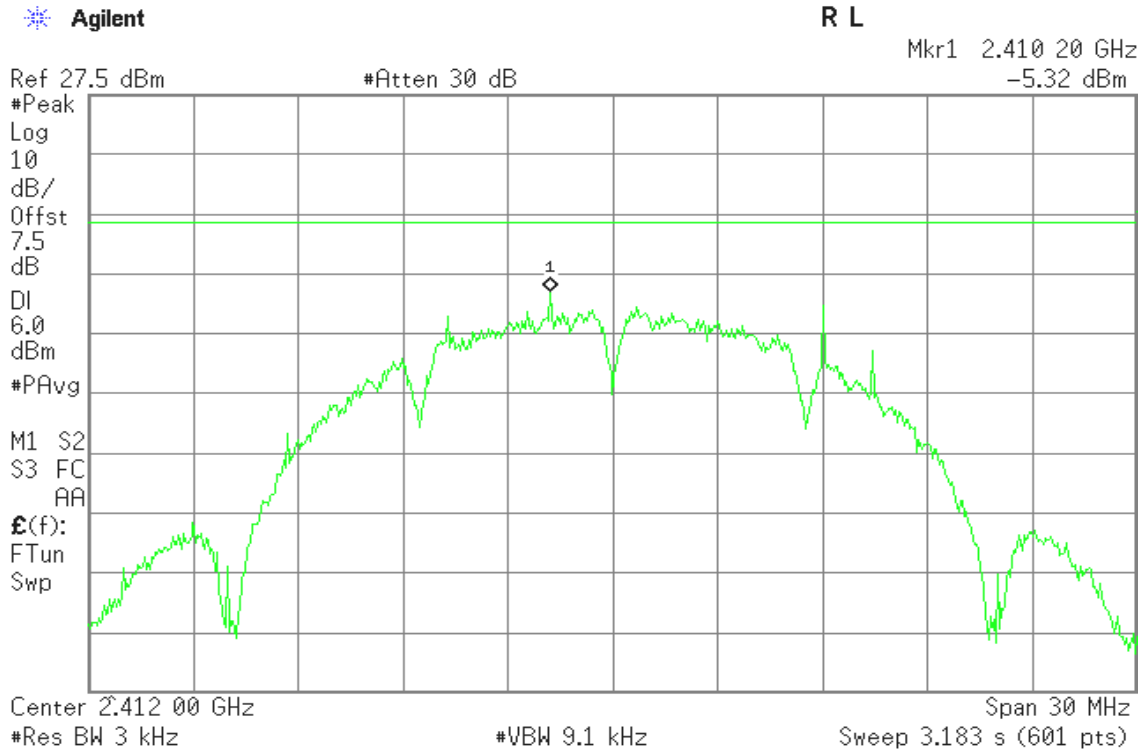


PPSD (CH Mid)

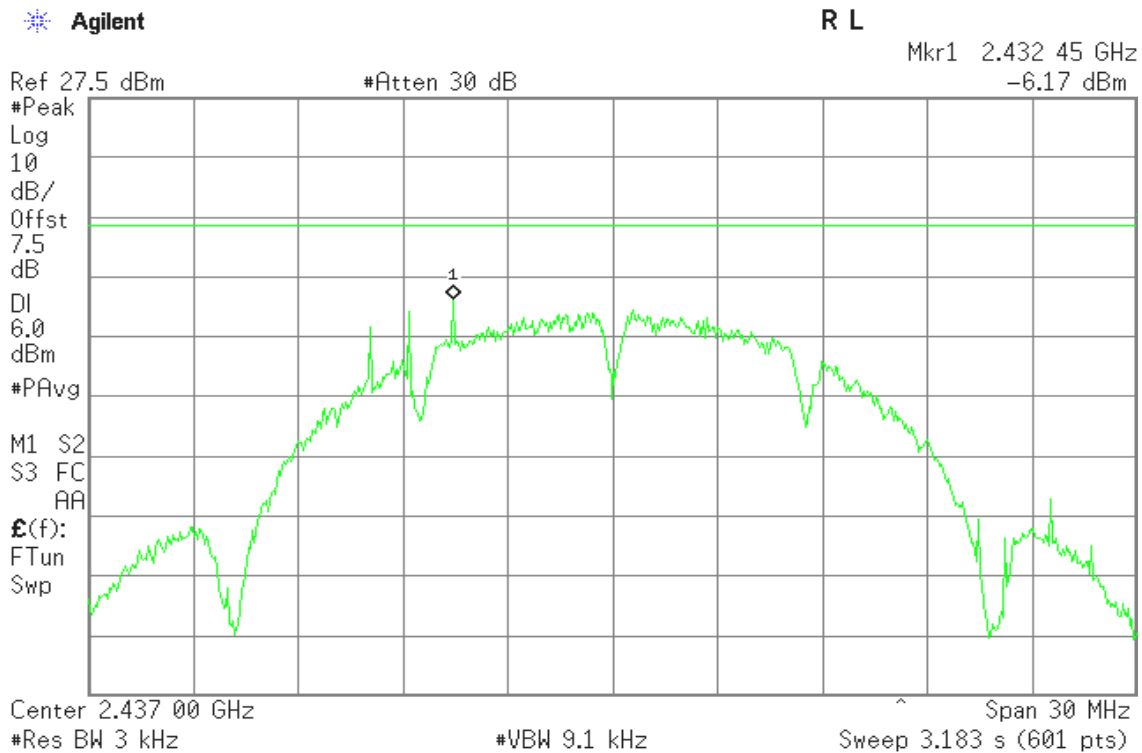




PPSD (CH High)

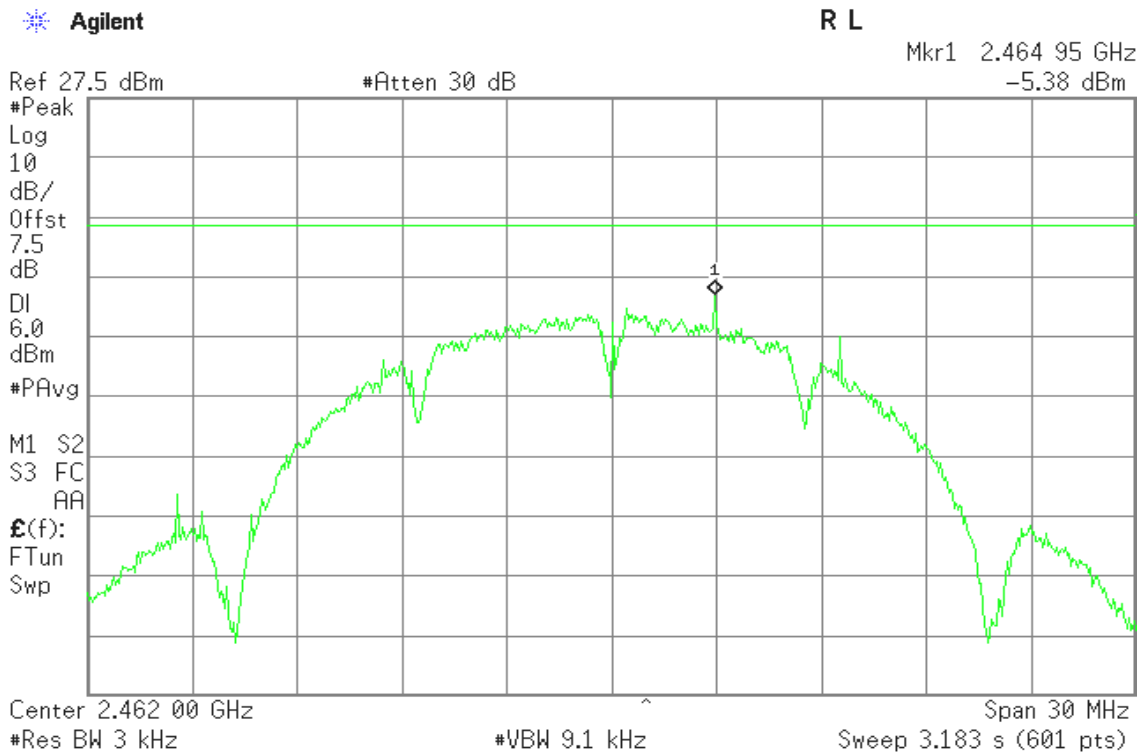


IEEE 802.11g mode

PPSD (CH Low)

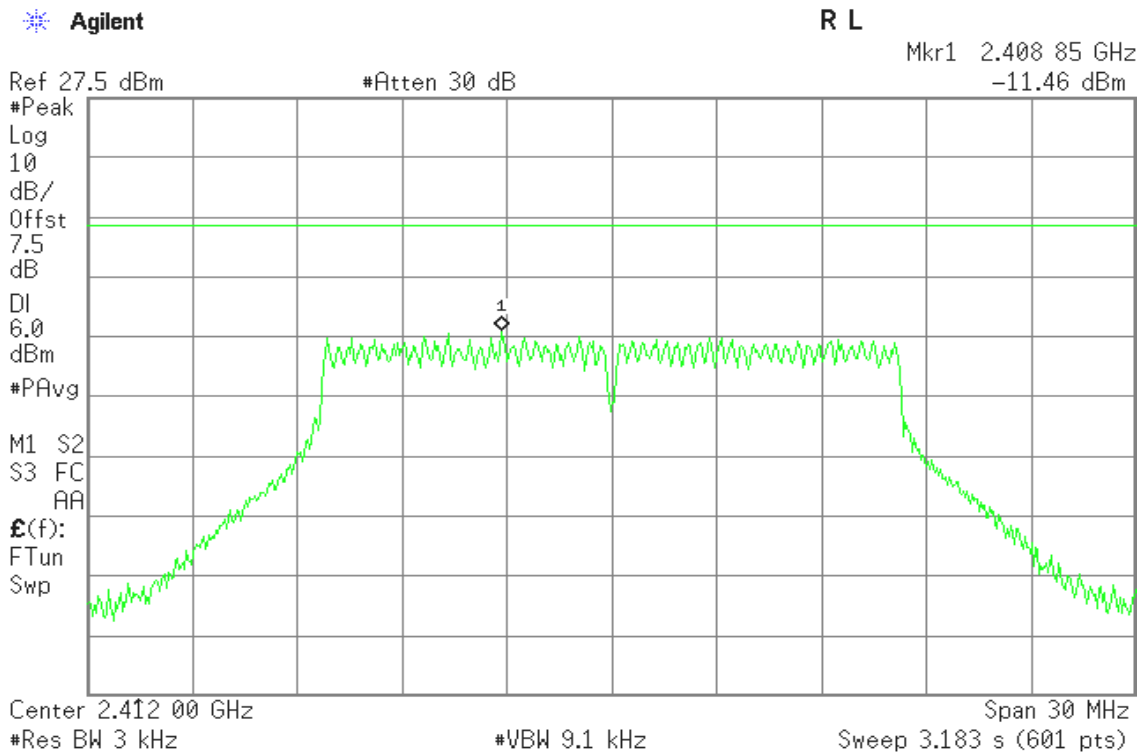




PPSD (CH Mid)

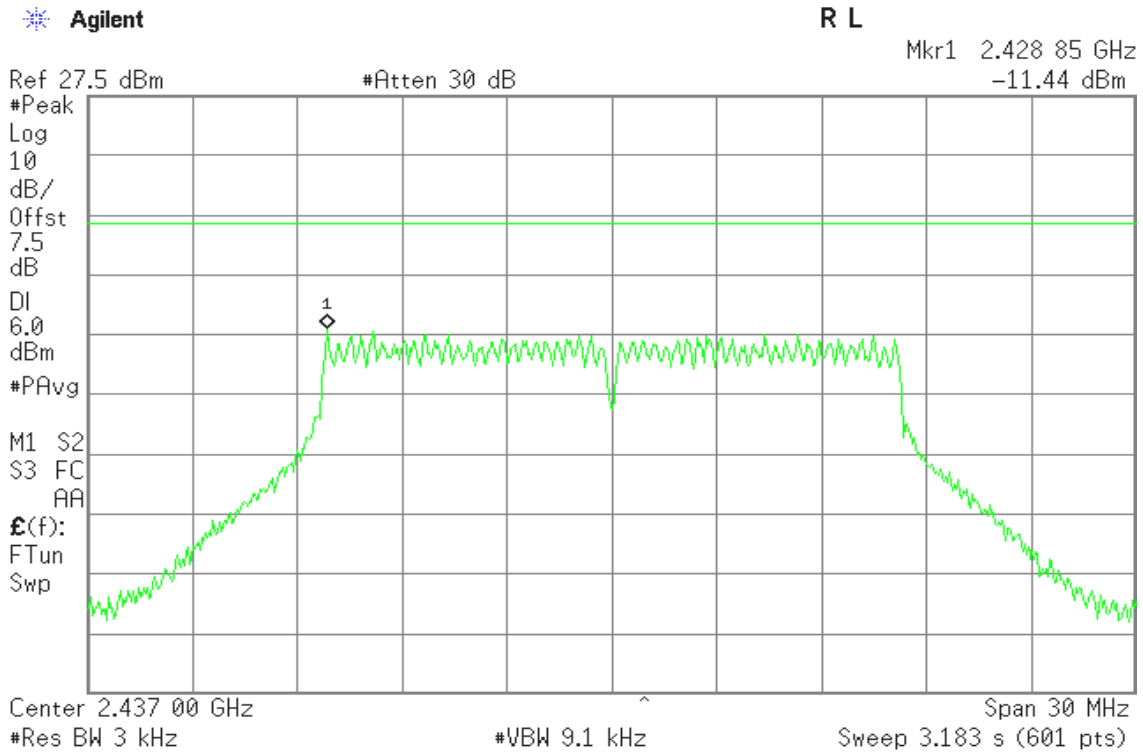


PPSD (CH High)

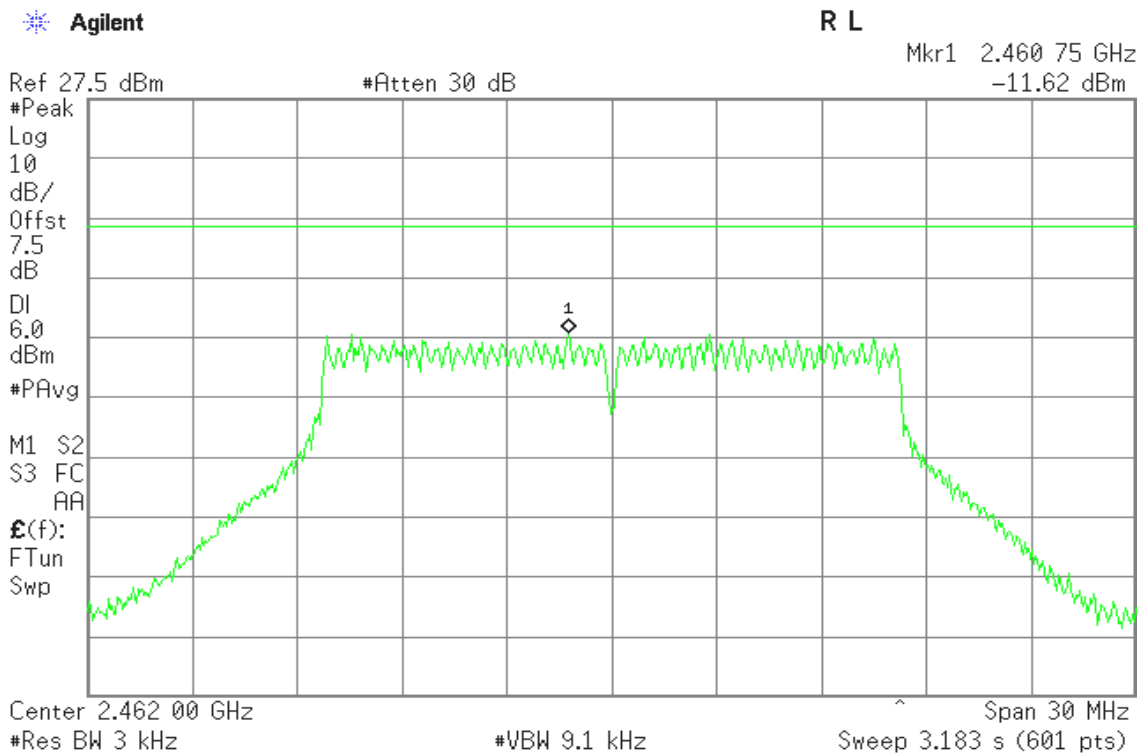




IEEE 802.11n HT20 mode / Chain 0

PPSD (CH Low)

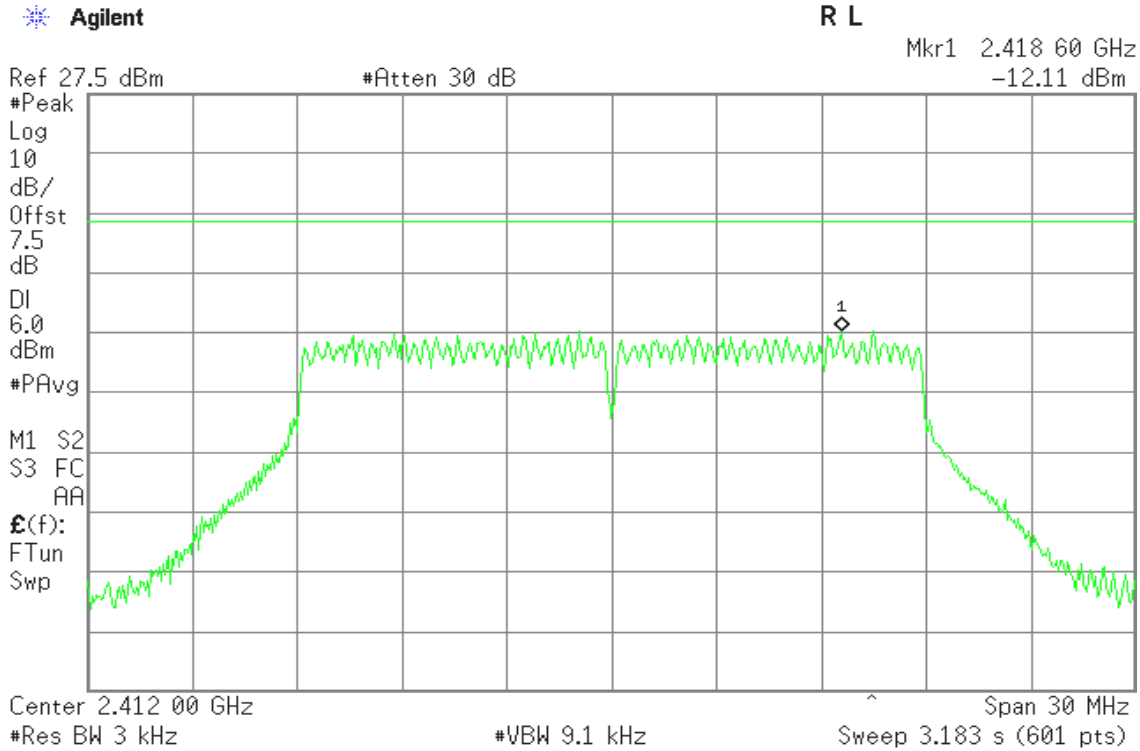


PPSD (CH Mid)

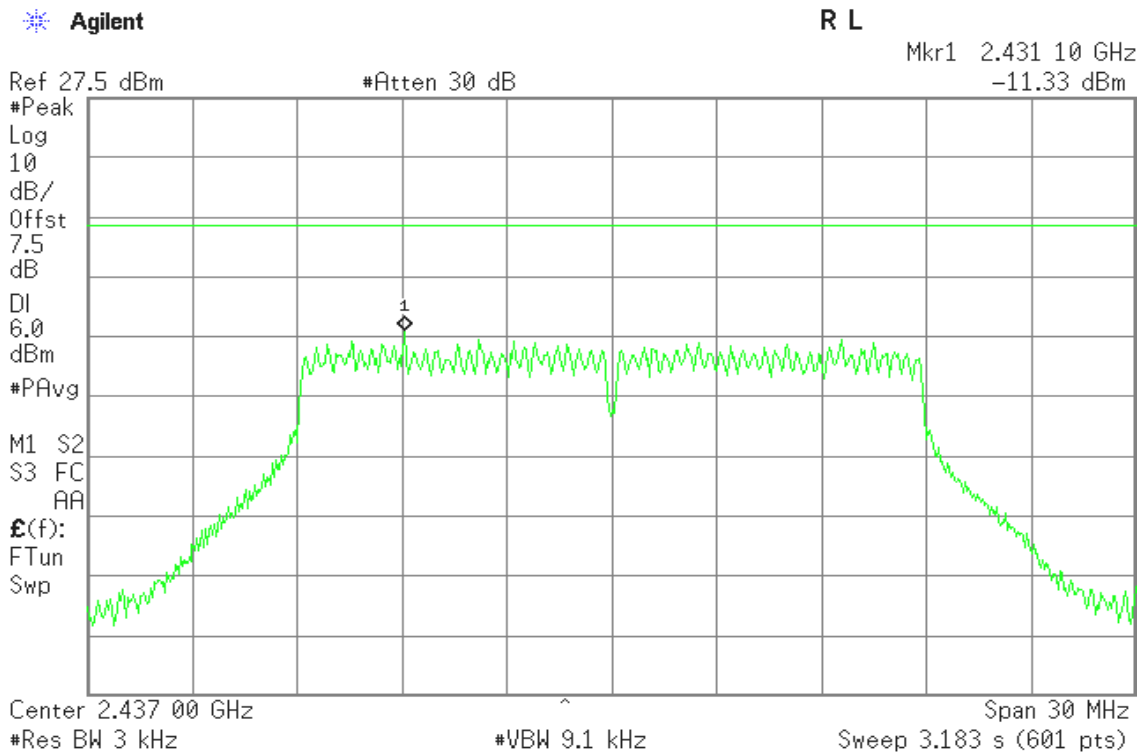




PPSD (CH High)

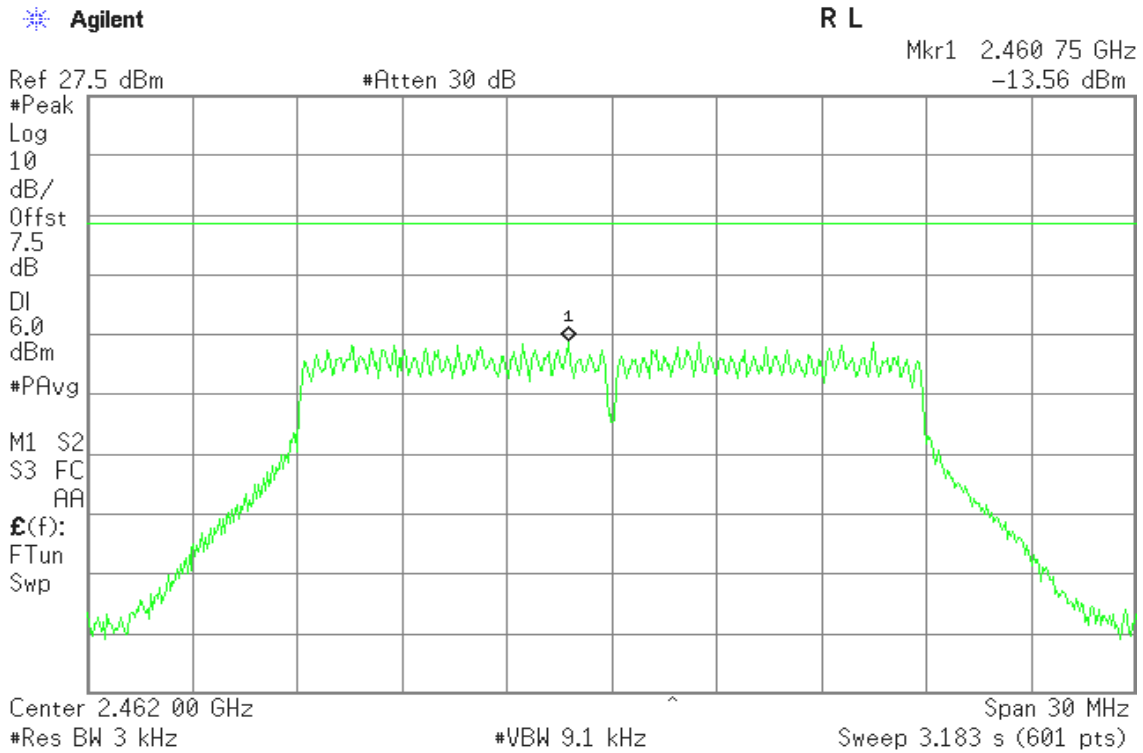


IEEE 802.11n HT20 mode / Chain 1

PPSD (CH Low)

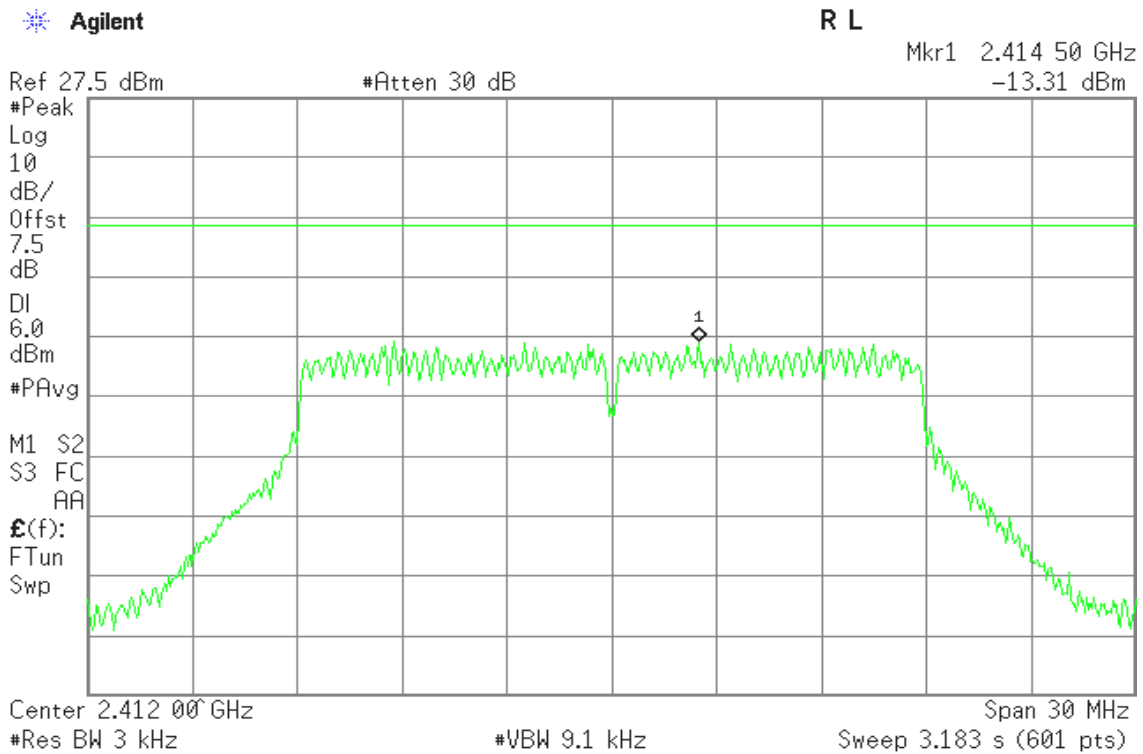




PPSD (CH Mid)

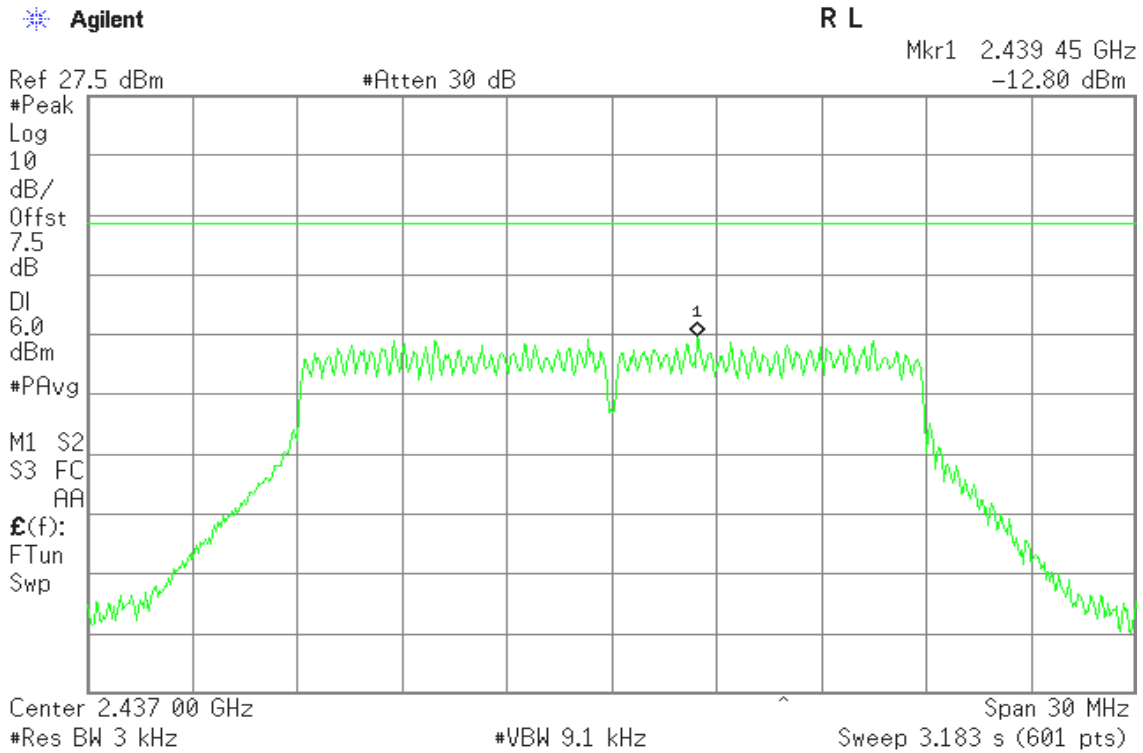


PPSD (CH High)

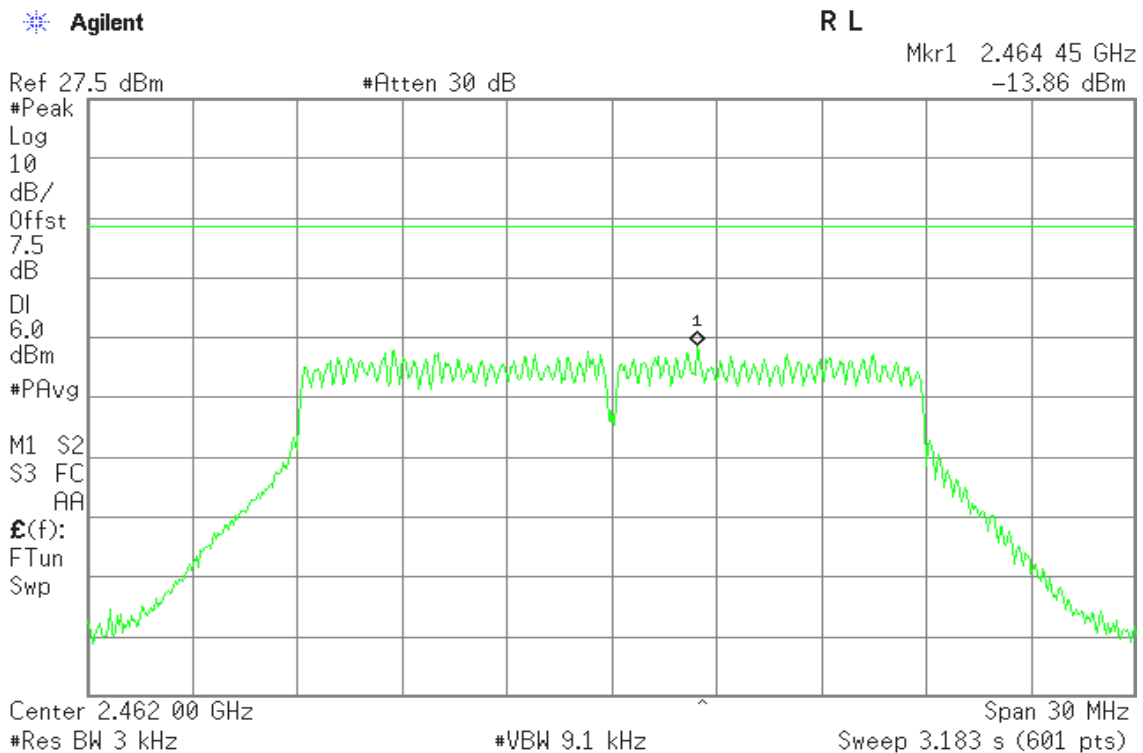




IEEE 802.11n HT40 mode / Chain 0

PPSD (CH Low)

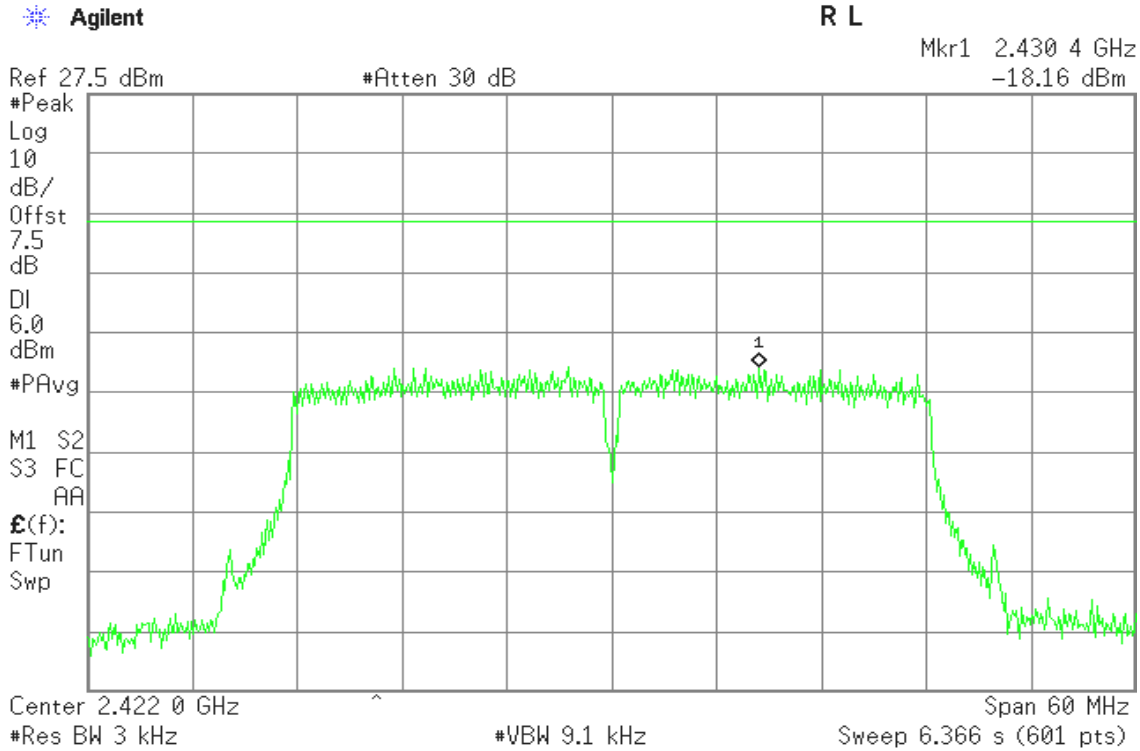


PPSD (CH Mid)

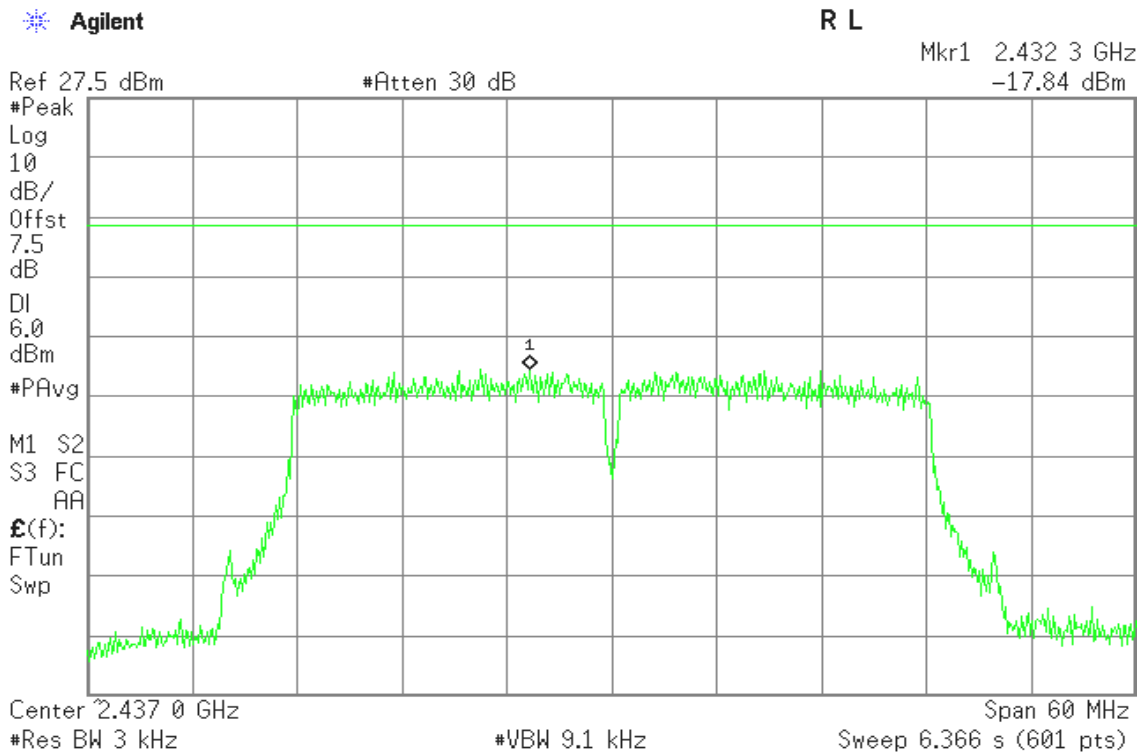




PPSD (CH High)

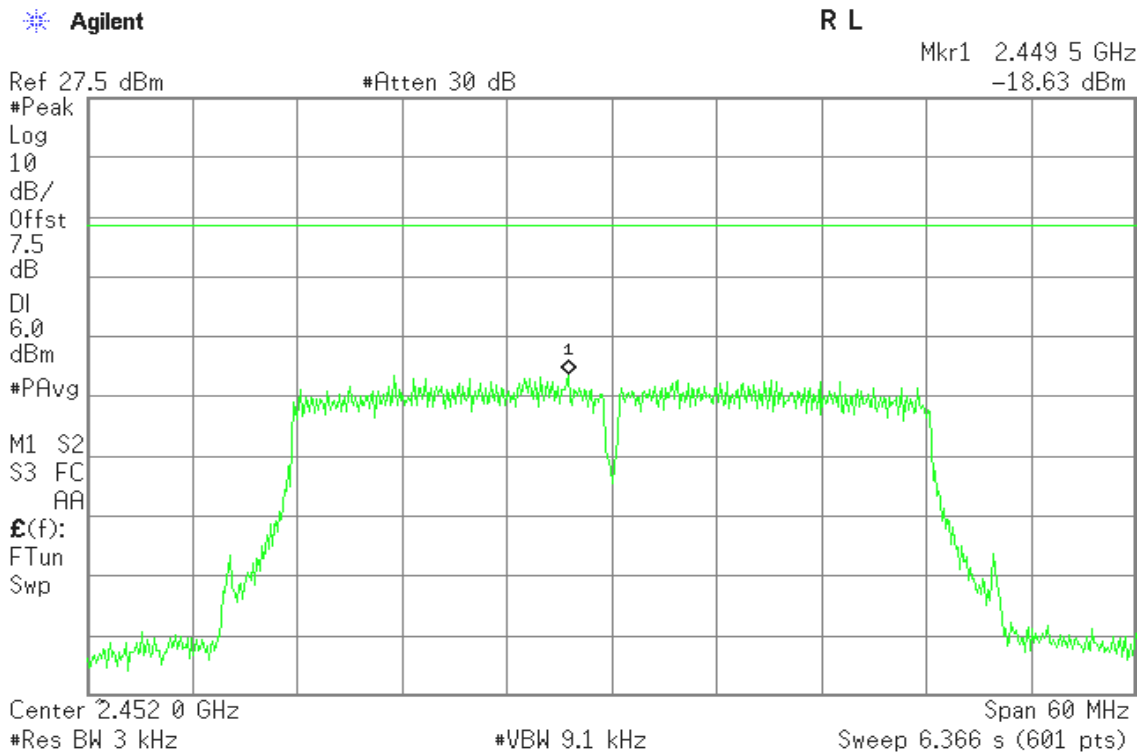


IEEE 802.11n HT40 mode / Chain 1

PPSD (CH Low)

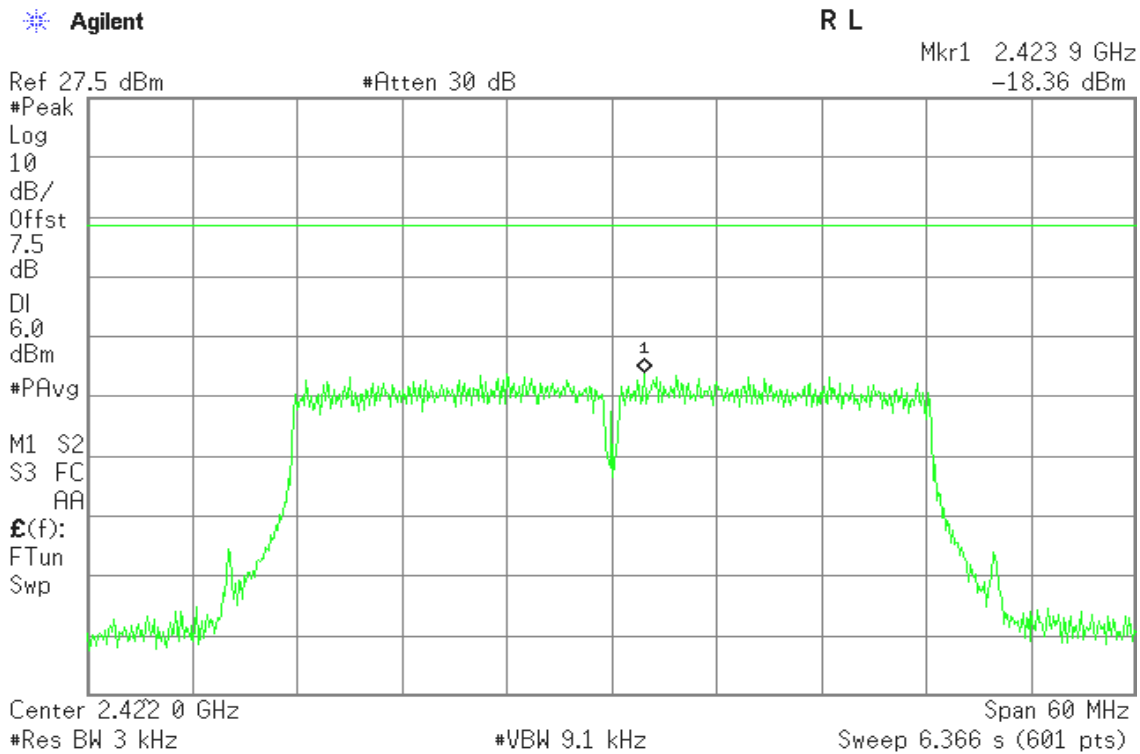




PPSD (CH Mid)

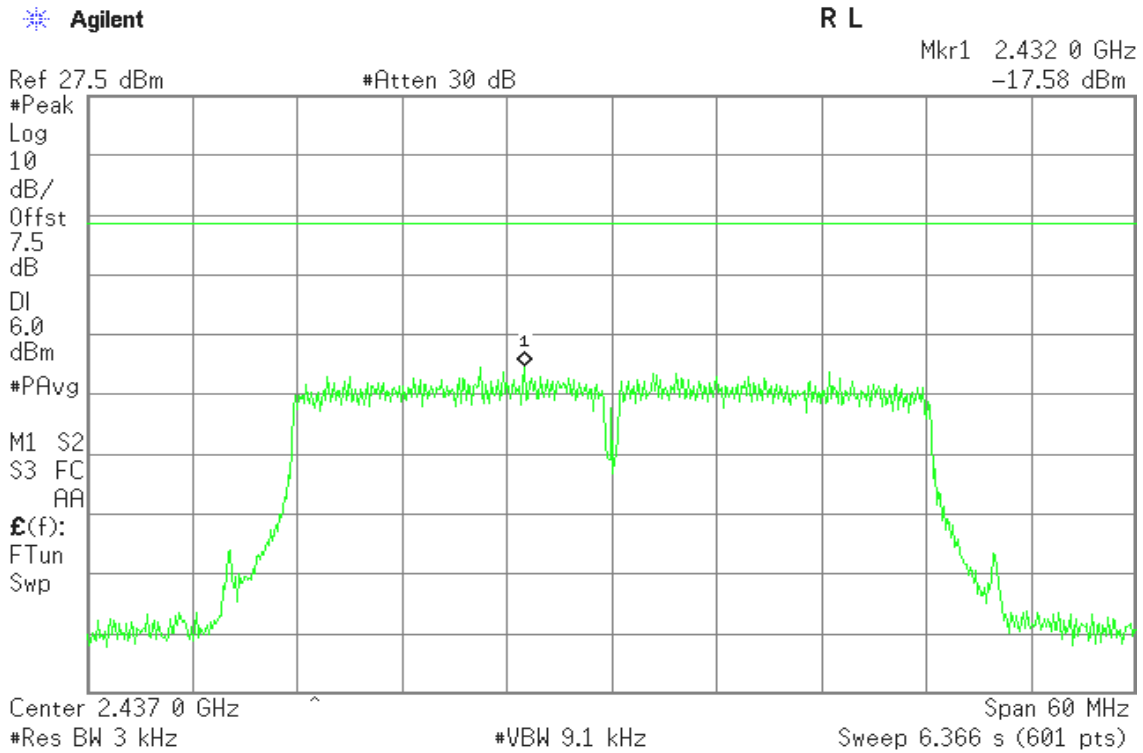

PPSD (CH High)

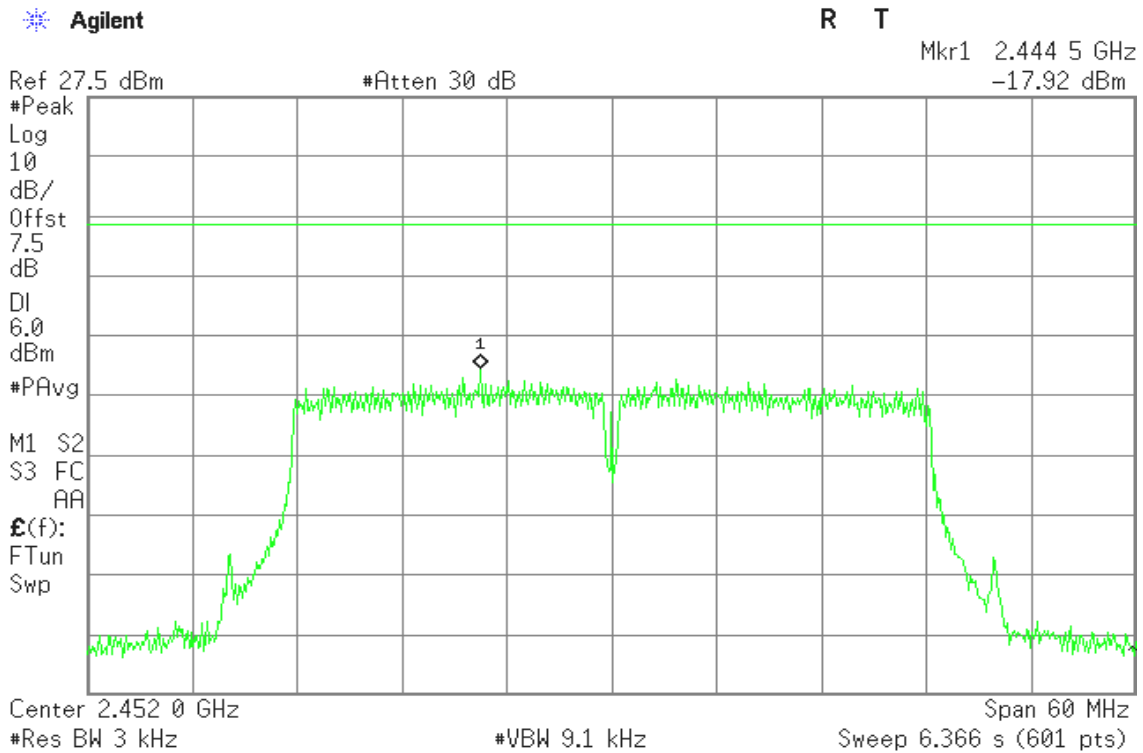




7.6 SPURIOUS EMISSIONS

7.6.1 CONDUCTED MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

Per KDB 662911 D01 Multiple Transmitter Output v01r02

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.




Test Plot


Spurious Emissions

IEEE 802.11b mode

CH Low

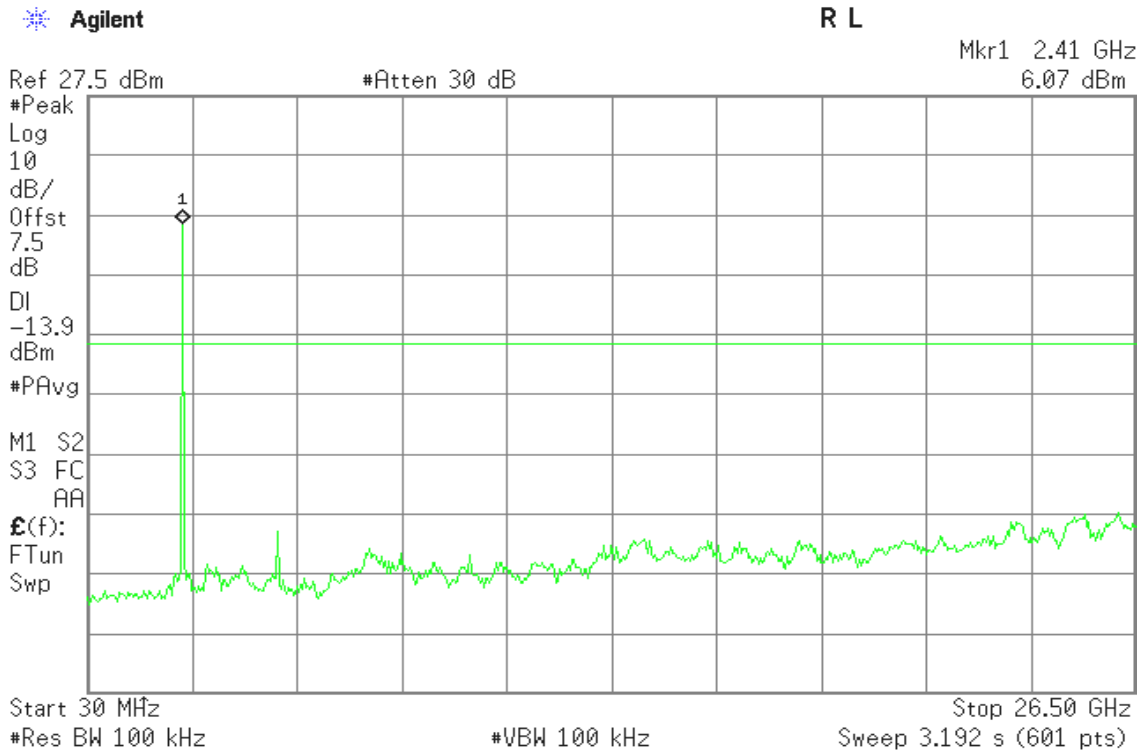

CH Mid

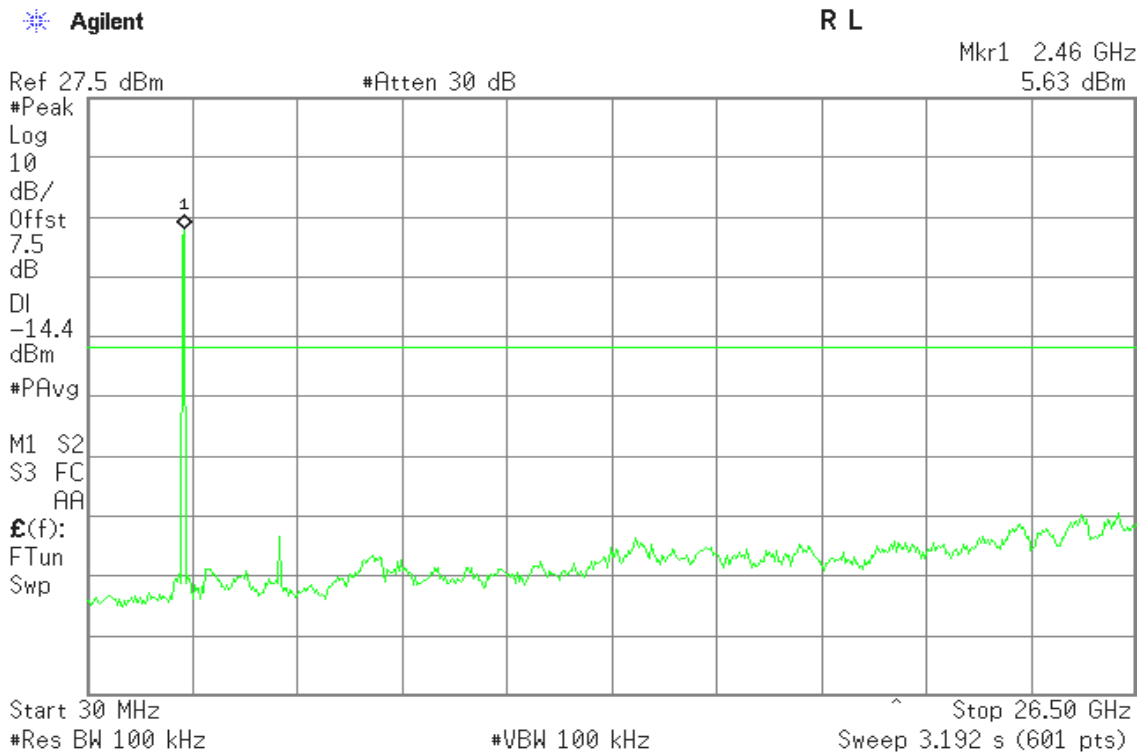




CH High

Agilent

R L

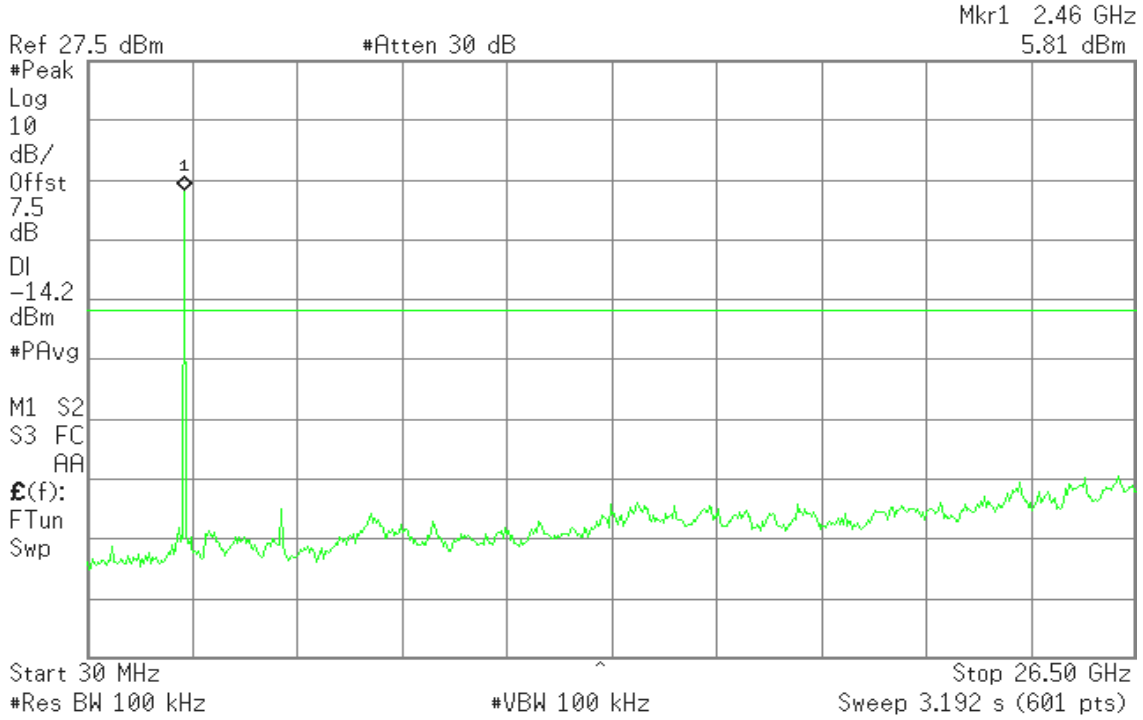


IEEE 802.11g mode

CH Low

Agilent

R L

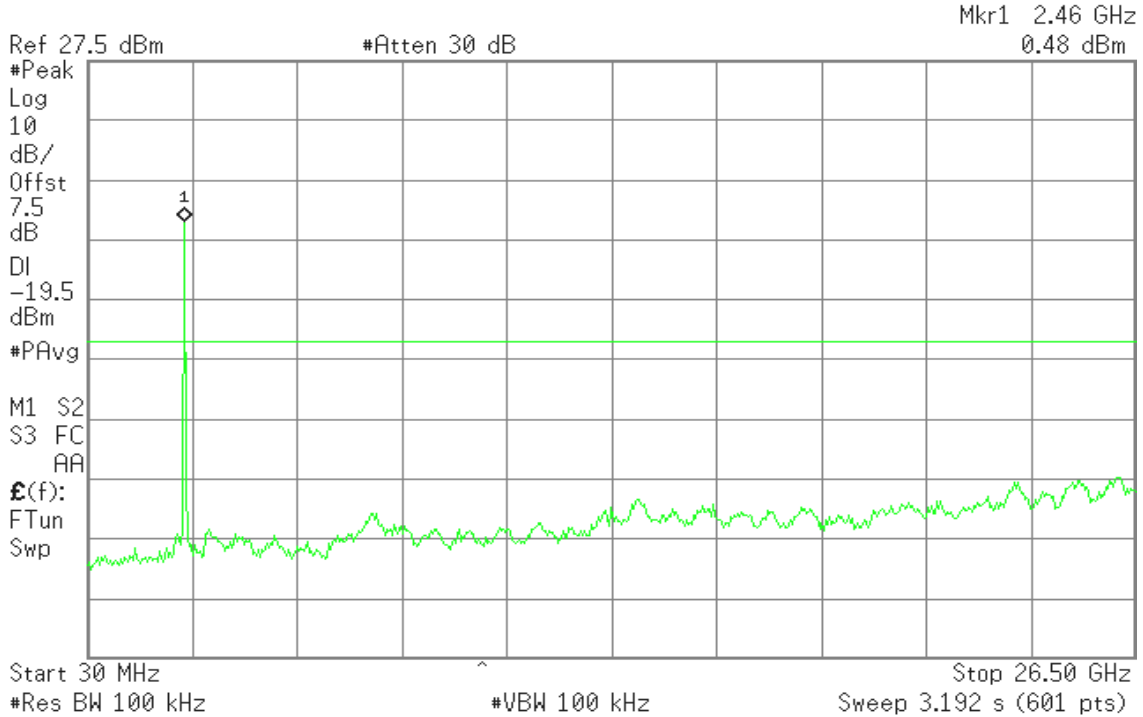




CH Mid

Agilent


R L

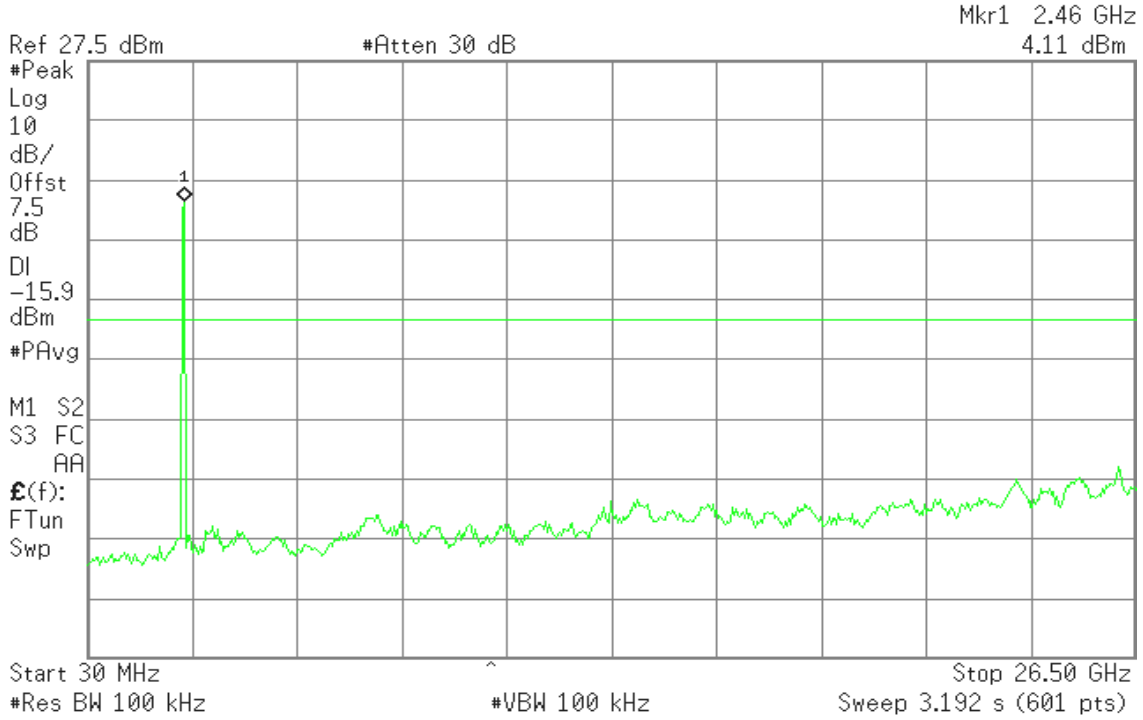

CH High

Agilent


R T

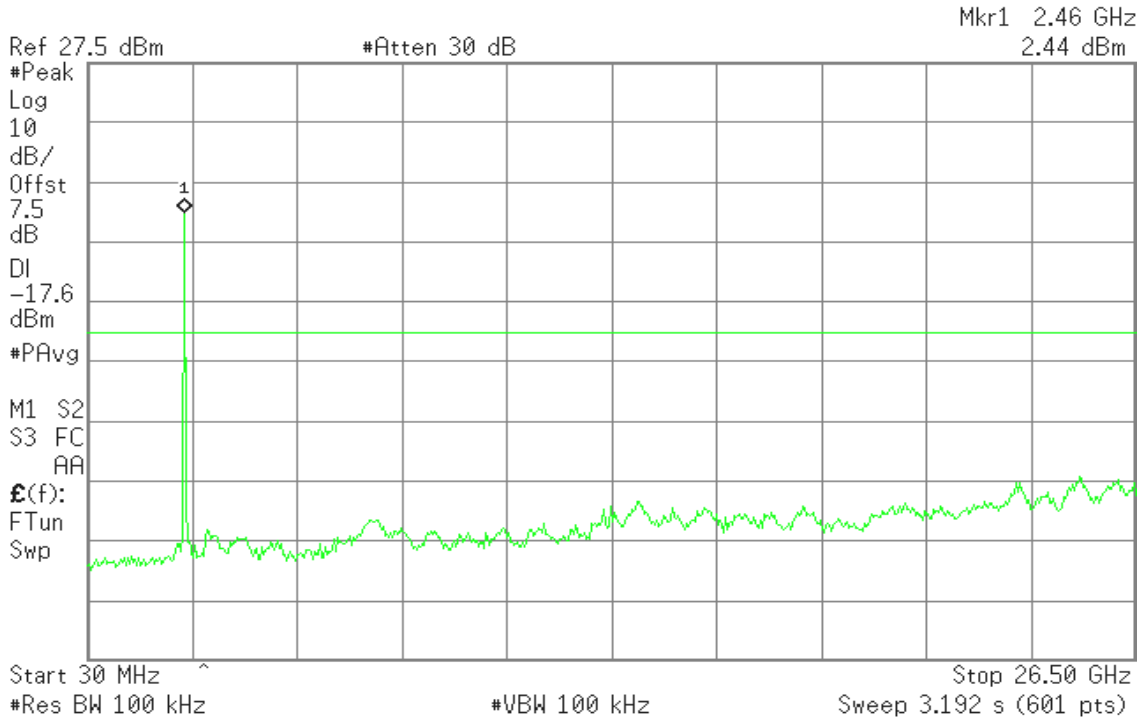




IEEE 802.11n HT20 mode / Chain 0

CH Low

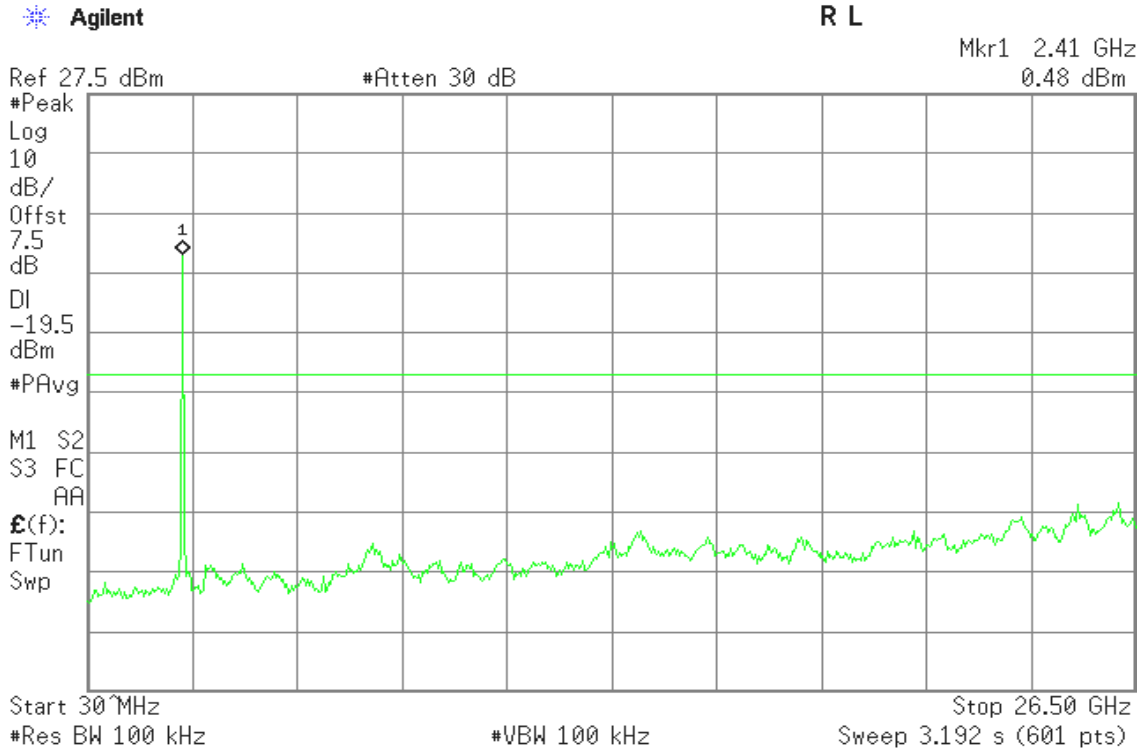

CH Mid

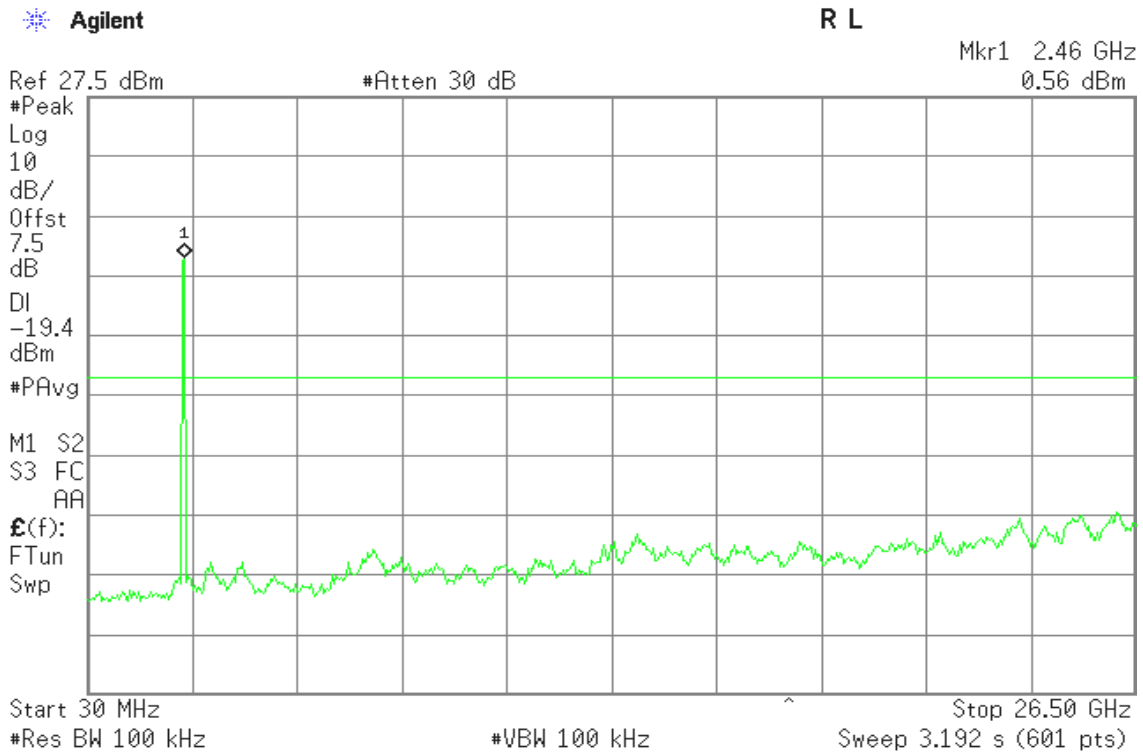




CH High

Agilent

R L

Mkr1 2.46 GHz
1.35 dBm

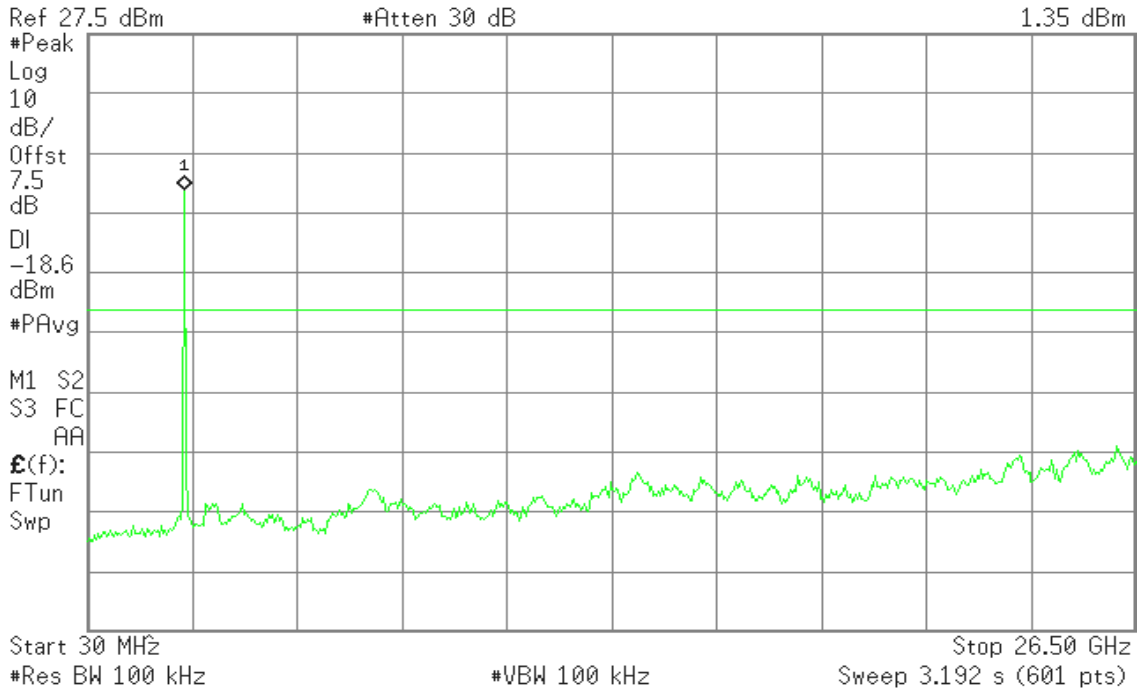


IEEE 802.11n HT20 mode / Chain 1

CH Low

Agilent

R L

Mkr1 2.41 GHz
0.54 dBm

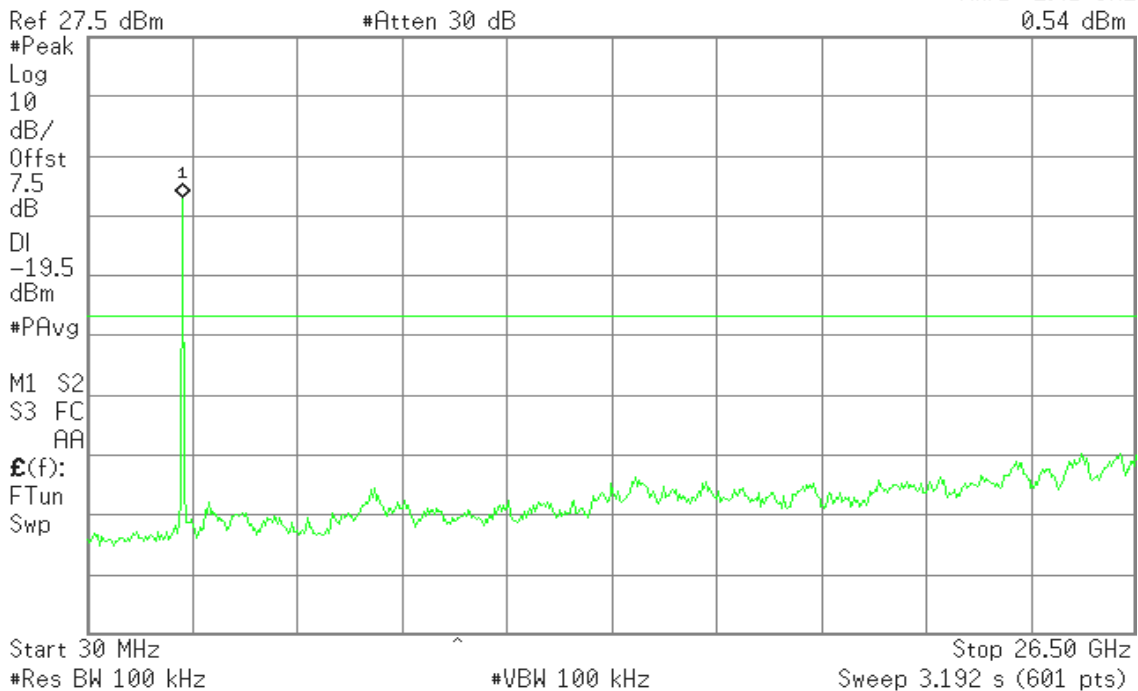




CH Mid

Agilent


R L

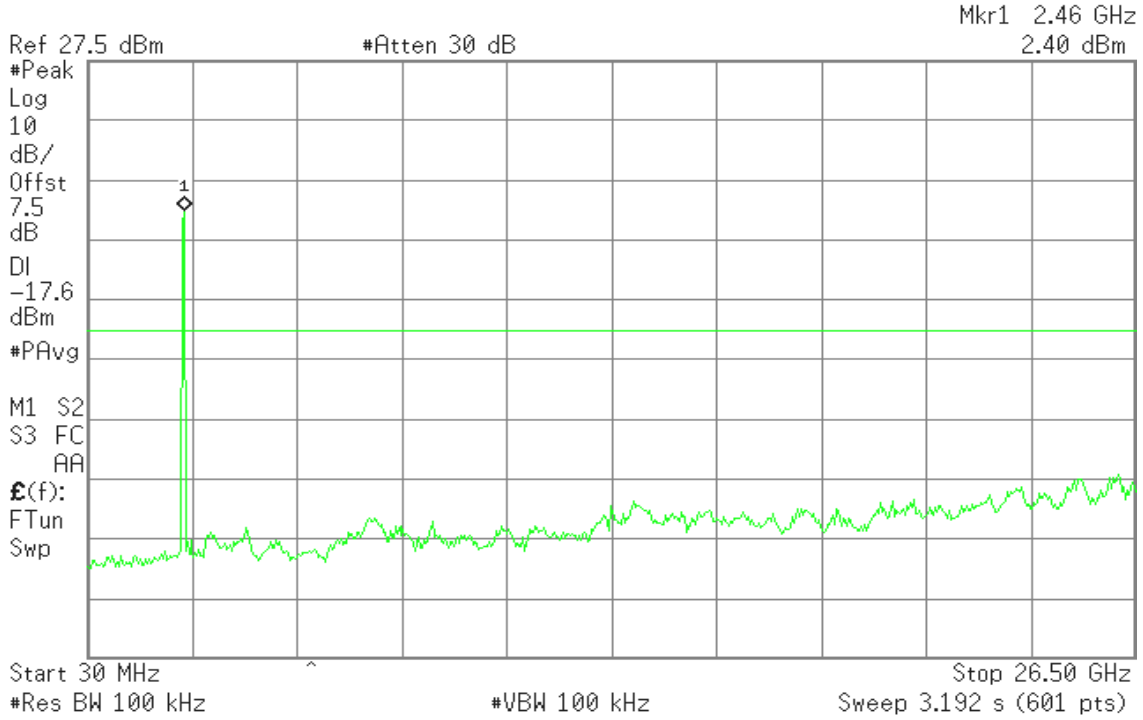

CH High

Agilent


R L

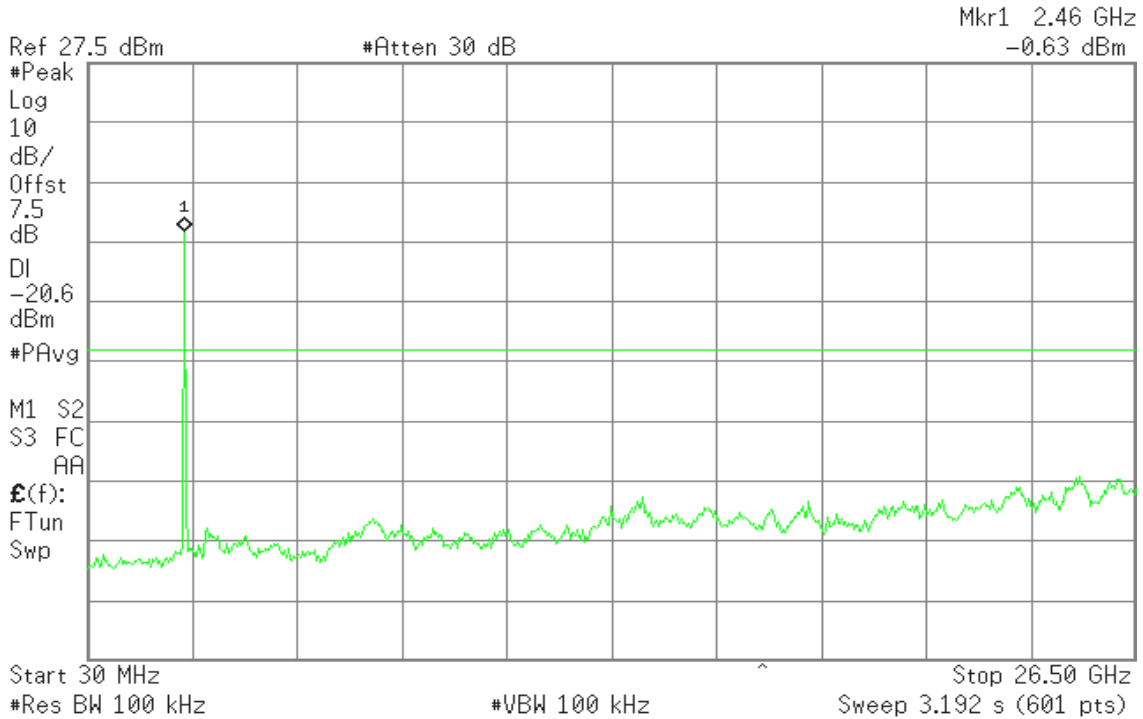




IEEE 802.11n HT40 mode / Chain 0

CH Low

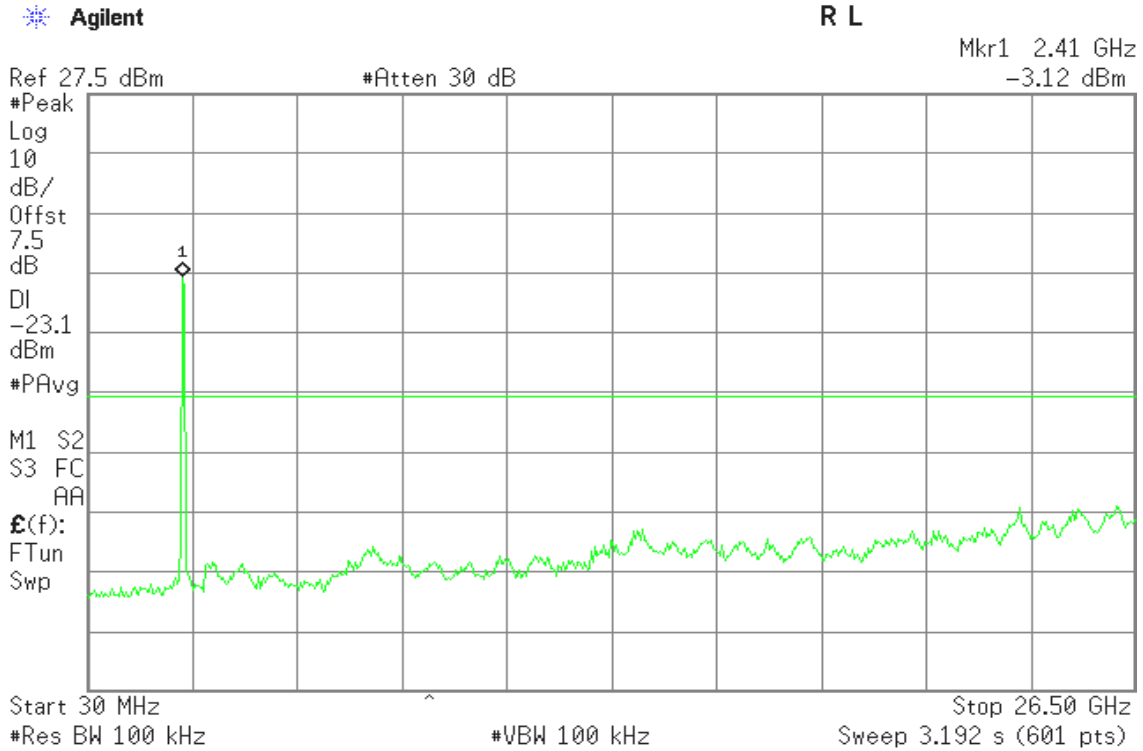

CH Mid

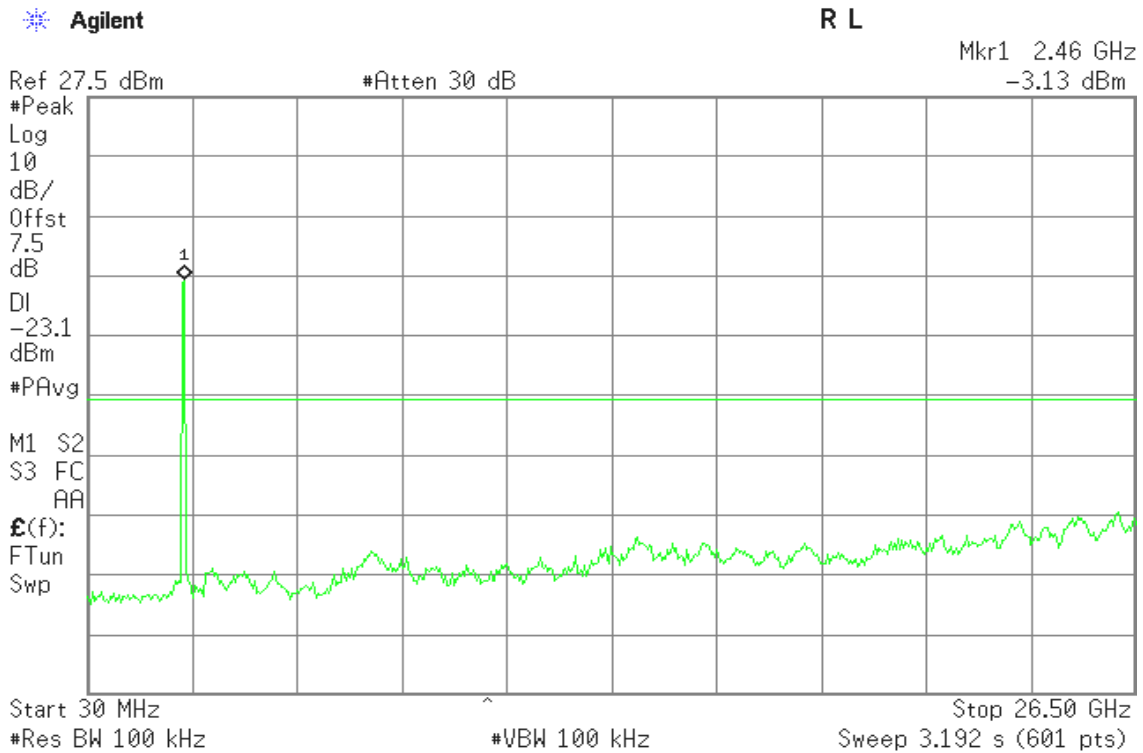




CH High

Agilent

R L

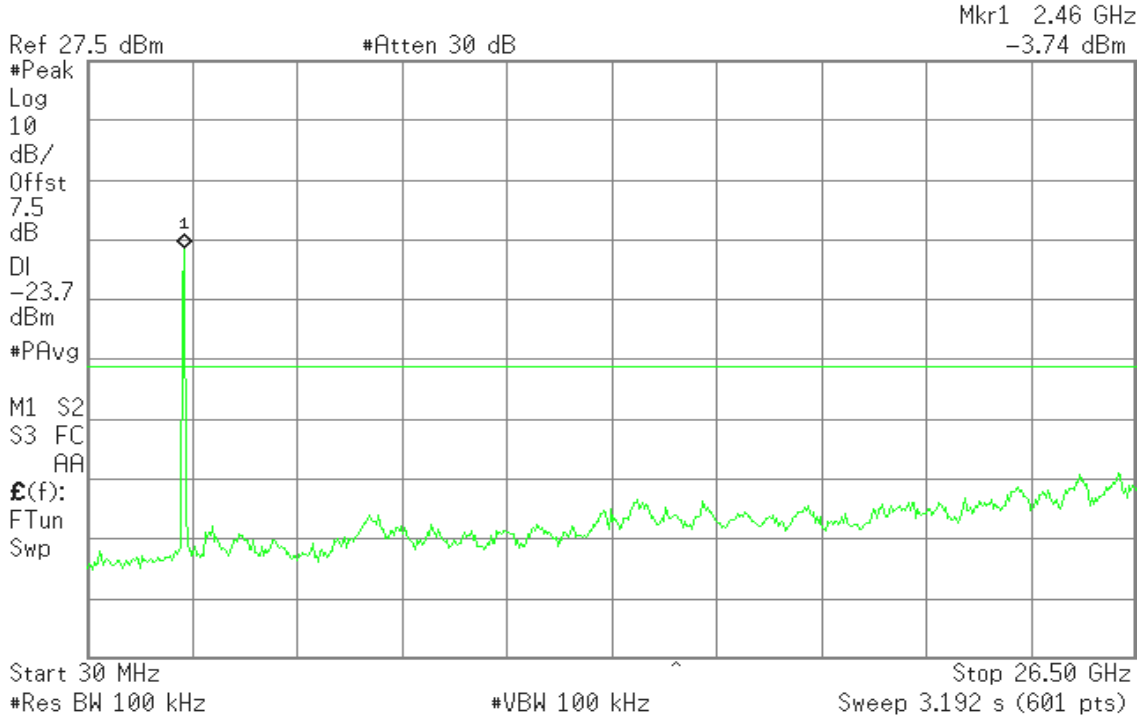


IEEE 802.11n HT40 mode / Chain 1

CH Low

Agilent

R L

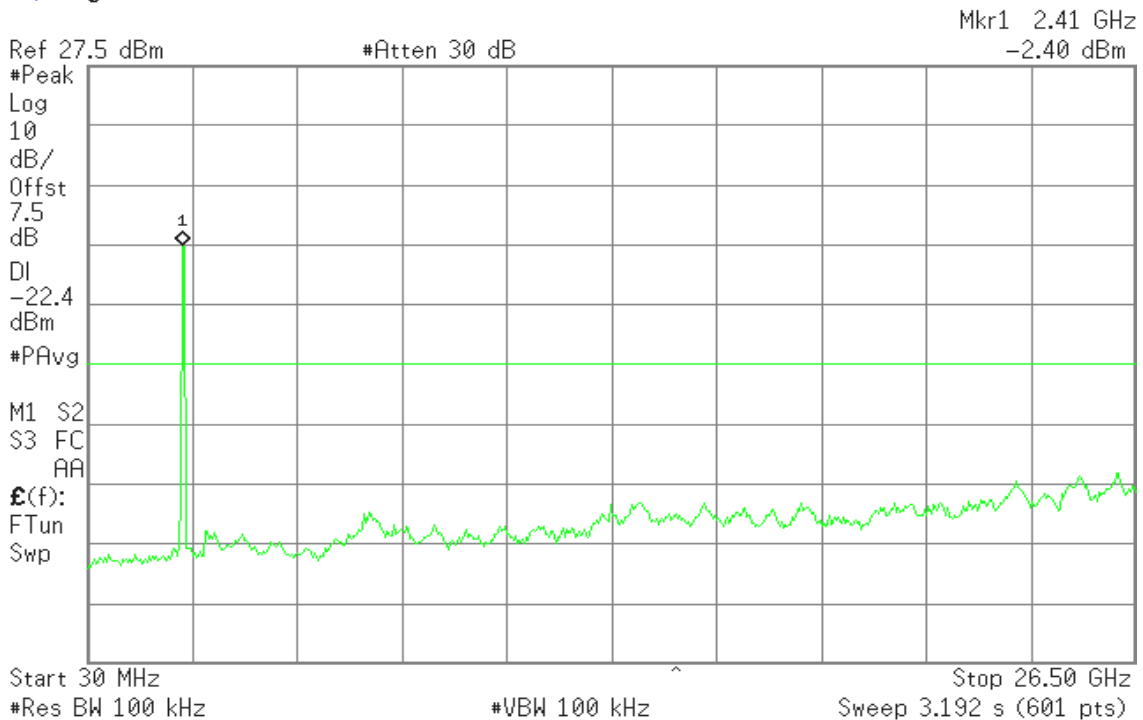




CH Mid

Agilent


R L

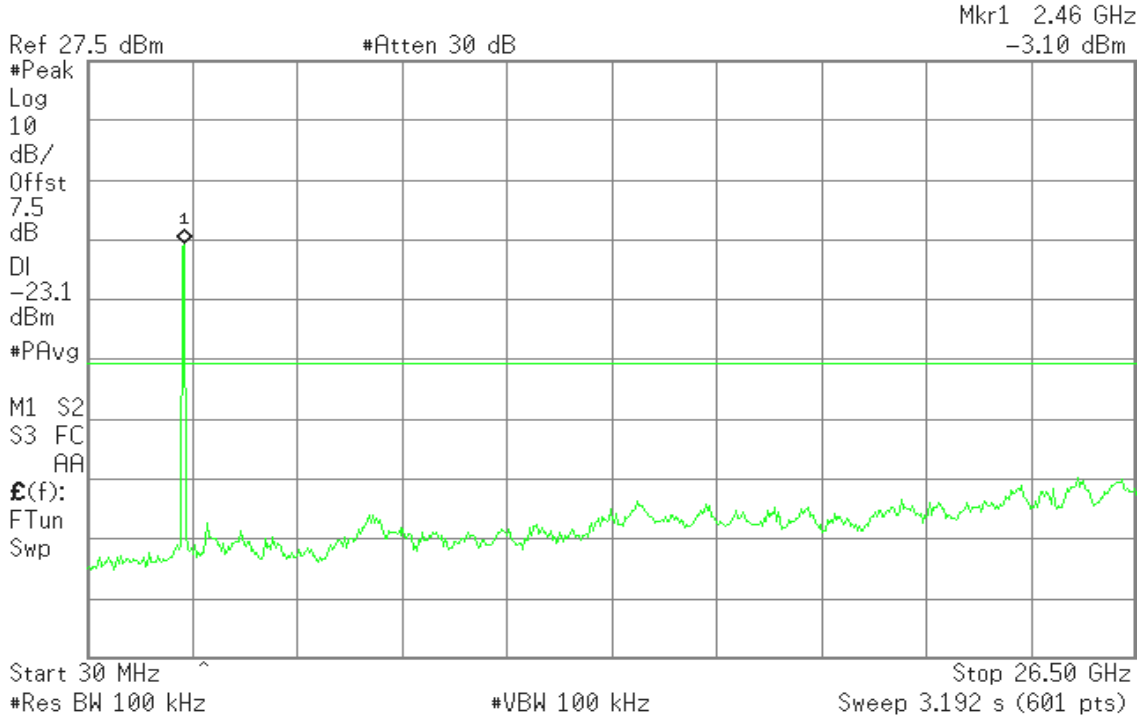

CH High

Agilent

R L

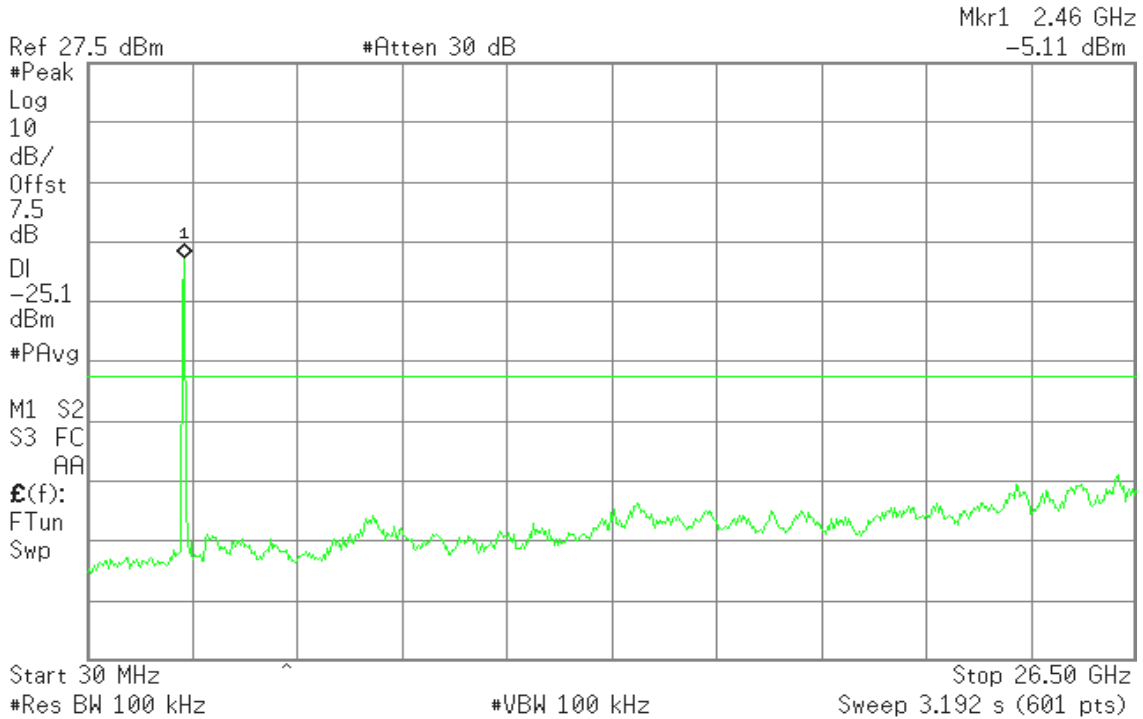





Conducted band-edge

IEEE 802.11b mode

CH Low

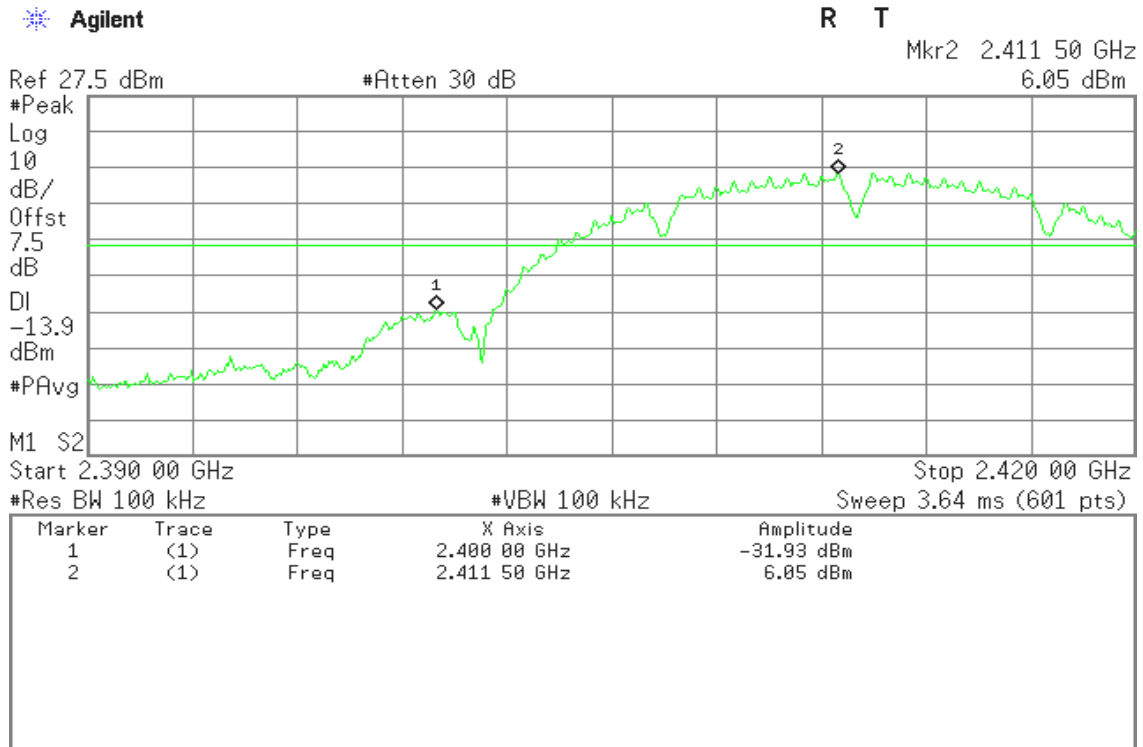

CH High

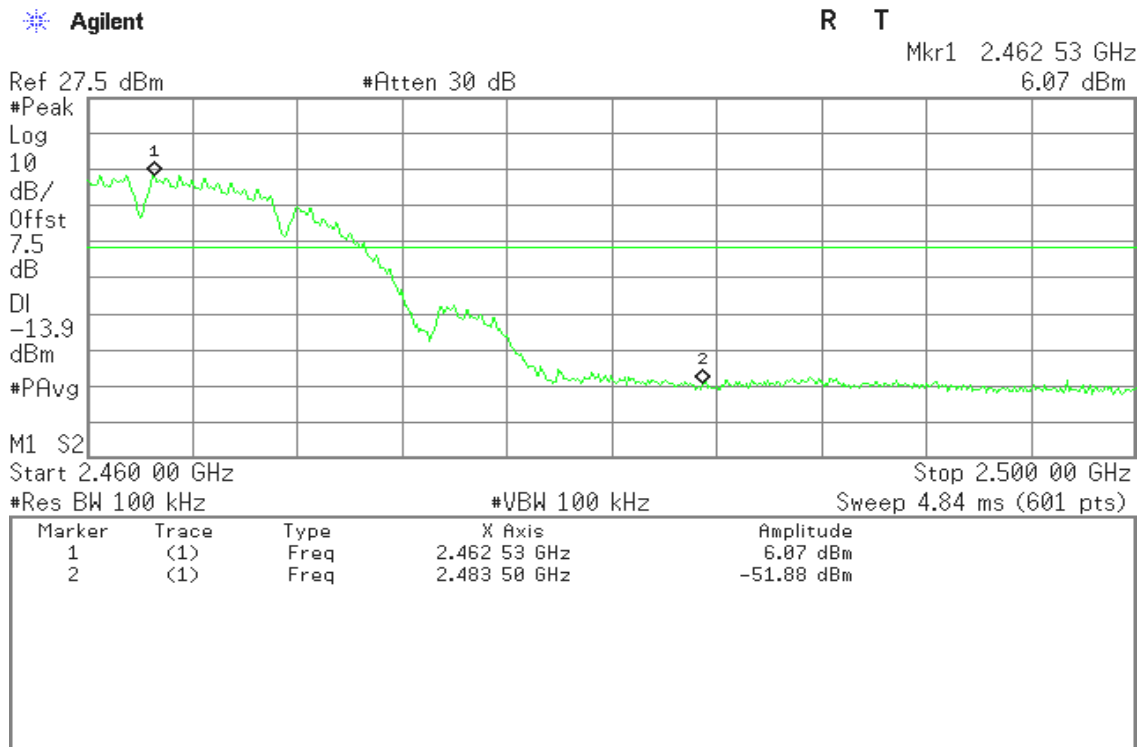




IEEE 802.11g mode

CH Low

Agilent

R T

Mkr3 2.413 25 GHz
3.46 dBm

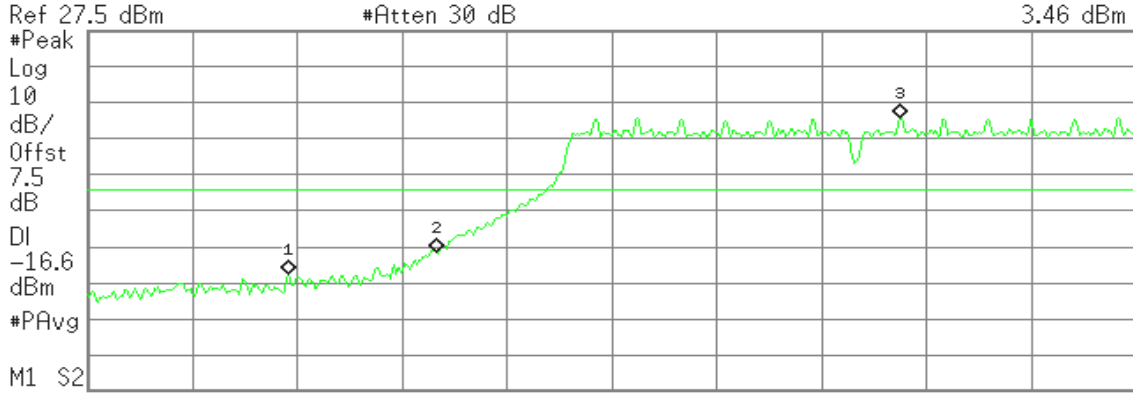

Start 2.390 00 GHz Stop 2.420 00 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 3.64 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.395 75 GHz	-40.18 dBm
2	(1)	Freq	2.400 00 GHz	-34.03 dBm
3	(1)	Freq	2.413 25 GHz	3.46 dBm

CH High

Agilent

R T

Mkr1 2.463 27 GHz
2.94 dBm

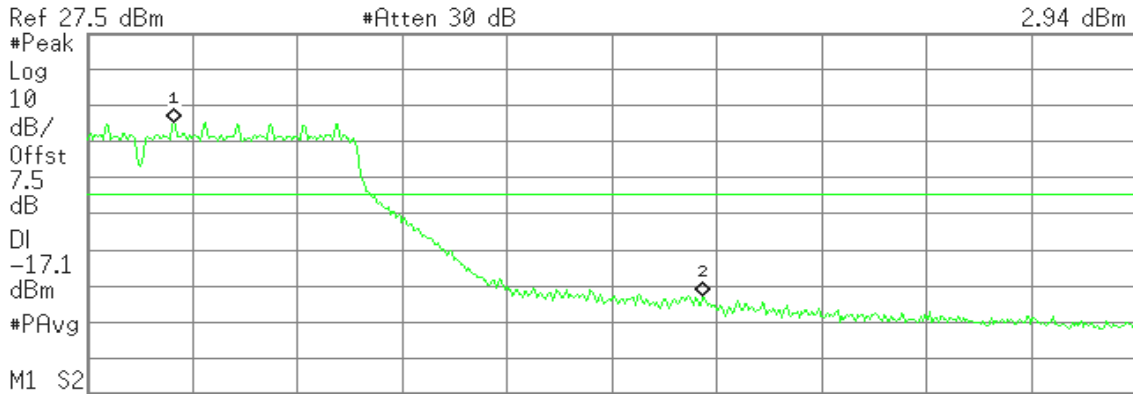


Start 2.460 00 GHz Stop 2.500 00 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 4.84 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.463 27 GHz	2.94 dBm
2	(1)	Freq	2.483 50 GHz	-45.19 dBm




IEEE 802.11n HT20 mode / Chain 0

CH Low

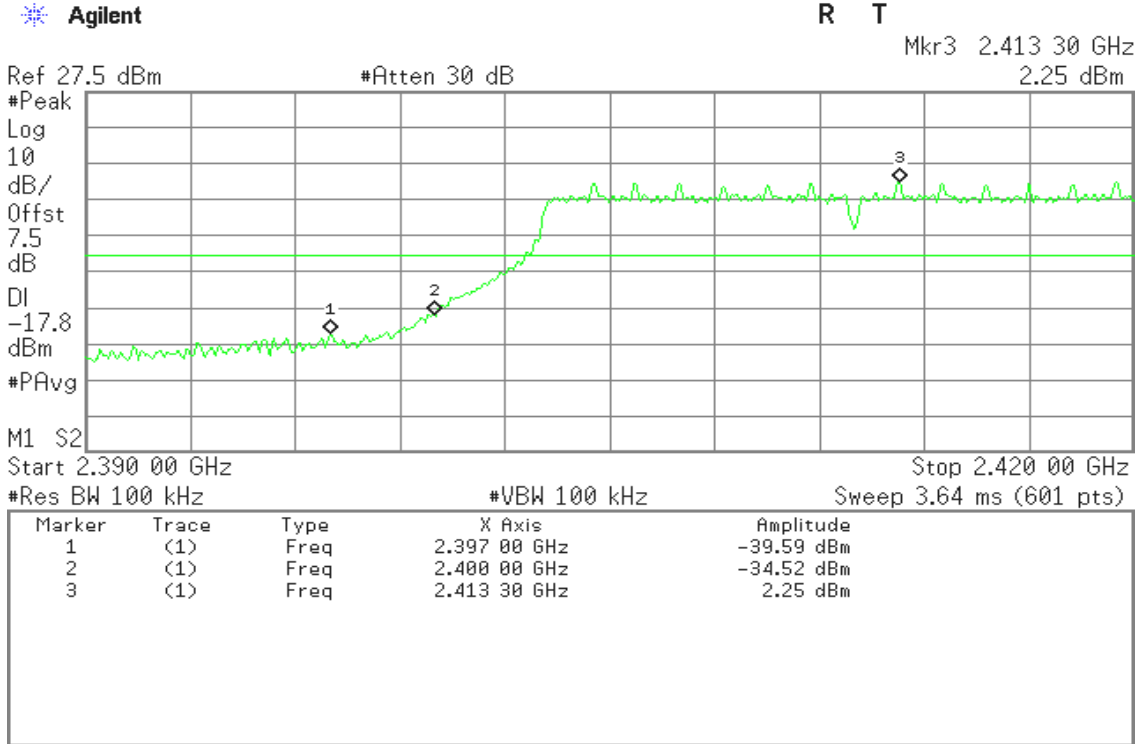


CH High

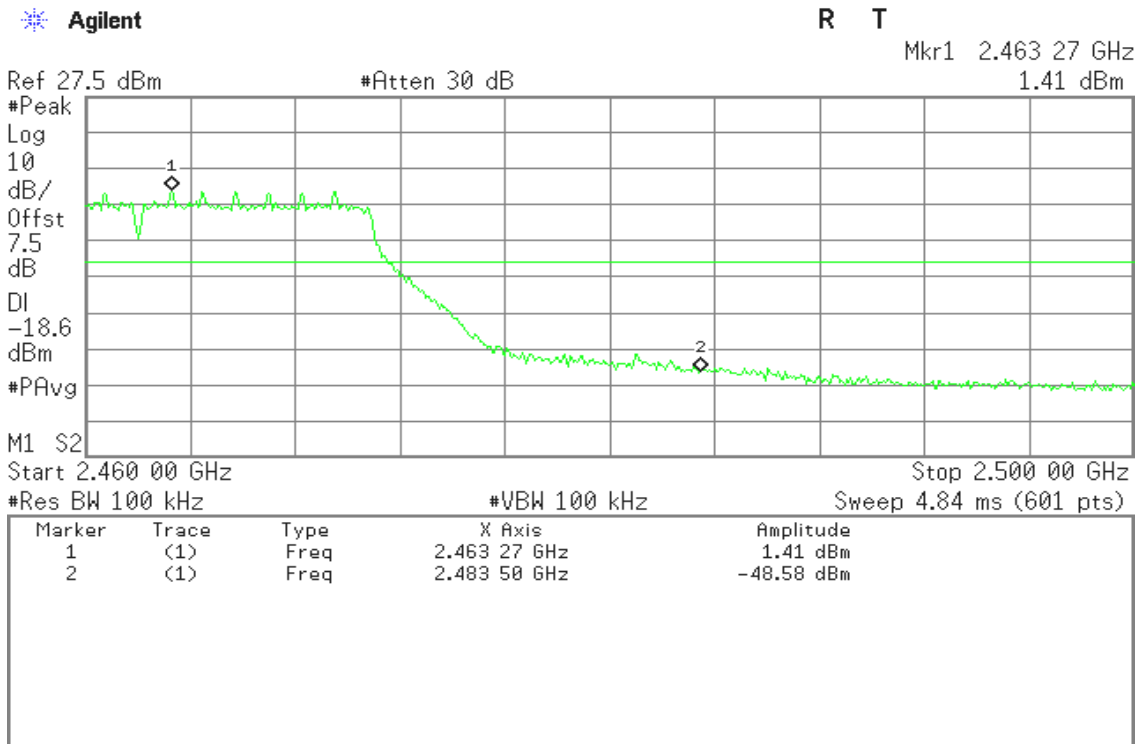




IEEE 802.11n HT20 mode / Chain 1

CH Low

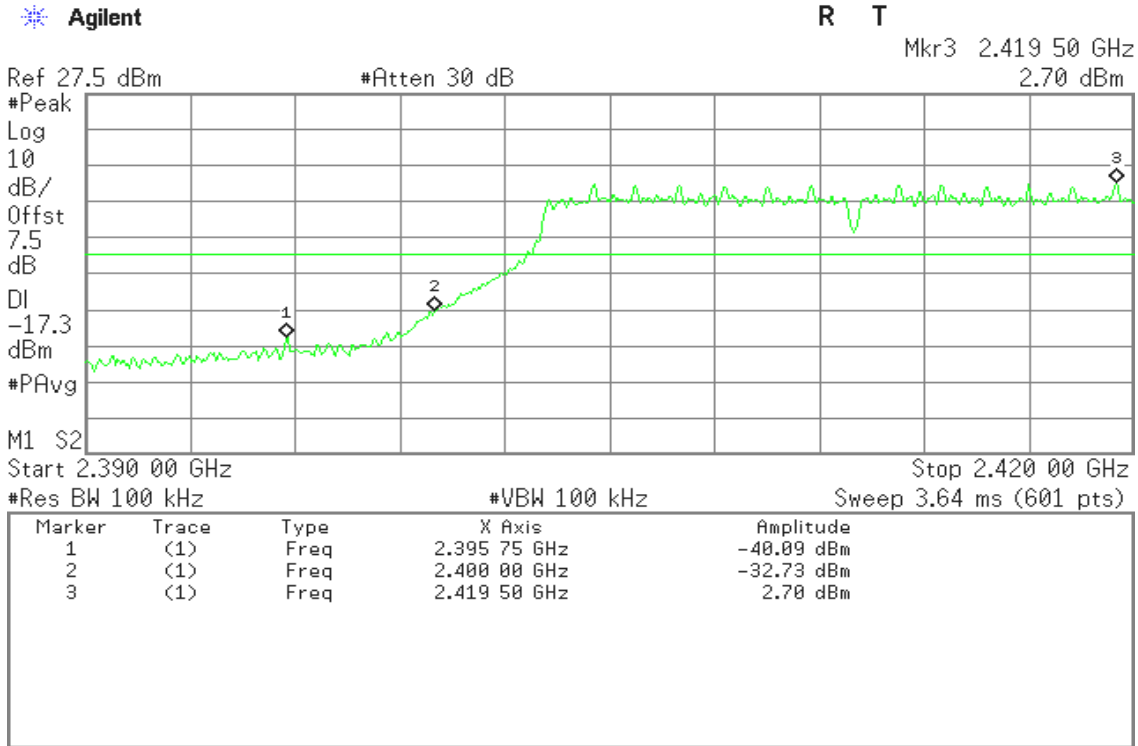


CH High

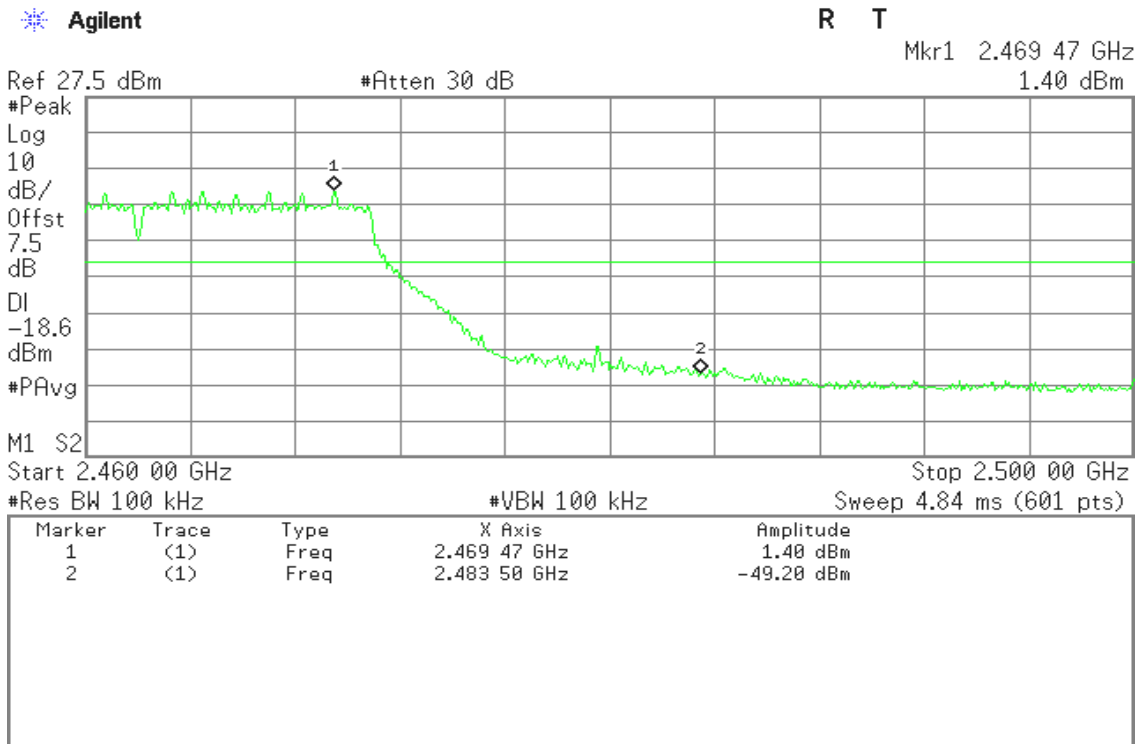




IEEE 802.11n HT40 mode / Chain 0

CH Low

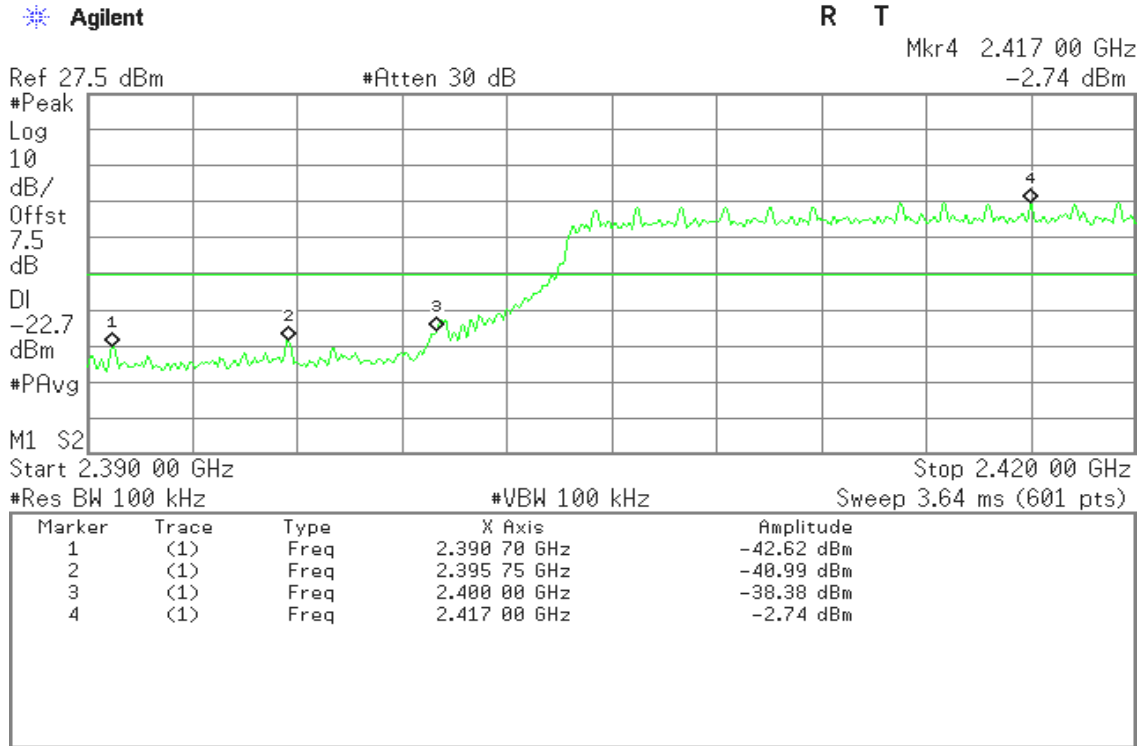


CH High

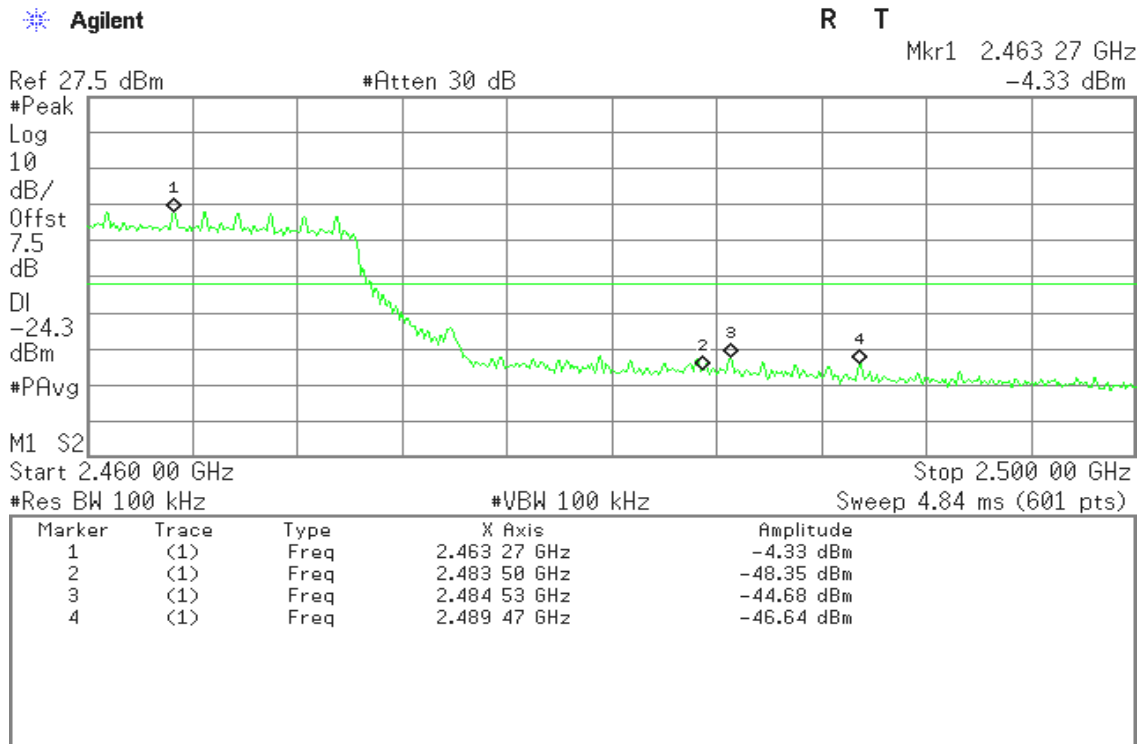




IEEE 802.11n HT40 mode / Chain 1

CH Low

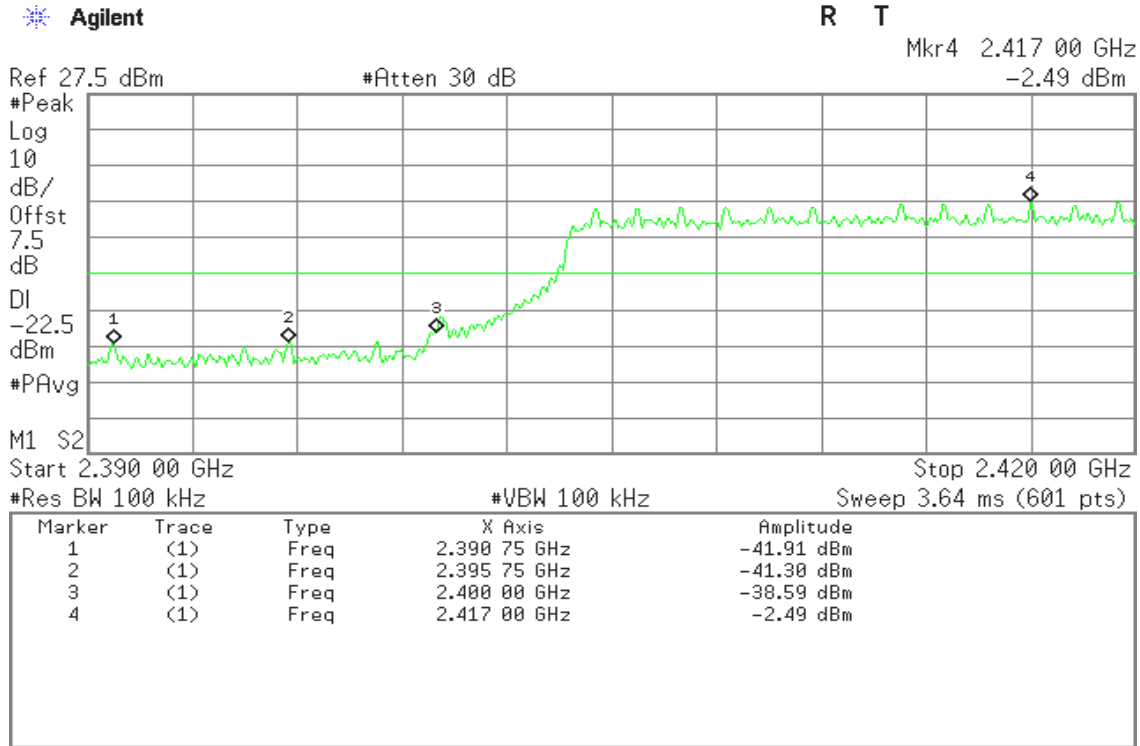

CH High

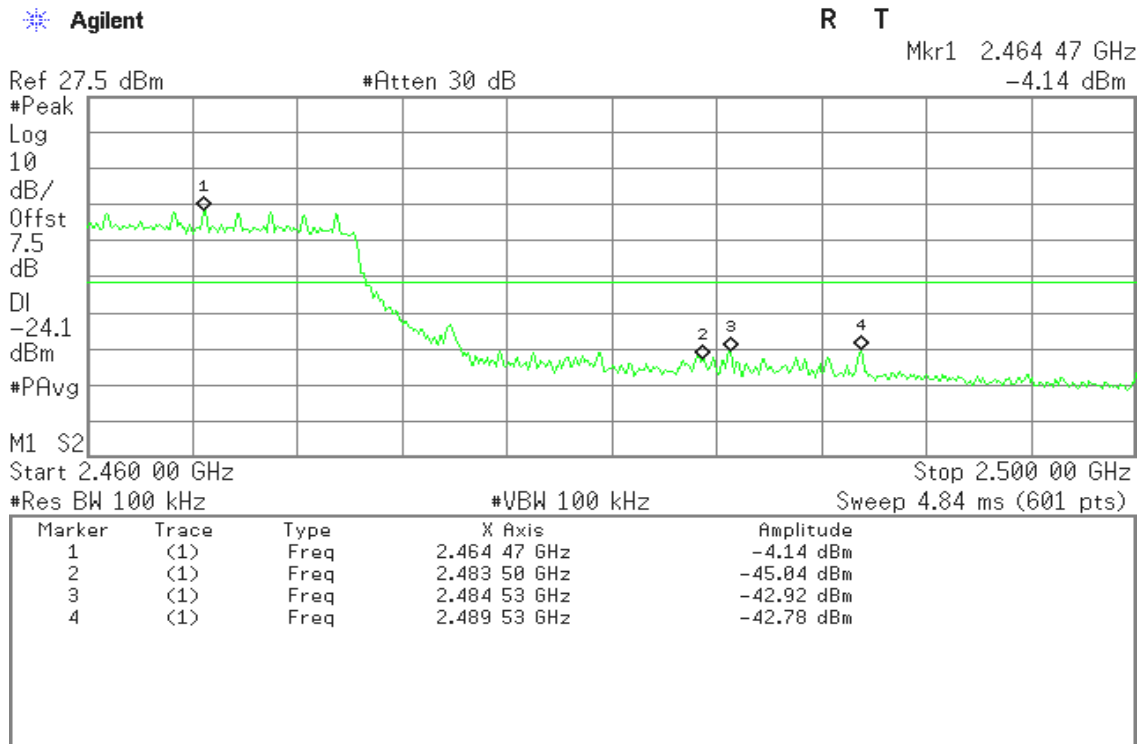



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




TEST CONFIGURATION

9kHz ~ 30MHz

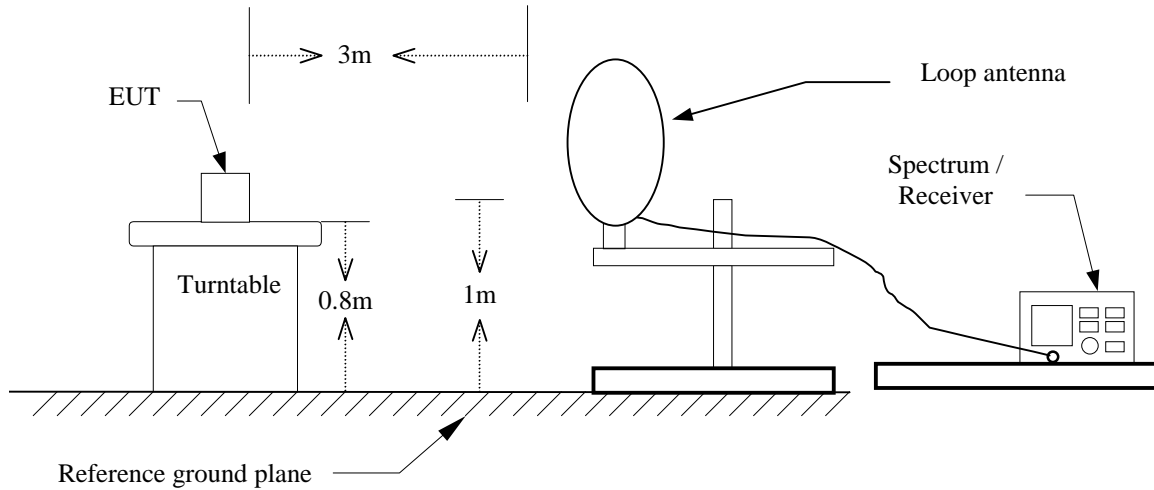


30MHz ~ 1GHz

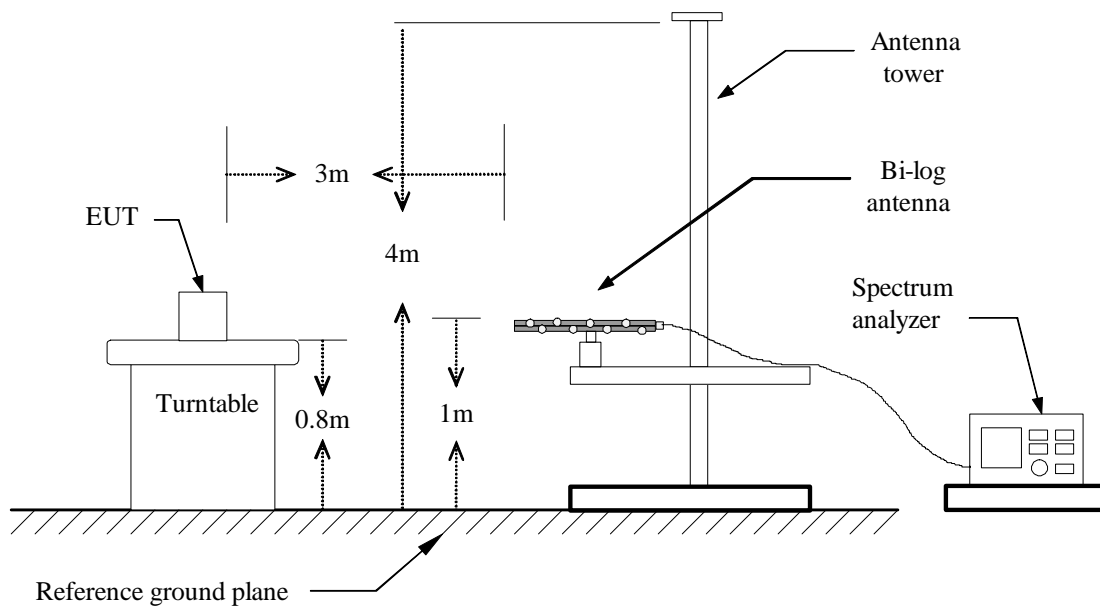



Above 1 GHz

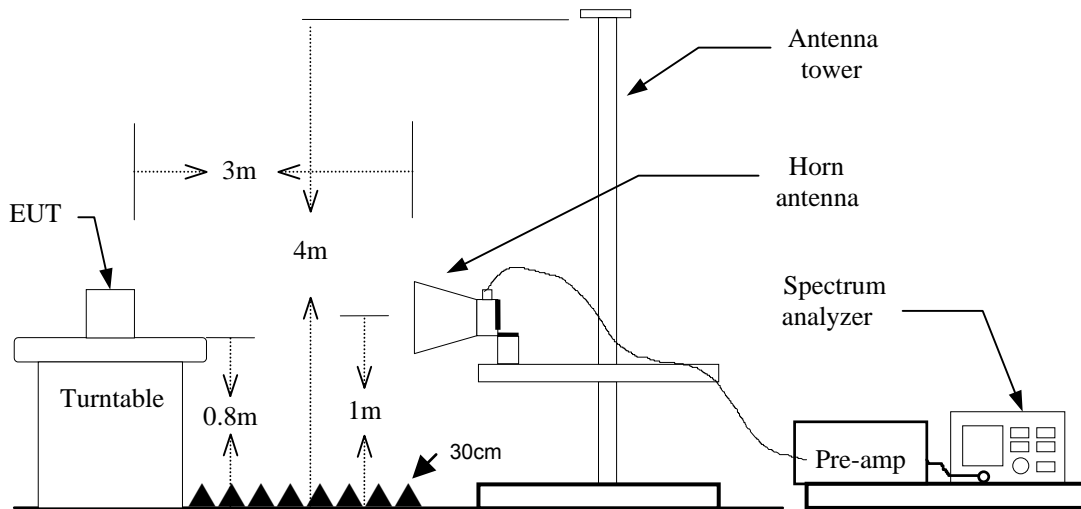

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 30MHz

RBW=10kHz / VBW=30kHz / Sweep=AUTO

30 ~ 1000MHz:

RBW=100kHz / VBW=300KHz / Sweep=AUTO

Above 1GHz:

- a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
- b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.



TEST DATA

Below 1GHz

Operation Mode: Transmitting **Test Date:** 2014/3/12
Temperature: 26°C **Tested by:** Louis Shen
Humidity: 56% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBUV)	Correction Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Ant. Pol. (H/V)	Remark
36.7900	35.80	-12.73	23.07	40.00	-16.93	V	QP
43.5800	48.10	-16.27	31.83	40.00	-8.17	V	QP
49.0500	53.10	-18.85	34.25	40.00	-5.75	V	QP
55.3200	54.60	-20.36	34.24	40.00	-5.76	V	QP
60.1900	56.70	-21.31	35.39	40.00	-4.61	V	QP
250.0100	56.50	-13.49	43.01	46.00	-2.99	V	QP
750.0346	44.80	-6.13	38.67	46.00	-7.33	V	QP
224.9700	43.13	-15.78	27.35	46.00	-18.65	H	QP
250.1900	50.08	-13.48	36.60	46.00	-9.40	H	QP
357.8600	42.62	-10.95	31.67	46.00	-14.33	H	QP
500.4500	46.53	-9.24	37.29	46.00	-8.71	H	QP
749.7400	48.43	-6.14	42.29	46.00	-3.71	H	QP
900.0900	35.69	-3.92	31.77	46.00	-14.23	H	QP

Remark:

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 9 kHz to the 1GHz.
3. Radiated emissions measured in the measured frequency range were made with an instrument using peak detector or quasi-peak detector mode.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low **Test Date:** 2014/3/6

Temperature: 26°C **Tested by:** Francis Lee

Humidity: 56 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1568.000	52.26	-4.94	47.32	74.00	-26.68	V	peak
2252.000	59.87	-1.44	58.43	74.00	-15.57	V	peak
2252.000	51.10	-1.44	49.66	54.00	-4.34	V	AVG
2286.000	58.90	-1.52	57.38	74.00	-16.62	V	peak
2286.000	48.83	-1.52	47.31	54.00	-6.69	V	AVG
2538.000	57.24	-1.40	55.84	74.00	-18.16	V	peak
2538.000	48.76	-1.40	47.36	54.00	-6.64	V	AVG
2714.000	52.02	-1.56	50.46	74.00	-23.54	V	peak
3615.000	42.03	2.86	44.89	74.00	-29.11	V	peak
4825.000	45.70	2.68	48.38	74.00	-25.62	V	peak
7235.000	44.05	10.21	54.26	74.00	-19.74	V	peak
7235.000	41.55	10.21	51.76	54.00	-2.24	V	AVG
1396.000	52.51	-7.00	45.51	74.00	-28.49	H	peak
2158.000	51.27	-3.65	47.62	74.00	-26.38	H	peak
2584.000	50.97	-3.43	47.54	74.00	-26.46	H	peak
4360.000	41.39	7.22	48.61	74.00	-25.39	H	peak
4825.000	43.68	5.88	49.56	74.00	-24.44	H	peak
7235.000	41.86	10.96	52.82	74.00	-21.18	H	peak
7235.000	35.26	10.96	46.22	54.00	-7.78	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1974.000	51.36	-1.71	49.65	74.00	-24.35	V	peak
2272.000	59.17	-1.49	57.68	74.00	-16.32	V	peak
2272.000	49.86	-1.49	48.37	54.00	-5.63	V	AVG
2560.000	57.33	-1.67	55.66	74.00	-18.34	V	peak
2560.000	48.23	-1.67	46.56	54.00	-7.44	V	AVG
2728.000	52.92	-1.65	51.27	74.00	-22.73	V	peak
3755.000	41.99	3.14	45.13	74.00	-28.87	V	peak
4875.000	43.03	3.81	46.84	74.00	-27.16	V	peak
7310.000	44.81	10.56	55.37	74.00	-18.63	V	peak
7310.000	41.47	10.56	52.03	54.00	-1.97	V	AVG
1408.000	52.16	-7.07	45.09	74.00	-28.91	H	peak
2158.000	50.69	-3.65	47.04	74.00	-26.96	H	peak
2780.000	49.90	-2.66	47.24	74.00	-26.76	H	peak
4270.000	41.63	7.16	48.79	74.00	-25.21	H	peak
4975.000	42.07	7.48	49.55	74.00	-24.45	H	peak
7310.000	41.49	11.77	53.26	74.00	-20.74	H	peak
7310.000	36.74	11.77	48.51	54.00	-5.49	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limiter as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1524.000	52.89	-5.15	47.74	74.00	-26.26	V	peak
1980.000	50.86	-1.62	49.24	74.00	-24.76	V	peak
2304.000	59.37	-1.55	57.82	74.00	-16.18	V	peak
2304.000	51.48	-1.55	49.93	54.00	-4.07	V	AVG
2622.000	55.43	-2.02	53.41	74.00	-20.59	V	peak
2622.000	47.28	-2.02	45.26	54.00	-8.74	V	AVG
2756.000	52.84	-1.82	51.02	74.00	-22.98	V	peak
4075.000	41.45	3.21	44.66	74.00	-29.34	V	peak
6590.000	41.00	6.88	47.88	74.00	-26.12	V	peak
7385.000	43.32	11.18	54.50	74.00	-19.50	V	peak
7385.000	40.47	11.18	51.65	54.00	-2.35	V	AVG
1398.000	51.42	-6.95	44.47	74.00	-29.53	H	peak
2134.000	51.06	-3.71	47.35	74.00	-26.65	H	peak
2774.000	49.88	-2.71	47.17	74.00	-26.83	H	peak
4340.000	40.92	7.36	48.28	74.00	-25.72	H	peak
4925.000	42.01	7.26	49.27	74.00	-24.73	H	peak
7385.000	41.34	11.39	52.73	74.00	-21.27	H	peak
7385.000	37.05	11.39	48.44	54.00	-5.56	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limiter as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1510.000	52.34	-5.21	47.13	74.00	-26.87	V	peak
2020.000	51.65	-1.75	49.90	74.00	-24.10	V	peak
2250.000	58.93	-1.44	57.49	74.00	-16.51	V	peak
2250.000	49.29	-1.44	47.85	54.00	-6.15	V	AVG
2544.000	57.17	-1.48	55.69	74.00	-18.31	V	peak
2544.000	47.67	-1.48	46.19	54.00	-7.81	V	AVG
2696.000	52.06	-1.50	50.56	74.00	-23.44	V	peak
3625.000	41.01	2.82	43.83	74.00	-30.17	V	peak
4940.000	40.51	4.75	45.26	74.00	-28.74	V	peak
7235.000	48.14	10.21	58.35	74.00	-15.65	V	peak
7235.000	36.10	10.21	46.31	54.00	-7.69	V	AVG
1368.000	52.81	-7.72	45.09	74.00	-28.91	H	peak
2194.000	51.04	-3.57	47.47	74.00	-26.53	H	peak
2852.000	49.61	-2.09	47.52	74.00	-26.48	H	peak
3660.000	42.30	3.93	46.23	74.00	-27.77	H	peak
4330.000	40.71	7.44	48.15	74.00	-25.85	H	peak
7245.000	40.67	11.09	51.76	74.00	-22.24	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limiter as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1534.000	52.57	-5.10	47.47	74.00	-26.53	V	peak
2000.000	50.94	-1.30	49.64	74.00	-24.36	V	peak
2272.000	59.14	-1.49	57.65	74.00	-16.35	V	peak
2272.000	48.38	-1.49	46.89	54.00	-7.11	V	AVG
2520.000	57.02	-1.18	55.84	74.00	-18.16	V	peak
2520.000	46.46	-1.18	45.28	54.00	-8.72	V	AVG
2696.000	53.12	-1.50	51.62	74.00	-22.38	V	peak
5000.000	39.58	5.32	44.90	74.00	-29.10	V	peak
6255.000	39.29	6.67	45.96	74.00	-28.04	V	peak
7310.000	45.30	10.56	55.86	74.00	-18.14	V	peak
7310.000	33.46	10.56	44.02	54.00	-9.98	V	AVG
1400.000	52.81	-6.90	45.91	74.00	-28.09	H	peak
2132.000	51.23	-3.71	47.52	74.00	-26.48	H	peak
2758.000	50.92	-2.85	48.07	74.00	-25.93	H	peak
4295.000	41.44	7.58	49.02	74.00	-24.98	H	peak
5605.000	40.46	9.14	49.60	74.00	-24.40	H	peak
7310.000	42.05	11.77	53.82	74.00	-20.18	H	peak
7310.000	31.67	11.77	43.44	54.00	-10.56	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limiter as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1538.000	52.57	-5.08	47.49	74.00	-26.51	V	peak
2044.000	51.98	-2.30	49.68	74.00	-24.32	V	peak
2280.000	59.35	-1.51	57.84	74.00	-16.16	V	peak
2280.000	50.12	-1.51	48.61	54.00	-5.39	V	AVG
2718.000	52.43	-1.58	50.85	74.00	-23.15	V	peak
4100.000	41.35	3.12	44.47	74.00	-29.53	V	peak
5490.000	40.32	6.25	46.57	74.00	-27.43	V	peak
7385.000	43.43	11.18	54.61	74.00	-19.39	V	peak
7385.000	34.37	11.18	45.55	54.00	-8.45	V	AVG
1400.000	52.09	-6.90	45.19	74.00	-28.81	H	peak
2186.000	51.00	-3.59	47.41	74.00	-26.59	H	peak
2790.000	49.59	-2.57	47.02	74.00	-26.98	H	peak
4270.000	40.77	7.16	47.93	74.00	-26.07	H	peak
5535.000	39.37	8.98	48.35	74.00	-25.65	H	peak
7385.000	40.98	11.39	52.37	74.00	-21.63	H	peak
7385.000	32.16	11.39	43.55	54.00	-10.45	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limiter as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 55 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1600.000	51.70	-4.79	46.91	74.00	-27.09	V	peak
2004.000	50.66	-1.39	49.27	74.00	-24.73	V	peak
2240.000	57.64	-1.42	56.22	74.00	-17.78	V	peak
2240.000	49.40	-1.42	47.98	54.00	-6.02	V	AVG
2578.000	58.20	-1.90	56.30	74.00	-17.70	V	peak
2578.000	49.24	-1.90	47.34	54.00	-6.66	V	AVG
2786.000	51.93	-2.01	49.92	74.00	-24.08	V	peak
5000.000	40.62	5.32	45.94	74.00	-28.06	V	peak
6645.000	40.56	7.19	47.75	74.00	-26.25	V	peak
7235.000	43.60	10.21	53.81	74.00	-20.19	V	peak
7235.000	35.05	10.21	45.26	54.00	-8.74	V	AVG
1404.000	51.92	-6.98	44.94	74.00	-29.06	H	peak
2128.000	50.85	-3.72	47.13	74.00	-26.87	H	peak
2718.000	50.18	-3.21	46.97	74.00	-27.03	H	peak
4305.000	40.25	7.62	47.87	74.00	-26.13	H	peak
5905.000	39.68	9.20	48.88	74.00	-25.12	H	peak
7310.000	38.87	11.77	50.64	74.00	-23.36	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1590.000	51.97	-4.84	47.13	74.00	-26.87	V	peak
2008.000	50.68	-1.48	49.20	74.00	-24.80	V	peak
2278.000	60.92	-1.50	59.42	74.00	-14.58	V	peak
2278.000	50.42	-1.50	48.92	54.00	-5.08	V	AVG
2604.000	58.55	-2.14	56.41	74.00	-17.59	V	peak
2604.000	50.16	-2.14	48.02	54.00	-5.98	V	AVG
3765.000	41.52	3.26	44.78	74.00	-29.22	V	peak
5545.000	40.24	6.09	46.33	74.00	-27.67	V	peak
7315.000	42.82	10.60	53.42	74.00	-20.58	V	peak
7315.000	31.35	10.60	41.95	54.00	-12.05	V	AVG
1950.000	51.68	-6.11	45.57	74.00	-28.43	H	peak
2206.000	50.07	-3.73	46.34	74.00	-27.66	H	peak
2844.000	48.99	-2.15	46.84	74.00	-27.16	H	peak
4300.000	41.46	7.66	49.12	74.00	-24.88	H	peak
5585.000	40.09	9.15	49.24	74.00	-24.76	H	peak
7305.000	39.77	11.79	51.56	74.00	-22.44	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11n HT20 mode / CH High

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1708.000	51.60	-5.61	45.99	74.00	-28.01	V	peak
2028.000	50.69	-1.94	48.75	74.00	-25.25	V	peak
2304.000	59.69	-1.55	58.14	74.00	-15.86	V	peak
2304.000	46.16	-1.55	44.61	54.00	-9.39	V	AVG
2606.000	56.09	-2.13	53.96	74.00	-20.04	V	peak
2606.000	45.15	-2.13	43.02	54.00	-10.98	V	AVG
2928.000	50.56	-0.84	49.72	74.00	-24.28	V	peak
3770.000	41.76	3.32	45.08	74.00	-28.92	V	peak
5220.000	40.96	5.48	46.44	74.00	-27.56	V	peak
7385.000	43.84	11.18	55.02	74.00	-18.98	V	peak
7385.000	31.38	11.18	42.56	54.00	-11.44	V	AVG
1738.000	52.22	-7.29	44.93	74.00	-29.07	H	peak
2198.000	51.13	-3.56	47.57	74.00	-26.43	H	peak
2824.000	49.56	-2.30	47.26	74.00	-26.74	H	peak
4305.000	40.63	7.62	48.25	74.00	-25.75	H	peak
5520.000	40.12	8.93	49.05	74.00	-24.95	H	peak
7275.000	39.34	11.49	50.83	74.00	-23.17	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11n HT40 mode / CH Low

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1552.000	51.37	-5.02	46.35	74.00	-27.65	V	peak
2008.000	49.79	-1.48	48.31	74.00	-25.69	V	peak
2254.000	56.53	-1.45	55.08	74.00	-18.92	V	peak
2254.000	46.18	-1.45	44.73	54.00	-9.27	V	AVG
2578.000	56.70	-1.90	54.80	74.00	-19.20	V	peak
2578.000	45.38	-1.90	43.48	54.00	-10.52	V	AVG
3485.000	42.32	2.09	44.41	74.00	-29.59	V	peak
5675.000	41.28	5.93	47.21	74.00	-26.79	V	peak
7470.000	39.58	11.47	51.05	74.00	-22.95	V	peak
1790.000	50.85	-6.83	44.02	74.00	-29.98	H	peak
2164.000	50.58	-3.64	46.94	74.00	-27.06	H	peak
2802.000	48.72	-2.46	46.26	74.00	-27.74	H	peak
4265.000	40.68	7.07	47.75	74.00	-26.25	H	peak
5940.000	40.21	9.06	49.27	74.00	-24.73	H	peak
7320.000	39.86	11.72	51.58	74.00	-22.42	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limiter as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11n HT40 mode / CH Mid

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1590.000	51.35	-4.84	46.51	74.00	-27.49	V	peak
1976.000	50.23	-1.68	48.55	74.00	-25.45	V	peak
2270.000	57.72	-1.48	56.24	74.00	-17.76	V	peak
2270.000	46.47	-1.48	44.99	54.00	-9.01	V	AVG
2610.000	56.27	-2.10	54.17	74.00	-19.83	V	peak
2610.000	44.85	-2.10	42.75	54.00	-11.25	V	AVG
3760.000	42.01	3.20	45.21	74.00	-28.79	V	peak
5465.000	40.31	6.29	46.60	74.00	-27.40	V	peak
7550.000	39.64	11.72	51.36	74.00	-22.64	V	peak
1440.000	51.92	-7.74	44.18	74.00	-29.82	H	peak
2094.000	50.30	-3.94	46.36	74.00	-27.64	H	peak
2854.000	49.42	-2.07	47.35	74.00	-26.65	H	peak
4320.000	40.83	7.51	48.34	74.00	-25.66	H	peak
5590.000	39.63	9.17	48.80	74.00	-25.20	H	peak
7320.000	39.15	11.72	50.87	74.00	-23.13	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: TX / IEEE 802.11n HT40 mode / CH High

Test Date: 2014/3/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
2040.000	50.77	-2.21	48.56	74.00	-25.44	V	peak
2304.000	56.86	-1.55	55.31	74.00	-18.69	V	peak
2304.000	47.14	-1.55	45.59	54.00	-8.41	V	AVG
2606.000	54.65	-2.13	52.52	74.00	-21.48	V	peak
2606.000	44.18	-2.13	42.05	54.00	-11.95	V	AVG
3600.000	42.42	2.93	45.35	74.00	-28.65	V	peak
5560.000	40.12	6.04	46.16	74.00	-27.84	V	peak
7585.000	39.27	11.85	51.12	74.00	-22.88	V	peak
1412.000	51.57	-7.15	44.42	74.00	-29.58	H	peak
2198.000	50.35	-3.56	46.79	74.00	-27.21	H	peak
2830.000	49.00	-2.25	46.75	74.00	-27.25	H	peak
4355.000	40.83	7.25	48.08	74.00	-25.92	H	peak
5555.000	39.70	9.05	48.75	74.00	-25.25	H	peak
7280.000	39.40	11.55	50.95	74.00	-23.05	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limitor as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



TEST DATA

Test Mode	Charging	6dBBandwidth	9 kHz
Environmental Conditions	25°C, 57% RH	Test Date:	2014/3/14
Tested By	Louis Shen	Line	L1

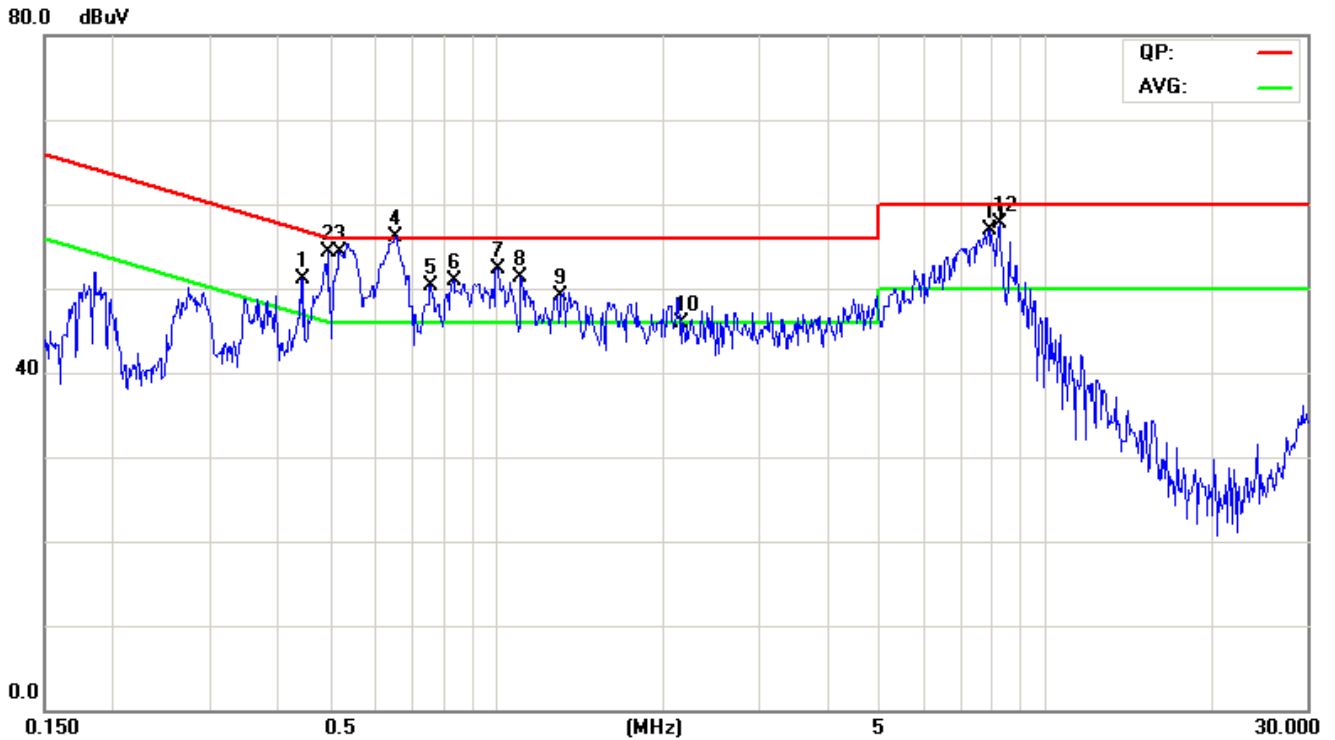


NO.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark (Pass/Fail)
1	0.4438	26.20	16.51	9.63	35.83	26.14	56.99	46.99	-21.16	-20.85	Pass
2	0.4888	33.15	20.03	9.64	42.79	29.67	56.19	46.19	-13.40	-16.52	Pass
3	0.5248	38.32	25.79	9.64	47.96	35.43	56.00	46.00	-8.04	-10.57	Pass
4*	0.6490	39.23	27.94	9.64	48.87	37.58	56.00	46.00	-7.13	-8.42	Pass
5	0.7654	28.78	19.24	9.64	38.42	28.88	56.00	46.00	-17.58	-17.12	Pass
6	0.8332	33.01	20.20	9.64	42.65	29.84	56.00	46.00	-13.35	-16.16	Pass
7	1.0116	31.63	22.17	9.64	41.27	31.81	56.00	46.00	-14.73	-14.19	Pass
8	1.1068	30.07	19.64	9.64	39.71	29.28	56.00	46.00	-16.29	-16.72	Pass
9	1.2963	32.31	20.89	9.65	41.96	30.54	56.00	46.00	-14.04	-15.46	Pass
10	2.1719	28.49	18.91	9.68	38.17	28.59	56.00	46.00	-17.83	-17.41	Pass
11	7.8924	38.58	27.93	9.78	48.36	37.71	60.00	50.00	-11.64	-12.29	Pass
12	8.1316	37.38	27.16	9.78	47.16	36.94	60.00	50.00	-12.84	-13.06	Pass

REMARKS:L1 = Line One (Live Line)



Test Mode	Charging	6dBBandwidth	9 kHz
Environmental Conditions	25°C, 57% RH	Test Date:	2014/3/14
Tested By	Louis Shen	Line	L2

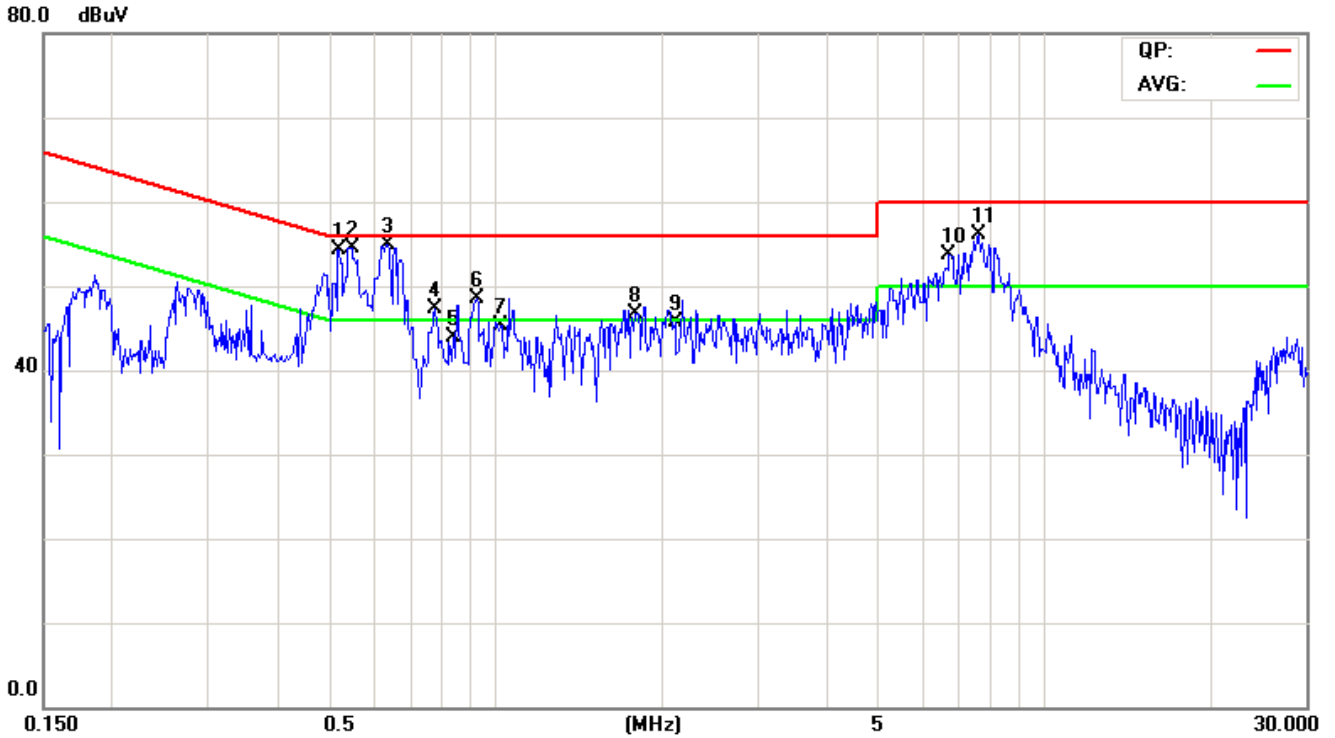

NO.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	(Pass/Fail)
1	0.5239	39.47	25.34	9.62	49.09	34.96	56.00	46.00	-6.91	-11.04	Pass
2*	0.5450	39.71	25.30	9.62	49.33	34.92	56.00	46.00	-6.67	-11.08	Pass
3	0.6461	39.71	26.78	9.62	49.33	36.40	56.00	46.00	-6.67	-9.60	Pass
4	0.7727	31.62	15.95	9.62	41.24	25.57	56.00	46.00	-14.76	-20.43	Pass
5	0.8327	29.80	16.65	9.62	39.42	26.27	56.00	46.00	-16.58	-19.73	Pass
6	0.9236	33.59	20.28	9.62	43.21	29.90	56.00	46.00	-12.79	-16.10	Pass
7	1.0143	32.92	19.78	9.62	42.54	29.40	56.00	46.00	-13.46	-16.60	Pass
8	1.8385	28.63	17.78	9.66	38.29	27.44	56.00	46.00	-17.71	-18.56	Pass
9	2.1120	27.73	16.70	9.66	37.39	26.36	56.00	46.00	-18.61	-19.64	Pass
10	6.6991	34.37	24.56	9.75	44.12	34.31	60.00	50.00	-15.88	-15.69	Pass
11	7.5501	36.77	27.14	9.77	46.54	36.91	60.00	50.00	-13.46	-13.09	Pass

REMARKS:L2 = Line Two (Neutral Line)



8. APPENDIX IPHOTOGRAPHS OF TEST SETUP

Radiated Emission Set up Photos Below 1GHz





Above 1GHz





Conducted Emission Setup Photos





Powerline Conducted Emissions Setup Photos





9. APPENDIX 1: PHOTOGRAPHS OF EUT

Refer to T140219D03 Photographs.