



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

AC1200 Wireless Dual Band High Power USB Adapter

Model: WF2561

Trade Name: netis

Issued to

**NETIS SYSTEMS CO., LTD
4F & 5F, R&D Building, Oriental Cyberport, High-Tech Industrial Park,
Nanshan, Shenzhen, China**

Issued by

**Compliance Certification Services Inc.
No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township,
Taoyuan County 33841, Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235
<http://www.ccsrf.com>
service@ccsrf.com**



Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.*



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 10, 2014	Initial Issue	All	Iren Wang



TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	EUT DESCRIPTION	5
3	TEST METHODOLOGY	6
3.1	EUT CONFIGURATION	6
3.2	EUT EXERCISE	6
3.3	GENERAL TEST PROCEDURES	6
3.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5	DESCRIPTION OF TEST MODES.....	8
4	INSTRUMENT CALIBRATION	9
4.1	MEASURING INSTRUMENT CALIBRATION.....	9
4.2	MEASUREMENT EQUIPMENT USED	9
4.3	MEASUREMENT UNCERTAINTY	11
5	FACILITIES AND ACCREDITATIONS	12
5.1	FACILITIES.....	12
5.2	LABORATORY ACCREDITATIONS AND LISTING	12
5.3	TABLE OF ACCREDITATIONS AND LISTINGS.....	13
6	SETUP OF EQUIPMENT UNDER TEST	14
6.1	SETUP CONFIGURATION OF EUT.....	14
6.2	SUPPORT EQUIPMENT	14
7	FCC PART 15 REQUIREMENTS	15
7.1	6DB BANDWIDTH.....	15
7.2	PEAK POWER	26
7.3	AVERAGE POWER.....	28
7.4	BAND EDGES MEASUREMENT	30
7.5	PEAK POWER SPECTRAL DENSITY	54
7.6	SPURIOUS EMISSIONS.....	65
7.7	POWERLINE CONDUCTED EMISSIONS	93
8	APPENDIX I PHOTOGRAPHS OF TEST SETUP	96
9	APPENDIX II: PHOTOGRAPHS OF EUT	100



1 TEST RESULT CERTIFICATION

Applicant: **NETIS SYSTEMS CO., LTD**
 4F & 5F, R&D Building, Oriental Cyberport, High-Tech Industrial Park,
 Nanshan, Shenzhen, China

Manufacturer: **Shenzhen Netcore Industrial Ltd.**
 4F & 5F, R&D Building, Oriental Cyberport, High-Tech Industrial Park,
 Nanshan, Shenzhen, China

Equipment Under Test: AC1200 Wireless Dual Band High Power USB Adapter

Trade Name: netis

Model: WF2561

Date of Test: June 6 ~ July 11, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Stan Lin
Section Manager

Reviewed by:

Angel Hu
Section Manager



2 EUT DESCRIPTION

Product	AC1200 Wireless Dual Band High Power USB Adapter		
Trade Name	netis		
Model Number	WF2561		
Model Discrepancy	N/A		
EUT Power Rating	5VDC		
Received Date	June 5, 2014		
RF Module Manufacturer	RealTek	Model	RTL8812AU
Frequency Range	IEEE 802.11b/g/ IEEE 802.11n HT20 mode: 2412~2462MHz IEEE 802.11n HT40 mode: 2422~2452MHz		
Transmit Power	IEEE 802.11b mode: 17.26 dBm (0.0532W) IEEE 802.11g mode: 22.45 dBm (0.1758W) IEEE 802.11n HT20 mode: 24.64 dBm (0.2911W) IEEE 802.11n HT40 mode: 21.64 dBm (0.1459W)		
Modulation Technique & Transmit Data Rate	IEEE 802.11b mode: DSSS (11, 5.5, 2, 1 Mbps) IEEE 802.11g mode: OFDM (54, 48, 36, 24, 18, 12, 9, 6Mbps) IEEE 802.11n HT20 mode: OFDM (72.2, 65, 58.5, 57.78, 52, 43.33, 39, 28.89, 26, 21.7, 19.5, 14.44, 13, 7.2, 6.5 Mbps) IEEE 802.11n HT40 mode: OFDM (150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5Mbps)		
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT20 mode: 11 Channels IEEE 802.11n HT40 mode: 7 Channels		
Antenna Specification	Chain 0: Dipole Antenna / Gain: 4.93 dBi (For IEEE 802.11 b/g) Chain 1: Dipole Antenna / Gain: 4.93 dBi (For IEEE 802.11 b/g) MIMO: $4.93+10\log(2)=7.94$ (For IEEE 802.11 n)		

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **T58WF2561R** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247 and DA00-705.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT is a 2Tx2R MIMO transmitter.

The EUT (model: WF2561) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

The worst case data rate is determined as the data rate with highest output power. After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4 INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/01/2015
Spectrum Analyzer	Agilent	N9010A	MY52220817	03/20/2015
Spectrum Analyzer	R&S	FSL	100837	11/11/2014
Power meter	Anritsu	ML2495A	1033009	09/25/2015
Power Sensor	Anritsu	MA2411B	0917221	09/28/2015

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/01/2015
Spectrum Analyzer	R&S	FSL	100837	11/11/2014
Pre-Amplifier	HP	8447D	2944A06530	05/02/2015
Pre-Amplifier	EMEC	EM01M26G	060570	07/28/2015
Pre-Amplifier	MITEQ	AMF-6F-26040 0-40-8P	985646	06/12/2015
Pre-Amplifier	Agilent	8449B	3008A01738	08/11/2015
EMI Test Receiver	SCHAFFNER	SCR 3501	430	03/30/2015
Loop Antenna	EMCO	6502	8905-2356	09/23/2015
Bilog Antenna	TESEQ	CBL 6112D	35378	08/21/2015
Horn Antenna	EMCO	3115	00022250	08/05/2015
Horn Antenna	EMCO	3116	00026370	12/29/2014
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. N.C.R = No Calibration Request.



Powerline Conducted Emissions Test Site #3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101338	01/16/2015
LISN	R&S	ENV216	101549	07/23/2015
LISN	FCC	FCC-LISN-50/2 50-16-2-07	06012	12/02/2014
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.



4.3 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Powerline Conducted Emission	±2.1876
3M Semi Anechoic Chamber / 30MHz ~ 200MHz	±3.5921
3M Semi Anechoic Chamber / 200MHz ~ 1GHz	±3.5657
3M Semi Anechoic Chamber / 1 ~ 8GHz	±2.5873
3M Semi Anechoic Chamber / 8 ~ 18GHz	±2.6646
3M Semi Anechoic Chamber / 18 ~ 26GHz	±2.9617
3M Semi Anechoic Chamber / 26 ~ 40GHz	±3.4250

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No. 163-1, Jhongsheng Rd., Sindien District, Taipei City 23151, Taiwan
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No 11, Wugong 6th Rd, Wugu District, New Taipei City 24891, Taiwan (R.O.C)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, Taiwan
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, IC 2324G-2 for 3M Semi Anechoic Chamber B.



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	
USA	FCC MRA	3 meter Open Area Test Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS-Gen Issue 3	

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6 SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

For Radiated Emissions(Below 1GHz) & Conducted Emission							
No.	Device Type	Model	Series No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook PC	ThinkPad T430u	PB-VZLGG 12/09	FCC DOC	LENOVO	USB Cable: Shielded, 1.8m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	LCD	2408WFB	CN-0G293H-74261 -87C-0LVS-A00	FCC DOC	DELL	HDMI Cable: Shielded, 1.8m	Shielded, 1.8m
3	USB MOUSE	M100	N/A	N/A	Logitech	Unshielded, 1.8m	N/A

For Radiated Emissions(Above 1GHz) & Powerline Conducted Emission							
No.	Device Type	Model	Series No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook PC	ThinkPad T430u	PB-VZLGG 12/09	FCC DOC	LENOVO	USB Cable: Shielded, 1.8m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7 FCC PART 15 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

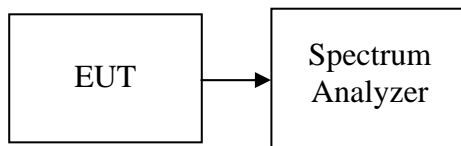

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto, Span = 30MHz (IEEE 802.11b, IEEE 802.11g, IEEE 802.11n HT20) or Span = 50MHz (IEEE 802.11n HT40).
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.14	>500	PASS
Mid	2437	10.14		PASS
High	2462	10.14		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.56	>500	PASS
Mid	2437	16.56		PASS
High	2462	16.56		PASS

Test mode: IEEE 802.11n HT20 mode (Chain 0)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.73	>500	PASS
Mid	2437	17.79		PASS
High	2462	17.73		PASS

Test mode: IEEE 802.11n HT20 mode (Chain 1)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.70	>500	PASS
Mid	2437	17.70		PASS
High	2462	17.70		PASS

Test mode: IEEE 802.11n HT40 mode (Chain 0)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.50	>500	PASS
Mid	2437	36.55		PASS
High	2452	36.55		PASS

Test mode: IEEE 802.11n HT40 mode (Chain 1)


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.45	>500	PASS
Mid	2437	36.45		PASS
High	2452	36.45		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

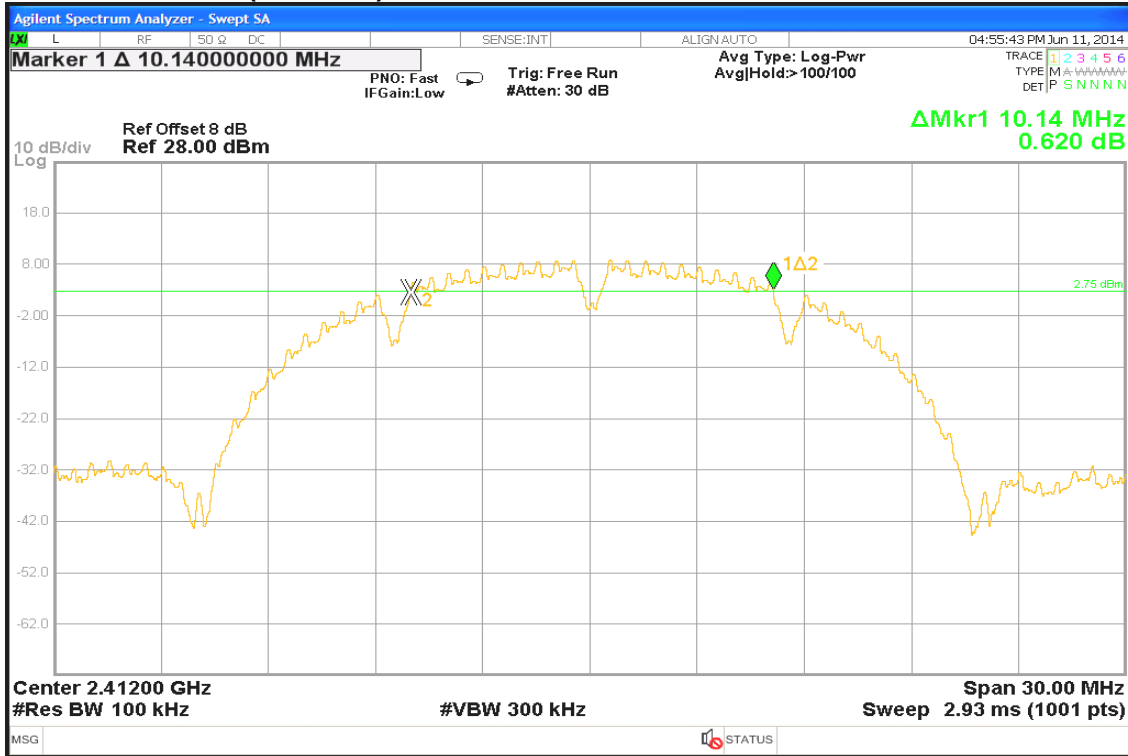


6dB Bandwidth (CH Mid)

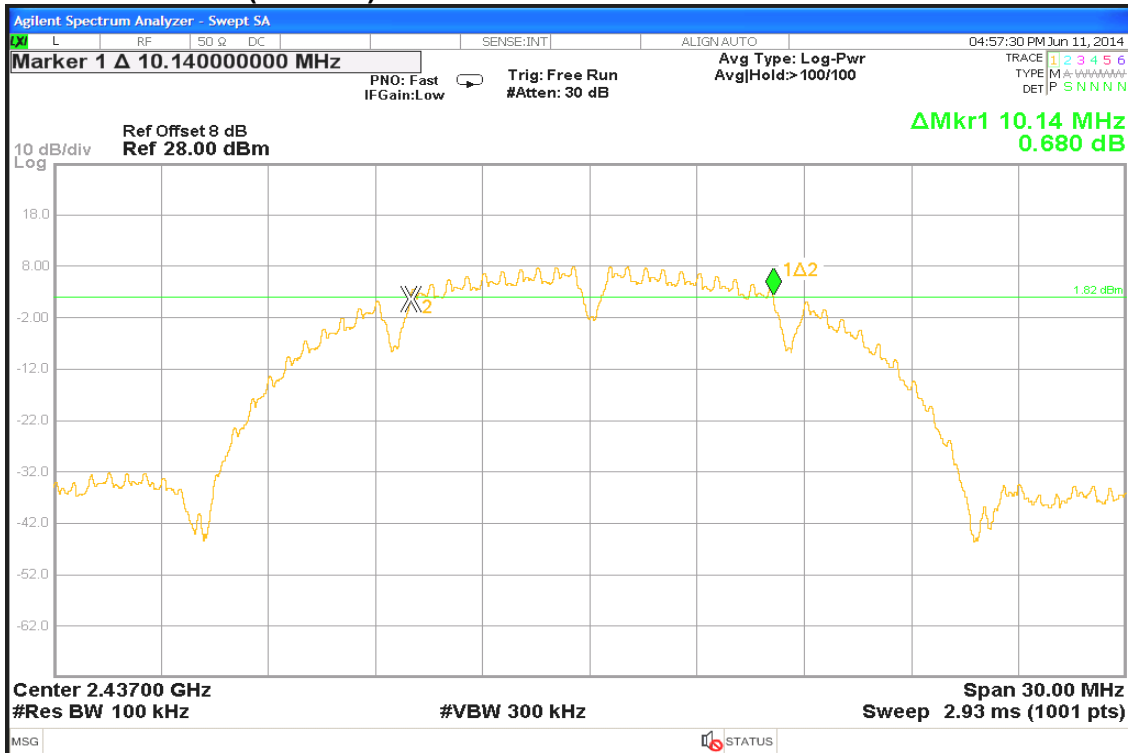




6dB Bandwidth (CH High)

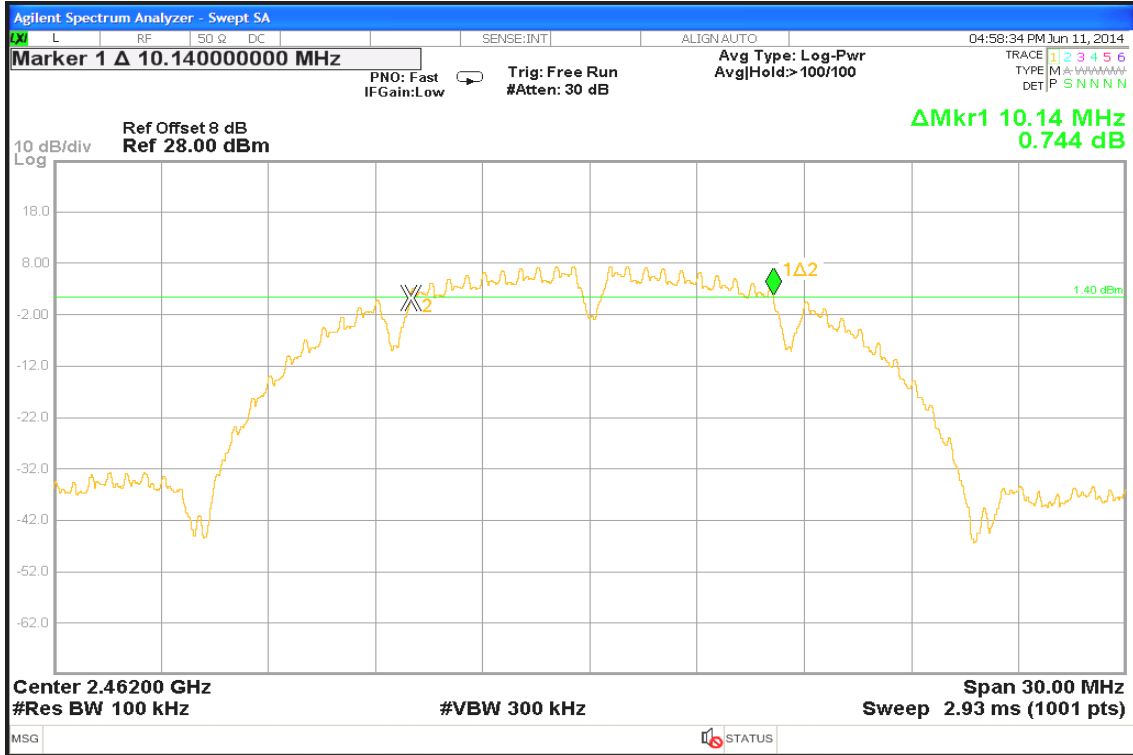


IEEE 802.11g mode

6dB Bandwidth (CH Low)

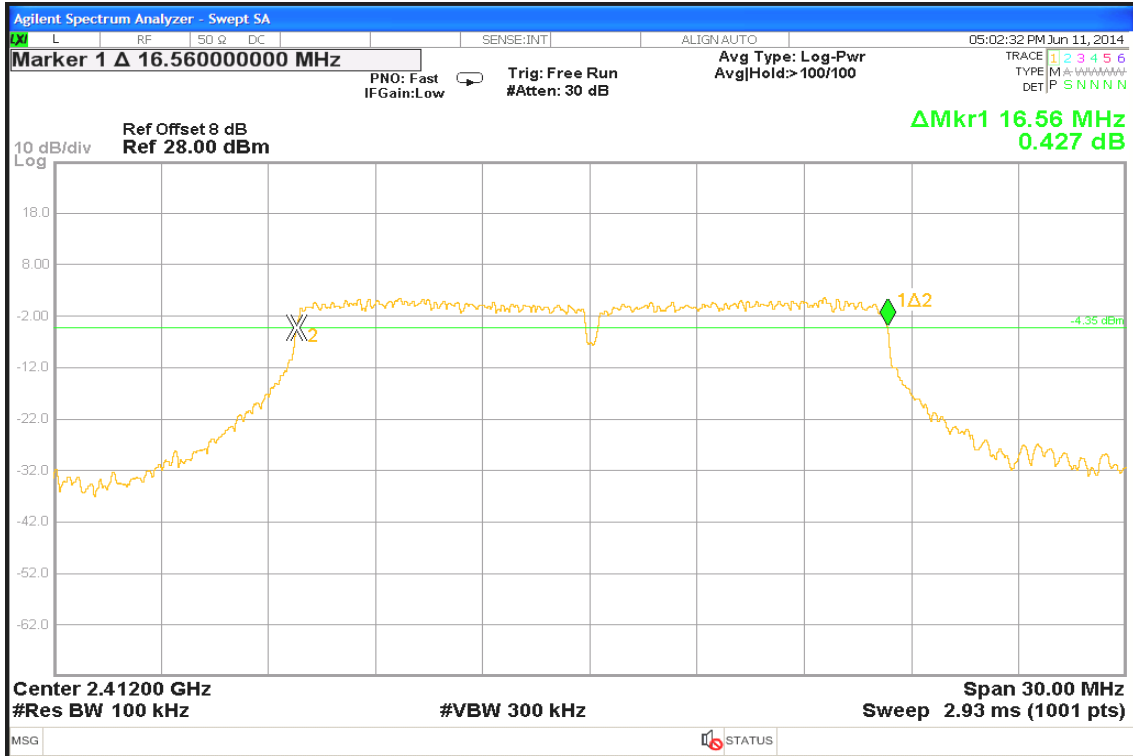




6dB Bandwidth (CH Mid)

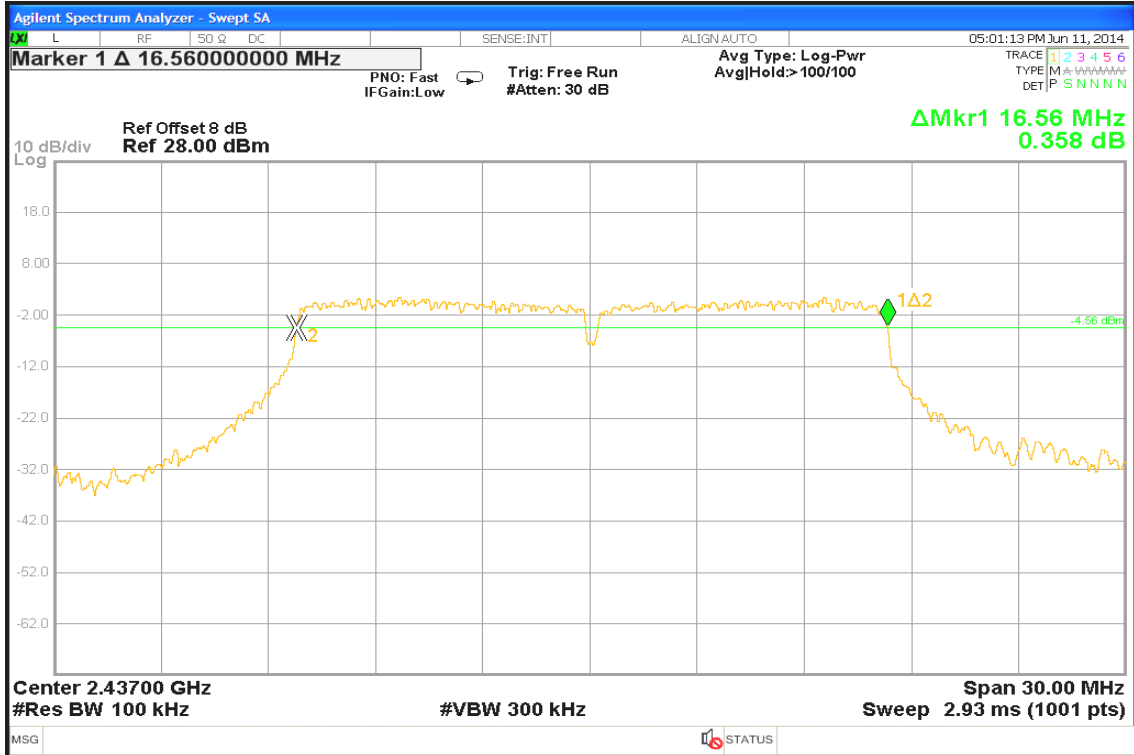


6dB 6dB Bandwidth (CH High)

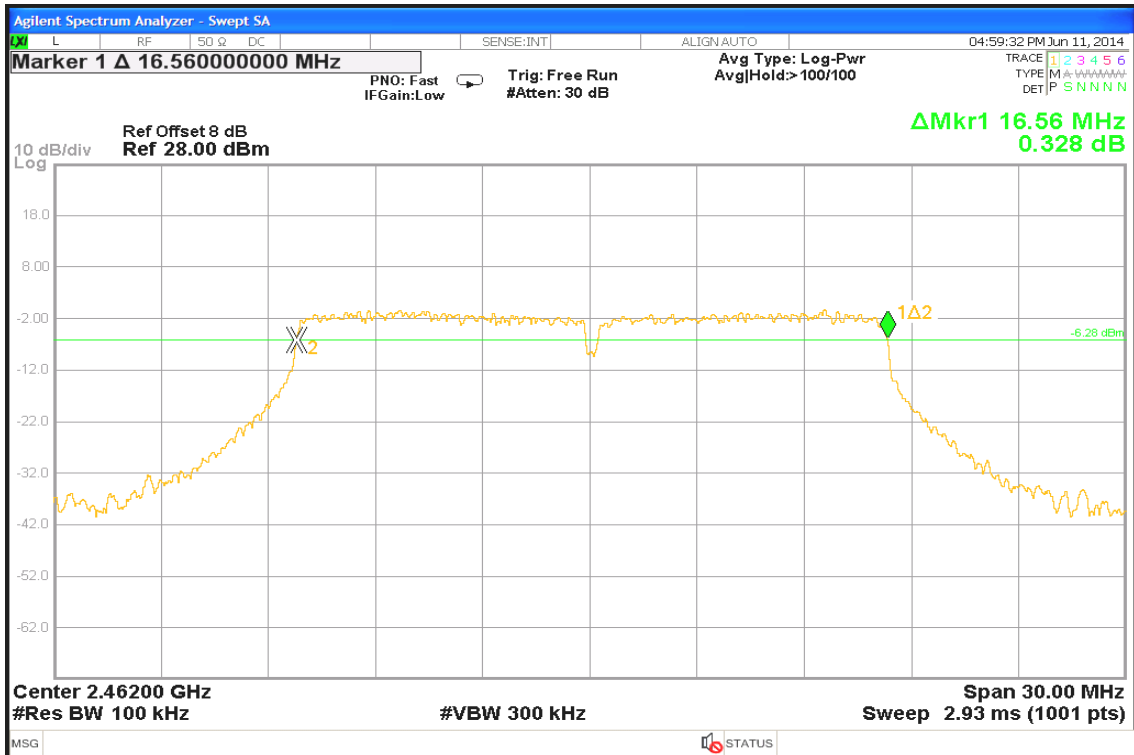




IEEE 802.11n HT20 mode (Chain 0)

6dB Bandwidth (CH Low)

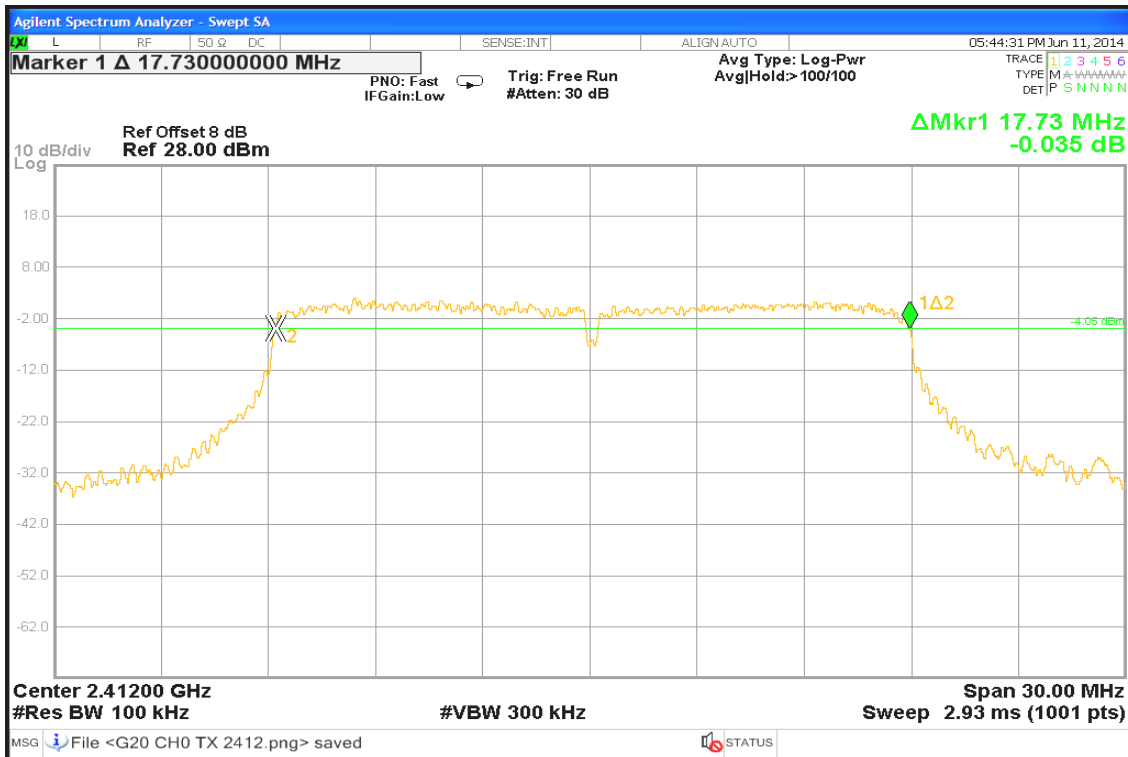


6dB Bandwidth (CH Mid)

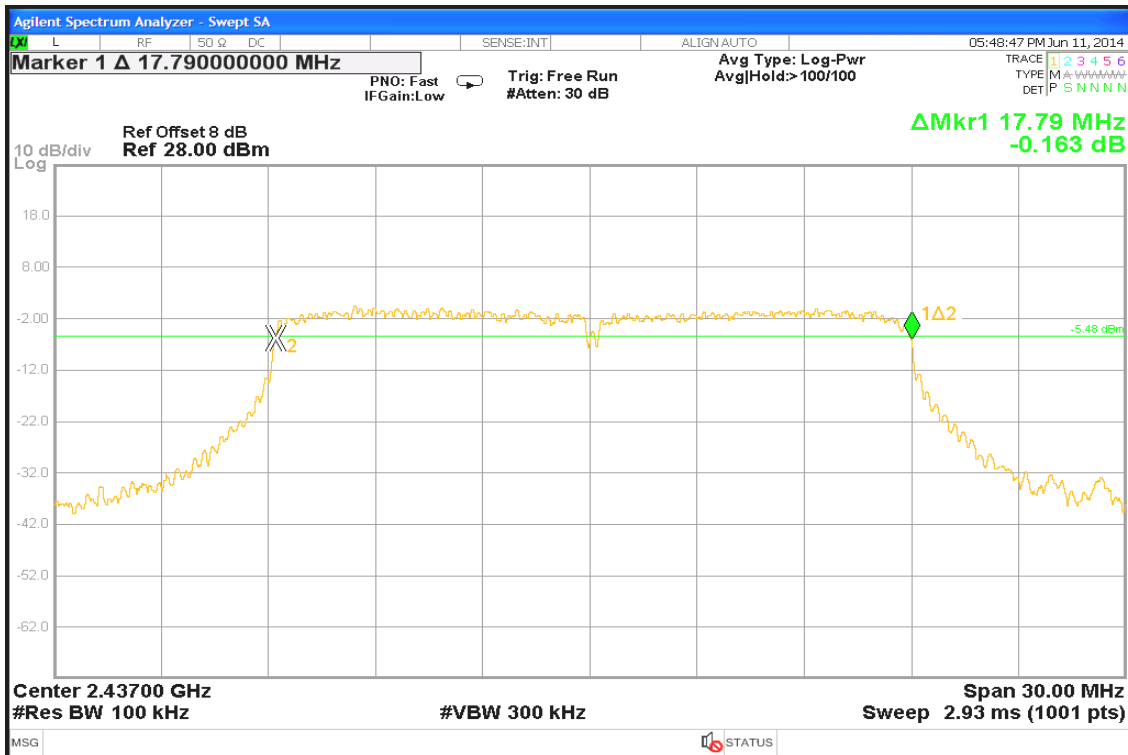




6dB Bandwidth (CH High)

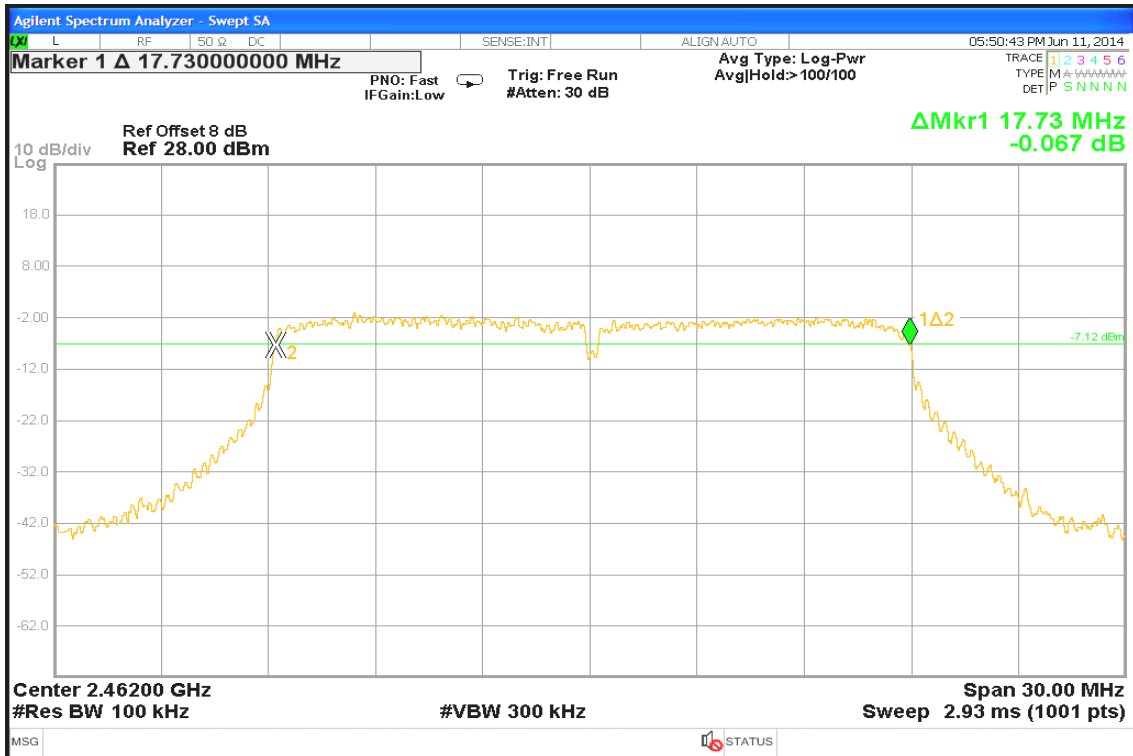


IEEE 802.11n HT20 mode (Chain 1)

6dB Bandwidth (CH Low)

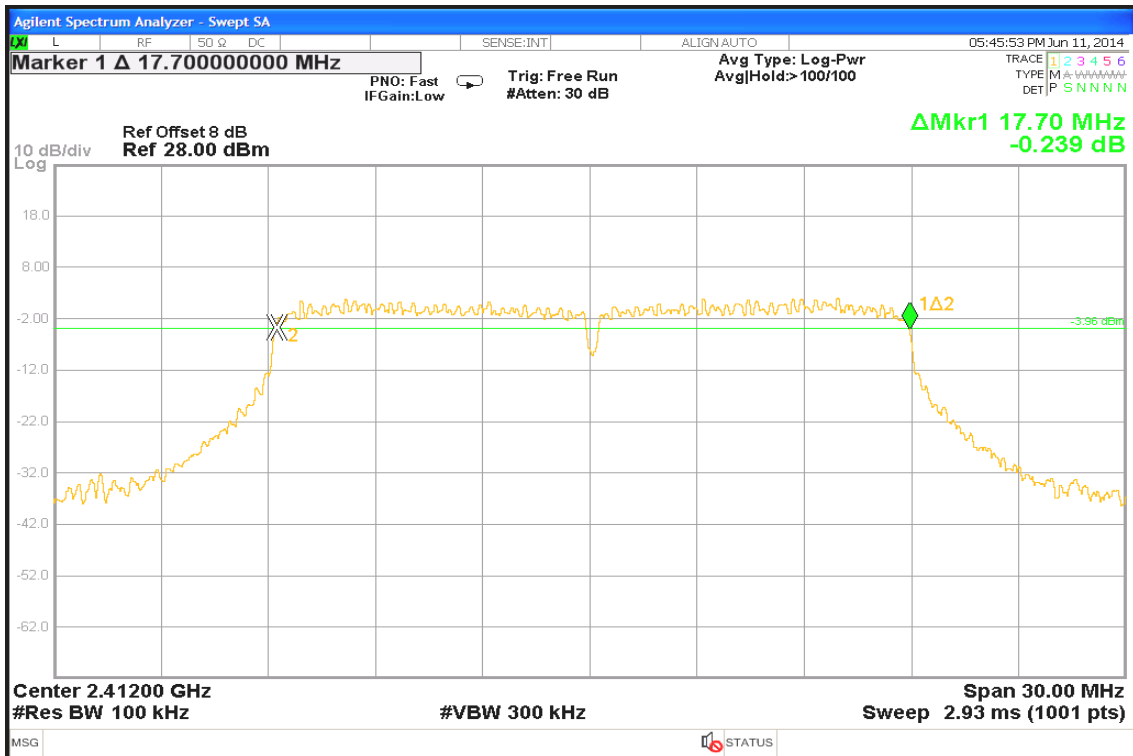




6dB Bandwidth (CH Mid)

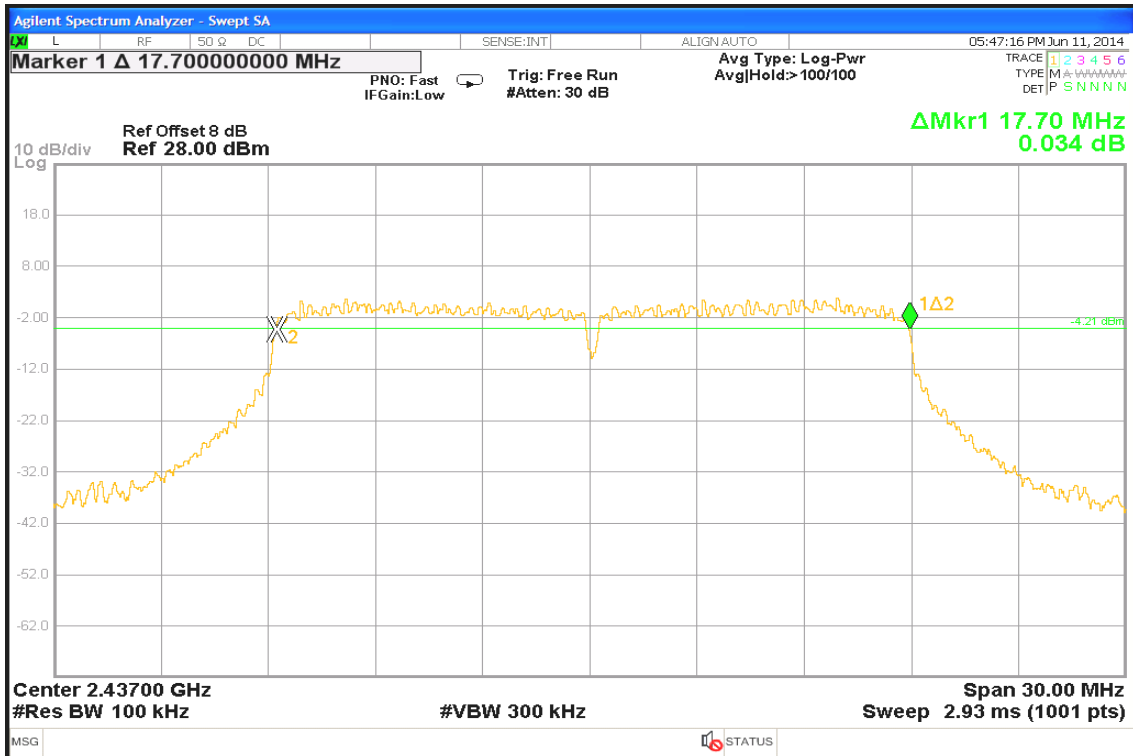


6dB Bandwidth (CH High)

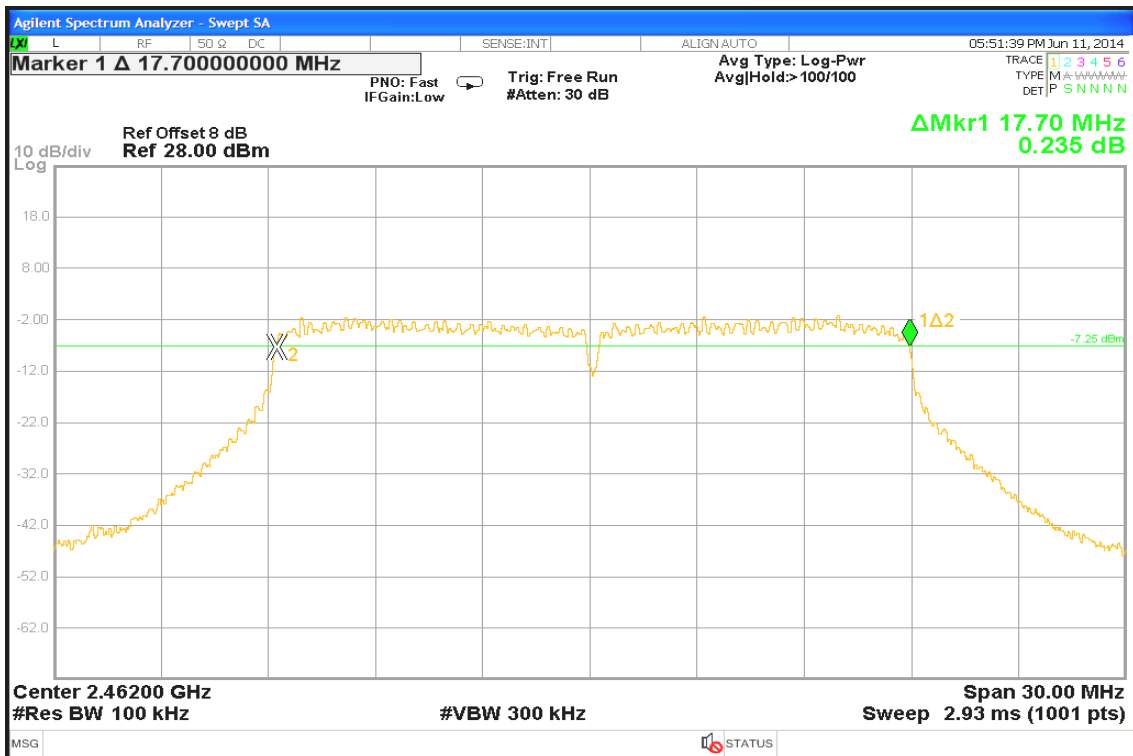



IEEE 802.11n HT40 mode (Chain 0)

6dB Bandwidth (CH Low)

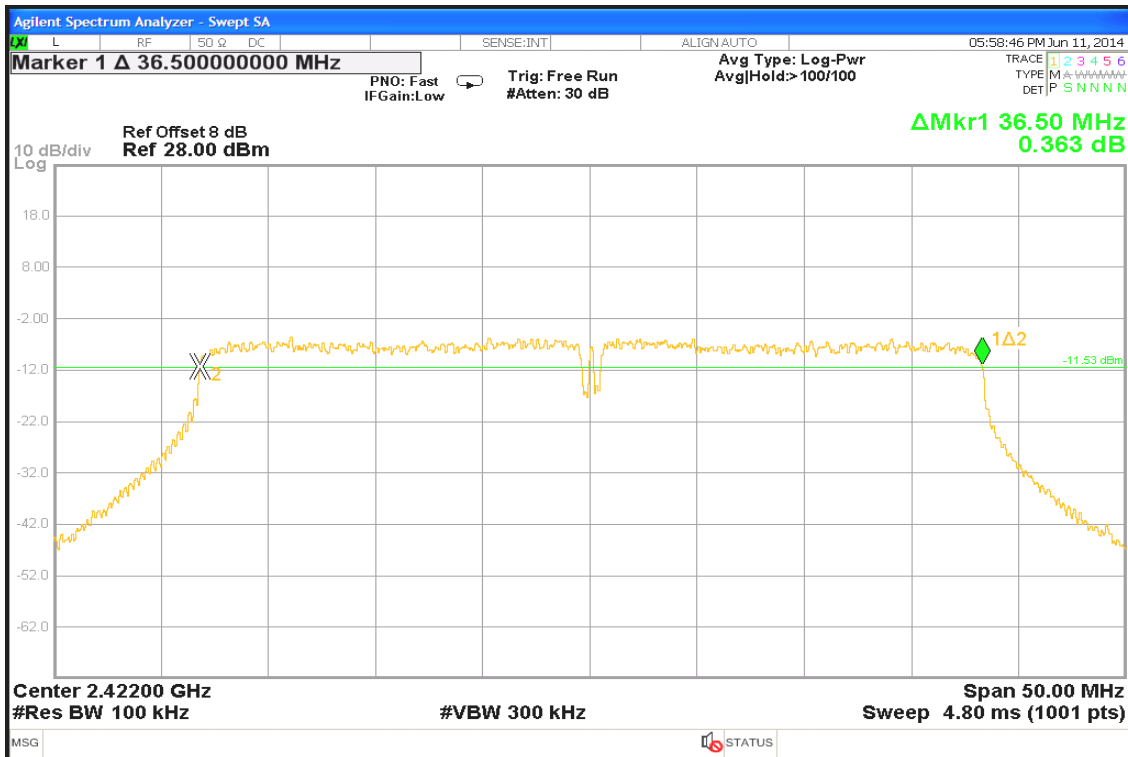


6dB Bandwidth (CH Mid)






6dB Bandwidth (CH High)

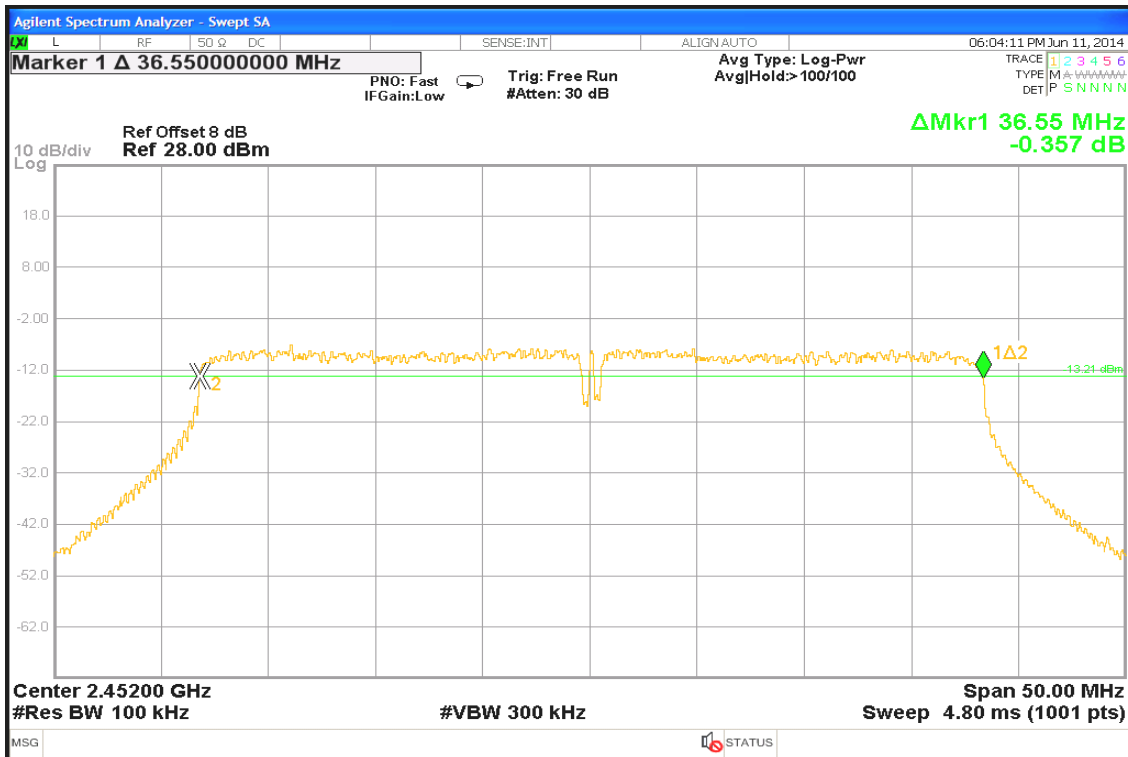


IEEE 802.11n HT40 mode (Chain 1)

6dB Bandwidth (CH Low)

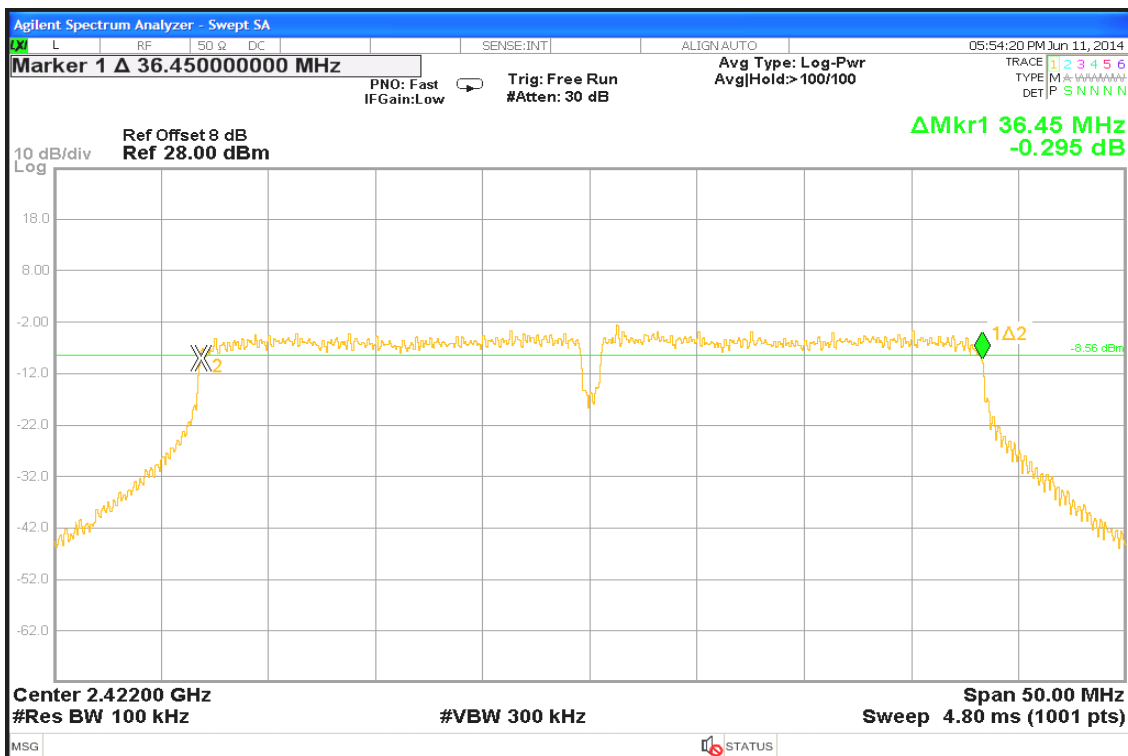




6dB Bandwidth (CH Mid)

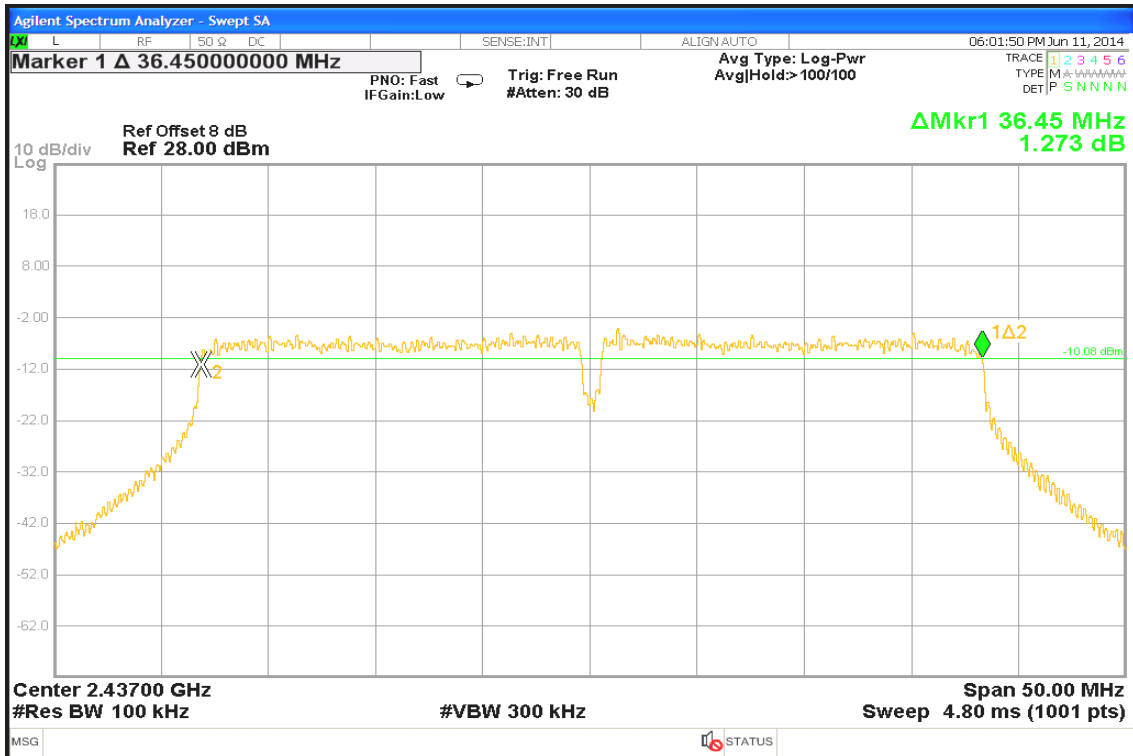

6dB Bandwidth (CH High)

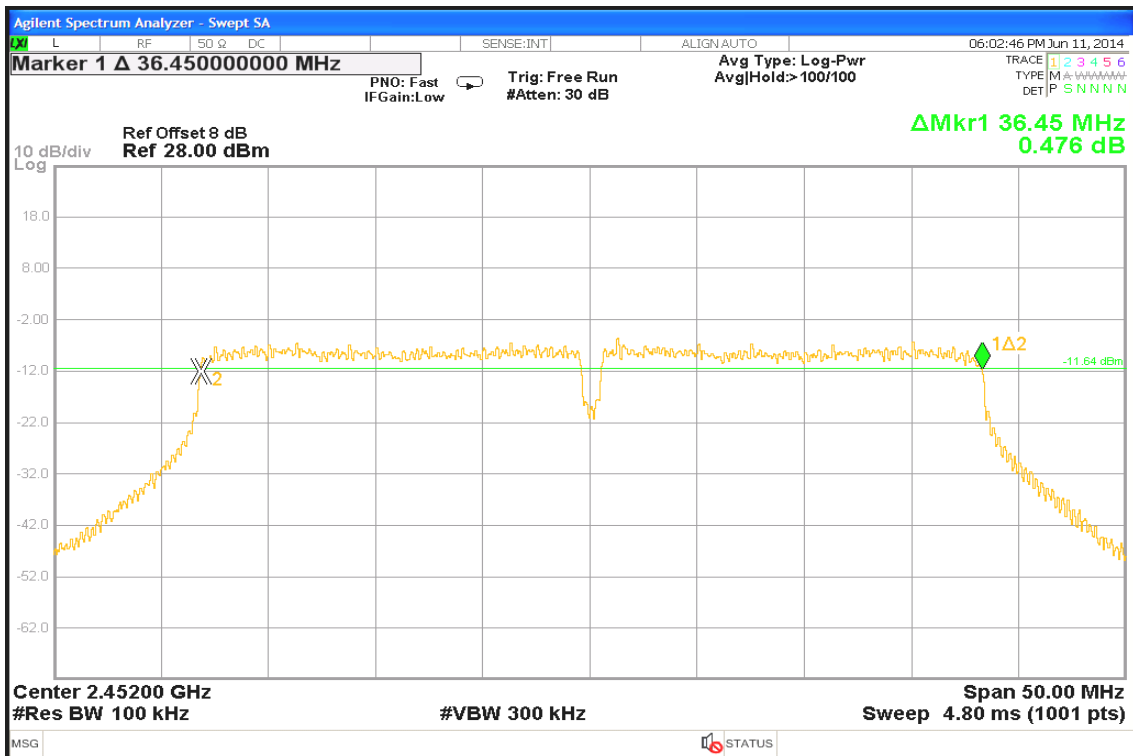




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

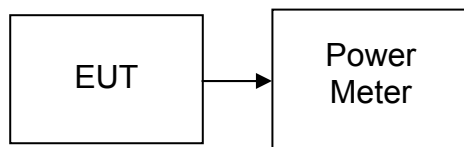

TEST PROCEDURE

Per KDB 558074 v03r01

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.26	0.0532	1.00	PASS
Mid	2437	17.03	0.0505		PASS
High	2462	16.96	0.0497		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	22.45	0.1758	1.00	PASS
Mid	2437	22.20	0.1660		PASS
High	2462	20.58	0.1143		PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Chain 0 Output Power (W)	Chain 1 Output Power (W)	Total Output Power (W)	Limit (W)	Result
Low	2412	21.70	21.55	24.64	0.1479	0.1429	0.2911	0.6397	PASS
Mid	2437	21.04	21.31	24.19	0.1271	0.1352	0.2624		PASS
High	2462	18.80	18.64	21.73	0.0759	0.0731	0.1489		PASS

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Chain 0 Output Power (W)	Chain 1 Output Power (W)	Total Output Power (W)	Limit (W)	Result
Low	2422	18.03	18.45	21.26	0.0635	0.0700	0.1337	0.6397	PASS
Mid	2437	18.22	19.00	21.64	0.0664	0.0794	0.1459		PASS
High	2452	16.71	16.77	19.75	0.0469	0.0475	0.0944		PASS

Remark:

1. Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000) + Chain 1 (10^(Output Power /10)/1000))
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 28.06dBm(0.6397W).




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

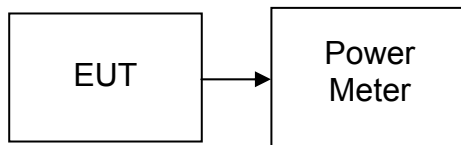

TEST PROCEDURE

Per KDB 558074 v03r01

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.62	0.0290
Mid	2437	14.53	0.0284
High	2462	14.31	0.0270

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	15.72	0.0373
Mid	2437	15.33	0.0341
High	2462	13.58	0.0228

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Chain 0 Output Power (W)	Chain 1 Output Power (W)	Total Output Power (W)
Low	2412	14.57	14.35	17.47	0.0286	0.0272	0.0558
Mid	2437	13.99	14.15	17.08	0.0251	0.0260	0.0511
High	2462	11.66	11.41	14.55	0.0147	0.0138	0.0285

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Chain 0 Output Power (W)	Chain 1 Output Power (W)	Total Output Power (W)
Low	2422	11.13	11.61	14.39	0.0130	0.0145	0.0275
Mid	2437	11.25	11.52	14.40	0.0133	0.0142	0.0275
High	2452	10.02	9.98	13.01	0.0100	0.0100	0.0200




7.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated

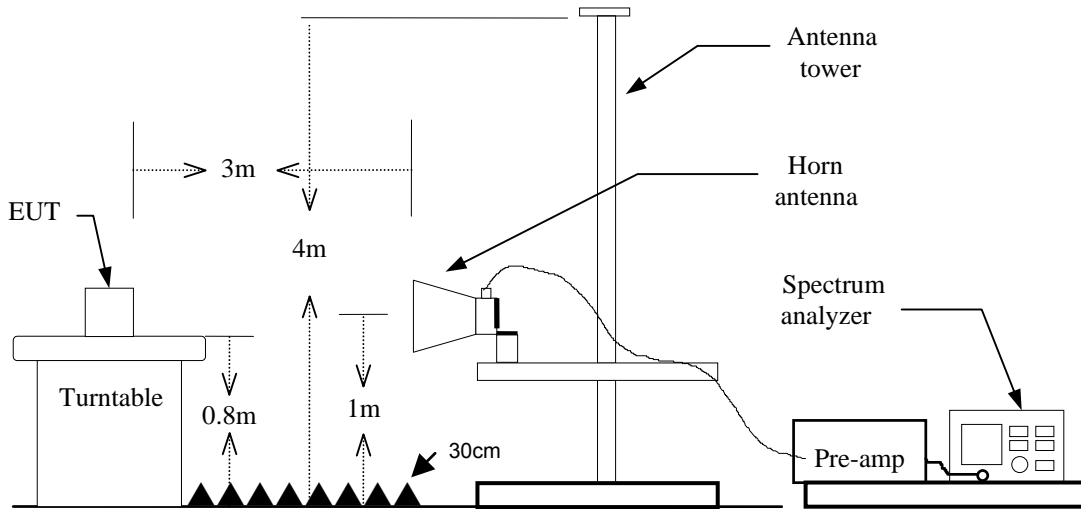

For Conducted

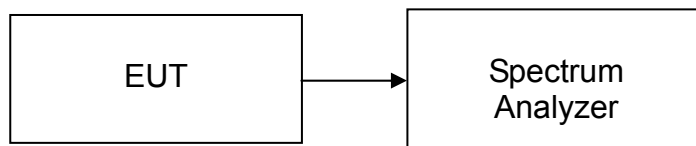



TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

TEST RESULTS


Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

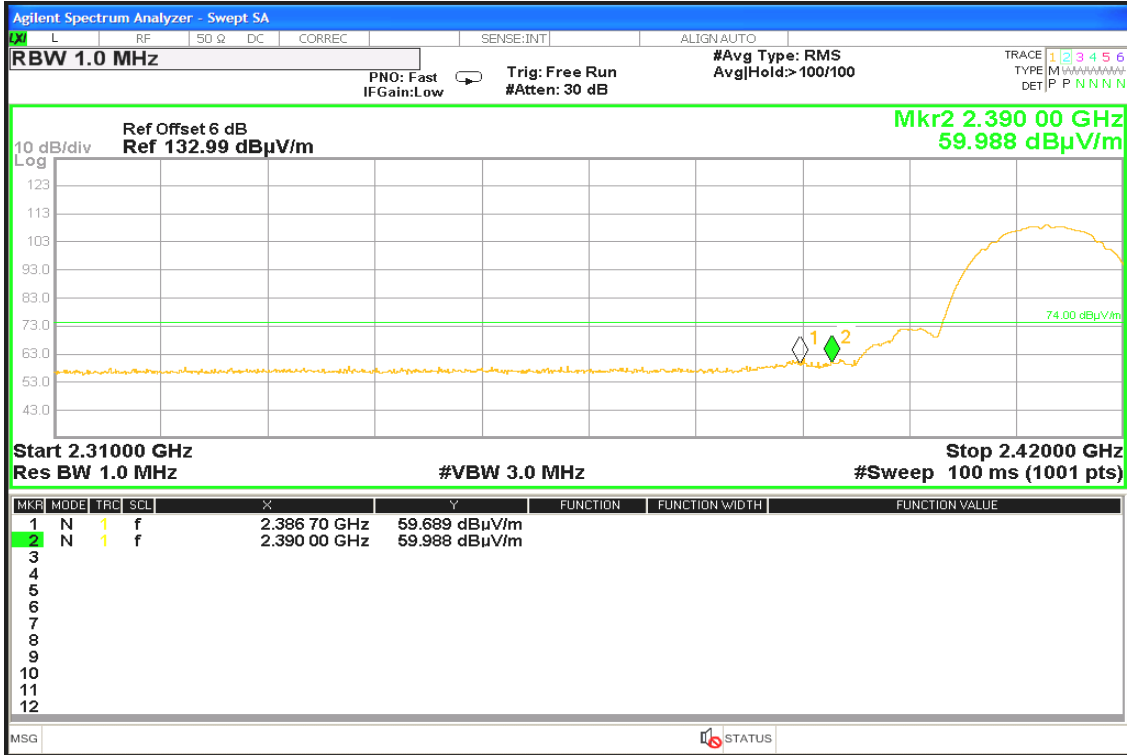

Detector mode: Average


Polarity: Vertical





Detector mode: Peak

Polarity: Horizontal

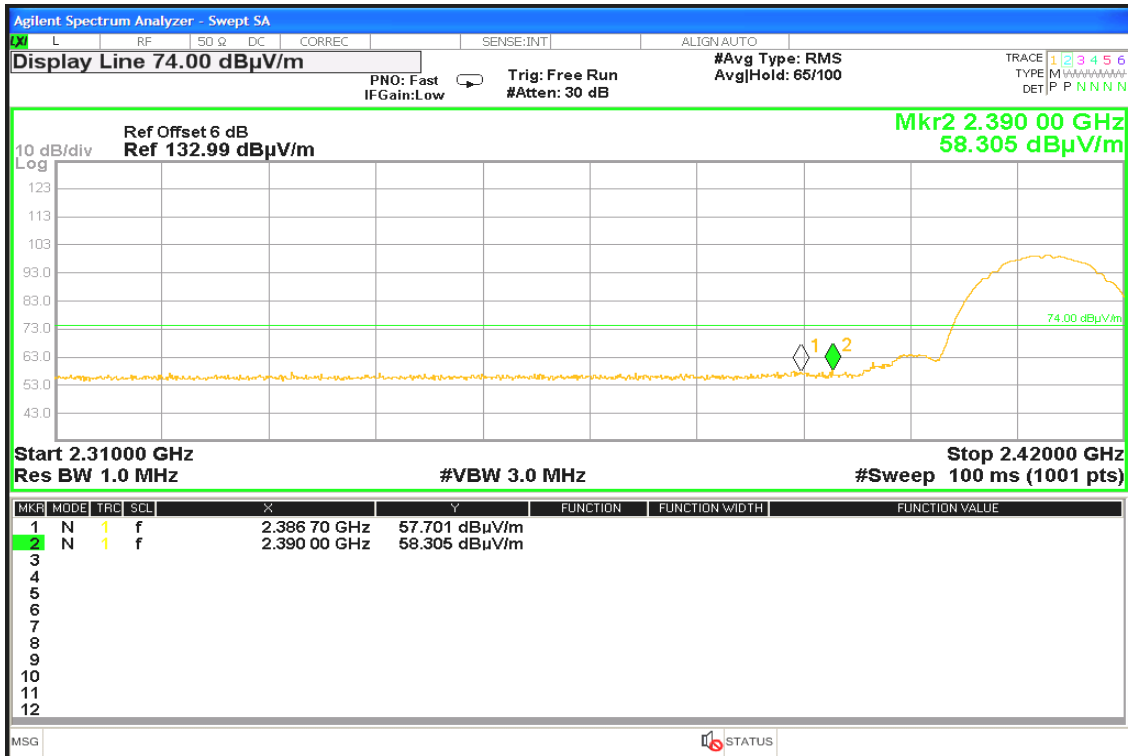

Detector mode: Average

Polarity: Horizontal






Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

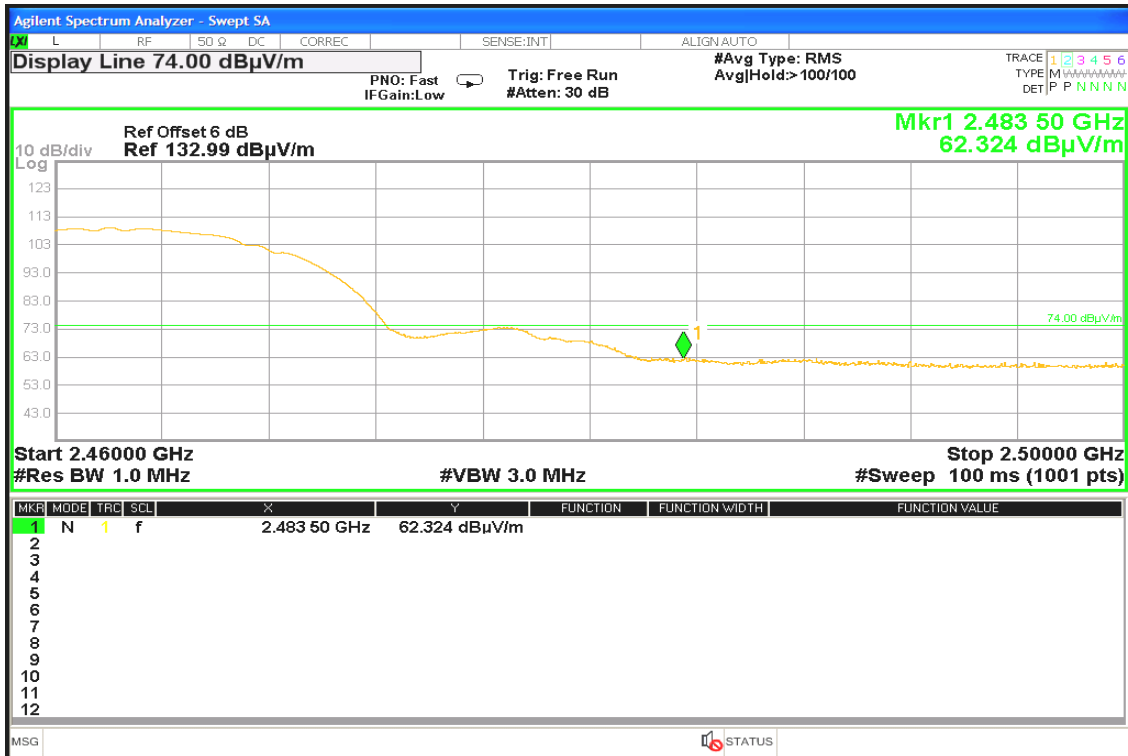

Detector mode: Average


Polarity: Vertical

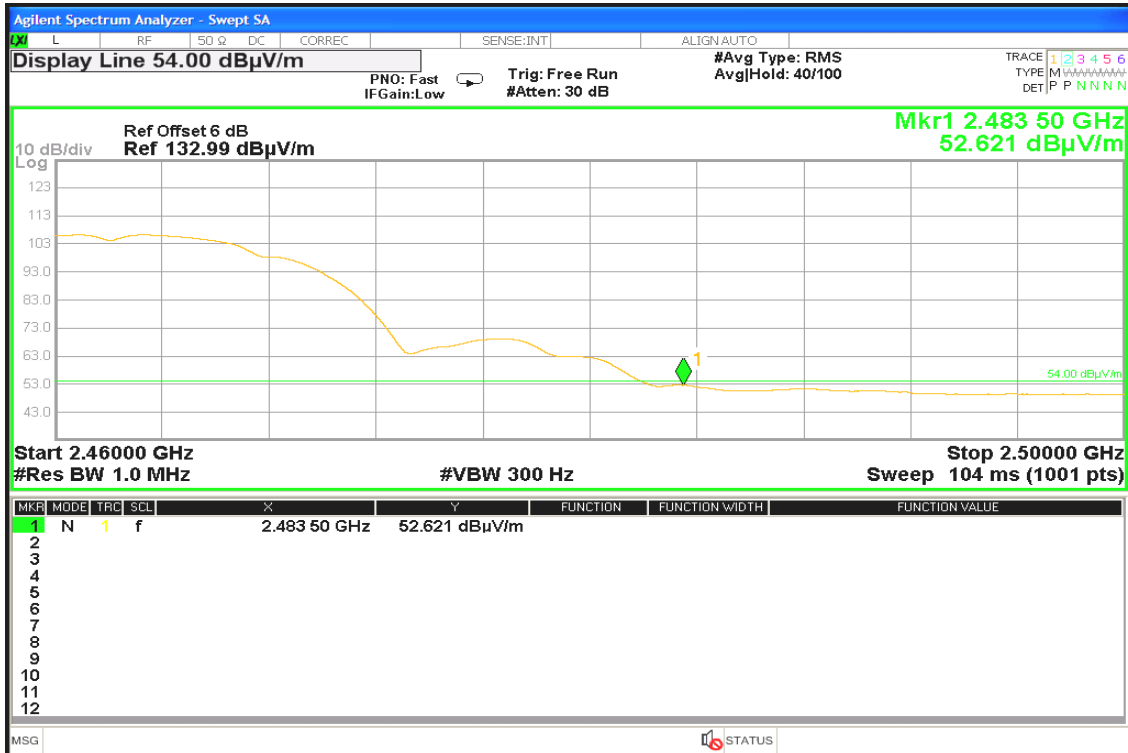




Detector mode: Peak

Polarity: Horizontal

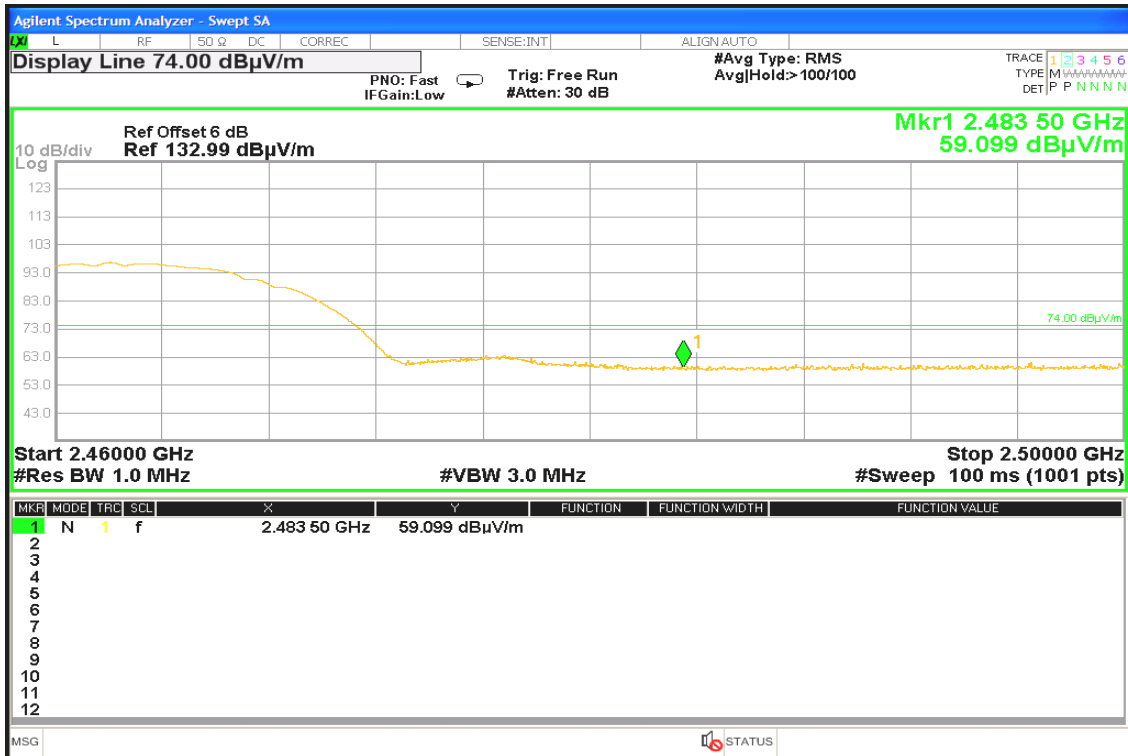

Detector mode: Average

Polarity: Horizontal

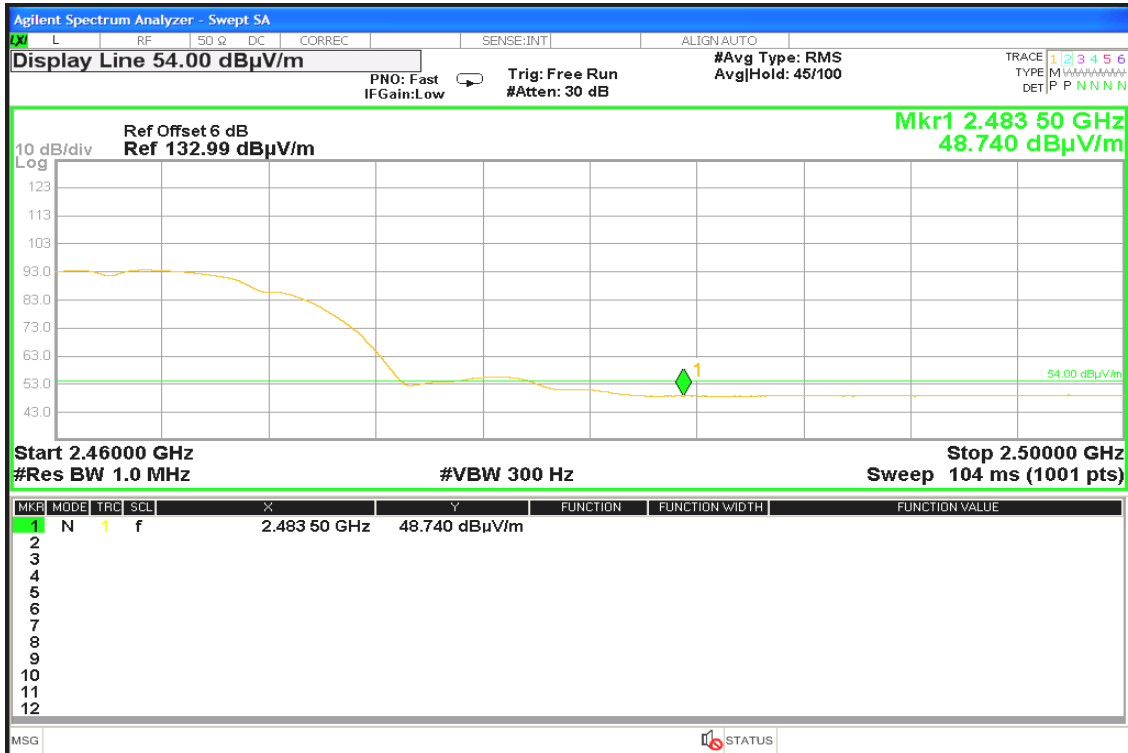




Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

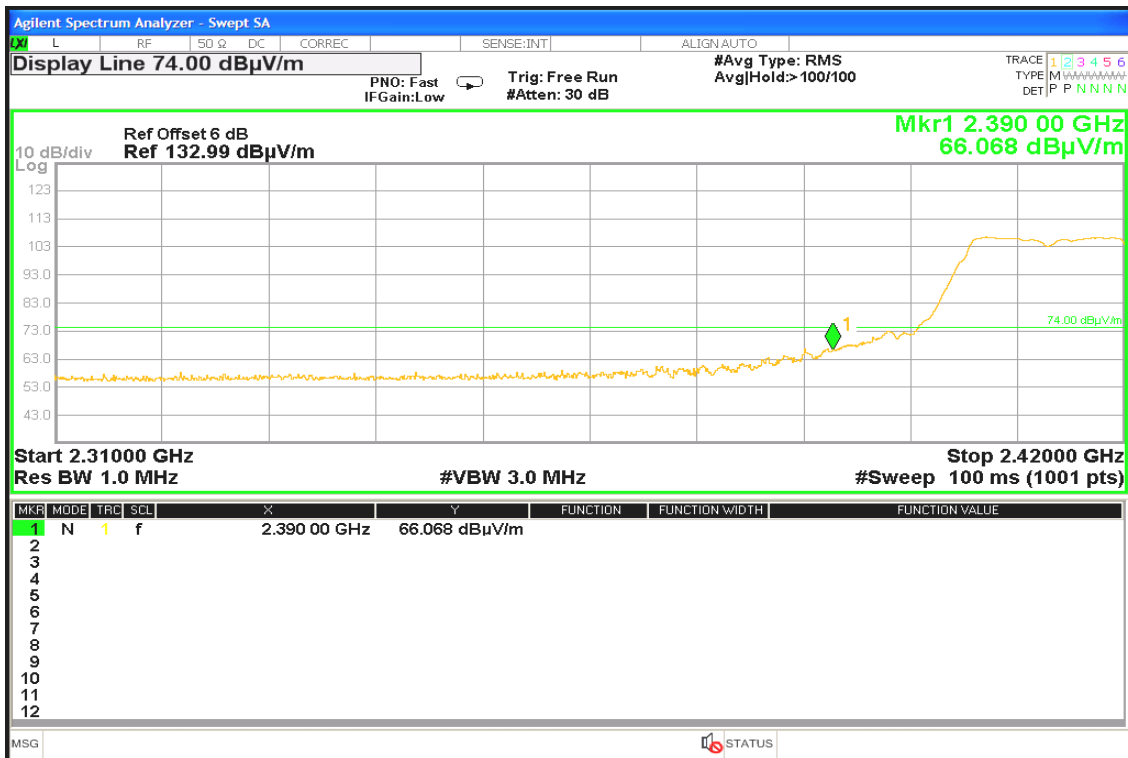

Detector mode: Average


Polarity: Vertical





Detector mode: Peak

Polarity: Horizontal

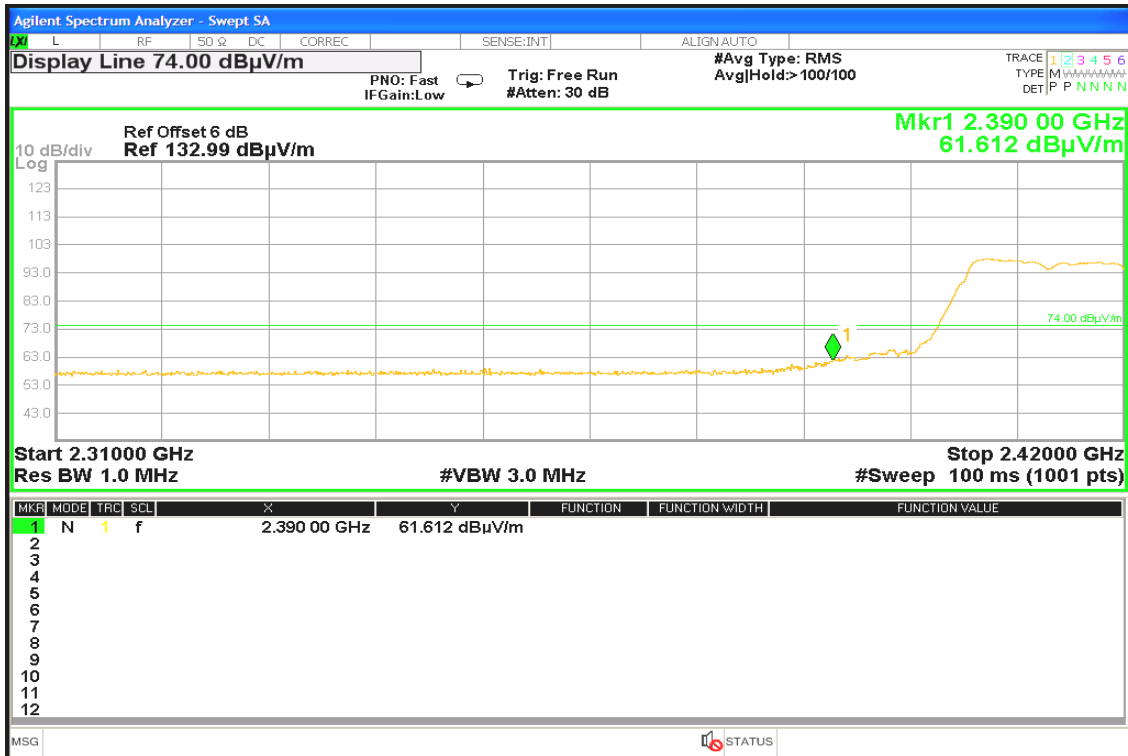

Detector mode: Average

Polarity: Horizontal






Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

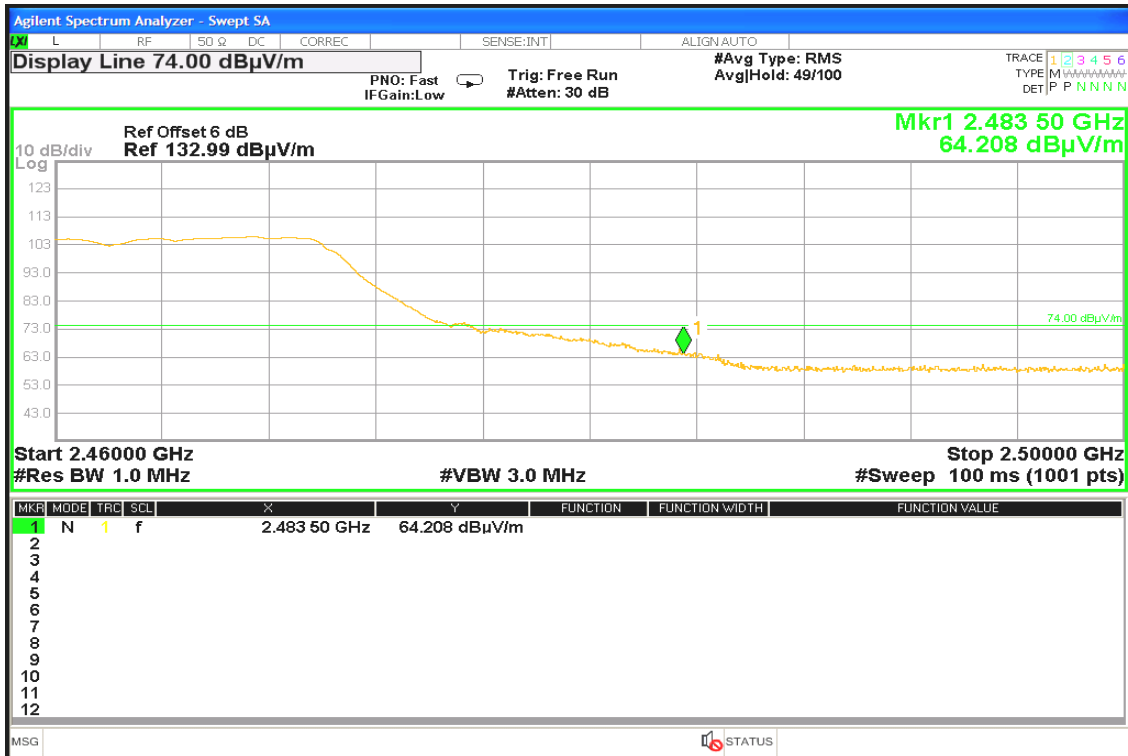

Detector mode: Average


Polarity: Vertical

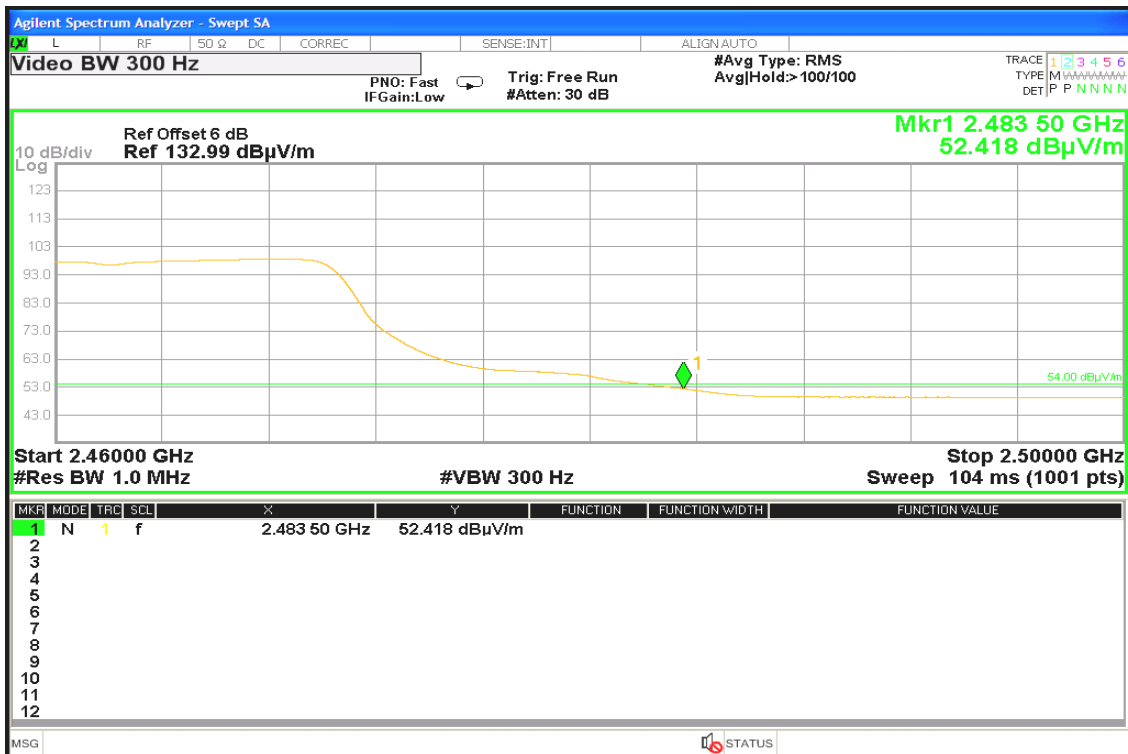




Detector mode: Peak

Polarity: Horizontal

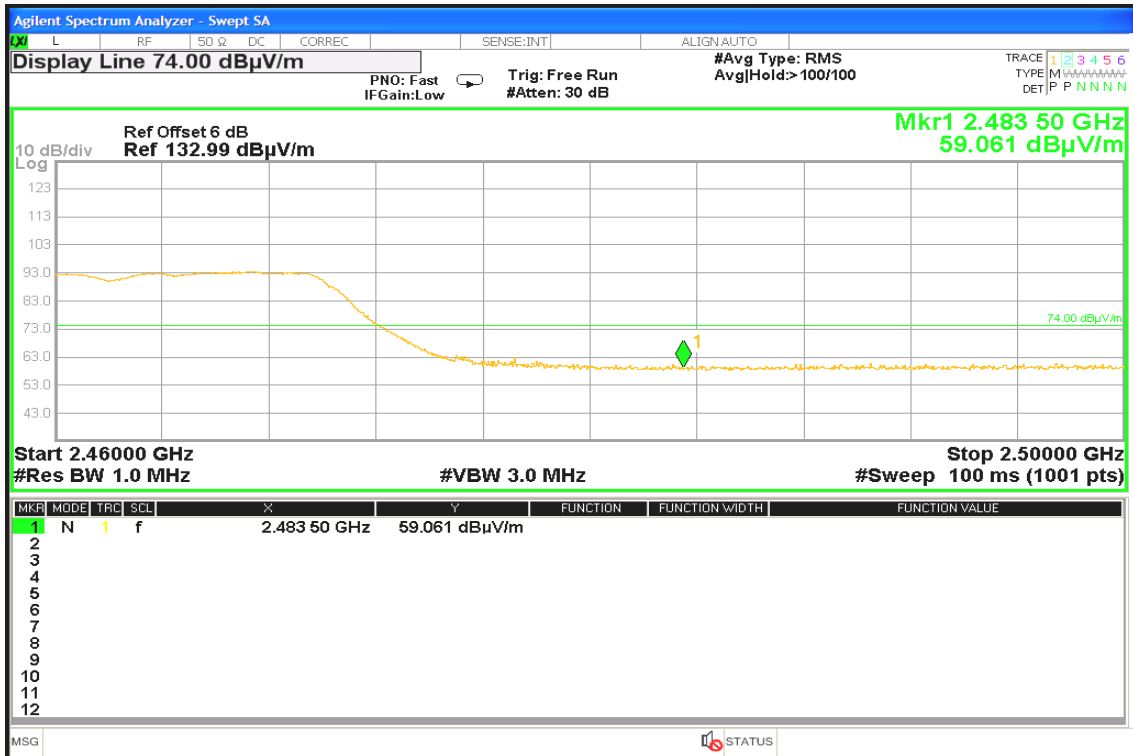

Detector mode: Average

Polarity: Horizontal

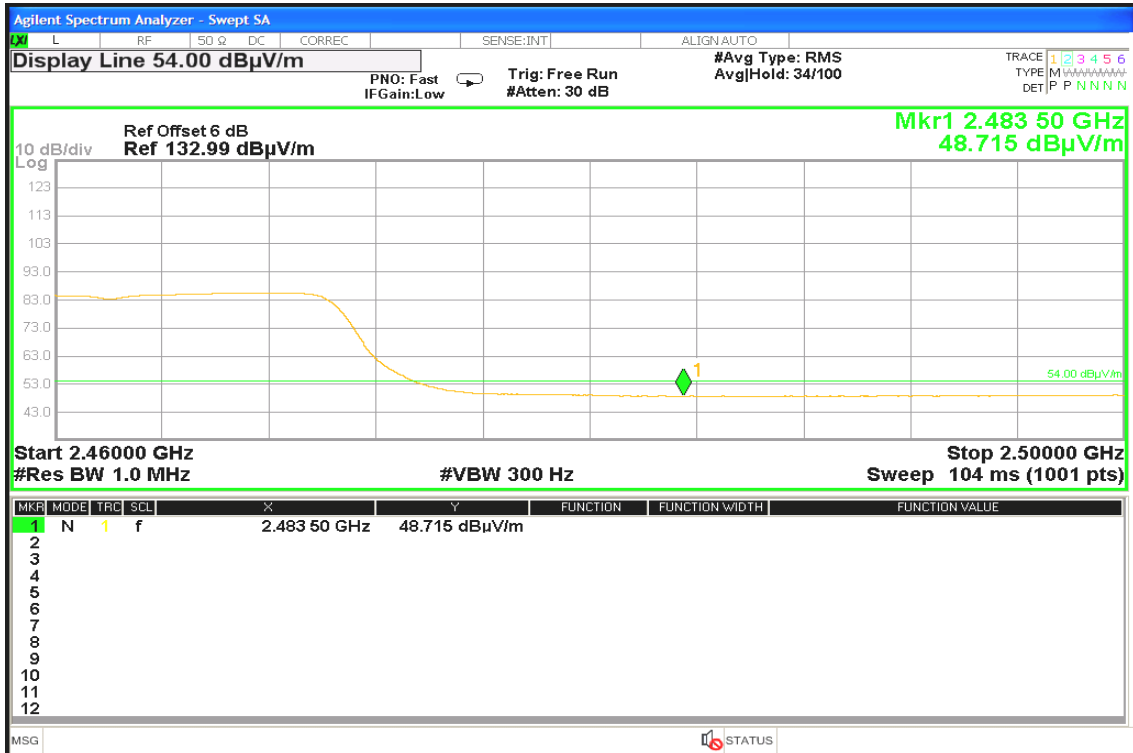




Band Edges (IEEE 802.11n HT20 mode / CH Low)

Detector mode: Peak

Polarity: Vertical

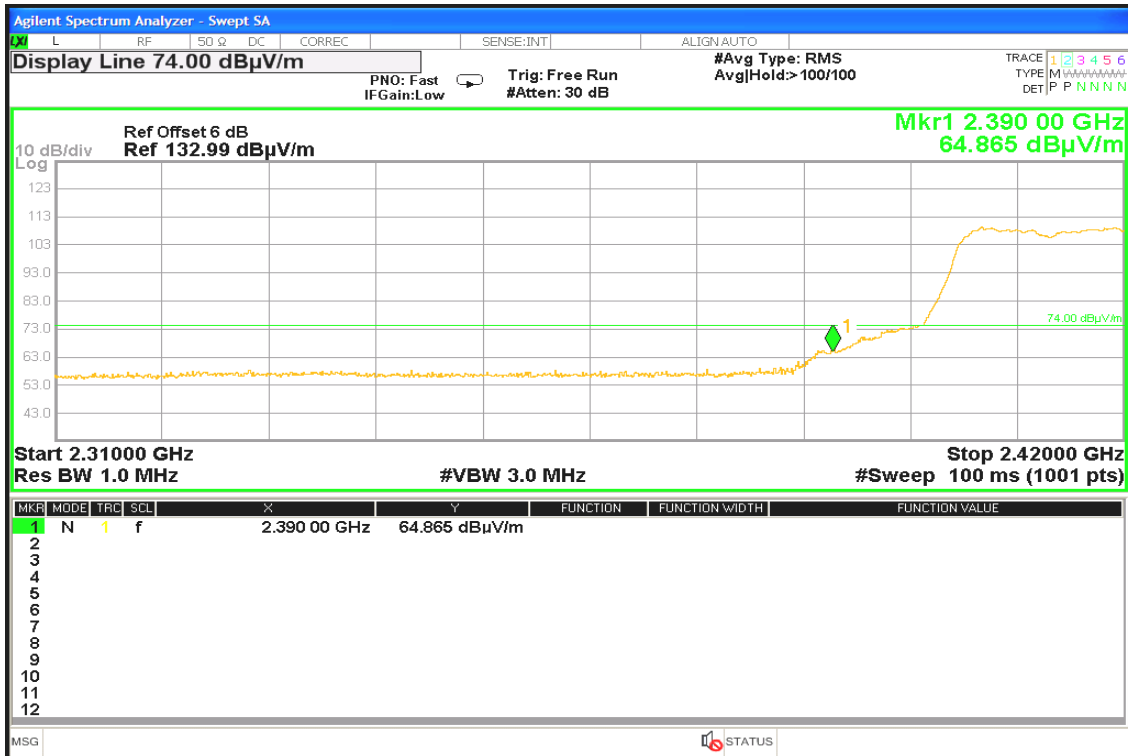

Detector mode: Average


Polarity: Vertical





Detector mode: Peak

Polarity: Horizontal

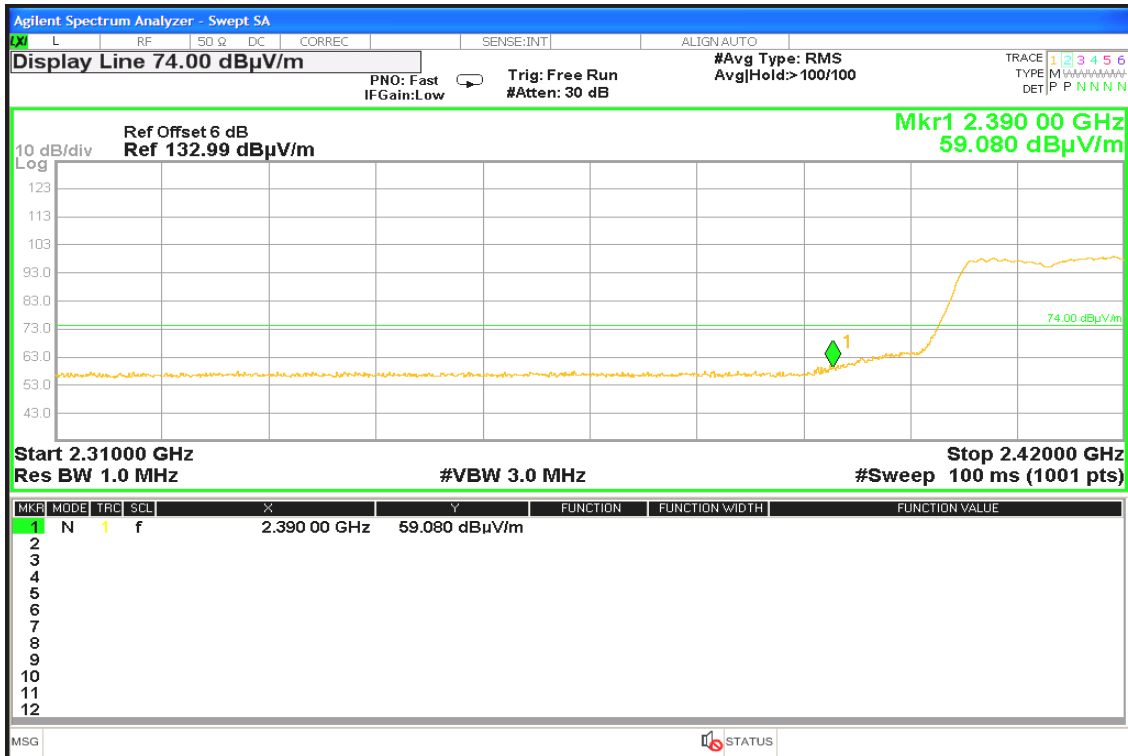

Detector mode: Average

Polarity: Horizontal






Band Edges (IEEE 802.11n HT20 mode / CH High)


Detector mode: Peak

Polarity: Vertical

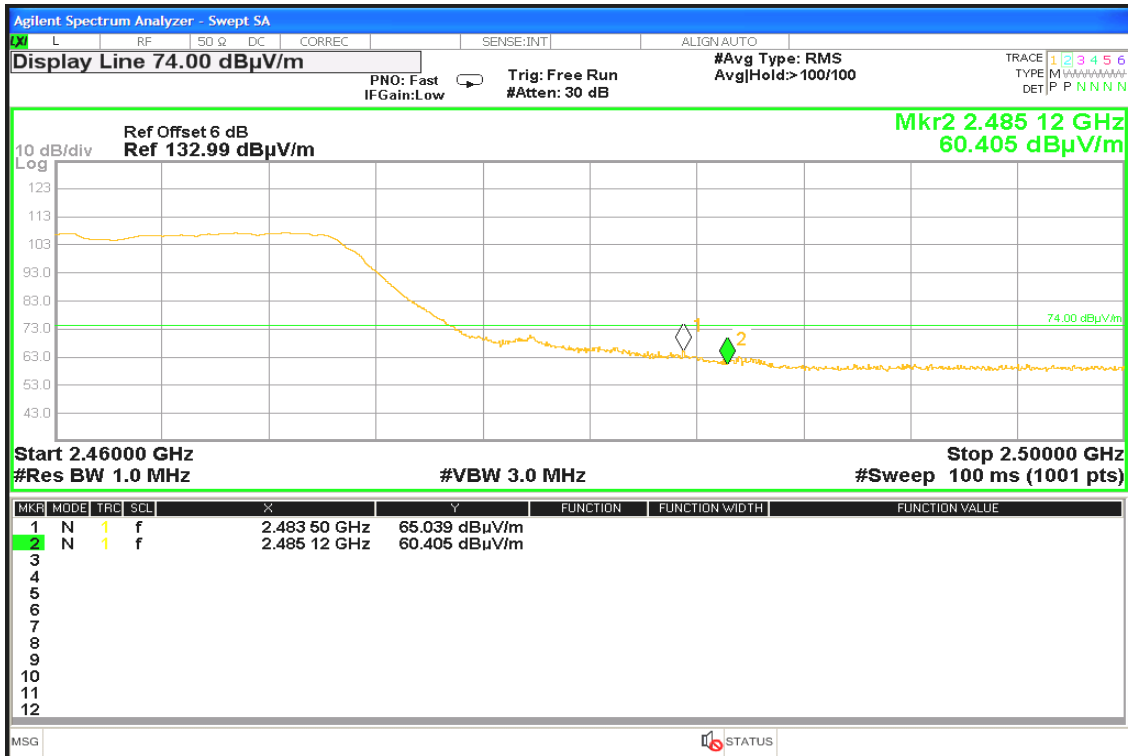

Detector mode: Average


Polarity: Vertical

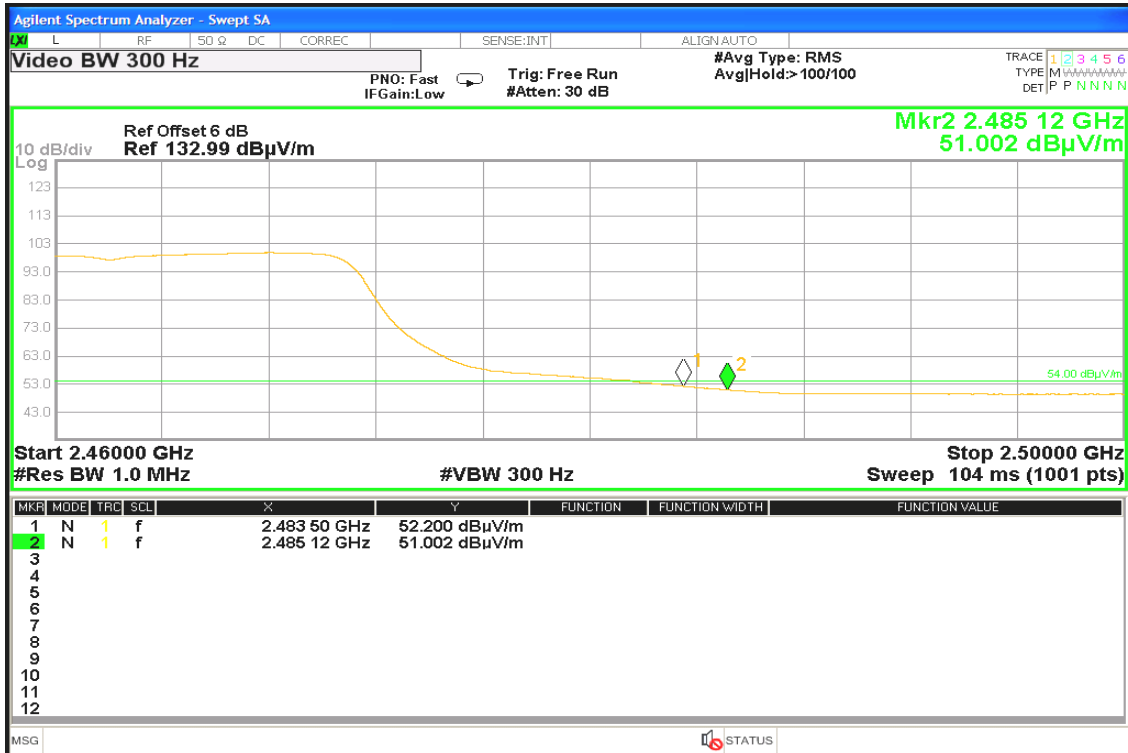




Detector mode: Peak

Polarity: Horizontal

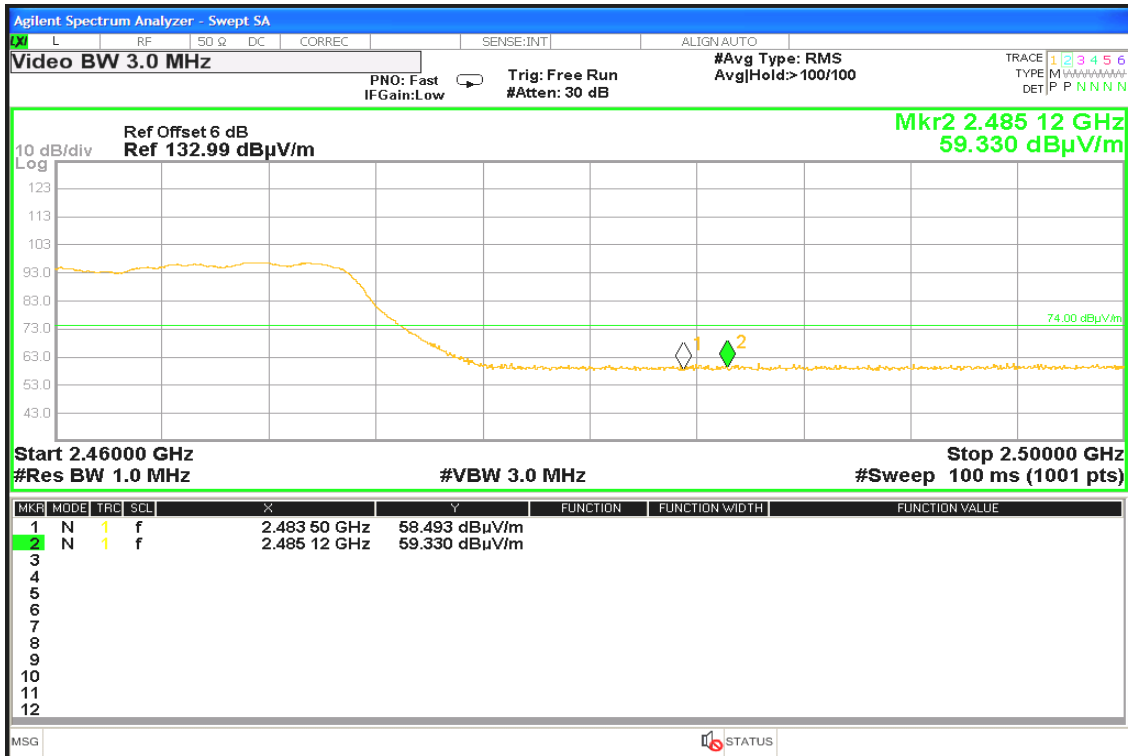

Detector mode: Average

Polarity: Horizontal

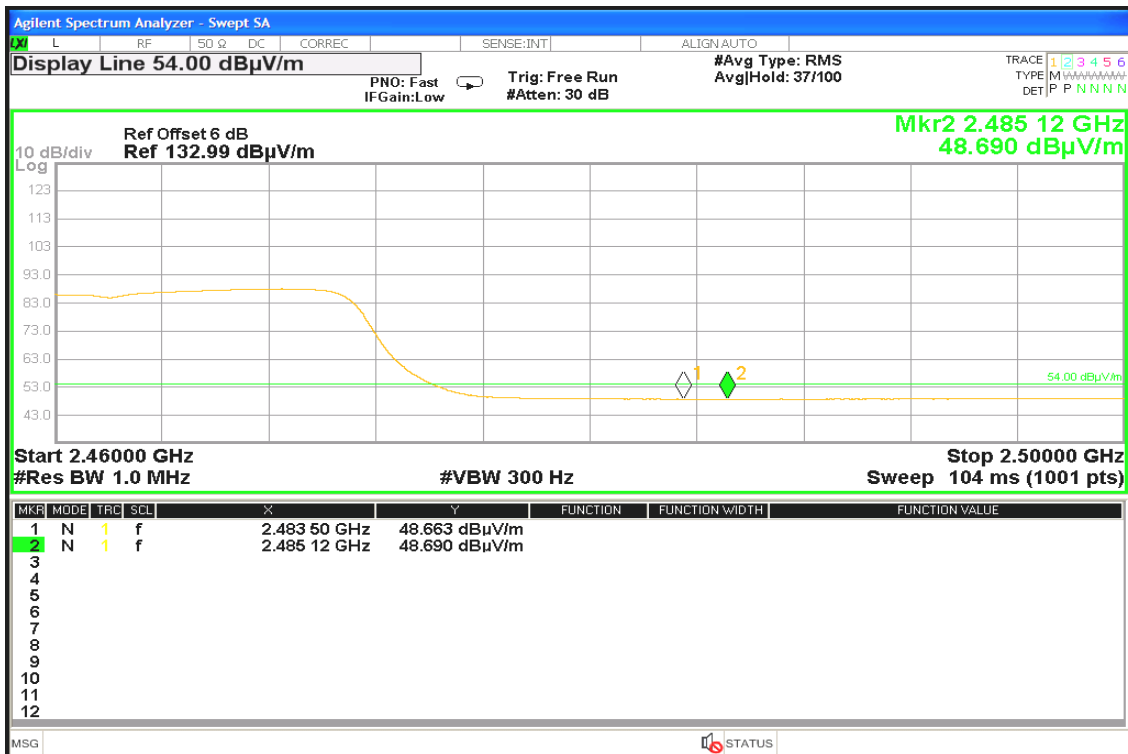




Band Edges (IEEE 802.11n HT40 mode / CH Low)

Detector mode: Peak

Polarity: Vertical

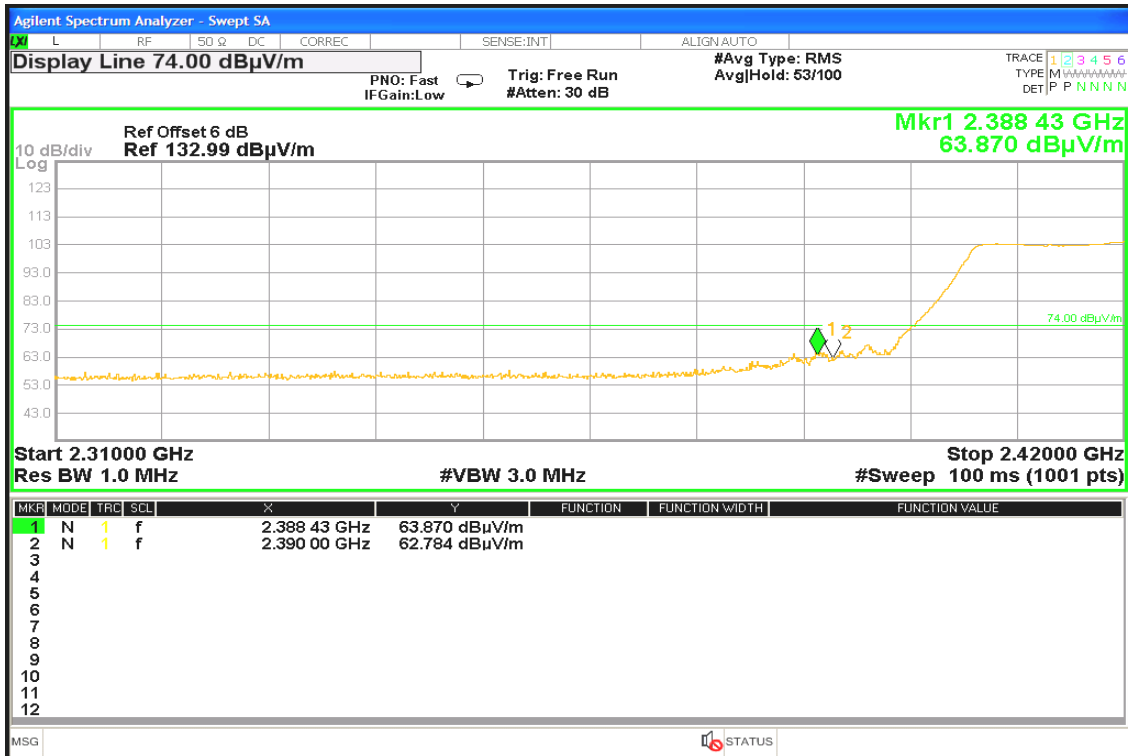

Detector mode: Average


Polarity: Vertical





Detector mode: Peak

Polarity: Horizontal

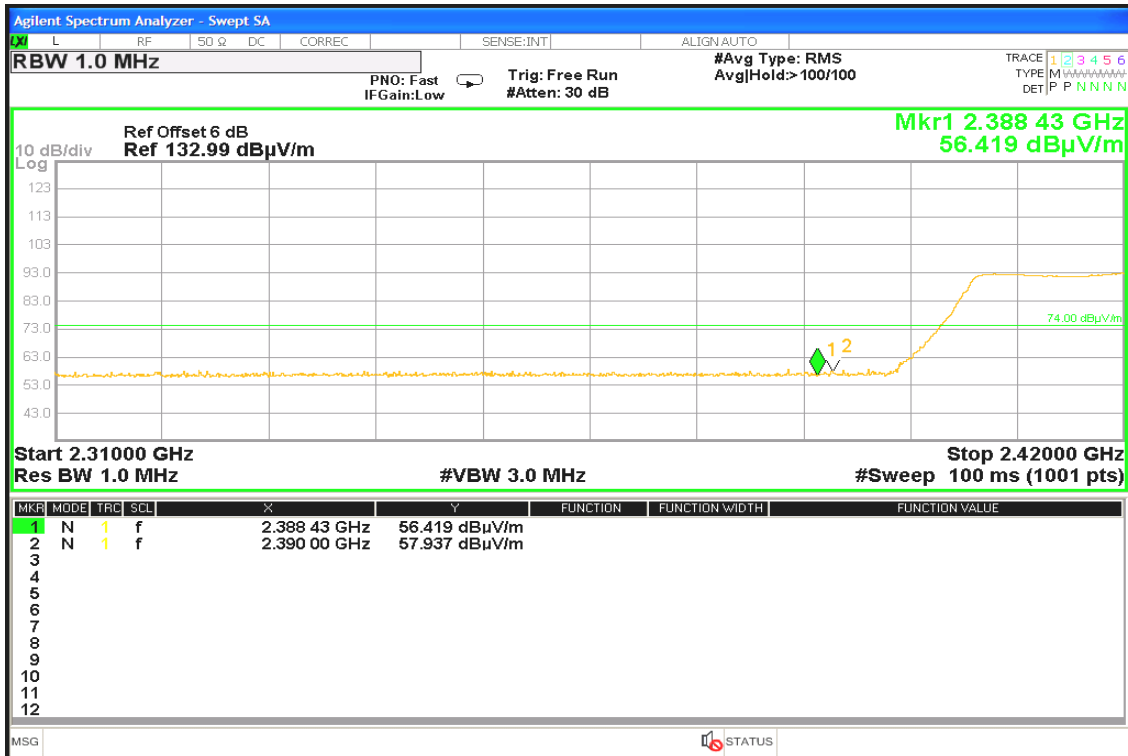

Detector mode: Average

Polarity: Horizontal






Band Edges (IEEE 802.11n HT40 mode / CH High)


Detector mode: Peak

Polarity: Vertical

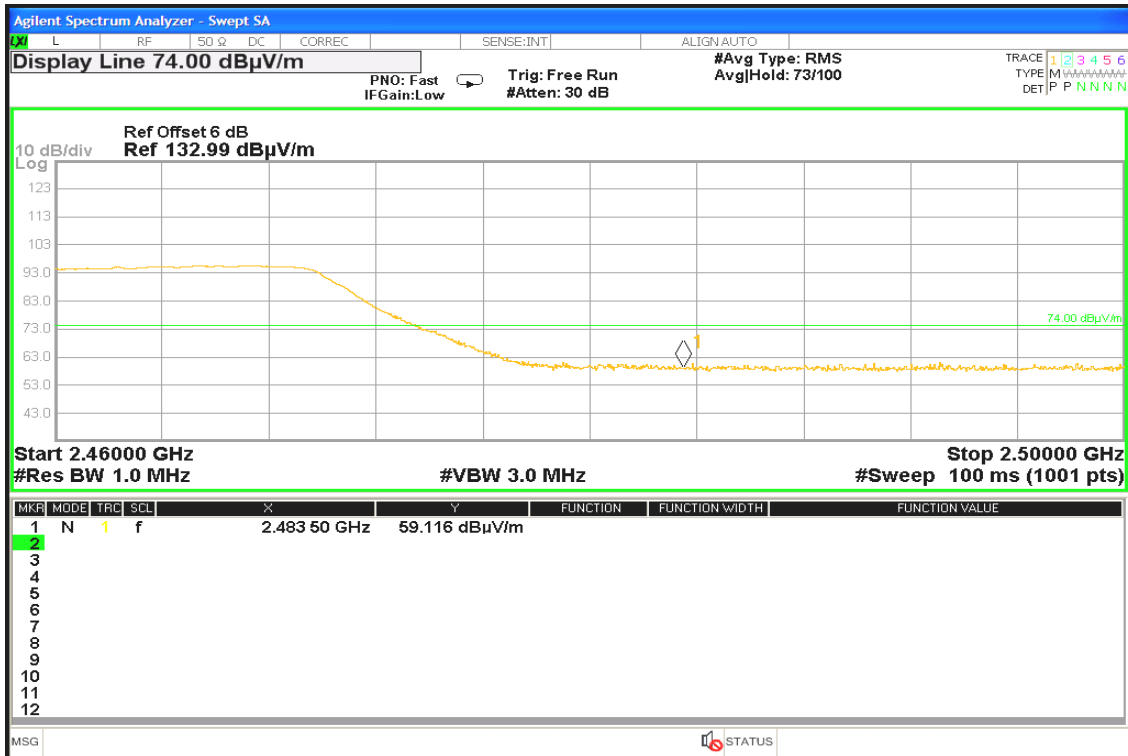

Detector mode: Average


Polarity: Vertical

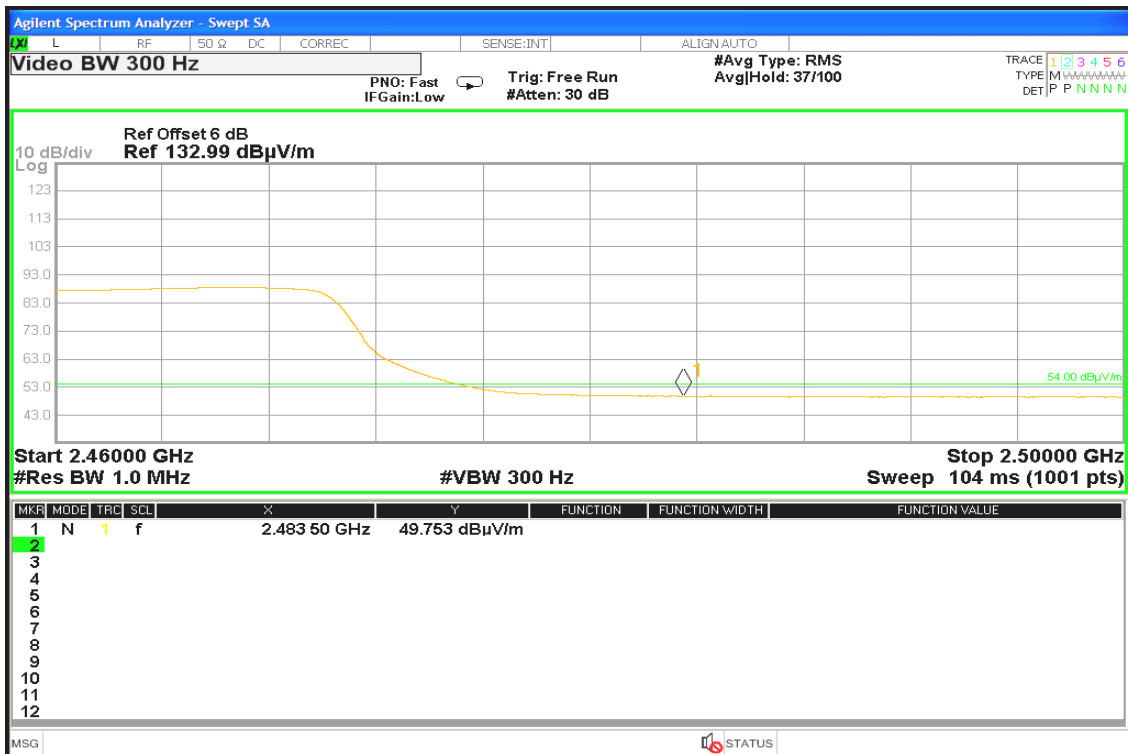




Detector mode: Peak

Polarity: Horizontal

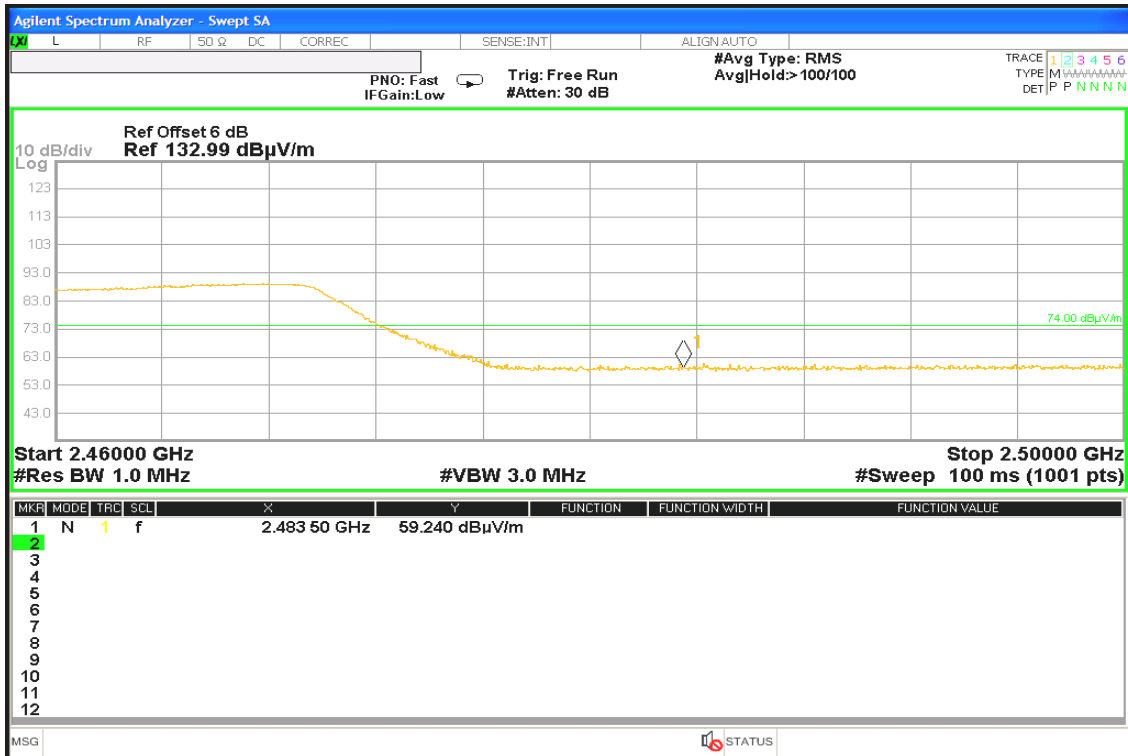

Detector mode: Average


Polarity: Horizontal

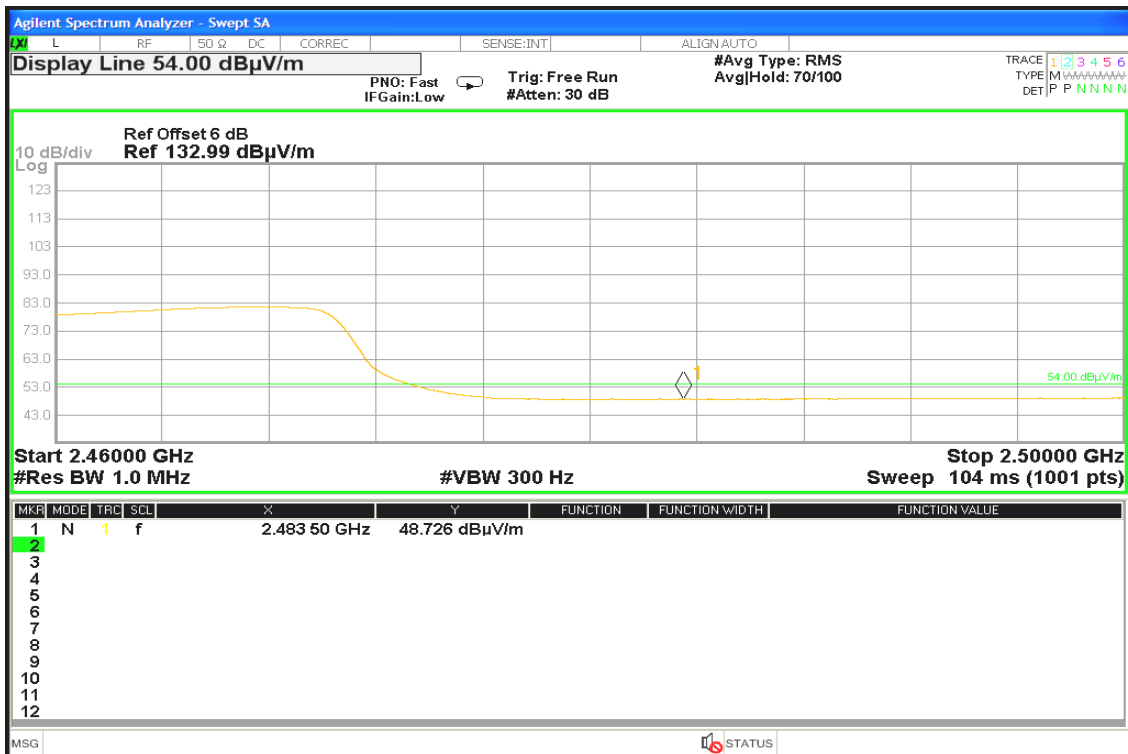




Test Plot

Conducted Band Edges (IEEE 802.11b mode / CH Low)

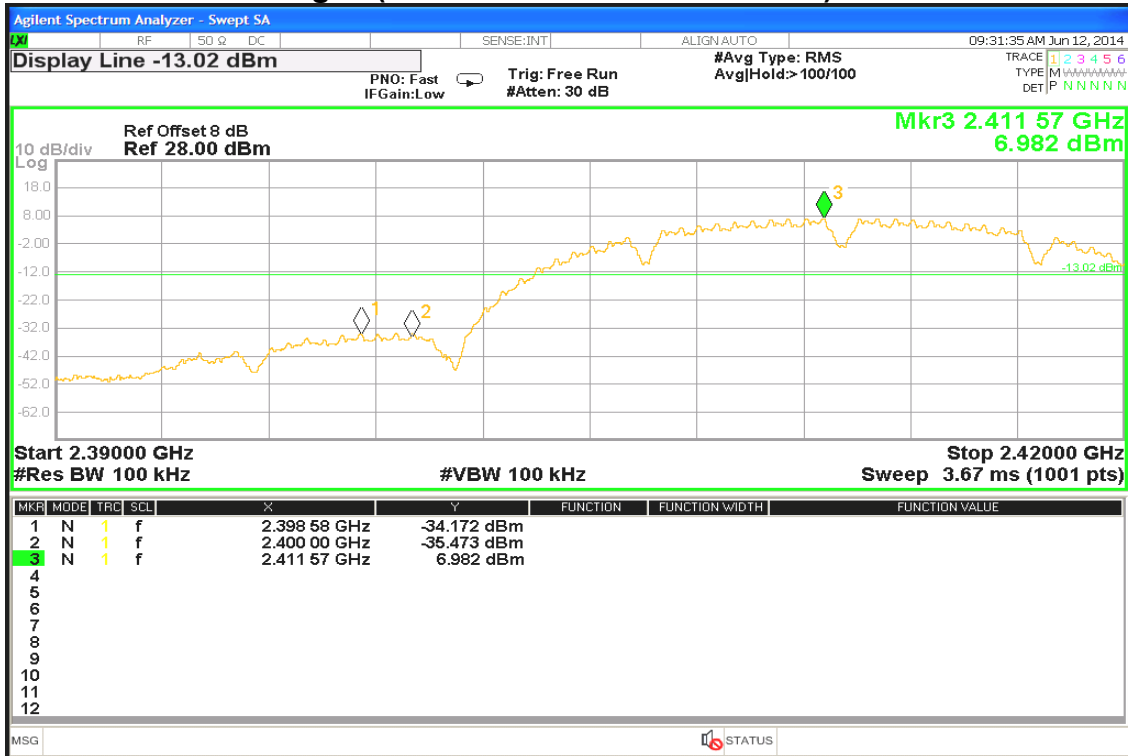


Conducted Band Edges (IEEE 802.11b mode / CH High)

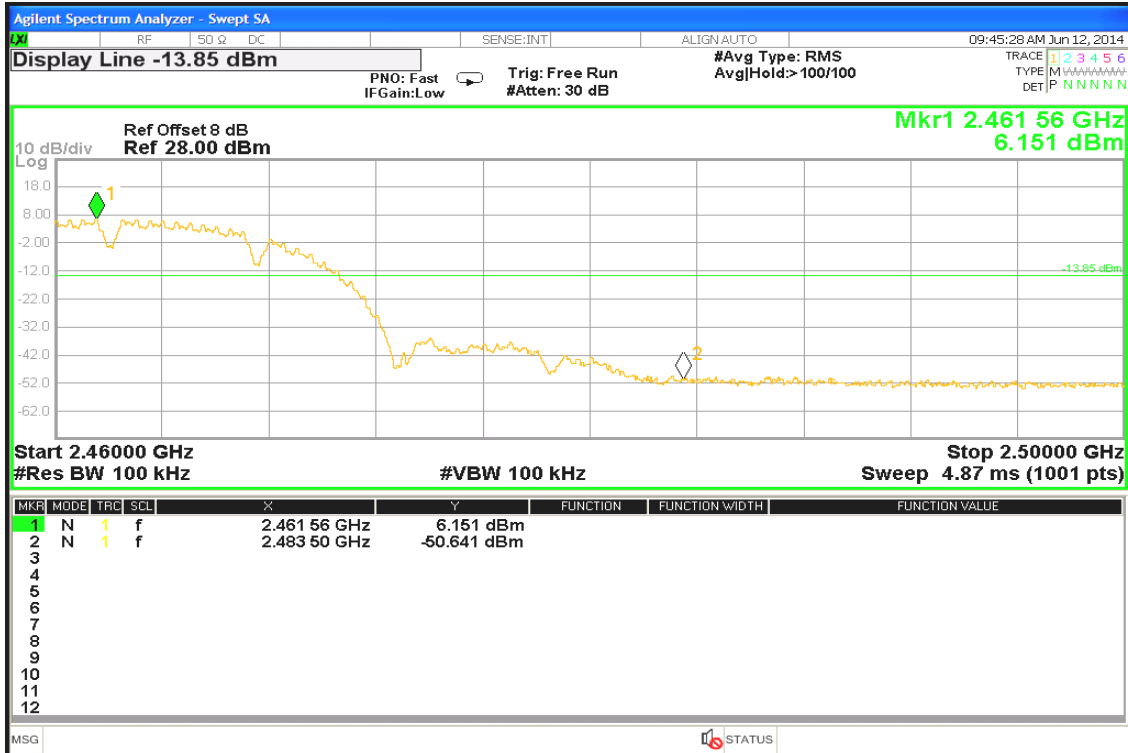




Conducted Band Edges (IEEE 802.11g mode / CH Low)

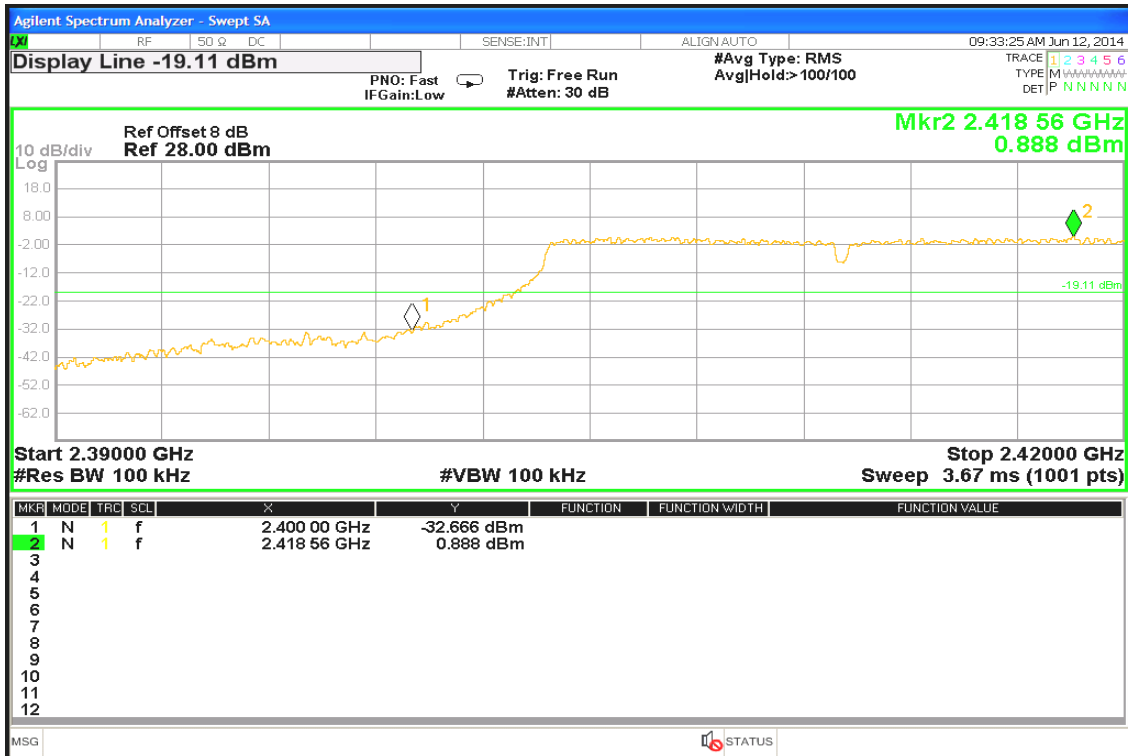


Conducted Band Edges (IEEE 802.11g mode / CH High)

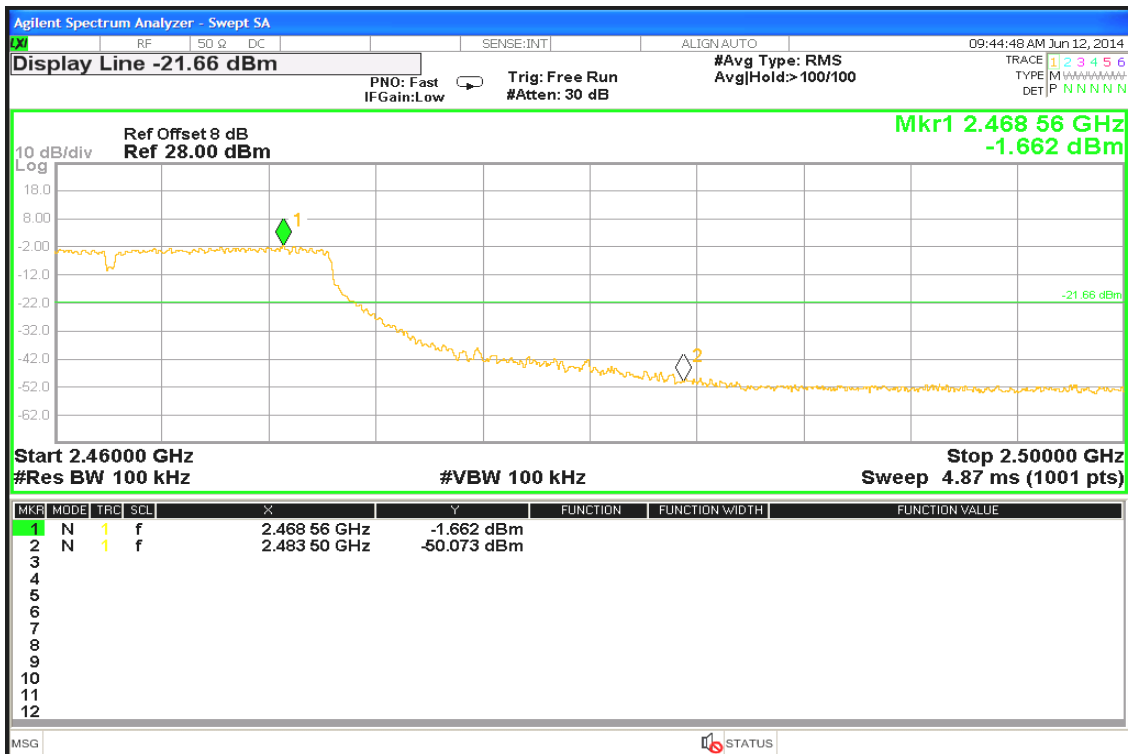




Conducted Band Edges (IEEE 802.11n HT20 mode / Chain 0 / CH Low)

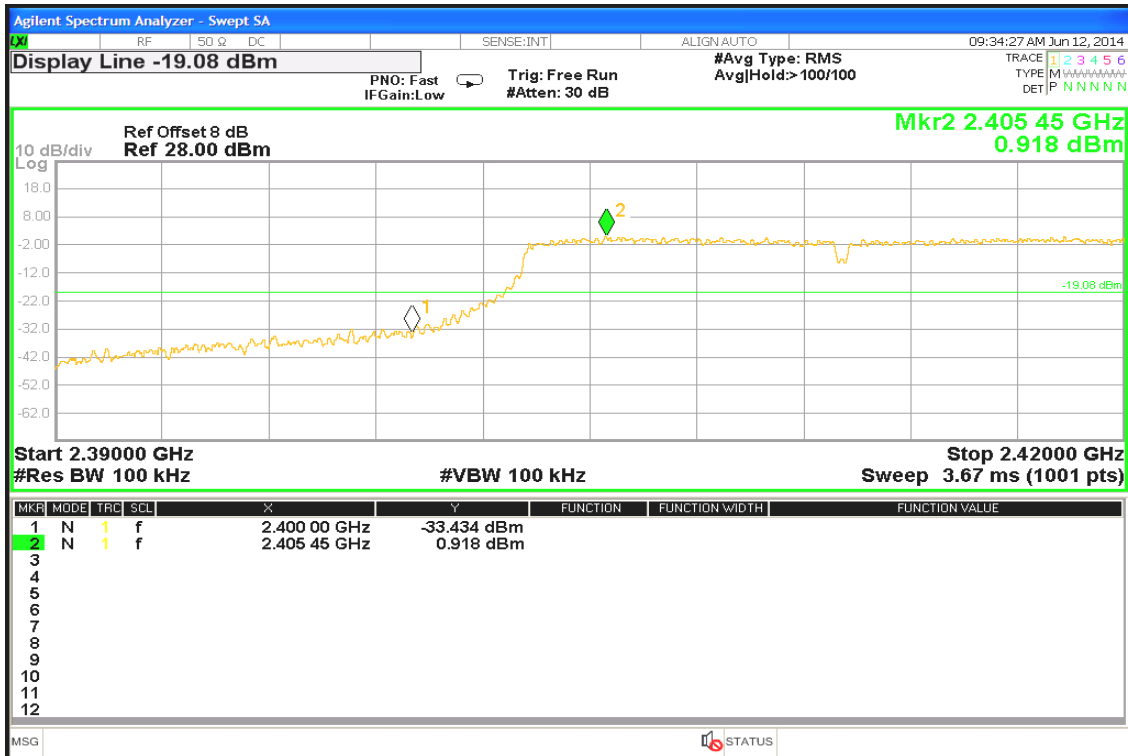


Conducted Band Edges (IEEE 802.11n HT20 mode / Chain 0 / CH High)

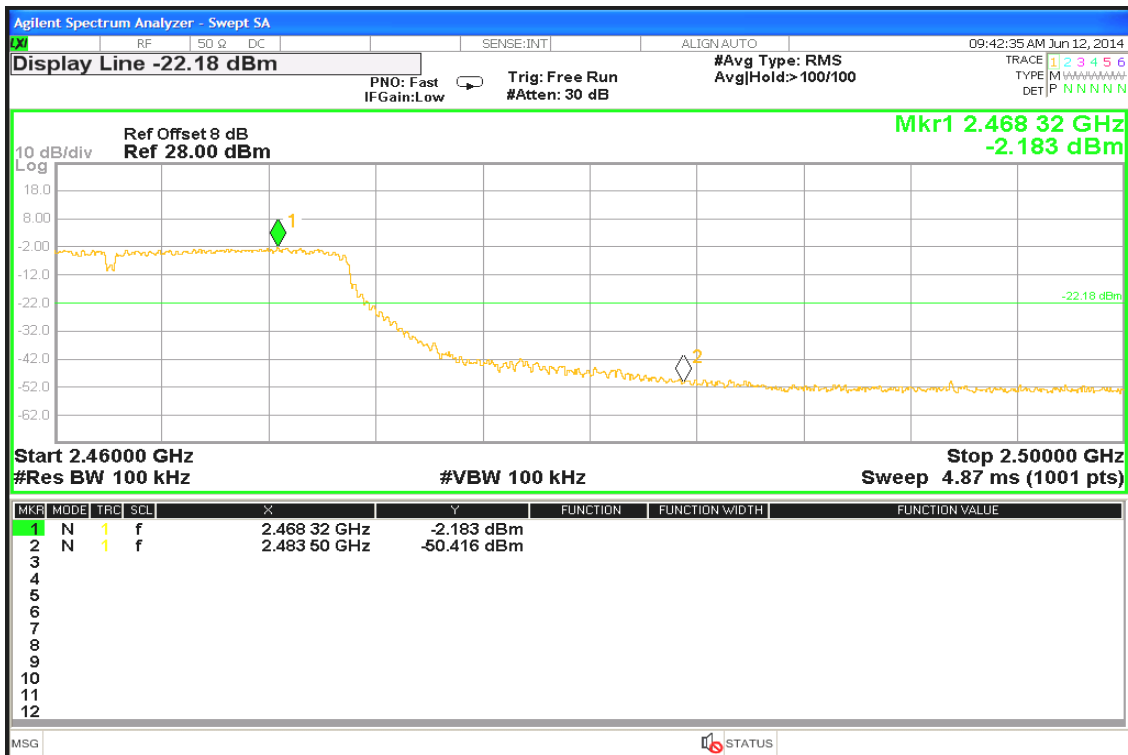




Conducted Band Edges (IEEE 802.11n HT20 mode / Chain 1 / CH Low)

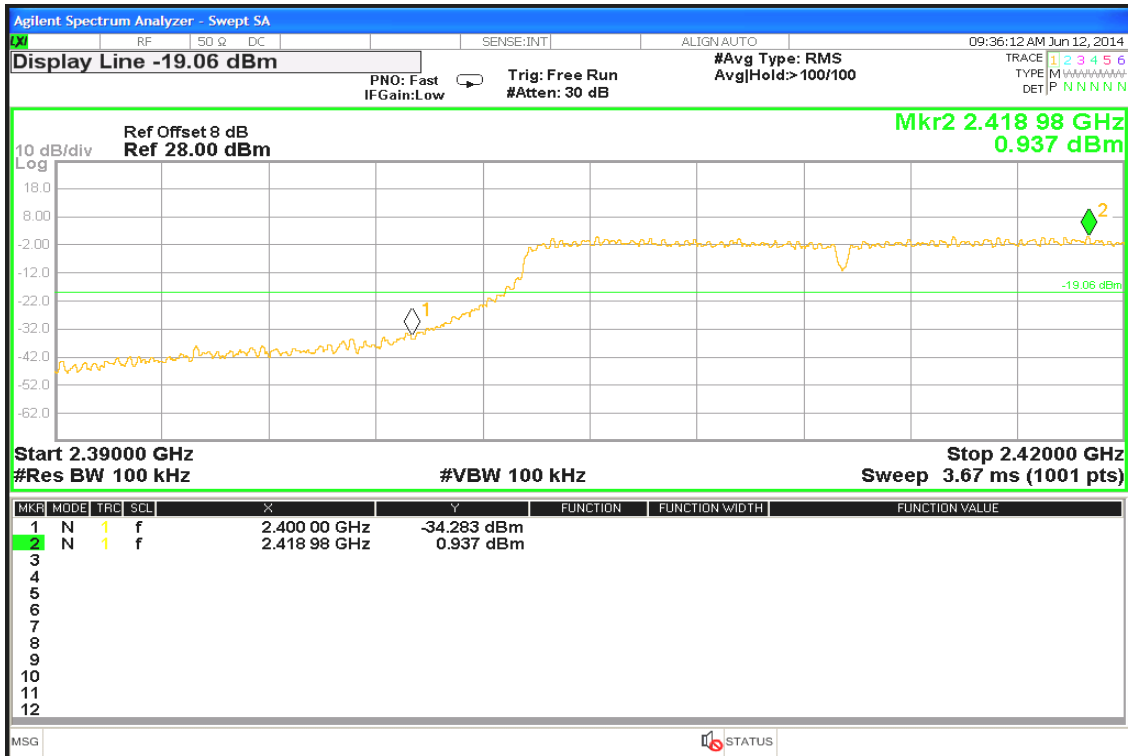


Conducted Band Edges (IEEE 802.11n HT20 mode / Chain 1 / CH High)

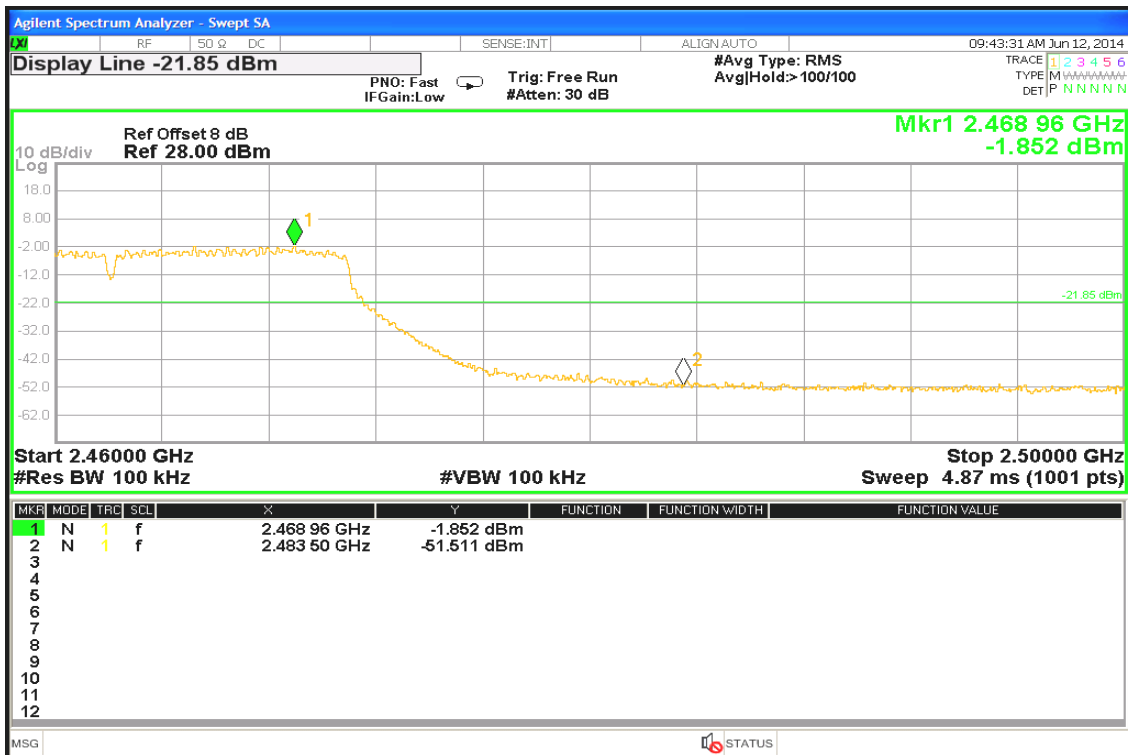




Conducted Band Edges (IEEE 802.11n HT40 mode / Chain 0 / CH Low)

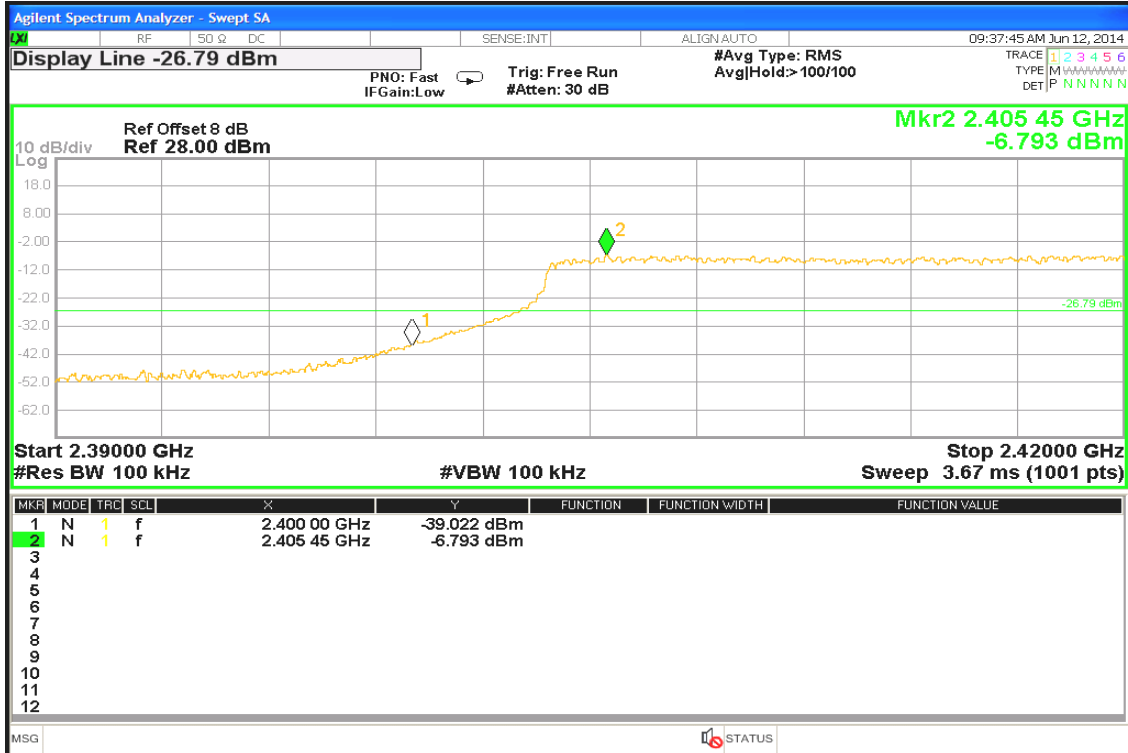


Conducted Band Edges (IEEE 802.11n HT40 mode / Chain 0 / CH High)

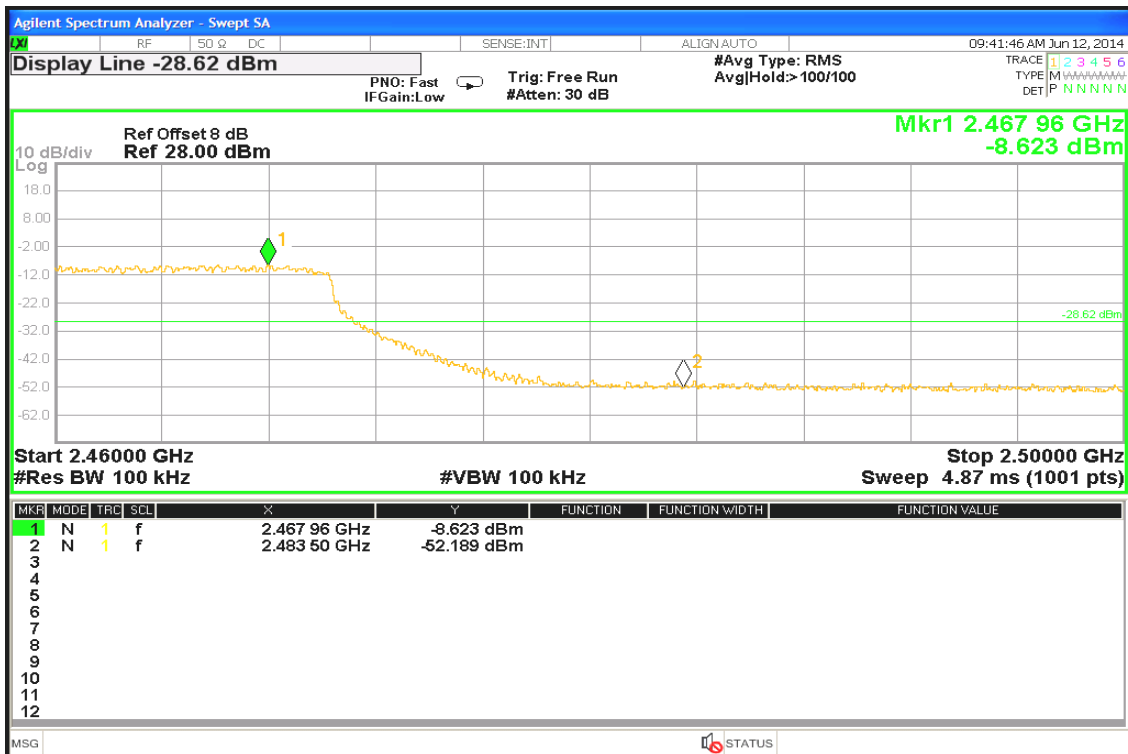




Conducted Band Edges (IEEE 802.11n HT40 mode / Chain 1 / CH Low)

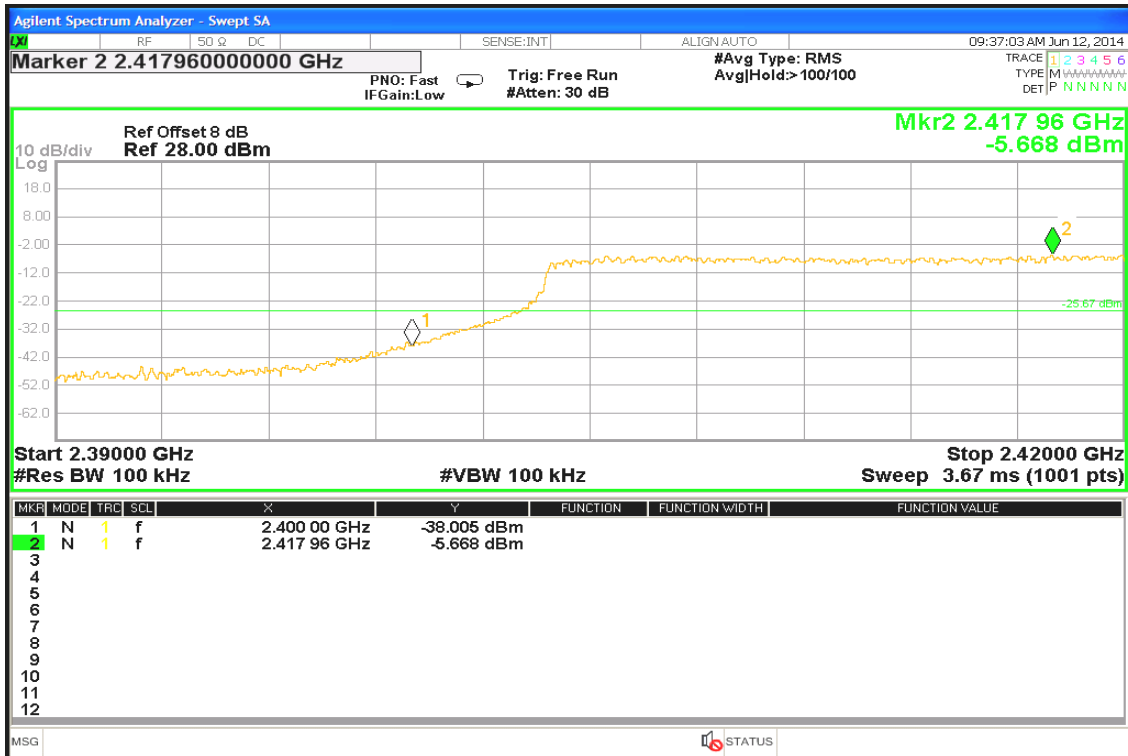

Conducted Band Edges (IEEE 802.11n HT40 mode / Chain 1 / CH High)

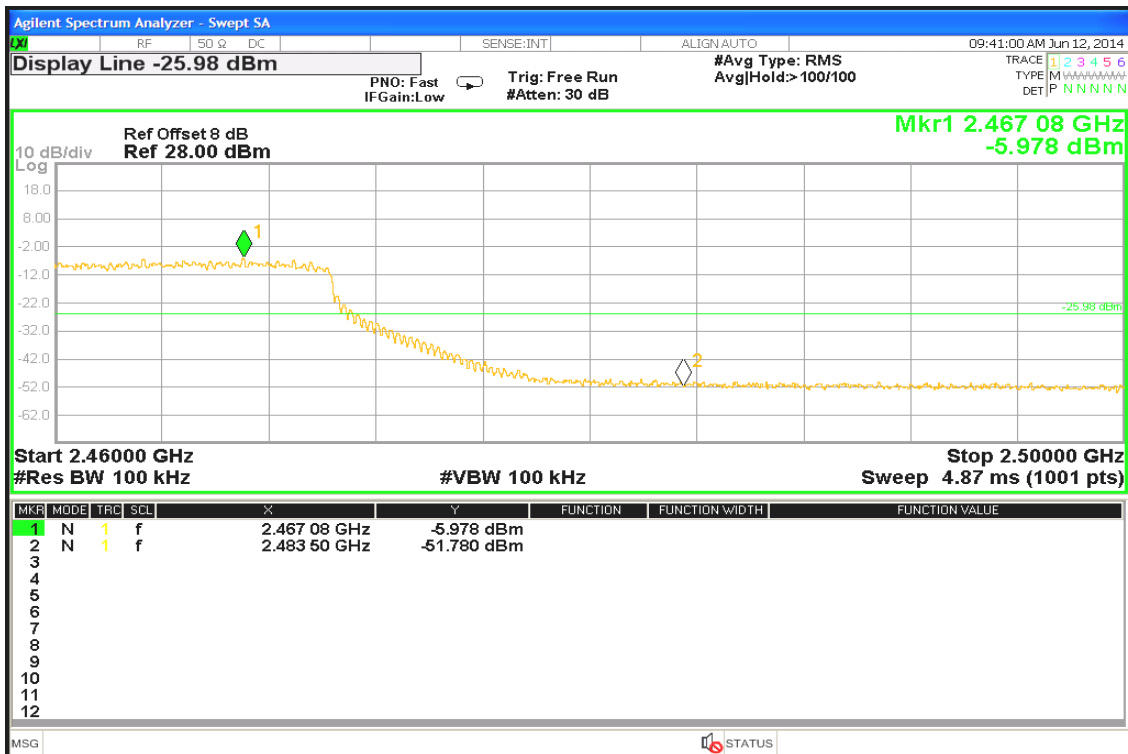




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

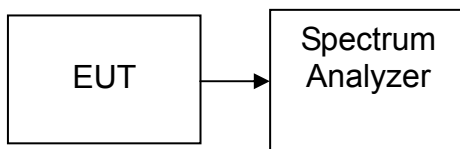

TEST PROCEDURE

Per KDB 558074 v03r02

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.241	8.00	PASS
Mid	2437	-12.698		PASS
High	2462	-13.114		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.382	8.00	PASS
Mid	2437	-13.621		PASS
High	2462	-9.585		PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD(dBm)			Limit (dBm)	Result
		Chain 0	Chain 1	Total		
Low	2412	-10.888	-13.14	-8.86	6.06	PASS
Mid	2437	-12.862	-13.105	-9.97		PASS
High	2462	-10.318	-15.172	-9.09		PASS

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	PPSD(dBm)			Limit (dBm)	Result
		Chain 0	Chain 1	Total		
Low	2422	-17.01	-19.655	-15.12	6.06	PASS
Mid	2437	-10.224	-19.022	-9.69		PASS
High	2452	-10.42	-20.949	-10.05		PASS

Remark:


1.Total PPSD (dBm) = 10*LOG(10^(Chain 0 PPSD / 10)+10^(Chain 1 PPSD / 10))

2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 6.06dBm




Test Plot

IEEE 802.11b mode PPSD (CH Low)

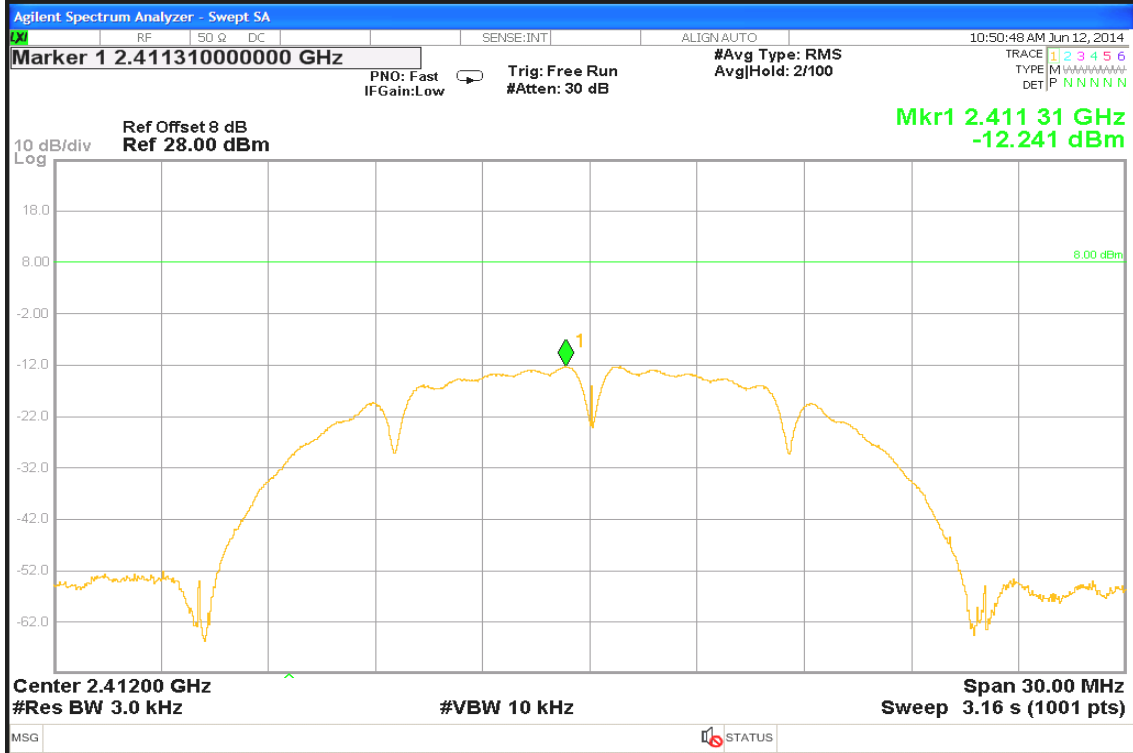


PPSD (CH Mid)

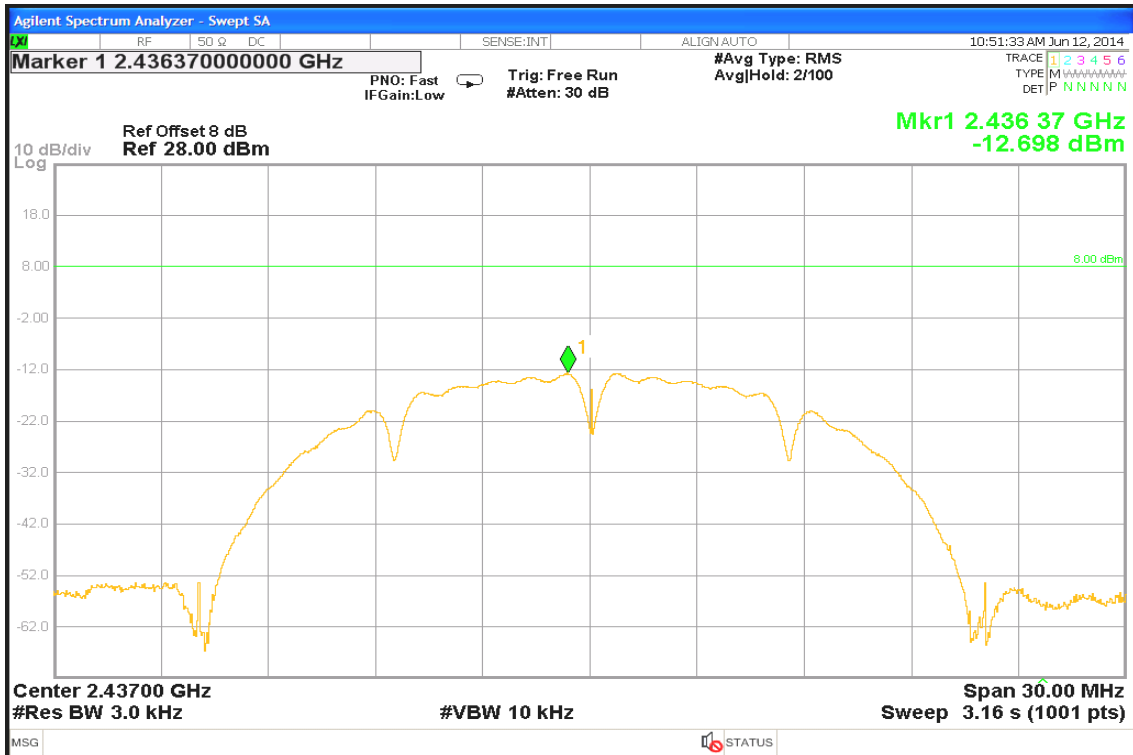




PPSD (CH High)

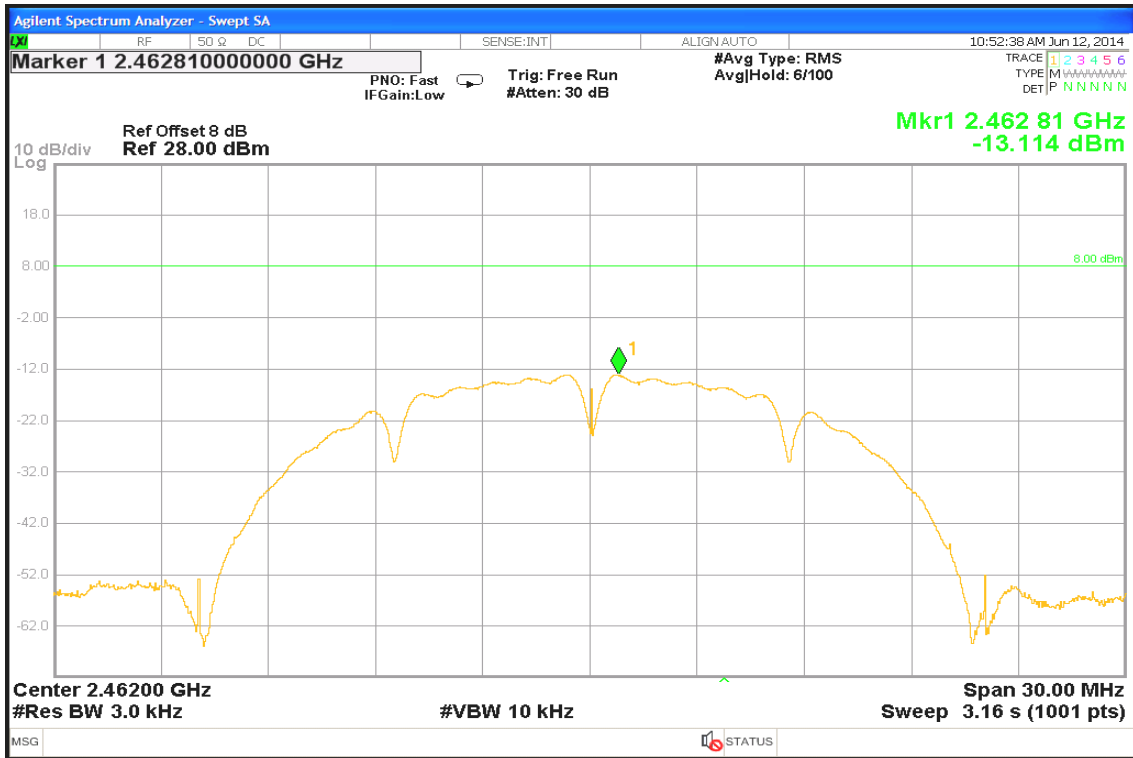


IEEE 802.11g mode

PPSD (CH Low)

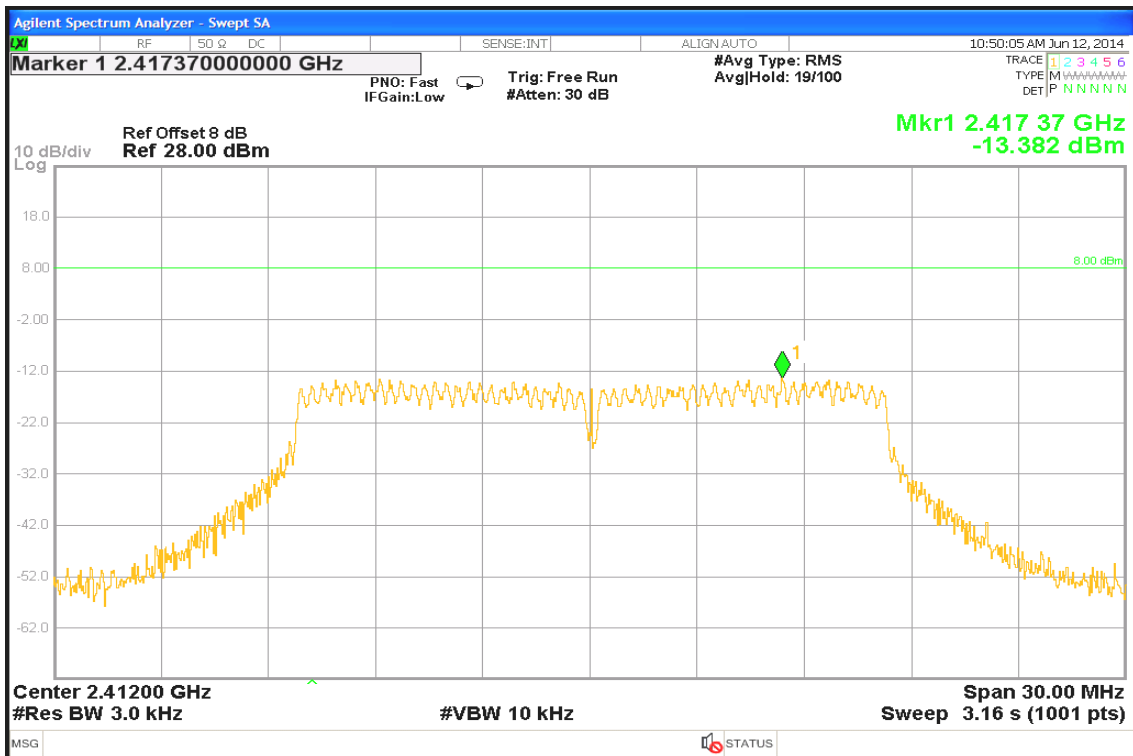




PPSD (CH Mid)

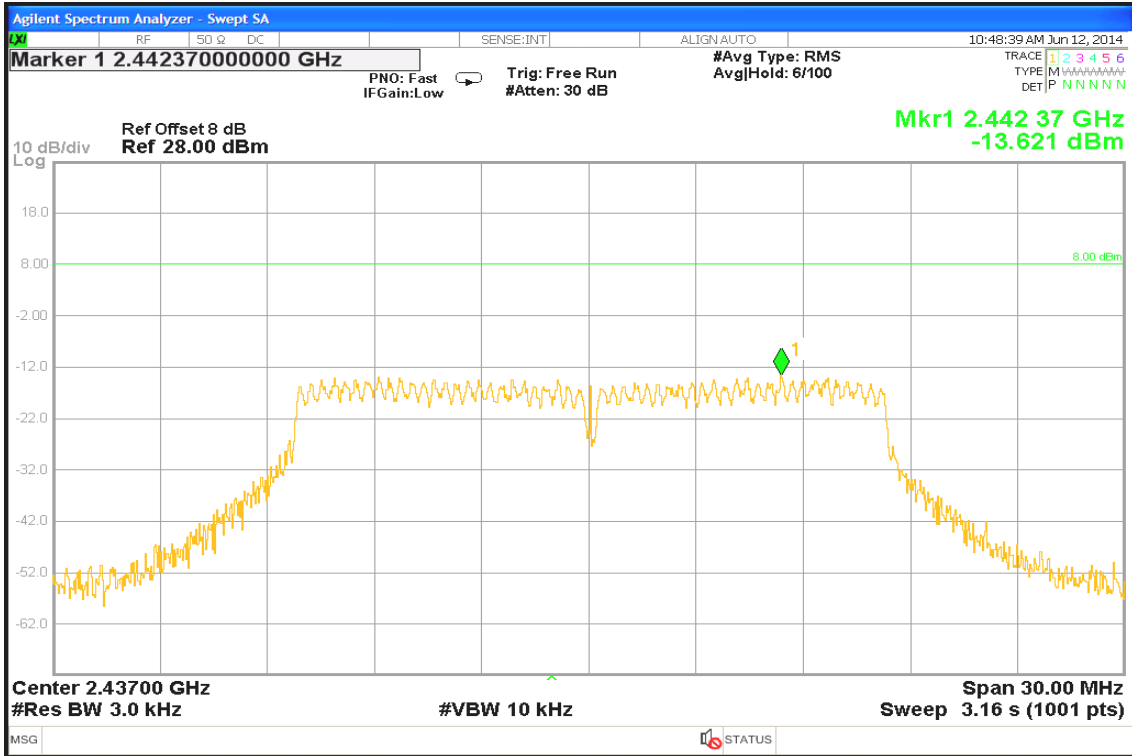


PPSD (CH High)

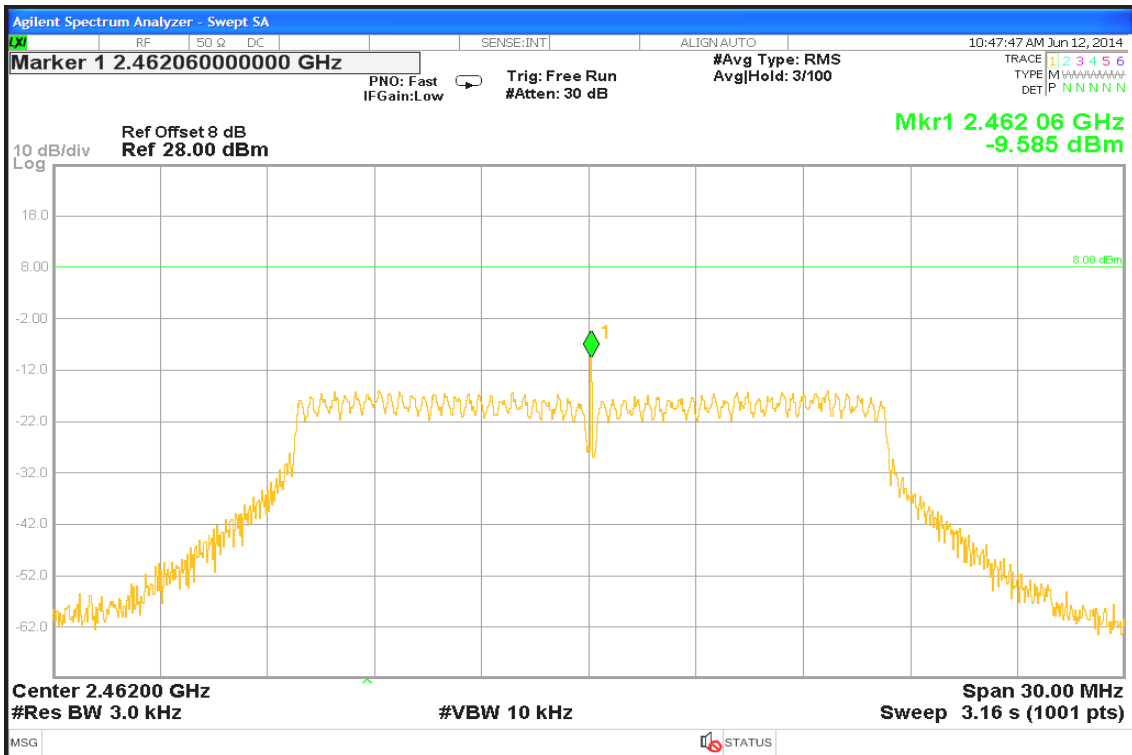




IEEE 802.11n HT20 mode (Chain 0)

PPSD (CH Low)

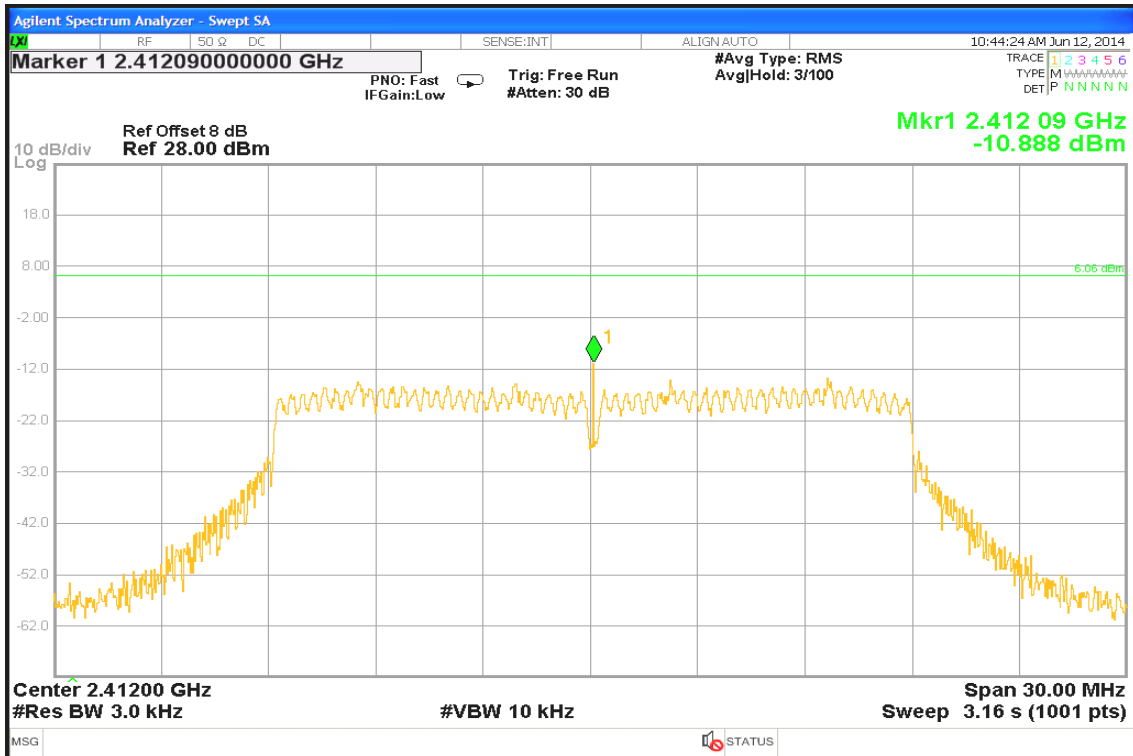


PPSD (CH Mid)

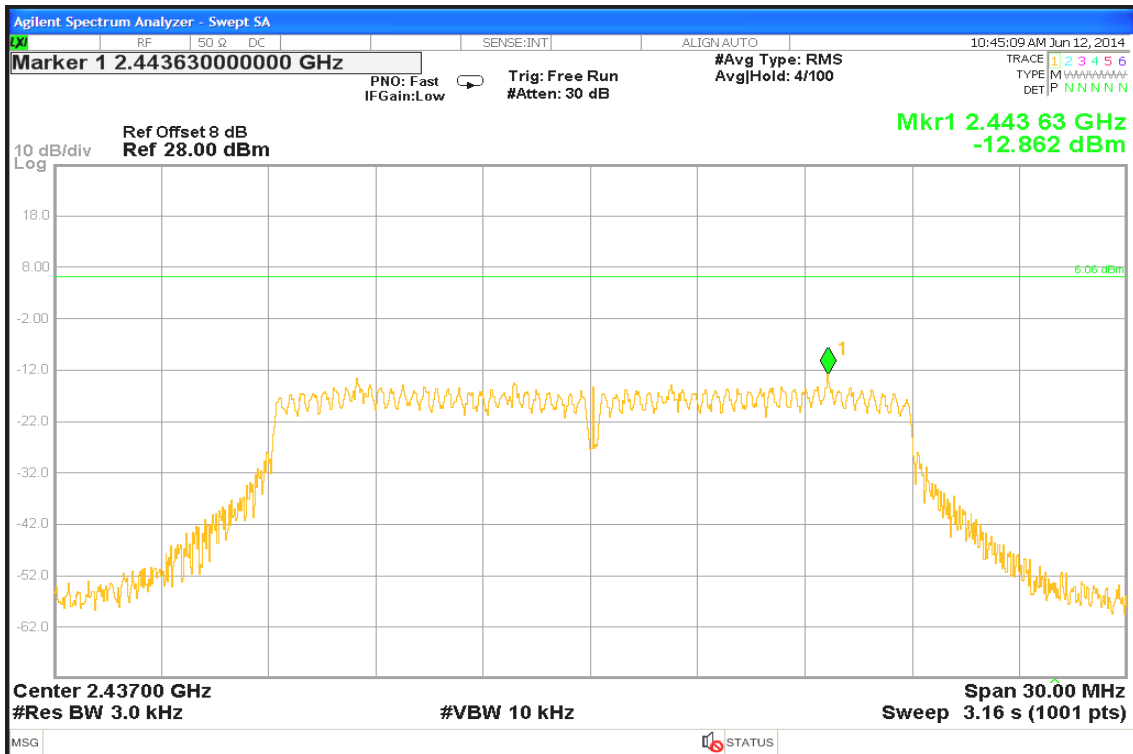




PPSD (CH High)

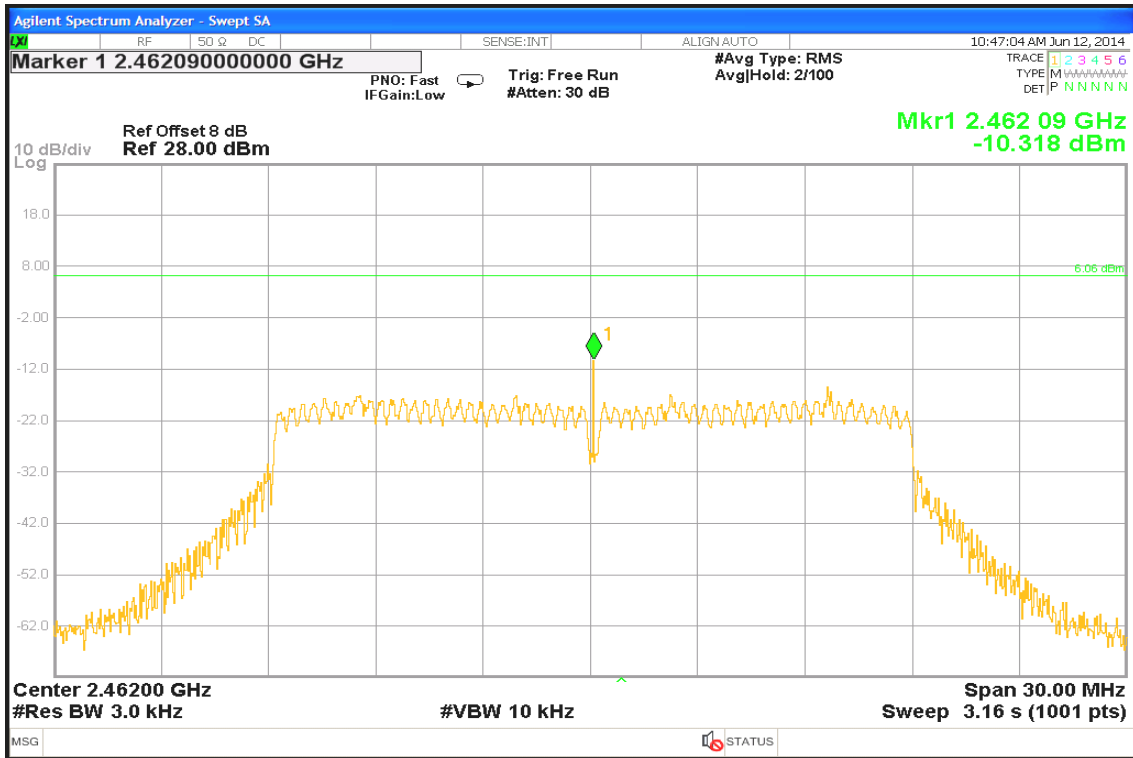


IEEE 802.11n HT20 mode (Chain 1)

PPSD (CH Low)

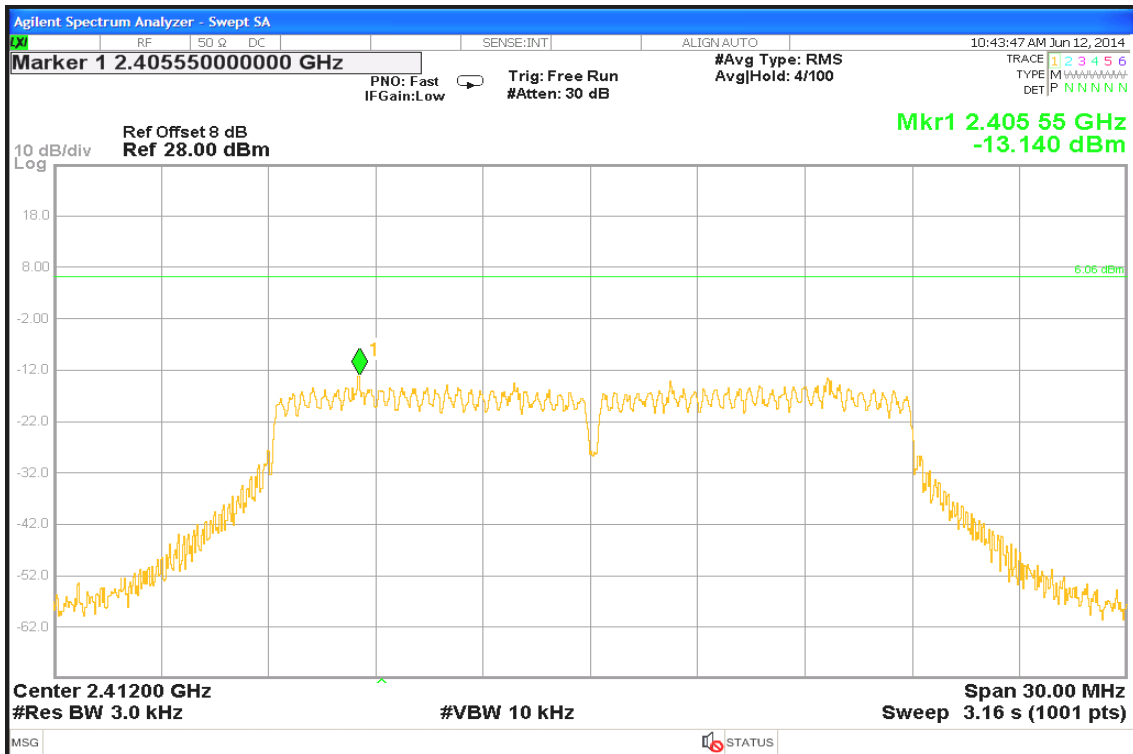



PPSD (CH Mid)

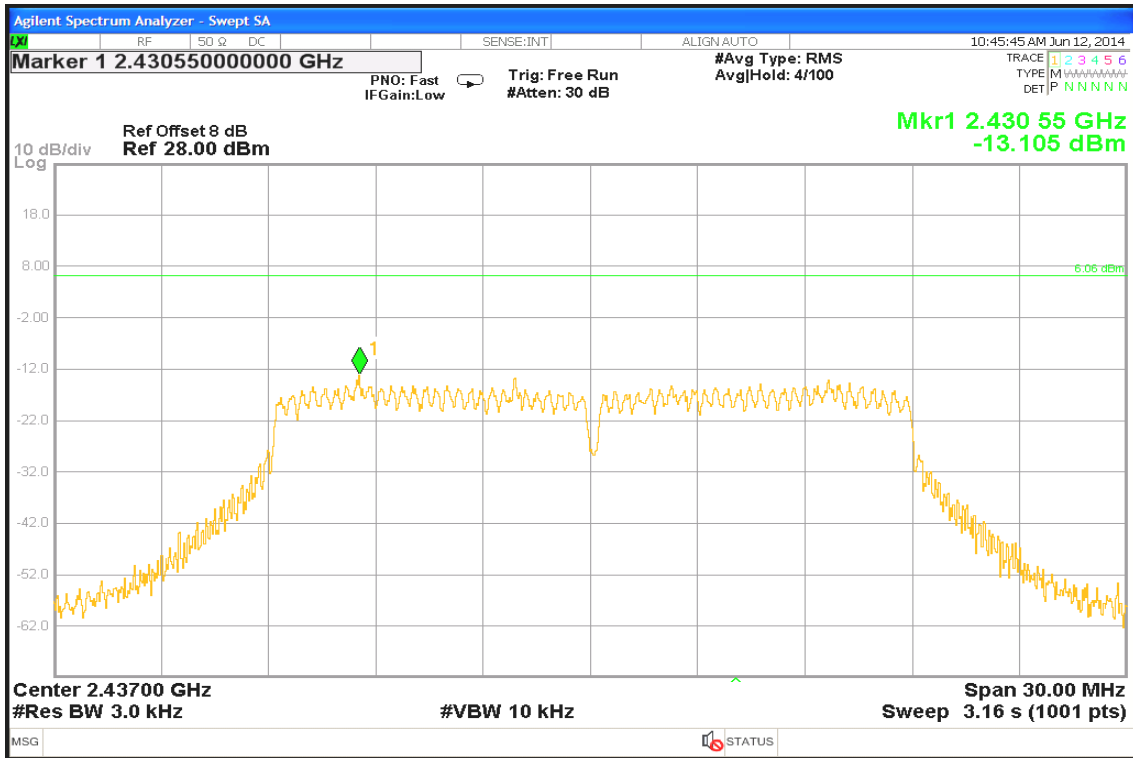


PPSD (CH High)






IEEE 802.11n HT40 mode (Chain 0)

PPSD (CH Low)

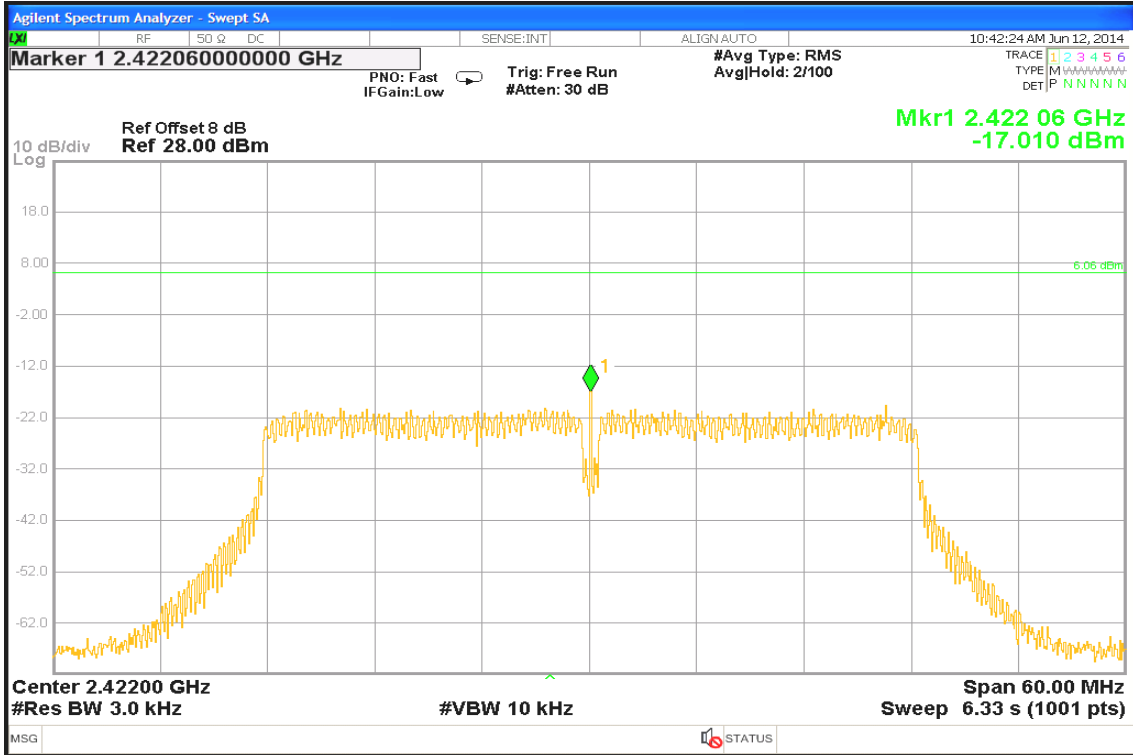


PPSD (CH Mid)

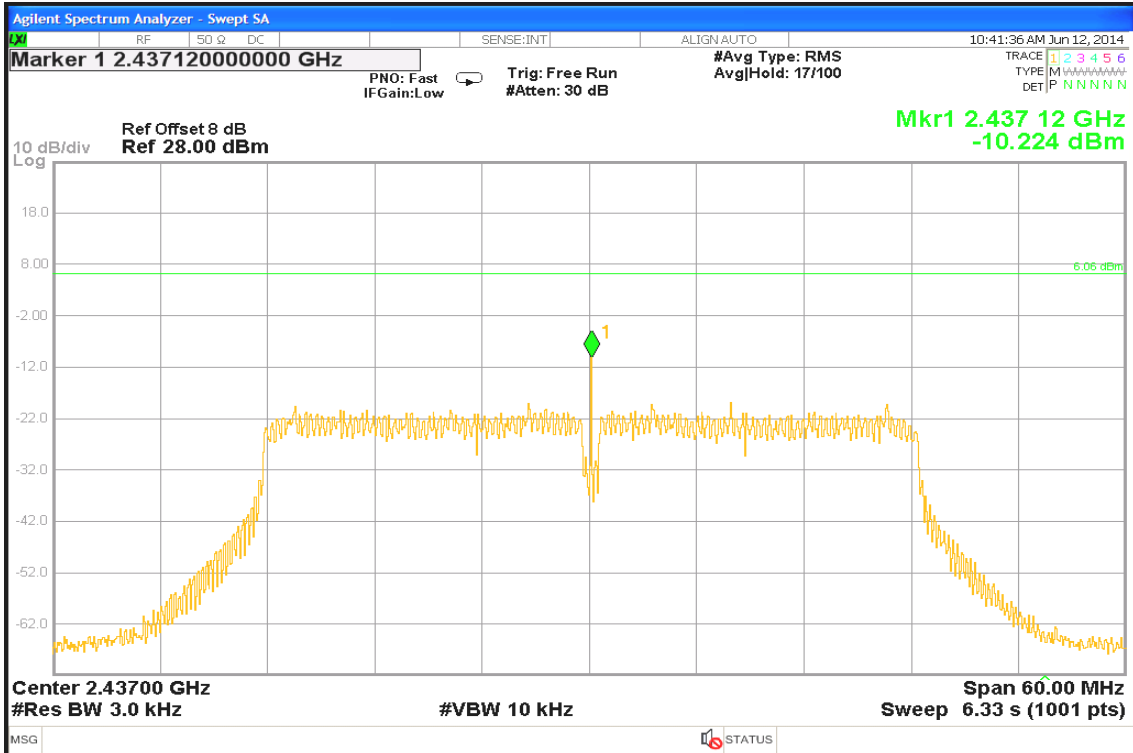




PPSD (CH High)

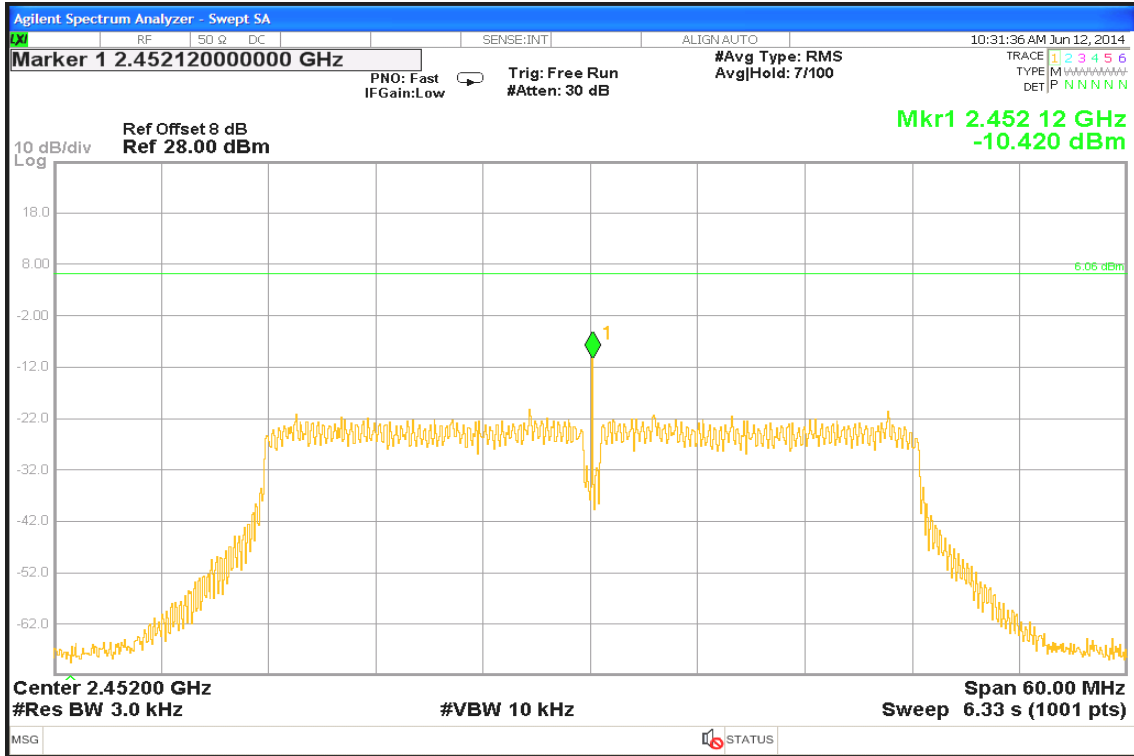


IEEE 802.11n HT40 mode (Chain 1)

PPSD (CH Low)

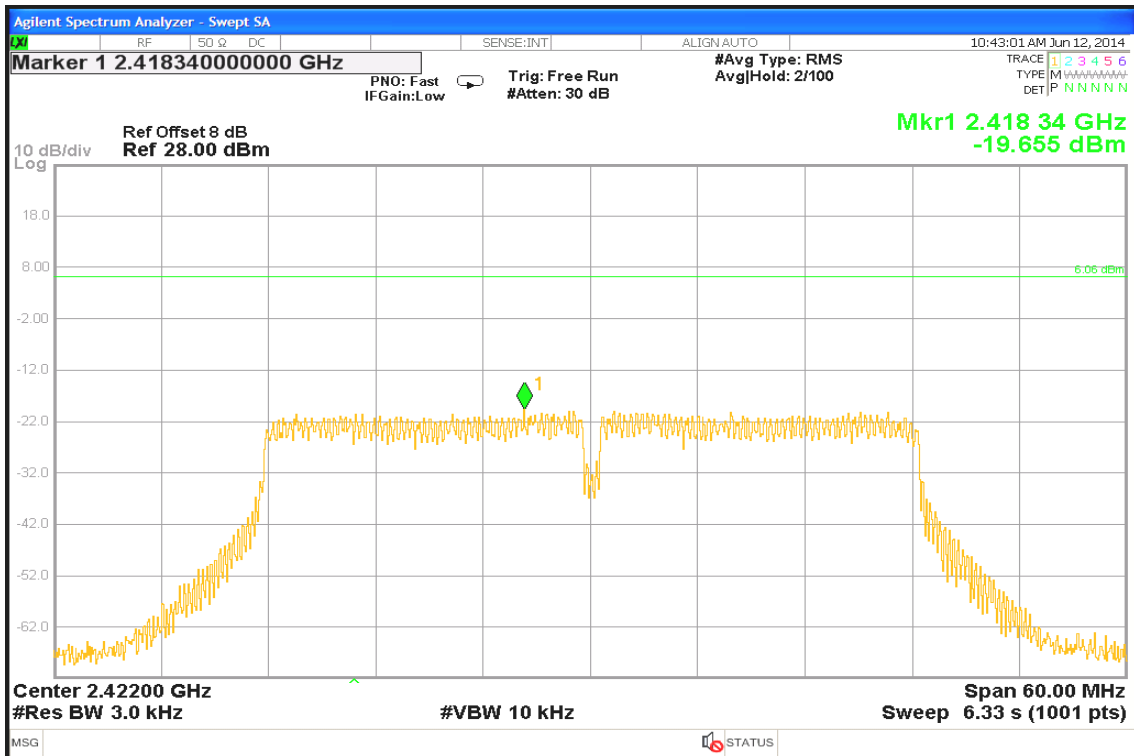




PPSD (CH Mid)

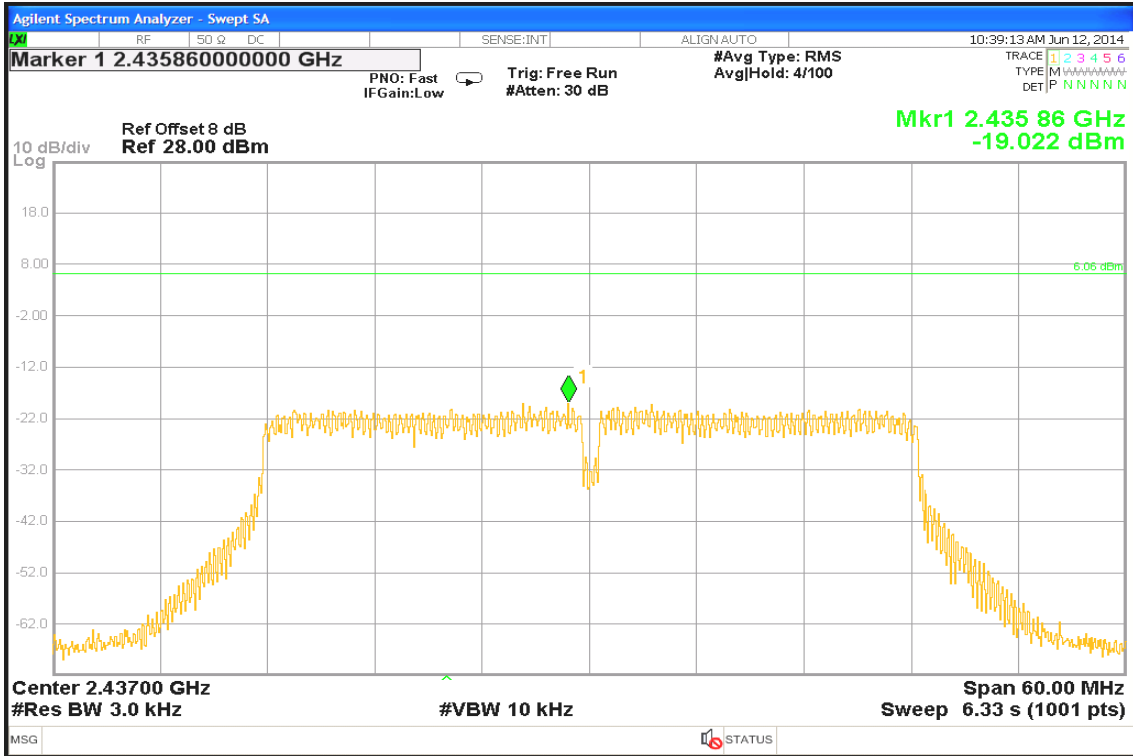

PPSD (CH High)

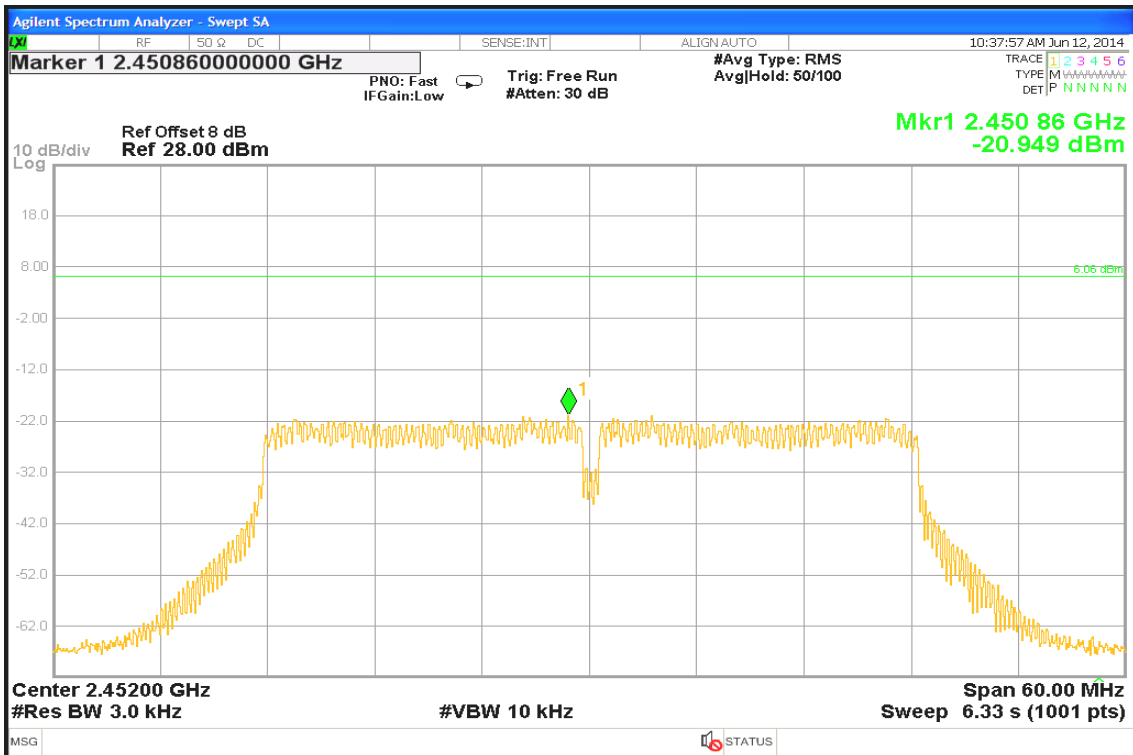




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

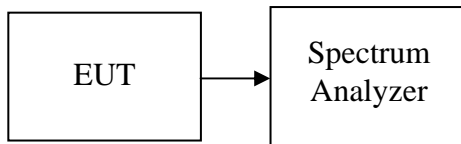

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range for IEEE 802.11b/g, 30MHz to 40GHz range for IEEE 802.11a with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted




Test Plot

IEEE 802.11b mode

CH Low

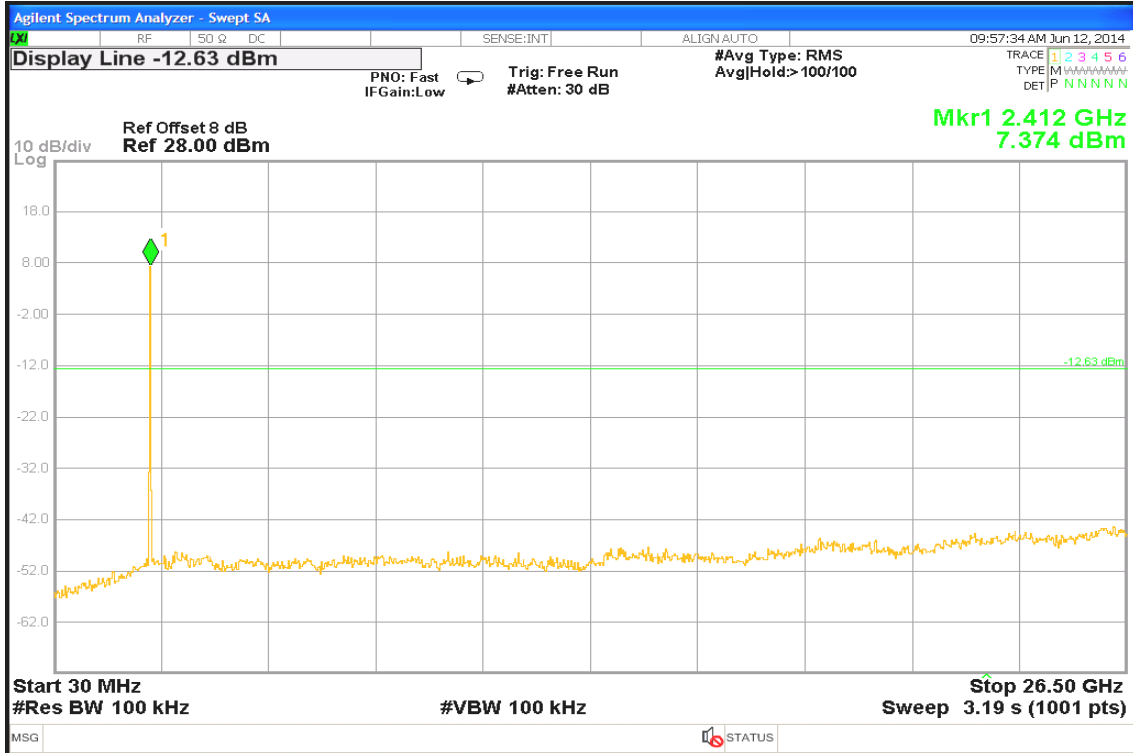


CH Mid

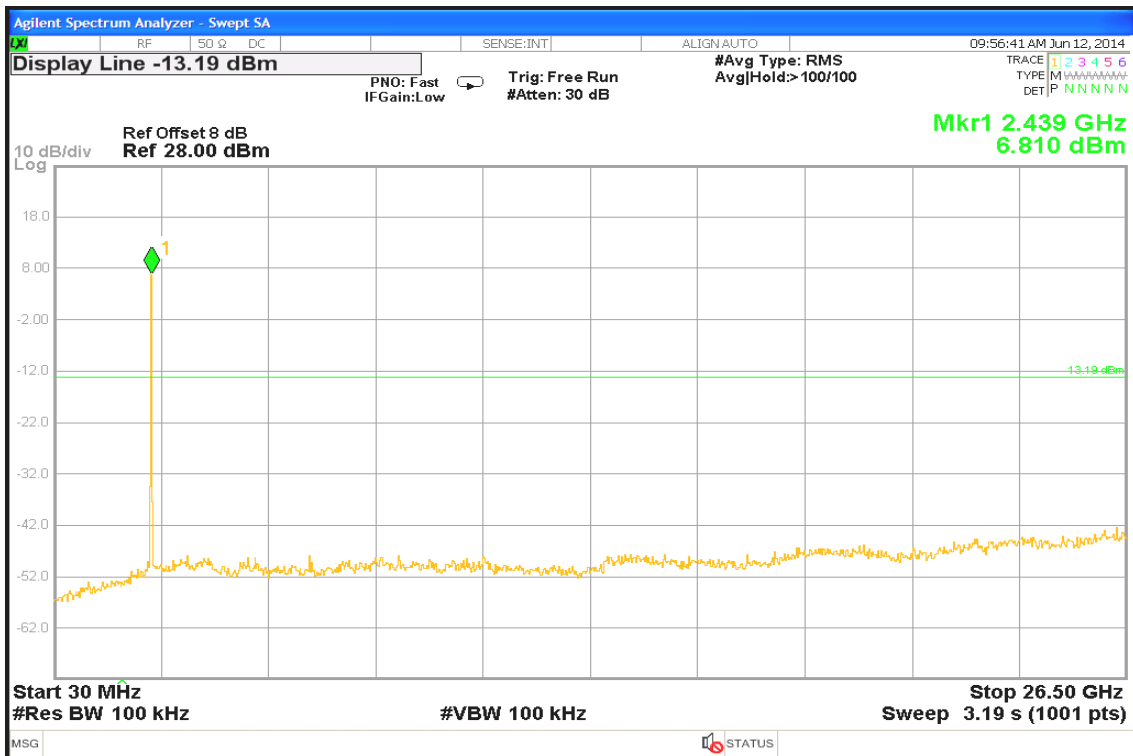




CH High

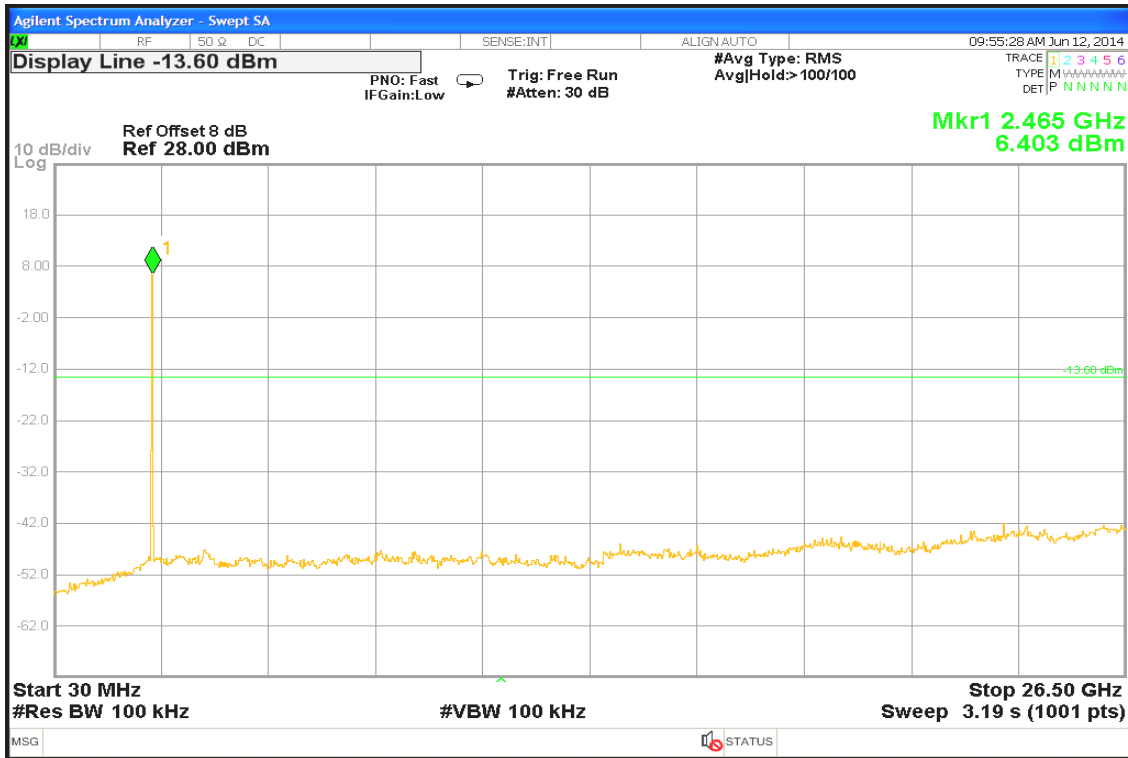


IEEE 802.11g mode

CH Low

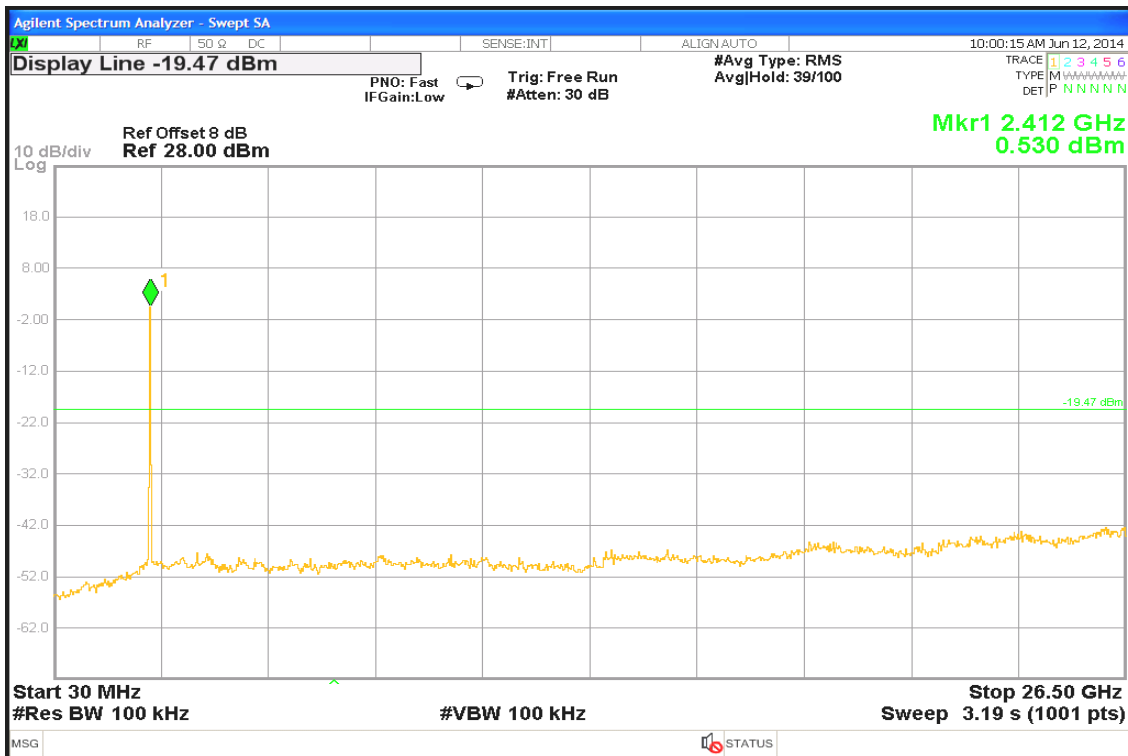



CH Mid

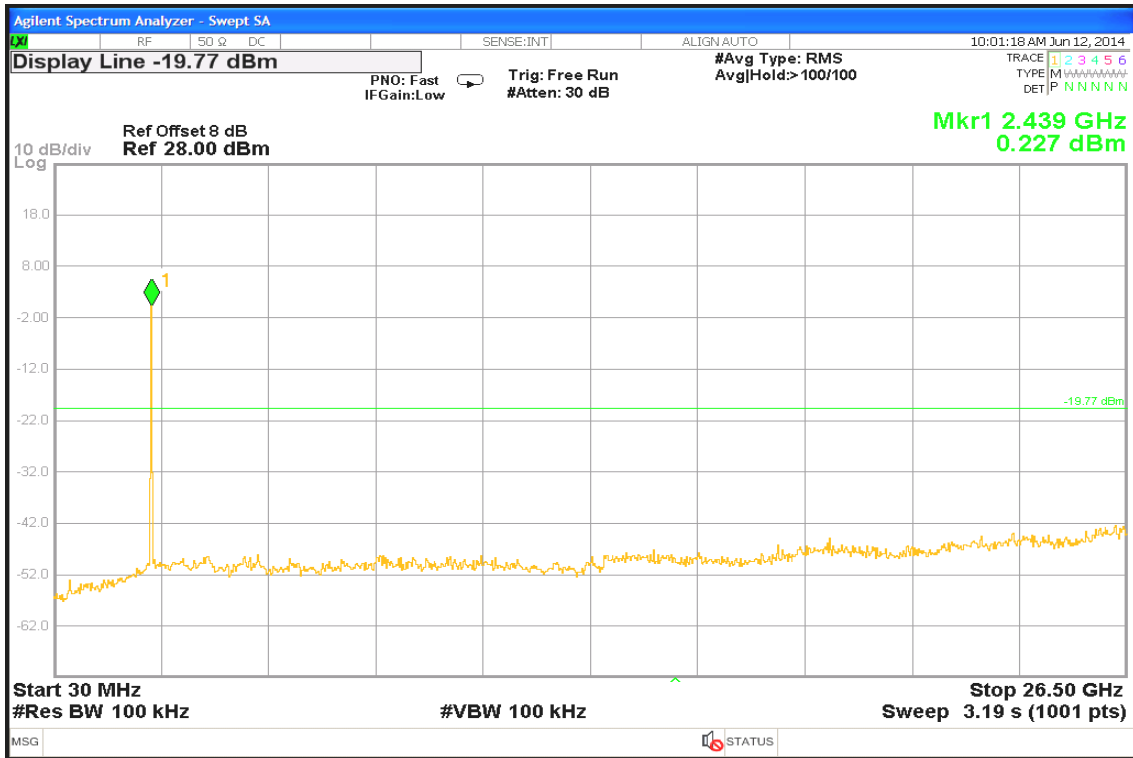


CH High






IEEE 802.11n HT20 mode (Chian 0)

CH Low

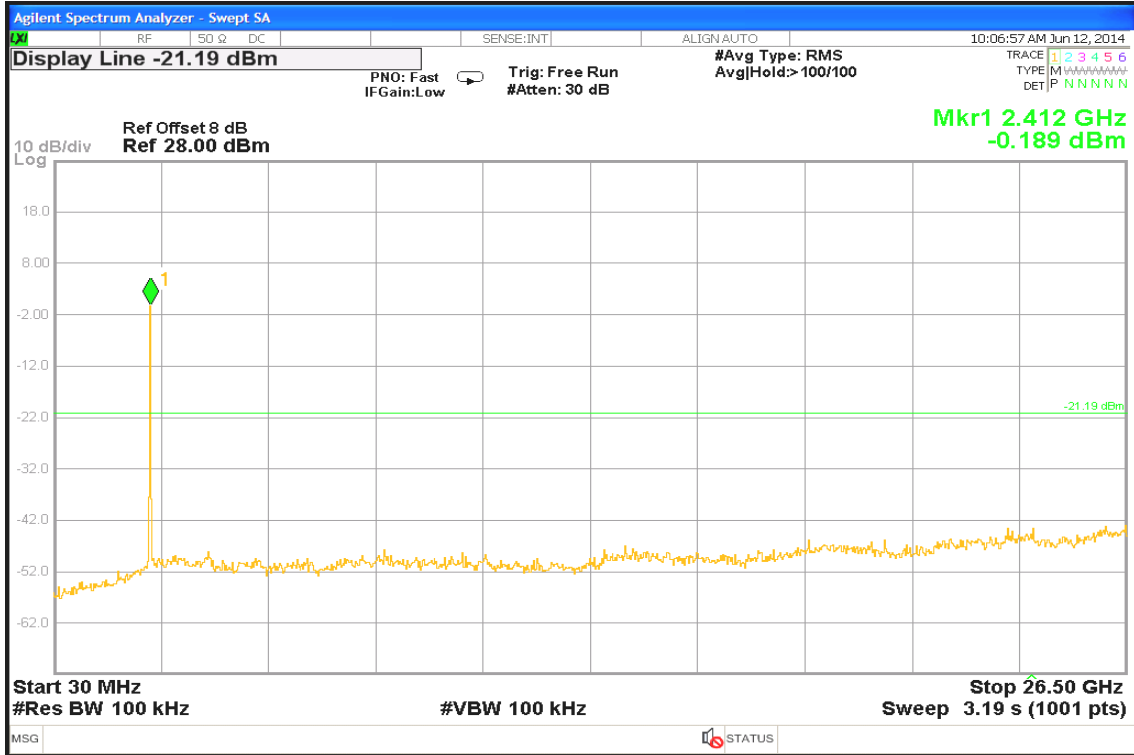


CH Mid

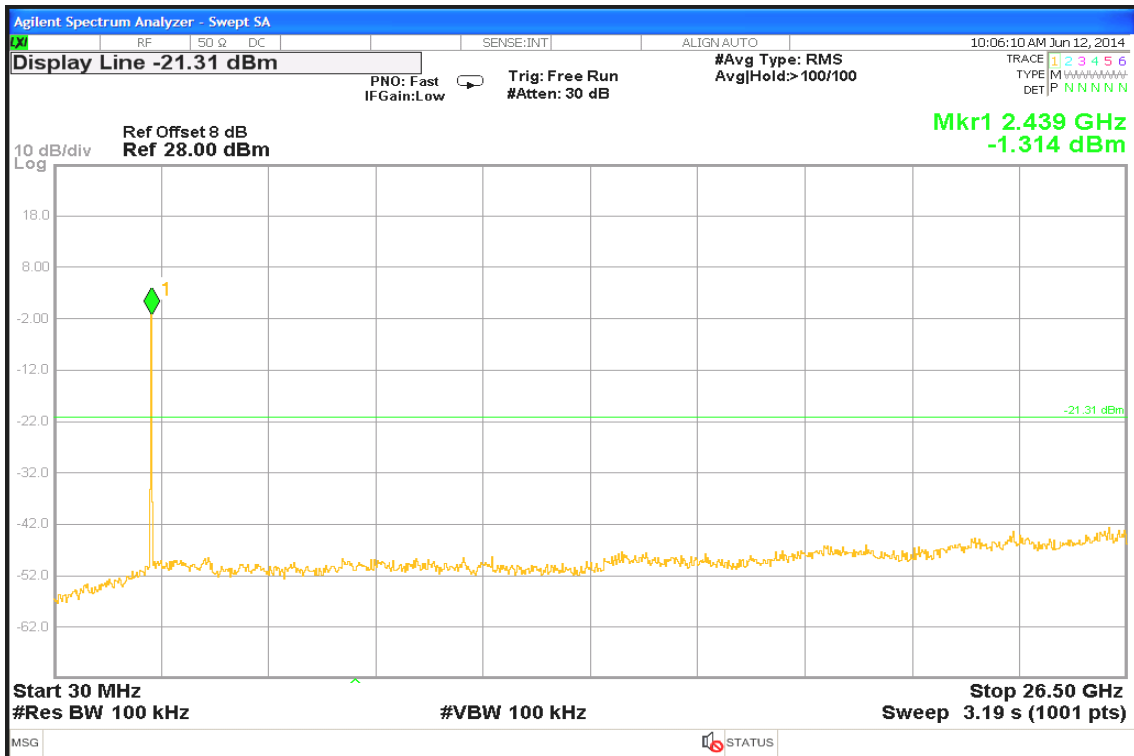




CH High

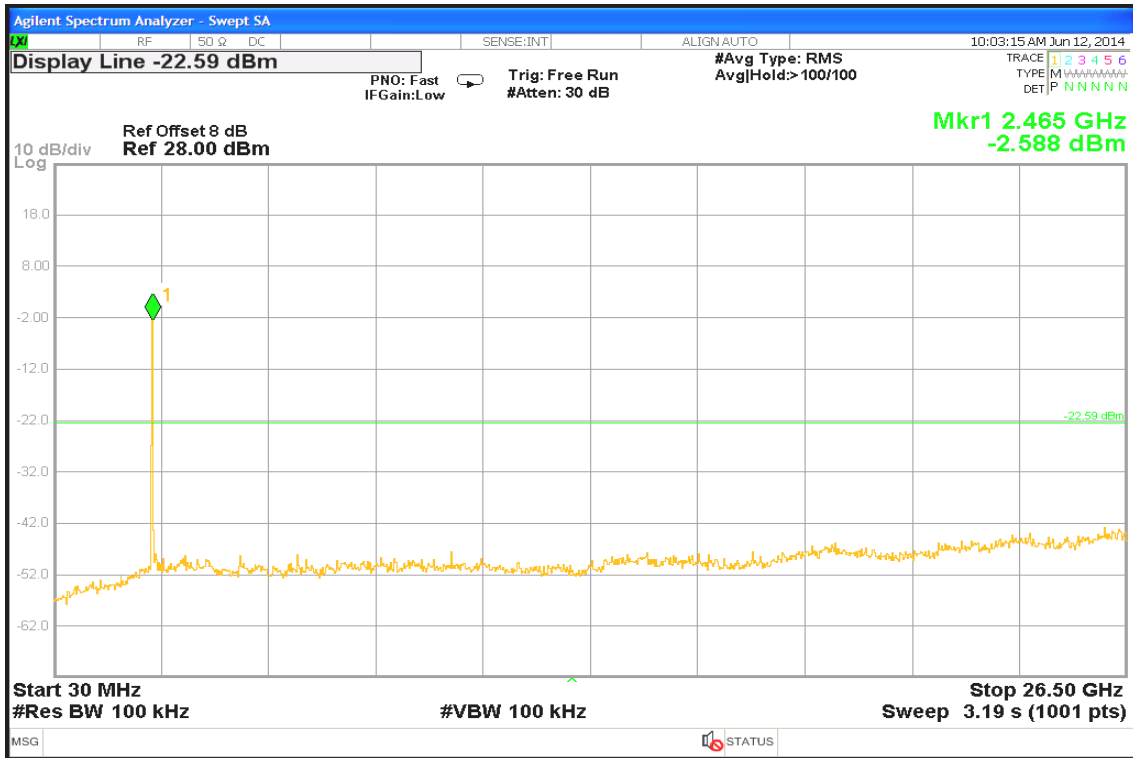

IEEE 802.11n HT20 mode (Chian 1)

CH Low

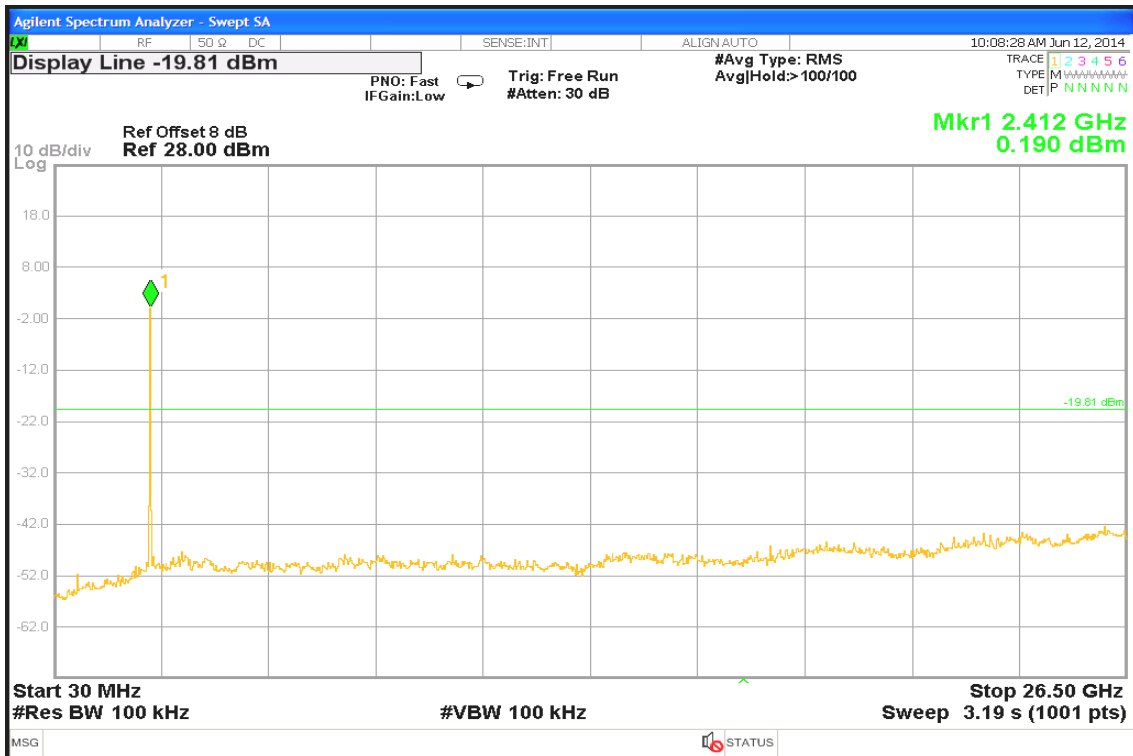



CH Mid



CH High






IEEE 802.11n HT40 mode (Chan 0)

CH Low




CH Mid

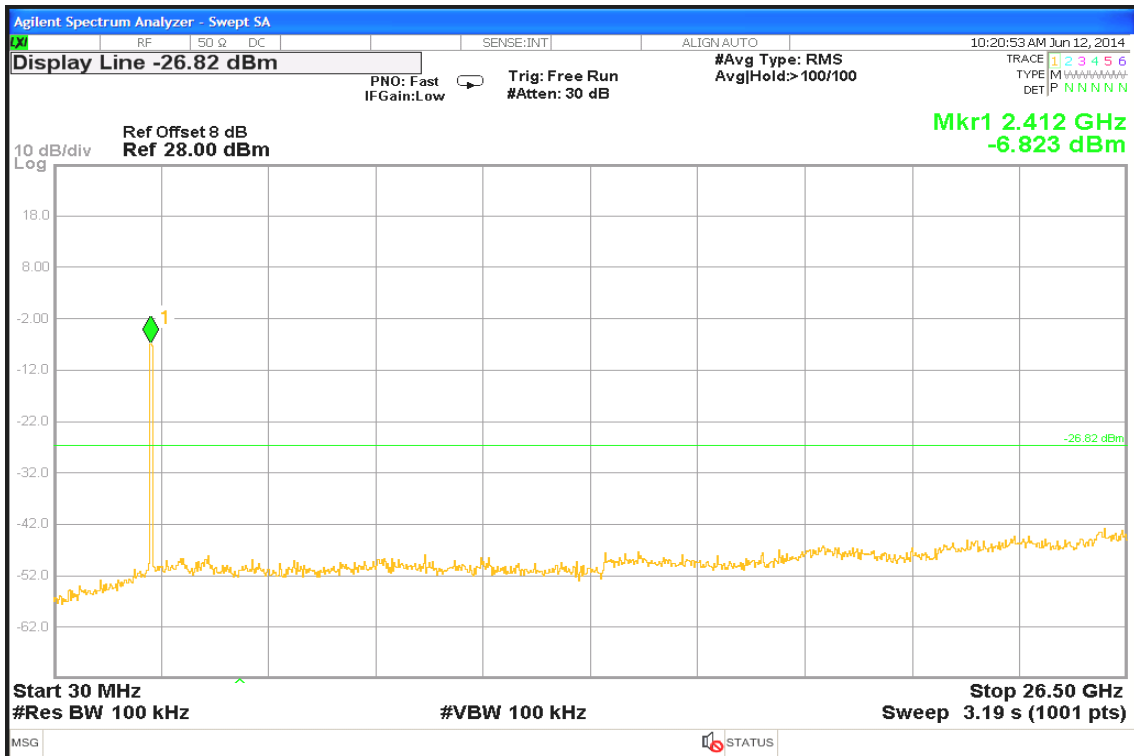




CH High

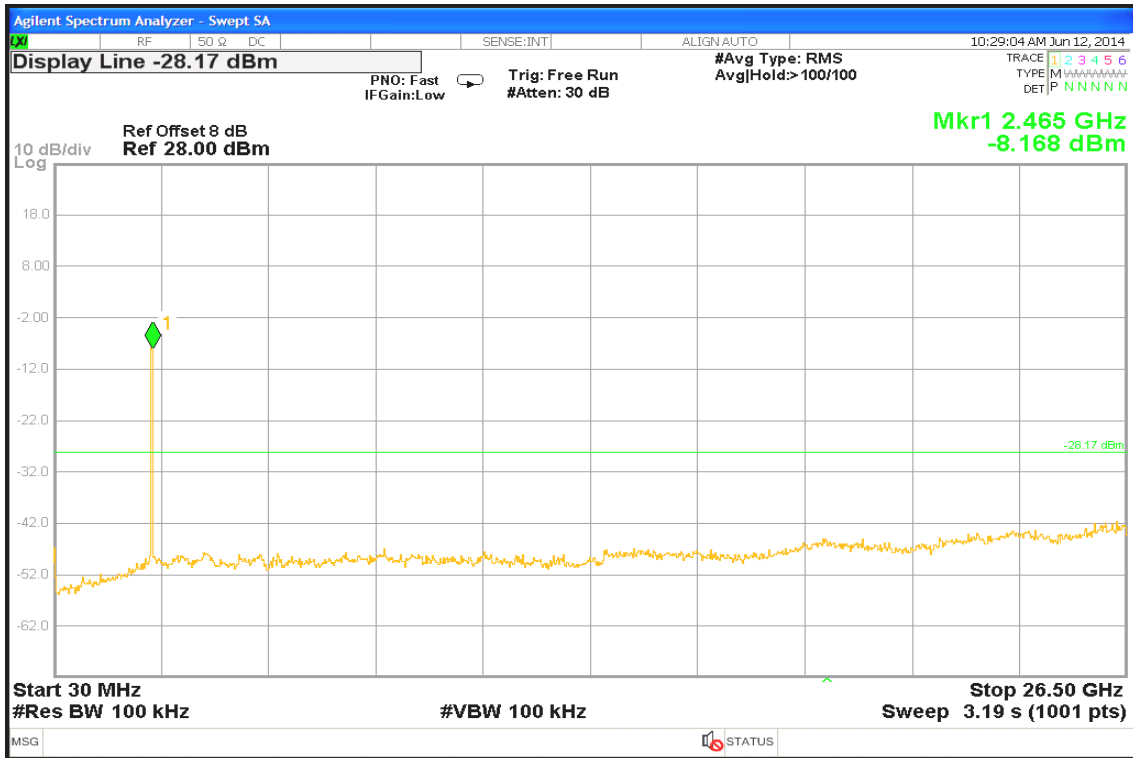


IEEE 802.11n HT40 mode (Chian 1)

CH Low

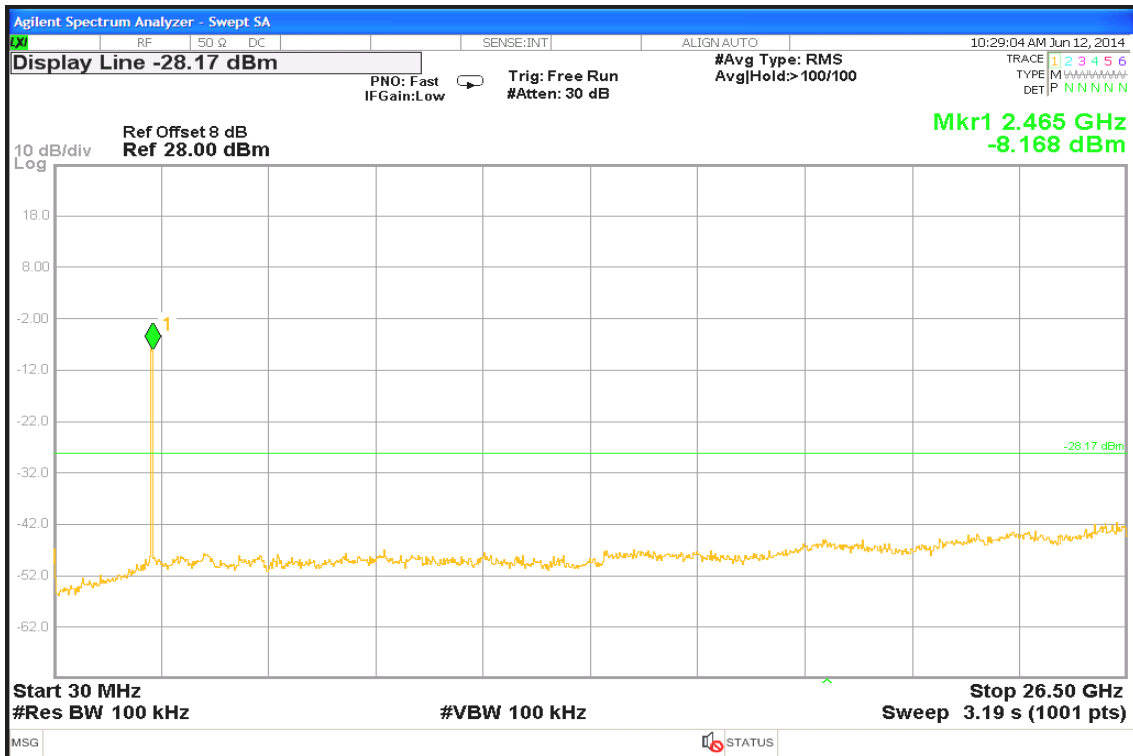




CH Mid

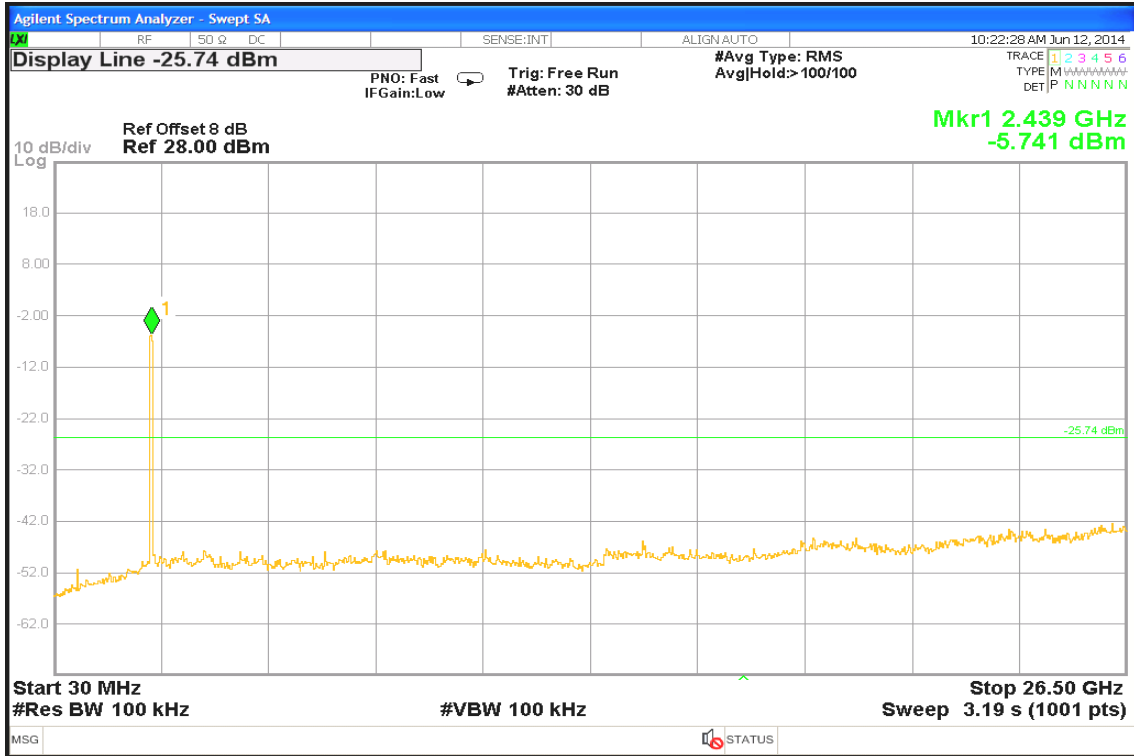

CH High

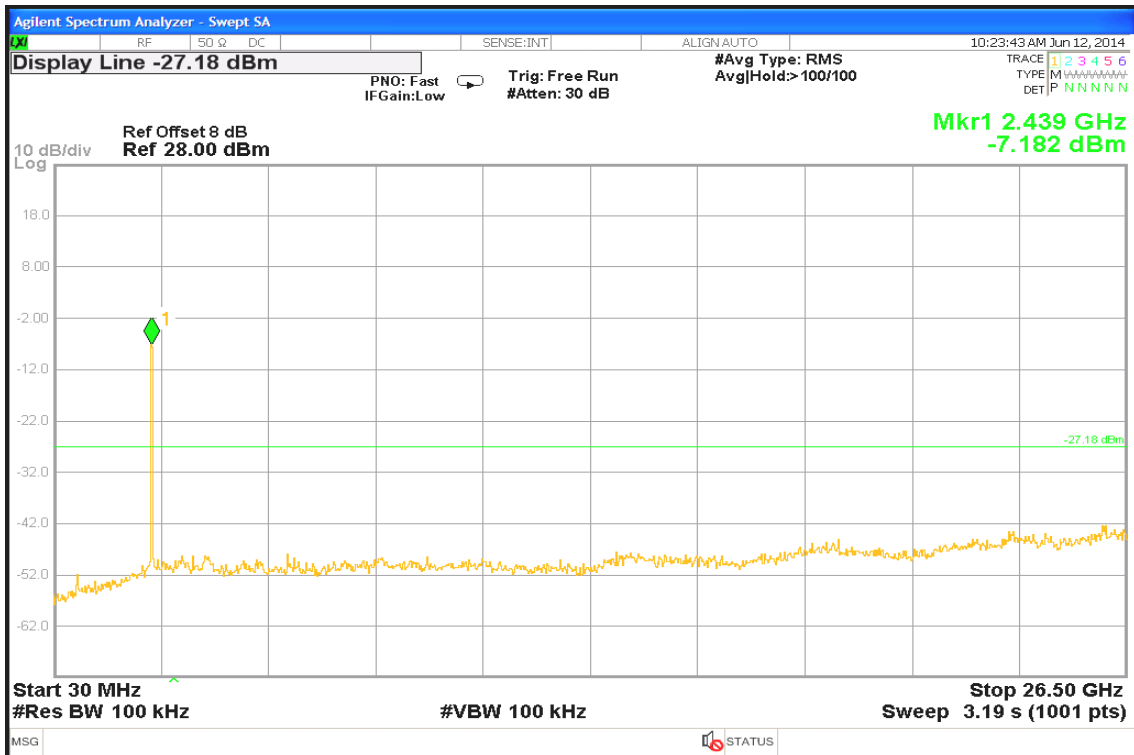



7.6.2 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

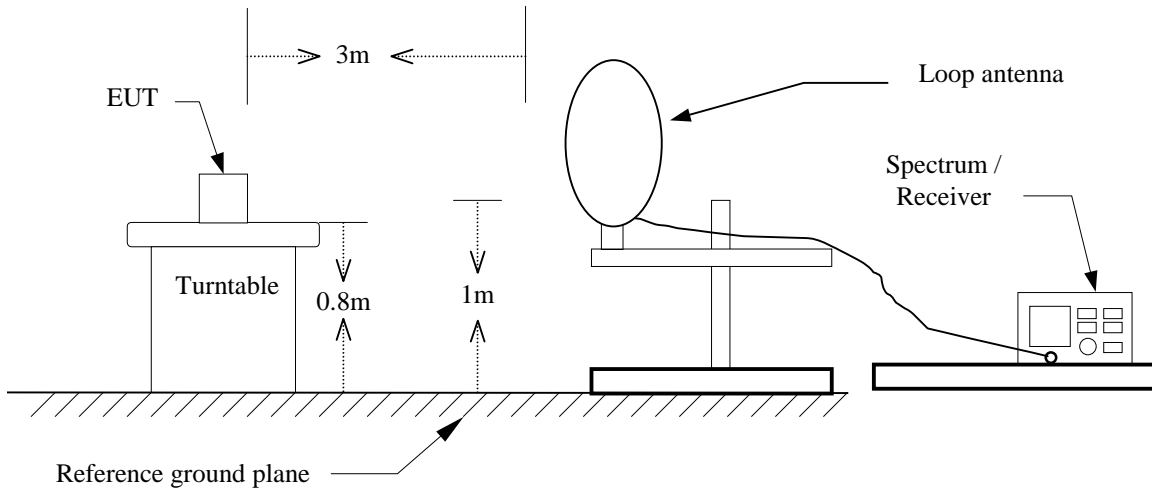


30MHz ~ 1GHz

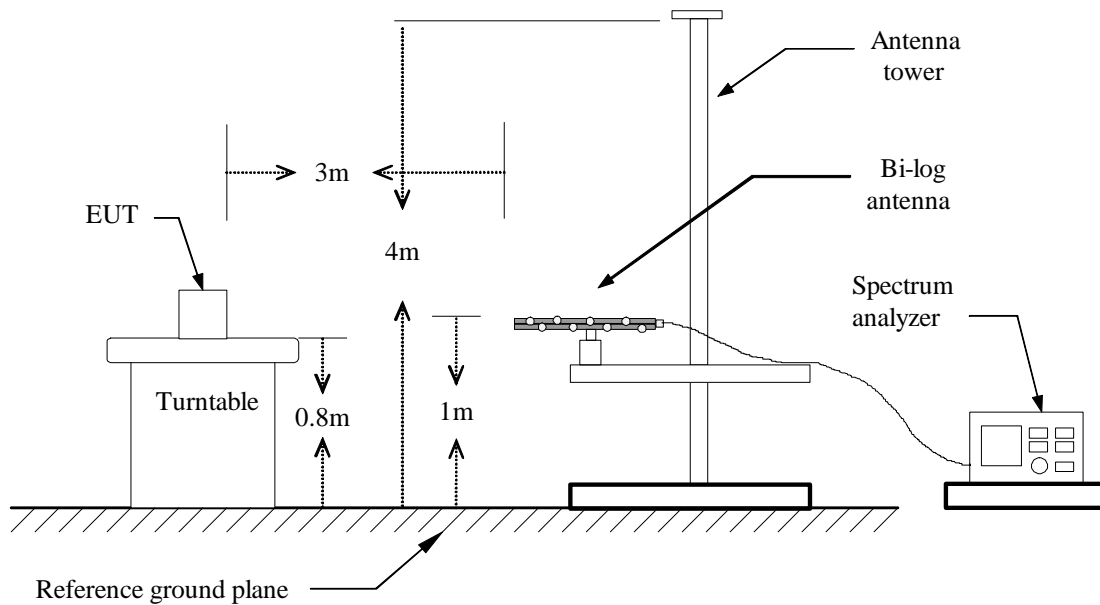



Above 1 GHz

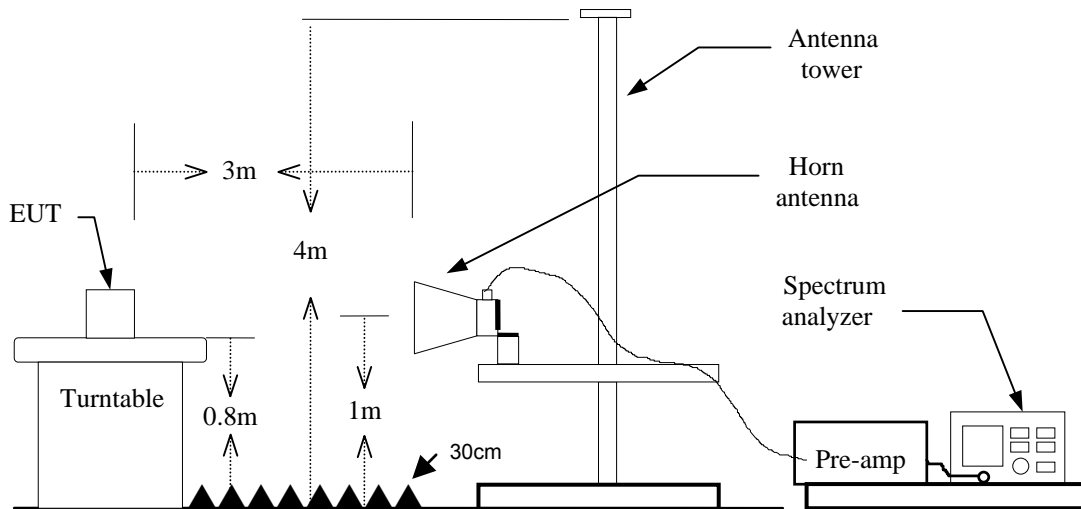

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 30MHz

RBW=10kHz / VBW=30kHz / Sweep=AUTO

30 ~ 1000MHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
- b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



DATA SAMPLE

Below 1 GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol. (H/V)	Remark
x.xx	43.20	-20.71	22.49	40.00	-17.51	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor – Amplifier gain + Cable loss
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-Peak

Above 1 GHz

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
x.xx	45.25	6.91	52.16	74.00	-21.84	H	peak
x.xx	32.33	6.91	39.24	54.00	-14.76	H	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)



Below 1 GHz

Operation Mode: Data Link **Test Date:** 2014/6/11
Temperature: 26°C **Tested by:** Francis Lee
Humidity: 56% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol. (H/V)	Remark
31.9400	38.70	-9.94	28.76	40.00	-11.24	V	QP
212.3600	45.00	-16.37	28.63	43.50	-14.87	V	QP
309.3599	33.20	-12.11	21.09	46.00	-24.91	V	QP
686.6900	31.90	-7.22	24.68	46.00	-21.32	V	QP
840.9199	35.60	-4.67	30.93	46.00	-15.07	V	QP
858.3799	34.50	-4.33	30.17	46.00	-15.83	V	QP
31.9400	34.80	-9.94	24.86	40.00	-15.14	H	QP
120.2100	46.60	-15.18	31.42	43.50	-12.08	H	QP
210.4200	52.60	-16.39	36.21	43.50	-7.29	H	QP
617.8200	36.90	-7.76	29.14	46.00	-16.86	H	QP
686.6900	33.50	-7.22	26.28	46.00	-19.72	H	QP
858.3799	38.30	-4.33	33.97	46.00	-12.03	H	QP

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / IEEE 802.11b mode / CH Low **Test Date:** 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1292.000	56.36	-8.60	47.76	74.00	-26.24	V	peak
2202.000	53.97	-1.33	52.64	74.00	-21.36	V	peak
2202.000	42.78	-1.33	41.45	54.00	-12.55	V	AVG
2654.000	54.76	-1.79	52.97	74.00	-21.03	V	peak
2654.000	43.33	-1.79	41.54	54.00	-12.46	V	AVG
3800.000	40.55	3.69	44.24	74.00	-29.76	V	peak
4825.000	50.05	2.68	52.73	74.00	-21.27	V	peak
4825.000	49.20	2.68	51.88	54.00	-2.12	V	AVG
7235.000	40.77	10.21	50.98	74.00	-23.02	V	peak
1404.000	54.02	-6.98	47.04	74.00	-26.96	H	peak
2200.000	53.64	-3.56	50.08	74.00	-23.92	H	peak
2728.000	53.64	-3.12	50.52	74.00	-23.48	H	peak
4330.000	40.25	7.44	47.69	74.00	-26.31	H	peak
4825.000	46.80	5.88	52.68	74.00	-21.32	H	peak
4825.000	45.63	5.88	51.51	54.00	-2.49	H	AVG
7305.000	39.03	11.79	50.82	74.00	-23.18	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b mode / CH Mid **Test Date:** 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1574.000	53.81	-4.91	48.90	74.00	-25.10	V	peak
2256.000	54.04	-1.45	52.59	74.00	-21.41	V	peak
2256.000	43.51	-1.45	42.06	54.00	-11.94	V	AVG
2890.000	54.02	-0.80	53.22	74.00	-20.78	V	peak
2890.000	42.54	-0.80	41.74	54.00	-12.26	V	AVG
3775.000	40.87	3.38	44.25	74.00	-29.75	V	peak
4875.000	49.22	3.81	53.03	74.00	-20.97	V	peak
4875.000	48.60	3.81	52.41	54.00	-1.59	V	AVG
7310.000	40.41	10.56	50.97	74.00	-23.03	V	peak
1398.000	53.54	-6.95	46.59	74.00	-27.41	H	peak
2080.000	54.60	-4.31	50.29	74.00	-23.71	H	peak
2822.000	53.64	-2.31	51.33	74.00	-22.67	H	peak
3605.000	41.88	4.14	46.02	74.00	-27.98	H	peak
4875.000	44.95	6.73	51.68	74.00	-22.32	H	peak
7350.000	38.81	11.57	50.38	74.00	-23.62	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode:TX / IEEE 802.11b mode / CH High Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1574.000	53.69	-4.91	48.78	74.00	-25.22	V	peak
2202.000	53.75	-1.33	52.42	74.00	-21.58	V	peak
2202.000	43.13	-1.33	41.80	54.00	-12.20	V	AVG
2694.000	54.14	-1.51	52.63	74.00	-21.37	V	peak
2694.000	43.18	-1.51	41.67	54.00	-12.33	V	AVG
3775.000	41.24	3.38	44.62	74.00	-29.38	V	peak
4925.000	47.10	4.61	51.71	74.00	-22.29	V	peak
7390.000	39.29	11.22	50.51	74.00	-23.49	V	peak
1396.000	53.37	-7.00	46.37	74.00	-27.63	H	peak
2154.000	53.76	-3.66	50.10	74.00	-23.90	H	peak
2800.000	53.46	-2.48	50.98	74.00	-23.02	H	peak
4325.000	39.69	7.47	47.16	74.00	-26.84	H	peak
4925.000	42.64	7.26	49.90	74.00	-24.10	H	peak
7240.000	39.81	11.02	50.83	74.00	-23.17	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode:TX / IEEE 802.11g mode / CH Low Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1296.000	55.95	-8.61	47.34	74.00	-26.66	V	peak
2004.000	53.75	-1.39	52.36	74.00	-21.64	V	peak
2004.000	42.60	-1.39	41.21	54.00	-12.79	V	AVG
2710.000	55.02	-1.53	53.49	74.00	-20.51	V	peak
2710.000	42.59	-1.53	41.06	54.00	-12.94	V	AVG
3660.000	40.47	2.65	43.12	74.00	-30.88	V	peak
4820.000	56.07	2.57	58.64	74.00	-15.36	V	peak
4820.000	48.39	2.57	50.96	54.00	-3.04	V	AVG
7245.000	50.38	10.25	60.63	74.00	-13.37	V	peak
7245.000	40.09	10.25	50.34	54.00	-3.66	V	AVG
1422.000	54.14	-7.36	46.78	74.00	-27.22	H	peak
2200.000	53.99	-3.56	50.43	74.00	-23.57	H	peak
2600.000	55.91	-3.36	52.55	74.00	-21.45	H	peak
2600.000	43.09	-3.36	39.73	54.00	-14.27	H	AVG
4305.000	40.88	7.62	48.50	74.00	-25.50	H	peak
4825.000	51.77	5.88	57.65	74.00	-16.35	H	peak
4825.000	44.82	5.88	50.70	54.00	-3.30	H	AVG
7235.000	43.57	10.96	54.53	74.00	-19.47	H	peak
7235.000	34.03	10.96	44.99	54.00	-9.01	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode:TX / IEEE 802.11g mode / CH Mid Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1298.000	57.49	-8.62	48.87	74.00	-25.13	V	peak
2028.000	54.77	-1.94	52.83	74.00	-21.17	V	peak
2028.000	42.33	-1.94	40.39	54.00	-13.61	V	AVG
2864.000	54.10	-1.18	52.92	74.00	-21.08	V	peak
2864.000	42.35	-1.18	41.17	54.00	-12.83	V	AVG
3635.000	40.79	2.77	43.56	74.00	-30.44	V	peak
4875.000	56.31	3.81	60.12	74.00	-13.88	V	peak
4875.000	48.26	3.81	52.07	54.00	-1.93	V	AVG
7310.000	48.24	10.56	58.80	74.00	-15.20	V	peak
7310.000	38.37	10.56	48.93	54.00	-5.07	V	AVG
1384.000	53.63	-7.31	46.32	74.00	-27.68	H	peak
2178.000	54.23	-3.61	50.62	74.00	-23.38	H	peak
2798.000	53.71	-2.50	51.21	74.00	-22.79	H	peak
3995.000	40.60	4.87	45.47	74.00	-28.53	H	peak
4875.000	50.70	6.73	57.43	74.00	-16.57	H	peak
4875.000	44.02	6.73	50.75	54.00	-3.25	H	AVG
7305.000	42.78	11.79	54.57	74.00	-19.43	H	peak
7305.000	33.39	11.79	45.18	54.00	-8.82	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode:TX / IEEE 802.11g mode / CH High Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1296.000	56.99	-8.61	48.38	74.00	-25.62	V	peak
2168.000	54.10	-2.05	52.05	74.00	-21.95	V	peak
2168.000	42.87	-2.05	40.82	54.00	-13.18	V	AVG
2874.000	53.96	-1.03	52.93	74.00	-21.07	V	peak
2874.000	42.78	-1.03	41.75	54.00	-12.25	V	AVG
3780.000	40.42	3.45	43.87	74.00	-30.13	V	peak
4915.000	56.46	4.51	60.97	74.00	-13.03	V	peak
4915.000	47.96	4.51	52.47	54.00	-1.53	V	AVG
7385.000	45.55	11.18	56.73	74.00	-17.27	V	peak
7385.000	37.65	11.18	48.83	54.00	-5.17	V	AVG
1412.000	53.76	-7.15	46.61	74.00	-27.39	H	peak
2136.000	53.48	-3.70	49.78	74.00	-24.22	H	peak
2910.000	53.38	-1.62	51.76	74.00	-22.24	H	peak
4315.000	39.79	7.55	47.34	74.00	-26.66	H	peak
4920.000	53.34	7.24	60.58	74.00	-13.42	H	peak
4920.000	43.35	7.24	50.59	54.00	-3.41	H	AVG
7375.000	42.45	11.44	53.89	74.00	-20.11	H	peak
7375.000	29.31	11.44	40.75	54.00	-13.25	H	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1298.000	56.52	-8.62	47.90	74.00	-26.10	V	peak
1996.000	53.88	-1.36	52.52	74.00	-21.48	V	peak
1996.000	42.61	-1.36	41.25	54.00	-12.75	V	AVG
2896.000	54.07	-0.72	53.35	74.00	-20.65	V	peak
2896.000	42.85	-0.72	42.13	54.00	-11.87	V	AVG
3595.000	39.55	2.90	42.45	74.00	-31.55	V	peak
4815.000	54.11	2.46	56.57	74.00	-17.43	V	peak
4815.000	43.37	2.46	45.83	54.00	-8.17	V	AVG
7235.000	46.94	10.21	57.15	74.00	-16.85	V	peak
7235.000	32.95	10.21	43.16	54.00	-10.84	V	AVG
1404.000	53.14	-6.98	46.16	74.00	-27.84	H	peak
2136.000	53.81	-3.70	50.11	74.00	-23.89	H	peak
2850.000	55.26	-2.10	53.16	74.00	-20.84	H	peak
2850.000	42.84	-2.10	40.74	54.00	-13.26	H	AVG
3940.000	39.04	5.07	44.11	74.00	-29.89	H	peak
4825.000	50.15	5.88	56.03	74.00	-17.97	H	peak
4825.000	39.41	5.88	45.29	54.00	-8.71	H	AVG
7225.000	39.87	10.82	50.69	74.00	-23.31	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1296.000	55.75	-8.61	47.14	74.00	-26.86	V	peak
2000.000	53.96	-1.30	52.66	74.00	-21.34	V	peak
2000.000	42.62	-1.30	41.32	54.00	-12.68	V	AVG
2708.000	54.80	-1.52	53.28	74.00	-20.72	V	peak
2708.000	43.43	-1.52	41.91	54.00	-12.09	V	AVG
3805.000	38.96	3.58	42.54	74.00	-31.46	V	peak
4875.000	51.03	3.81	54.84	74.00	-19.16	V	peak
4875.000	42.39	3.81	46.20	54.00	-7.80	V	AVG
7310.000	44.63	10.56	55.19	74.00	-18.81	V	peak
7310.000	33.05	10.56	43.61	54.00	-10.39	V	AVG
1720.000	54.49	-7.45	47.04	74.00	-26.96	H	peak
2184.000	53.61	-3.60	50.01	74.00	-23.99	H	peak
2864.000	53.72	-2.00	51.72	74.00	-22.28	H	peak
3770.000	39.17	4.70	43.87	74.00	-30.13	H	peak
4875.000	48.78	6.73	55.51	74.00	-18.49	H	peak
4875.000	39.29	6.73	46.02	54.00	-7.98	H	AVG
7315.000	39.05	11.74	50.79	74.00	-23.21	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 mode / CH High

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1570.000	53.64	-4.93	48.71	74.00	-25.29	V	peak
2000.000	54.02	-1.30	52.72	74.00	-21.28	V	peak
2000.000	42.61	-1.30	41.31	54.00	-12.69	V	AVG
2222.000	54.43	-1.38	53.05	74.00	-20.95	V	peak
2222.000	43.17	-1.38	41.79	54.00	-12.21	V	AVG
2746.000	54.64	-1.76	52.88	74.00	-21.12	V	peak
2746.000	43.19	-1.76	41.43	54.00	-12.57	V	AVG
3680.000	40.45	2.56	43.01	74.00	-30.99	V	peak
4915.000	52.54	4.51	57.05	74.00	-16.95	V	peak
4915.000	42.30	4.51	46.81	54.00	-7.19	V	AVG
7395.000	41.34	11.26	52.60	74.00	-21.40	V	peak
7395.000	30.70	11.26	41.96	54.00	-12.04	V	AVG
1398.000	53.31	-6.95	46.36	74.00	-27.64	H	peak
2176.000	53.96	-3.61	50.35	74.00	-23.65	H	peak
2856.000	53.95	-2.06	51.89	74.00	-22.11	H	peak
3800.000	39.18	5.10	44.28	74.00	-29.72	H	peak
4925.000	49.08	7.26	56.34	74.00	-17.66	H	peak
4925.000	40.19	7.26	47.45	54.00	-6.55	H	AVG
7390.000	39.08	11.36	50.44	74.00	-23.56	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 mode / CH Low

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1294.000	56.27	-8.61	47.66	74.00	-26.34	V	peak
1940.000	54.03	-2.25	51.78	74.00	-22.22	V	peak
2194.000	55.03	-1.46	53.57	74.00	-20.43	V	peak
2194.000	43.15	-1.46	41.69	54.00	-12.31	V	AVG
2894.000	53.59	-0.75	52.84	74.00	-21.16	V	peak
2894.000	42.88	-0.75	42.13	54.00	-11.87	V	AVG
4095.000	39.51	3.14	42.65	74.00	-31.35	V	peak
4850.000	47.75	3.25	51.00	74.00	-23.00	V	peak
7255.000	41.99	10.29	52.28	74.00	-21.72	V	peak
7255.000	29.45	10.29	39.74	54.00	-14.26	V	AVG
1396.000	53.93	-7.00	46.93	74.00	-27.07	H	peak
2176.000	54.64	-3.61	51.03	74.00	-22.97	H	peak
2794.000	53.56	-2.53	51.03	74.00	-22.97	H	peak
4335.000	38.64	7.40	46.04	74.00	-27.96	H	peak
4850.000	45.15	6.30	51.45	74.00	-22.55	H	peak
7415.000	38.33	11.25	49.58	74.00	-24.42	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 mode / CH Mid

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1570.000	54.15	-4.93	49.22	74.00	-24.78	V	peak
2188.000	54.82	-1.60	53.22	74.00	-20.78	V	peak
2188.000	42.86	-1.60	41.26	54.00	-12.74	V	AVG
2712.000	54.25	-1.55	52.70	74.00	-21.30	V	peak
2712.000	43.39	-1.55	41.84	54.00	-12.16	V	AVG
4005.000	38.98	3.47	42.45	74.00	-31.55	V	peak
4895.000	46.97	4.26	51.23	74.00	-22.77	V	peak
7310.000	40.94	10.56	51.50	74.00	-22.50	V	peak
1386.000	53.13	-7.26	45.87	74.00	-28.13	H	peak
2112.000	53.69	-3.75	49.94	74.00	-24.06	H	peak
2840.000	53.70	-2.18	51.52	74.00	-22.48	H	peak
4345.000	39.21	7.33	46.54	74.00	-27.46	H	peak
4875.000	45.06	6.73	51.79	74.00	-22.21	H	peak
7300.000	37.63	11.82	49.45	74.00	-24.55	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 mode / CH High

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1242.000	55.94	-8.51	47.43	74.00	-26.57	V	peak
1994.000	53.07	-1.39	51.68	74.00	-22.32	V	peak
2694.000	54.67	-1.51	53.16	74.00	-20.84	V	peak
2694.000	43.26	-1.51	41.75	54.00	-12.25	V	AVG
3770.000	39.07	3.32	42.39	74.00	-31.61	V	peak
4920.000	47.06	4.56	51.62	74.00	-22.38	V	peak
7370.000	38.93	11.05	49.98	74.00	-24.02	V	peak
1398.000	53.27	-6.95	46.32	74.00	-27.68	H	peak
2150.000	54.03	-3.67	50.36	74.00	-23.64	H	peak
2948.000	53.29	-1.22	52.07	74.00	-21.93	H	peak
2948.000	42.46	-1.22	41.24	54.00	-12.76	H	AVG
4040.000	38.85	5.08	43.93	74.00	-30.07	H	peak
4925.000	48.23	7.26	55.49	74.00	-18.51	H	peak
4925.000	36.07	7.26	43.33	54.00	-10.67	H	AVG
7325.000	37.94	11.69	49.63	74.00	-24.37	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: RX / 2.4GHz

Test Date: 2014/6/6

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56%RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1296.000	54.45	-8.61	45.84	74.00	-28.16	V	peak
1962.000	46.18	-1.90	44.28	74.00	-29.72	V	peak
2278.000	48.18	-1.50	46.68	74.00	-27.32	V	peak
3700.000	39.36	2.47	41.83	74.00	-32.17	V	peak
5065.000	38.61	4.70	43.31	74.00	-30.69	V	peak
7535.000	38.35	11.67	50.02	74.00	-23.98	V	peak
1100.000	46.72	-10.26	36.46	74.00	-37.54	H	peak
2432.000	46.90	-5.54	41.36	74.00	-32.64	H	peak
2966.000	39.60	-1.02	38.58	74.00	-35.42	H	peak
4320.000	37.70	7.51	45.21	74.00	-28.79	H	peak
5975.000	37.53	8.93	46.46	74.00	-27.54	H	peak
7450.000	37.86	11.10	48.96	74.00	-25.04	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.


TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.




Test Plots

Conducted emissions (Line 1)

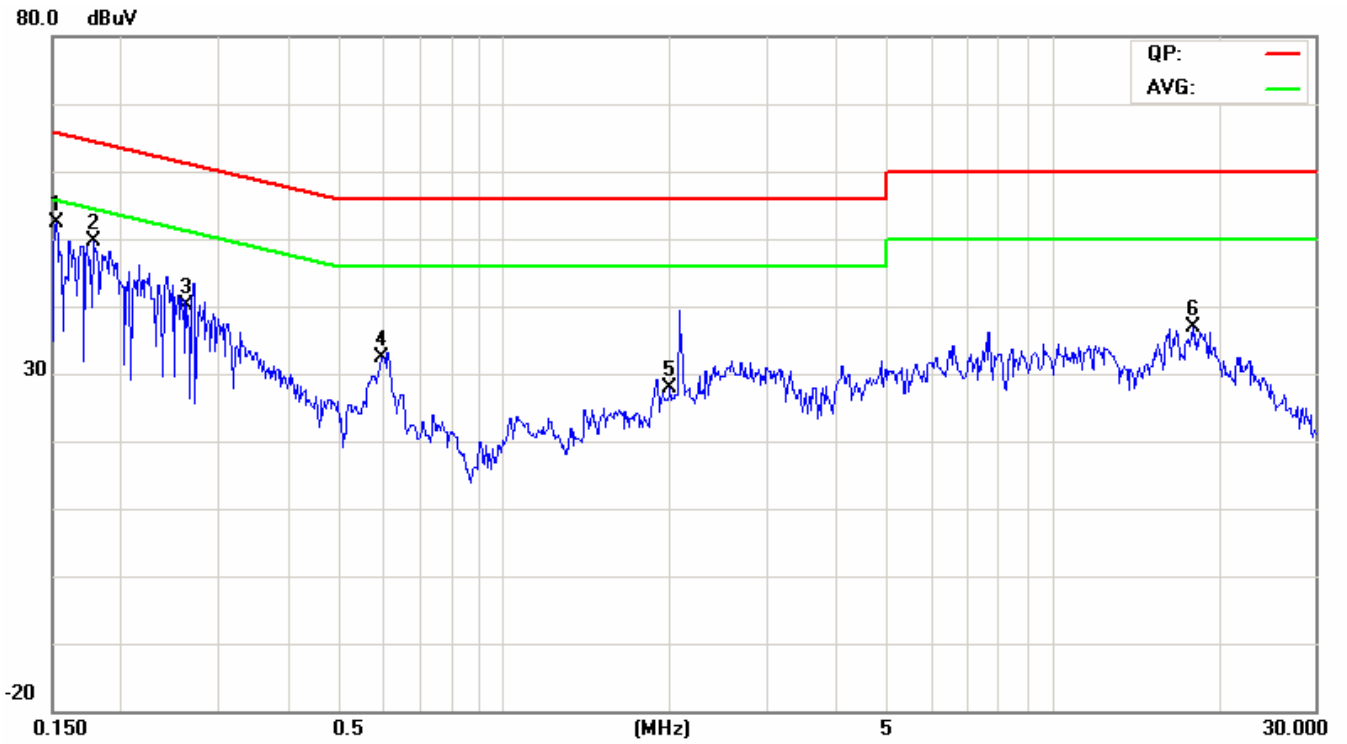

Conducted emissions (Line 2)

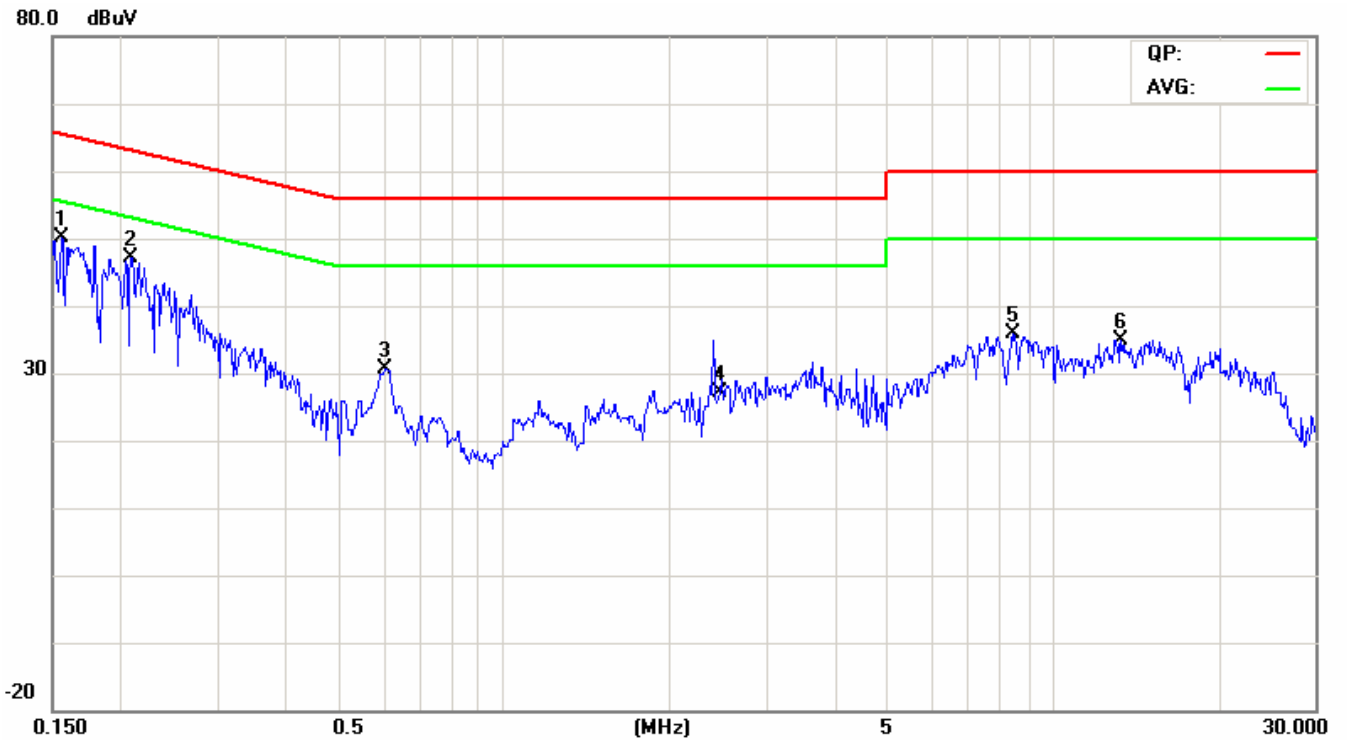




8 APPENDIX I PHOTOGRAPHS OF TEST SETUP

Radiated Emissions Setup Photos Below 1GHz






Above 1GHz

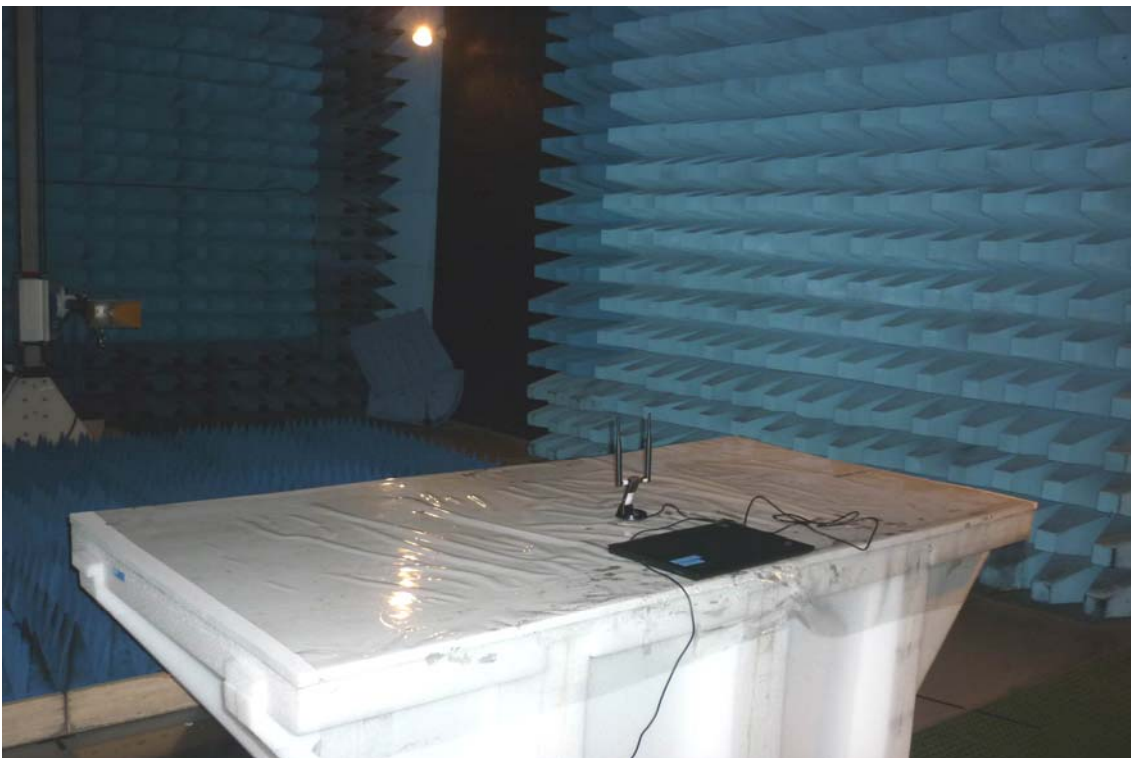



Conducted Emissions Setup Photo

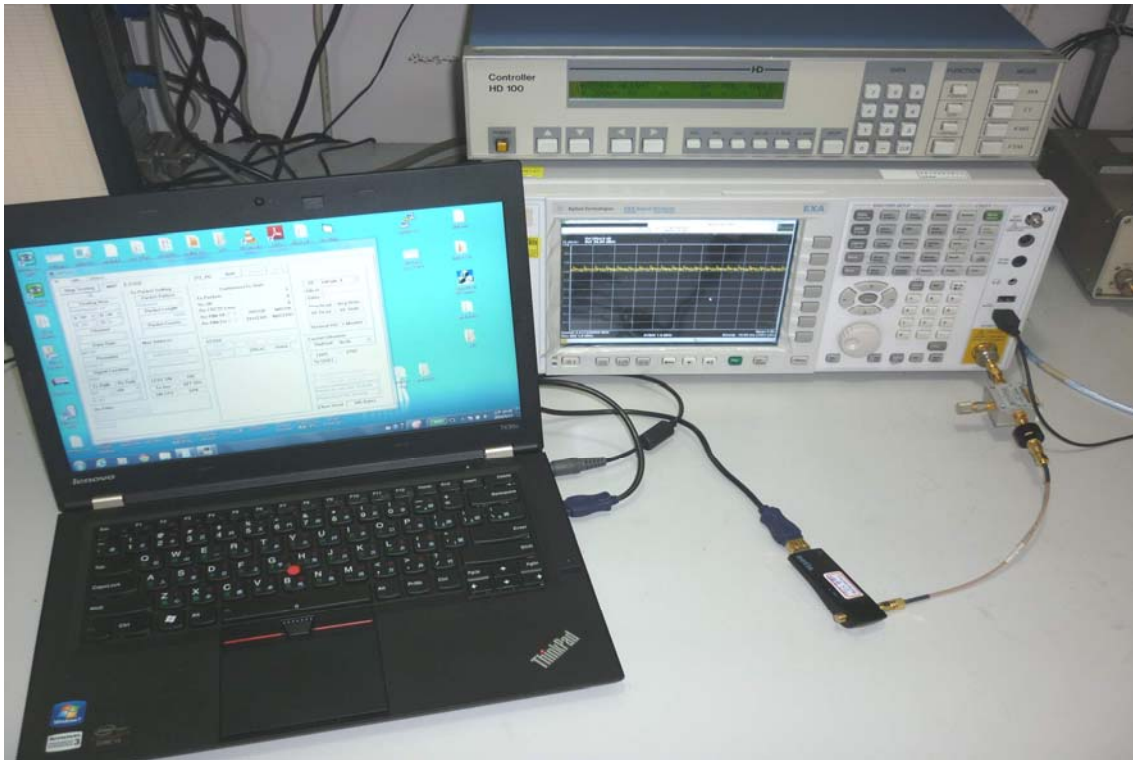



Powerline Conducted Emissions Setup Photos





9 APPENDIX II: PHOTOGRAPHS OF EUT

Refer to T140605D06 External Photographs.