



# LS RESEARCH LLC

Wireless Product Development

W66 N220 Commerce Court • Cedarburg, WI 53012 USA • Phone: 262.375.4400 • Fax: 262.375.4248 • www.lsr.com

## ENGINEERING TEST REPORT # 313086 B LSR Job #: C-1700

### Compliance Testing of:

Queue Interface


### Test Date(s):

July 23 and August 2, 14, 21 2013 and September 3, 2013

### Prepared For:

Scott Safety, A Division of Scott Technologies, Inc.  
Attn: Craig Parkulo  
Monroe Corporate Center  
4320 Goldmine Road  
Monroe, NC 28112-7355  
USA


**This Test Report is issued under the Authority of:** Adam Alger, EMC Engineer

Signature:  Date: 9-3-13

**Test Report Reviewed by:**  
Khairul Aidi Zainal, Senior EMC Engineer / Lab Supervisor

Signature:  Date: 8-23-13

**Report by:**  
Adam Alger, EMC Engineer

Signature:  Date: 8-23-13

*This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.*

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## **Table of Contents**

i.	Title Page .....	1
ii.	Table of Contents .....	2
iii.	LS Research, LLC .....	3
1.0	Summary of Test Report .....	4
2.0	Test Facilities .....	4
3.0	Client Information .....	5
3.1	Equipment Under Test (EUT) Information .....	5
3.2	Product Description .....	5
3.3	Modifications Incorporated In the EUT for Compliance Purposes .....	5
3.4	Deviations & Exclusions from Test Specifications .....	5
3.5	Additional Information .....	5
4.0	Conditions of Test .....	6
5.0	Test Equipment .....	6
6.0	Conformance Summary .....	6
Appendix A – Test Equipment .....		7
Appendix B – Test Data .....		8
B.1 –	Radiated Emissions .....	10
B.2 –	AC Mains Conducted Emissions .....	17
B.3 –	RF Conducted Output Power Verification .....	8
Appendix C - Uncertainty Summary .....		19
Appendix D - References .....		20

## LS Research, LLC in Review

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:

---



TESTING CERT #1255.01

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation  
A2LA Certificate Number: 1255.01

---



Federal Communications Commission (FCC) – USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948  
FCC Registration Number: 90756

---



Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1

File Number: IC 3088-A

On file, 3 and 10 Meter OATS based on RSS-212 – Issue 1

File Number: IC 3088

---



U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a U. S. Competent Body operating under the U. S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility –Council Directive 2004/108/EC (formerly 89/336/EEC, Article 10.2).

Date of Validation: January 16, 2001

Validated by the European Commission as a U.S. Notified Body operating under the U.S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union

Telecommunication Equipment – Council Directive 99/5/EC, Annex V.

Date of Validation: November 20, 2002

Notified Body Identification Number: 1243

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## 1.0 Summary of Test Report

The purpose of this test report is:

- A) To show compliance of the spurious radiated harmonics from the 2.4 GHz DTS transmitter module as tested inside a host since it was tested as stand alone in its original approval.
- B) To show compliance with spurious radiated emissions when the 2.4 GHz DTS transmitter and the 127 kHz DCD transmitter are co-located inside a host and simultaneously transmitting.
- C) To show output power of the DTS 2.4 GHz transmitter has not changed since its original approval so the original test results (TFB-APEXLT) are valid for other DTS parameters from this 2.4 GHz device.

In July and August and September 2013 the EUT, Queue Interface was tested and MEETS the following requirements:

Purpose	FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)	Test Report Section
C	N/A	RF Conducted Output Power Verification	N/A <sup>(2)</sup>	B.1
B	FCC: 15.209 / 15.109 IC: RSS-GEN Section 6, 7.2.5	2.4 GHz Radio emissions in restricted bands (Co-location test) in the 30-1000 MHz range	Yes	B.2.1
A	FCC: 15.205 / 15.209 IC: RSS-GEN Section 7.2.2, 7.2.5	2.4 GHz Radio Harmonics in restricted bands (Co-location test) in the 1-25 GHz range	Yes	B.2.2
A / B	FCC : 15.207 IC : RSS GEN sect. 7.2.2	Power Line Conducted Emissions Measurements	N/A <sup>(1)</sup>	B.3

Note 1: Manufacturer declares EUT powered by DC battery only.

## 2.0 Test Facilities

All testing was performed at:

LS Research, LLC  
W66 N220 Commerce Court  
Cedarburg, Wisconsin, 53012 USA

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to the requirements of ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted.

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

### 3.0 Client Information

<b>Manufacturer Name:</b>	Scott Safety, A Division of Scott Technologies, Inc.
<b>Address:</b>	Monroe Corporate Center 4320 Goldmine Road Monroe, NC 28112-7355 USA
<b>Contact Person:</b>	Craig Parkulo

#### 3.1 Equipment Under Test (EUT) Information

*The following information has been supplied by the applicant.*

<b>Product Name:</b>	Queue Interface
<b>Model Number:</b>	201211
<b>Serial Number:</b>	None (engineering sample)
<b>FCC ID</b>	T5E-201211
<b>IC Number</b>	6453A-201211

#### 3.2 Product Description

Scott Emergency Management System (SEMS II) is a telemetry system for firefighter, capable of bidirectional communications with a base station (gateway). The Queue Interface is part of the firefighter telemetry system.

#### 3.3 Modifications Incorporated In the EUT for Compliance Purposes

1. Added 1 $\mu$ F capacitor across the pins of J5 (DC Power Input)
2. Added muRata ferrite bead (BLM18AG221SN1) placed at pin 4 of U7 between pin 4 and C52

#### 3.4 Deviations & Exclusions from Test Specifications

None noted at time of test

#### 3.5 Additional Information

Manufacturer declares use of single 2.4 GHz channel of 2.405 GHz.

2.4 GHz radio programmed for continuous transmit and receive via serial to Ember redbox controller connected to a laptop with use of telnet commands. RFID did not require programming as it was configured for continuous (pulsed) mode as used in normal operation.

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## 4.0 Conditions of Test

Environmental:

Temperature: 20-25° C  
Relative Humidity: 30-60%  
Atmospheric Pressure: 86-106 kPa

Mains Voltage: 120VAC 60Hz  
DC Supply: 12 VDC

## 5.0 Test Equipment

All test equipment is calibrated by a calibration laboratory accredited by A2LA to the requirements of ISO 17025. For a complete list of test equipment and calibration dates, see Appendix A. Unless otherwise noted, resolution bandwidth of measuring instrument used during testing for given frequency range, see below.

Frequency Range	Resolution Bandwidth
9 kHz – 150 kHz	100 Hz
150 kHz – 30 MHz	9 kHz
30 MHz – 1000 MHz	120 kHz
Above 1000 MHz	1 MHz

## 6.0 Conformance Summary

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.209 and 15.109, and Industry Canada RSS-GEN Issue 3.

If some emissions are seen to be within 3 dB of their respective limits:

As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## Appendix A – Test Equipment



Date : 23-Jul-2013

Type Test : Harmonic colocation

Job # : C-1700

Prepared By: Aidi

Customer : Tyco/Scott Health and Safety

Quote # : 313086

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/28/2013	5/28/2014	Active Calibration
2	EE 960147	Pre-Amp	Adv. Micro	WLA612	123101	2/11/2013	2/11/2014	Active Calibration
3	AA 960144	Phaseflex	Gore	EKD01D010720	5900373	System	System	System
4	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/29/2013	1/29/2014	Active Calibration
5	EE 960146	Std. Gain Horn Ant. w/preamp	Adv. Micro / EMC	WLA622-4 / 3160-09	123001	9/26/2012	9/26/2013	Active Calibration

Project Engineer: Aidi

Quality Assurance: None



Date : 23-Jul-2013

Type Test : Radiated Emissions 30-1000 MHz

Job # : C-1700

Prepared By: Adam

Customer : Tyco/Scott Health and Safety

Quote # : 313086

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960013	EMI Receiver	HP	8546A System	3617A00320;3448A	2/11/2013	2/11/2014	Active Calibration
2	EE 960014	EMI Receiver-filter section	HP	85460A	3448A00296	2/11/2013	2/11/2014	Active Calibration
3	AA 960150	Bicon Antenna	ETS	3110B	0003-3346	12/12/2012	12/12/2013	Active Calibration
4	AA 960004	Log Periodic Antenna	EMCO	93146	9512-4276	9/17/2012	9/17/2013	Active Calibration

Project Engineer: Adam

Quality Assurance: None



Date : 23-Jul-2013

Type Test : Rad harmonics

Job # : C-1700

Prepared By: Adam

Customer : Tyco/Scott Health and Safety

Quote # : 313086

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/28/2013	5/28/2014	Active Calibration
2	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/29/2013	1/29/2014	Active Calibration
3	EE 960147	Pre-Amp	Adv. Micro	WLA612	123101	2/11/2013	2/11/2014	Active Calibration
4	EE 960146	Std. Gain Horn Ant. w/preamp	Adv. Micro / EMC	WLA622-4 / 3160-09	123001	9/26/2012	9/26/2013	Active Calibration
5	AA 960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	6/10/2013	6/10/2014	Active Calibration
6	EE 960013	EMI Receiver	HP	8546A System	3617A00320;3448A	2/11/2013	2/11/2014	Active Calibration
7	EE 960014	EMI Receiver-filter section	HP	85460A	3448A00296	2/11/2013	2/11/2014	Active Calibration

Project Engineer: Adam

Quality Assurance: None



Date : 23-Jul-2013

Type Test : Emissions Below 30 MHz

Job # : C-1700

Prepared By: Adam

Customer : Tyco/Scott Health and Safety

Quote # : 313086

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/28/2013	5/28/2014	Active Calibration
2	AA 960006	Active Loop Antenna	EMCO	6502	9205-2753	9/21/2011	9/21/2013	Active Calibration

Project Engineer: Adam

Quality Assurance: None

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## Appendix B – Test Data

### B.1 – RF Conducted Output Power Verification

Manufacturer	Scott Health & Safety-Division of Scott Technologies, Inc.
Test Location	LS Research, LLC
Rule Part	FCC Part 15.247 / RSS-210 Annex 8
General Measurement Procedure	ANSI C63.10-2009 Section 6.7
General Description of Measurement	A direct measurement of the transmitted signal was performed at the antenna port of the EUT via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings thereby allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source.



Date : 3-Sep-2013	Type Test : RF Conducted Output Power	Job # : C-1700																											
Prepared By: Adam A	Customer : Tyco/Scott Health and Safety	Quote #: 313086																											
<table border="1"> <thead> <tr> <th>No.</th> <th>Asset #</th> <th>Description</th> <th>Manufacturer</th> <th>Model #</th> <th>Serial #</th> <th>Cal Date</th> <th>Cal Due Date</th> <th>Equipment Status</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>EE 960073</td> <td>Spectrum Analyzer</td> <td>Agilent</td> <td>E4446A</td> <td>US45300564</td> <td>5/28/2013</td> <td>5/28/2014</td> <td>Active Calibration</td> </tr> <tr> <td>2</td> <td>AA 960143</td> <td>Phaseflex</td> <td>Gore</td> <td>EKD01D01048.0</td> <td>5546519</td> <td>6/14/2013</td> <td>6/14/2015</td> <td>Active Calibration</td> </tr> </tbody> </table>			No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status	1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/28/2013	5/28/2014	Active Calibration	2	AA 960143	Phaseflex	Gore	EKD01D01048.0	5546519	6/14/2013	6/14/2015	Active Calibration
No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status																					
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/28/2013	5/28/2014	Active Calibration																					
2	AA 960143	Phaseflex	Gore	EKD01D01048.0	5546519	6/14/2013	6/14/2015	Active Calibration																					
Project Engineer: <u>Adam A</u>	Quality Assurance: <u>Adam A</u>																												

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)


### B.1.1 – RF Conducted – Fundamental Power Verification

Manufacturer	Scott Health & Safety-Division of Scott Technologies, Inc.
Date	9-3-13
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	15.247 / RSS-210 A8
Specific Measurement Procedure	ANSI C63.10-2009 Section 6.7
Additional Description of Measurement	ANSI C63.10-2009 Section 6.7
Additional Notes	<ol style="list-style-type: none"> <li>Continuous transmit modulated used for this test.</li> <li>Manufacturer declares use of low channel (2405 MHz) only for this application.</li> </ol>

**Table**

Frequency (MHz)	Measured Power (dBm)	Original Reported Power (dBm)
2405	18.50	18.56

**Note:** The output power for channel 2405 MHz has been measured and verified to be similar to the original reported value for that channel under FCC ID TFB-APEXLT.

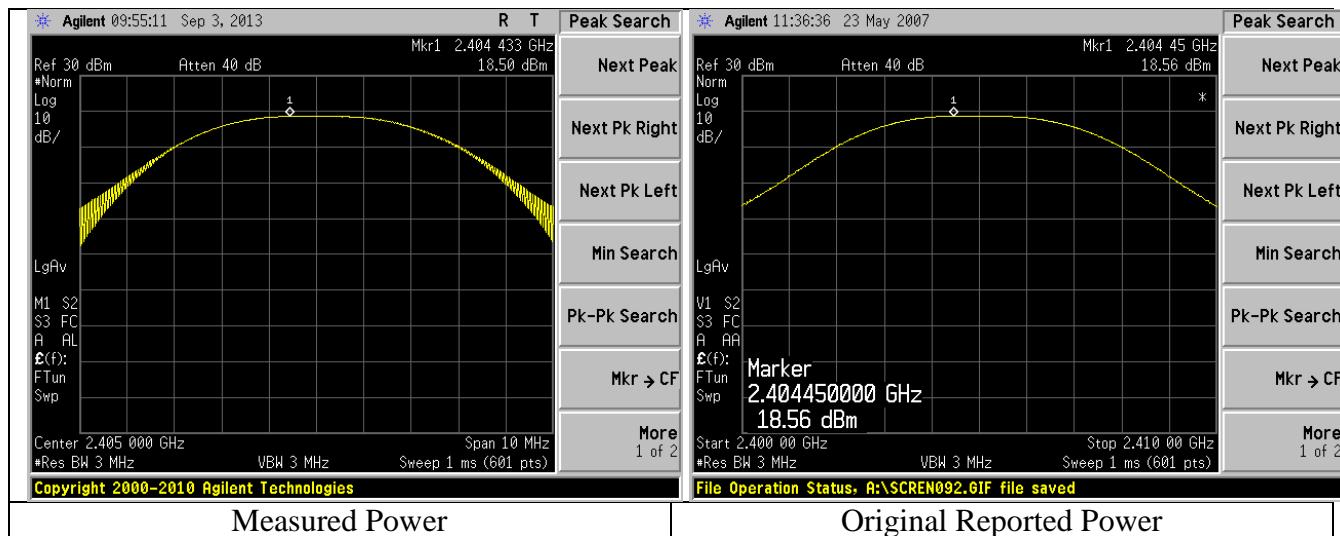

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## B.2 – Radiated Emissions

Rule Part(s)	FCC: 15.209 / 15.205 / 15.109 IC: RSS-GEN Section 7.2.5 / 7.2.2 / 6.0			
Measurement Procedure	ANSI C63.4 - 2003 ANSI C63.10 – 2009			
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber			
Test Distance	See data section			
EUT Placement	80 cm height non-conductive table above reference ground plane			
Frequency Range of Measurement	Loop Antenna: 9 kHz – 30 MHz	Biconical: 30-300 MHz	Log Periodic Dipole Array: 300-1000 MHz	Double-Ridged Waveguide Horn: 1-18 GHz
Measurement Detectors	RBW: 9-150 kHz: 100 Hz RBW: 150 kHz -30MHz: 9kHz Peak, Quasi-Peak, Average	30-1000MHz RBW: 120 kHz VBW: At least 300 kHz Peak, Quasi-Peak, Average	1 - 40 GHz: RBW: 1MHz VBW: 3(MHz) Peak 10 Hz Average	
Description of Measurement	<p>1) The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are preformed. The data is gathered and reported as the corrected values.</p> <p>2) The EUT is placed on a non-conductive pedestal centered on a turn-table in the test location with the antenna at the test distance from the EUT</p> <p>3) Above 30 MHz the maximum radiated RF emissions are determined by rotation of azimuth and scanning the sense antenna between 1 and 4 meters in height using both horizontal and vertical antenna polarities. Maximized levels are manually noted at degree values of azimuth and at sense antenna height.</p> <p>4) Below 30 MHz the loop antenna was set at a 3 meter distance from the EUT with the center of the loop at 1 m above the ground plane. The loop was positioned in three orthogonal positions with maximum results reported.</p>			
Example Calculations	Reported Measurement data = Raw receiver measurement + Antenna Correction Factor + Cable factor (dB) - amplification factor (when applicable) + Additional factor (when applicable)			

**FCC Part 15.209 / IC RSS-GEN Section 7.2.5 Limits:**

Frequency (MHz)	Limit ( $\mu$ V/m)	3 m Limit (dB $\mu$ V/m)	Distance	Type
0.009 - 0.490	2400/F(kHz)	128.5 - 93.8	300	Quasi-Peak / Average*
0.490 - 1.705	24000/F(kHz)	73.8 - 62.97	30	Quasi-Peak
1.705 - 30	30	69.54	30	Quasi-Peak

\*Average Limit 9-90 and 110-490 kHz

**Below 30 MHz distance correction** =  $40 * \log (300/3)$  or  $40 * \log (30/3)$

Frequency (MHz)	3 m Limit ( $\mu$ V/m)	3 m Limit (dB $\mu$ V/m)	Type
30-88	100	40.0	Quasi-Peak
88-216	150	43.5	Quasi-Peak
216-960	200	46.0	Quasi-Peak
Above 960	500	54.0	Average (>1 GHz)

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

**B.2.1 – 2.4 GHz Radio emissions in restricted bands (Co-location test) in the 30-1000 MHz range**

Manufacturer	Scott Health & Safety-Division of Scott Technologies, Inc.
Date	8-14-13
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	15.209 / 15.109 / RSS-GEN
Measurement Procedure	ANSI C63.4 - 2003 ANSI C63.10 - 2009
Test Distance	3 meter
EUT Placement	80 cm height non-conductive table centered on turn-table
Detectors	Peak, Quasi-Peak
Additional Notes	1) Tested with 2.4 GHz radio in transmit and receive mode single channel with 127 kHz (RFID) in continuous (pulsed) operation (normal operation)

**Example Calculation:**

Quasi-Peak Limit @ 3 meter (dB $\mu$ V/m) – Quasi-Peak Reading (dB $\mu$ V/m) = Margin

**Table**

Frequency (MHz)	Height (m)	Azimuth (degree)	Quasi Peak Reading (dB $\mu$ V/m)	Quasi Peak Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Polarity
96.1	1.00	0	40.30	43.50	3.20	Vertical
132.0	1.00	97	36.40	43.50	7.10	Vertical
60.4	1.00	312	32.00	40.00	8.00	Vertical
144.6	1.00	105	33.00	43.50	10.50	Vertical
73.2	1.00	282	28.30	40.00	11.70	Vertical
48.2	1.00	0	29.40	40.00	10.60	Vertical
32.0	1.00	313	31.80	40.00	8.20	Vertical
216.0	1.00	0	33.50	46.00	12.50	Vertical
156.0	2.01	268	40.90	43.50	2.60	Horizontal
96.0	2.25	41	42.10	43.50	1.40	Horizontal
124.5	1.73	54	34.80	43.50	8.70	Horizontal
61.1	1.55	55	29.70	40.00	10.30	Horizontal
158.7	1.85	0	32.80	43.50	10.70	Horizontal
144.0	1.77	274	37.34	43.50	6.16	Horizontal

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.


Name: Queue Interface

Report: TR 313086 B

Model: 201211

LSR: C-1700

Serial: none (engineering sample)

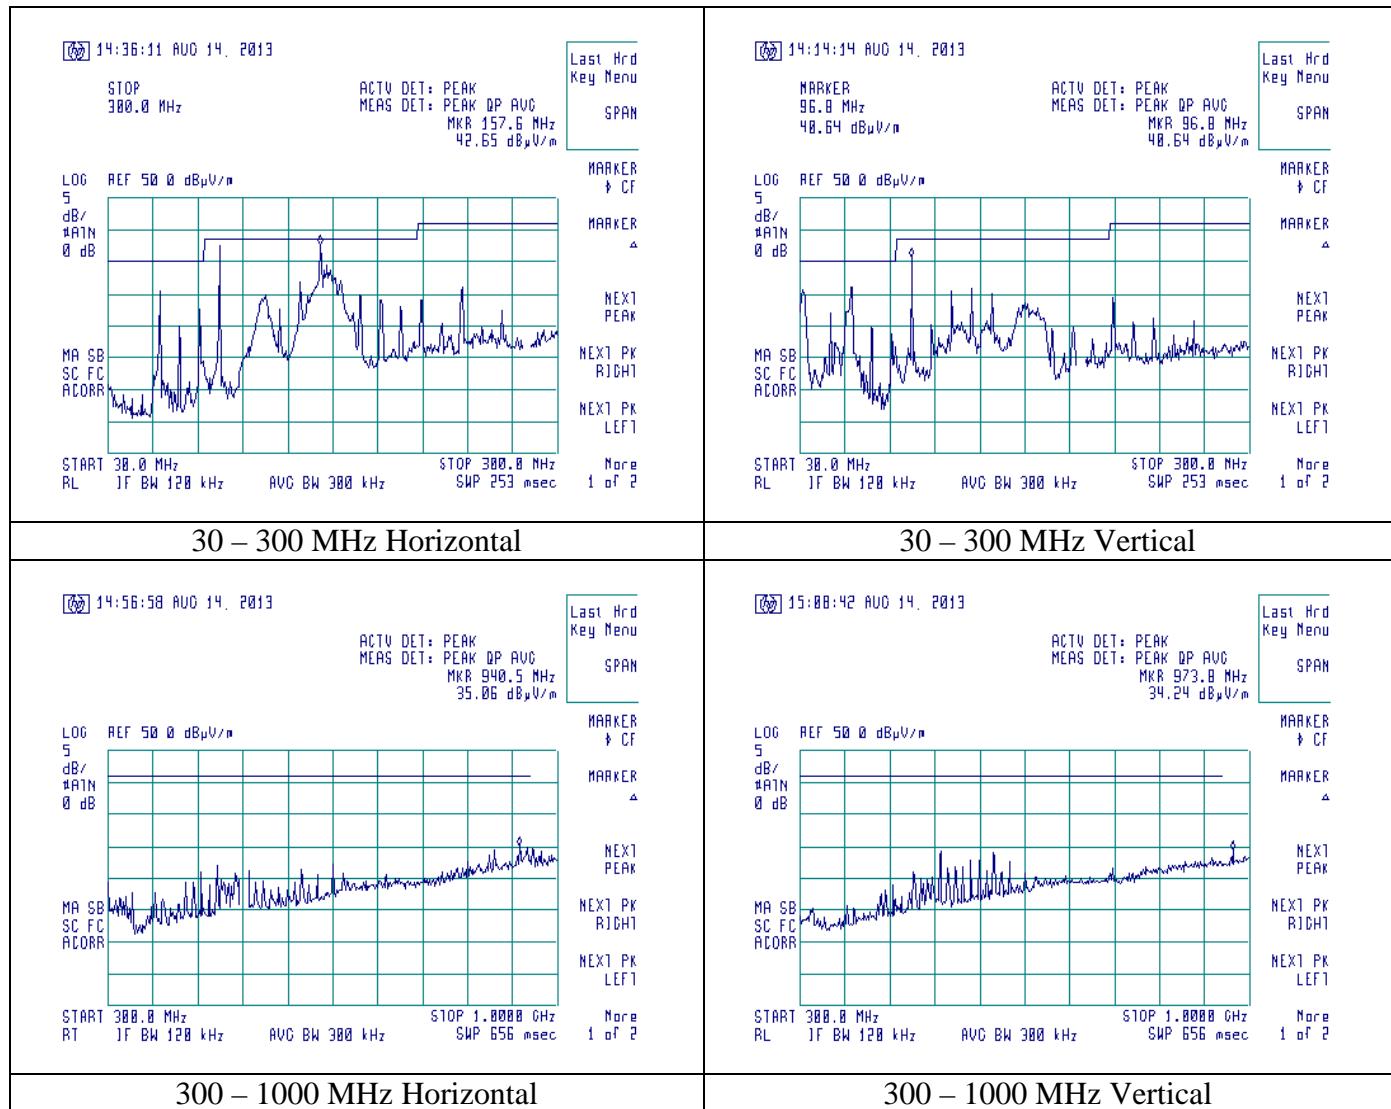

**B.2.2 – 2.4 GHz Radio Harmonics in restricted bands (Co-location test) in the 1-25 GHz range**

Manufacturer	Scott Health & Safety-Division of Scott Technologies, Inc.
Date	7-23, 8-14, 8-21 2013
Operator	Aidi / Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	15.209 / 15.109
Measurement Procedure	ANSI C63.4 - 2003 ANSI C63.10 - 2009
Test Distance	1-4 GHz (3 meter); 4-25 GHz (1 meter)
EUT Placement	80 cm height non-conductive table centered on turn-table
Detectors	Peak and Average
Additional Notes	<ol style="list-style-type: none"><li>1) Tested with 127 kHz (RFID) in continuous (pulsed) operation (normal operation)</li><li>2) Continuous receive mode single channel tested (no emissions found above system noise floor)</li><li>3) Transmitter harmonics in restricted bands tested to ensure co-location of radios maintains compliance of emissions.</li></ol>

**Example Calculation:**

FCC 15.209 Average Limit @ 3 meter (dB $\mu$ V/m) – Average Reading (dB $\mu$ V/m) = Average Margin


Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## Receive Mode of 2.4 GHz Radio

15:31:59 AUG 14, 2013

ACTV DET: PEAK  
MEAS DET: PEAK DP AVG  
MRR 3.989 GHz  
47.21 dB $\mu$ V/m

Last Hrd  
Key Menu  
SPAN

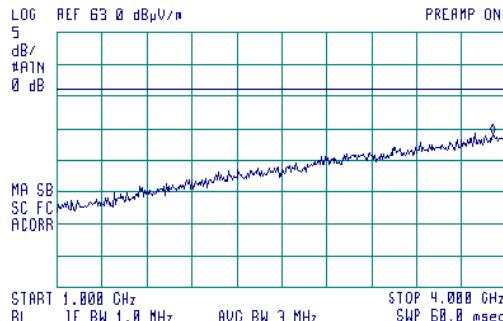


MARKER ↓ CF  
MARKER ▲  
NEXT PEAK  
NEXT PK RIGHT  
NEXT PK LEFT  
More 1 of 2

15:38:55 AUG 14, 2013


ACTV DET: PEAK  
MEAS DET: PEAK DP AVG  
MRR 3.989 GHz  
47.21 dB $\mu$ V/m

Last Hrd  
Key Menu  
SPAN

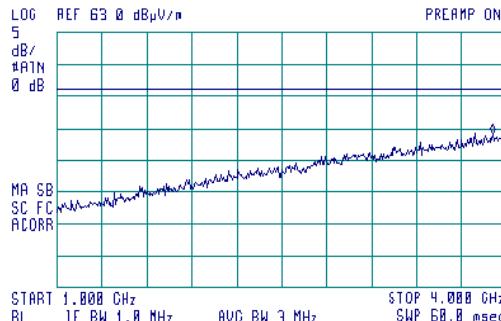

MARKER ↓ CF  
MARKER ▲  
NEXT PEAK  
NEXT PK RIGHT  
NEXT PK LEFT  
More 1 of 2

### 1 – 4 MHz Horizontal

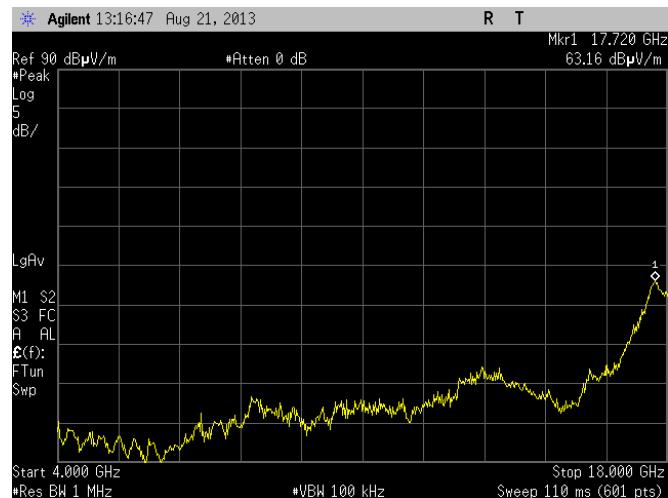

### 1 – 4 MHz Vertical



### 4 – 18 GHz Horizontal

### 4 – 18 GHz Vertical

### 18 – 25 GHz Horizontal

### 18 – 25 GHz Vertical

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.

Name: Queue Interface

Report: TR 313086 B


Model: 201211

LSR: C-1700

Serial: none (engineering sample)

## Transmit Harmonics in restricted bands of 2.4 GHz radio

Frequency (MHz)	Antenna	EUT	Height (m)	Azimuth (°)	Peak	Average	limit	Margin
4810.00	H	V	1.00	178	51.9	47.9	63.5	15.6
4810.00	V	V	1.11	81	54.5	51.6	63.5	11.9
12025.00	H	V	1.23	296	52.9	47.5	63.5	16.0
12025.00	V	V	1.00	312	50.8	45.7	63.5	17.8
19240.00	H	V	1.00	98	58.2	56.2	63.5	7.3
19240.00	V	V	1.00	136	56.7	54.7	63.5	8.8

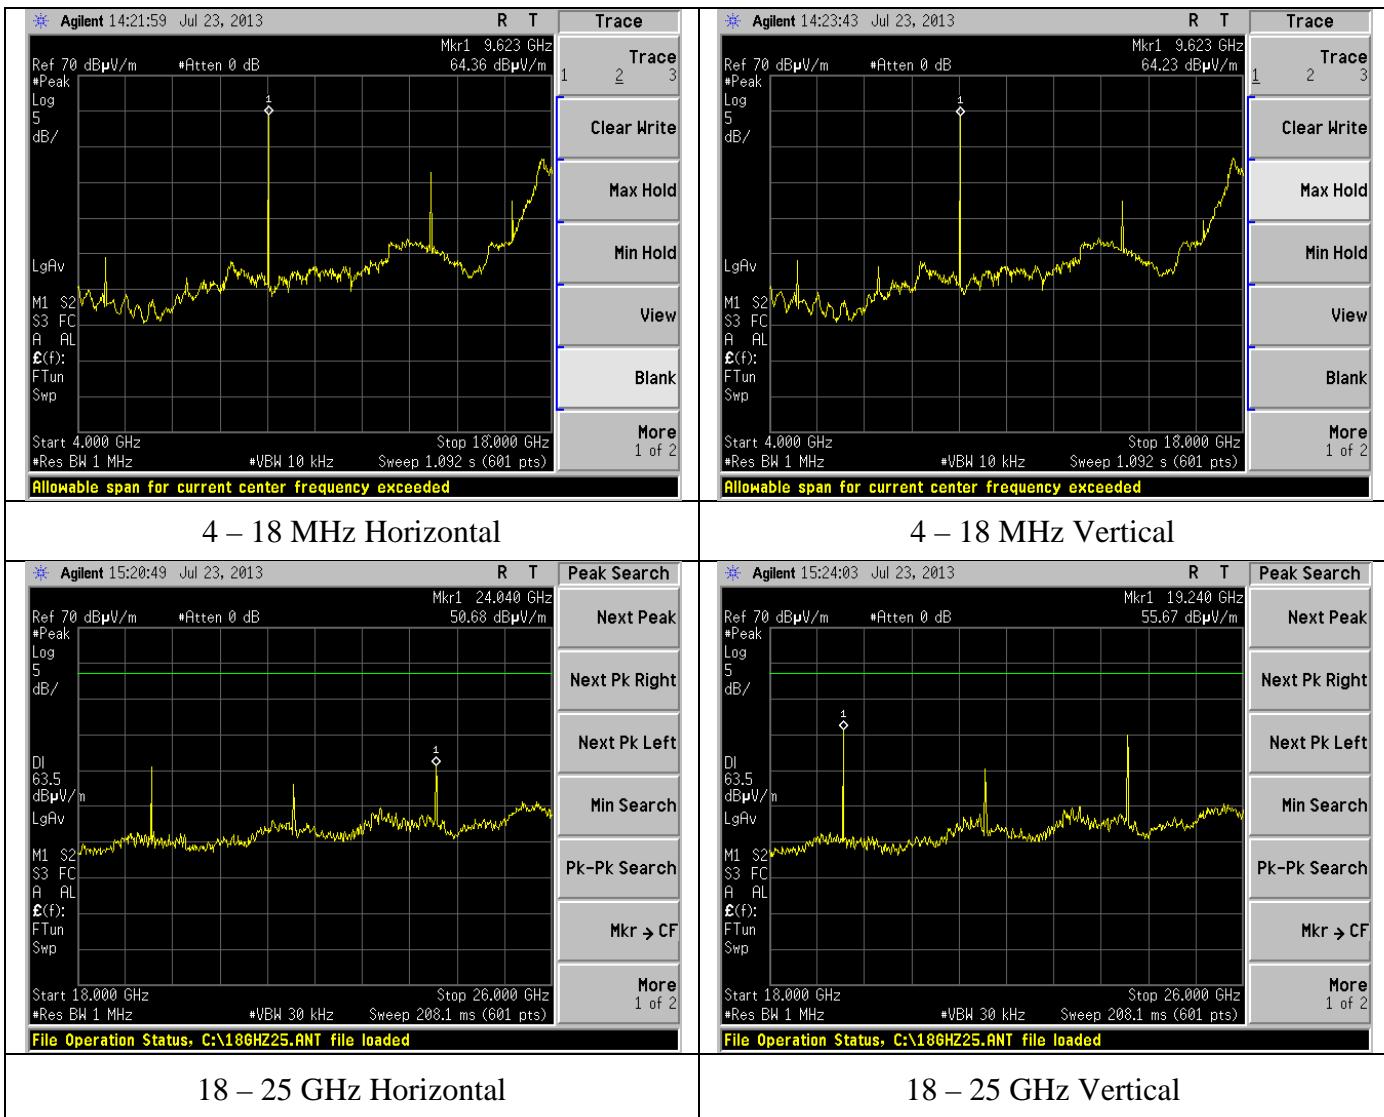

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.

Name: Queue Interface

Report: TR 313086 B

Model: 201211

LSR: C-1700

Serial: none (engineering sample)

## B.3 – AC Mains Conducted Emissions

### Test Setup

The test area and setup are in accordance with ANSI C63.4-2003 and with Title 47 CFR, FCC Part 15, Industry Canada RSS-210 and RSS GEN. The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT's power cable was plugged into a Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to the EMI Receiver. The LISN used has the ability to terminate the unused port with a  $50\Omega$  (ohm) load when switched to either L1 (line) or L2 (neutral).

### Test Procedure

The EUT was investigated in continuous modulated transmit mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements was as specified for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

### Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dB $\mu$ V)		Measuring Bandwidth
	Quasi-Peak	Average	
0.150 -0.50 *	66-56	56-46	RBW = 9 kHz
0.5 – 5.0	56	46	
5.0 – 30	60	50	

\* The limit decreases linearly with the logarithm of the frequency in this range.

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## Test Data

Test not applicable. Manufacturer declared unit only powered from vehicle battery only.

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## Appendix C - Uncertainty Summary

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

*Table of Expanded Uncertainty Values, (K=2) for Specified Measurements*

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.82 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.88 dB
Radiated Emissions	3-Meter Chamber, Horn Antenna	4.85 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.32 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.63 dB
Absolute Conducted Emissions	Agilent PSA/ESA Series	1.38 dB
AC Line Conducted Emissions	Shielded Room/EMCO LISN	3.20 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	2.05 Volts/Meter
Conducted Immunity	3 Volts level	2.33 V
EFT Burst, Surge, VDI	230 VAC	54.4 V
ESD Immunity	Discharge at 15kV	3200 V
Temperature/Humidity	Thermo-hygrometer	0.64°/ 2.88 %RH

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## Appendix D - References

Publication	Year	Title
FCC CFR Parts 0-15	2013	Code of Federal Regulations – Telecommunications
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-GEN Issue 3	2010	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)

## END OF REPORT

Date	Version	Comments	Person
8-23-13	V0	Initial Draft Release	Adam A
9-03-13	V1	Final Release	Adam A
9-17-13	V2	TCB Review Modifications	Adam A

Prepared For: Scott Health & Safety-Division of Scott Technologies, Inc.	Name: Queue Interface
Report: TR 313086 B	Model: 201211
LSR: C-1700	Serial: none (engineering sample)