



Design. Create. Certify. *Connect.* TESTING CERT #1255.01

W66 N220 Commerce Court • Cedarburg, WI 53012

Phone: 262.375.4400 • Fax: 262.375.4248

www.lsr.com

ENGINEERING TEST REPORT # 315096B LSR Job #: C-2202

Compliance Testing of:

X3 SEMS + BT

Test Date(s)

April 7th – May 8th, 2015


Prepared For:

Tyco/Scott Health and Safety
Attn: Ann Carver
4320 Goldmine Road
Monroe, NC 28110

This Test Report is issued under the Authority of: Shane D. Rismeyer, EMC Engineer


Signature:  Date: 6/2/15

Test Report Reviewed by:

Signature:  Date: 9/14/15

Report by:

Shane D. Rismeyer, EMC Engineer

Signature:  Date: 6/2/15

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

Table of Contents

1.0	Summary of Test Report.....	4
2.0	Test Facilities	4
3.0	Client Information.....	4
3.1	Equipment Under Test (EUT) Information.....	5
3.2	Product Description	5
3.3	Modifications Incorporated In the EUT for Compliance Purposes	5
3.4	Deviations & Exclusions from Test Specifications	5
3.5	Additional Information	5
4.0	Conditions of Test.....	6
5.0	Test Equipment	6
6.0	Conformance Summary	6
	Appendix A – Test Equipment	7
	Appendix B – Test Data.....	8
	B.1 – RF Conducted Emissions	8
	B.2 – Radiated Emissions	18
	Appendix C - Uncertainty Summary	30
	Appendix D - References.....	31

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

LS Research, LLC in Review

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:



TESTING CERT #1255.01

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation
A2LA Certificate Number: 1255.01



Federal Communications Commission (FCC) – USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948
FCC Registration Number: 90756



Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1

File Number: IC 3088-A

On file, 3 and 10 Meter OATS based on RSS-212 – Issue 1

File Number: IC 3088



U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a U. S. Competent Body operating under the U. S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility –Council Directive 2004/108/EC (formerly 89/336/EEC, Article 10.2).

Date of Validation: January 16, 2001

Validated by the European Commission as a U.S. Notified Body operating under the U.S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union Telecommunication Equipment – Council Directive 99/5/EC, Annex V.

Date of Validation: November 20, 2002

Notified Body Identification Number: 1243

Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202

1.0 Summary of Test Report

In April-May, 2015, the EUT, X3 SEMS + BT, was tested and MEETS the following requirements for the Bluetooth (FHSS) radio:

FCC Requirement	IC Requirement	Test Requirements	Measurement Procedure	Compliance (Yes/No)
15.247 (a)(1)	RSS-247 Section 5.1 (1)	Bandwidth of a Frequency Hopping System	ANSI C63.10-2013 Section 6.9	Yes
15.247(b) & 1.1310	RSS-247 Section 5.4 (2)	Maximum Output Power	ANSI C63.10-2013 Section 7.8	Yes
15.247 (a)(1)	RSS-247 Section 5.1 (2)	Carrier Frequency Separation	ANSI C63.10-2013 Section 7.8	Yes
15.247 (a)(1)(iii)	RSS-247 Section 5.1 (4)	Number of Channels and Time of Occupancy	ANSI C63.10-2013 Section 7.8	Yes
15.247(d)	RSS-247 Section 5.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	ANSI C63.10-2013 Section 7.8	Yes
15.247(c), 15.209 & 15.205	RSS-GEN Section 8.9, 8.10	Transmitter Radiated Emissions in Restricted Bands	ANSI C63.10-2013 Section (6.3,6.5,6.6)	Yes
2.1055 (d)	RSS-GEN Section 6.11	Frequency Stability	ANSI C63.10-2013 Section 6.8	Yes
15.207	RSS-GEN Section 8.8	Power Line Conducted Emissions Measurements	ANSI C63.10-2013 Section 6.2	Yes

2.0 Test Facilities

All testing was performed at:

LS Research, LLC
W66 N220 Commerce Court
Cedarburg, Wisconsin, 53012 USA

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to the requirements of ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted.

3.0 Client Information

LS Research, LLC

Page 4 of 31

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

Manufacturer Name:	Tyco/Scott Health and Safety
Address:	4320 Goldmine Road
Contact Person:	Ann Carver

3.1 Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	X3 SEMS + BT
Model Number:	201122-31, 201122-32 and 201122-33
Serial Number:	Test
FCC ID	T5E201122A
IC Number	6453A-201122A

3.2 Product Description

Scott Emergency Management System (SEMS II) with Blue Tooth is a telemetry system for firefighter, comprises mainly of two devices a (1) Control Module which house the piezos for the Personnel Alarm Safety System (PASS) and (2) an Console unit which houses the telemetry radio being capable of bidirectional communications with a base station (gateway) comprised of a USB or PCMCIA card. The system operates on a radio frequency of 2.4 GHz, where by the console unit is capable of transmitting and receiving information to and from the base station. The transmission range is 450ft in a typical indoor environment and 2000ft line of sight (LOS). The Console also contains a blue tooth radio with ability to pair and transmit data every 60 seconds to an external APX Motorola radio which then forwards the data over a Motorola network.

3.3 Modifications Incorporated In the EUT for Compliance Purposes

None noted at time of test

3.4 Deviations & Exclusions from Test Specifications

None noted at time of test

3.5 Additional Information

Low Channel 0 (2402 MHz), Middle Channel 19 (2440 MHz), High Channel 39 (2480 MHz). EUT programmed for continuous transmit or receive on selectable channel using a programming cable and a Tyco/Scott software tool on a laptop computer.

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

4.0 Conditions of Test

Environmental:

Temperature: 20-25° C
Relative Humidity: 30-60%
Atmospheric Pressure: 86-106 kPa

Voltage: 5VDC

5.0 Test Equipment

All test equipment is calibrated by a calibration laboratory accredited by A2LA to the requirements of ISO 17025. For a complete list of test equipment and calibration dates, see Appendix A. Unless otherwise noted, resolution bandwidth of measuring instrument used during testing for given frequency range, see below.

Frequency Range	Resolution Bandwidth
9 kHz – 150 kHz	200 Hz
150 kHz – 30 MHz	9 kHz
30 MHz – 1000 MHz	120 kHz
Above 1000 MHz	1 MHz

6.0 Conformance Summary

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, 15.109, Industry Canada RSS-247 Issue 1 (2015), RSS-GEN Issue 4 (2014).

If some emissions are seen to be within 3 dB of their respective limits:

As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Appendix A – Test Equipment



Date : 17-Apr-2015

Type Test : Emissions

Job # : C-2202

Prepared By: Shane Rismeyer

Customer : Tyco/Scott Health and Safety

Quote #: 315096

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	10/19/2014	10/19/2015	Active Calibration
2	EE 960088	8GHz MXE Spectrum Analyzer	Agilent	N9038A	MY51210138	1/9/2015	1/9/2016	Active Calibration
3	AA 960078	Log Periodic Antenna	EMCO	93146	9701-4855	1/19/2015	1/19/2016	Active Calibration
4	AA 960150	Biconical Antenna	ETS	3110B	0003-3346	1/22/2015	1/22/2016	Active Calibration
5	EE 960146	Std. Gain Horn Ant. w/preamp	Adv. Micro / EMCO	WLA622-4 / 3160-09	123001	8/19/2014	8/19/2015	Active Calibration
6	AA 960137	Standard Gain Horn Ant.	EMCO	3160-10	69259	8/19/2014	8/19/2015	Active Calibration
7	AA 960158	Double Ridge Horn Antenna	ETS Lindgren	3117	109300	7/9/2014	7/9/2015	Active Calibration
8	EE 960159	0.8 - 21GHz LNA	Mini-Circuits	ZVA-213X-S+	740411007	7/9/2014	7/9/2015	Active Calibration
9	AA 960161	Highpass Filter	K&L Microwave	11SH10-8000	2	2/6/2015	2/6/2016	Active Calibration
10	AA 960006	Active Loop Antenna	EMCO	6502	9205-2753	8/19/2014	8/19/2015	Active Calibration

Project Engineer: Shane Rismeyer

Quality Assurance: Peter Fasen

Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202

Appendix B – Test Data

B.1 – RF Conducted Emissions

Manufacturer	Tyco/Scott
Test Location	LS Research, LLC
Rule Part	FCC 15.247 IC RSS-247
General Measurement Procedure	ANSI C63.10-2013
General Description of Measurement	A direct measurement of the transmitted signal was performed at the antenna port of the EUT via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings thereby allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source.

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

B.1.1 – RF Conducted – Fundamental Bandwidth

Manufacturer	Tyco/Scott
Date	5/8/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30 - 60% R.H.
Rule Part	FCC 15.247 (a)(1) IC RSS-247 Section 5.1 (1)
Specific Measurement Procedure	ANSI C63.10-2013
Additional Description of Measurement	Peak detector used
Additional Notes	Continuous transmit modulated used for this test.

Table

Channel	Frequency (MHz)	99% BW (MHz)	20 dB BW (MHz)	Limit (MHz)
0	2402	0.872	0.976	0.667
19	2440	0.885	0.987	0.667
39	2480	0.869	0.981	0.667

Note:

1. The limit is based on 2/3 of the channel separation which in this case is 1MHz.

Plots

Low Channel – 2402 MHz



Mid Channel – 2440 MHz



High Channel – 2480 MHz



Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202

B.1.2 – RF Conducted – Fundamental Power

Manufacturer	Tyco/Scott
Date	5/8/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 (b) IC RSS-247 Section 5.4 (2)
Specific Measurement Procedure	ANSI C63.10-2013 Section 7.8
Additional Notes	Continuous transmit modulated used for this test. Sample Calculation: Margin (dB) = Limit – Measured level Average Output power = 1.17dBm < 30 dBm (limit)

Output Power Table


Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
0	2402	1.17	30	28.8
19	2440	0.59	30	29.4
39	2480	0.55	30	29.5

Plots

Low Channel – 2402 MHz



Mid Channel – 2440 MHz

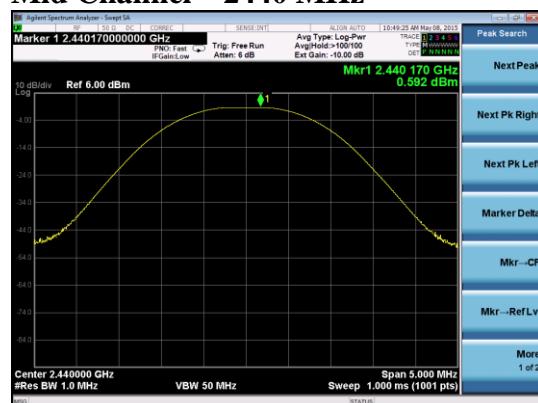

High Channel – 2480 MHz



B.1.3 – RF Conducted – Emissions in non-restricted frequency bands

Manufacturer	Tyco/Scott
Date	5/8/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 (d) IC RSS-247 Section 5.5
Specific Measurement Procedure	ANSI C63.10-2013 Section 7.8
Additional Description of Measurement	RF Conducted Measurement
Additional Notes	No Emissions found to be within 15 dB of limit Continuous transmit modulated used for this test.


Plots start next page

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

Channel – 2405 MHz




30-1000 MHz

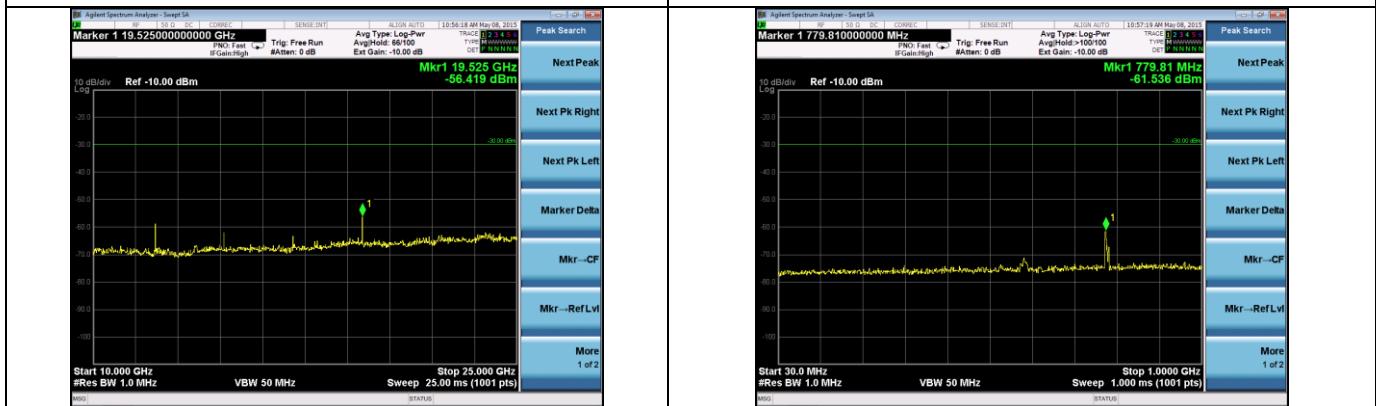

1 - 10 GHz

10-25 GHz

30-1000 MHz (Receive Mode)

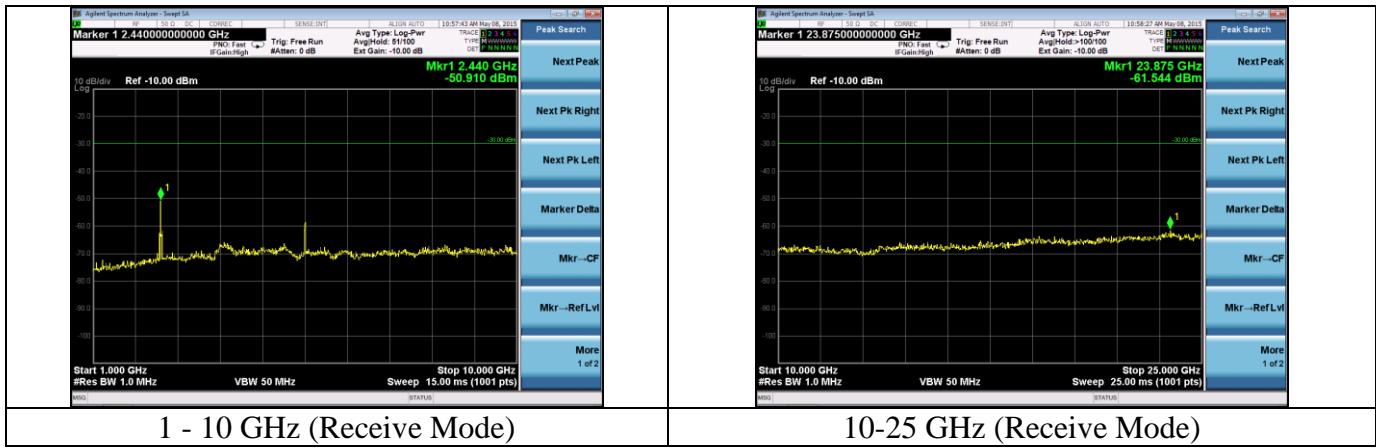



1 - 10 GHz (Receive Mode)



10-25 GHz (Receive Mode)

Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202


B.1.4 – RF Conducted – Channel Separation and Occupancy

Manufacturer	Tyco/Scott
Date	5/8/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247 (a)(1) & (a)(1)(iii) IC RSS-247 Section 5.1 (2) & 5.1 (4)
Specific Measurement Procedure	ANSI C63.10-2013 Section 7.8
Additional Notes	Continuous packet transmit modulated used for this test.

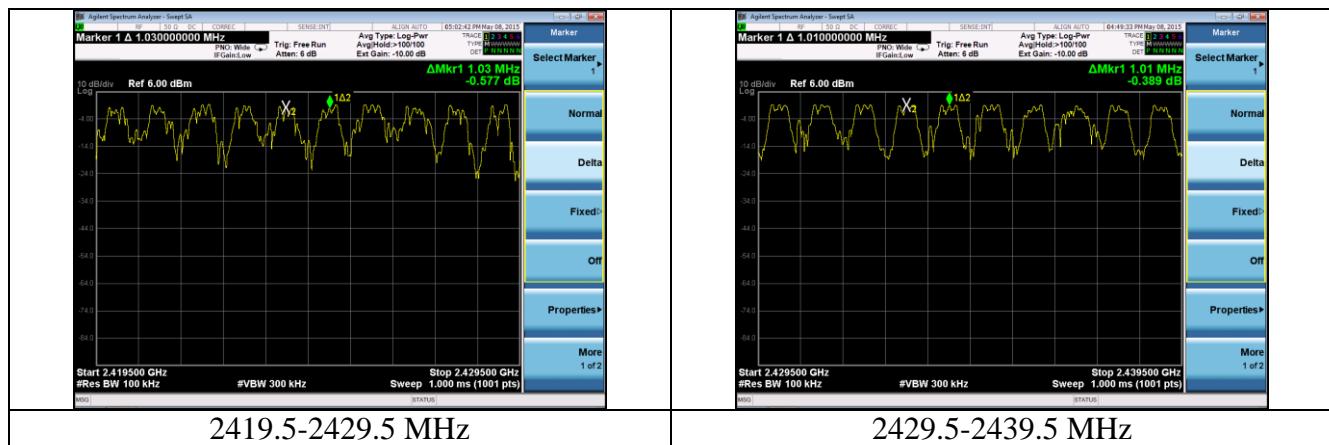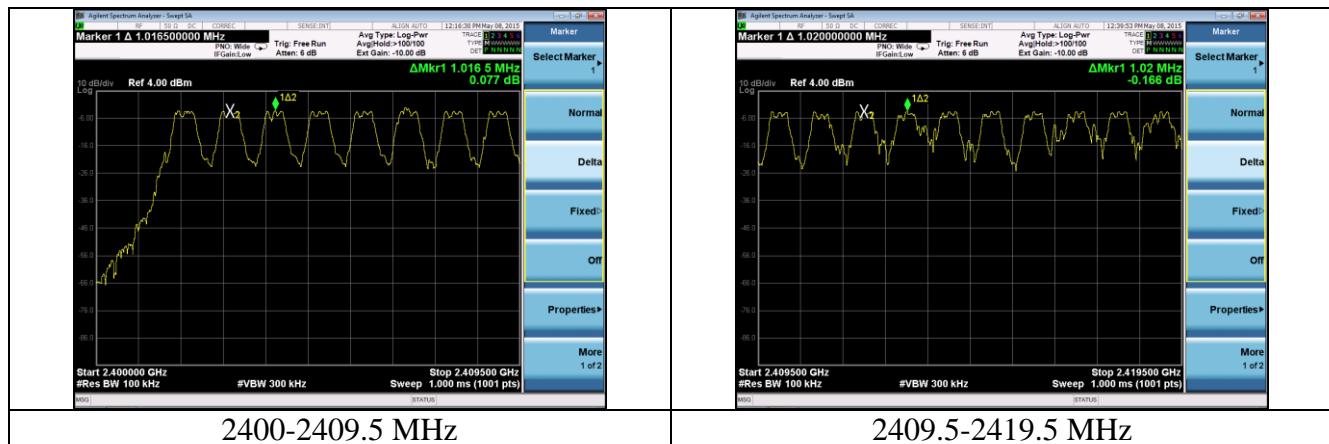

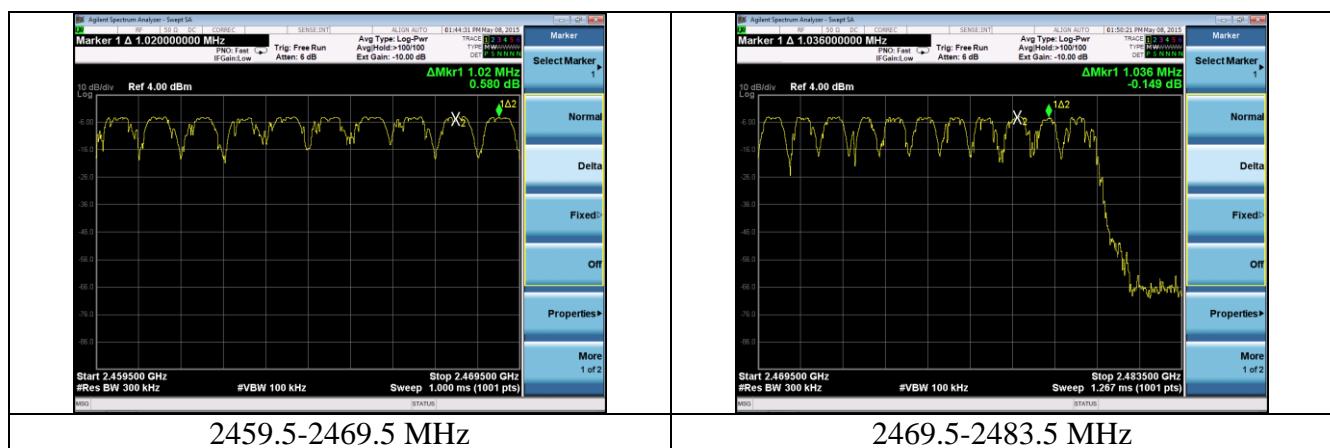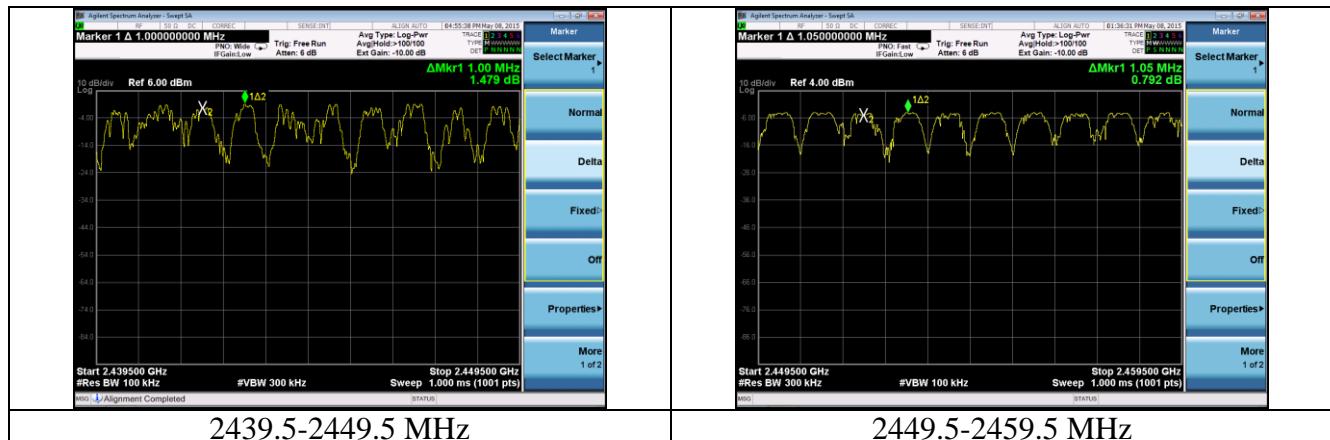

Occupancy

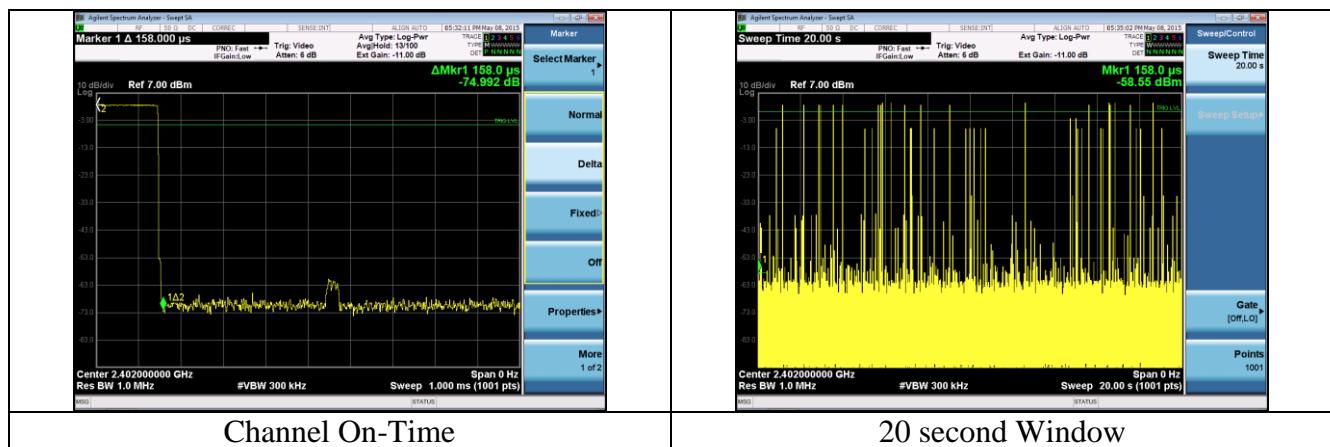

Total on-time allowable is 400ms*Number of channels

Given the EUT has 79 channels, maximum allowable on-time is $400\text{ms} * 79 = 31.6 \text{ sec}$

A 20 second screen capture demonstrates a pro-rated number of transmissions

40 transmissions in 20 sec equates to 63 transmissions in 31.6 sec

Each transmission maximum on-time is 0.158 ms.

In 31.6 sec, total on-time = $63 * 0.158\text{ms} = 10.112 \text{ ms}$

Total on-time of 10.112 ms is less than the maximum allowable on-time of 400ms

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

B.2 – Radiated Emissions

Rule Part(s)	FCC: 15.247 / 15.205 / 15.209 IC: RSS-GEN Section 8.9,8.10					
Measurement Procedure	ANSI C63.10 – 2013 Section 6.3,6.5,6.6					
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber					
Test Distance	See data section					
EUT Placement	Above 1 GHz: 150 cm height non-conductive table above reference ground plane covered with absorbers Below 1 GHz: 80 cm height non-conductive table above reference ground plane					
Frequency Range of Measurement	Biconical: 30-300 MHz	Log Periodic Dipole Array: 300-1000 MHz	Double-Ridged Waveguide Horn: 1-18 GHz	Standard Gain Horn: 18-26GHz		
Measurement Detectors	30-1000MHz RBW: 120 kHz VBW: At least 300 kHz		1 - 40 GHz: RBW : 1MHz VBW: At least 3 (MHz) Peak 10 Hz Average			
Description of Measurement	1) The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed. The data is gathered and reported as the corrected values. 2) The EUT is placed on a non-conductive pedestal centered on a turn-table in the test location with the antenna at the test distance from the EUT 3) Maximum radiated RF emissions are determined by rotation of azimuth and scanning the sense antenna between 1 and 4 meters in height using both horizontal and vertical antenna polarities. Maximized levels are manually noted at degree values of azimuth and at sense antenna height.					
Example Calculations	Reported Measurement data = Raw receiver measurement + Antenna Correction Factor + Cable factor (dB) - amplification factor (when applicable) + Additional factor (when applicable)					

FCC Part 15.209 / IC RSS-210 Section 2.7 Limits:

Frequency (MHz)	3 m Limit (µV/m)	3 m Limit (dBµV/m)	Type
30-88	100	40.0	Quasi-Peak
88-216	150	43.5	Quasi-Peak
216-960	200	46.0	Quasi-Peak
Above 960	500	54.0	Average (>1 GHz)

Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202

B.2.1 – Radiated Band-Edge Restricted Bands

Manufacturer	Tyco/Scott
Date	4/7/15
Operator	Mike Hintzke
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247/ 15.205 / 15.209 IC RSS-247 / RSS-GEN
Measurement Procedure	ANSI C63.10-2013 Section 6.3, 6.6
Test Distance	3 meter (1-4 GHz)
EUT Placement	150 cm height non-conductive table centered on turn-table , absorbers covering ground plane
Detectors	Peak; RBW 1MHz VBW 3 MHz (10Hz VBW for average measurements)
Additional Notes	1) EUT maximized in azimuth and antenna height with maximum results reported.



Example Calculation:

FCC 15.209 Average Limit @ 3 meter (dB μ V/m) – Peak Reading (dB μ V/m) = Margin

Data Table

Channel	Frequency (MHz)	EUT orientation/ Antenna Polarity	Height (cm)	Azimuth (degree)	Peak Reading (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Avg Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)
0	2388	Side/Vertical	3.74	255	63.7	74.0	10.3	43.8	54.0	10.2
39	2492	Side/Vertical	3.45	242	57.0	74.0	17.0	34.3	54.0	19.7

Plots

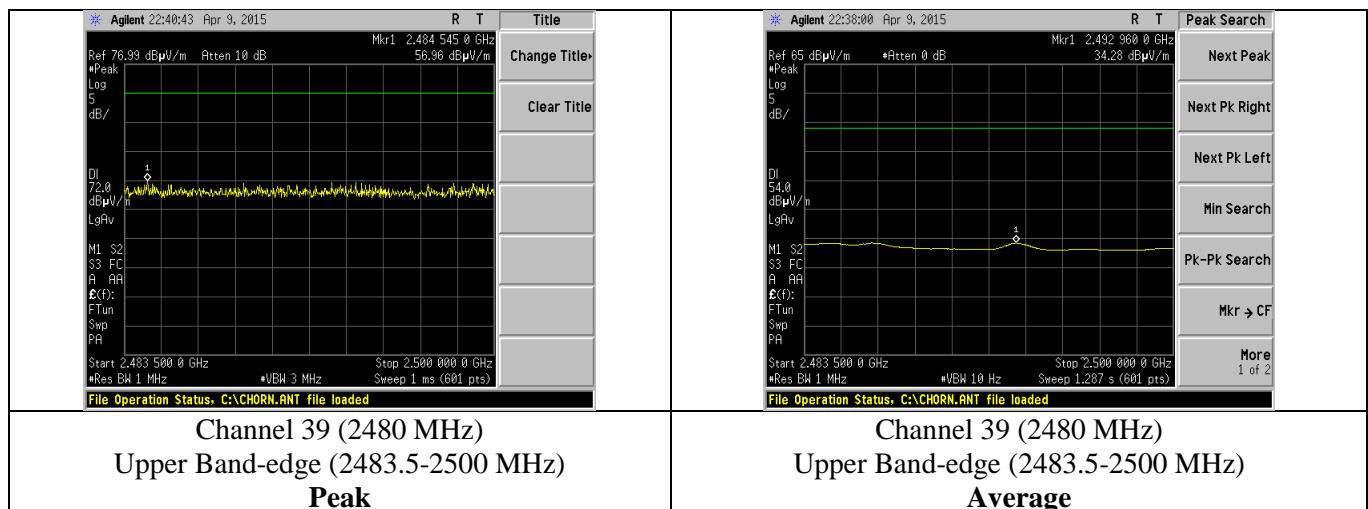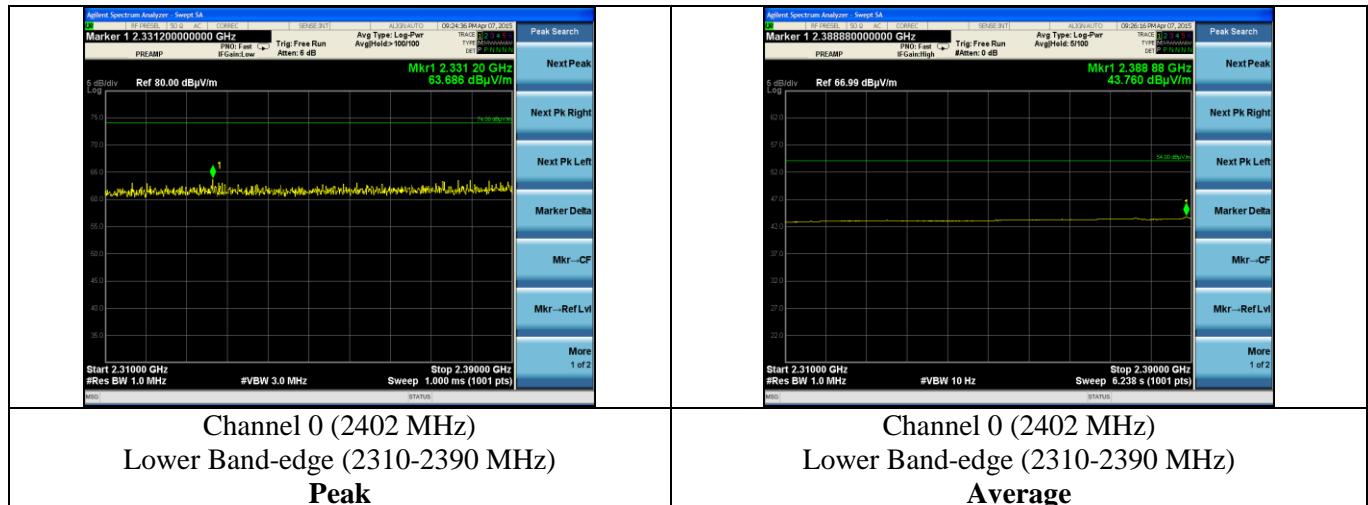

B.2.2 – Radiated Harmonics in Restricted Bands

Manufacturer	Tyco/Scott
Date	4/26/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247/ 15.205 / 15.209 IC RSS-247 / RSS-GEN
Measurement Procedure	ANSI C63.10-2013 Section 6.3, 6.6
Test Distance	3 meters 4-26 GHz
EUT Placement	150 cm height non-conductive table centered on turn-table , absorbers covering ground plane
Detectors	Peak; RBW 1 MHz Average VBW (10Hz)
Additional Notes	1) Tested in continuous transmit modulated mode with EUT in three orientations at maximum power. (Worst case 1 Mbps)



Example Calculation:

FCC 15.209 Average Limit @ 3 meters (dB μ V/m) – Average Reading (dB μ V/m) = Margin

Data Table

Frequency (MHz)	Height (cm)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	Orientation
7440	100	0	53.5	48.5	54.0	5.5	V	Vertical
7440	131	0	50.5	44.5	54.0	9.5	V	Side

Plots - Channel

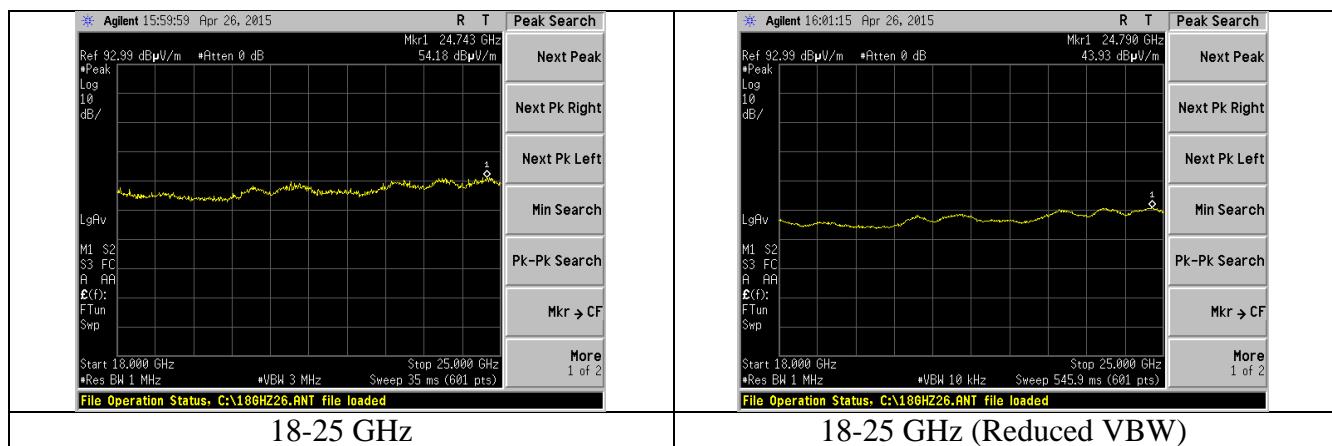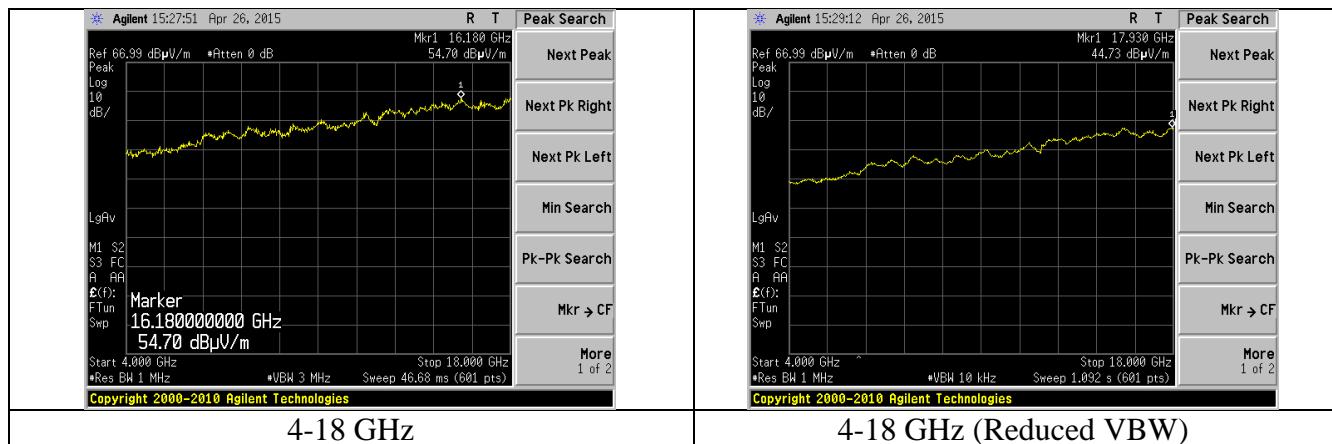

B.2.3 – Radiated Emissions Transmit Mode

Manufacturer	Tyco/Scott
Date	4/15/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	FCC 15.247/ 15.205 / 15.209 IC RSS-247 / RSS-GEN
Measurement Procedure	ANSI C63.10-2013 Section 6.3, 6.5, 6.6
Test Distance	3 meter 30-4000 MHz
EUT Placement	80 cm height non-conductive table centered on turn-table (no absorbers on ground plane) 150 cm height non-conductive table centered on turn-table , absorbers covering ground plane
Detectors	Quasi-Peak; 120 kHz and Peak; RBW 1 MHz
Additional Notes	<ol style="list-style-type: none"> 1) Tested in continuous transmit modulated mode with EUT in three orientations at maximum power. 2) Emissions not effected by channel or transmit or receive mode.


Example Calculation:

Limit (dB μ V/m) – Reading (dB μ V/m) = Margin

Table

Frequency (MHz)	Height (cm)	Azimuth (degree)	Peak Reading (dB μ V/m)	Quasi Peak Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
298	1	0	31.5	46.0	14.5	H	Vertical
298.8	1	0	31.0	46.0	15.0	V	Vertical
981.9	1	0	36.9	54.0	17.1	H	Vertical
691.3	1	0	36.1	46.0	9.9	V	Vertical

Plots

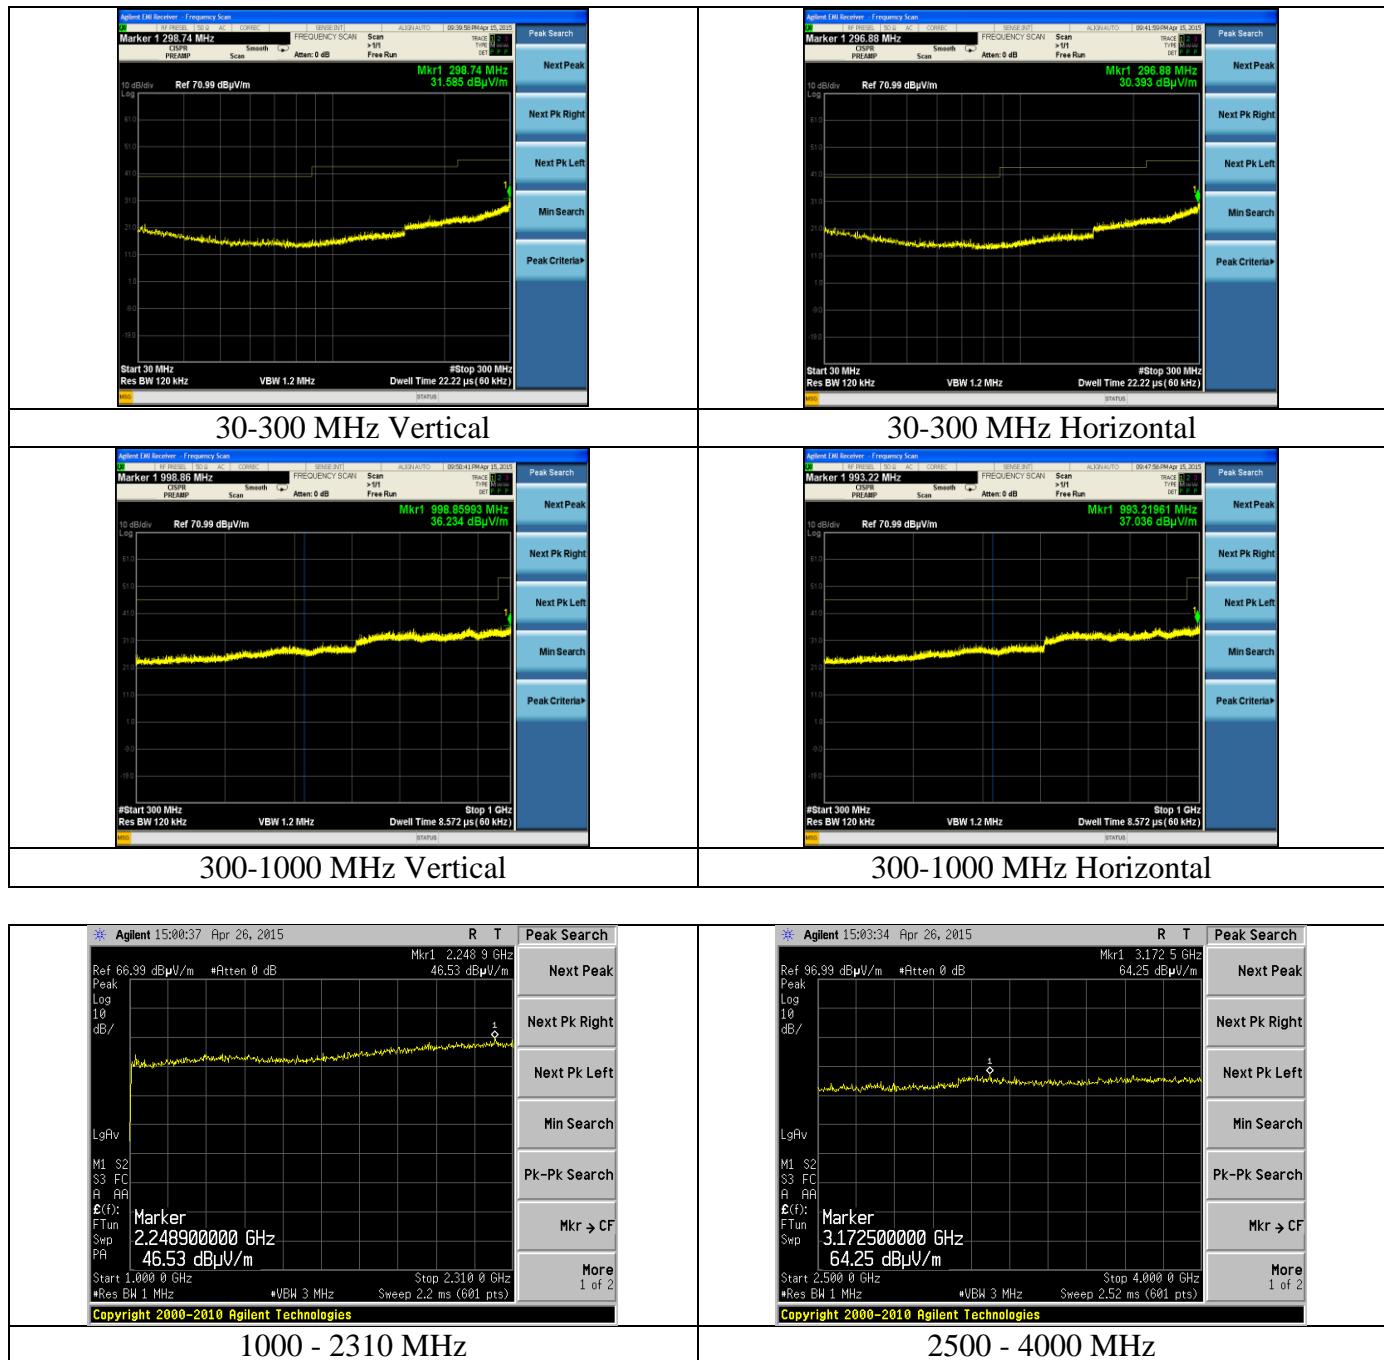

Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202

B.2.4 – Radiated Emissions Receive Mode




Manufacturer	Tyco/Scott
Date	4/26/15
Operator	Shane Rismeyer
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Rule Part	15.109 / RSS-GEN
Measurement Procedure	ANSI C63.10 - 2013
Test Distance	3 meter 30-25000MHz
EUT Placement	80 cm height non-conductive table centered on turn-table
Detectors	Quasi-Peak; RBW 120 kHz and Peak; RBW 1 MHz
Additional Notes	<ol style="list-style-type: none"> 1) Tested in continuous transmit modulated mode with EUT in three orientations at maximum power. 2) Maximum results reported 3) Emissions not effected by channel or transmit or receive mode.

Example Calculation:


$$\text{Limit (dB}\mu\text{V/m)} - \text{Reading (dB}\mu\text{V/m)} = \text{Margin}$$

Table

Frequency (MHz)	Height (cm)	Azimuth (degree)	Peak Reading (dB μ V/m)	Quasi Peak Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
298	1	0	31.5	46.0	14.5	H	Vertical
298.8	1	0	31.0	46.0	15.0	V	Vertical
981.9	1	0	36.9	54.0	17.1	H	Vertical
691.3	1	0	36.1	46.0	9.9	V	Vertical

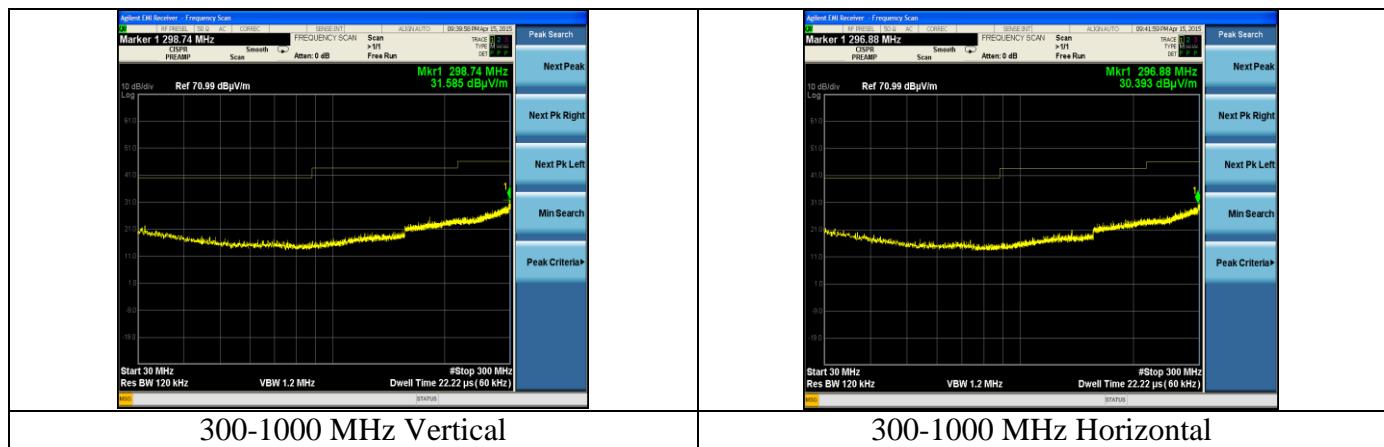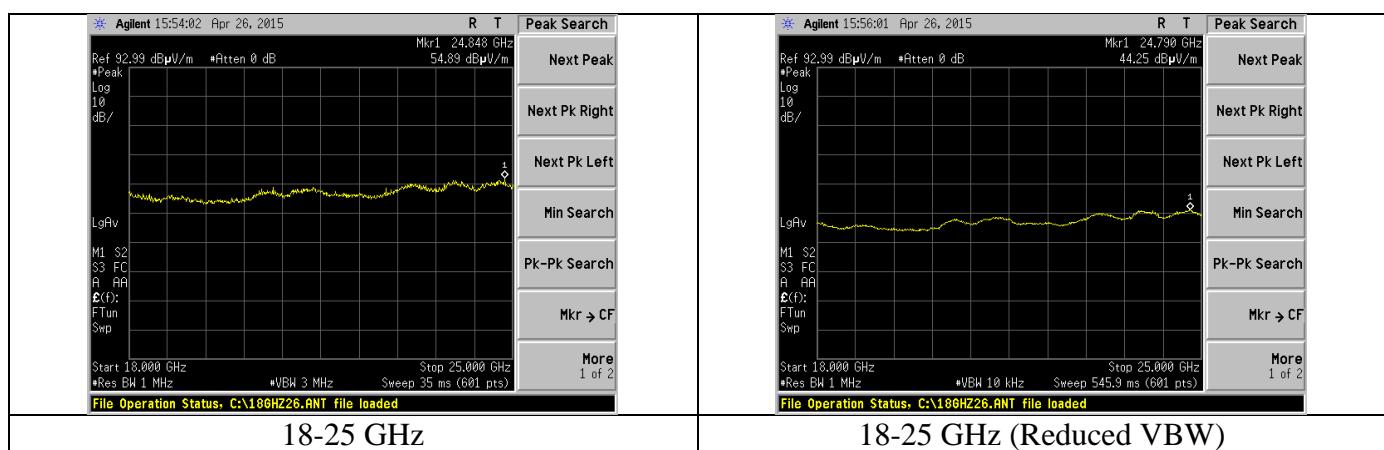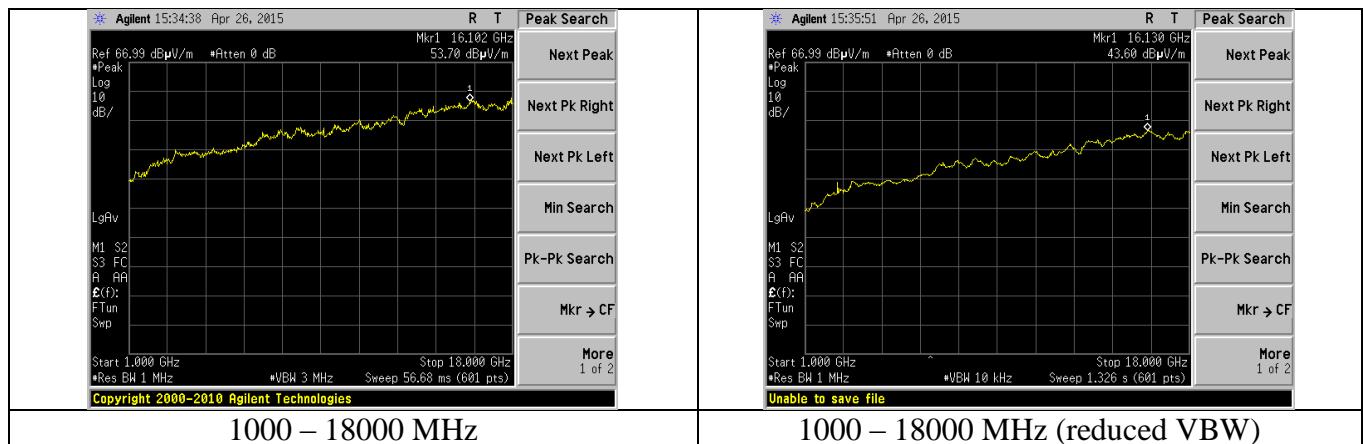

Prepared For: Tyco/Scott	Model Number: 201122-31, 201122-32 and 201122-33	Report #: 315096B
EUT: X3 SEMS + BT	Serial Number: Test	LSR Job #: C-2202

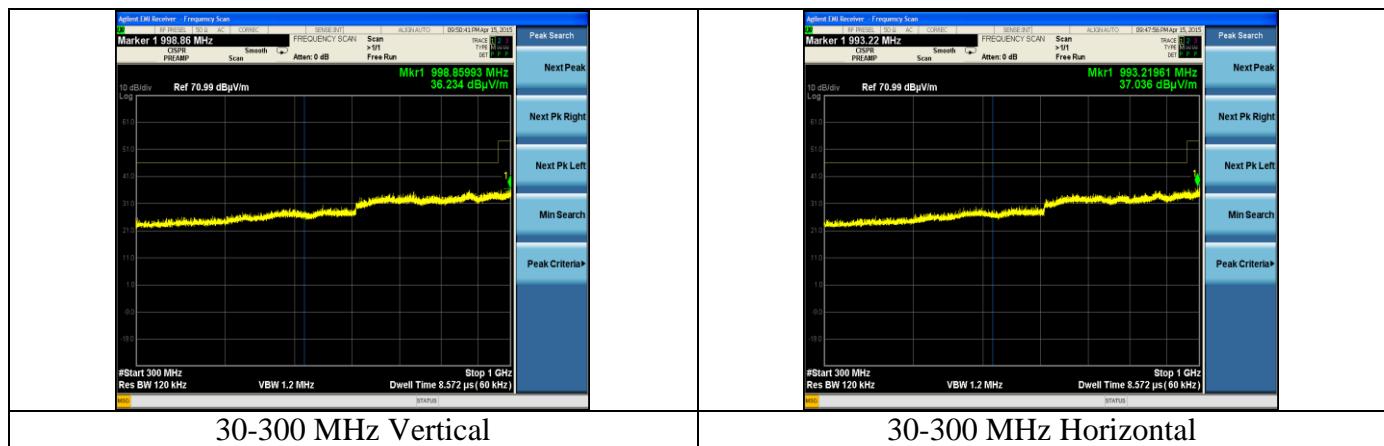

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--

B3 – Frequency Stability

Manufacturer	Tyco/Scott
Operator	Shane Rismeyer
Rule Part	FCC 2.1055 RSS-GEN Section 6.11
Measurement Procedure	ANSI C63.10-2013 Section 6.8
Additional Notes	<p>The power and frequency stability of the device was examined as a function of the input voltage available to the EUT. A Spectrum Analyzer was used to measure the RF output power and frequency at the appropriate frequency markers. Power was supplied by an external bench-type DC power supply and was varied from the nominal.</p> <p>The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were well behaved, and the system returned to the same state of operation as before the power cycle.</p> <p>Below is data showing stability of the fundamental frequency.</p> <p>Continuous transmit modulated used for this test.</p>

Channel	Supply voltage (DC)		Deviation (Hz)
	Nominal (5 VDC)	-15% (4.25 VDC)	
Low (Hz)	2401997390	2401997160	230
Middle (Hz)	2439996768	2439996733	35
High (Hz)	2479997217	2479997107	110


Low Channel




Nominal (5 VDC)

-15% (4.25 VDC)

Mid Channel

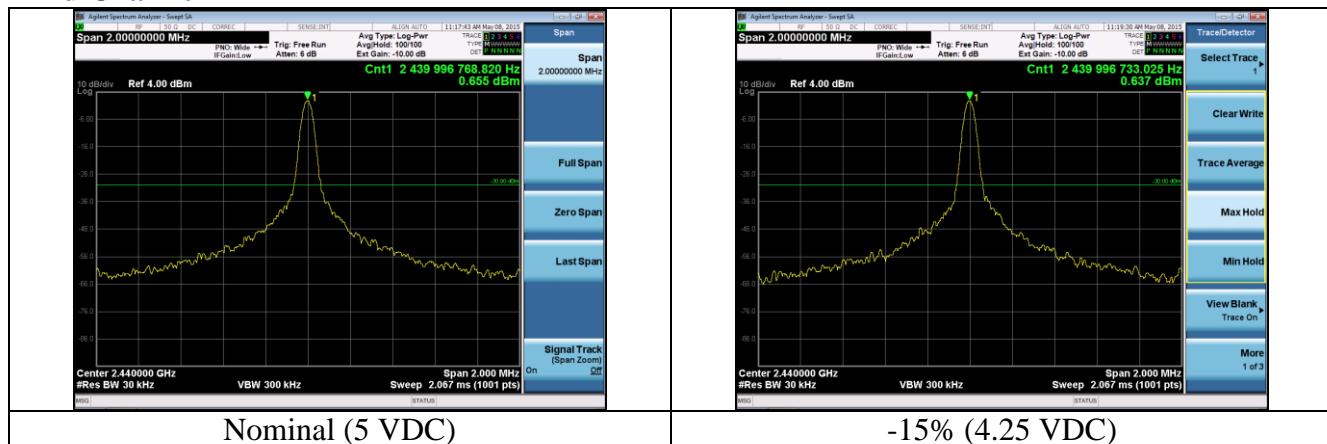

High Channel

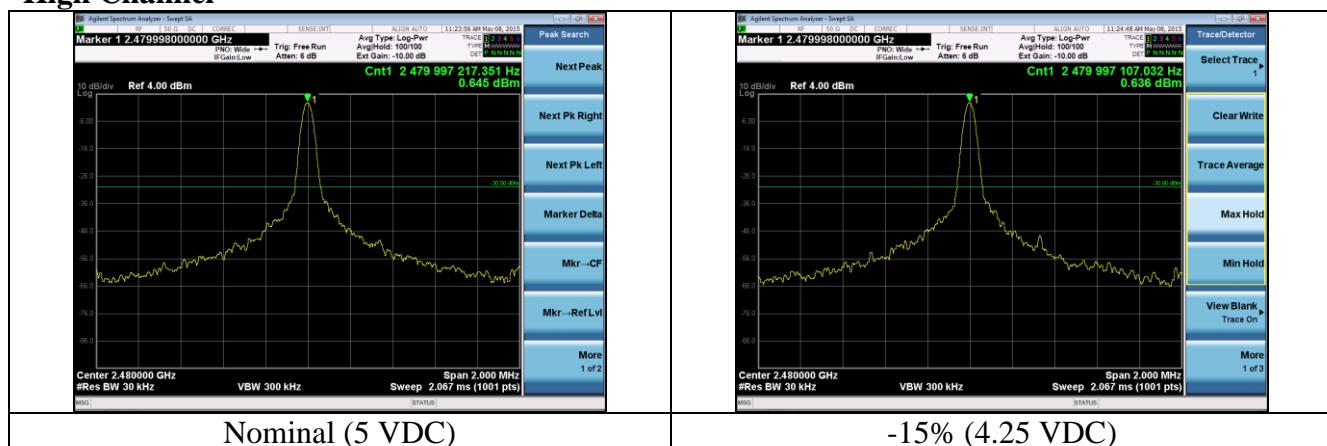

Appendix C - Uncertainty Summary

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.82 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.88 dB
Radiated Emissions	3-Meter Chamber, Horn Antenna	4.85 dB
Absolute Conducted Emissions	Agilent PSA/ESA Series	1.38 dB
AC Line Conducted Emissions	Shielded Room/EMCO LISN	3.20 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	2.05 Volts/Meter
Conducted Immunity	3 Volts level	2.33 V
EFT Burst, Surge, VDI	230 VAC	54.4 V
ESD Immunity	Discharge at 15kV	3200 V
Temperature/Humidity	Thermo-hygrometer	0.64° / 2.88 %RH

Appendix D - References

Publication	Year	Title
FCC CFR Parts 0-15	2015	Code of Federal Regulations – Telecommunications
RSS-247 Issue 1	2015	Digital Transmissions Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN Issue 4	2014	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing Unlicensed Wireless Devices

Prepared For: Tyco/Scott EUT: X3 SEMS + BT	Model Number: 201122-31, 201122-32 and 201122-33 Serial Number: Test	Report #: 315096B LSR Job #: C-2202
---	---	--