

Nemko Test Report: 138966-13TRFWL

Applicant: DAP Technologies
875 Charest Boulevard West,
suite 200,
Québec City, QC, Canada
G1N 2C9

Apparatus: Encompass 1d Handheld Reader

FCC ID: T5M5000B4

In Accordance With: FCC Part 15 Subpart C, 15.247
FHSS System and Digitally Modulated Radiators
902–928 MHz, 2400–2483.5 MHz, 5725–5850
MHz – Fundamental, power spectral density and
spurious emissions

Authorized By: Andrey Adelberg, Senior Wireless/EMC Specialist

Date: December 16, 2009

Total Number of Pages: 46

TABLE OF CONTENTS

Section 1 : Report Summary	3
Section 2 : Equipment Under Test.....	4
2.1 Identification of Equipment Under Test (EUT).....	4
2.2 Accessories	4
2.3 EUT Description.....	4
2.4 Technical Specifications of the EUT	5
2.5 EUT Setup diagram	6
2.6 Operation of the EUT during testing	6
2.7 Modifications incorporated in the EUT	6
Section 3 : Test Conditions.....	7
3.1 Specifications	7
3.2 Deviations From Laboratory Test Procedures	7
3.3 Test Environment	7
3.4 Measurement Uncertainty.....	7
3.5 Test Equipment.....	8
Section 4 : Results Summary	9
4.1 FCC Part 15 Subpart C : Test Results	9
Appendix A : Test Results.....	10
Clause 15.209(a) Radiated Emissions within Restricted Bands	10
Clause 15.247(b)(1) Maximum peak output power of Frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band	20
Clause 15.247(b)(2) Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band.....	20
Clause 15.247(b)(3) Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands.....	20
Clause 15.247(b)(4) Maximum peak output power	20
Clause 15.247(d) Radiated Emissions Not in Restricted Bands	25
Clause 15.247(e) Power Spectral Density for Digitally Modulated Devices.....	42
Appendix B : Setup Photographs	45
Appendix C : Block Diagram of Test Setups.....	46

Section 1 : Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003.

The assessment summary is as follows:

Apparatus Assessed:	Encompass 1d Handheld Reader
Specification:	FCC Part 15 Subpart C, 15.247
Compliance Status:	Complies
Exclusions:	None
Non-compliances:	None
Report Release History:	Original Release
Test Location:	Nemko Canada Inc. 303 River Road Ottawa, Ontario K1V 1H2
Registration Number:	176392 (3 m Semi-Anechoic Chamber)
Tests Performed By:	Kevin Ma, EMC/Wireless Specialist
Test Dates:	December 2009

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Section 2 : Equipment Under Test

2.1 Identification of Equipment Under Test (EUT)

The following information identifies the EUT under test:

Type of Equipment:	Handheld reader CE 5000B with RFID
Brand Name:	DAP
Model Number:	5000B4
FCC ID:	T5M5000B4
Date of Receipt:	November 25, 2009

2.2 Accessories

No accessories were used during this assessment.

2.3 EUT Description

The EUT is a handheld reader with internal Bluetooth, RFID and WiFi connectivity. The RFID End Cap Reader was not equipped with imager.

2.4 Technical Specifications of the EUT

Operating Band:	902–928 MHz
Operating Frequencies:	902.750–927.250 MHz
Modulation:	eGo (Manchester, 35 kbps) SeGo (Manchester, 80 kbps) ATA (CW) Allegro (Manchester, 300 kbps) Title-21 (Manchester, 300 kbps) Gen2 (PIE, 40 kbps)
Antenna Data:	Microstrip patch antenna 1.5 dBi
Power Supply Requirements:	120 VAC, 60 Hz / 7.4 VDC (Battery powered)
Operating Band:	2400–2483.5 MHz
Operating Frequencies:	2402–2480 MHz (Bluetooth) 2412–2462 MHz (WiFi)
Modulation:	FHSS; GFSK (Bluetooth) CCK, OFDM (WiFi)
Emission Designator:	F1D (Bluetooth) G1D; W7D (WiFi)
Antenna Data:	Ceramic Chip antenna 1.3 dBi (Bluetooth) Rufa antenna 4.4 dBi (WiFi)
Power Supply Requirements:	120 VAC, 60 Hz / 7.4 VDC (Battery powered)

2.5 EUT Setup diagram



2.6 Operation of the EUT during testing

The EUT was operated using test software that would cause the EUT to transmit continuously on selected channels.

2.7 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

Section 3 : Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.247

FHSS System and Digitally Modulated Radiators

902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz

3.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

3.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15–30 °C
Humidity range	:	20–75 %
Pressure range	:	86–106 kPa
Power supply range	:	±5 % of rated voltages

3.4 Measurement Uncertainty

Nemko Canada measurement uncertainty has been calculated using guidance of UKAS LAB 34:2003 and TIA-603-B Nov 7, 2002. All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko Canada document MU-003.

3.5 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Cal. Date	Next Cal.
3 m EMI Test Chamber	TDK	SAC-3	FA002047	May 06/09	May 06/10
Receiver/Spectrum Analyzer	Rohde & Schwarz	ESU 26	FA002043	Dec. 16/08	Dec. 16/09
Bilog	Sunol	JB3	FA002108	Jan. 27/09	Jan. 27/10
Horn Antenna #2	EMCO	3115	FA000825	Jan. 21/09	Jan. 21/10
1 – 18 GHz Amplifier	JCA	JCA118-503	FA002091	Oct 7/09	Oct 7/10
Spectrum Analyzer	Rohde & Schwarz	FSU46	FA001877	Sep 29/09	Sep 29/10
Horn 18 – 26.5 GHz	Electro-Metrics	SH-50/60-1	FA000479	COU	COU
18.0 – 26.0 GHz Amplifier	NARDA	BBS-1826N612	FA001550	COU	COU
Highpass Filter	Trilithic Inc.	6HC1000/10000	FA002232	COU	COU
Highpass Filter	Trilithic Inc.	6HC3000/18000	FA002231	COU	COU
Notch Filter	Microwave Circuits	2400-2483MHz	FA001940	COU	COU
Notch Filter	Microwave Circuits	902-928MHz	FA002096	COU	COU

COU – Calibrate on Use

NCR – No Calibration Required

Section 4 : Results Summary

This section contains the following:

FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No : not applicable / not relevant.

Y Yes : Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See Report Summary)

4.1 FCC Part 15 Subpart C : Test Results

Part 15	Test Description	Required	Result
15.209(a)	Radiated Emissions within Restricted Bands	Y	PASS
15.247(b)(1)	Maximum peak output power of Frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band	Y	PASS
15.247(b)(2)	Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band	Y	PASS
15.247(b)(3)	Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands	Y	PASS
15.247(b)(4)	Maximum peak output power	Y	PASS
15.247(d)	Radiated Emissions Not in Restricted Bands	Y	PASS
15.247(e)	Power Spectral Density for Digitally Modulated Devices	Y	PASS

Note: Only partial tests were performed based on the original modular approval certification. The EUT has a custom antenna path and layout therefore fundamental, power spectral density and spurious emissions tests were performed.

Appendix A : Test Results

Clause 15.209(a) Radiated Emissions within Restricted Bands

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Measurement Distance (meters)
	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)	
0.009–0.490	2400/F	67.6–20log(F)	300
0.490–1.705	24000/F	87.6–20log(F)	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
Above 960	500	54.0	3

Note: F = fundamental frequency in kHz

Test Results: Pass

Additional Observations:

These results apply to emissions found in the restricted bands defined in FCC Part 15 Subpart C, 15.205.

The EUT was measured on three orthogonal axis.

The Emissions measured at a distance of 3 m and the spectrum was searched from 30 MHz to 25 GHz. Measurements were performed using a Peak detector with 1 MHz RBW / 1 MHz VBW for the Peak values.

For the frequency below 1 GHz Quasi-Peak detector with 120 kHz RBW/300 kHz VBW was used.

Fresh batteries were used throughout all tests.

Only the worst-case results were presented.

RFID:

Frequencies above 1 GHz:

Channel	Frequency (MHz)	Pol.	Emission level Peak (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
902.750	1050.0000	V	49.91	74.00	24.09
902.750	3600.0000	V	52.12	74.00	21.88
914.750	1008.5000	V	54.34	74.00	19.66
914.750	2697.5200	V	59.30	74.00	14.70
914.750	3659.5200	V	58.80	74.00	15.20
927.250	1033.5000	V	53.93	74.00	20.07
927.250	2772.0000	V	57.94	74.00	16.06

Channel	Frequency (MHz)	Pol.	Emission level Average (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
902.750	1050.0000	V	40.20	54.00	13.80
902.750	3600.0000	V	42.41	54.00	11.59
914.750	1008.5000	V	44.63	54.00	9.37
914.750	2697.5200	V	49.59	54.00	4.41
914.750	3659.5200	V	49.09	54.00	4.91
927.250	1033.5000	V	44.22	54.00	9.78
927.250	2772.0000	V	48.23	54.00	5.77

Note: Peak Emission level values include antenna factor, cable losses and amplifier gain.
 Average Emission Level is calculated from Peak Emission level plus the duty cycle factor (-9.71 dB)

Frequencies below 1 GHz:


Frequency MHz	Quasi-Peak dB μ V/m	Polarity	Corr. dB	Limit dB μ V/m	Margin dB
960.000	40.3	H	25.7	43.5	3.2
965.000	38.6	H	26.0	54.0	15.4

Note: Correction factor includes antenna gain and cable loss

There were no additional emissions or change in existing emissions when the RFID was operated simultaneously with the Bluetooth and WiFi.

Duty cycle correction factor calculation:

Number of transmissions within 100 ms is 1

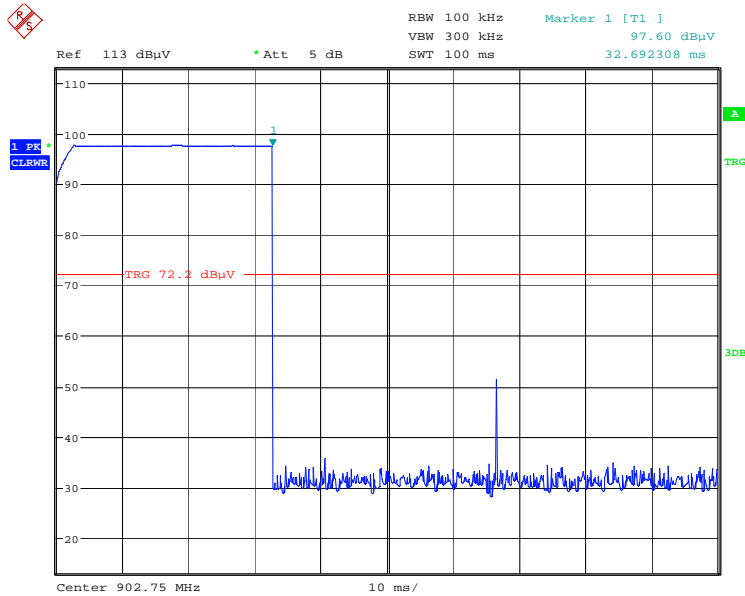

Date: 27.NOV.2009 10:49:02

Transmission width is 32.692308 ms.

Duty cycle factor calculation: $20 \times \text{Log}(32.692308 \text{ ms} / 100 \text{ ms}) = -9.71 \text{ dB}$

Bluetooth:


Channel	Frequency (MHz)	Pol.	Emission level Peak (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
2402	4804	V	48.04	74.00	25.96
2402	4804	H	46.72	74.00	27.28
2441	4875	V	50.04	74.00	23.96
2441	4875	H	47.28	74.00	26.72
2480	4924	V	47.68	74.00	26.32
2480	4924	H	45.79	74.00	28.21

Channel	Frequency (MHz)	Pol.	Emission level Average (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
2402	4804	V	6.79	54.00	47.21
2402	4804	H	5.47	54.00	48.53
2441	4875	V	8.79	54.00	45.21
2441	4875	H	6.03	54.00	47.94
2480	4924	V	6.43	54.00	47.57
2480	4924	H	4.54	54.00	49.46

Note: Note: Peak Emission level values include antenna factor, cable losses and amplifier gain. Average Emission Level is calculated from Peak Emission level plus the duty cycle factor (-41.25 dB)

There were no additional emissions or change in existing emissions when the Bluetooth was operated simultaneously with the RFID and WiFi.

Delta Marker Measurement for 2.4835 GHz Band Edge

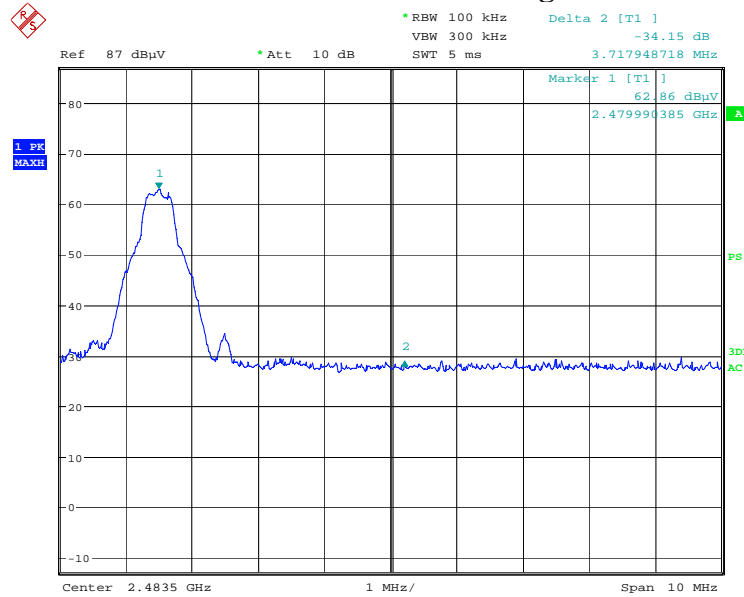

Date: 2.DEC.2009 08:52:14

Measured Field Strength for High Channel in 1 MHz RBW/3 MHz VBW = 97.54 dBμV/m

Delta Marker = -34.15 dB


Therefore, Peak Field Strength = 97.54 dBμV/m - 34.15 dB = 63.39 dBμV/m

Limit = 74 dBμV/m

Average Field Strength = 63.39 dBμV/m - 41.25 dB (Duty cycle factor) = 22.14 dBμV/m


Limit = 54 dBμV/m

Duty cycle correction factor calculation:
 Number of transmissions within 100 ms is 2

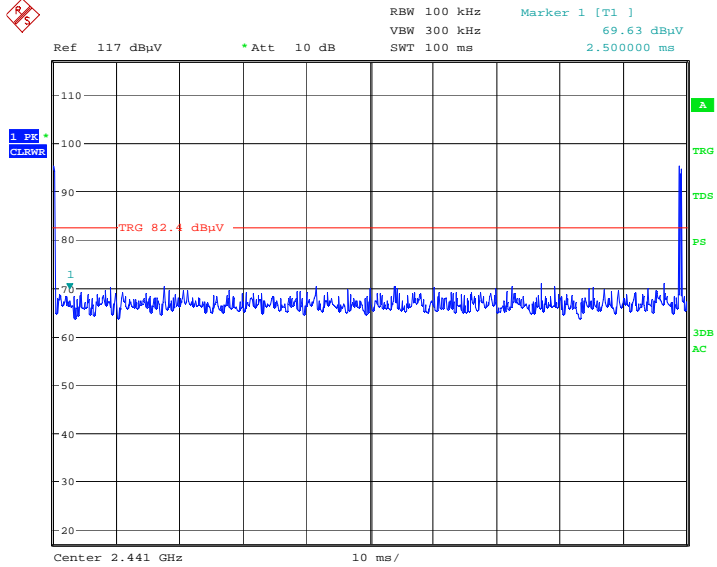

Date: 2.DEC.2009 12:41:09

Transmission width is 432.69 µs.

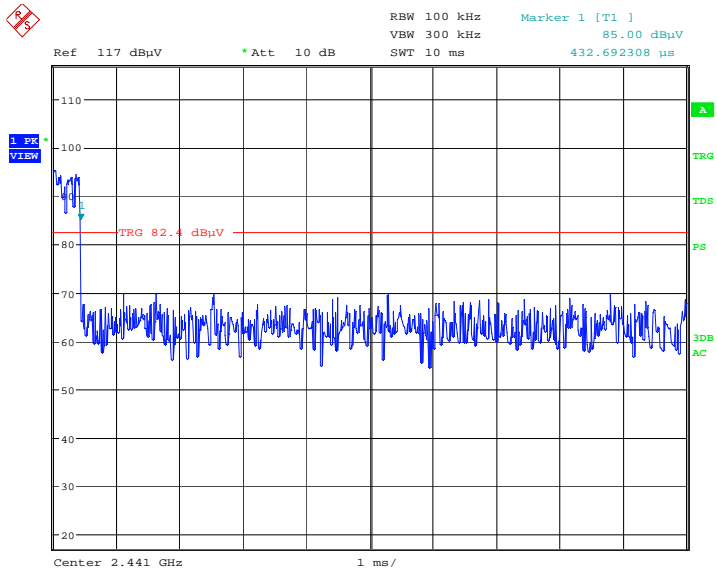

Date: 2.DEC.2009 12:42:37

Duty cycle factor calculation: $20 \times \log(2 \times 0.43269 \text{ ms} / 100 \text{ ms}) = -41.25 \text{ dB}$

WiFi:

CCK:


Channel	Frequency (MHz)	Pol.	Emission level Peak (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
2412	4823.0	V	50.77	74.00	23.23
2412	4823.0	H	46.23	74.00	27.77
2432	4875.0	V	51.66	74.00	22.34
2432	4875.0	H	46.98	74.00	27.02
2462	4924.5	V	52.17	74.00	21.83
2462	4924.5	H	47.56	74.00	26.44

Channel	Frequency (MHz)	Pol.	Emission level Average (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
2412	4823.0	V	40.36	54.00	13.64
2412	4823.0	H	37.56	54.00	16.44
2432	4875.0	V	42.65	54.00	11.35
2432	4875.0	H	38.12	54.00	15.88
2462	4924.5	V	42.01	54.00	11.99
2462	4924.5	H	39.68	54.00	14.32


Note: Emission level Peak and Average values include antenna factor, cable losses and amplifier gain.

There were no additional emissions or change in existing emissions when the WiFi was operated simultaneously with the Bluetooth and RFID.

2.4835 GHz Band Edge Measurements:

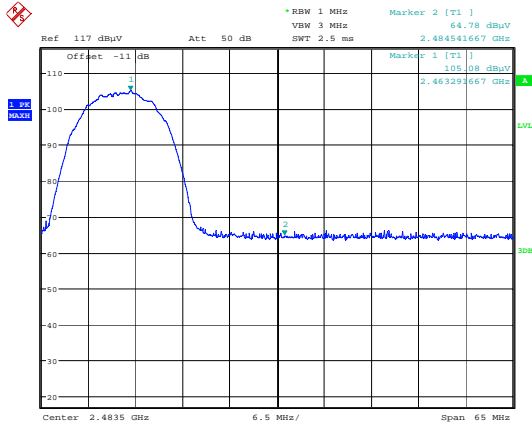

Date: 4.DEC.2009 09:45:15

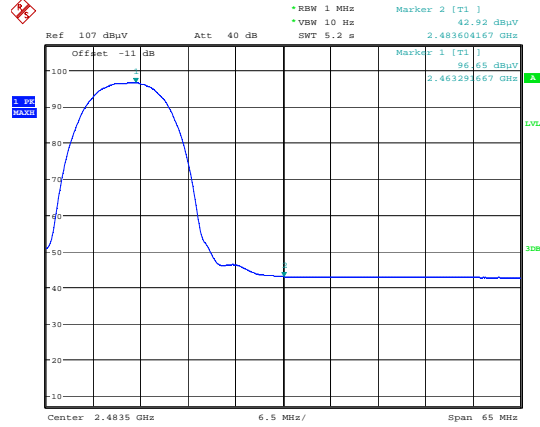

Date: 4.DEC.2009 09:46:27

Frequency, MHz	Emission level Peak, dBμV/m	Limit, dBμV/m	Margin, dB
2483.5	64.78	74.00	9.22

Frequency, MHz	Emission level Average, dBμV/m	Limit, dBμV/m	Margin, dB
2483.5	42.92	54.00	11.08

OFDM:

Channel	Frequency (MHz)	Pol.	Emission level Peak (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
2412	4823.0	V	52.23	74.00	21.77
2412	4823.0	H	46.93	74.00	27.07
2432	4875.0	V	50.29	74.00	23.71
2432	4875.0	H	43.62	74.00	30.38
2462	4924.5	V	51.57	74.00	22.43
2462	4924.5	H	45.56	74.00	28.44



Channel	Frequency (MHz)	Pol.	Emission level Average (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
2412	4823.0	V	43.25	54.00	10.75
2412	4823.0	H	38.84	54.00	15.16
2432	4875.0	V	41.98	54.00	12.02
2432	4875.0	H	36.25	54.00	17.75
2462	4924.5	V	42.08	54.00	11.92
2462	4924.5	H	37.52	54.00	16.48

There were no additional emissions or change in existing emissions when the WiFi was operated simultaneously with the Bluetooth and RFID.



Nemko Canada Inc.

2.4835 GHz Band Edge Measurements:

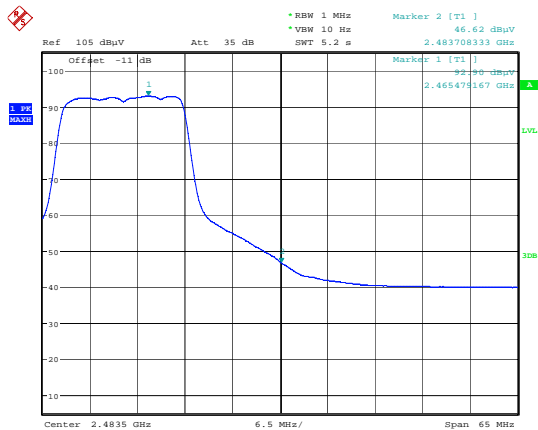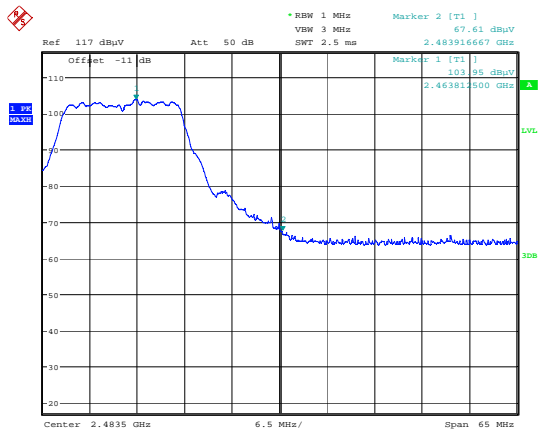

Date: 4.DEC.2009 09:30:36

Date: 4.DEC.2009 09:21:31

Frequency, MHz	Emission level Peak, dBμV/m	Limit, dBμV/m	Margin, dB
2483.5	67.61	74.00	6.39

Frequency, MHz	Emission level Average, dBμV/m	Limit, dBμV/m	Margin, dB
2483.5	46.62	54.00	7.38

Clause 15.247(b)(1) Maximum peak output power of Frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 W.

Clause 15.247(b)(2) Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band

For frequency hopping systems operating in the 902–928 MHz band: 1 W for systems employing at least 50 hopping channels; and, 0.25 W for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Clause 15.247(b)(3) Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W. As an alternative to a peak power measurement, compliance with the 1 W limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Clause 15.247(b)(4) Maximum peak output power

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Results: Pass

Additional Observations:

The EUT was modified to perform the conducted measurements.

Fresh batteries were used throughout all tests.

RFID:

Peak Output Power:

	Channel 902.750 MHz	Channel 914.750 MHz	Channel 927.250 MHz	Limits	Margin (dB)
eGo	29.43 dBm	29.38 dBm	29.42 dBm	30 dBm	0.57
SeGo	29.34 dBm	29.31 dBm	29.36 dBm	30 dBm	0.64
ATA	29.29 dBm	29.37 dBm	29.42 dBm	30 dBm	0.58
Title 21	29.06 dBm	29.02 dBm	29.10 dBm	30 dBm	0.90
Allegro	29.07 dBm	29.08 dBm	29.17 dBm	30 dBm	0.83
Gen2	28.84 dBm	28.82 dBm	28.87 dBm	30 dBm	1.13

Note: all measurements were performed conducted using a peak detector with 1 MHz/3 MHz RBW/VBW.

Maximum antenna is 1.5 dBi

Maximum EIRP = 29.43 + 1.5 = 30.93 dBm

EIRP Limit: 36 dBm

Margin = 5.07 dB

Bluetooth:

Peak Output Power:

Frequency MHz	Output power dBm	Limits dBm	Margin dB	Antenna Gain dBi	EIRP dBm	EIRP Limits dBm	Margin dB
2402	1.99	30.00	28.01	1.30	3.29	36.00	32.71
2441	2.06	30.00	27.94	1.30	3.36	36.00	32.64
2480	2.00	30.00	28.00	1.30	3.30	36.00	32.70

Note: all measurements were performed conducted using a peak detector with 3 MHz/3 MHz RBW/VBW.


WiFi:

CCK


Frequency MHz	Output power dBm	Limits dBm	Margin dB	Antenna Gain dBi	EIRP dBm	EIRP Limits dBm	Margin dB
2412	11.74	30.00	18.26	4.40	16.14	36.00	19.86
2432	13.59	30.00	16.41	4.40	17.99	36.00	18.01
2462	12.03	30.00	17.97	4.40	16.43	36.00	19.57

Note: power measurements were performed according to FCC DTS guidelines using method 1 of the power option 2.


Channel 2412 MHz

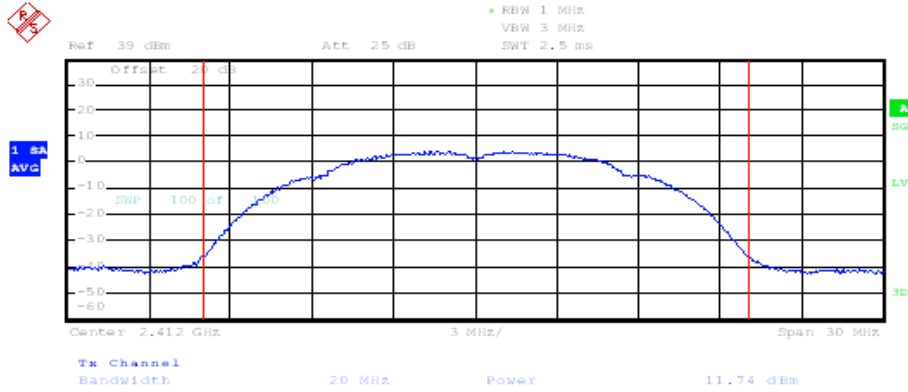

Channel 2432 MHz

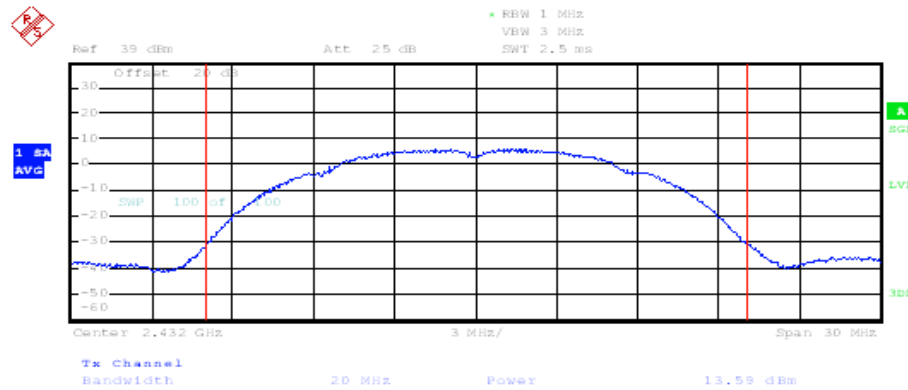

Channel 2462 MHz

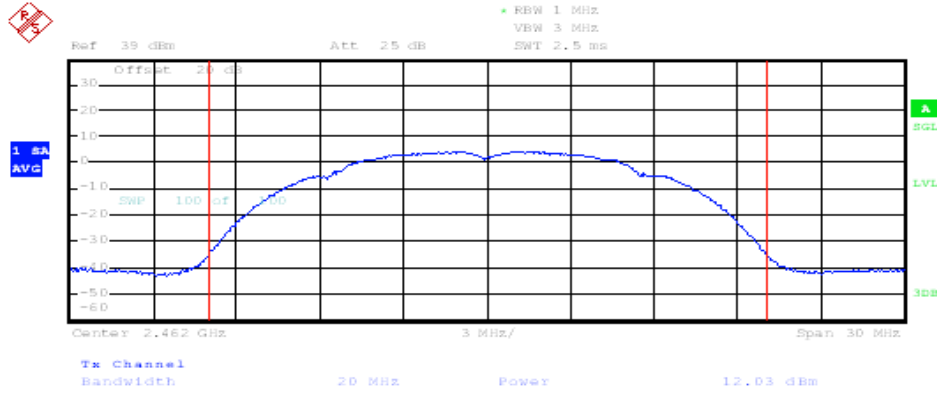


OFDM


Frequency MHz	Output power dBm	Limits dBm	Margin dB	Antenna Gain dBi	EIRP dBm	EIRP Limits dBm	Margin dB
2412	9.61	30.00	20.39	4.40	14.01	36.00	21.99
2432	10.06	30.00	19.94	4.40	14.46	36.00	21.54
2462	9.59	30.00	20.41	4.40	13.99	36.00	22.01

Note: power measurements were performed according to FCC DTS guidelines using method 1 of the power option 2.


Channel 2412 MHz

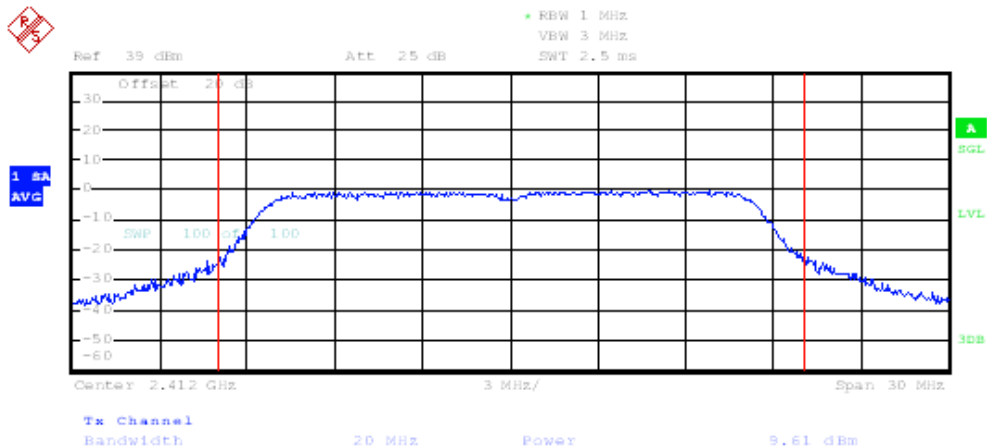

Channel 2432 MHz

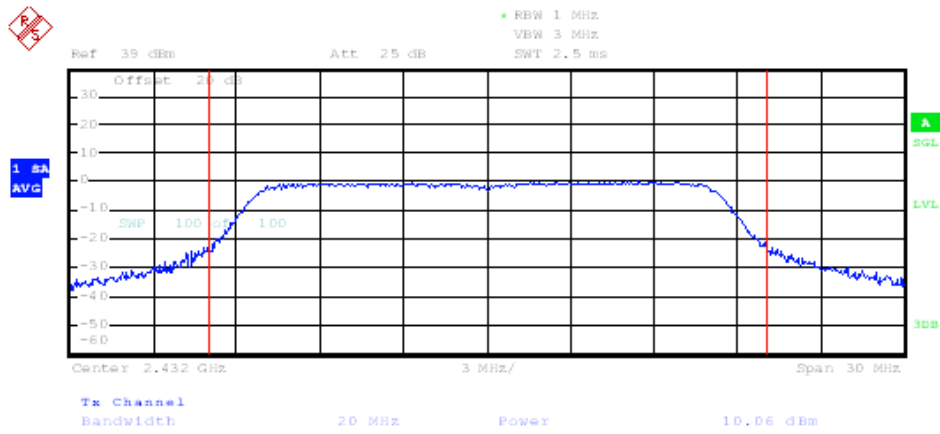

Channel 2462 MHz

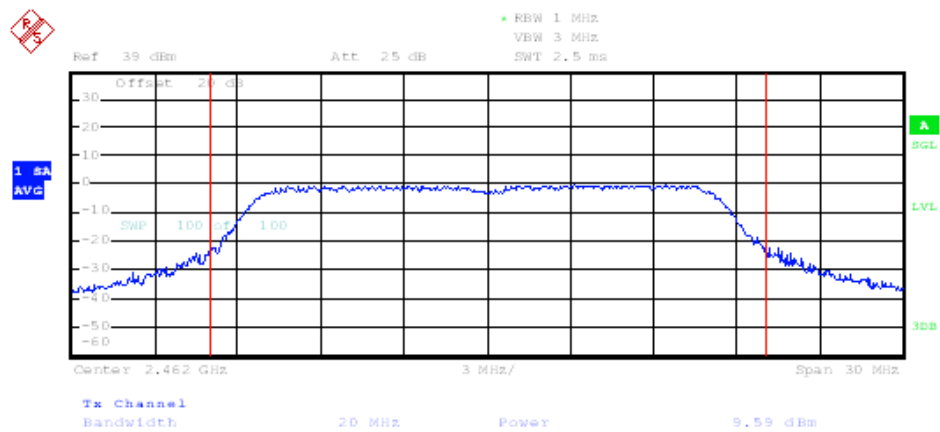

Clause 15.247(d) Radiated Emissions Not in Restricted Bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Results: Pass

Additional Observations:

The EUT was modified to perform the conducted measurements. Measurements were performed using a Peak detector with 100 kHz RBW / 300 kHz VBW.

Fresh batteries were used throughout all tests.

No emissions were detected higher than 30 dB below the in-band emission measured with 100 kHz IF bandwidth.




Nemko Canada Inc.

RFID:


eGo

Lower Band Edge Hopping off:

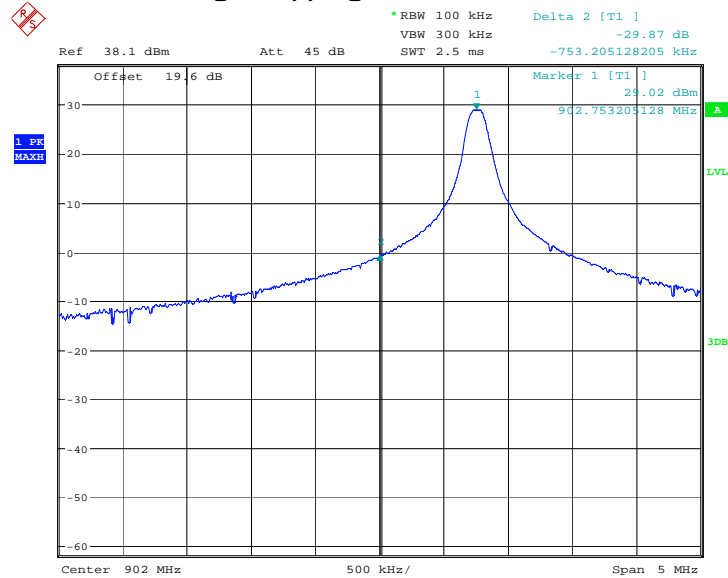


Date: 30.NOV.2009 14:19:04

Lower Band Edge Hopping On:

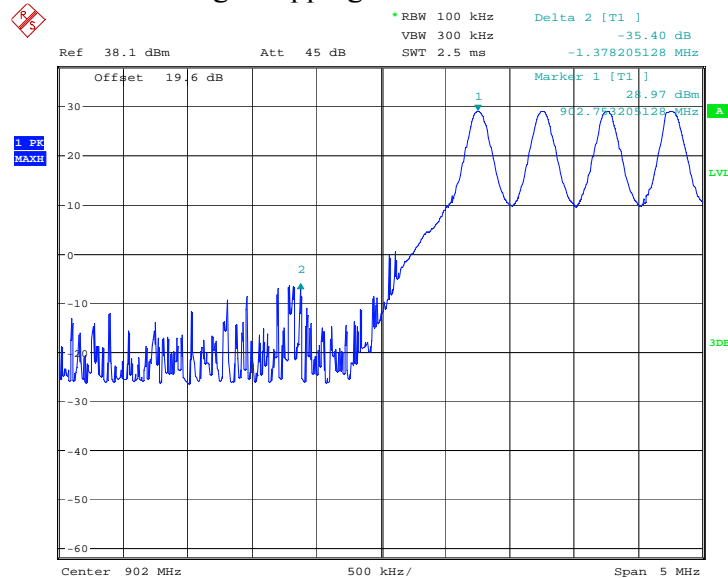


Date: 30.NOV.2009 14:10:54

Higher Band Edge Hopping Off:

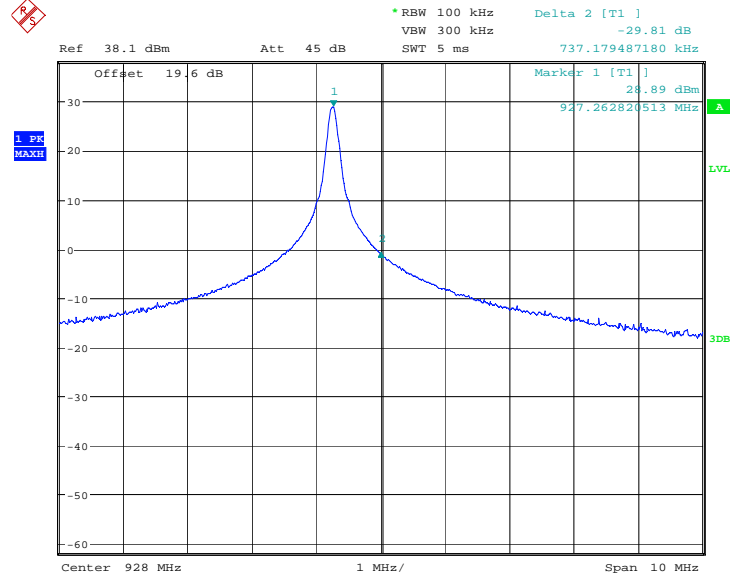

Date: 30.NOV.2009 14:00:57

Higher Band Edge Hopping On:

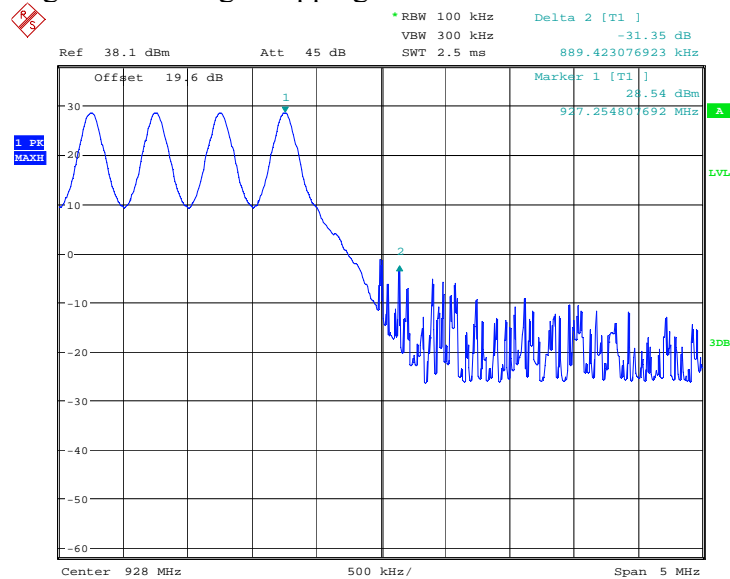


Date: 30.NOV.2009 14:07:21



Nemko Canada Inc.


SeGo

Lower Band Edge Hopping Off:

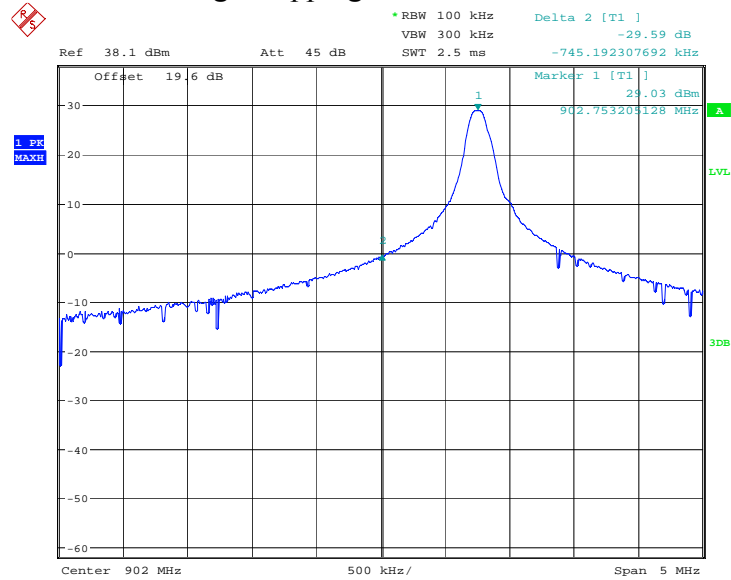


Date: 30.NOV.2009 14:33:46

Lower Band Edge Hopping On:

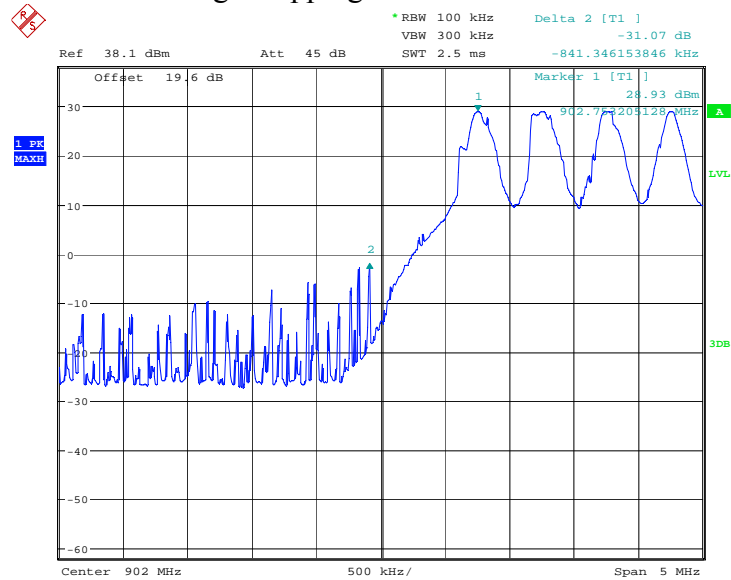


Date: 30.NOV.2009 14:36:24

Higher Band Edge Hopping Off:

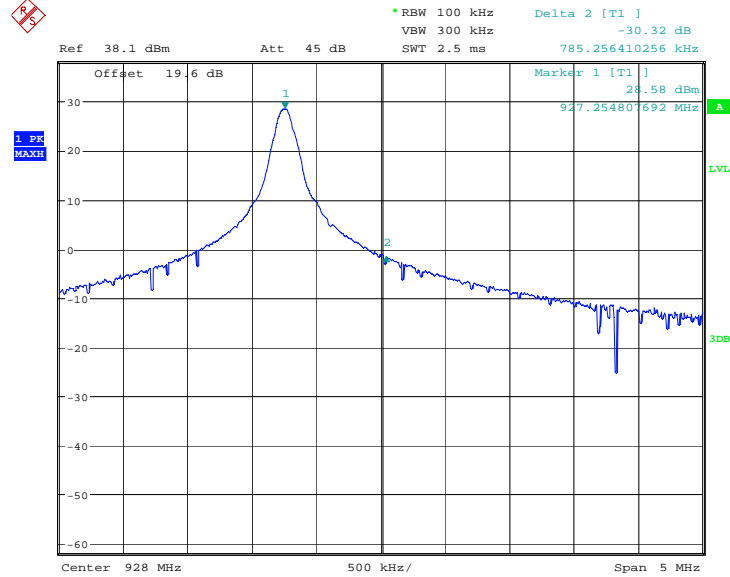

Date: 30.NOV.2009 14:55:10


Higher Band Edge Hopping On:

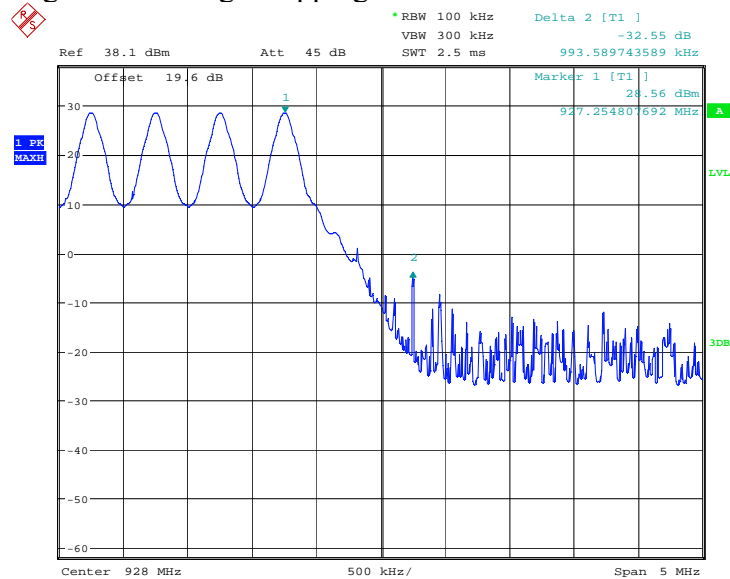

Date: 30.NOV.2009 14:39:03


ATA

Lower Band Edge Hopping Off:

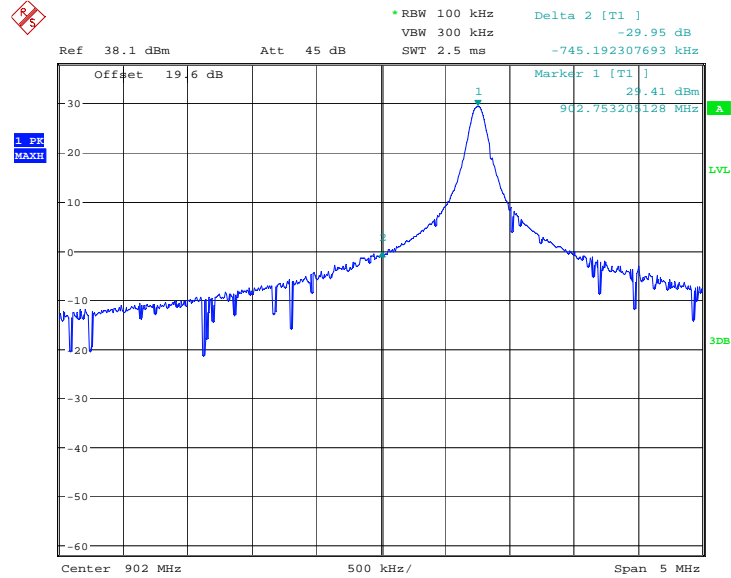


Date: 30.NOV.2009 15:35:29

Lower Band Edge Hopping On:

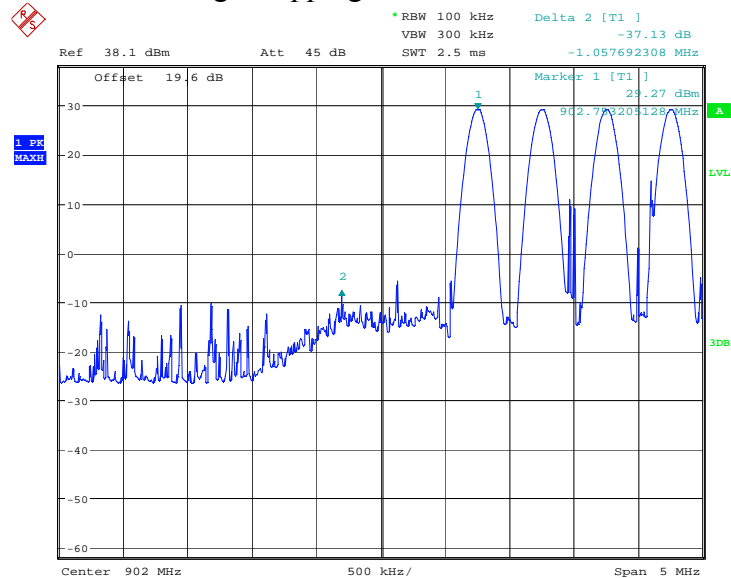


Date: 30.NOV.2009 15:03:10

Higher Band Edge Hopping Off:

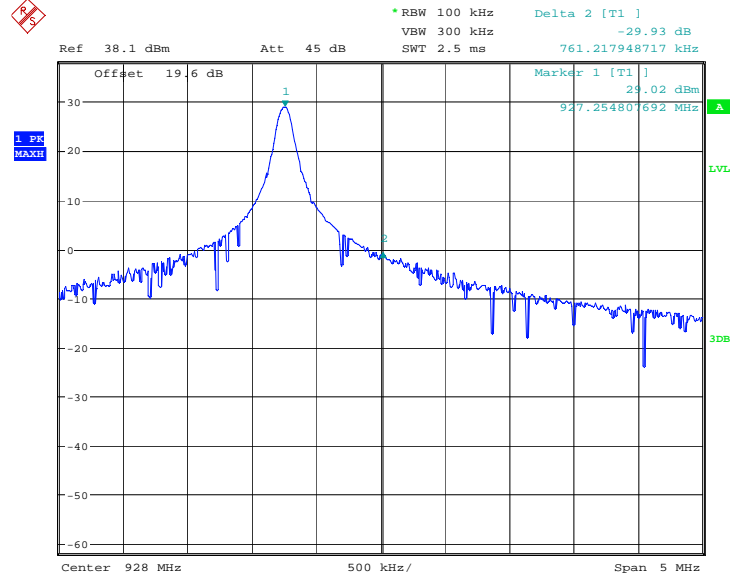

Date: 30.NOV.2009 15:17:22

Higher Band Edge Hopping On:

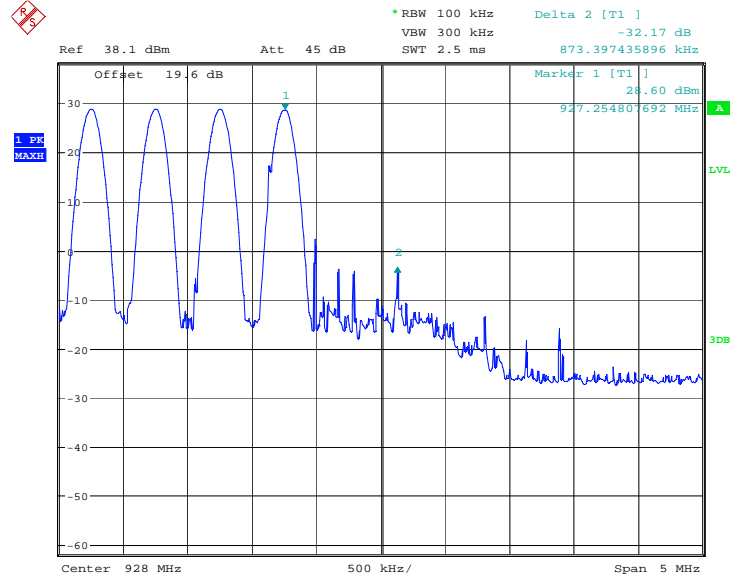


Date: 30.NOV.2009 15:04:38



Nemko Canada Inc.


Title-21

Lower Band Edge Hopping Off:

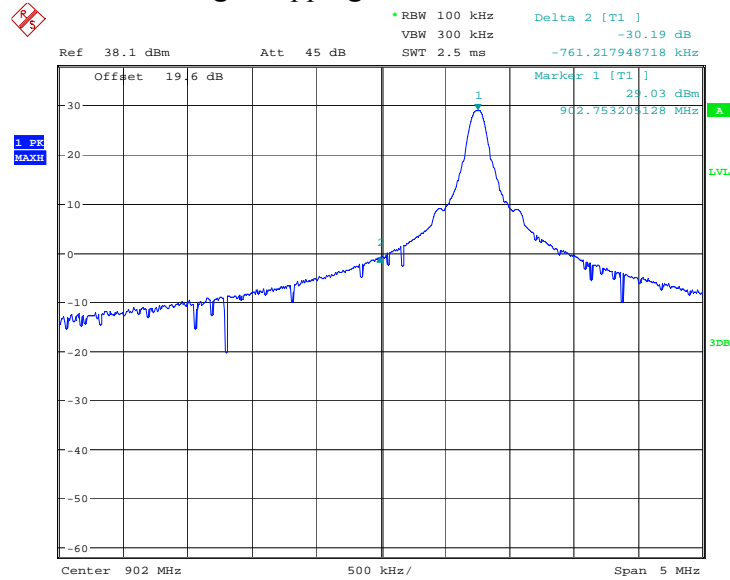


Date: 30.NOV.2009 15:48:18

Lower Band Edge Hopping On:

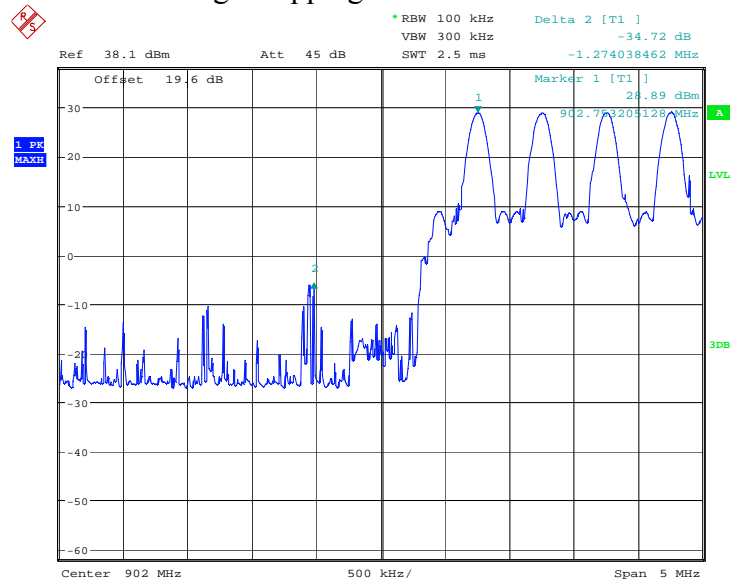


Date: 30.NOV.2009 15:51:48

Higher Band Edge Hopping Off:

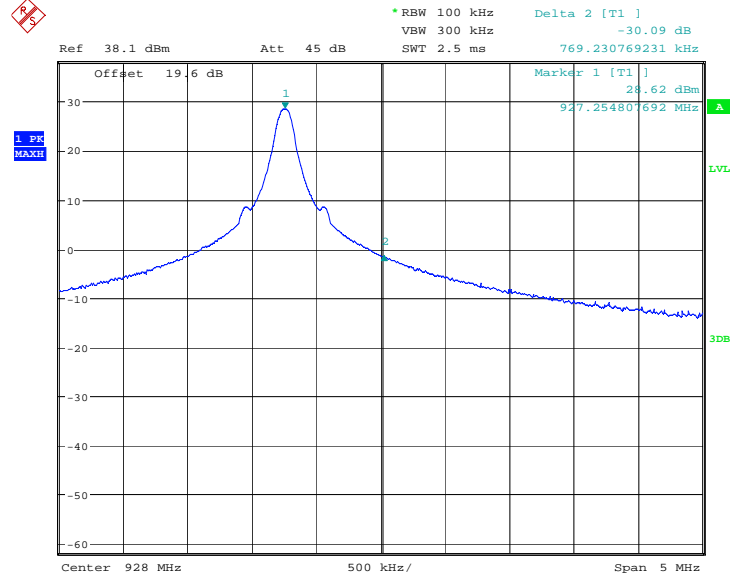

Date: 30.NOV.2009 16:27:39

Higher Band Edge Hopping On:

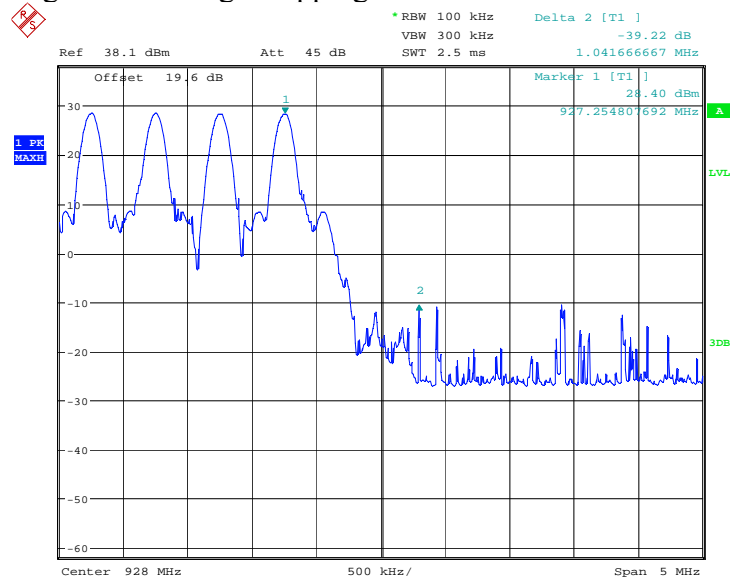


Date: 30.NOV.2009 15:53:32



Nemko Canada Inc.


Allegro

Lower Band Edge Hopping Off:

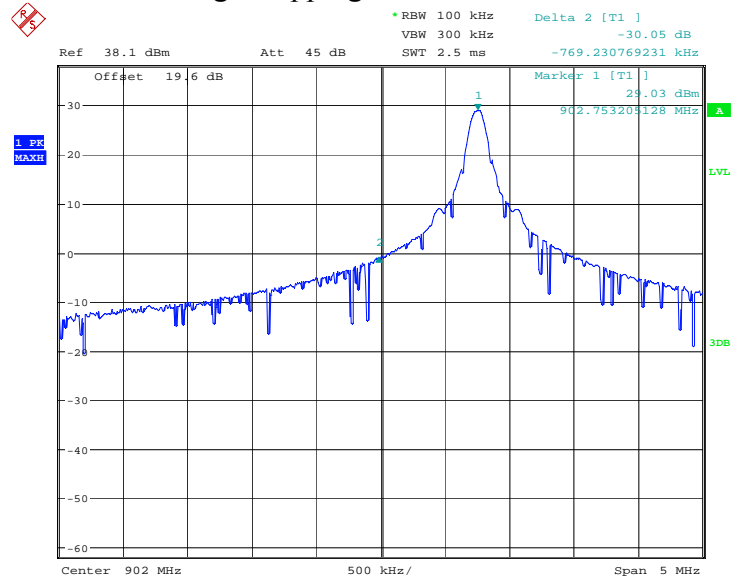


Date: 30.NOV.2009 16:43:44

Lower Band Edge Hopping On:

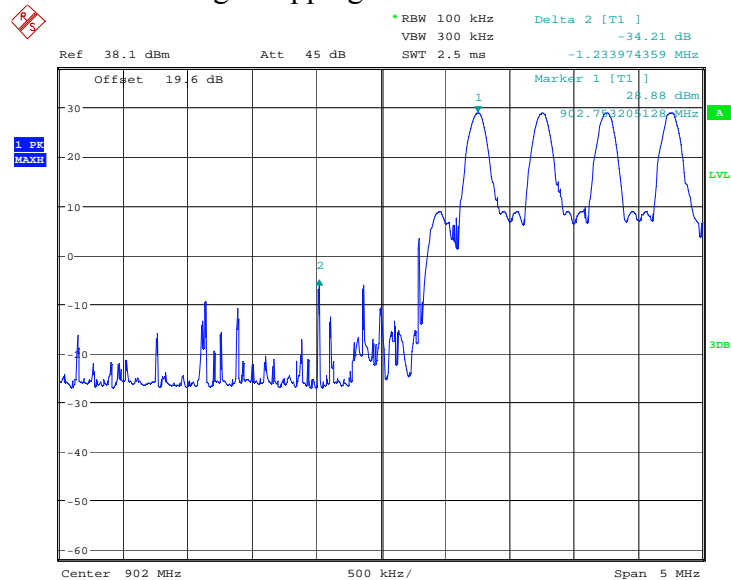


Date: 30.NOV.2009 16:34:00

Higher Band Edge Hopping Off:

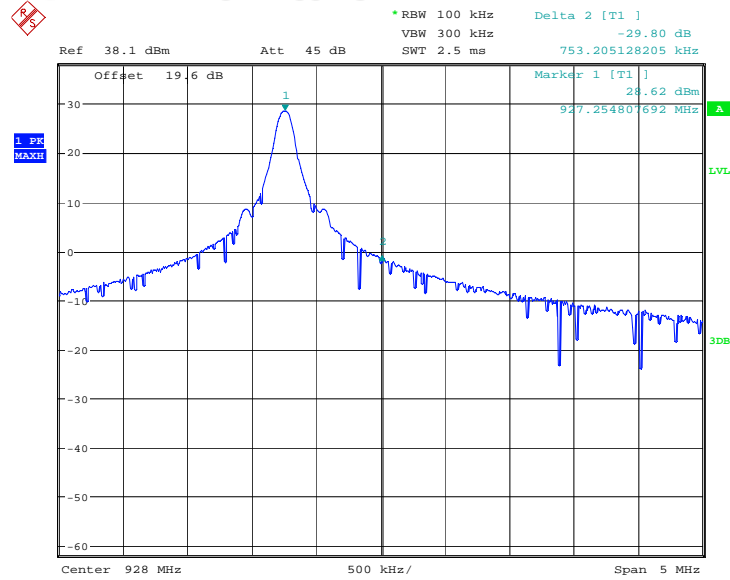

Date: 30.NOV.2009 16:55:32


Higher Band Edge Hopping On:

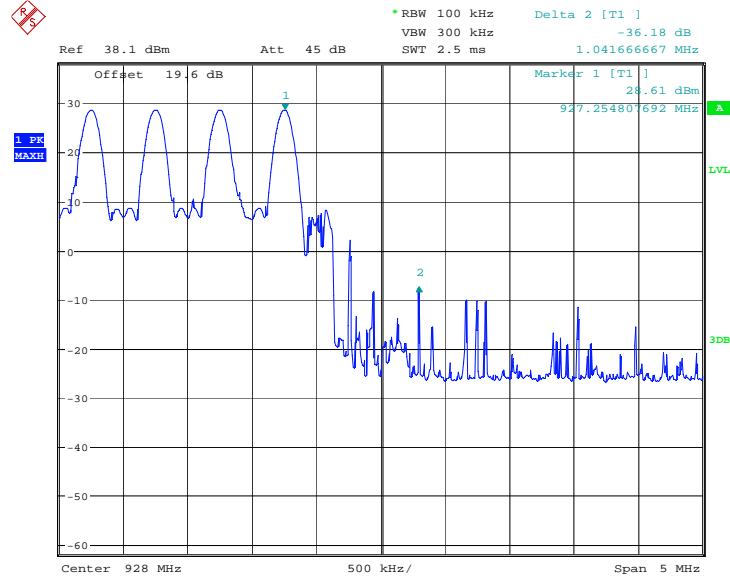

Date: 30.NOV.2009 16:31:31


Gen2

Lower Band Edge Hopping Off:

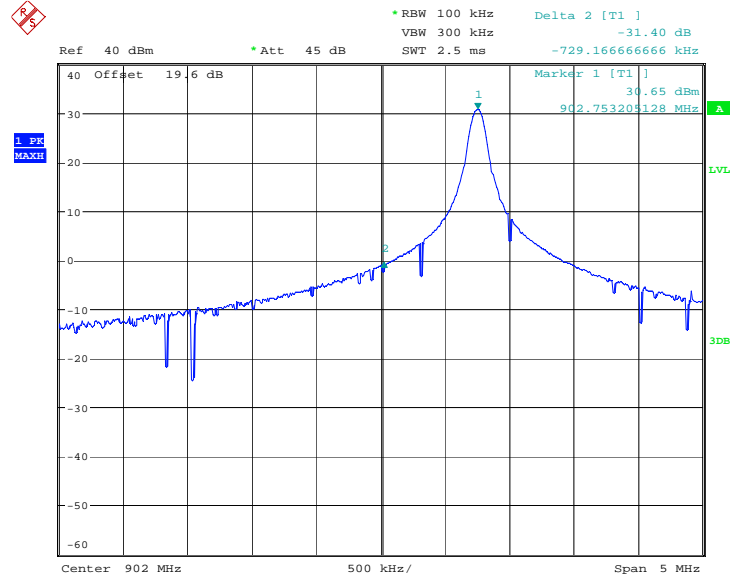


Date: 7.DEC.2009 09:57:29

Lower Band Edge Hopping On:

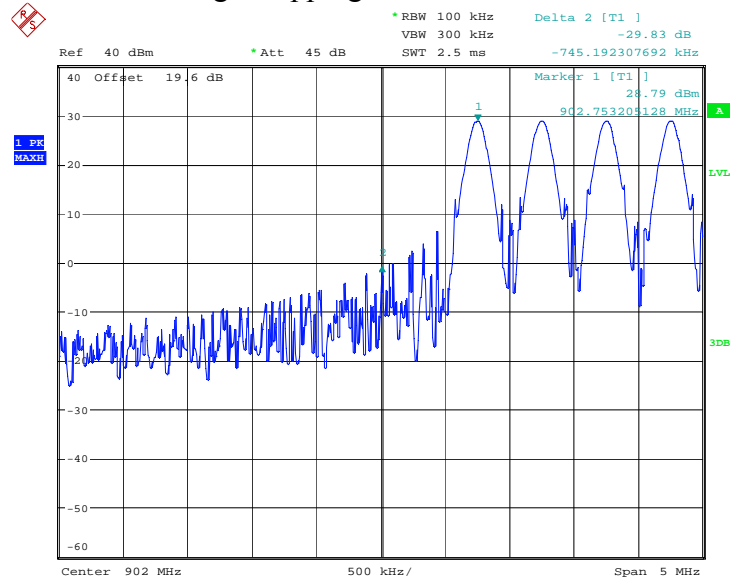


Date: 7.DEC.2009 10:07:45

Higher Band Edge Hopping Off:

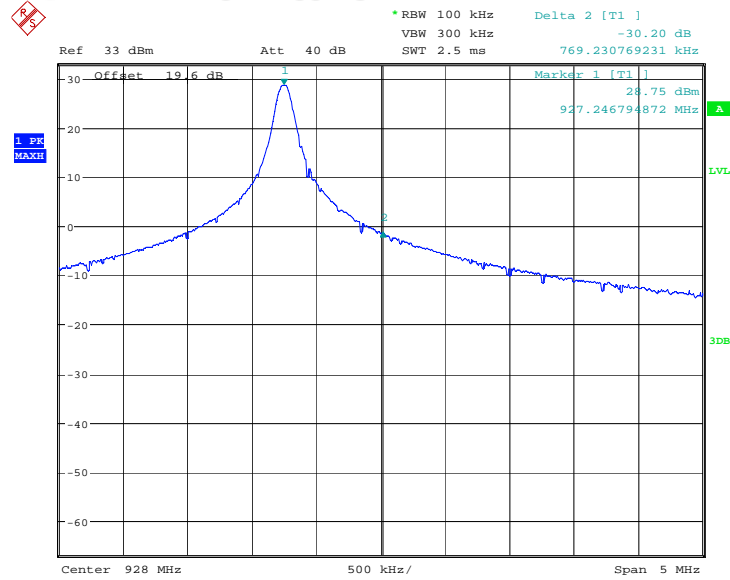

Date: 7.DEC.2009 09:43:34

Higher Band Edge Hopping On:

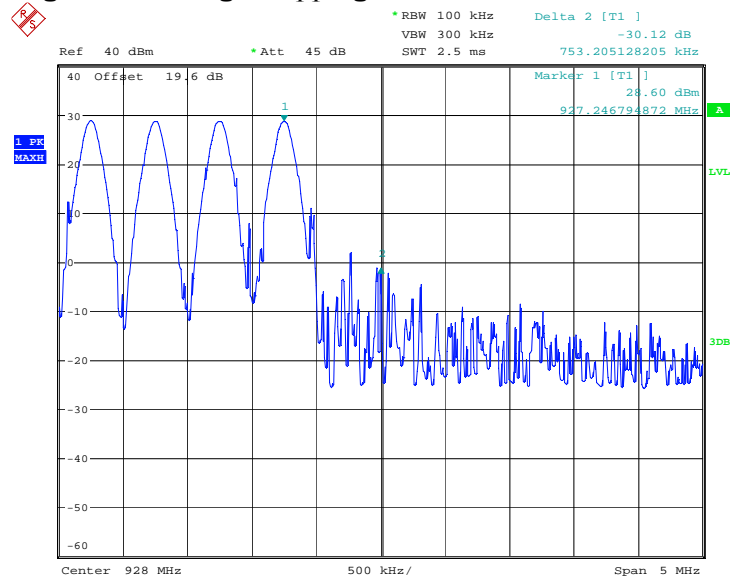


Date: 7.DEC.2009 10:14:32

There were no additional emissions or change in existing emissions when the RFID was operated simultaneously with the Bluetooth and WiFi.


Bluetooth

Lower Band Edge Hopping Off:

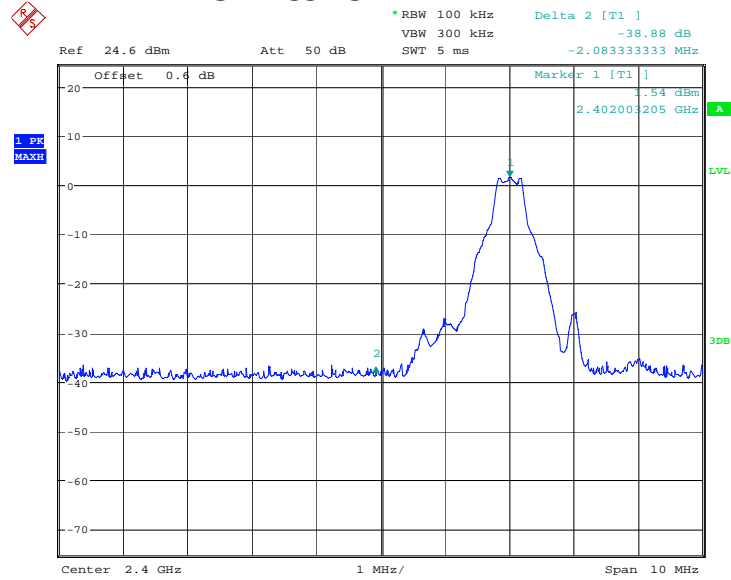


Date: 4.DEC.2009 13:35:25

Lower Band Edge Hopping On:

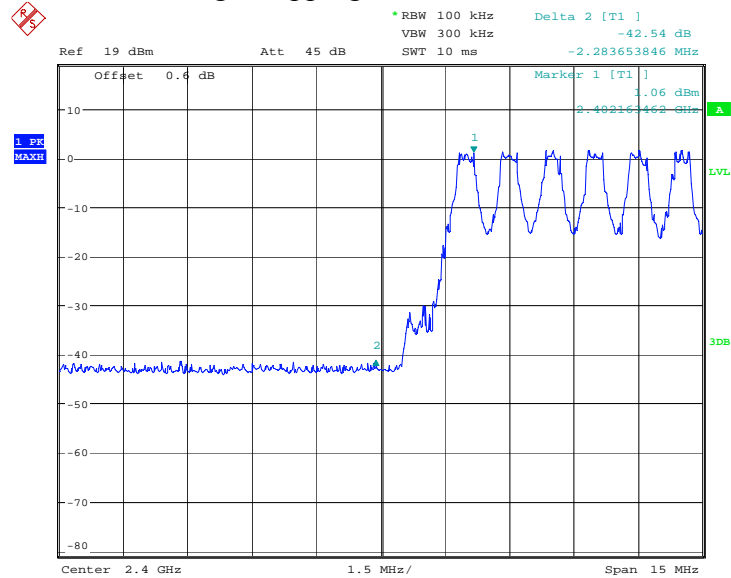


Date: 4.DEC.2009 13:43:40

Higher Band Edge Hopping Off:

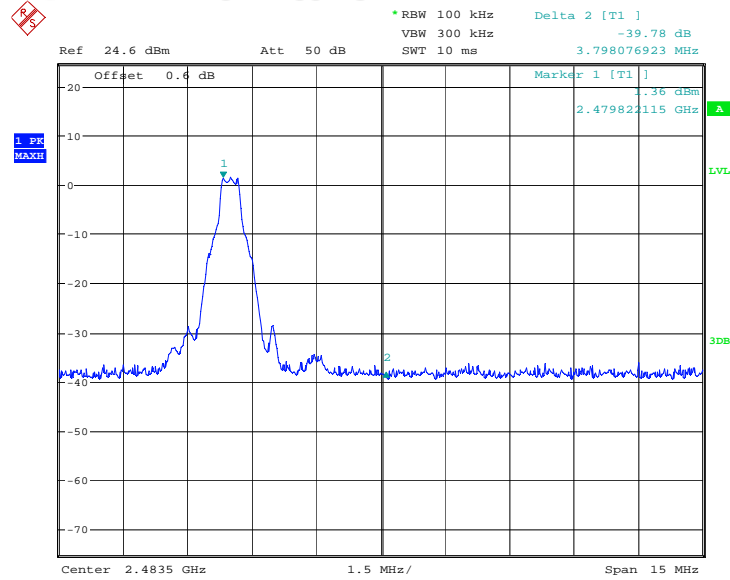

Date: 4.DEC.2009 13:38:59

Higher Band Edge Hopping On:

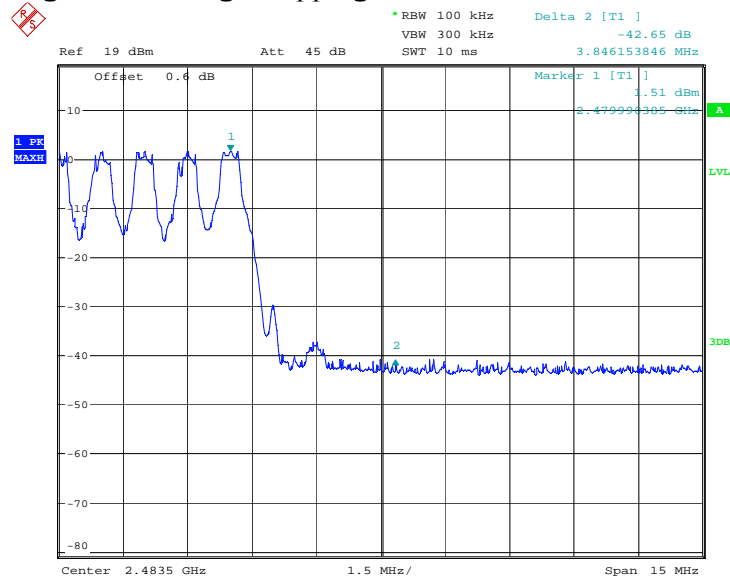


Date: 4.DEC.2009 13:42:00

There were no additional emissions or change in existing emissions when the Bluetooth was operated simultaneously with the RFID and WiFi.

WiFi:


CCK

Lower Band Edge

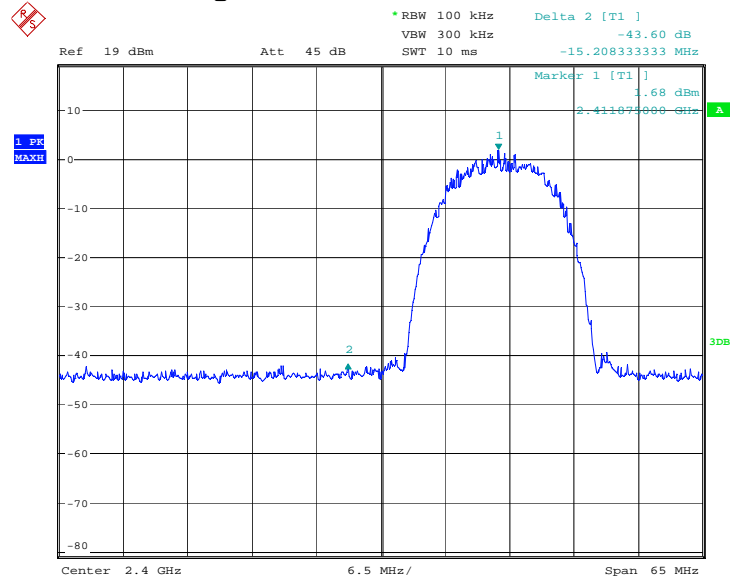

Date: 3.DEC.2009 17:29:55


Higher Band Edge

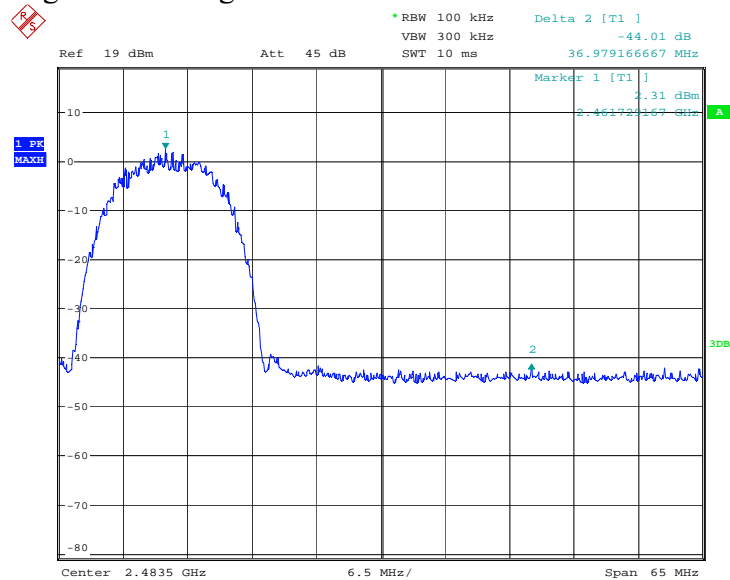

Date: 3.DEC.2009 17:21:59


OFDM

Lower Band Edge

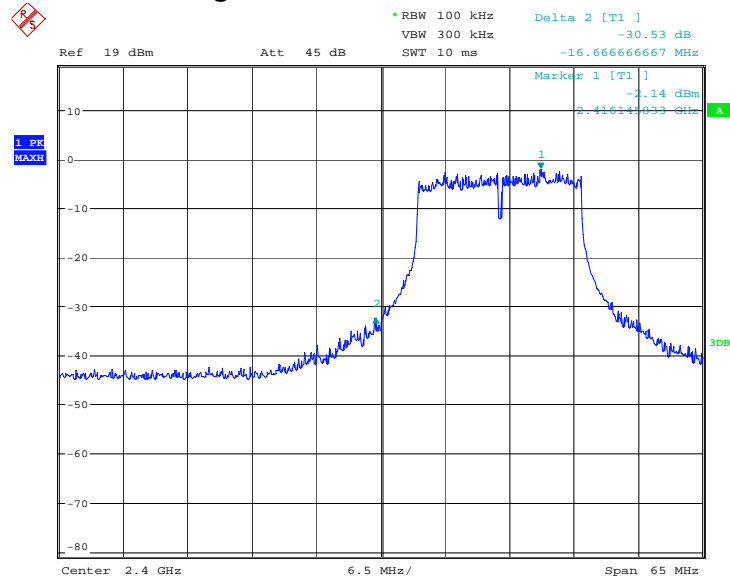

Date: 3..DEC.2009 17:27:27

Higher Band Edge

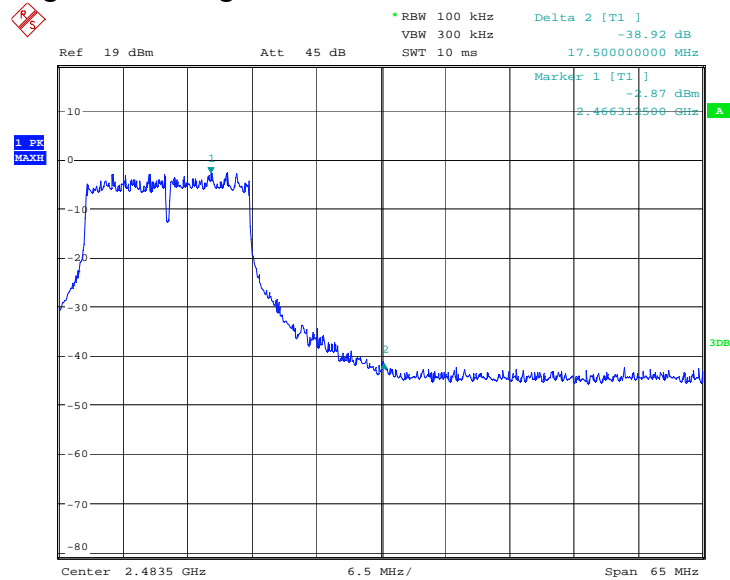

Date: 3..DEC.2009 17:26:23

There were no additional emissions or change in existing emissions when the WiFi was operated simultaneously with the Bluetooth and RFID.

Clause 15.247(e) Power Spectral Density for Digitally Modulated Devices

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Results: Pass

Additional Observations:

The EUT was modified to perform the conducted measurements.

Fresh batteries were used throughout all tests.

WiFi



CCK

Freq. MHz	Conducted spectral Density dBm/3 kHz	Spectral Density Limit dBm/3 kHz	Margin dB
2412	-13.08	8.00	21.08
2432	-12.51	8.00	20.51
2462	-10.79	8.00	18.79

OFDM

Freq. MHz	Conducted spectral Density dBm/3 kHz	Spectral Density Limit dBm/3 kHz	Margin dB
2412	-17.94	8.00	25.94
2432	-16.33	8.00	24.33
2462	-17.18	8.00	25.18



CCK
Channel 2412

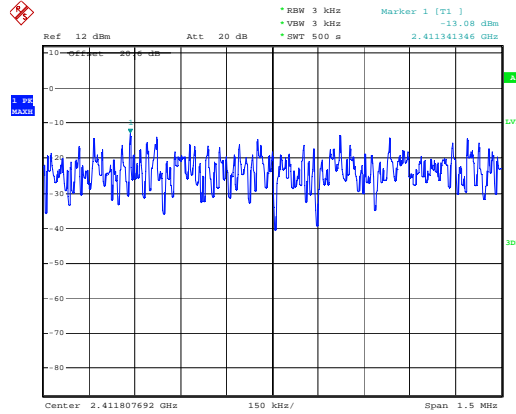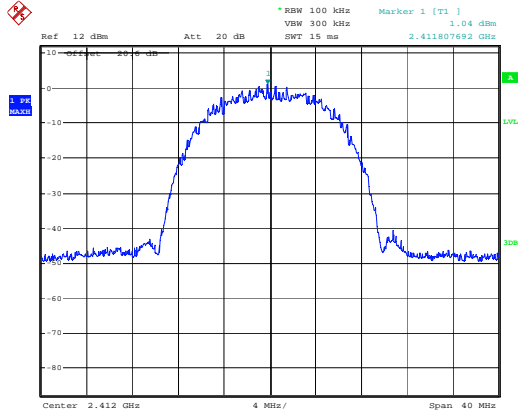

Date: 4.DEC.2009 12:27:50

Date: 4.DEC.2009 12:41:06



Channel 2432

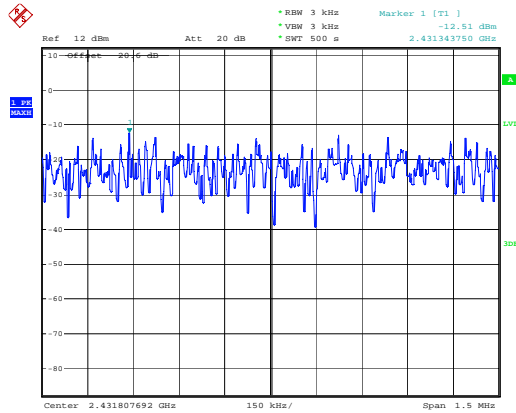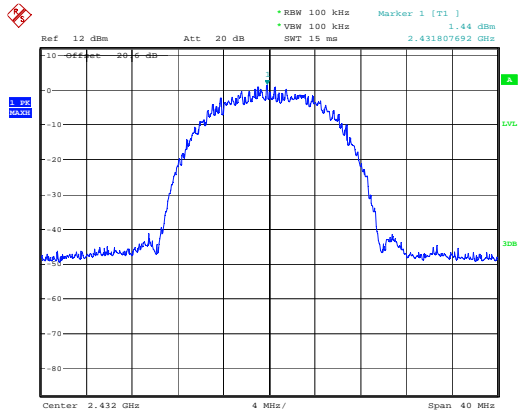

Date: 4.DEC.2009 12:14:10

Date: 4.DEC.2009 12:26:49



Channel 2462

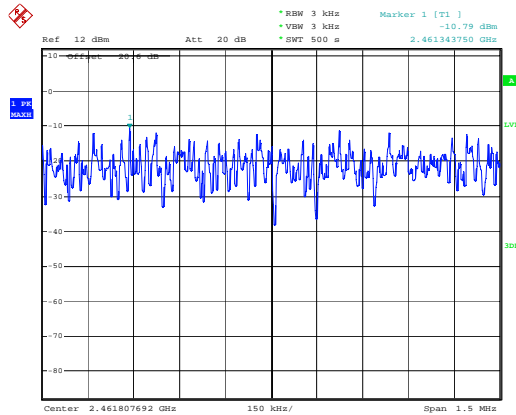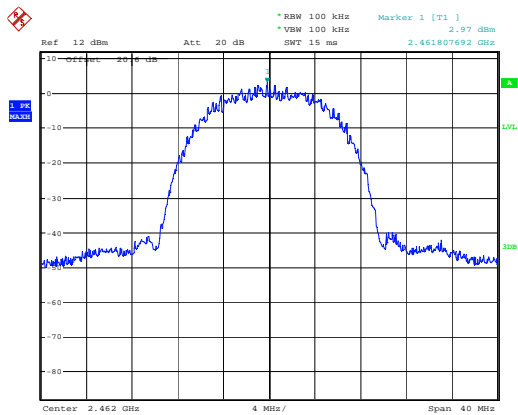

Date: 4.DEC.2009 12:03:43

Date: 4.DEC.2009 12:12:39



OFDM
Channel 2412

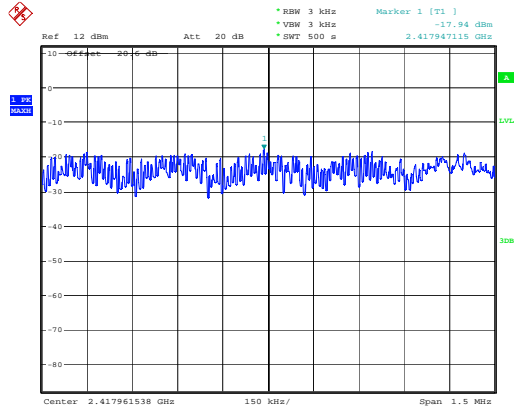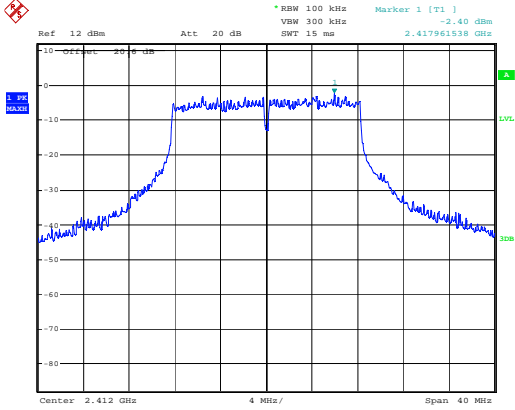

Date: 4.DEC.2009 11:36:13

Date: 4.DEC.2009 11:52:32



Channel 2432

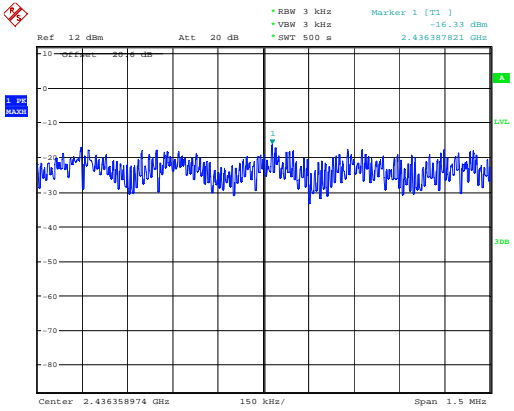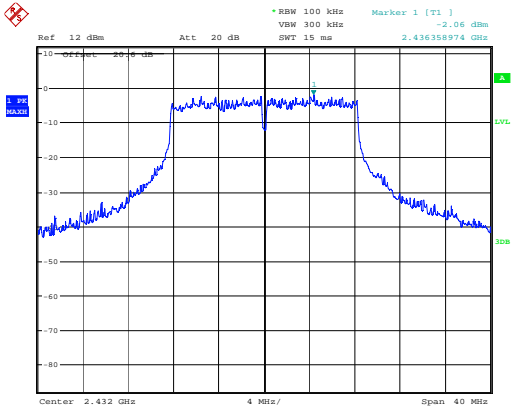

Date: 4.DEC.2009 11:24:30

Date: 4.DEC.2009 11:34:38

Channel 2462

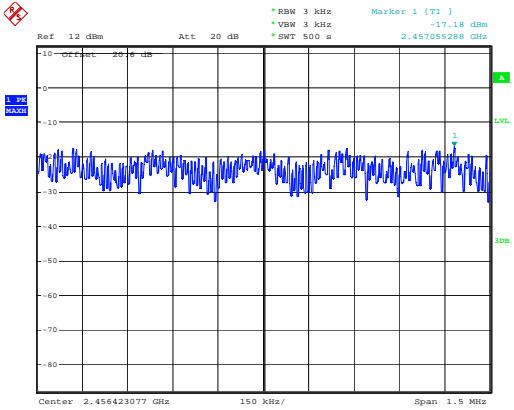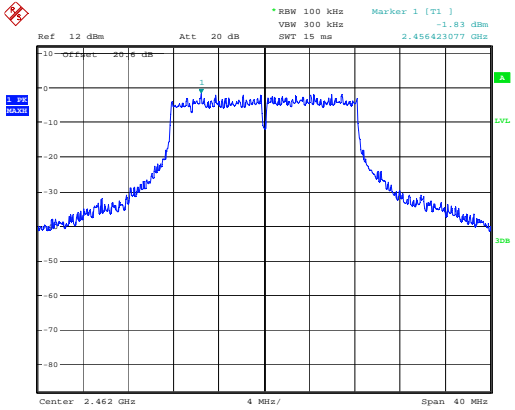


Date: 4.DEC.2009 11:53:39

Date: 4.DEC.2009 12:02:22

Appendix B : Setup Photographs

Spurious Emissions Setup:

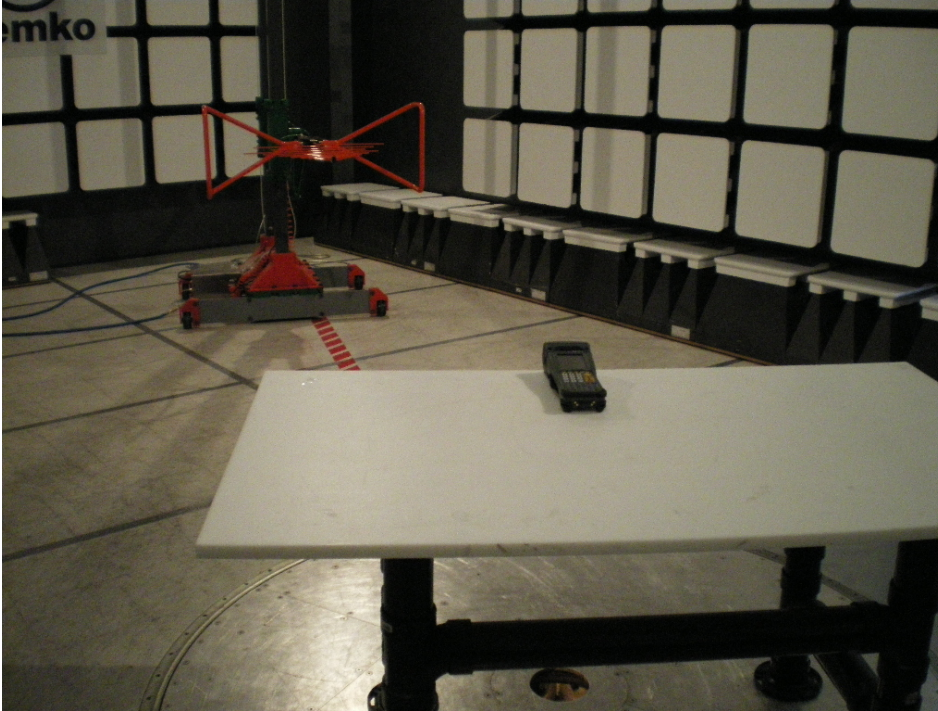

Appendix C : Block Diagram of Test Setups

Radiated Emissions above 30 MHz Test Site

