

# TEST REPORT

for

FCC Part 22 Subpart H / Part 24 Subpart E  
Canada RSS-132 / RSS-133

of

E.U.T. : Rugged Tablet PC

Model : M9700

FCC ID : T5M9700WBW

IC ID : 4609A-9700WBW

for

APPLICANT : DAP Technologies LTD

ADDRESS : 4535 Boul. Wilfrid-Hamel Suite 100, Quebec, G1P  
2J7, Canada

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**

NO. 34. LIN 5. DINGFU, LINKOU DIST.,  
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052 Fax:(02)26010910

<http://www.etc.org.tw> ; e-mail : [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 12-10-RBF-008-01

# TEST REPORT CERTIFICATION

Applicant : DAP Technologies LTD  
4535 Boul. Wilfrid-Hamel Suite 100,Quebec,G1P 2J7, Canada

Manufacture : WINMATE Communication INC.  
9F, No.111-6, Shing-De Rd., San-Chung District, New Taipei City  
241 Taiwan

Description of Device :

a) Type of EUT : Rugged Tablet PC

b) Trade Name : dAP

c) Model No. : M9700

d) Power Supply : Adapter:  
Input : 100~240V , 1.8A , 50-60Hz  
Output: DC12V , 4.16A

Regulation Applied : FCC 47 CFR, Part 22 Subpart H and Part 24 Subpart E  
Canada RSS132 Issue 2 and RSS-133 Issue 5

## I HEREBY CERTIFY THAT:

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date Test Item Received : Oct. 09, 2012  
Date Test Campaign Completed : Oct. 23, 2012  
Date of Issue : Nov. 08, 2012

Test Engineer :



( Vincent Chang, Engineer )

Approve & Authorized :



S. S. Liou, Section Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN

<b>Table of Contents</b>	<b>Page</b>
<b>1 GENERAL INFORMATION.....</b>	<b>1</b>
1.1 Product Description.....	1
1.2 Characteristics of Device .....	1
1.3 Test Methodology .....	1
1.4 Test Facility.....	1
1.5 Test Summary .....	2
<b>2 SYSTEM TEST CONFIGURATION .....</b>	<b>3</b>
2.1 Justification .....	3
2.2 Devices for Tested System.....	3
<b>3 PEAK POWER MEASUREMENT .....</b>	<b>4</b>
3.1 Applied Standard.....	4
3.2 Measurement Procedure.....	4
3.3 Measurement Equipment .....	4
3.4 Test Result.....	5
<b>4. ERP &amp; EIRP MEASUREMENT .....</b>	<b>6</b>
4.1 Standard Applicable .....	6
4.2 Measurement Procedure.....	6
4.3 Test Result.....	8
4.4 Result Calculation .....	12
4.5 Test Equipment .....	12
<b>5 OCCUPIED BANDWIDTH MEASUREMENT.....</b>	<b>13</b>
5.1 Standard Applicable .....	13
5.2 Measurement Procedure.....	13
5.3 Measurement Equipment .....	13
5.4 Test Result.....	14
<b>6 OUT OF BAND EMISSION AT ANTENNA TERMINALS .....</b>	<b>42</b>
6.1 Standard Applicable .....	42
6.2 Measurement Procedure.....	42
6.3 Measurement Equipment .....	42
6.4 Measurement Data .....	43
<b>7 SPURIOUS RADIATION MEASUREMENT .....</b>	<b>67</b>
7.1 Applicable Standard .....	67
7.2 Measurement Procedure.....	67
7.3 Measuring Instrument .....	67
7.4 Test Result.....	68

7.5 Photos of Test Setup.....	72
<b>8. FREQUENCY STABILITY MEASUREMENT .....</b>	<b>73</b>
8.1 Provisions Applicable .....	73
8.2 Measurement Procedure.....	73
8.3 Measurement Instrument.....	74
8.4 Measurement Data .....	75
<b>9 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>79</b>
9.1 Standard Applicable .....	79
9.2 Measurement Procedure.....	79
9.3 Conducted Emission Data .....	81
9.4 Result Data Calculation.....	95
9.5 Conducted Measurement Equipment .....	95
9.6 Photos of Conduction Measuring Setup.....	96

## 1 GENERAL INFORMATION

### 1.1 Product Description

- a) Type of EUT : Rugged Tablet PC
- b) Trade Name : dAP
- c) Model No. : M9700
- d) Power Supply : Adapter:  
Input : 100~240V , 1.8A , 50-60Hz  
Output: DC12V , 4.16A
- e) Model Difference : N/A
- f) Note : N/A

### 1.2 Characteristics of Device

The EUT is a rugged tablet PC.

This device includes 2G/3G, Bluetooth and 2.4GHz WiFi function.

### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 and FCC CFR 47, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO. 34. LIN 5. DINGFU, LINKOU DIST., NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Jan. 11, 2011.

Open Area Test Site Industry Canada Number: 2949A-1.

## 1.5 Test Summary

FCC Part Section (s)	RSS Section (s)	Test Description	Test Limit	Test Condition	Test Result	Note
<b>TRANSMITTER MODE (TX)</b>						
2.1049, 22.917(a), 24.238 (a)	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	
2.1051, 22.917(a) 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge/Conducted Spurious Emissions	<43+ log10 (P[Watts]) at Band Edge and for all outband emissions		PASS	
24.232(d)	RSS-133	(6.4) Peak-Average Ratio	<13 dB		PASS	
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	<7 Watts max. ERP	RADIATED	PASS	
24.232(c)	RSS-133 (6.4) [SRSP-510(5.1.2)]	Equivalent Isotropic Radiated Power	<2 Watts max. EIRP		PASS	
2.1053, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	<43+log10 (P[Watts]) for all outband emissions		PASS	
2.1055,22.355,24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	<2.5 ppm		PASS	
<b>RECEIVER MODE (RX) / DIGITAL EMISSIONS</b>						
N/A	RSS-132 (4.6) RSS-133 (6.6)	Receiver Spurious Emissions Limits	<RSS-Gen Limits [Section 6; Table 1]	RADIATED	PASS	

## 2 SYSTEM TEST CONFIGURATION

### 2.1 Justification

For the purposes of this test report ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT during the test. The simulate equipment was used to control the RF channel under the highest, middle and lowest frequency and transmit the maximum RF power.

### 2.2 Devices for Tested System

Device	Manufacture	Model	Description
Rugged Tablet PC *	WINMATE Communication INC.	M9700	1.5 Unshielded AC Adapter
Speaker	----	----	1.5m Unshielded AC Power Line 0.8m Unshielded Audio Cable
Mouse	Lenovo	M028UOL	1.5m Unshielded USB Cable

Remark “\*” means equipment under test.

#### 2.2.1 Test Channel – Frequency comparison table for test:

GSM 850		PCS 1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.2	512	1850.2
190	836.6	661	1880.0
251	848.8	810	1909.8

#### 2.2.2 Power Control Level (CMU200)

GSM 850	5 (33 dBm)
PCS 1900	0 (30 dBm)

### 3 PEAK POWER MEASUREMENT


#### 3.1 Applied Standard

According to FCC §2.1046.

#### 3.2 Measurement Procedure

The setup of the EUT as shown in figure 1. The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a Spectrum Analyzer. Transmitter output was read off the Spectrum Analyzer in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the Spectrum Analyzer reading.

Figure 1: Peak power measurement configuration.

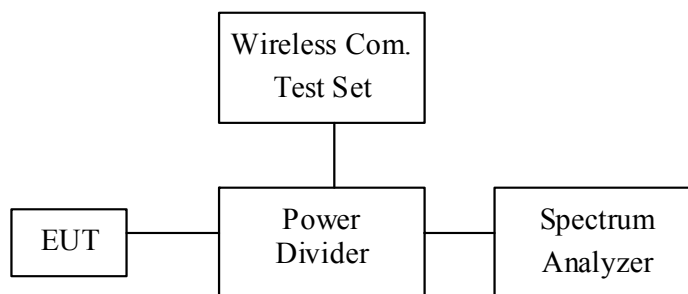

#### 3.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2013/09/20
Power Divider	SUHNER	4901.19.A	2013/08/12
Universal Digital Radiocommunication Tester	R&S	CMU200	2013/04/22



### 3.4 Test Result

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

(A) 850 band

Limits:

Power Control Level	Normal Peak Output Power	Tolerance (dB)
5	33dBm (2W)*	±2

Power measurements:

Test Mode	Channel	Frequency (MHz)	Peak Power (dBm)
GSM850 GPRS	128	824.2	31.59
	190	836.6	31.21
	251	848.8	31.32
GSM850 EDGE	128	824.2	31.61
	190	836.6	31.28
	251	848.8	31.35

(B) 1900 band

Limits:

Power Control Level	Normal Peak Output Power	Tolerance (dB)
0	30dBm (1W)*	±2

Power measurements:

Test Mode	Channel	Frequency (MHz)	Peak Power (dBm)
PCS1900 GPRS	512	1850.2	28.15
	661	1880.0	28.41
	810	1909.8	28.82
PCS1900 EDGE	512	1850.2	28.18
	661	1880.0	28.47
	810	1909.8	28.89

## 4. ERP & EIRP MEASUREMENT

### 4.3.1 Standard Applicable

According to FCC § 2.1046 and FCC § 22.913(b): The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts. FCC §24.232(b): The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

### 4.2 Measurement Procedure

1. Setup the configuration per figure 2 and 3 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° , and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.
7. Repeat step 6 until all frequencies need to be measured was complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

Figure 2: Frequencies measured below 1 GHz configuration


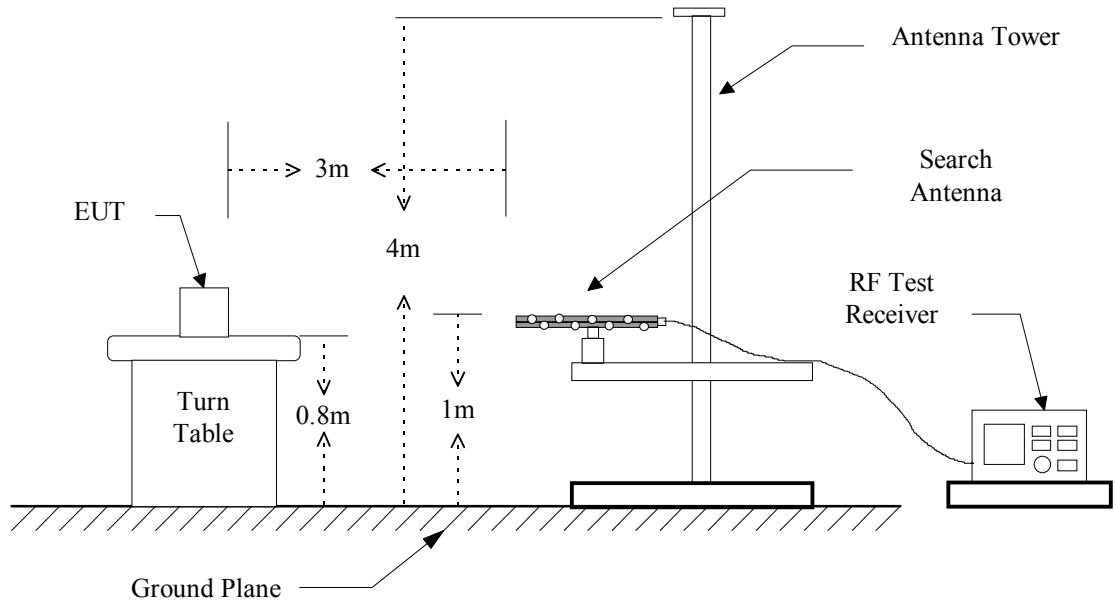


Figure 3: Frequencies measured above 1 GHz configuration

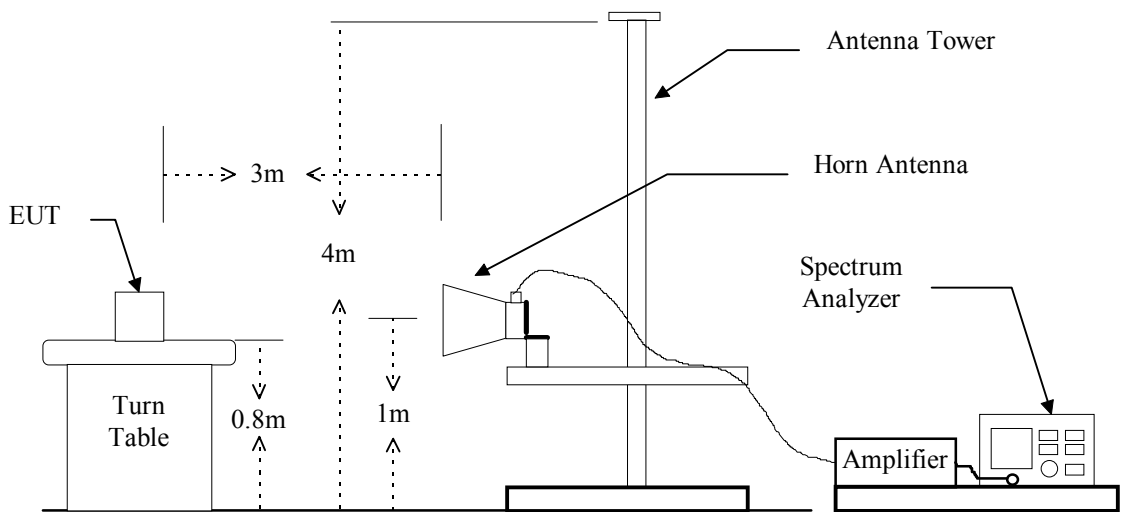

### 4.3 Test Result

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

#### GSM 850 Band (ERP)/(GPRS)

Test Mode	EUT Pol.	Channel	Frequency (MHz)	Polarity (H/V)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result ERP (dBm)	Limit (dBm)	Margin (dBm)
GSM850 GPRS	X	128	824.200	H	87.40	16.70	2.70	----	14.00	38.45	-24.45
			824.200	V	79.20	11.30	2.70	----	8.60	38.45	-29.85
		190	836.600	H	87.90	18.70	2.70	----	14.60	38.45	-23.85
			836.600	V	79.50	13.10	2.70	----	9.30	38.45	-29.15
		251	848.800	H	87.90	18.70	2.70	----	16.00	38.45	-22.45
			848.800	V	79.50	13.10	2.70	----	10.40	38.45	-28.05
	Y	128	824.200	H	81.60	10.90	2.70	----	8.20	38.45	-30.25
			824.200	V	82.10	14.20	2.70	----	11.50	38.45	-26.95
		190	836.600	H	81.60	11.60	2.70	----	8.90	38.45	-29.55
			836.600	V	83.40	16.20	2.70	----	13.50	38.45	-24.95
		251	848.800	H	81.70	12.50	2.70	----	9.80	38.45	-28.65
			848.800	V	83.60	17.20	2.70	----	14.50	38.45	-23.95
	Z	128	824.200	H	82.20	11.50	2.70	----	8.80	38.45	-29.65
			824.200	V	82.50	14.60	2.70	----	11.90	38.45	-26.55
		190	836.600	H	82.40	12.40	2.70	----	9.70	38.45	-28.75
			836.600	V	82.60	15.40	2.70	----	12.70	38.45	-25.75
		251	848.800	H	82.20	13.00	2.70	----	10.30	38.45	-28.15
			848.800	V	82.50	16.10	2.70	----	13.40	38.45	-25.05

**Note: For measured frequency below 1GHz, a tuned dipole antenna is used.**

**GSM 850 Band (EDGE)/(GPRS)**

Test Mode	EUT Pol.	Channel	Frequency (MHz)	Polarity (H/V)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result ERP (dBm)	Limit (dBm)	Margin (dBm)
GSM850 EDGE	X	128	824.200	H	87.60	16.90	2.70	----	14.20	38.45	-24.25
			824.200	V	79.40	11.50	2.70	----	8.80	38.45	-29.65
		190	836.600	H	87.50	17.50	2.70	----	14.80	38.45	-23.65
			836.600	V	79.30	12.10	2.70	----	9.40	38.45	-29.05
		251	848.800	H	88.00	18.80	2.70	----	16.10	38.45	-22.35
			848.800	V	79.70	13.30	2.70	----	10.60	38.45	-27.85
	Y	128	824.200	H	81.70	11.00	2.70	----	8.30	38.45	-30.15
			824.200	V	82.20	14.30	2.70	----	11.60	38.45	-26.85
		190	836.600	H	81.80	11.80	2.70	----	9.10	38.45	-29.35
			836.600	V	83.50	16.30	2.70	----	13.60	38.45	-24.85
		251	848.800	H	81.90	12.70	2.70	----	10.00	38.45	-28.45
			848.800	V	83.70	17.30	2.70	----	14.60	38.45	-23.85
	Z	128	824.200	H	82.30	11.60	2.70	----	8.90	38.45	-29.55
			824.200	V	82.60	14.70	2.70	----	12.00	38.45	-26.45
		190	836.600	H	82.50	12.50	2.70	----	9.80	38.45	-28.65
			836.600	V	82.80	15.60	2.70	----	12.90	38.45	-25.55
		251	848.800	H	82.40	13.20	2.70	----	10.50	38.45	-27.95
			848.800	V	82.50	16.10	2.70	----	13.40	38.45	-25.05

**Note: For measured frequency below 1GHz, a tuned dipole antenna is used.**

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

**PCS 1900 Band (EIRP)/ GPRS**

Test Mode	EUT Pol.	Channel	Frequency (MHz)	Polarity (H/V)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result ERP (dBm)	Limit (dBm)	Margin (dBm)
PCS1900 GPRS	X	512	1850.200	H	120.80	12.00	1.60	7.70	18.10	33.00	-14.90
			1850.200	V	115.20	6.50	1.60	7.70	12.60	33.00	-20.40
		661	1880.000	H	120.90	12.20	1.70	7.70	18.20	33.00	-14.80
			1880.000	V	115.80	7.20	1.70	7.70	13.20	33.00	-19.80
		810	1909.800	H	121.00	12.40	1.70	7.70	18.40	33.00	-14.60
			1909.800	V	115.90	7.40	1.70	7.70	13.40	33.00	-19.60
	Y	512	1850.200	H	117.20	8.40	1.60	7.70	14.50	33.00	-18.50
			1850.200	V	118.50	9.80	1.60	7.70	15.90	33.00	-17.10
		661	1880.000	H	117.50	8.80	1.70	7.70	14.80	33.00	-18.20
			1880.000	V	118.70	10.10	1.70	7.70	16.10	33.00	-16.90
		810	1909.800	H	117.60	9.00	1.70	7.70	15.00	33.00	-18.00
			1909.800	V	118.90	10.40	1.70	7.70	16.40	33.00	-16.60
	Z	512	1850.200	H	118.20	9.40	1.60	7.70	15.50	33.00	-17.50
			1850.200	V	118.90	10.20	1.60	7.70	16.30	33.00	-16.70
		661	1880.000	H	118.40	9.70	1.70	7.70	15.70	33.00	-17.30
			1880.000	V	118.70	10.10	1.70	7.70	16.10	33.00	-16.90
		810	1909.800	H	118.50	9.90	1.70	7.70	15.90	33.00	-17.10
			1909.800	V	118.50	10.00	1.70	7.70	16.00	33.00	-17.00

**PCS 1900 Band (EIRP)/ EDGE**

Test Mode	EUT Pol.	Channel	Frequency (MHz)	Polarity (H/V)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result ERP (dBm)	Limit (dBm)	Margin (dBm)
PCS1900 EDGE	X	512	1850.200	H	119.80	11.00	1.60	7.70	17.10	33.00	-15.90
			1850.200	V	114.50	5.80	1.60	7.70	11.90	33.00	-21.10
		661	1880.000	H	119.70	11.00	1.70	7.70	17.00	33.00	-16.00
			1880.000	V	114.50	5.90	1.70	7.70	11.90	33.00	-21.10
		810	1909.800	H	119.90	11.30	1.70	7.70	17.30	33.00	-15.70
			1909.800	V	114.60	6.10	1.70	7.70	12.10	33.00	-20.90
	Y	512	1850.200	H	116.30	7.50	1.60	7.70	13.60	33.00	-19.40
			1850.200	V	117.80	9.10	1.60	7.70	15.20	33.00	-17.80
		661	1880.000	H	116.40	7.70	1.70	7.70	13.70	33.00	-19.30
			1880.000	V	117.60	9.90	1.70	7.70	15.00	33.00	-18.00
		810	1909.800	H	116.80	8.20	1.70	7.70	14.20	33.00	-18.80
			1909.800	V	117.50	9.00	1.70	7.70	15.00	33.00	-18.00
	Z	512	1850.200	H	117.50	8.70	1.60	7.70	14.80	33.00	-18.20
			1850.200	V	117.80	9.10	1.60	7.70	15.20	33.00	-17.80
		661	1880.000	H	117.40	8.70	1.70	7.70	14.70	33.00	-18.30
			1880.000	V	117.90	9.30	1.70	7.70	15.30	33.00	-17.70
		810	1909.800	H	117.80	9.20	1.70	7.70	15.20	33.00	-17.80
			1909.800	V	117.80	9.30	1.70	7.70	15.30	33.00	-17.70

### 3.4 Result Calculation

Result calculation is as following:

ERP calculation:

Result = SG Reading - Cable Loss + Antenna Gain Corrected (if applicable)

Antenna Gain Corrected is used for antenna other than dipole to convert radiated power to ERP.

EIRP calculation:

Result = SG Reading - Cable Loss + Antenna Gain Corrected

Antenna Gain Corrected is the antenna gain (dBi) of the horn antenna for transmitting.

$$mW = \log^{-1} \left[ \frac{\text{Result(dBm)}}{10} \right]$$

### 4.5 Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Rohde & Schwarz	ESCI	2013/04/26
Spectrum Analyzer	Rohde & Schwarz	FSP40	2013/09/20
Dipole Antenna	Schwarzbeck	1166;1167	2014/09/07
Dipole Antenna	Schwarzbeck	897;898	2014/09/07
Log-periodic Antenna	EMCO	3146	2012/11/03
Amplifier	HP	8447D	2013/05/16
Horn Antenna	EMCO	3116	2012/10/26
Horn Antenna	EMCO	3115	2013/05/17
Signal generator	HP	83732B	2013/09/06



## 5 OCCUPIED BANDWIDTH MEASUREMENT

### 5.1 Standard Applicable

According to §FCC 2.1049.

### 5.2 Measurement Procedure

The setup of the EUT as shown in figure 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW was set to about but not less than 1% of emission BW, VBW is set to 3 times the RBW, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

### 5.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2013/09/20
Power Divider	SUHNER	4901.19.A	2013/08/12
Universal Digital Radiocommunication Tester	R&S	CMU200	2013/04/22

## 5.4 Test Result

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

### 5.4.1 GSM 850 Band (GPRS)

Test Mode	Channel	Frequency (MHz)	Bandwidth (kHz)	Occupied Bandwidth (kHz)
GSM850 GPRS	128	824.2	314.00	240.00
	190	836.6	314.00	242.00
	251	848.8	312.00	244.00


*Note: Please refer to the following pages for chart*

(A) Bandwidth (-26dB)  
**Channel Low**



\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz                    19.52 dBm  
 Ref 30 dBm                    Att 30 dB                    SWT 10 ms                    824.206000000 MHz

1 PK  
 VIEW

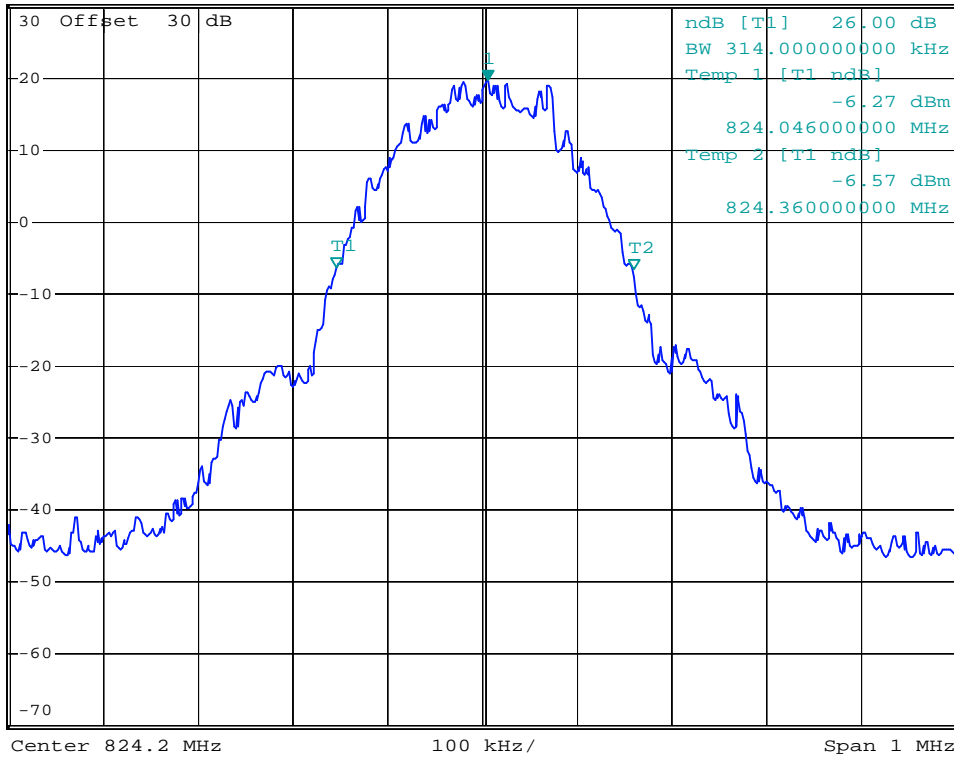


### Channel Middle



\*RBW 10 kHz    Marker 1 [T1 ]  
VBW 30 kHz                    19.06 dBm  
SWT 10 ms                      836.616000000 MHz

Ref 30 dBm                    Att 30 dB


1 PK  
VIEW

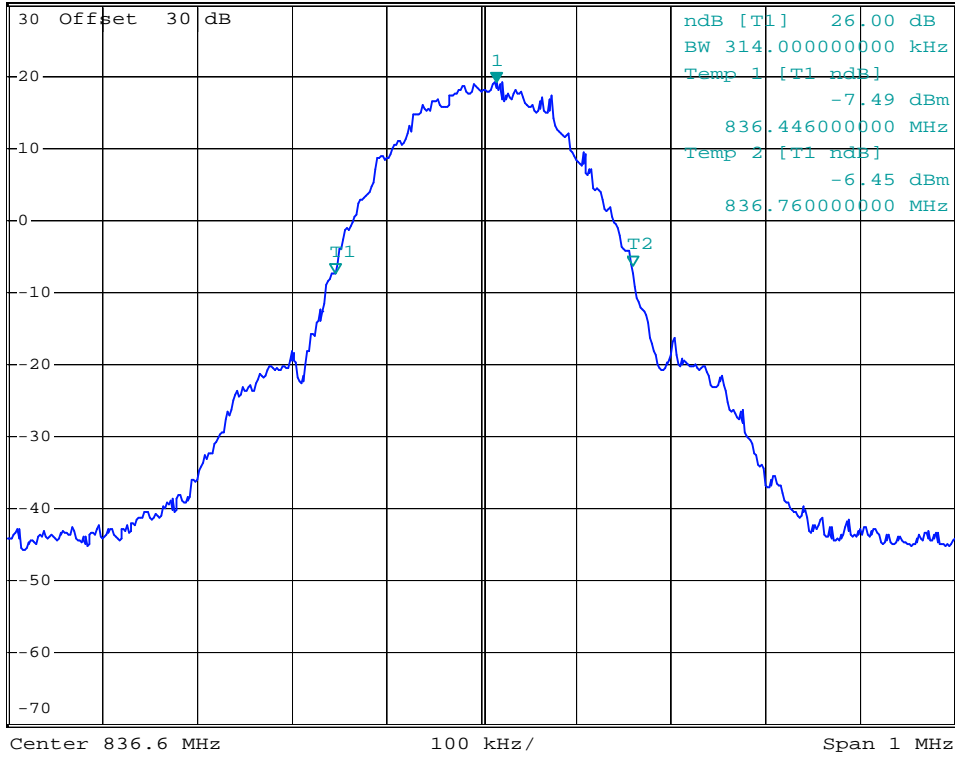

**Channel High**



\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz    20.13 dBm  
 Ref 30 dBm    Att 30 dB    SWT 10 ms    848.780000000 MHz

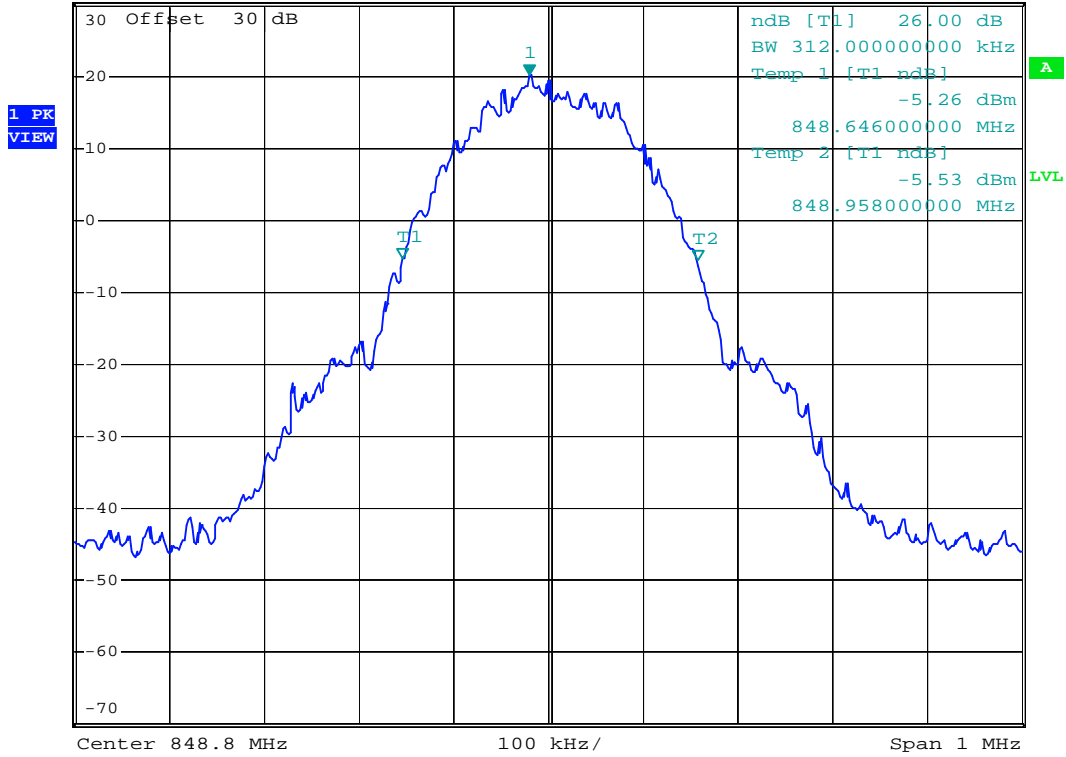


(B) Occupied bandwidth (99% bandwidth)

Channel Low



\*RBW 3 kHz      Marker 1 [T1 ]  
 VBW 10 kHz      15.48 dBm  
 Ref 20 dBm      Att 10 dB      SWT 115 ms      824.180000000 MHz

1 PK  
 VIEW

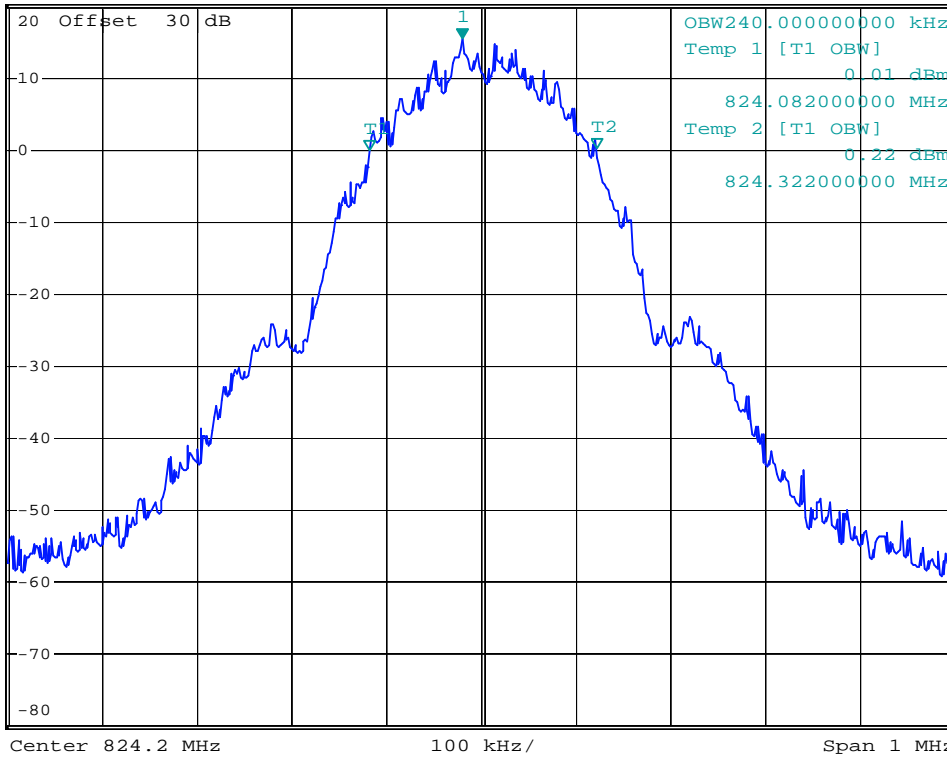

Channel Middle




\*RBW 3 kHz      Marker 1 [T1 ]  
 VBW 10 kHz      13.43 dBm  
 SWT 115 ms      836.566000000 MHz

Ref 20 dBm

Att 10 dB

L PK  
 VIEW

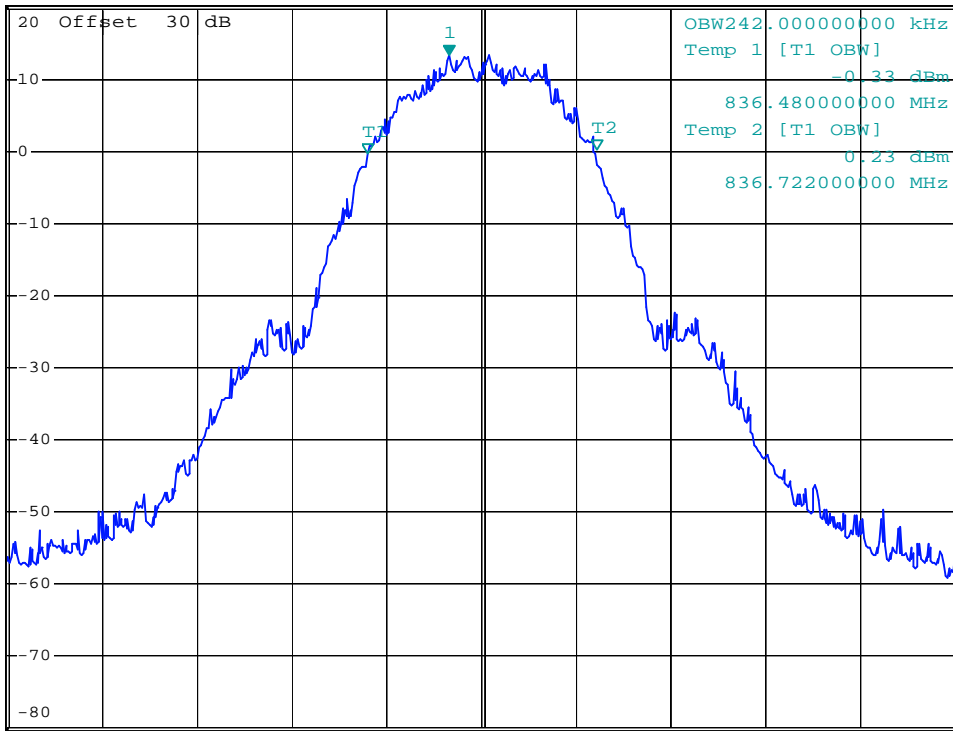


### Channel High



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      15.17 dBm  
SWT 115 ms      848.782000000 MHz

Ref 20 dBm

Att 10 dB

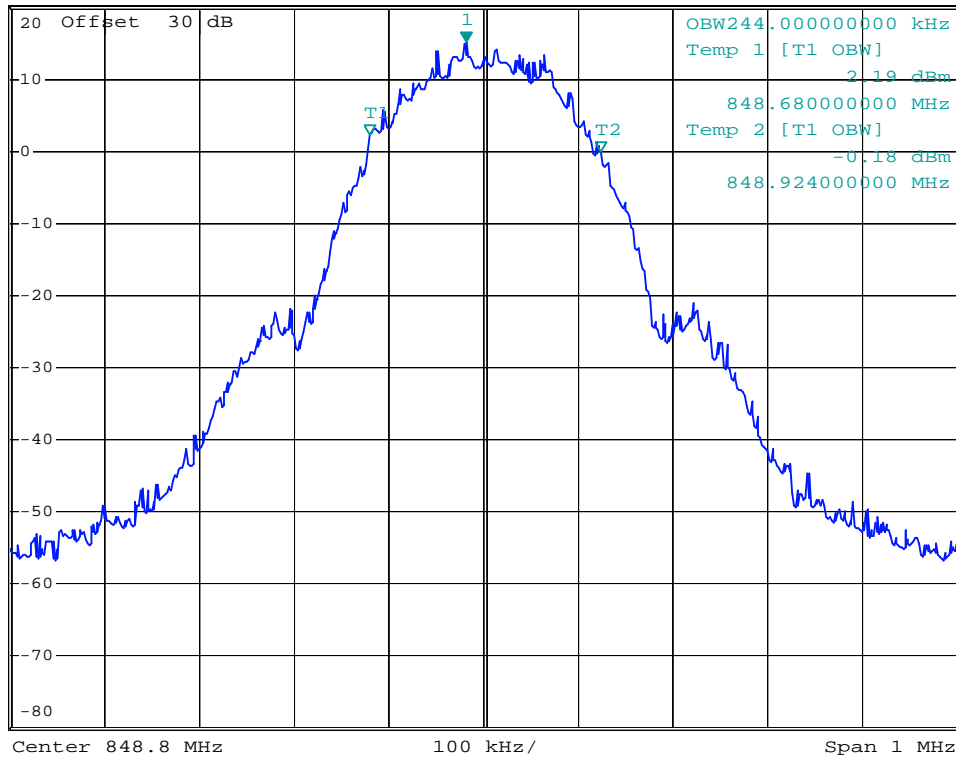



Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

#### 5.4.2 GSM 850 Band (EDGE)

Test Mode	Channel	Frequency (MHz)	Bandwidth (kHz)	Occupied Bandwidth (kHz)
GSM850 EDGE	128	824.2	314.00	242.00
	190	836.6	318.00	242.00
	251	848.8	314.00	248.00

*Note: Please refer to the following pages for chart*


(A) Bandwidth (-26dB)  
Channel Low



\*RBW 10 kHz    Marker 1 [T1 ]  
VBW 30 kHz                    20.26 dBm  
SWT 10 ms                    824.206000000 MHz

Ref 30 dBm


Att 30 dB

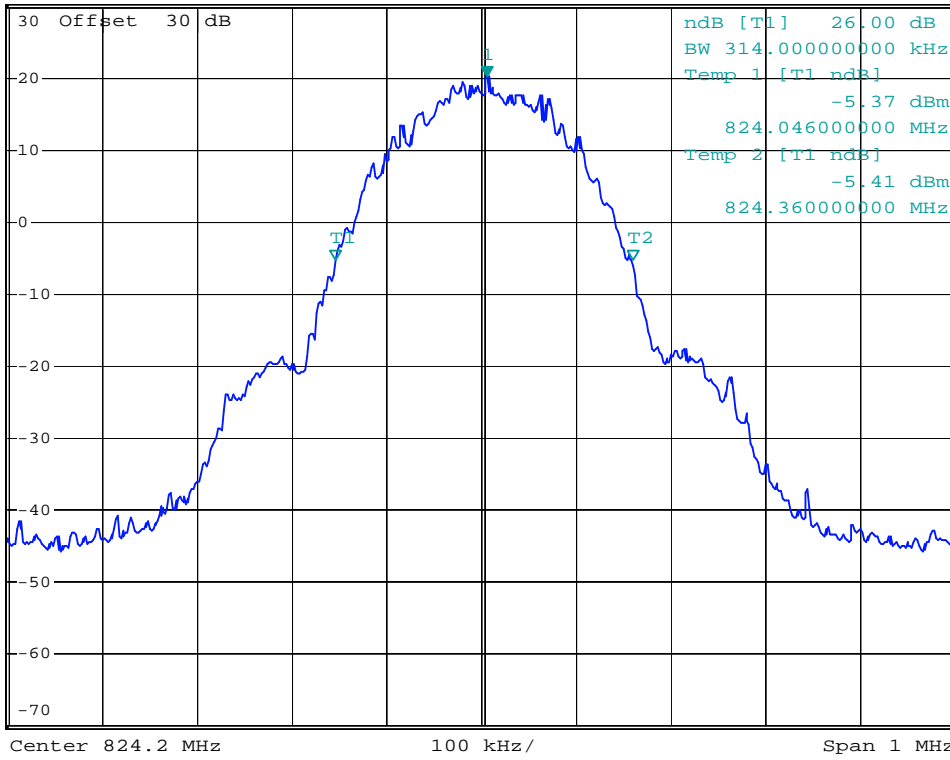

**Channel Middle**




\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz                                  19.59 dBm  
 Ref 30 dBm                                  Att 30 dB                                  SWT 10 ms                                  836.574000000 MHz

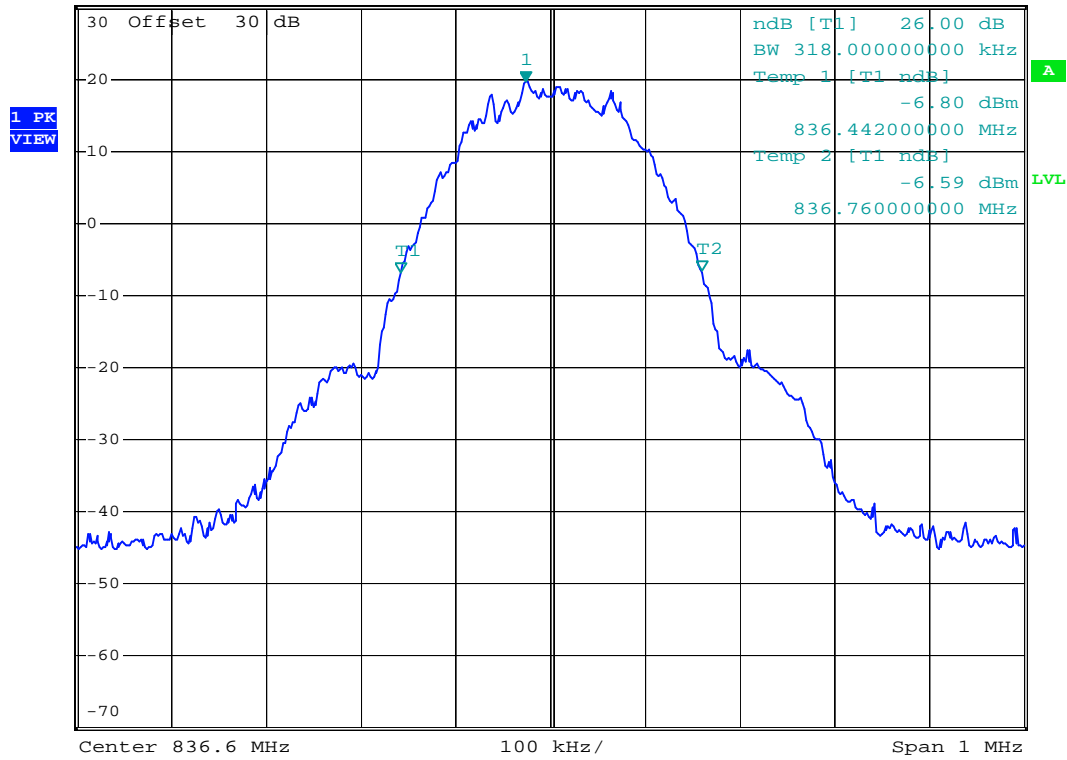

**Channel High**



\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz                    19.73 dBm  
 Att 30 dB                        848.812000000 MHz  
 Ref 30 dBm                      SWT 10 ms

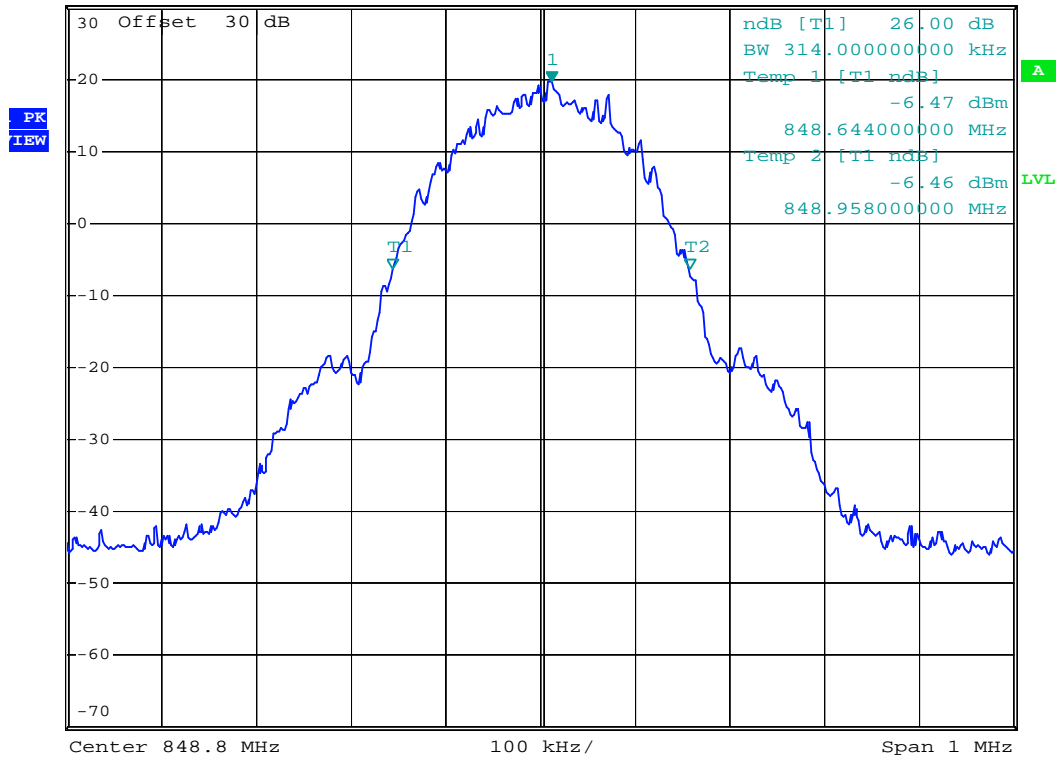

(B) Occupied bandwidth (99% bandwidth)


Channel Low



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      14.28 dBm  
SWT 115 ms      824.182000000 MHz

Ref 20 dBm

Att 10 dB

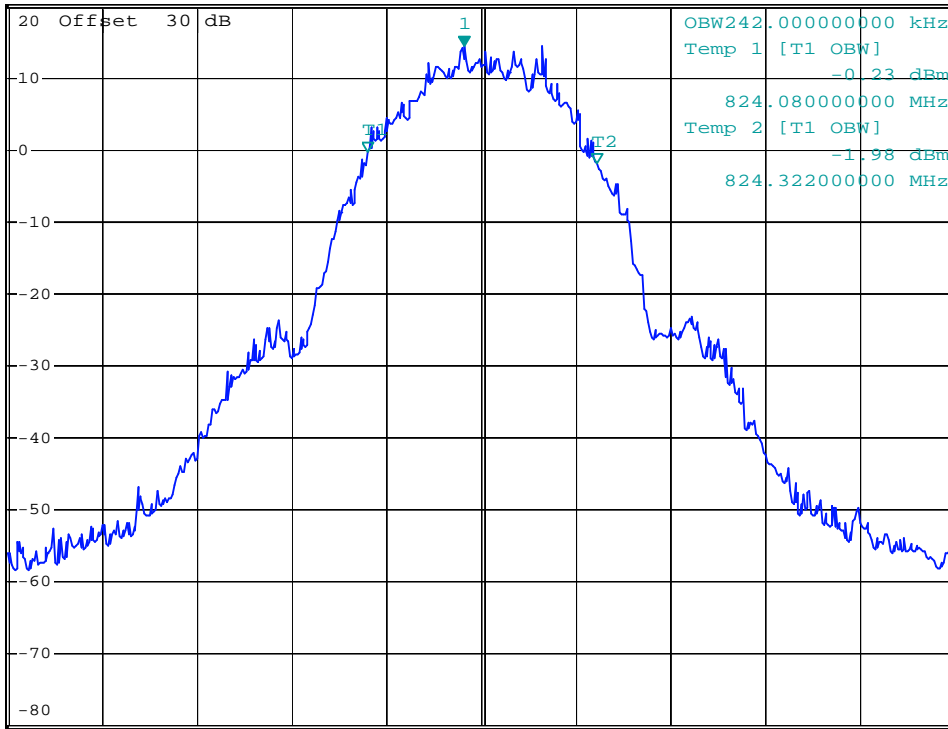

1 PK  
VIEW

A

LVL

Center 824.2 MHz


100 kHz/

Span 1 MHz

Channel Middle



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      12.87 dBm  
SWT 115 ms      836.578000000 MHz

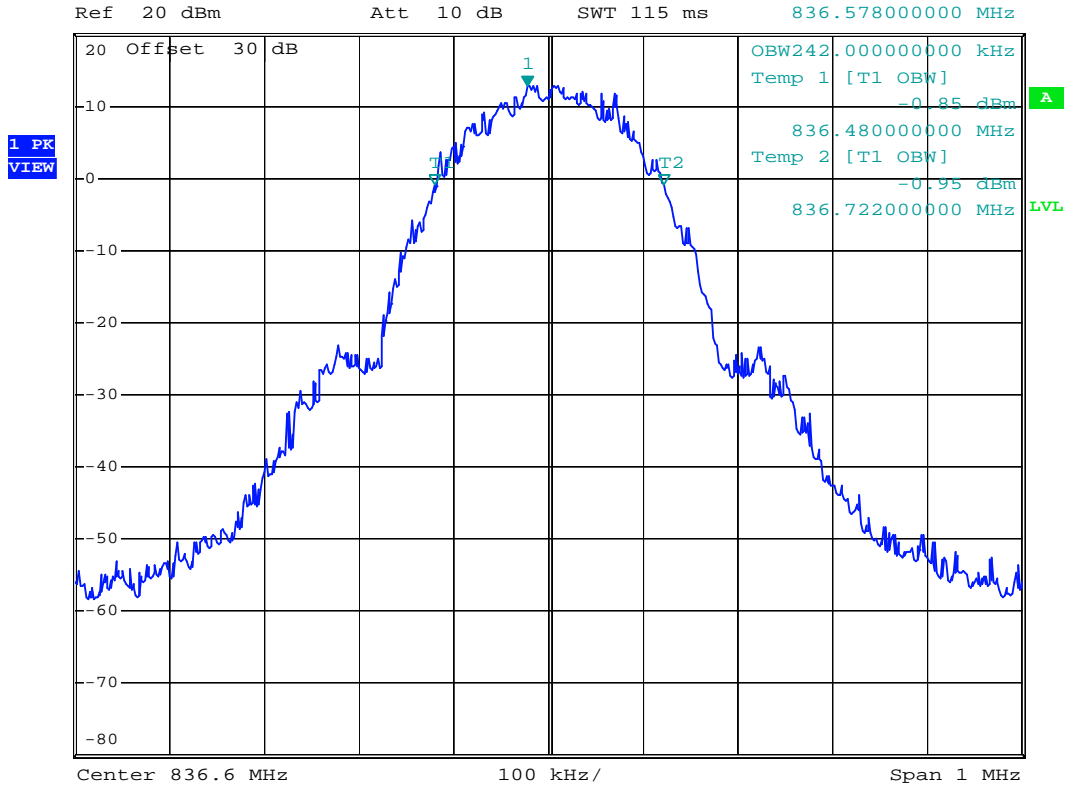


**Channel High**



\*RBW 3 kHz      Marker 1 [T1 ]  
 VBW 10 kHz      13.62 dBm  
 Ref 20 dBm      Att 10 dB      SWT 115 ms      848.782000000 MHz

1 PK  
 VIEW

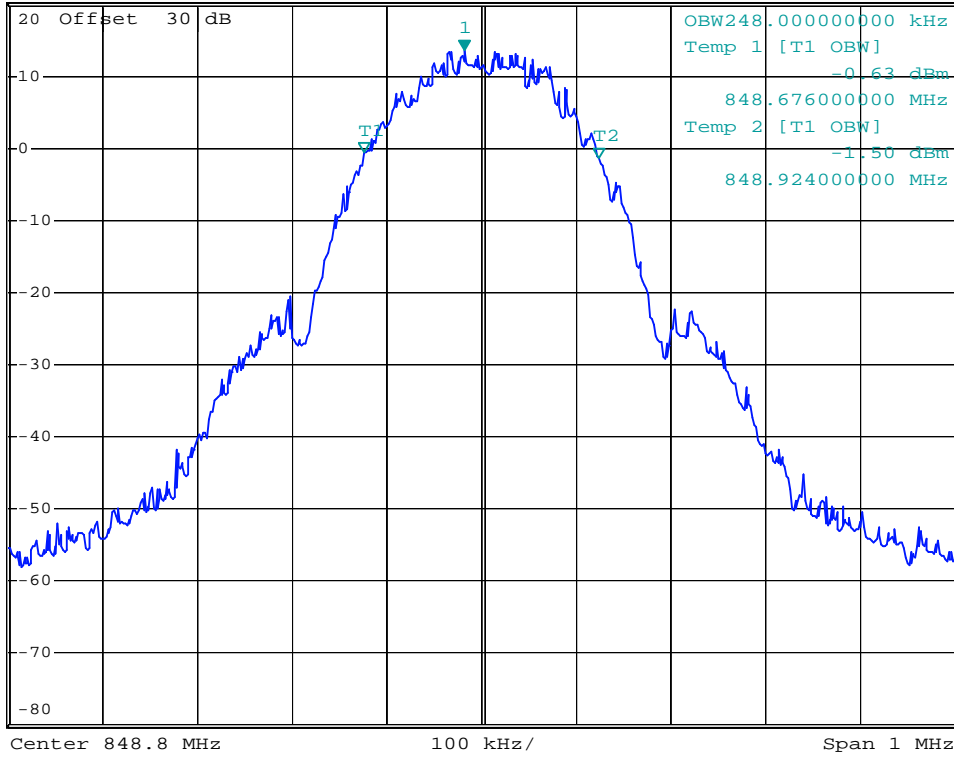

Test Date : Oct. 23, 2012      Temperature : 20 °C      Humidity : 65 %

#### 5.4.3 PCS1900 Band (GPRS)

Test Mode	Channel	Frequency (MHz)	Bandwidth (kHz)	Occupied Bandwidth (kHz)
PCS1900 GPRS	512	1850.2	306.00	240.00
	661	1880.0	310.00	240.00
	810	1909.8	310.00	240.00

*Note: Please refer to the following pages for chart*



(A) Bandwidth (-26dB)  
Channel Low




\*RBW 10 kHz    Marker 1 [T1 ]  
VBW 30 kHz                    20.22 dBm  
SWT 10 ms                    1.850270000 GHz

Ref 30 dBm

\*Att 10 dB

1 PK  
MAXH

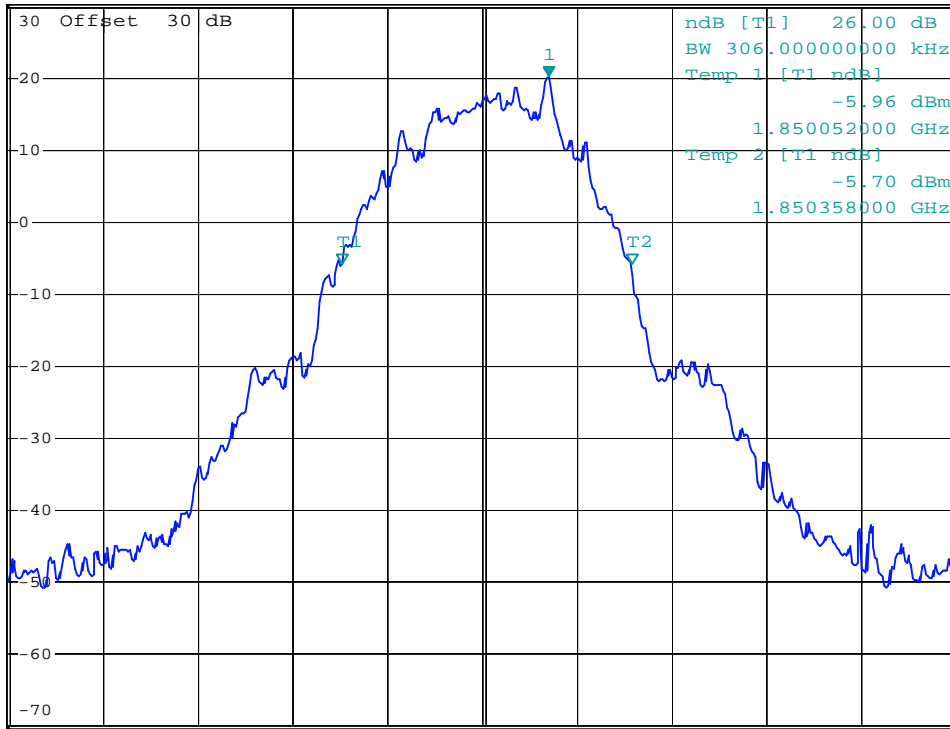

A

LVL

Center 1.8502 GHz

100 kHz/

Span 1 MHz

Channel Middle




\*RBW 10 kHz    Marker 1 [T1 ]  
VBW 30 kHz                    20.18 dBm  
SWT 10 ms                    1.880072000 GHz

Ref 30 dBm

\*Att 10 dB

1 PK  
VIEW

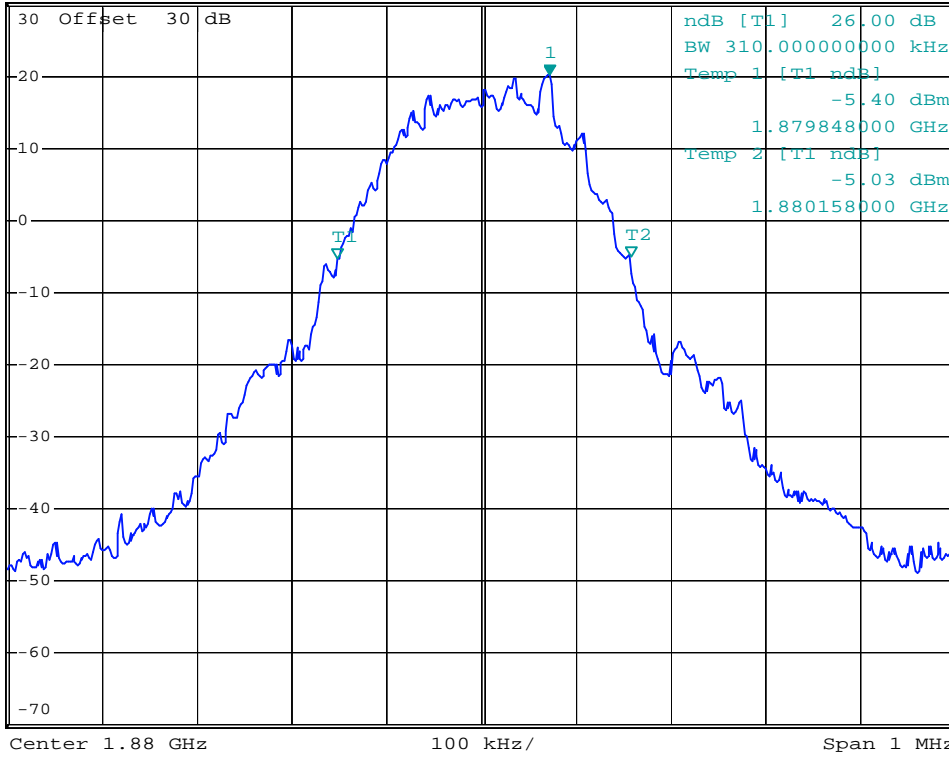

**Channel High**




\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz                    20.15 dBm  
 SWT 10 ms                      1.909868000 GHz

Ref 30 dBm

\*Att 10 dB

1 PK  
 VIEW

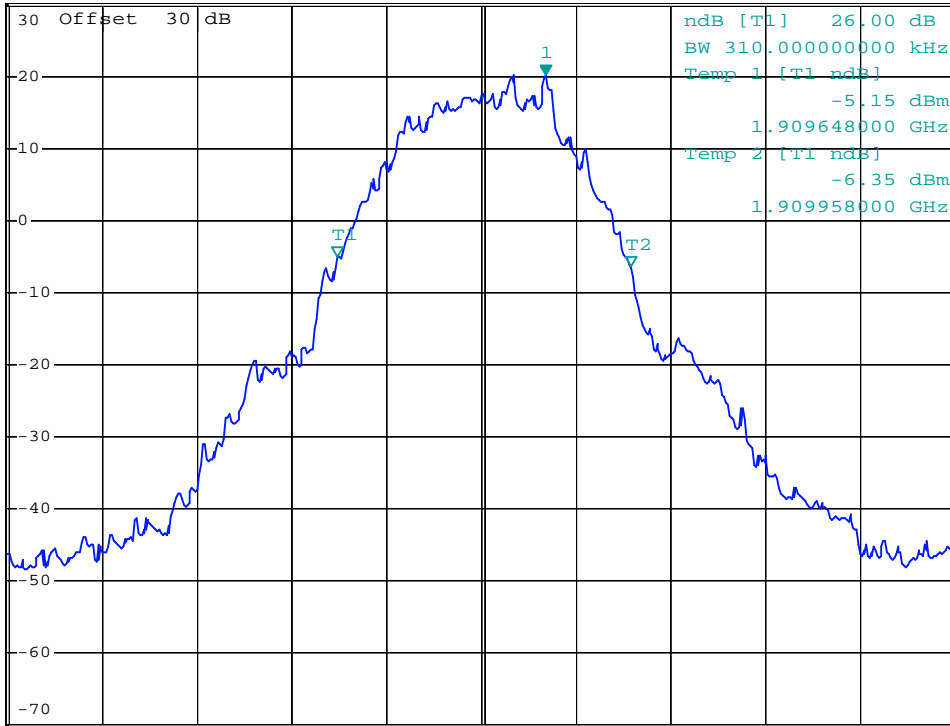

Center 1.9098 GHz

100 kHz/

Span 1 MHz


(B) Occupied bandwidth (99% bandwidth)

Channel Low



1 PK  
MAXH

Ref 20 dBm      \*Att 10 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
 VBW 10 kHz      16.25 dBm  
 SWT 115 ms      1.850268000 GHz

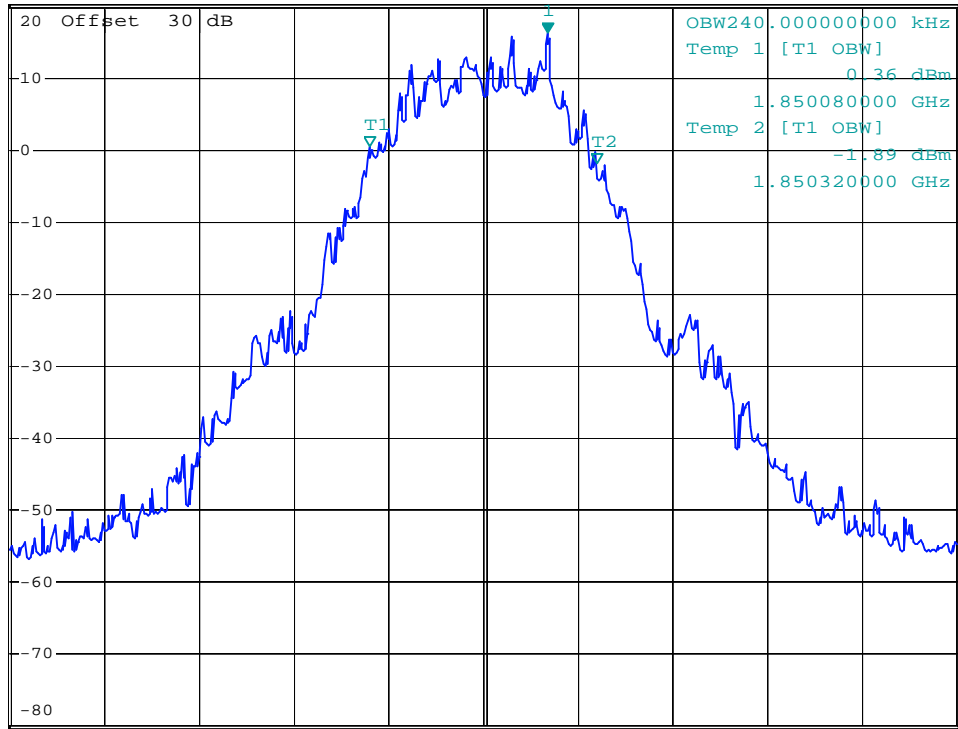

Center 1.8502 GHz      100 kHz/      Span 1 MHz

Channel Middle




\*RBW 3 kHz      Marker 1 [T1 ]  
 VBW 10 kHz      15.87 dBm  
 SWT 115 ms      1.880068000 GHz

Ref 20 dBm

\*Att 10 dB


1 PK  
 VIEW

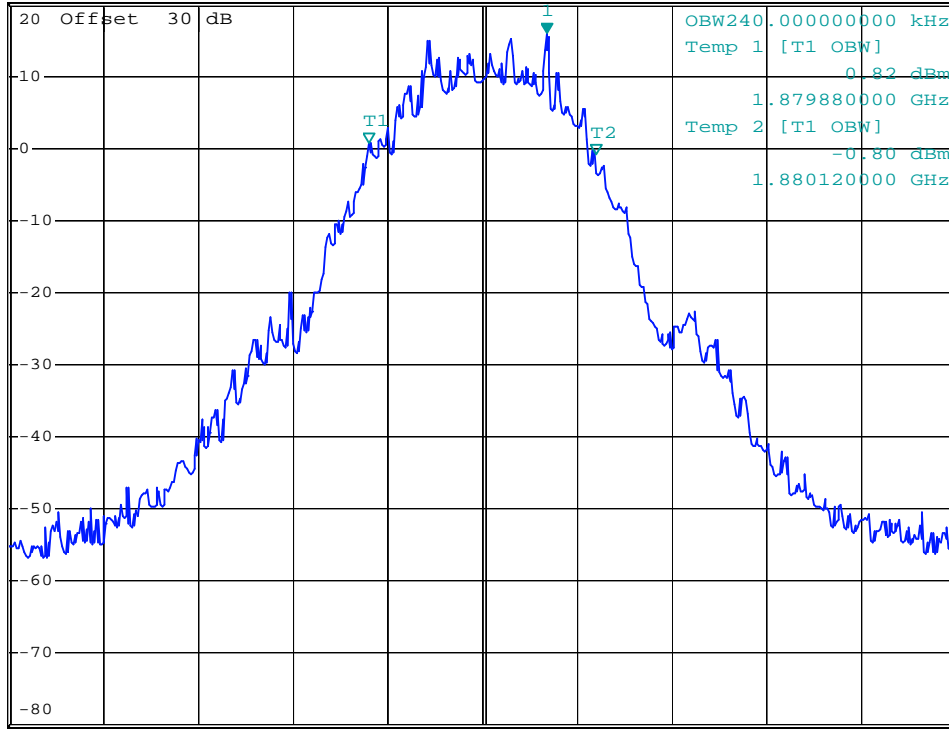

### Channel High



Ref 20 dBm      \*Att 10 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      15.89 dBm  
SWT 115 ms      1.909868000 GHz

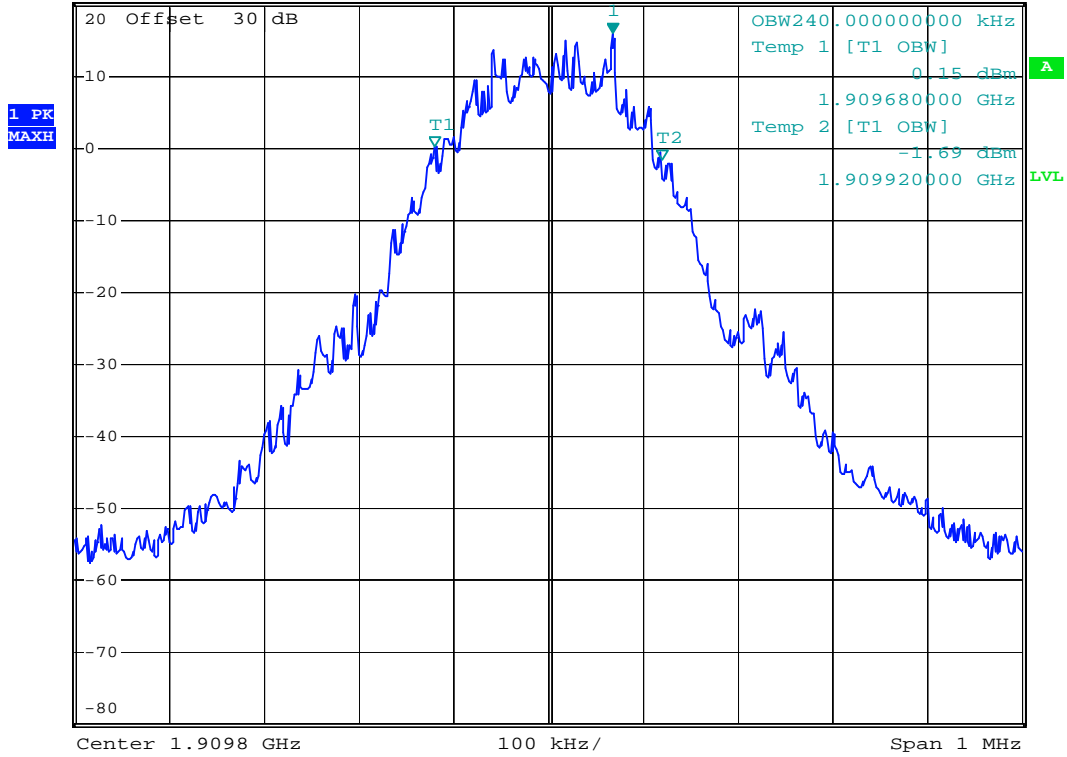

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

#### 5.4.4 PCS1900 Band (EDGE)


Test Mode	Channel	Frequency (MHz)	Bandwidth (kHz)	Occupied Bandwidth (kHz)
PCS1900 EDGE	512	1850.2	308.00	240.00
	661	1880.0	306.00	238.00
	810	1909.8	314.00	240.00

*Note: Please refer to the following pages for chart*

(A) Bandwidth (-26dB)  
 Channel Low



\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz    19.89 dBm  
 Ref 30 dBm    \*Att 10 dB    SWT 10 ms    1.850268000 GHz

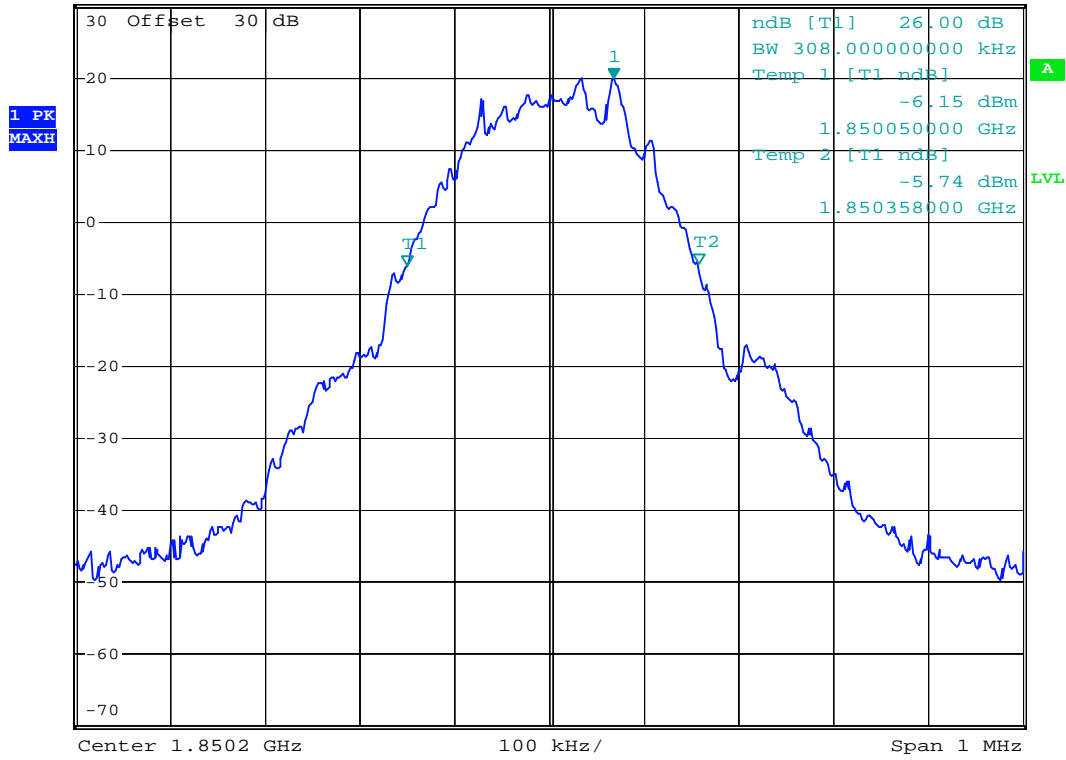





**Channel High**




\*RBW 10 kHz    Marker 1 [T1 ]  
 VBW 30 kHz    19.17 dBm  
 SWT 10 ms    1.909868000 GHz

Ref 30 dBm

\*Att 10 dB

1 PK  
 VIEW

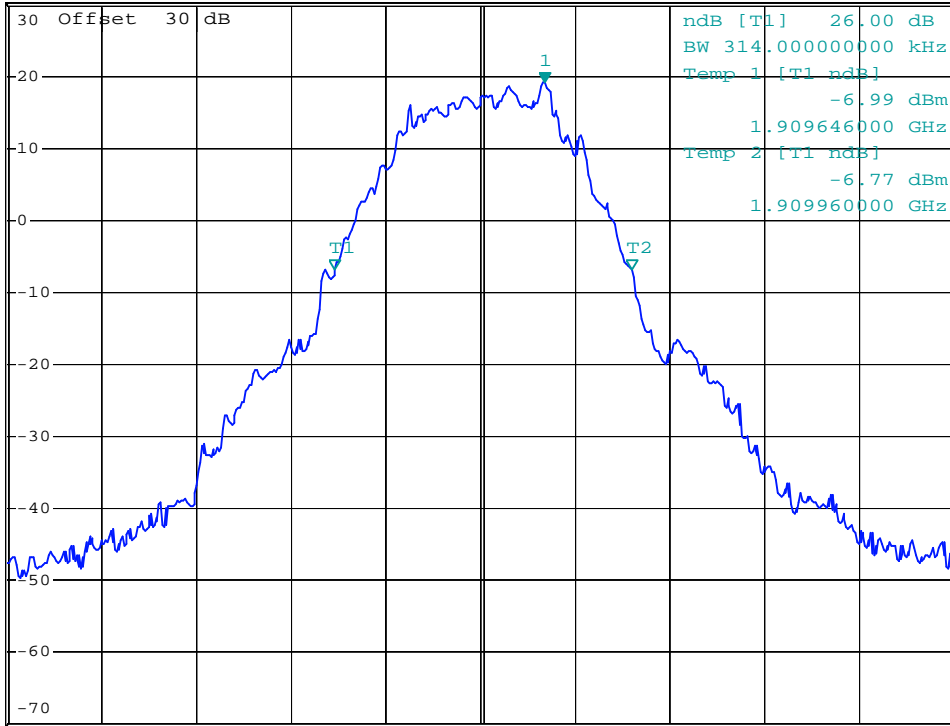


Center 1.9098 GHz

100 kHz/

Span 1 MHz

(B) Occupied bandwidth (99% bandwidth)

Channel Low

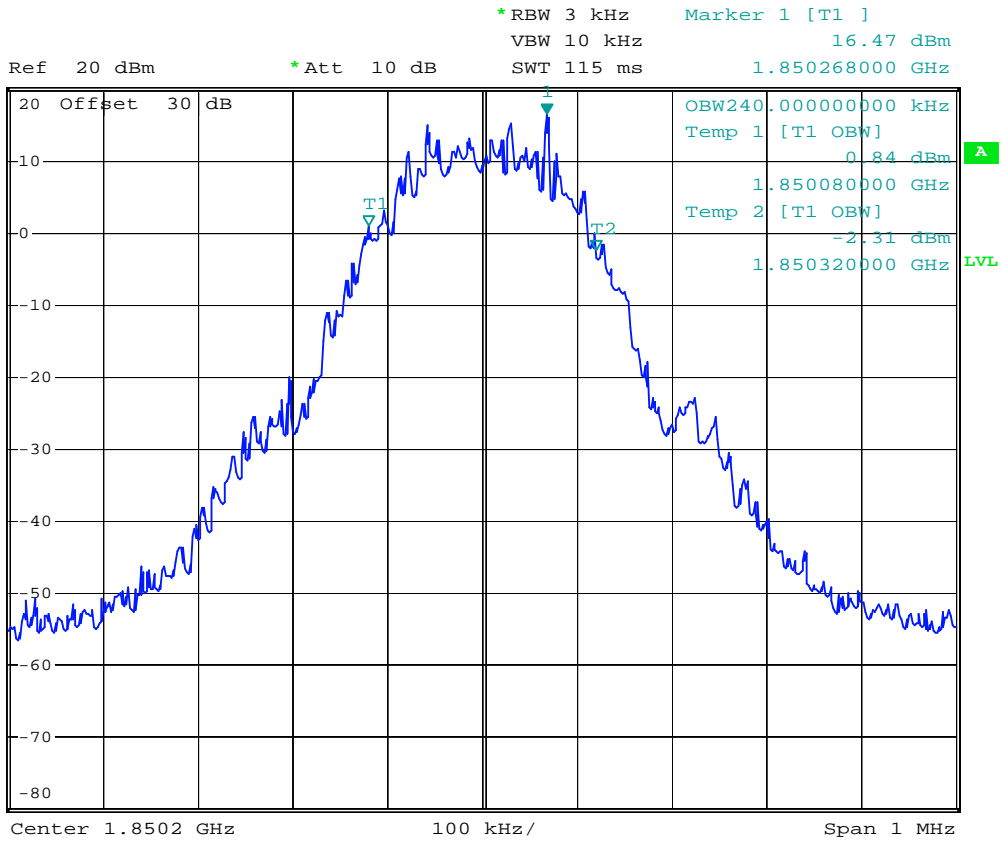

Channel Middle




\*RBW 3 kHz      Marker 1 [T1 ]  
 VBW 10 kHz      15.89 dBm  
 SWT 115 ms      1.880068000 GHz

Ref 20 dBm

\*Att 10 dB

1 PK  
 MAXH

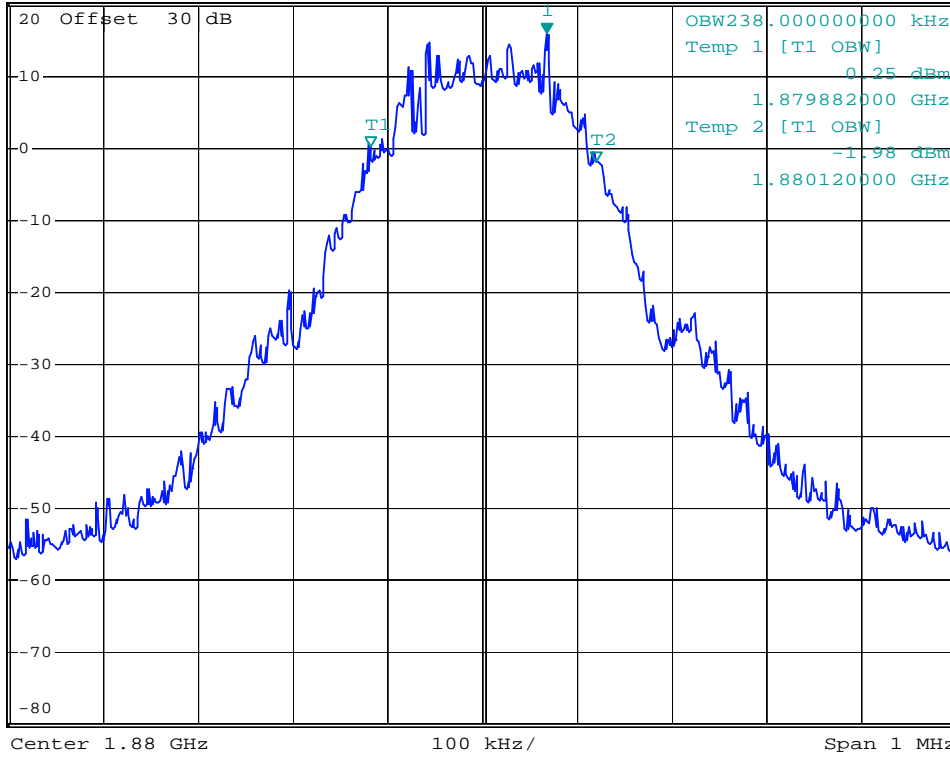

### Channel High




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      16.09 dBm  
SWT 115 ms      1.909868000 GHz

Ref 20 dBm

\*Att 10 dB

1 PK  
MAXH

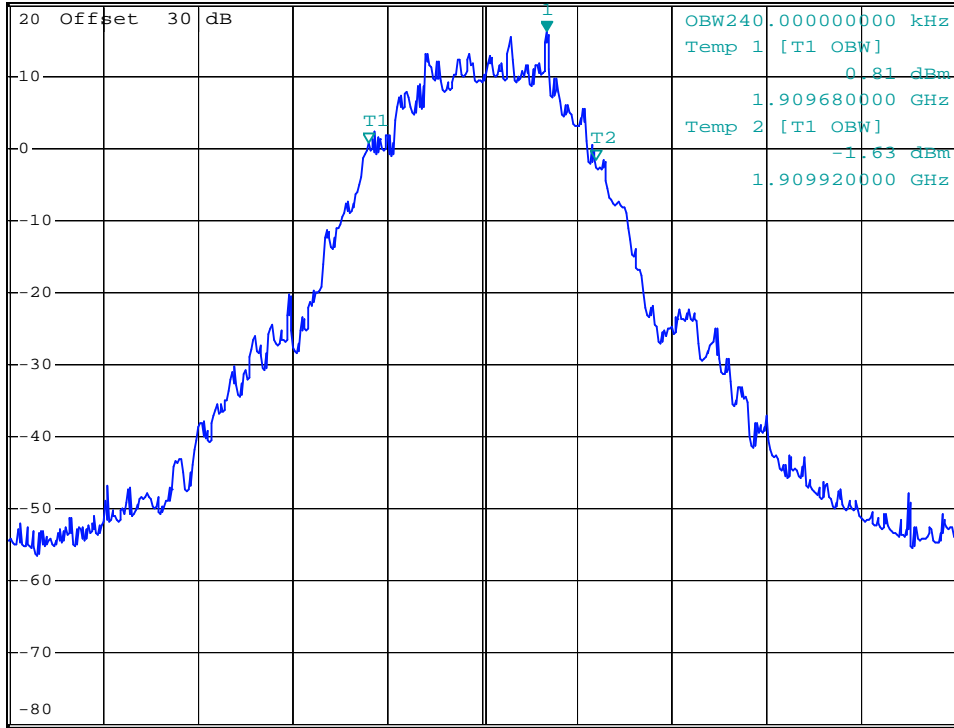

A

LVL

## 6 OUT OF BAND EMISSION AT ANTENNA TERMINALS

### 6.1 Standard Applicable

According to FCC §2.1051, FCC §22.917(f), FCC §24.238(a).

**Out of Band Emissions:** The mean power of emission must be attenuated below the mean power of the non-modulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least  $43 + 10 \log P$  dB.

**Mobile Emissions in Base Frequency Range:** The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not exceed  $-80$  dBm at the transmit antenna connector.

**Band Edge Requirements:** In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the Out of band Emission.

### 6.2 Measurement Procedure

The setup of the EUT as shown in figure 1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW=1MHz, Start=30MHz, Stop= 10th harmonic. Limit = -13dBm

Band Edge Requirements (824 MHz and 849 MHz / 1850MHz and 1910MHz): In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band emissions. Limit = -13dBm.

### 6.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2013/09/20
Power Divider	SUHNER	4901.19.A	2013/08/12
Universal Digital Radiocommunication Tester	R&S	CMU200	2013/04/22

## 6.4 Measurement Data

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

### 6.4.1 GSM850 Band (GPRS)

Test Mode	Channel	Frequency Range	Note	Chart
GSM850 GPRS	128	823MHz-825MHz	Lower Band Edge	Page 44
	251	848MHz-850MHz	Upper Band Edge	Page 45
	128	30MHz-10GHz	All Band Edge	Page 46
	190	30MHz-10GHz	All Band Edge	Page 47
	251	30MHz-10GHz	All Band Edge	Page 48


*Note: Please refer to the following pages for chart*

(A) Lower Band Edge

Low Channel



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.68 dBm  
SWT 115 ms      823.980000000 MHz

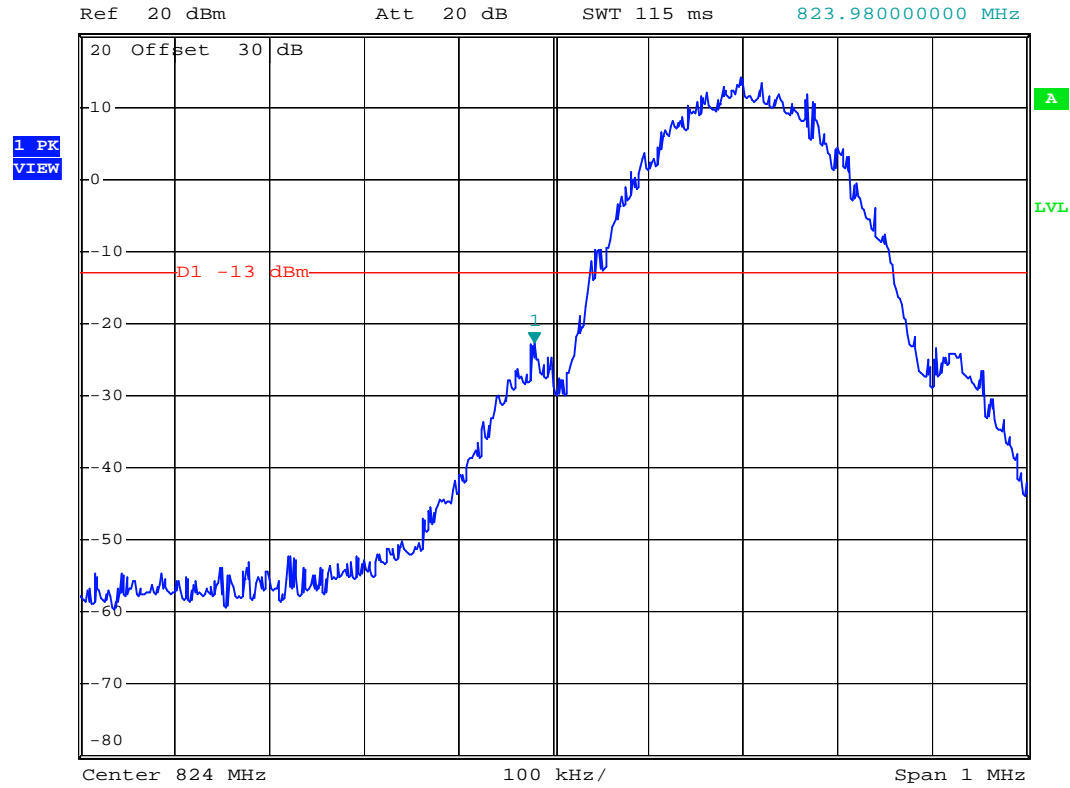



(B) Upper Band Edge

High Channel




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -23.24 dBm  
SWT 115 ms      849.024000000 MHz

Ref 20 dBm

Att 20 dB

1 PK  
VIEW

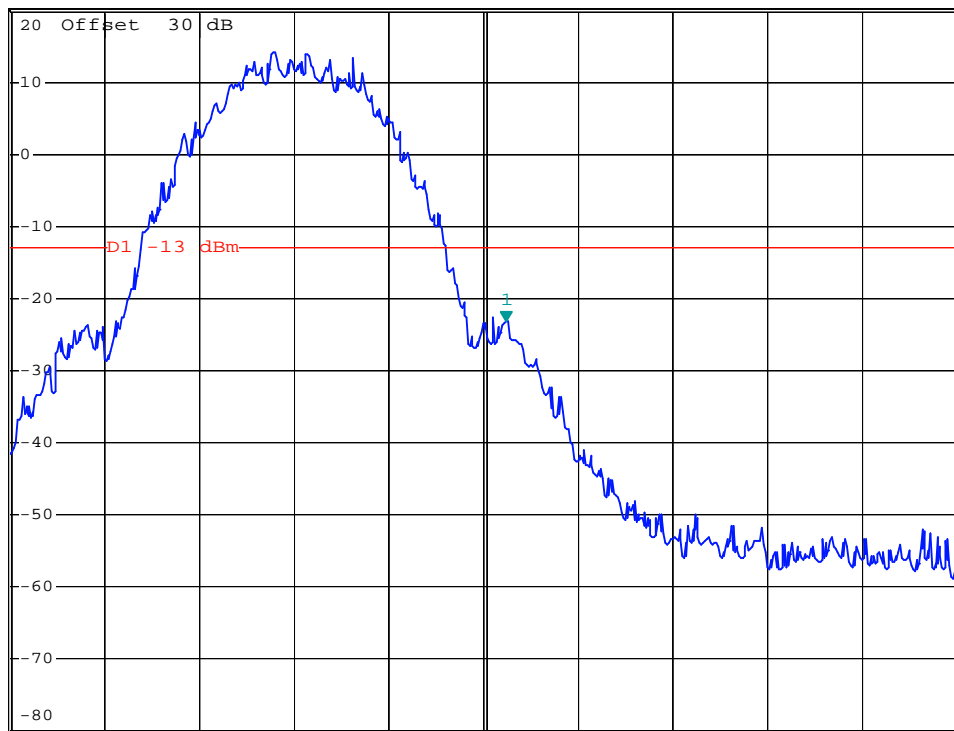


A

LVL

(C) All Band Edge


Low Channel

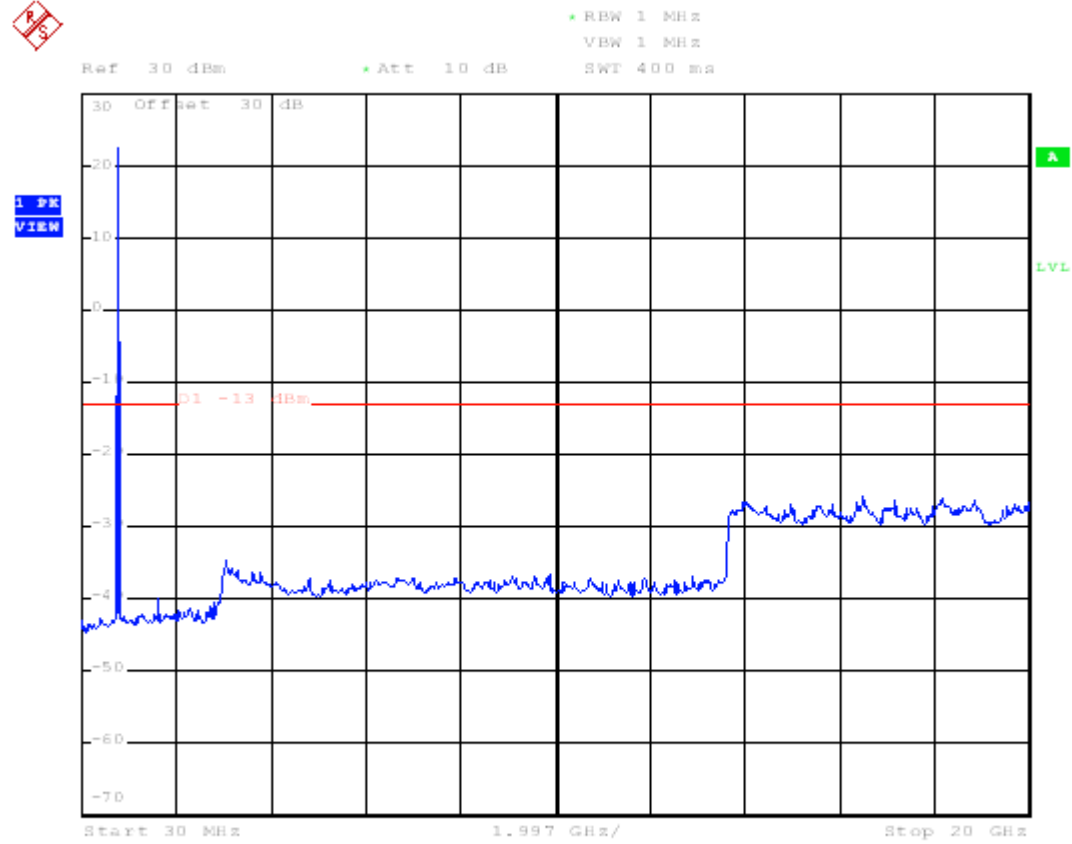

(D) All Band Edge  
Middle Channel




RBW 1 MHz  
VBW 1 MHz  
Att 10 dB  
SWT 400 ms

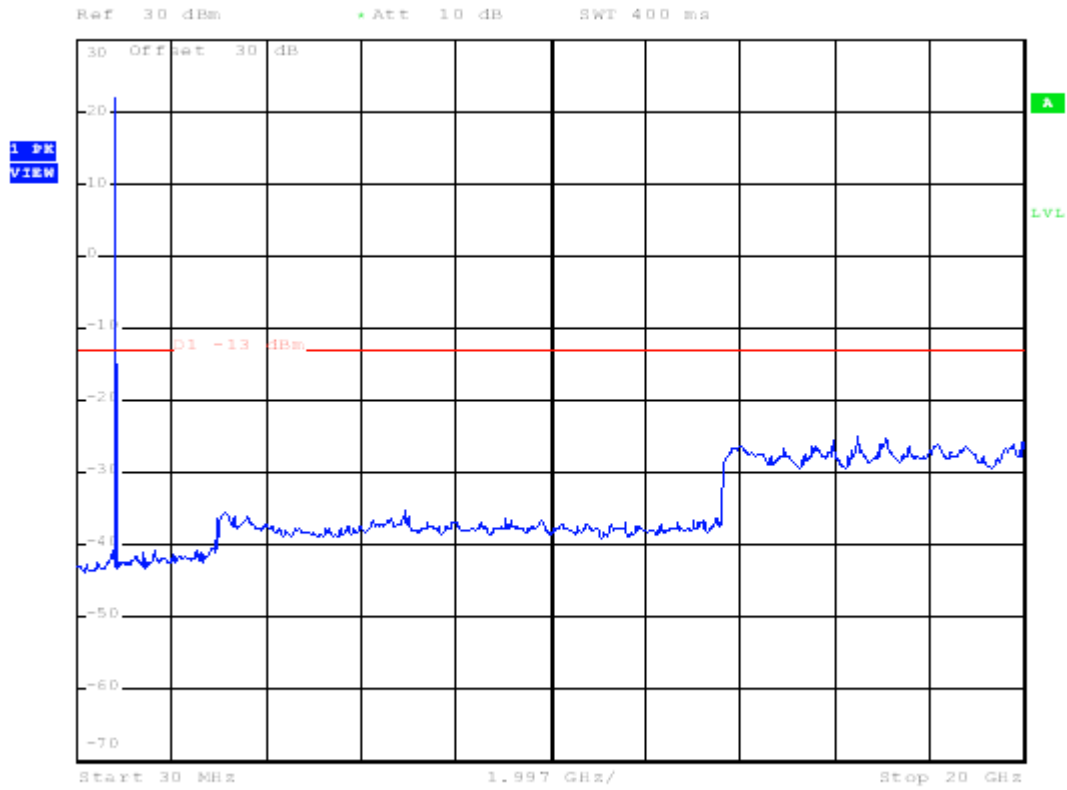

(E) All Band Edge

High Channel

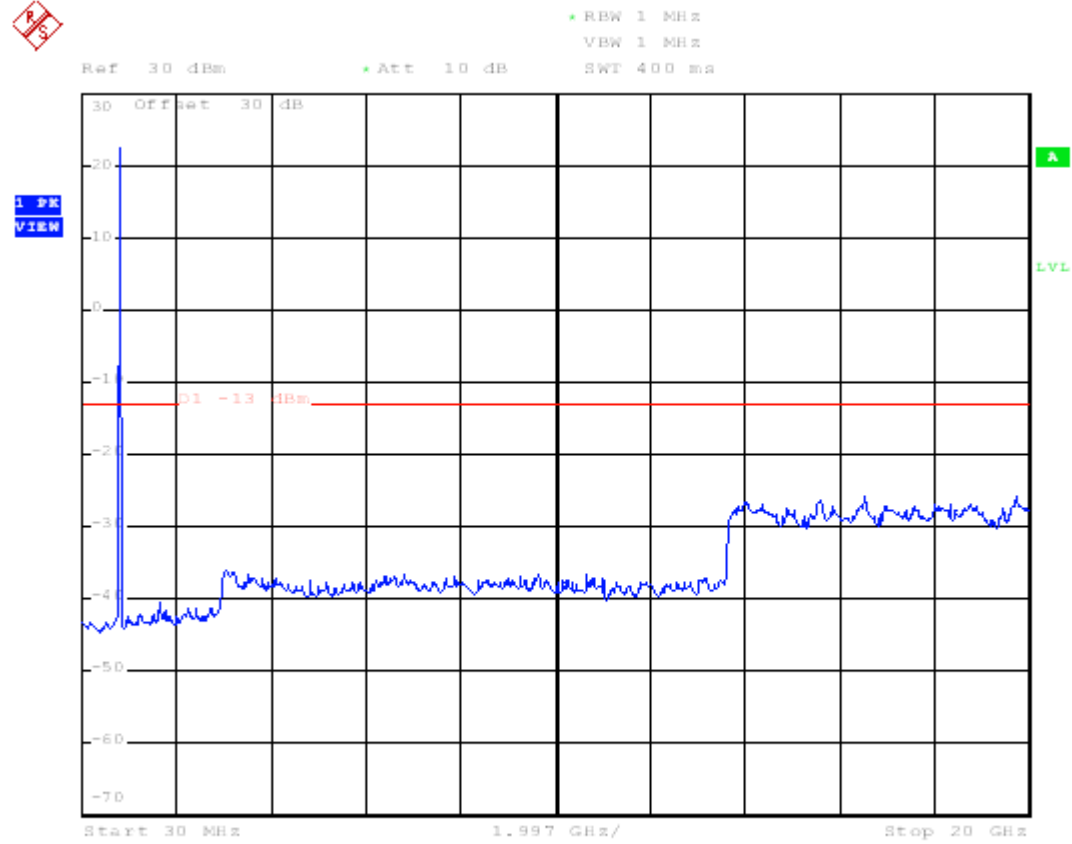

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

#### 6.4.2 GSM850 Band (EDGE)

Test Mode	Channel	Frequency Range	Note	Chart
GSM850 EDGE	128	823MHz-825MHz	Lower Band Edge	Page 50
	251	848MHz-850MHz	Upper Band Edge	Page 51
	128	30MHz-10GHz	All Band Edge	Page 52
	190	30MHz-10GHz	All Band Edge	Page 53
	251	30MHz-10GHz	All Band Edge	Page 54


*Note: Please refer to the following pages for chart*

(A) Lower Band Edge

Low Channel



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.74 dBm  
SWT 115 ms      823.986000000 MHz

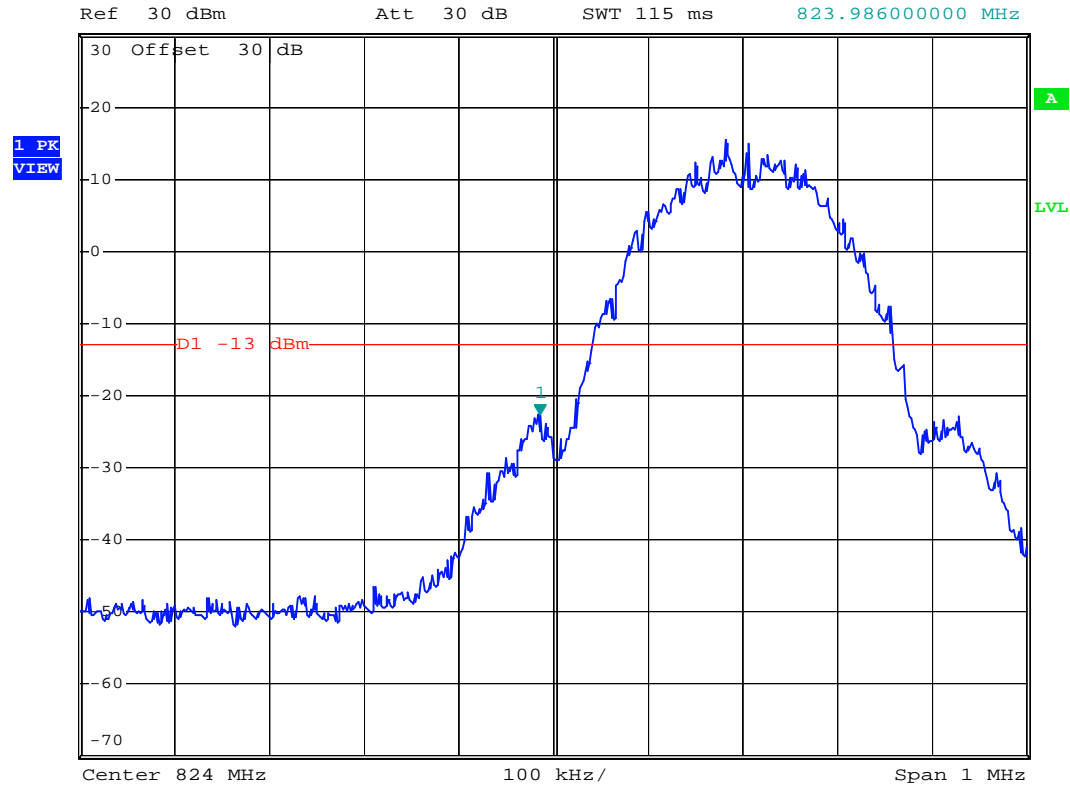


(B) Upper Band Edge

High Channel




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.01 dBm  
SWT 115 ms      849.020000000 MHz

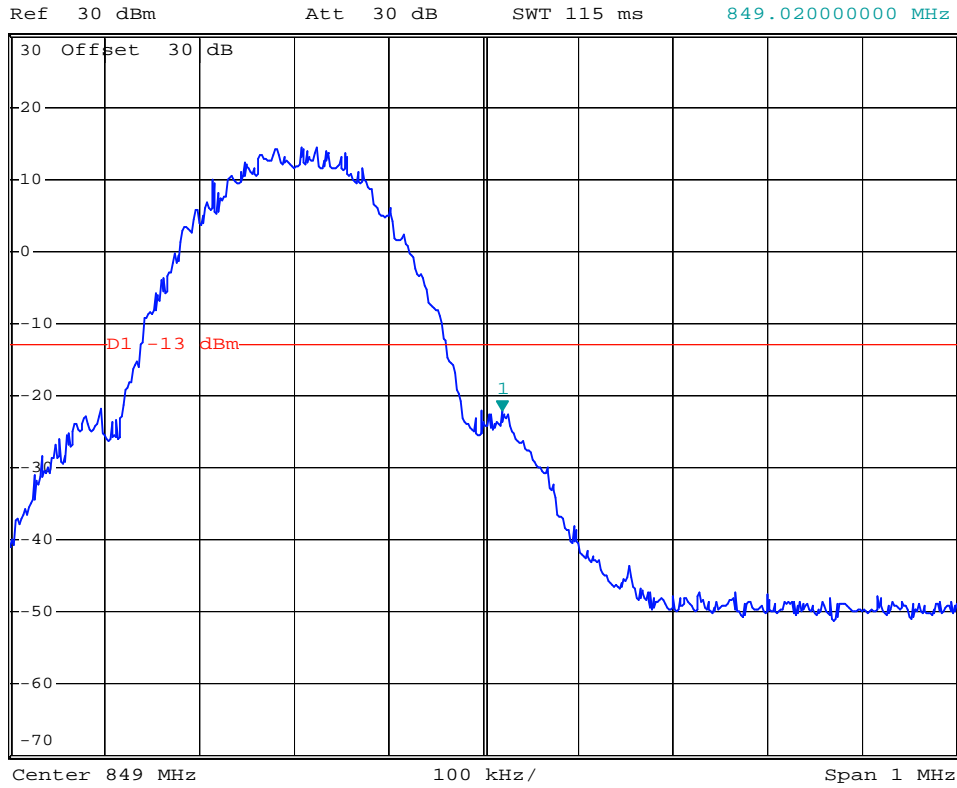

(C) All Band Edge


Low Channel

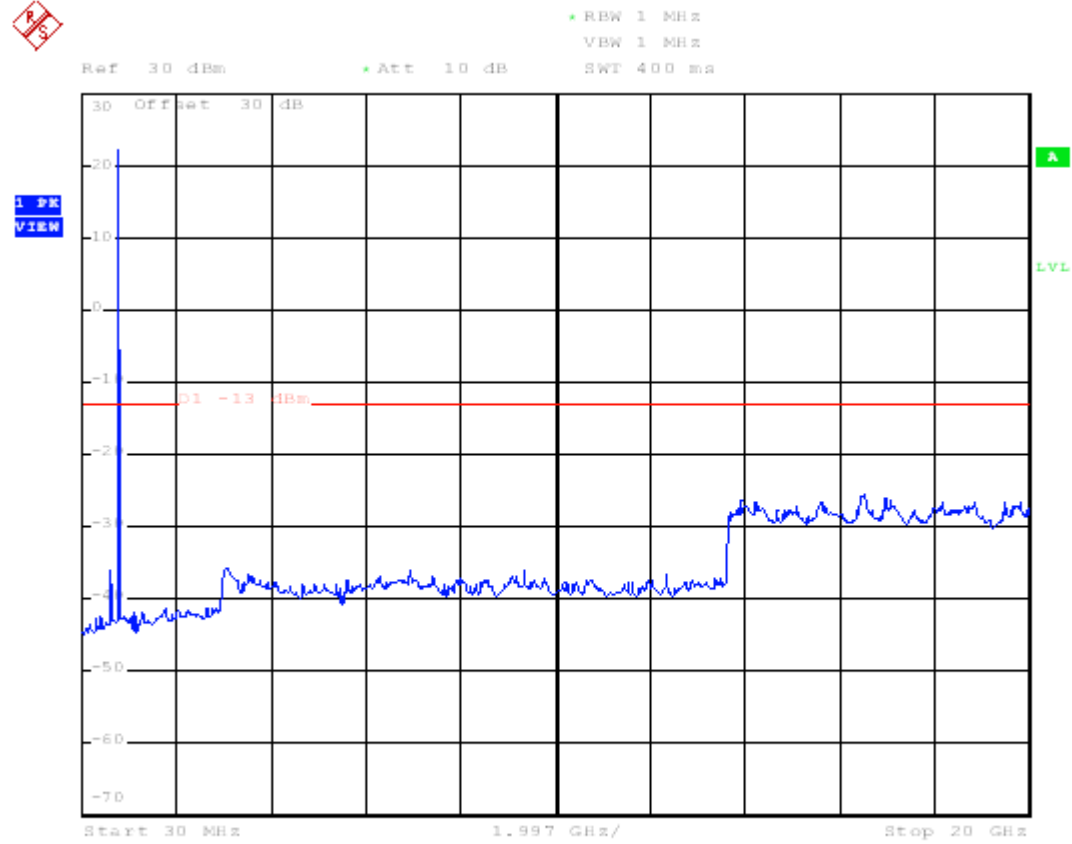




(D) All Band Edge

**Middle Channel**

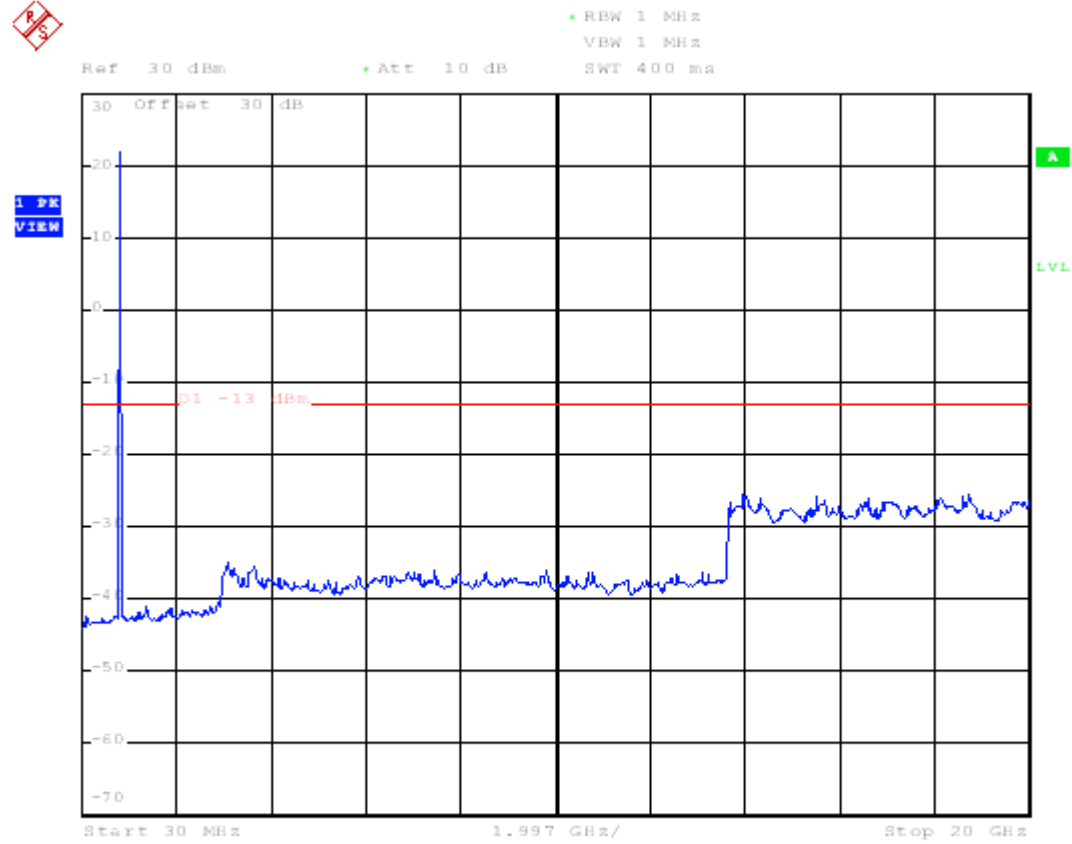

(E) All Band Edge

High Channel

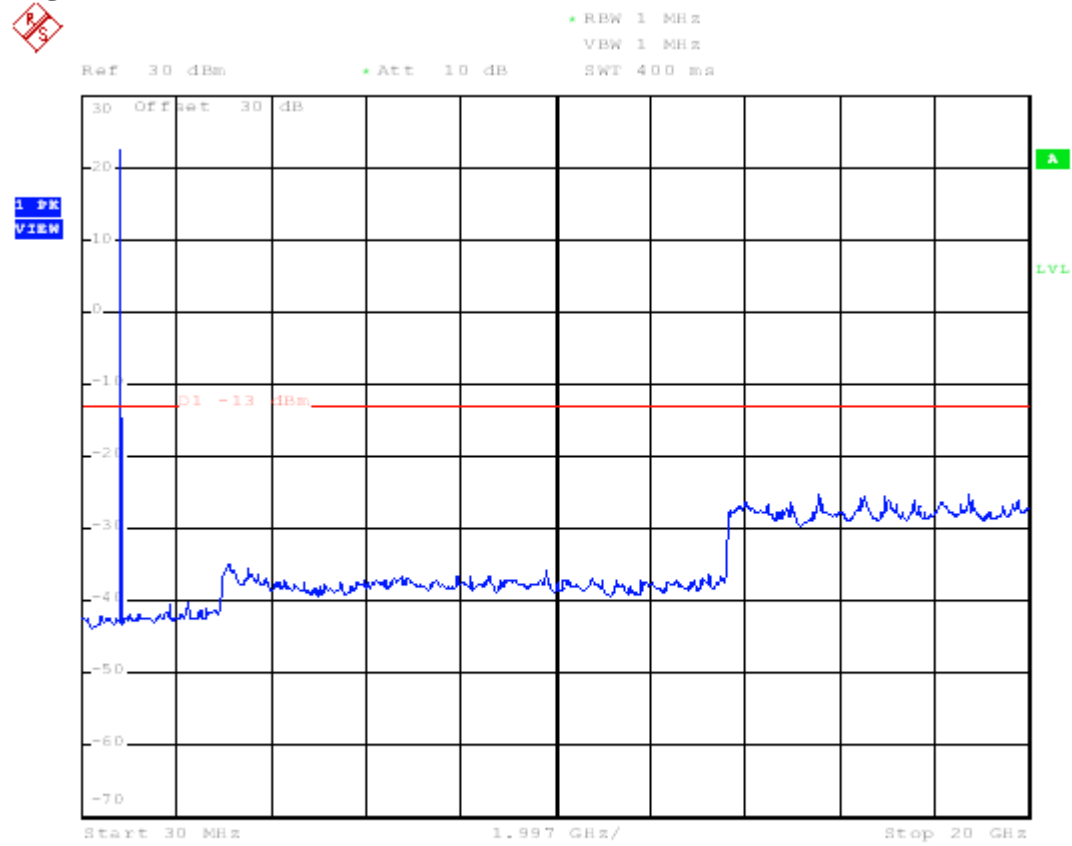

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

### 6.4.3 PCS1900 Band (GPRS)

Test Mode	Channel	Frequency Range	Note	Chart
PCS1900 GPRS	512	1849MHz-1851MHz	Lower Band Edge	Page 56
	810	1909MHz-1911MHz	Upper Band Edge	Page 57
	512	30MHz-20GHz	All Band Edge	Page 58
	661	30MHz-20GHz	All Band Edge	Page 59
	810	30MHz-20GHz	All Band Edge	Page 60


*Note: Please refer to the following pages for chart*

(A) Lower Band Edge

Low Channel



Ref 20 dBm      \*Att 10 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -20.27 dBm  
SWT 115 ms      1.849996000 GHz

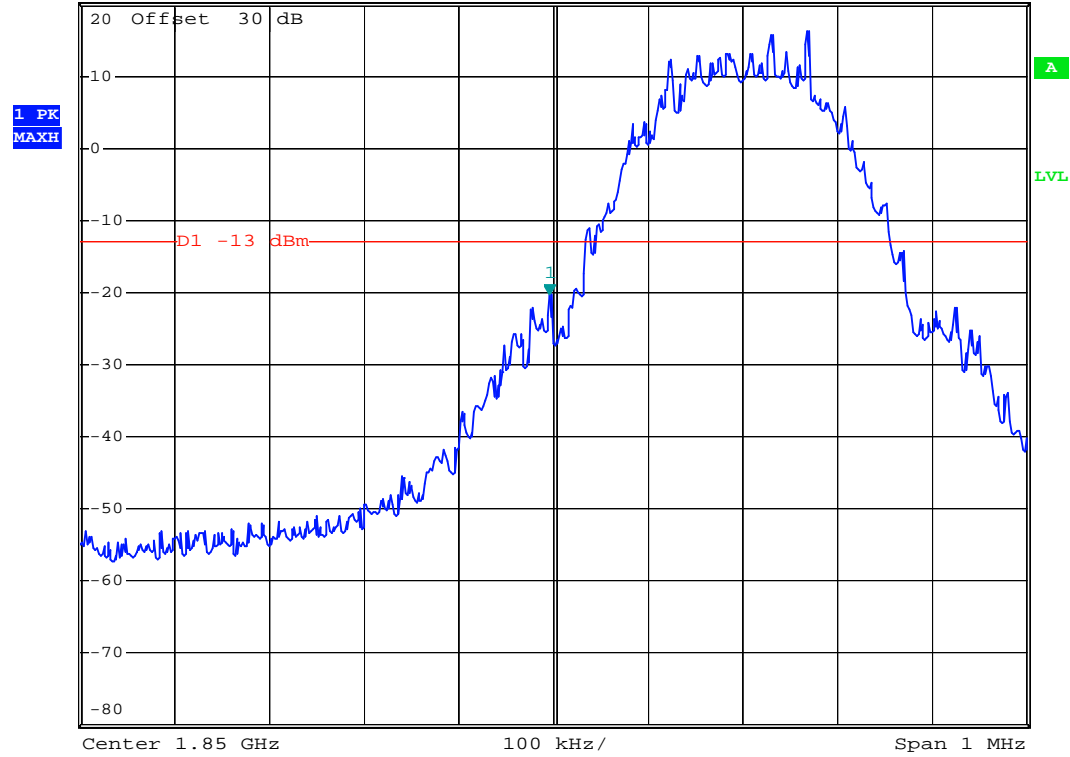


### (B) Upper Band Edge

#### High Channel




Ref 20 dBm      \*Att 10 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.21 dBm  
SWT 115 ms      1.910014000 GHz

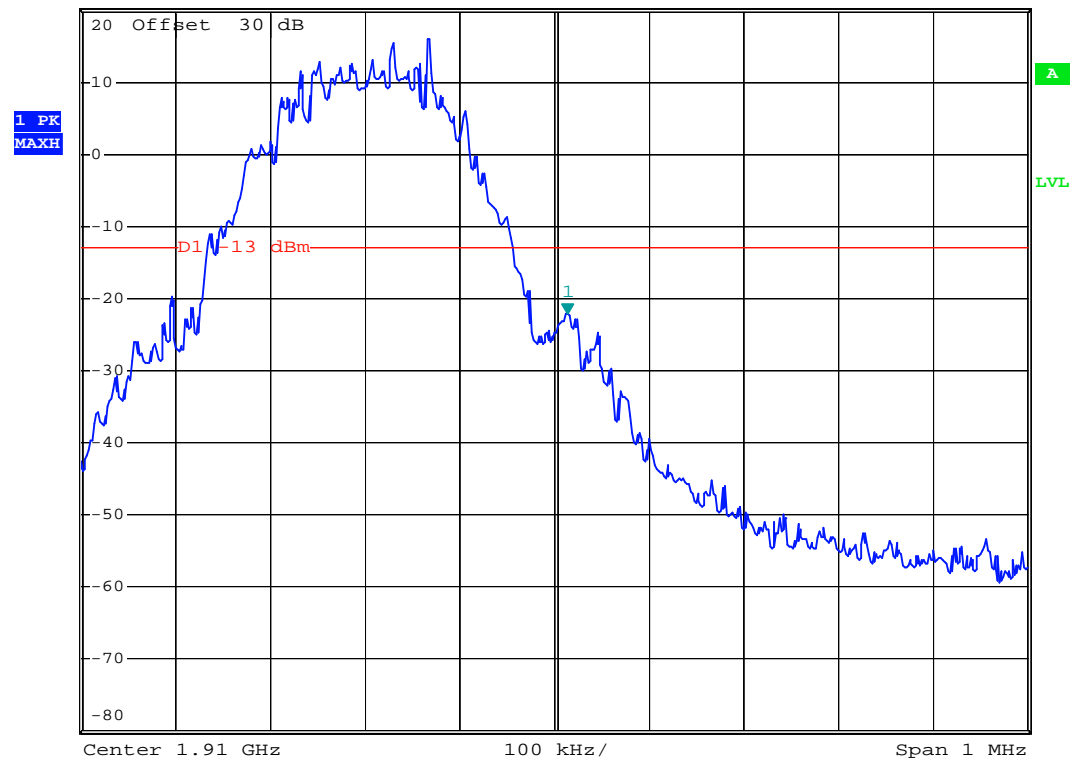


(C) All Band Edge

Low Channel

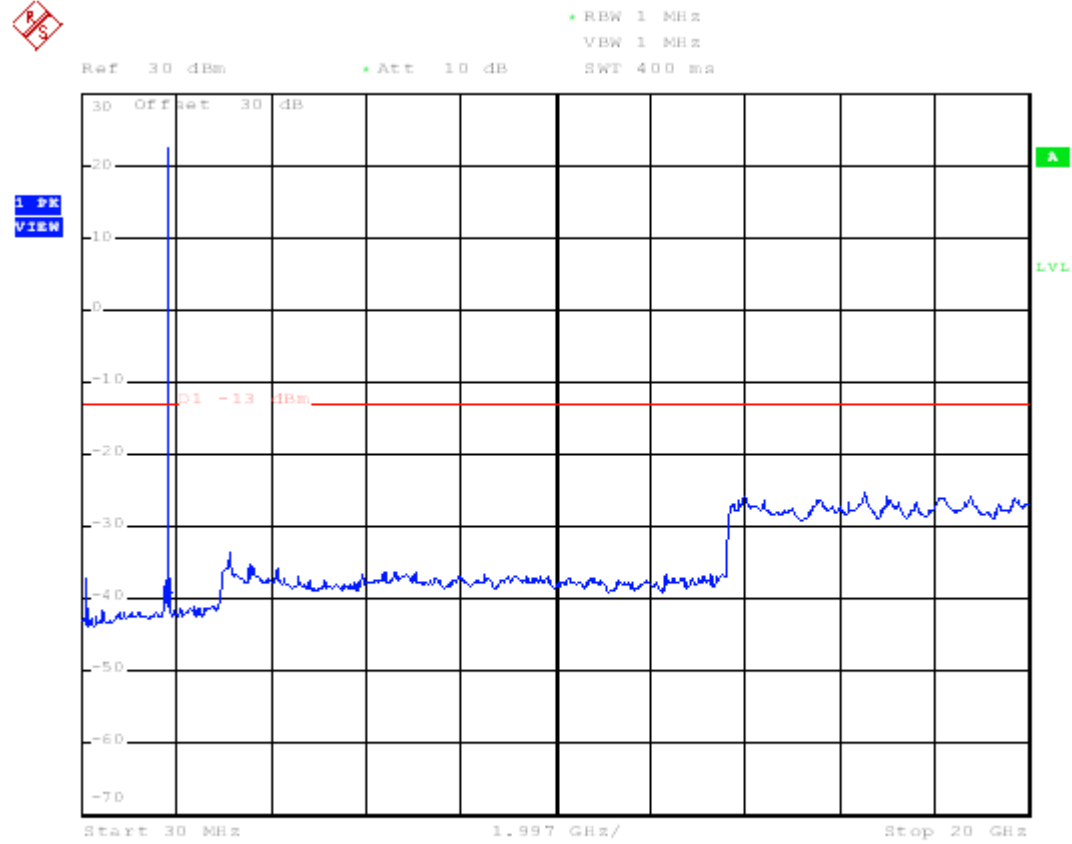


(D) All Band Edge

**Middle Channel**

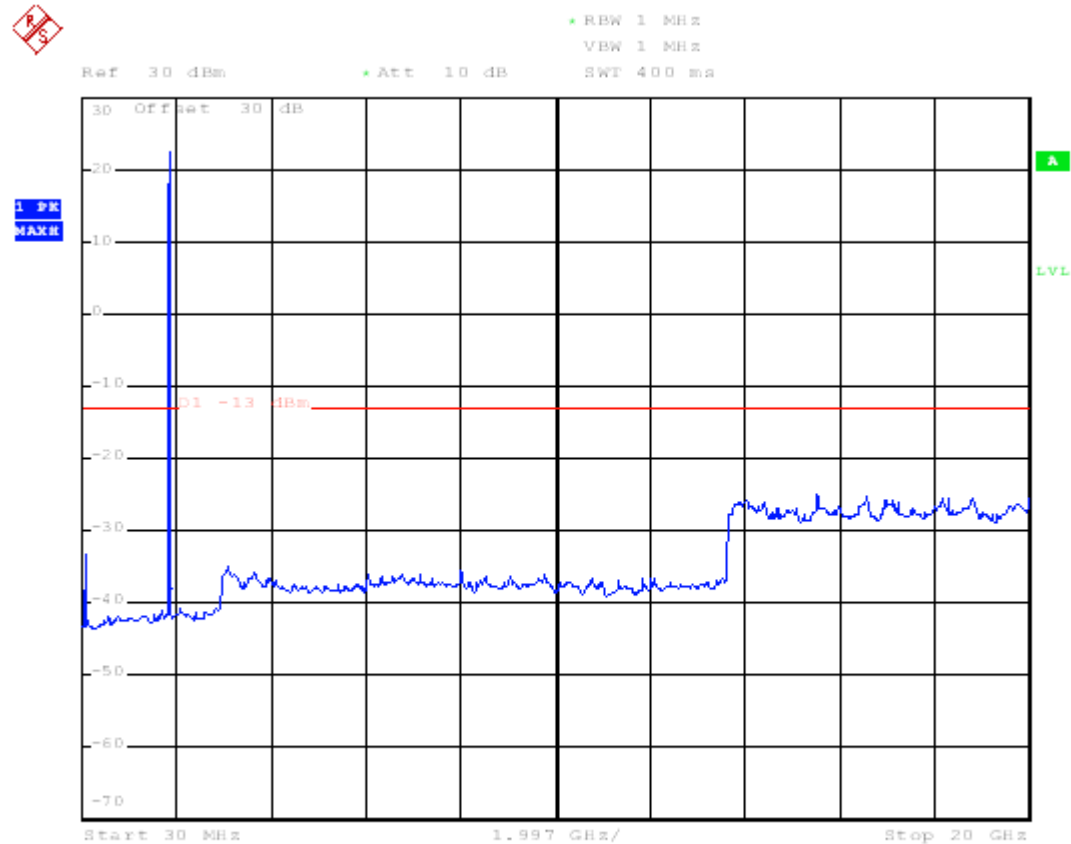

(E) All Band Edge

High Channel

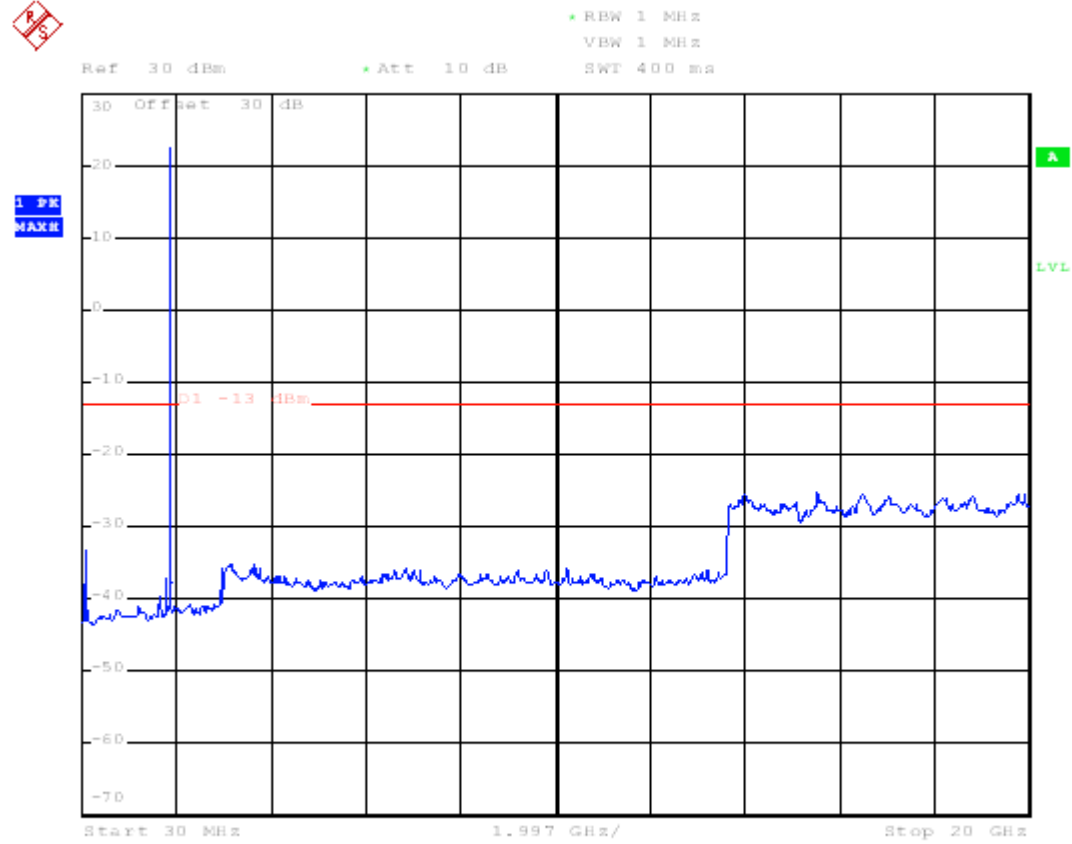



Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

### 6.4.3 PCS1900 Band (EDGE)

Test Mode	Channel	Frequency Range	Note	Chart
PCS1900 EDGE	512	1849MHz-1851MHz	Lower Band Edge	Page 62
	810	1909MHz-1911MHz	Upper Band Edge	Page 63
	512	30MHz-20GHz	All Band Edge	Page 64
	661	30MHz-20GHz	All Band Edge	Page 65
	810	30MHz-20GHz	All Band Edge	Page 66

*Note: Please refer to the following pages for chart*

(A) Lower Band Edge

Low Channel




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -19.98 dBm  
SWT 115 ms      1.849996000 GHz

Ref 20 dBm

\*Att 10 dB

1 PK  
MAXH

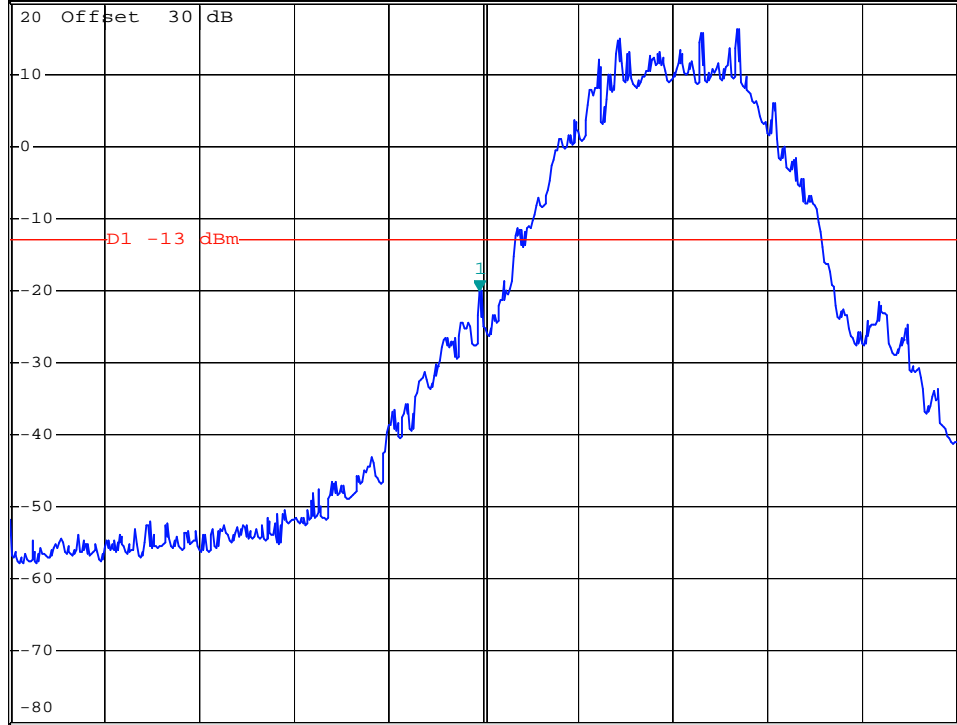

Center 1.85 GHz

100 kHz/

Span 1 MHz


(B) Upper Band Edge

High Channel




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.78 dBm  
SWT 115 ms      1.910024000 GHz

Ref 20 dBm      \*Att 10 dB

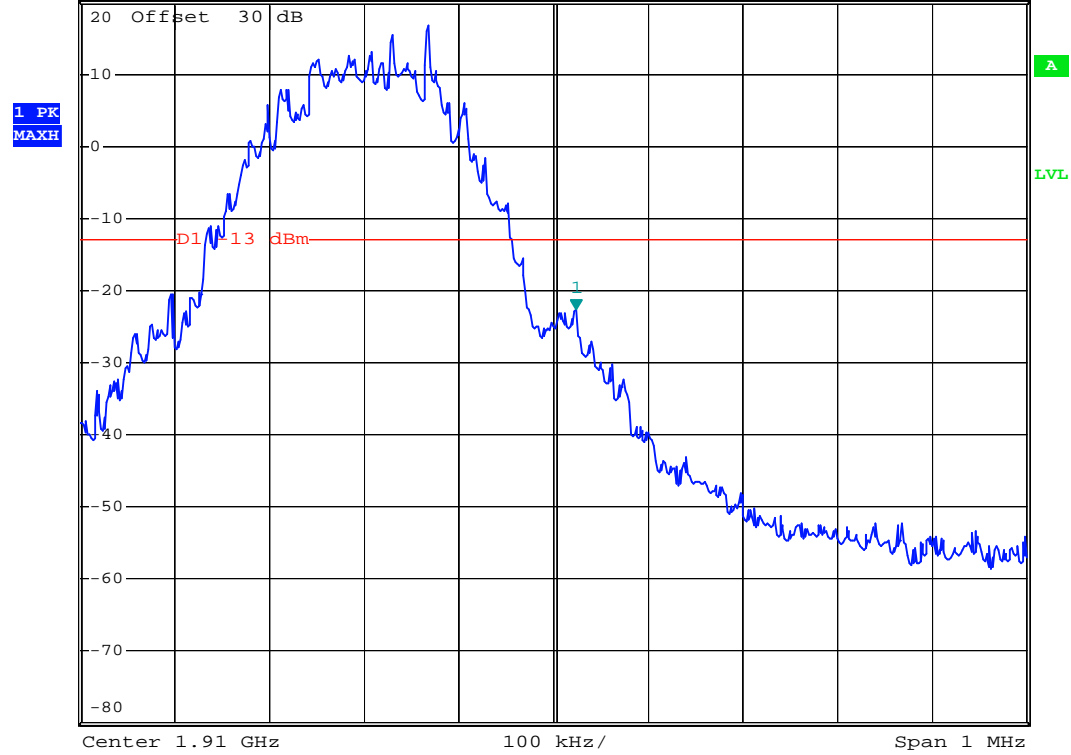


(C) All Band Edge

Low Channel

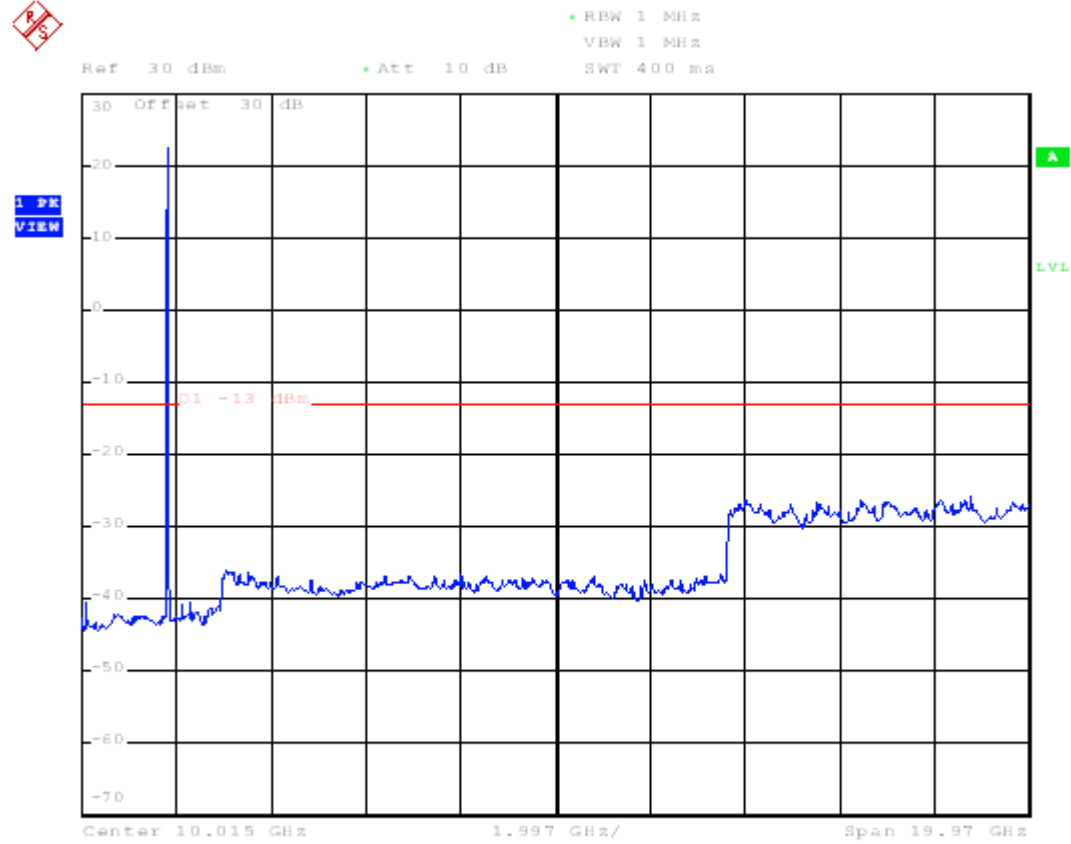


(D) All Band Edge

**Middle Channel**

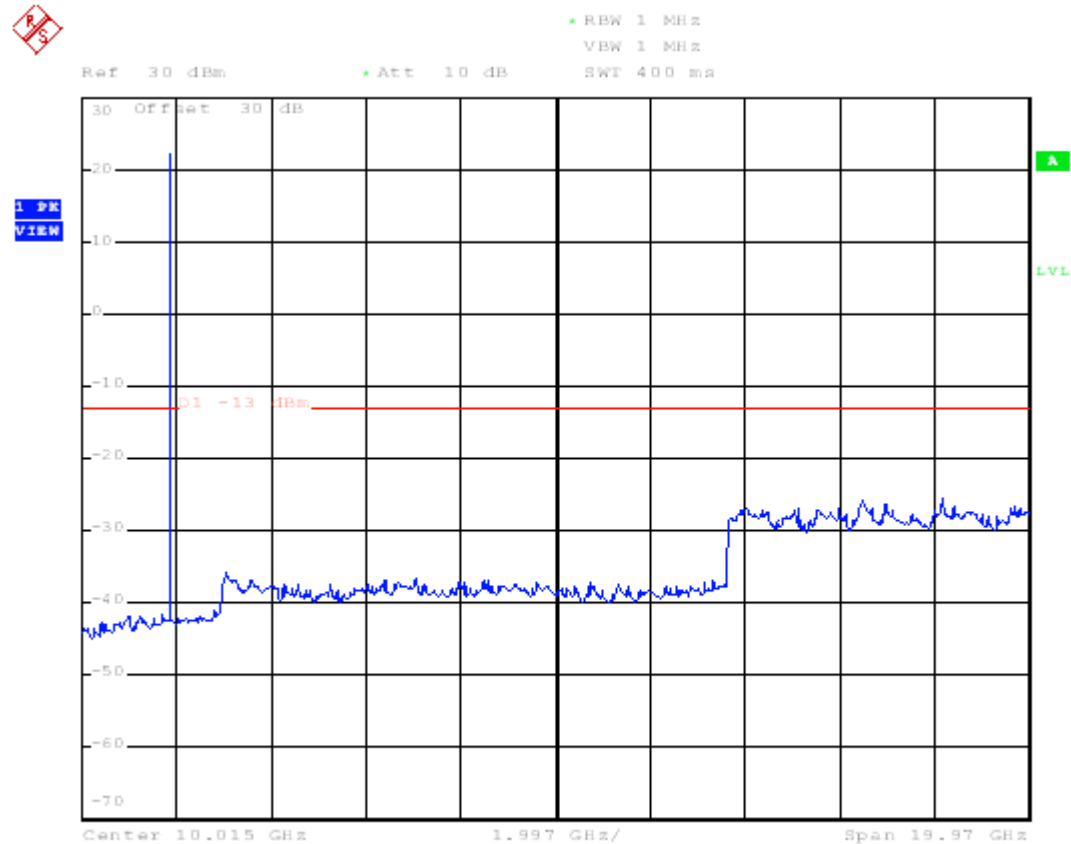

(E) All Band Edge

High Channel

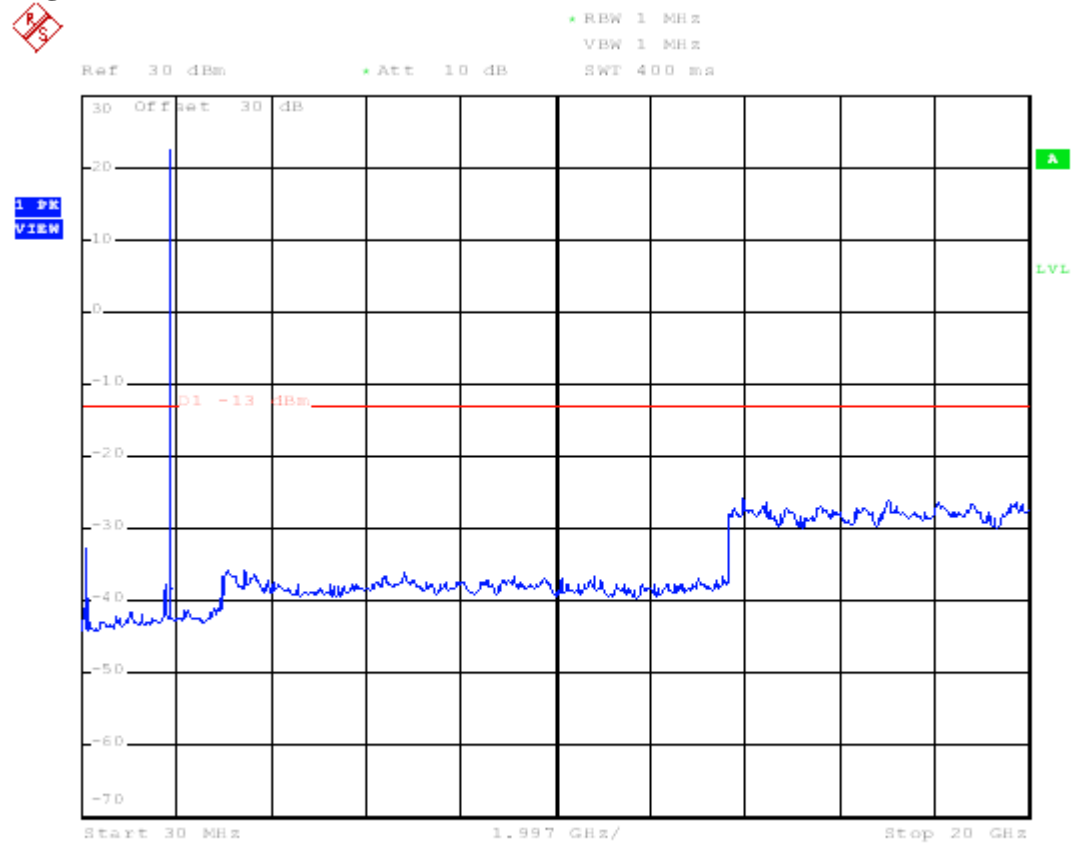

## 7 SPURIOUS RADIATION MEASUREMENT

### 7.1 Applicable Standard

According to FCC §2.1053

### 7.2 Measurement Procedure

The setup of the EUT as shown in figure 2 and figure 3. The EUT was placed on a non-conductive, the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

### 7.3 Measuring Instrument

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Rohde & Schwarz	ESCI	2013/04/26
Spectrum Analyzer	Rohde & Schwarz	FSP40	2013/09/20
Dipole Antenna	Schwarzbeck	1166;1167	2014/09/07
Dipole Antenna	Schwarzbeck	897;898	2014/09/07
Log-periodic Antenna	EMCO	3146	2012/11/03
Amplifier	HP	8447D	2013/05/16
Horn Antenna	EMCO	3116	2012/10/26
Horn Antenna	EMCO	3115	2013/05/17
Signal generator	HP	83732B	2013/09/06

## 7.4 Test Result

### 7.4.1 GSM850 Band (GPRS)

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

(A)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
GSM850 GPRS	128	142.5200	H	-41.3	-13
		210.4200	V	-40.2	-13
		271.5300	H	-42.5	-13
		400.5400	V	-41.8	-13
		499.4800	H	-42.5	-13
		580.9600	V	-40.9	-13

(B)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
GSM850 GPRS	190	41.6400	H	-42.9	-13
		68.8000	V	-41.9	-13
		132.8200	H	-41.1	-13
		210.4200	V	-40.2	-13
		410.2400	H	-42.5	-13
		499.4800	V	-40.8	-13

(C)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
GSM850 GPRS	251	41.6400	H	-42.1	-13
		53.2800	V	-40.3	-13
		68.8000	H	-41.5	-13
		210.4200	V	-40.3	-13
		355.9200	H	-41.9	-13
		456.8000	V	-40.0	-13



**7.4.2 GSM850 Band (EDGE)**

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

(A)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
GSM850 EDGE	128	132.8200	H	-41.9	-13
		210.4200	V	-41.1	-13
		272.5000	H	-42.8	-13
		400.5400	V	-41.5	-13
		499.4800	H	-42.6	-13
		580.9600	V	-41.5	-13

(B)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
GSM850 EDGE	190	142.5200	H	-42.2	-13
		210.4200	V	-41.3	-13
		216.2400	H	-42.9	-13
		272.5000	V	-41.5	-13
		398.6000	H	-42.9	-13
		497.5400	V	-41.2	-13

(C)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
GSM850 EDGE	251	210.4200	H	-42.5	-13
		272.5000	V	-41.3	-13
		295.7800	H	-42.7	-13
		404.4200	V	-40.5	-13
		499.4800	H	-41.9	-13
		580.9600	V	-40.5	-13

### 7.4.3 PCS1900 Band (GPRS)

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

(A)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
PCS1900 GPRS	512	188.210	H	-42.2	-13
		195.320	V	-41.3	-13
		215.250	H	-42.7	-13
		233.650	V	-41.2	-13
		245.660	H	-42.3	-13
		325.250	V	-41.5	-13

(B)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
PCS1900 GPRS	661	33.560	H	-41.8	-13
		119.650	V	-41.0	-13
		135.240	H	-42.5	-13
		188.940	V	-41.3	-13
		225.850	H	-42.7	-13
		332.540	V	-41.2	-13

(C)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
PCS1900 GPRS	810	125.750	H	-42.2	-13
		135.950	V	-41.3	-13
		165.250	H	-42.7	-13
		178.850	V	-41.5	-13
		192.520	H	-42.6	-13
		211.020	V	-41.4	-13

**7.4.4 PCS1900 Band (EDGE)**

Test Date : Oct. 23, 2012      Temperature : 25 °C      Humidity : 65 %

(A)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
PCS1900 EDGE	512	119.250	H	-42.5	-13
		135.650	V	-41.6	-13
		188.950	H	-42.7	-13
		199.450	V	-41.3	-13
		255.640	H	-42.2	-13
		278.990	V	-41.3	-13

(B)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
PCS1900 EDGE	661	118.320	H	-42.3	-13
		129.350	V	-41.5	-13
		157.850	H	-42.2	-13
		188.950	V	-41.7	-13
		192.350	H	-41.5	-13
		215.250	V	-40.2	-13

(C)

Test Mode	Channel	Frequency (MHz)	Polarity (H/V)	Result ERP (dBm)	Limit (dBm)
PCS1900 EDGE	810	136.550	H	-42.2	-13
		175.650	V	-41.9	-13
		188.670	H	-42.8	-13
		193.350	V	-41.6	-13
		215.540	H	-42.1	-13
		229.950	V	-41.1	-13

## 7.5 Photos of Test Setup



## 8. FREQUENCY STABILITY MEASUREMENT

### 8.1 Provisions Applicable

According to FCC §2.1055, FCC §22.355, .FCC §24.235.  
Frequency Tolerance: 2.5 ppm

### 8.2 Measurement Procedure


#### A) Frequency stability versus environmental temperature

1. Setup the configuration per figure 4 for frequencies measured at ambient temperature if it is within 15°C to 25°C. Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100 kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measurement frequencies.

#### B) Frequency stability versus input voltage

1. Setup the configuration per figure 4 for frequencies measured at ambient temperature if it is within 15°C to 25°C. Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100 kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Figure 4: Frequency stability measurement configuration

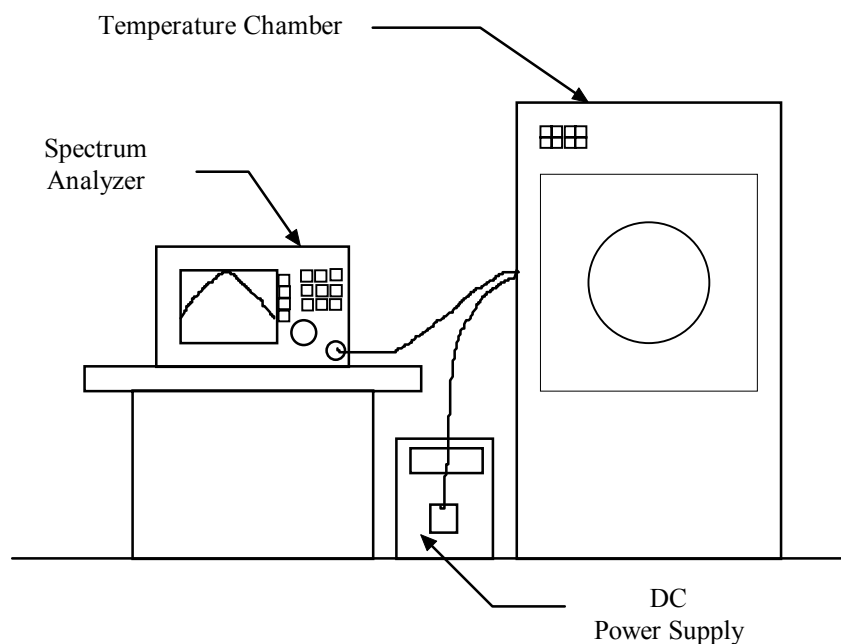

### 8.3 Measurement Instrument

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2013/09/20
Power Divider	SUHNER	4901.19.A	2013/08/12
Universal Digital Radiocommunication Tester	R&S	CMU200	2013/04/22
Temperature Chamber	MALLIER	MCT-2X-M	2013/05/03

## 8.4 Measurement Data

### A. GSM850 Band (GPRS)

#### A1. Frequency stability versus environment temperature

Reference Frequency : GSM850 Middle Channel 836.6 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
50	120	836.6015	0.00018
40		836.6007	0.00008
30		836.6007	0.00009
20		836.6002	0.00003
10		836.5990	-0.00012
0		836.5991	-0.00010
-10		836.5988	-0.00015
-20		836.5991	-0.00011
-30		836.5986	-0.00016

#### A2. Frequency stability versus supplied voltage (85% - 115%)

Reference Frequency : GSM850 Middle Channel 836.6 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
25	138	836.6015	0.00018
25	102	836.6016	0.00019

**B. GSM850 Band (EDGE)**

**B1. Frequency stability versus environment temperature**

Reference Frequency : GSM850 Middle Channel 836.6 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
50	120	836.6005	0.00006
40		836.6000	0.00000
30		836.5996	-0.00004
20		836.6000	0.00000
10		836.5996	-0.00005
0		836.5990	-0.00012
-10		836.5994	-0.00007
-20		836.5985	-0.00018
-30		836.5984	-0.00019

**B2. Frequency stability versus supplied voltage (85% - 115%)**

Reference Frequency : GSM850 Middle Channel 836.6 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
25	138	836.5994	-0.00007
25	102	836.5997	-0.00004



**C. PCS1900 Band (GPRS)**

**C1. Frequency stability versus environment temperature**

Reference Frequency : PCS1900 Middle Channel 1880 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
50	120	1880.0025	0.00013
40		1880.0019	0.00010
30		1880.0016	0.00009
20		1879.9996	-0.00002
10		1879.9991	-0.00005
0		1879.9991	-0.00005
-10		1879.9971	-0.00015
-20		1879.9975	-0.00013
-30		1879.9967	-0.00018

**C2. Frequency stability versus supplied voltage (85% - 115%)**

Reference Frequency : PCS1900 Middle Channel 1880 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
25	138	1879.9975	-0.00013
25	102	1879.9971	-0.00015

**D. PCS1900 Band (EDGE)**

**D1. Frequency stability versus environment temperature**

Reference Frequency : PCS1900 Middle Channel 1880 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
50	120	1880.0025	0.00013
40		1880.0001	0.00000
30		1880.0001	0.00000
20		1879.9997	-0.00001
10		1879.9997	-0.00002
0		1879.9977	-0.00012
-10		1879.9981	-0.00010
-20		1879.9988	-0.00007
-30		1879.9977	-0.00012

**D2. Frequency stability versus supplied voltage (85% - 115%)**

Reference Frequency : PCS1900 Middle Channel 1880 MHz			
Environment Temperature (°C)	Power Supplied (Vac)	Limit : 0.00025% (2.5 ppm)	
		Frequency (MHz)	Delta (%)
25	138	1879.9981	-0.00010
25	102	1879.9977	-0.00012

## 9 CONDUCTED EMISSION MEASUREMENT

### 9.1 Standard Applicable

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.


Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\* Decreases with the logarithm of the frequency


### 9.2 Measurement Procedure

1. Setup the configuration per figure 5.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then records the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 5: Conducted emissions measurement configuration

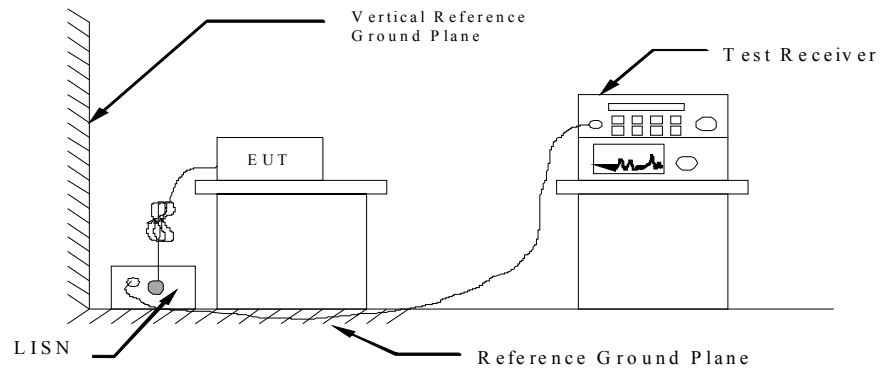

### 9.3 Conducted Emission Data

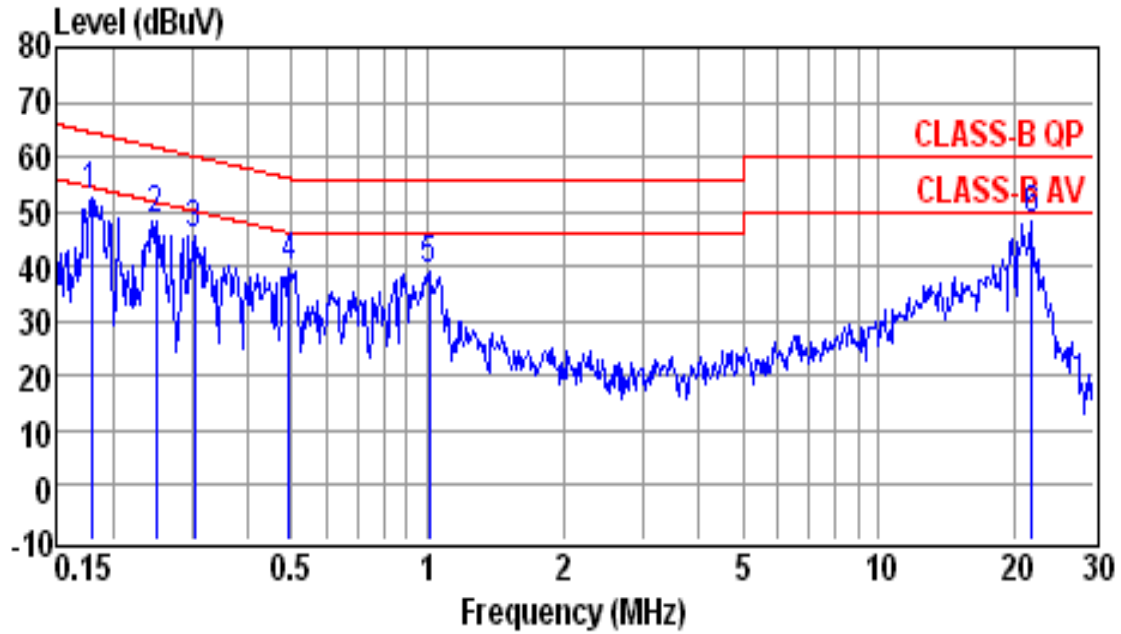


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & FULL SYSTEM WORKING  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1796	52.4	0.2	52.6	64.5	-11.9	QP
0.2495	48.0	0.2	48.2	61.8	-13.6	QP
0.3035	45.4	0.2	45.6	60.1	-14.5	QP
0.4941	39.4	0.2	39.6	56.1	-16.5	QP
1.0100	38.6	0.4	39.0	56.0	-17.0	QP
21.8300	47.4	0.9	48.3	60.0	-11.7	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

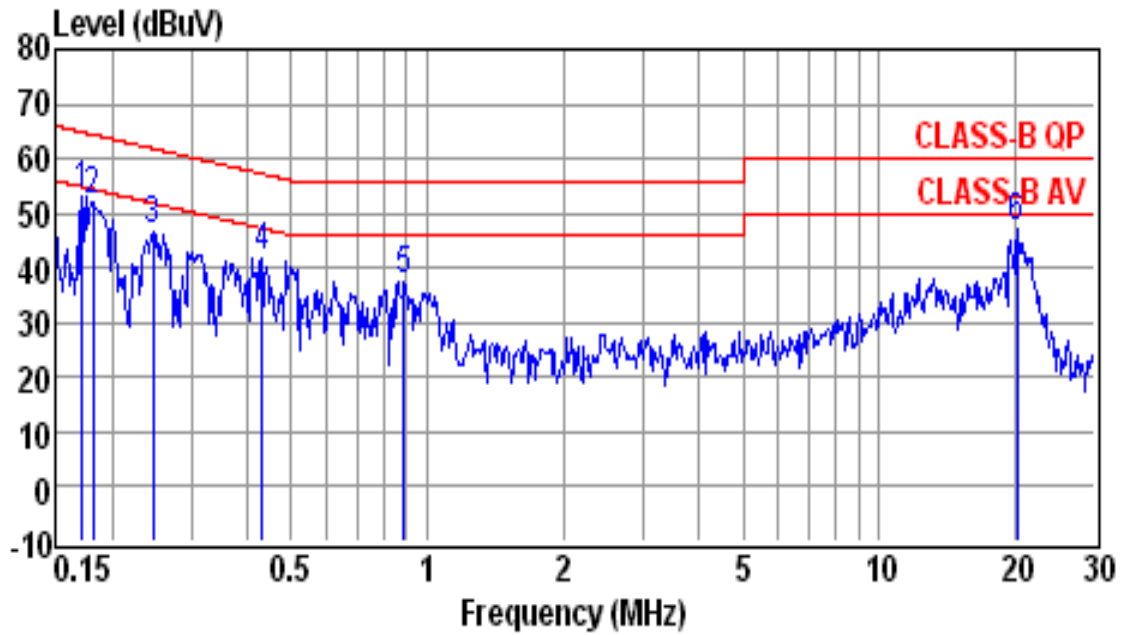


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & FULL SYSTEM WORKING  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1722	52.8	0.3	53.1	64.9	-11.8	QP
0.1815	51.6	0.3	51.9	64.4	-12.5	QP
0.2468	46.2	0.3	46.5	61.9	-15.4	QP
0.4305	41.6	0.3	41.9	57.2	-15.3	QP
0.8897	37.1	0.3	37.4	56.0	-18.6	QP
20.1620	46.0	1.2	47.2	60.0	-12.8	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

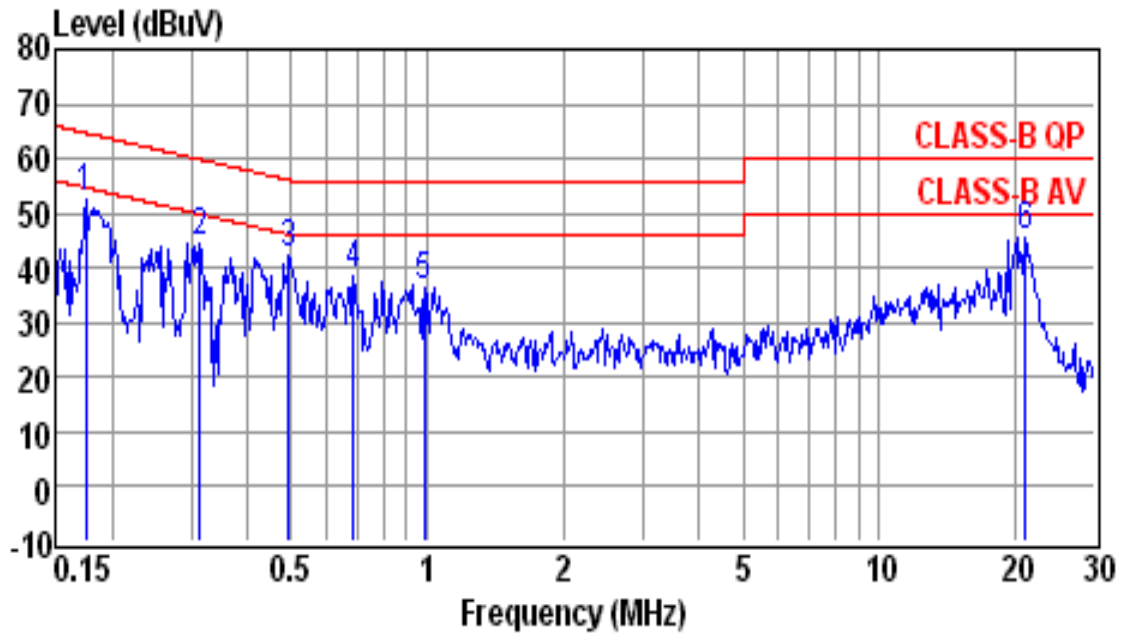


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & GSM850 OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1758	52.2	0.2	52.4	64.7	-12.3	QP
0.3133	44.5	0.2	44.7	59.9	-15.2	QP
0.4941	42.3	0.2	42.5	56.1	-13.6	QP
0.6863	38.1	0.2	38.3	56.0	-17.7	QP
0.9839	36.3	0.2	36.5	56.0	-19.5	QP
21.1470	44.8	0.9	45.7	60.0	-14.3	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

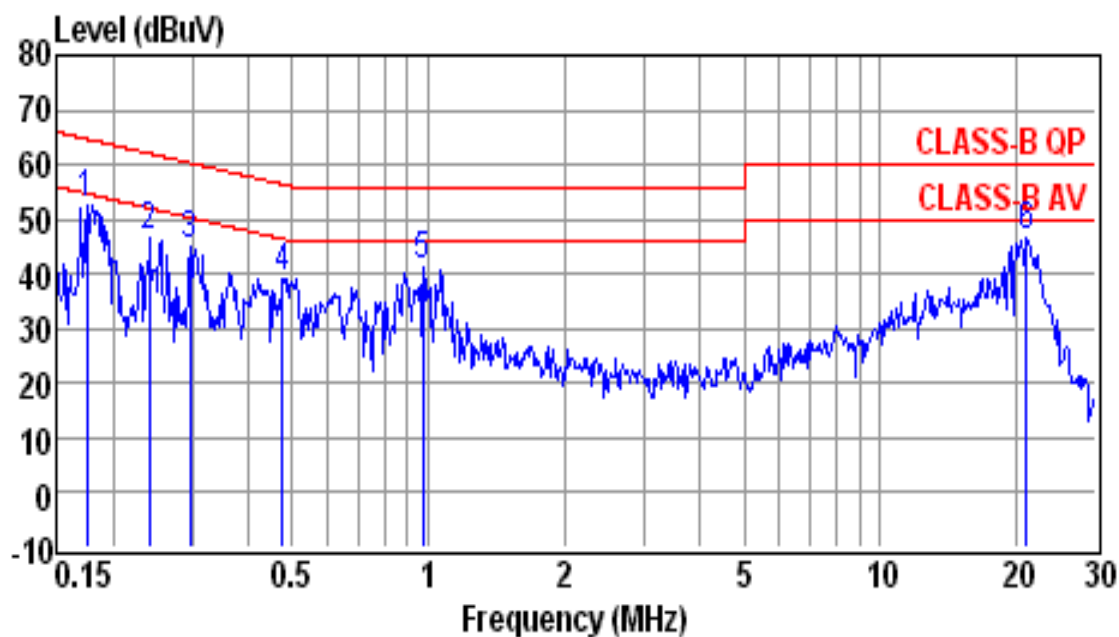


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & GSM850 OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1758	52.2	0.3	52.5	64.7	-12.2	QP
0.2417	46.1	0.3	46.4	62.0	-15.6	QP
0.2971	44.5	0.3	44.8	60.3	-15.5	QP
0.4761	38.9	0.3	39.2	56.4	-17.2	QP
0.9735	41.0	0.3	41.3	56.0	-14.7	QP
21.1470	45.4	1.2	46.6	60.0	-13.4	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss



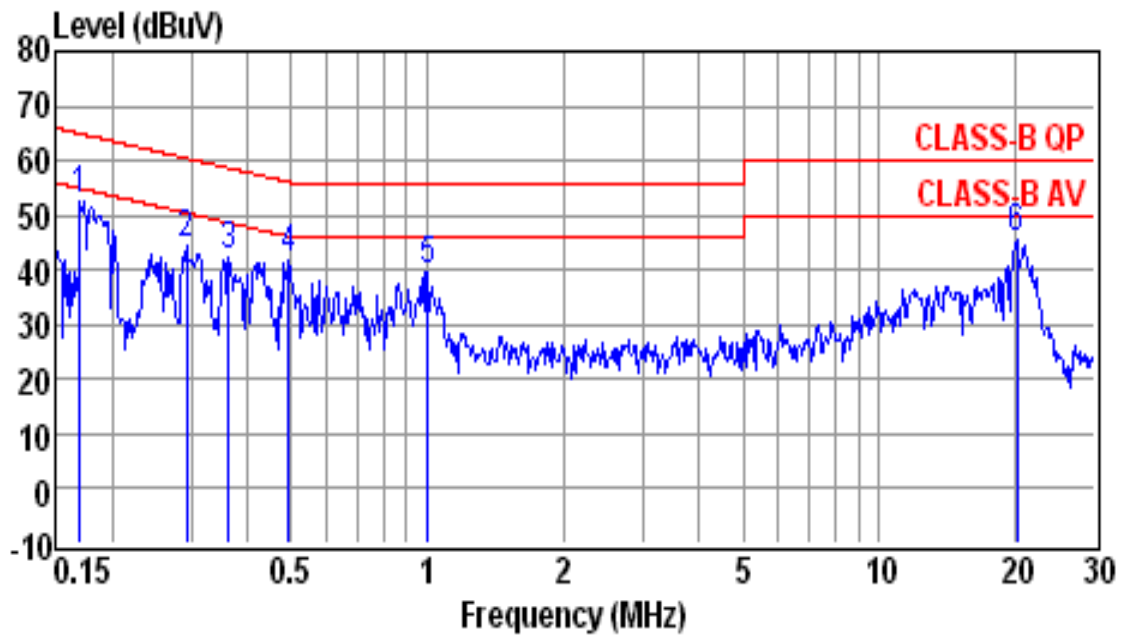


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : GSM1900 OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1703	52.1	0.2	52.3	64.9	-12.6	QP
0.2924	44.1	0.2	44.3	60.5	-16.2	QP
0.3634	41.8	0.2	42.0	58.7	-16.7	QP
0.4941	41.6	0.2	41.8	56.1	-14.3	QP
0.9997	39.2	0.3	39.5	56.0	-16.5	QP
20.1620	44.7	0.9	45.6	60.0	-14.4	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

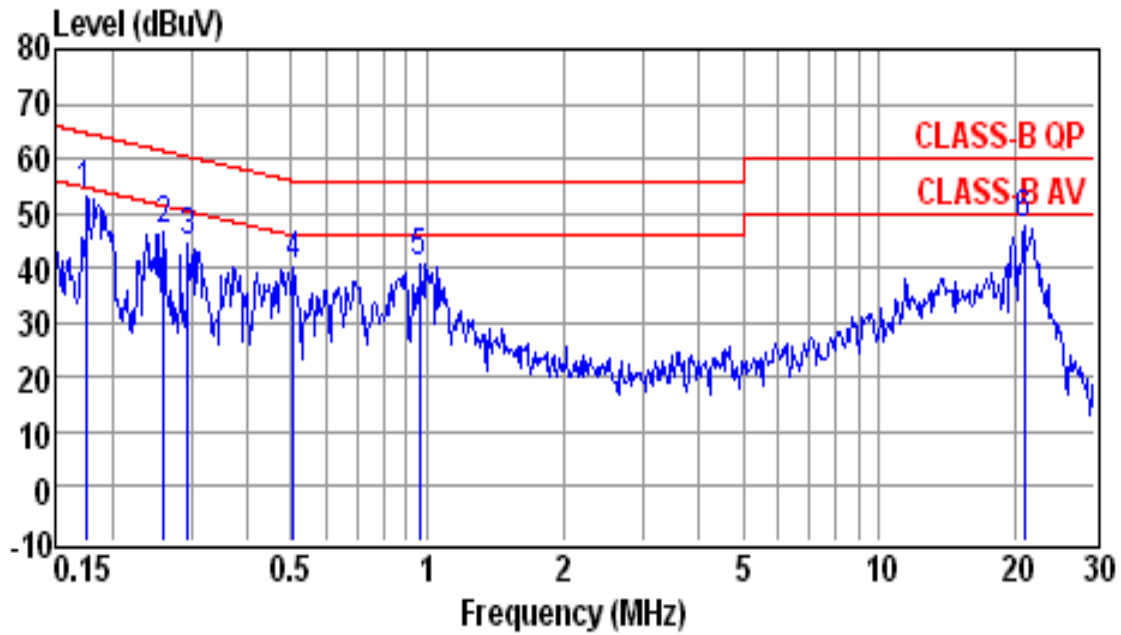


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & GSM1900 OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1758	52.5	0.3	52.8	64.7	-11.9	QP
0.2616	46.3	0.3	46.6	61.4	-14.8	QP
0.2955	44.1	0.3	44.4	60.4	-16.0	QP
0.5047	39.6	0.3	39.9	56.0	-16.1	QP
0.9633	40.5	0.3	40.8	56.0	-15.2	QP
20.9240	46.6	1.2	47.8	60.0	-12.2	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

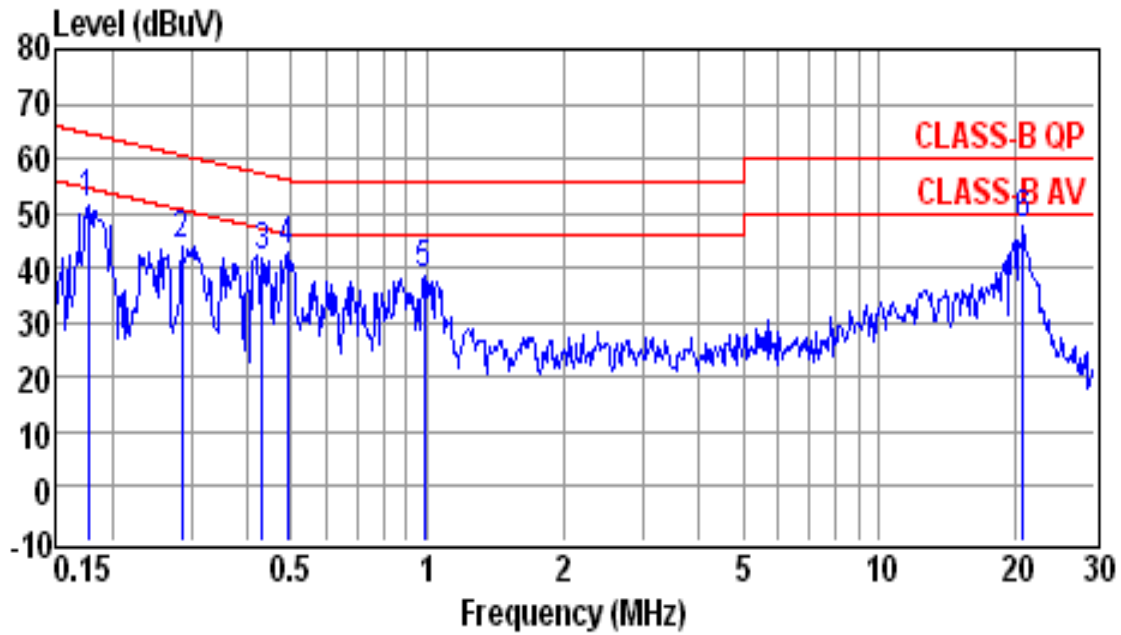


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & GPRS OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1777	51.4	0.2	51.6	64.6	-13.0	QP
0.2863	43.7	0.2	43.9	60.6	-16.7	QP
0.4305	41.6	0.2	41.8	57.2	-15.4	QP
0.4889	42.4	0.2	42.6	56.2	-13.6	QP
0.9839	38.4	0.2	38.6	56.0	-17.4	QP
20.8140	46.7	0.9	47.6	60.0	-12.4	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

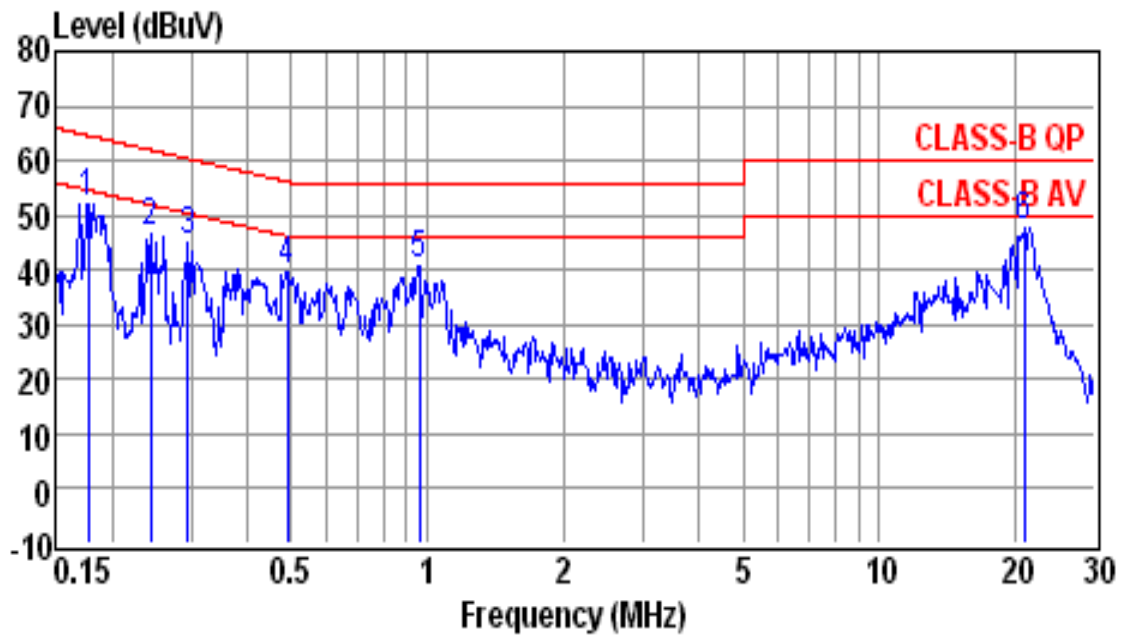


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & GPRS OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1777	51.9	0.3	52.2	64.6	-12.4	QP
0.2442	46.1	0.3	46.4	62.0	-15.6	QP
0.2955	44.4	0.3	44.7	60.4	-15.7	QP
0.4889	39.2	0.3	39.5	56.2	-16.7	QP
0.9633	40.4	0.3	40.7	56.0	-15.3	QP
20.9240	46.4	1.2	47.6	60.0	-12.4	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

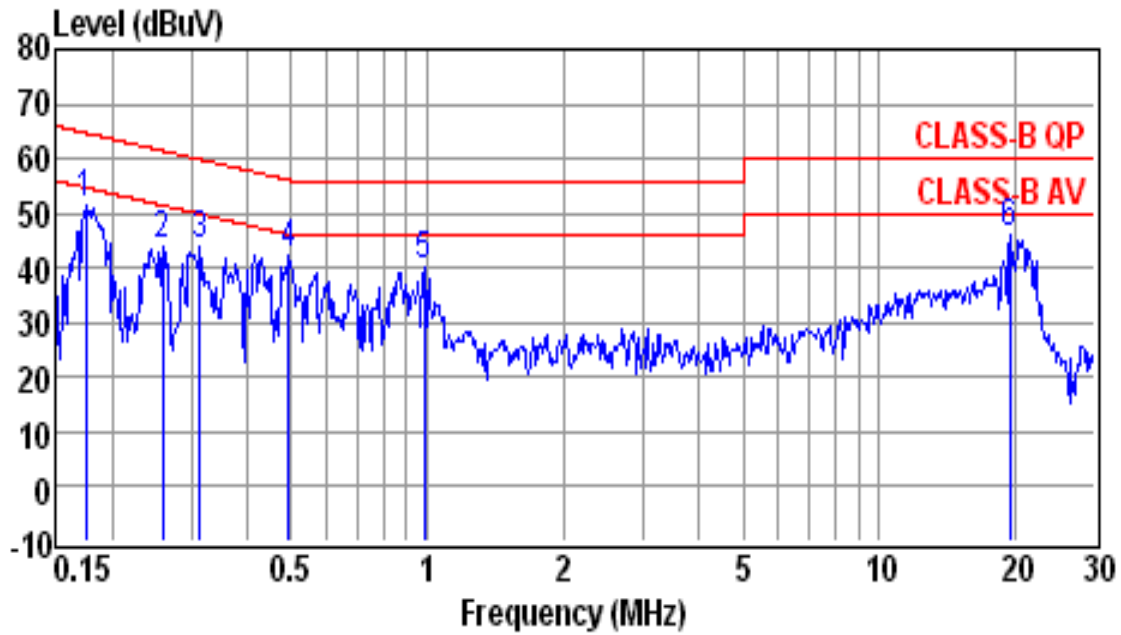


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & EDGE OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1758	51.1	0.2	51.3	64.7	-13.4	QP
0.2589	43.6	0.2	43.8	61.5	-17.7	QP
0.3133	43.5	0.2	43.7	59.9	-16.2	QP
0.4941	41.9	0.2	42.1	56.1	-14.0	QP
0.9839	39.8	0.2	40.0	56.0	-16.0	QP
19.5320	44.9	0.9	45.8	60.0	-14.2	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

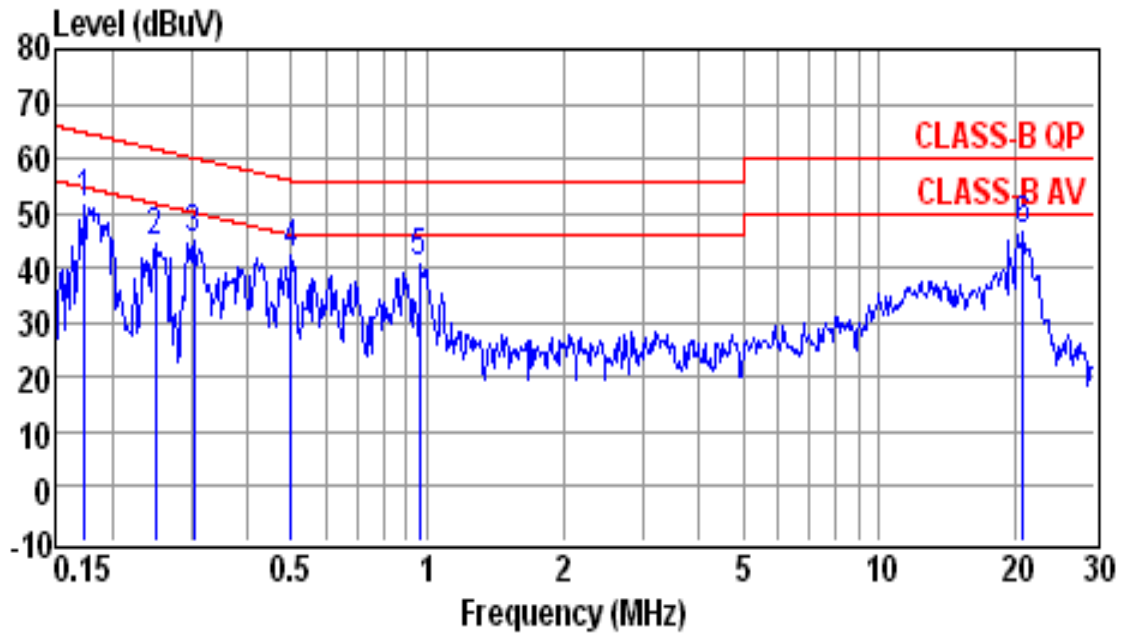


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & EDGE OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1740	50.9	0.3	51.2	64.8	-13.6	QP
0.2495	44.2	0.3	44.5	61.8	-17.3	QP
0.3035	44.8	0.3	45.1	60.1	-15.0	QP
0.4994	42.0	0.3	42.3	56.0	-13.7	QP
0.9633	40.1	0.3	40.4	56.0	-15.6	QP
20.8140	45.2	1.2	46.4	60.0	-13.6	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

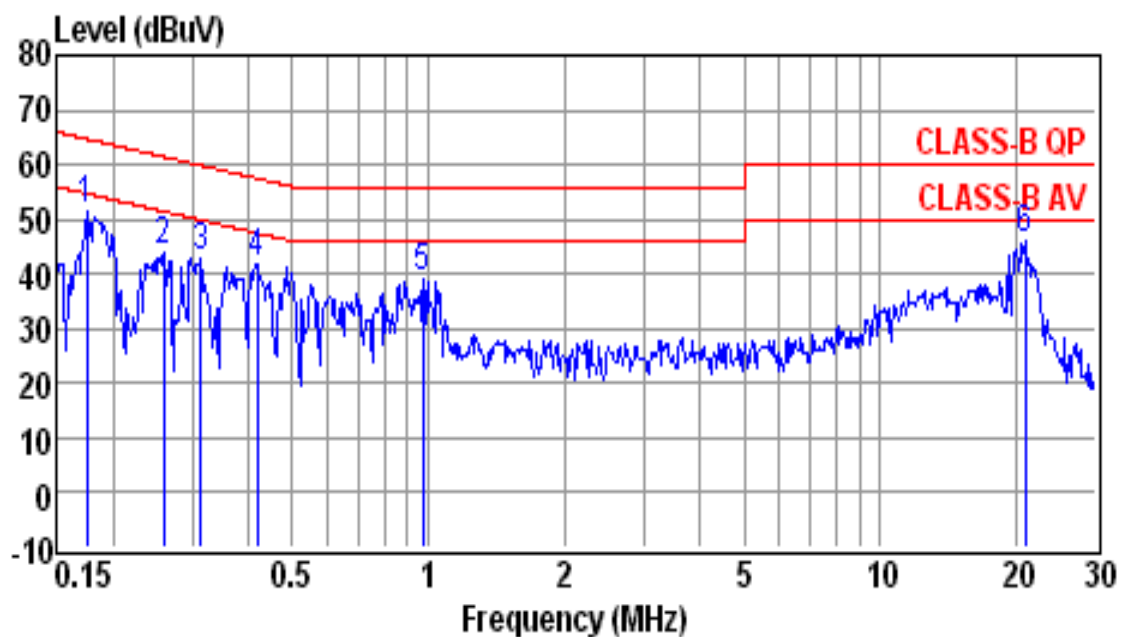


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & WIFI OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1758	51.5	0.2	51.7	64.7	-13.0	QP
0.2589	43.4	0.2	43.6	61.5	-17.9	QP
0.3133	42.7	0.2	42.9	59.9	-17.0	QP
0.4171	41.7	0.2	41.9	57.5	-15.6	QP
0.9735	38.6	0.2	38.8	56.0	-17.2	QP
20.9240	45.3	0.9	46.2	60.0	-13.8	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

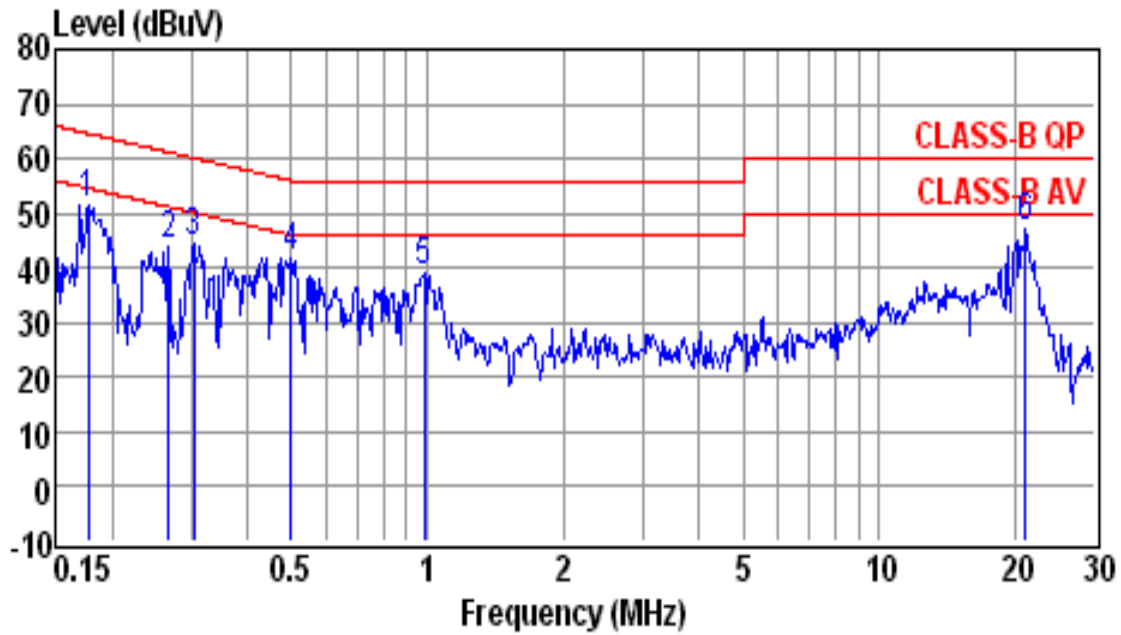


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & WIFI OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1777	51.1	0.3	51.4	64.6	-13.2	QP
0.2672	43.4	0.3	43.7	61.2	-17.5	QP
0.3035	44.1	0.3	44.4	60.1	-15.7	QP
0.4994	41.5	0.3	41.8	56.0	-14.2	QP
0.9839	38.7	0.3	39.0	56.0	-17.0	QP
21.1470	46.1	1.2	47.3	60.0	-12.7	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss



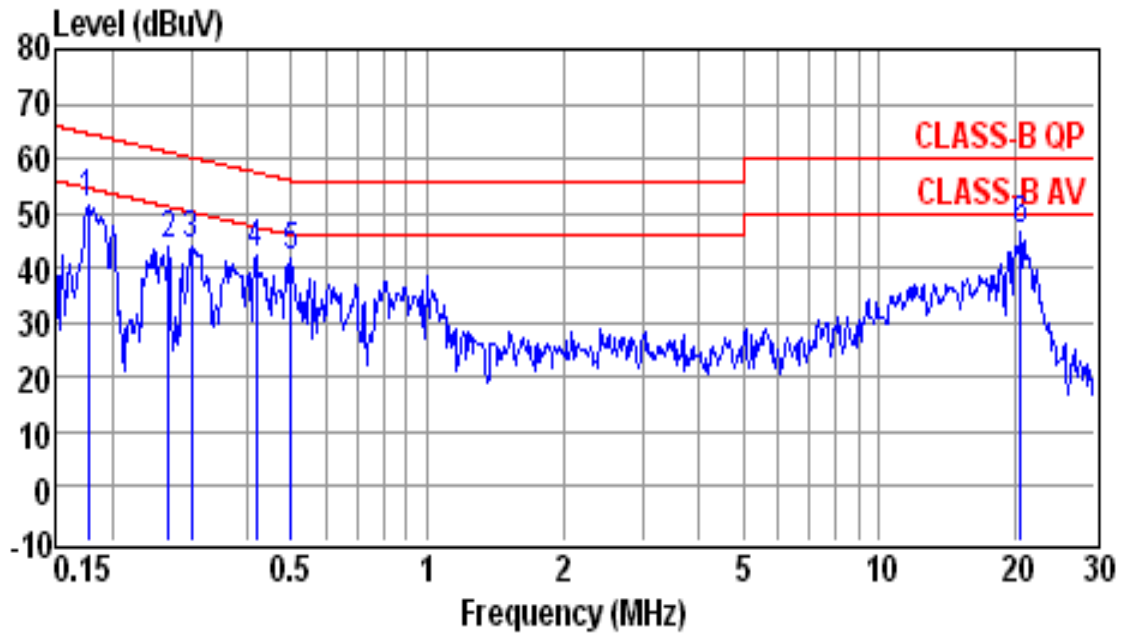


Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & BLUETOOTH OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1777	51.0	0.2	51.2	64.6	-13.4	QP
0.2672	43.7	0.2	43.9	61.2	-17.3	QP
0.3003	43.8	0.2	44.0	60.2	-16.2	QP
0.4171	42.3	0.2	42.5	57.5	-15.0	QP
0.4994	41.4	0.2	41.6	56.0	-14.4	QP
20.5940	45.9	0.9	46.8	60.0	-13.2	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

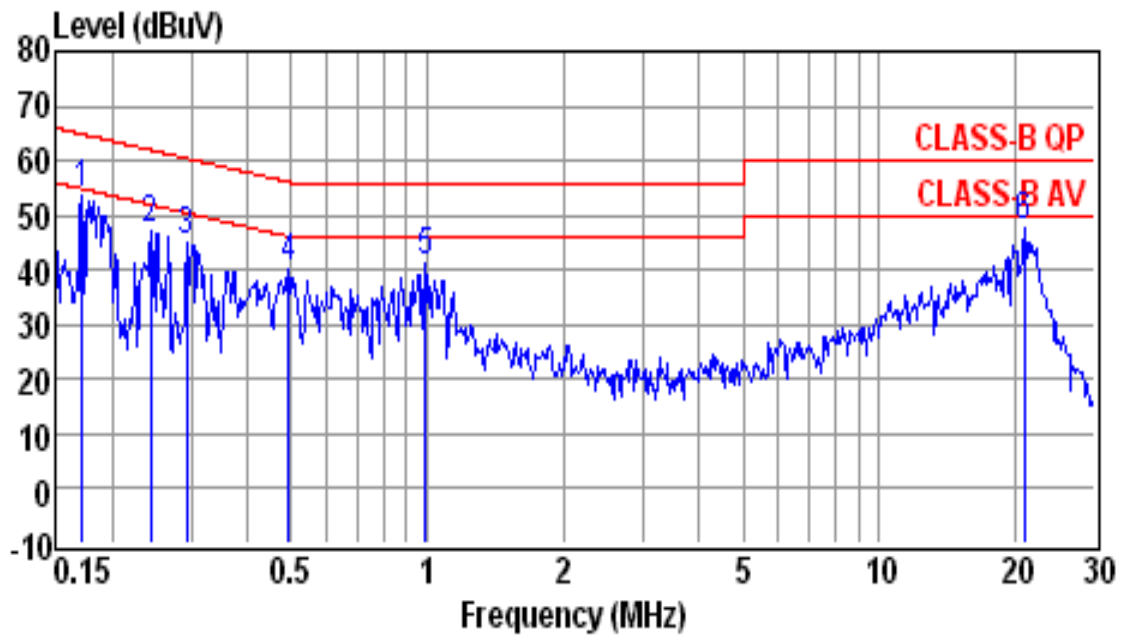

Site : conducted #1 Date : 10-23-2012  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65%  
 Test Mode : CHARGE & BLUETOOTH OPERATION MODE  
 EUT : 9.7" TABLE PC  
 Power Rating : AC 100-240V (POWER FROM ADAPTER)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1722	53.0	0.3	53.3	64.9	-11.6	QP
0.2442	46.6	0.3	46.9	62.0	-15.1	QP
0.2924	44.7	0.3	45.0	60.5	-15.5	QP
0.4941	39.6	0.3	39.9	56.1	-16.2	QP
0.9891	41.1	0.3	41.4	56.0	-14.6	QP
20.9240	46.3	1.2	47.5	60.0	-12.5	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 9.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB  $\mu$  V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

## 9.5 Conducted Measurement Equipment

The following test equipments are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Rohde & Schwarz	ESCI	2013/07/16
LISN	EMCO	3825/2	2012/10/26
LISN	Rohde & Schwarz	ESH2-Z5	2013/08/23

## 9.6 Photos of Conduction Measuring Setup



## CONSTRUCTED PHOTOS of EUT

(A)EUT

1.




2.



### CONSTRUCTED PHOTOS of EUT

3.

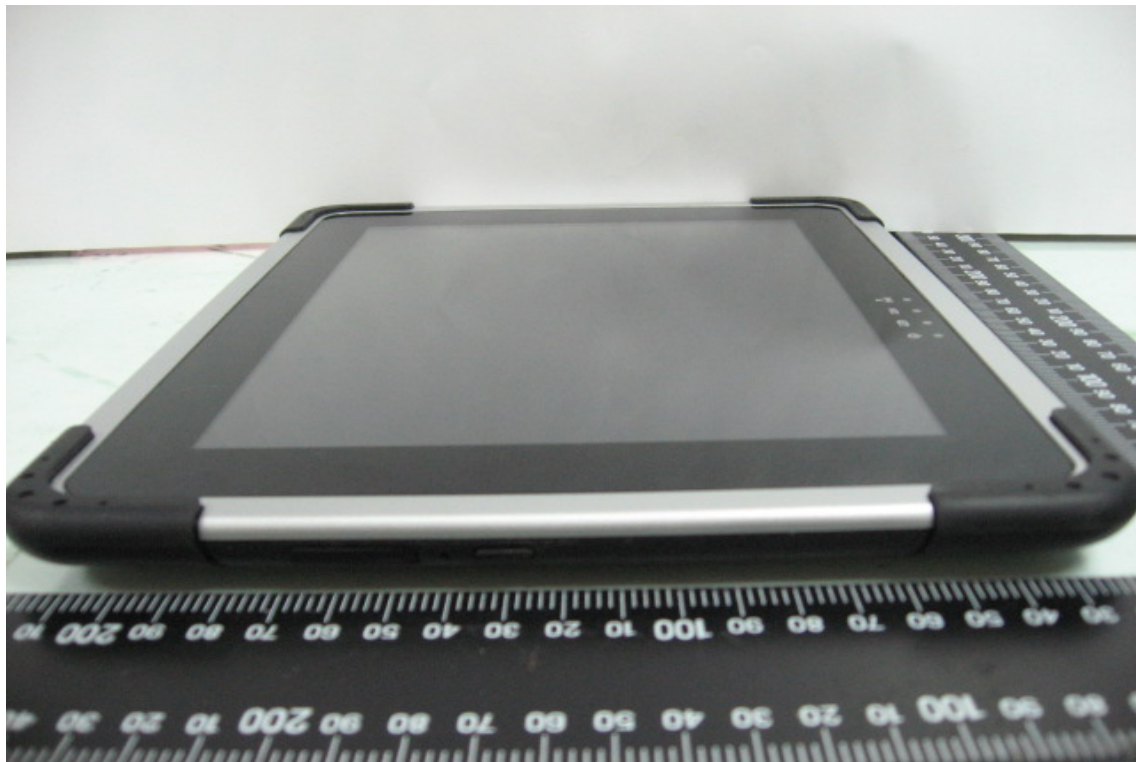

4.




## CONSTRUCTED PHOTOS of EUT

5.




6.

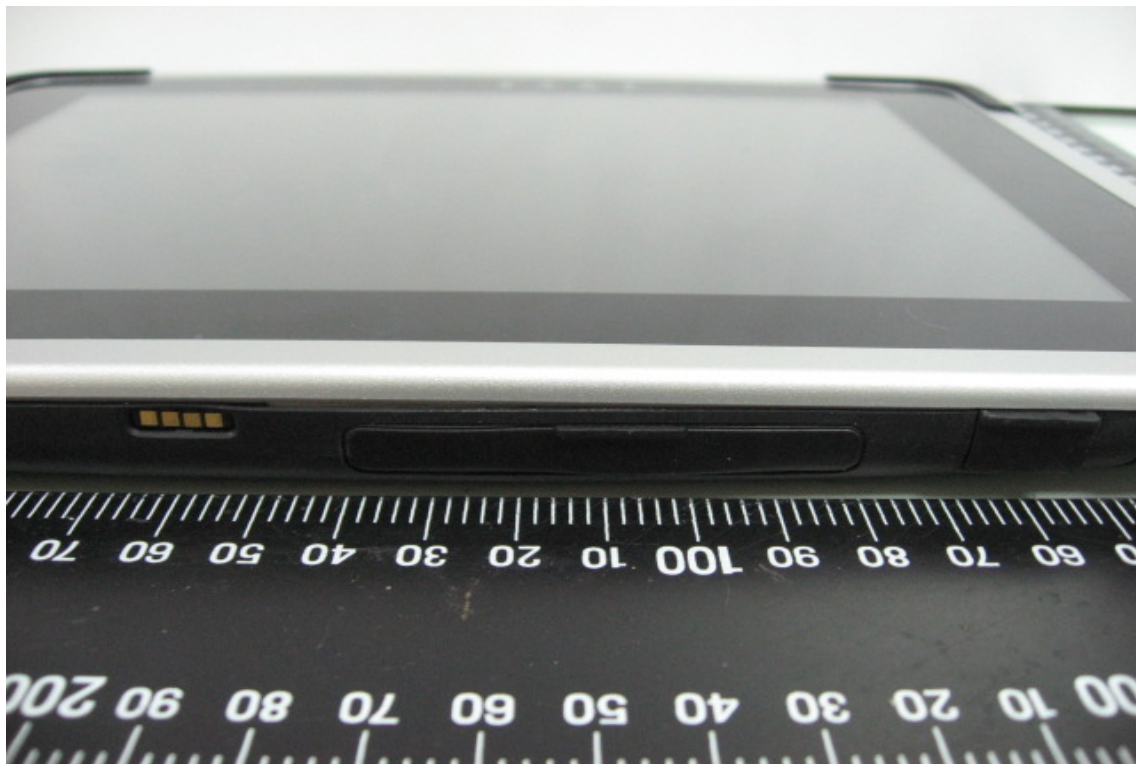

### CONSTRUCTED PHOTOS of EUT

7.

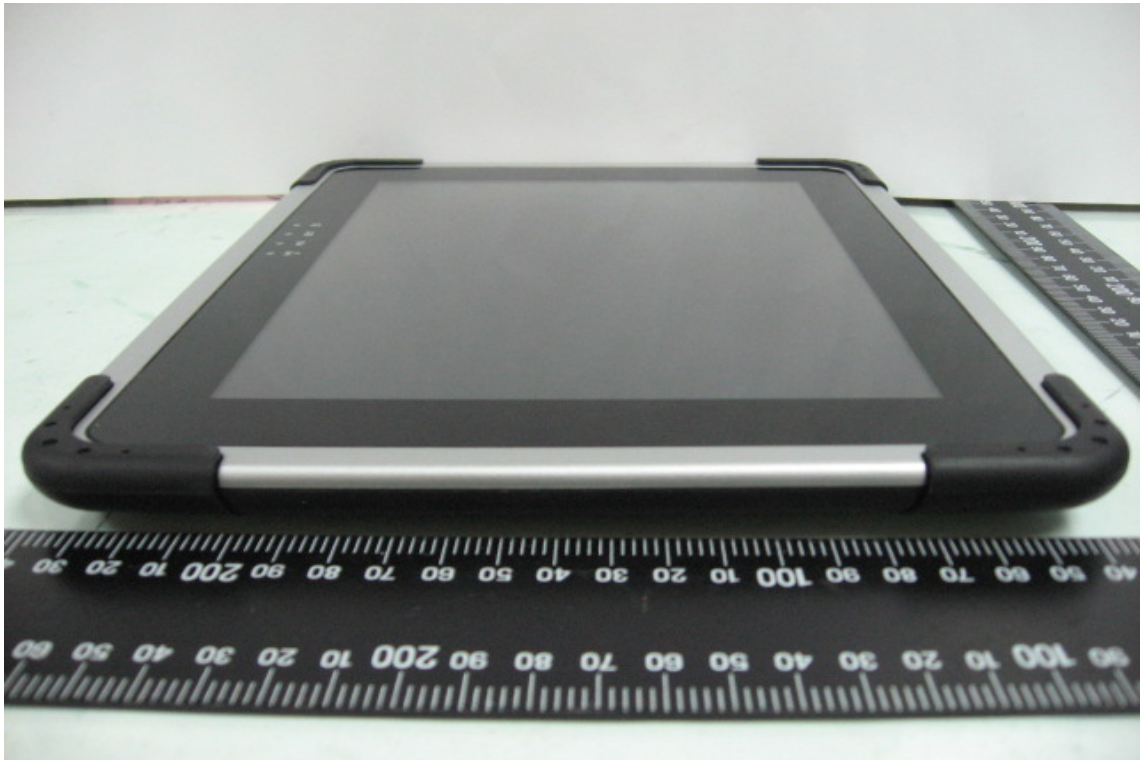


8.






## CONSTRUCTED PHOTOS of EUT

9.

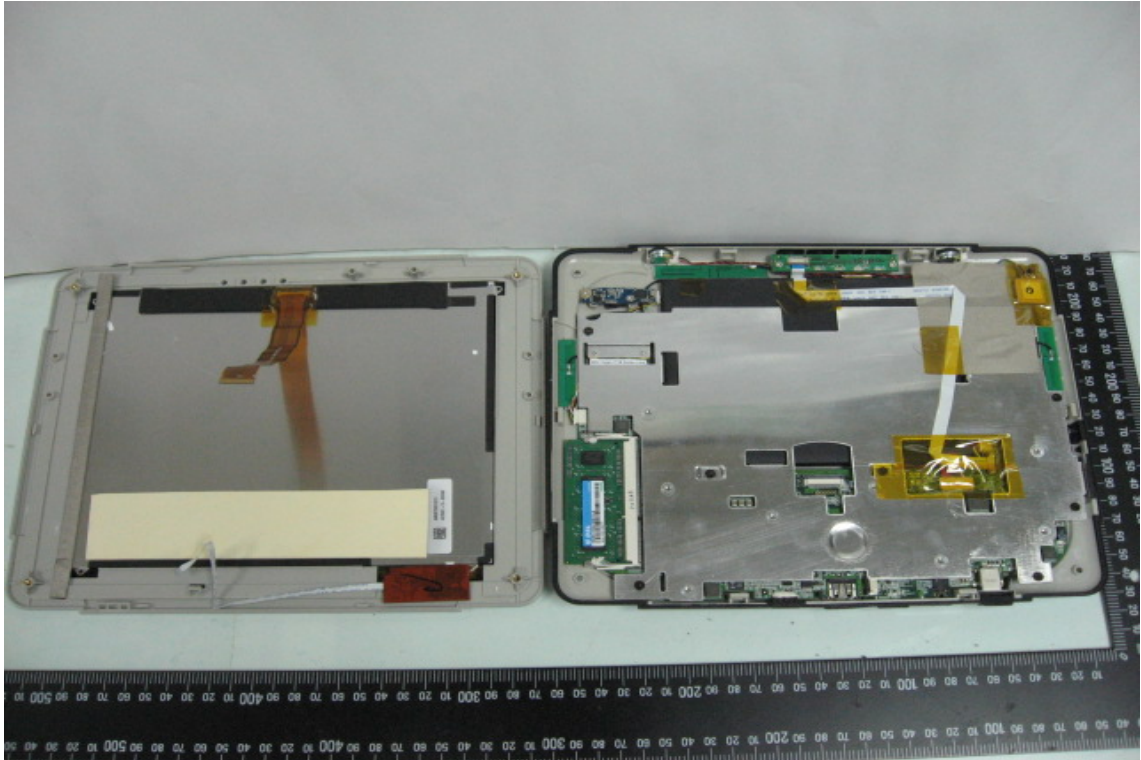

10.

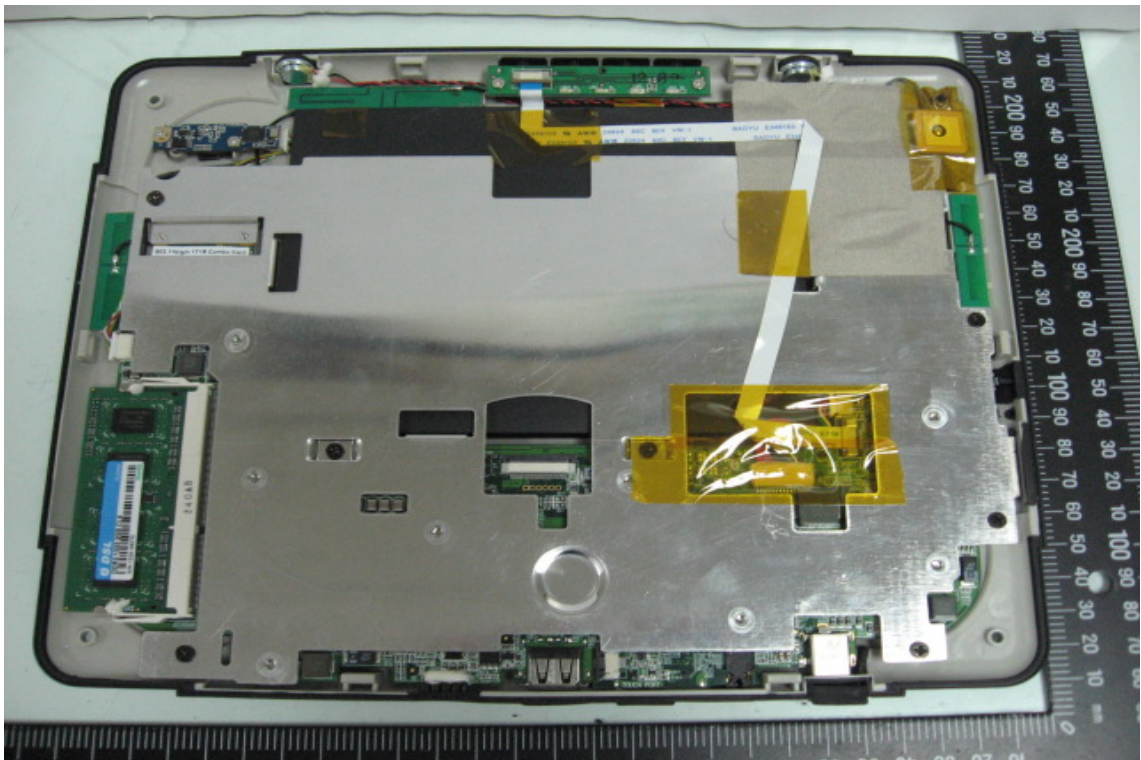

## CONSTRUCTED PHOTOS of EUT

11.




12.




### CONSTRUCTED PHOTOS of EUT

13.

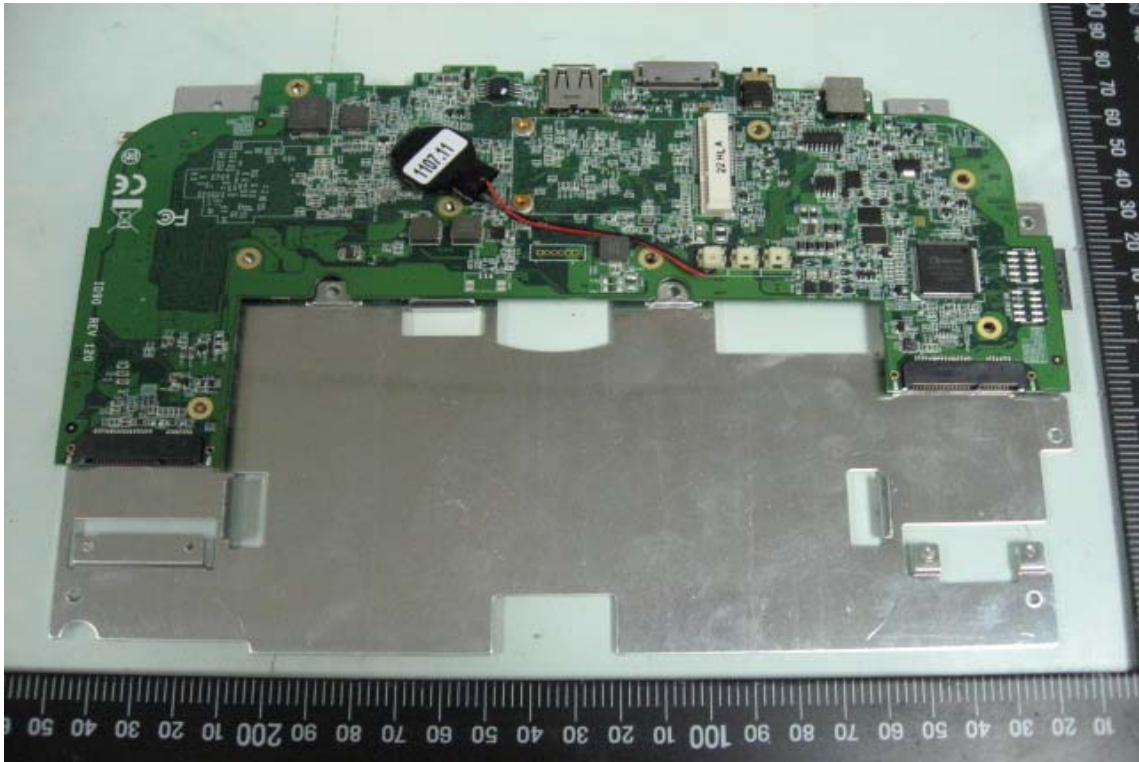


14.

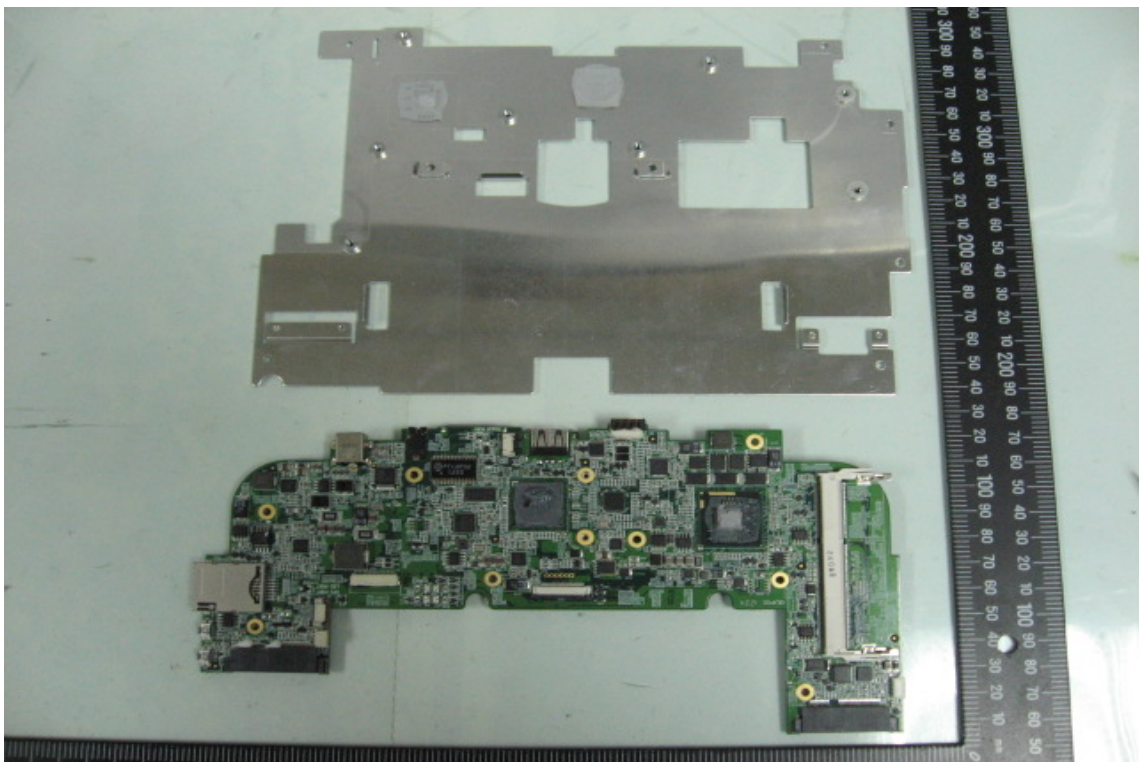


### CONSTRUCTED PHOTOS of EUT

15.

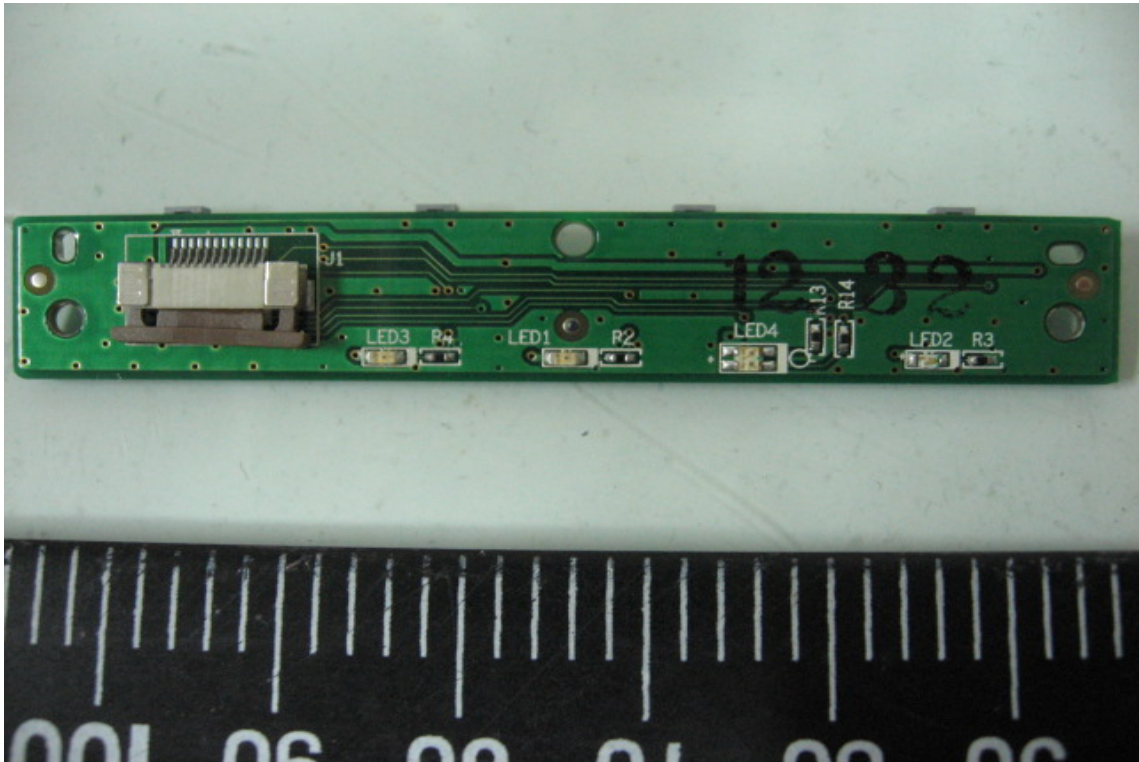


16.

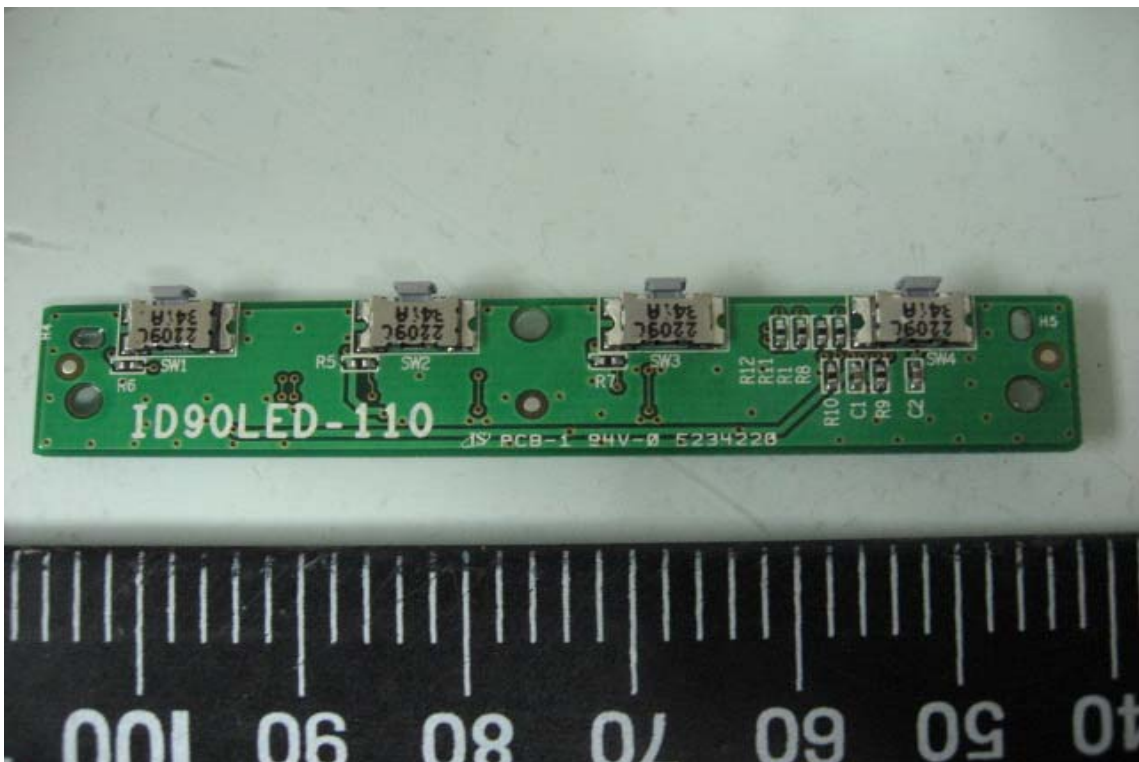


### CONSTRUCTED PHOTOS of EUT

17.

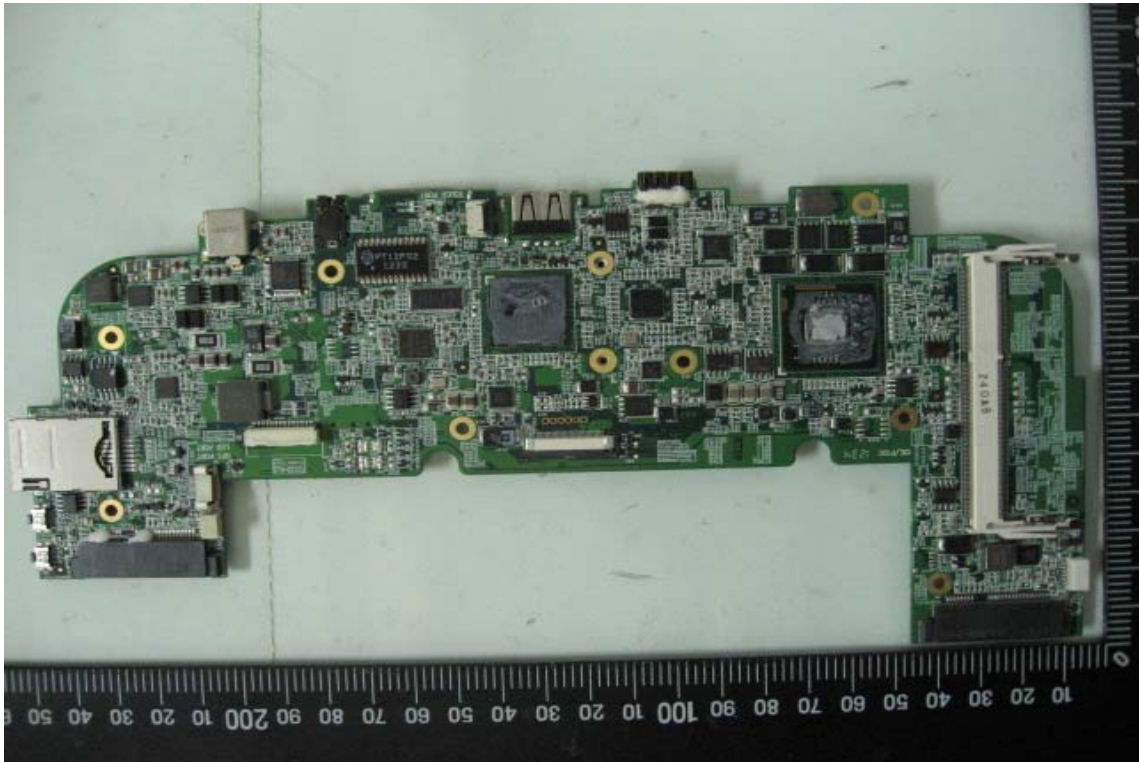

18.

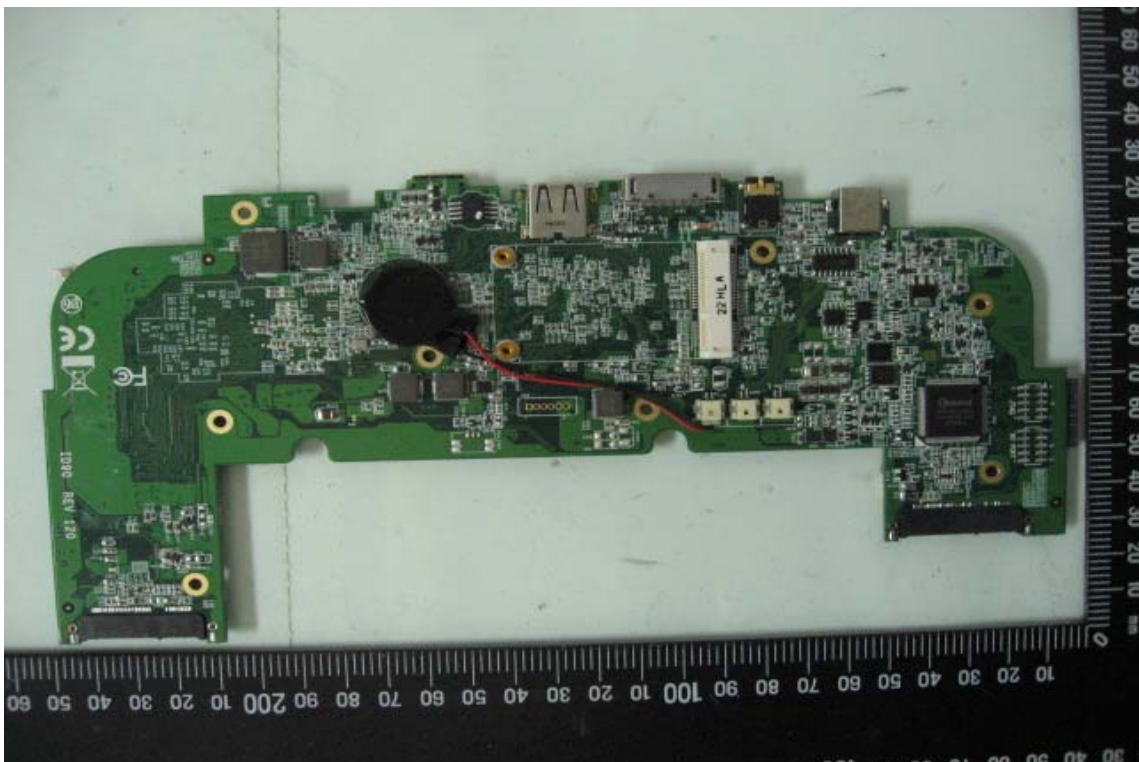

## CONSTRUCTED PHOTOS of EUT


### (B) GPS Module

1.




## CONSTRUCTED PHOTOS of EUT

2.

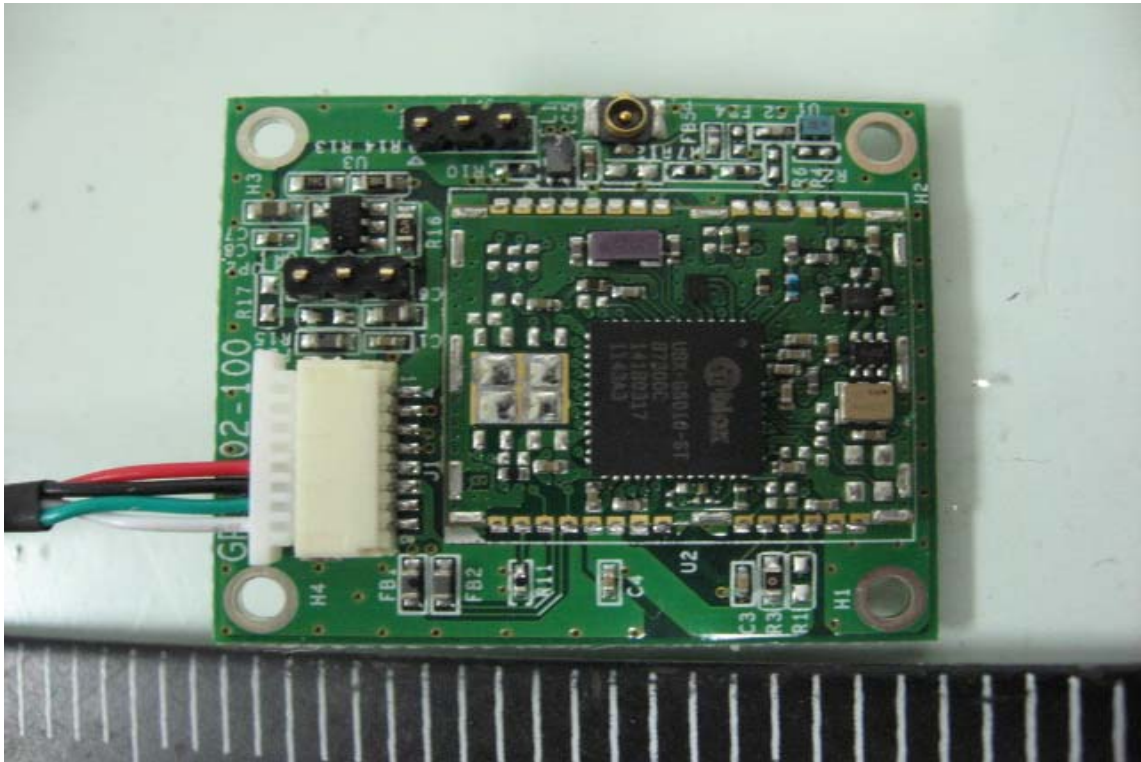


3.

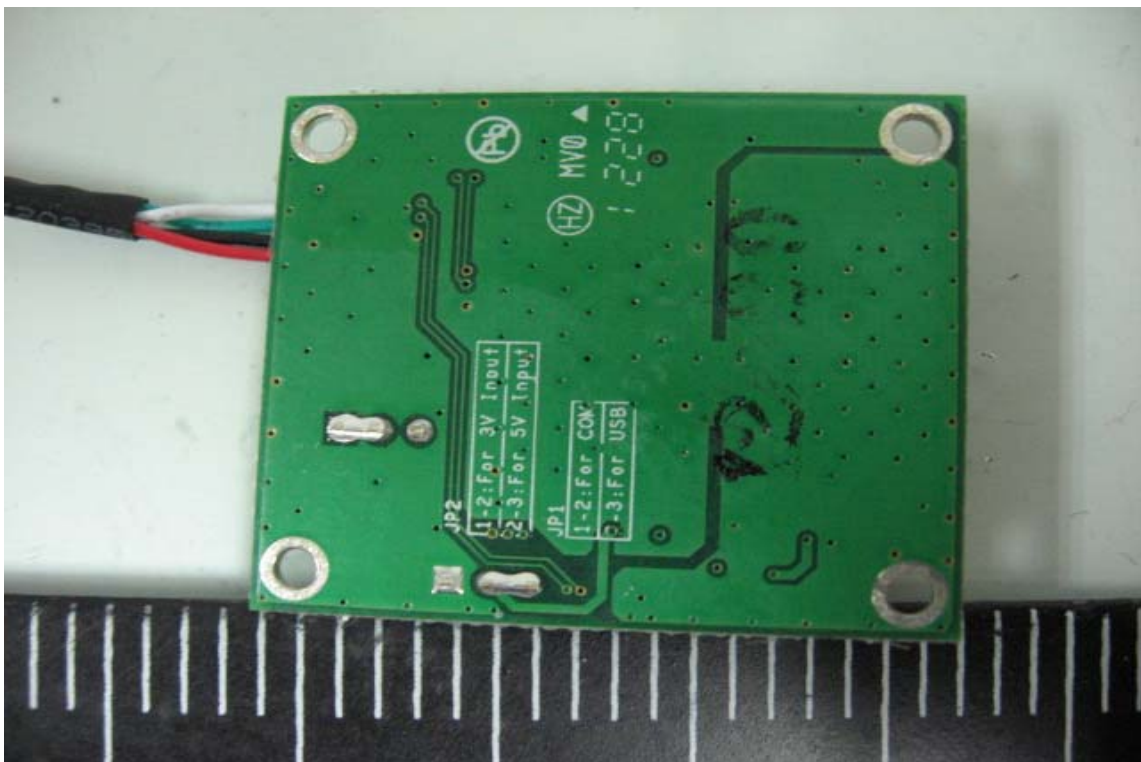


### CONSTRUCTED PHOTOS of EUT

4.

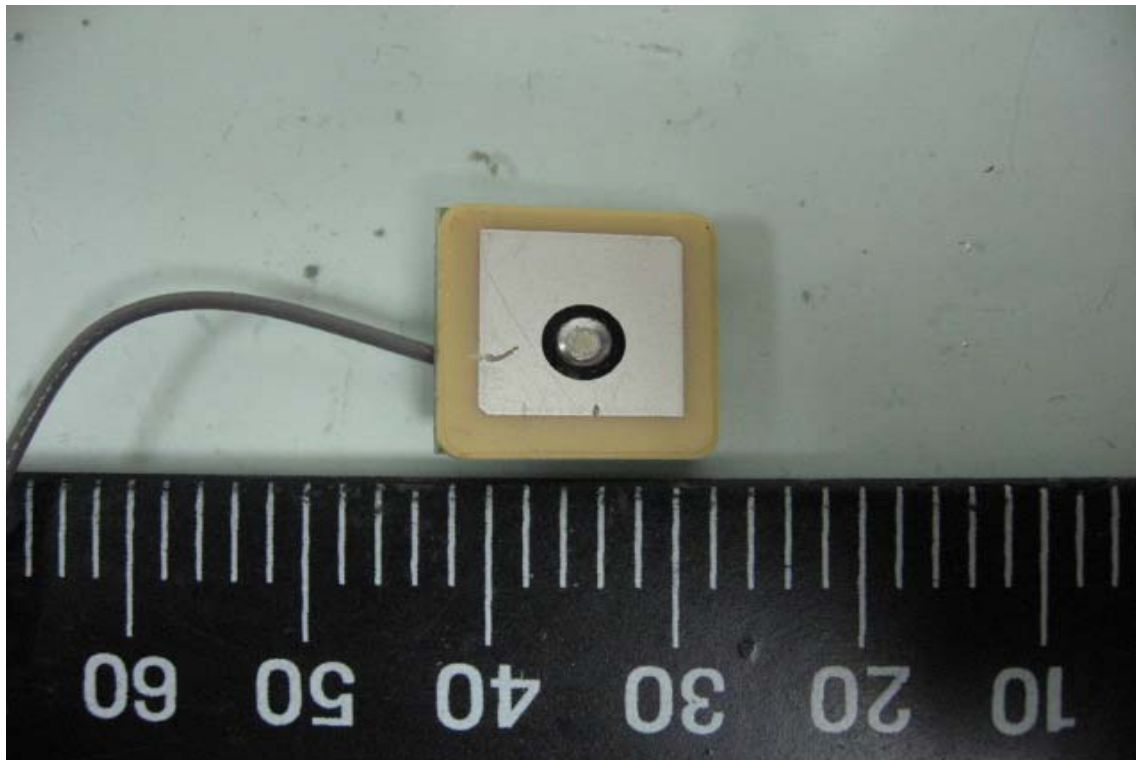

5.

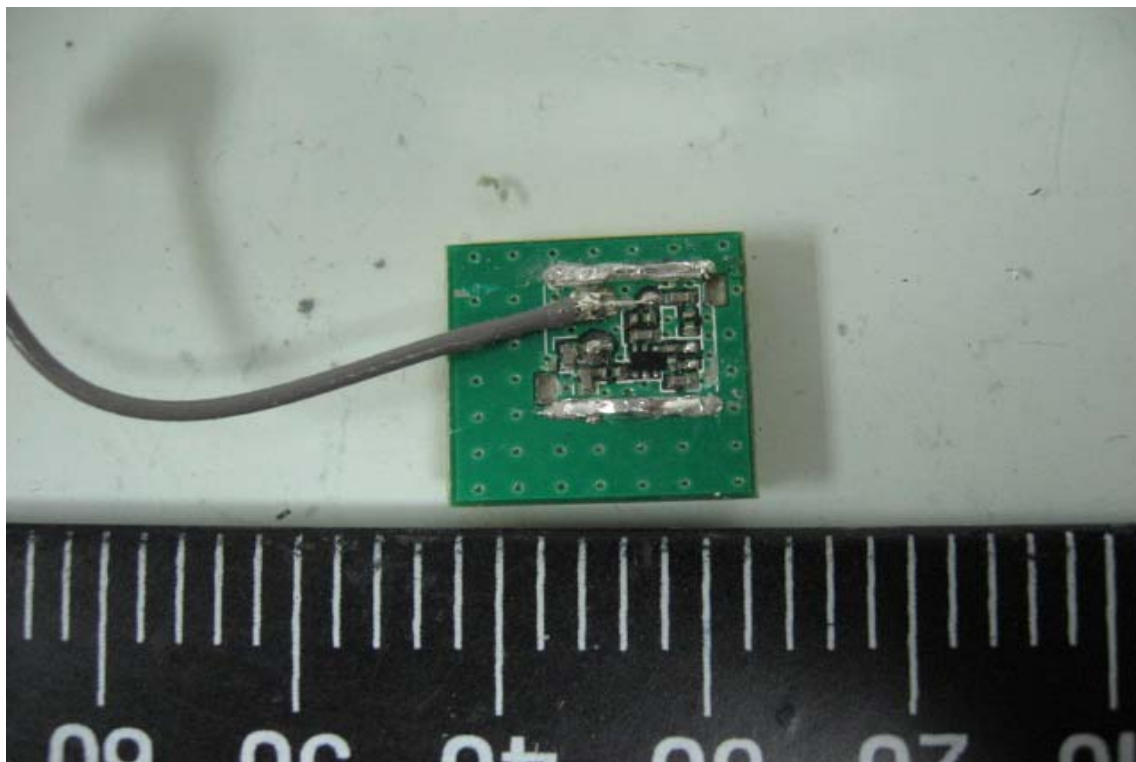



## CONSTRUCTED PHOTOS of EUT

### (C) GSM Module

1.



### CONSTRUCTED PHOTOS of EUT

2.



3.




### CONSTRUCTED PHOTOS of EUT

4.




5.

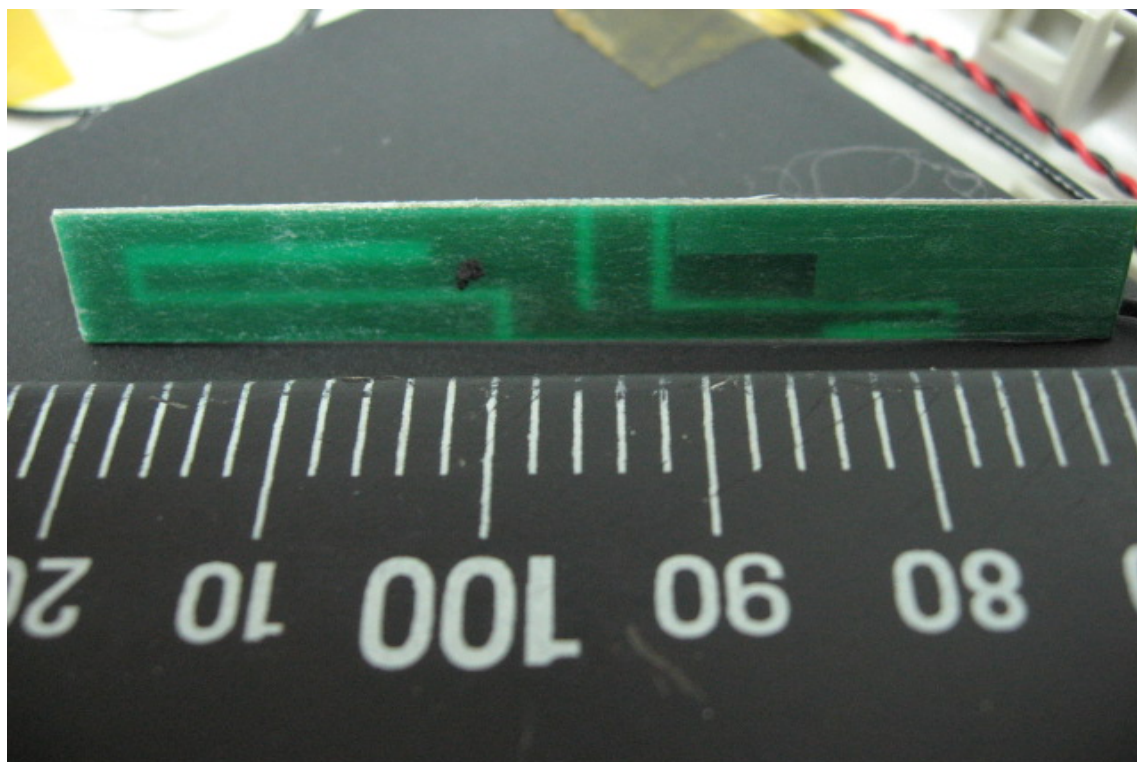


## CONSTRUCTED PHOTOS of EUT

(D) Panel

1.

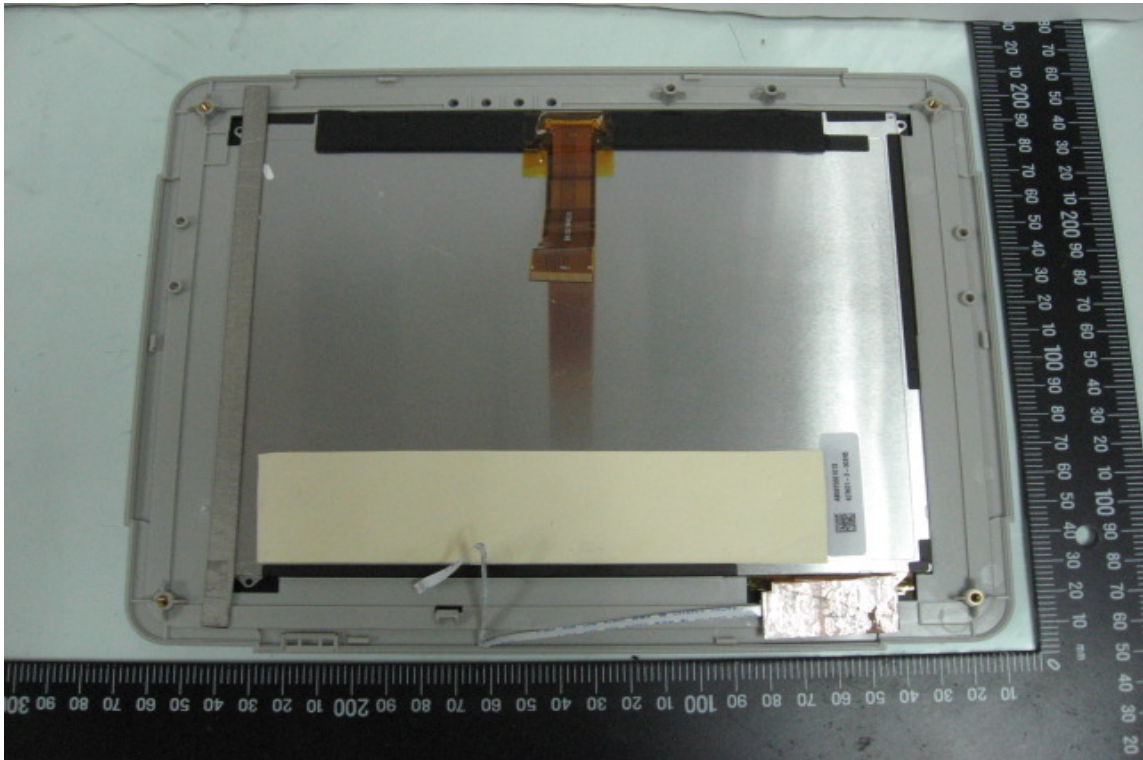

2.

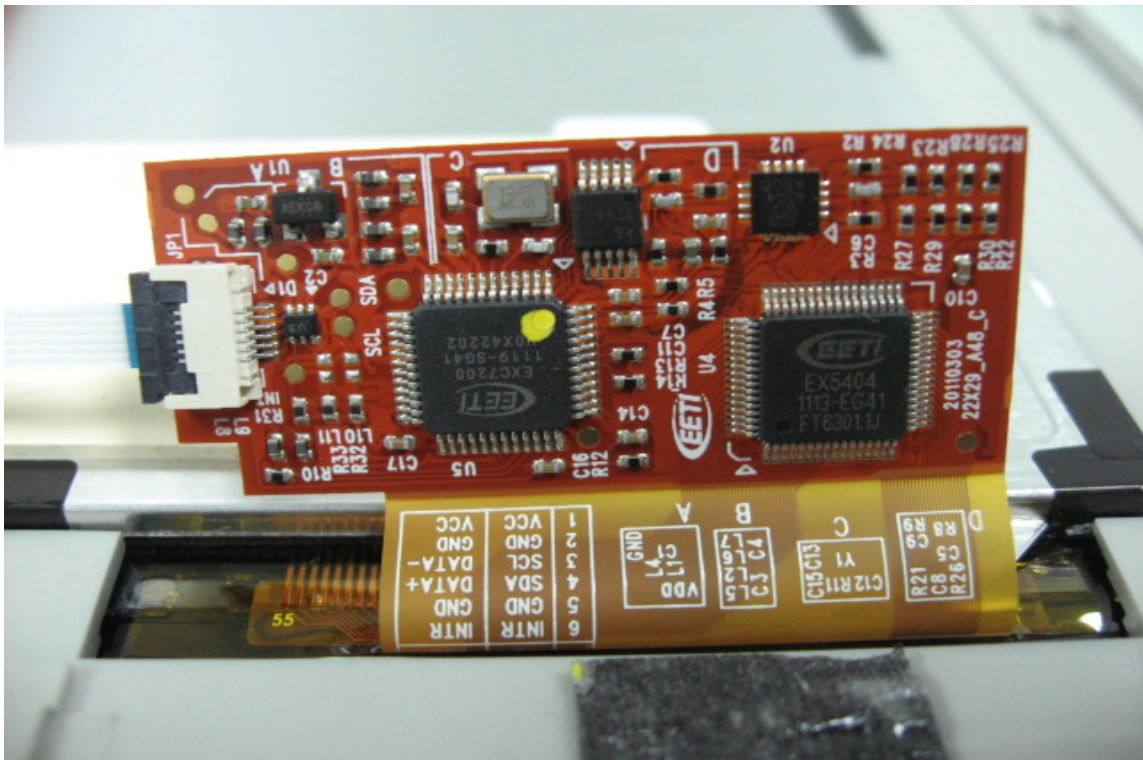


## CONSTRUCTED PHOTOS of EUT

### (E) WIFI & BT Module

1.




2.

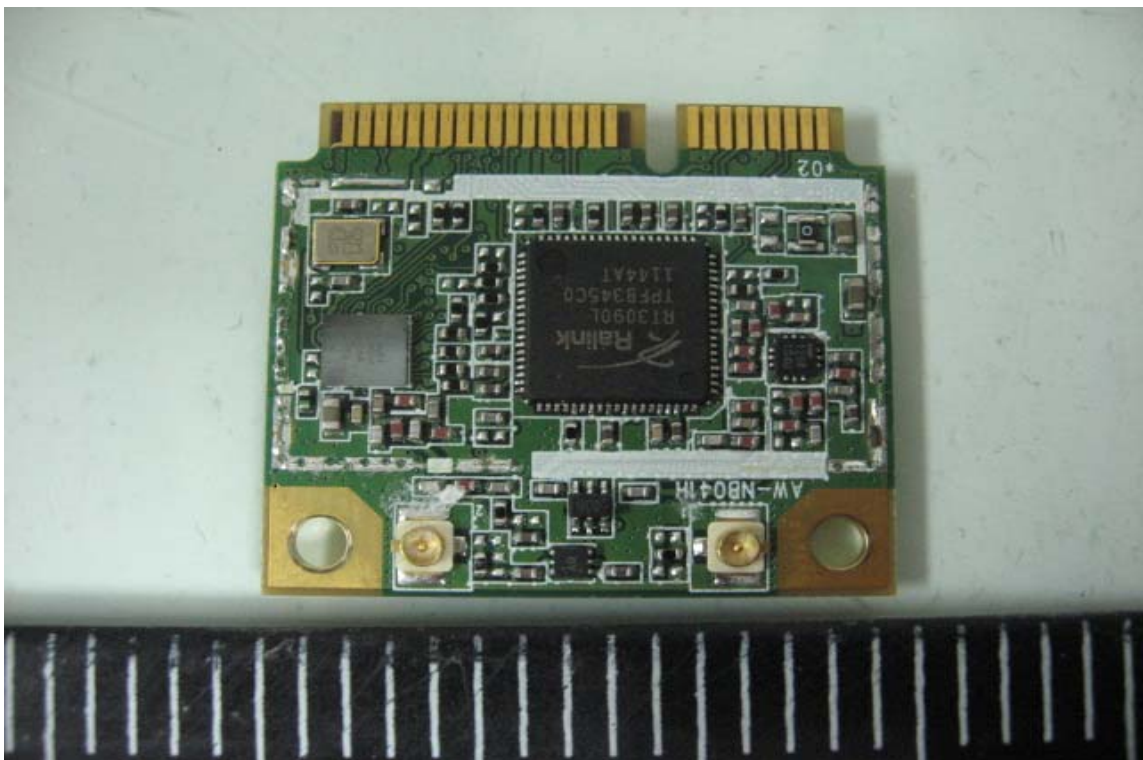


### CONSTRUCTED PHOTOS of EUT

3.

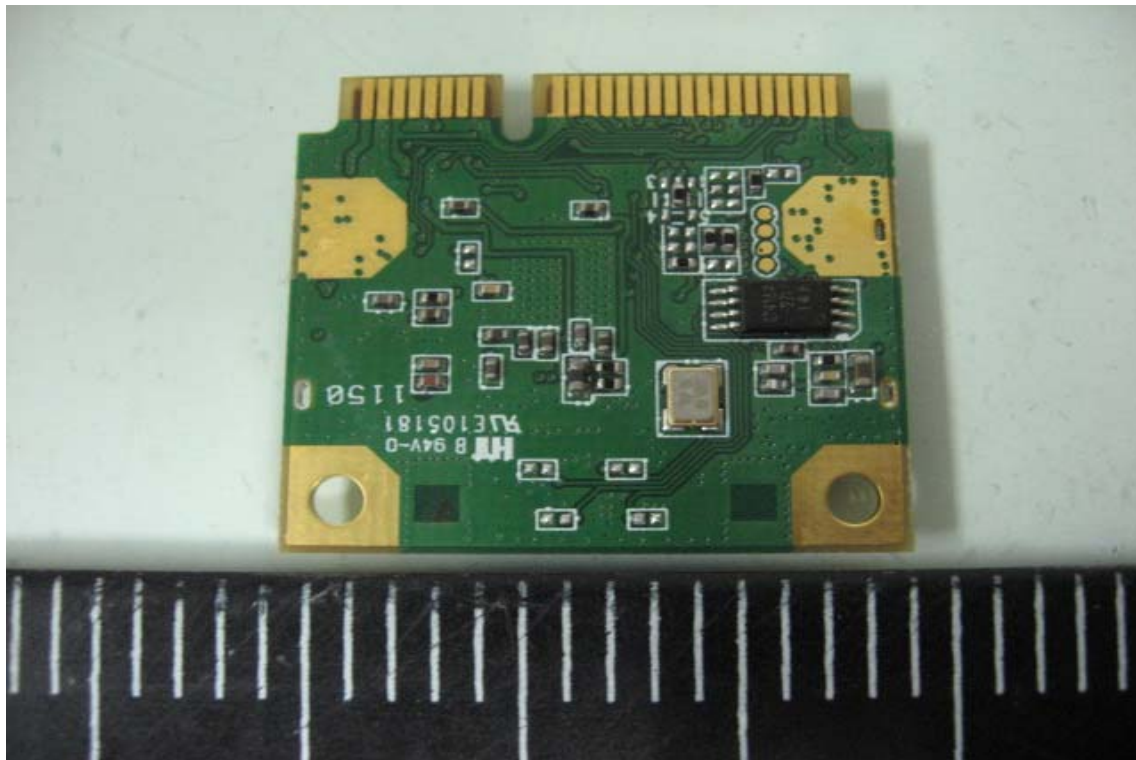


4.

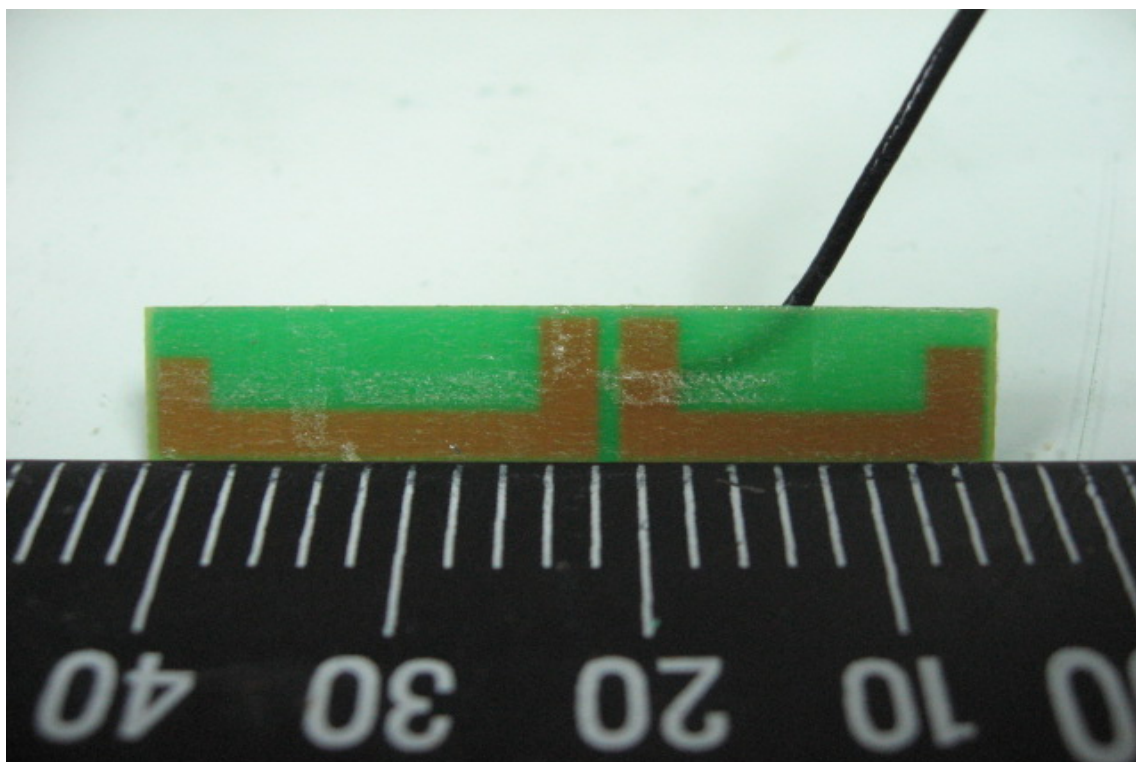

### CONSTRUCTED PHOTOS of EUT


5.

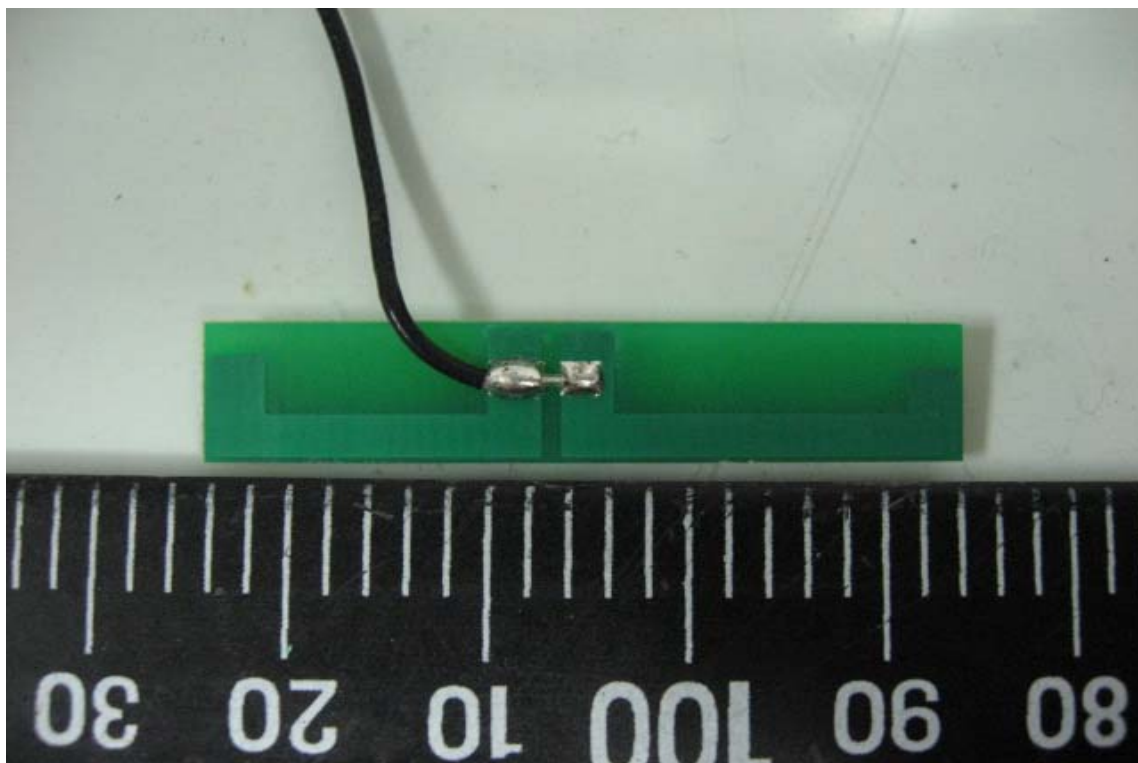


## CONSTRUCTED PHOTOS of EUT

### (F) Camara Module

1.

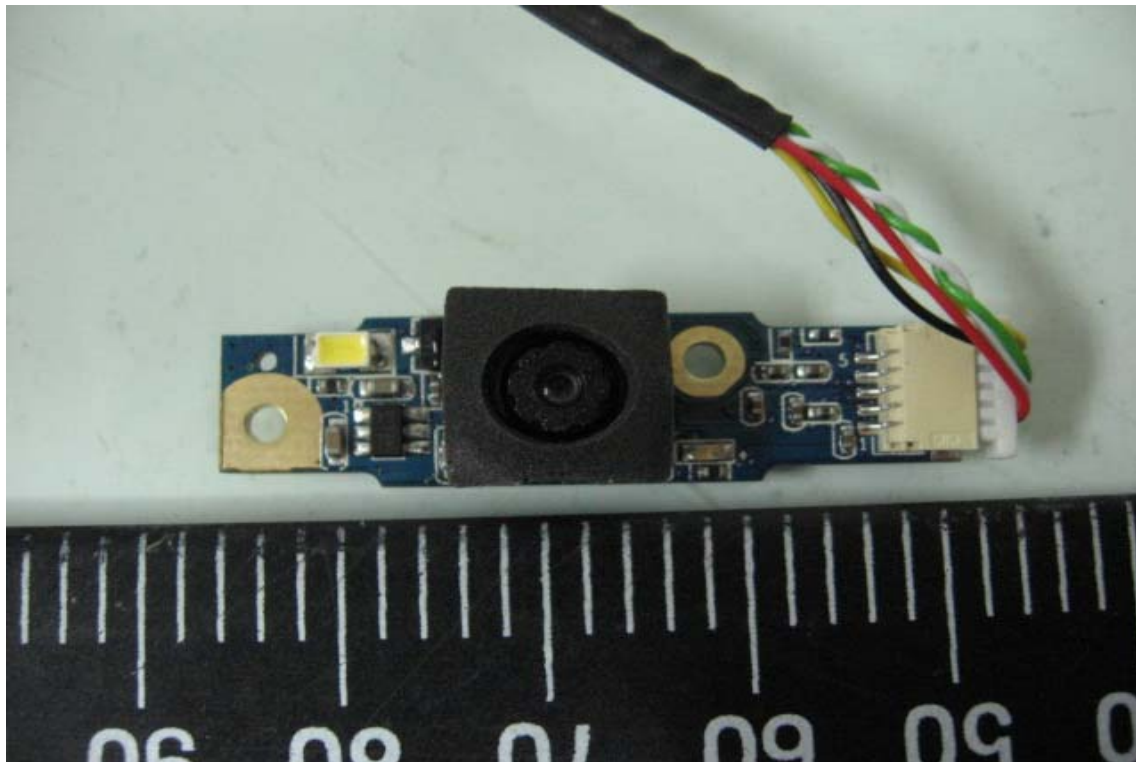

2.

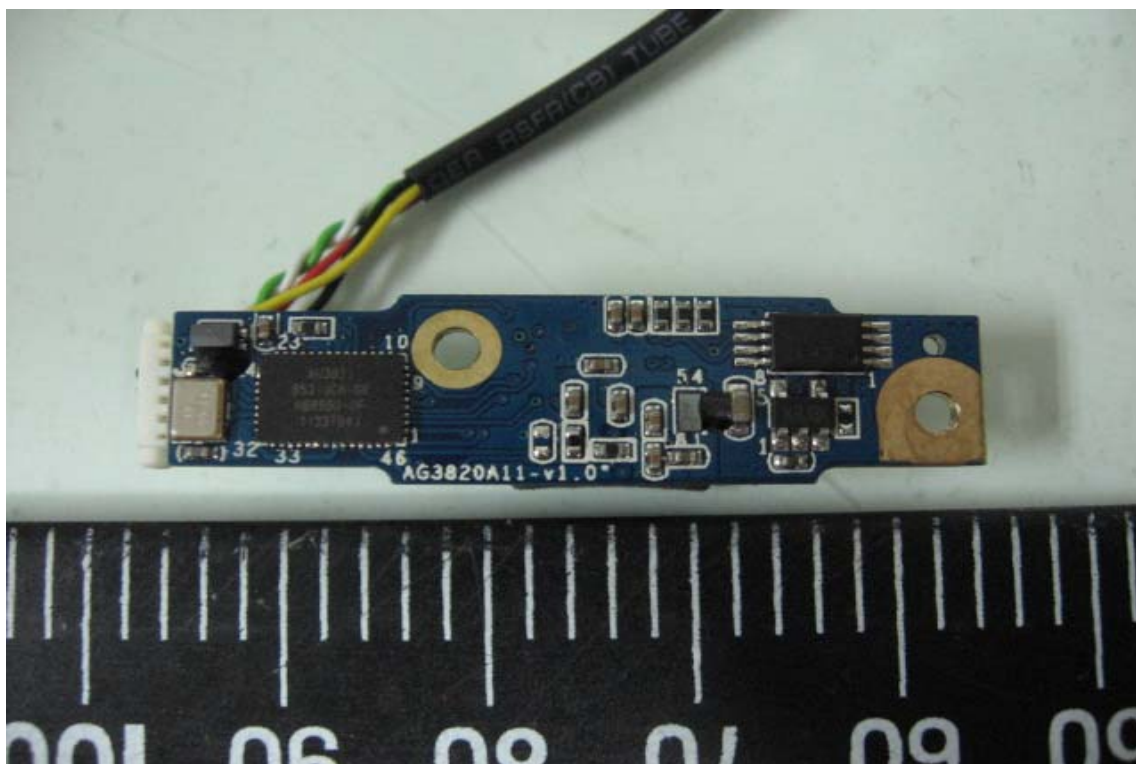




### CONSTRUCTED PHOTOS of EUT

(G) 2G Memory Card

1.



2.

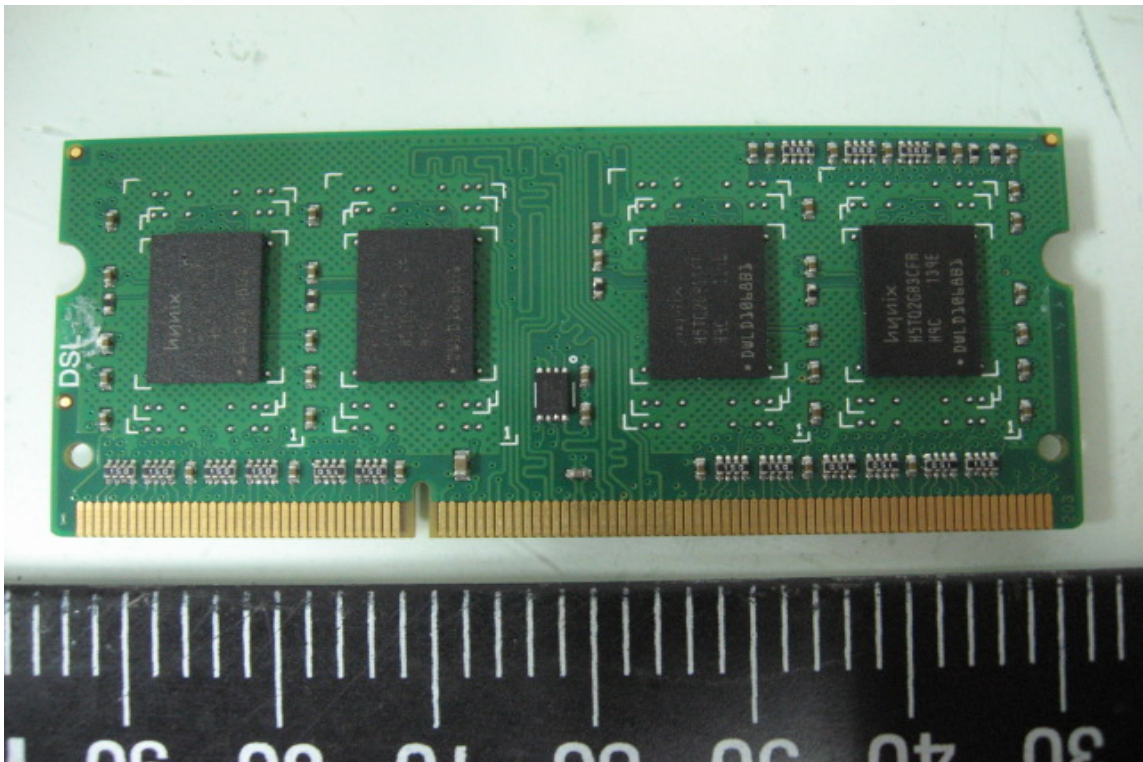

### CONSTRUCTED PHOTOS of EUT

3.



## CONSTRUCTED PHOTOS of EUT

(H) 32G mSATA SSD

1.




2.



### CONSTRUCTED PHOTOS of EUT

3.

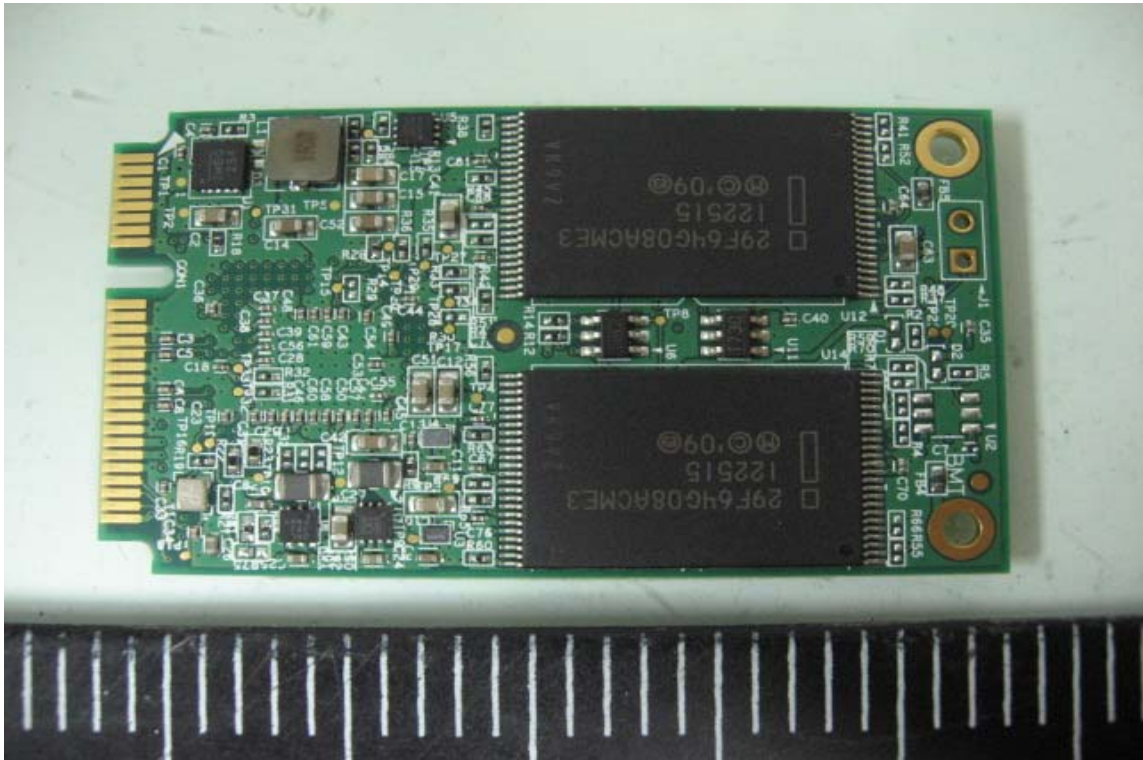

## CONSTRUCTED PHOTOS of EUT

### (I) Power Adapter

1.



2.



### CONSTRUCTED PHOTOS of EUT

3.



4.

