

RJE Technologies, Inc.

EMC TEST REPORT FOR
Pool Safety Alarm
Model: Aquatic Incident Alert (Safety Turtle) AIA100

Tested To The Following Standards:

FCC Part 15 Subpart C Section(s)
15.207 & 15.249

Report No.: 97475-4

Date of issue: September 1, 2015



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions.....	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing.....	5
Conditions During Testing.....	5
Equipment Under Test.....	6
FCC Part 15 Subpart C	7
15.207 AC Conducted Emissions.....	7
15.215(c) 20dB Occupied Bandwidth	16
15.31(e) Voltage Variations	21
15.249(a) Field Strength of Fundamental.....	25
15.249(a)(d) Field Strength of Spurious Emissions and Band Edge	31
Supplemental Information.....	43
Measurement Uncertainty	43
Emissions Test Details.....	43

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

RJE Technologies, Inc.
15375 Barranca Parkway I-112
Irvine, CA 92618

Representative: Corinne Zemla
Customer Reference Number: 11071

REPORT PREPARED BY:

Morgan Tramontin
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 97475

DATE OF EQUIPMENT RECEIPT:
DATE(S) OF TESTING:

August 26, 2015
August 26 - 27, 2015

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
110 Olinda Place
Brea, CA 92823

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.02.00
Immunity	5.00.07

Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Brea A	US0060	SL2-IN-E-1146R	3082D-1	90473	A-0147
Brea D	US0060	SL2-IN-E-1146R	3082D-2	100638	A-0147

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C

Test Procedure	Description	Modifications*	Results
15.207	Conducted Emissions	Mod. 1	Pass
15.215(c)	20dB Occupied Bandwidth	Mod. 1	Pass
15.31(e)	Voltage Variations	Mod. 1	Pass
15.249(a)	Field Strength of Fundamental	Mod. 1	Pass
15.249(a)(d)	Field Strength of Spurious Emissions Band Edge	Mod. 1	Pass

Modifications* During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

Mod. 1: Modification on firmware: rearranging the sequence of setting up the radio as to better gate the coupled noise; the channel/PA isn't enabled until it's ready to transmit, rather than enabling the PA and then setting up the radio, thereby allowing digital noise to couple in and be amplified.

*Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
Pool Safety Alarm	RJE Technologies, Inc.	Aquatic Incident Alert (Safety Turtle) AIA100	NA
Power Supply	Shen Zhen Keyu Power Supply Technology Co., LTD.	KA23-0502000DEU	NA

Support Equipment:

Device	Manufacturer	Model #	S/N
Pool Safety Alarm	RJE Technologies, Inc.	Safety Turtle Receiver	NA
Power Supply	Samsung	ETAOU61JBE	RT2DA13FS/A-E
Pool Safety Alarm	RJE Technologies, Inc.	Safety Turtle (Watch)	NA

FCC PART 15 SUBPART C

15.207 AC Conducted Emissions

Test Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: **RJE Technologies, Inc.**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **97475** Date: 8/27/2015
 Test Type: **Conducted Emissions** Time: 08:09:00
 Tested By: Don Nguyen Sequence#: 3
 Software: EMITest 5.02.00 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is stand alone on the table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz.

The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver. All support equipment is located remotely.


Frequency range of data sheet 150kHz-30MHz

RBW=VBW=9kHz. Temperature: 24°C, Relative Humidity: 35%, Atmospheric Pressure: 100kPa.

Test Method: ANSI C63.4 (2009)
 Site D.

Mod. 1 was in place during testing.

CKC Laboratories, Inc. Date: 8/27/2015 Time: 08:09:00 RJE Technologies, Inc. WO#: 97475
 15.207 AC Mains - Average Test Lead: L1 120V 60Hz Sequence#: 3 Ext ATTN: 0 dB

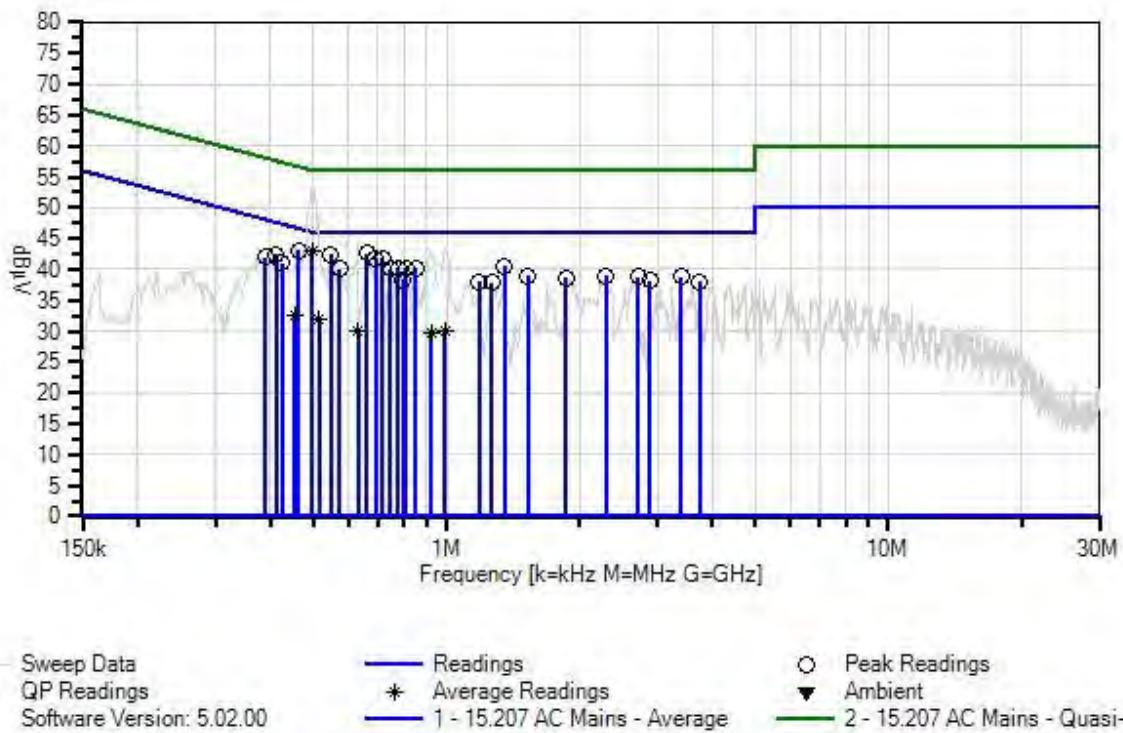

Test Equipment:

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06084	Attenuator	SA18N10W-06	12/17/2014	12/17/2016
T2	ANP01910	Cable	RG-142	1/8/2014	1/8/2016
T3	AN00969A	50uH LISN-Line 1 (L1) (dB)	3816/2NM	3/12/2015	3/12/2017
	AN00969A	50uH LISN-Line 2 (L2) (dB)	3816/2NM	3/12/2015	3/12/2017
	AN02869	Spectrum Analyzer	E4440A	7/17/2015	7/17/2016
T4	AN02343	High Pass Filter	HE9615-150K-50-720B	1/8/2015	1/8/2017

Measurement Data:

Reading listed by margin.

Test Lead: L1

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	497.931k Ave	36.9	+5.7	+0.0	+0.1	+0.2	+0.0	42.9	46.0	-3.1	L1
^	497.931k	47.7	+5.7	+0.0	+0.1	+0.2	+0.0	53.7	46.0	+7.7	L1
^	498.331k	47.6	+5.7	+0.0	+0.1	+0.2	+0.0	53.6	46.0	+7.6	L1
4	659.771k	36.6	+5.7	+0.0	+0.1	+0.2	+0.0	42.6	46.0	-3.4	L1
5	463.425k	37.1	+5.7	+0.0	+0.1	+0.2	+0.0	43.1	46.6	-3.5	L1
6	546.327k	36.4	+5.7	+0.0	+0.1	+0.2	+0.0	42.4	46.0	-3.6	L1
7	691.041k	35.8	+5.7	+0.0	+0.1	+0.2	+0.0	41.8	46.0	-4.2	L1
8	717.220k	35.9	+5.7	+0.0	+0.1	+0.1	+0.0	41.8	46.0	-4.2	L1
9	411.794k	36.4	+5.7	+0.0	+0.1	+0.2	+0.0	42.4	47.6	-5.2	L1
10	1.354M	34.6	+5.7	+0.0	+0.1	+0.1	+0.0	40.5	46.0	-5.5	L1
11	808.121k	34.4	+5.7	+0.0	+0.1	+0.1	+0.0	40.3	46.0	-5.7	L1
12	775.397k	34.3	+5.7	+0.0	+0.1	+0.1	+0.0	40.2	46.0	-5.8	L1
13	851.026k	34.3	+5.7	+0.0	+0.1	+0.1	+0.0	40.2	46.0	-5.8	L1
14	747.036k	34.2	+5.7	+0.0	+0.1	+0.1	+0.0	40.1	46.0	-5.9	L1
15	571.779k	34.0	+5.7	+0.0	+0.1	+0.2	+0.0	40.0	46.0	-6.0	L1
16	389.250k	35.9	+5.7	+0.0	+0.1	+0.2	+0.0	41.9	48.1	-6.2	L1
17	423.429k	35.0	+5.7	+0.0	+0.1	+0.2	+0.0	41.0	47.4	-6.4	L1

18	1.528M	33.0	+5.7	+0.1	+0.1	+0.1	+0.0	39.0	46.0	-7.0	L1
19	2.293M	32.9	+5.7	+0.1	+0.1	+0.1	+0.0	38.9	46.0	-7.1	L1
20	2.714M	32.8	+5.7	+0.1	+0.1	+0.1	+0.0	38.8	46.0	-7.2	L1
21	3.395M	32.6	+5.7	+0.2	+0.2	+0.1	+0.0	38.8	46.0	-7.2	L1
22	1.868M	32.7	+5.7	+0.1	+0.1	+0.1	+0.0	38.7	46.0	-7.3	L1
23	796.486k	32.5	+5.7	+0.0	+0.1	+0.1	+0.0	38.4	46.0	-7.6	L1
24	2.884M	32.1	+5.7	+0.1	+0.2	+0.1	+0.0	38.2	46.0	-7.8	L1
25	3.739M	31.9	+5.7	+0.2	+0.2	+0.1	+0.0	38.1	46.0	-7.9	L1
26	1.183M	32.1	+5.7	+0.0	+0.1	+0.1	+0.0	38.0	46.0	-8.0	L1
27	1.268M	32.0	+5.7	+0.0	+0.1	+0.1	+0.0	37.9	46.0	-8.1	L1
28	513.603k	25.9	+5.7	+0.0	+0.1	+0.2	+0.0	31.9	46.0	-14.1	L1
	Ave										
^	513.603k	42.5	+5.7	+0.0	+0.1	+0.2	+0.0	48.5	46.0	+2.5	L1
30	453.972k	26.6	+5.7	+0.0	+0.1	+0.2	+0.0	32.6	46.8	-14.2	L1
	Ave										
^	453.972k	37.8	+5.7	+0.0	+0.1	+0.2	+0.0	43.8	46.8	-3.0	L1
32	629.956k	24.1	+5.7	+0.0	+0.1	+0.2	+0.0	30.1	46.0	-15.9	L1
	Ave										
^	629.955k	38.4	+5.7	+0.0	+0.1	+0.2	+0.0	44.4	46.0	-1.6	L1
34	992.029k	24.0	+5.7	+0.0	+0.1	+0.1	+0.0	29.9	46.0	-16.1	L1
	Ave										
^	992.028k	37.5	+5.7	+0.0	+0.1	+0.1	+0.0	43.4	46.0	-2.6	L1
36	923.985k	23.7	+5.7	+0.0	+0.1	+0.1	+0.0	29.6	46.0	-16.4	L1
	Ave										
^	923.984k	37.2	+5.7	+0.0	+0.1	+0.1	+0.0	43.1	46.0	-2.9	L1



Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
Customer: **RJE Technologies, Inc.**
Specification: **15.207 AC Mains - Average**
Work Order #: **97475** Date: 8/27/2015
Test Type: **Conducted Emissions** Time: 08:19:04
Tested By: Don Nguyen Sequence#: 4
Software: EMITest 5.02.00 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is stand alone on the table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz.
The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver.
All support equipment is located remotely.


Frequency range of data sheet 150kHz-30MHz

RBW=VBW=9kHz. Temperature: 24°C, Relative Humidity: 35%, Atmospheric Pressure: 100kPa.

Test Method: ANSI C63.4 (2009)
Site D.

Mod. 1 was in place during testing.

CKC Laboratories, Inc. Date: 8/27/2015 Time: 08:19:04 RJE Technologies, Inc. WO#: 97475
15.207 AC Mains - Average Test Lead: L2 120V 60Hz Sequence#: 4 Ext ATTN: 0 dB

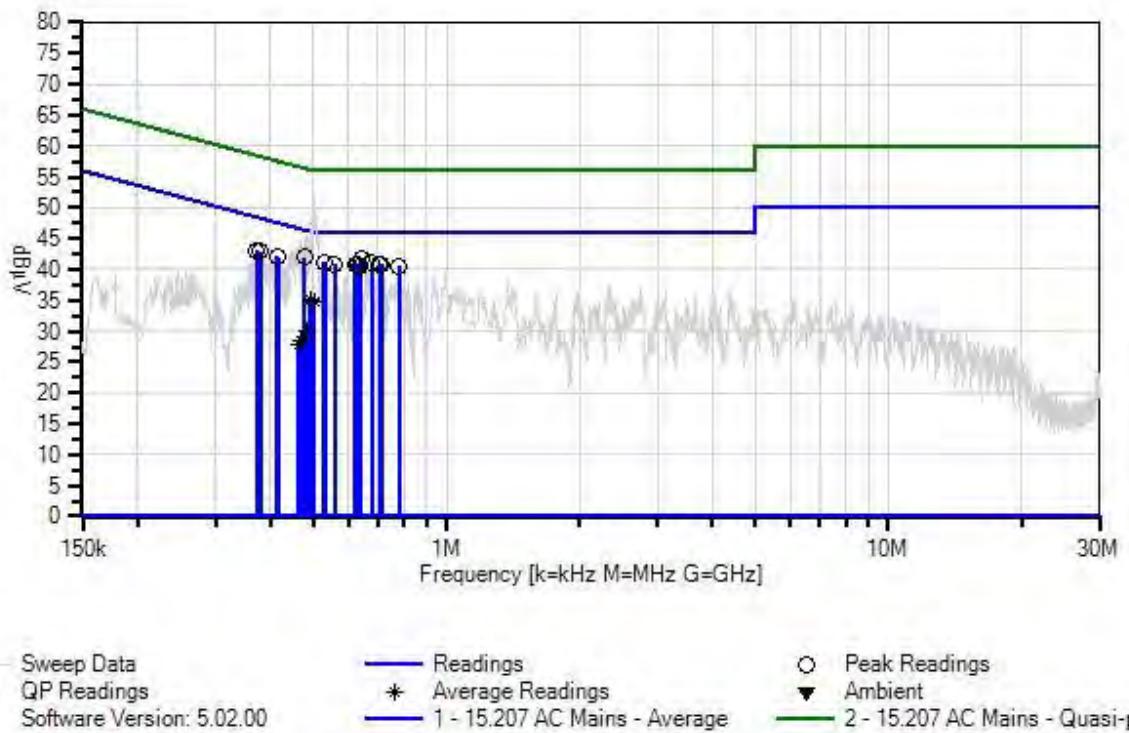

Test Equipment:

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06084	Attenuator	SA18N10W-06	12/17/2014	12/17/2016
T2	ANP01910	Cable	RG-142	1/8/2014	1/8/2016
	AN00969A	50uH LISN-Line 1 (L1) (dB)	3816/2NM	3/12/2015	3/12/2017
T3	AN00969A	50uH LISN-Line 2 (L2) (dB)	3816/2NM	3/12/2015	3/12/2017
	AN02869	Spectrum Analyzer	E4440A	7/17/2015	7/17/2016
T4	AN02343	High Pass Filter	HE9615-150K-50-720B	1/8/2015	1/8/2017

Measurement Data:


Reading listed by margin.

Test Lead: L2

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	640.136k	35.7	+5.7	+0.0	+0.1	+0.2	+0.0	41.7	46.0	-4.3	L2
2	475.788k	35.9	+5.7	+0.0	+0.1	+0.2	+0.0	41.9	46.4	-4.5	L2
3	526.692k	35.2	+5.7	+0.0	+0.1	+0.2	+0.0	41.2	46.0	-4.8	L2
4	530.328k	35.0	+5.7	+0.0	+0.1	+0.2	+0.0	41.0	46.0	-5.0	L2
5	677.224k	35.0	+5.7	+0.0	+0.1	+0.2	+0.0	41.0	46.0	-5.0	L2
6	711.403k	35.0	+5.7	+0.0	+0.1	+0.1	+0.0	40.9	46.0	-5.1	L2
7	557.235k	34.9	+5.7	+0.0	+0.1	+0.2	+0.0	40.9	46.0	-5.1	L2
8	627.047k	34.9	+5.7	+0.0	+0.1	+0.2	+0.0	40.9	46.0	-5.1	L2
9	620.502k	34.8	+5.7	+0.0	+0.1	+0.2	+0.0	40.8	46.0	-5.2	L2
10	630.683k	34.8	+5.7	+0.0	+0.1	+0.2	+0.0	40.8	46.0	-5.2	L2
11	705.585k	34.8	+5.7	+0.0	+0.1	+0.2	+0.0	40.8	46.0	-5.2	L2
12	372.525k	37.1	+5.7	+0.0	+0.1	+0.2	+0.0	43.1	48.4	-5.3	L2
13	379.797k	37.0	+5.7	+0.0	+0.1	+0.2	+0.0	43.0	48.3	-5.3	L2
14	712.857k	34.8	+5.7	+0.0	+0.1	+0.1	+0.0	40.7	46.0	-5.3	L2
15	636.500k	34.6	+5.7	+0.0	+0.1	+0.2	+0.0	40.6	46.0	-5.4	L2
16	779.760k	34.7	+5.7	+0.0	+0.1	+0.1	+0.0	40.6	46.0	-5.4	L2
17	413.248k	36.1	+5.7	+0.0	+0.1	+0.2	+0.0	42.1	47.6	-5.5	L2

18	416.157k	36.0	+5.7	+0.0	+0.1	+0.2	+0.0	42.0	47.5	-5.5	L2
19	492.514k	29.2	+5.7	+0.0	+0.1	+0.2	+0.0	35.2	46.1	-10.9	L2
	Ave										
^	492.514k	41.5	+5.7	+0.0	+0.1	+0.2	+0.0	47.5	46.1	+1.4	L2
^	494.695k	38.8	+5.7	+0.0	+0.1	+0.2	+0.0	44.8	46.1	-1.3	L2
^	488.877k	37.8	+5.7	+0.0	+0.1	+0.2	+0.0	43.8	46.2	-2.4	L2
23	501.842k	28.9	+5.7	+0.0	+0.1	+0.2	+0.0	34.9	46.0	-11.1	L2
	Ave										
^	501.240k	46.1	+5.7	+0.0	+0.1	+0.2	+0.0	52.1	46.0	+6.1	L2
^	501.842k	45.2	+5.7	+0.0	+0.1	+0.2	+0.0	51.2	46.0	+5.2	L2
^	496.877k	41.5	+5.7	+0.0	+0.1	+0.2	+0.0	47.5	46.1	+1.4	L2
27	483.060k	24.0	+5.7	+0.0	+0.1	+0.2	+0.0	30.0	46.3	-16.3	L2
	Ave										
^	483.060k	39.3	+5.7	+0.0	+0.1	+0.2	+0.0	45.3	46.3	-1.0	L2
^	487.423k	38.6	+5.7	+0.0	+0.1	+0.2	+0.0	44.6	46.2	-1.6	L2
^	480.151k	38.6	+5.7	+0.0	+0.1	+0.2	+0.0	44.6	46.3	-1.7	L2
^	478.697k	37.2	+5.7	+0.0	+0.1	+0.2	+0.0	43.2	46.4	-3.2	L2
32	467.789k	22.4	+5.7	+0.0	+0.1	+0.2	+0.0	28.4	46.6	-18.2	L2
	Ave										
^	467.789k	38.6	+5.7	+0.0	+0.1	+0.2	+0.0	44.6	46.6	-2.0	L2
^	470.697k	37.6	+5.7	+0.0	+0.1	+0.2	+0.0	43.6	46.5	-2.9	L2
35	461.971k	21.8	+5.7	+0.0	+0.1	+0.2	+0.0	27.8	46.7	-18.9	L2
	Ave										
^	461.971k	38.8	+5.7	+0.0	+0.1	+0.2	+0.0	44.8	46.7	-1.9	L2

Test Setup Photo(s)

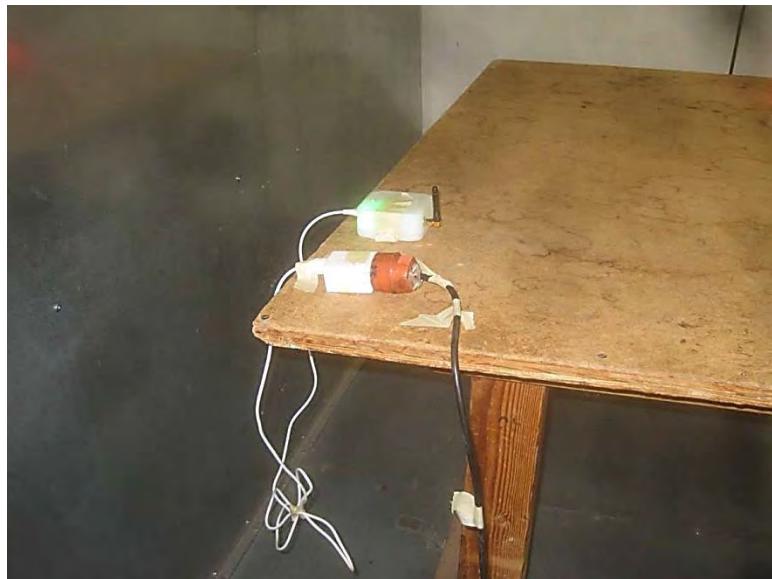

15.215(c) 20dB Occupied Bandwidth

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: RJE Technologies, Inc.
 Specification: **Occupied Bandwidth**
 Work Order #: **97475** Date: 8/26/2015
 Test Type: **Maximized Emissions** Time: 14:28:24
 Tested By: Don Nguyen Sequence#: 2
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:


The EUT is stand alone on the Styrofoam table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz. • The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver. • All support equipment is located remotely. • The EUT is positioned in three different axis and data is taken in each axis. Frequency range of data sheet 915.0 to 915.05MHz. • RBW=VBW=120kHz.

Temperature: 26°C, Relative Humidity: 35%, Atmospheric Pressure: 100kPa. •


Test Method: ANSI C63.4 (2009)• Site D. •

Mod. 1 was in place during testing.

Test Data

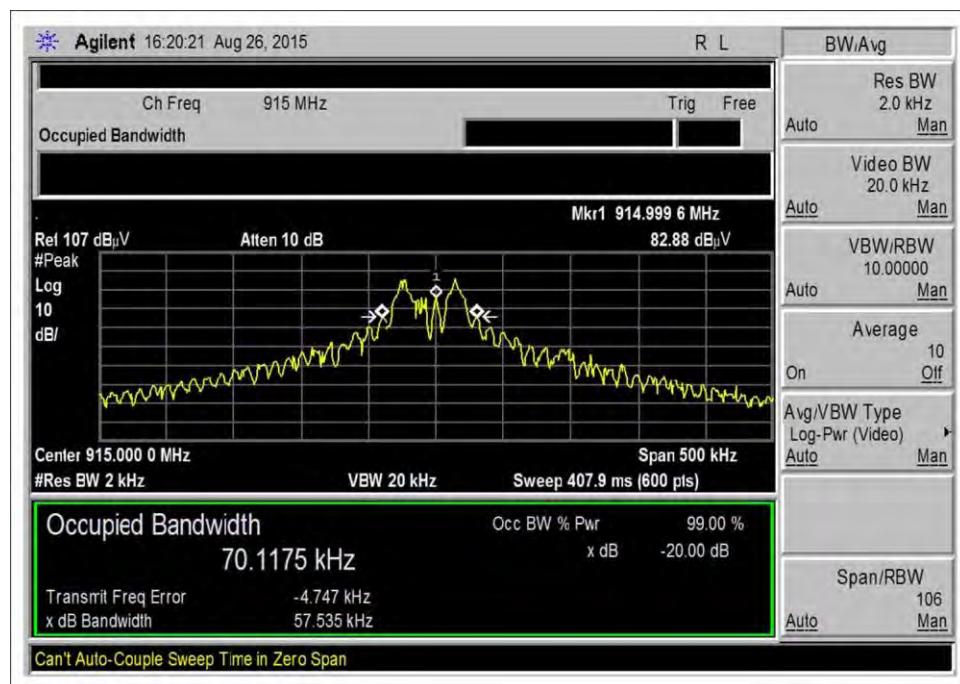


Test Setup Photo(s)

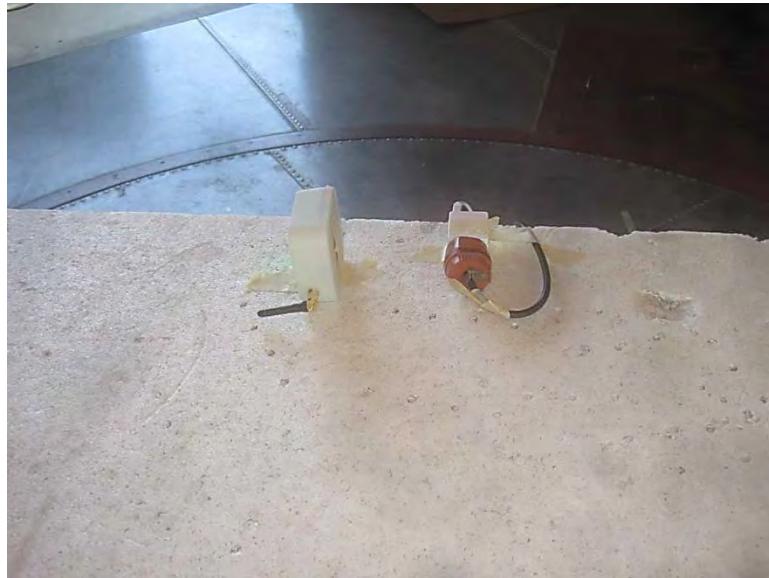


Front View




Back View

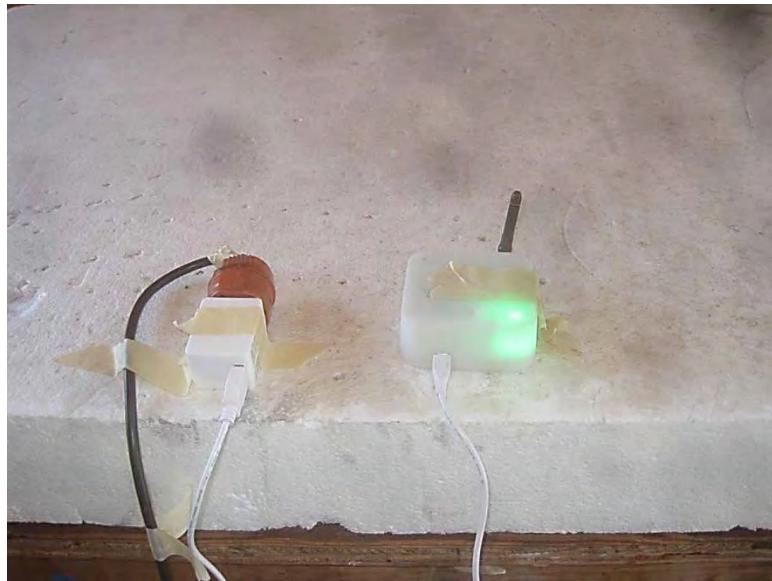

X-Axis

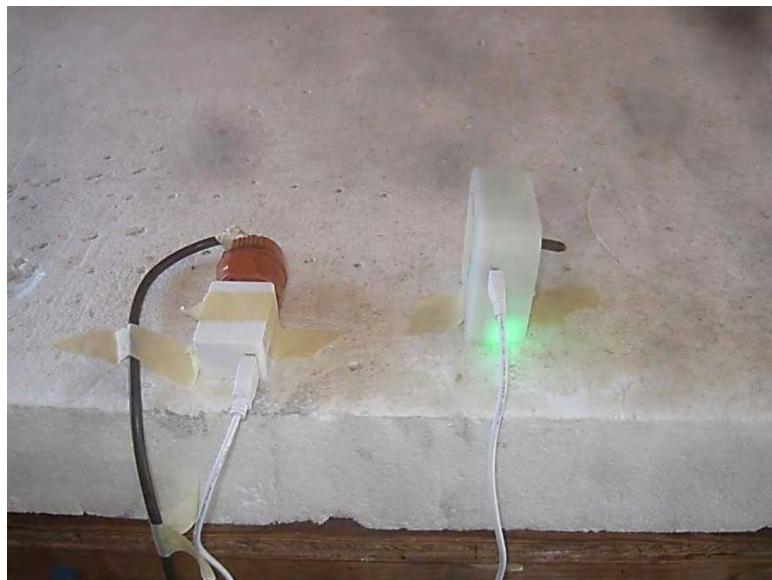

Y-Axis

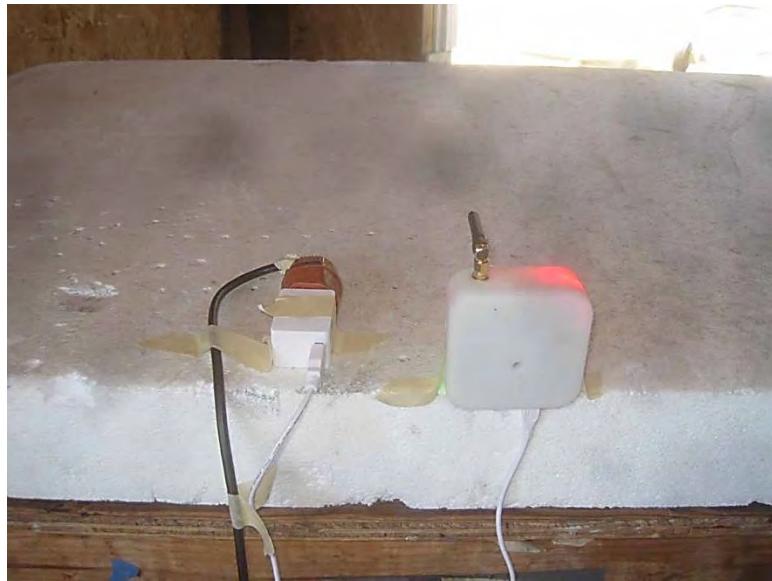

Z-Axis

15.31(e) Voltage Variations

Test Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: RJE Technologies, Inc.
 Specification: **15.31e**
 Work Order #: **97475** Date: 8/26/2015
 Test Type: **Maximized Emissions** Time: 14:28:24
 Tested By: Don Nguyen Sequence#: 2
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is stand alone on the Styrofoam table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz. • The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver. • All support equipment is located remotely. • The EUT is positioned in three different axis and data is taken in each axis. Frequency range of data sheet 915.0 to 915.05MHz. • RBW=VBW=120kHz.


Temperature: 26°C, Relative Humidity: 35%, Atmospheric Pressure: 100kPa. •

Test Method: ANSI C63.4 (2009)• Site D. •

Mod. 1 was in place during testing.

15.31(e) compliance: the supply voltage was varied between 85% and 115% of the nominal rated supply voltage, no change in the fundamental signal level was observed.


Test Setup Photo(s)

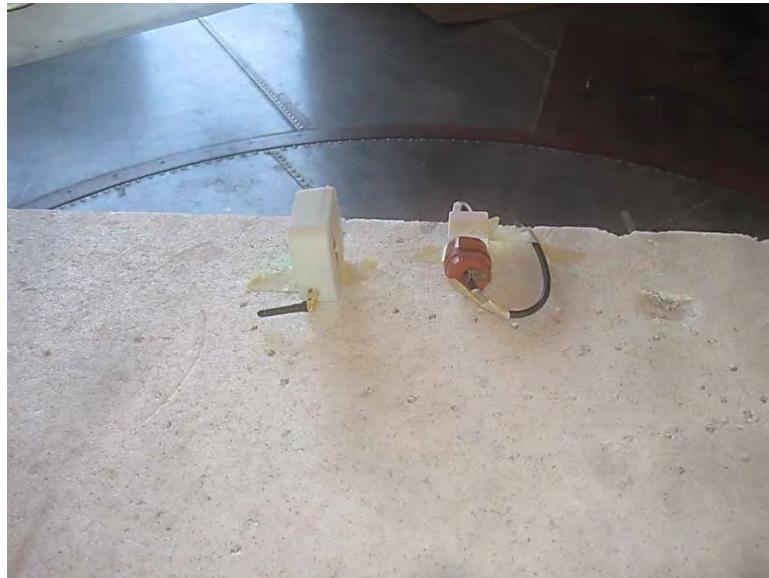


Front View




Back View

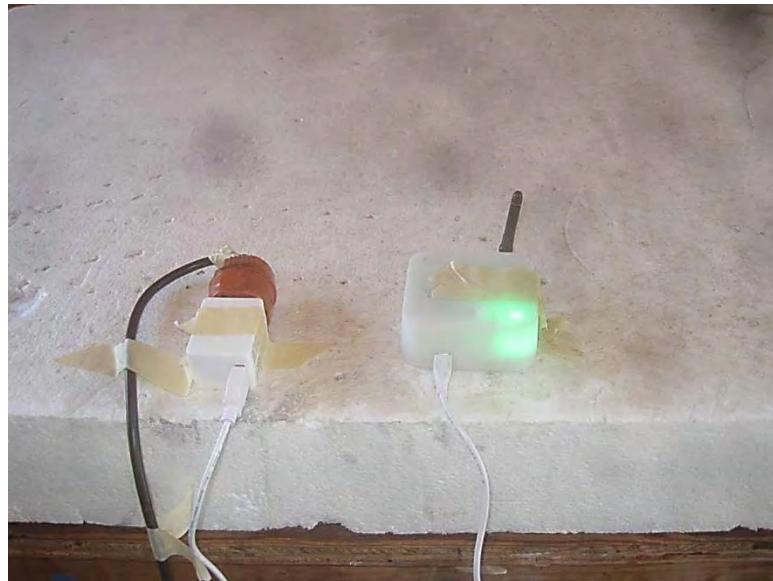

X-Axis

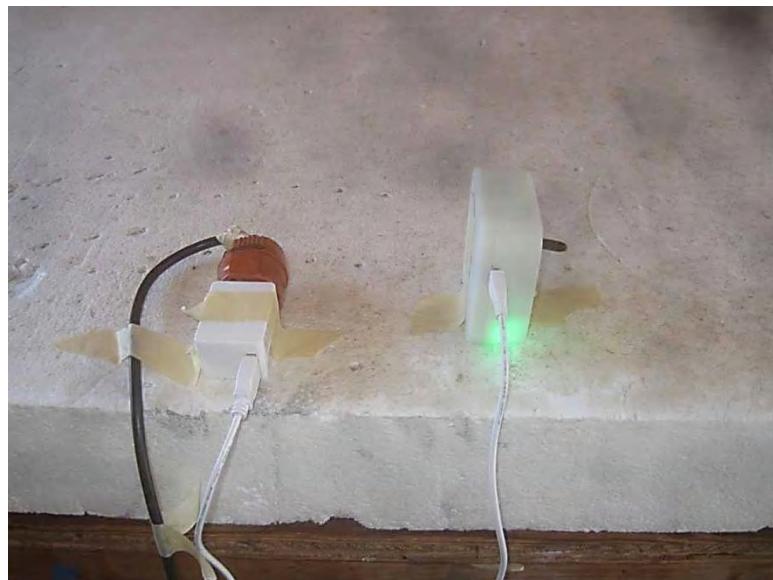

Y-Axis

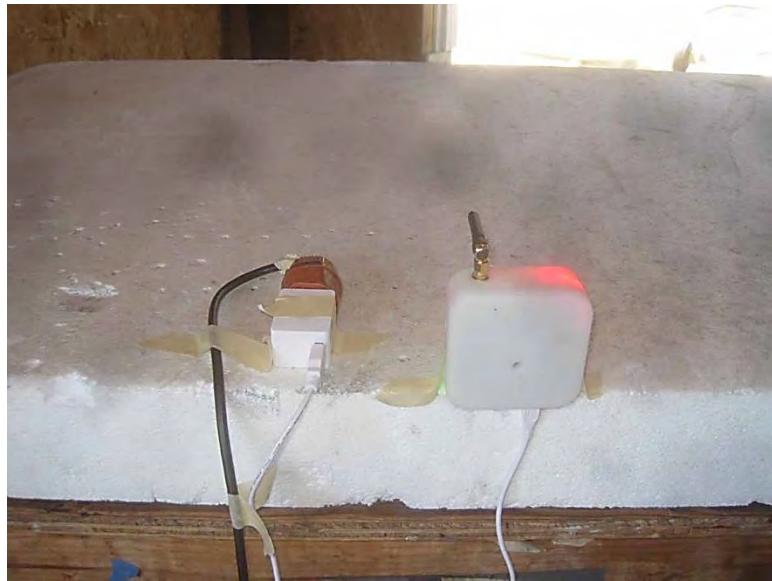

Z-Axis

15.249(a) Field Strength of Fundamental

Test Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: **RJE Technologies, Inc.**
 Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**
 Work Order #: **97475** Date: 8/26/2015
 Test Type: **Maximized Emissions** Time: 14:28:24
 Tested By: Don Nguyen Sequence#: 2
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is stand alone on the Styrofoam table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz.
 The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver.
 All support equipment is located remotely.
 The EUT is positioned in three different axes and data is taken in each axis.


Frequency range of data sheet 915.0 to 915.05MHz.
 RBW=VBW=120kHz.

Temperature: 26°C, Relative Humidity: 35%, Atmospheric Pressure: 100kPa.

Test Method: ANSI C63.4 (2009)
 Site D.

Mod. 1 was in place during testing.

CKC Laboratories, Inc. Date: 8/26/2015 Time: 14:28:24 RJE Technologies, Inc. WO#: 97475
15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter) Test Distance: 3 Meters Sequence#: 2 Ext ATTN: 0
dB

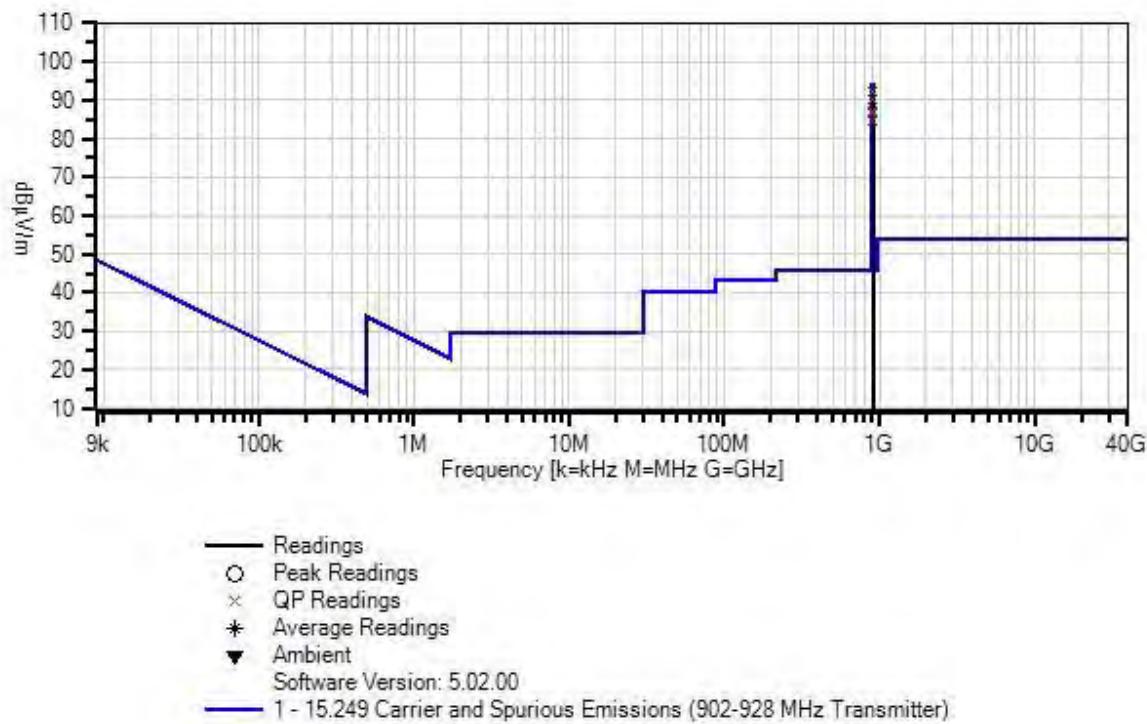

Test Equipment:

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	AN00010	Preamp	8447D	3/12/2014	3/12/2016
T2	ANP05555	Cable	RG223/U	5/7/2014	5/7/2016
T3	ANP05569	Cable	RG-214/U	5/7/2014	5/7/2016
T4	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
T5	AN02869	Spectrum Analyzer	E4440A	7/17/2015	7/17/2016
T6	ANP04382	Cable	LDF-50	7/30/2014	7/30/2016

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
			MHz	dB μ V	dB	dB					Ant
1	914.993M	89.7	-27.5	+0.5	+3.4	+22.8	+0.0	92.3	94.0	-1.7	Horiz
	QP		+0.0	+3.4							Y axis
2	914.995M	87.5	-27.5	+0.5	+3.4	+22.8	+0.0	90.1	94.0	-3.9	Vert
	QP		+0.0	+3.4							X axis
3	914.995M	84.8	-27.5	+0.5	+3.4	+22.8	+0.0	87.4	94.0	-6.6	Vert
	QP		+0.0	+3.4							Y axis
4	914.995M	83.8	-27.5	+0.5	+3.4	+22.8	+0.0	86.4	94.0	-7.6	Vert
	QP		+0.0	+3.4							Z axis
^	914.995M	90.7	-27.5	+0.5	+3.4	+22.8	+0.0	93.3	94.0	-0.7	Vert
			+0.0	+3.4							X axis
^	914.995M	88.9	-27.5	+0.5	+3.4	+22.8	+0.0	91.5	94.0	-2.5	Vert
			+0.0	+3.4							Y axis
^	914.995M	87.8	-27.5	+0.5	+3.4	+22.8	+0.0	90.4	94.0	-3.6	Vert
			+0.0	+3.4							Z axis
8	914.995M	82.1	-27.5	+0.5	+3.4	+22.8	+0.0	84.7	94.0	-9.3	Horiz
	QP		+0.0	+3.4							Z axis
^	914.993M	92.9	-27.5	+0.5	+3.4	+22.8	+0.0	95.5	94.0	+1.5	Horiz
			+0.0	+3.4							Y axis
^	914.995M	86.5	-27.5	+0.5	+3.4	+22.8	+0.0	89.1	94.0	-4.9	Horiz
			+0.0	+3.4							Z axis
^	914.995M	85.2	-27.5	+0.5	+3.4	+22.8	+0.0	87.8	94.0	-6.2	Horiz
			+0.0	+3.4							X axis


Test Setup Photo(s)




Front View




Back View

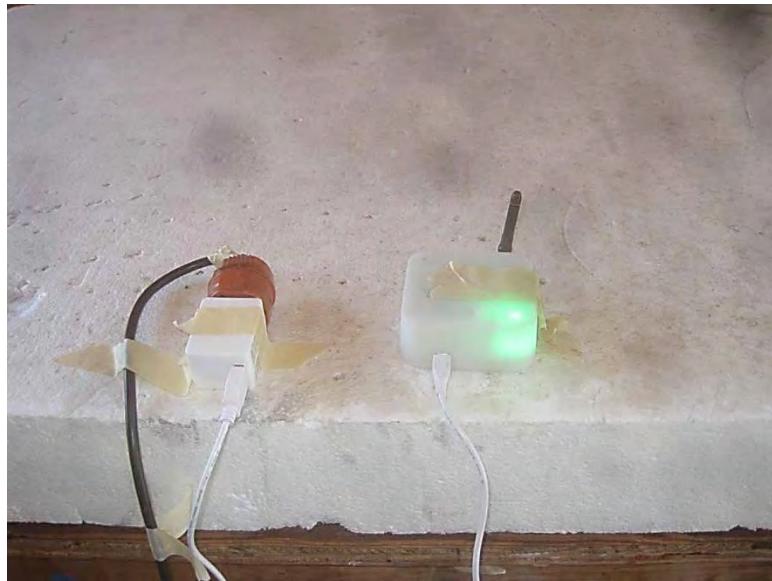

X-Axis

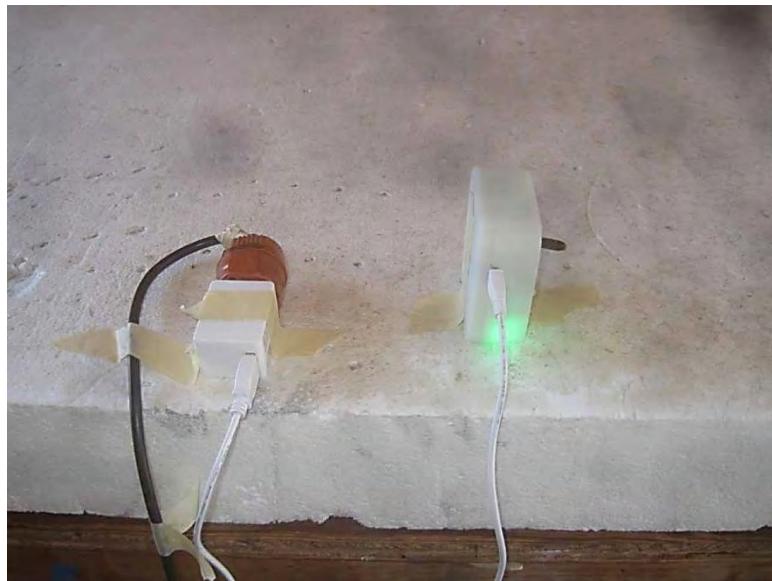

Y-Axis

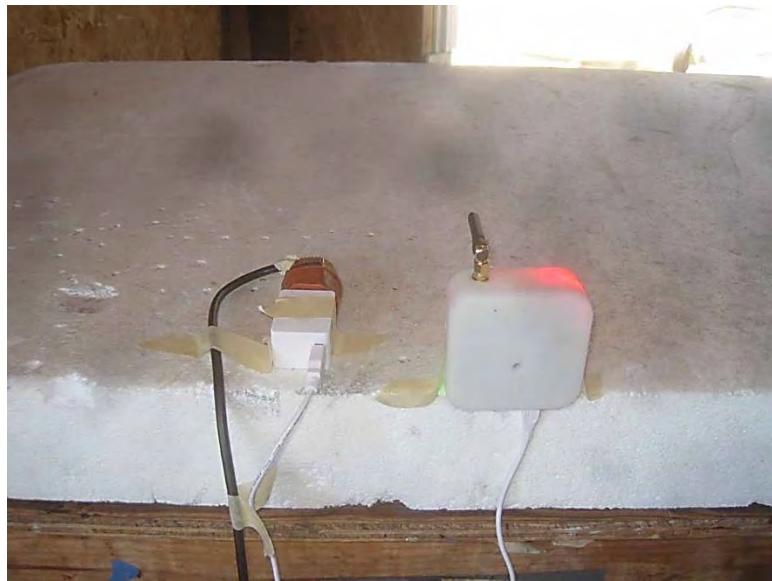

Z-Axis

15.249(a)(d) Field Strength of Spurious Emissions and Band Edge

Test Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: **RJE Technologies, Inc.**
 Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**
 Work Order #: **97475** Date: 8/26/2015
 Test Type: **Maximized Emissions** Time: 15:40:12
 Tested By: Don Nguyen Sequence#: 2
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is stand alone on the Styrofoam table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz.
 The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver.
 All support equipment is located remotely.
 The EUT is positioned in three different axes.


Frequency range of data sheet: 0.009-10000MHz
 0.009 to 0.15MHz, RBW=VBW=0.2kHz.
 0.15 to 30MHz, RBW=VBW=9kHz.
 30 to 1000MHz, RBW=VBW=120kHz.
 1000 to 10000MHz, RBW=VBW=1MHz

Temperature: 26°C, Relative Humidity: 34%, Atmospheric Pressure: 100kPa.

Test Method: ANSI C63.4 (2009)
 Site D.

Spurious emissions of this data sheet represent worst case emission levels for each axis and antenna polarity
 Mod. 1 was in place during testing.

CKC Laboratories, Inc. Date: 8/26/2015 Time: 15:40:12 RJE Technologies, Inc. WO#: 97475
 15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter) Test Distance: 3 Meters Sequence#: 2 Ext ATTN: 0 dB

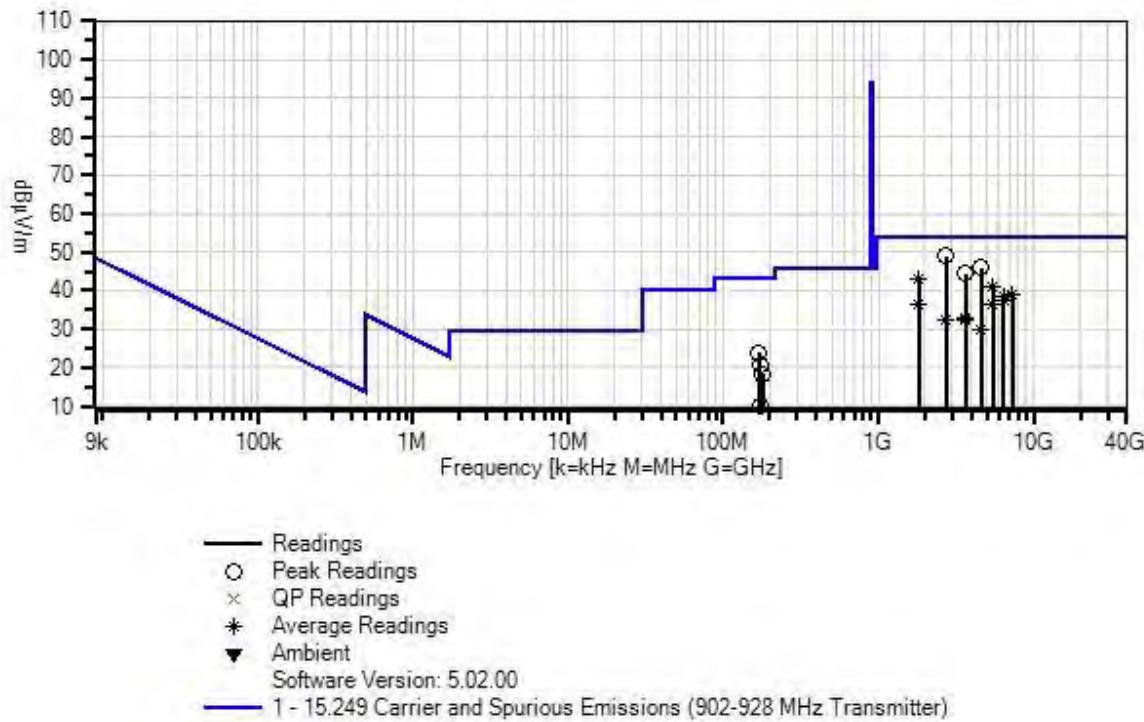

Test Equipment:

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	7/2/2014	7/2/2016
T1	AN00010	Preamp	8447D	3/12/2014	3/12/2016
T2	ANP05555	Cable	RG223/U	5/7/2014	5/7/2016
T3	ANP05569	Cable	RG-214/U	5/7/2014	5/7/2016
T4	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
T5	AN02869	Spectrum Analyzer	E4440A	7/17/2015	7/17/2016
T6	ANP04382	Cable	LDF-50	7/30/2014	7/30/2016
T7	AN00787	Preamp	83017A	6/10/2015	6/10/2017
T8	AN01646	Horn Antenna	3115	3/18/2014	3/18/2016
T9	ANP06360	Cable	L1-PNMNM-48	7/29/2014	7/29/2016
T10	ANP06554	Cable	32022-29094K- 29094K-24TC	3/19/2014	3/19/2016
T11	AN03169	High Pass Filter	HM1155-11SS	6/24/2015	6/24/2017

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8	Table	dB μ V/m	dB μ V/m	dB	
			MHz	dB μ V	dB	dB	dB	dB μ V/m	dB μ V/m	dB	Ant
1	2745.000M	51.4	+0.0	+0.0	+0.0	+0.0	+0.0	49.0	54.0	-5.0	Horiz
			+0.0	+6.9	-40.0	+26.6					
			+3.5	+0.4	+0.2						
2	4574.942M	42.2	+0.0	+0.0	+0.0	+0.0	+0.0	45.9	54.0	-8.1	Horiz
			+0.0	+9.1	-40.2	+29.6					
			+4.6	+0.5	+0.1						
3	3658.160M	44.1	+0.0	+0.0	+0.0	+0.0	+0.0	44.5	54.0	-9.5	Vert
			+0.0	+7.5	-40.4	+28.6					
			+4.1	+0.5	+0.1						
4	3658.092M	43.9	+0.0	+0.0	+0.0	+0.0	+0.0	44.3	54.0	-9.7	Horiz
			+0.0	+7.5	-40.4	+28.6					
			+4.1	+0.5	+0.1						
5	1830.030M	49.8	+0.0	+0.0	+0.0	+0.0	+0.0	43.2	54.0	-10.8	Vert
Ave			+0.0	+5.1	-39.4	+24.4					
			+2.7	+0.3	+0.3						
^	1830.030M	75.5	+0.0	+0.0	+0.0	+0.0	+0.0	68.9	54.0	+14.9	Vert
			+0.0	+5.1	-39.4	+24.4					
			+2.7	+0.3	+0.3						
7	5489.950M	34.3	+0.0	+0.0	+0.0	+0.0	+0.0	40.9	54.0	-13.1	Horiz
Ave			+0.0	+9.7	-40.1	+30.9					
			+5.3	+0.6	+0.2						
^	5489.950M	59.1	+0.0	+0.0	+0.0	+0.0	+0.0	65.7	54.0	+11.7	Horiz
			+0.0	+9.7	-40.1	+30.9					
			+5.3	+0.6	+0.2						
9	7319.950M	27.5	+0.0	+0.0	+0.0	+0.0	+0.0	38.8	54.0	-15.2	Horiz
Ave			+0.0	+11.3	-40.3	+33.5					
			+5.9	+0.7	+0.2						
^	7319.950M	45.2	+0.0	+0.0	+0.0	+0.0	+0.0	56.5	54.0	+2.5	Horiz
			+0.0	+11.3	-40.3	+33.5					
			+5.9	+0.7	+0.2						
11	6404.950M	29.2	+0.0	+0.0	+0.0	+0.0	+0.0	38.3	54.0	-15.7	Horiz
Ave			+0.0	+10.5	-39.8	+32.0					
			+5.5	+0.6	+0.3						
^	6404.950M	51.5	+0.0	+0.0	+0.0	+0.0	+0.0	60.6	54.0	+6.6	Horiz
			+0.0	+10.5	-39.8	+32.0					
			+5.5	+0.6	+0.3						
13	6404.968M	28.3	+0.0	+0.0	+0.0	+0.0	+0.0	37.4	54.0	-16.6	Vert
Ave			+0.0	+10.5	-39.8	+32.0					
			+5.5	+0.6	+0.3						
^	6404.968M	49.8	+0.0	+0.0	+0.0	+0.0	+0.0	58.9	54.0	+4.9	Vert
			+0.0	+10.5	-39.8	+32.0					
			+5.5	+0.6	+0.3						
15	5489.968M	30.0	+0.0	+0.0	+0.0	+0.0	+0.0	36.6	54.0	-17.4	Vert
Ave			+0.0	+9.7	-40.1	+30.9					
			+5.3	+0.6	+0.2						

^	5489.968M	53.0	+0.0	+0.0	+0.0	+0.0	+0.0	59.6	54.0	+5.6	Vert
			+0.0	+9.7	-40.1	+30.9					
			+5.3	+0.6	+0.2						
17	1830.000M	42.8	+0.0	+0.0	+0.0	+0.0	+0.0	36.2	54.0	-17.8	Horiz
	Ave		+0.0	+5.1	-39.4	+24.4					
			+2.7	+0.3	+0.3						
^	1830.000M	67.6	+0.0	+0.0	+0.0	+0.0	+0.0	61.0	54.0	+7.0	Horiz
			+0.0	+5.1	-39.4	+24.4					
			+2.7	+0.3	+0.3						
19	169.510M	37.7	-26.8	+0.2	+1.3	+10.0	+0.0	23.9	43.5	-19.6	Vert
			+0.0	+1.5	+0.0	+0.0					
			+0.0	+0.0	+0.0						
20	3660.000M	32.5	+0.0	+0.0	+0.0	+0.0	+0.0	32.9	54.0	-21.1	Horiz
	Ave		+0.0	+7.5	-40.4	+28.6					
			+4.1	+0.5	+0.1						
^	3660.000M	55.4	+0.0	+0.0	+0.0	+0.0	+0.0	55.8	54.0	+1.8	Horiz
			+0.0	+7.5	-40.4	+28.6					
			+4.1	+0.5	+0.1						
22	3659.968M	32.1	+0.0	+0.0	+0.0	+0.0	+0.0	32.5	54.0	-21.5	Vert
	Ave		+0.0	+7.5	-40.4	+28.6					
			+4.1	+0.5	+0.1						
^	3659.968M	49.1	+0.0	+0.0	+0.0	+0.0	+0.0	49.5	54.0	-4.5	Vert
			+0.0	+7.5	-40.4	+28.6					
			+4.1	+0.5	+0.1						
24	2744.968M	34.8	+0.0	+0.0	+0.0	+0.0	+0.0	32.4	54.0	-21.6	Vert
	Ave		+0.0	+6.9	-40.0	+26.6					
			+3.5	+0.4	+0.2						
^	2744.960M	53.5	+0.0	+0.0	+0.0	+0.0	+0.0	51.1	54.0	-2.9	Vert
			+0.0	+6.9	-40.0	+26.6					
			+3.5	+0.4	+0.2						
26	173.310M	34.7	-26.8	+0.2	+1.3	+9.7	+0.0	20.6	43.5	-22.9	Vert
			+0.0	+1.5	+0.0	+0.0					
			+0.0	+0.0	+0.0						
27	4574.968M	26.3	+0.0	+0.0	+0.0	+0.0	+0.0	30.0	54.0	-24.0	Vert
	Ave		+0.0	+9.1	-40.2	+29.6					
			+4.6	+0.5	+0.1						
^	4574.968M	47.0	+0.0	+0.0	+0.0	+0.0	+0.0	50.7	54.0	-3.3	Vert
			+0.0	+9.1	-40.2	+29.6					
			+4.6	+0.5	+0.1						
29	180.310M	33.0	-26.8	+0.2	+1.3	+9.1	+0.0	18.3	43.5	-25.2	Vert
			+0.0	+1.5	+0.0	+0.0					
			+0.0	+0.0	+0.0						
30	172.510M	24.0	-26.8	+0.2	+1.3	+9.8	+0.0	10.0	43.5	-33.5	Horiz
			+0.0	+1.5	+0.0	+0.0					
			+0.0	+0.0	+0.0						

Band Edge Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 7149936112
 Customer: RJE Technologies, Inc.
 Specification: **Band Edge**
 Work Order #: **97475** Date: 8/26/2015
 Test Type: **Maximized Emissions** Time: 14:28:24
 Tested By: Don Nguyen Sequence#: 2
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:



The EUT is stand alone on the Styrofoam table top. The EUT is powered from an external DC power supplying output 5VDC. The EUT transmits solely on a single channel 915 MHz. • The transmission triggered by shorting the support Safety Turtle and the signal will be received by support receiver. • All support equipment is located remotely. • The EUT is positioned in three different axis and data is taken in each axis. • Frequency range of data sheet 915.0 to 915.05MHz. • RBW=VBW=120kHz.



Temperature: 26°C, Relative Humidity: 35%, Atmospheric Pressure: 100kPa. •


Test Method: ANSI C63.4 (2009)• Site D. •

Mod. 1 was in place during testing.


Band Edge Plots

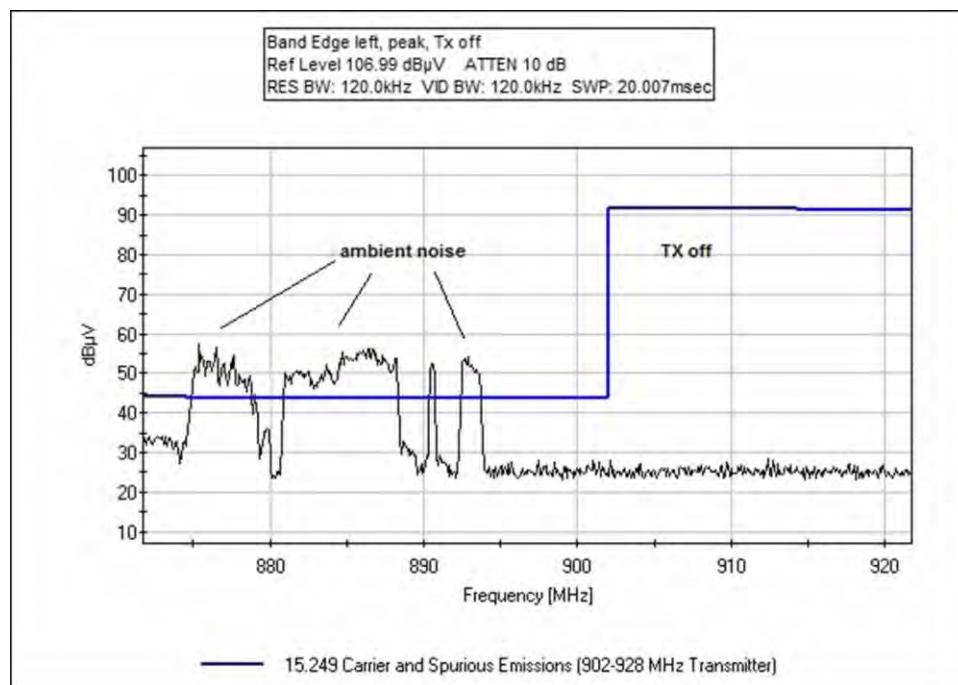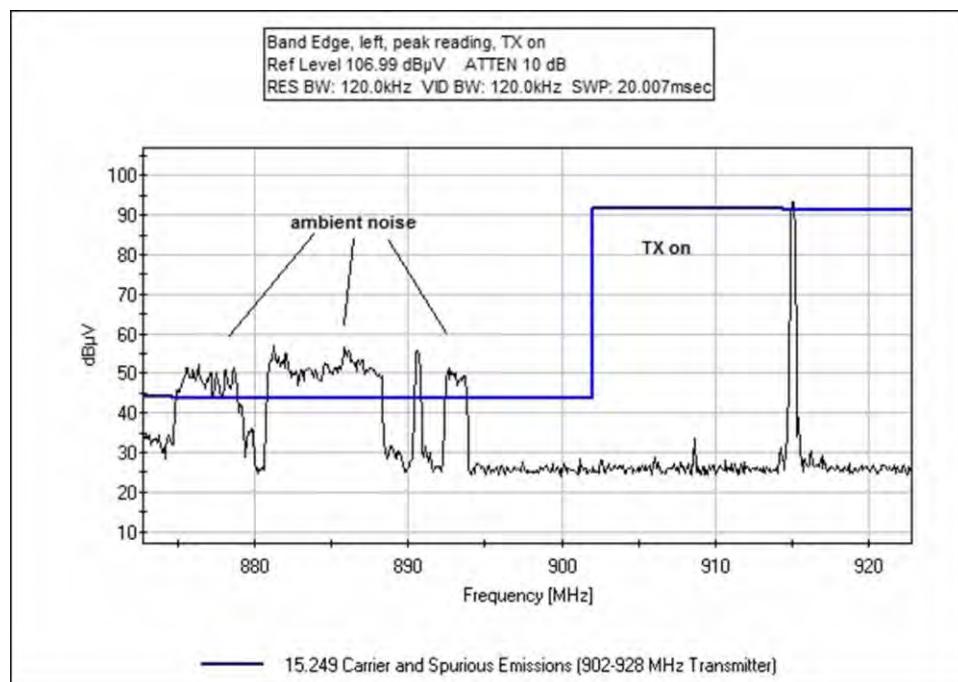

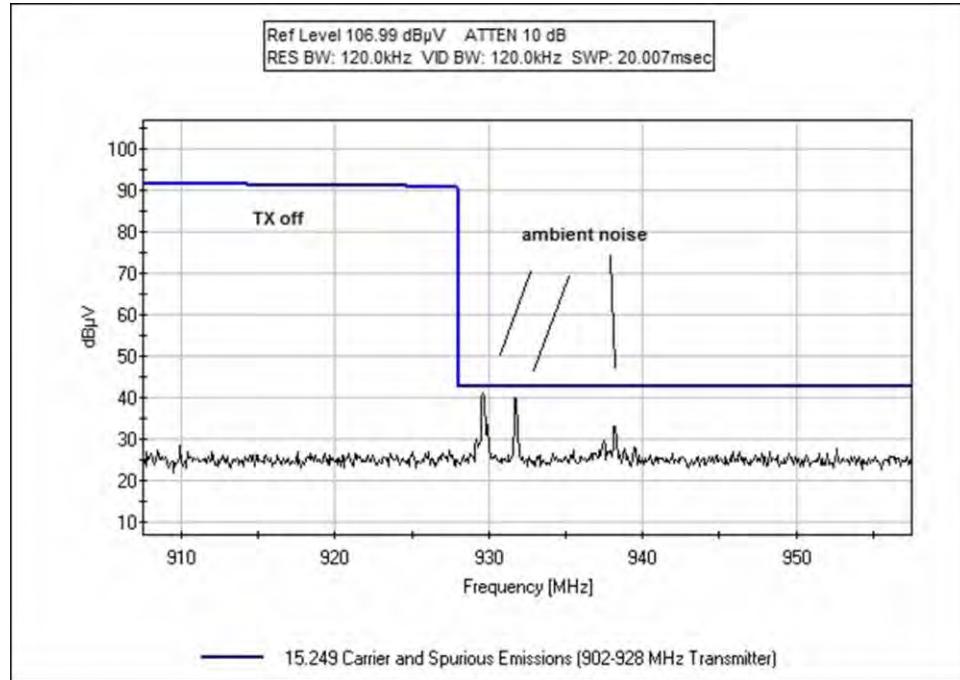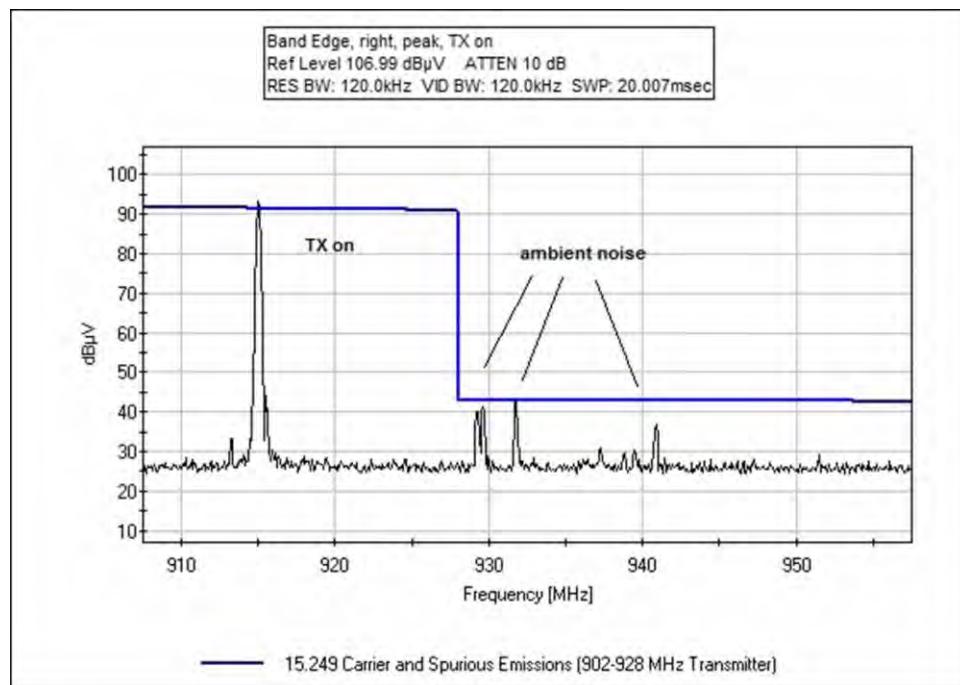

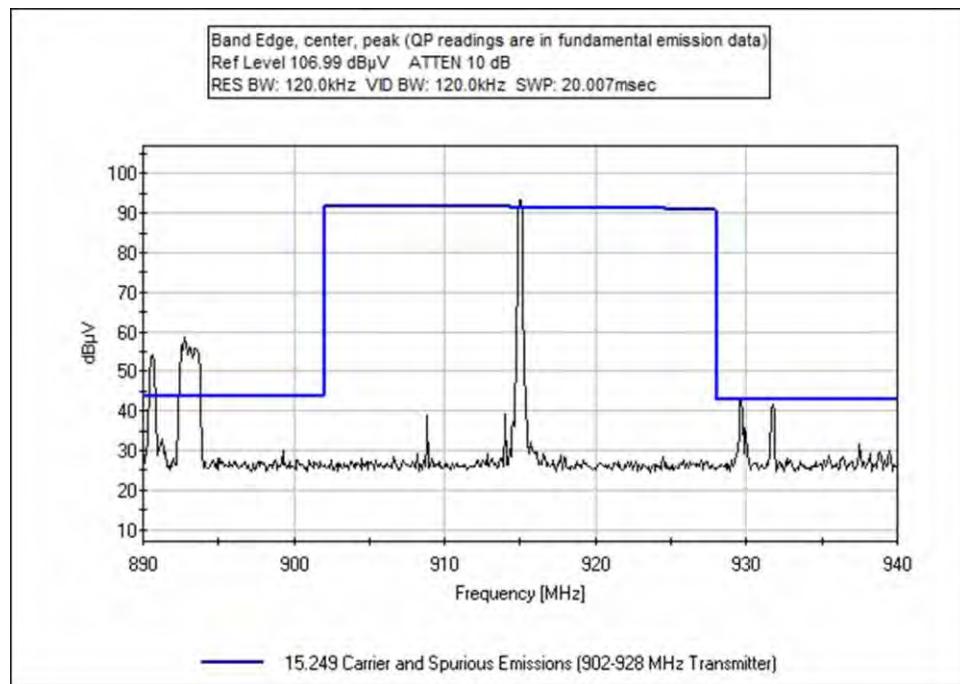

Test Setup Photo(s)

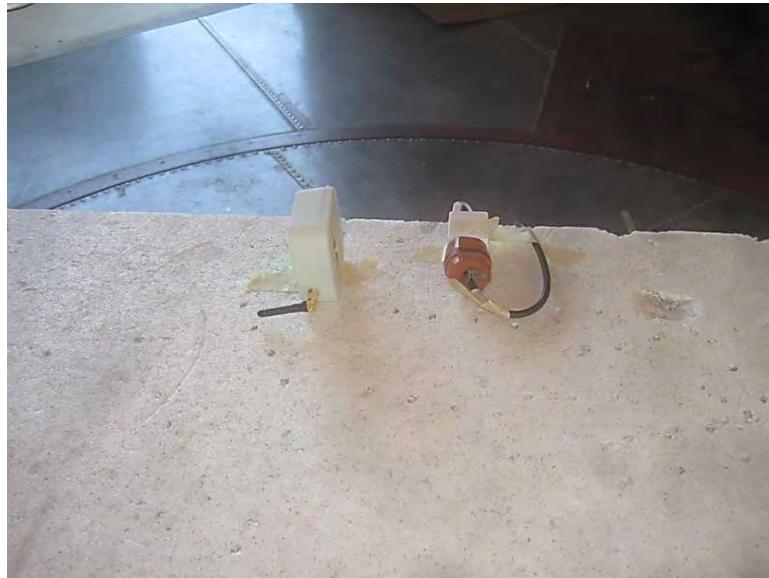

Front View




Back View




Cone 1




Cone 2

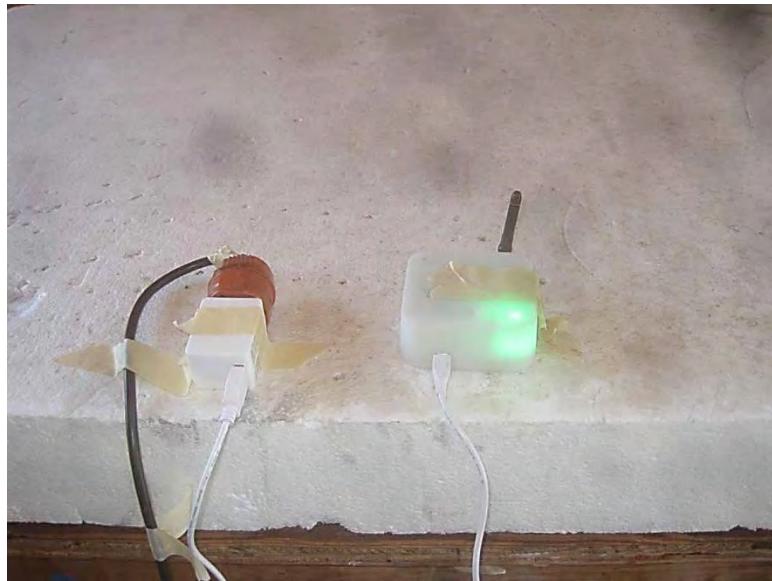

X-Axis

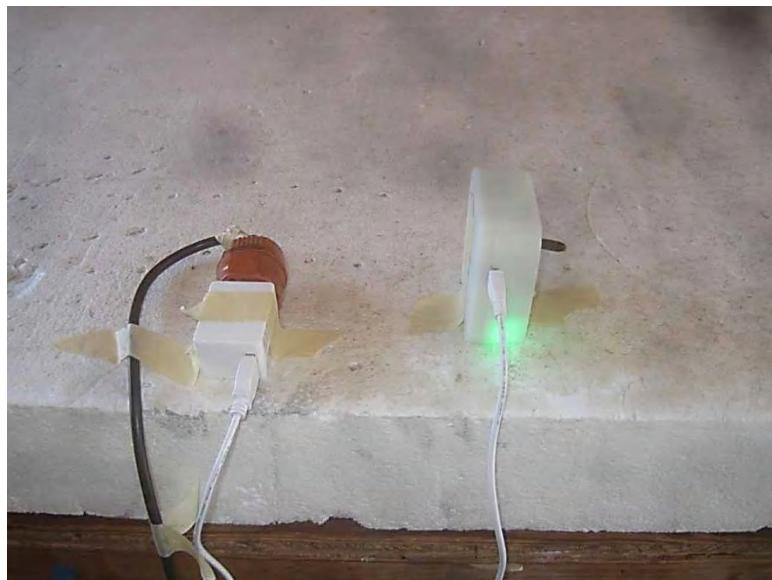

Y-Axis

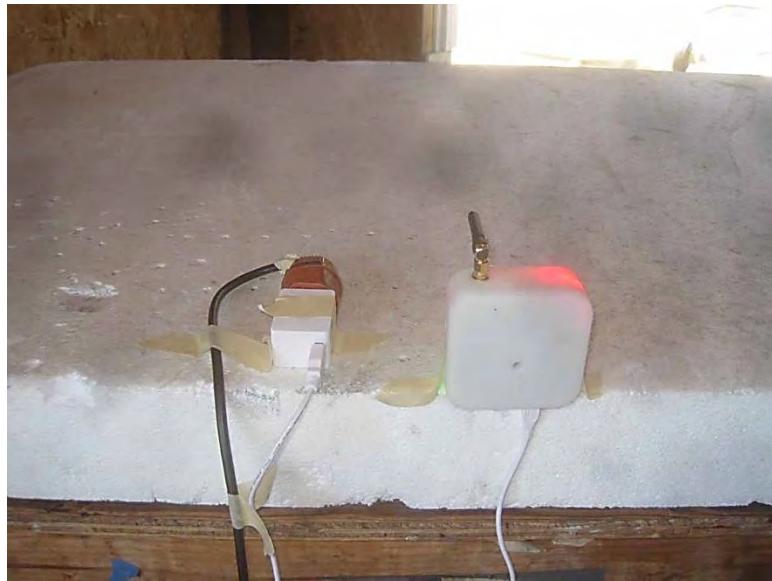

Z-Axis

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit.

SAMPLE CALCULATIONS	
Meter reading	(dB μ V)
+ Antenna Factor	(dB)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or carrot ("") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.