



A D T

FCC TEST REPORT (PART 27)

REPORT NO.: RF970930L16

MODEL NO.: WU211(refer to item 3.1 for more details)

RECEIVED: Sep. 30, 2008

TESTED: Jan. 06 ~ Jan. 08, 2009

ISSUED: Jan. 10, 2009

APPLICANT: Quanta Microsystems, Inc.

ADDRESS: 188 Wenhwa 2nd Rd., Kueishan Hsiang Taoyuan
Shien 333, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4	TEST TYPES AND RESULTS.....	12
4.1	OUTPUT POWER MEASUREMENT	12
4.1.1	LIMITS OF OUTPUT POWER MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES.....	14
4.1.4	TEST SETUP.....	15
4.1.5	EUT OPERATING CONDITIONS.....	15
4.1.6	TEST RESULTS.....	16
4.2	FREQUENCY STABILITY MEASUREMENT.....	18
4.2.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURE	19
4.2.4	TEST SETUP.....	19
4.2.5	EUT OPERATING CONDITIONS.....	19
4.2.6	TEST RESULTS.....	20
4.3	EMISSION BANDWIDTH MEASUREMENT	22
4.3.1	LIMITS OF EMISSION BANDWIDTH MEASUREMENT	22
4.3.2	TEST INSTRUMENTS	22
4.3.3	TEST PROCEDURE	22
4.3.4	TEST SETUP.....	23
4.3.5	EUT OPERATING CONDITIONS.....	23
4.3.6	TEST RESULTS.....	24
4.4	CHANNEL EDGE MEASUREMENT	28
4.4.1	LIMITS OF CHANNEL EDGE MEASUREMENT	28
4.4.2	TEST INSTRUMENTS	28
4.4.3	TEST SETUP.....	28
4.4.4	TEST PROCEDURES.....	29
4.4.5	EUT OPERATING CONDITION	29
4.4.6	TEST RESULTS.....	30
4.5	CONDUCTED SPURIOUS EMISSIONS.....	36
4.5.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	36
4.5.2	TEST INSTRUMENTS	36
4.5.3	TEST PROCEDURE	37
4.5.4	TEST SETUP.....	37
4.5.5	EUT OPERATING CONDITIONS.....	37
4.5.6	TEST RESULTS.....	38
4.6	RADIATED EMISSION MEASUREMENT (BELOW 1GHz)	50
4.6.1	LIMITS OF RADIATED EMISSION MEASUREMENT	50
4.6.2	TEST INSTRUMENTS	51



A D T

4.6.3	TEST PROCEDURES.....	52
4.6.4	DEVIATION FROM TEST STANDARD	52
4.6.5	TEST SETUP	53
4.6.6	EUT OPERATING CONDITIONS.....	53
4.6.7	TEST RESULTS.....	54
4.7	RADIATED EMISSION MEASUREMENT (ABOVE 1GHz).....	60
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	60
4.7.2	TEST INSTRUMENTS	61
4.7.3	TEST PROCEDURES.....	62
4.7.4	DEVIATION FROM TEST STANDARD	62
4.7.5	TEST SETUP	63
4.7.6	EUT OPERATING CONDITIONS.....	63
4.7.7	TEST RESULTS.....	64
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	70
6	INFORMATION ON THE TESTING LABORATORIES	71



A D T

1 CERTIFICATION

PRODUCT: IEEE802.16e WiMAX USB Dongle (refer to item 3.1 for more details)

MODEL: WU211 (refer to item 3.1 for more details)

BRAND: QMI (refer to item 3.1 for more details)

APPLICANT: Quanta Microsystems, Inc.

TESTED: Jan. 06 ~ Jan. 08, 2009

TEST SAMPLE: ENGINEERING SAMPLE

TEST STANDARDS: FCC Part 27, Subpart C & M

The above equipment (Model no.: WU211) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE** : Jan. 10, 2009
Andrea Hsia / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE** : Jan. 10, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE** : Jan. 10, 2009
Gary Chang / Assistant Manager



A D T

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC Part 27 & Part 2			
2.1046 27.50(h)(2)	Maximum Peak Output Power Limit: max. 2 watts	PASS	Meet the requirement of limit. Minimum passing margin is 26.42dBm at 2687.50MHz.
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Emission Bandwidth	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -11.78dB at 996.11MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE802.16e WiMAX USB Dongle (refer to NOTE for more details)
MODEL NO.	WU211 (refer to NOTE for more details)
FCC ID	T5U-WU211
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TYPE	QPSK, 16QAM, 64QAM (refer to NOTE 3 for more details)
CODING RATE	1/2, 2/3, 3/4 (refer to NOTE 3 for more details)
MODULATION TECHNOLOGY	OFDMA
DUPLEX METHOD	TDD
FREQUENCY RANGE	2496MHz ~ 2690MHz
CHANNEL BANDWIDTH	5MHz, 10MHz
MAX. E.I.R.P. POWER (RMS)	26.42dBm
ANTENNA TYPE	Printed antenna with 2.8dBi gain
OPERATION TEMPERATURE RANGE	0°C ~ 45°C
DATA CABLE	0.08m USB cable without core
I/O PORTS	USB
ACCESSORY DEVICES	Refer to note 2 as below

NOTE:

- The models as below are identical to each other except for their model designation, brand name and product name due to marketing requirement.

BRAND	MODEL	PRODUCT NAME
QMI	WU211	IEEE802.16e WiMAX USB Dongle
Alcatel-Lucent	1AF16465xxxx (The "x" means 0~9 or A~Z or blank)	Alcatel-Lucent 9799 MIMO USB Dongle 2.5 GHz

- For the EUT with accessory devices as below:

ACCESSORY DEVICES	Remark
USB connector 1	Black
USB connector 2	Black
USB cable	White

*For the two of the convertible USB connector & USB cable, client will chose one of them random for sale.

**For the USB connector 1 & 2 were difference in internal design.



A D T

3. For the EUT with modulation type and coding rate. After pre-testing in test items of output power and spurious emissions, QPSK was found to be worst case and was selected for the final test configuration.

DOWN LINK		UP LINK	
MODULATION	CODING RATE	MODULATION	CODING RATE
QPSK	1/2	QPSK	1/2
	3/4		3/4
16QAM	1/2	16QAM	1/2
	3/4		3/4
64QAM	1/2		
	2/3		
	3/4		

4. The above EUT information was declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

Three channels had been tested for each channel bandwidth.


CHANNEL BANDWIDTH: 5MHz	CHANNEL BANDWIDTH: 10MHz
Low channel (L): 2498.5MHz.	Low channel (L): 2501.0MHz.
Middle channel (M): 2587.0MHz.	Middle channel (M): 2587.0MHz.
High channel (H): 2687.5MHz.	High channel (H): 2685.0MHz.

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A & B

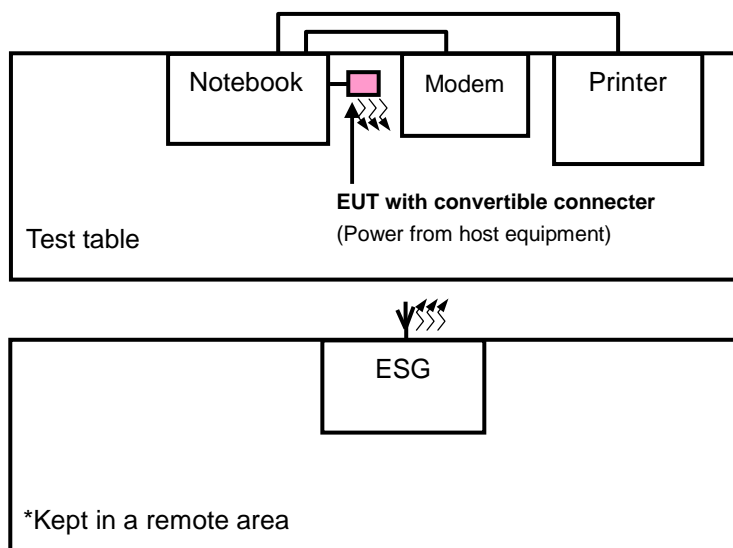

TEST MODE C

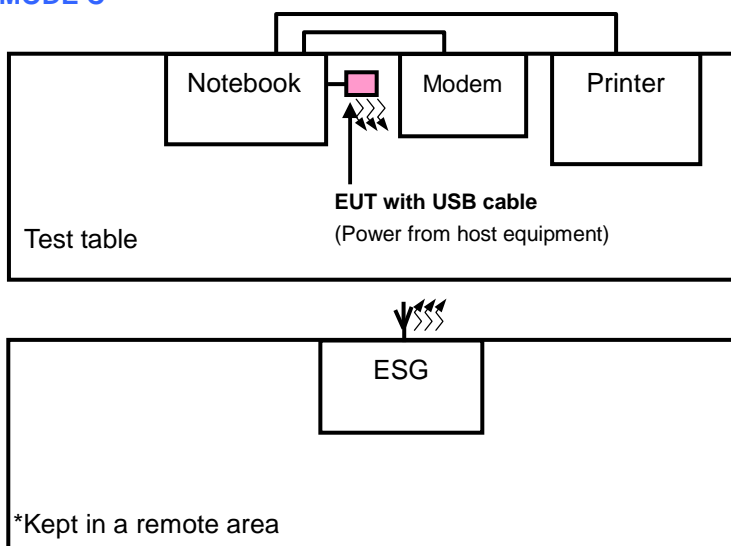



A D T

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	EB	CE	CSE	RE<1G	RE≥1G	
A	√	√	√	√	√	√	√	EUT with USB connector 1
B	-	-	-	-	-	√	-	EUT with USB connector 2
C	-	-	-	-	-	√	-	EUT with USB cable

Where **OP**: Output power **FS**: Frequency stability
EB: Emission bandwidth **CE**: Channel edge
CSE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz **NOTE**: “-“means no effect.

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CHANNEL BANDWIDTH	CODING RATE	AXIS
A	L, M, H	OFDMA	QPSK	5MHz	1/2	X
A	L, M, H	OFDMA	QPSK	10MHz	1/2	X

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CHANNEL BANDWIDTH	CODING RATE
A	L	OFDMA	QPSK	5MHz	1/2
A	L	OFDMA	QPSK	10MHz	1/2

EMISSION BANDWIDTH MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CHANNEL BANDWIDTH	CODING RATE
A	L, M, H	OFDMA	QPSK	5MHz	1/2
A	L, M, H	OFDMA	QPSK	10MHz	1/2



A D T

CHANNEL EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CHANNEL BANDWIDTH	CODING RATE
A	L, M, H	OFDMA	QPSK	5MHz	1/2
A	L, M, H	OFDMA	QPSK	10MHz	1/2

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CODING RATE	CHANNEL BANDWIDTH
A	L, M, H	OFDMA	QPSK	1/2	5MHz
A	L, M, H	OFDMA	QPSK	1/2	10MHz

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CODING RATE	CHANNEL BANDWIDTH	AXIS
A	M	OFDMA	QPSK	1/2	5MHz	X
A	M	OFDMA	QPSK	1/2	10MHz	X
B	M	OFDMA	QPSK	1/2	5MHz	x
B	M	OFDMA	QPSK	1/2	10MHz	X
C	M	OFDMA	QPSK	1/2	5MHz	x
C	M	OFDMA	QPSK	1/2	10MHz	x

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	CODING RATE	CHANNEL BANDWIDTH	AXIS
A	L, M, H	OFDMA	QPSK	1/2	5MHz	X
A	L, M, H	OFDMA	QPSK	1/2	10MHz	x



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-C-2004

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D820	21498926752	FCC DoC Approved
2	PRINTER	hp	hp-1015	Q2462A -CNFG149502	NA
3	MODEM	ACEEX	1414V/3	0401008253	IFAXDM1414
4	SIGNAL GENERATOR	Agilent	E4438C	MY45092849	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable
3	1.2m braid shielded wire, DB25 & DB9 connector, w/o core.
4	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



A D T

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 30, 2008	Jun. 29, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 02, 2008	May 01, 2009
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 24, 2008	Jun. 23, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 20, 2008	May 19, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 20, 2008	May 19, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.




4.1.3 TEST PROCEDURES

- a. The EUT was set up for the rated power with signal generator. The RMS power was measured with RMS detector of Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. E.I.R.P power measurement. In the semi anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. “Raw” is the spectrum reading value, “SG” is signal generator export power, “TX Gain” is calibration antenna isotropic gain value, “TX cable” is the transmitted cable loss between the calibration antenna and signal generator. The “Factor” means that the transmission path loss is equal to “SG” - “TX cable” + “TX Gain” – “Raw”.
- d. Actually the real E.I.R.P peak power is equal to “Read Value” + “Factor”.

4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

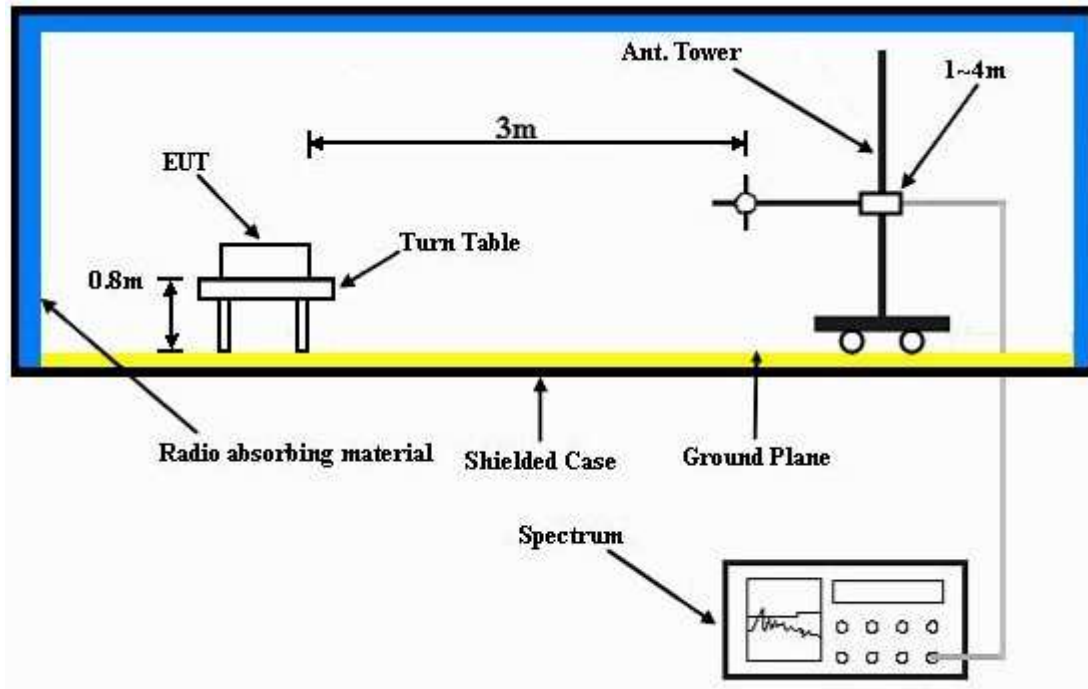

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- a. Link up EUT with signal generator.
- b. The signal generator controlled EUT to export rated output power under transmission mode and specific channel frequency.



A D T

4.1.6 TEST RESULTS

INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	RMS
ENVIRONMENTAL CONDITIONS	22deg°C, 63%RH 991hPa	CHANNEL BANDWIDTH	5MHz
TEST MODE	A	TESTED BY	Dean Wang

EIRP POWER (RMS)					
CHANNEL	FREQUENCY (MHz)	C.F (dB)	S.A. READING (dBm)	TOTAL POWER (dBm)	TOTAL POWER (W)
Low	2498.50	46.20	-20.96	25.24	0.334
Middle	2587.00	46.60	-21.41	25.19	0.330
High	2687.50	47.10	-20.68	26.42	0.439

NOTE: C.F = space loss + antenna factor + cable loss

CONDUCTED POWER (RMS)					
CHANNEL	FREQUENCY (MHz)	C.F (dB)	S.A. READING (dBm)	TOTAL POWER (dBm)	TOTAL POWER (W)
Low	2498.50	21.00	1.58	22.58	0.181
Middle	2587.00	21.00	1.48	22.48	0.177
High	2687.50	21.00	2.80	23.80	0.240

NOTE: C.F = attenuator + cable loss



A D T

INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	RMS
ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa	CHANNEL BANDWIDTH	10MHz
TEST MODE	A	TESTED BY	Dean Wang

EIRP POWER (RMS)					
CHANNEL	FREQUENCY (MHz)	C.F (dB)	S.A. READING (dBm)	TOTAL POWER (dBm)	TOTAL POWER (W)
Low	2501.00	46.20	-20.86	25.34	0.342
Middle	2587.00	46.60	-21.54	25.06	0.321
High	2685.00	47.10	-21.38	25.72	0.373

NOTE: C.F = space loss + antenna factor + cable loss

CONDUCTED POWER (RMS)					
CHANNEL	FREQUENCY (MHz)	C.F (dB)	S.A. READING (dBm)	TOTAL POWER (dBm)	TOTAL POWER (W)
Low	2501.00	21.00	1.45	22.45	0.176
Middle	2587.00	21.00	1.43	22.43	0.175
High	2685.00	21.00	2.02	23.02	0.200

NOTE: C.F = attenuator + cable loss



A D T

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT 0°C ~ 45°C.

4.2.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11. 2009
* Hewlett Packard RF cable	8120-6192	01428251	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA	NA
* WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jun. 26, 2008	Jun. 25, 2009

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipments are used for the final measurement.
 3. The test was performed in ADT RF OVEN room.

4.2.3 TEST PROCEDURE

- a. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 93.5 Volts to 126.5 Volts. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- d. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

4.2.4 TEST SETUP

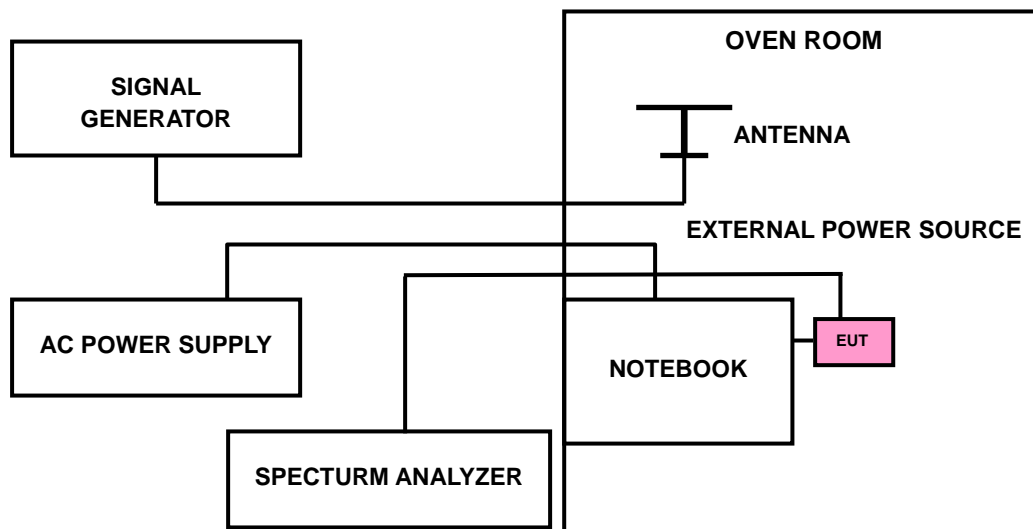

4.2.5 EUT OPERATING CONDITIONS

The EUT connected to the notebook. Use software to control the EUT channel and transmit a single tone.



A D T

4.2.6 TEST RESULTS

MODE	Low channel	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa	TESTED BY	Dean Wang
CHANNEL BANDWIDTH	5MHz	TEST MODE	A

AFC FREQUENCY ERROR VS. VOLTAGE		
VOLTAGE (Volts)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
126.5	2498.495678	-1.7298379
110.0	2498.496413	-1.4356614
93.5	2498.495817	-1.6742045

AFC FREQUENCY ERROR VS. TEMP.		
TEMP. (°C)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
50	2498.495550	-1.7810686
40	2498.495803	-1.6798079
30	2498.495642	-1.7442465
20	2498.496413	-1.4356614
10	2498.495599	-1.7614569
0	2498.496019	-1.5933560
-10	2498.496387	-1.4460676
-20	2498.495635	-1.7470482
-30	2498.495569	-1.7734641



A D T

MODE	Low channel	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa	TESTED BY	Dean Wang
CHANNEL BANDWIDTH	10MHz	TEST MODE	A

AFC FREQUENCY ERROR VS. VOLTAGE		
VOLTAGE (Volts)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
126.5	2500.995140	-1.9432227
110.0	2500.995598	-1.7600960
93.5	2500.995152	-1.9384246

AFC FREQUENCY ERROR VS. TEMP.		
TEMP. (°C)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
50	2500.995123	-1.9500200
40	2500.995418	-1.8320672
30	2500.995381	-1.8468613
20	2500.995598	-1.7600960
10	2500.995956	-1.6169532
0	2500.996312	-1.4746102
-10	2500.995562	-1.7744902
-20	2500.995815	-1.6733307
-30	2500.995338	-1.8640544



A D T

4.3 EMISSION BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT

According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11. 2009
* Hewlett Packard RF cable	8120-6192	01428251	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA	NA
* WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jun. 26, 2008	Jun. 25, 2009


NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipments are used for the final measurement.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 51kHz, VBW = 160kHz (for test mode A), RBW = 100kHz, VBW = 300kHz (for test mode B). The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

4.3.4 TEST SETUP

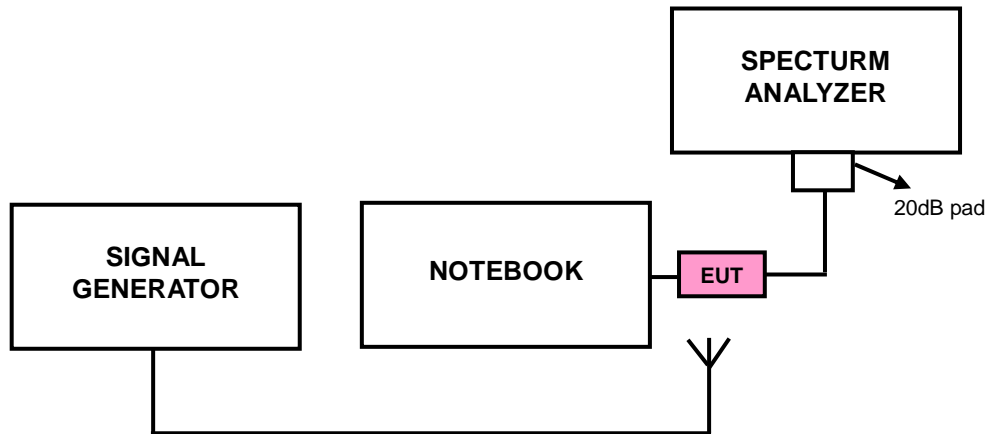

4.3.5 EUT OPERATING CONDITIONS

- a. Link up EUT with signal generator.
- b. The signal generator controlled EUT to export rated output power under transmission mode and specific channel frequency. FCC 27.53(l)(6) required a measurement bandwidth is the fundamental emission below 26dB bandwidth.




A D T

4.3.6 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz


CHANNEL	-26dBc BANDWIDTH (MHz)
Low	4.796
Middle	4.794
High	4.994

LOW CHANNEL

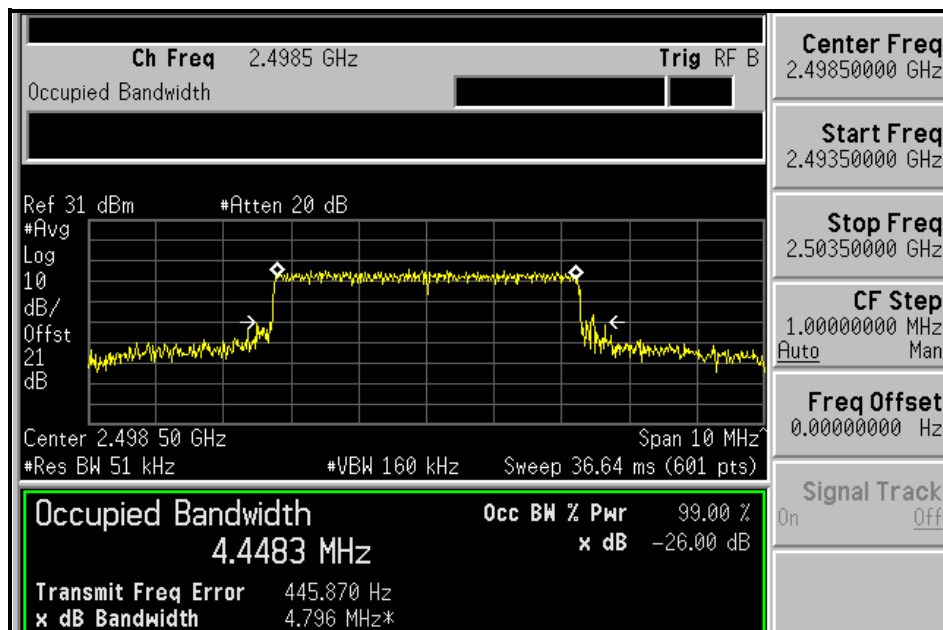




MIDDLE CHANNEL

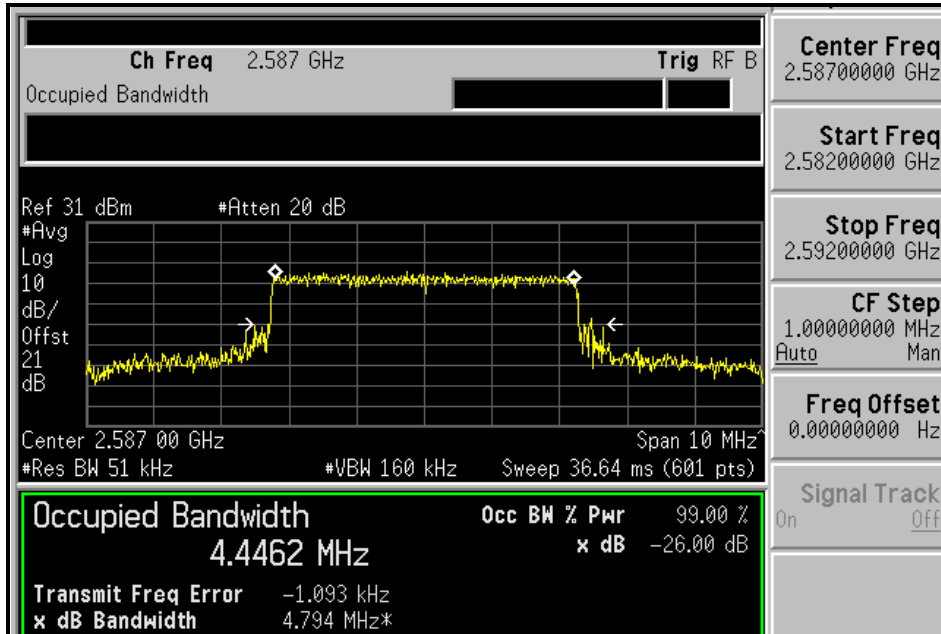

HIGH CHANNEL

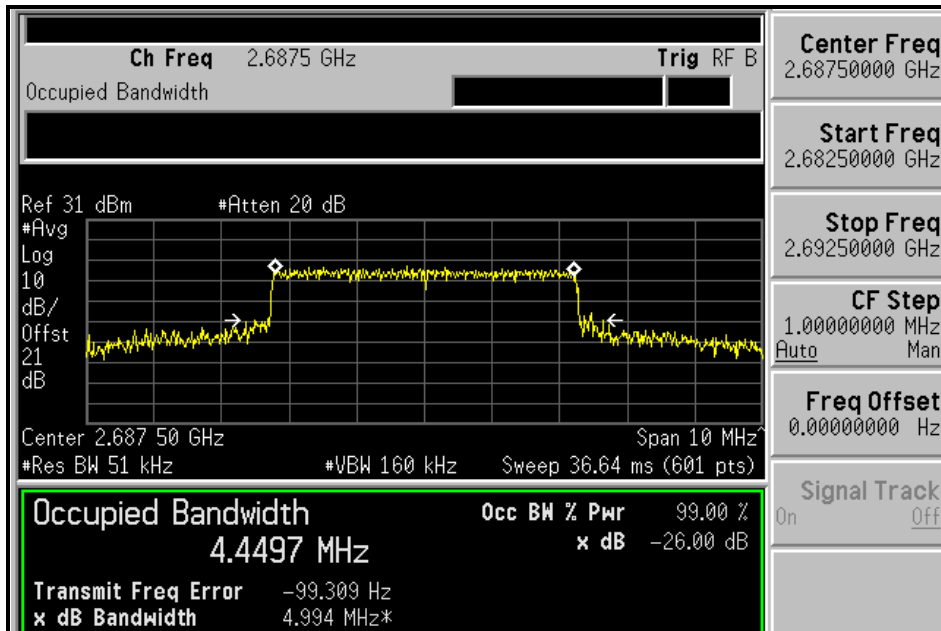




A D T

CHANNEL BANDWIDTH: 10MHz

CHANNEL	-26dBc BANDWIDTH (MHz)
Low	9.817
Middle	9.641
High	9.842


LOW CHANNEL

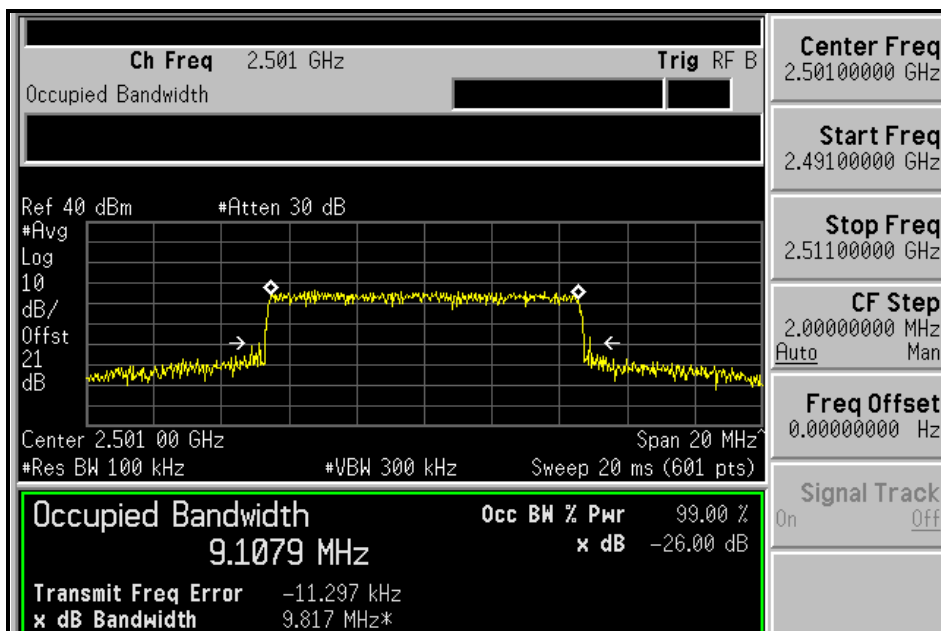




A D T

MIDDLE CHANNEL

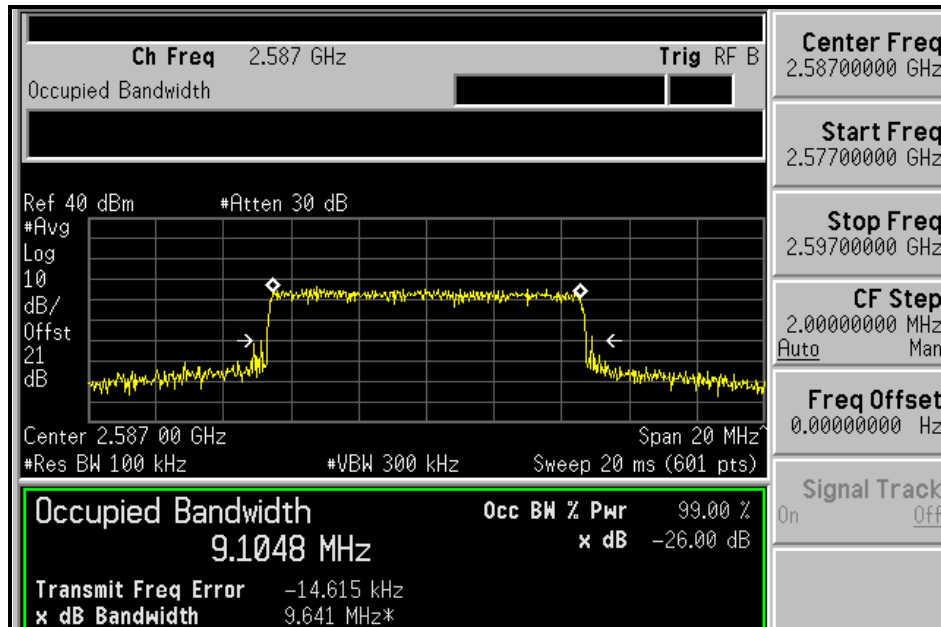

HIGH CHANNEL

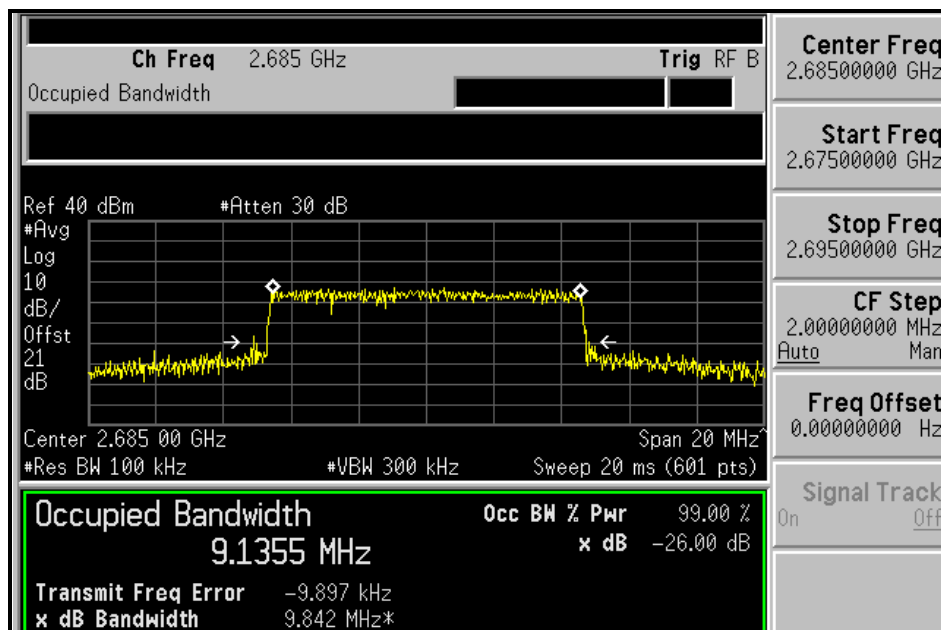



4.4 CHANNEL EDGE MEASUREMENT

4.4.1 LIMITS OF CHANNEL EDGE MEASUREMENT

According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge, the limit of emission equal to -13dBm . And $55 + 10 \log (P)$ dB at 5.5 MHz from the channel edges, the limit of emission equal to -25dBm . In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11. 2009
* JFW 10dB attenuation	50HF-010-SMA	NA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA	NA
* WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jun. 26, 2008	Jun. 25, 2009

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. “*” = These equipments are used for the final measurement.

4.4.3 TEST SETUP

Same as Item 4.3.3



4.4.4 TEST PROCEDURES

- a. The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 20MHz (Channel Bandwidth: 5MHz) / 30MHz (Channel Bandwidth: 10MHz). RBW of the spectrum is 51kHz (Channel Bandwidth: 5MHz) / 100kHz (Channel Bandwidth: 10MHz).
- c. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION

- a. Link up EUT with signal generator.
- b. The signal generator controlled EUT to export rated output power under transmission mode and specific channel frequency.





A D T

4.4.6 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz



LOW CHANNEL

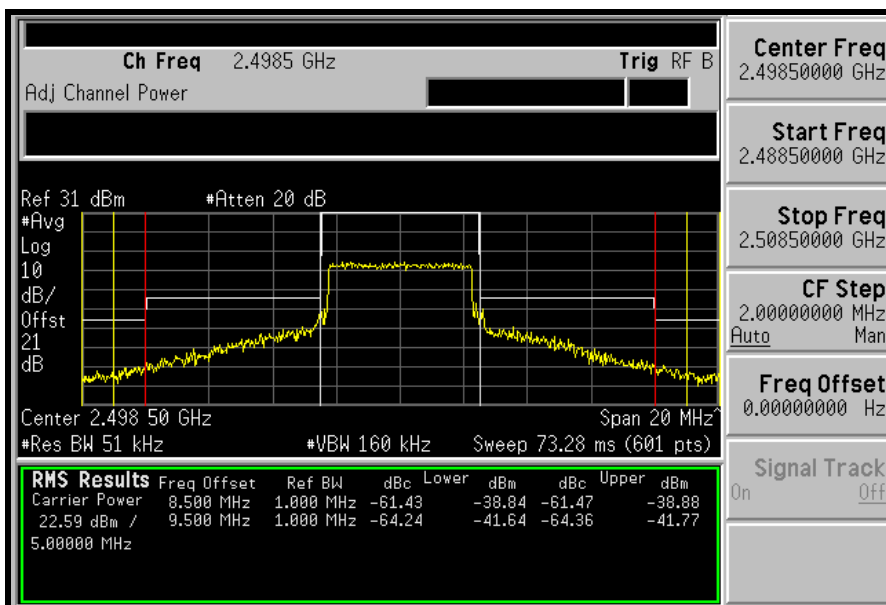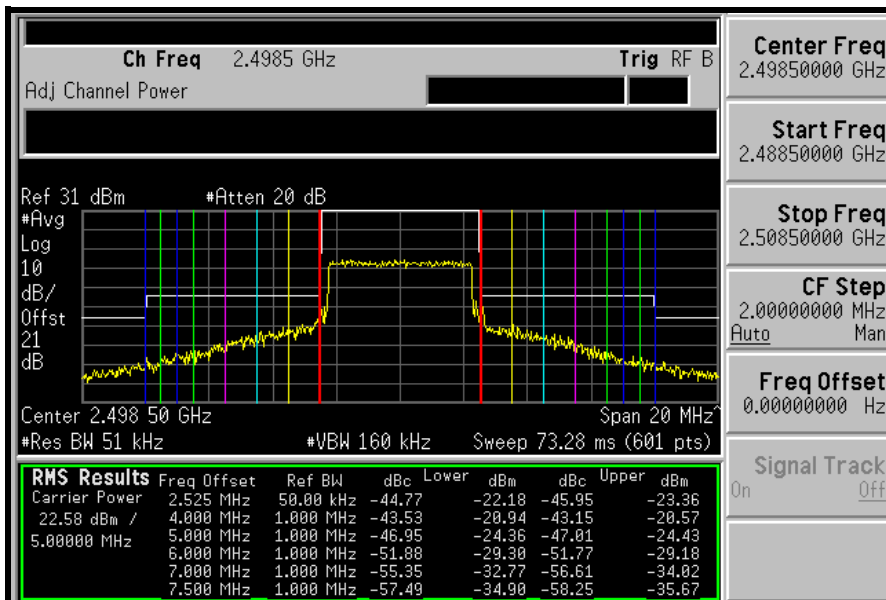



A D T



MIDDLE CHANNEL

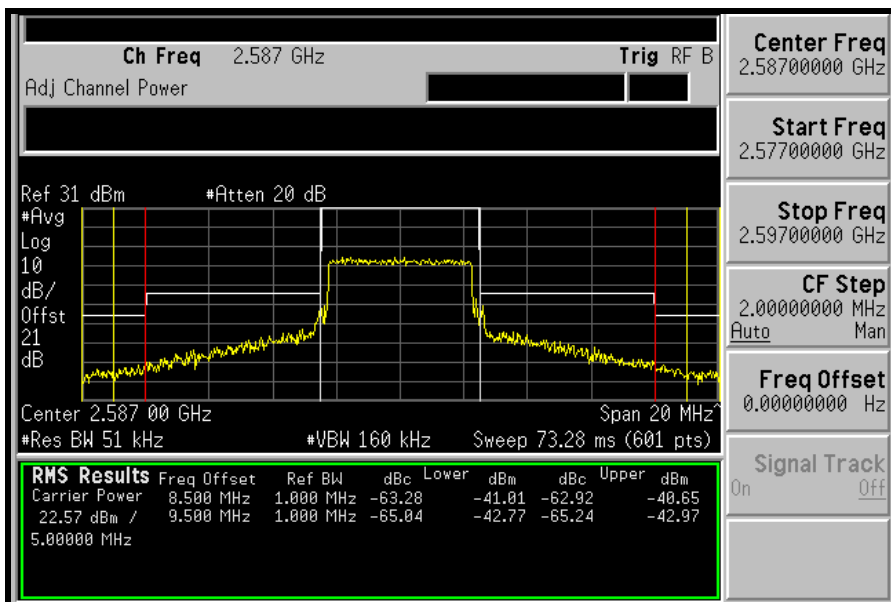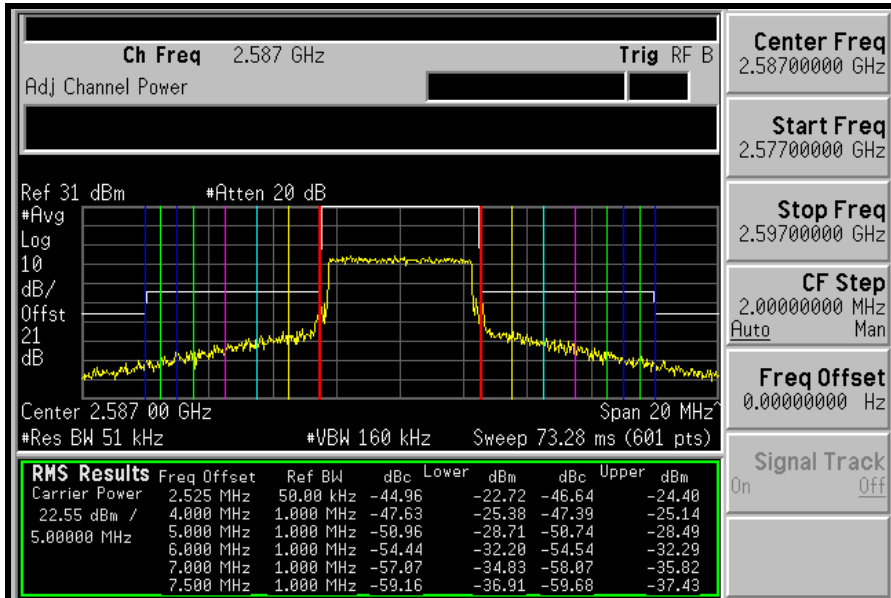



A D T

HIGH CHANNEL

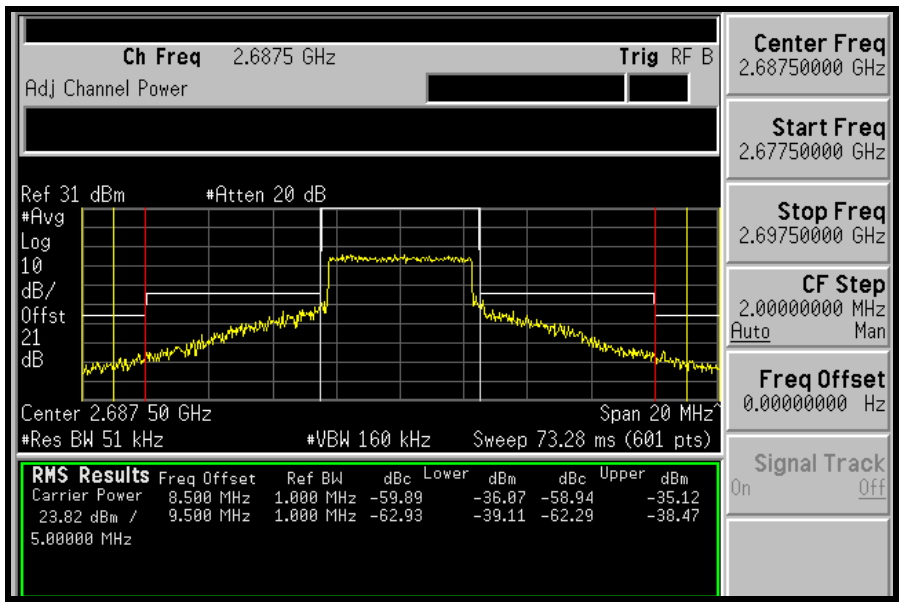
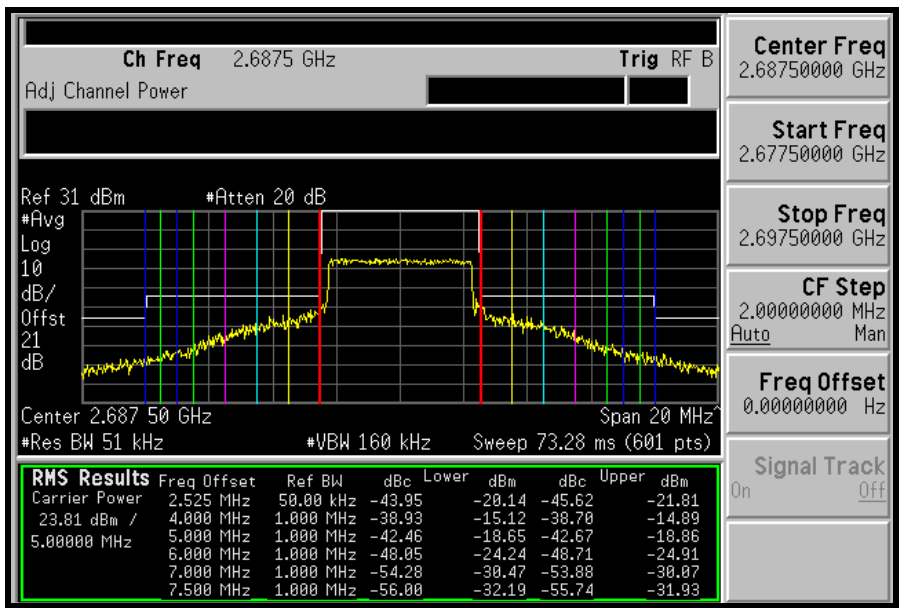




A D T

CHANNEL BANDWIDTH: 10MHz



LOW CHANNEL

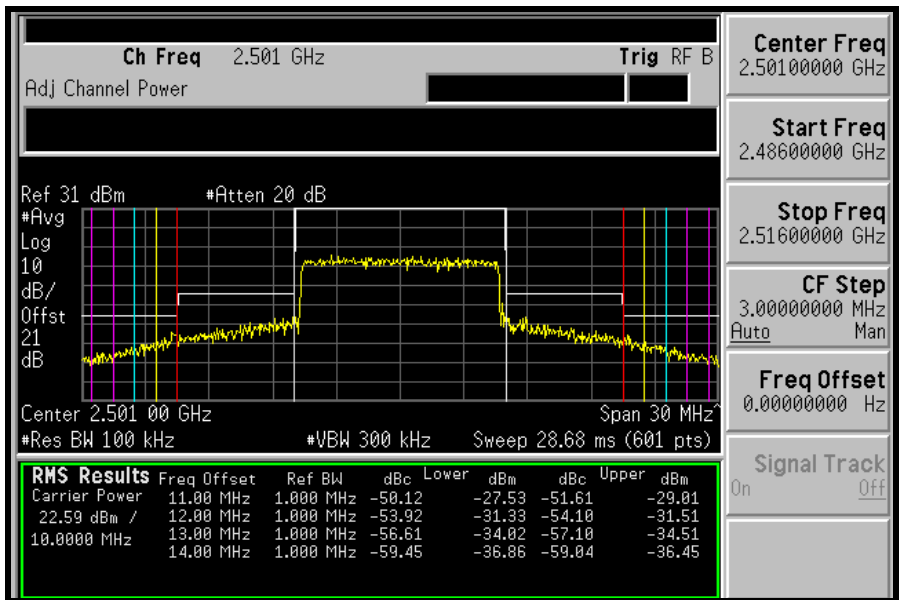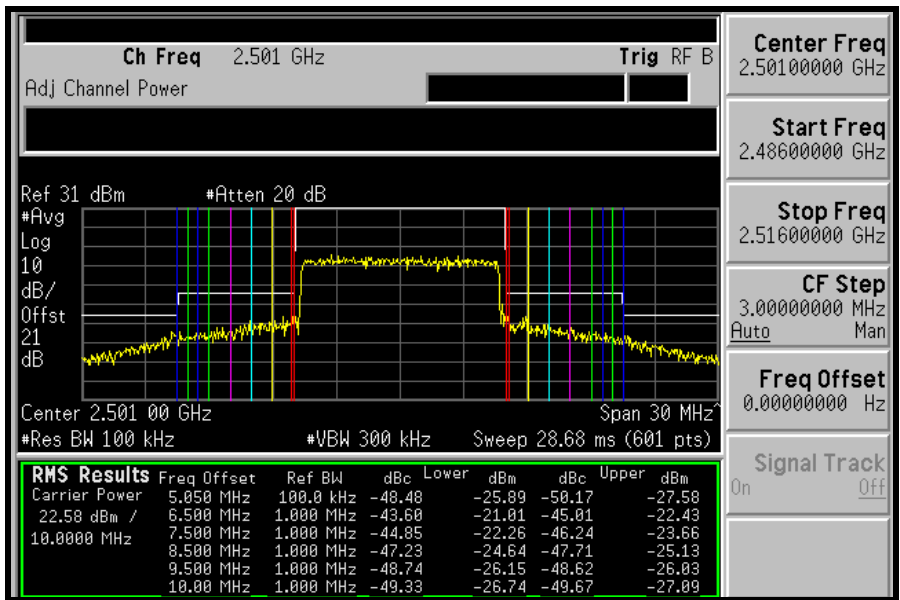



A D T



MIDDLE CHANNEL

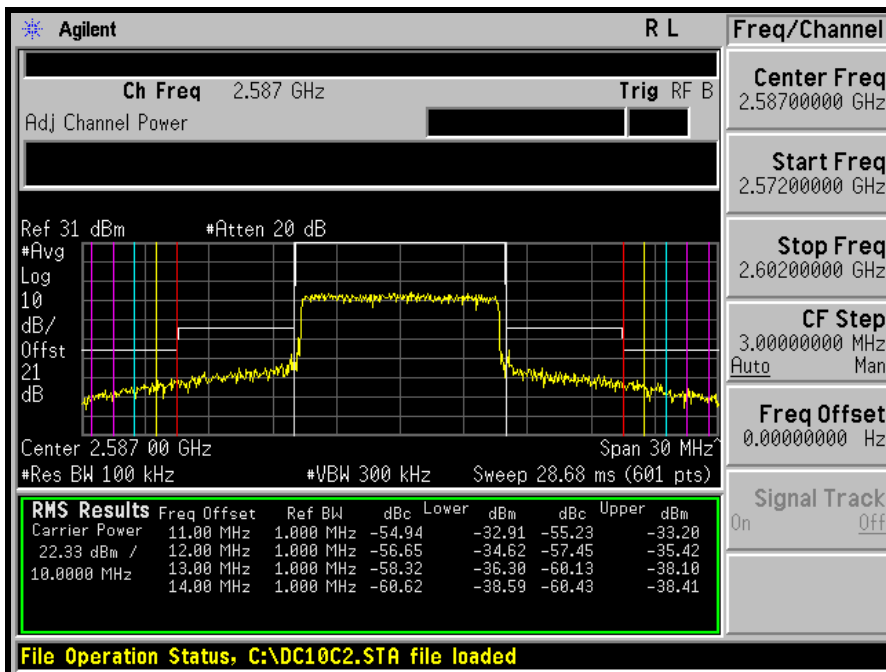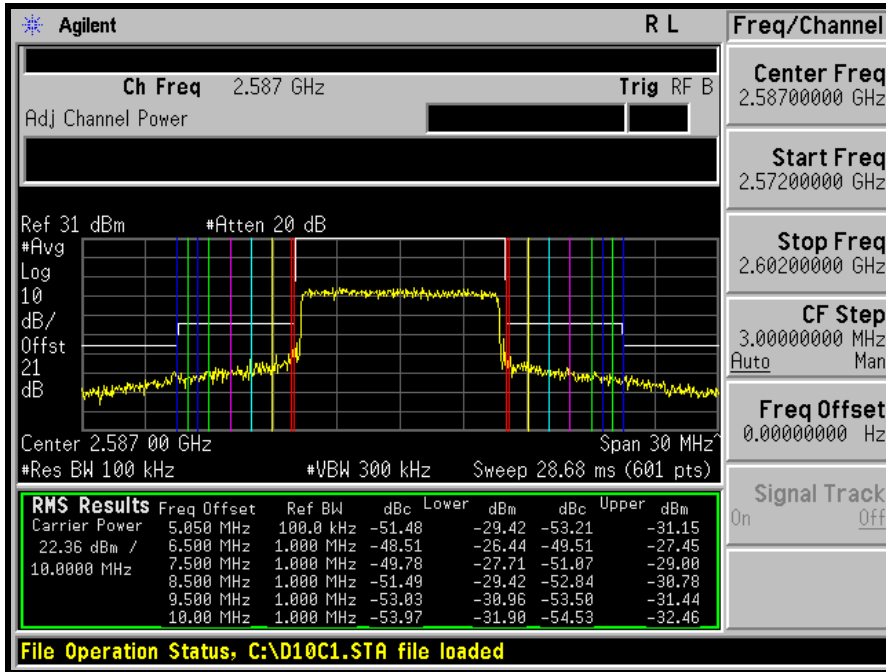



A D T

HIGH CHANNEL

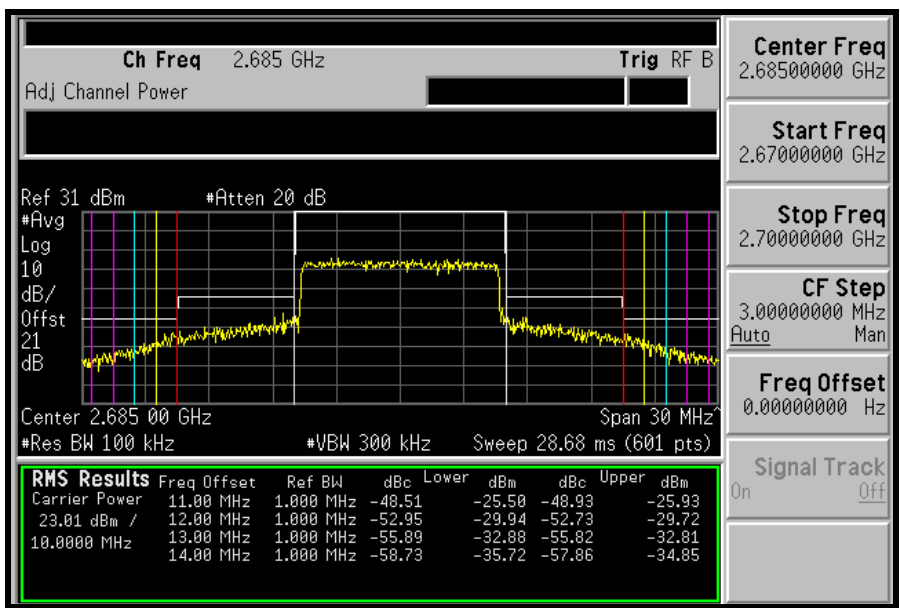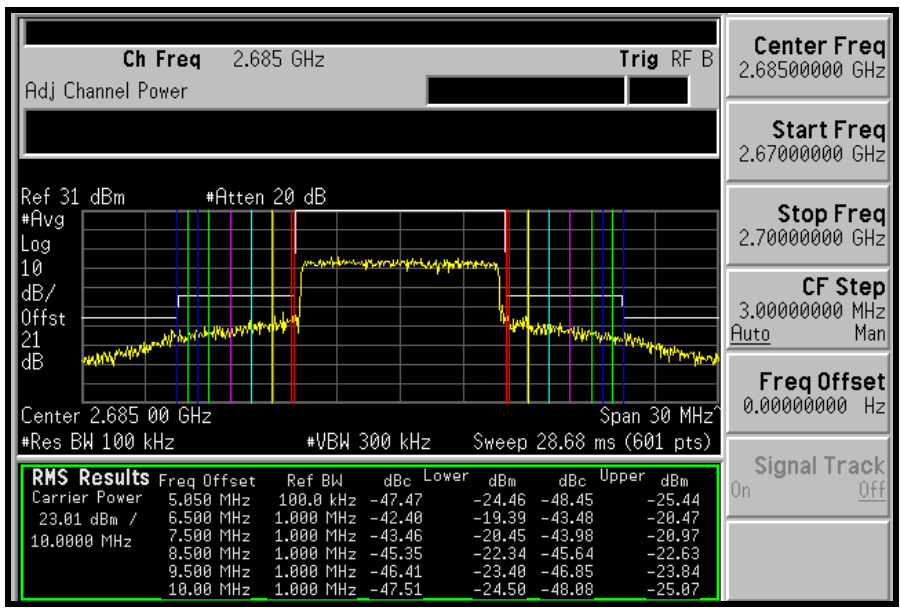



A D T

4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission equal to -25 dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11. 2009
* Wainwright Instruments High Pass Filter	WHK3.1/18G-10 SS	ZZ-010091	NA	NA
* JFW 10dB attenuation	50HF-010-SMA	NA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA	Jun. 25, 2009


NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipments are used for the final measurement.

4.5.3 TEST PROCEDURE

- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 30MHz to 3GHz, it shall be connected to the 20dB pad attenuated the carried frequency. The spectrum set $RB = 1\text{MHz}$, $VB = 3\text{MHz}$.
- c. When the spectrum scanned from 3GHz to 27GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set $RB = 1\text{MHz}$, $VB = 3\text{MHz}$.

4.5.4 TEST SETUP

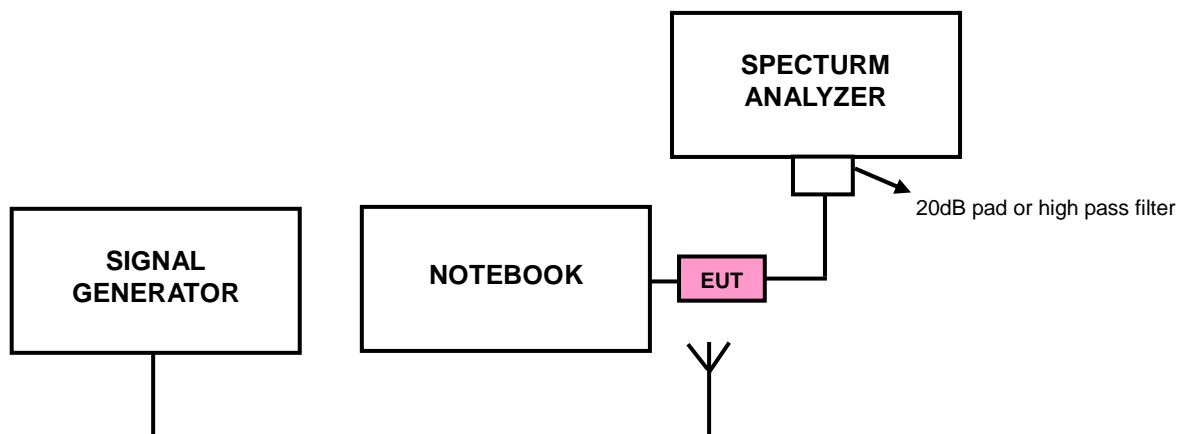

4.5.5 EUT OPERATING CONDITIONS

- a. Link up EUT with signal generator.
- b. The signal generator controlled EUT to export rated output power under transmission mode and specific channel frequency.




A D T


4.5.6 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz

LOW CHANNEL: 30MHz ~ 1GHz:

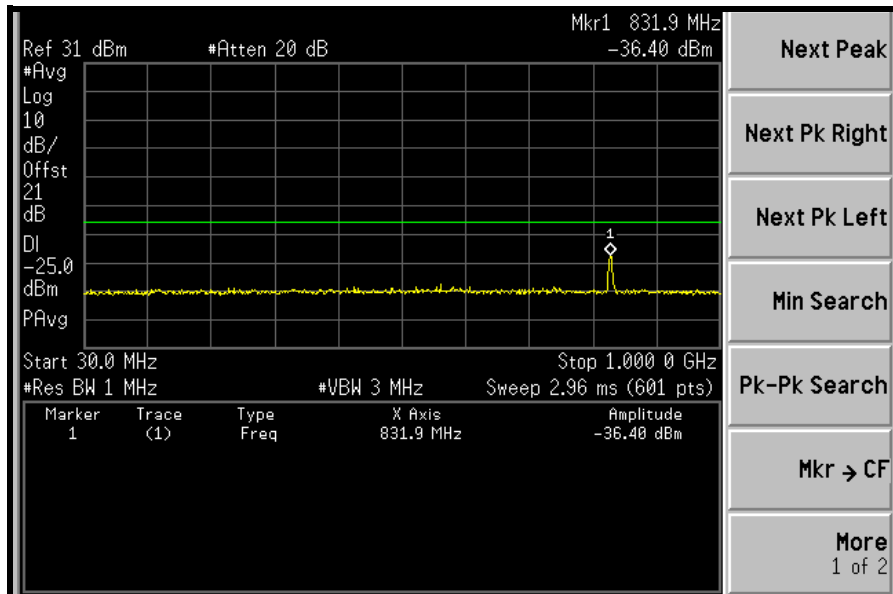


1GHz ~ 3GHz:

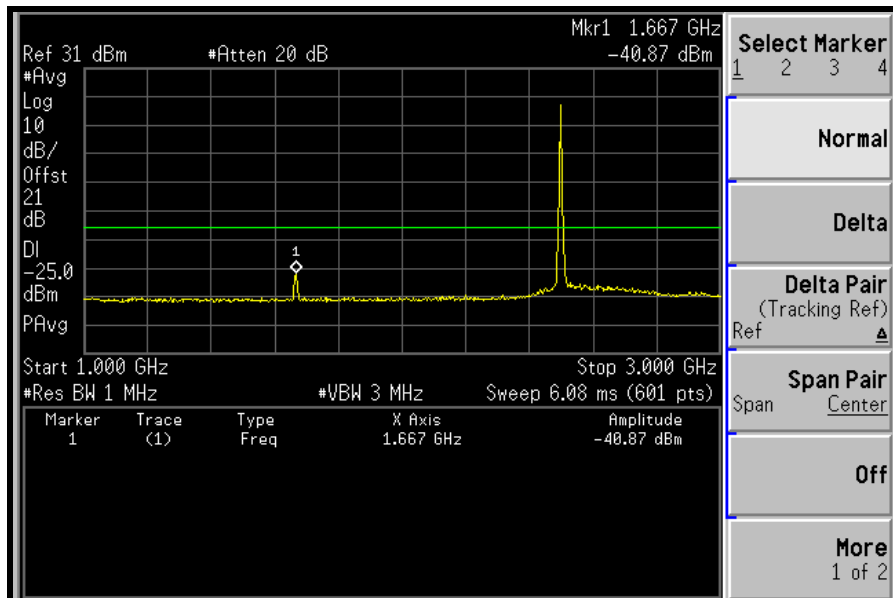




A D T

3GHz ~ 10GHz:

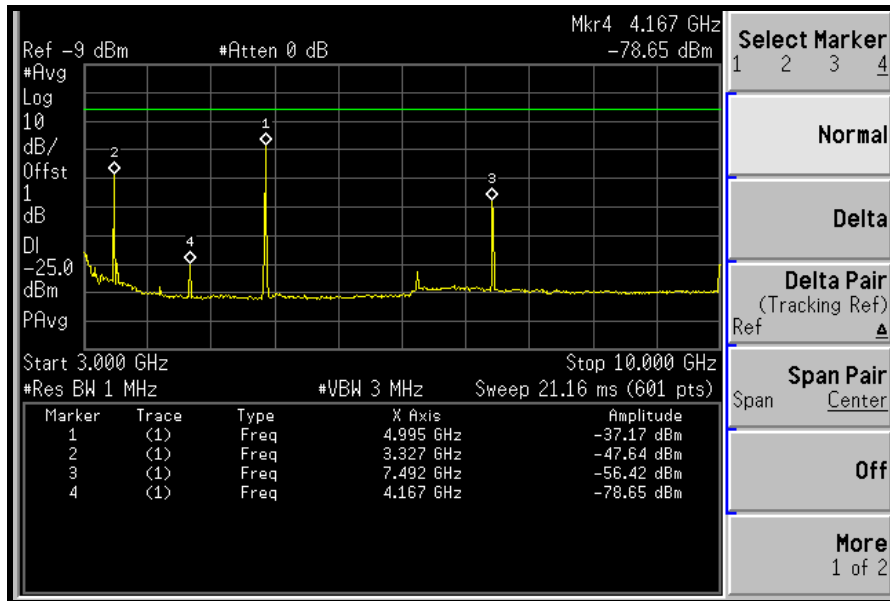


10GHz ~ 27GHz:

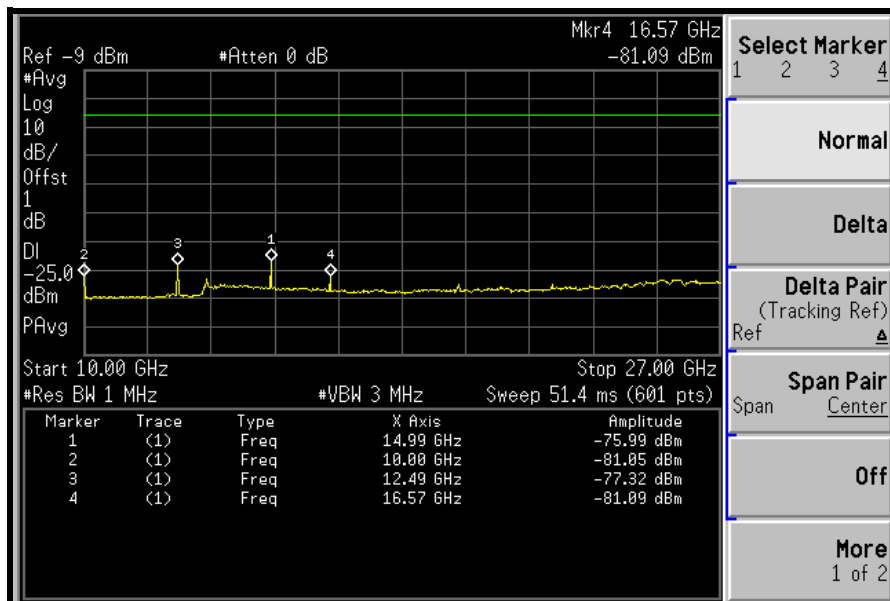




A D T

MIDDLE CHANNEL: 30MHz ~ 1GHz:

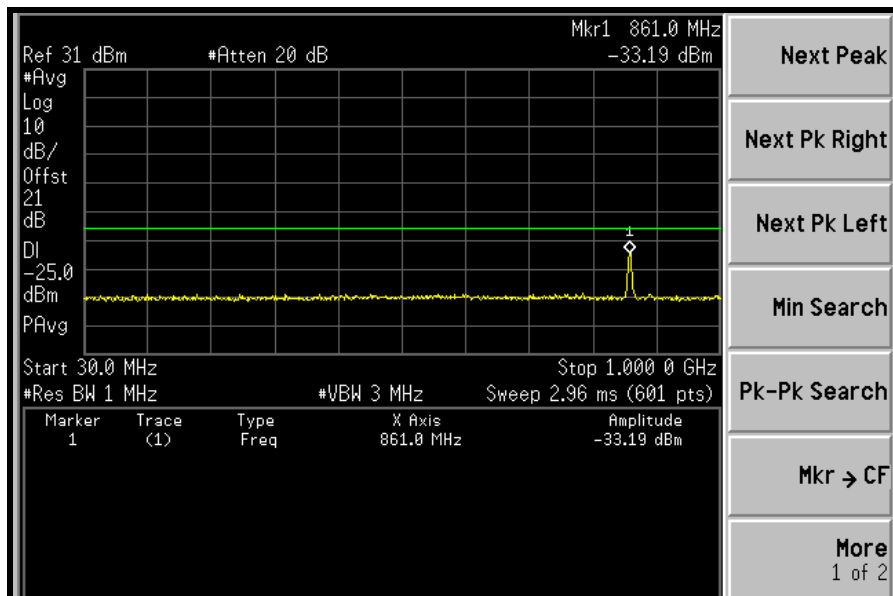


1GHz ~ 3GHz:

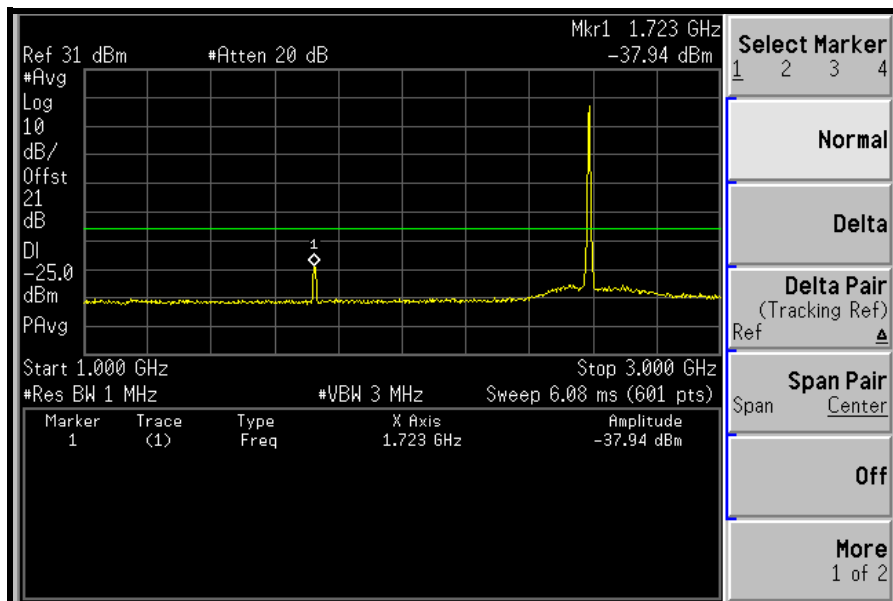




A D T

3GHz ~ 10GHz:

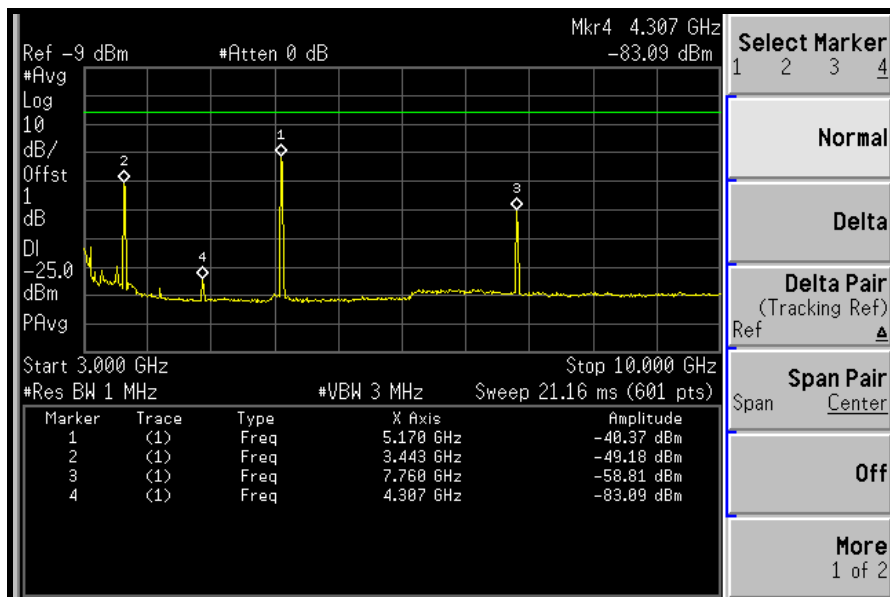


10GHz ~ 27GHz:

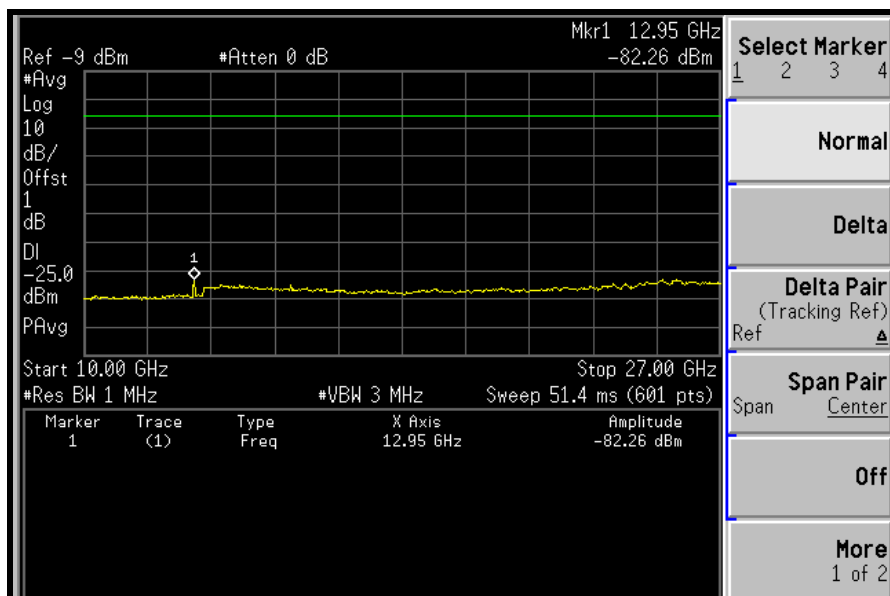




A D T

HIGH CHANNEL: 30MHz ~ 1GHz:

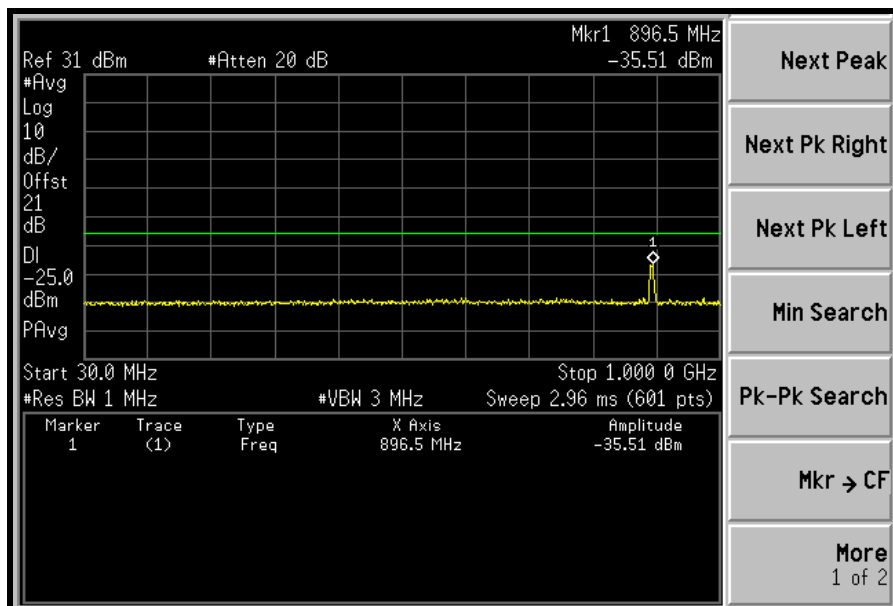


1GHz ~ 3GHz:

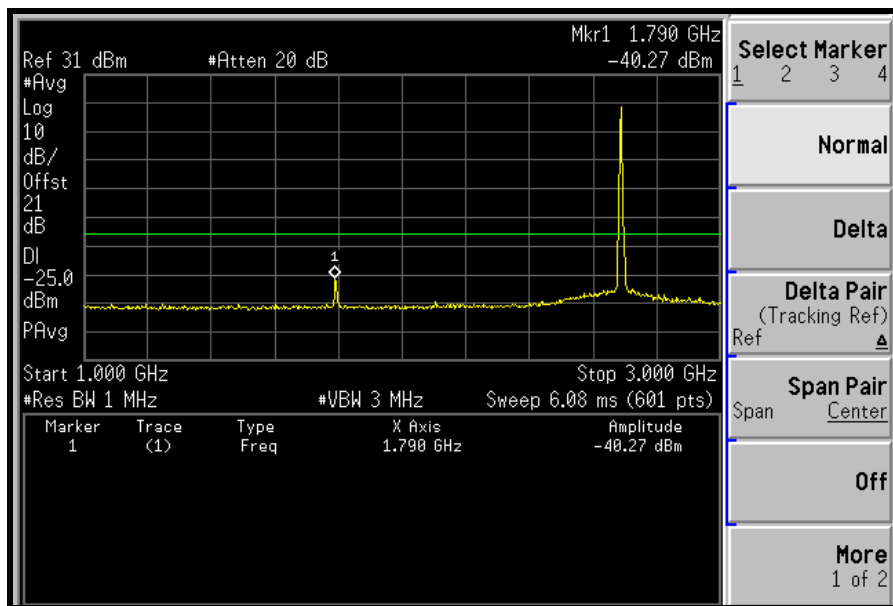




A D T

3GHz ~ 10GHz:

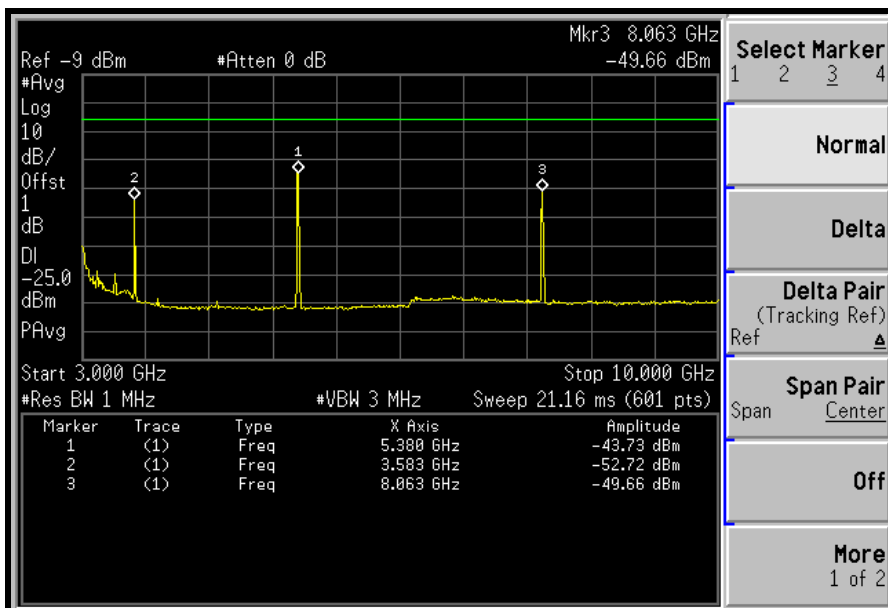

10GHz ~ 27GHz:

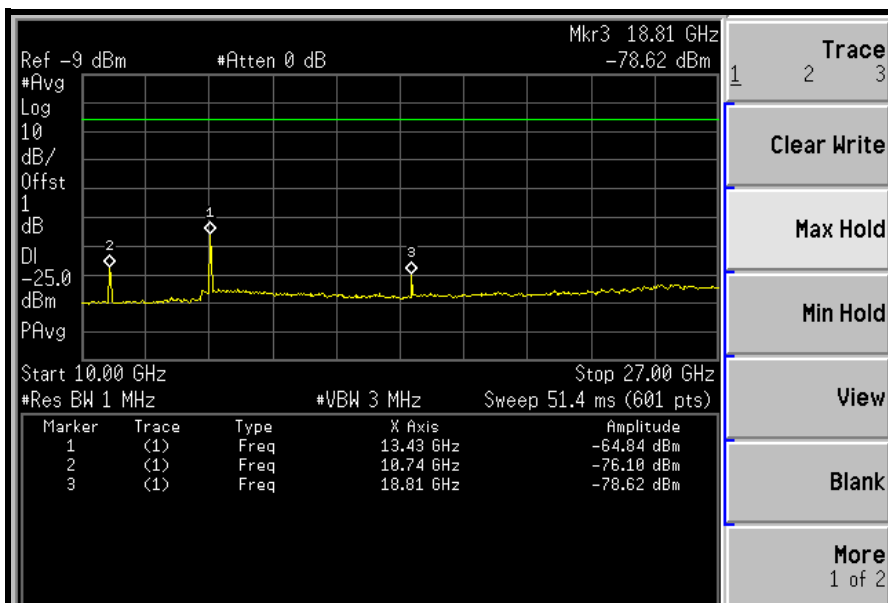





A D T

CHANNEL BANDWIDTH: 10MHz

LOW CHANNEL: 30MHz ~ 1GHz:

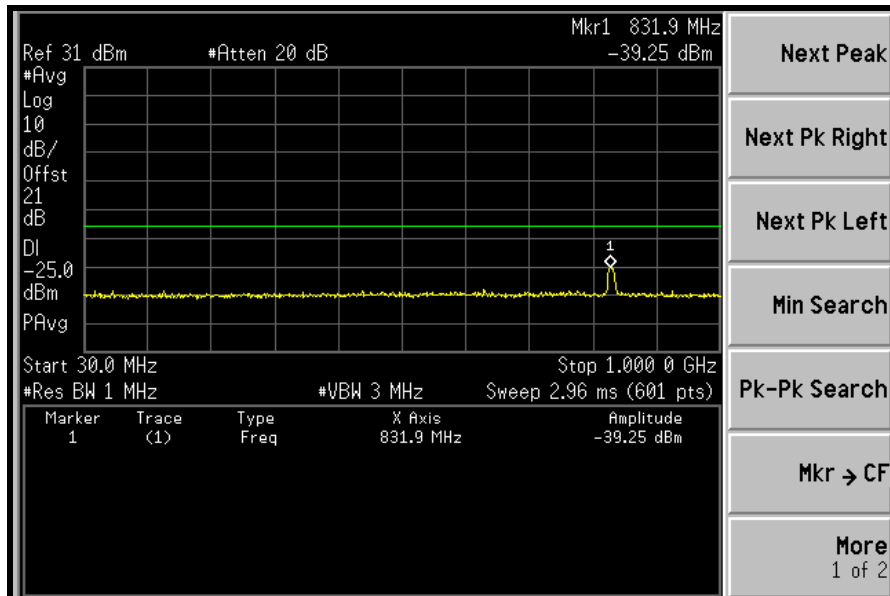


1GHz ~ 3GHz:

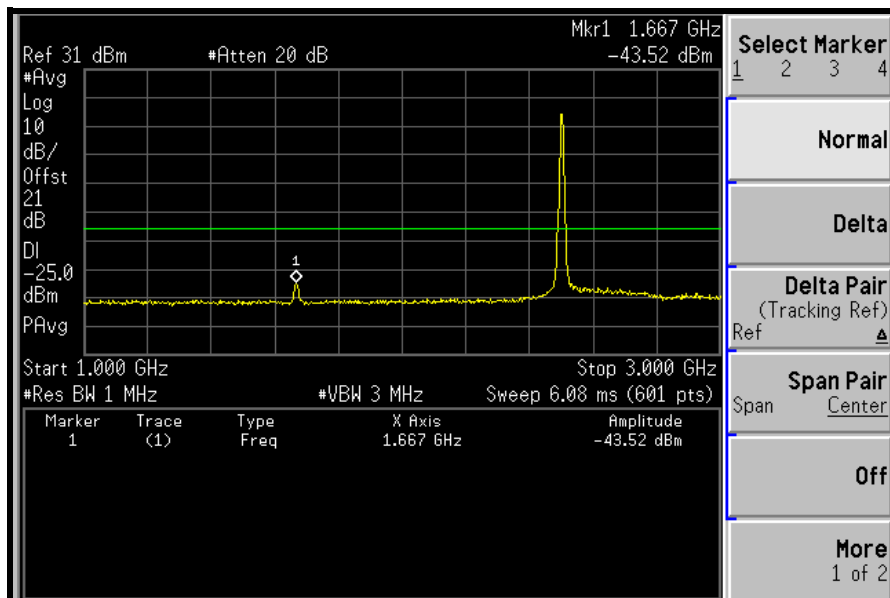




A D T

3GHz ~ 10GHz:

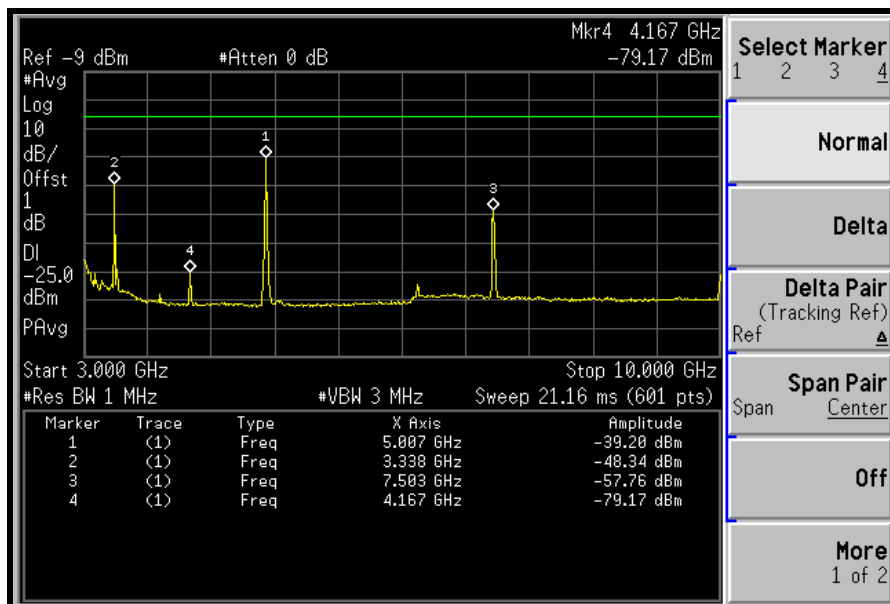


10GHz ~ 27GHz:

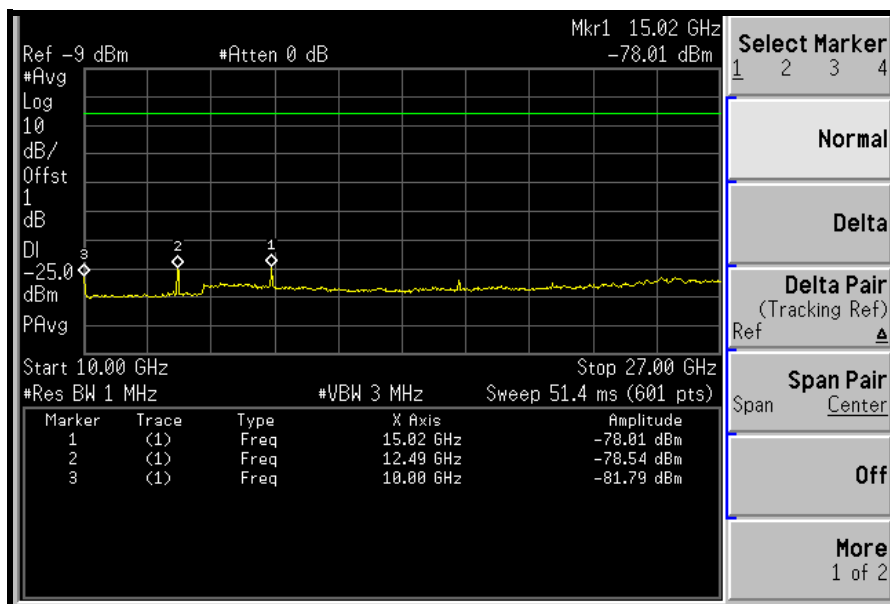




A D T

MIDDLE CHANNEL: 30MHz ~ 1GHz:

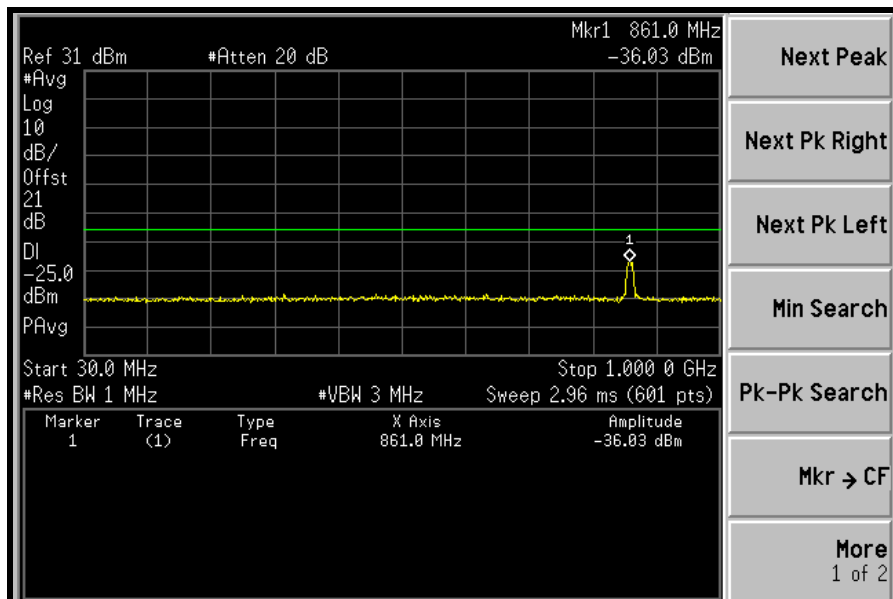


1GHz ~ 3GHz:

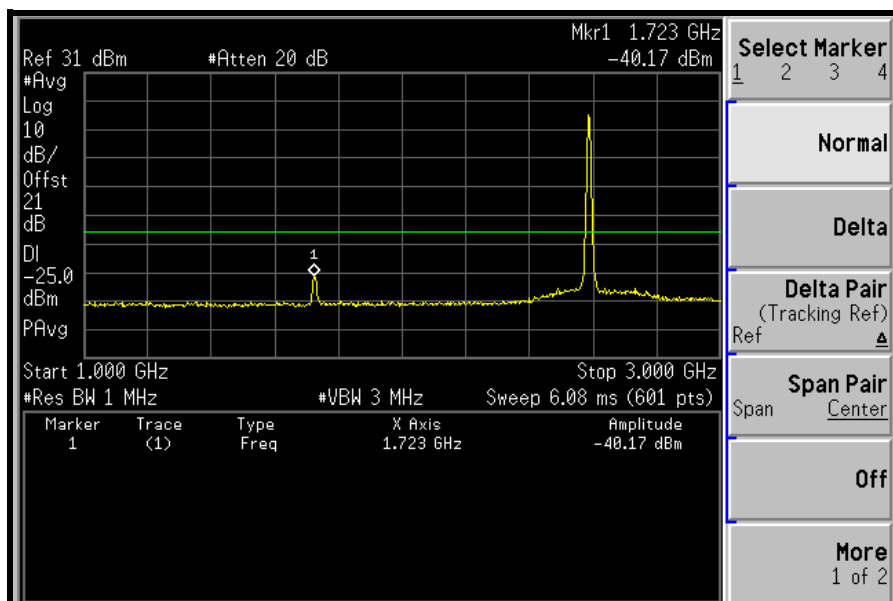




A D T

3GHz ~ 10GHz:

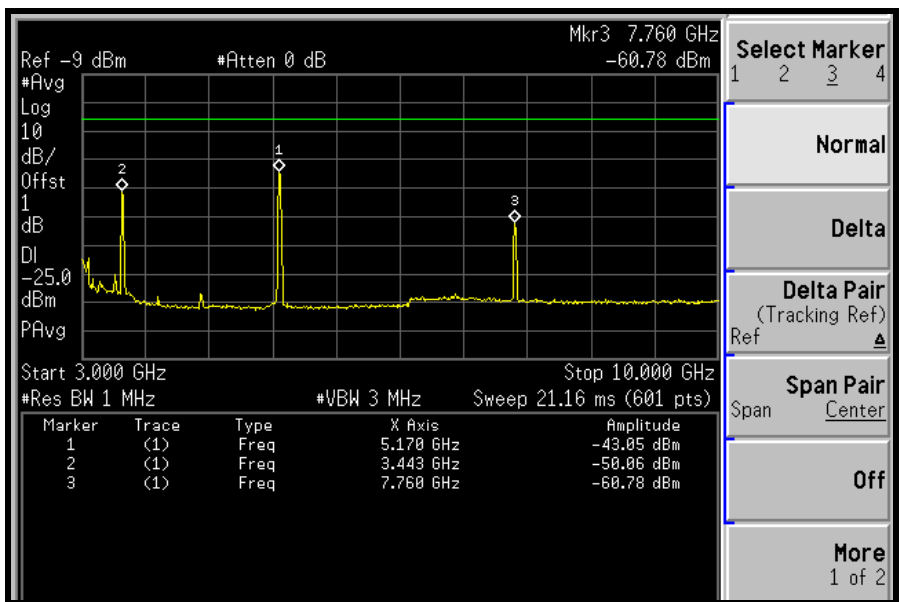


10GHz ~ 27GHz:

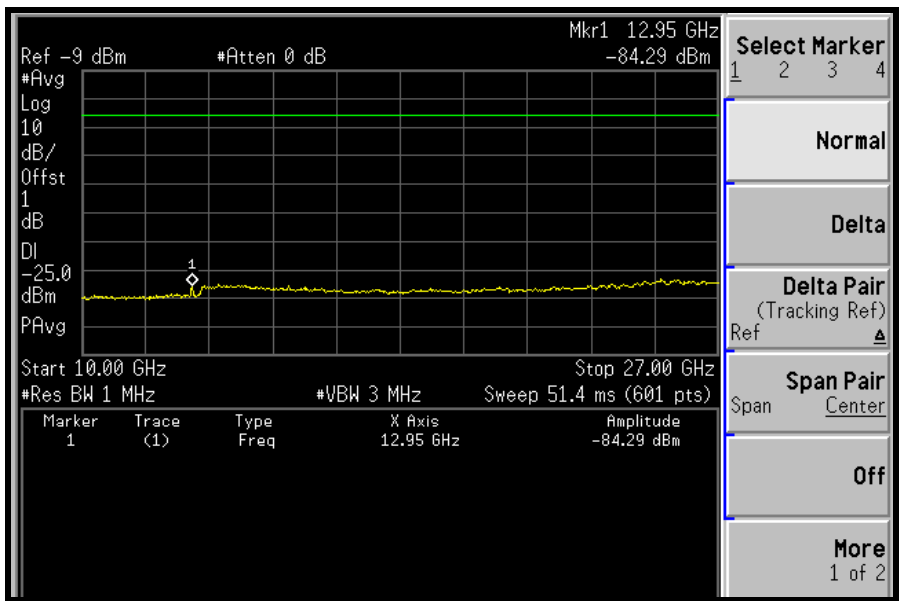




A D T

HIGH CHANNEL: 30MHz ~ 1GHz:

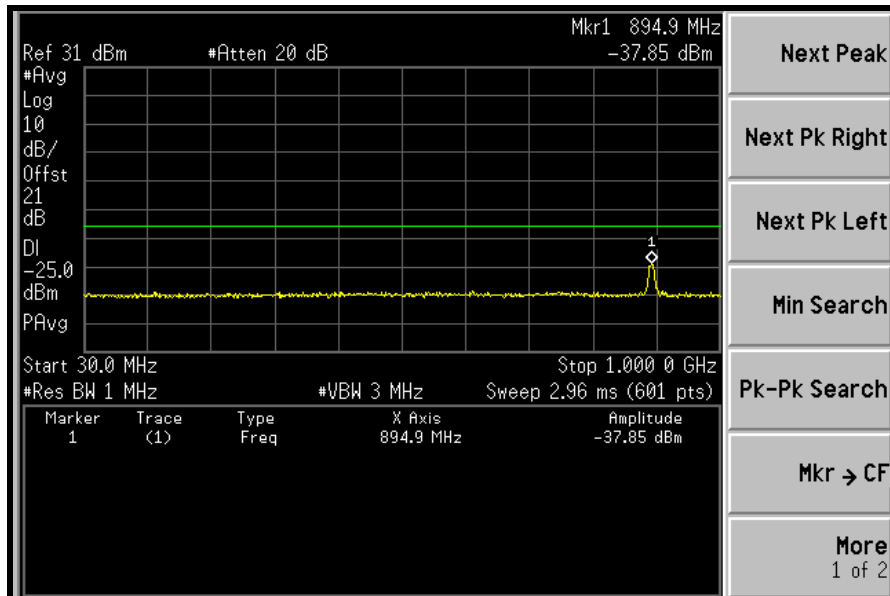


1GHz ~ 3GHz:

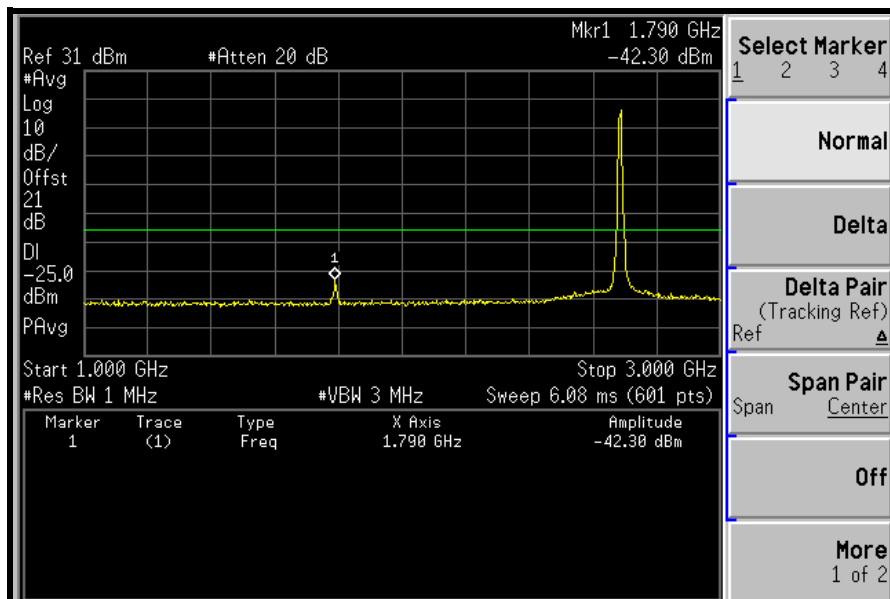




A D T

3GHz ~ 10GHz:

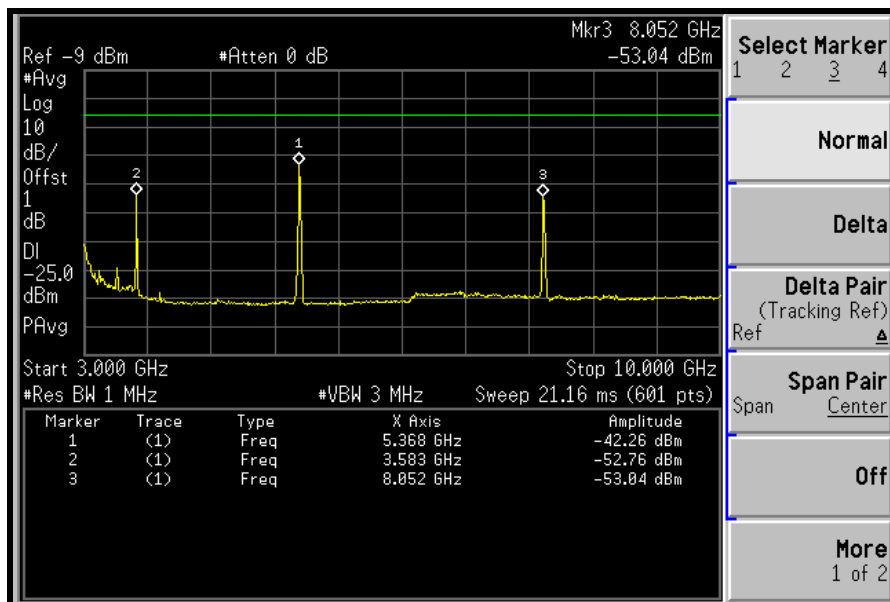

10GHz ~ 27GHz:

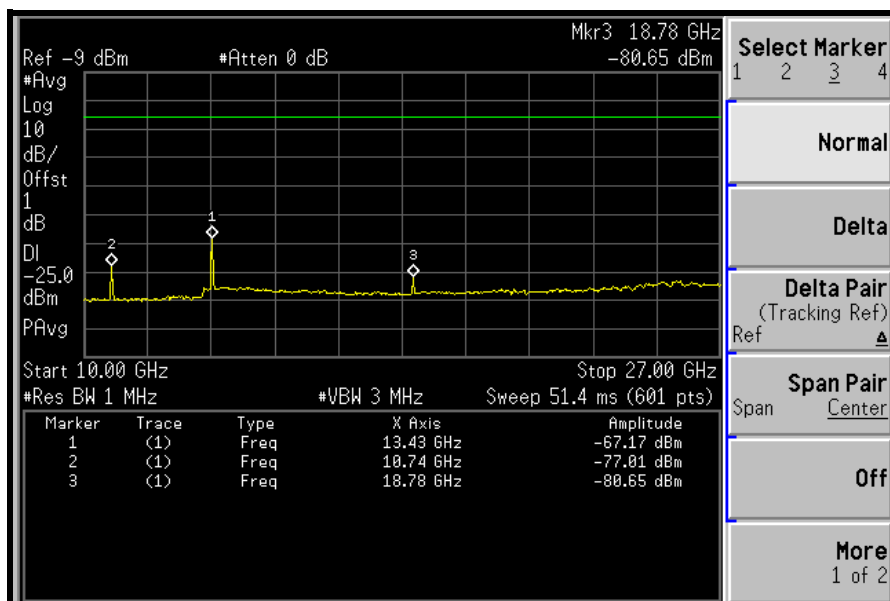



A D T

4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block the power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission equal to -25 dBm.



A D T

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 30, 2008	Jun. 29, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 02, 2008	May 01, 2009
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 24, 2008	Jun. 23, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 20, 2008	May 19, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 20, 2008	May 19, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

4.6.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a Bi_Log antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is 3MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

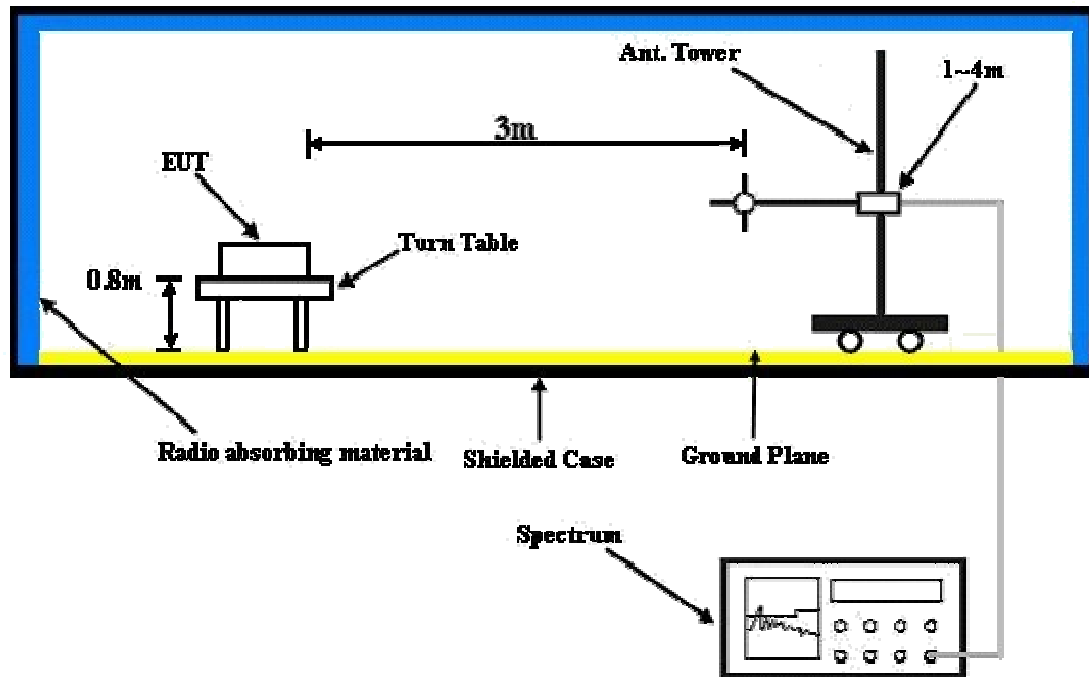

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITIONS

- a. Link up EUT with signal generator.
- b. The signal generator controlled EUT to export rated output power under transmission mode and specific channel frequency.



A D T

4.6.7 TEST RESULTS

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 65%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	35.83	51.28	-25.00	-51.61	7.30	-44.31
2	99.98	49.03	-25.00	-54.45	7.50	-46.95
3	185.51	51.47	-25.00	-51.57	7.50	-44.07
4	422.67	41.89	-25.00	-61.18	7.40	-53.78
5	949.46	53.53	-25.00	-49.38	7.30	-42.08
6	998.06	55.29	-25.00	-47.69	7.40	-40.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	98.04	51.45	-25.00	-51.57	7.50	-44.07
2	168.02	52.27	-25.00	-50.88	7.40	-43.48
3	216.61	54.74	-25.00	-48.28	7.30	-40.98
4	245.77	53.14	-25.00	-49.99	7.40	-42.59
5	533.47	43.76	-25.00	-59.04	7.30	-51.74
6	998.06	54.63	-25.00	-48.12	7.30	-40.82

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 65%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	35.83	51.62	-25.00	-51.51	7.30	-44.21
2	175.79	50.70	-25.00	-52.67	7.50	-45.17
3	208.84	50.46	-25.00	-52.48	7.50	-44.98
4	533.47	42.86	-25.00	-60.23	7.40	-52.83
5	986.90	56.31	-25.00	-46.45	7.30	-39.15
6	998.06	55.76	-25.00	-47.37	7.40	-39.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	133.03	51.38	-25.00	-51.82	7.50	-44.32
2	179.68	52.09	-25.00	-50.88	7.40	-43.48
3	218.56	53.91	-25.00	-49.03	7.30	-41.73
4	245.77	55.18	-25.00	-47.93	7.40	-40.53
5	959.18	52.64	-25.00	-50.26	7.30	-42.96
6	998.06	55.80	-25.00	-47.38	7.30	-40.08

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 65%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TEST MODE	C
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	35.83	51.25	-25.00	-51.65	7.30	-44.35
2	99.98	49.94	-25.00	-53.24	7.50	-45.74
3	193.29	50.69	-25.00	-52.36	7.50	-44.86
4	533.47	43.46	-25.00	-59.61	7.40	-52.21
5	947.52	53.01	-25.00	-49.78	7.30	-42.48
6	998.06	58.67	-25.00	-44.31	7.40	-36.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	119.42	50.25	-25.00	-52.83	7.50	-52.83
2	171.90	52.99	-25.00	-50.11	7.40	-50.11
3	216.61	54.83	-25.00	-47.92	7.30	-47.92
4	245.77	54.98	-25.00	-47.94	7.40	-47.94
5	533.47	46.27	-25.00	-56.46	7.30	-56.46
6	998.06	55.58	-25.00	-47.58	7.30	-47.58

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	35.83	52.46	-25.00	-50.51	7.30	-43.21
2	99.98	48.58	-25.00	-54.48	7.50	-46.98
3	175.79	50.10	-25.00	-53.12	7.50	-45.62
4	204.95	49.29	-25.00	-53.63	7.40	-46.23
5	533.47	44.97	-25.00	-57.97	7.30	-50.67
6	998.06	57.40	-25.00	-45.43	7.40	-38.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	99.98	51.99	-25.00	-51.08	7.40	-43.68
2	171.90	51.48	-25.00	-51.32	7.30	-44.02
3	216.61	54.55	-25.00	-48.29	7.40	-40.89
4	245.77	55.48	-25.00	-47.45	7.30	-40.15
5	966.95	52.16	-25.00	-50.68	7.40	-43.28
6	998.06	57.81	-25.00	-45.26	7.50	-37.86

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	35.83	51.79	-25.00	-51.16	7.30	-43.86
2	99.98	50.36	-25.00	-52.77	7.50	-45.27
3	179.68	49.08	-25.00	-54.09	7.50	-46.59
4	533.47	43.56	-25.00	-59.43	7.40	-52.03
5	961.12	56.61	-25.00	-46.24	7.30	-38.94
6	1000.00	57.03	-25.00	-45.88	7.40	-38.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	133.03	51.08	-25.00	-52.15	7.40	-44.75
2	173.85	51.27	-25.00	-51.68	7.30	-44.38
3	216.61	54.75	-25.00	-48.22	7.40	-40.82
4	245.77	55.48	-25.00	-47.53	7.30	-40.23
5	533.47	45.28	-25.00	-57.77	7.40	-50.37
6	1000.00	57.10	-25.00	-45.96	7.50	-38.56

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TEST MODE	C
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	203.01	49.98	-25.00	-52.95	7.30	-45.65
2	230.22	47.85	-25.00	-55.32	7.50	-47.82
3	418.78	43.91	-25.00	-59.13	7.50	-51.63
4	533.47	43.68	-25.00	-59.24	7.40	-51.84
5	951.40	53.51	-25.00	-49.37	7.30	-42.07
6	996.11	58.95	-25.00	-44.18	7.40	-36.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	171.90	52.61	-25.00	-50.48	7.40	-43.08
2	216.61	54.36	-25.00	-48.56	7.30	-41.26
3	247.72	55.65	-25.00	-47.64	7.40	-40.24
4	533.47	44.37	-25.00	-58.47	7.30	-51.17
5	966.95	51.59	-25.00	-51.42	7.40	-44.02
6	1000.00	57.86	-25.00	-45.25	7.50	-37.85

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission equal to -25 dBm.



A D T

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 30, 2008	Jun. 29, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 02, 2008	May 01, 2009
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 24, 2008	Jun. 23, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 20, 2008	May 19, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 20, 2008	May 19, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

4.7.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is 3MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

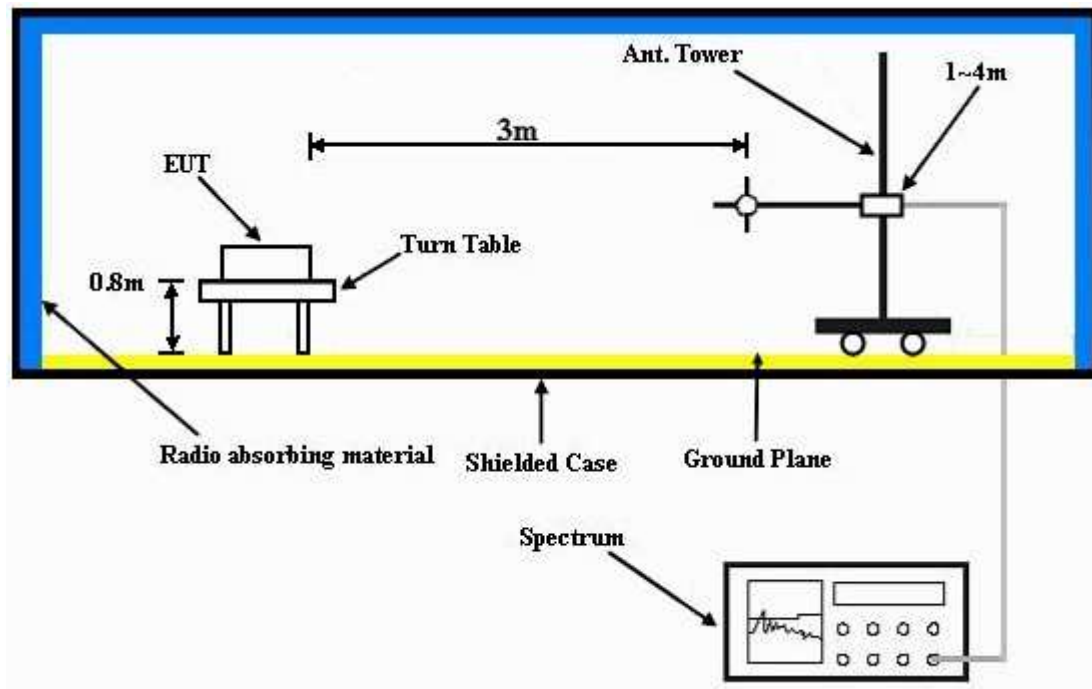

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITIONS

- a. Link up EUT with signal generator.
- b. The signal generator controlled EUT to export rated output power under transmission mode and specific channel frequency.



A D T

4.7.7 TEST RESULTS

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1666.00	54.37	-25.00	-49.04	7.48	-41.56
2	3331.00	43.85	-25.00	-61.48	9.86	-51.62
3	4997.00	50.36	-25.00	-54.43	9.49	-44.94
4	7495.50	53.88	-25.00	-9.51	7.83	-41.68
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1666.00	55.59	-25.00	-47.69	7.48	-40.21
2	3331.00	44.63	-25.00	-60.81	9.86	-50.95
3	4997.00	51.23	-25.00	-53.86	9.49	-44.37
4	7495.50	53.68	-25.00	-49.70	7.83	-41.87

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1725.00	55.36	-25.00	-48.14	7.89	-40.25
2	3449.00	42.42	-25.00	-62.88	9.96	-52.92
3	5174.00	46.38	-25.00	-58.86	9.74	-49.12
4	7761.00	53.84	-25.00	-49.60	7.76	-41.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1725.00	53.26	-25.00	-50.17	7.89	-42.28
2	3449.00	45.36	-25.00	-60.33	9.96	-50.37
3	5174.00	51.62	-25.00	-53.62	9.74	-43.88
4	7761.00	53.02	-25.00	-50.22	7.76	-42.46

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1792.00	52.64	-25.00	-51.33	8.48	-42.85
2	3583.00	42.88	-25.00	-62.63	9.94	-52.69
3	5375.00	47.66	-25.00	-57.76	9.72	-48.04
4	8062.50	55.48	-25.00	-47.99	7.82	-40.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1792.00	53.64	-25.00	-50.45	8.48	-41.97
2	3583.00	43.56	-25.00	-61.83	9.94	-51.89
3	5375.00	47.62	-25.00	-57.75	9.72	-48.03
4	8062.50	54.62	-25.00	-48.95	7.82	-41.13

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1667.00	56.02	-25.00	-47.23	7.48	-39.75
2	3334.00	41.84	-25.00	-63.93	9.86	-54.07
3	5002.00	50.12	-25.00	-55.11	9.49	-45.62
4	7503.00	52.01	-25.00	-51.31	7.83	-43.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1667.00	56.38	-25.00	-46.56	7.48	-39.08
2	3334.00	43.02	-25.00	-62.29	9.86	-52.43
3	5002.00	51.28	-25.00	-53.76	9.49	-44.27
4	7503.00	52.84	-25.00	-50.62	7.83	-42.79

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1725.00	51.48	-25.00	-52.01	7.89	-44.12
2	3449.00	44.87	-25.00	-60.64	9.96	-50.68
3	5174.00	50.31	-25.00	-55.11	9.74	-45.37
4	7761.00	51.86	-25.00	-51.41	7.76	-43.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1725.00	53.26	-25.00	-50.23	7.89	-42.34
2	3449.00	45.89	-25.00	-59.71	9.96	-49.75
3	5174.00	50.96	-25.00	-54.36	9.74	-44.62
4	7761.00	53.84	-25.00	-49.49	7.76	-41.73

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1790.00	51.13	-25.00	-53.23	8.48	-44.75
2	3580.00	42.66	-25.00	-62.87	9.94	-52.93
3	5370.00	46.12	-25.00	-59.13	9.72	-49.41
4	8055.00	51.84	-25.00	-51.78	7.82	-43.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1790.00	52.87	-25.00	-51.19	8.48	-42.71
2	3580.00	41.98	-25.00	-63.59	9.94	-53.65
3	5370.00	45.86	-25.00	-59.30	9.72	-49.58
4	8055.00	52.79	-25.00	-50.54	7.82	-42.72

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
GERMANY	TUV Rheinland
JAPAN	VCCI
NORWAY	NEMKO
CANADA	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
NETHERLANDS	Telefication
SINGAPORE	GOST-ASIA (MOU)
RUSSIA	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab: Web Site: www.adt.com.tw

Tel: 886-3-3183232

Fax: 886-3-3185050

The address and road map of all our labs can be found in our web site also.

---END---