

# **Electromagnetic Compatibility Test Report**

*Prepared in accordance with*

**FCC Part 15C, RSS-210 Issue 7 and ANSI C63.10**

On

## **CLAMP METER**

## **FLUKE 381 - DISPLAY**

**Fluke Electronics Corp.**

**6920 Seaway Blvd. Everett, WA 98203, USA**

**PO Box 9090 Everett, WA 98206, USA**





Prepared by:

**TUV Rheinland of North America, Inc.**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**31051395.002**

Page 2 of 45

<b>Client:</b>		Fluke Electronics Corp. 6920 Seaway Blvd. Everett, WA 98203, USA PO Box 9090 Everett, WA 98206, USA	Joe Swanzy 425-347-6100 joe.swanzy@fluke.com
<b>Identification:</b>	CLAMP METER	<b>Serial No.:</b>	RADIATED - 00510066 CONDUCTED - 00510043
<b>Test item:</b>	FLUKE 381 - DISPLAY	<b>Date tested:</b>	16 June 2010
<b>Testing location:</b>	TUV Rheinland of North America 762 Park Avenue Youngsville, NC 27596-9470 U.S.A.	Tel: (919) 554-3668 Fax: (919) 554-3542	
<b>Test specification:</b>	<b>Emissions:</b> FCC Part 15, Subpart C, RSS-210 Issue 7: FCC Parts 15.107(c), 15.207(c) and RSS-GEN 7.2.2 FCC Parts 15.247(d), 15.205, 15.209, 15.215(c) and RSS-210 A8.5 and RSS-GEN 7.2.1 FCC Part 15.247(a)(2) and RSS-210 A1.1.3, FCC Part 15.247 and RSS-210 Annex 8, FCC Part 15.247(b)(3) and RSS-210 A8.4(4), FCC Part 15.247(d) and RSS-210 2.2, FCC Parts 15.109(a) and RSS-210 2.2, 2.6,A8.5, RSS-GEN 7.2.3.2 FCC Parts 15.247(i) and RSS-102, Issue 4,		
<b>Test Result</b>	The above product was found to be <b>Compliant</b> to the above test standard(s)		
<b>tested by:</b> Mark Ryan		<b>reviewed by:</b> Michael Moranha	
 28 June 2010 Signature		 28 June 2010 Signature	
<b>Other Aspects:</b>	None		
Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable			
 <b>90552 and 100881</b>	 <b>NVLAP Lab Code (200094-0)</b>	<b>Industry Canada</b> <b>IC-2932H</b>	

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
1.1	SCOPE .....	4
1.2	PURPOSE .....	4
1.3	SUMMARY OF TEST RESULTS .....	5
<b>2</b>	<b>LABORATORY INFORMATION .....</b>	<b>6</b>
2.1	ACCREDITATIONS AND ENDORSEMENTS .....	6
2.2	MEASUREMENT UNCERTAINTY EMISSIONS .....	7
2.3	CALIBRATION TRACEABILITY .....	7
2.4	MEASUREMENT EQUIPMENT USED .....	8
<b>3</b>	<b>PRODUCT INFORMATION .....</b>	<b>8</b>
3.1	PRODUCT DESCRIPTION .....	8
3.2	EQUIPMENT MODIFICATIONS .....	8
<b>4</b>	<b>RADIATED EMISSIONS .....</b>	<b>9</b>
4.1	SPURIOUS EMISSIONS OUTSIDE THE BAND - FCC 15.247(D), RSS-210 A8.5 .....	9
4.2	BAND EDGE .....	19
4.1	CONDUCTED EMISSIONS IN TRANSMIT AND RECEIVE MODE .....	22
<b>5</b>	<b>ANTENNA PORT CONDUCTED EMISSIONS .....</b>	<b>23</b>
5.1	CONDUCTED OUTPUT POWER, FCC 15.247(B)(3) AND RSS-210 A8.4(4) .....	23
5.2	PEAK POWER SPECTRAL DENSITY .....	26
5.3	OCCUPIED BANDWIDTH .....	29
5.4	VOLTAGE REQUIREMENTS FCC PART 15.31(E) .....	34
<b>6</b>	<b>EMISSIONS IN RECEIVE MODE.....</b>	<b>36</b>
6.1	RADIATED EMISSIONS .....	36
<b>7</b>	<b>RF EXPOSURE.....</b>	<b>43</b>
7.1	EXPOSURE REQUIREMENTS – FCC PARTS 2.1091, 15.247(D), AND RSS-102 ISSUE 7.....	43
	<b>APPENDIX A .....</b>	<b>44</b>
	<b>TEST PLAN.....</b>	<b>44</b>

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## **1 General Information**

### **1.1 Scope**

This report is intended to document the status of conformance with the requirements of the FCC Part 15C, RSS-210 Issue 7 and ANSI C63.10 based on the results of testing performed on 16 June 2010 on the CLAMP METER, Model No. FLUKE 381 - DISPLAY, manufactured by Fluke Electronics Corp.. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### **1.2 Purpose**

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**31051395.002**

Page 5 of 45

### 1.3 Summary of Test Results

<b>Applicant</b>	Fluke Electronics Corp. 6920 Seaway Blvd. Everett, WA 98203, USA PO Box 9090 Everett, WA 98206, USA	<b>Tel</b>	425-347-6100	<b>Contact</b>	Joe Swanzy
		<b>Fax</b>	425-446-6490	<b>e-mail</b>	joe.swanzy@fluke.com
<b>Description</b>	CLAMP METER	<b>Fluke 381 - Display</b>	FLUKE 381 - DISPLAY		
<b>Serial Number</b>	RADIATED - 00510066 CONDUCTED - 00510043	<b>Test Voltage/Freq.</b>	3.0 VDC battery		
<b>Test Date Completed:</b>	16 June 2010	<b>Test Engineer</b>	Mark Ryan		
<b>Standards</b>	<b>Description</b>	<b>Severity Level or Limit</b>		<b>Criteria</b>	<b>Test Result</b>
FCC Part 15, Subpart C Standard	Radio Frequency Devices- Subpart C: Intentional Radiators	See called out parts below		See Below	<b>Complies</b>
RSS-210 Issue 7 Standard	Low-Power Licence-exempt Radiocommunication Devices Category I Equipment	See called out parts below		See Below	<b>Complies</b>
FCC Part 15.247 and RSS-210 Annex 8	Operation within the band 2400 to 2483.5 MHz	See called out parts below		Below Limit	Complies
FCC Parts 15.247(d), 15.205, 15.209, 15.215(c) and RSS-210 A8.5 and RSS-GEN 7.2.1	Out-of-Band Spurious and Harmonic Emissions (EUT in Transmit Mode)	Below the applicable limits		Below Limit	Complies
FCC Parts 15.107(c), 15.207(c) and RSS-GEN 7.2.2	Conducted Emissions on AC Mains	NA, EUT is battery operated		NA	NA
FCC Part 15.247(d) and RSS-210 2.2	Band Edge Radiated Emission	Per requirements of the standard		Below Limit	Complies
FCC Part 15.247(b)(3) and RSS-210 A8.4(4)	Conducted Output Power	Shall not exceed 1.0 Watts		Below Limit	Complies
FCC Part 15.247(a)(2) and RSS-210 A1.1.3	Occupied Bandwidth	6 dB ≥ 500 kHz 99% BW ≤ 0.5% of center freq.		Within Limits	Complies
FCC Part 15.247(e) and RSS-210, Section A8.2(b)	Peak Power Spectral Density	≤ 8 dBm in any 3 kHz		Below Limit	Complies
FCC Part 15.31(e)	Voltage Requirements	Output at 0.85% and 1.15% of Nominal Voltage		Below Limit	Complies
FCC Parts 15.109(a) and RSS-210 2.2, 2.6, A8.5, RSS-GEN 7.2.3.2	Radiated Emissions while EUT in Receive Mode	Below limit of section 15.109(a) Class B		Below Limit	Complies
FCC Parts 15.247(i) and RSS-102, Issue 4	RF Exposure	SAR or MPE Requirements		Below Limit	Complies (without testing)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 2 Laboratory Information

### 2.1 Accreditations and Endorsements

#### 2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 762 Park Avenue, Youngsville, NC 27596-9470 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

#### 2.1.2 NIST / NVLAP

Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Lab code: 200094-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Industry Canada

Registration No.: IC-2932H The OATS has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2009.

#### 2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. R-1174, R-1679, C-1790 and C-1791).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 2.1.5 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

Measurement + Antenna Factor – Amplifier Gain + Cable loss = Radiated Emissions (dB $\mu$ V/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

### 2.2 Measurement Uncertainty Emissions

	<b>U<sub>lab</sub></b>	<b>U<sub>cispr</sub></b>
<b>Radiated Disturbance @ 10m</b>		
30 MHz – 1,000 MHz	3.3 dB	5.2 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	1.18 dB	3.6 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.88 dB	4.5 dB

### 2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**31051395.002**

Page 8 of 45

## 2.4 Measurement Equipment Used

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
<b>Radiated and Conducted RF Emissions (5 Meter Chamber)</b>					
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	24-Feb-10	24-Feb-11
Ant. BiconiLog	Chase	CBL6140A	1108	13-Jun-08	13-Jun-10
Antenna Horn 1-18GHz	EMCO	3115	2236	12-Mar-09	12-Mar-11
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	29-Jun-09	29-Jun-10
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	04-Dec-09	04-Dec-10
Micro wave Frequency Counter	EIP	458A	01576	24-Feb-10	24-Feb-11
Cable, Coax	Andrew	FSJ1-50A	003	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	030	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	045	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	049	14-Dec-09	14-Dec-10
1.5 GHz High Pass Filter	Bonn Elektronik	BHF 1500	025155	16-Feb-10	16-Feb-11
<b>General Laboratory Equipment</b>					
Meter, Temp/Humid/Barom	Fisher	02-400	01	28-Dec-09	28-Dec-10
Meter, Temp/Humidity	Dickson Company	TH550	6215304	19-Mar-09	19-Mar-11
Meter, Multi	Fluke	179	90580752	01-Dec-10	01-Dec-11
Attenuator	Pasternack	PE7015-20	NA	22-Jan-09	22-Jan-10

## 3 Product Information

### 3.1 Product Description

See Description in the test plan in Appendix A of this report

### 3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



## 4 Radiated Emissions

### 4.1 Spurious Emissions Outside the band - FCC 15.247(d), RSS-210 A8.5

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

#### 4.1.1 Over View of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	8 June 2010	
<b>Standard</b>	FCC Parts 15.205, 15.209, 15.215(c), 15.247(d), RSS-210 A8.5, and RSS-GEN 7.2.1						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	00510066		
<b>Test Set-up</b>	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	76 °F	<b>Humidity</b>	36%	<b>Pressure</b>	1007 mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>		Readings Under Limit		
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>		Mark Ryan		

#### 4.1.2 Test Procedure

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSS-GEN Issue 2. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

#### 4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

#### 4.1.4 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

The worst –case emissions are shown below. All other emissions are on file at TUV Rheinland.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

#### 4.1.4.1 Emissions Outside the Frequency Band

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

Radiated Emissions of Fundamental Highest Emission Investigation										
Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
2440.00	H	1.74	3	59.68	0.00	6.00	28.38	94.06	NA	NA
2440.00	V	1	264	55.50	0.00	6.00	28.24	89.74	NA	NA
2440.00	H	1.68	151	54.07	0.00	6.00	28.38	88.45	NA	NA
2440.00	V	1.1	37	56.25	0.00	6.00	28.24	90.49	NA	NA
2440.00	H	1.1	350	57.12	0.00	5.84	28.31	91.27	NA	NA
2440.00	V	1	34	57.39	0.00	5.84	28.21	91.43	NA	NA

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty  
 Combined Standard Uncertainty  $u_c(y) = \pm 1.6\text{dB}$  Expanded Uncertainty  $U = k u_c(y)$   $k = 2$  for 95% confidence

Notes: The emissions shown in **RED** are Orientation 1.  
 The emissions shown in **GREEN** are Orientation 2.  
 The emissions shown in **BLUE** are Orientation 3.

Orientation 1 produces the highest emissions output.  
 This orientation was used for all spurious emissions measurements.

(Refer to Test Setup Photos.)


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.





**Worst-Case Radiated Emissions 1GHz to 10GHz**

**Horizontal**

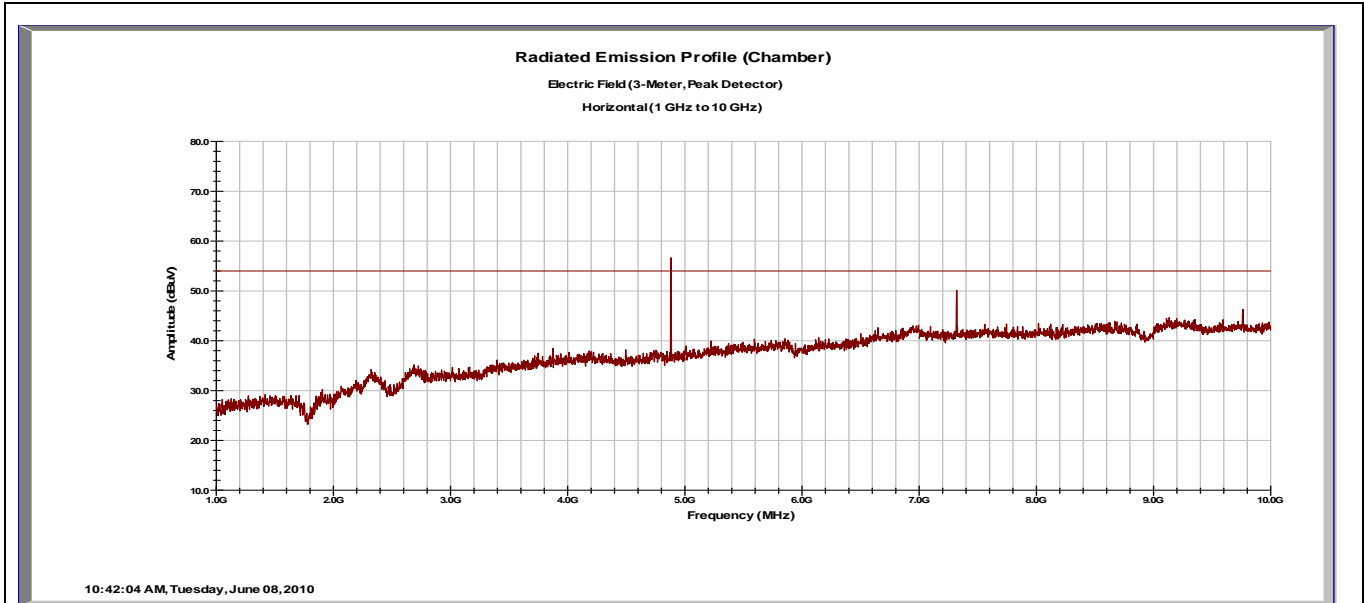


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
4880.00	H	1.2	221	28.50	35.49	11.11	32.96	37.08	54.00	-16.92
7302.00	H	1	74	33.48	35.32	14.38	36.09	48.63	54.00	-5.37
9766.00	H	1	131	26.37	36.09	16.33	38.09	44.69	54.00	-9.31
4880.00	H	1.2	221	41.40	35.49	11.11	32.96	49.98	74.00	-24.02
7302.00	H	1	74	45.56	35.32	14.38	36.09	60.71	74.00	-13.29
9760.00	H	1	131	39.87	36.09	16.33	38.09	58.19	74.00	-15.81

Notes: Average limit line shown  
 Emissions shown in **Green** were measured using the Average detector.  
 The Emissions shown in **Blue** were measured using the Peak detector.  
 Worst Case Emissions shown was using orientation 1, at mid band.  
 ALL EMISSIONS including those outside Restricted Bands are below the limits of Part FCC 15.209.  
 The Fundamental Emissions at 2440 MHz is attenuated by use of a notch filter.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Worst-Case Radiated Emissions 1GHz to 10GHz**

**Vertical**

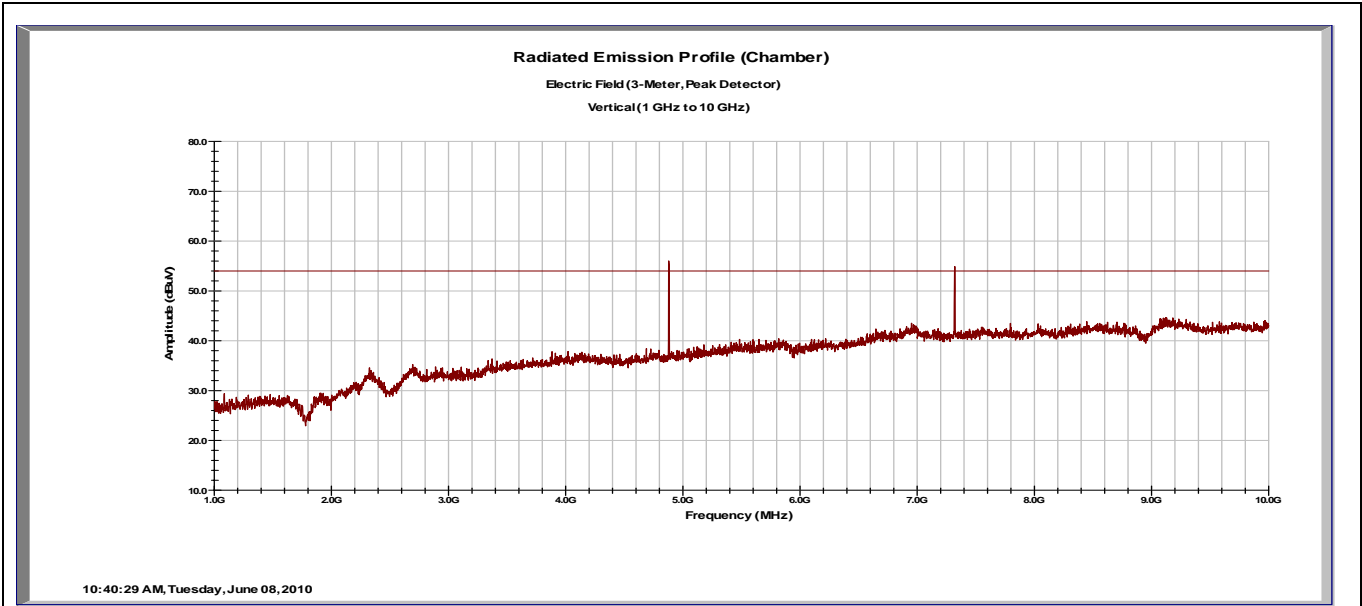


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
4880.00	V	1.1	249	40.81	35.49	11.11	32.96	49.39	54.00	-4.61
7302.00	V	1.1	253	36.35	35.34	14.66	36.50	52.17	54.00	-1.83
4880.00	V	1.1	249	51.27	35.49	11.11	32.96	59.85	74.00	-14.14
7302.00	V	1.1	253	48.04	35.34	14.66	36.50	63.86	74.00	-10.04

Notes:  
 Emissions shown in **Green** were measured using the Average detector.  
 The Emissions shown in **Blue** were measured using the Peak detector.  
 ALL EMISSIONS including those outside Restricted Bands are below the limits of Part FCC 15.209.  
 The Fundamental Emissions at 2405MHz is attenuated by use of a notch filter.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Worst-Case Radiated Emissions 10GHz to 18GHz**

**Horizontal**

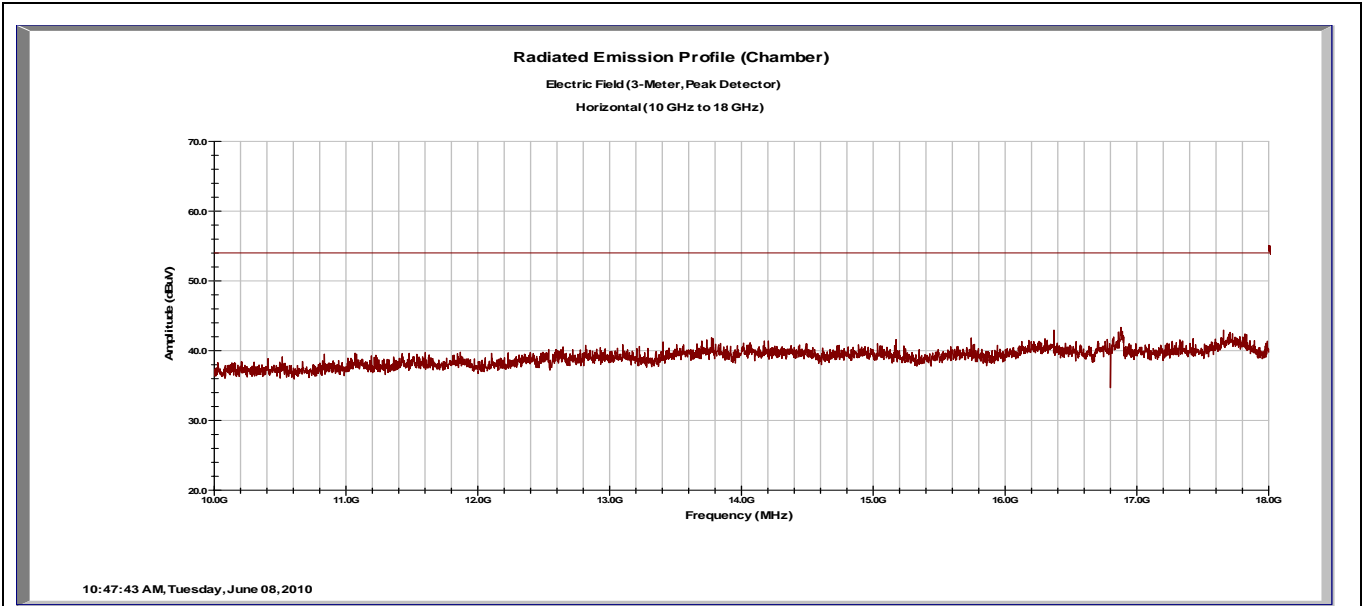

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)


Notes: ALL EMISSIONS including those outside Restricted Bands are below the limits of Part FCC 15.209. The Fundamental Emissions is attenuated by use of a notch filter.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.





**Worst-Case Radiated Emissions 18GHz to 25GHz**  
**Horizontal**

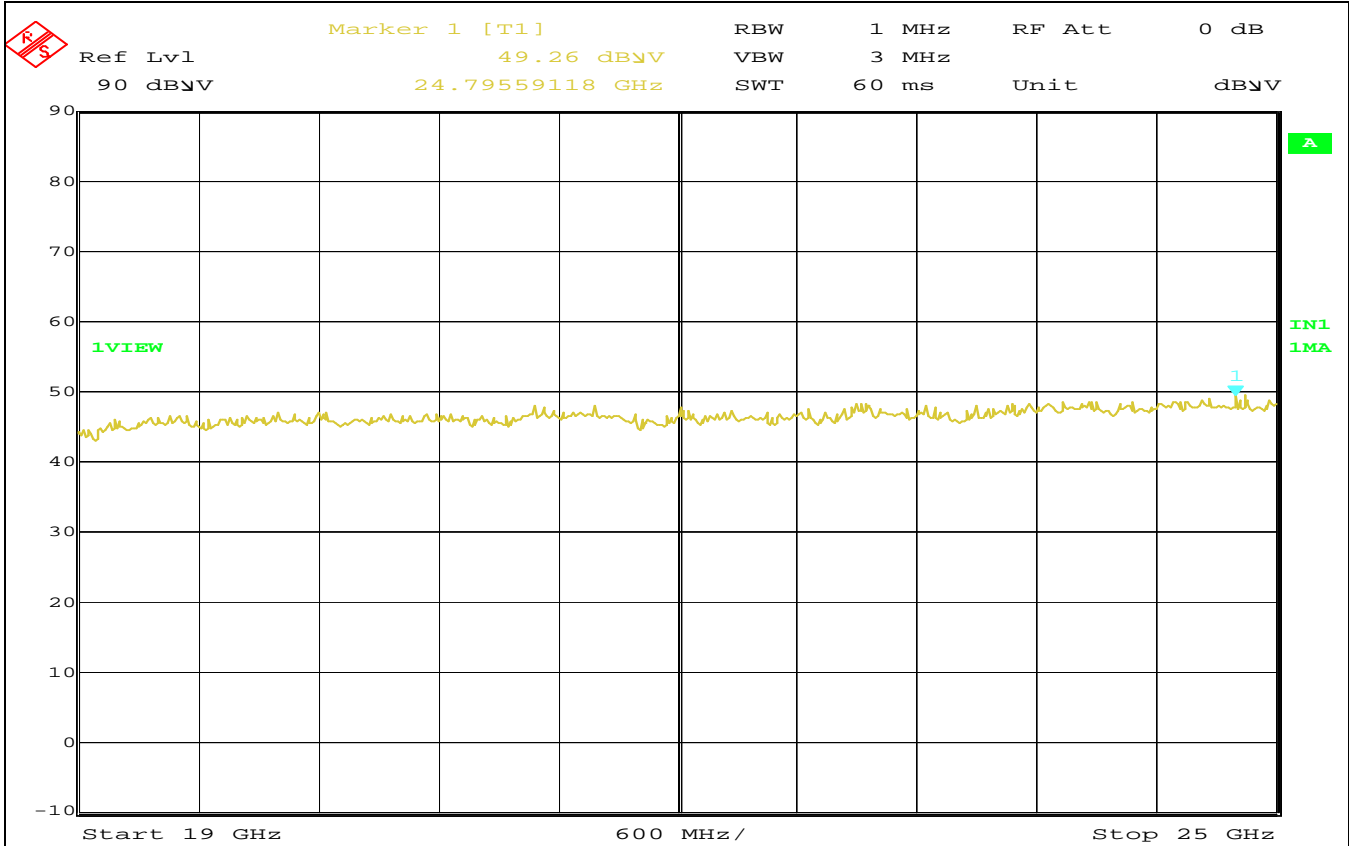

Date: 8.JUN.2010 15:24:43

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBμV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBμV/m)	Spec Limit (dBμV/m)	Spec Margin (dB)


Notes: All emissions were below the noise floor of the EMC Receiver.  
The Trace shown above is raw data, without the application of correction factors.  
Transmitter operating on CH 7

The emission of 49.26 dBμV/m at 1m is equivalent to 39.72 dBμV/m at 3m. This is a peak reading.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Worst-Case Radiated Emissions 18GHz to 25GHz**

**Vertical**

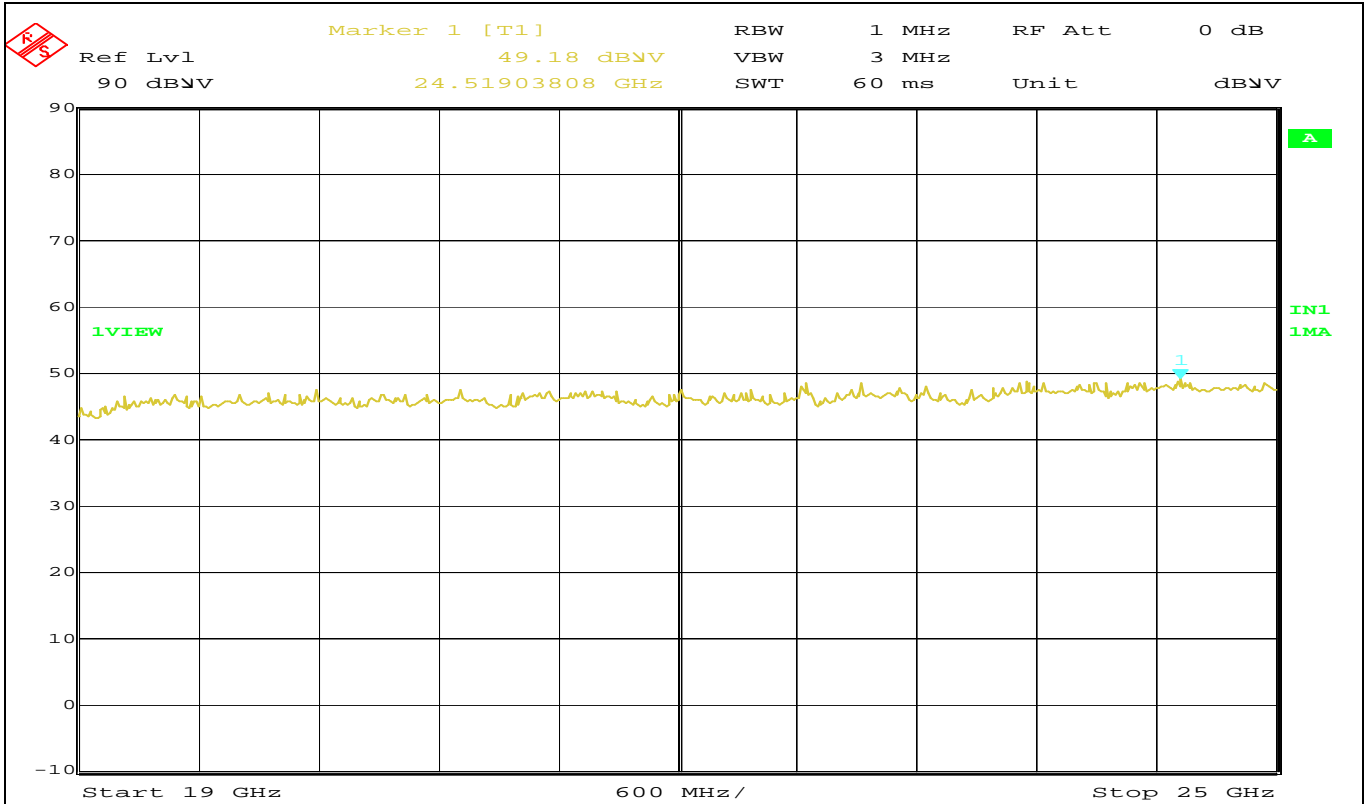

Date: 8.JUN.2010 15:26:44

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBμV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBμV/m)	Spec Limit (dBμV/m)	Spec Margin (dB)

Notes: All emissions were below the noise floor of the EMC Receiver.  
The Trace shown above is raw data, without the application of correction factors.  
Transmitter operating on CH 7

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 4.2 Band Edge

### 4.2.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	14 June 2010	
<b>Standard</b>	FCC Part 15.247(d), RSS 210 2.2						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	RADIATED - 00510066 CONDUCTED - 00510043		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	76° F	<b>Humidity</b>	46%	<b>Pressure</b>	1002 mbar
<b>Perf. Criteria</b>	(Below Limit)			<b>Perf. Verification</b>	Readings Under Limit		
<b>Mod. to EUT</b>	None			<b>Test Performed By</b>	Mark Ryan		

### 4.2.2 Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

### 4.2.4 Final Test

The EUT met the performance criteria requirement as specified in this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


**Report No.:**

**31051395.002**

Page 20 of 45



Marker 1 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	91.40 dBµV	VBW	100 kHz	
130 dBµV	2.40463928 GHz	SWT	5 ms	Unit dBµV

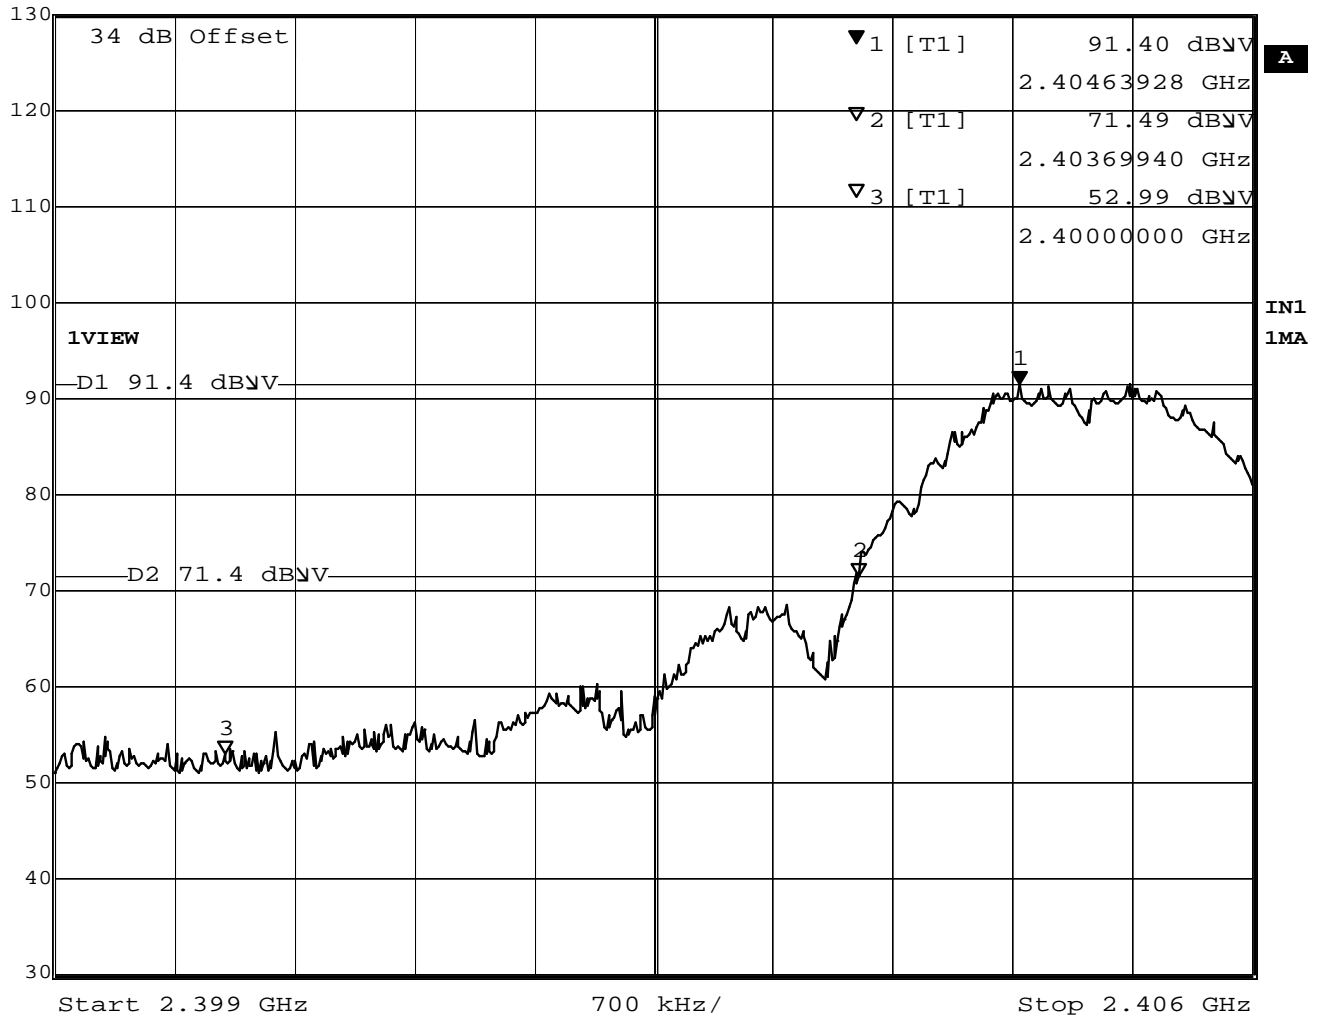

Date: 14.JUN.2010 10:45:54

Notes: Measured using the Peak detector. Band Edge is at 2.4 GHz (Marker 3).

The nearest restricted band (2390MHz) is 10 MHz below the band edge


At the lowest channel, the 20dB down point (Marker 2) is at 2403.67 MHz.

The band edge (Marker 3) is at 2400 MHz

Figure 1: Lower Band Edge Measurement (Radiated Emission)

The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

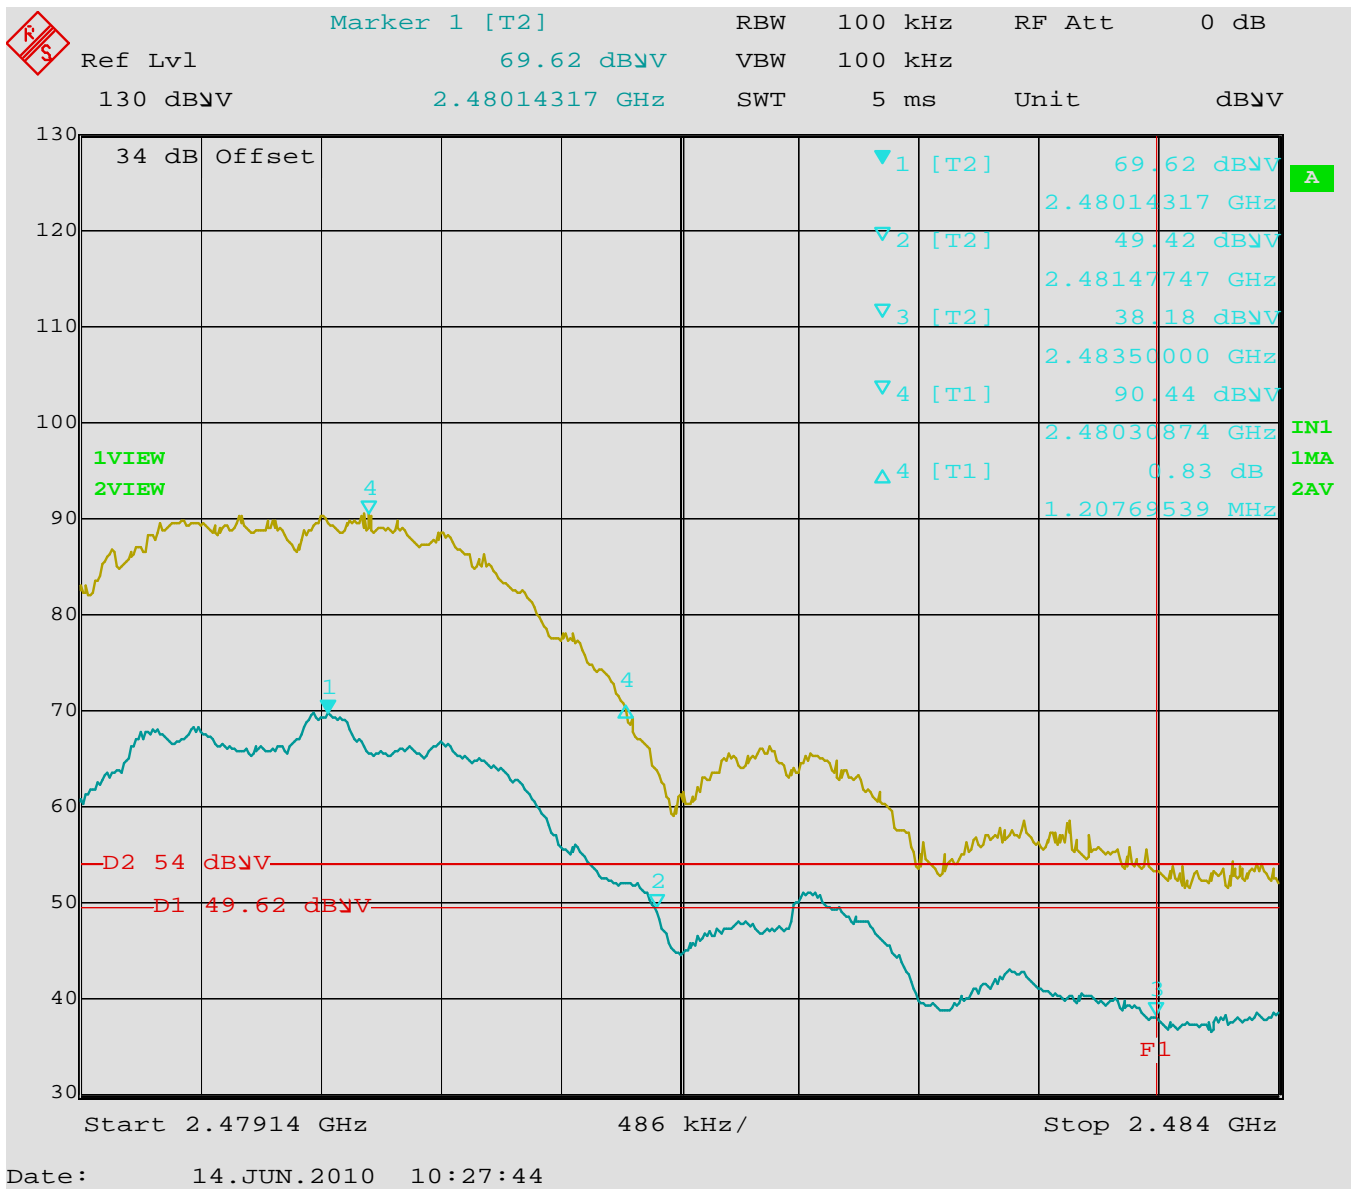

Note: Measured using the Peak and Average detectors.

Band edge (F1) at 2483.5 MHz is also the start of a restricted band, so the rules of 15.205 apply.

The 20dB down point is below the limit of 15.205.

At the band edge of 2483.5 MHz: Peak = 53.8 dBμV/m which is 20.2 dB below the 74 dBμV/m limit.

Average (Marker 3) = 38.2 dBμV/m which is 15.8 dB below the 54 dBμV/m limit.

Figure 2: Upper Band Edge Measurement (Radiated Emission)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**31051395.002**

Page 22 of 45

#### 4.1 Conducted Emissions in Transmit and Receive mode

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

##### 4.1.1 Over View of Test

<b>Results</b>	NA (as tested per this report)				<b>Date</b>	NA	
<b>Standard</b>	FCC Parts 15.107(c), 15.207(c) and RSS-GEN 7.2.2						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	NA		
<b>Test Set-up</b>	Tested in shielded room. EUT placed on table, see test plans for details						
<b>EUT Powered By</b>	120VAC / 60 Hz	<b>Temp</b>	73° F	<b>Humidity</b>	25%	<b>Pressure</b>	1011 mbar
<b>Frequency Range</b>	150 kHz – 30 MHz						
<b>Perf. Criteria</b>	(Below Limit )		<b>Perf. Verification</b>	Readings Under Limit for L1 & Neutral			
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Mark Ryan			

##### 4.1.2 Test Procedure

This device is battery powered, therefore per FCC Part 15.207(c) this test is not required.

##### 4.1.3 Final Test

Since the EUT is a battery powered at 3.0VDC battery device, this test is not applicable.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5 Antenna Port Conducted Emissions

For conducted tests, the emissions were measured at the antenna port.

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSP-100 Issue 9. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

### 5.1 Conducted Output Power, FCC 15.247(b)(3) and RSS-210 A8.4(4)

**5.1.1** For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

#### 5.1.2 Test Over View


<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	10 June 2010	
<b>Standard</b>	FCC Part 15.247(b)(3) and RSS-210 A8.4(4)						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	00510043		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)			<b>Perf. Verification</b>	Readings Under Limit		
<b>Mod. to EUT</b>	None			<b>Test Performed By</b>	Mark Ryan		

#### 5.1.3 Test Procedure

The peak output power was measured at the low, mid and high band frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The cable loss and the attenuator was measured and added in the reference level offset in the spectrum analyzer. The spectrum analyzer's resolution bandwidth was greater than the 20dB bandwidth of the modulated carrier and the video bandwidth was equal to the resolution bandwidth.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Test Setup:

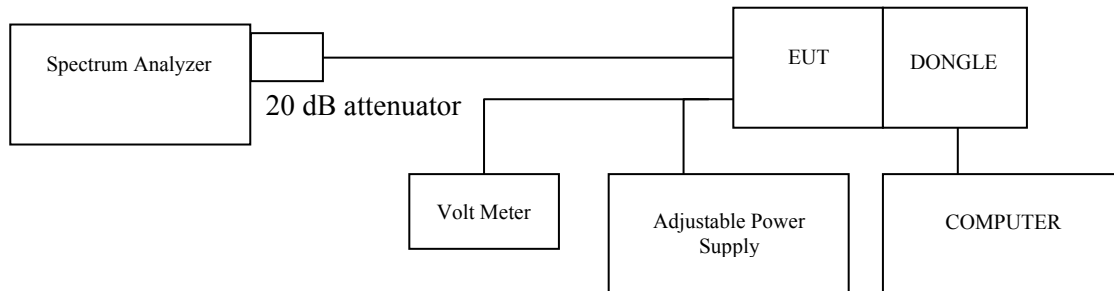

### 5.1.4 Deviations

There were no deviations from the test methodology listed in the test plan for the Surge Immunity test.

### 5.1.5 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.


### 5.1.6 Peak Power Output

Peak Output Conducted Power Measurements

Emission Freq (MHz)	Corrected Value (dBm)	Spec Limit (dBm)	Spec Margin (dB)
2405.00 ( $f_H$ )	-7.32	+30.00	-37.32
2440.00 ( $f_M$ )	-7.12	+30.00	-37.12
<b>2480.00 (<math>f_H</math>)</b>	<b>-6.07</b>	<b>+30.00</b>	<b>-36.07</b>

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



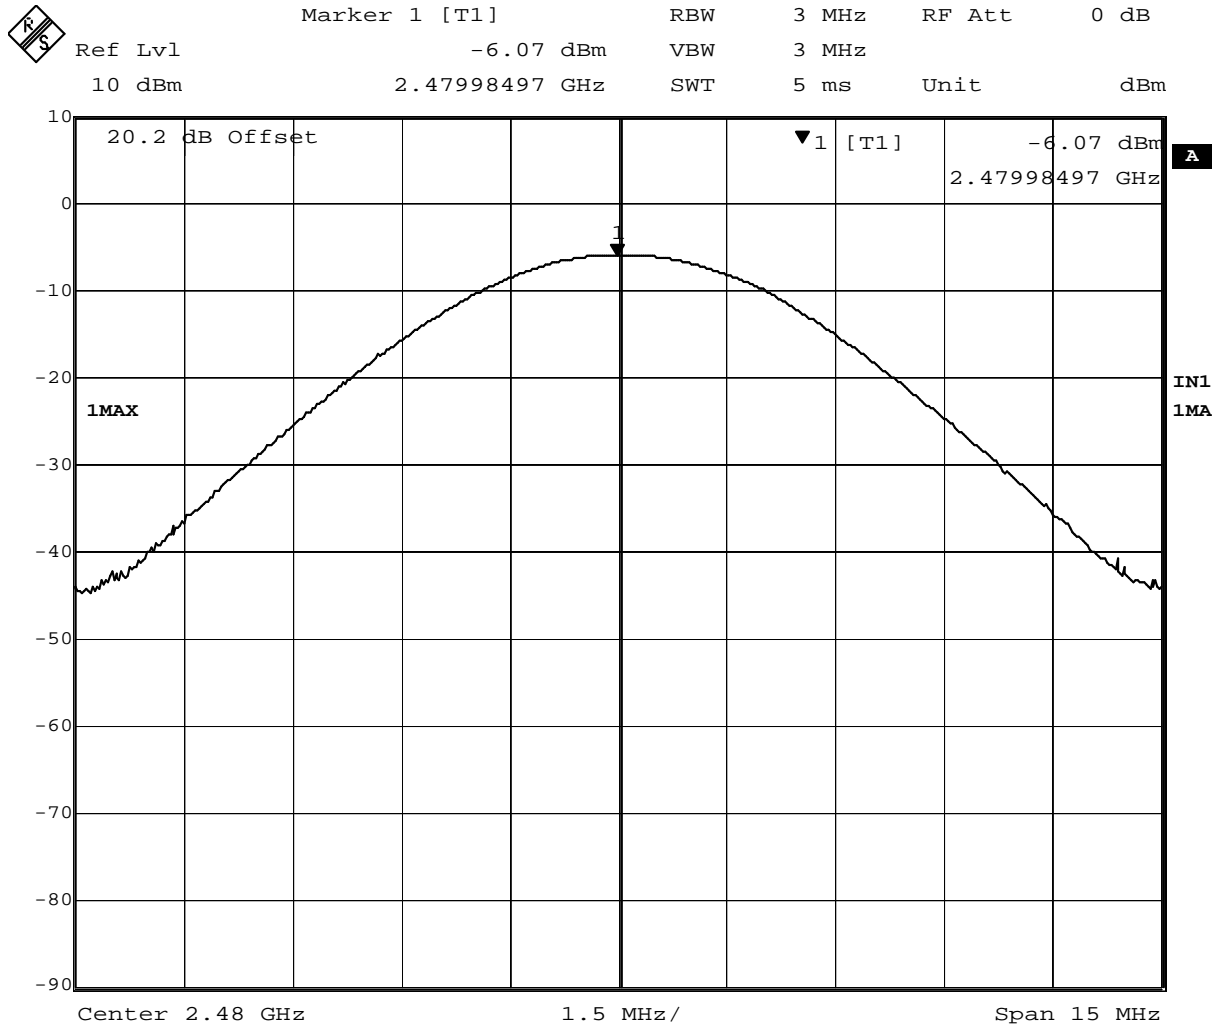

Date: 10.JUN.2010 15:07:13

Figure 3 – Highest Peak Conducted Power Output for EUT highest frequency.

Graphs of the other frequencies are on file at the manufacturer and at TUV.

### Antenna Gain

The Antenna used is below 6dBi gain.

The EUT is also compliant to FCC Part 15.247(b)(4)

### Results

As tested, the EUT was found to be compliant to the requirements of the test standard.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5.2 Peak Power Spectral Density

### 5.2.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	10 June 2010	
<b>Standard</b>	FCC Part 15.247(e) and RSS 210 A8.2(b)						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	00510043		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	Below Limit (10dBm)		<b>Perf. Verification</b>		≤8 dBm in any 3 kHz		
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>		Mark Ryan		

### 5.2.2 Test Procedure

Using the methods of ANSI C63.10:1999, section 6.11.2.3 were used.

### 5.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

### 5.2.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

Power Spectral Density Measurements

Emission Freq (MHz)	Corrected Value (dBm)	Spec Limit (dBm)	Spec Margin (dB)
2405.00 ( $f_H$ )	-21.92	8	-29.92
<b>2440.00 (<math>f_M</math>)</b>	<b>-21.86</b>	<b>8</b>	<b>-29.86</b>
2480.00 ( $f_H$ )	-21.92	8	-29.92

Note: worst Case PSD measurement plots are shown below; the other plots are on file at TUV Rheinland.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**5.2.5 Final Data**

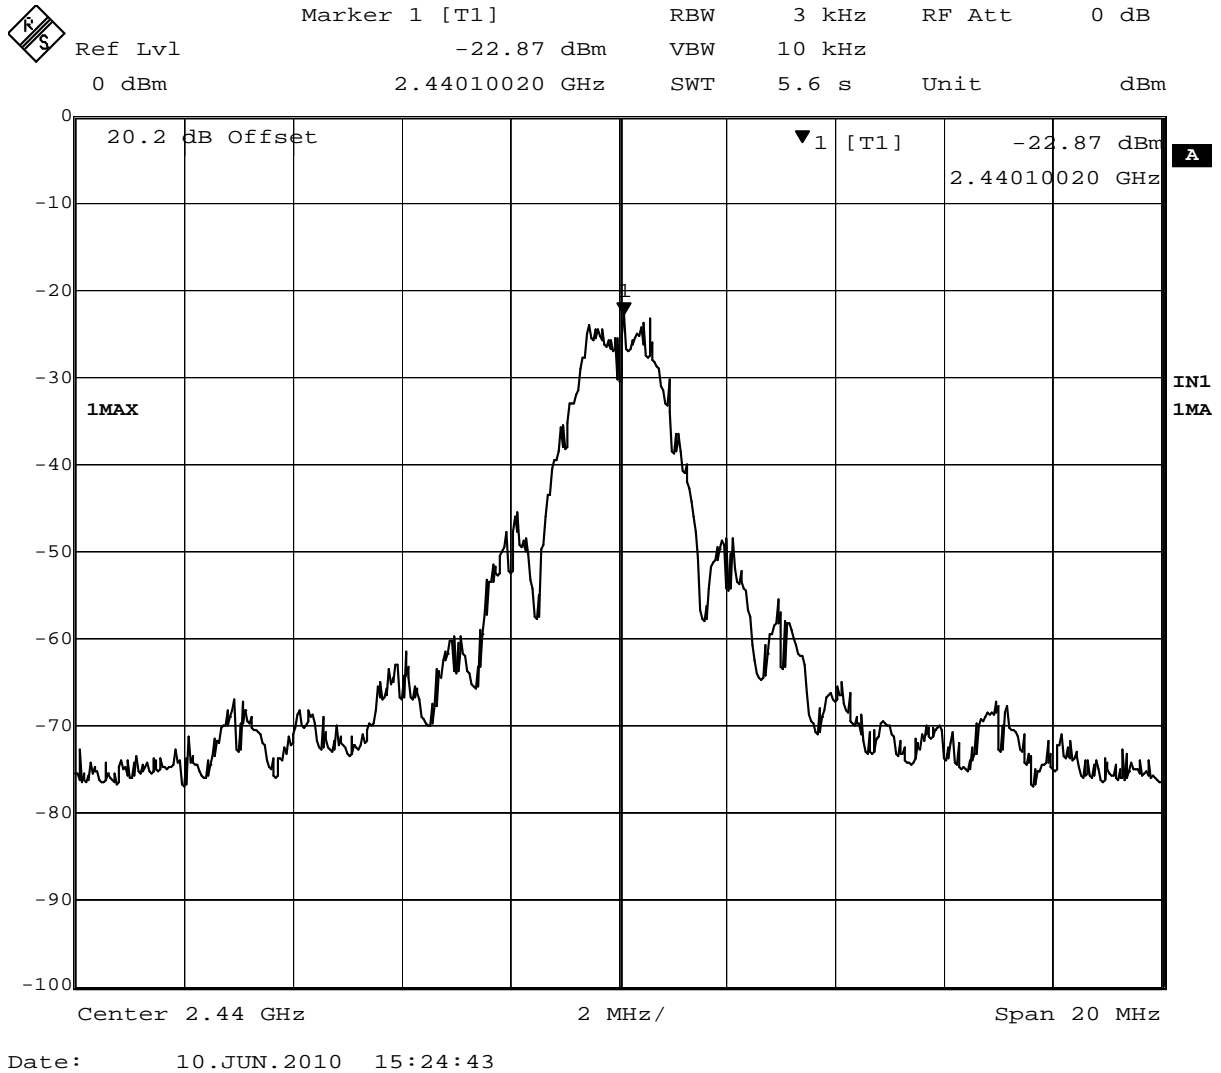


Figure 4: Peak Reference Frequency

**Spectrum Analyzer Parameters:**

- RBW= 3kHz
- Span= 20MHz
- VBW= 10kHz
- LOG dB/div.= 10dB
- Sweep = Auto
- Detector = sample detector, max hold

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**

**31051395.002**

Page 28 of 45

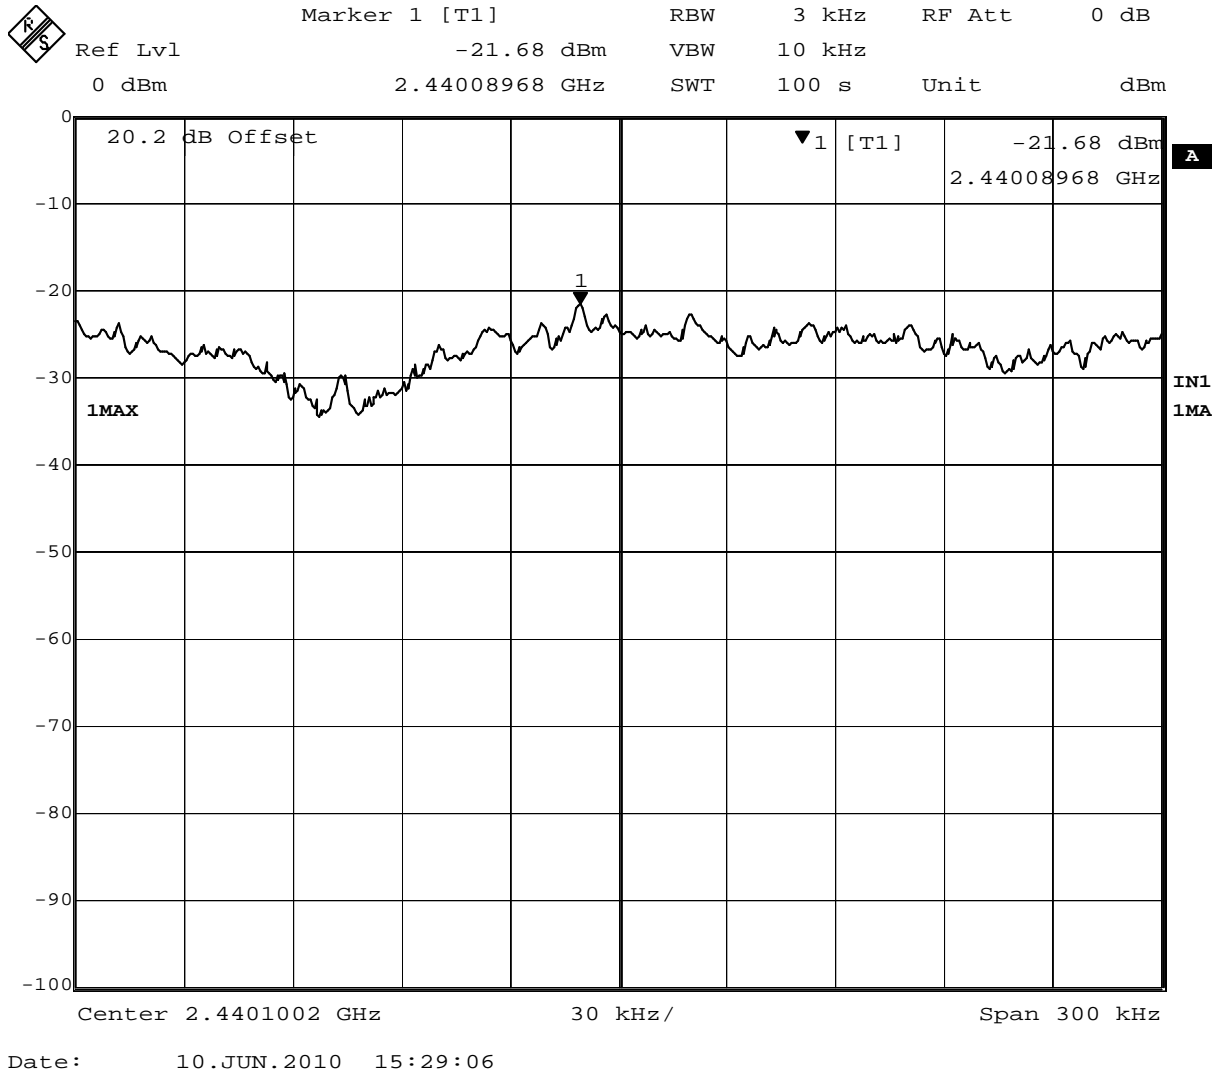


Figure 5: Power Spectral Density measurement

Spectrum Analyzer Parameters:

- RBW= 3kHz
- Span= 300kHz
- VBW= 10kHz
- LOG dB/div.= 10dB
- Sweep = 100 Seconds
- Detector = Sample detector, max hold

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 5.3 Occupied Bandwidth

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.3.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	10 June 2010	
<b>Standard</b>	FCC Part 15.247(a)(2)						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	00510043		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>		Readings Under Limit		
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>		Mark Ryan		

#### 5.3.2 Test Procedure

Minimum allowed 6dB Bandwidth = 500 kHz

#### 5.3.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

#### 5.3.4 Final Test

6dB Band width is 1.61 MHz which is > 500 kHz


The EUT met the performance criteria requirement as specified in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.3.5 Final Data



Marker 2 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	90.23 dBµV	VBW	100 kHz	
110 dBµV	2.43923347 GHz	SWT	5 ms	Unit dBµV

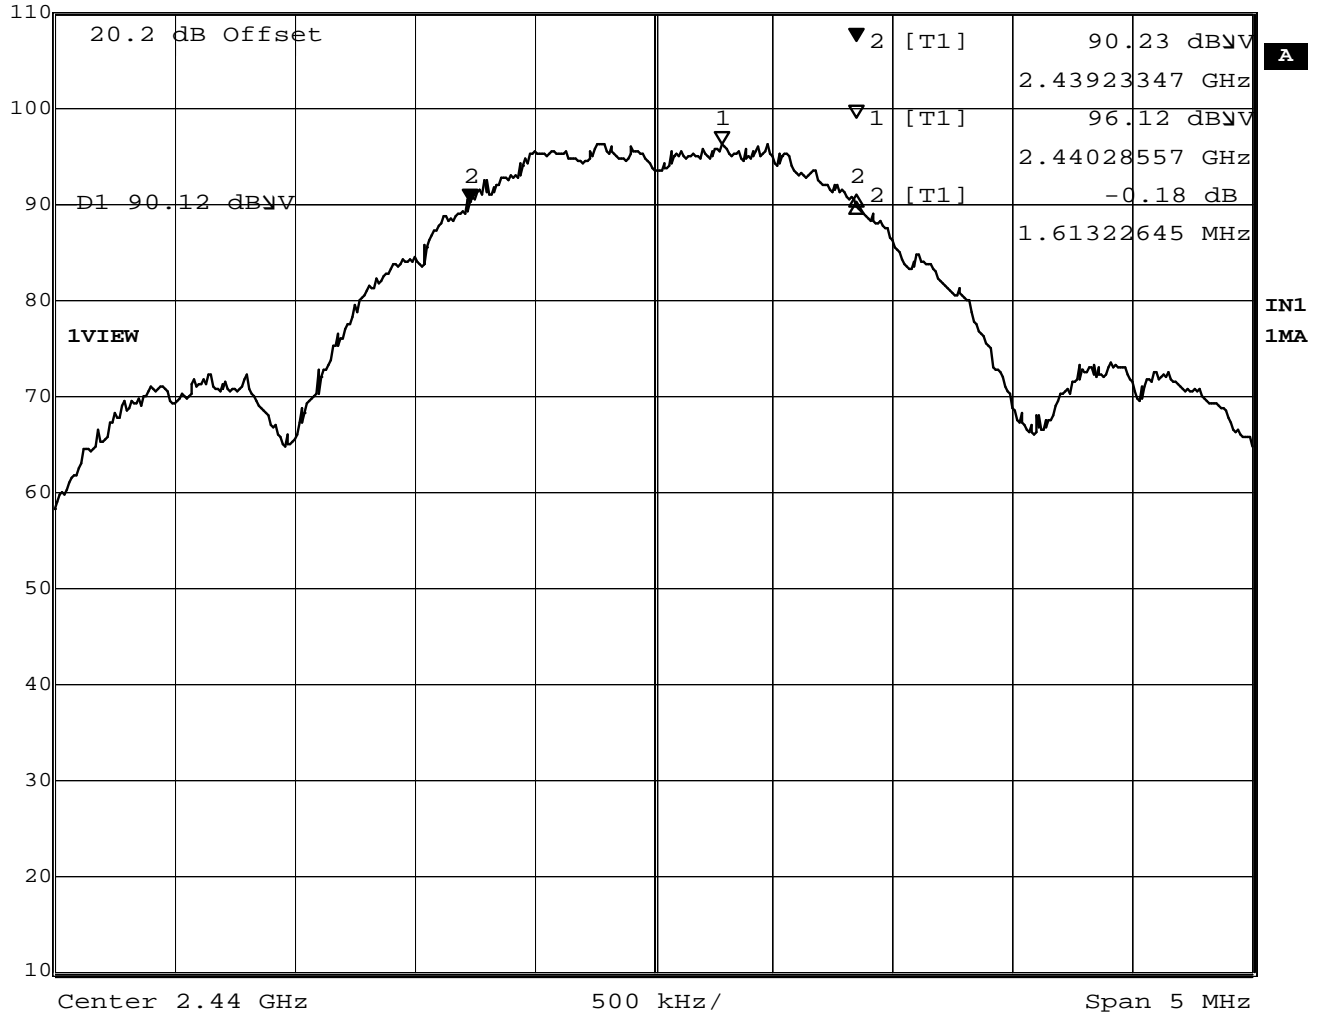

Date: 10.JUN.2010 14:40:40

Figure 6: 6dB Occupied Bandwidth

Note: The above plot is the worst case.

6dB Band width is 1.61 MHz which is > 500 kHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Report No.:

31051395.002

Page 31 of 45



	Delta 2 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	0.07 dB	VBW	100 kHz		
110 dB $\mu$ V	2.71543086 MHz	SWT	5 ms	Unit	dB $\mu$ V

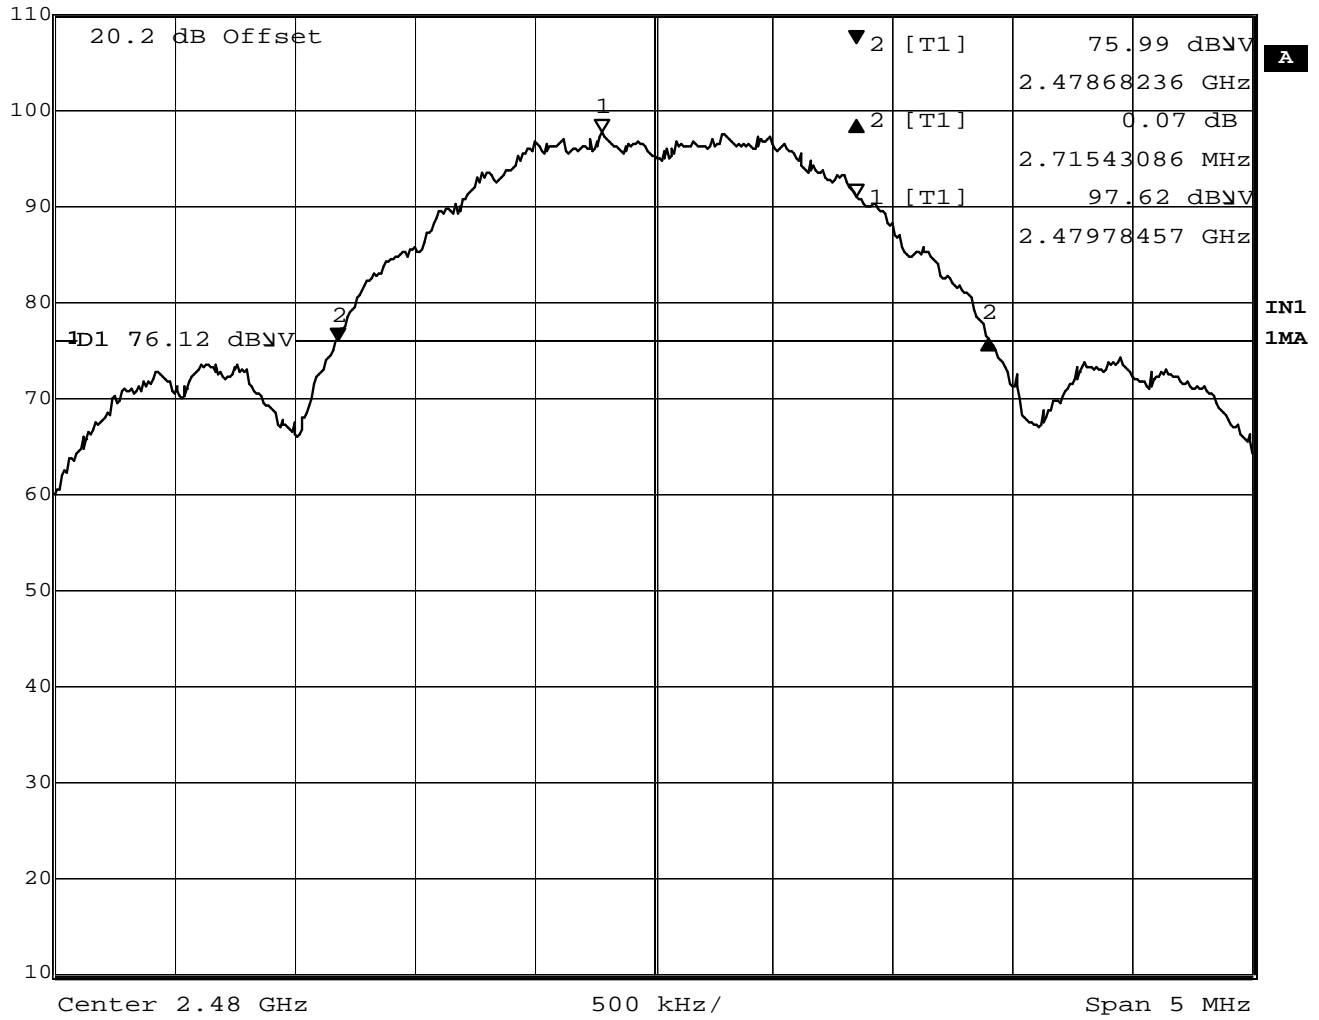

Date: 10.JUN.2010 14:46:55

Figure 7: 20 dB Occupied Bandwidth

Note: The above plot is the worst case.

20dB Band width is 2.72 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**31051395.002**

Page 32 of 45

### 5.3.6 99% Power Bandwidth

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than .25% of the center frequency for devices operating between 70-900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

### 5.3.7 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	22 January 2010	
<b>Standard</b>	RSS-210 Section A1.1.3						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	00510043		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)			<b>Perf. Verification</b>	Readings Under Limit		
<b>Mod. to EUT</b>	None			<b>Test Performed By</b>	Mark Ryan		

### 5.3.8 Test Procedure

Using the procedures of RSS-GEN section 4.6.1, the 1 kHz resolution bandwidth is 1% of the 1 MHz span. The Video bandwidth is 3 times that of the resolution bandwidth.

The limit of the bandwidth would be 0.5% of 2.4 GHz or 12 MHz.

### 5.3.9 Deviations

There were no deviations from the test methodology listed in the test plan for the Electrical Fast transients (EFT) Immunity test.

### 5.3.10 Final Results

The measured 99% bandwidth is 2.42 MHz, which is well below the 12 MHz limit.

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



Report No.:


31051395.002

Page 33 of 45

**5.3.11 Final Data**



Marker 1 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	96.12 dBµV	VBW	100 kHz	
110 dBµV	2.44028557 GHz	SWT	5 ms	Unit dBµV

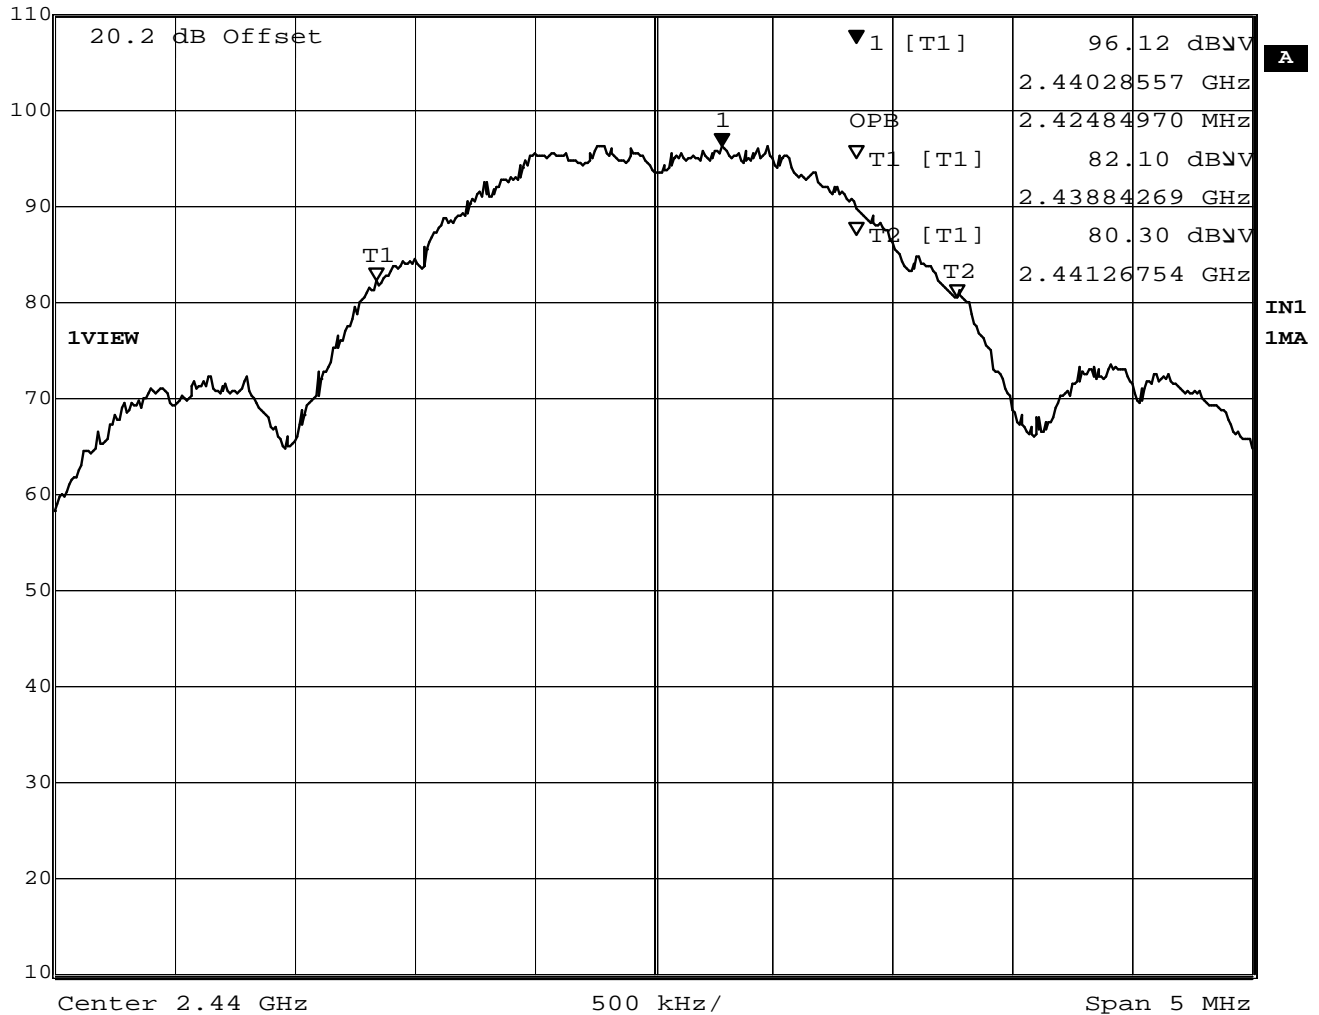

Date: 10.JUN.2010 14:38:51

Figure 8 – 99% Power Bandwidth = 2.42 MHz

The EUT is compliant to the requirements of RSS-210 A1.1.3

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5.4 Voltage Requirements FCC Part 15.31(e)

FCC Part 15.31 states that for intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.4.1 Over View of Test


<b>Results</b>	<b>Complies</b> (as tested per this report)	<b>Date</b>	07 April 2010
<b>Standard</b>	FCC Part 15.31(e)		
<b>Product Model</b>	FLUKE 381 - DISPLAY	<b>Serial#</b>	00510043
<b>Test Set-up</b>	Tested in shielded room. EUT placed on table, see test plans for details		
<b>Mod. to EUT</b>	None	<b>Test Performed By</b>	Mark Ryan

### 5.4.2 Test Procedure

Since this module could be used in many different applications, including battery operation, the manufacturer selected that worst-case testing suite to be performed. The power source test was performed using the  $\pm 15\%$  of rated voltage

Manufacturer Rated voltage: 3.0VDC, the test will be performed at  $\pm 15\%$  of rated voltage.

#### Test Setup:

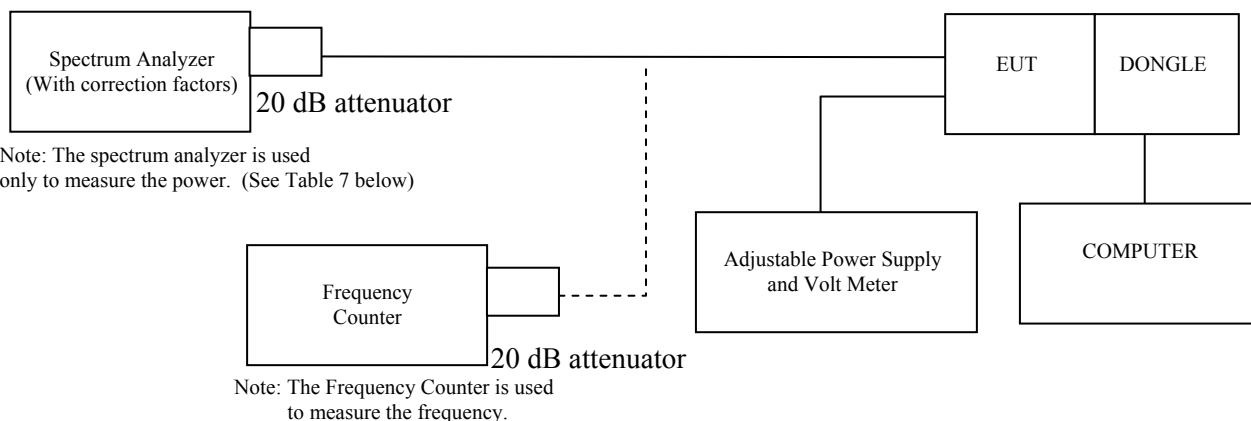

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reference at nominal temperature; +20° C


Volts	P(dBm)	Frequency in Hz	Δ to nominal Power (dB)	Δ to nominal Frequency (Hz)
3.000	-5.929	2,480,027,650	0.00	0
2.550	-5.913	2,480,013,950	0.02	-13,700
3.450	-5.882	2,479,876,450	0.05	-151,200

Note: Reading highlighted in **Yellow** is the reference frequency and power.

Nominal Rated Voltage ( $V_{Nom}$ ): 3.000 Volts  
 +15% Max Voltage ( $V_{max}$ ): 2.550 Volts  
 -15% Minimum Voltage ( $V_{min}$ ): 3.450 Volts

### 5.4.3 Final Test

As tested, the EUT was found to be compliant to the requirements of the test standard.

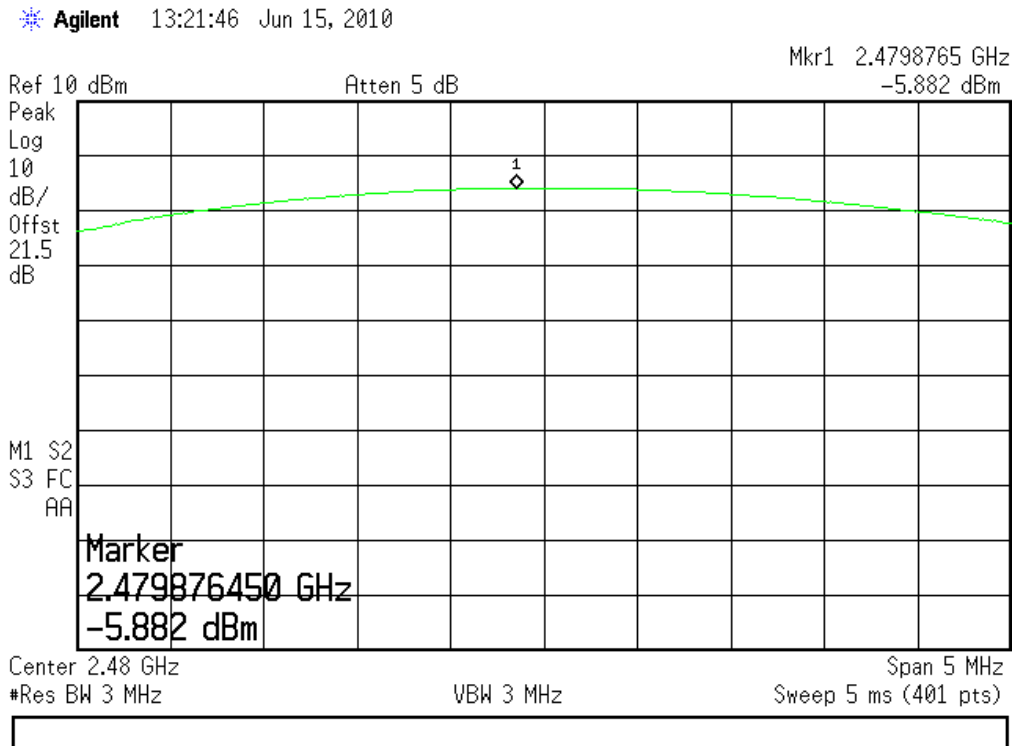

Worst Case power shift at +3.8VDC from 18.1 dBm to 18.6 dBm.

Note: All other plots of the extreme voltage tests are on file at TUV Rheinland.  
All Frequency measurements are recorded in the table above.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 6 Emissions in Receive Mode.

### 6.1 Radiated Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

#### 6.1.1 Over View of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	26 March 2010	
<b>Standard</b>	FCC Parts 15.109(a) and RSS-210 2.2, 2.6,A8.5, RSS-GEN 7.2.3.2						
<b>Product Model</b>	FLUKE 381 - DISPLAY			<b>Serial#</b>	00510066		
<b>Configuration</b>	See test plan for details						
<b>Test Set-up</b>	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details						
<b>EUT Powered By</b>	3.0 VDC battery	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Frequency Range</b>	30 MHz to 13 GHz @ 3m						
<b>Perf. Criteria</b>	(Below Limit)			<b>Perf. Verification</b>	Readings Under Limit		
<b>Mod. to EUT</b>	None			<b>Test Performed By</b>	Mark Ryan		

#### 6.1.2 Test Procedure

Radiated and FCC emissions tests were performed using the procedures of ANSI C63.4:2003 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 30 MHz to 13 GHz was investigated for radiated emissions.

Radiated emission testing was performed at a distance of 3 meters in a 5 meter semi-anechoic chamber.

#### 6.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

#### 6.1.4 Final Test


All final radiated emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

6.1.5 Final Graphs and Tabulated Data

Radiated Emissions – 30MHz to 1 GHz

Horizontal

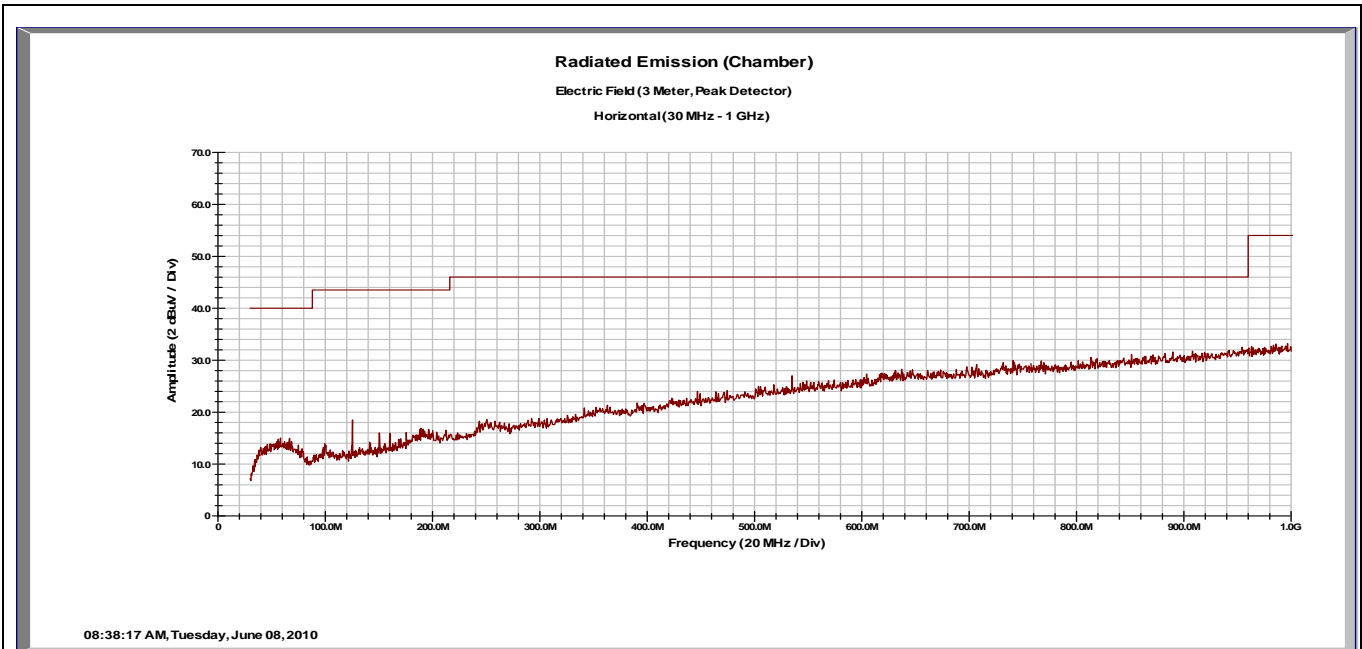

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty


Combined Standard Uncertainty  $u_c(y) = \pm 1.6\text{dB}$  Expanded Uncertainty  $U = ku_c(y)$   $k = 2$  for 95% confidence

Notes: All emissions are either more than 20dB below the limit, or below the noise floor of the receiver. The signals below 130MHz are anomalies in the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Radiated Emissions – 30MHz to 1 GHz**

**Vertical**

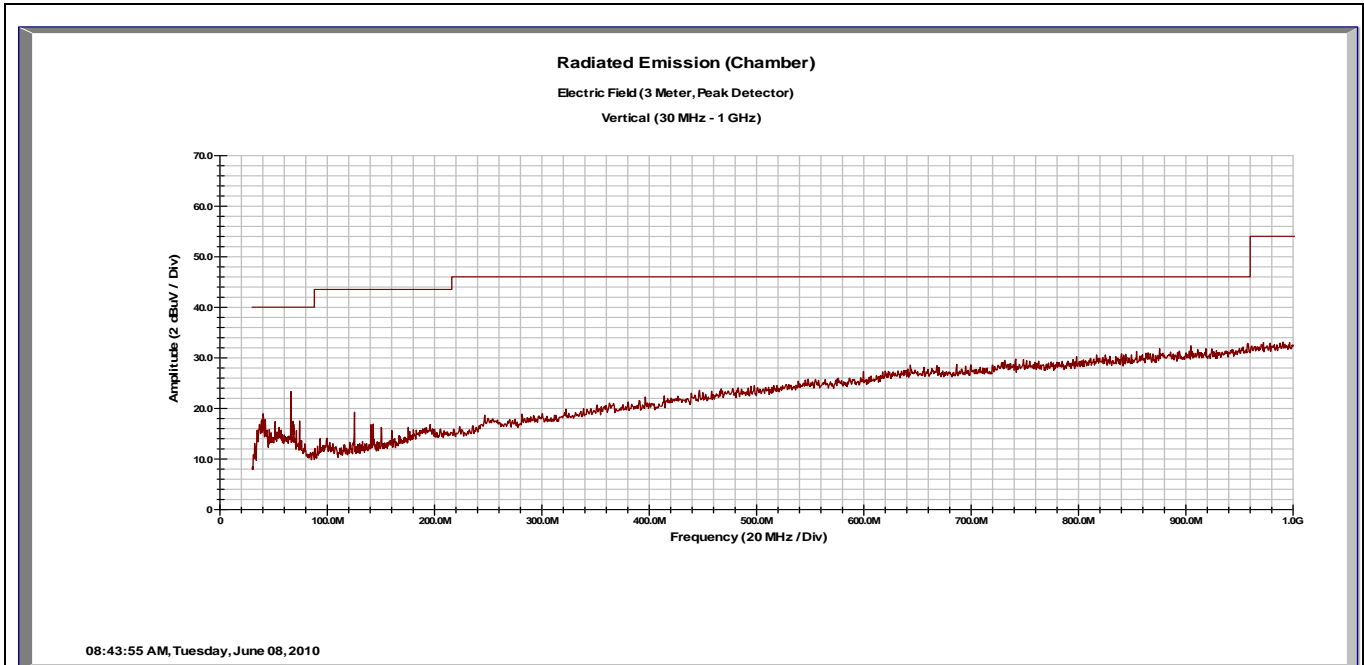

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty


Combined Standard Uncertainty  $u_c(y) = \pm 1.6\text{dB}$  Expanded Uncertainty  $U = k u_c(y)$   $k = 2$  for 95% confidence

Notes: All emissions are either more than 20dB below the limit, or below the noise floor of the receiver. The signals below 130MHz are anomalies in the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Radiated Emissions – 1 GHz to 10 GHz**

**Horizontal**

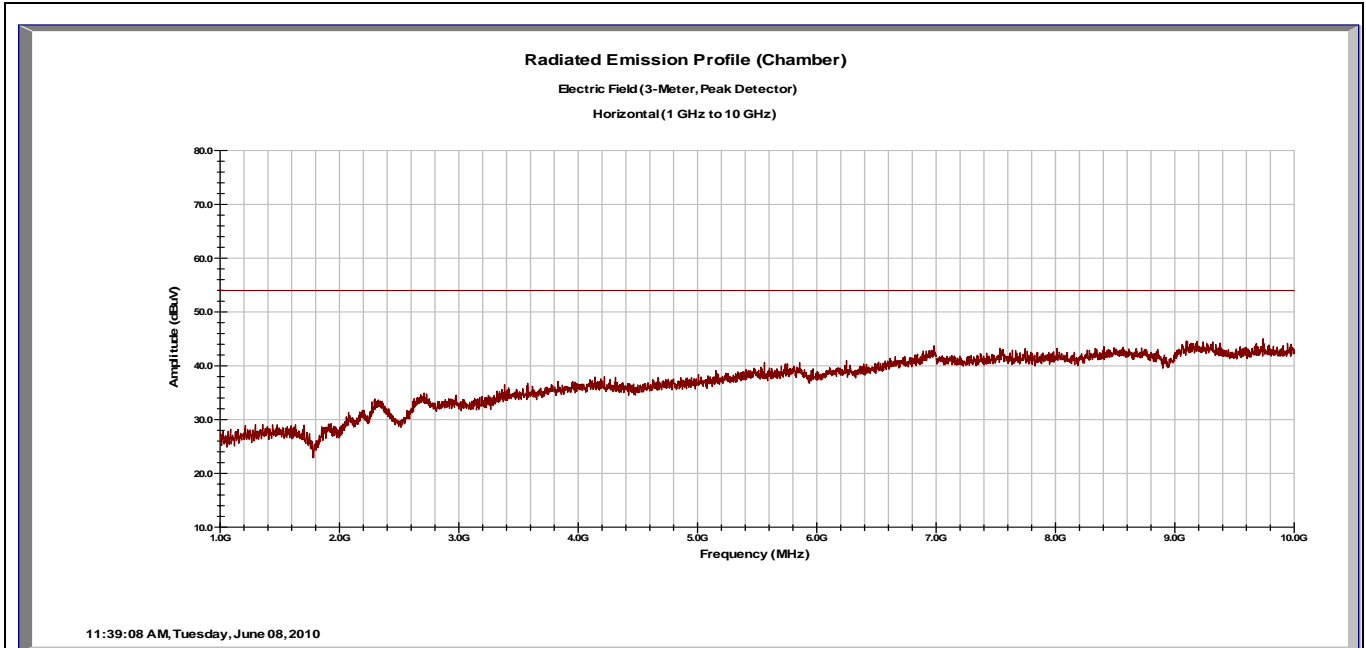

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty  
 Combined Standard Uncertainty  $u_c(y) = \pm 1.6\text{dB}$  Expanded Uncertainty  $U = ku_c(y)$   $k = 2$  for 95% confidence


Notes: All emissions are either more than 20dB below the limit, or below the noise floor of the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.





**Radiated Emissions – 10 GHz to 12.75 GHz**  
**Horizontal**

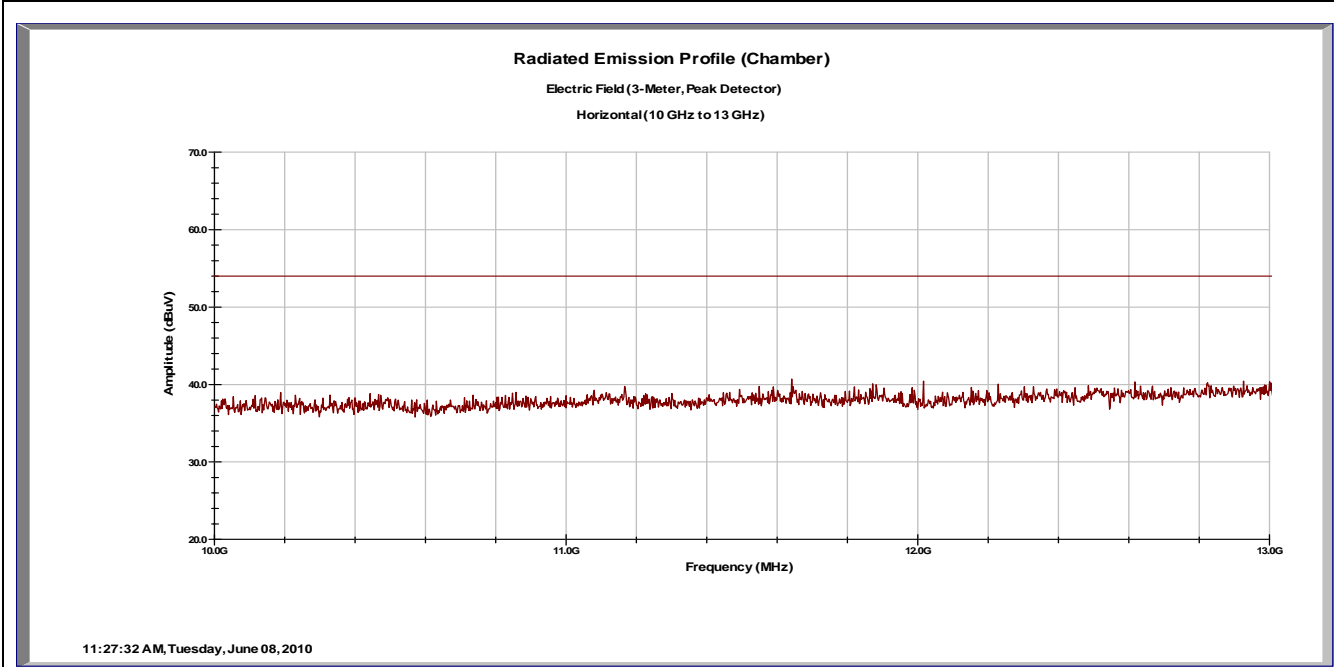

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty


Combined Standard Uncertainty  $u_c(y) = \pm 1.6\text{dB}$  Expanded Uncertainty  $U = k u_c(y)$   $k = 2$  for 95% confidence

Notes: All emissions are either more than 20dB below the limit, or below the noise floor of the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Radiated Emissions – 10 GHz to 12.75 GHz

Vertical

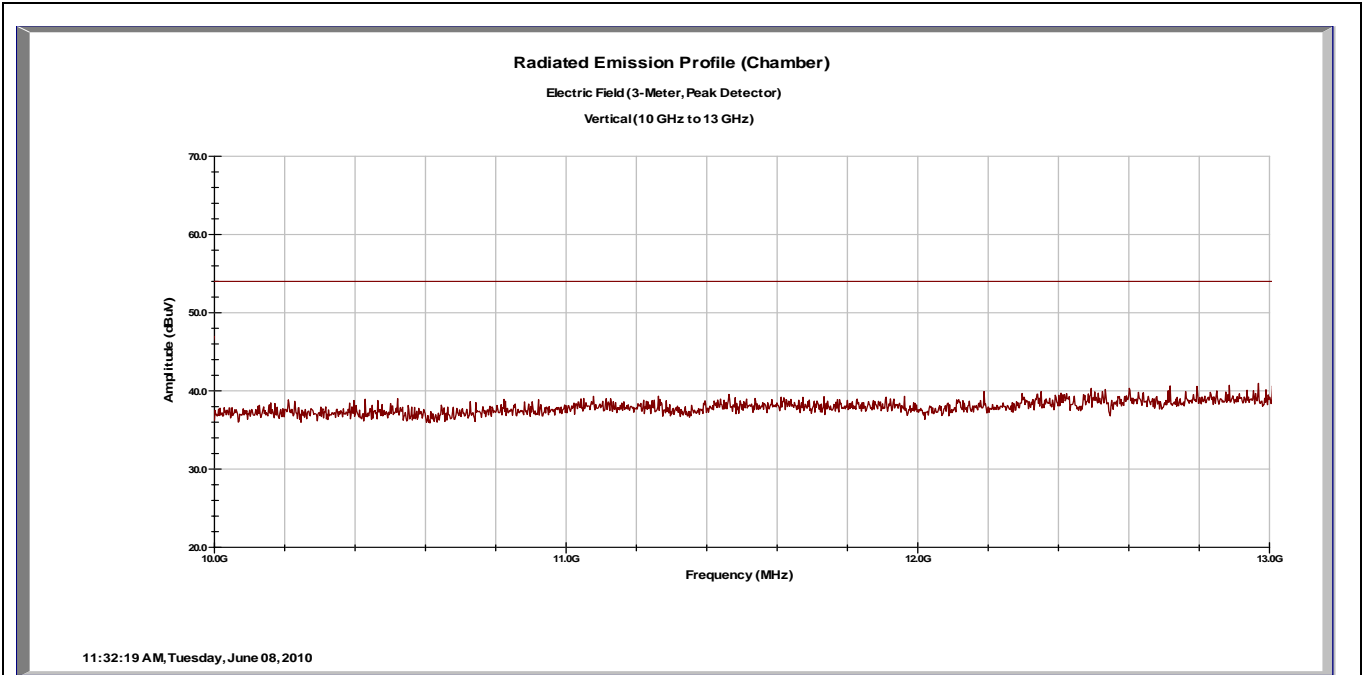

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty

Combined Standard Uncertainty  $u_c(y) = \pm 1.6\text{dB}$  Expanded Uncertainty  $U = ku_c(y)$   $k = 2$  for 95% confidence

Notes: All emissions are either more than 20dB below the limit, or below the noise floor of the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 7 RF Exposure

### 7.1 Exposure Requirements – FCC Parts 2.1091, 15.247(d), and RSS-102 Issue 7

FCC Part 15.247(d) states that SAR evaluation is not required if “Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of CFR 47.”

RSS-102 section 2.5.1 states that a device is exempt from SAR evaluation if the frequency is “above 2.2 GHz and up to 3 GHz inclusively, and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 20 mW for general public use...”.

#### 7.1.1 Test Procedure

If the antenna is located > 20cm from the user, then an MPE calculation is acceptable.

If the antenna is located < 20cm (portable / mobile / hand-held device) from the user, then SAR evaluation is required.

#### 7.1.2 Evaluation

The EUT is a hand-held portable device where the antenna can be located less than 20cm from the user, therefore SAR evaluation is required.

##### 7.1.2.1 Evaluation for FCC

FCC 447498 D01 Mobile Portable RF Exposure v04, Paragraph 2) section a) i) states: “A device may be used in portable exposure conditions with no restrictions on host platforms when either the source-based time-averaged output power is  $\leq 60/f_{\text{(GHz)}} \text{ mW}$  or all measured 1-g SAR are  $< 0.4 \text{ W/kg}$ .<sup>11</sup>”.

The minimum power that requires SAR is  $60 / 2.4 \text{ GHz}$  or 25 mW.

The maximum power output plus maximum antenna gain of the EUT is:

$$-6.07\text{dBm} + 3\text{dBi (antenna)} = -3.07\text{dBm} = 0.49 \text{ mW}.$$

The EUT is well below the 25mW power level.

##### 7.1.2.2 Evaluation for Industry Canada

The maximum power output plus maximum antenna gain of the EUT is:

$$-6.68\text{dBm} + 3\text{dBi (antenna)} = -3.68\text{dBm} = 0.49 \text{ mW}.$$

The EUT is well below the 20mW power.

#### 7.1.3 Conclusion

SAR testing is not required for either FCC or Industry Canada.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:****31051395.002***Page 44 of 45*

## Appendix A

### Test Plan

This test report is intended to follow this test plan outlined here in unless other wise stated in this here report. The following test plan will give details on product information, standards to be used, test set ups and refer to TUV test procedures. The test procedures will give the steps to be taken when performing the stated test. The product information below came via client, product manual, product itself and or the internet.

### GENERAL INFORMATION

**EUT: Display****Clamp meter****Product Description:****Measure amperage, voltage, and ohms and provide remote display capability so the user can view the measurement at a distance or outside an electrical cabinet etc.****Model:****Fluke 381 (Base)****Operation:****A procedure was provided to the testing lab to control modulation, Frequency, and Mode of the device. Two test samples are provided; one with normal operating internal antenna, and a model with a cable connected directly to the transmitter output for conducted RF measurements.**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## Test Plan Summary

**Table 1: EMC Test Plan Summary FCC& IC**

Test	Test Method ANSI C63.10	Test Parameters (from Standard)
Spurious Emission in Received Mode	CFR47 15.109, RSS-GEN Sect.7.2.3	Class B
Spurious Emission in Transmitted Mode	CFR47 15.209, RSS-GEN Sect.7.2.3	Class B
Restricted Bands of Operation	CFR47 15.205, RSS 210 Sect.2.6	Class B
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.7.2.2	Class B
Occupied Bandwidth	CFR47 15.247 (a2), RSS GEN Sect.4.4.1	500kHz minimum
Maximum Transmitted Power	CFR47 15.247 (b3), RSS 210 Sect. A.8.4	30dBm w/ 6dBi antenna
Peak Power Spectral Density	CFR47 15.247 (e), RSS 210 Sect. A.8.2	8dBm/ 3kHz.
Band edge Measurement	CFR47 15.247 (d), RSS 210 Sect. A.8.5	20dBr
RF Exposure	CFR47 15.247 (i), 2.1091	General Population

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.