



DISPLAY MODULE BOTTOM CASE

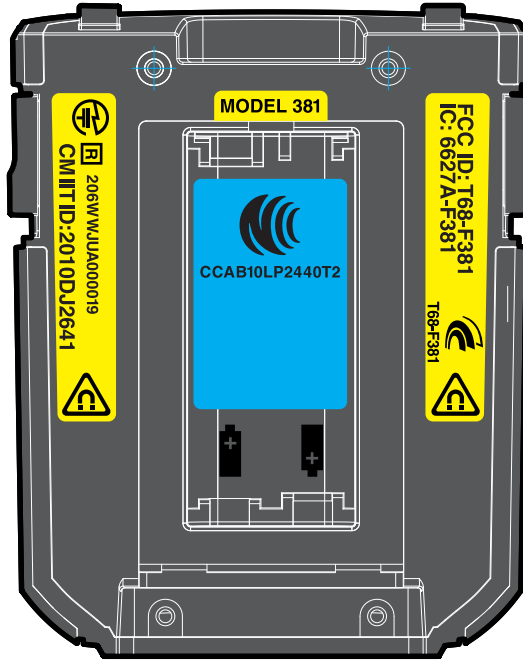

INSERT

ARTWORK

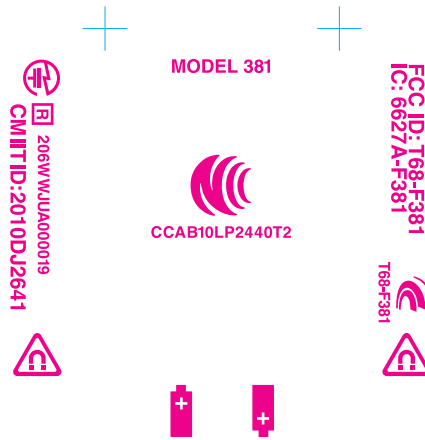

SPECS FOR MOLDED TEXT

- TEXT AND SYMBOLS TO BE MOLDED IN (RECESSED) AT A DEPTH OF 0.25 mm
- FAR SURFACE OF ALL TEXT AND SYMBOLS TO BE S.P.I. - S.P.E. #2 FINISH
- TEXT AND SYMBOLS TO BE MOLDED IN (RECESSED) AT A DEPTH OF 0.35 mm
- FAR SURFACE OF ALL TEXT AND SYMBOLS TO BE S.P.I. - S.P.E. #2 FINISH

DISPLAY MODULE BOTTOM CASE MOLDED TEXT, FLUKE 381

FLUKE®

Fluke Corporation
P.O. Box 9090
Everett, WA 98206-9090

DESIGNER	FLAURINO	DATE	25 JUNE 2010
APPLICATION	ILLUSTRATOR CS2	SCALE	1:1
DWG. NO.	X	REV.	1
PART NO.	X	ID FILE	dsply_mdl_btm_mld_381.ai

PROPRIETARY NOTICE: This document and the technical data hereon disclosed, are proprietary to Fluke Corporation and shall not, without express written permission of Fluke Corporation, be used, released or disclosed in whole or in part, or used to solicit quotations from a competitive source or used for manufacture by anyone other than Fluke Corporation. The information hereon has been developed at private expense, and may only be used for purposes of engineering evaluation and for incorporation into technical specifications and other documents which specify procurement of products from Fluke Corporation.