



## FCC PART 15.247

## TEST REPORT

For

### RTX Hong Kong Limited

8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong

**FCC ID: T7HCT8121**

<b>Report Type:</b> Original Report	<b>Product Type:</b> DECT Handset
<b>Test Engineer:</b> <u>Gardon Zhang</u>	<i>Gardon Zhang</i>
<b>Report Number:</b> <u>RSZ131213007-00C</u>	
<b>Report Date:</b> <u>2014-02-08</u>	
<b>Reviewed By:</b> <u>Jimmy Xiao</u>	<i>Jimmy Xiao</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §15. 319 (i) &amp; §2.1093 - RF EXPOSURE.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC§15.315 &amp; §15.207 - CONDUCTED EMISSIONS.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY .....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION .....	12
TEST RESULTS SUMMARY.....	13
TEST DATA .....	13
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
MEASUREMENT UNCERTAINTY .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY.....	18
TEST DATA .....	18
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST PROCEDURE .....	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA .....	21

<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA .....	28
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>34</b>
APPLICABLE STANDARD .....	34
TEST PROCEDURE .....	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA .....	34
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA .....	37
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>53</b>
APPLICABLE STANDARD .....	53
TEST PROCEDURE .....	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA .....	53
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>59</b>
APPLICABLE STANDARD .....	59
TEST PROCEDURE .....	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA .....	59

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *RTX Hong Kong Limited*'s product, model number: *8242 DECT Handset* (the "EUT") in this report was a *8242 DECT Handset named by applicant*, which was measured approximately: 14.0 cm (L) x 5.0 cm (W) x 2.8 cm (H), rated with input voltage: DC 3.7V battery.

Adapter Information:

Model: CMC15

Input: AC 100-240V, 50/60Hz, 150mA

Output: DC 5.0V, 500mA

\* All measurement and test data in this report was gathered from production sample serial number: RTX134690184 (Assigned by applicant). The EUT supplied by the applicant was received on 2013-12-13.

### Objective

This test report is prepared on behalf of *RTX Hong Kong Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC part 15D PUE submission with FCC ID: T7HCT8121.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

## Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode which was controlled by the equipment Bluetooth tester.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

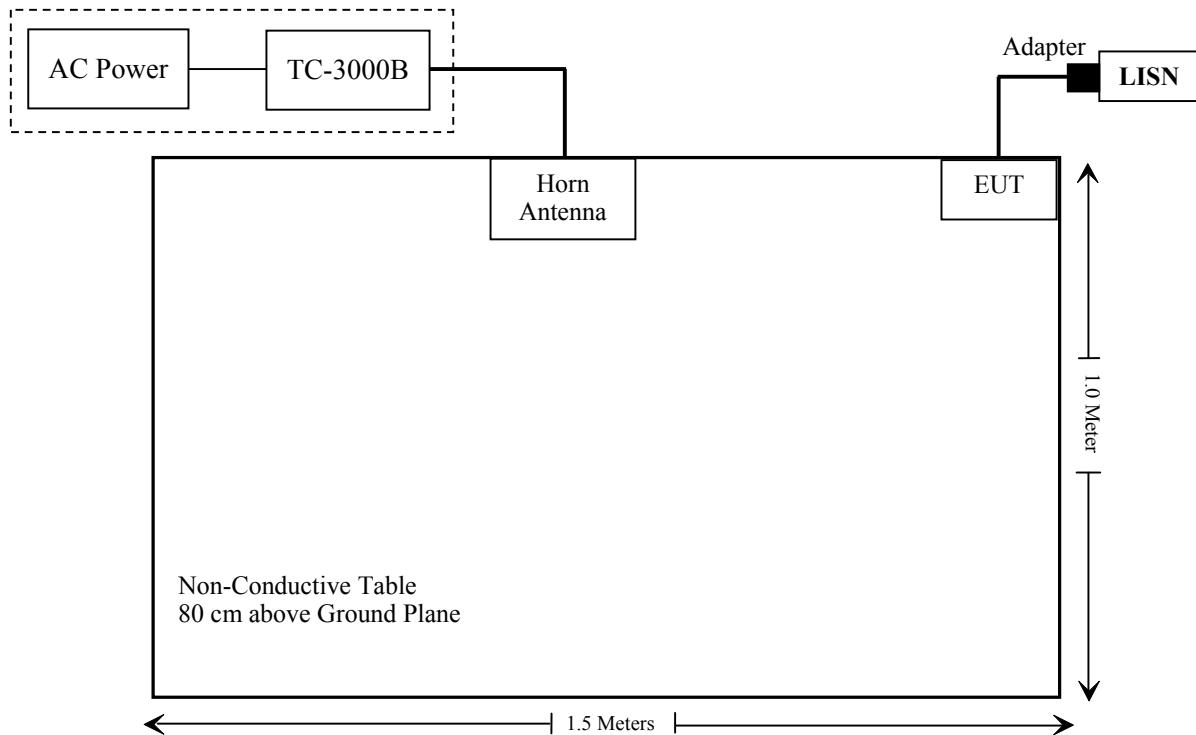
Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000B	3000B630010

### External I/O Cable

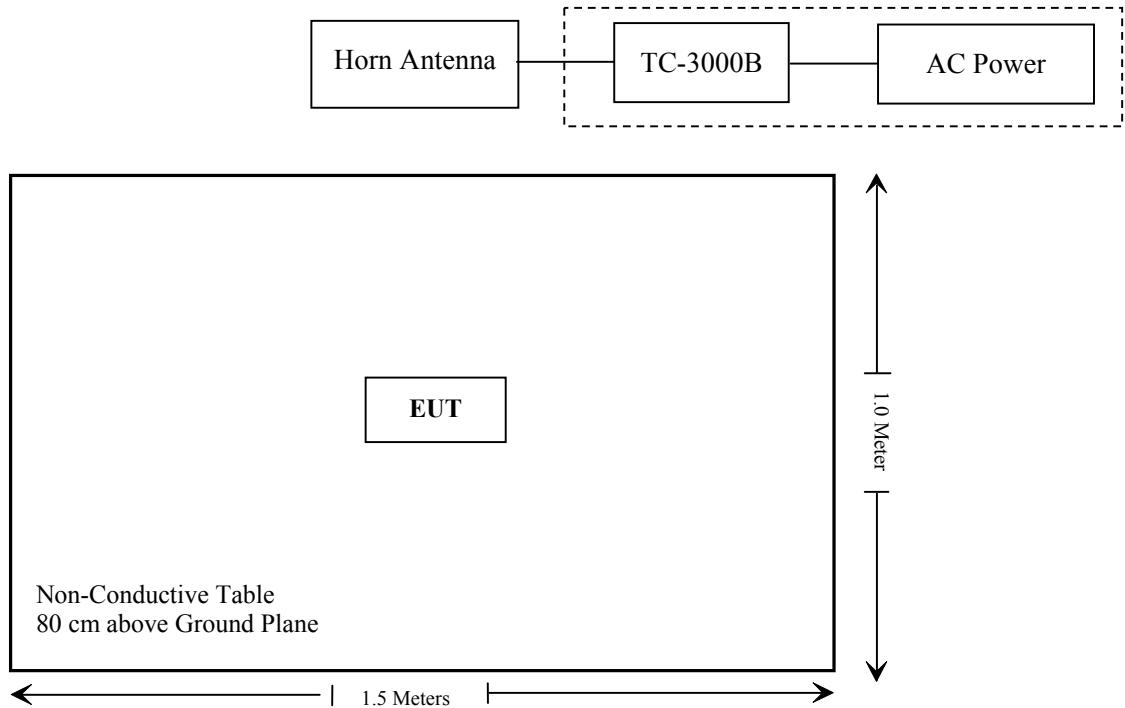
Cable Description	Length (m)	From/Port	To
Unshielded Undetectable DC Power Cable	1.8	EUT	Adapter

### Block Diagram of Test Setup

For Conducted Emission:



For Radiated Emission:



## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 15.319 (i)&2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

## **FCC §15. 319 (i) & §2.1093 - RF EXPOSURE**

### **Applicable Standard**

According to FCC Part15.319 (i), Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in§1.1307(b) and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

### **Result:**

Please refer to SAR test report RSZ131213007-20A.

## FCC §15.203 – ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Antenna Connector Construction

The EUT has one monopole antenna arrangement for bluetooth, which was permanently attached and the antenna gain is 1dBi, fulfill the requirement of this section. Please refer to the internal photos.

**Result:** Compliance.

## FCC§15.315 & §15.207 - CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.315, an unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.

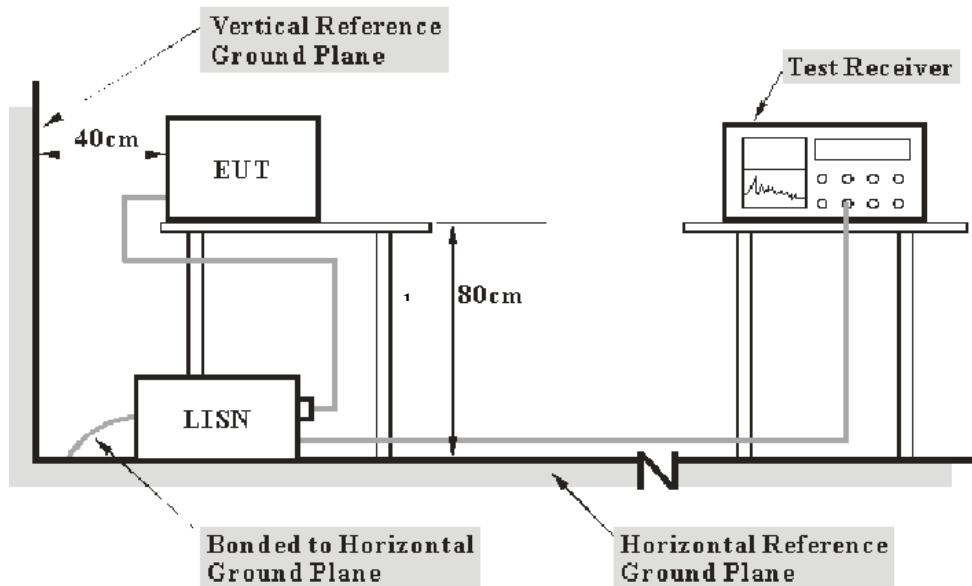
### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

### EUT Setup



- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC 15.315 and FCC 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### **Test Procedure**

During the conducted emission test, adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2013-10-15	2014-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

**14.1 dB at 1.897470 MHz in the Line conducted mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cisp}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cisp}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

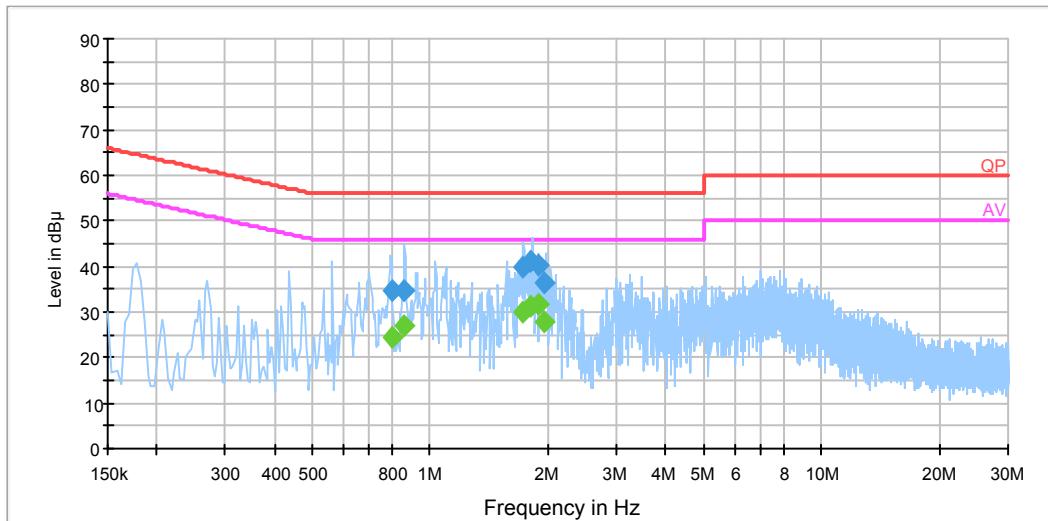
<b>Temperature:</b>	18 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Gardon Zhang on 2014-02-08.*

*Test mode: Transmitting / Charging*

**AC 120V/60 Hz, Line**

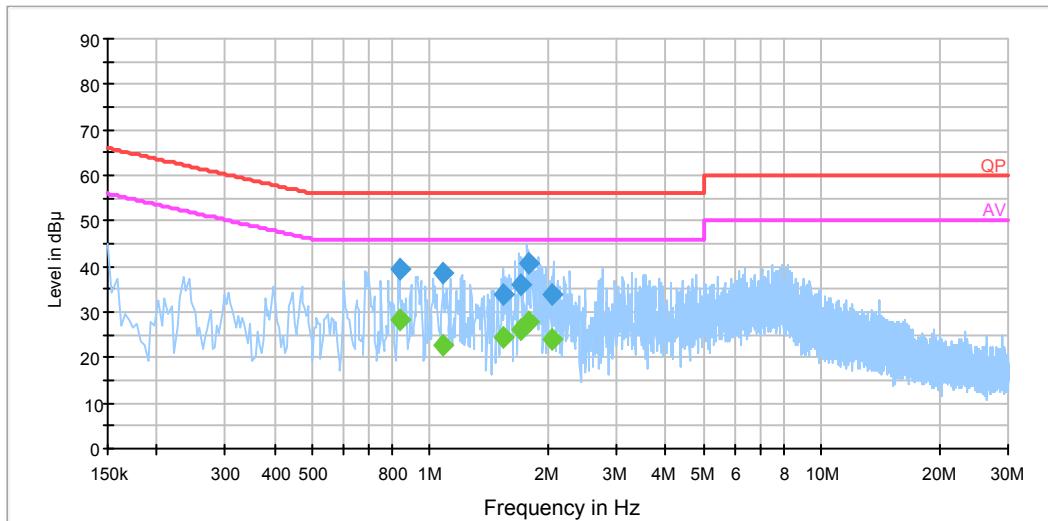
EMI Auto Test L



Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Remark (PK/QP/Ave)
0.798090	34.7	19.5	56.0	21.3	QP
0.798090	24.6	19.5	46.0	21.4	Ave.
0.853070	34.8	19.5	56.0	21.2	QP
0.853070	27.0	19.5	46.0	19.0	Ave.
1.727990	39.7	19.5	56.0	16.3	QP
1.727990	30.1	19.5	46.0	15.9	Ave.
1.802670	41.2	19.5	56.0	14.8	QP
1.802670	31.1	19.5	46.0	14.9	Ave.
1.897470	40.4	19.6	56.0	15.6	QP
1.897470	31.9	19.6	46.0	14.1	Ave.
1.964270	36.3	19.6	56.0	19.7	QP
1.964270	27.8	19.6	46.0	18.2	Ave.

**AC 120V/60 Hz, Neutral**

EMI Auto Test N



Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Remark (PK/QP/Ave)
0.837490	39.5	19.6	56.0	16.5	QP
0.837490	28.3	19.6	46.0	17.7	Ave.
1.081830	38.8	19.5	56.0	17.2	QP
1.081830	22.8	19.5	46.0	23.2	Ave.
1.530990	33.9	19.5	56.0	22.1	QP
1.530990	24.5	19.5	46.0	21.5	Ave.
1.707230	35.9	19.6	56.0	20.1	QP
1.707230	26.1	19.6	46.0	19.9	Ave.
1.779450	40.8	19.6	56.0	15.2	QP
1.779450	27.7	19.6	46.0	18.3	Ave.
2.055070	34.0	19.6	56.0	22.0	QP
2.055070	23.8	19.6	46.0	22.2	Ave.

**Note:**

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation  
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard

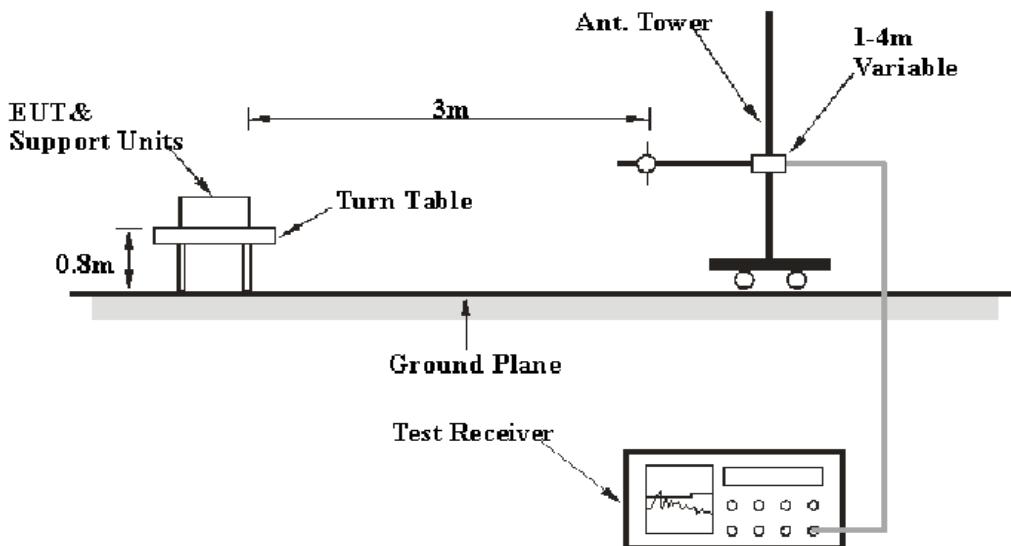
FCC §15.205; §15.209; §15.247(d)

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

### EUT Setup



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-17	2014-09-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Amplifier	ZVA-183-S+	5969001149	2013-04-03	2014-04-03
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Test software	EMC 32	V8.53	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**10.24 dB at 2483.6 MHz in the Vertical polarization**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

in BACL.,  $U_{(Lm)}$  is less than  $+ U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	20 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Gardon Zhang on 2013-12-18.*

*EUT operation mode: Transmitting*

**30 MHz -25 GHz:** (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Part 15.247/205/209	
	Reading (dB $\mu$ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	95.48	PK	212	1.4	H	5.48	100.96	/	/
2402.0	85.69	Ave.	212	1.4	H	5.48	91.17	/	/
2402.0	93.04	PK	307	1.3	V	5.48	98.52	/	/
2402.0	82.60	Ave.	307	1.3	V	5.48	88.08	/	/
2385.9	43.53	PK	304	1.4	H	5.48	49.01	74	24.99
2385.9	27.88	Ave.	304	1.4	H	5.48	33.36	54	20.64
2376.0	43.02	PK	161	1.2	H	5.48	48.50	74	25.50
2376.0	27.10	Ave.	161	1.2	H	5.48	32.58	54	21.42
2499.0	34.87	PK	224	1.4	H	7.21	42.08	74	31.92
2499.0	21.43	Ave.	224	1.4	H	7.21	28.64	54	25.36
4804.0	41.85	PK	15	1.4	V	12.44	54.29	74	19.71
4804.0	28.67	Ave.	15	1.4	V	12.44	41.11	54	12.89
7206.0	35.13	PK	80	1.2	V	17.06	52.19	74	21.81
7206.0	21.33	Ave.	80	1.2	V	17.06	38.39	54	15.61
9608.0	34.10	PK	318	1.3	H	19.28	53.38	74	20.62
9608.0	20.62	Ave.	318	1.3	H	19.28	39.90	54	14.10
Middle Channel (2441 MHz)									
2441.0	94.69	PK	140	1.3	H	6.13	100.82	/	/
2441.0	84.48	Ave.	140	1.3	H	6.13	90.61	/	/
2441.0	92.79	PK	112	1.4	V	6.13	98.92	/	/
2441.0	82.68	Ave.	112	1.4	V	6.13	88.81	/	/
2372.5	36.36	PK	79	1.5	V	5.48	41.84	74	32.16
2372.5	23.02	Ave.	79	1.5	V	5.48	28.50	54	25.50
2488.5	35.06	PK	234	1.5	H	7.21	42.27	74	31.73
2488.5	20.03	Ave.	234	1.5	H	7.21	27.24	54	26.76
2492.2	35.69	PK	81	1.3	H	7.21	42.90	74	31.10
2492.2	20.52	Ave.	81	1.3	H	7.21	27.73	54	26.27
4882.0	38.56	PK	172	1.3	V	12.4	50.96	74	23.04
4882.0	26.03	Ave.	172	1.3	V	12.4	38.43	54	15.57
7323.0	34.82	PK	300	1.4	V	16.49	51.31	74	22.69
7323.0	20.42	Ave.	300	1.4	V	16.49	36.91	54	17.09
9764.0	34.18	PK	130	1.4	H	19.4	53.58	74	20.42
9764.0	19.86	Ave.	130	1.4	H	19.4	39.26	54	14.74

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Part 15.247/205/209	
	Reading (dB $\mu$ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB $\mu$ V/m)	Margin (dB)
High Channel (2480 MHz)									
2480.0	94.15	PK	100	1.2	H	7.21	101.36	/	/
2480.0	84.08	Ave.	100	1.2	H	7.21	91.29	/	/
2480.0	91.84	PK	306	1.3	V	7.21	99.05	/	/
2480.0	82.12	Ave.	306	1.3	V	7.21	89.33	/	/
2388.7	35.62	PK	293	1.5	V	5.48	41.10	74	32.90
2388.7	23.02	Ave.	293	1.5	V	5.48	28.50	54	25.50
2483.6	53.74	PK	337	1.3	V	7.21	60.95	74	13.05
2483.6	36.55	Ave.	337	1.3	V	7.21	43.76	54	10.24
2495.8	40.05	PK	228	1.2	V	7.21	47.26	74	26.74
2495.8	25.52	Ave.	228	1.2	V	7.21	32.73	54	21.27
4960.0	40.30	PK	7	1.3	H	12.5	52.80	74	21.20
4960.0	28.73	Ave.	7	1.3	H	12.5	41.23	54	12.77
7440.0	35.42	PK	155	1.4	H	15.9	51.32	74	22.68
7440.0	21.54	Ave.	155	1.4	H	15.9	37.44	54	16.56
9920.0	34.61	PK	162	1.2	V	19.39	54.00	74	20.00
9920.0	20.00	Ave.	162	1.2	V	19.39	39.39	54	14.61

Note: Below 1GHz, the data which is 20dB below the limit was not recorded.

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

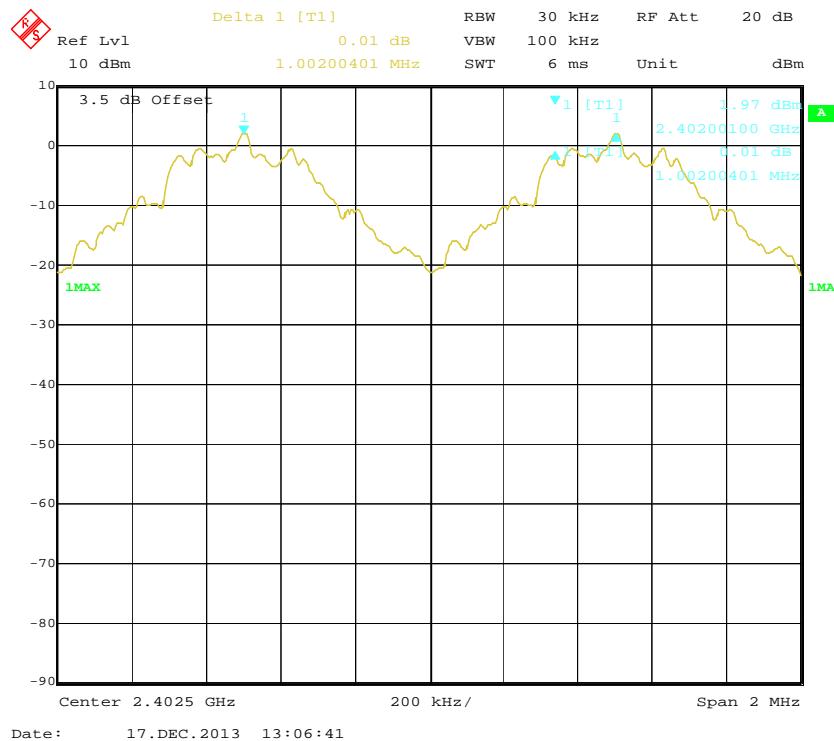
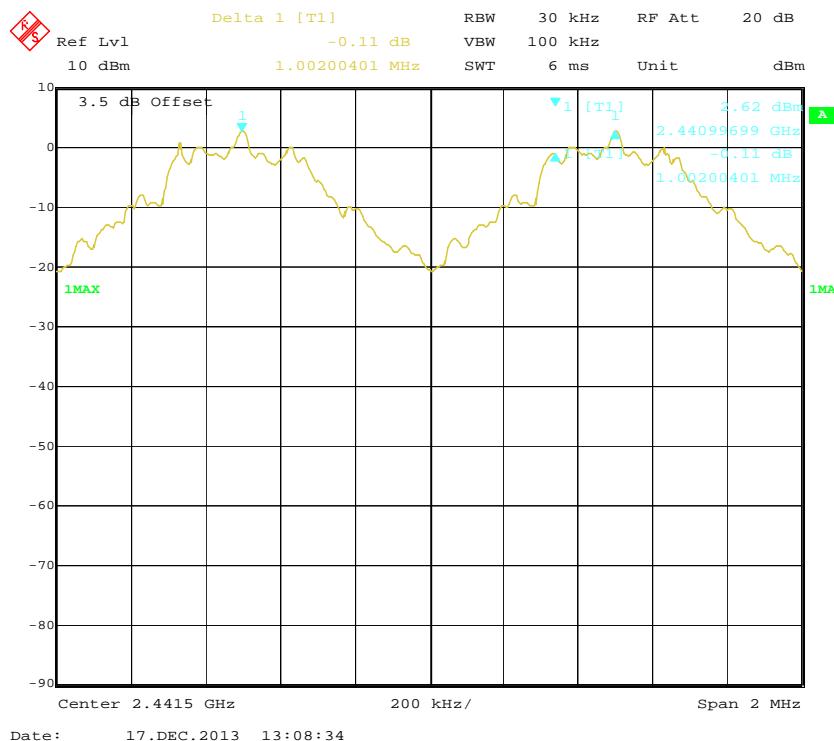
The testing was performed by Gardon Zhang on 2013-12-17.

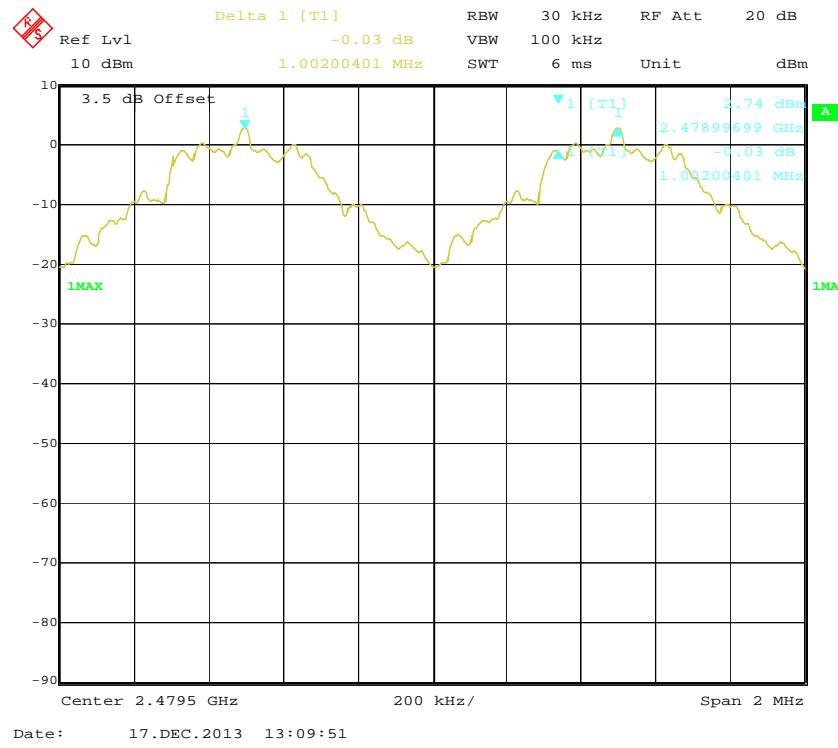
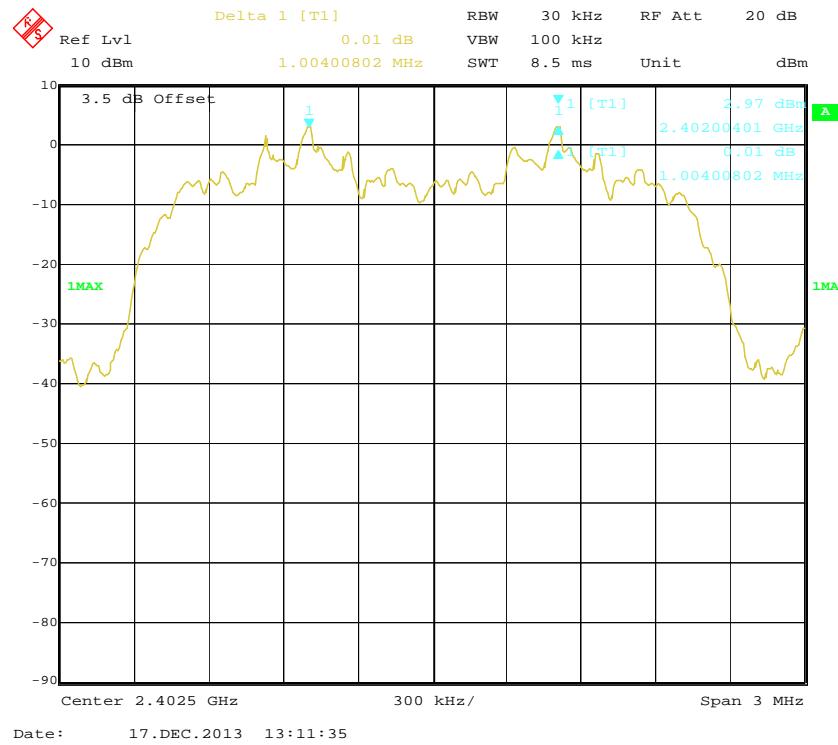
EUT operation mode: Transmitting

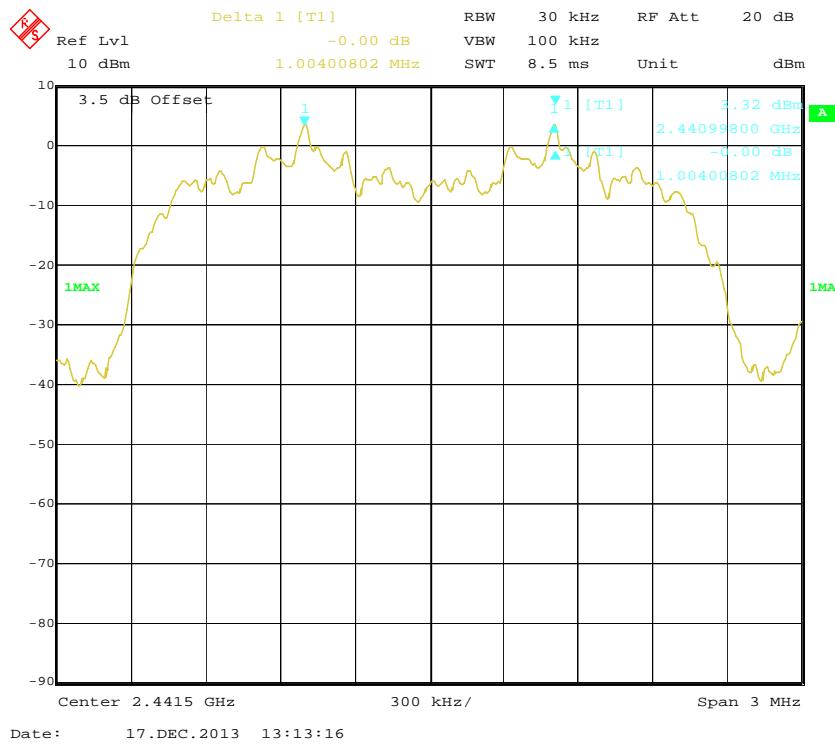
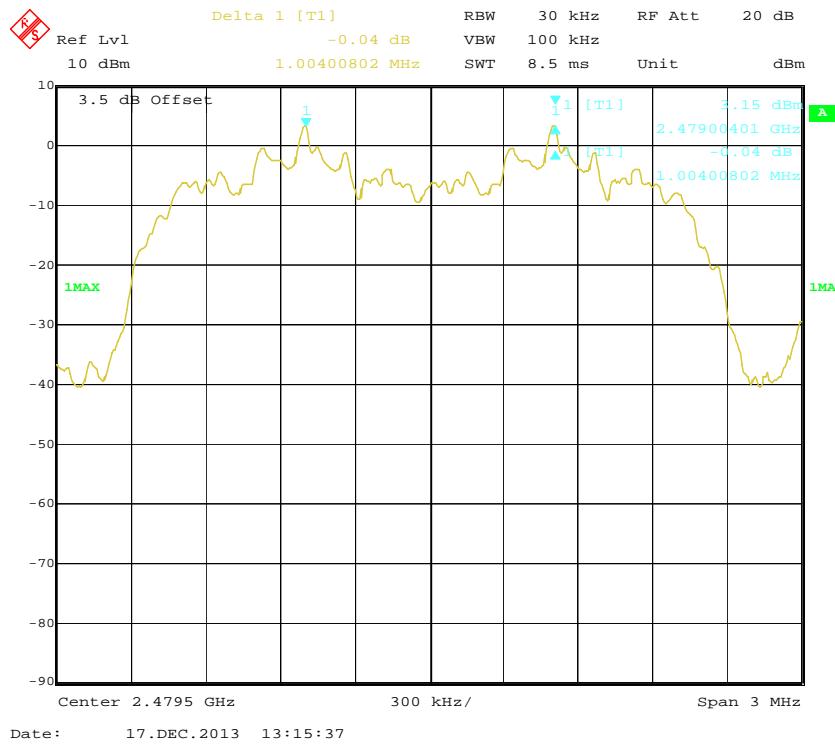
Test Result: Compliance. Please refer to following tables and plots

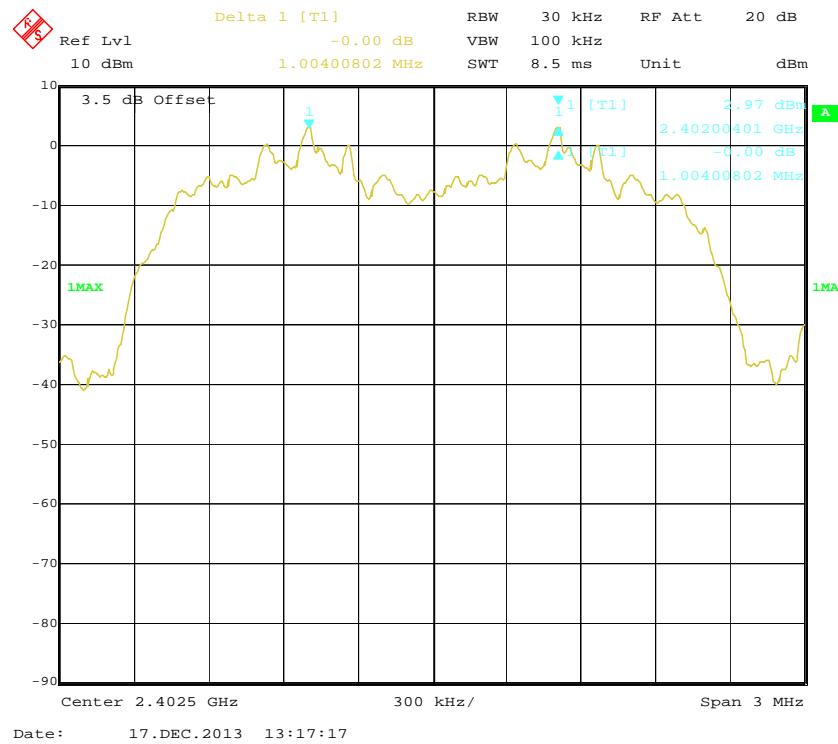
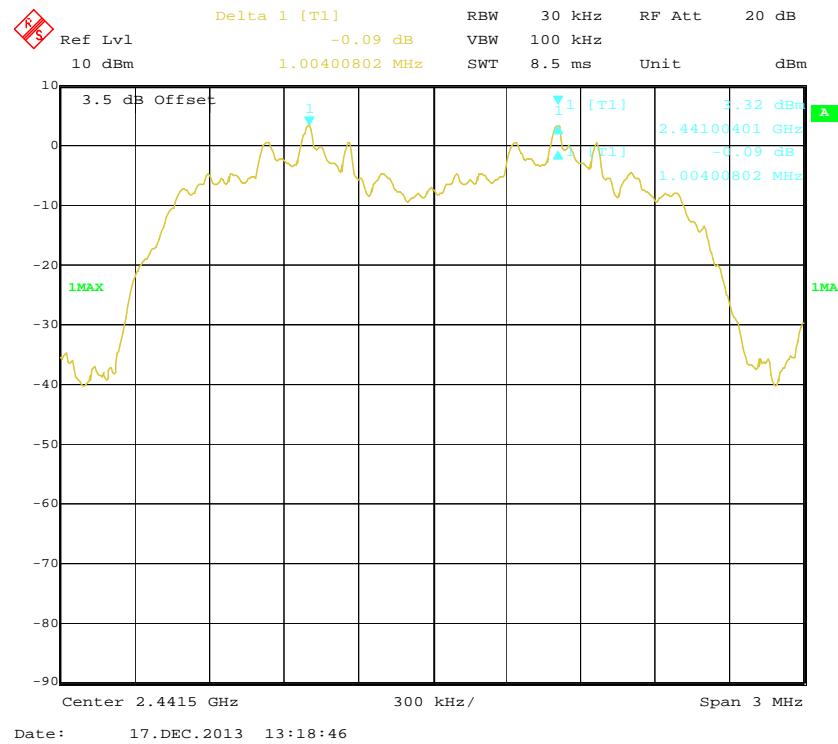
Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.002	0.620	Pass
	Adjacent	2403			
	Middle	2441			
	Adjacent	2442	1.002	0.620	Pass
	High	2480			
	Adjacent	2479			
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.004	0.825	Pass
	Adjacent	2403			
	Middle	2441			
	Adjacent	2442	1.004	0.825	Pass
	High	2480			
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.823	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.823	Pass
	Adjacent	2442			
	High	2480	1.004	0.823	Pass
	Adjacent	2479			

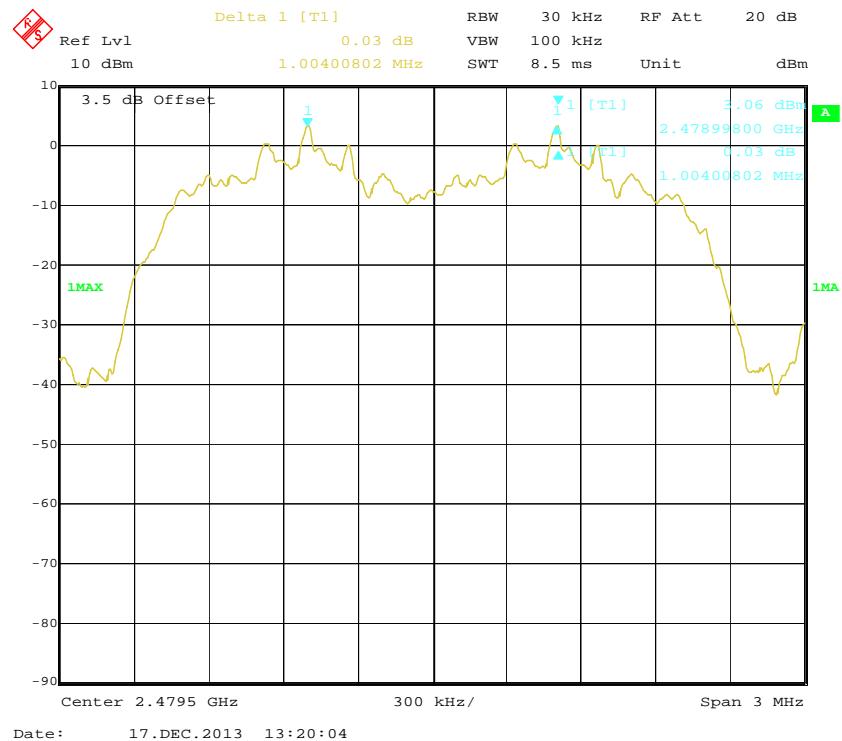
Note: Limit = 20 dB bandwidth \*2/3

**BDR (GFSK): Low Channel****BDR (GFSK): Middle Channel**

**BDR (GFSK): High Channel****EDR ( $\pi/4$ -DQPSK): Low Channel**

**EDR ( $\pi/4$ -DQPSK): Middle Channel****EDR ( $\pi/4$ -DQPSK): High Channel**

**EDR (8DPSK): Low Channel****EDR (8DPSK): Middle Channel**

**EDR (8DPSK): High Channel**

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

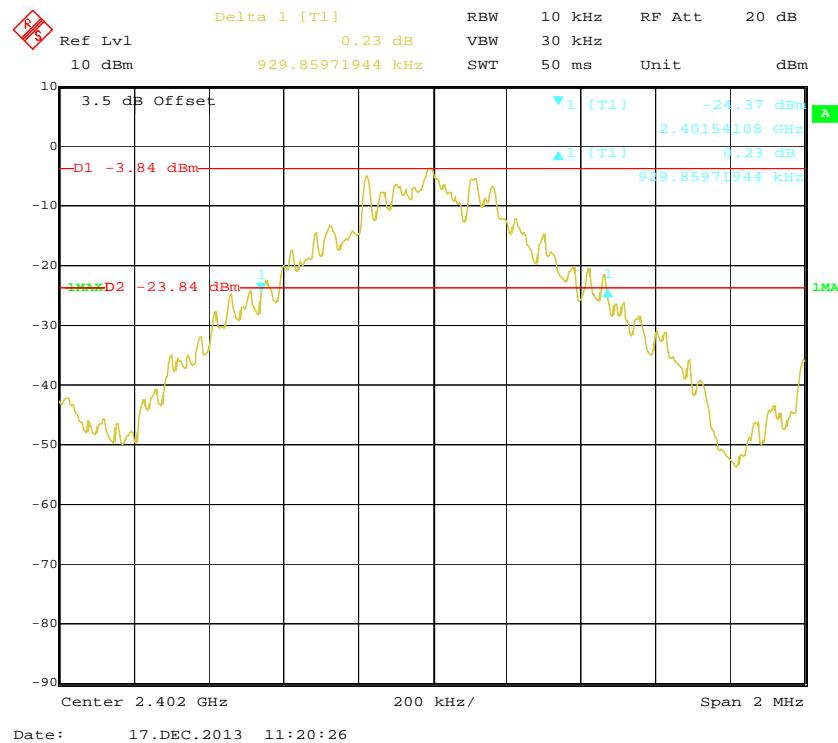
The testing was performed by Gardon Zhang on 2013-12-17.

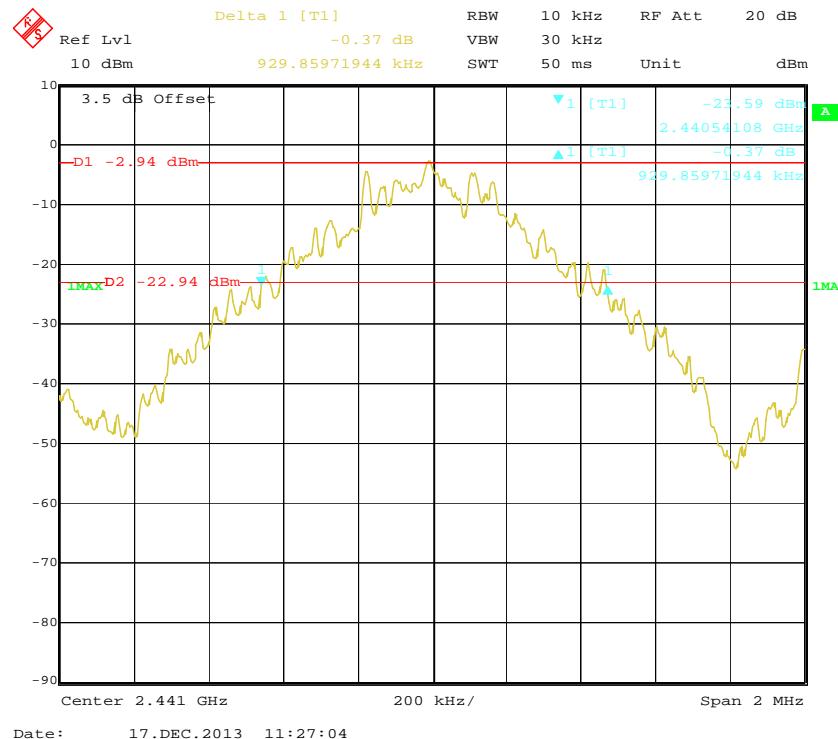
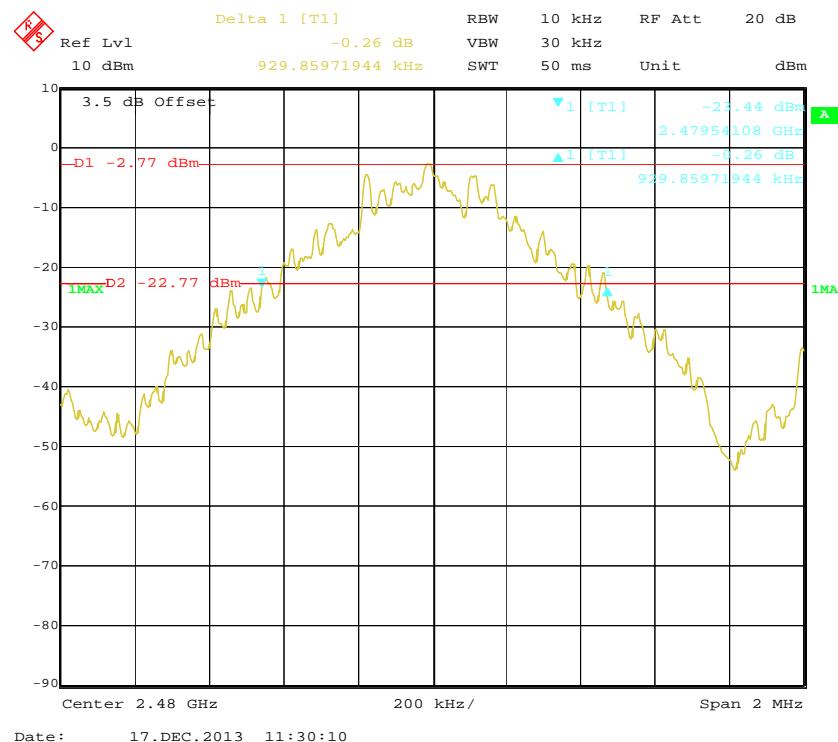
EUT operation mode: Transmitting

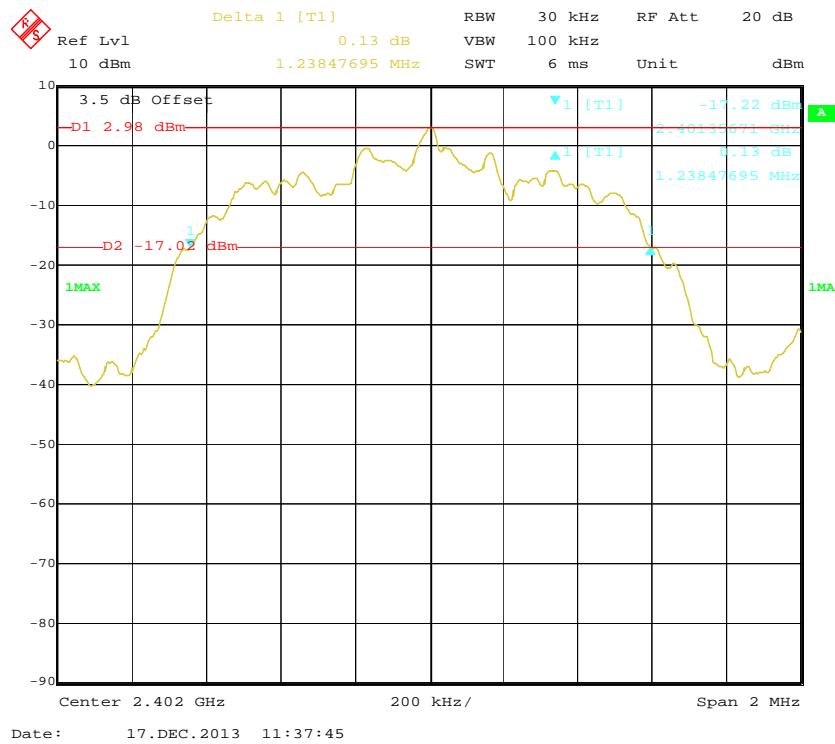
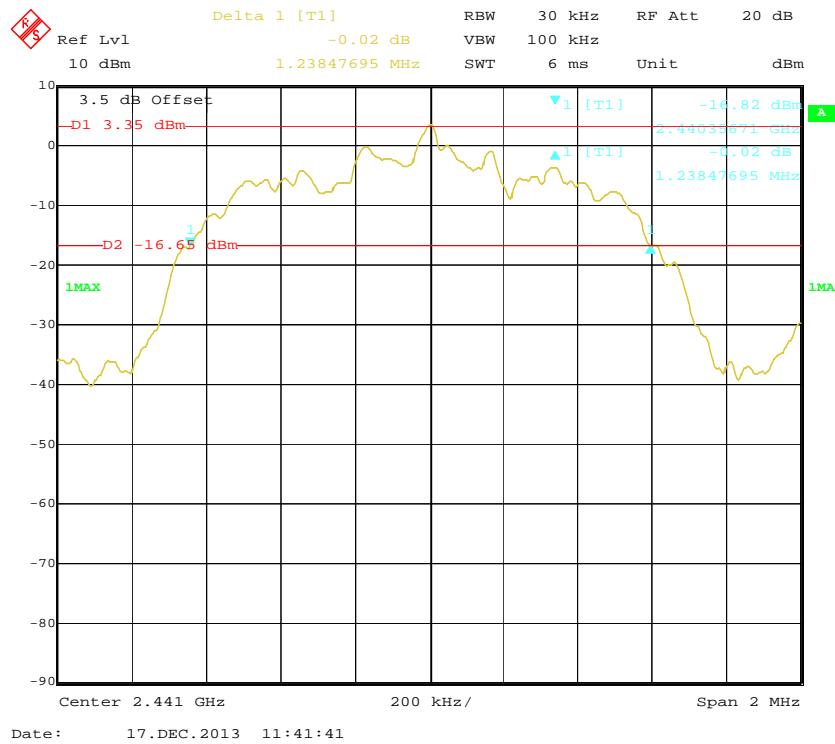
Test Result: Compliance. Please refer to following tables and plots

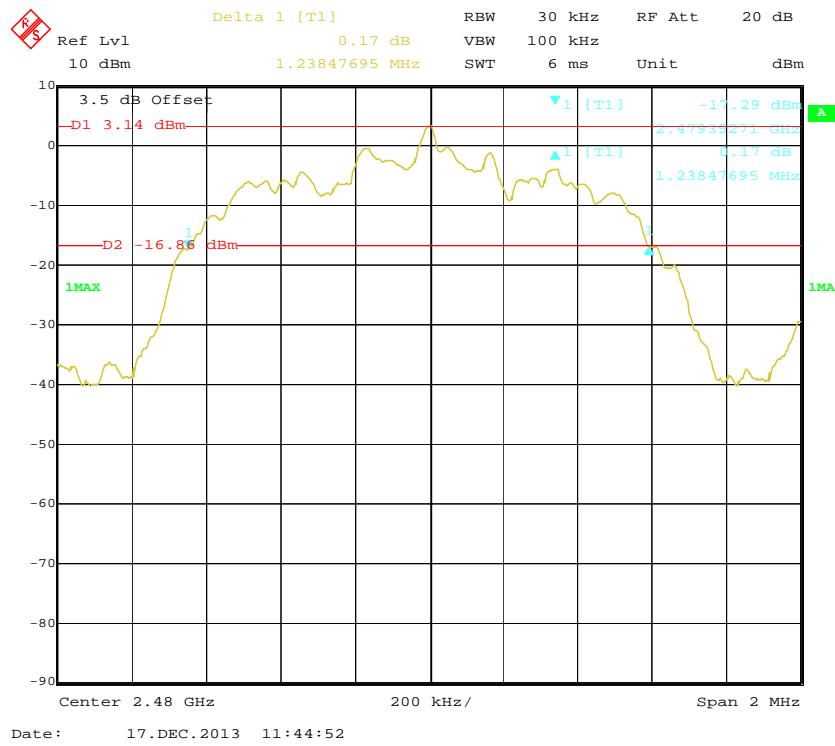
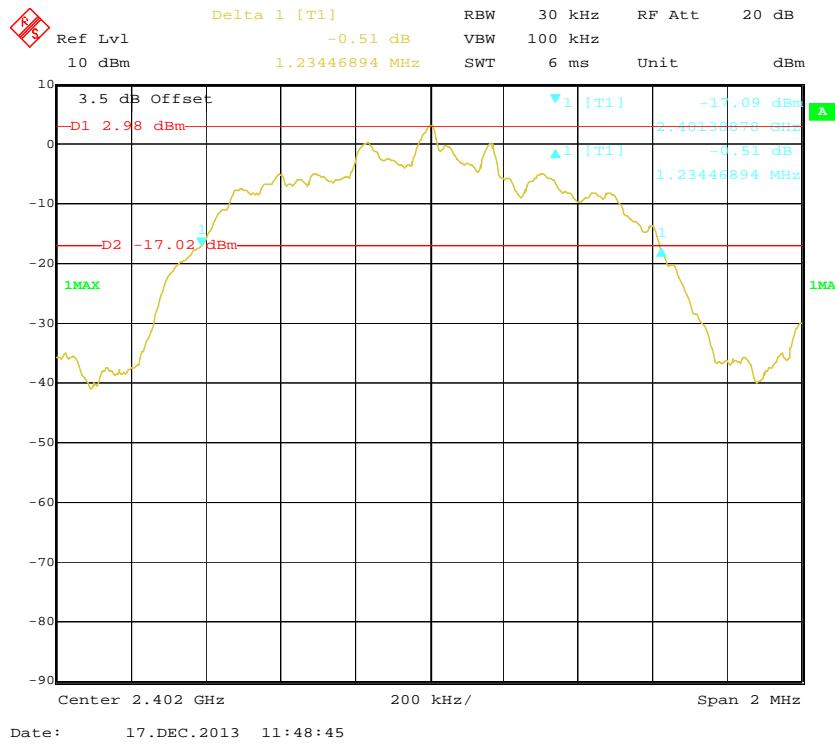
Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.930
	Middle	2441	0.930
	High	2480	0.930
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.238
	Middle	2441	1.238
	High	2480	1.238
EDR (8DPSK)	Low	2402	1.234
	Middle	2441	1.234
	High	2480	1.234

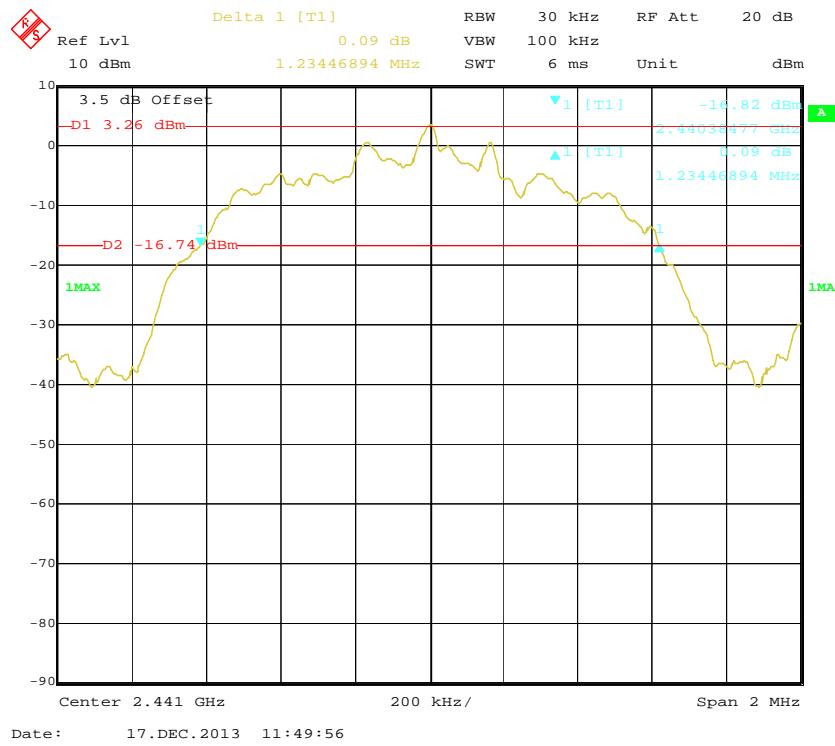
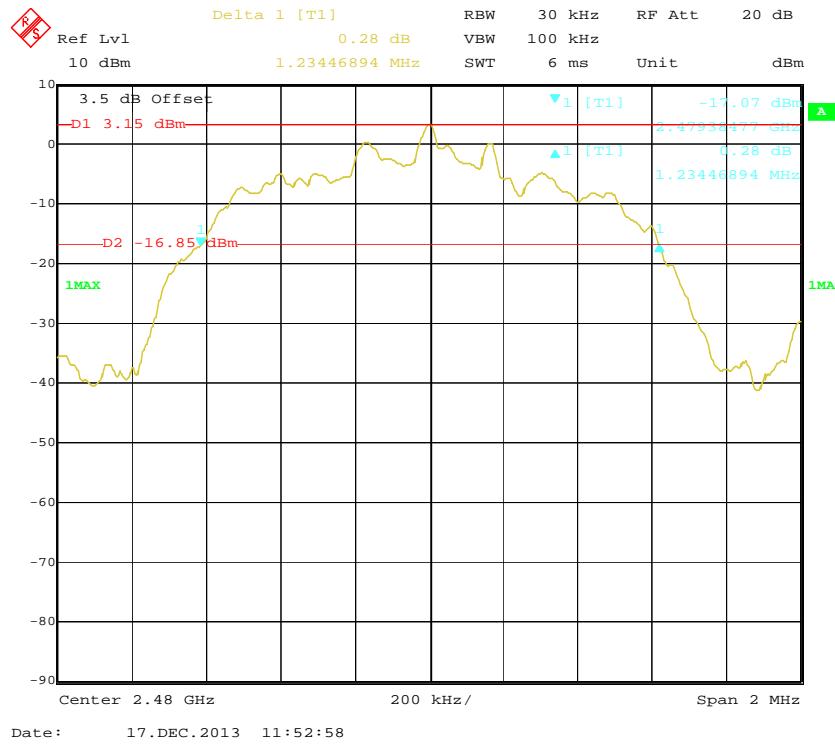
### BDR (GFSK): Low Channel



**BDR (GFSK): Middle Channel****BDR (GFSK): High Channel**

**EDR ( $\pi/4$ -DQPSK): Low Channel****EDR ( $\pi/4$ -DQPSK): Middle Channel**

**EDR ( $\pi/4$ -DQPSK): High Channel****EDR (8DPSK): Low Channel**

**EDR (8DPSK): Middle Channel****EDR (8DPSK): High Channel**

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

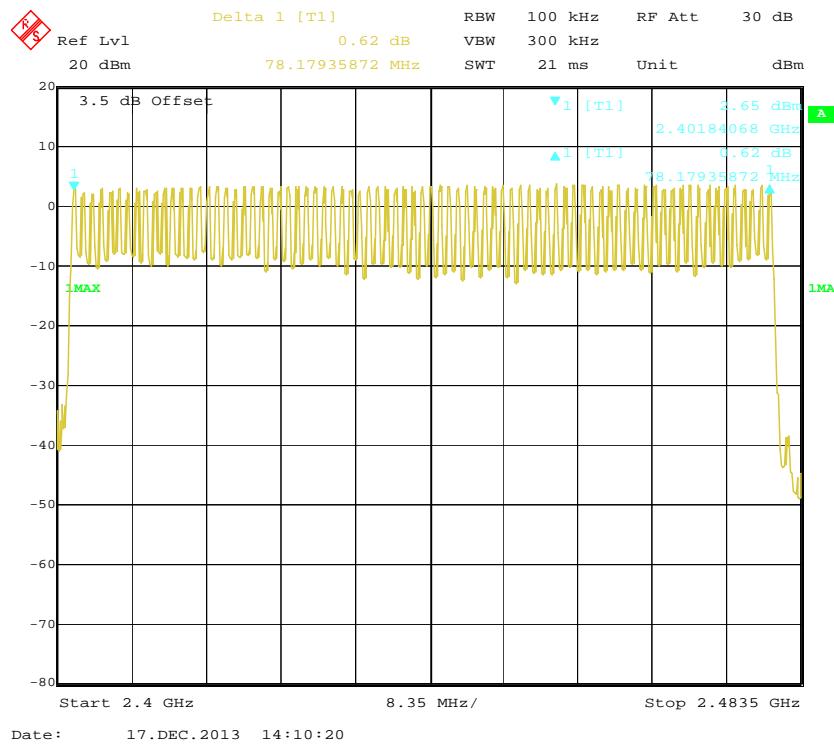
The testing was performed by Gardon Zhang on 2013-12-17.

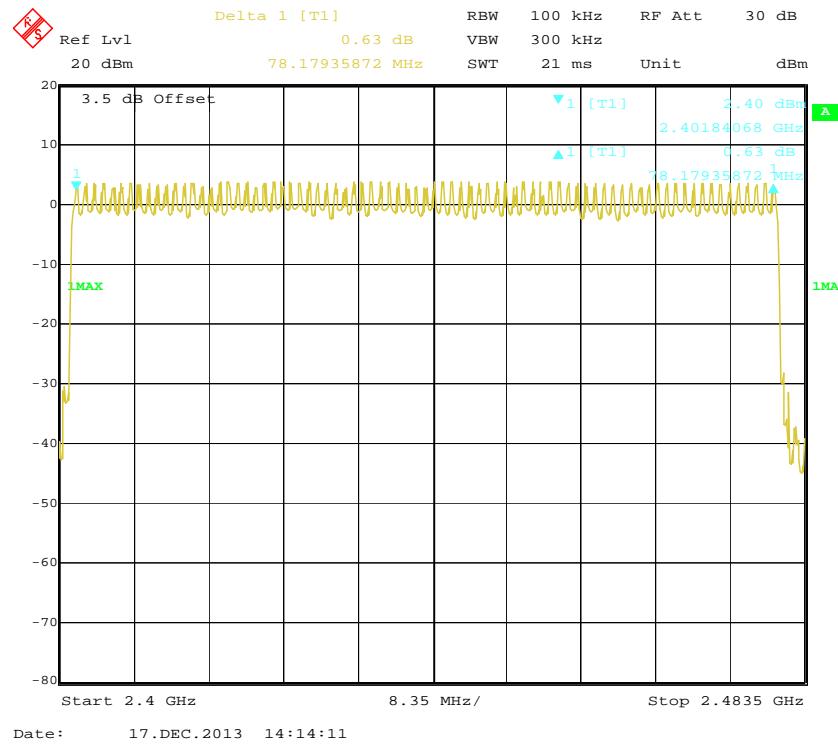
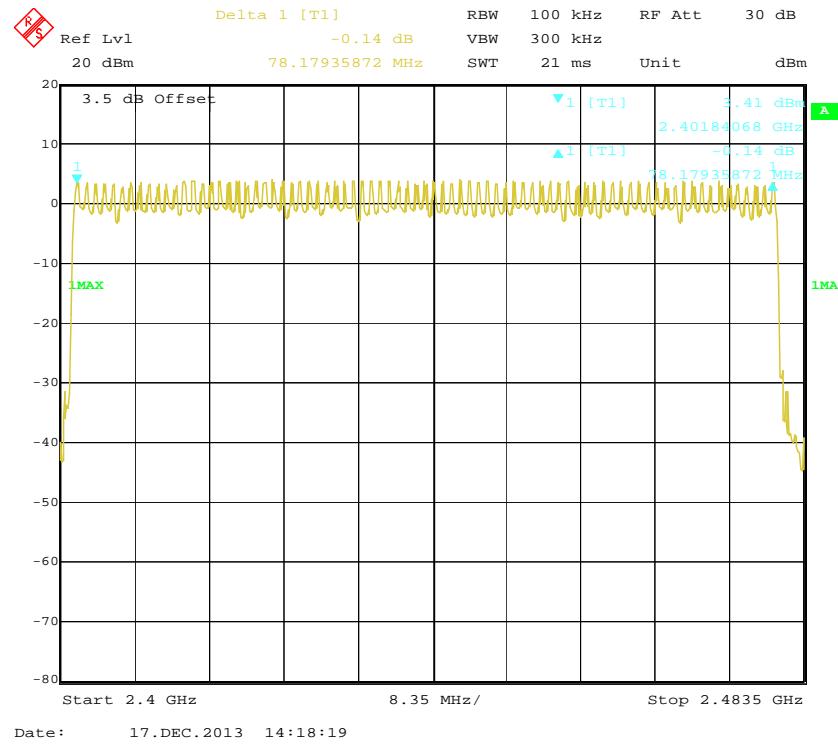
EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ( $\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

### BDR (GFSK): Number of Hopping Channels



**EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels****EDR (8DPSK): Number of Hopping Channels**

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

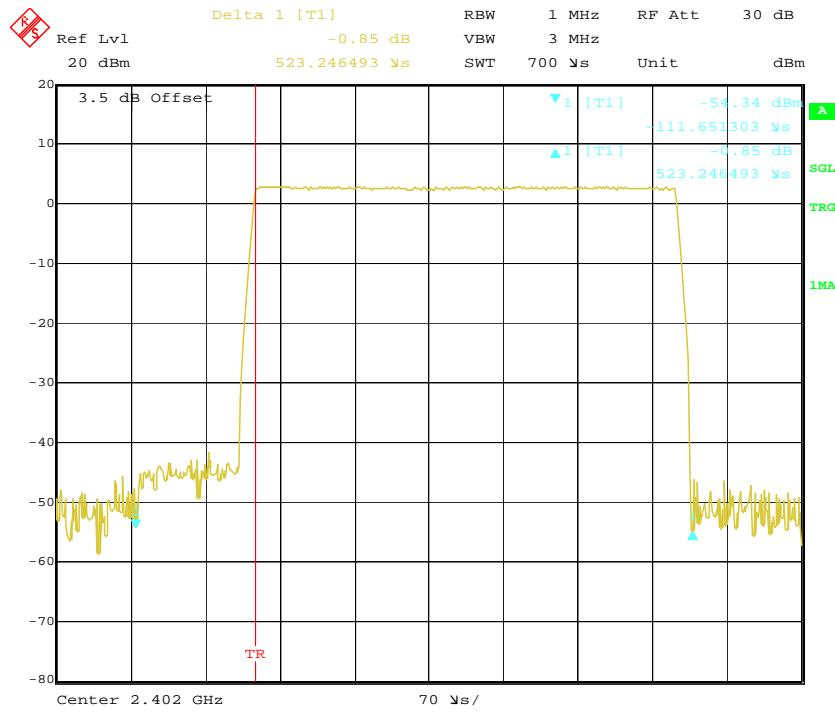
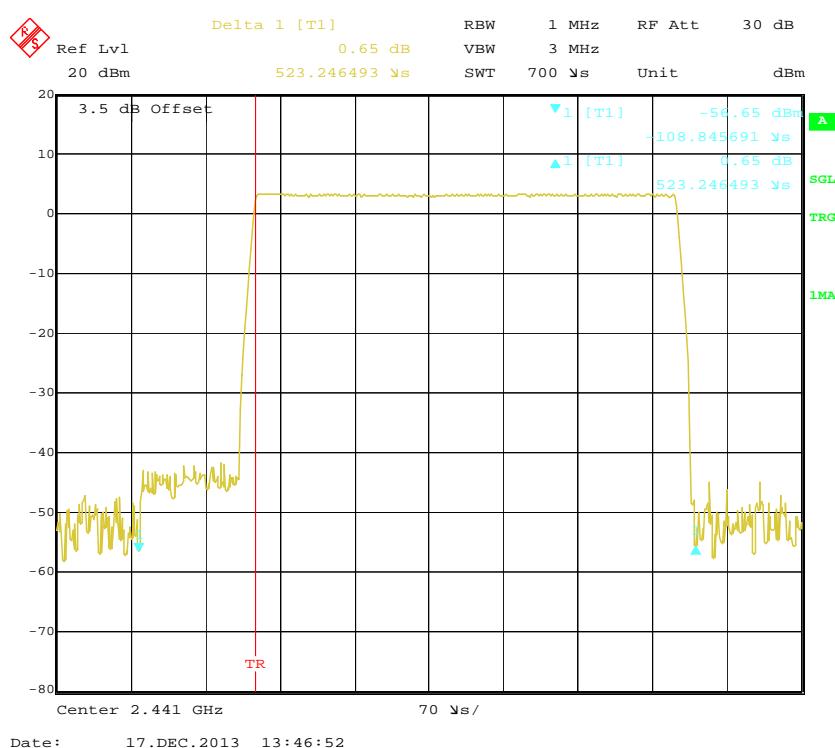
Temperature:	20 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

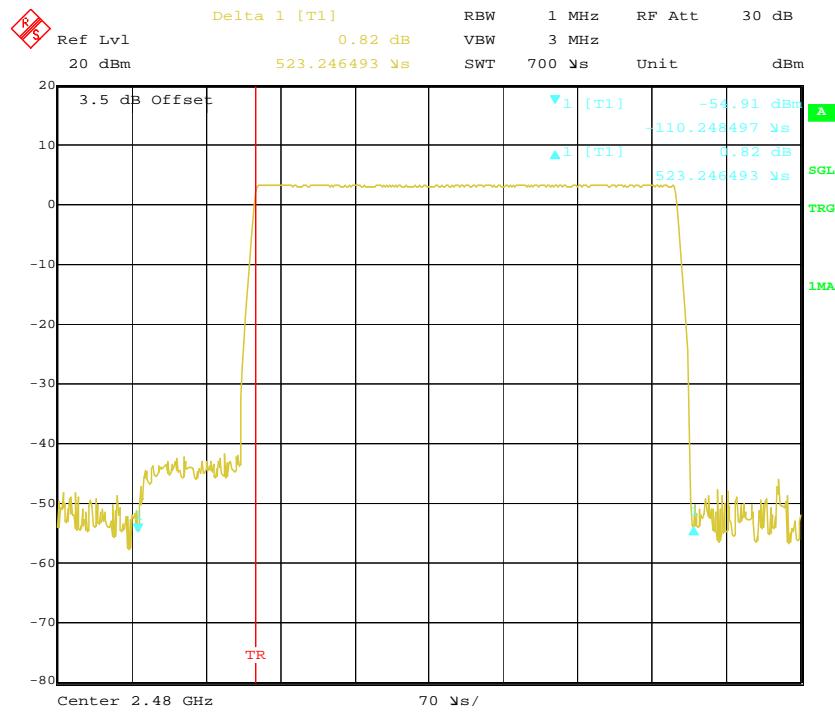
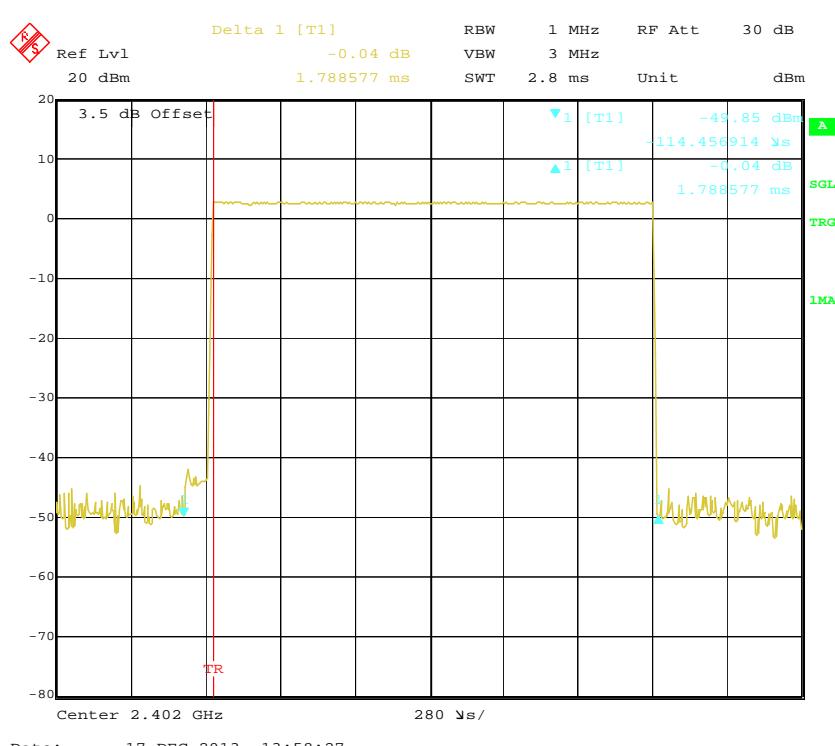
*The testing was performed by Gardon Zhang on 2013-12-17.*

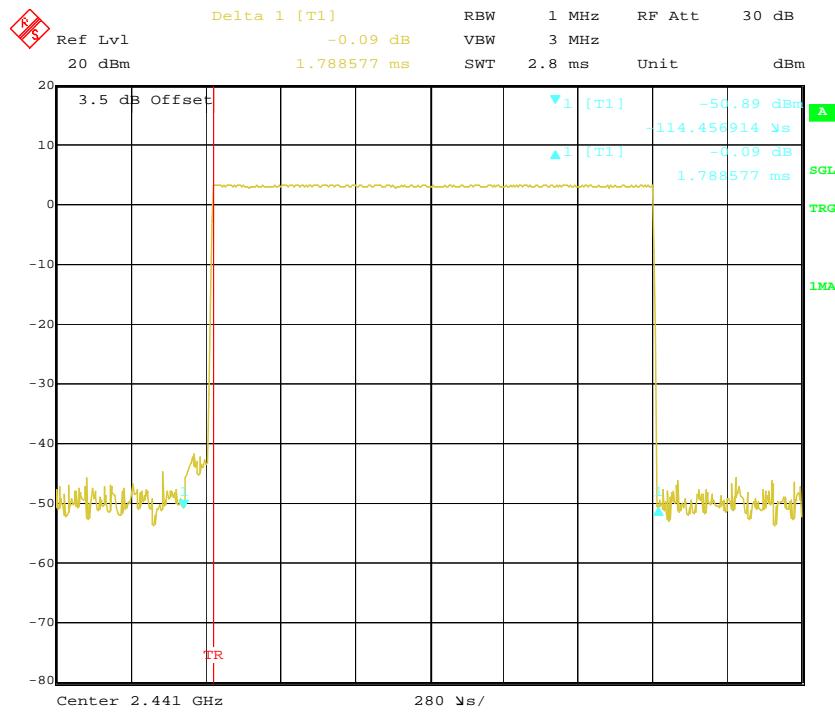
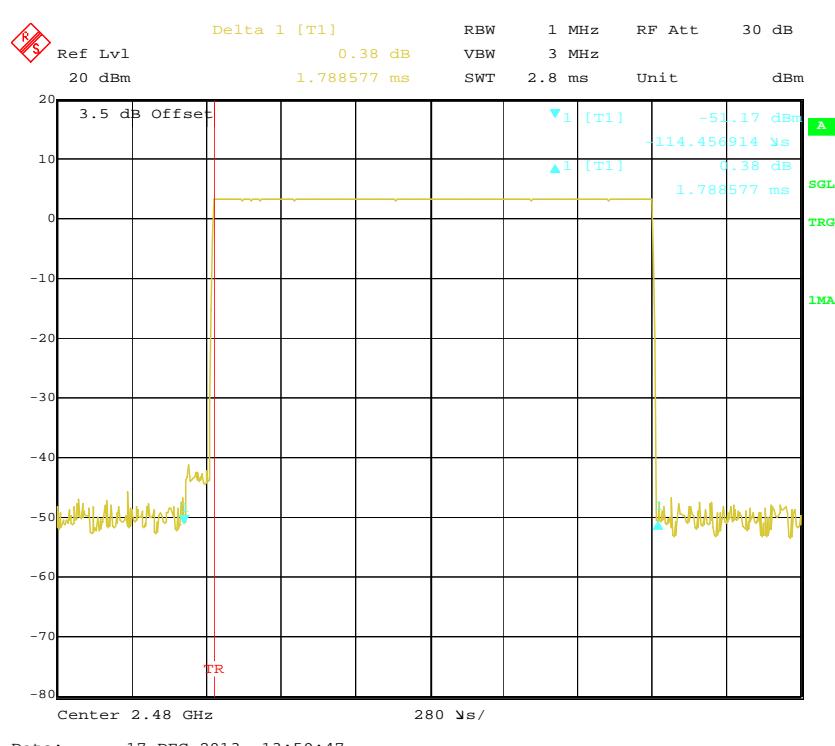
*EUT operation mode: Transmitting*

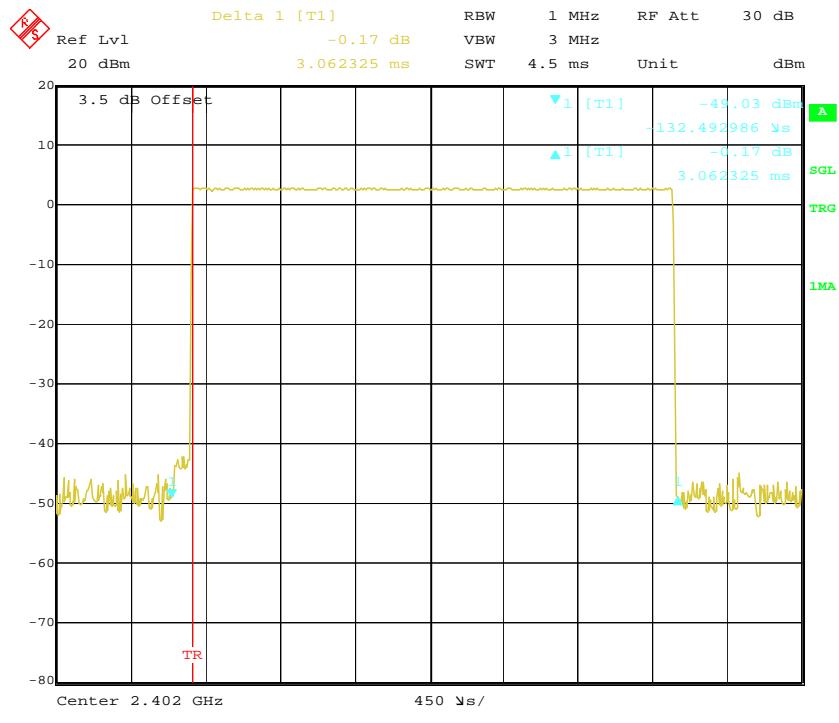
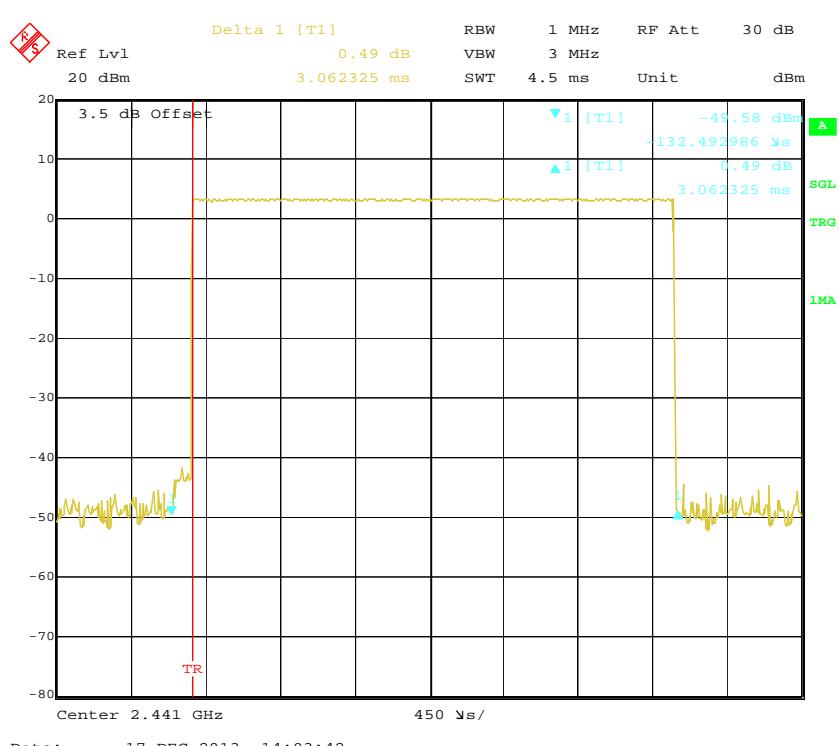
*Test Result: Compliance. Please refer to following tables and plots*

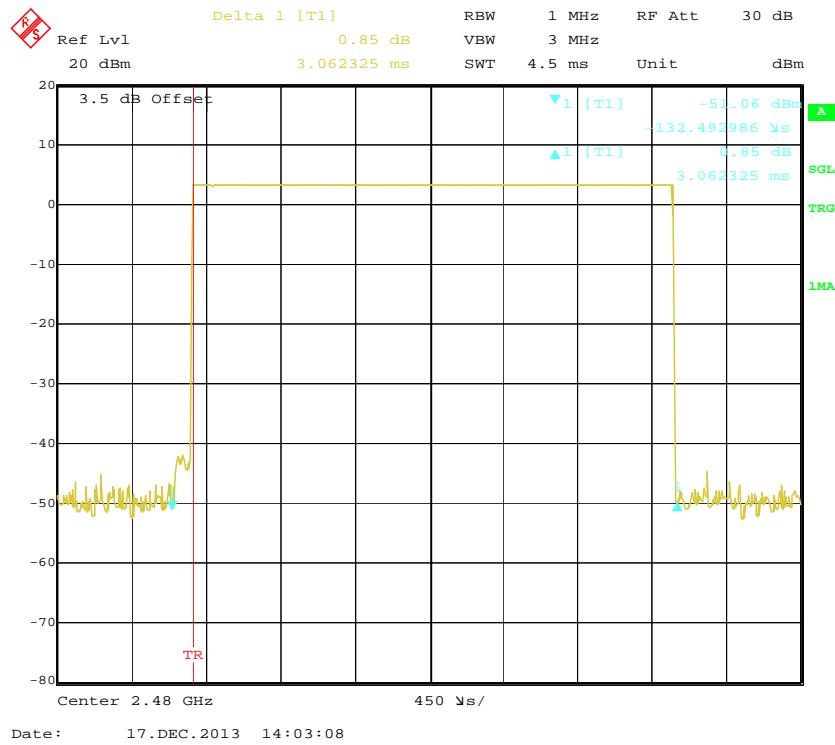
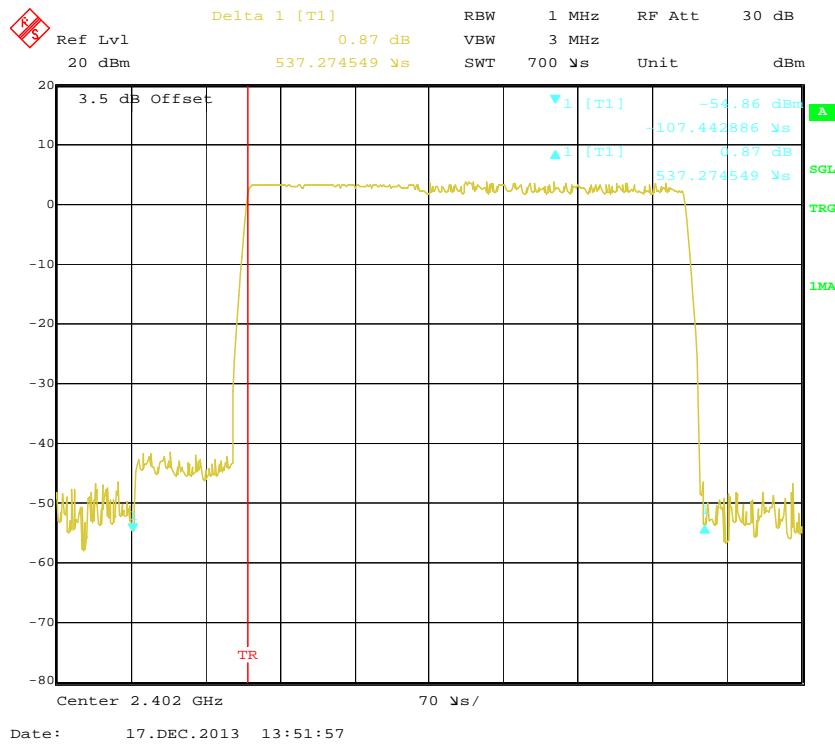
Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.5232	0.1674	0.4	Pass
		Middle	0.5232	0.1674	0.4	Pass
		High	0.5232	0.1674	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	DH 3	Low	1.7886	0.2862	0.4	Pass
		Middle	1.7886	0.2862	0.4	Pass
		High	1.7886	0.2862	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	DH 5	Low	3.0623	0.3266	0.4	Pass
		Middle	3.0623	0.3266	0.4	Pass
		High	3.0623	0.3266	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
EDR (π/4-DQPSK)	DH 1	Low	0.5373	0.1719	0.4	Pass
		Middle	0.5373	0.1719	0.4	Pass
		High	0.5373	0.1719	0.4	Pass
	Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	DH 3	Low	1.7998	0.2880	0.4	Pass
		Middle	1.7998	0.2880	0.4	Pass
		High	1.7998	0.2880	0.4	Pass
	Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	DH 5	Low	3.0623	0.3266	0.4	Pass
		Middle	3.0623	0.3266	0.4	Pass
		High	3.0623	0.3266	0.4	Pass
	Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
EDR (8DPSK)	DH 1	Low	0.5373	0.1719	0.4	Pass
		Middle	0.5373	0.1719	0.4	Pass
		High	0.5373	0.1719	0.4	Pass
	Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	DH 3	Low	1.7998	0.2880	0.4	Pass
		Middle	1.7998	0.2880	0.4	Pass
		High	1.7998	0.2880	0.4	Pass
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	DH 5	Low	3.0623	0.3266	0.4	Pass
		Middle	3.0623	0.3266	0.4	Pass
		High	3.0623	0.3266	0.4	Pass
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					

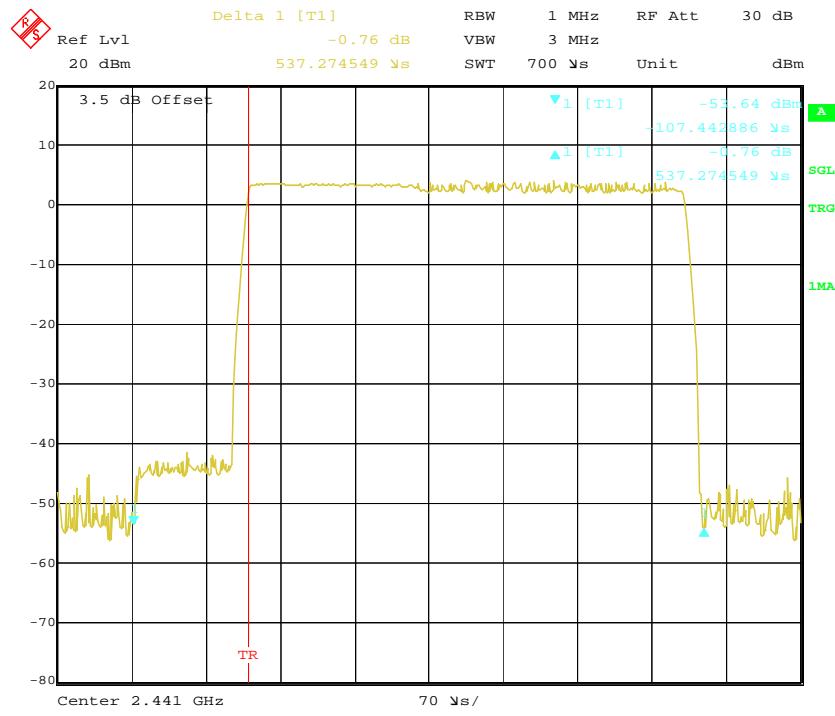
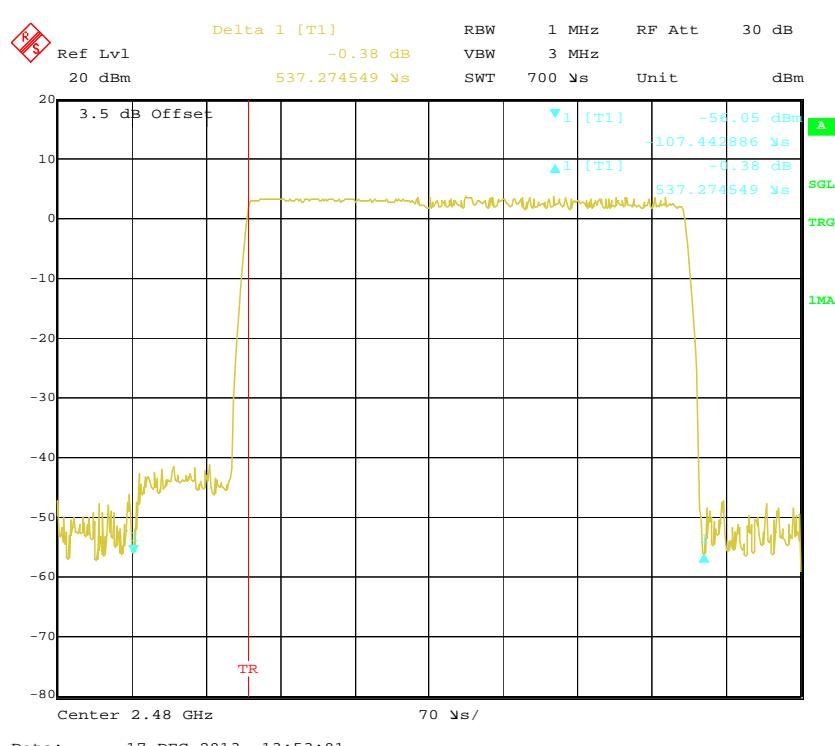
**BDR (GFSK):****Pulse time, Low Channel, DH1****Pulse time, Middle Channel, DH1**

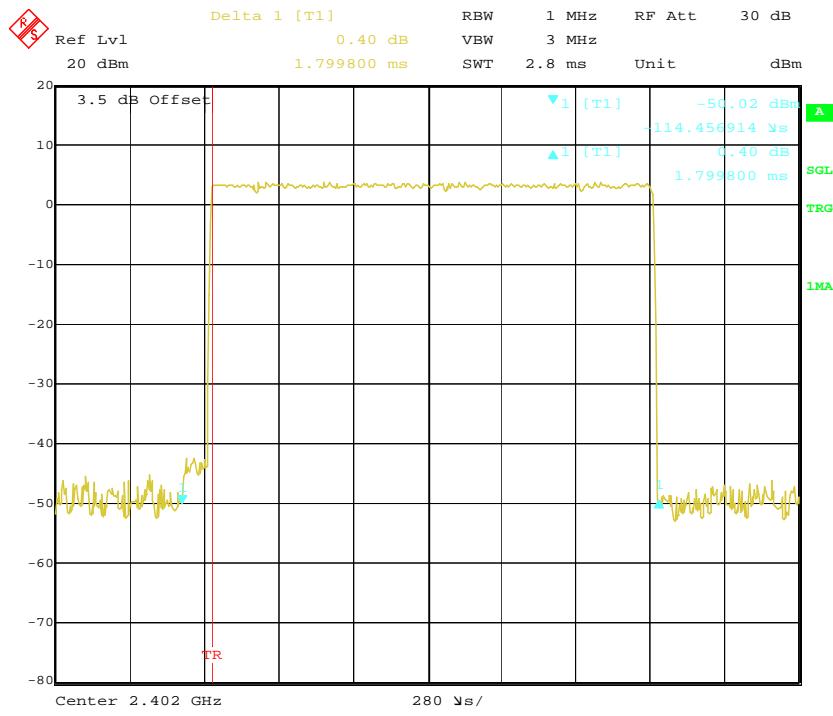
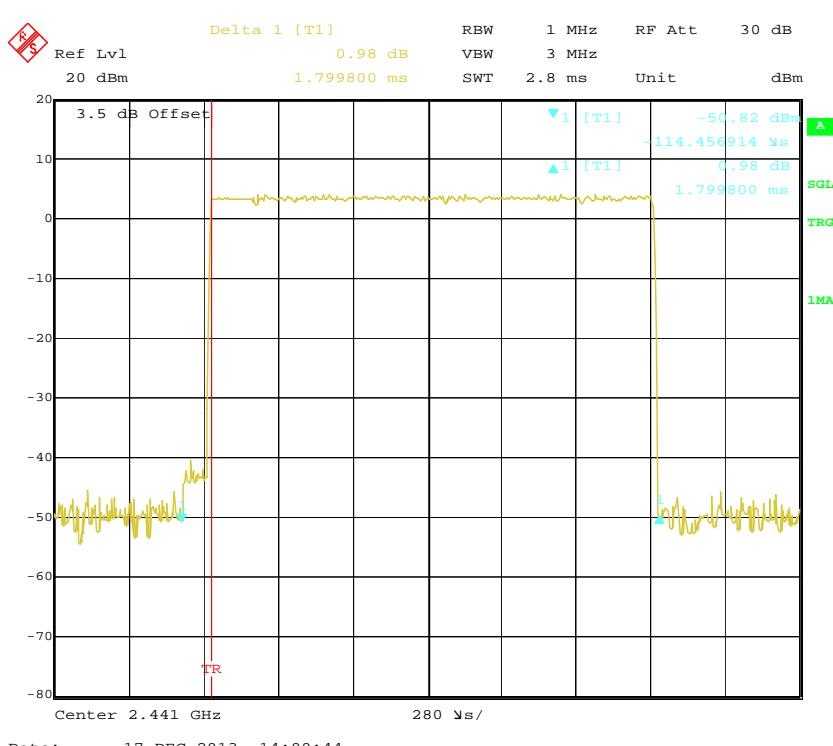
**Pulse time, High Channel, DH1****Pulse time, Low Channel, DH3**

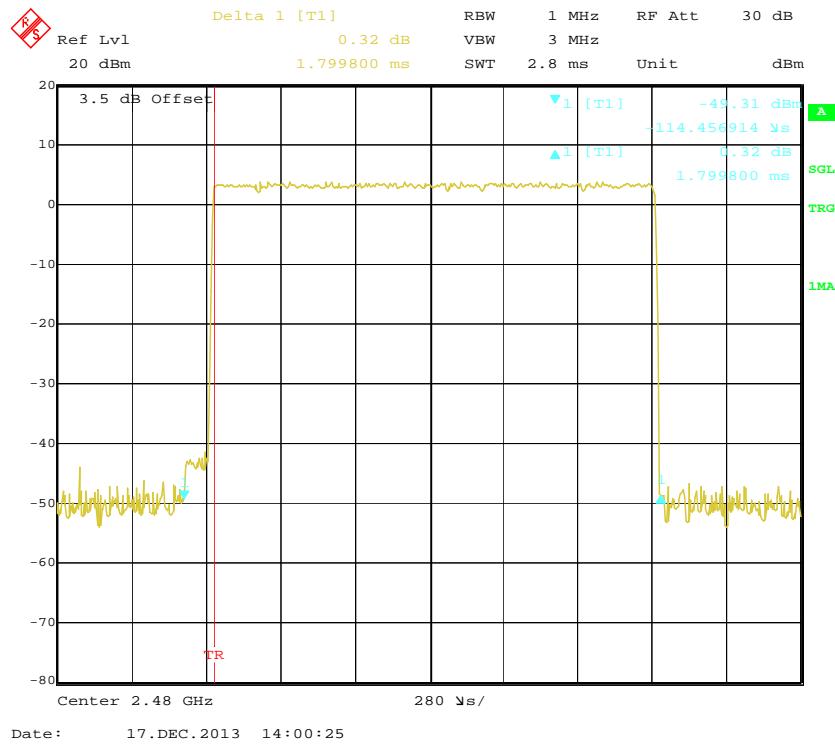
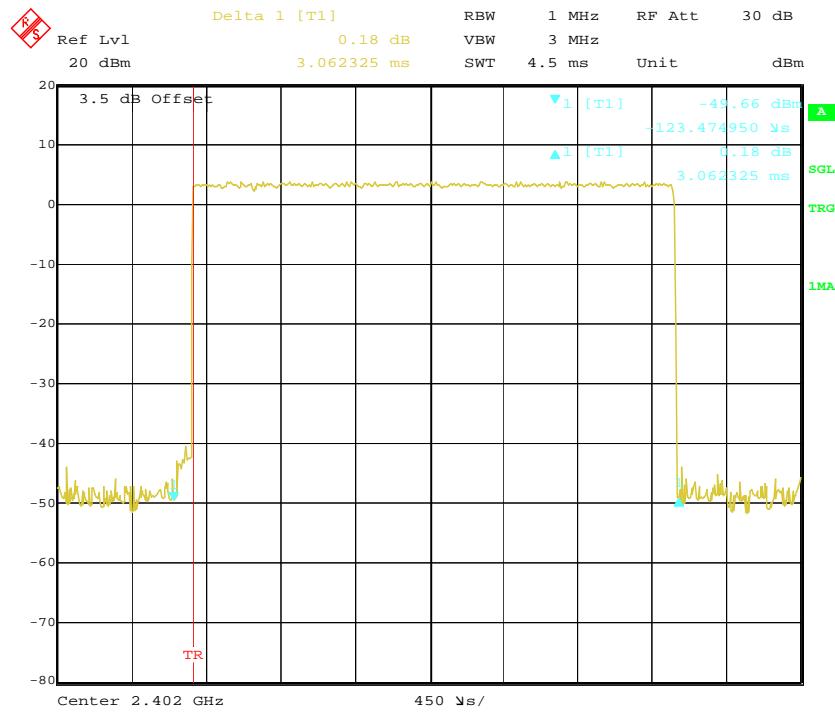
**Pulse time, Middle Channel, DH3****Pulse time, High Channel, DH3**

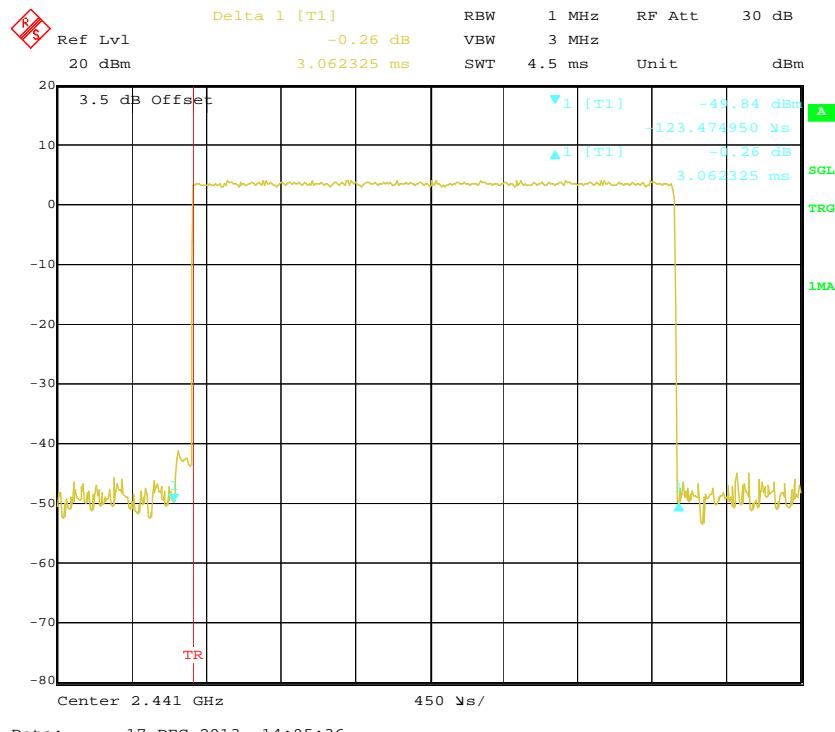
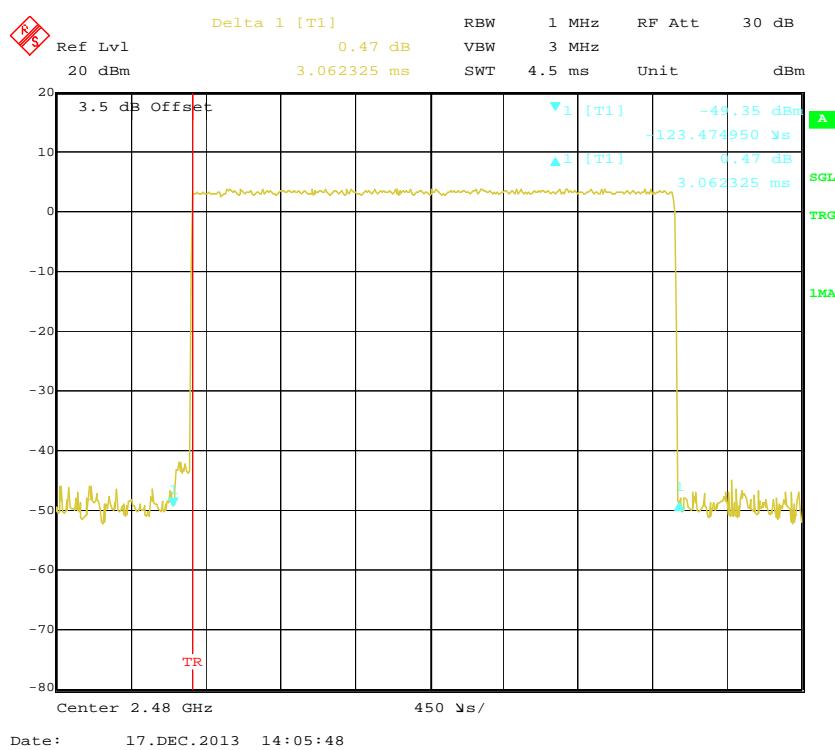
**Pulse time, Low Channel, DH5****Pulse time, Middle Channel, DH5**

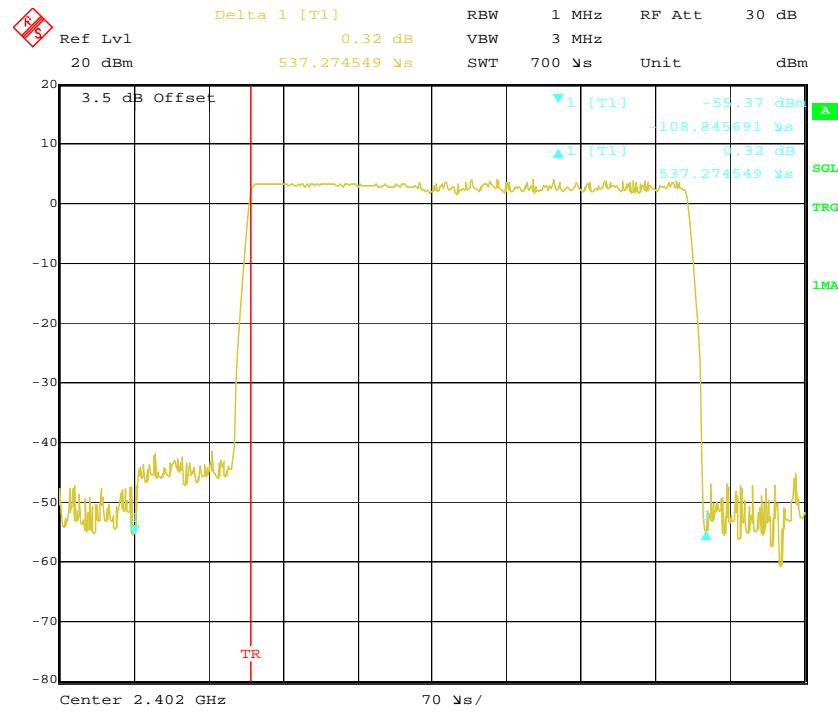
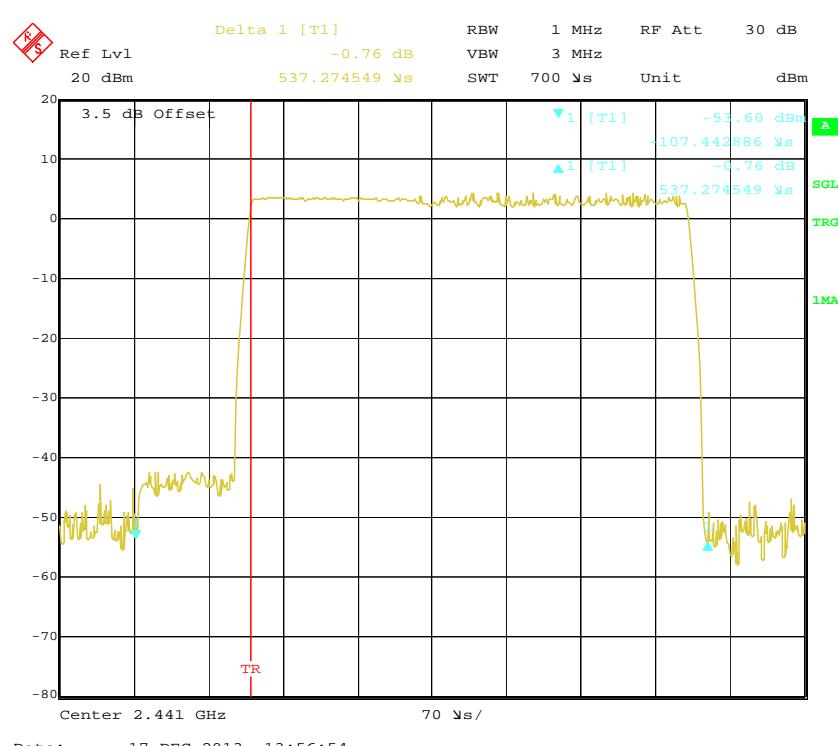
**Pulse time, High Channel, DH5****EDR ( $\pi/4$ -DQPSK):****Pulse time, Low Channel, 2DH1**

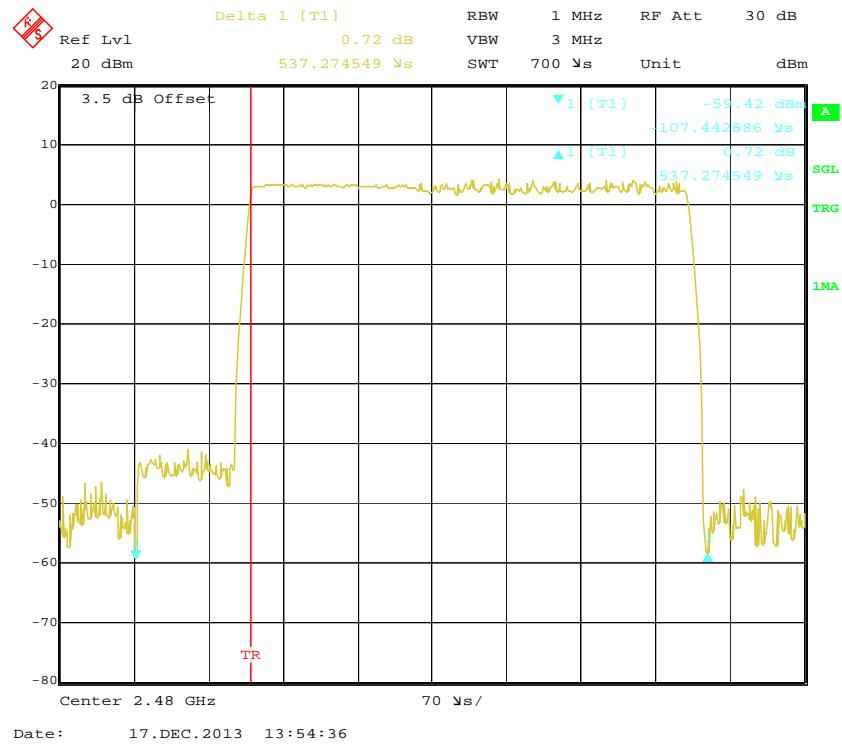
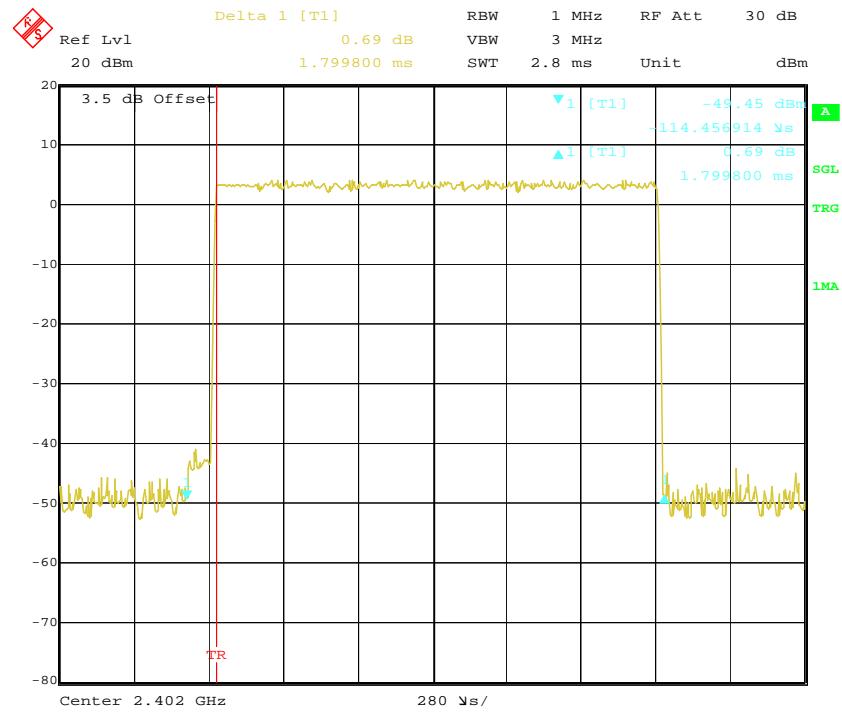
**Pulse time, Middle Channel, 2DH1****Pulse time, High Channel, 2DH1**

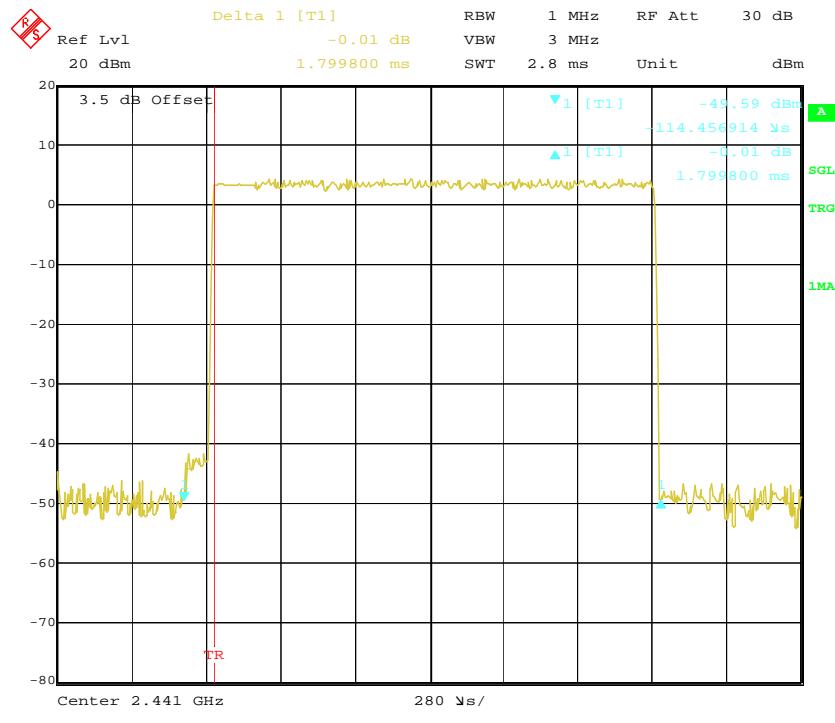
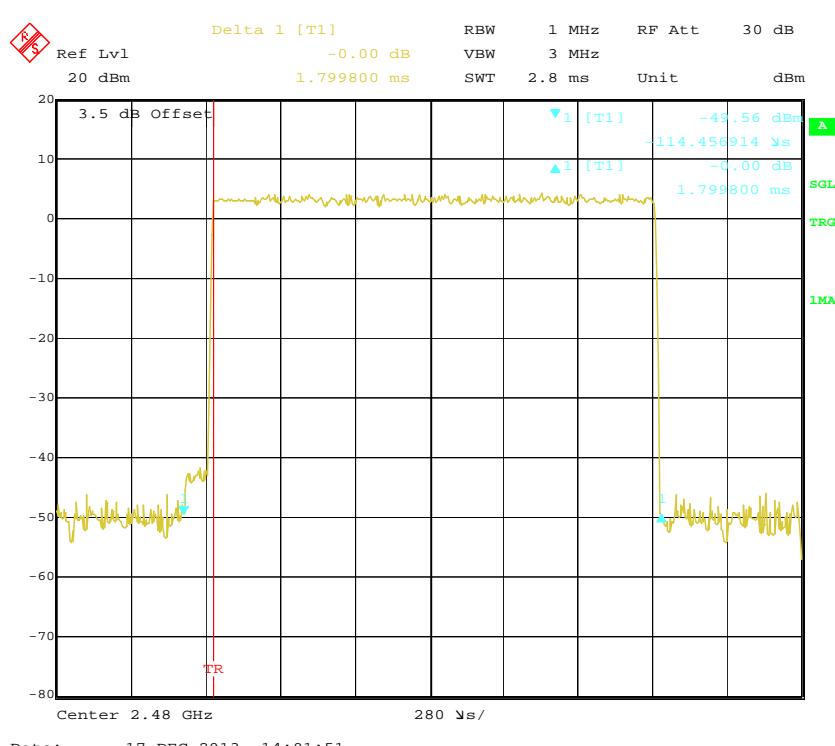
**Pulse time, Low Channel, 2DH3****Pulse time, Middle Channel, 2DH3**

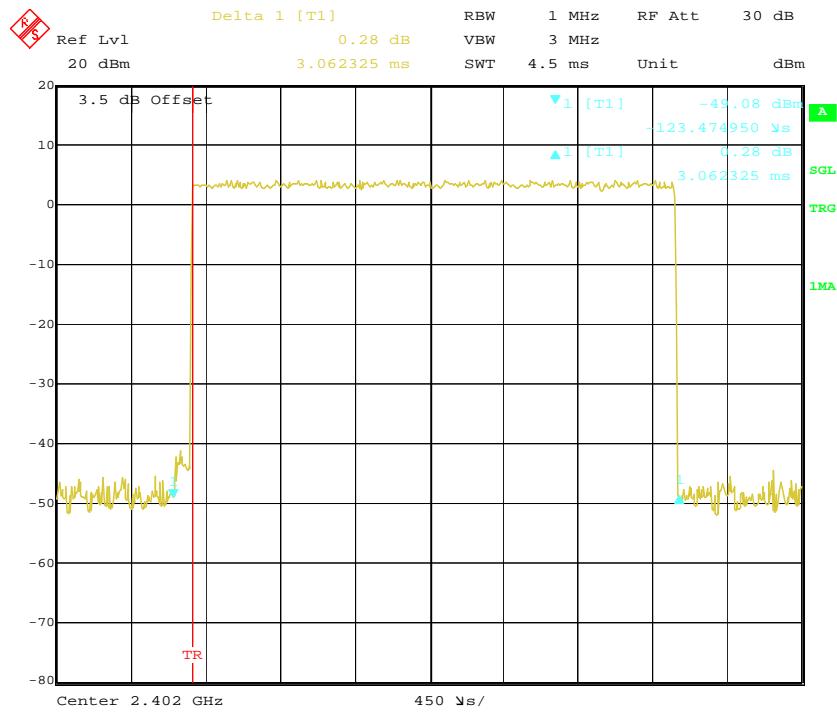
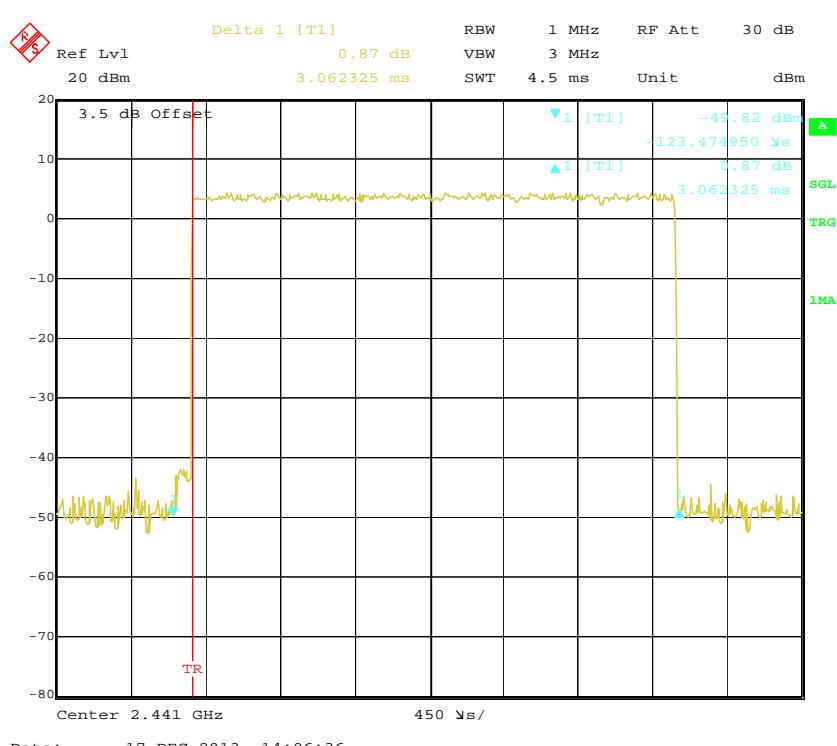
**Pulse time, High Channel, 2DH3****Pulse time, Low Channel, 2DH5**

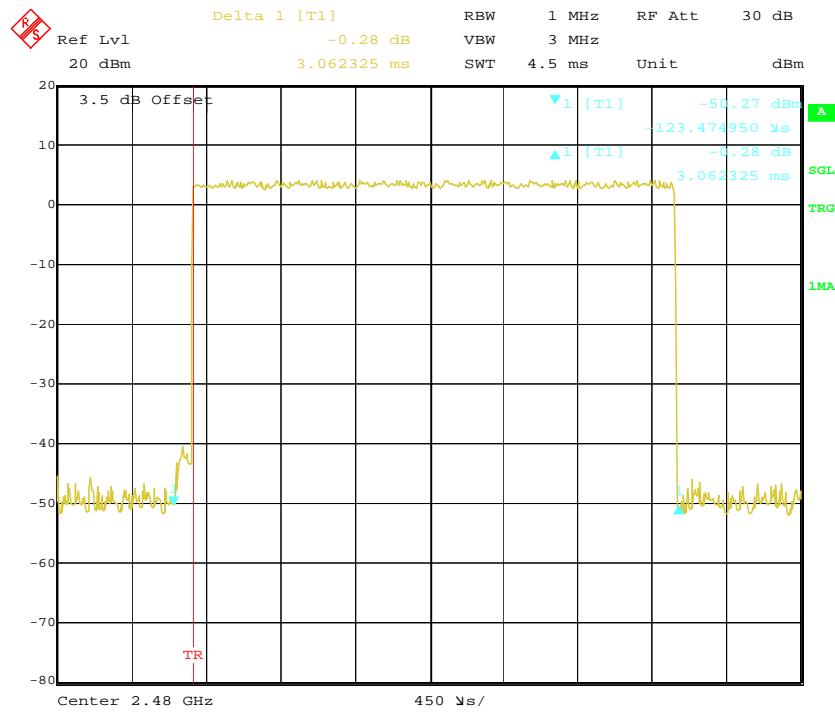
**Pulse time, Middle Channel, 2DH5****Pulse time, High Channel, 2DH5**

**EDR (8DPSK):****Pulse time, Low Channel, 3DH1****Pulse time, Middle Channel, 3DH1**

**Pulse time, High Channel, 3DH1****Pulse time, Low Channel, 3DH3**

**Pulse time, Middle Channel, 3DH3****Pulse time, High Channel, 3DH3**

**Pulse time, Low Channel, 3DH5****Pulse time, Middle Channel, 3DH5**

**Pulse time, High Channel, 3DH5**

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

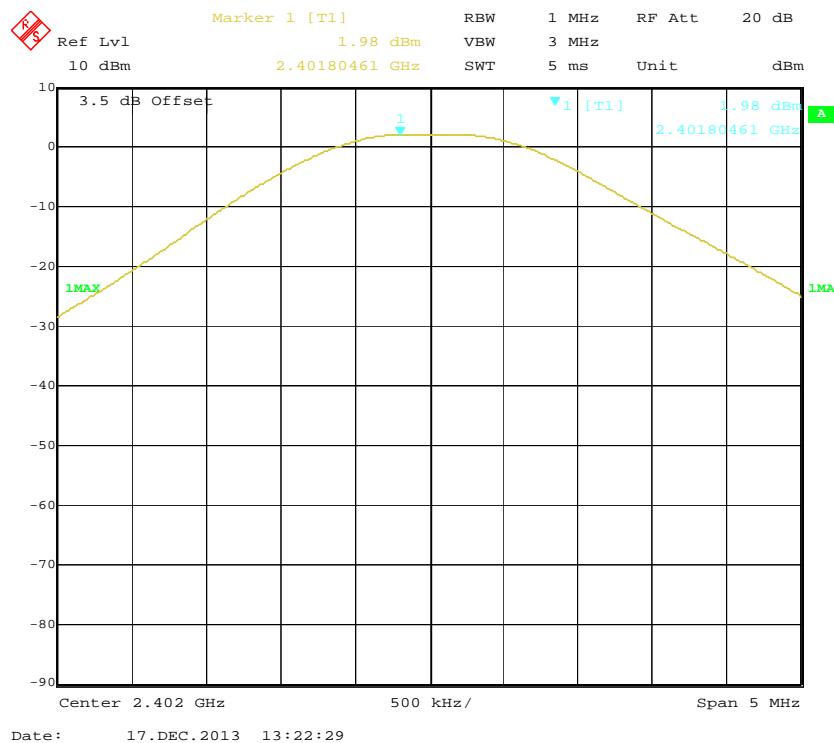
The testing was performed by Gardon Zhang on 2013-12-17.

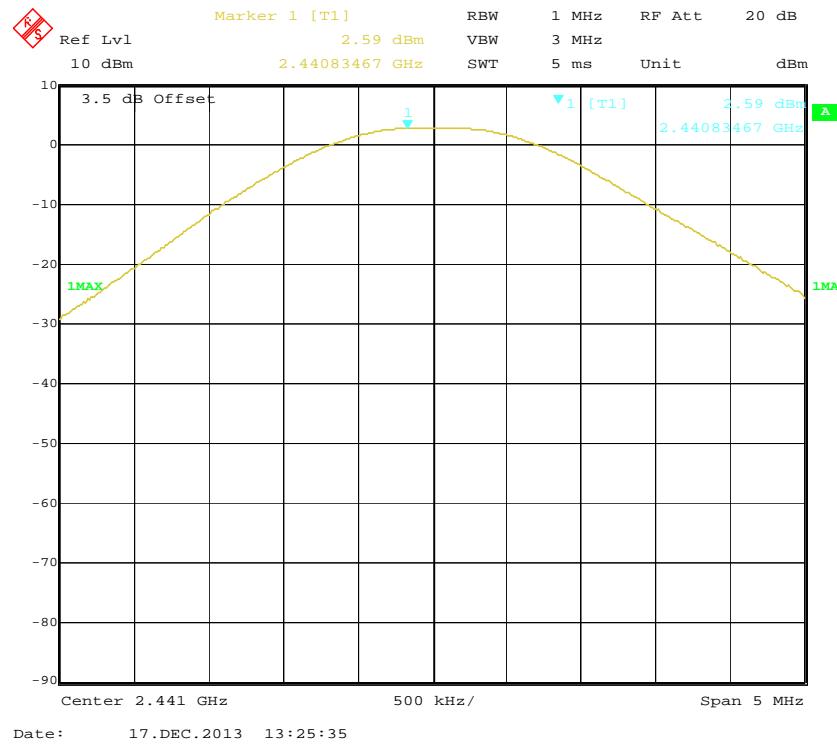
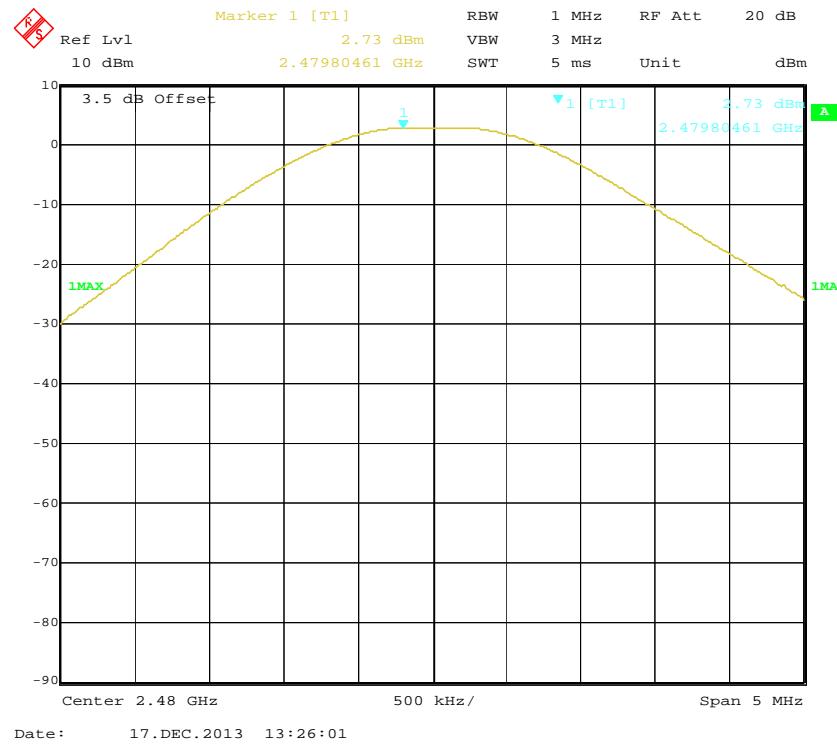
EUT operation mode: Transmitting

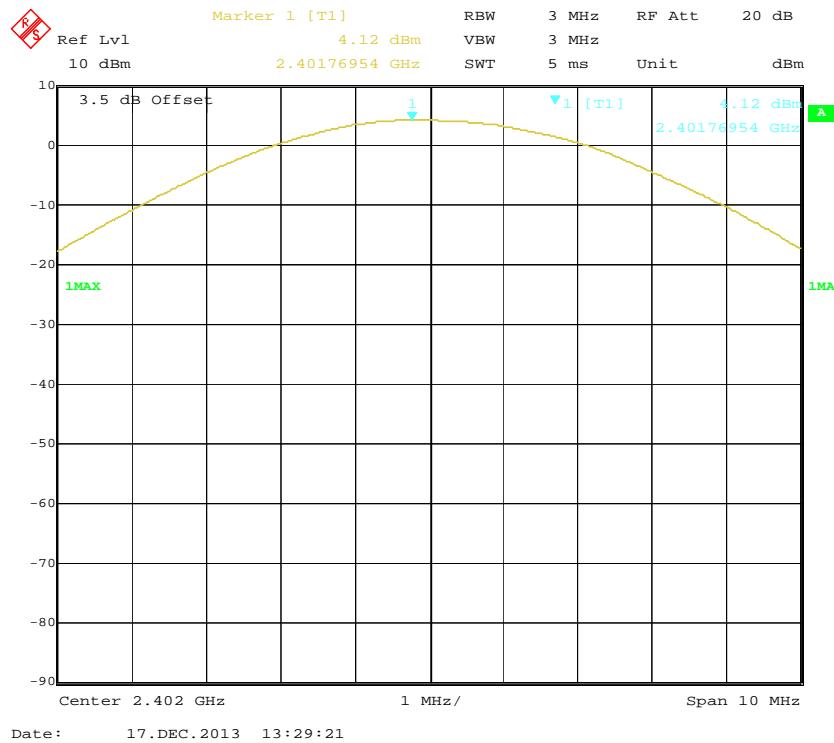
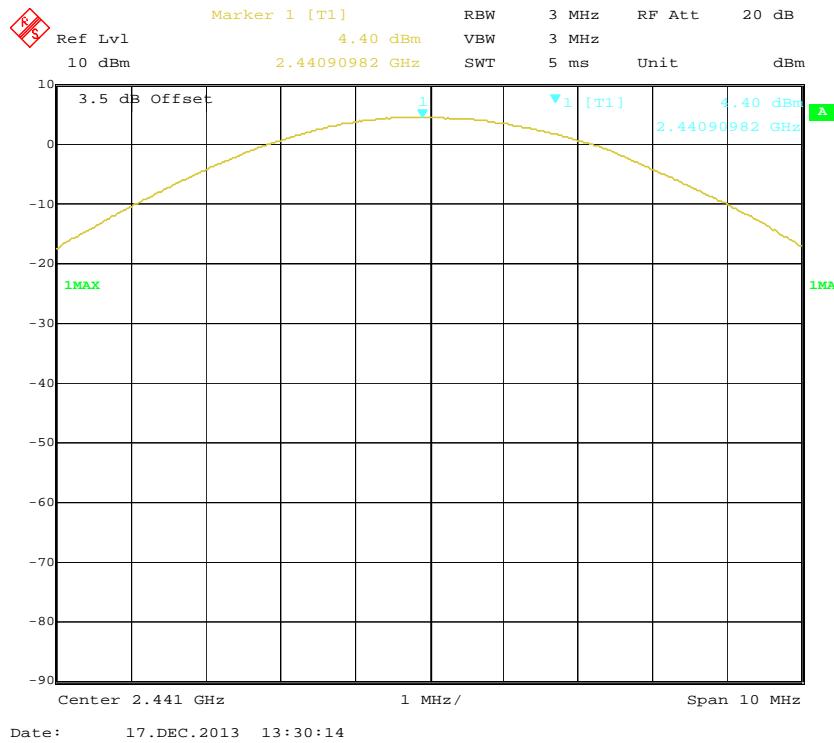
Test Result: Compliance. Please refer to following tables and plots

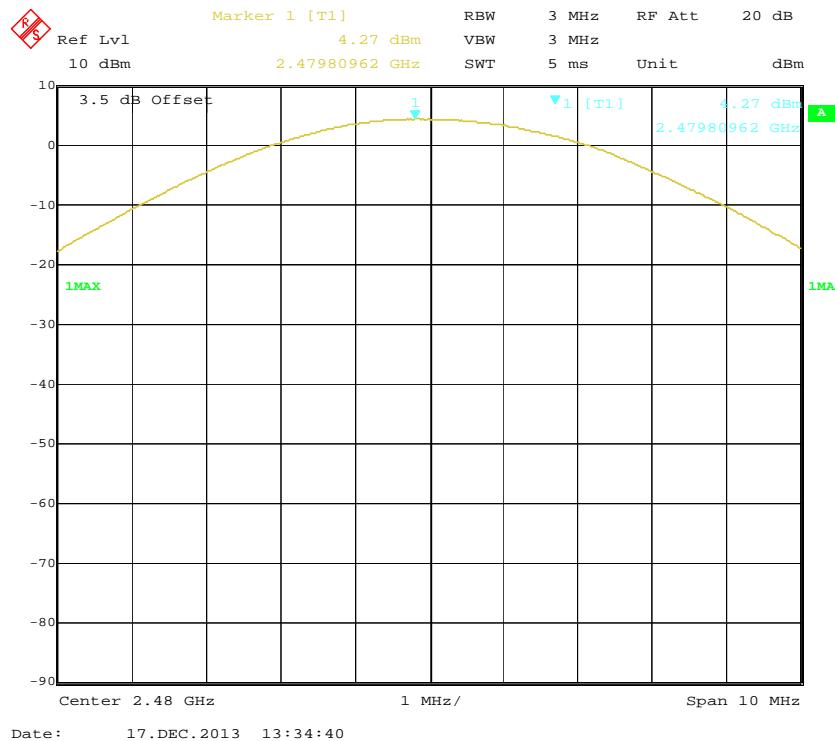
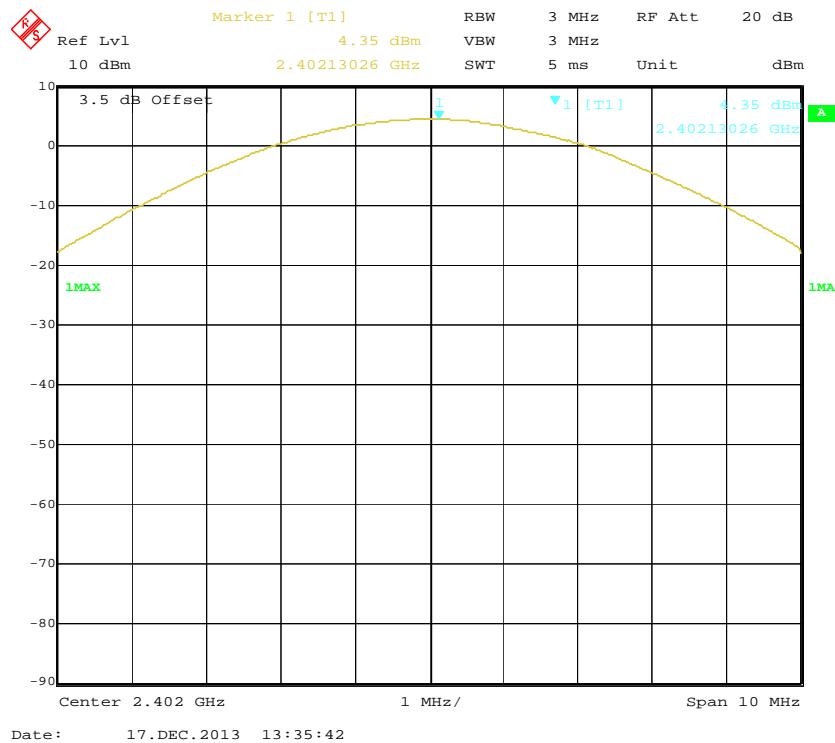
Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
<b>BDR (GFSK)</b>	Low	2402	1.98	1.578	1000
	Middle	2441	2.59	1.816	1000
	High	2480	2.73	1.875	1000
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	4.12	2.582	1000
	Middle	2441	4.40	2.754	1000
	High	2480	4.27	2.673	1000
<b>EDR (8DPSK)</b>	Low	2402	4.35	2.723	1000
	Middle	2441	4.70	2.951	1000
	High	2480	4.51	2.825	1000

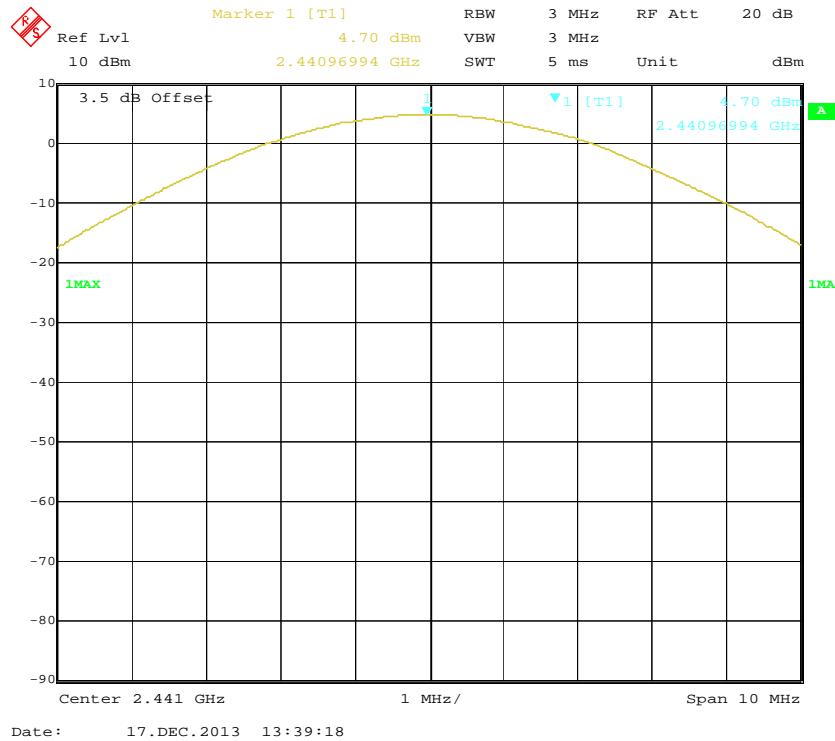
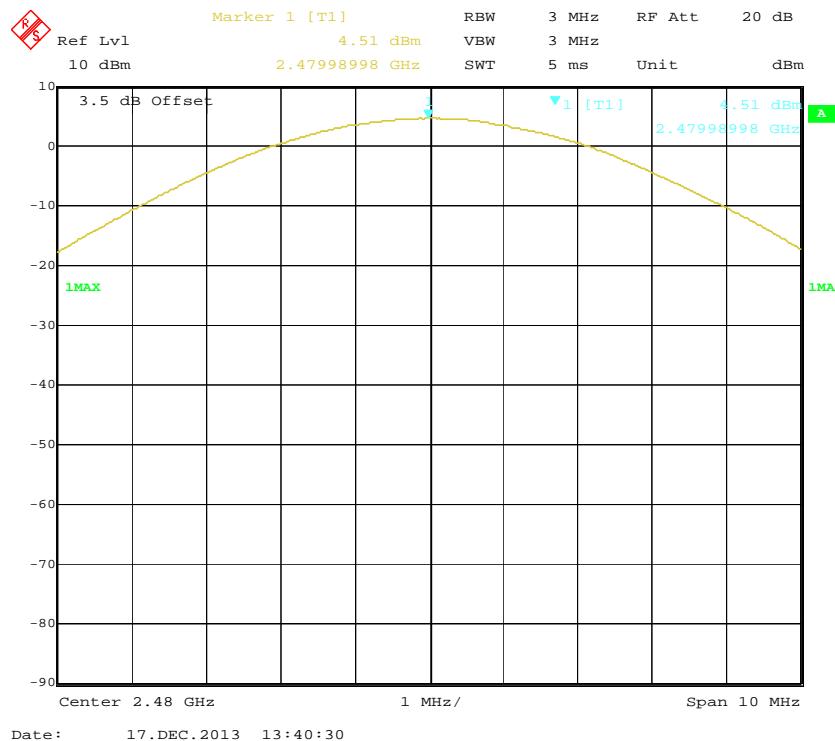
### BDR (GFSK): Low Channel



**BDR (GFSK): Middle Channel****BDR (GFSK): High Channel**

**EDR( $\pi/4$ -DQPSK): Low Channel****EDR( $\pi/4$ -DQPSK): Middle Channel**

**EDR( $\pi/4$ -DQPSK): High Channel****EDR(8DPSK): Low Channel**

**EDR(8DPSK): Middle Channel****EDR(8DPSK): High Channel**

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2013-05-31	2014-05-31

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	20 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

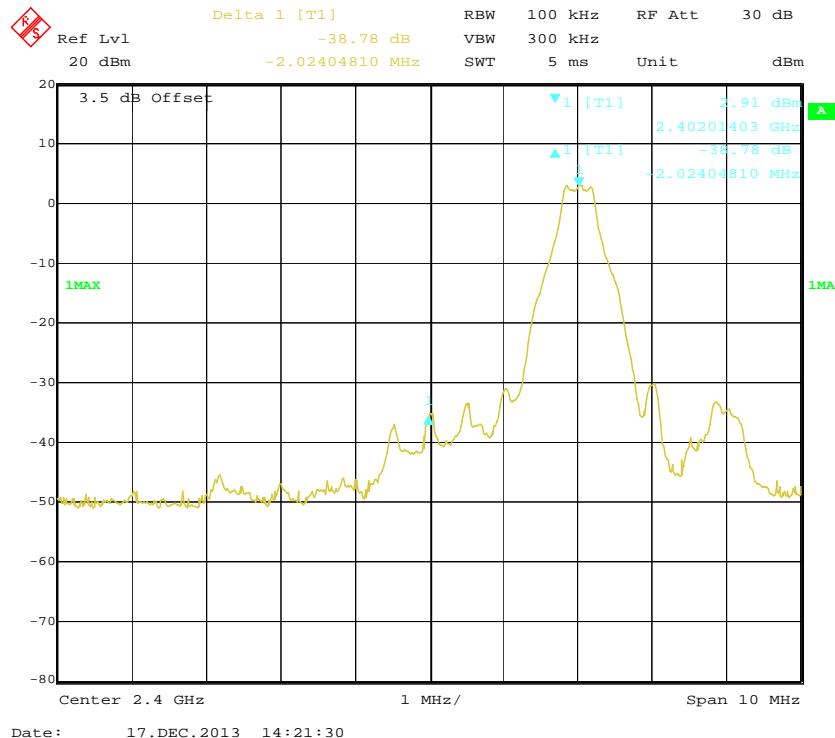
The testing was performed by Gardon Zhang on 2013-12-17.

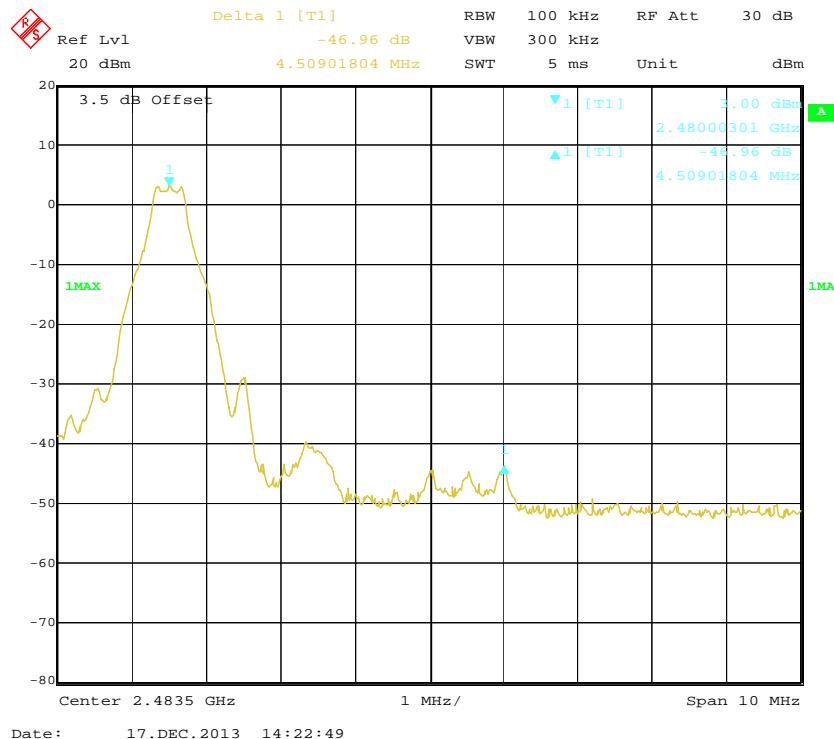
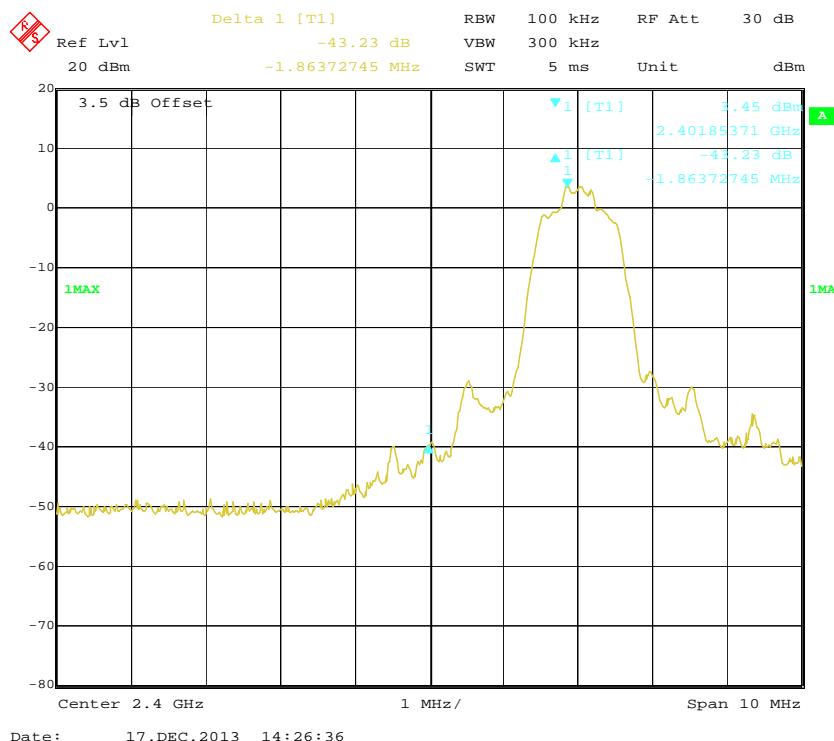
EUT operation mode: Transmitting

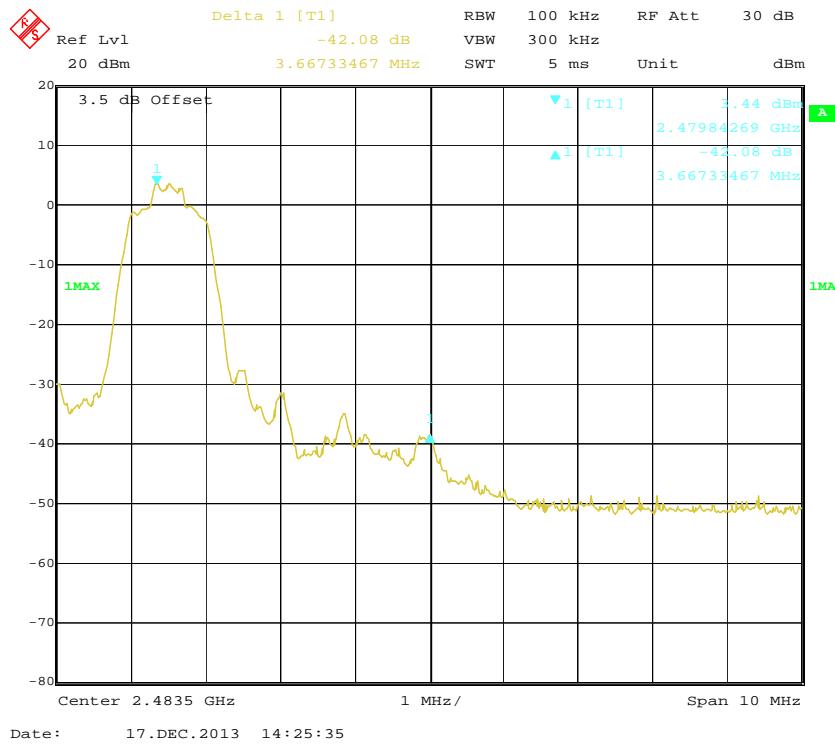
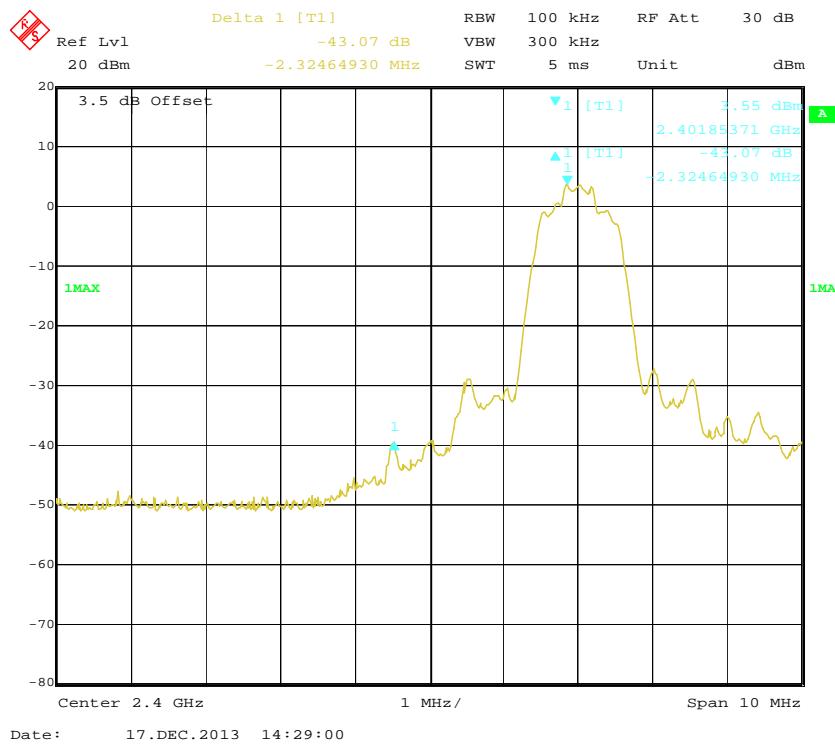
*Test Result: Compliance. Please refer to following table and plots.*

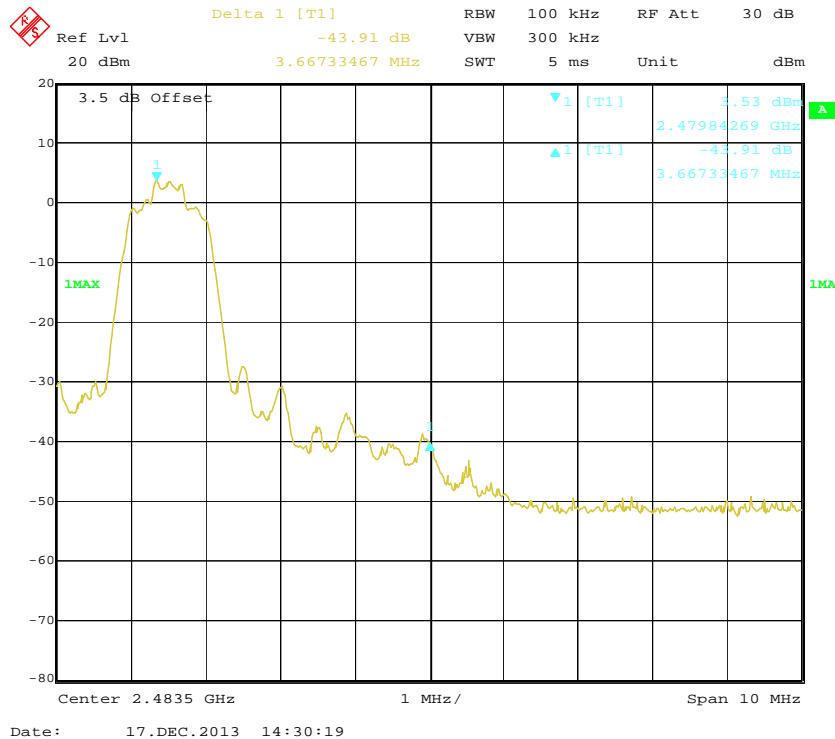
Frequency Band	Delta Peak to band emission (dBc)	Limit (dBc)	Result
BDR mode (GFSK)			
Left-band	38.78	20	Pass
Right-band	46.96	20	Pass
EDR Mode ( $\pi/4$ -DQPSK)			
Left-band	43.23	20	Pass
Right-band	42.08	20	Pass
EDR Mode (8 DPSK)			
Left-band	43.07	20	Pass
Right-band	43.91	20	Pass

### BDR (GFSK): Band Edge-Left Side



**BDR (GFSK): Band Edge-Right Side****EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side**

**EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side****EDR (8DPSK): Band Edge-Left Side**

**BDR (8DPSK): Band Edge-Right Side****\*\*\*\*\* END OF REPORT \*\*\*\*\***