

SAT Test Plots:**Plot 1#:DECT_Head Left Cheek_Low****DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1921.536 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe:EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1921.536 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0407 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.221 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0359 W/kg

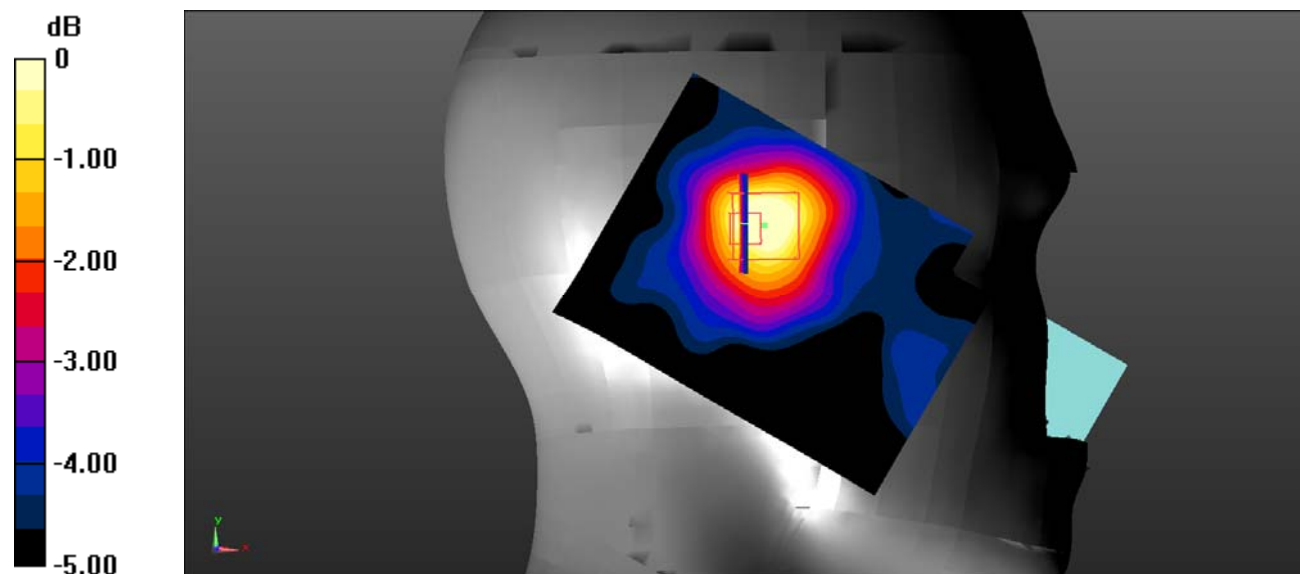

0 dB = 0.0359 W/kg = -14.45 dBW/kg

SAT Test Plots:

Plot 2#:DECT_Head Left Cheek_Middle

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0397 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.442 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0358 W/kg

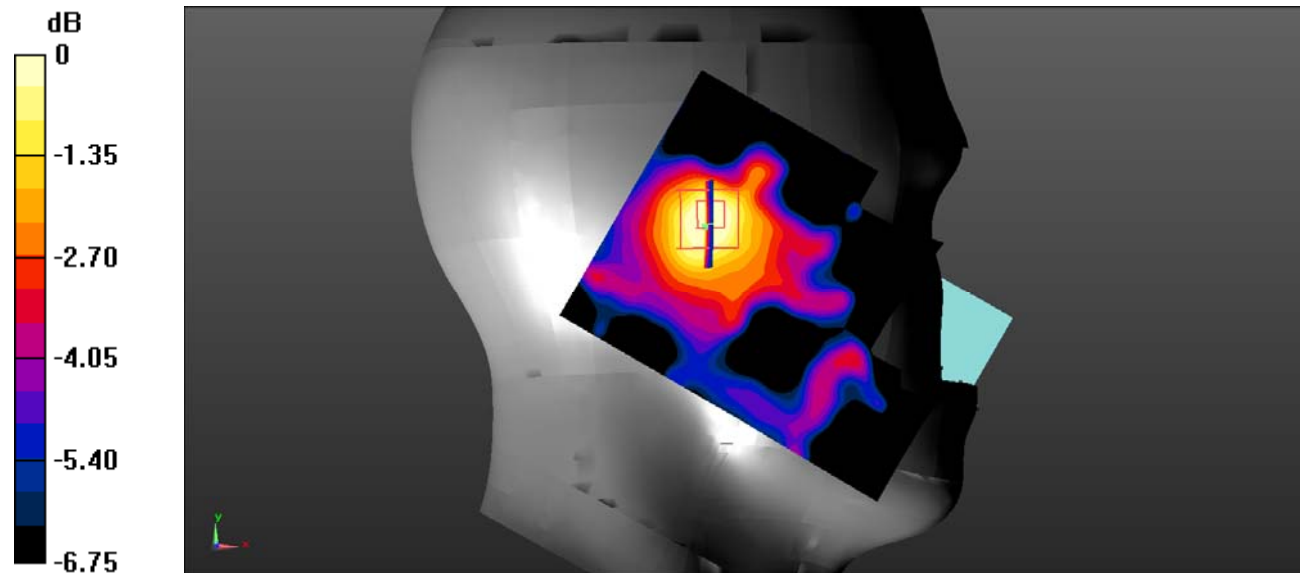

0 dB = 0.0358 W/kg = -14.46 dBW/kg

Plot 3#:DECT_Head Left Check_High**DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz; Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1928.448$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.569$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (61x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0357 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.841 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0333 W/kg

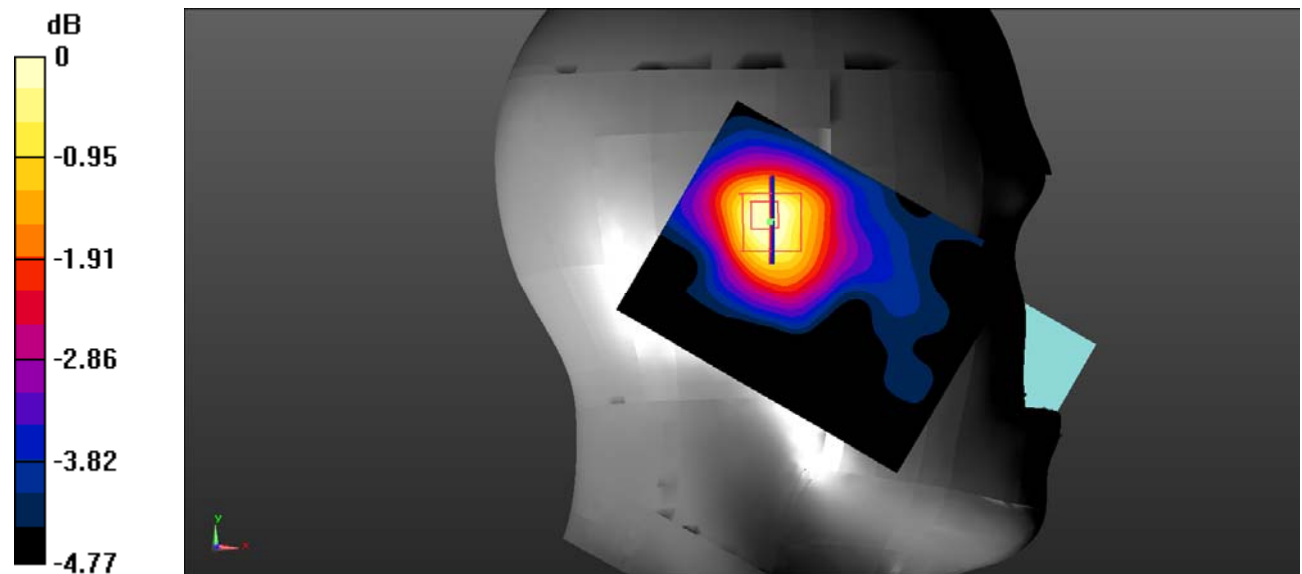

0 dB = 0.0333 W/kg = -14.78 dBW/kg

Plot 4#:DECT_Head Left Tilt_Middle**DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz; Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0252 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.308 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0247 W/kg

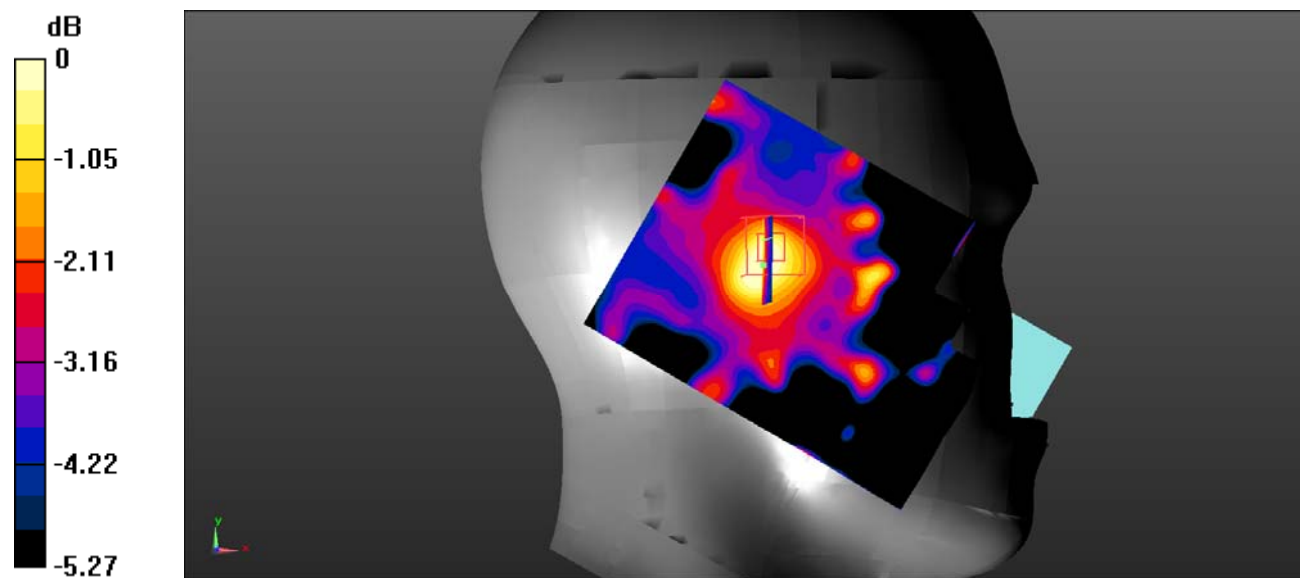 $0 \text{ dB} = 0.0247 \text{ W/kg} = -16.07 \text{ dBW/kg}$

Plot 5#:DECT_Head Right Cheek_Middle**DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0320 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.650 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0304 W/kg

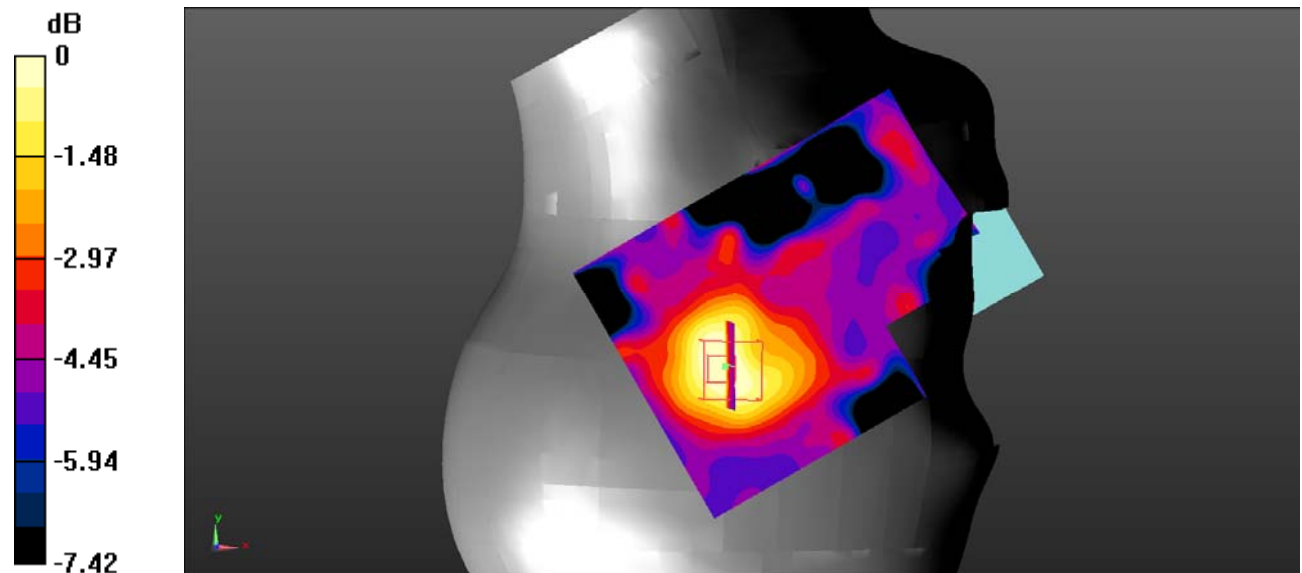

0 dB = 0.0304 W/kg = -15.17 dBW/kg

Plot 6#:DECT_Head Right Tilt_Middle

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0214 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.031 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.0300 W/kg
SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.015 W/kg
 Maximum value of SAR (measured) = 0.0213 W/kg

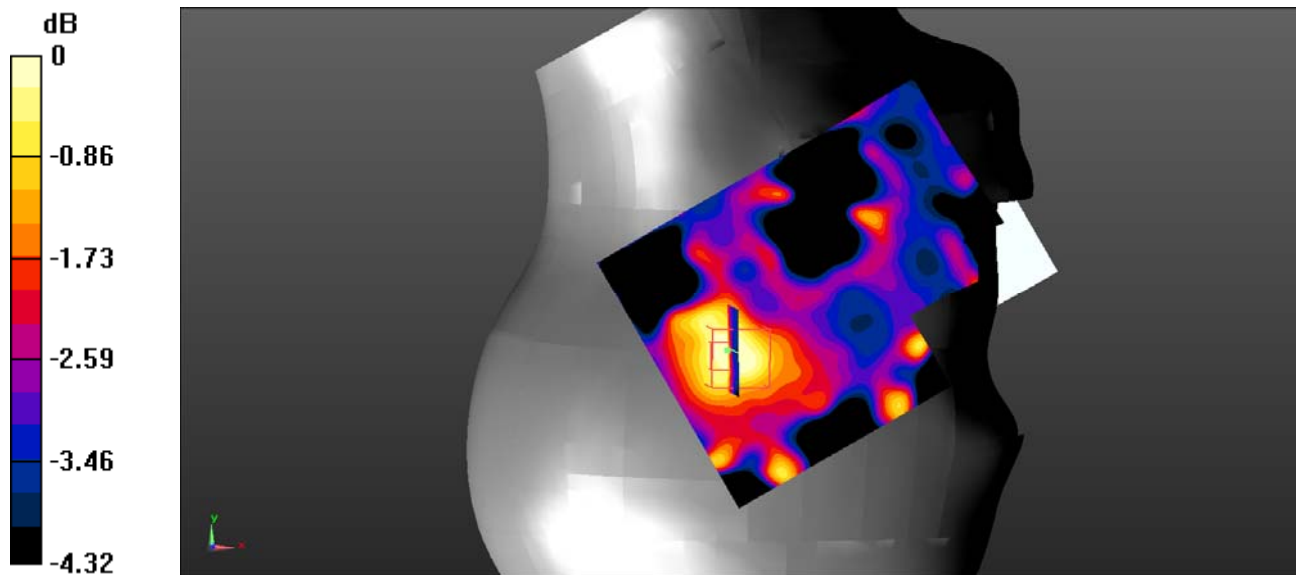

0 dB = 0.0213 W/kg = -16.72 dBW/kg

Plot 7#:DECT_Body Back_Low

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40.085$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe:EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1921.536 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0238 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.000 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0296 W/kg

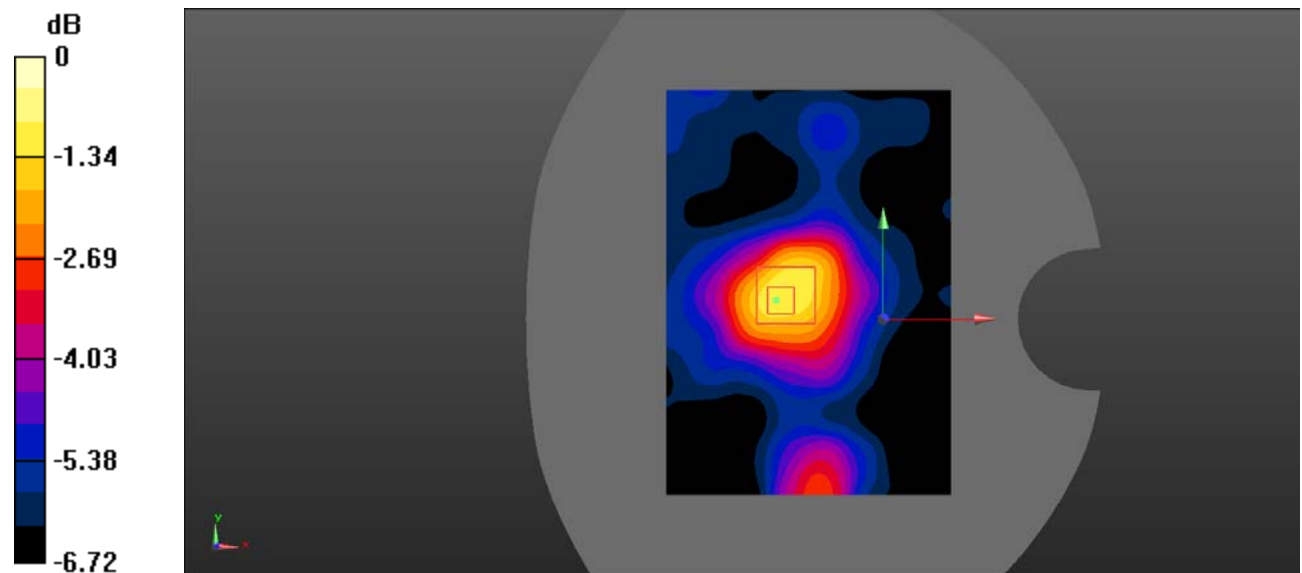

0 dB = 0.0296 W/kg = -15.29 dBW/kg

Plot 8#:DECT_Body Back _Middle

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.852$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0273 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.346 V/m ; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.0340 W/kg
SAR(1 g) = 0.022 W/kg ; SAR(10 g) = 0.016 W/kg
 Maximum value of SAR (measured) = 0.0238 W/kg

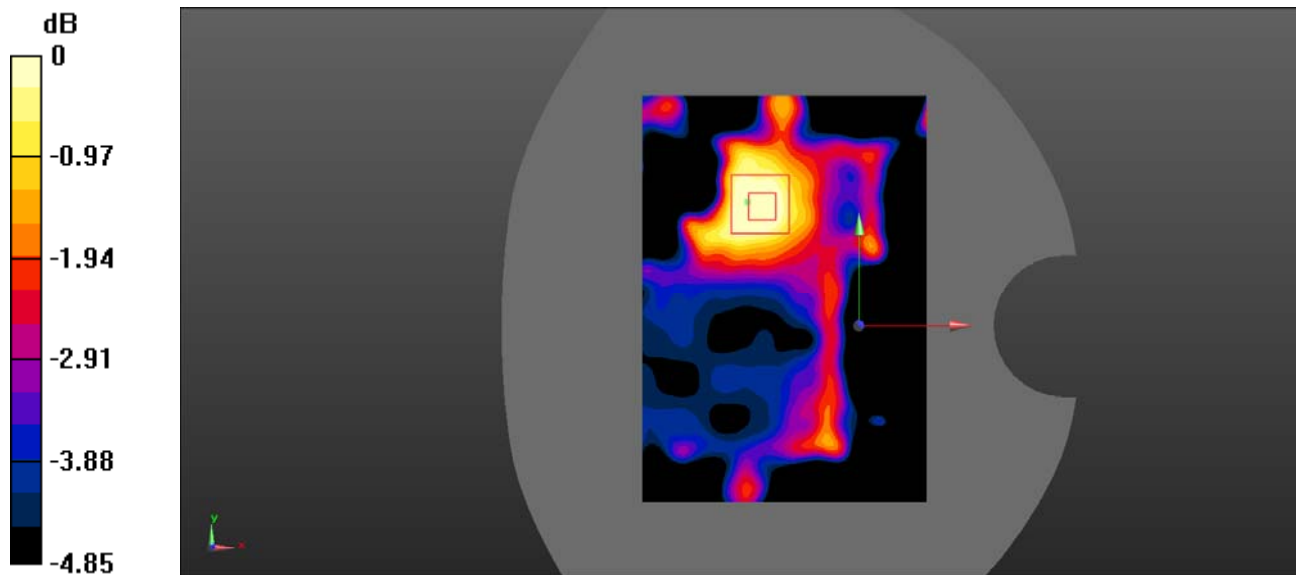

0 dB = $0.0238 \text{ W/kg} = -16.23 \text{ dBW/kg}$

Plot 9#:DECT_Body Back_High

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1928.448 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 39.569$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe:EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0235 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.884 V/m ; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.0360 W/kg
SAR(1 g) = 0.022 W/kg ; SAR(10 g) = 0.016 W/kg
 Maximum value of SAR (measured) = 0.0232 W/kg

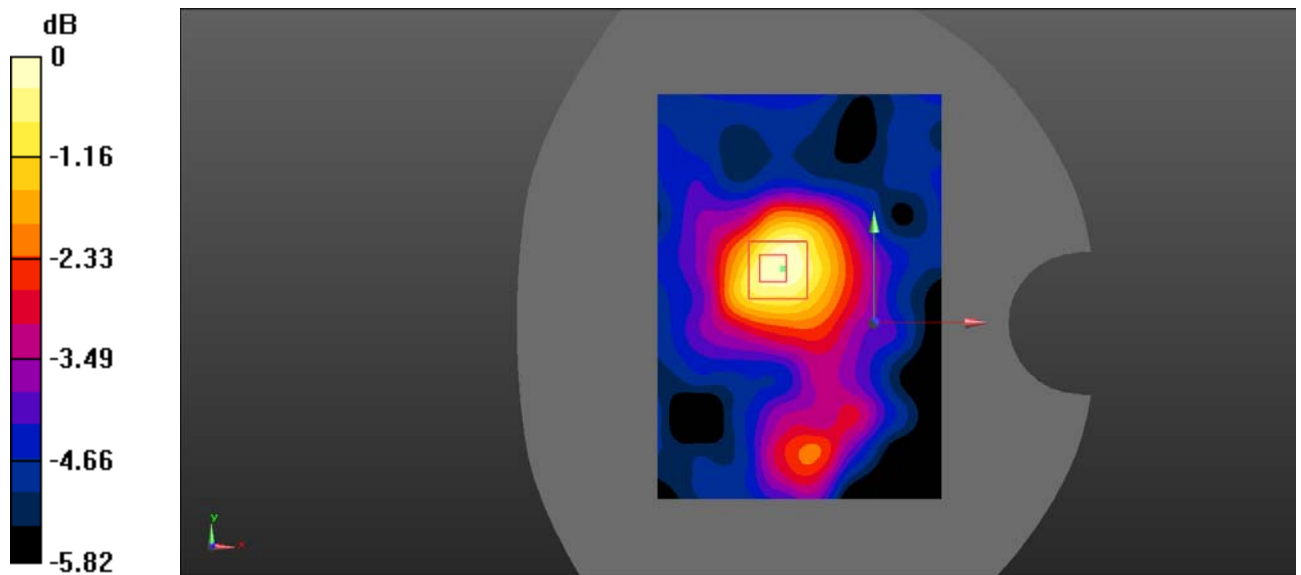

0 dB = 0.0232 W/kg = -16.35 dBW/kg

Plot 10#:DECT_Head Left Cheek_Low**DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1921.536 MHz; Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1921.536 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0280 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.654 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0245 W/kg

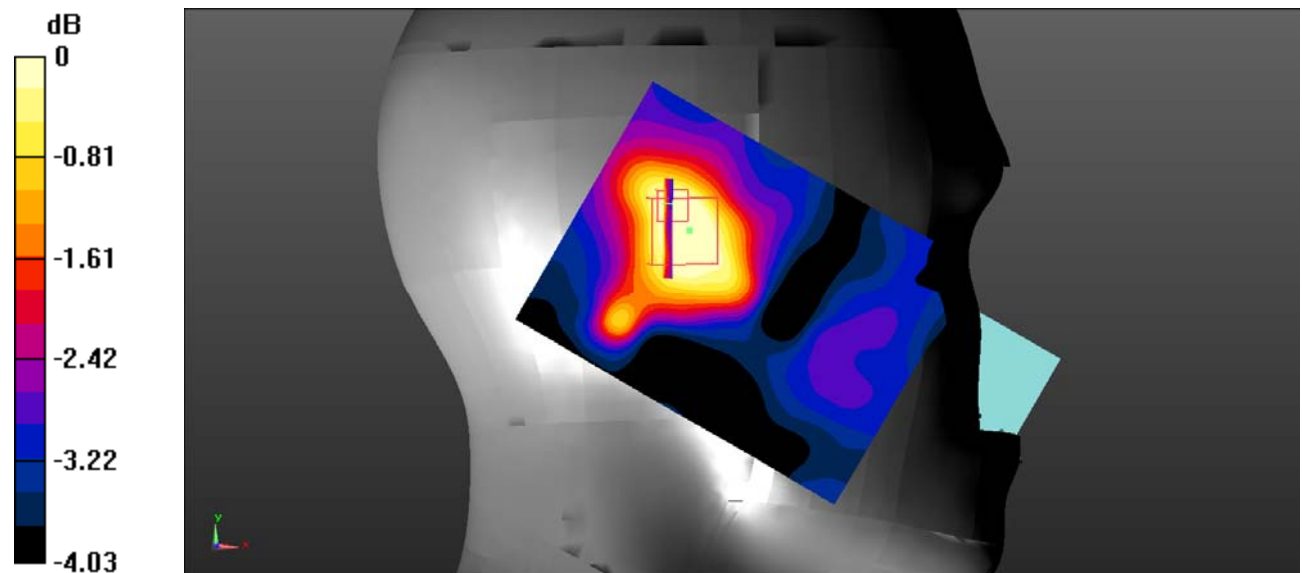

0 dB = 0.0245 W/kg = -16.11 dBW/kg

Plot 11#:DECT_Head Left Cheek_Middle**DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz; Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0457 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.454 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0498 W/kg

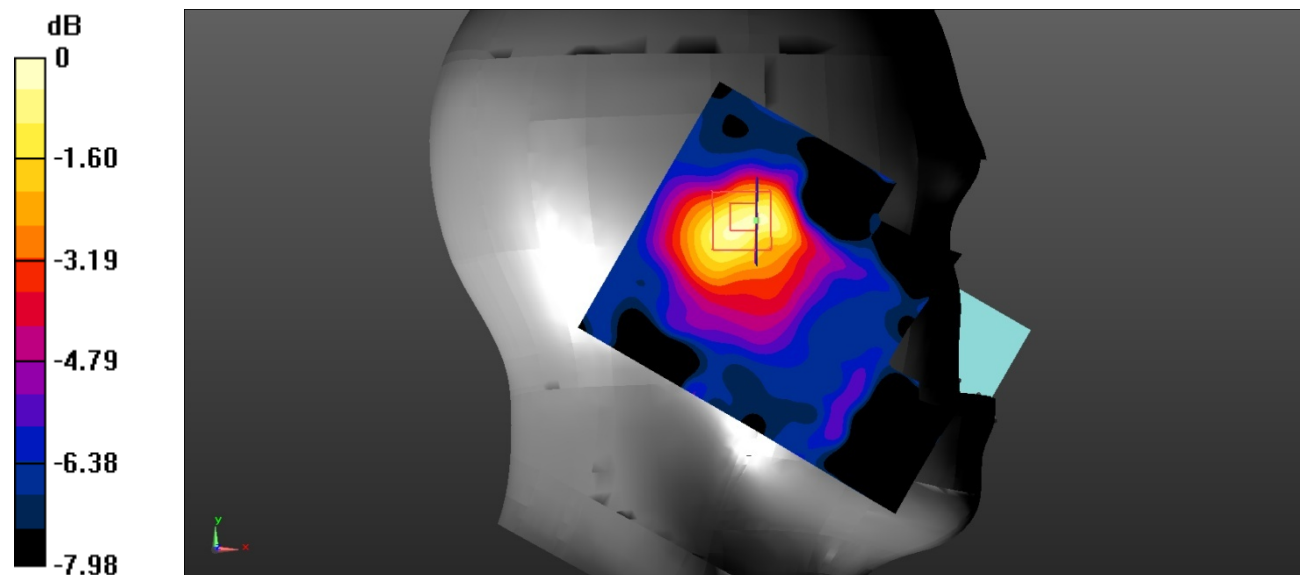

Plot 12#:DECT_Head Left Cheek_High

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1928.448$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.569$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe:EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0287 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.712 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0247 W/kg

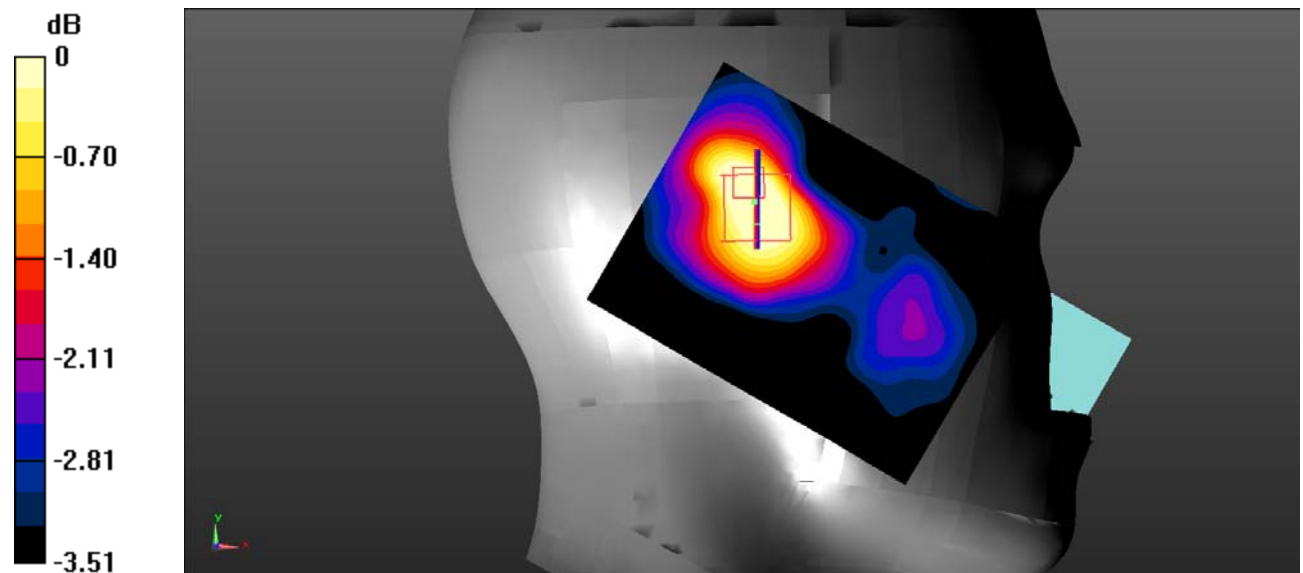

0 dB = 0.0247 W/kg = -16.07 dBW/kg

Plot 13#:DECT_Head Left Tilt_Middle

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz; Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0257 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.382 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0258 W/kg

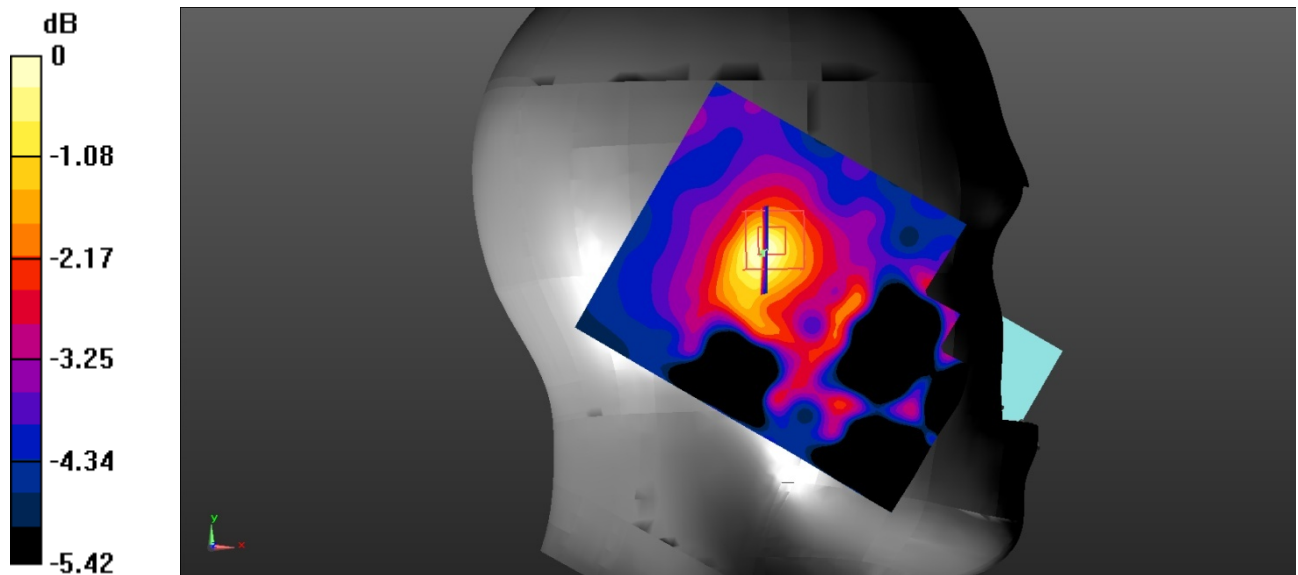

0 dB = 0.0258 W/kg = -15.88 dBW/kg

Plot 14#:DECT_ Head Right Cheek_ Middle

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0347 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.542 V/m; Power Drift = 0.007 dB
 Peak SAR (extrapolated) = 0.0510 W/kg
SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.020 W/kg
 Maximum value of SAR (measured) = 0.0333 W/kg

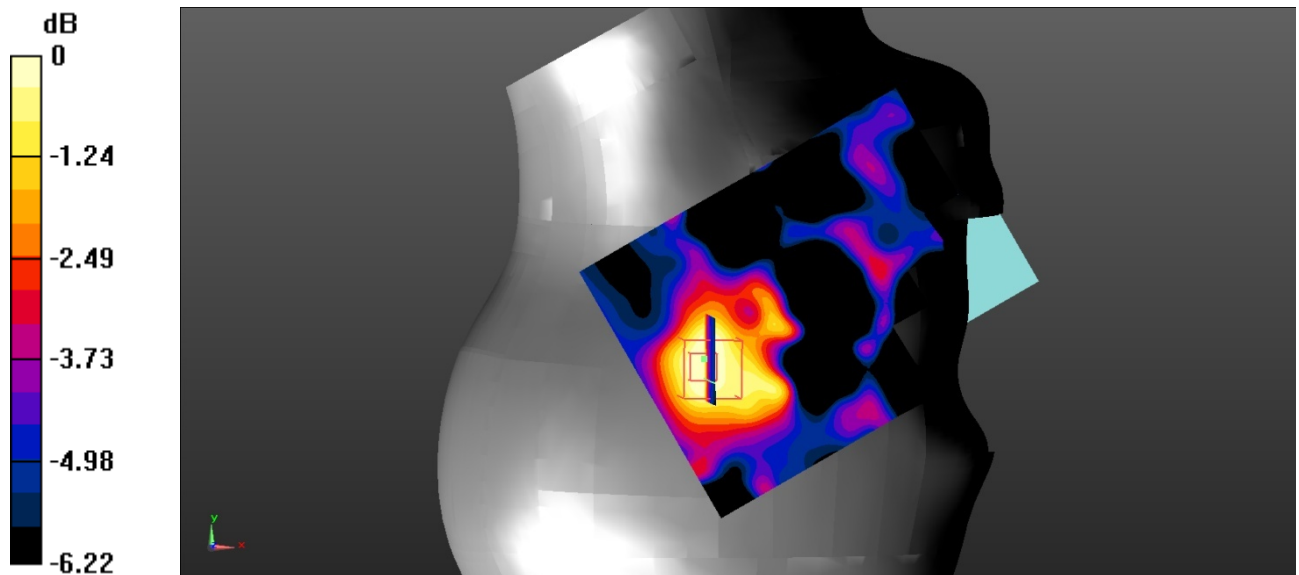

0 dB = 0.0333 W/kg = -14.78 dBW/kg

Plot 15#:DECT_ Head Right Tilt_ Middle**DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1**

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz; Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0220 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.476 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0215 W/kg

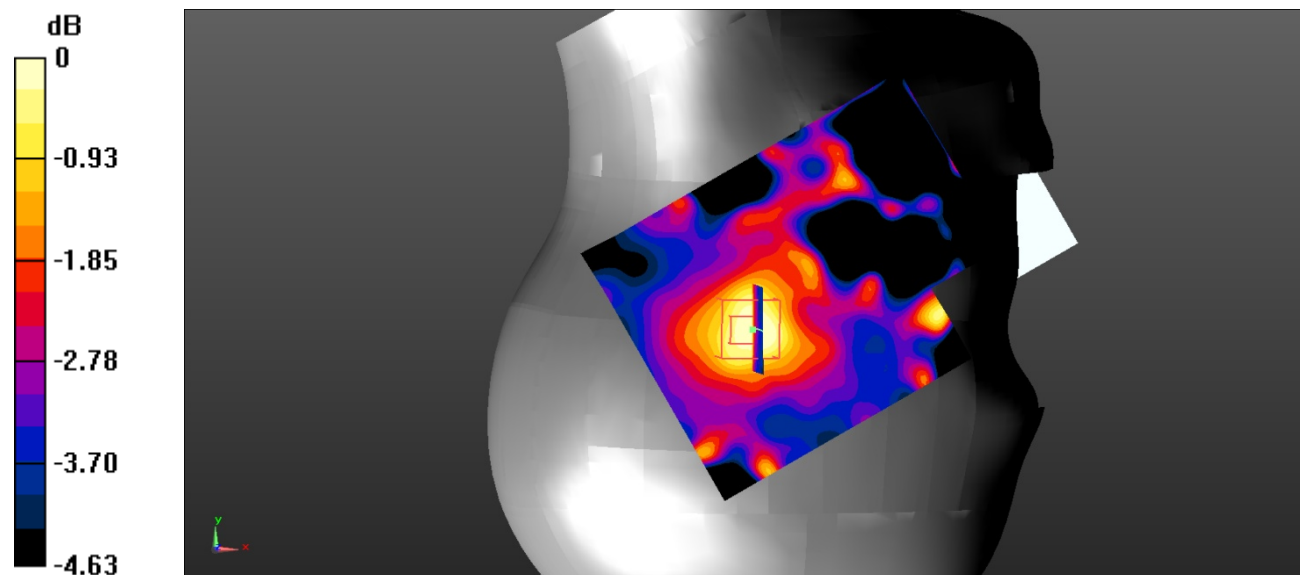

0 dB = 0.0215 W/kg = -16.68 dBW/kg

Plot 16#:DECT_ Body Back _Low

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40.085$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe:EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1921.536 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0232 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.154 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0209 W/kg

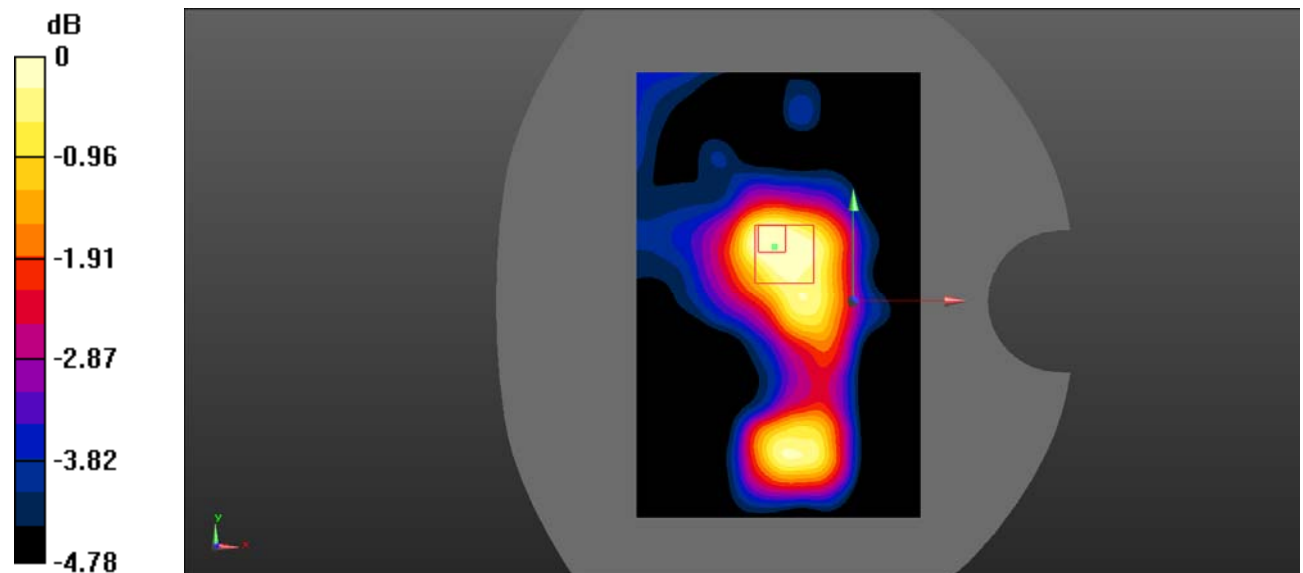

0 dB = 0.0209 W/kg = -16.80 dBW/kg

Plot 17#:DECT_ Body Back _Middle

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz; Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.852$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0454 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.211 V/m; Power Drift = 0.011 dB
 Peak SAR (extrapolated) = 0.0690 W/kg
SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.026 W/kg
 Maximum value of SAR (measured) = 0.0451 W/kg

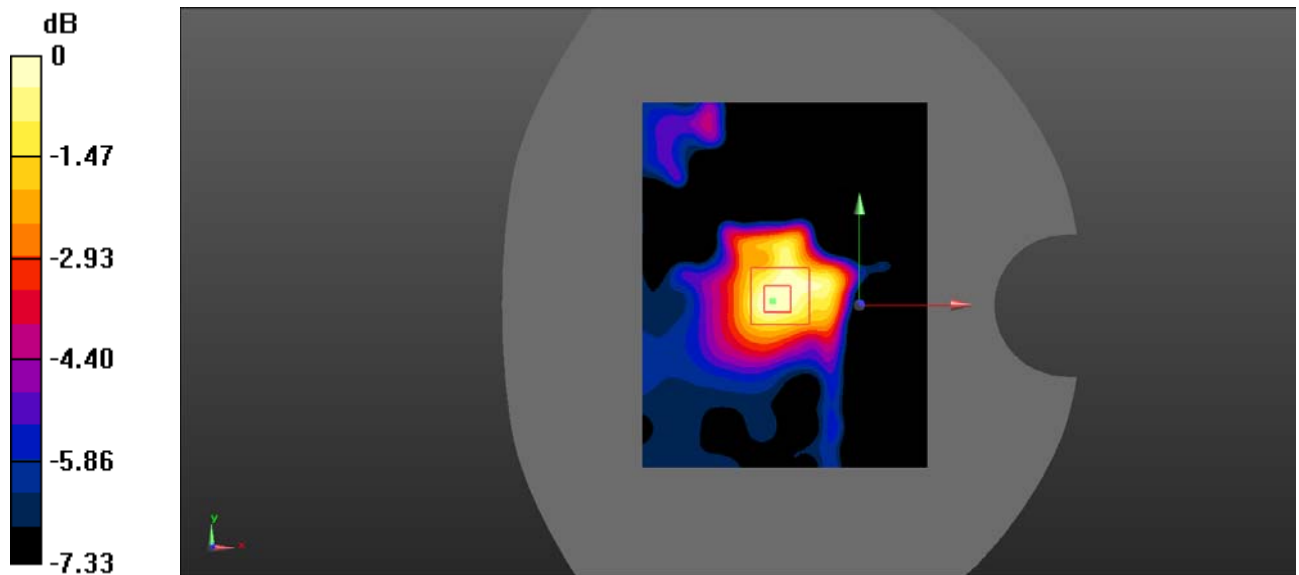

0 dB = 0.0451 W/kg = -13.46 dBW/kg

Plot 18#:DECT_ Body Back _High

DUT: Cordless DECT Handset; Type: 8254 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1928.448$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.569$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe:EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17) @ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated:13/9/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0184 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.371 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.0300 W/kg
SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.013 W/kg
 Maximum value of SAR (measured) = 0.0176 W/kg

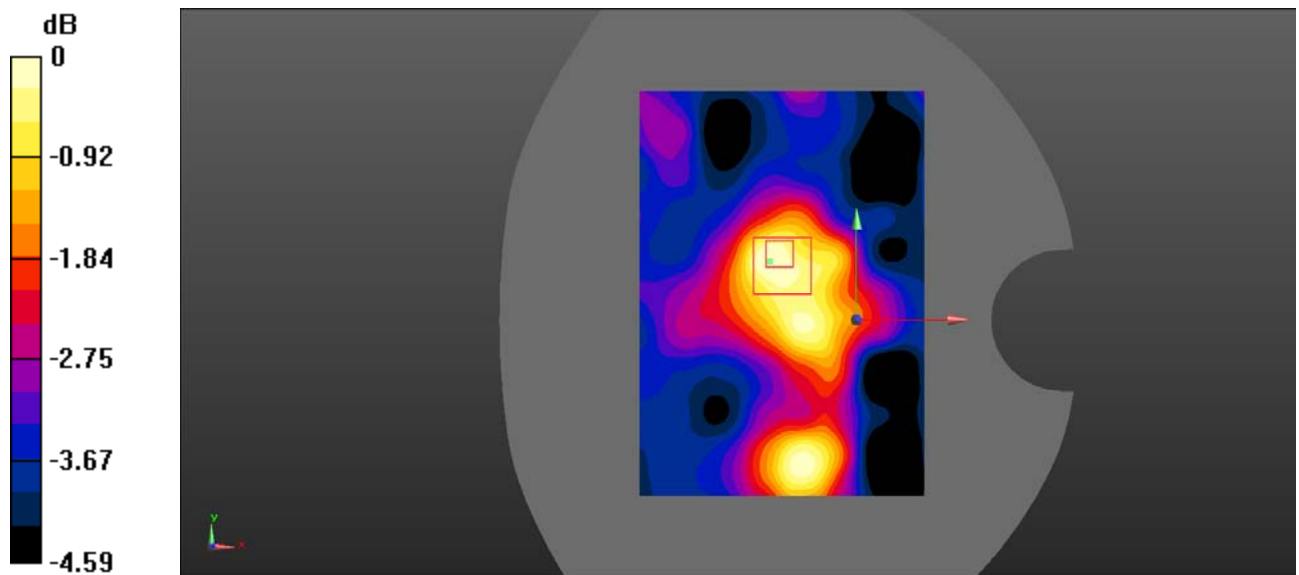

0 dB = 0.0176 W/kg = -17.54 dBW/kg

Plot 19#:DECT_ Head Left Cheek _ Low

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1921.536;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0349 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.914 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0329 W/kg

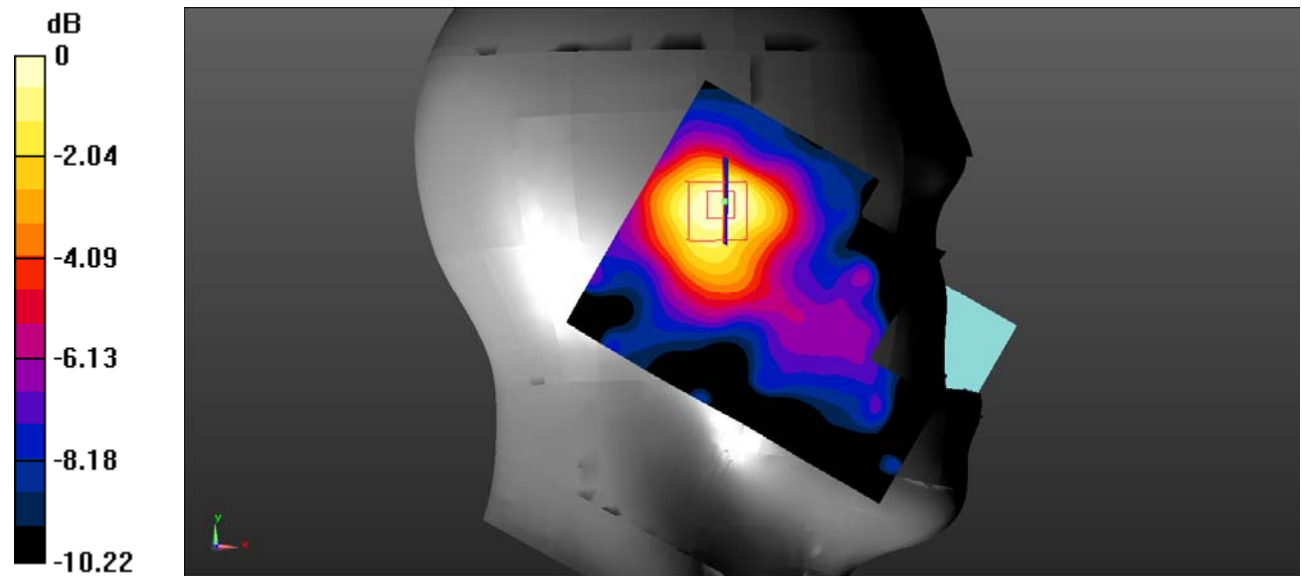

0 dB = 0.0329 W/kg = -14.83 dBW/kg

Plot 20#:DECT_ Head Left Cheek _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0259 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.975 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0244 W/kg

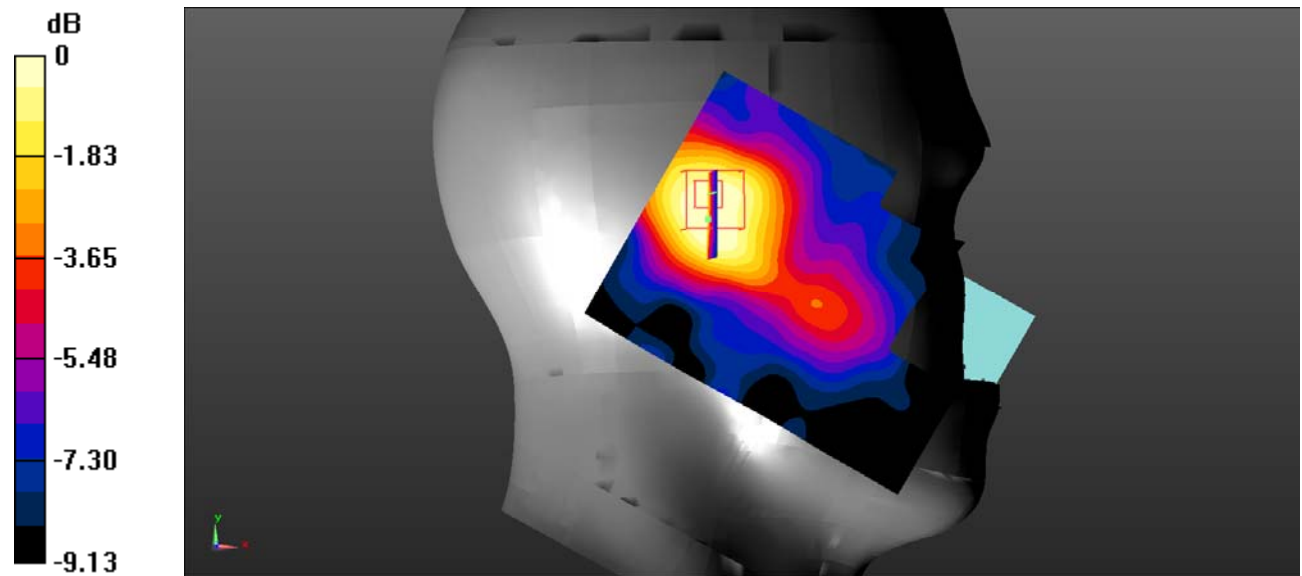

0 dB = 0.0244 W/kg = -16.13 dBW/kg

Plot 21#:DECT_ Head Left Cheek _ High

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1928.448 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 39.569$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0289 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.390 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.0530 W/kg
SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.017 W/kg
 Maximum value of SAR (measured) = 0.0315 W/kg

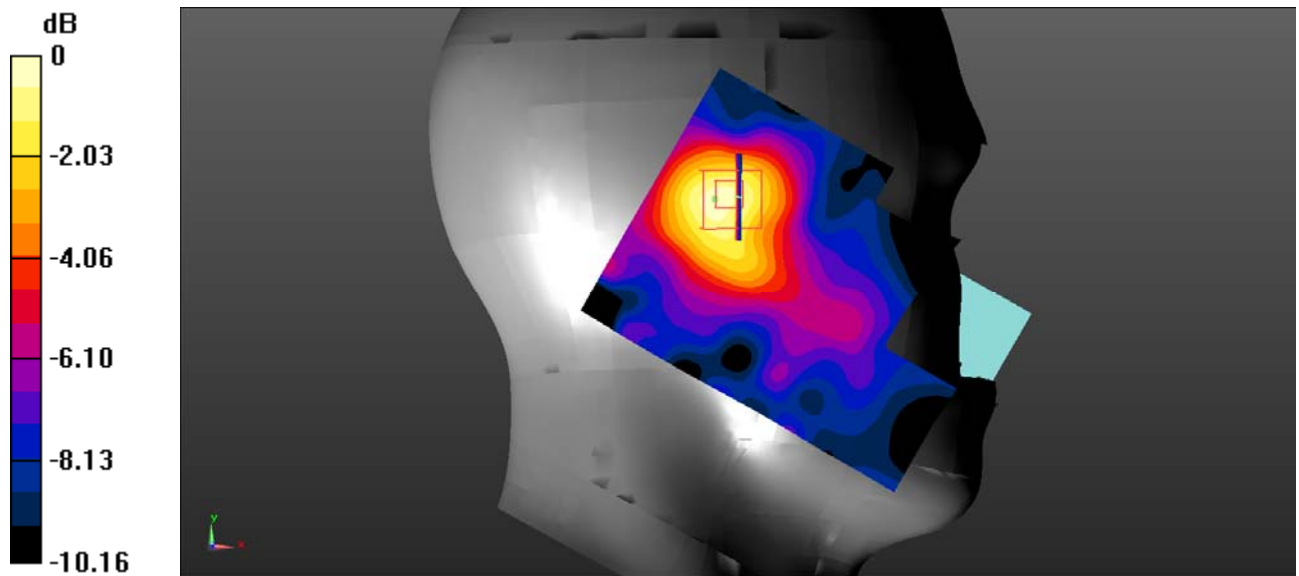

0 dB = 0.0315 W/kg = -15.02 dBW/kg

Plot 22#:DECT_ Head Left Tilt _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0262 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.237 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0260 W/kg

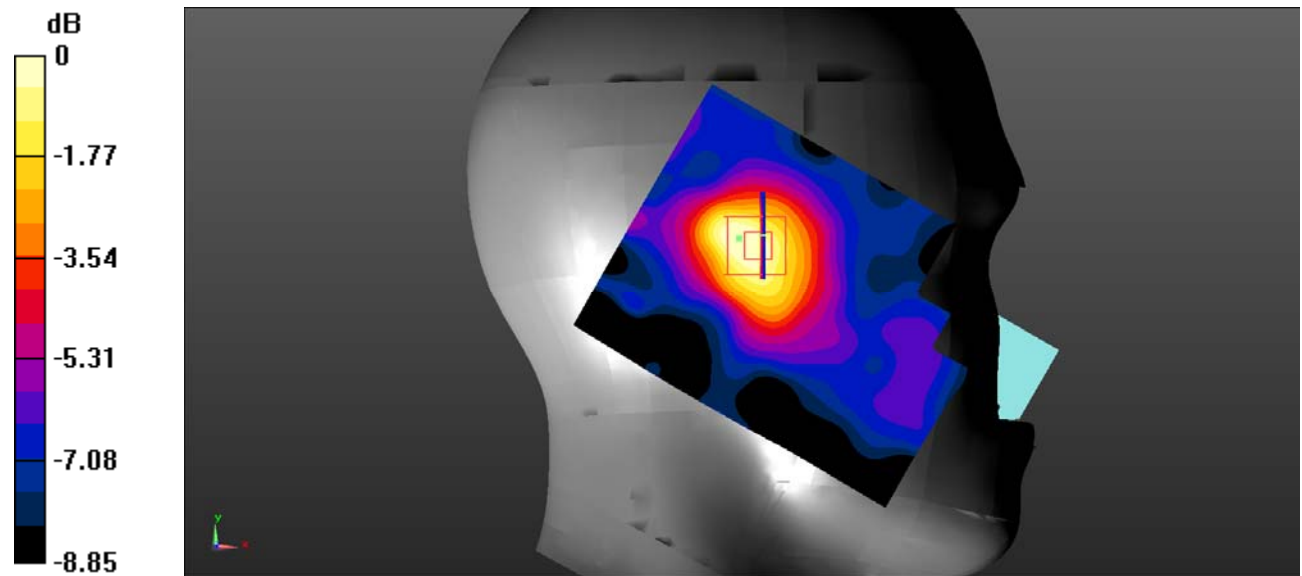

0 dB = 0.0260 W/kg = -15.85 dBW/kg

Plot 23#:DECT_ Head Right Cheek _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.852$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0273 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.068 V/m; Power Drift = 0.060 dB
 Peak SAR (extrapolated) = 0.0390 W/kg
SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg
 Maximum value of SAR (measured) = 0.0244 W/kg

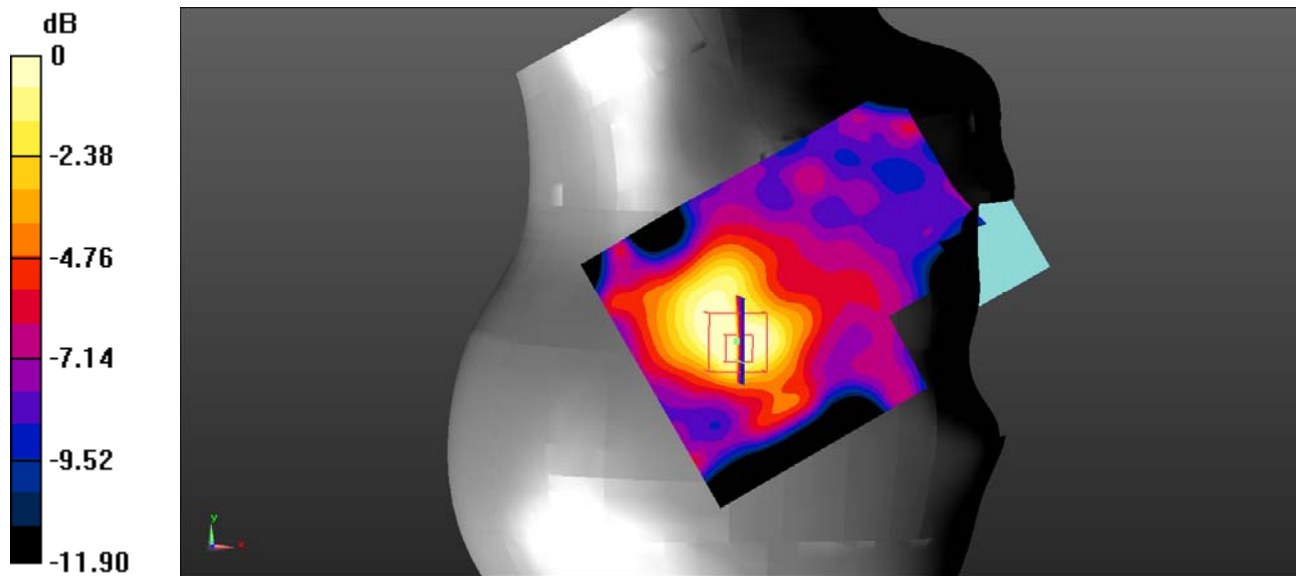

0 dB = 0.0244 W/kg = -16.13 dBW/kg

Plot 24#:DECT_ Head Right Tilt _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.852$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0274 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.484 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.0380 W/kg
SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.012 W/kg
 Maximum value of SAR (measured) = 0.0246 W/kg

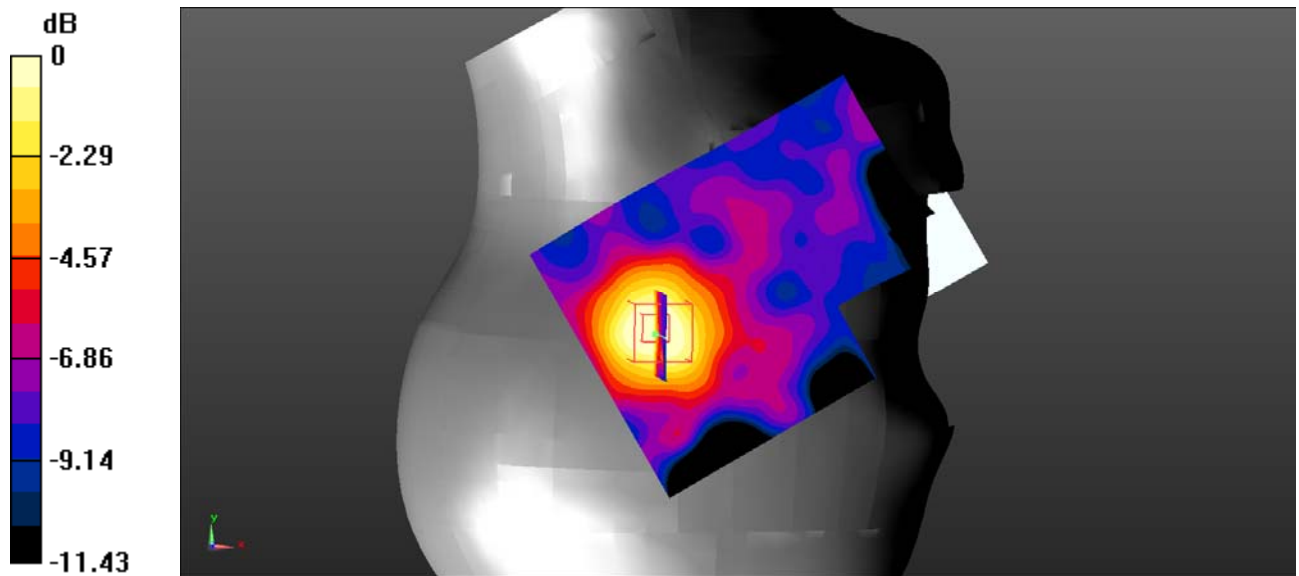

0 dB = 0.0246 W/kg = -16.09 dBW/kg

Plot 25#:DECT_ Body Back _ Low

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1921.536;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

DECT Low/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0172 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00941 W/kg

Maximum value of SAR (measured) = 0.0167 W/kg

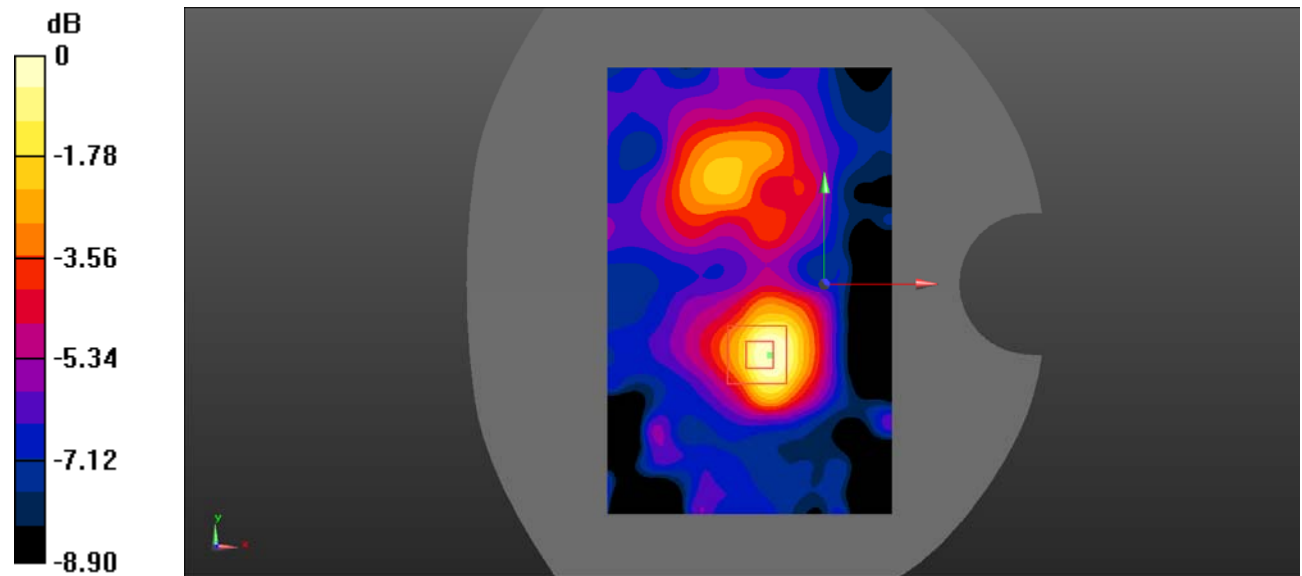

0 dB = 0.0167 W/kg = -17.77 dBW/kg

Plot 26#:DECT_ Body Back _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0179 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 1.252 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.0150 W/kg
SAR(1 g) = 0.00992 W/kg; SAR(10 g) = 0.00751 W/kg
 Maximum value of SAR (measured) = 0.0102 W/kg

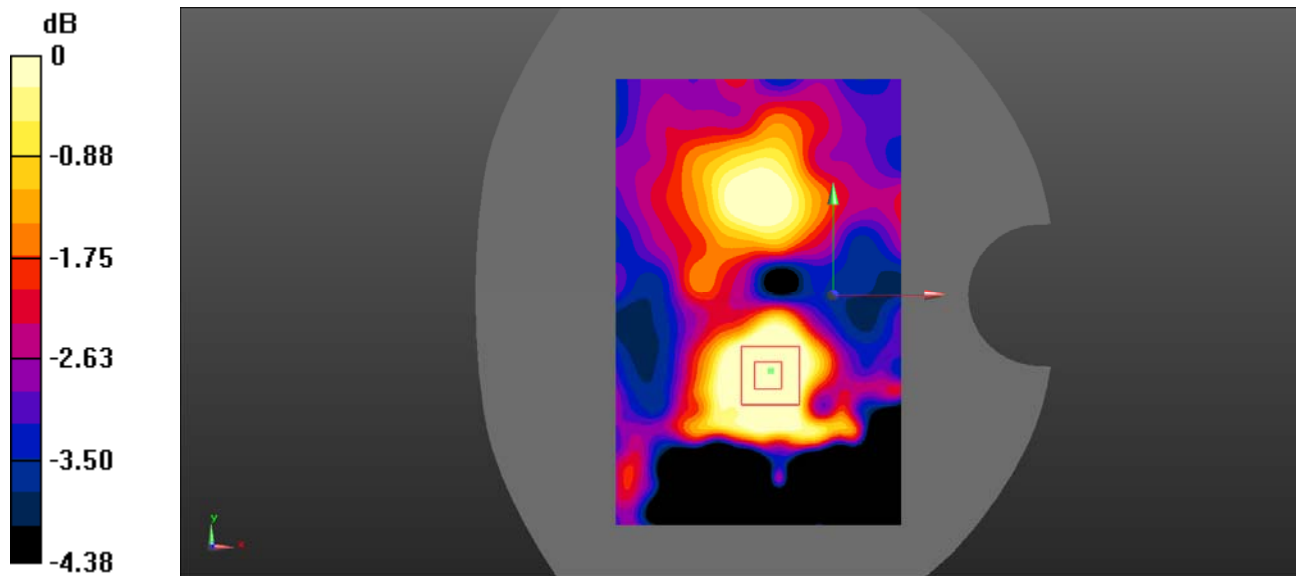

0 dB = 0.0102 W/kg = -19.91 dBW/kg

Plot 27#:DECT_ Body Back _ High

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1928.448$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.569$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0176 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 0.8370 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.0250 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00886 W/kg
 Maximum value of SAR (measured) = 0.0152 W/kg

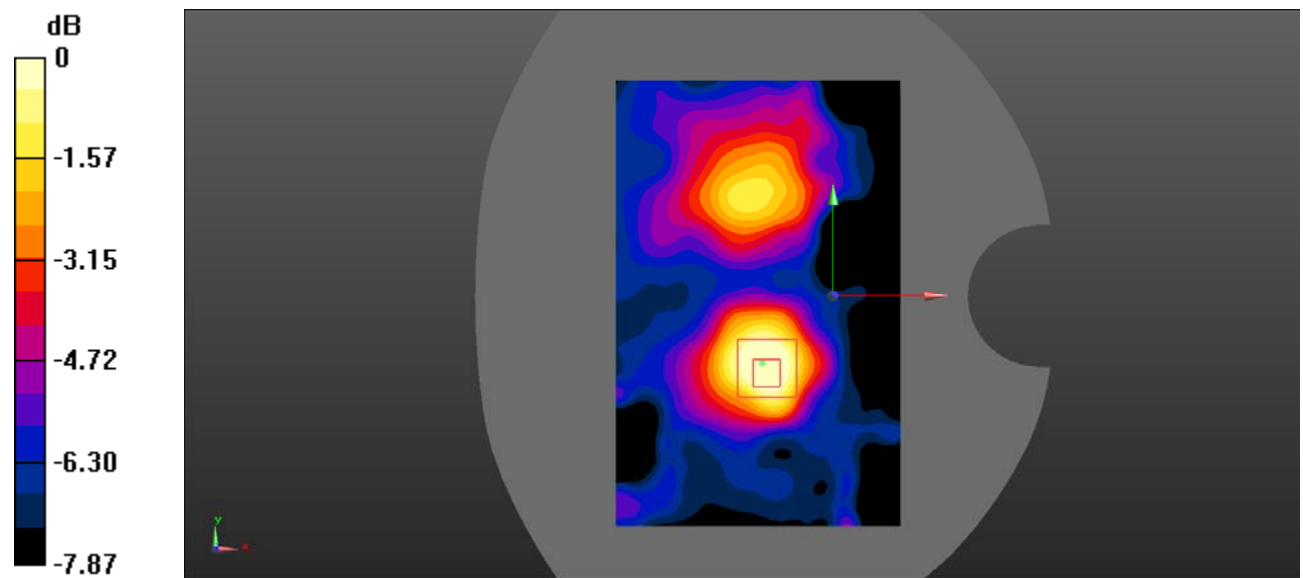

0 dB = 0.0152 W/kg = -18.18 dBW/kg

Plot 28#:DECT_ Head Left Cheek _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.852$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

DECT Mid/Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0279 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.831 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.0460 W/kg
SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg
 Maximum value of SAR (measured) = 0.0271 W/kg

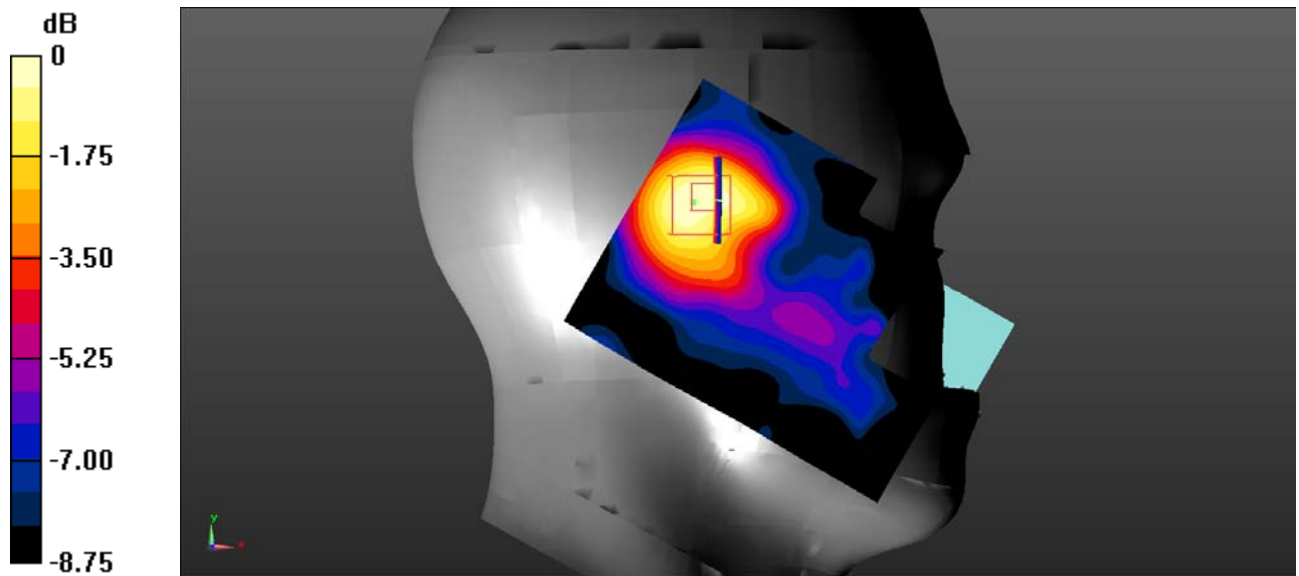

0 dB = 0.0271 W/kg = -15.67 dBW/kg

Plot 29#:DECT_ Head Left Tilt _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

DECT Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0273 W/kg


DECT Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.713 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0250 W/kg

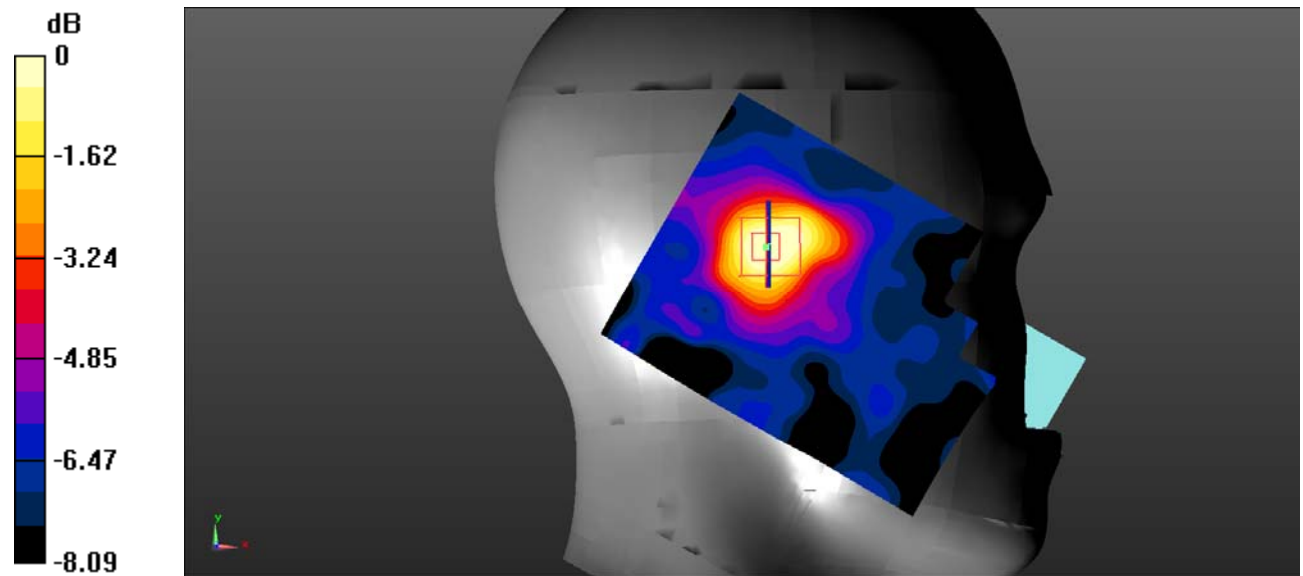

0 dB = 0.0250 W/kg = -16.02 dBW/kg

Plot 30#:DECT_ Head Right Cheek _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

DECT Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0311 W/kg

DECT Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 2.966 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.0390 W/kg
SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.015 W/kg
 Maximum value of SAR (measured) = 0.0265 W/kg

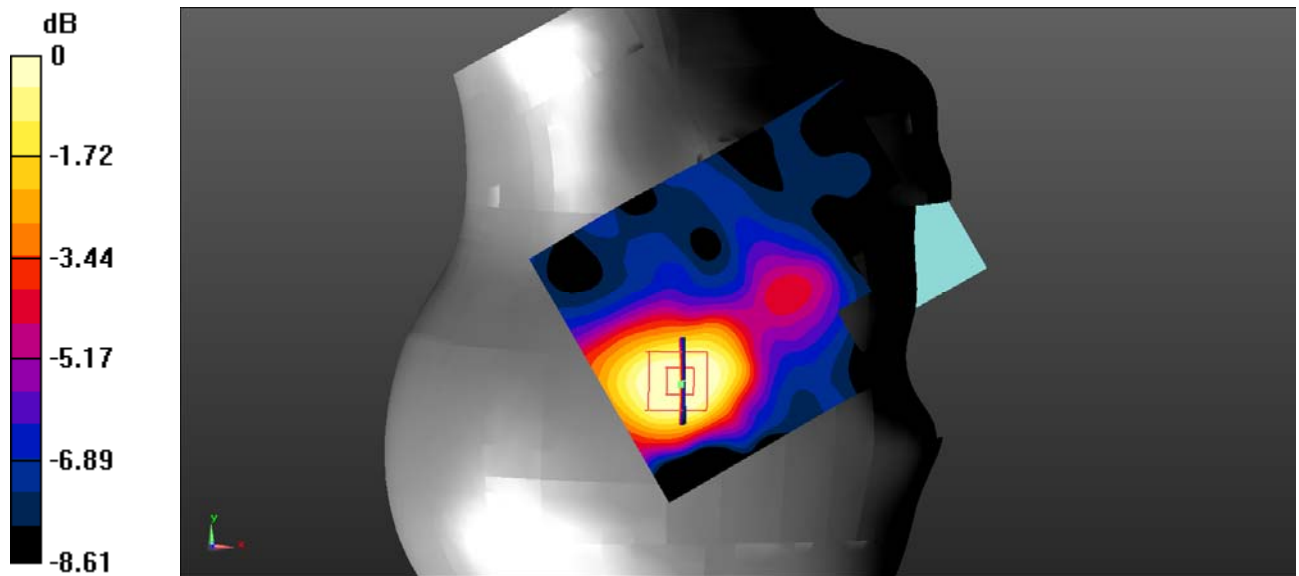

0 dB = 0.0265 W/kg = -15.77 dBW/kg

Plot 31#:DECT_ Head Right Tilt _ Low

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1921.536;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

DECT Low/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0276 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.719 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0269 W/kg

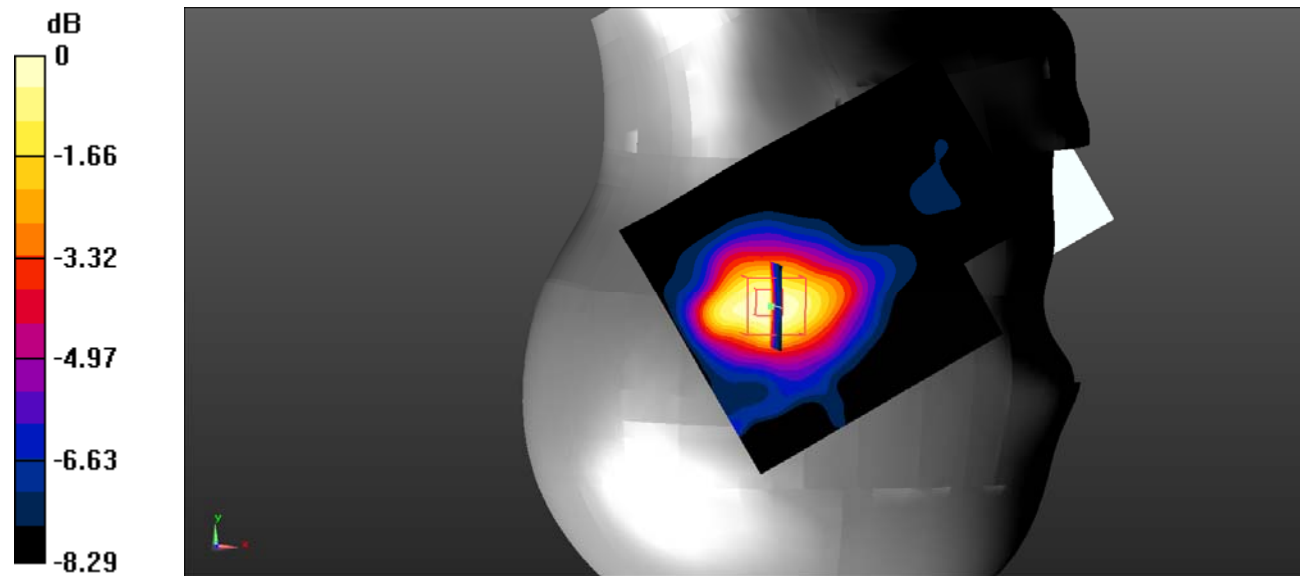

0 dB = 0.0269 W/kg = -15.70 dBW/kg

Plot 32#:DECT_ Head Right Tilt _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1924.992 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1924.992 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.852$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1924.992 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0293 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.210 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 0.0410 W/kg
SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.016 W/kg
 Maximum value of SAR (measured) = 0.0279 W/kg

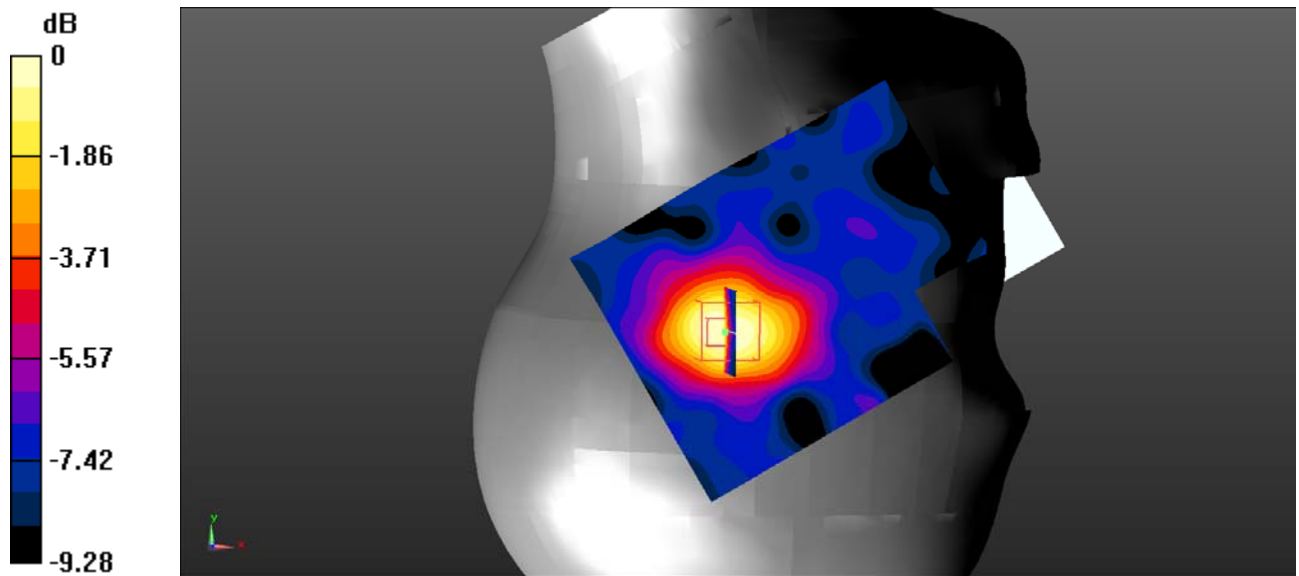

0 dB = 0.0279 W/kg = -15.54 dBW/kg

Plot 33#:DECT_ Head Right Tilt _ High

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1928.448 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 39.569$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0320 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.159 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.0440 W/kg
SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.016 W/kg
 Maximum value of SAR (measured) = 0.0278 W/kg

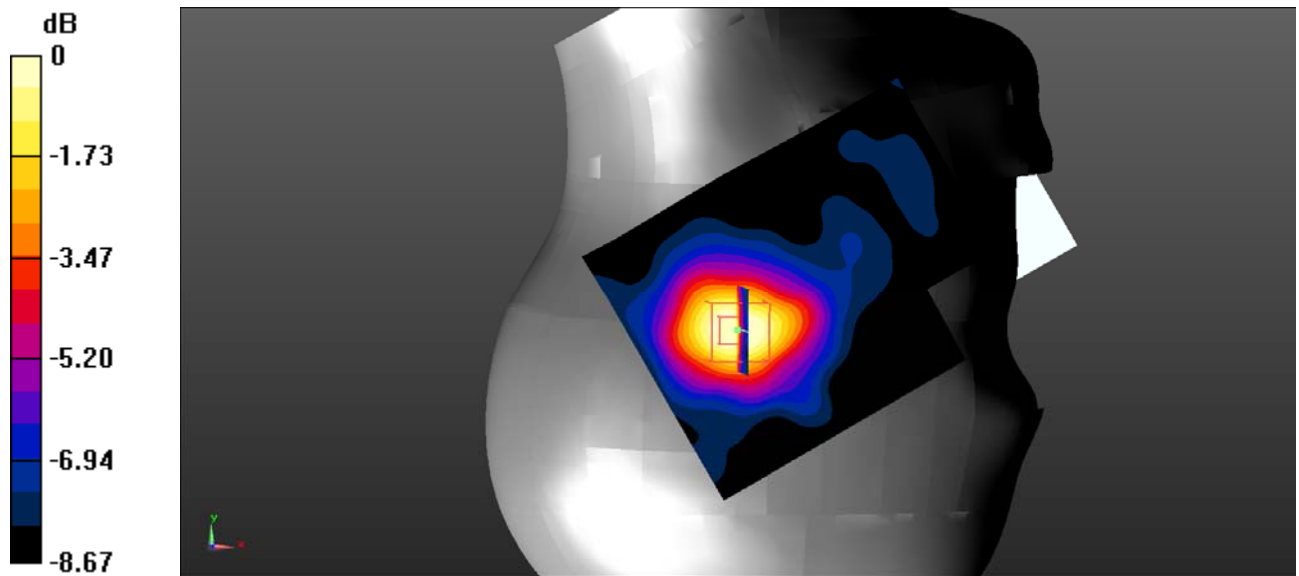

0 dB = 0.0278 W/kg = -15.56 dBW/kg

Plot 34#:DECT_ Body Back _ Low

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1921.536;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0172 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.0075 W/kg

Maximum value of SAR (measured) = 0.0115 W/kg

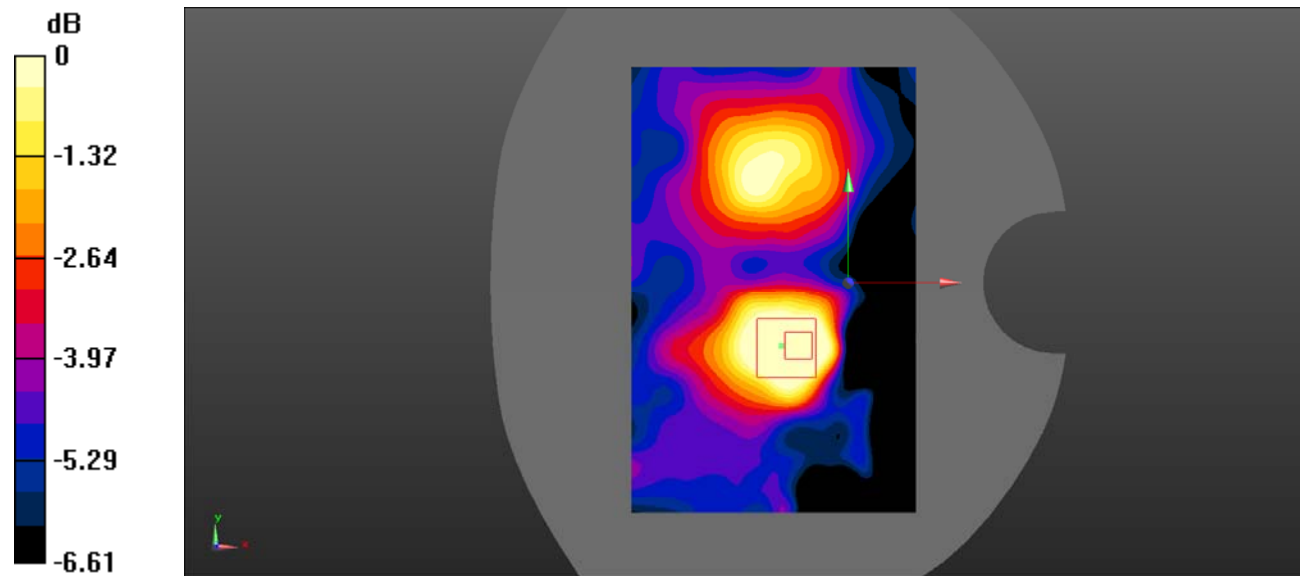

0 dB = 0.0115 W/kg = -19.39 dBW/kg

Plot 35#:DECT_ Body Back _ Mid

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1

Communication System: UID 0, DECT (0); Frequency: 1921.536;Duty Cycle: 1:24

Medium parameters used (interpolated): $f = 1921.536$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.085$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1921.536;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0180 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.844 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00981 W/kg

Maximum value of SAR (measured) = 0.0154 W/kg

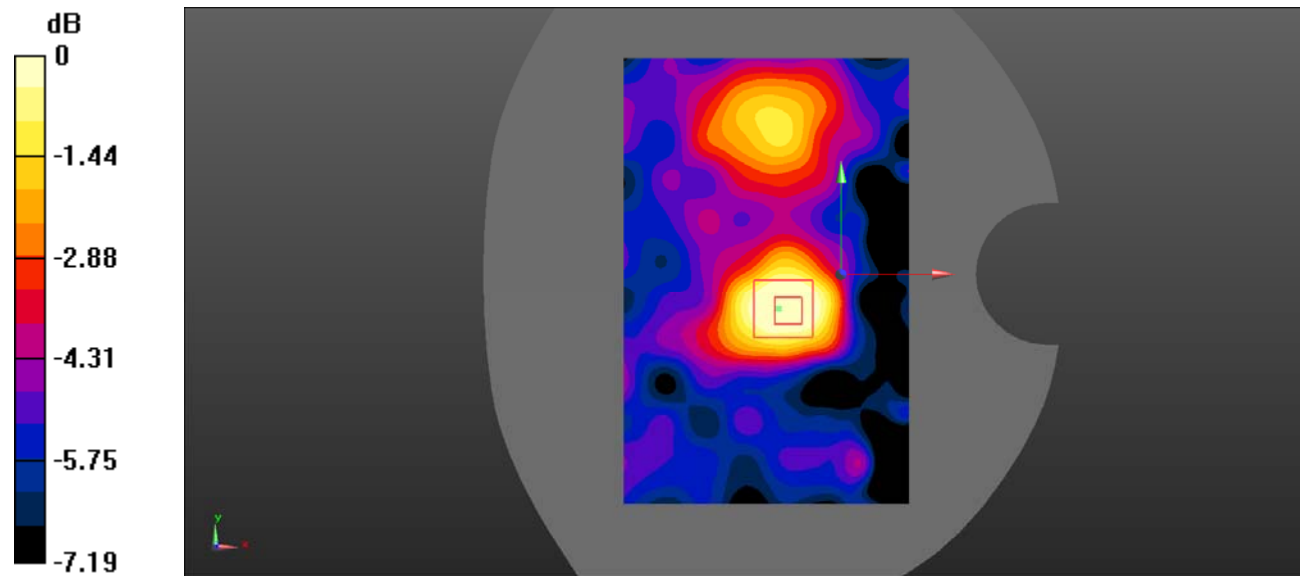

0 dB = 0.0154 W/kg = -18.12 dBW/kg

Plot 36#:DECT_ Body Back _ High

DUT: Cordless DECT Handset; Type: 8234 DECT Handset; Serial: RSZ200113002-SA-S1


Communication System: UID 0, DECT (0); Frequency: 1928.448 MHz;Duty Cycle: 1:24
 Medium parameters used (interpolated): $f = 1928.448 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 39.569$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(8.17, 8.17, 8.17)@ 1928.448 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 9/13/2019
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0208 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.969 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.0290 W/kg
SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.011 W/kg
 Maximum value of SAR (measured) = 0.0182 W/kg

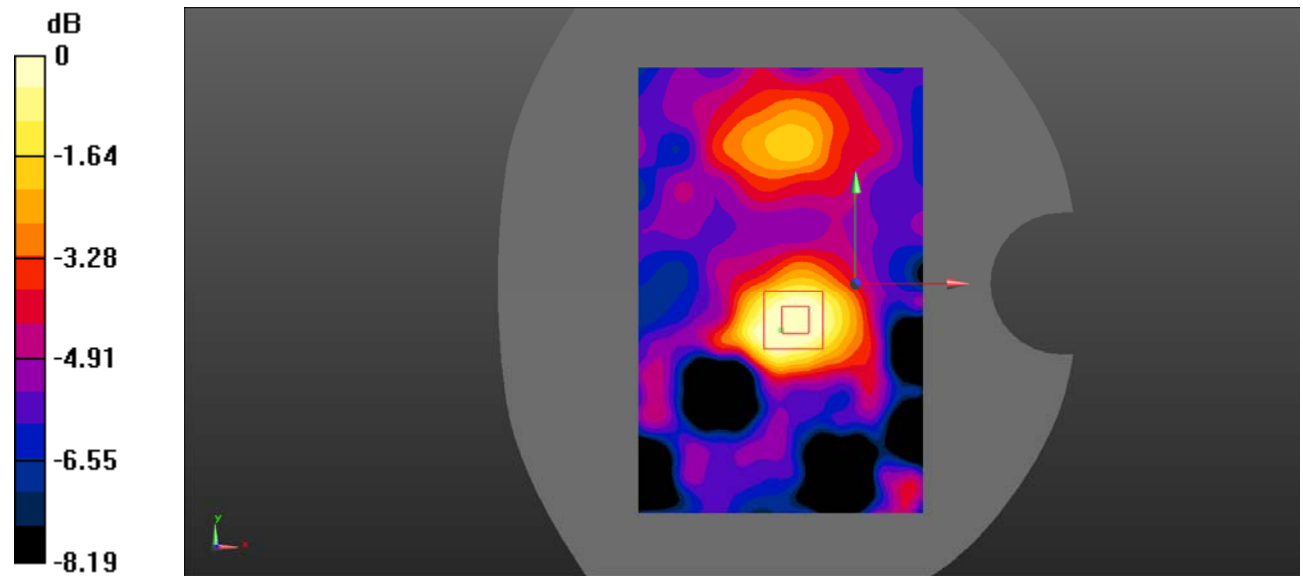

0 dB = 0.0182 W/kg = -17.40 dBW/kg