



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: RTX Hong Kong Ltd.

Address: 8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Kowloon,
Hong Kong

FCC ID: T7HX9431

Product Name: VOIP Phone

**Standard(s): FCC PART 15D
ANSI C63.17-2013**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR220939717-00A3M1

Date Of Issue: 2023/12/08

Reviewed By: Calvin Chen

Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY.....	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 CONDUCTED EMISSIONS.....	11
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	11
3.1.3 EMI Test Receiver Setup	11
3.1.4 Test Procedure	12
3.1.5 Corrected Amplitude & Margin Calculation.....	12
3.2 EMISSION BANDWIDTH:	13
3.2.1 Applicable Standard.....	13
3.2.2 EUT Setup.....	13
3.2.3 Test Procedure	13
3.3 PEAK TRANSMIT POWER:	14
3.3.1 Applicable Standard.....	14
3.3.2 EUT Setup.....	14
3.3.3 Test Procedure	14
3.4 POWER SPECTRAL DENSITY:	15
3.4.1 Applicable Standard.....	15
3.4.2 EUT Setup.....	15
3.4.3 Test Procedure	15
3.5 EMISSION INSIDE AND OUTSIDE THE SUB-BAND:	17
3.5.1 Applicable Standard.....	17
3.5.2 EUT Setup.....	17
3.5.3 Test Procedure	17
3.6 FREQUENCY STABILITY:	19
3.6.1 Applicable Standard.....	19
3.6.2 EUT Setup.....	19
3.6.3 Test Procedure	19
3.7 SPECIFIC REQUIREMENTS FOR UPCS DEVICE:	20
3.7.1 Applicable Standard.....	20
3.7.2 EUT Setup.....	22
3.7.3 Test Procedure	22


4. Test DATA AND RESULTS	24
4.1 CONDUCTED EMISSIONS.....	24
4.2 PEAK TRANSMIT POWER:	33
4.3 EMISSION INSIDE AND OUTSIDE THE SUB-BAND:	39
5. RF EXPOSURE EVALUATION	54
5.1 APPLICABLE STANDARD.....	54
5.2 MEASUREMENT RESULT	54
6. EUT PHOTOGRAPHS	55
7. TEST SETUP PHOTOGRAPHS	56

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR220939717-00A3	Original Report	2023/10/10
2.0	CR220939717-00A3M1	Added Emission Inside and Outside the Sub-band	2023/12/08

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	VOIP Phone
EUT Model:	RTX9431
Multiple Model(s):	8328 SIP-DECT SINGLE BASE STATION
Trade Mark:	RTX/Alcatel or Alcatel-Lucent or Alcatel-Lucent Enterprise or 
Operation Frequency:	1921.536-1928.448 MHz
Maximum Peak Output Power (Conducted):	18.89dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 5V from adapter or DC 48V from PoE
Serial Number:	RTX9431: 1H0H-11 for CE test, 1H0H-9 for RF test 8328 SIP-DECT SINGLE BASE STATION: 1H0H-12 for CE test, 1H0H-10 for RF test
EUT Received Date:	2023.03.25
EUT Received Status:	Good

Note: This is Class II permissive change application for FCC ID: T7HX9431, the below changes was made based on the device certified on 11/15/2019, which was provided by the manufacturer▲:

- (1) Add models “8328 SIP-DECT SINGLE BASE STATION”.
- (2) Add trade mark.
- (3) Add an alternative PCB with the following:
 - a. Changed PoE chip from Si3402 to MP8007.
 - b. Changed voltage regulator from LDO to DCDC.
 - c. Changed Ethernet bias to 2.7V.
 - d. Add LED driving circuit.
 - e. Add one output coupling capacitor in RF output circuit.
 - f. Add one backup decoupling capacitor for RF selector.
 - g. Changed Ethernet surge protection component.

Antenna Information Detail▲:

Antenna Chain	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chain 1/Chain 2	PCB	50	1.92~1.93GHz	1 dBi

The Method of §15.203 Compliance:

- Antenna was permanently attached to the unit.
- Antenna use a unique type of connector to attach to the EUT.
- Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter 1	/	S008ACM0500200
Adapter 2	/	S010WU0500200

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No
The engineering mode was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
RTX	SIP Sever	AIO100	Unknown
I.T.E.	POE	G1082-PoE48G	Unknown
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	NO	NO	6	SIP Sever	EUT/POE
RJ45 Cable	NO	NO	1	POE	EUT
DC Cable	NO	NO	1.8	Adapter	EUT

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:
POE

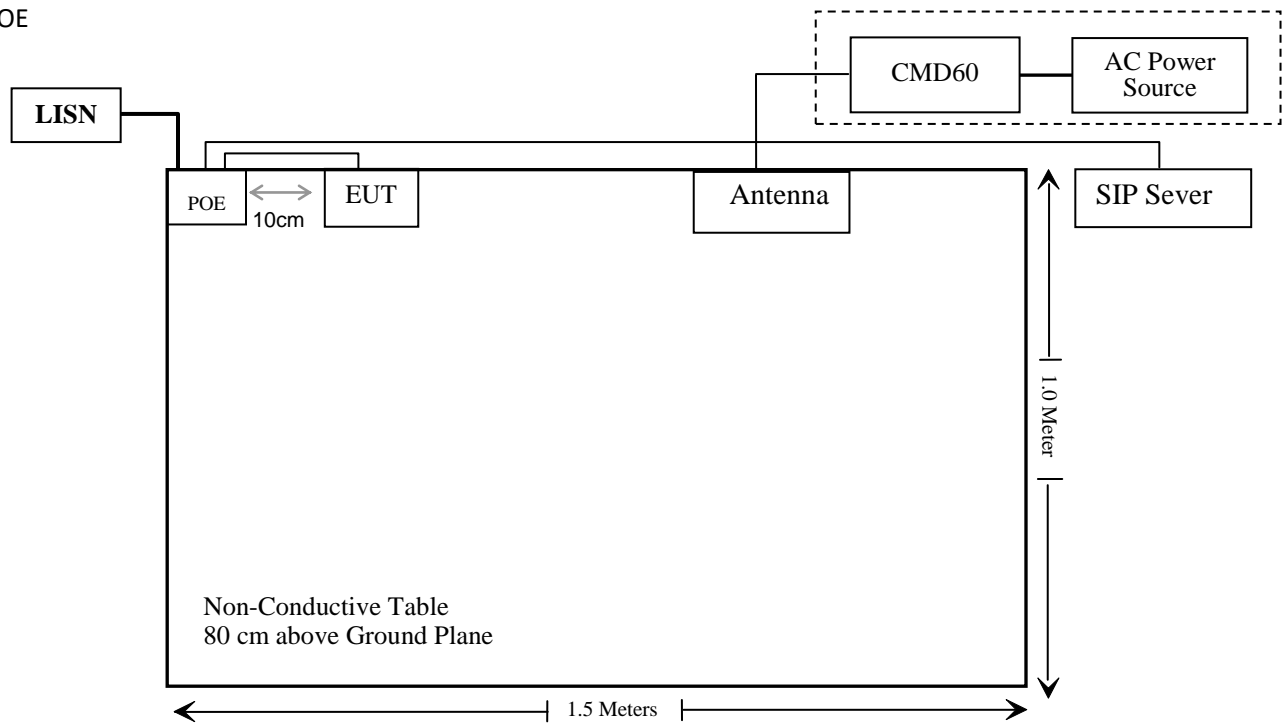

Adapter

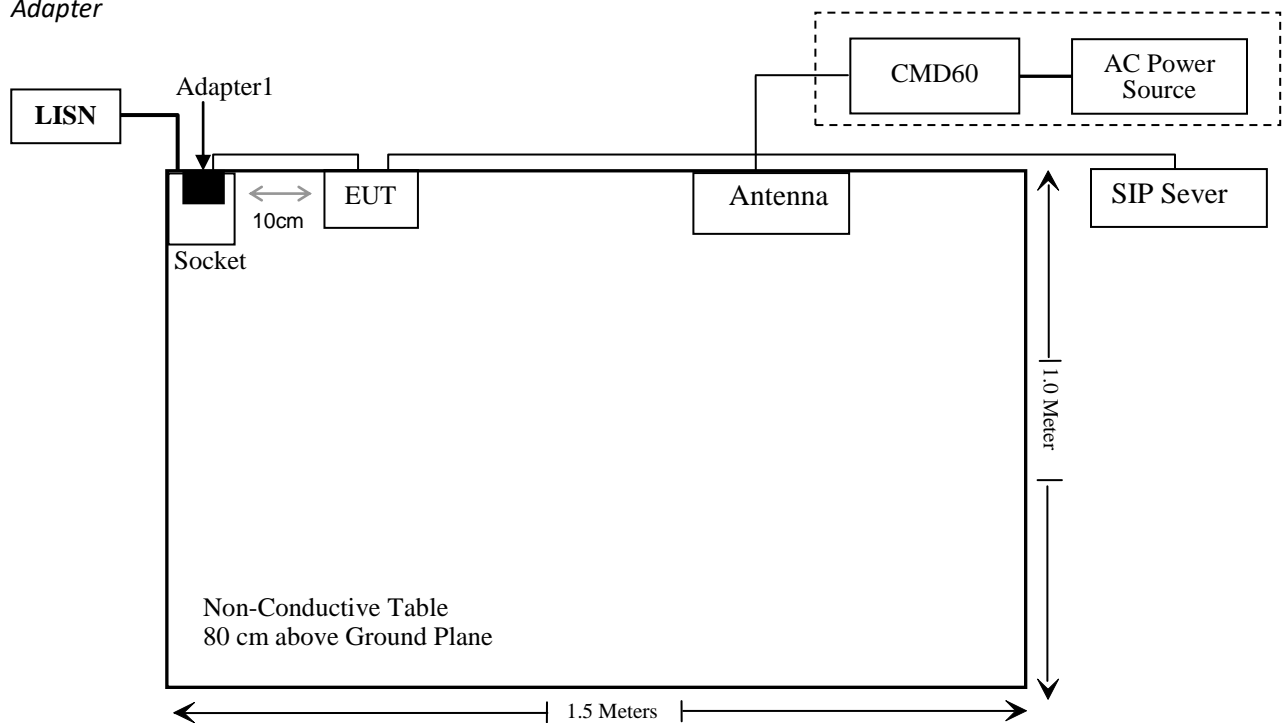

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC § 15.315, § 15.207	Conducted Emission	Compliant
FCC § 15.323 (a)	Emission Bandwidth	Note*
FCC § 15.319 (c)	Peak Transmit Power	Reporting only
FCC § 15.319 (d)	Power Spectral Density	Note*
FCC § 15.323 (d)	Emission Inside and Outside the sub-band	Compliant
FCC § 15.323 (f)	Frequency Stability	Note*
FCC § 15.323 (c)(e) & § 15.319 (f)	Specific Requirements for UPCS	Note*
FCC § 15.317, § 15.203	Antenna Requirement	Compliant
FCC § 15.319 (i) & 1.1307	RF Exposure Evaluation	Compliant

Note*: Per spot check with the output power, the RF parameters identical with the original device, the result please refer to the original report: RSZ190711005-00, China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided in the original report.

3. REQUIREMENTS AND TEST PROCEDURES


3.1 Conducted Emissions

3.1.1 Applicable Standard

FCC §15.315

An unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.

3.1.2 EUT Setup

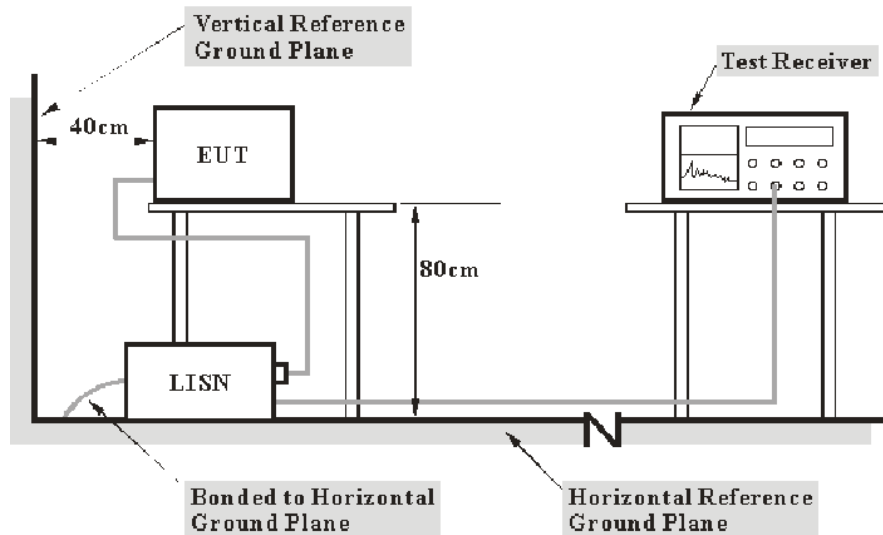

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.315, FCC 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Emission Bandwidth:

3.2.1 Applicable Standard

FCC §15.323 (a)

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

3.2.2 EUT Setup

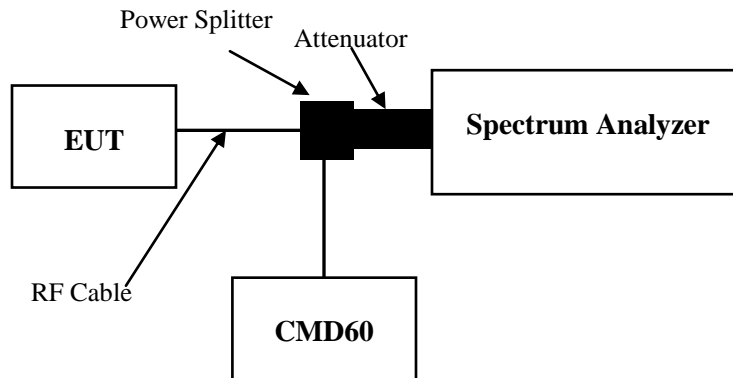

3.2.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.3

Table 3—Spectrum analyzer settings for measurement of emissions bandwidth *B*

RBW	Approximately 1% of the emission bandwidth (a rough estimate may be obtained from peak power level measurement, or use manufacturer's declared value)
Video bandwidth	$\geq 3 \times$ the RBW
Center frequency	Nominal center frequency of channel
Span	$\geq 2 \times$ the expected emission bandwidth
Sweep time	Coupled to frequency span and RBW
Amplitude scale	Log
Detection	Peak detection with maximum hold enabled

Record the maximum level of the modulated carrier. Find the two furthest frequencies above and below the frequency of the maximum level of the modulated carrier where the signal level is 26 dB below the peak level of the carrier. The difference in frequency between these two frequencies is the emission bandwidth.

If after measuring the emission bandwidth, it is found that the RBW used was not approximately 1% of the emission bandwidth, then adjust the RBW and repeat the procedure until the correct RBW is used. If the spectrum analyzer has fixed values of RBW, the one that is the nearest to 1% of the emission bandwidth is acceptable, provided it is no less than 0.5% of the emission bandwidth and no greater than 2% of the emission bandwidth.


3.3 Peak Transmit Power:

3.3.1 Applicable Standard

FCC §15.319 (c)

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.3.2 EUT Setup

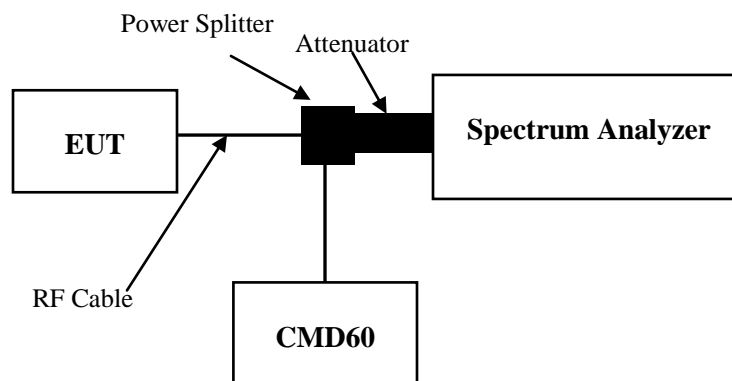

3.3.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.2

The resolution bandwidth (RBW) setting for this test must be adjusted by repeating this test and using increasing values of the RBW until there are negligible changes (within ± 0.5 dB) in the measured values of the maximum power.

Table 2—Spectrum analyzer settings for determining the peak power

RBW	\geq Emission bandwidth
Video bandwidth	\geq RBW
Span	Zero
Center frequency	Nominal center frequency of transmit carrier
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately


3.4 Power Spectral Density:

3.4.1 Applicable Standard

FCC §15.319 (d)

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

3.4.2 EUT Setup

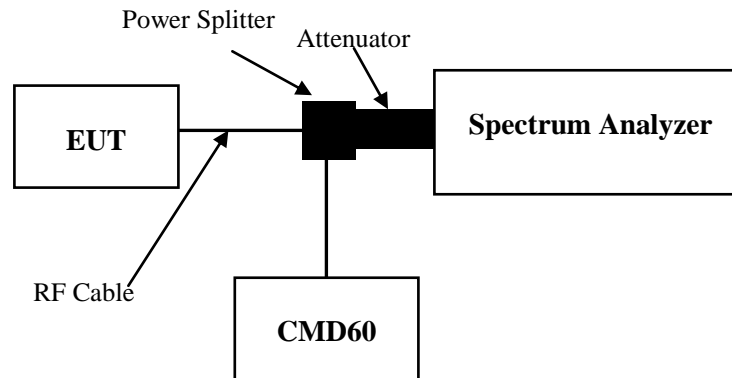

3.4.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.5

The EUT transmit data sequence and mode of operation shall be representative of that encountered in normal operation, so that transient effects associated with transmission bursts or data content are captured by the PSD measurement.

Table 4—Spectrum analyzer settings for finding of the maximum of PSD_{EUT}

RBW	3 kHz
Video bandwidth	$\geq 3 \times \text{RBW}$
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 μs). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

For burst-type signals, arrange to measure the wideband burst duration of each burst analyzed and compute the mean duration.

Determine the level that is 20 dB below the first peak. Record the power-averaged waveform between the 20 dB threshold levels around the first peak with at least 30 000 samples per second as shown in Figure 4. Multiple wideband bursts may produce the waveform between -20 dB peaks; these must be included in the determination of the average burst length. If there is no level that is 20 dB below the peak, then analyze the complete sweep and include all of the wideband waveform that occurs during the sweep time in the computation of average burst length.

Sum the values of the sample points (in linear units of power) and divide by the sample frequency to obtain the total pulse energy in the 3 kHz bandwidth, then divide by the average duration of the wideband input pulse to obtain the average pulse power.

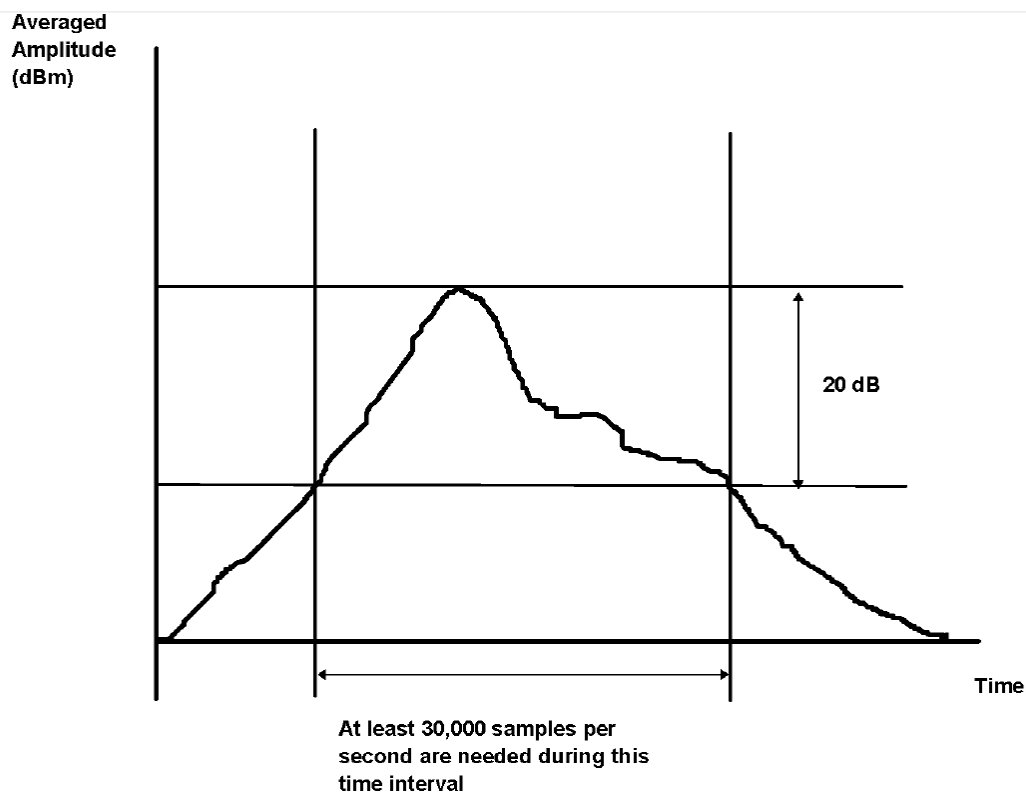


Figure 4—Computed average transient method: Sampling of the averaged power waveform measured with 3 kHz RBW


3.5 Emission Inside and Outside the Sub-band:

3.5.1 Applicable Standard

FCC §15.323 (d)

Emissions outside the band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the band and 1.25 MHz above or below the band; 50 dB between 1.25 and 2.5 MHz above or below the band; and 60 dB at 2.5 MHz or greater above or below the band. Emissions inside the band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. B” is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

3.5.2 EUT Setup

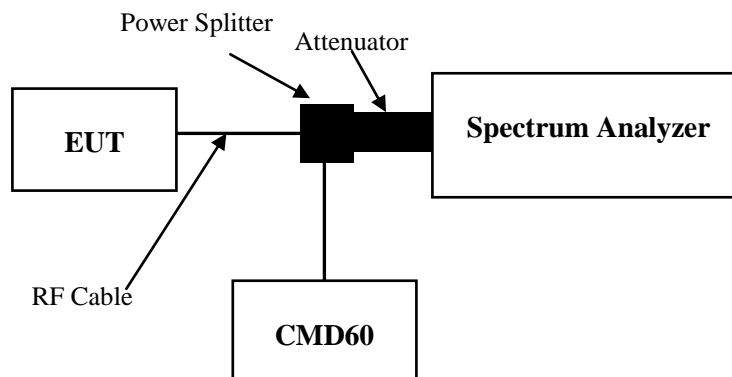

3.5.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.6

In-band emission:

In the region between 1B and 2B from the center of the RF carrier, the measured emission level (measured with 1% of emission bandwidth) shall not exceed 30 dB below the permitted peak power for the EUT.

In the region between 2B and 3B from the center of the RF carrier, the measured emission level shall not exceed 50 dB below the permitted peak power for the EUT.

Table 5—Spectrum analyzer settings for measuring in-band emissions

RBW	Approximately 1% of the emission bandwidth (B)
Video bandwidth	$3 \times \text{RBW}$
Sweep time	The sweep time shall be sufficiently slow that the swept frequency rate shall not exceed one RBW per three transmit bursts.
Number of sweeps	Sufficient to stabilize the trace
Amplitude scale	Log
Detection	Peak detection and max hold enabled
Span	Approximately equal to $3.5 B$

In the region between $3B$ and the UPCS band edge, as measured from the center of the RF carrier, the measured emission level shall not exceed 60 dB below the permitted peak power for the EUT.

Out-band emission:

Out-of-band tests shall be performed with the RF carrier set to the lowest and highest carriers defined by the EUT. The spectrum analyzer settings for in-band unwanted emissions in 6.1.6.1 also apply to out-of-band emissions. The EUT shall pass the tests of item a), item b), and either item c) or item d), as follows:

a) In the region between the band edges and 1.25 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -9.5 dBm.

b) In the region between 1.25 and 2.5 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -29.5 dBm.

c) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed -39.5 dBm.

d) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.

UPCS devices, in general, include digital circuitry not directly associated with the radio transmitter and are subject to the requirements for unintentional radiators as described in 47CFR15.109, for both in-band and out-of-band emissions. These emissions shall be measured with the EUT operating in receive and transmit modes. For the transmit mode, do not measure within 3.75 MHz or $3B$, whichever is the largest, of the edges of the band. Emissions that are directly caused by digital circuits in the transmit path do not have to meet 47CFR15.109 limits, but shall meet those limits as mentioned in the preceding list.


3.6 Frequency Stability:

3.6.1 Applicable Standard

FCC §15.323(f)

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20° to $+50^{\circ}$ °C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20° °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

3.6.2 EUT Setup

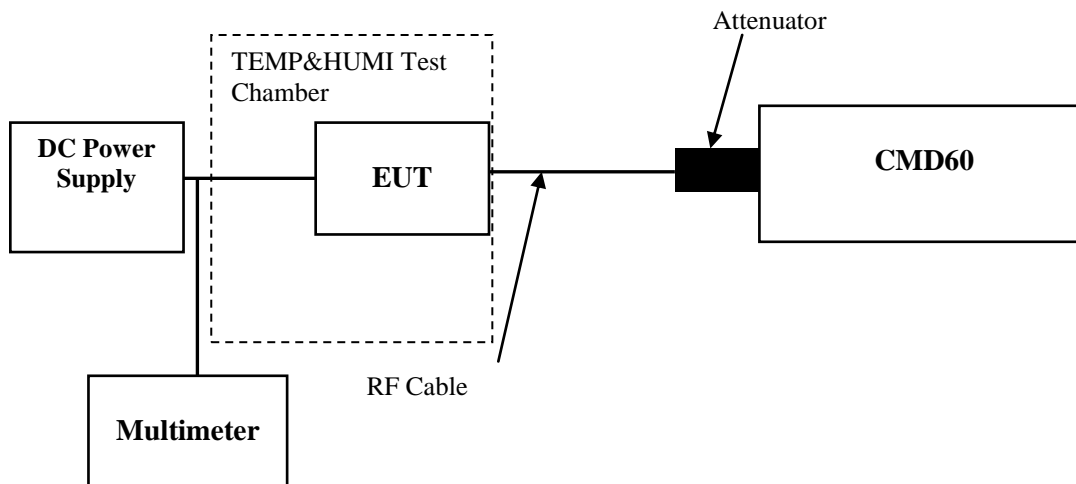

3.6.3 Test Procedure

According to ANSI C63.17-2013 Section 6.2.1.2

This test does not apply to an EUT that is capable only of operating from a battery. For a mains-powered EUT, the mean value of the carrier frequency shall be measured at the power supply voltage extremes of row 1 of Table 7.

Table 7—Test parameters for carrier-frequency stability testing

Temperature	Supply voltage
$20^{\circ}\text{C} \pm 2^{\circ}\text{C}$	85% to 115% of declared nominal voltage
$-20^{\circ}\text{C} \pm 2^{\circ}\text{C}$	All declared nominal(s)
$+50^{\circ}\text{C} \pm 2^{\circ}\text{C}$	All declared nominal(s)

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

3.7 Specific Requirements For UPCS Device:

3.7.1 Applicable Standard

FCC §15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

FCC §15.323(c)

Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

- (1) Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.
- (2) The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.
- (3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.
- (4) Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.
- (5) If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.
- (6) If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.
- (7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

(8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

(9) Devices that have a power output lower than the maximum permitted under this subpart may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

(10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

(11) An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

(12) The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

ANSI C63.17 2013 §6.2 Frequency and time stability and §7. Monitoring tests and §8. Time and spectrum window access procedure.


According to RSS-213 §5.1 & §5.2 type of modulation and access protocol
Equipment certified under this standard shall use digital modulation.

In order to provide equitable access to the radio frequency spectrum, the licence-exempt PCS device must possess an access protocol.

FCC §15.323(e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this band shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

3.7.2 EUT Setup

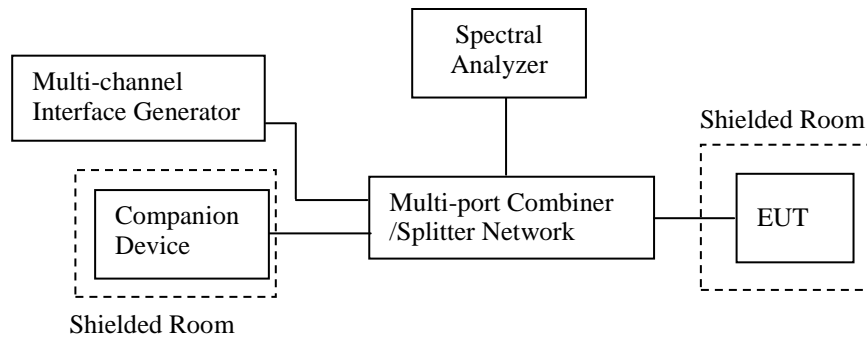

3.7.3 Test Procedure

1) Monitoring Time

According to ANSI C63.17- 2013 Section 7.3.3

2) Lower Monitoring Threshold

According to ANSI C63.17- 2013 Section 7.3.1

3) Maximum Transmit Period

According to ANSI C63.17- 2013 Section 8.2.2

4) System Acknowledgement

According to ANSI C63.17- 2013 Section 8.1, 8.2

5) Least Interfered Channel (LIC)

According to ANSI C63.17- 2013 Section 7.3.2, 7.3.3

6) Random waiting

According to ANSI C63.17- 2013 Section 8.1.2 or 8.1.3

7) Monitoring Bandwidth and Reaction Time

According to ANSI C63.17- 2013 Section 7.4, 7.5

8) Monitoring Antenna

According to ANSI C63.17- 2013 Section 4

9) Monitoring threshold relaxation

According to ANSI C63.17- 2013 Section 4

10) Duplex Connections

According to ANSI C63.17- 2013 Section 8.3

11) Alternative monitoring interval

According to ANSI C63.17- 2013 Section 8.4

12) Frame Repetition Stability Frame Period and Jitter

According to ANSI C63.17- 2013 Section 6.2.2, 6.2.3

4. Test DATA AND RESULTS

4.1 Conducted Emissions

Serial Number:	1H0H-11,1H0H-12	Test Date:	2023/09/30
Test Site:	CE	Test Mode:	Transmitting maximum output power mode (ANT1 Low channel)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101.2
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Powered by Adapter S008ACM0500200 (Model RTX9431)

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-30

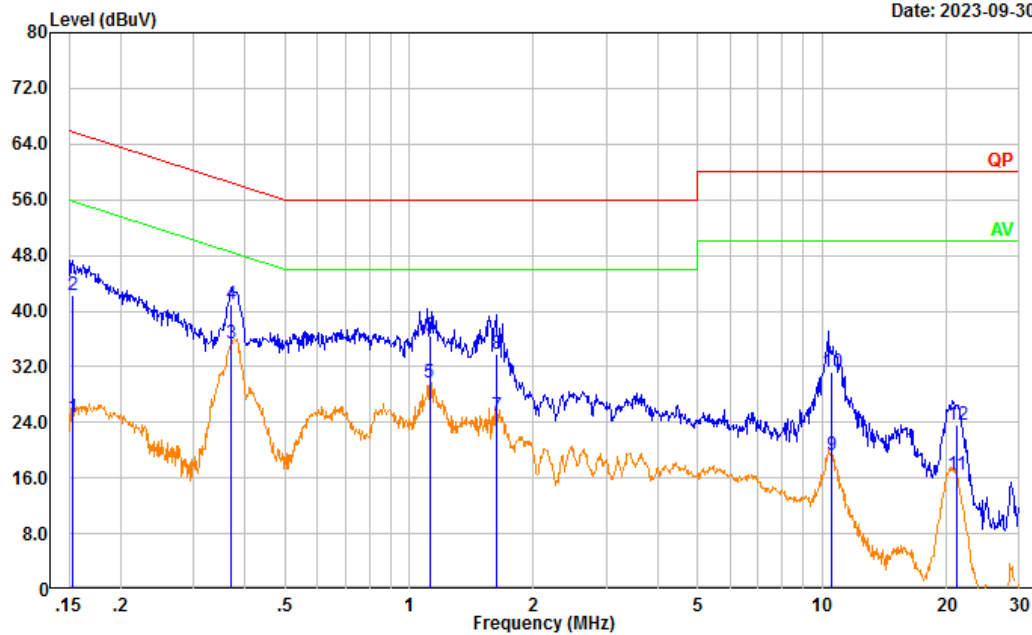

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.153	15.13	9.61	24.74	55.85	31.11	Average
2	0.153	32.63	9.61	42.24	65.85	23.61	QP
3	0.369	25.72	9.61	35.33	48.52	13.19	Average
4	0.369	31.33	9.61	40.94	58.52	17.58	QP
5	1.120	20.01	9.62	29.63	46.00	16.37	Average
6	1.120	26.86	9.62	36.48	56.00	19.52	QP
7	1.626	15.40	9.63	25.03	46.00	20.97	Average
8	1.626	24.11	9.63	33.74	56.00	22.26	QP
9	10.546	9.55	9.67	19.22	50.00	30.78	Average
10	10.546	21.51	9.67	31.18	60.00	28.82	QP
11	21.107	6.57	9.80	16.37	50.00	33.63	Average
12	21.107	13.86	9.80	23.66	60.00	36.34	QP

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-30

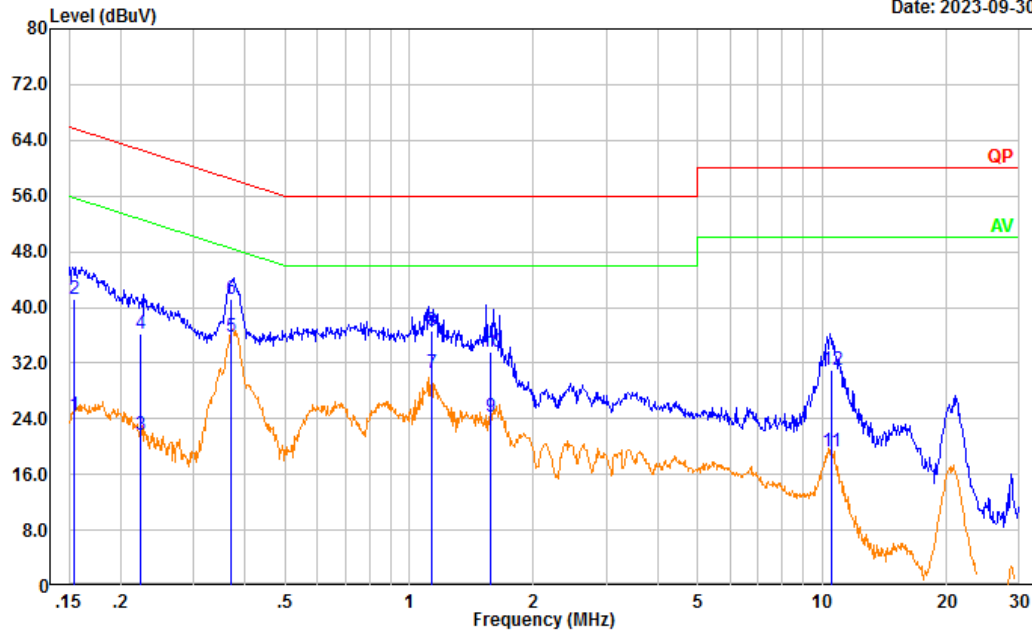


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.155	14.79	9.61	24.40	55.73	31.33	Average
2	0.155	31.48	9.61	41.09	65.73	24.64	QP
3	0.223	12.05	9.61	21.66	52.70	31.04	Average
4	0.223	26.57	9.61	36.18	62.70	26.52	QP
5	0.370	26.06	9.61	35.67	48.50	12.83	Average
6	0.370	31.69	9.61	41.30	58.50	17.20	QP
7	1.131	20.90	9.62	30.52	46.00	15.48	Average
8	1.131	27.08	9.62	36.70	56.00	19.30	QP
9	1.578	14.60	9.63	24.23	46.00	21.77	Average
10	1.578	23.89	9.63	33.52	56.00	22.48	QP
11	10.523	9.55	9.67	19.22	50.00	30.78	Average
12	10.523	21.40	9.67	31.07	60.00	28.93	QP

Powered by Adapter S010WU0500200 (Model RTX9431)

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-30

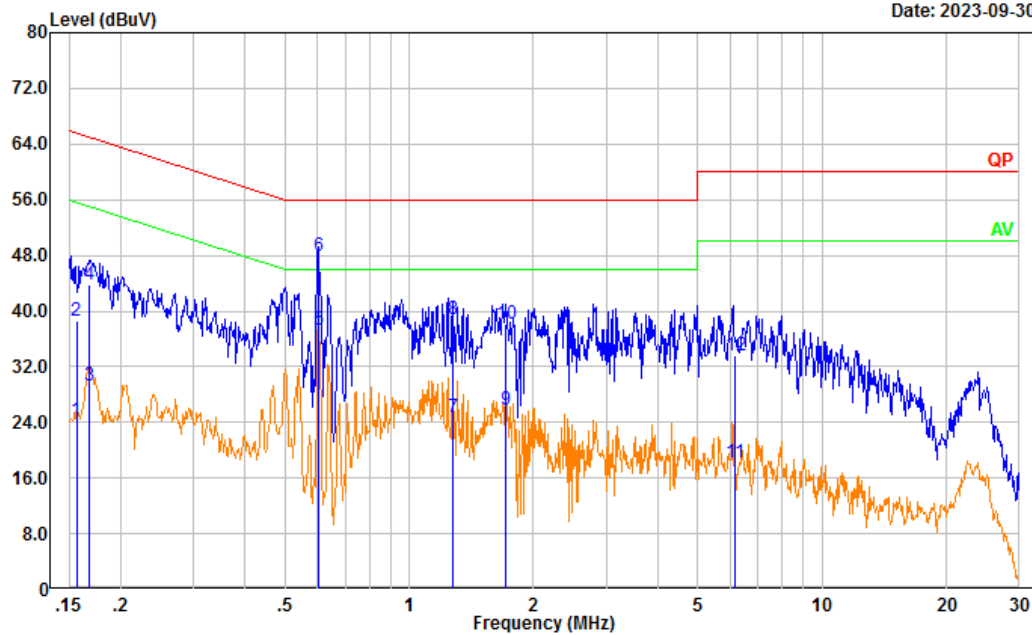

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	14.75	9.61	24.36	55.66	31.30	Average
2	0.156	29.05	9.61	38.66	65.66	27.00	QP
3	0.168	19.75	9.61	29.36	55.08	25.72	Average
4	0.168	34.29	9.61	43.90	65.08	21.18	QP
5	0.603	27.58	9.62	37.20	46.00	8.80	Average
6	0.603	38.37	9.62	47.99	56.00	8.01	QP
7	1.273	15.18	9.62	24.80	46.00	21.20	Average
8	1.273	29.26	9.62	38.88	56.00	17.12	QP
9	1.706	16.14	9.63	25.77	46.00	20.23	Average
10	1.706	28.49	9.63	38.12	56.00	17.88	QP
11	6.143	8.61	9.66	18.27	50.00	31.73	Average
12	6.143	23.92	9.66	33.58	60.00	26.42	QP

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-30

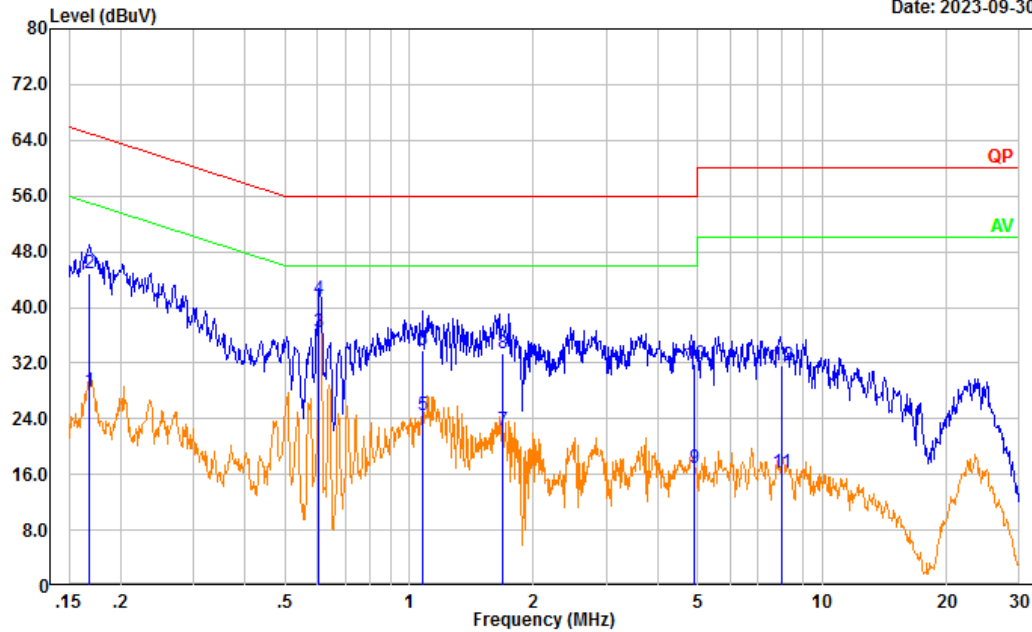


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.167	18.44	9.61	28.05	55.09	27.04	Average
2	0.167	35.24	9.61	44.85	65.09	20.24	QP
3	0.603	26.89	9.62	36.51	46.00	9.49	Average
4	0.603	31.66	9.62	41.28	56.00	14.72	QP
5	1.080	14.92	9.62	24.54	46.00	21.46	Average
6	1.080	24.26	9.62	33.88	56.00	22.12	QP
7	1.687	12.81	9.63	22.44	46.00	23.56	Average
8	1.687	23.84	9.63	33.47	56.00	22.53	QP
9	4.893	7.27	9.66	16.93	46.00	29.07	Average
10	4.893	22.29	9.66	31.95	56.00	24.05	QP
11	7.960	6.53	9.67	16.20	50.00	33.80	Average
12	7.960	22.01	9.67	31.68	60.00	28.32	QP

Powered by POE (Model RTX9431)

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-30

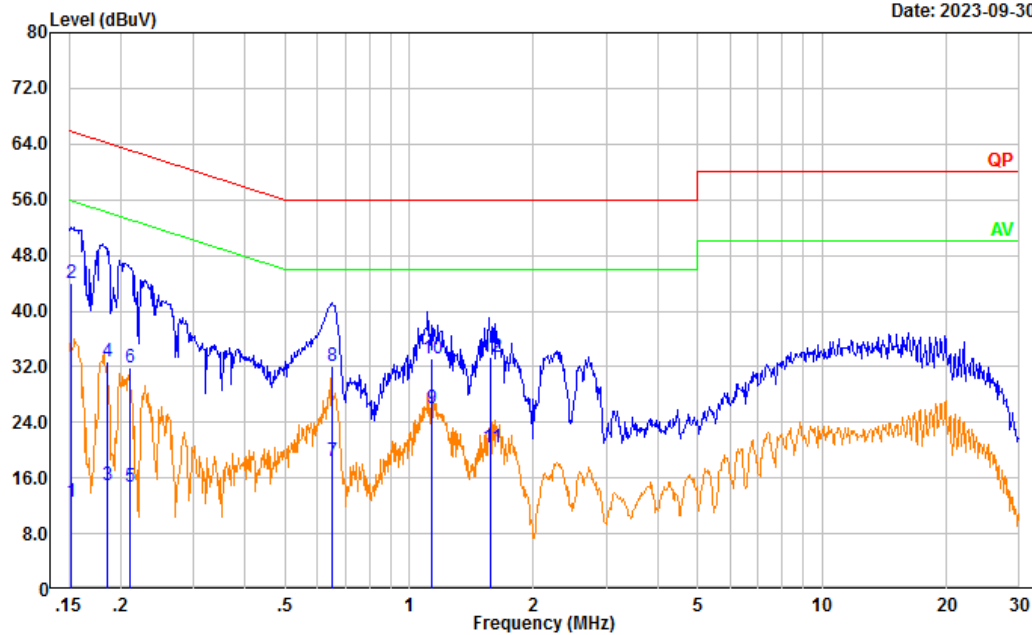

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	3.06	9.61	12.67	55.87	43.20	Average
2	0.152	34.47	9.61	44.08	65.87	21.79	QP
3	0.185	5.26	9.61	14.87	54.24	39.37	Average
4	0.185	23.21	9.61	32.82	64.24	31.42	QP
5	0.210	5.19	9.61	14.80	53.21	38.41	Average
6	0.210	22.27	9.61	31.88	63.21	31.33	QP
7	0.649	8.73	9.62	18.35	46.00	27.65	Average
8	0.649	22.54	9.62	32.16	56.00	23.84	QP
9	1.134	16.31	9.62	25.93	46.00	20.07	Average
10	1.134	23.64	9.62	33.26	56.00	22.74	QP
11	1.580	10.84	9.63	20.47	46.00	25.53	Average
12	1.580	23.70	9.63	33.33	56.00	22.67	QP

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-30

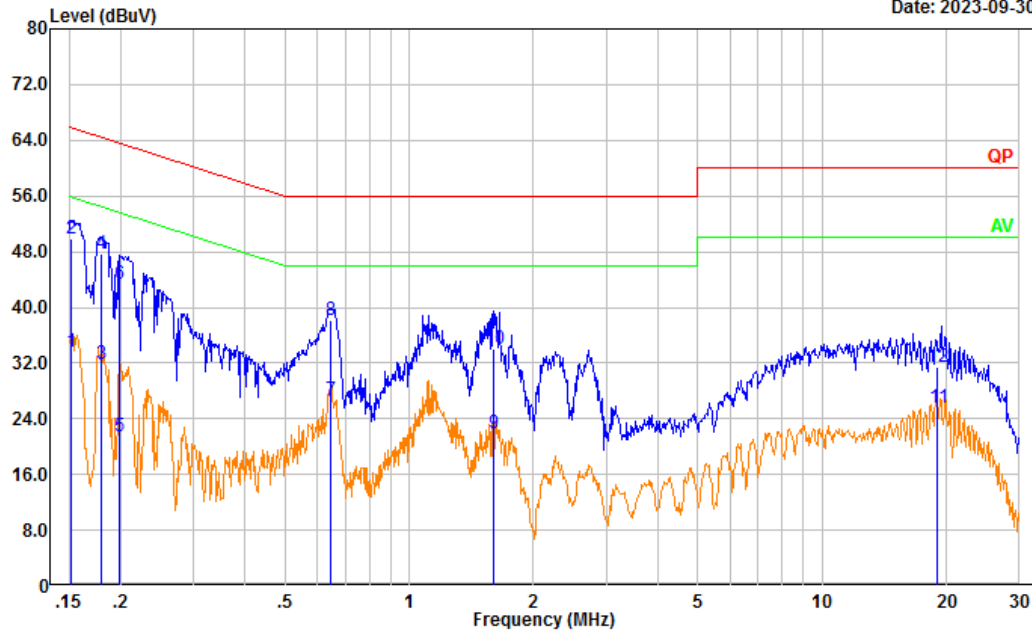


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	24.09	9.61	33.70	55.89	22.19	Average
2	0.152	40.27	9.61	49.88	65.89	16.01	QP
3	0.179	22.34	9.61	31.95	54.51	22.56	Average
4	0.179	38.10	9.61	47.71	64.51	16.80	QP
5	0.198	11.86	9.61	21.47	53.68	32.21	Average
6	0.198	33.70	9.61	43.31	63.68	20.37	QP
7	0.646	17.06	9.62	26.68	46.00	19.32	Average
8	0.646	28.53	9.62	38.15	56.00	17.85	QP
9	1.603	12.29	9.63	21.92	46.00	24.08	Average
10	1.603	24.39	9.63	34.02	56.00	21.98	QP
11	19.012	15.85	9.69	25.54	50.00	24.46	Average
12	19.012	21.83	9.69	31.52	60.00	28.48	QP

Powered by POE (Model 8328 SIP-DECT SINGLE BASE STATION)

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-30

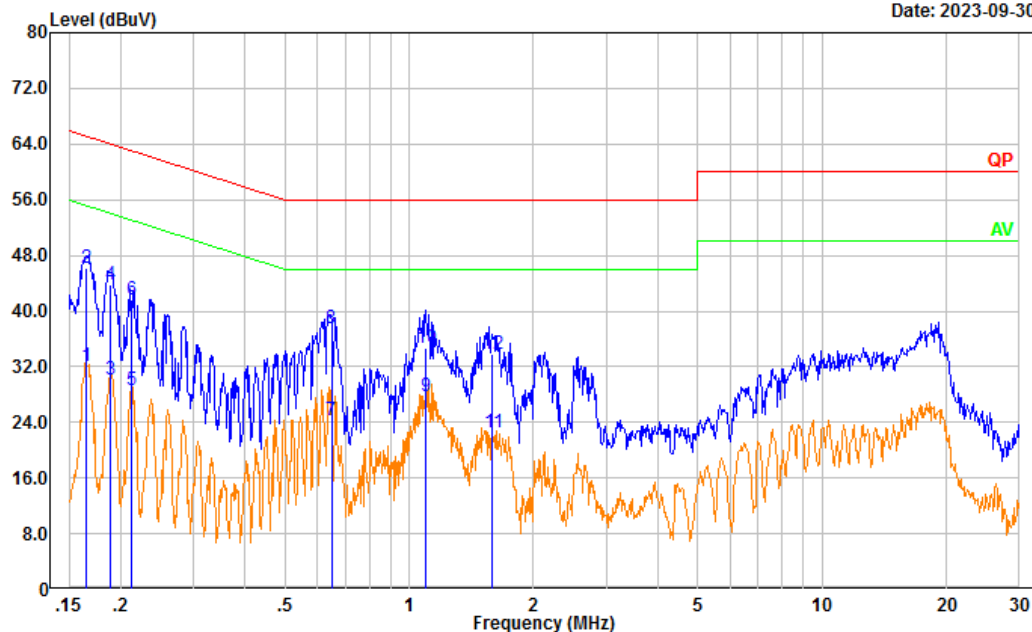

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.165	22.51	9.61	32.12	55.18	23.06	Average
2	0.165	36.66	9.61	46.27	65.18	18.91	QP
3	0.189	20.54	9.61	30.15	54.08	23.93	Average
4	0.189	34.22	9.61	43.83	64.08	20.25	QP
5	0.213	18.92	9.61	28.53	53.09	24.56	Average
6	0.213	32.02	9.61	41.63	63.09	21.46	QP
7	0.648	14.58	9.62	24.20	46.00	21.80	Average
8	0.648	27.78	9.62	37.40	56.00	18.60	QP
9	1.096	18.16	9.62	27.78	46.00	18.22	Average
10	1.096	25.05	9.62	34.67	56.00	21.33	QP
11	1.590	12.81	9.63	22.44	46.00	23.56	Average
12	1.590	24.19	9.63	33.82	56.00	22.18	QP

Project No.: CR220939717-RFA3
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-30

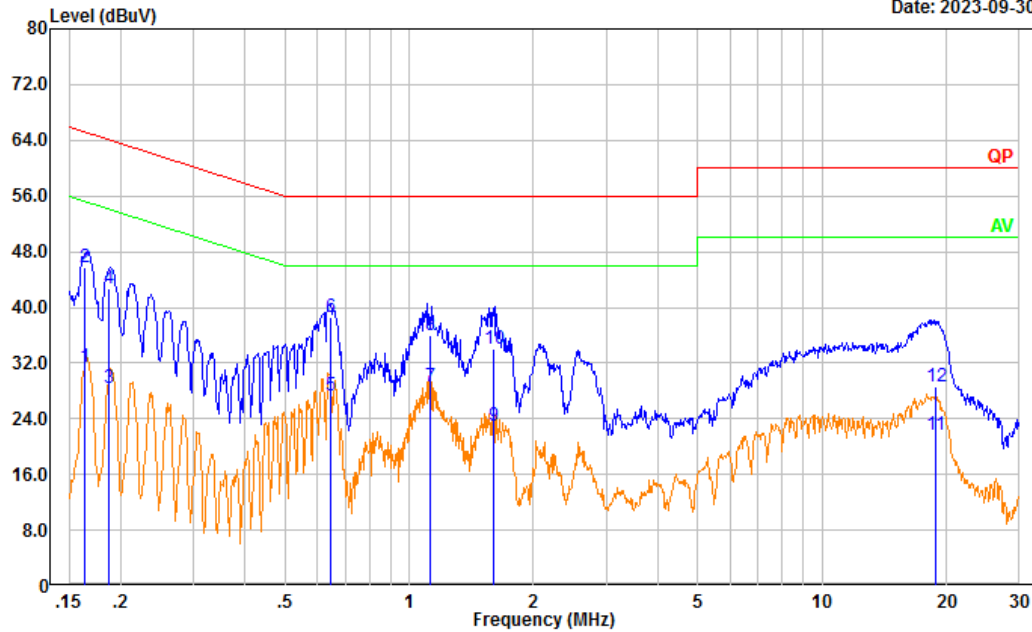

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.164	21.91	9.61	31.52	55.25	23.73	Average
2	0.164	36.06	9.61	45.67	65.25	19.58	QP
3	0.187	18.83	9.61	28.44	54.17	25.73	Average
4	0.187	33.19	9.61	42.80	64.17	21.37	QP
5	0.645	17.59	9.62	27.21	46.00	18.79	Average
6	0.645	28.96	9.62	38.58	56.00	17.42	QP
7	1.120	18.99	9.62	28.61	46.00	17.39	Average
8	1.120	26.46	9.62	36.08	56.00	19.92	QP
9	1.600	13.29	9.63	22.92	46.00	23.08	Average
10	1.600	24.49	9.63	34.12	56.00	21.88	QP
11	18.793	11.89	9.69	21.58	50.00	28.42	Average
12	18.793	18.97	9.69	28.66	60.00	31.34	QP

4.2 Peak Transmit Power:

Serial Number:	1H0H-9/1H0H-10	Test Date:	2023/9/30
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101
----------------------	----	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018	2023/6/8	2024/6/7
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**RTX9431****ANT 1:**

Test Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)
Lowest	1921.536	18.83	20.62
Middle	1924.992	18.81	20.63
Highest	1928.448	18.82	20.65

ANT 2:

Test Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)
Lowest	1921.536	18.67	20.62
Middle	1924.992	18.66	20.63
Highest	1928.448	18.63	20.65


8328 SIP-DECT SINGLE BASE STATION**ANT 1:**

Test Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)
Lowest	1921.536	18.89	20.62
Middle	1924.992	18.87	20.63
Highest	1928.448	18.65	20.65


ANT 2:

Test Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)
Lowest	1921.536	18.56	20.62
Middle	1924.992	18.53	20.63
Highest	1928.448	18.53	20.65


Model: RTX9431
ANT 1

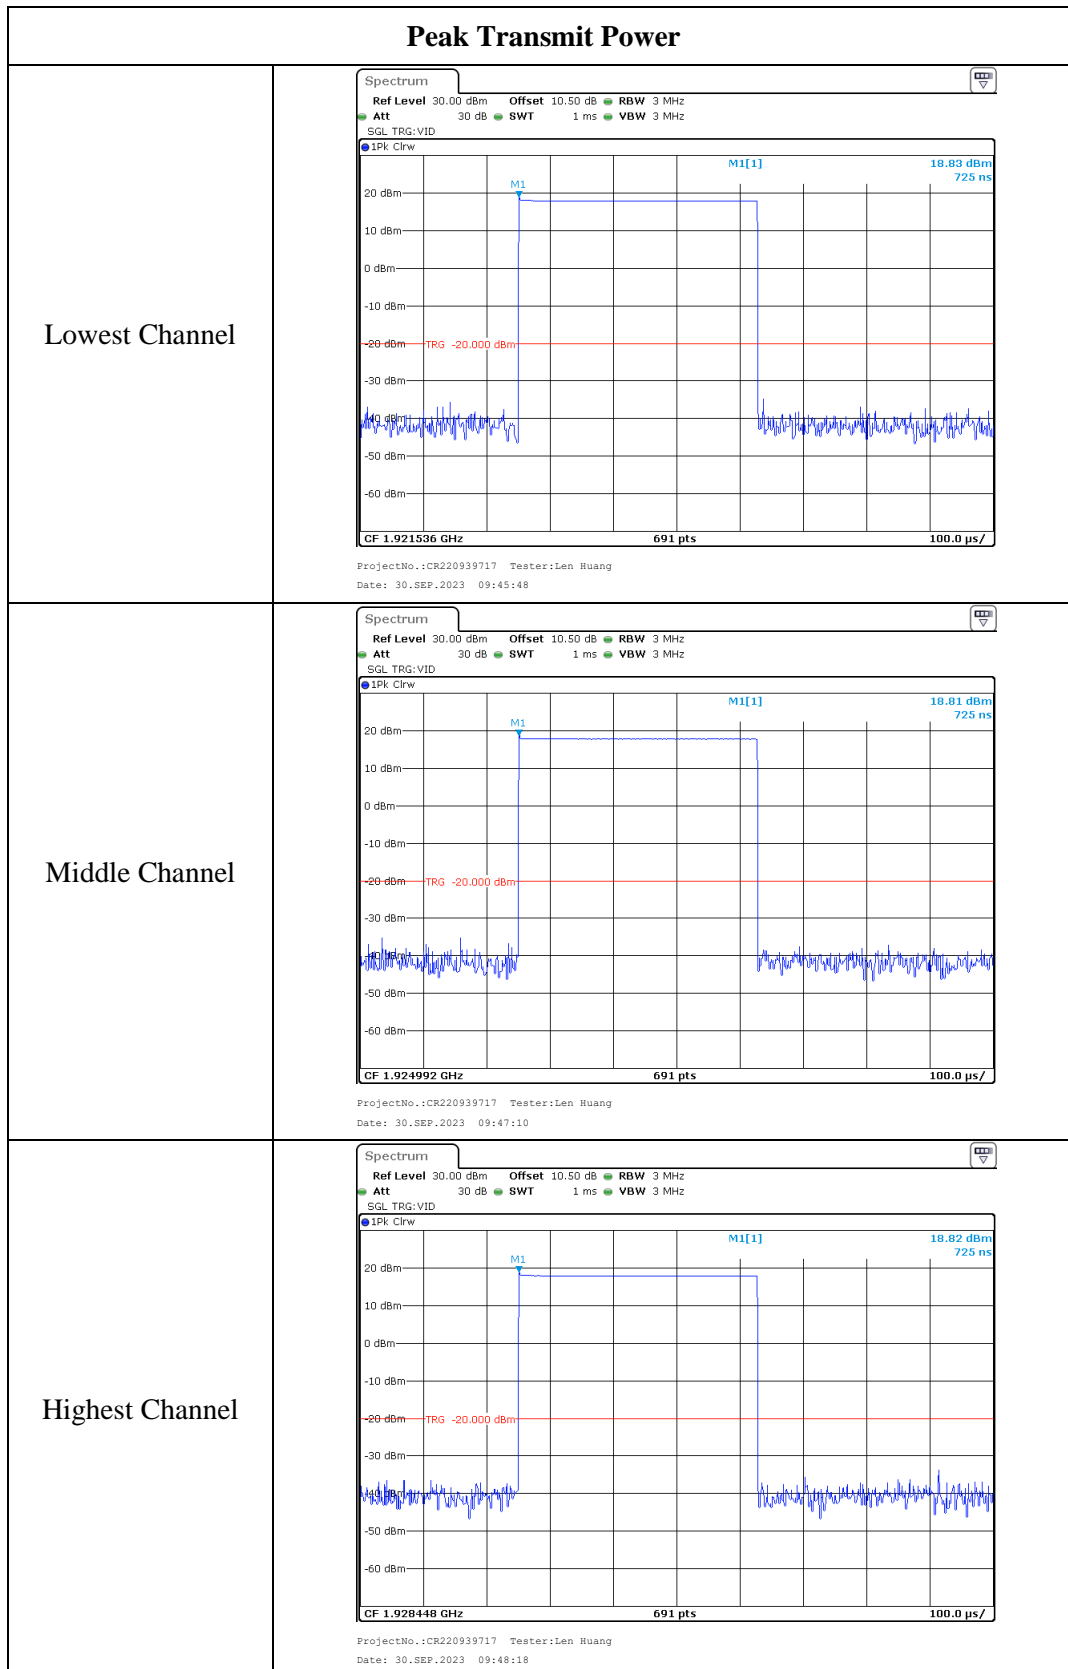


ANT 2

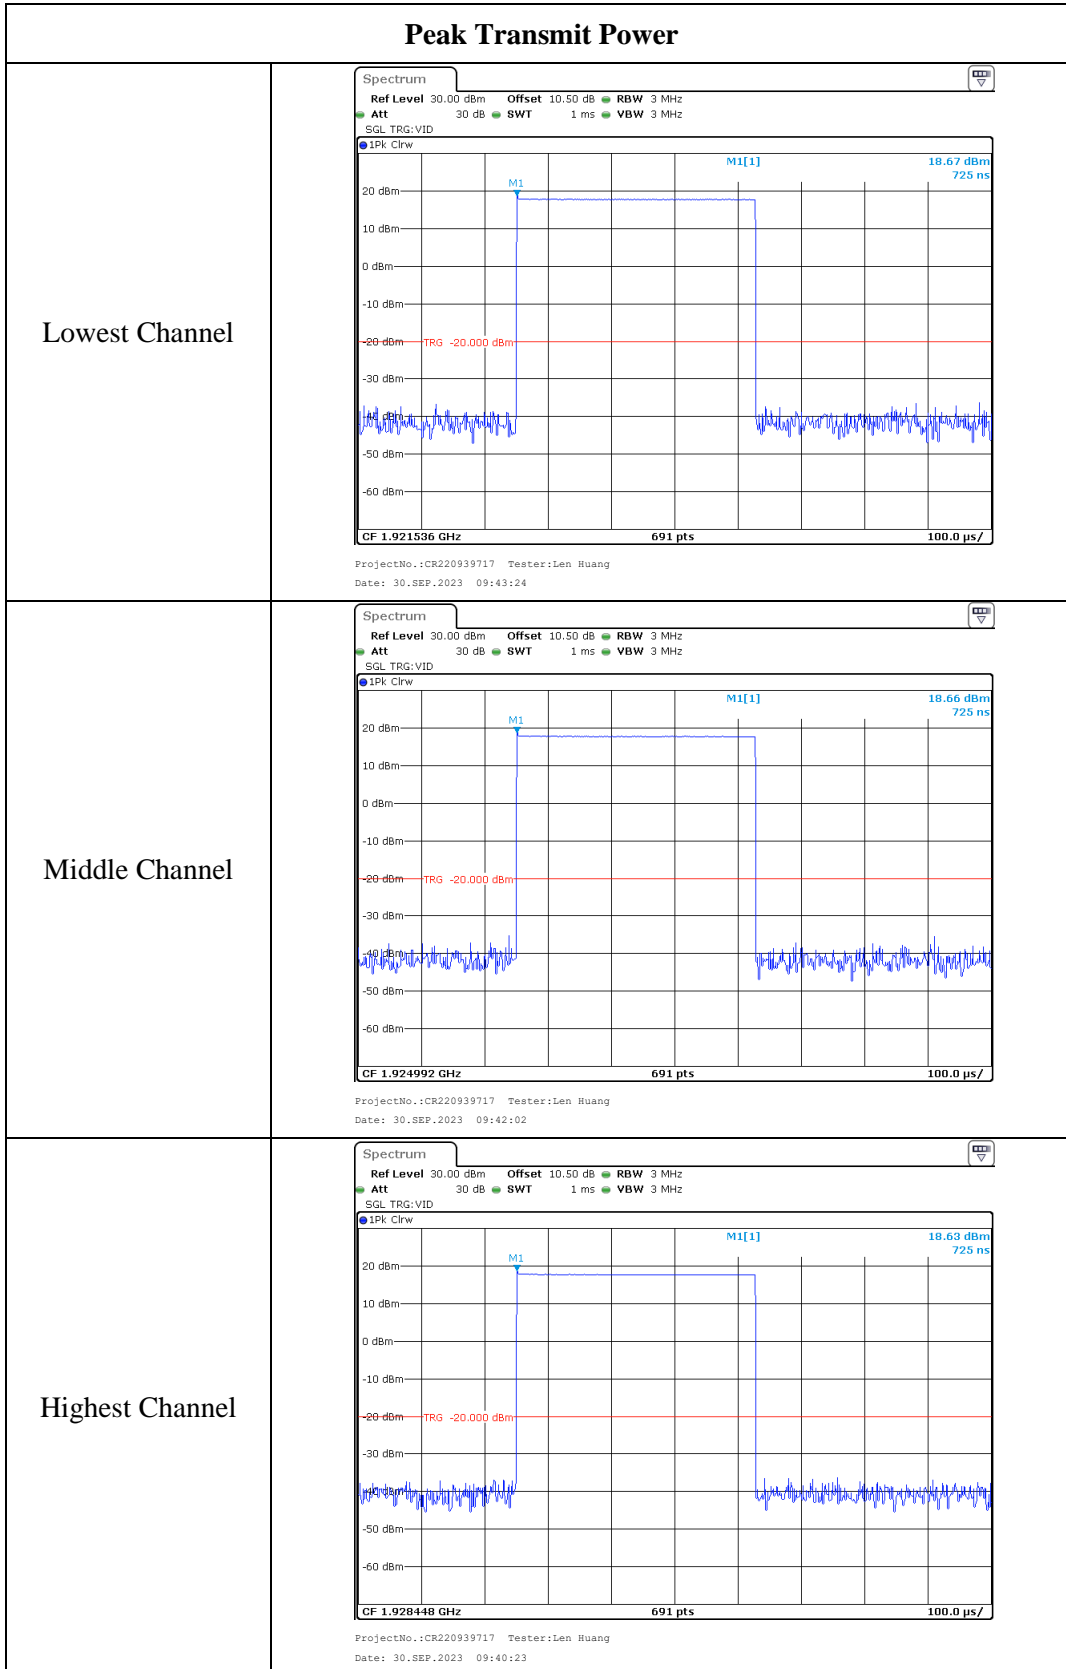

Model: 8328 SIP-DECT SINGLE BASE STATION
ANT 1

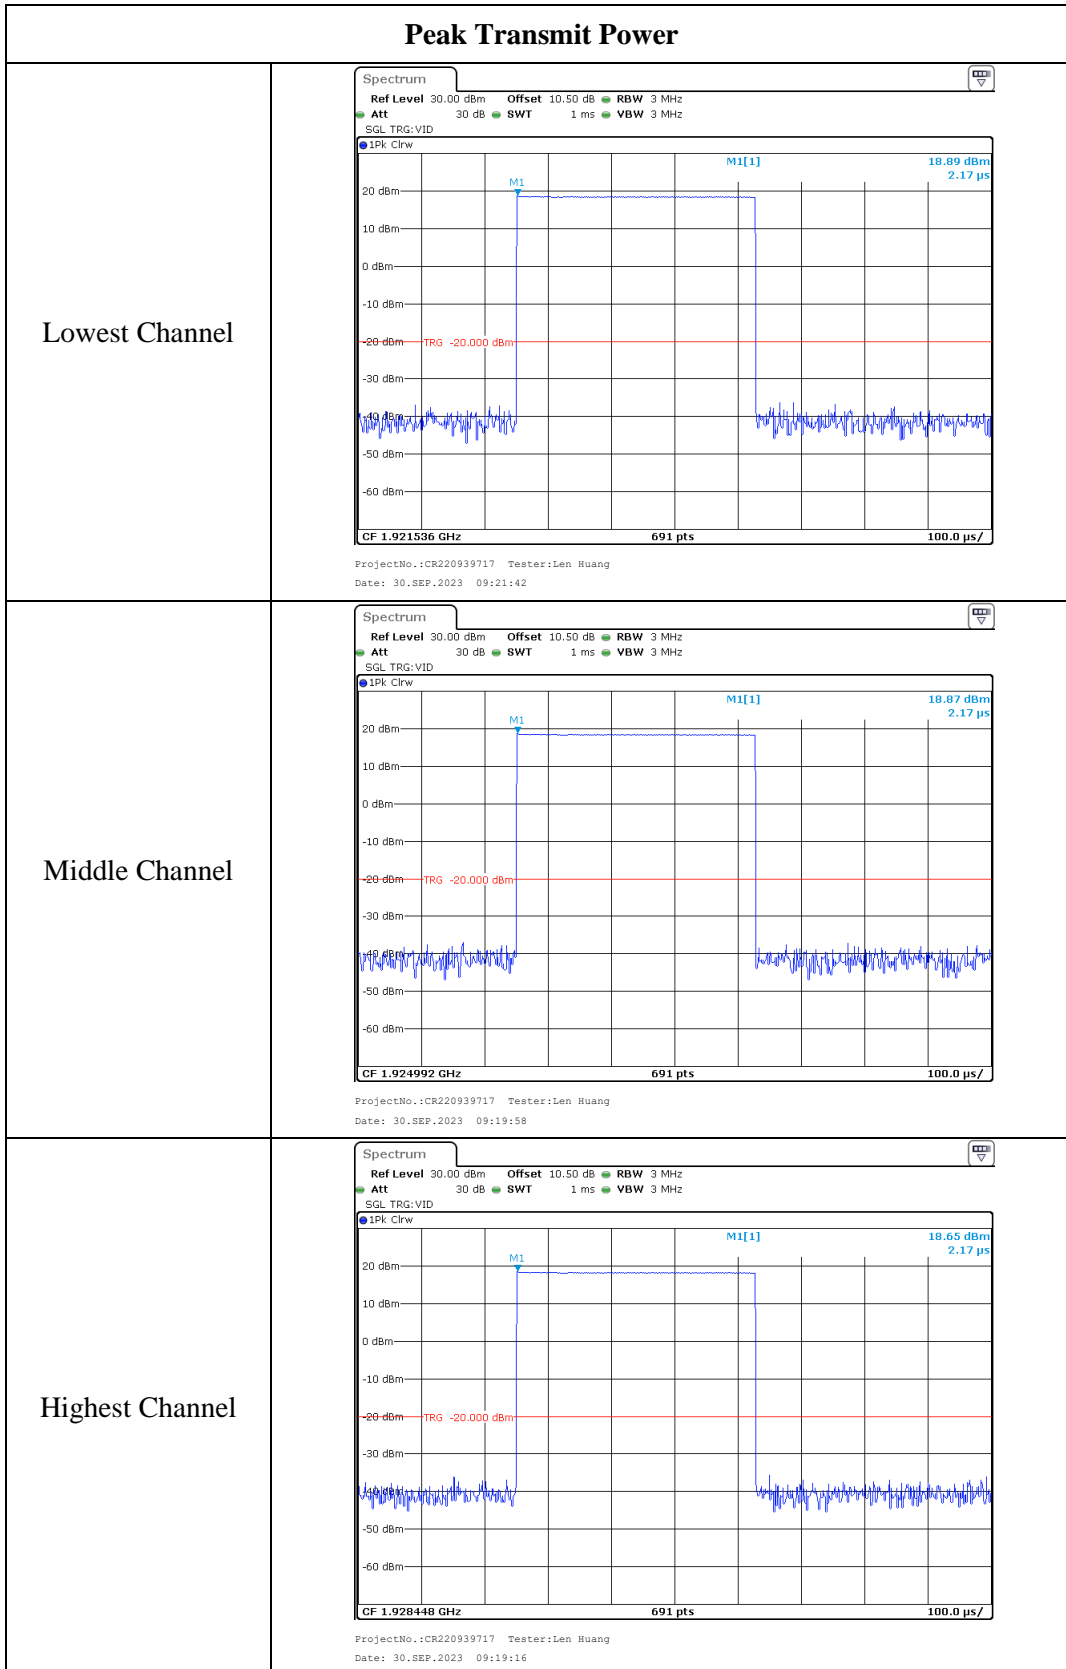

ANT 2

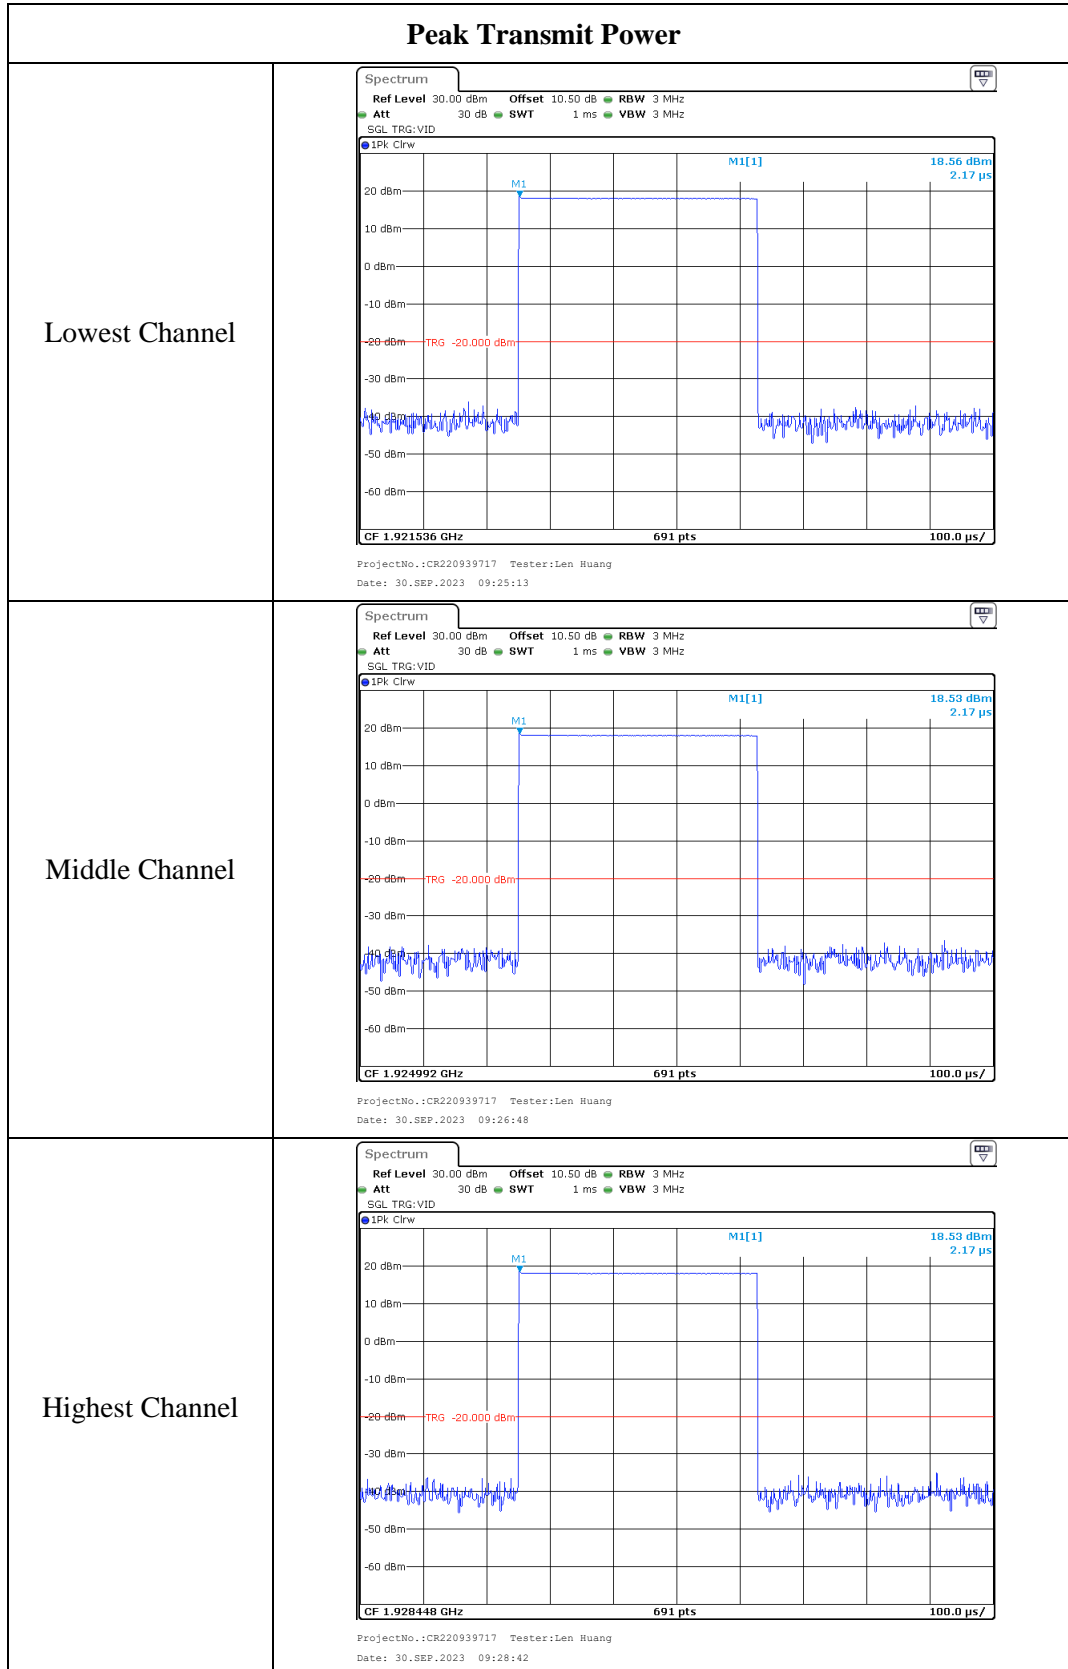

4.3 Emission Inside and Outside the Sub-band:**1) For RF Conducted Emission:**

Serial Number:	1H0H-9	Test Date:	2023/12/07~2023/12/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5	Relative Humidity: (%)	53	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018	2023/6/8	2024/6/7
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

ANT 1:


Unwanted Emission inside the Sub-band

Low Channel

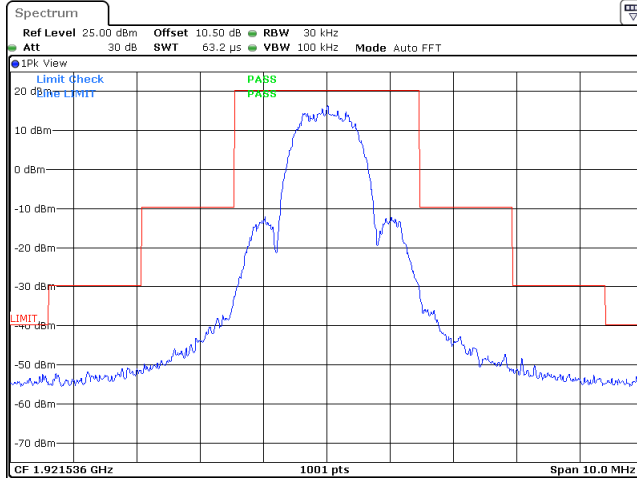


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7.DEC.2023 23:51:52

Middle Channel

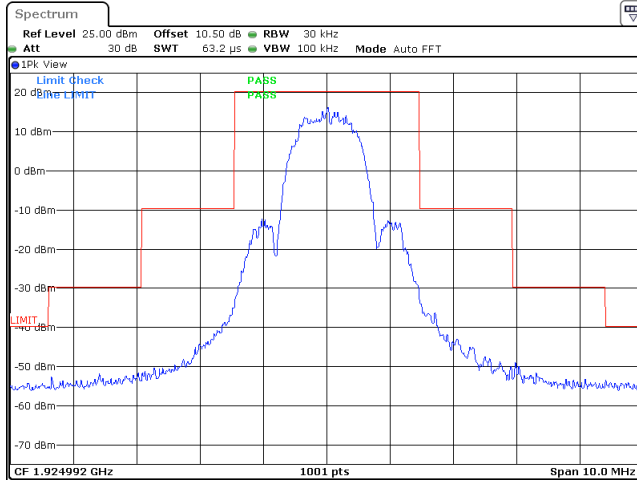


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7.DEC.2023 23:53:20

High Channel

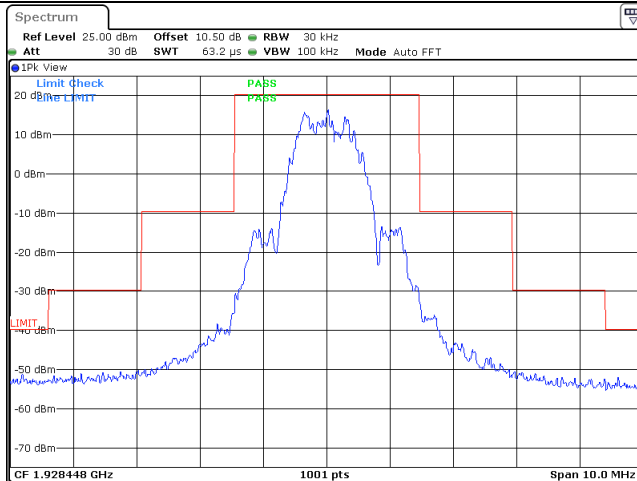


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7.DEC.2023 23:49:18


Low Channel (Unwanted Emission outside the Sub-band)

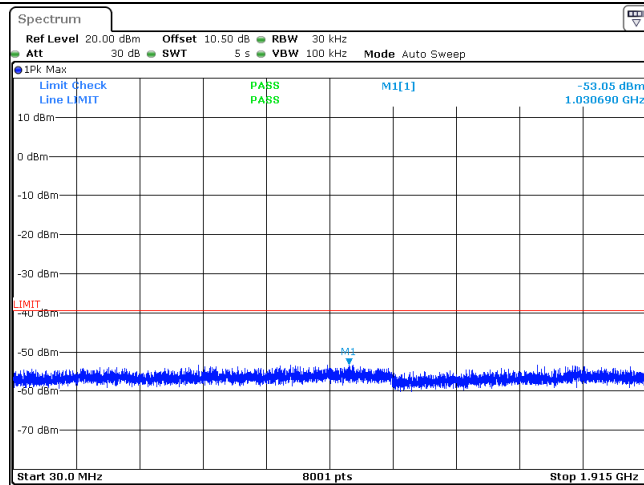



ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:04:18

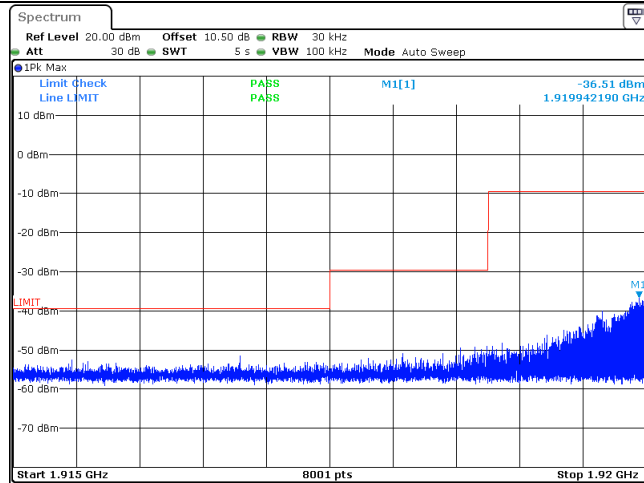


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:04:58

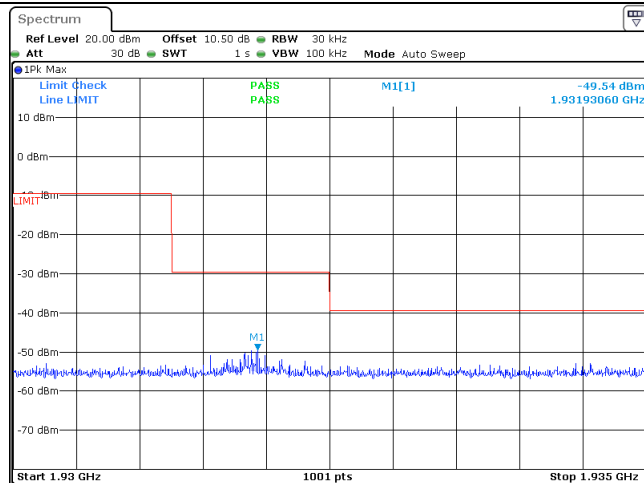


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:05:34

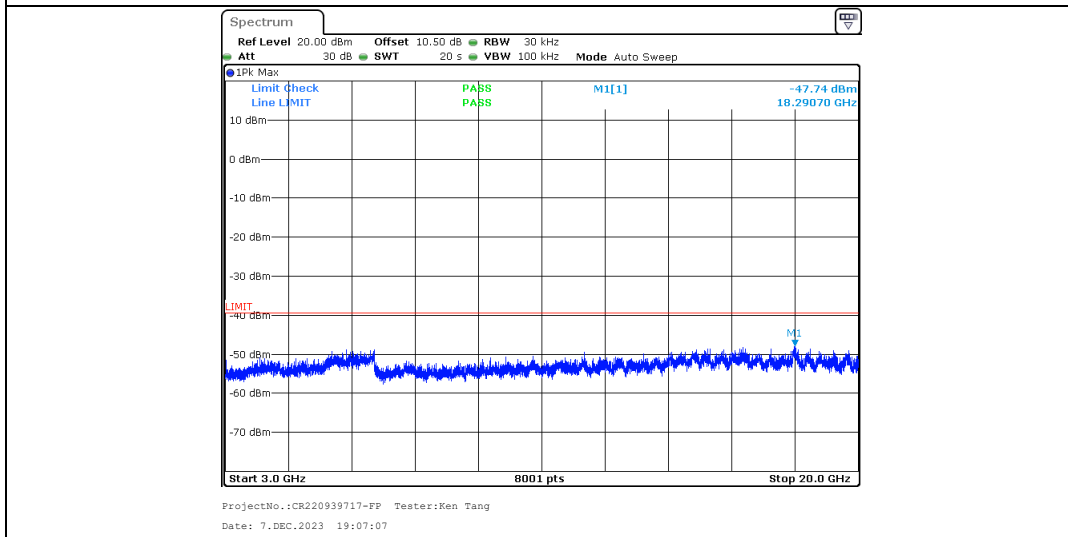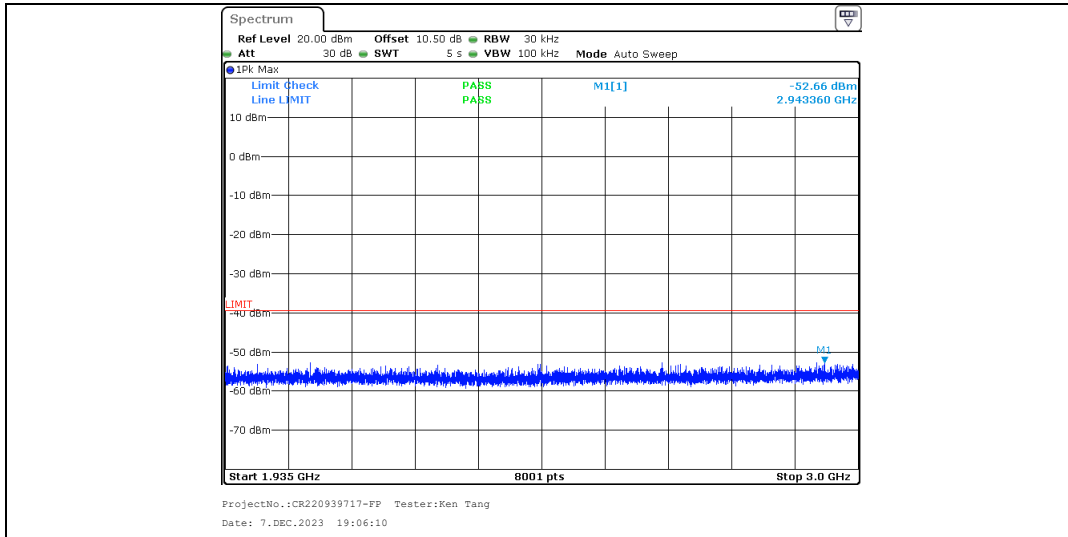


Middle Channel (Unwanted Emission outside the Sub-band)

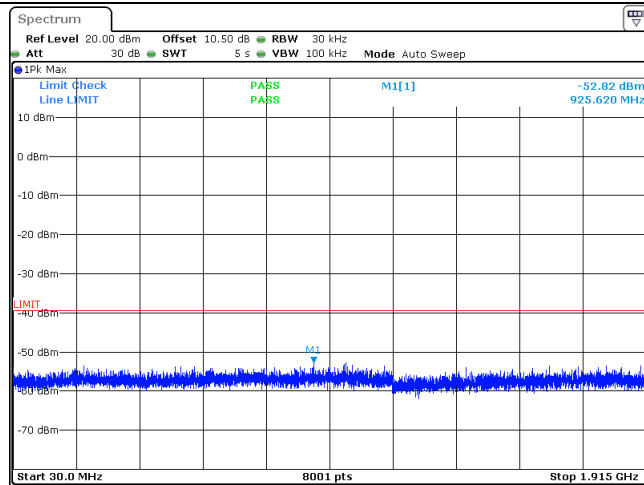



ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC.2023 18:58:46

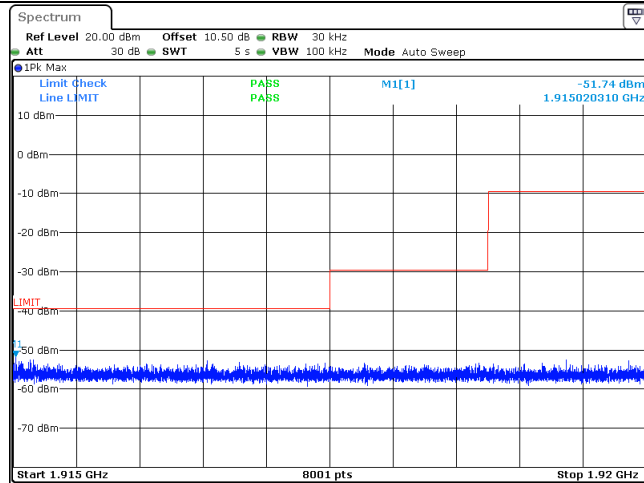


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC.2023 18:59:28

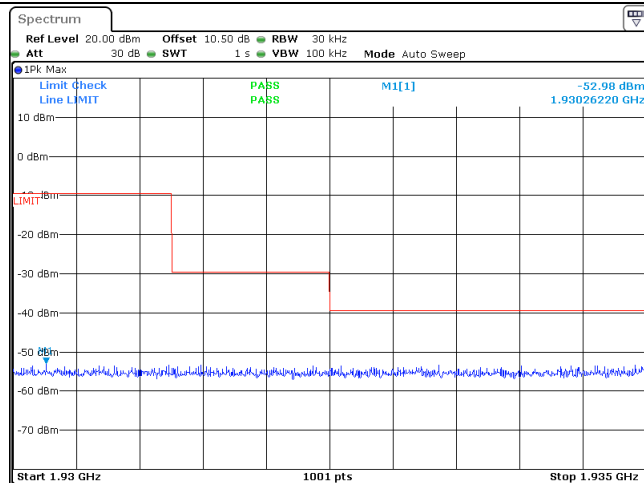


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC.2023 19:00:03

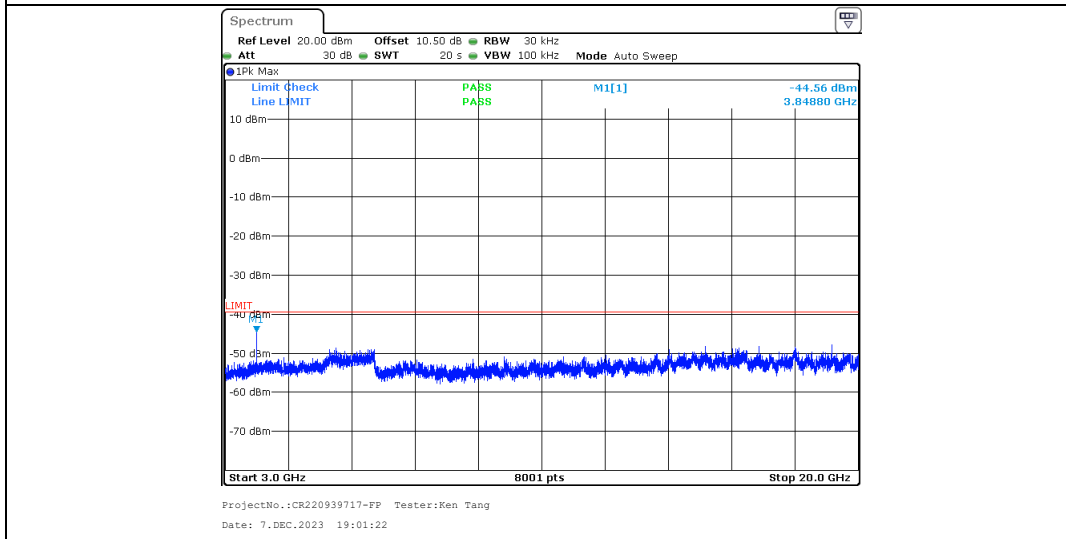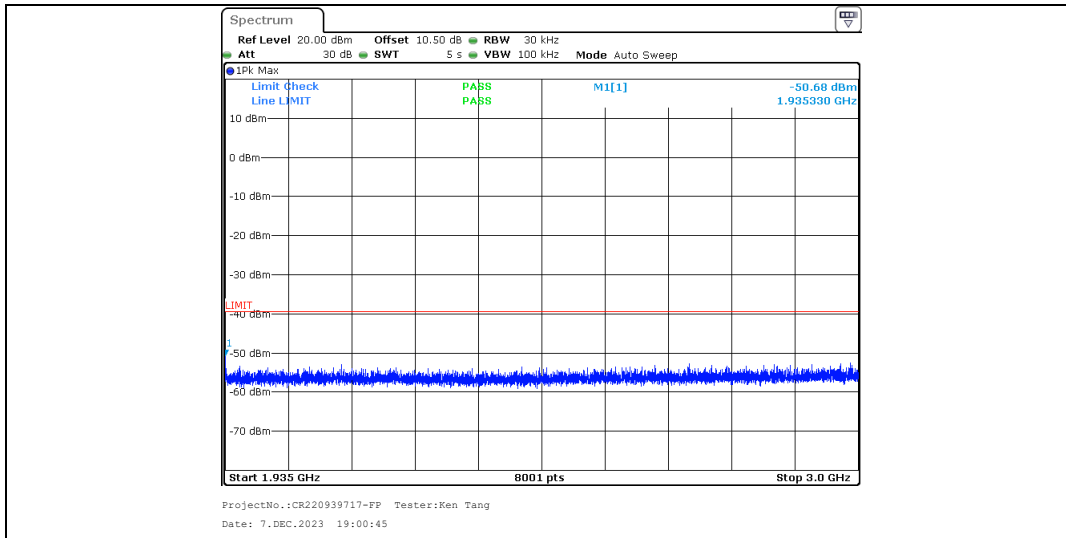


High Channel (Unwanted Emission outside the Sub-band)

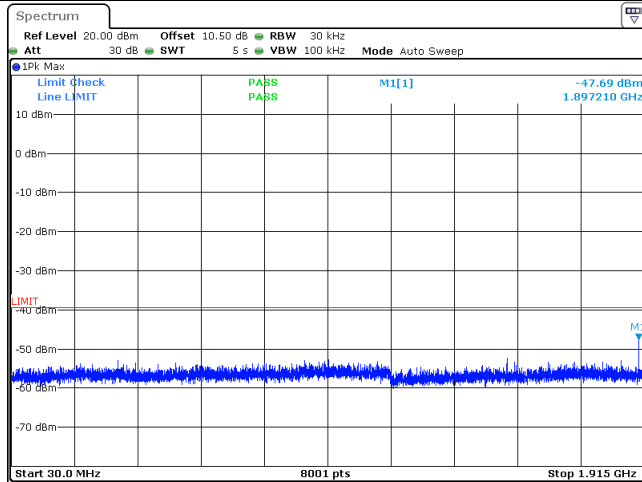



ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 18:50:51

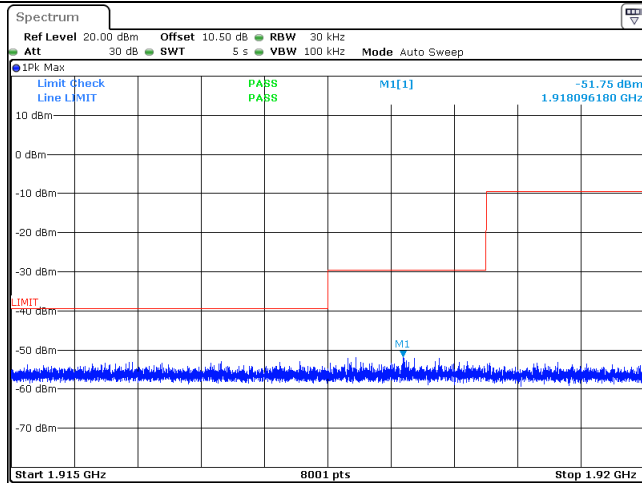

ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 18:51:34

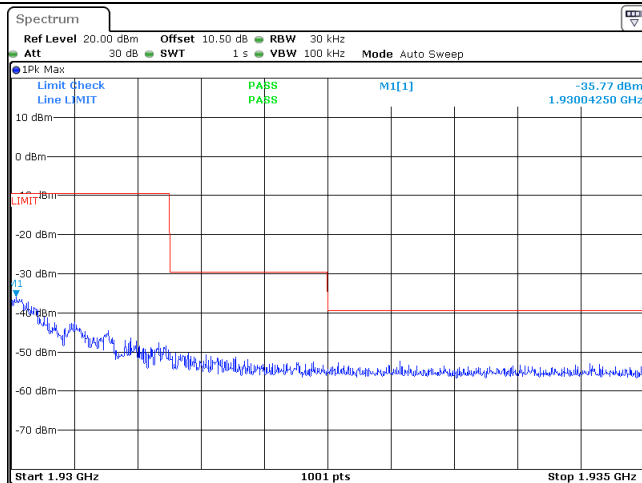


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 18:52:09

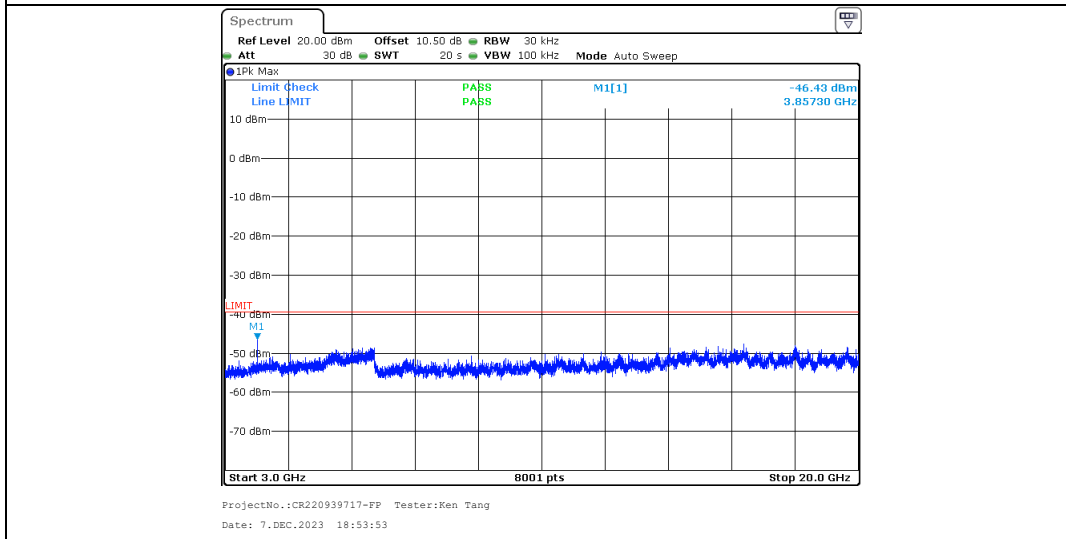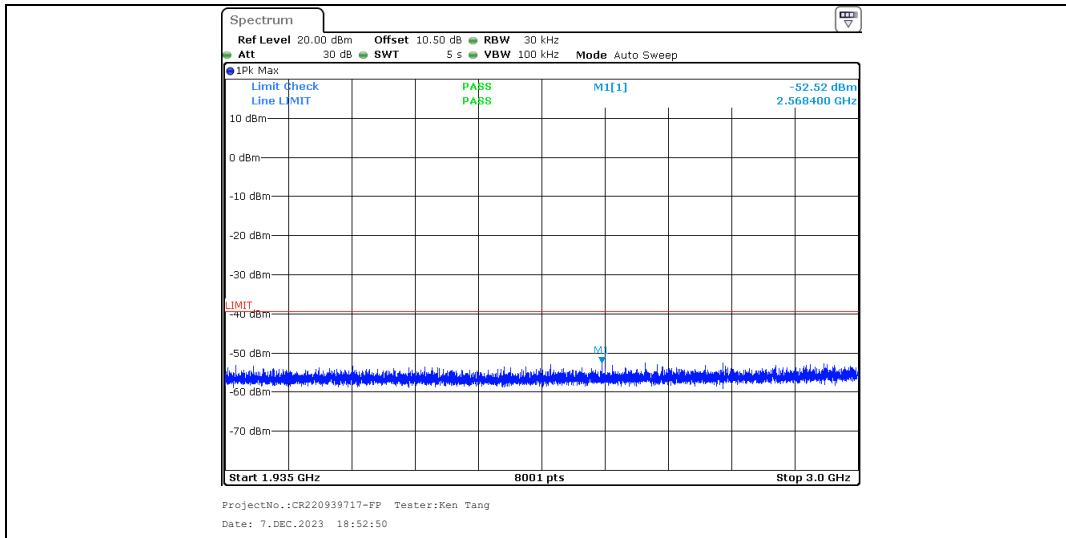


ANT 2:

Unwanted Emission inside the Sub-band


Low Channel

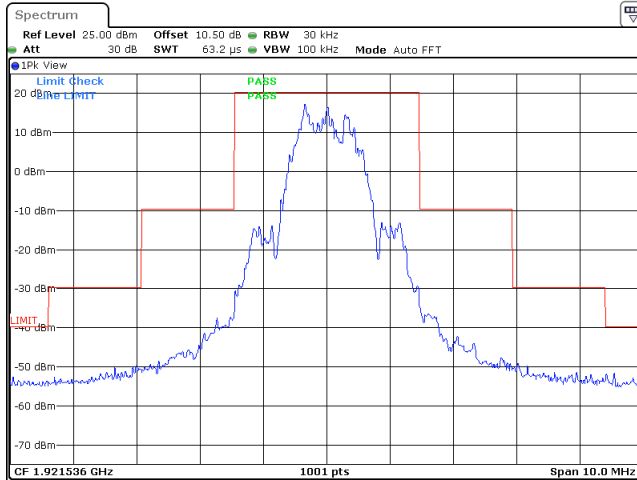


Middle Channel

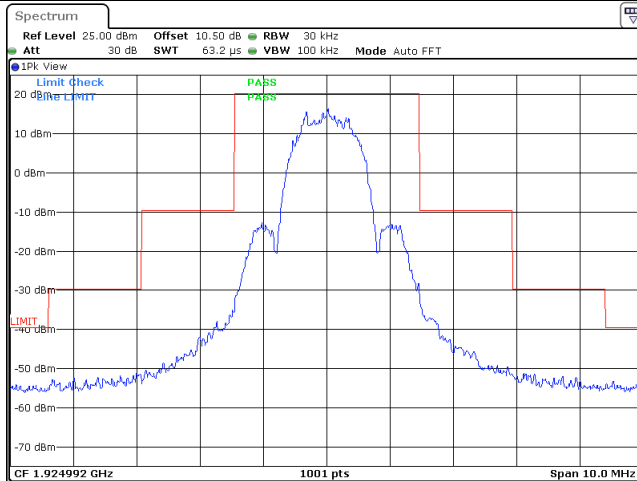


High Channel

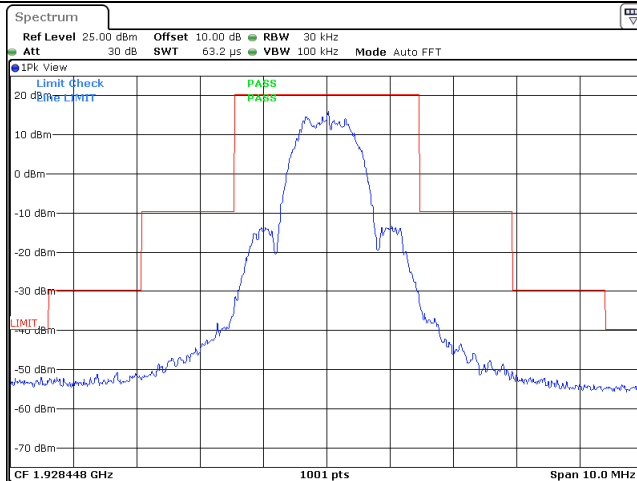


Low Channel (Unwanted Emission outside the Sub-band)

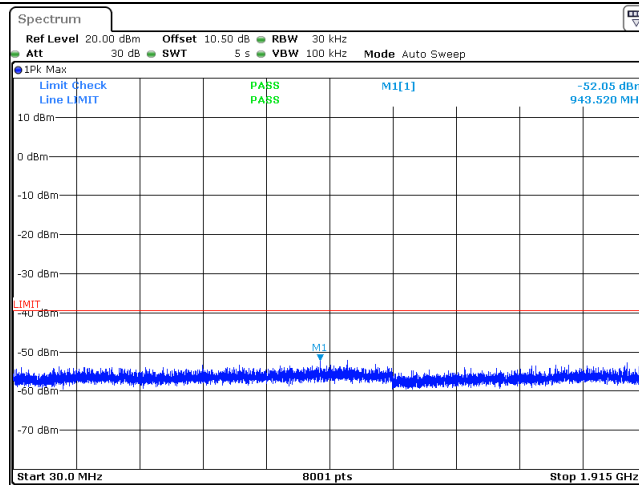



ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:11:12

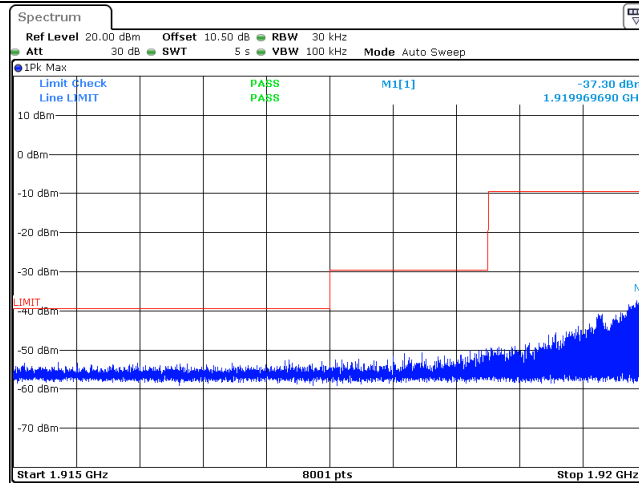


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:11:54

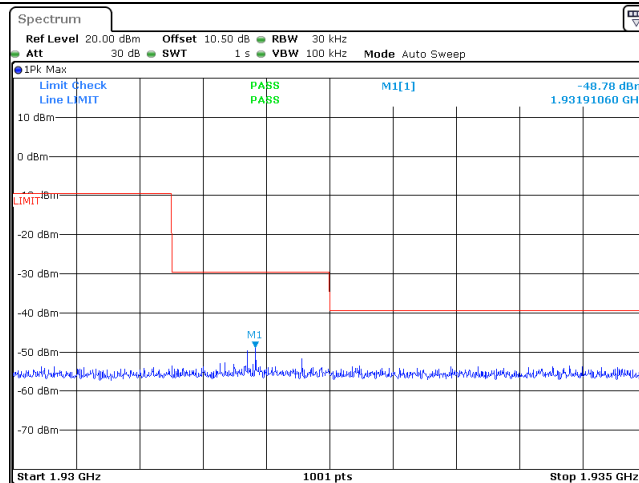


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:12:27

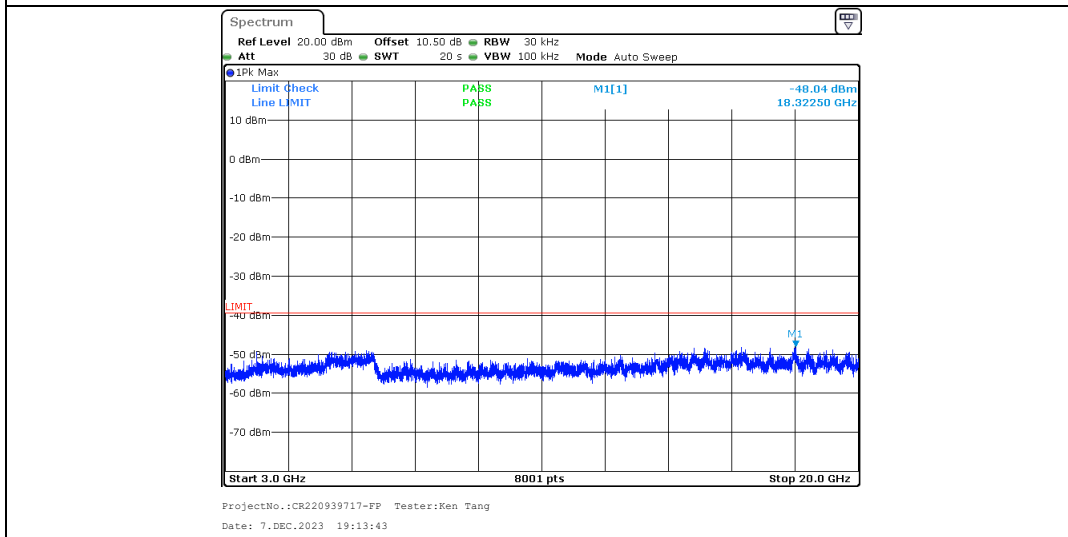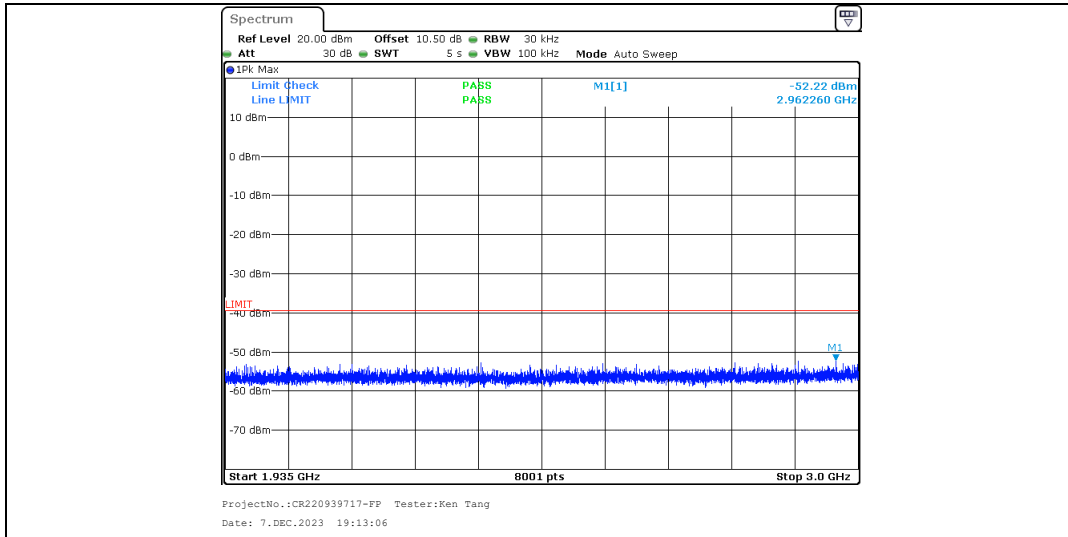


Middle Channel (Unwanted Emission outside the Sub-band)

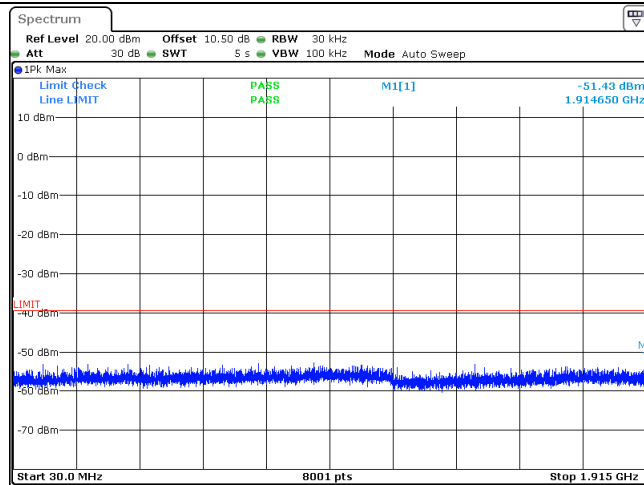



ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC.2023 19:16:01

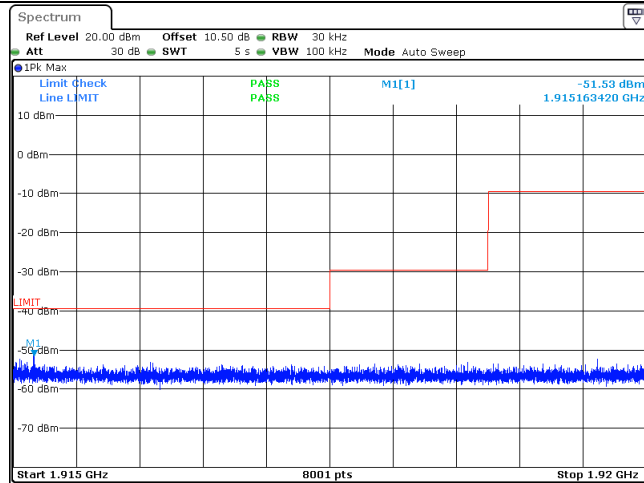


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC.2023 19:16:35

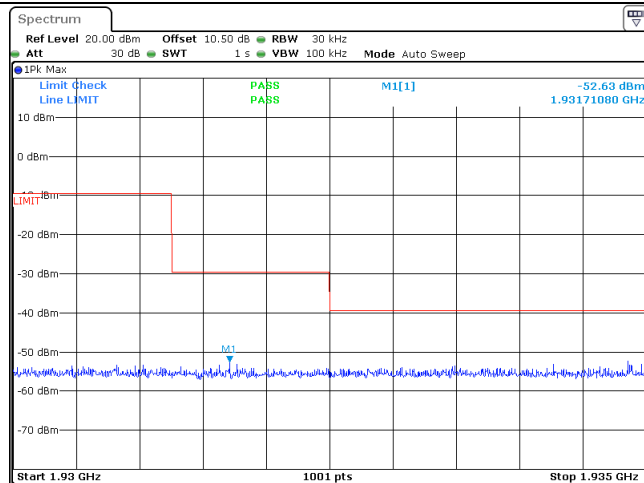


ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC.2023 19:17:07

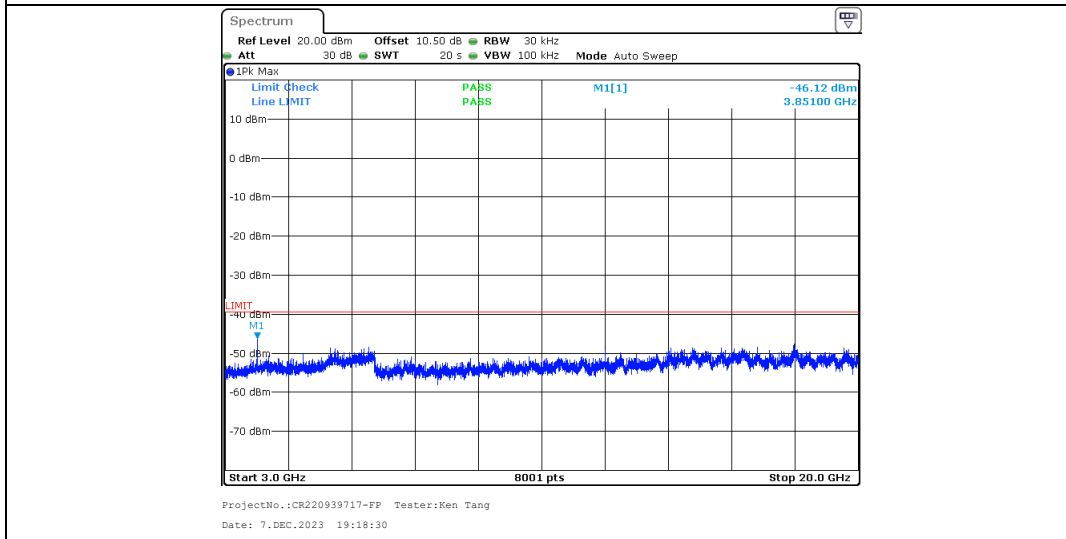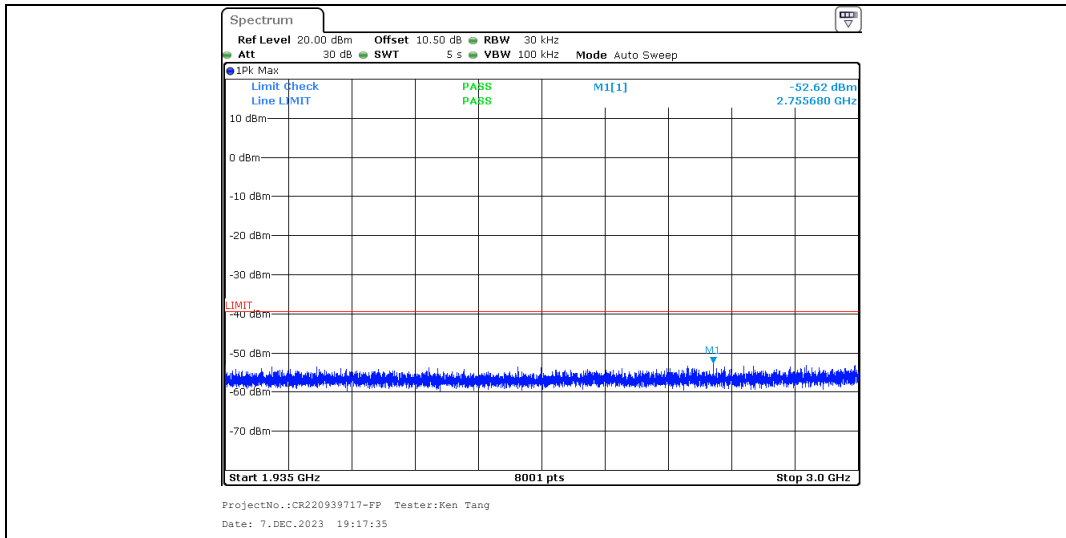


High Channel (Unwanted Emission outside the Sub-band)

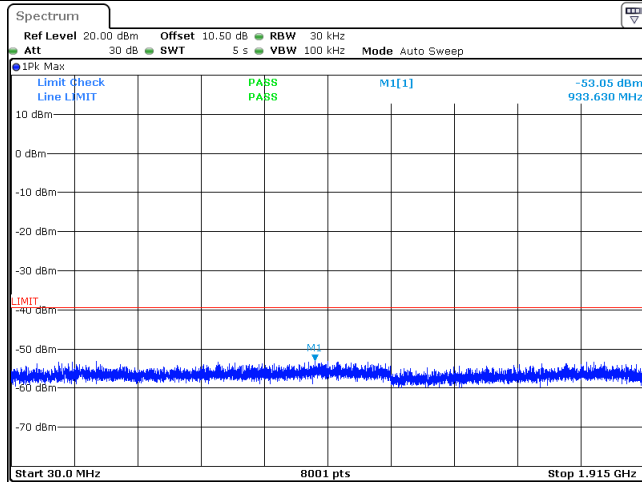



ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:20:19

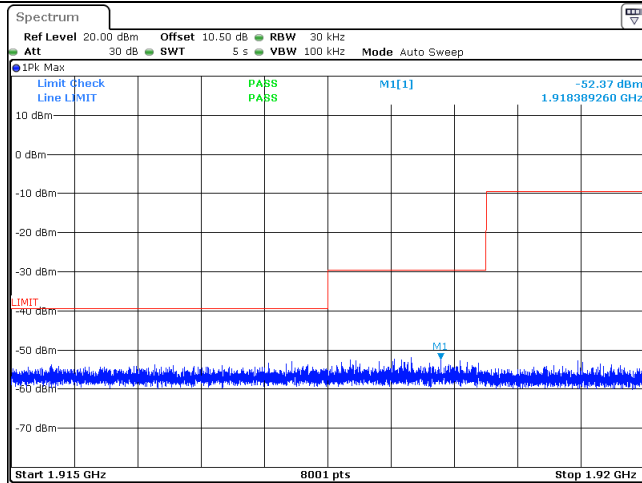

ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:20:43

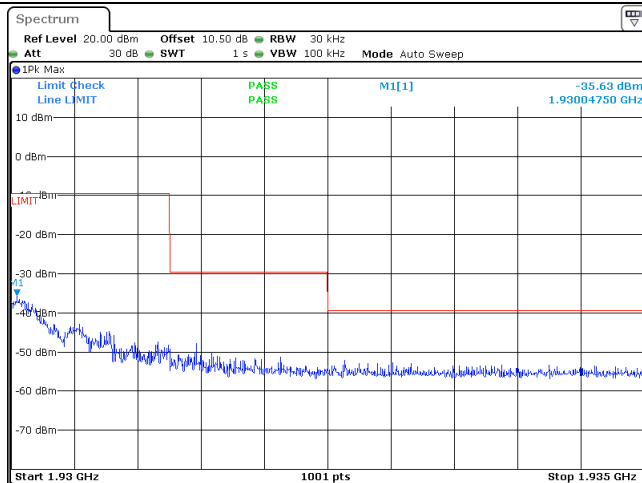

ProjectNo.:CR220939717-FP Tester:Ken Tang
Date: 7. DEC. 2023 19:21:18

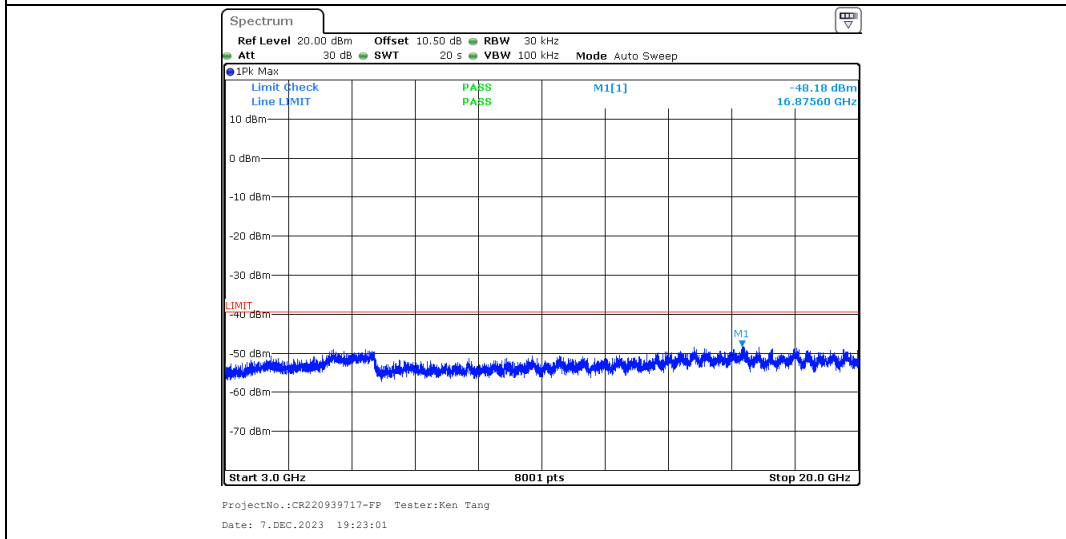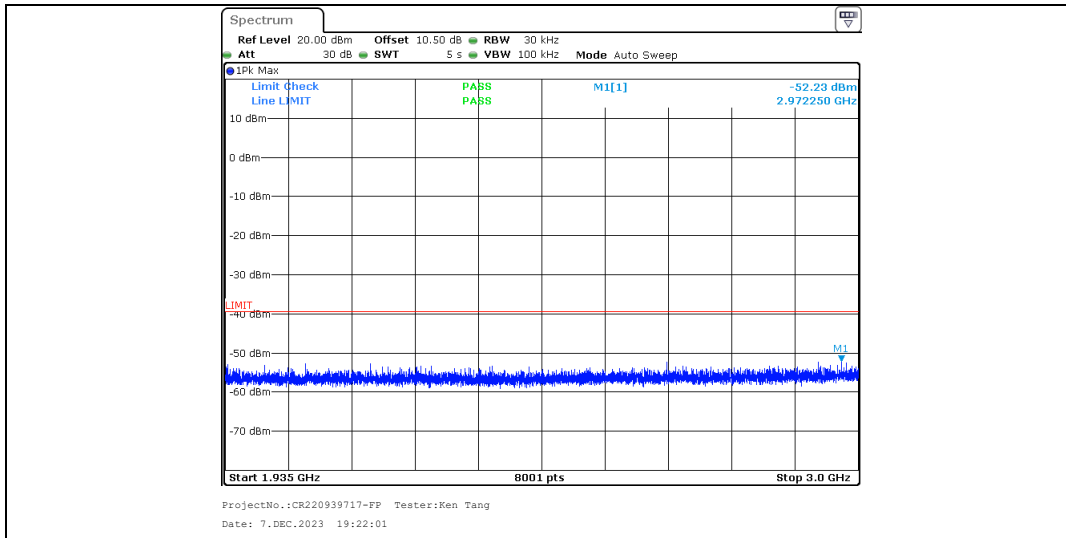

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

5.2 Measurement Result

Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (dBm)	MPE-Based Exemption
			(mW)	(dBm)				
1920-1930	24.87	200	768	28.85	19.2	1	18.05	Compliant

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

Result: The device compliant the MPE-Based Exemption at 20cm distances.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR220939717-EXP EUT EXTERNAL PHOTOGRAPHS and
CR220939717-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR220939717-00A3-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====