



<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B</b> <b>Industry Canada RSS-Gen</b> <b>Electromagnetic compatibility - Unintentional radiators</b>	
<b>Report Reference No.</b> .....	G0M-1502-4538-EF0115B-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01            FCC Filed Test Laboratory, Reg.-No.: 96970            IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Panasonic Industrial Devices Europe GmbH
Address .....	Zeppelinstr. 19 21337 Lüneburg GERMANY
<b>Test specification:</b>	
Standard.....	47 CFR Part 15 Subpart B RSS-Gen, Issue 4, 2014-11 ANSI C63.4:2009
<b>Equipment under test (EUT):</b>	
Product description	Bluetooth Smart Module
Model No.	ENW89847A1KF
Additional Models	None
Hardware version	01
Firmware / Software version	01
	FCC-ID: T7V1760                      IC: 216Q-1760
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**


- not applicable to test object ..... : N/A
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement..... : F (Fail)


**Testing:**

Date of receipt of test item ..... : 2015-02-24

Date (s) of performance of tests ..... : 2015-03-09 – 2015-03-10

Compiled by ..... : Marcus Klein

Tested by (+ signature)..... : Marcus Klein 

Approved by (+ signature) ..... : Jens Marquardt 

Date of issue ..... : 2015-05-19

Total number of pages ..... : 28

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revised by
V01	2015-05-19	Initial Release	

---



## REPORT INDEX

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	10
1.5	Input / Output Ports	10
1.6	Operating Modes and Configurations	11
1.7	Test Equipment Used During Testing	12
1.8	Sample emission level calculation	13
<b>2</b>	<b>RESULT SUMMARY</b>	<b>14</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>15</b>
3.1	Test Conditions and Results – Radiated emissions	15
3.2	Test Conditions and Results – AC power line conducted emissions	25


## 1 Equipment (Test item) Description

<b>Description</b>	Bluetooth Smart Module	
<b>Model</b>	ENW89847A1KF	
<b>Additional Models</b>	None	
<b>Serial number</b>	None	
<b>Hardware version</b>	01	
<b>Software / Firmware version</b>	01	
<b>FCC-ID</b>	T7V1760	
<b>IC</b>	216Q-1760	
<b>Power supply</b>	5 VDC (USB)	
<b>Radio module</b>	Type	BT Module
	Model	PAN 1760 / ENW89847A1KF
	Manufacturer	Panasonic
	HW Version	01
	SW Version	01
	FCC-ID	T7V1760
	IC	216Q-1760
<b>Manufacturer</b>	Panasonic Industrial Devices Europe GmbH Zeppelinstr. 19 21337 Lüneburg GERMANY	
<b>Highest emission frequency</b>	Fmax = 2.4 GHz	
<b>Device classification</b>	Class B	
<b>Equipment type</b>	Tabletop	
<b>Number of tested samples</b>	1	

1.1 Photos – Equipment external

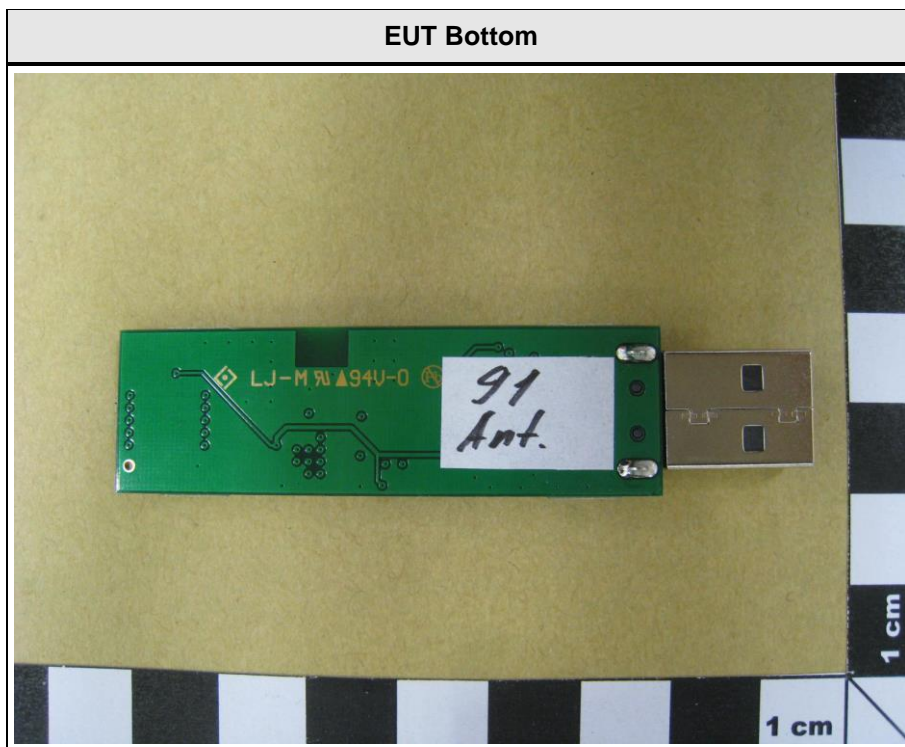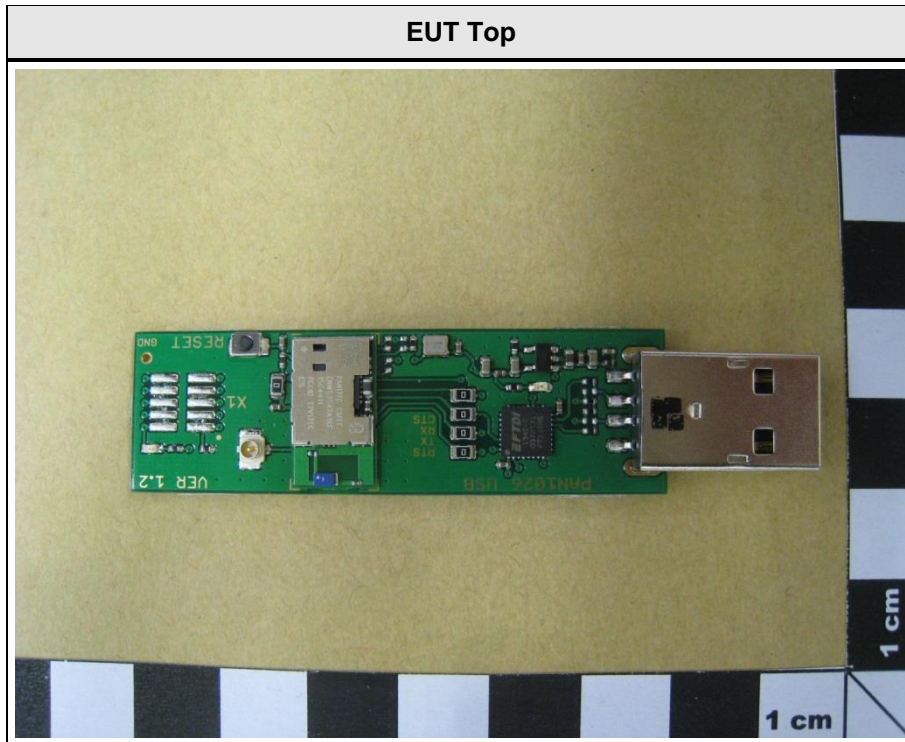


1.2 Photos – Equipment internal

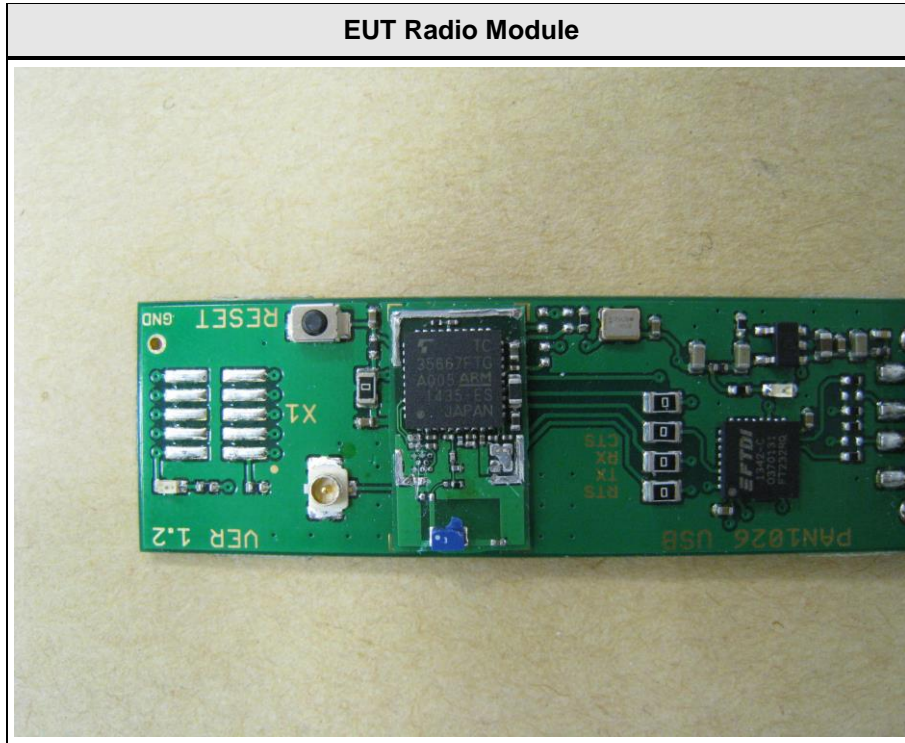



1.3 Photos – Test setup

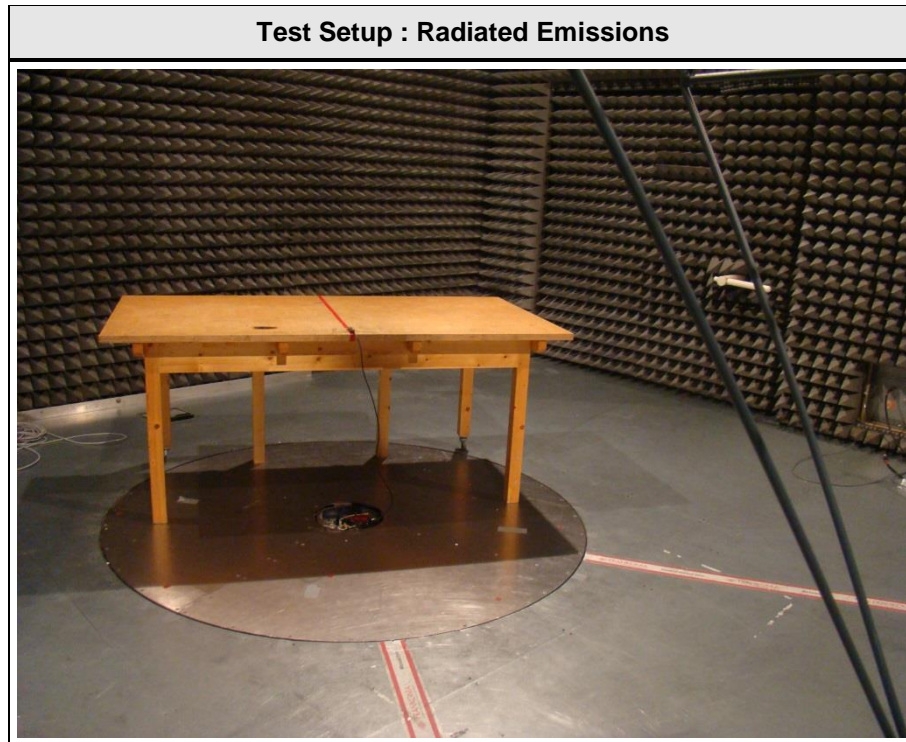



**Test Setup : Conducted Emissions**



#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Notebook	Dell	Latitude	
<p><b>*Note:</b> Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p>				

#### 1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	USB	I/O / DC	1.5m	Yes	-
2	AC Mains	AC	>3m	No	AC power port from Notebook
<p><b>*Note:</b> Use the following abbreviations:</p> <p>AC : AC power port</p> <p>DC : DC power port</p> <p>N/E : Non electrical</p> <p>I/O : Signal input or output port</p> <p>TP : Telecommunication port</p>					

## 1.6 Operating Modes and Configurations

Mode #	Description
1	Permanent TX @ 2419 MHz via TestTool supplied by customer.

Configuration #	EUT Configuration
1	EUT configured for use with Test-Notebook.

**1.7 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Radiated emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2015-01	2016-01

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 6.13	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	PASS	
<b>Remarks:</b>				



### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen		Verdict: PASS				
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	23°C				
Relative Humidity	30 to 60 %	41%				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	Fmax = 2.4 GHz					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 12 GHz					
Operating mode configuration	1 / 1					
<b>Limits and results Class B</b>						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.  
The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Bluetooth Smart Module  
 Model: ENW89847A1KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Klein  
 Test Conditions: Tnom: 23°C, Unom: 5V USB  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3m  
 Mode: Permanent TX @ 2419MHz  
 Test Date: 2015-03-09  
 Note:

Index 11

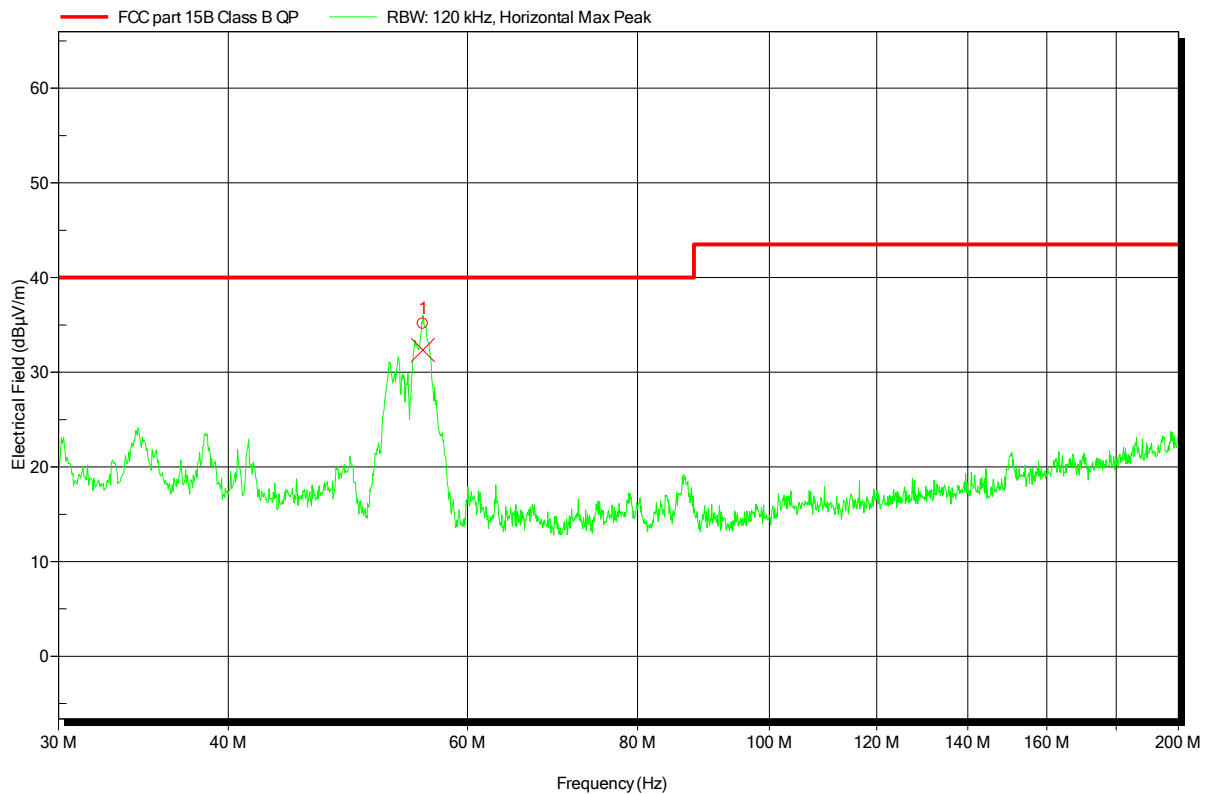

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
55,62 MHz	32,33 dBµV/m	40 dBµV/m	-7,67 dB	Pass

---

 Test Report No.: G0M-1502-4538-EF0115B-V01


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Bluetooth Smart Module  
 Model: ENW89847A1KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Klein  
 Test Conditions: Tnom: 23°C, Unom: 5V USB  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3m  
 Mode: Permanent TX @ 2419MHz  
 Test Date: 2015-03-09  
 Note:

Index 12

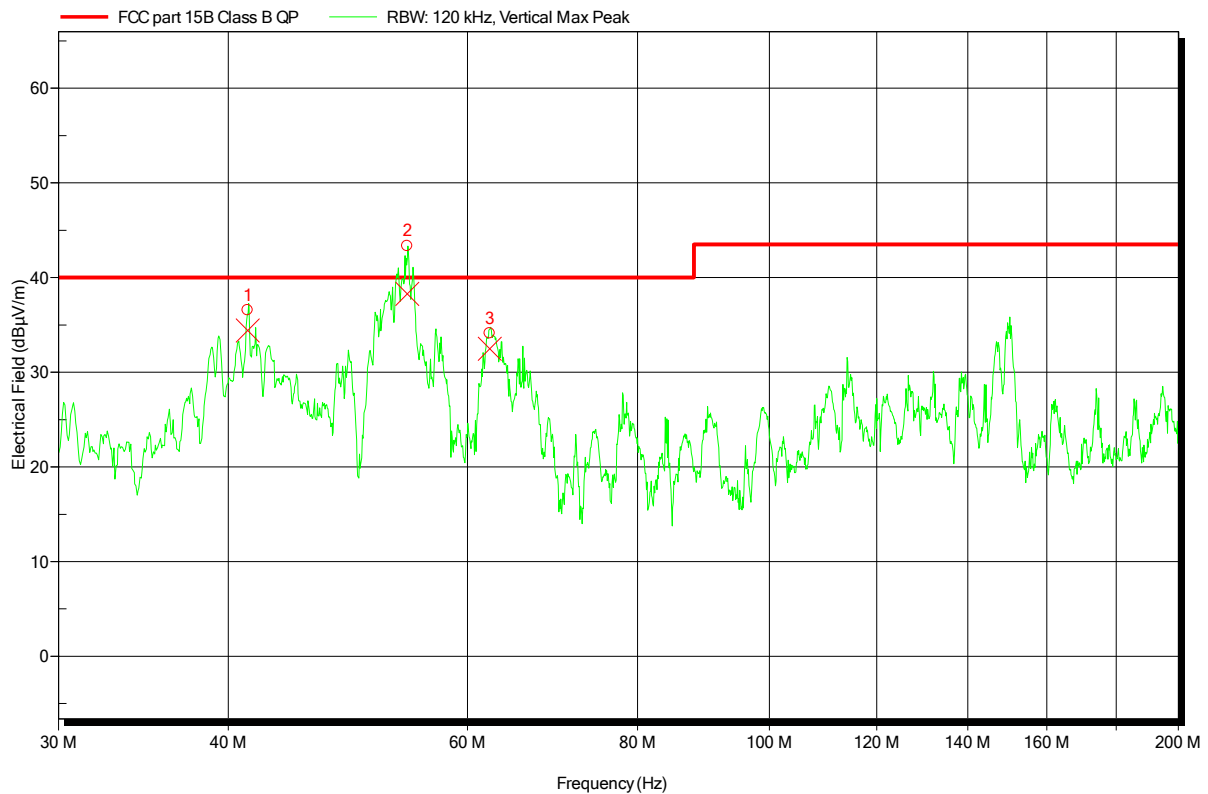


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
41,34 MHz	34,4 dBµV/m	40 dBµV/m	-5,6 dB	Pass
54,18 MHz	38,27 dBµV/m	40 dBµV/m	-1,73 dB	Pass
62,28 MHz	32,47 dBµV/m	40 dBµV/m	-7,53 dB	Pass

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Smart Module
Model:	ENW89847A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Klein
Test Conditions:	Tnom: 23°C, Unom: 5V USB
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	Permanent TX @ 2419MHz
Test Date:	2015-03-09
Note:	

Index 9

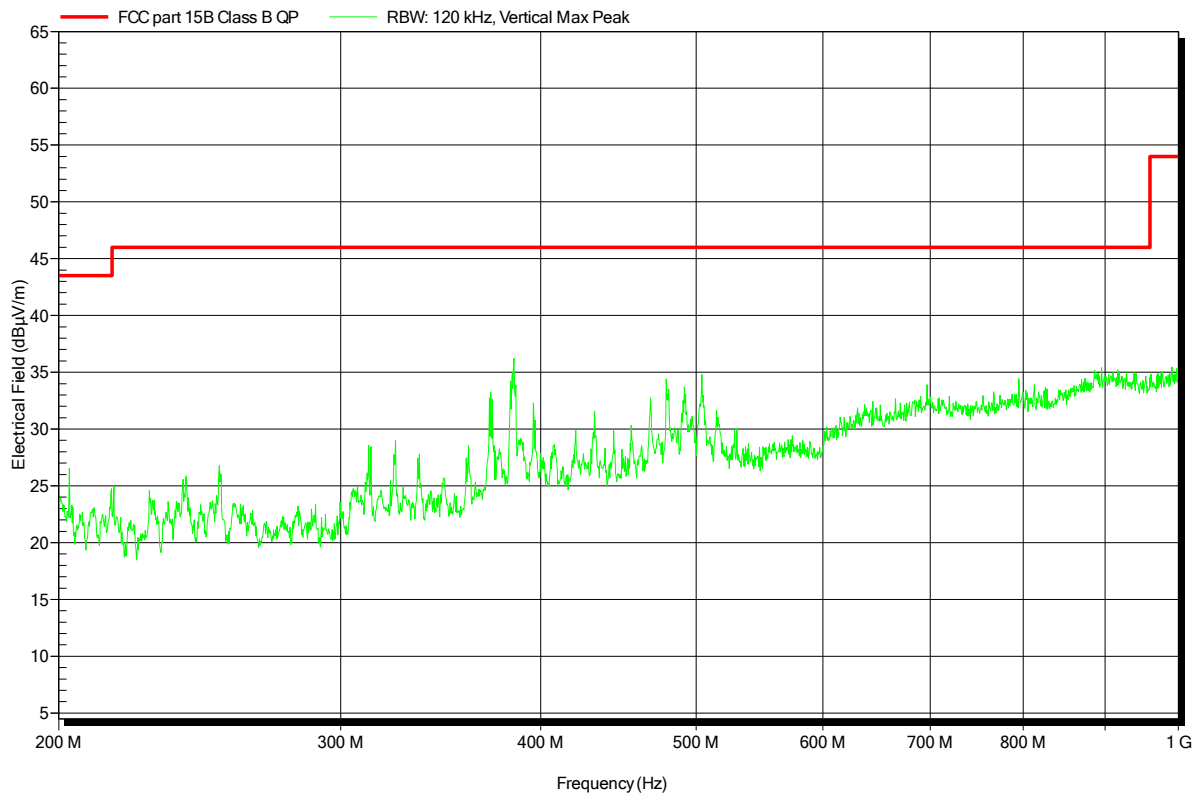


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Smart Module
Model:	ENW89847A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Klein
Test Conditions:	Tnom: 23°C, Unom: 5V USB
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	Permanent TX @ 2419MHz
Test Date:	2015-03-09
Note:	

Index 10

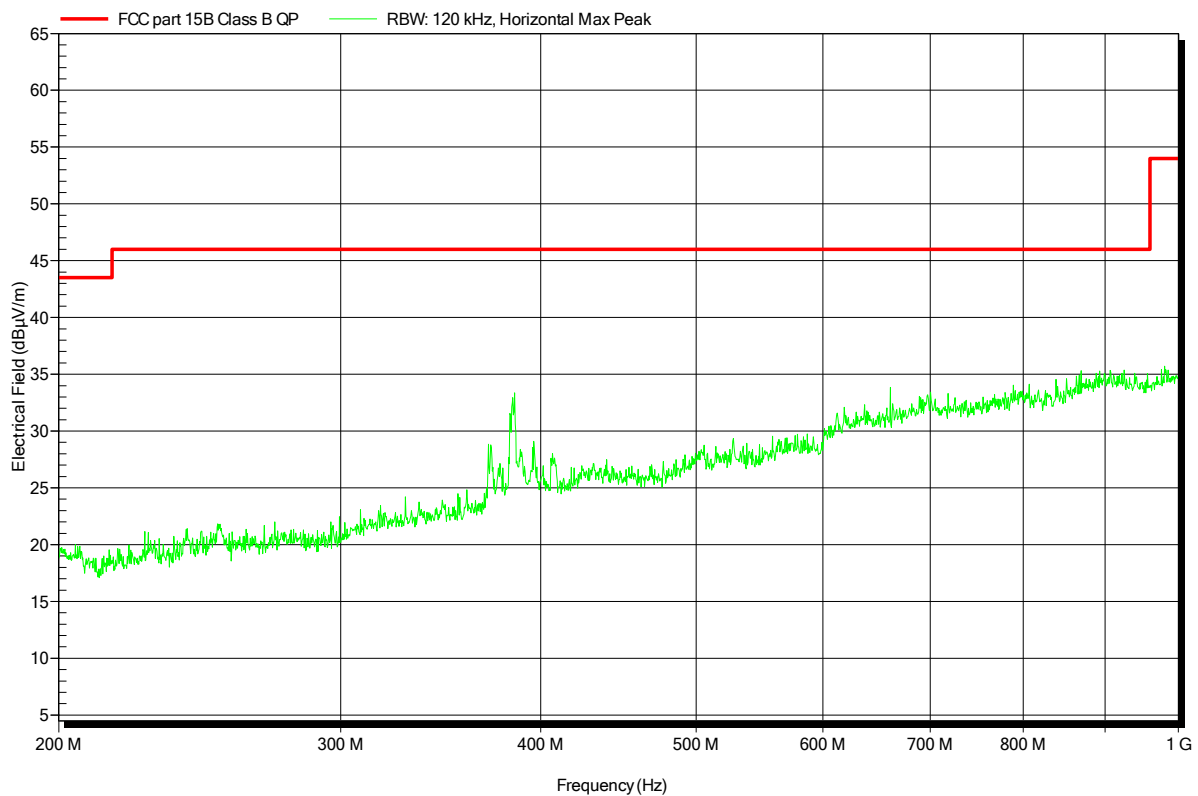




**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Smart Module
Model:	ENW89847A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Klein
Test Conditions:	Tnom: 23°C, Unom: 5V USB
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Permanent TX @ 2419MHz
Test Date:	2015-03-09
Note:	

Index 4

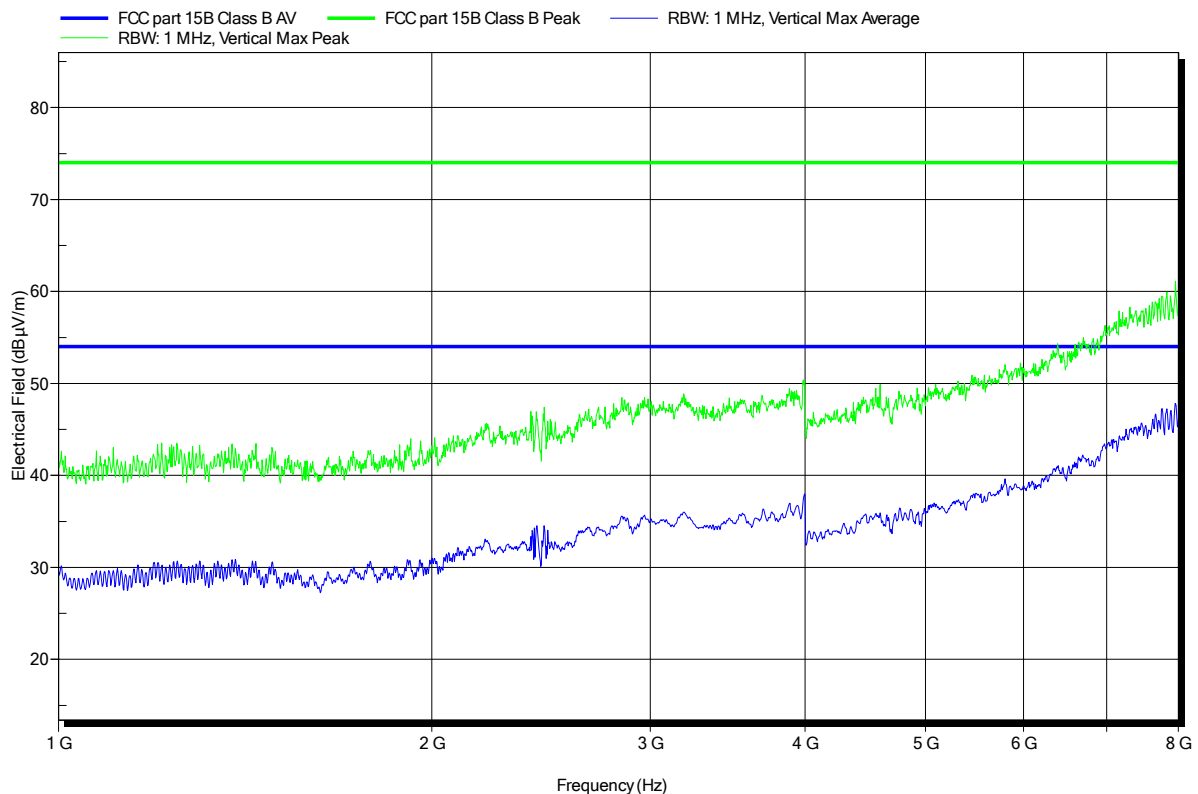


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Smart Module
Model:	ENW89847A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Klein
Test Conditions:	Tnom: 23°C, Unom: 5V USB
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Permanent TX @ 2419MHz
Test Date:	2015-03-09
Note:	

Index 3

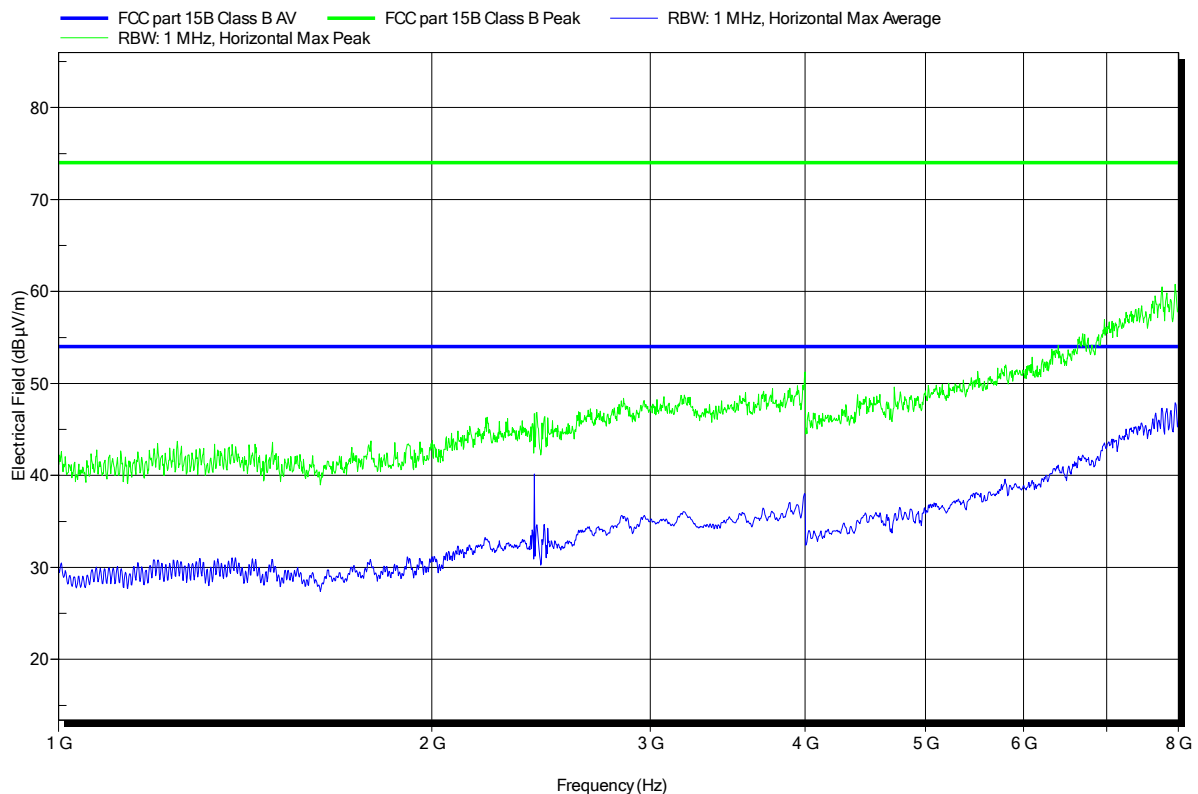


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Smart Module
Model:	ENW89847A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Klein
Test Conditions:	Tnom: 23°C, Unom: 5V USB
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Permanent TX @ 2419MHz
Test Date:	2015-03-09
Note:	

Index 2

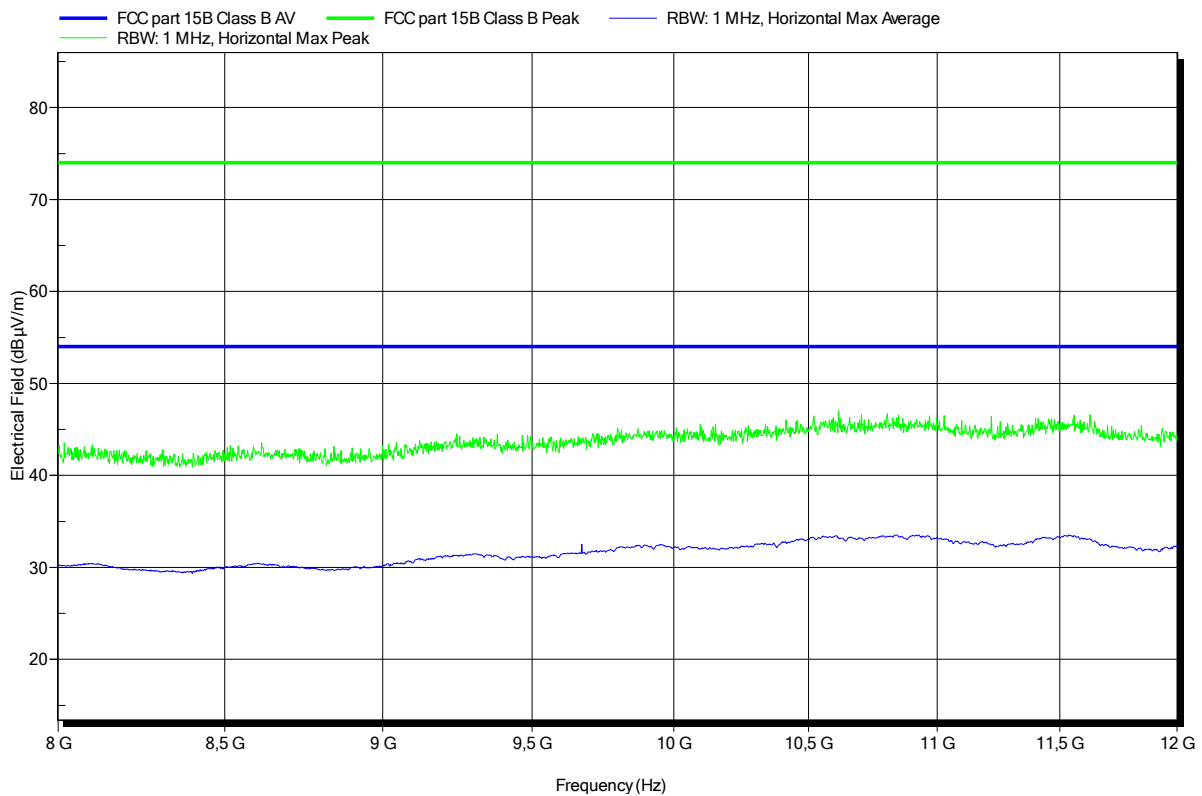


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Smart Module
Model:	ENW89847A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Klein
Test Conditions:	Tnom: 23°C, Unom: 5V USB
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Permanent TX @ 2419MHz
Test Date:	2015-03-09
Note:	

Index 1

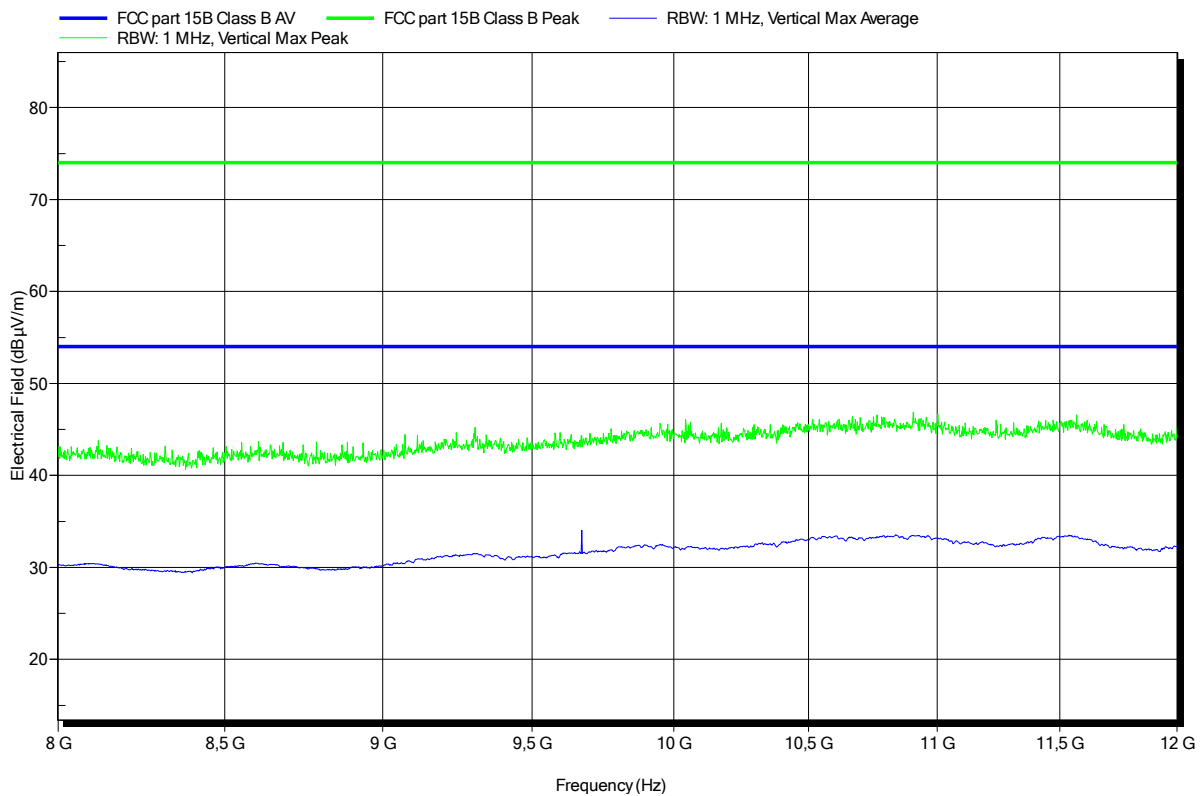

**3.2 Test Conditions and Results – AC power line conducted emissions**

<b>Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen</b>			<b>Verdict: PASS</b>	
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	23°C		
Relative Humidity	30 to 60 %	41%		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode and configuration	1 / 1			
<b>Limits and results Class B</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

**Test Procedure:**

- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor




**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Bluetooth Smart Module  
 Model: ENW89847A1KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Klein  
 Test Conditions: Tnom: 23°C, Unom: 5V USB from Notebook with 120V AC/DC-Adapter  
 LISN: ESH2-Z5 N  
 Mode: Permanent TX @ 2419MHz  
 Test Date: 2015-03-10  
 Note:

Index 15

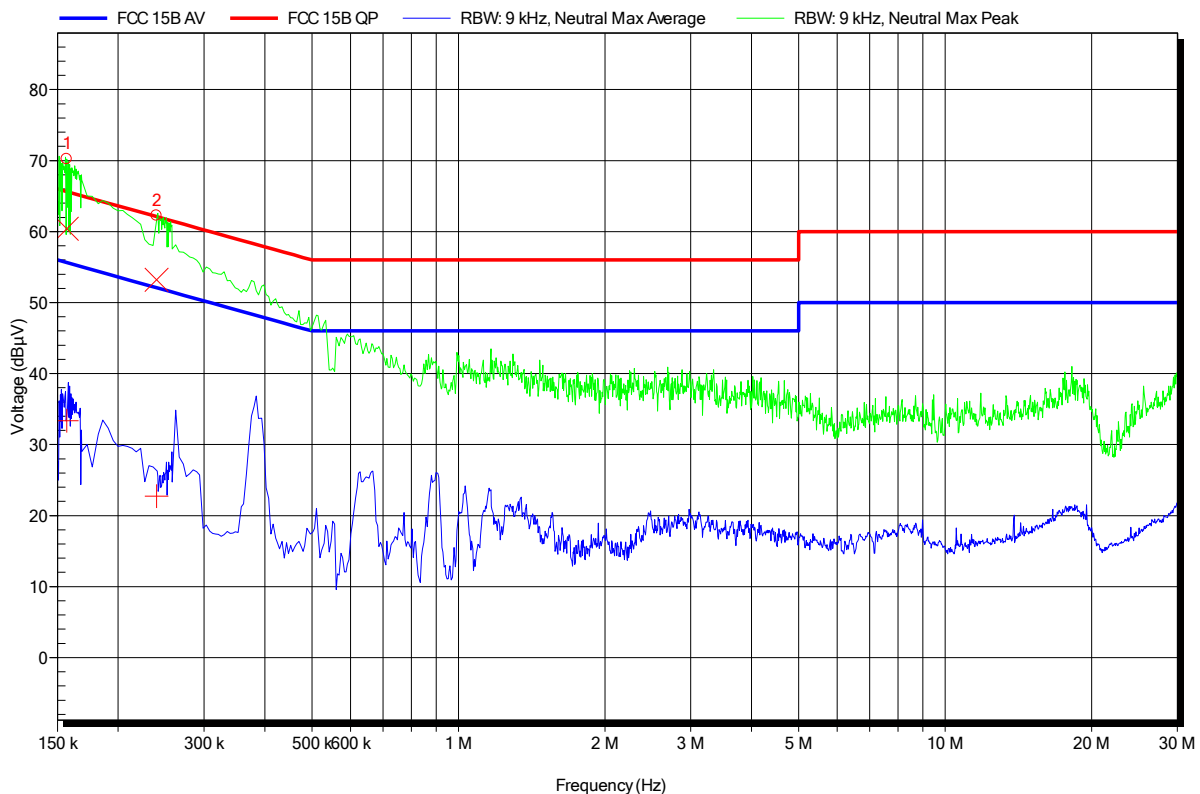

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
156,75 kHz	60,39 dBµV	65,63 dBµV	-5,25 dB	Pass
240 kHz	53,21 dBµV	62,1 dBµV	-8,89 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
156,75 kHz	33,35 dBµV	55,63 dBµV	-22,29 dB	Pass
240 kHz	22,74 dBµV	52,1 dBµV	-29,36 dB	Pass

Test Report No.: G0M-1502-4538-EF0115B-V01


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1502-4538

Manufacturer: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Bluetooth Smart Module  
 Model: ENW89847A1KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Klein  
 Test Conditions: Tnom: 23°C, Unom: 5V USB from Notebook with 120V AC/DC-Adapter  
 LISN: ESH2-Z5 L  
 Mode: Permanent TX @ 2419MHz  
 Test Date: 2015-03-10  
 Note:

Index 16

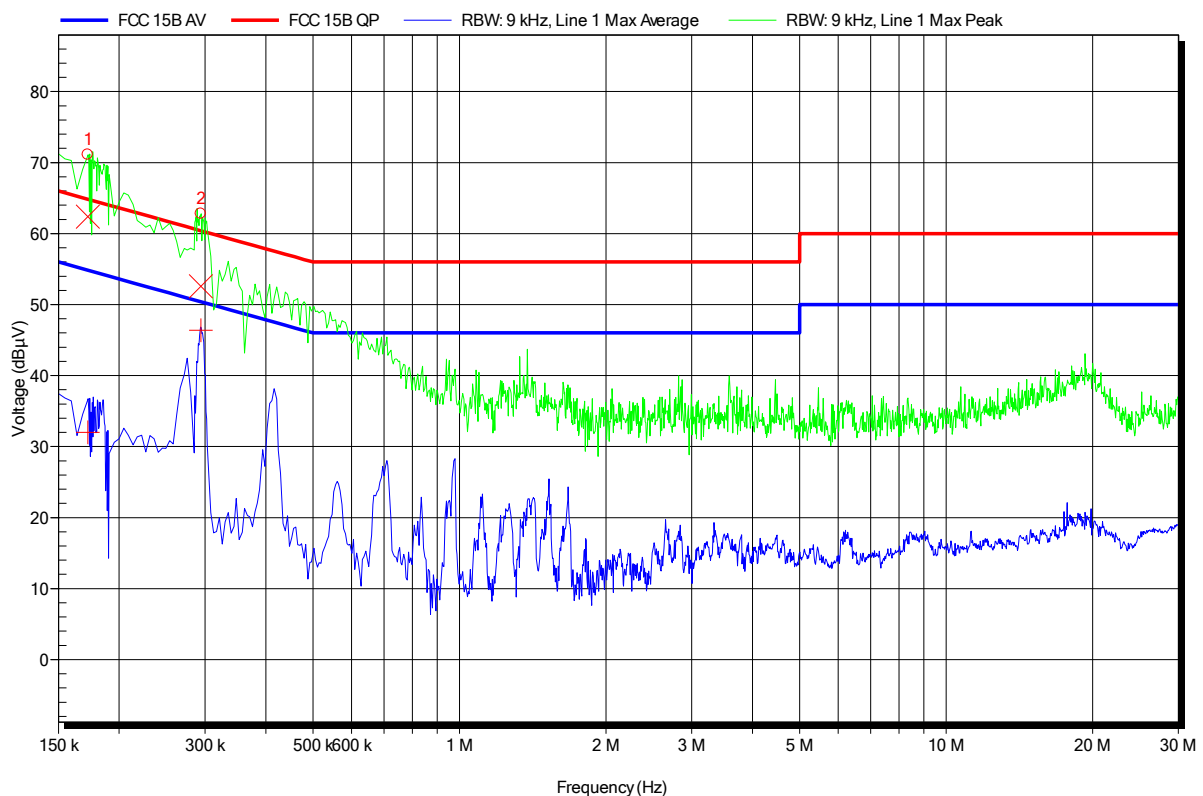

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
172,5 kHz	62,41 dBµV	64,84 dBµV	-2,43 dB	Pass
294,45 kHz	52,58 dBµV	60,4 dBµV	-7,82 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
172,5 kHz	31,99 dBµV	54,84 dBµV	-22,85 dB	Pass
294,45 kHz	46,37 dBµV	50,4 dBµV	-4,03 dB	Pass

Test Report No.: G0M-1502-4538-EF0115B-V01

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany