

FCC Test Report

Product Name	Infotainment System with Fondunit (with BT, Kleer technology)
Model No	NTG5 FU
FCC ID.	T8G9091

Applicant	Harman Becker Automotive Systems GmbH
Address	Becker-Göring-Str. 16, 76307 Karlsbad, Germany

Date of Receipt	Mar, 11. 2013
Issue Date	Mar. 15, 2013
Report No.	133233R-RFUSP30V01
Report Version	V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuietTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issue Date: Mar. 15, 2013

Report No.: 133233R-RFUSP30V01





Product Name	Infotainment System with Fondunit (with BT, Kleeer technology)
Applicant	Harman Becker Automotive Systems GmbH
Address	Becker-Görling-Str. 16, 76307 Karlsbad, Germany
Manufacturer	Harman Becker Automotive Systems GmbH
Model No.	NTG5 FU
EUT Rated Voltage	DC 12V (Power by vehicle Battery)
EUT Test Voltage	DC 12V (Power by vehicle Battery)
Trade Name	Daimler
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.4: 2003, ANSI C63.10: 2009
Test Result	Complied

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : 
(Senior Engineering Adm. Specialist /
Anita Chou)

Tested By : 
(Engineer / Andy Lin)


Approved By : 
(Manager / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Peak Power Output	13
3.1. Test Equipment.....	13
3.2. Test Setup	13
3.3. Limits	13
3.4. Test Procedure	13
3.5. Uncertainty	13
3.6. Test Result of Peak Power Output.....	14
4. Radiated Emission.....	15
4.1. Test Equipment.....	15
4.2. Test Setup	16
4.3. Limits	17
4.4. Test Procedure	17
4.5. Uncertainty	17
4.6. Test Result of Radiated Emission.....	18
5. RF antenna conducted test.....	22
5.1. Test Equipment.....	22
5.2. Test Setup	22
5.3. Limits	22
5.4. Test Procedure	23
5.5. Uncertainty	23
5.6. Test Result of RF antenna conducted test.....	24
6. Band Edge	30
6.1. Test Equipment.....	30
6.2. Test Setup	31
6.3. Limits	31
6.4. Test Procedure	32
6.5. Uncertainty	32
6.6. Test Result of Band Edge	33

7.	Occupied Bandwidth	37
7.1.	Test Equipment	37
7.2.	Test Setup	37
7.3.	Limits	37
7.4.	Test Procedure	37
7.5.	Uncertainty	37
7.6.	Test Result of Occupied Bandwidth	38
8.	Power Density	41
8.1.	Test Equipment	41
8.2.	Test Setup	41
8.3.	Limits	41
8.4.	Test Procedure	41
8.5.	Uncertainty	41
8.6.	Test Result of Power Density	42
9.	EMI Reduction Method During Compliance Testing	45
Attachment 1:	EUT Test Photographs	
Attachment 2:	EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Infotainment System with Fondunit (with BT, Kleeer technology)
Trade Name	Daimler
Model No.	NTG5 FU
FCC ID.	T8G9091
Frequency Range	2403~2478MHz
Channel Separation	5 MHz
Channel Number	16
Type of Modulation	MSK
Antenna Type	PCB antenna
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto
FCC Equipment class	DTS

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Harman Becker	N/A	PCB antenna	-0.5dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2403MHz	Channel 02:	2408MHz	Channel 03:	2413MHz	Channel 04:	2418MHz
Channel 05:	2423MHz	Channel 06:	2428MHz	Channel 07:	2433MHz	Channel 08:	2438MHz
Channel 09:	2443MHz	Channel 10:	2448MHz	Channel 11:	2453MHz	Channel 12:	2458MHz
Channel 13:	2463MHz	Channel 14:	2468MHz	Channel 15:	2473MHz	Channel 16:	2478MHz

Note:

1. The EUT is an Infotainment System with Fondunit (with BT, Kleeer technology), with a built-in Bluetooth and two Kleeer transceivers (Kleeer1and Kleeer2), this report for Kleeer1.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample for the purpose of demonstrating compliance of 2.4GHz transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices

Test Mode:	Mode 1: Transmit
------------	------------------

1.2. Operational Description

The EUT “Infotainment System with Fondunit (with BT, Kleeer technology)” is based on new low power Intel e-Module technology for a high performance infotainment system, This system will be installed in the new S-Class (W222) of Mercedes Benz and one year later in the new C-Class (W205). It contains features like navigation, different Tuner technologies, CD/DVD-Drive, HDD-Drive, RSC (Rear-Seat-Communication), Bluetooth, WLAN and Kleeer wireless technology. It was designed for use within different car series for different target markets.

The Number of the channels is 16 in 2403~2478MHz, The device adapts the MSK modulation, The Antenna is PCB antenna.

The Fondunit has two Kleeer Chips for connecting two Kleeer Headphones to the FondUnit. Each chip has one symmetric antenna. The antennas are connected over a Balun to the Kleeer Chip.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Test Fixture	Harman Becker	N/A	N/A
2	Notebook PC	Lenovo	T400	Non-shielded, 1.8m
3	Battery	TRANE	12B50PE	N/A

Signal Cable Type	Signal cable Description
A	Signal Cable
B	USB Cable
C	Power Cable
D	Power Cable

1.4. Configuration of Tested System

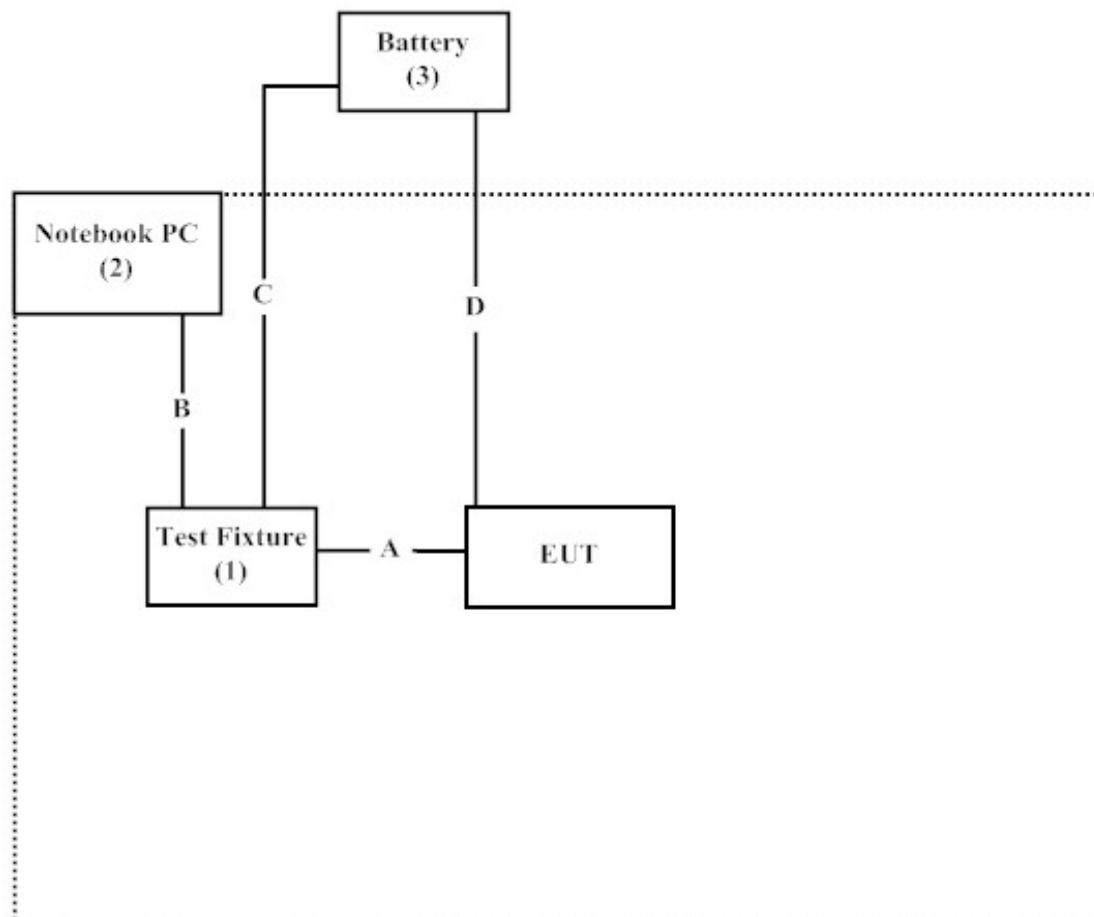

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4
- (2) Execute Software “Pkleer v1.0.0.7” on the notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site : <http://tw.quietek.com/tw/emc/accreditations/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :

<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Accreditation on NVLAP
NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2012	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2013	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2013	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2013	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2013	
	No.8 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

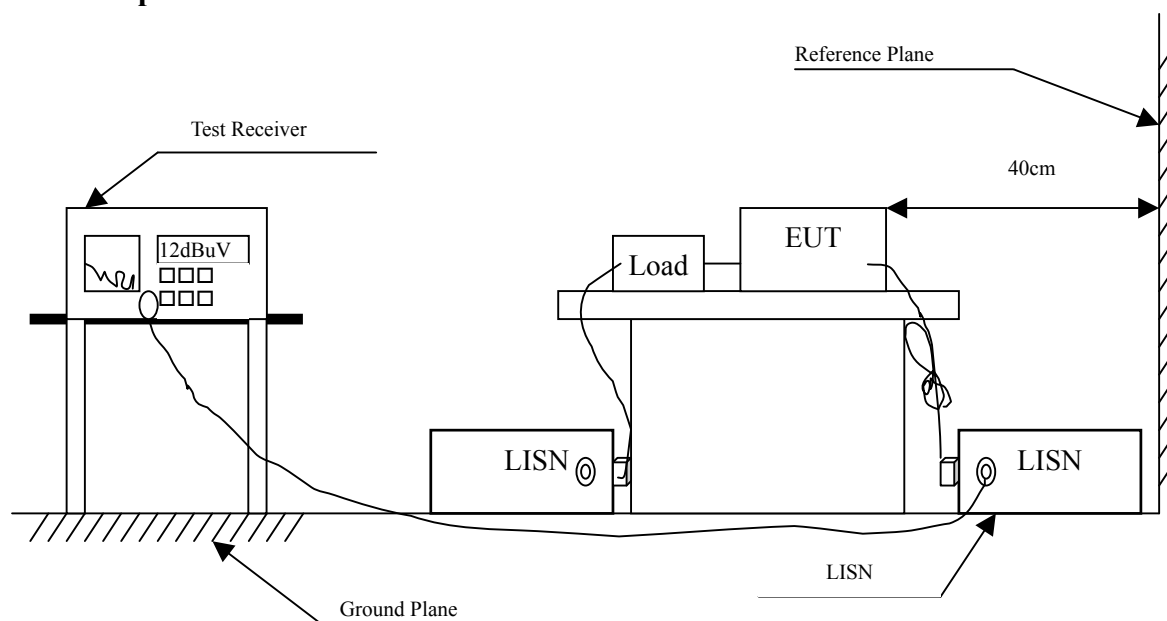

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Owing to the EUT use battery supply voltage, this test item is not performed.

3. Peak Power Output


3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2012
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2012

Note: 1. All instruments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

3.2. Test Setup

Conducted Measurement

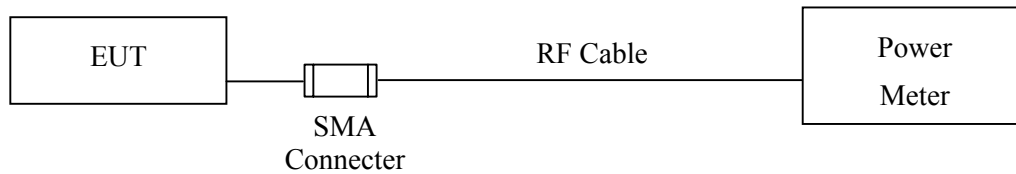

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : Infotainment System with Fondunit (with BT, Kleer technology)
Test Item : Peak Power Output Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
01	2403	-0.21	<30dBm	Pass
09	2443	-1.15	<30dBm	Pass
16	2478	-1.34	<30dBm	Pass

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> Site # 3	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2012
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2012
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2012
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2012
		Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2013
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2012
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2012
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

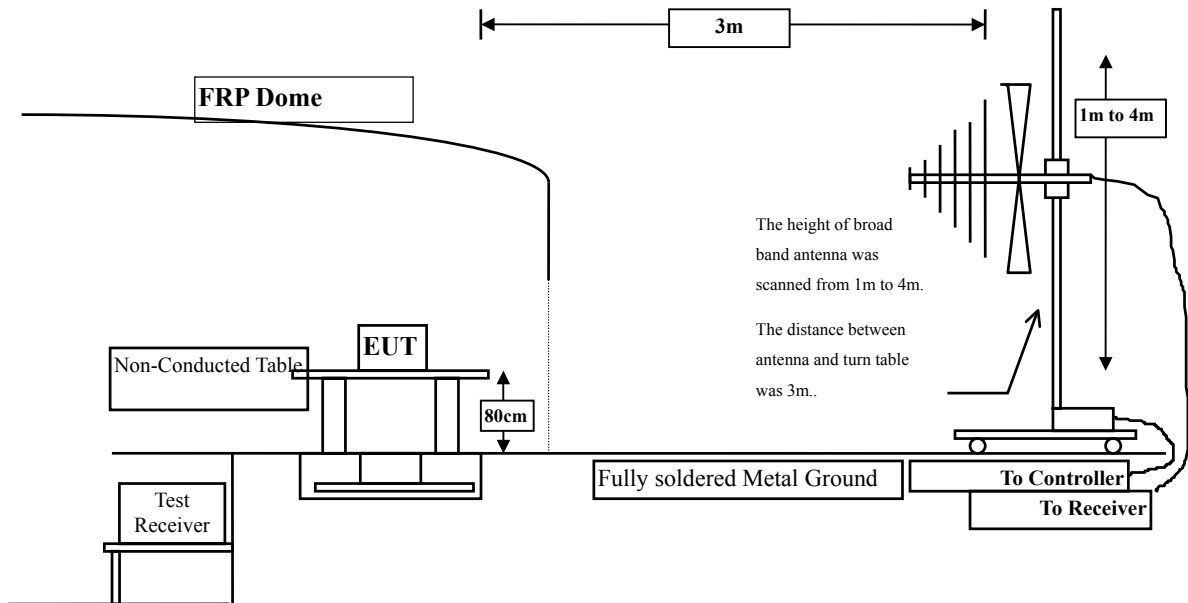

Radiated Emission Above 1GHz

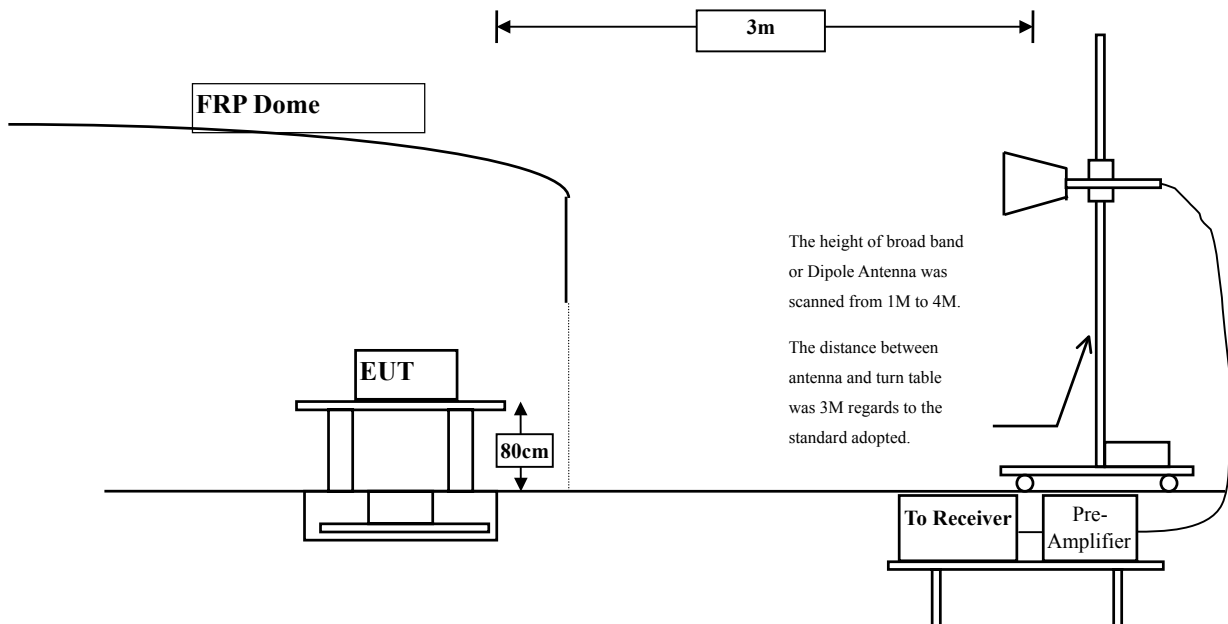

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement. The measurement frequency range from 30MHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Infotainment System with Fondunit (with BT, Klear technology)
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (2403MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4806.000	3.328	41.980	45.309	-28.691	74.000
7209.000	10.188	38.030	48.217	-25.783	74.000
9612.000	13.669	36.960	50.629	-23.371	74.000

Average Detector:

--

Vertical

Peak Detector:

4806.000	6.626	40.050	46.676	-27.324	74.000
7209.000	11.054	37.280	48.334	-25.666	74.000
9612.000	14.074	39.020	53.094	-20.906	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Fondunit (with BT, Kleer technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2443MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4886.000	2.984	39.920	42.904	-31.096	74.000
7329.000	11.873	37.170	49.043	-24.957	74.000
9772.000	12.527	36.980	49.507	-24.493	74.000

Average Detector:

--

Vertical

Peak Detector:

4886.000	5.665	39.470	45.135	-28.865	74.000
7329.000	12.778	36.520	49.298	-24.702	74.000
9772.000	12.979	37.170	50.149	-23.851	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Fondunit (with BT, Kleeer technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2478 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4956.000	2.771	39.510	42.281	-31.719	74.000
7434.000	12.509	36.160	48.670	-25.330	74.000
9912.000	13.411	36.800	50.211	-23.789	74.000

Average Detector:

--

Vertical

Peak Detector:

4956.000	5.553	38.200	43.754	-30.246	74.000
7434.000	13.416	35.670	49.087	-24.913	74.000
9912.000	13.964	36.940	50.905	-23.095	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Fondunit (with BT, Kleeer technology)
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2443 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
161.920	-11.626	49.452	37.827	-5.673	43.500
365.620	-1.329	39.469	38.140	-7.860	46.000
433.520	-1.972	41.926	39.954	-6.046	46.000
497.540	-0.273	39.925	39.652	-6.348	46.000
738.100	2.826	35.559	38.385	-7.615	46.000
885.540	6.102	31.238	37.340	-8.660	46.000
Vertical					
161.920	-6.696	42.617	35.922	-7.578	43.500
365.620	-2.179	33.866	31.687	-14.313	46.000
499.480	-0.852	34.234	33.382	-12.618	46.000
695.420	1.878	29.060	30.938	-15.062	46.000
811.820	3.121	28.083	31.203	-14.797	46.000
932.100	6.152	28.046	34.198	-11.802	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

5. RF antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

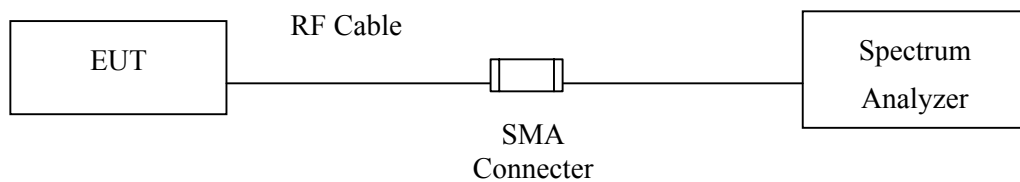

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty



Conducted is defined as $\pm 1.27\text{dB}$

5.6. Test Result of RF antenna conducted test



Product : Infotainment System with Fondunit (with BT, Kleer technology)
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (Antenna Type: Chip)


Channel 01(2403Hz)

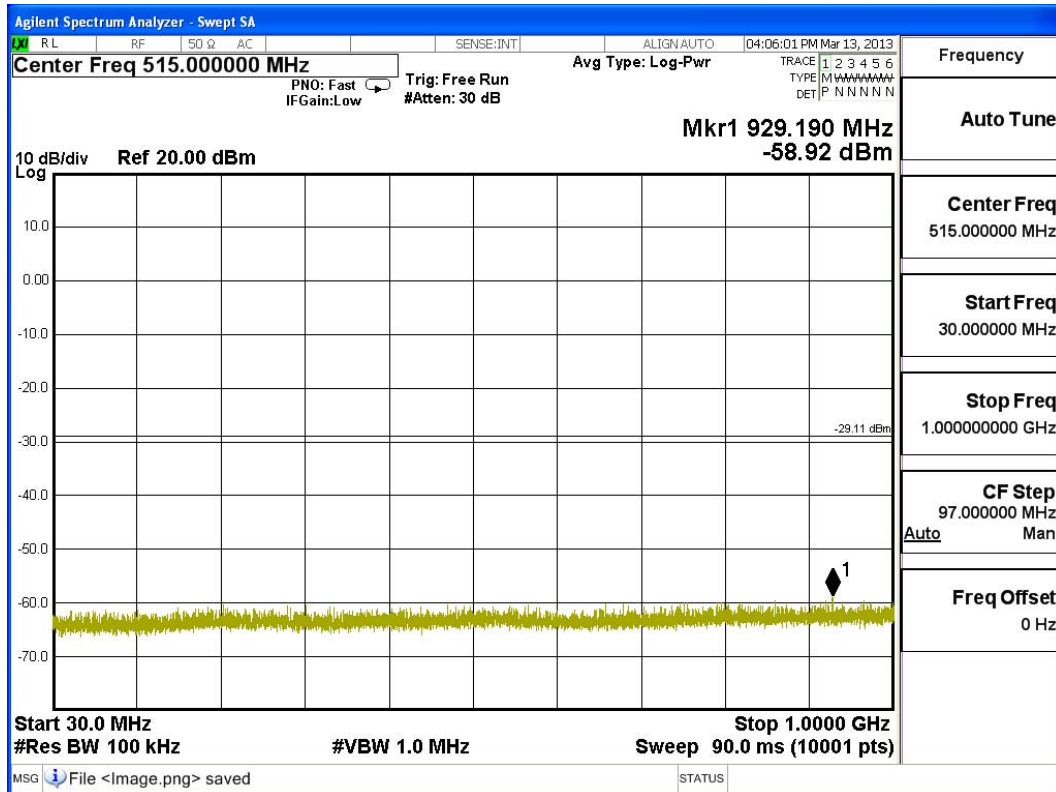

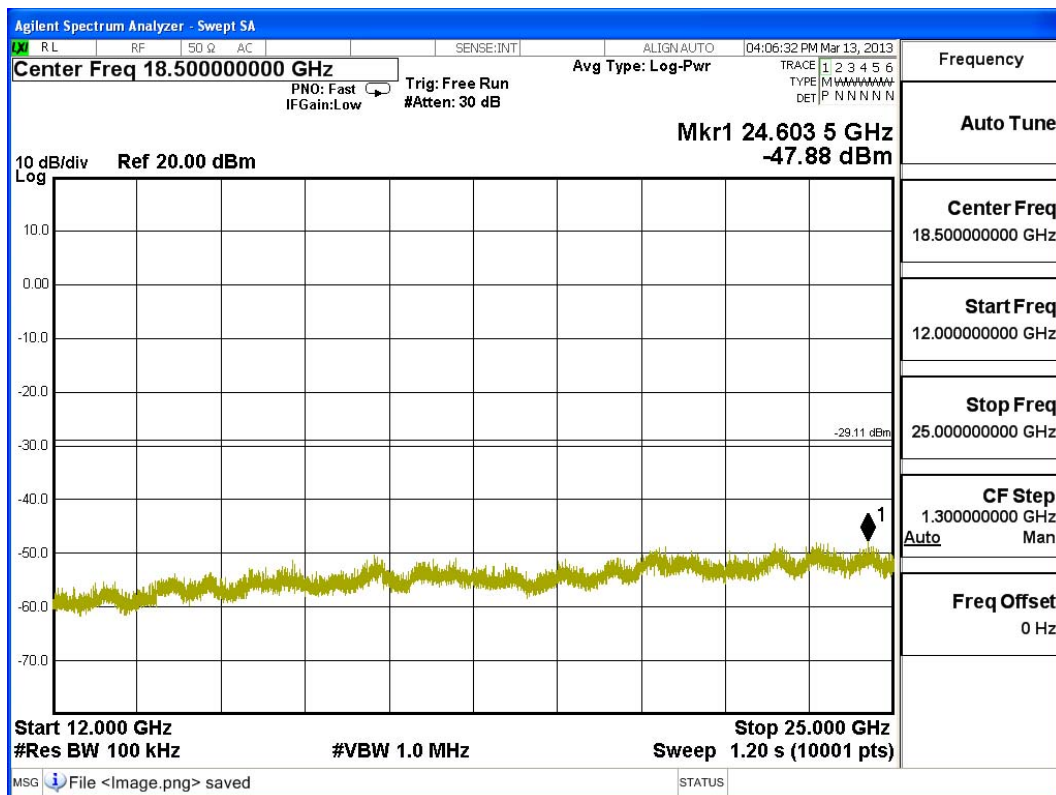
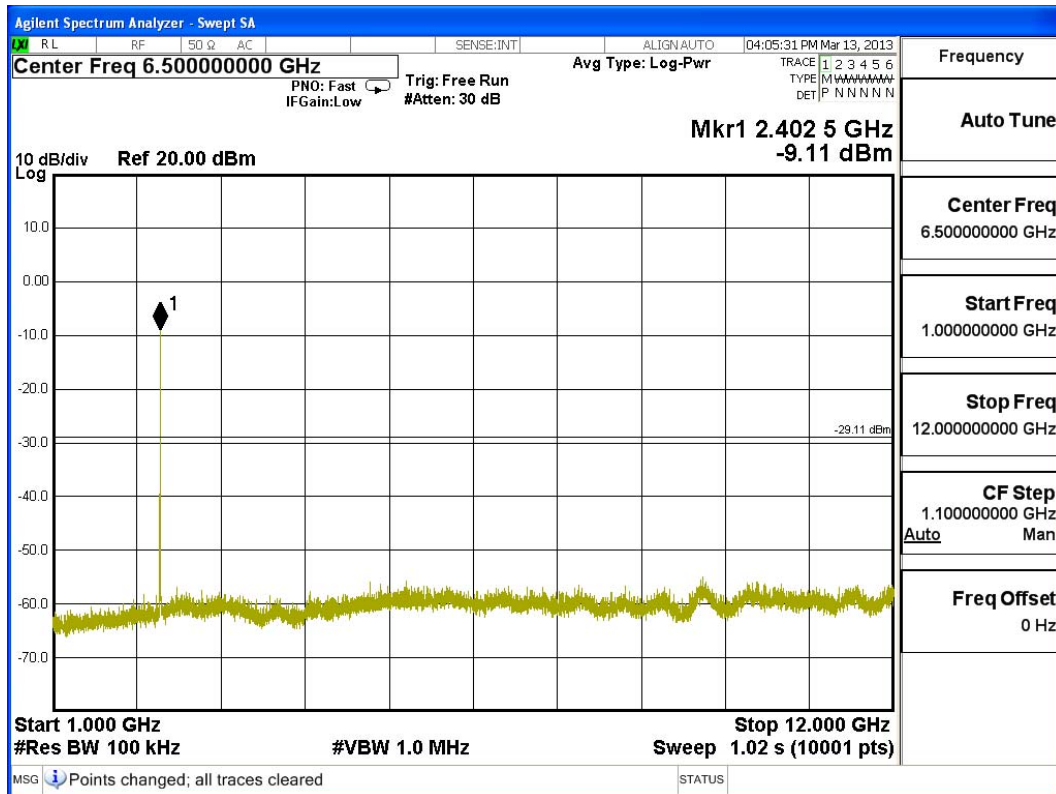



Channel 09 (2443MHz)

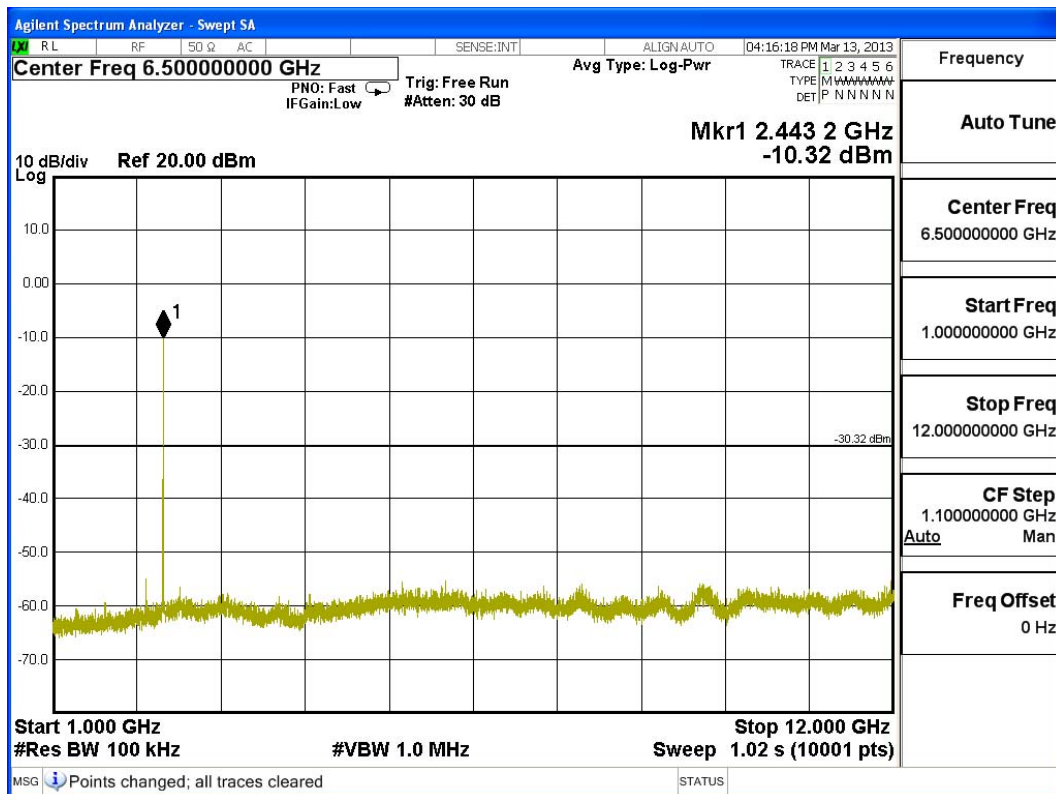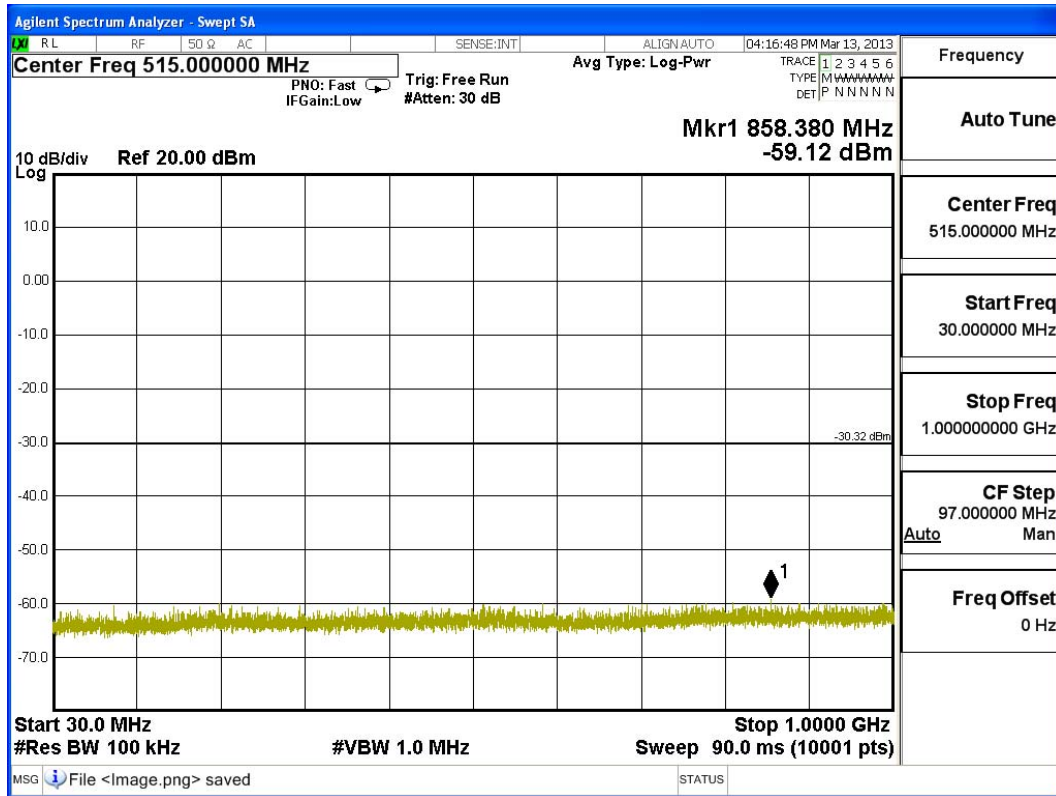

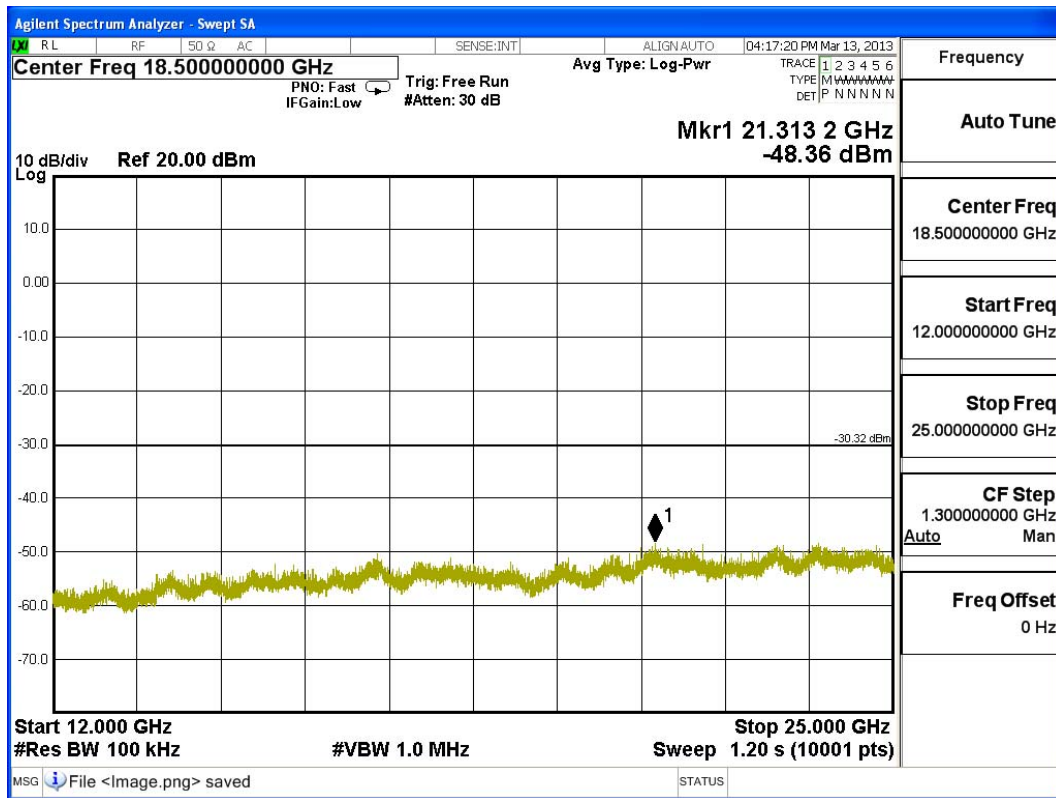

Channel 16 (2478MHz)

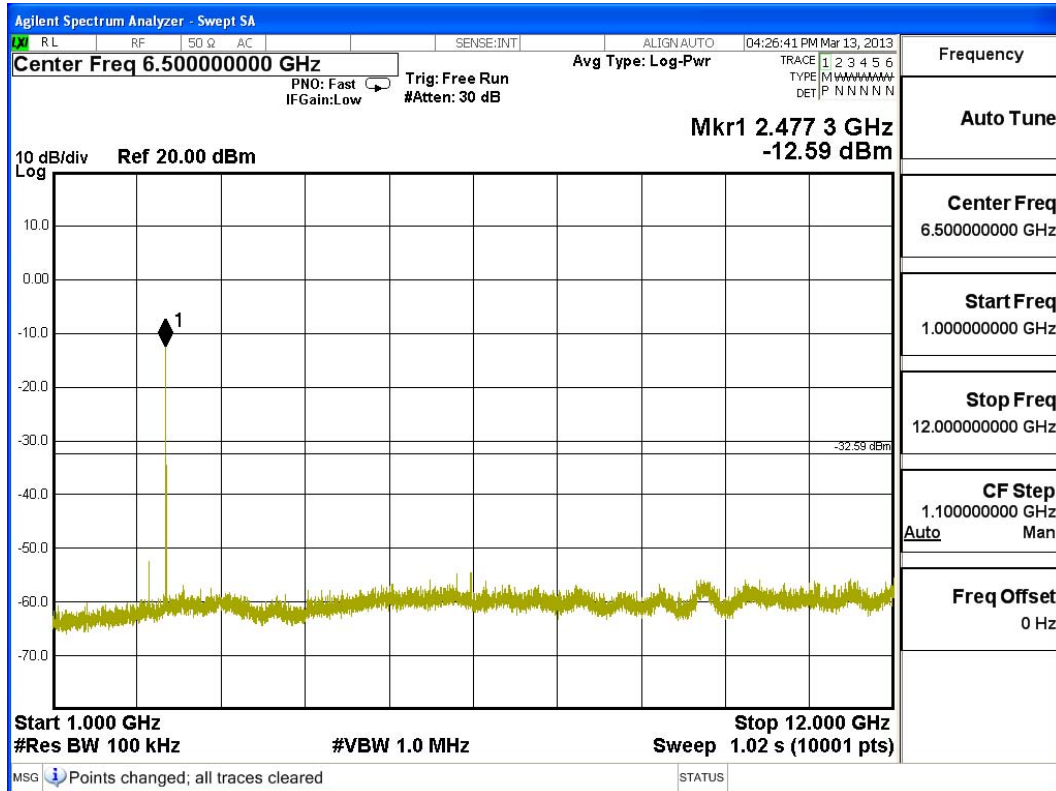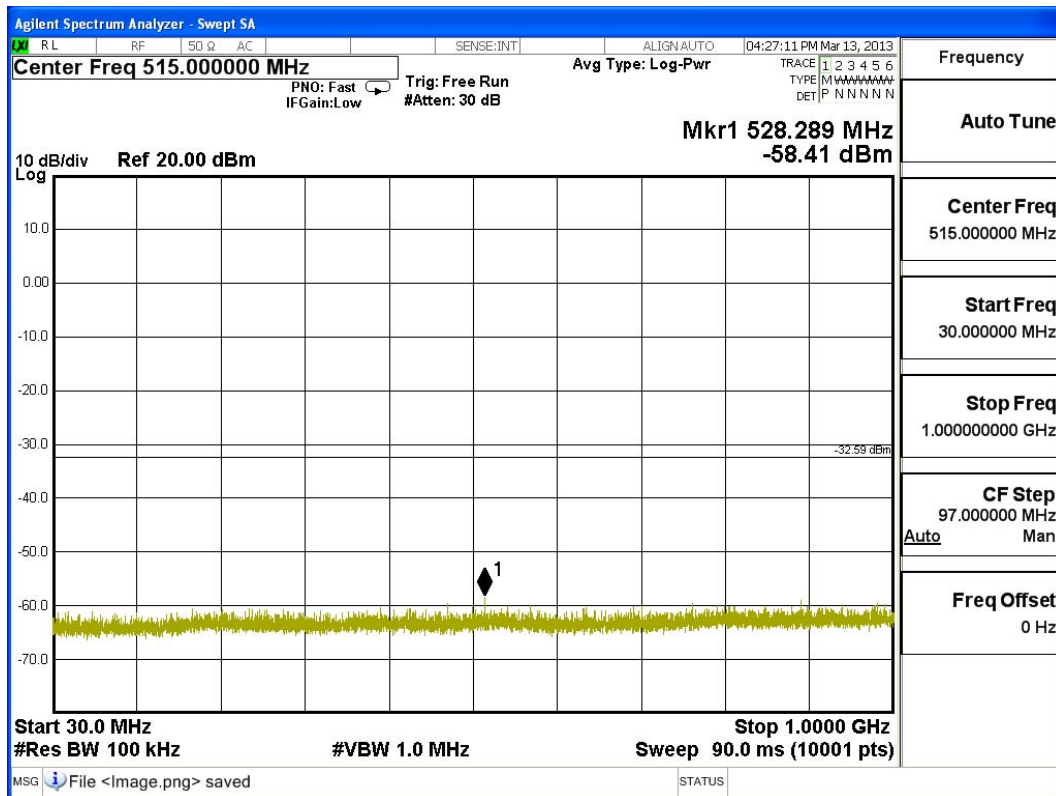

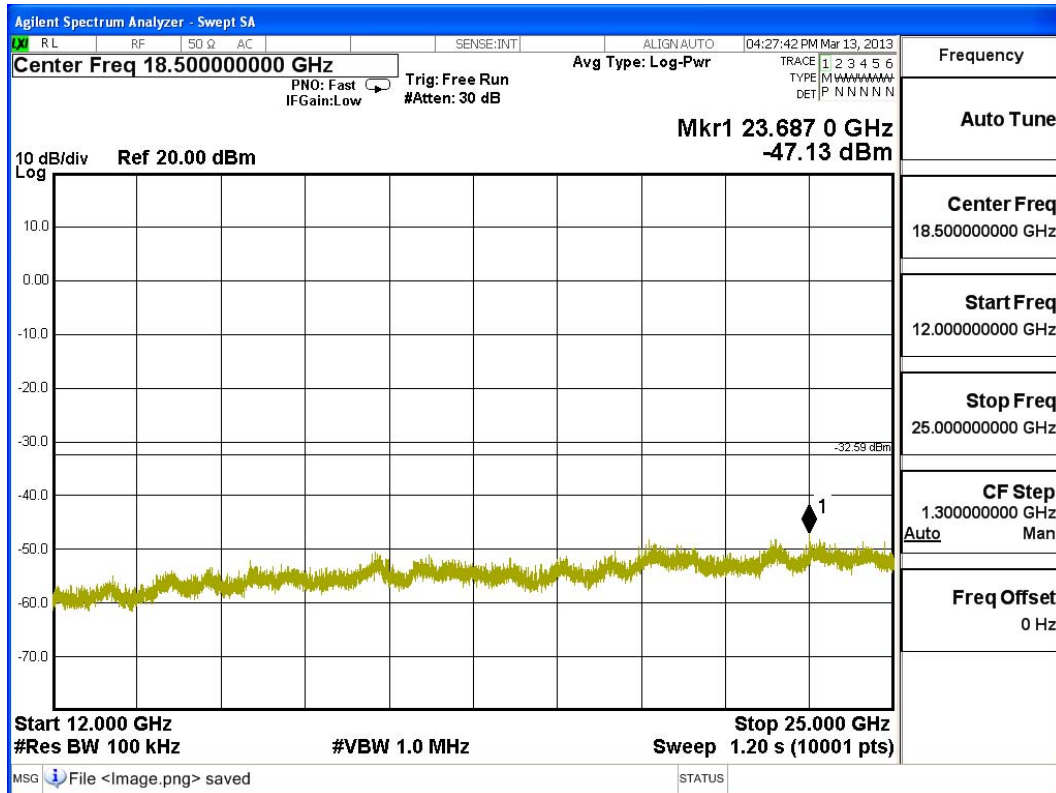

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2012
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2012
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2012
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2012
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2012
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement

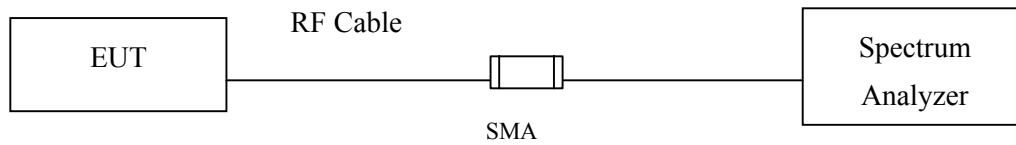

RF Radiated Measurement:

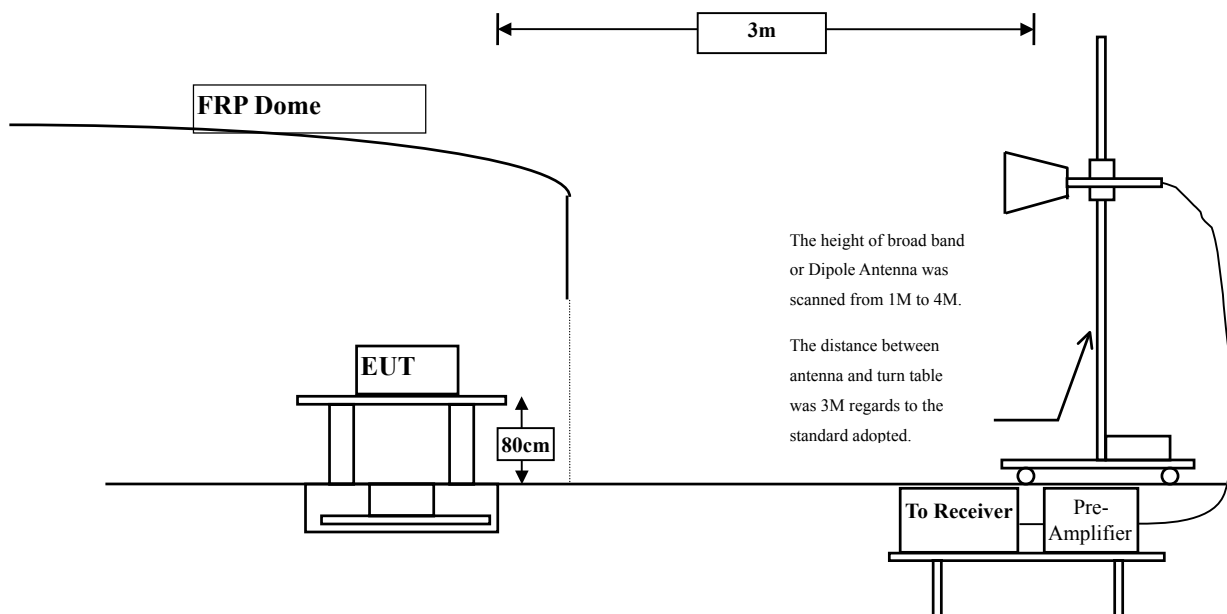

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : Infotainment System with Fondunit (with BT, Kleeer technology)
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (2403MHz)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2403	31.581	55.43	87.01	Peak
Horizontal	2403	31.581	52.63	84.21	Average
Vertical	2403	30.921	48.72	79.64	Peak
Vertical	2403	30.921	45.79	76.71	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2390	87.01	45.94	41.07	74.000	Peak
Horizontal	2390	84.21	54.79	29.42	54.000	Average
Vertical	2390	79.64	45.94	33.7	74.000	Peak
Vertical	2390	76.71	54.79	21.92	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

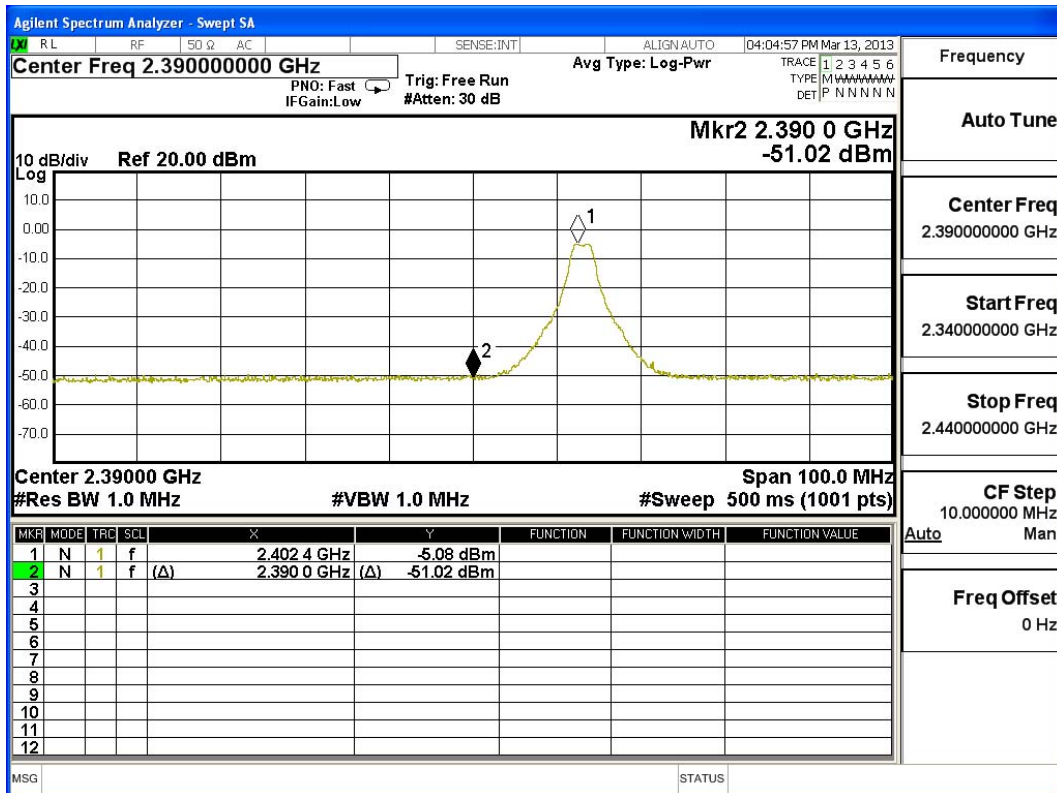

Average Detector of conducted Band Edge Delta

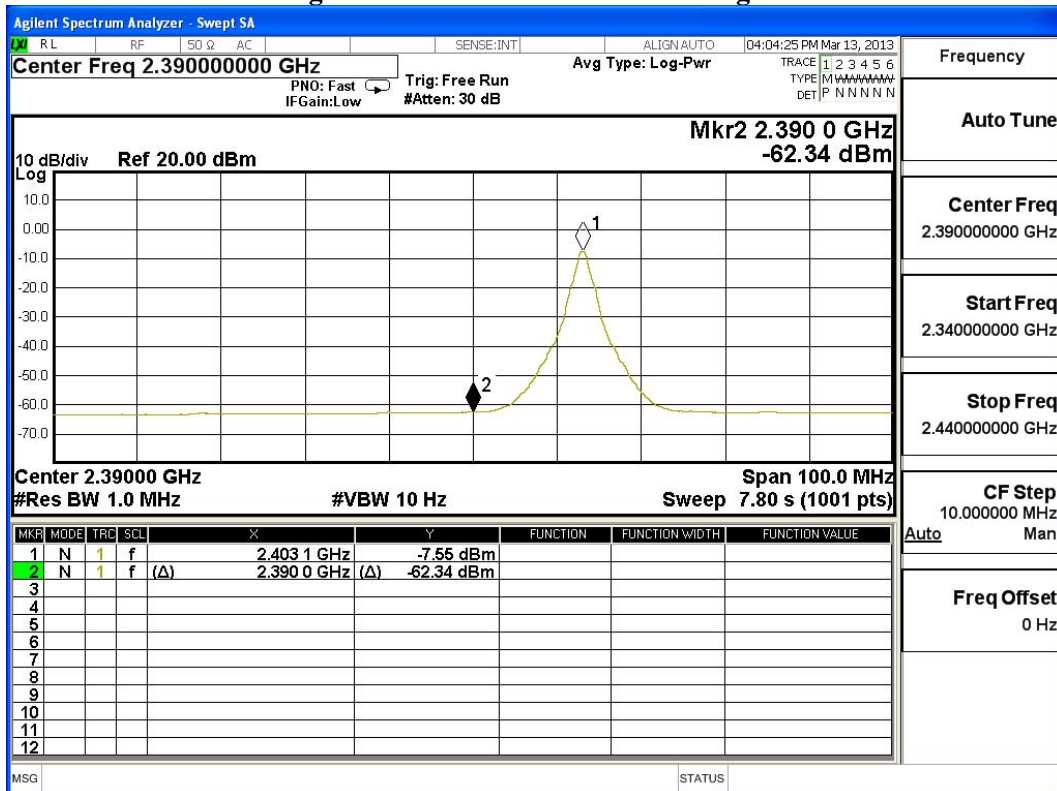

Product : Infotainment System with Fondunit (with BT, Klear technology)
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2478MHz)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dB(uV/m)]	Detector
Horizontal	2478	32.14	52.9	85.04	Peak
Horizontal	2478	32.14	49.69	81.83	Average
Vertical	2478	31.397	48.83	80.228	Peak
Vertical	2478	31.397	46.02	77.418	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2483.5	85.04	33.84	51.2	74.000	Peak
Horizontal	2483.5	81.83	41.74	40.09	54.000	Average
Vertical	2483.5	80.228	33.84	46.388	74.000	Peak
Vertical	2483.5	77.418	41.74	35.678	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

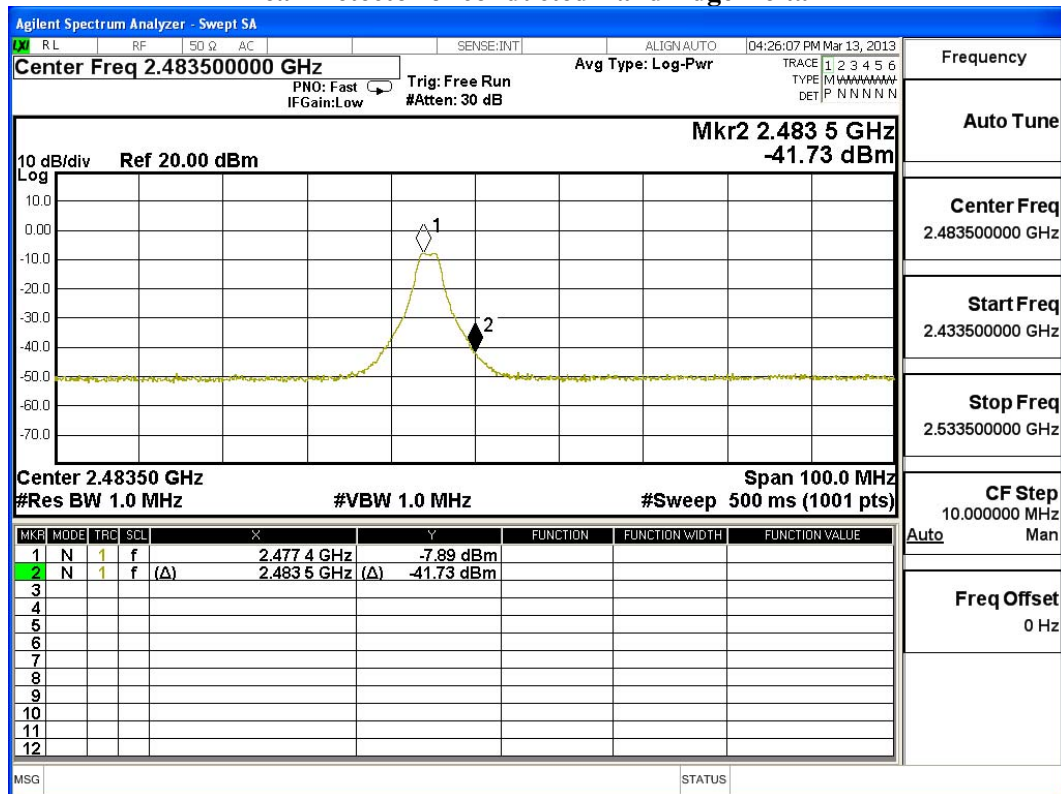

Average Detector of conducted Band Edge Delta

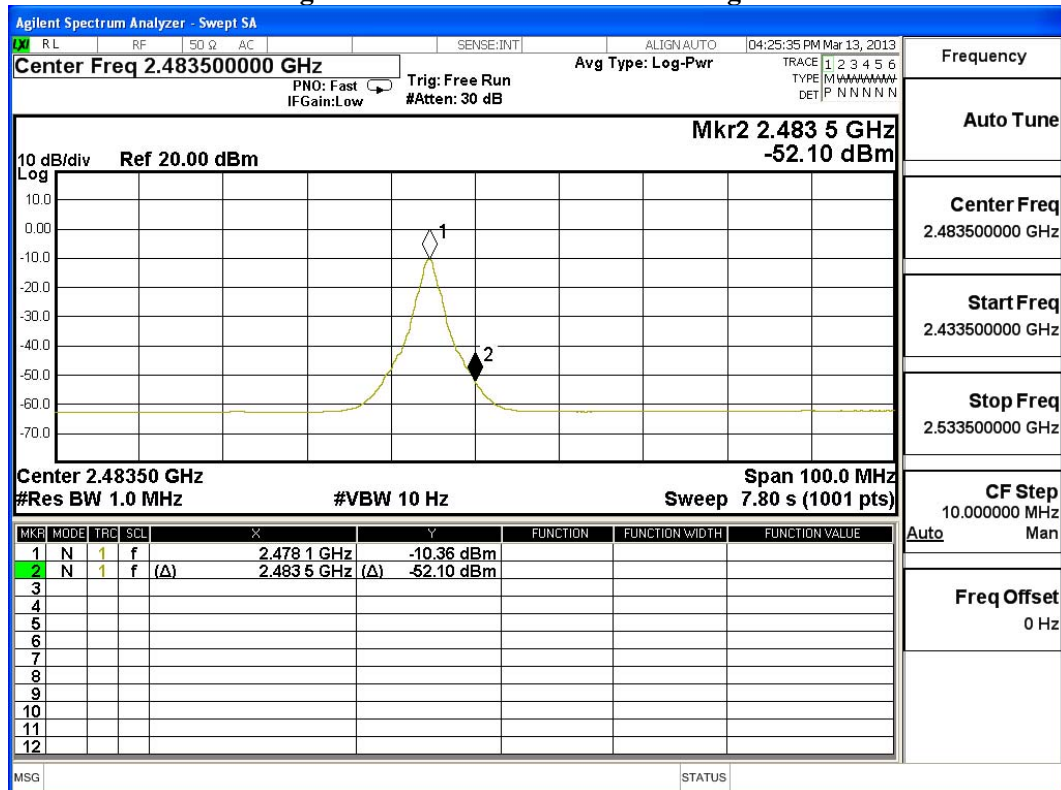


7. Occupied Bandwidth

7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note: 1. All instruments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

7.2. Test Setup

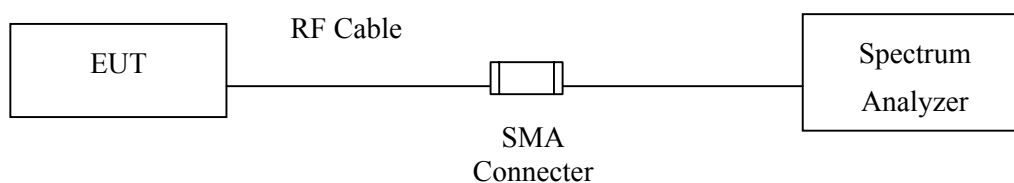

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009; tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 \times RBW$

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : Infotainment System with Fondunit (with BT, Kler technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2403MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2403	1560	>500	Pass


Figure Channel 01:

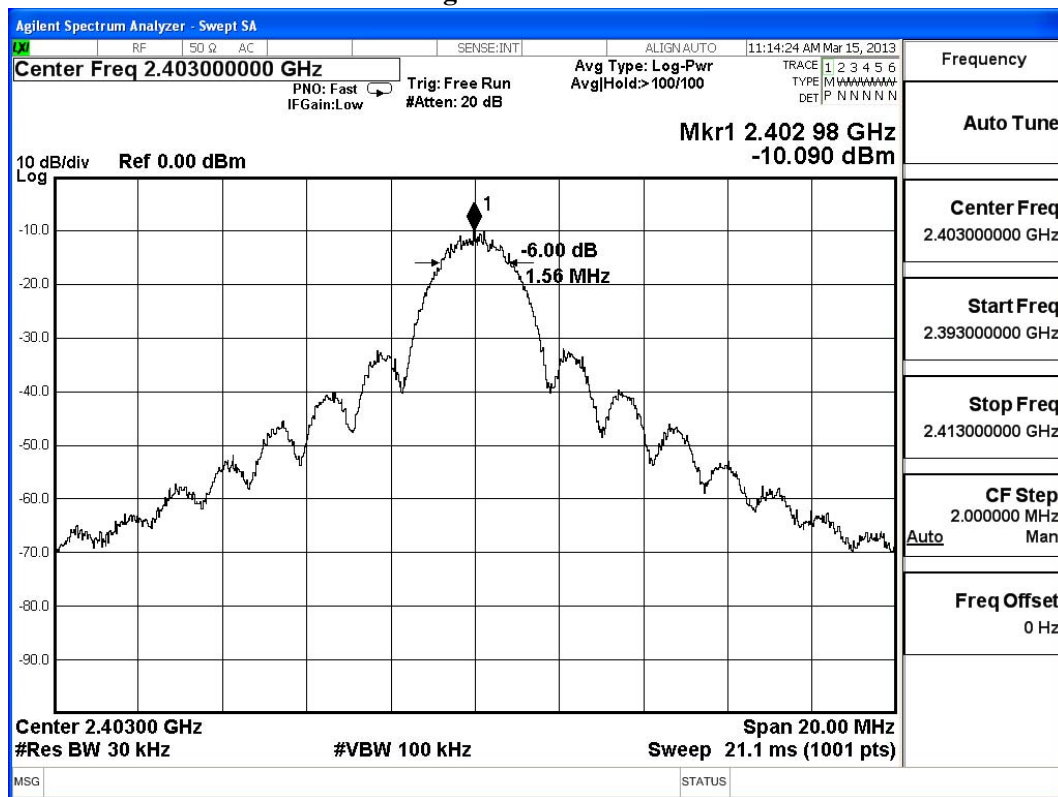

Product : Infotainment System with Fondunit (with BT, Kleer technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2443MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
09	2443	1810	>500	Pass


Figure Channel 09:

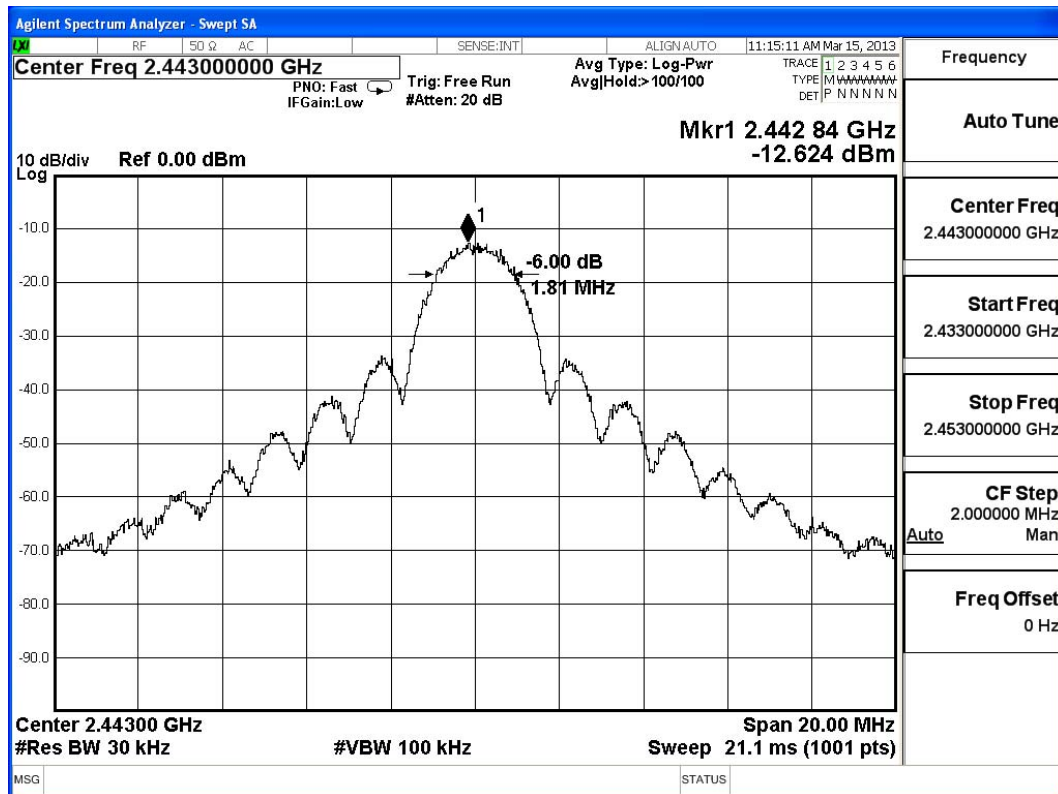

Product : Infotainment System with Fondunit (with BT, Kleer technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2478MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
16	2478	1680	>500	Pass

Figure Channel 16:

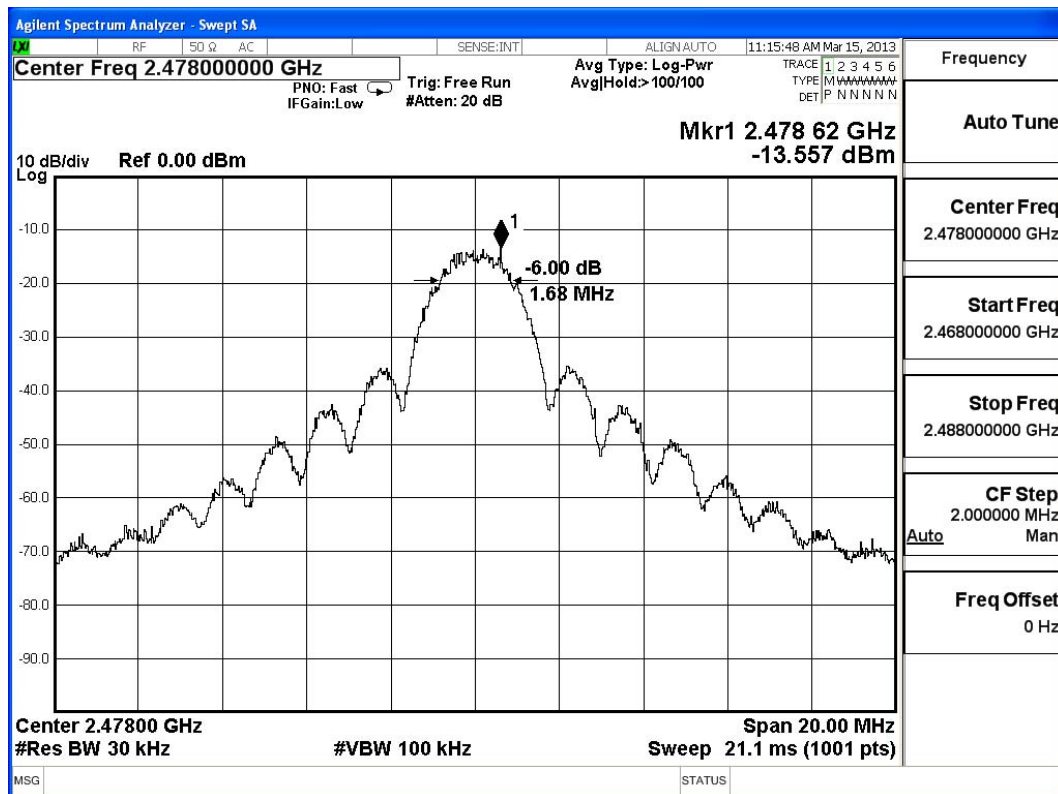


8. Power Density

8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

8.2. Test Setup

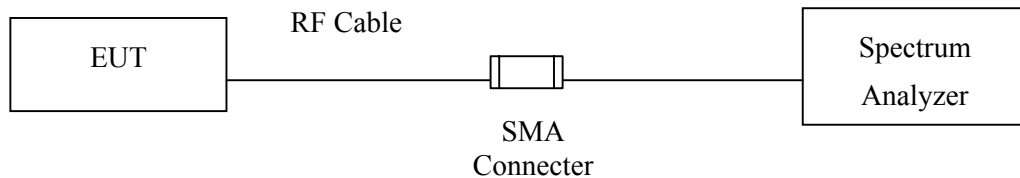

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009; tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, VBW \geq 300KHz, SPAN to 5-30 % greater than the EBW,

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF = 10log (3 kHz/100 kHz = -15.2 dB).

8.5. Uncertainty


± 1.27 dB

8.6. Test Result of Power Density

Product : Infotainment System with Fondunit (with BT, Kler technology)
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2403MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2403	-22.105	< 8dBm	Pass


Figure Channel 01:

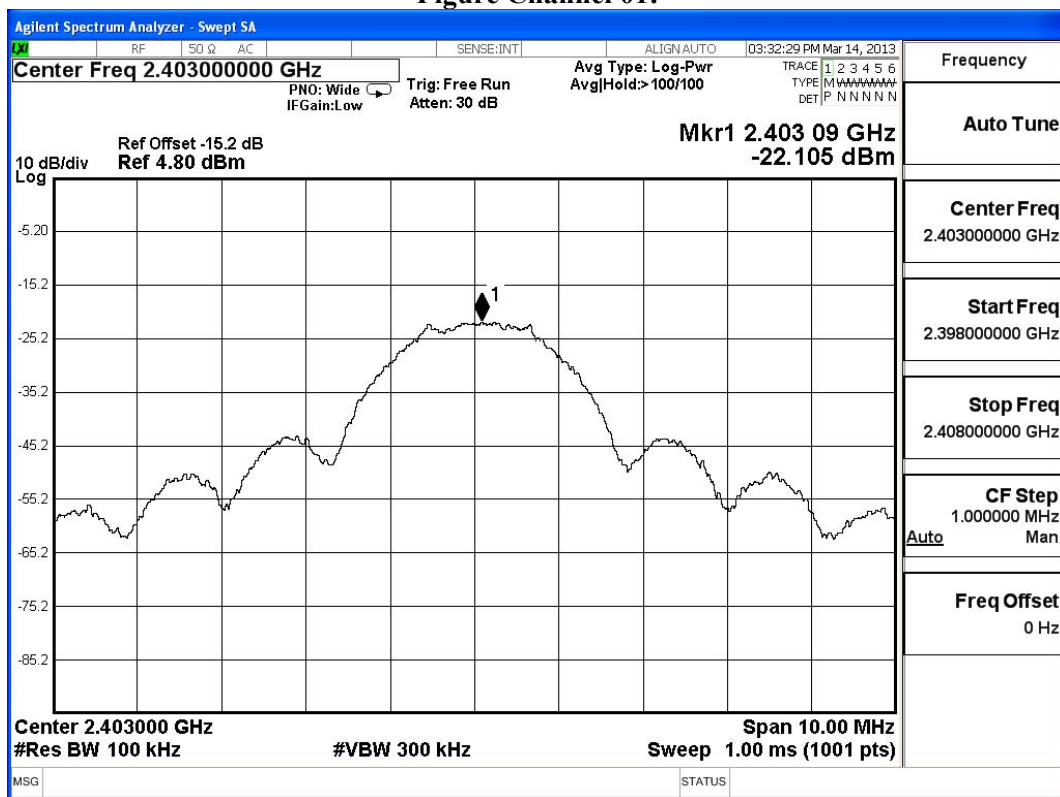

Product : Infotainment System with Fondunit (with BT, Kleer technology)
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (2443MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
09	2443	-23.964	< 8dBm	Pass


Figure Channel 09:

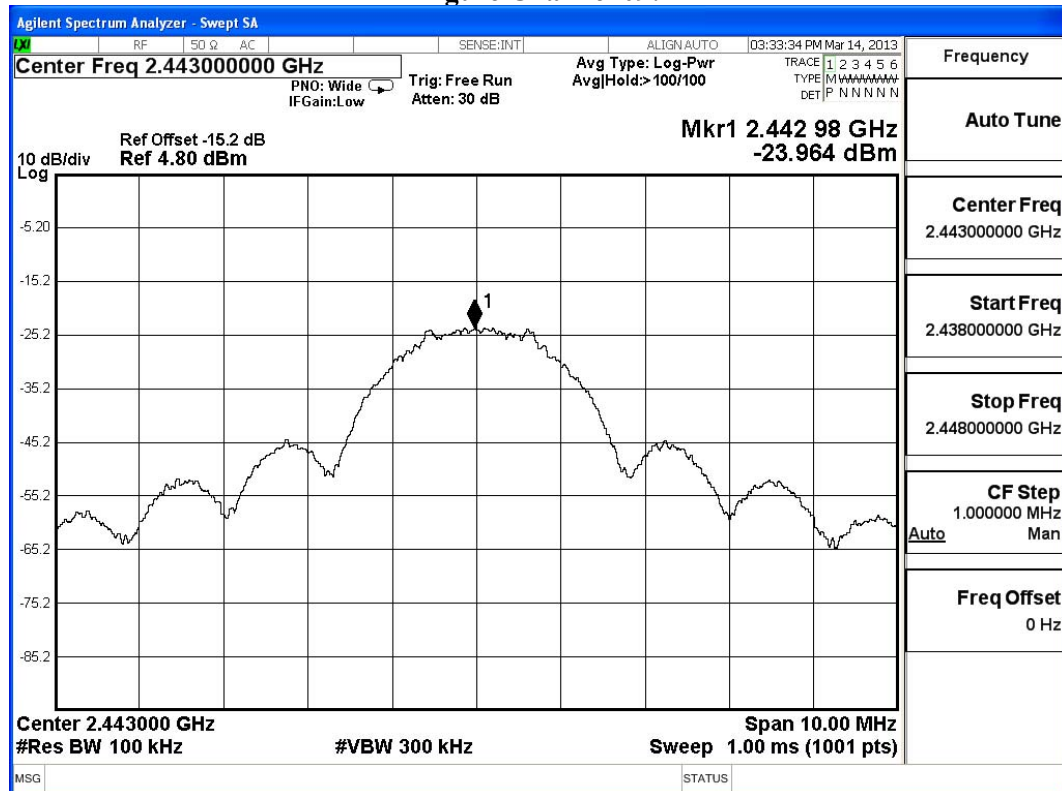

Product : Infotainment System with Fondunit (with BT, Kleer technology)
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2478MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
16	2478	-24.870	< 8dBm	Pass

Figure Channel 16:

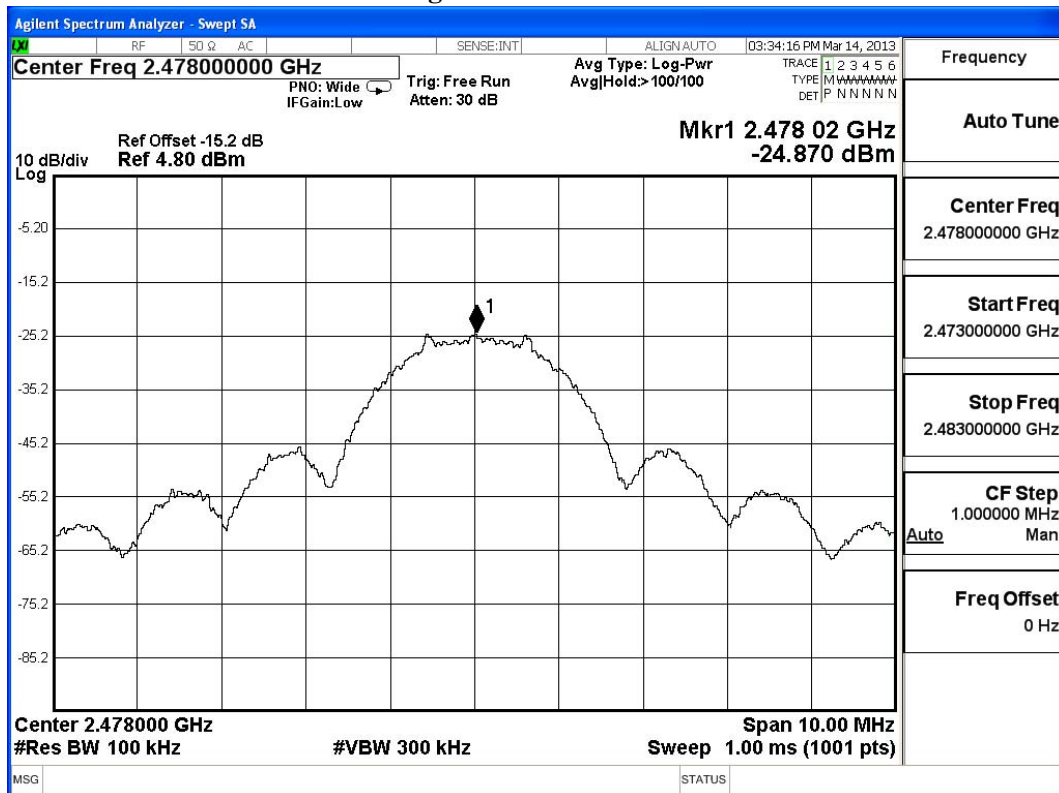

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs