



FCC LISTED, REGISTRATION
NUMBER: 2764.01

ISED LISTED REGISTRATION
NUMBER: 23595-1

Test Report No:

4373ERM.007

Partial Test Report

USA FCC Part 15.247, 15.209, & CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz

Digital Transmission Systems (DTSSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices.

| | |
|---|--|
| (*) Identification of item tested | Infotainment Head Unit |
| (*) Trademark | BMW |
| (*) Model and /or type reference | IDC2385H |
| Other identification of the product | FCC ID: T8GIDC23H IC: 6434A-IDC23H |
| (*) Features | Bluetooth classic; BLE; Wi-Fi 2.4GHz; Wi-Fi 5GHz; GNSS |
| Manufacturer | Harman Becker Automotive Systems GMBH Becker-Goering-Str. 16 76307 Karlsbad Germany |
| Test method requested, standard | USA FCC Part 15.247 (10-1-20 Edition): Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz USA FCC Part 15.209 (10-1-20 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 3 (August 2023). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices. |
| Summary | See Appendix A & B |
| Approved by (name / position & signature) | Domingo Galvez EMC&RF Lab Manager |
| Date of issue | 03-07-2024 |
| Report template No | FDT08_23 (*) "Data provided by the client" |

Index

| | |
|--|----|
| INDEX | 2 |
| ACRONYMS | 3 |
| COMPETENCES AND GUARANTEES | 3 |
| GENERAL CONDITIONS | 3 |
| UNCERTAINTY | 4 |
| DATA PROVIDED BY THE CLIENT | 4 |
| USAGE OF SAMPLES | 5 |
| TEST SAMPLE DESCRIPTION | 6 |
| IDENTIFICATION OF THE CLIENT | 7 |
| TESTING PERIOD AND PLACE | 7 |
| DOCUMENT HISTORY | 7 |
| ENVIRONMENTAL CONDITIONS | 8 |
| REMARKS AND COMMENTS | 8 |
| LIST OF EQUIPMENT USED DURING THE TEST | 9 |
| TESTING VERDICTS | 10 |
| SUMMARY | 10 |
| APPENDIX A: TEST RESULTS. BLUETOOTH CLASSIC (BR & EDR) | 12 |
| APPENDIX B: TEST RESULTS. WI-FI 2.4GHZ | 26 |

Acronyms

| Acronym ID | Acronym Description |
|------------------|-------------------------------------|
| | Emission Bandwidth |
| # of Tx Chains | Number of Transmission Chains |
| Equipment | Equipment Type |
| Freq | Frequency |
| In band Peak Lvl | In band Peak Level |
| Lvl | Level |
| MP | Measurement Point |
| Mod | Modulation |
| Occ Ch BW | Occupied Channel Bandwidth |
| PSD | Power Spectrum Density |
| Peak Power | Maximum Peak Conducted Output Power |
| Port | Active Port |

Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor k=2) was calculated according to the DEKRA Certification internal document PODT000.

| Test case | Frequency (MHz) | U (k=2) | Units |
|----------------------------|-----------------|---------|-------|
| RF Power and PSD | 2402-2483 | 0.88 | dB |
| Occupied Bandwidth | | 1.87 | % |
| Dwell Time | | 0.01 | % |
| Band Edge | | 0.64 | dB |
| Radiated Spurious Emission | 30-180 | 4.27 | dB |
| | 180-1000 | 3.14 | dB |
| | 1000-18000 | 3.30 | dB |
| | 18000-40000 | 3.49 | dB |

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of Infotainment Head Unit to be installed in vehicle with the main functionalities: Navigation, USB, voice recognition and several interfaces to the vehicle and Bluetooth / WLAN. The Head-unit provides different interfaces like: AR-CAM input, Video-out APIX3 (for the connection of an external Display), 3 USB interfaces.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Sample S/01 is composed of the following elements:

| Id | Control Number | Description | Model | Serial N° | Date of Reception | Application |
|------|----------------|--|----------|----------------|-------------------|--------------------|
| S/01 | 4373/01 | Infotainment head unit | IDC2385H | HBB429P65UAARZ | 01/04/2024 | Element Under Test |
| S/01 | 4373/02 | Harness | - | - | 01/04/2024 | Accessory |
| S/01 | 4373/03 | BR-Adapter (Automotive converter Ethernet BroadR-R | - | - | 01/04/2024 | Accessory |
| S/01 | 4373/04 | Power Plug cable for BR-Adapter | - | - | 01/04/2024 | Accessory |
| S/01 | 4373/06 | HSD (male) to OABR cable | - | - | 01/04/2024 | Accessory |
| S/01 | 4373/07 | Quad mate AXZ - High speed Fakra to SMA (male) | - | - | 01/04/2024 | Accessory |

Sample S/01 was used for the test(s): All Conducted tests indicated in appendix A & B.


Sample S/02 is composed of the following elements and accessories:

| Id | Control Number | Description | Model | Serial N° | Date of Reception | Application |
|------|----------------|--|----------|----------------|-------------------|--------------------|
| S/02 | 4373/01 | Infotainment head unit | IDC2385H | HBB429P65UAARZ | 01/04/2024 | Element Under Test |
| S/02 | 4373/02 | Harness | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/03 | BR-Adapter (Automotive converter Ethernet BroadR-R | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/04 | Power Plug cable for BR-Adapter | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/06 | HSD (male) to OABR cable | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/07 | Quad mate AXZ - High speed Fakra to SMA (male) | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/08 | BT/WLAN Antenna with SMA (male) connector | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/09 | BT/WLAN Antenna with SMA (male) connector | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/10 | BT/WLAN Antenna with SMA (male) connector | - | - | 01/04/2024 | Accessory |
| S/02 | 4373/11 | BT/WLAN Antenna with SMA (male) connector | - | - | 01/04/2024 | Element Under Test |

Sample S/02 was used for the test(s): All Radiated tests indicated in appendix A & B.

Test sample description

| | | | | | | | | |
|---|--|--------------------------------|--------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--|
| Ports..... : | Port name and description | | Cable | | | | | |
| | | | Specified length [m] | Attached during test | Shielded | | | |
| | BT/Wi-fi Antenna | | 2m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | |
| | USB1/2/3 | | 2m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | |
| | Power | | 2m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | |
| | CID | | 2m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | |
| | AR-Cam | | 2m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | |
| | 100 Base T1/1G Base T1/GPS/DCS/HUD/DFE | | 2m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | |
| Supplementary information to the ports..... | | No Data Provided | | | | | | |
| Rated power supply | Voltage and Frequency | | Reference poles | | | | | |
| | | | L1 | L2 | L3 | N | PE | |
| | <input type="checkbox"/> | AC: | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| | <input type="checkbox"/> | AC: | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| | <input checked="" type="checkbox"/> | DC: 8V to 16V | | | | | | |
| | <input type="checkbox"/> | DC: | | | | | | |
| Rated Power | | No Data Provided | | | | | | |
| Clock frequencies | | No Data Provided | | | | | | |
| Other parameters..... | | No Data Provided | | | | | | |
| Software version | | No Data Provided | | | | | | |
| Hardware version..... | | No Data Provided | | | | | | |
| Dimensions in cm (W x H x D)..... | | No Data Provided | | | | | | |
| Mounting position..... : | <input type="checkbox"/> | Tabletop equipment | | | | | | |
| | <input type="checkbox"/> | Wall/Ceiling mounted equipment | | | | | | |
| | <input type="checkbox"/> | Floor standing equipment | | | | | | |
| | <input type="checkbox"/> | Hand-held equipment | | | | | | |
| | <input checked="" type="checkbox"/> | Other: Automotive | | | | | | |
| Modules/parts | Module/parts of test item | | Type | | | Manufacturer | | |
| | No Data Provided | | | | | | | |

| Accessories (not part of the test item) | Description | Type | Manufacturer |
|---|----------------------------|--|--------------|
| | No Data Provided | | |
| | | | |
| | | | |
| Documents as provided by the applicant..... | Description | File name | Issue date |
| | Declaration Equipment Data | FDT30_18 DeclaratEquipmData_HAR_ID C23H_HW5.2_2023-07-28 | 09/12/2023 |
| Copy of marking plate: | | | |
| <div><div><div>Manufactured by: Herman Becker Automotive Systems GmbH Becker – Göring – Strasse 16 76307 Karlsbad, Germany</div><div></div></div><div><div>Model: IDC2385H</div><div>產品名稱：信息娛樂系統</div><div>Model/ 型號：IDC2385H</div><div>Power Supply / 輸入：12V --- 12A</div><div>Manufacture / 製造商：Herman Becker Automotive Systems GmbH</div><div>Made in / 製造：China</div></div></div> | | | |

Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH
BECKER-GOERING-STR. 16
76307 KARLSBAD
GERMANY

Testing period and place

| | |
|---------------|--------------------------|
| Test Location | DEKRA Certification Inc. |
| Date (start) | 01-04-2024 |
| Date (finish) | 01-10-2024 |

Document history

| Report number | Date | Description |
|---------------|------------|----------------|
| 4373ERM.007 | 03-07-2024 | First release. |

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

| | |
|-------------------|-------------------------------------|
| Temperature | Min. = 15 °C Max. = 35 °C |
| Relative humidity | Min. = 30 % Max. = 75 % |
| Air pressure | Min. = 860 mbar Max. = 1060 mbar |

In the semi anechoic chamber, the following limits were not exceeded during the test.

| | |
|-------------------|-------------------------------------|
| Temperature | Min. = 15 °C Max. = 35 °C |
| Relative humidity | Min. = 30 % Max. = 75 % |
| Air pressure | Min. = 860 mbar Max. = 1060 mbar |

In the chamber for conducted measurements, the following limits were not exceeded during the test:

| | |
|-------------------|-------------------------------------|
| Temperature | Min. = 15 °C Max. = 35 °C |
| Relative humidity | Min. = 30 % Max. = 60 % |
| Air pressure | Min. = 860 mbar Max. = 1060 mbar |

Remarks and comments

The tests have been performed by the technical personnel: Juliana Cherry, Prudhvi Kothapalli, Qi Zhang, Ivy Yousuf Moutushi and Koji Nishimoto.

List of equipment used during the test

Conducted Measurements

| CONTROL NUMBER | DESCRIPTION | Serial No | LAST CALIBRATION | NEXT CALIBRATION |
|----------------|---|-------------|------------------|------------------|
| 1039 | Fsv40 Signal Analyzer 40GHz | 101627 | 2022-11-01 | 2024-11-01 |
| 1041 | SMB100A Signal Generator | 180180 | 2022-10-06 | 2024-10-06 |
| 1042 | SMBV100A Vector Signal Generator | 262575 | 2022-03-16 | 2024-03-16 |
| 1107 | Ethernet SNMP Thermometer | 60038026952 | 2022-08-16 | 2024-10-18 |
| 1313 | Wireless Measurement Software R&S WMS32 | - | N/A | N/A |

Radiated Measurements

| CONTROL NUMBER | DESCRIPTION | Serial No | LAST CALIBRATION | NEXT CALIBRATION |
|----------------|--|---------------|------------------|------------------|
| 878 | Power supply (AMETEK / PROG-DC-PS) | 1707A01783 | N/A | N/A |
| 1012 | ESR26 Emi Test Receiver | 101478 | 2022-04-12 | 2024-04-12 |
| 1014 | FSV40 Signal Analyzer 40ghz | 101626 | 2022-08-01 | 2024-08-01 |
| 1056 | 3116C Double-Ridged Waveguide Horn Antenna 18-40 GHz | 213179 | 2023-02-23 | 2026-02-23 |
| 1058 | 3115 Double-Ridged Waveguide Horn Antenna 1-18 GHz | 211373 | 2023-06-26 | 2026-06-26 |
| 1064 | 3142E Biconilog Antenna | 208587 | 2021-12-13 | 2024-12-13 |
| 1108 | Ethernet SNMP Thermometer- CR Room | 60038026954 | 2022-10-18 | 2024-10-18 |
| 1111 | Ethernet SNMP Thermometer | 60038026577 | 2022-10-18 | 2024-10-18 |
| 1179 | SEMI-ANECHOIC CHAMBER | F169021 | N/A | N/A |
| 1314 | Wireless Measurement Software R&S Emc32 | 1040-OT102236 | N/A | N/A |
| 1461 | Low Noise Preamplifier (1-18GHz) | 2213857B | 2022-06-01 | 2024-06-01 |

Testing verdicts

| | |
|----------------|-----|
| Fail | F |
| Not applicable | N/A |
| Not measured | N/M |
| Pass | P |

Summary

Bluetooth EDR

| Requirement – Test case | FCC PART 15 PARAGRAPH / RSS-247 | Verdict | Remark |
|---|---------------------------------|---------|---------|
| RSS-247 5.1 (b) / FCC 15.247 (a) (1) 20 dB Bandwidth | | N/M | Refer 2 |
| RSS-247 5.1 (b) / FCC 15.247 (a) (1) Carrier Frequency Separation | | N/M | Refer 2 |
| RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Time of Occupancy (Dwell Time) | | N/M | Refer 2 |
| RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Number of hopping channels | | N/M | Refer 2 |
| RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted output power & Antenna gain | | P | N/A |
| RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted | | N/M | Refer 2 |
| FCC 2.1049 / 99dBw Occupied Channel Bandwidth 99% | | N/M | Refer 2 |
| RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted | | N/M | Refer 2 |
| RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated | | P | Refer 1 |
| Supplementary information and remarks: <ol style="list-style-type: none"> The results show the worst case. Only Partial testing has been requested | | | |

Wi-Fi 2.4GHz

| Requirement – Test case | FCC PART 15 PARAGRAPH / RSS-247 | Verdict | Remark |
|--|---------------------------------|---------|---------|
| RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth | | N/M | Refer 2 |
| RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density | | N/M | Refer 2 |
| RSS-247 5.4 (d) e.i.r.p | | N/M | Refer 2 |
| RSS-247 5.4 (d) / FCC 15.247 (b) (1) Maximum Average Conducted output Power | | P | N/A |
| RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted | | N/M | Refer 2 |
| FCC 2.1049 / Occupied Channel Bandwidth 99% | | P | Refer 2 |
| RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted | | N/M | Refer 2 |
| RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated | | P | Refer 1 |
| Supplementary information and remarks: <ol style="list-style-type: none"> 1. The results show the worst case. 2. Only Partial testing has been requested. | | | |

Appendix A: Test results. Bluetooth Classic (BR & EDR)

Index

PRODUCT INFORMATION 14

TEST CONDITIONS 15

TEST CASE DETAILS 18

Maximum Peak Conducted & Antenna Gain 18

Emission Limitations Radiated (Transmitter) - Radiated 21

PRODUCT INFORMATION

| Information | Description |
|------------------------------|---|
| Modulation | GFSK, $\pi/4$ -DQPSK, 8-DPSK |
| Adaptive | Non-Adaptive Equipment |
| Operation mode 1: | |
| Operating Frequency Range | 2400 – 2483.5 MHz |
| Nominal Channel Bandwidth | GFSK (1 Mbps), $\pi/4$ -DQPSK (2 Mbps), 8-DPSK (3 Mbps) |
| RF Output Power | 10 dBm |
| Extreme operating conditions | -40 °C to +65 °C |
| - Temperature range | |
| Antenna type | 1/4 wave coax |
| Antenna gain | -2.5 dBi |
| Nominal Voltage | |
| - Supply Voltage | 12 Vdc |
| - Type of power source | DC voltage |
| Equipment type | Bluetooth Classic (BR & EDR) |
| Geo-location capability | Yes |

TEST CONDITIONS


(*): Data provided by the client.

| TEST CONDITIONS | DESCRIPTION |
|-----------------|--|
| TC#01 | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Modulation:</u> GFSK <u>Test Frequencies for conducted tests:</u> Lowest range: 2402 MHz |
| TC#02 | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Modulation:</u> $\pi/4$ -DQPSK <u>Test Frequencies for Conducted tests:</u> Lowest range: 2402 MHz |
| TC#03 | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Modulation:</u> 8-DPSK <u>Test Frequencies for Conducted/Radiated tests:</u> Lowest range: 2402 MHz |

See the comparison table between previous test results (test report 3669ERM.006A1) and test results with the new sample shown in this test report below:

| Modulation | Frequency (MHz) | Maximum conducted power (dBm) | | Delta |
|----------------|-----------------|---|-----------------|-------|
| | | IDC23H - 3669 (test report 3669ERM.006A1) | IDC2385H - 4373 | |
| GFSK | 2402 | 0.6 | 0.9 | 0.3 |
| $\pi/4$ -DQPSK | 2402 | 2.7 | 3.0 | 0.3 |
| 8-DPSK | 2402 | 2.9 | 3.3 | 0.4 |

CONDUCTED MEASUREMENTS:

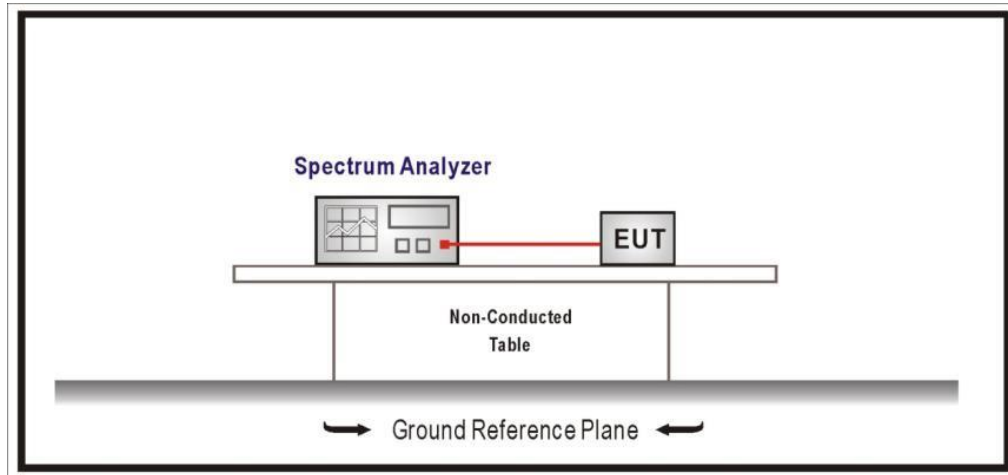

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz (Double ridge horn antenna), and 1m for the frequency range 18 GHz- 26 GHz (Double ridge horn antenna).

For radiated emissions in the range 18 - 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

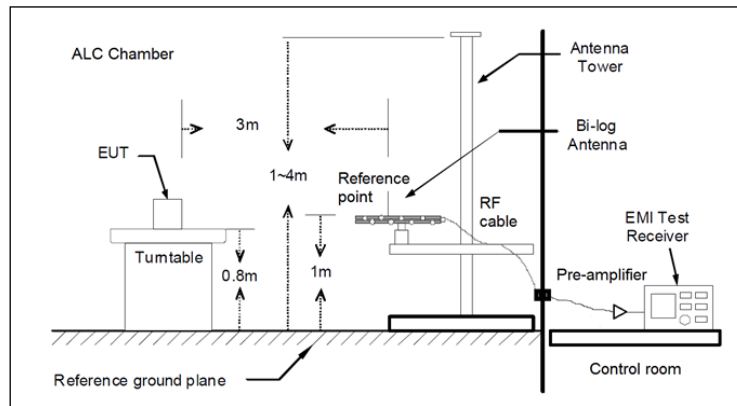


Fig A1: Radiated measurements Setup $f < 1$ GHz

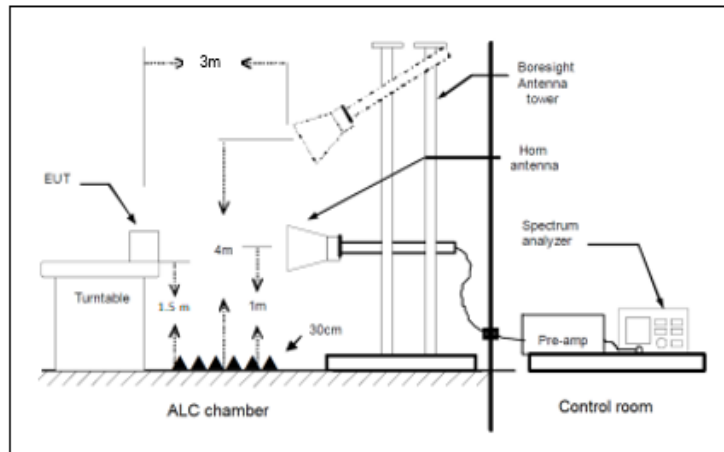


Fig A2: Radiated measurements setup $f > 1-18$ GHz

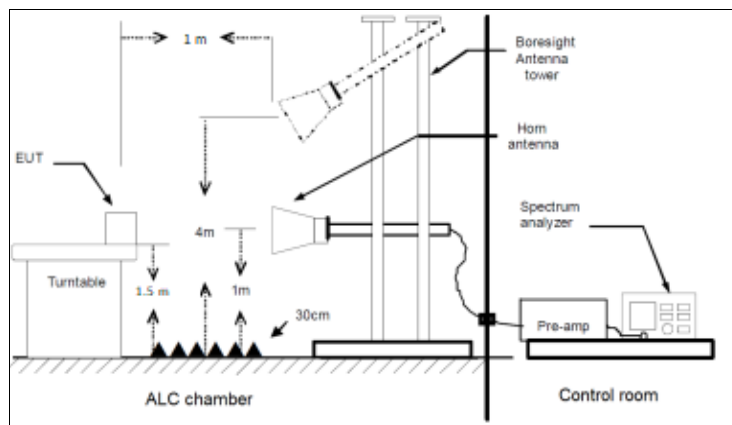


Fig A3: Radiated measurements setup $f > 18$ GHz

TEST CASE DETAILS

RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted & Antenna gain

Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm). The e.i.r.p. shall not exceed 4 W (RSS-247).

Maximum declared antenna gain: -2.5 dBi

Modulation: BT (GFSK 1-DH5)

Results

| Freq (MHz) | # of Tx Chains | Port | Peak Power (dBm) | Maximum EIRP power (dBm) |
|------------|----------------|------|------------------|--------------------------|
| 2402.00000 | 1 | 1 | 0.94 | -1.56 |

Modulation: BT ($\pi/4$ DQPSK 2-DH5)

Results

| Freq (MHz) | # of Tx Chains | Port | Peak Power (dBm) | Maximum EIRP power (dBm) |
|------------|----------------|------|------------------|--------------------------|
| 2402.00000 | 1 | 1 | 3.00 | 0.50 |

Modulation: BT (8DPSK 3-DH5)

Results

| Freq (MHz) | # of Tx Chains | Port | Peak Power (dBm) | Maximum EIRP power (dBm) |
|------------|----------------|------|------------------|--------------------------|
| 2402.00000 | 1 | 1 | 3.28 | 0.78 |


Verdict

Pass

Attachments


Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Modulation = BT (GFSK 1-DH5), Number of Transmission Chains = 1,

Images:

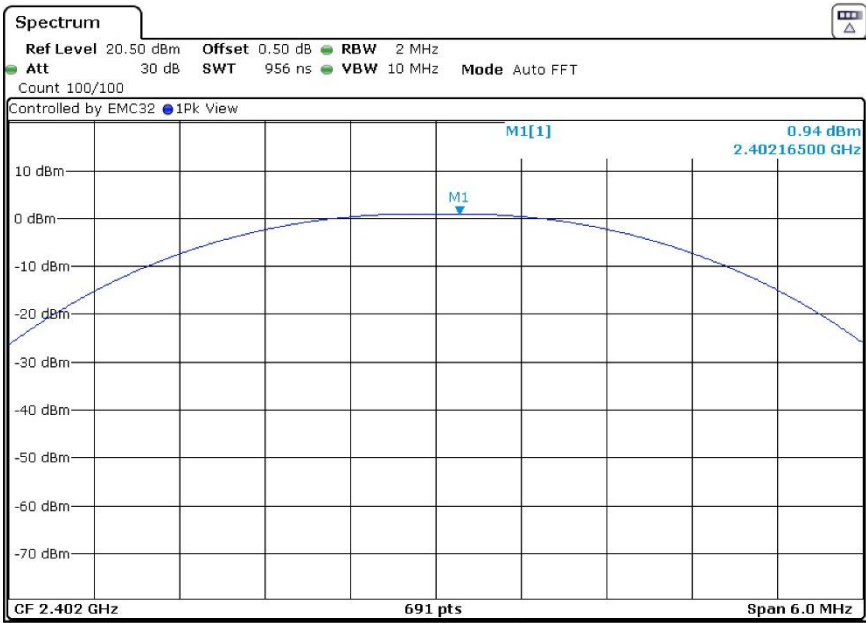


Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Modulation = BT ($\pi/4$ DQPSK 2-DH5), Number of Transmission Chains = 1,

Images:

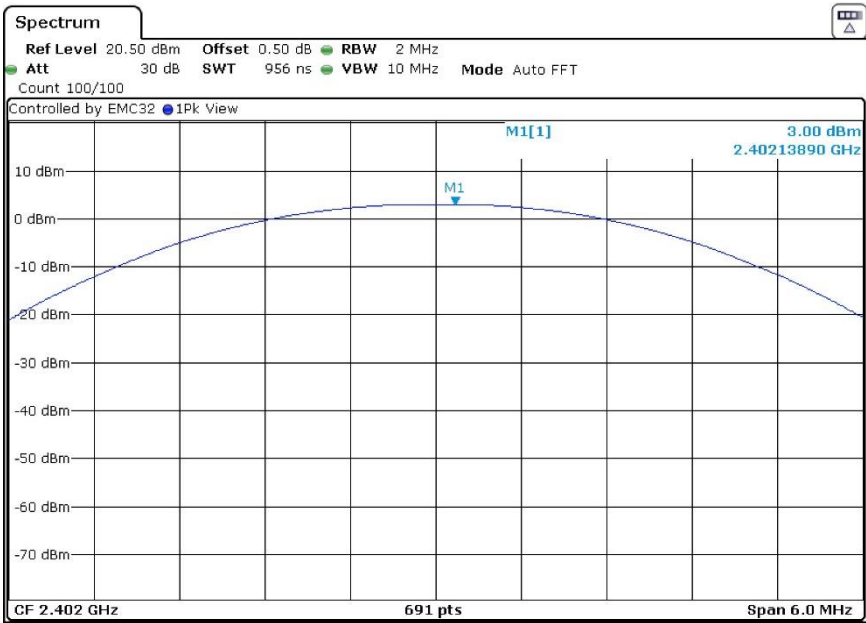

Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Modulation = BT (8DPSK 3-DH5), Number of Transmission Chains = 1,

Images:

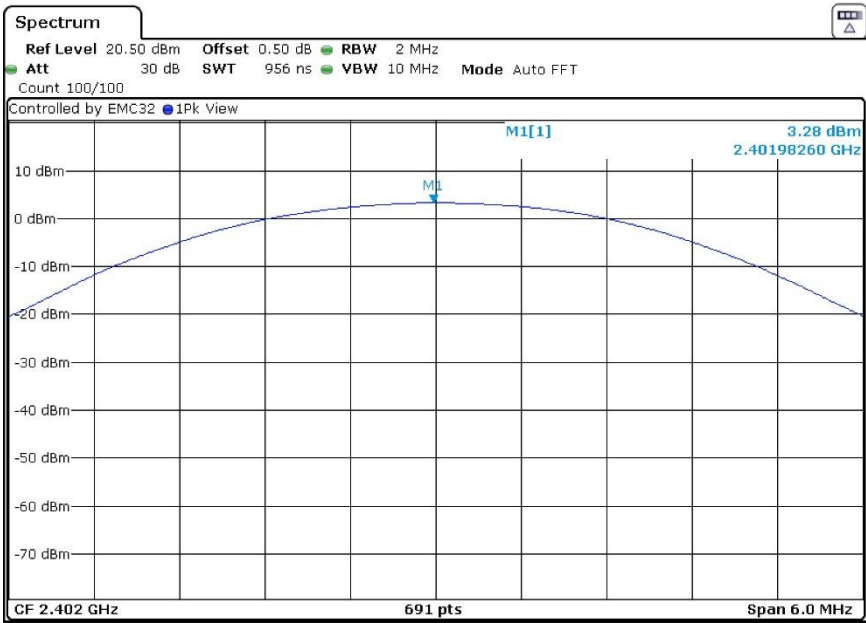

RSS-247 5.5 / FCC 15.247 (d) EMISSION LIMITATIONS RADIATED (TRANSMITTER) - Radiated

Limits

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

| Frequency Range (MHz) | Field strength (µV/m) | Field strength (dBµV/m) | Measurement distance (m) |
|-----------------------|-----------------------|-------------------------|--------------------------|
| 0.009-0.490 | 2400/F(kHz) | - | 300 |
| 0.490-1.705 | 24000/F(kHz) | - | 30 |
| 1.705 - 30.0 | 30 | - | 30 |
| 30 - 88 | 100 | 40 | 3 |
| 88 - 216 | 150 | 43.5 | 3 |
| 216 - 960 | 200 | 46 | 3 |
| 960 - 25000 | 500 | 54 | 3 |

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required


Verdict

Pass

Results

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.

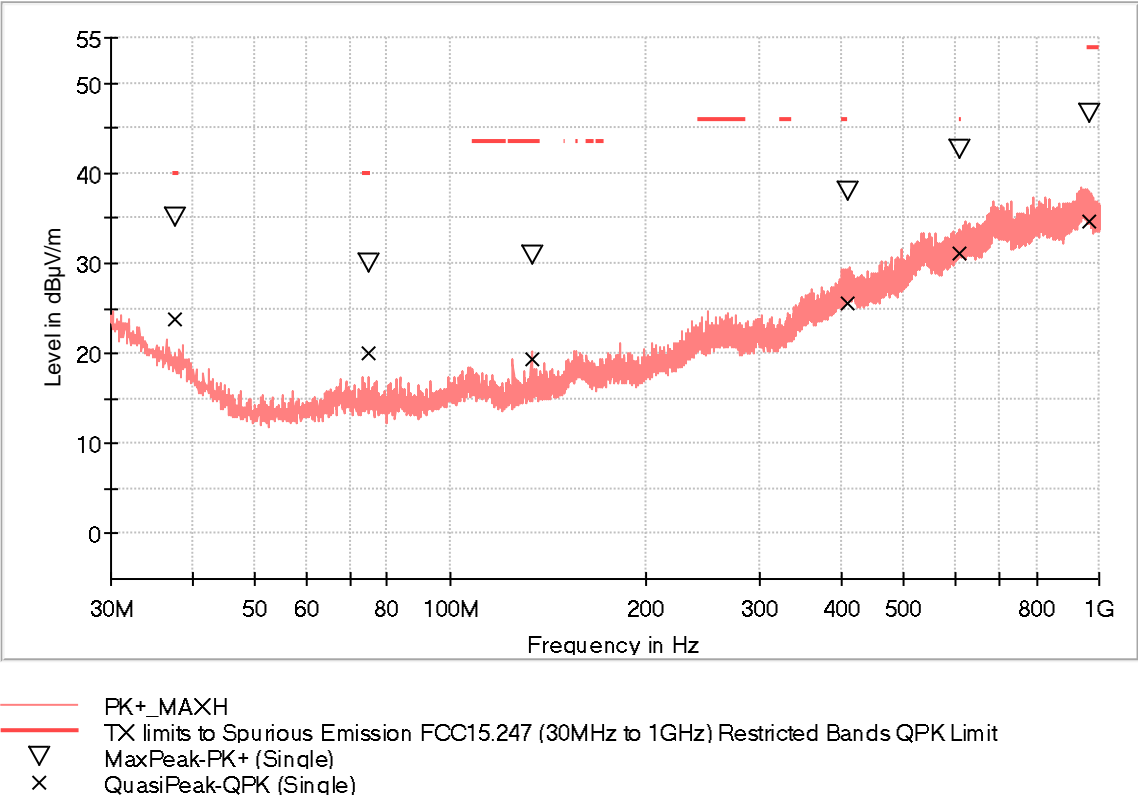

| Frequency (MHz) | MaxPeak (dBµV/m) | QuasiPeak (dBµV/m) | Pol | Margin - QPK (dB) | Limit - QPK (dBµV/m) |
|-----------------|------------------|--------------------|-----|-------------------|----------------------|
| 37.517500 | 35.0 | 23.9 | V | 16.2 | 40.0 |
| 75.008000 | 30.0 | 20.1 | V | 19.9 | 40.0 |
| 133.305000 | 30.8 | 19.5 | V | 24.1 | 43.5 |
| 408.882000 | 37.9 | 25.7 | V | 20.3 | 46.0 |
| 609.381000 | 42.6 | 31.1 | V | 14.9 | 46.0 |
| 967.020000 | 46.7 | 34.6 | V | 19.4 | 54.0 |


Frequency range 1 GHz – 26 GHz

The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz.

Modulation: BT (8DPSK)

Frequency range 1 - 18 GHz


Lowest Channel

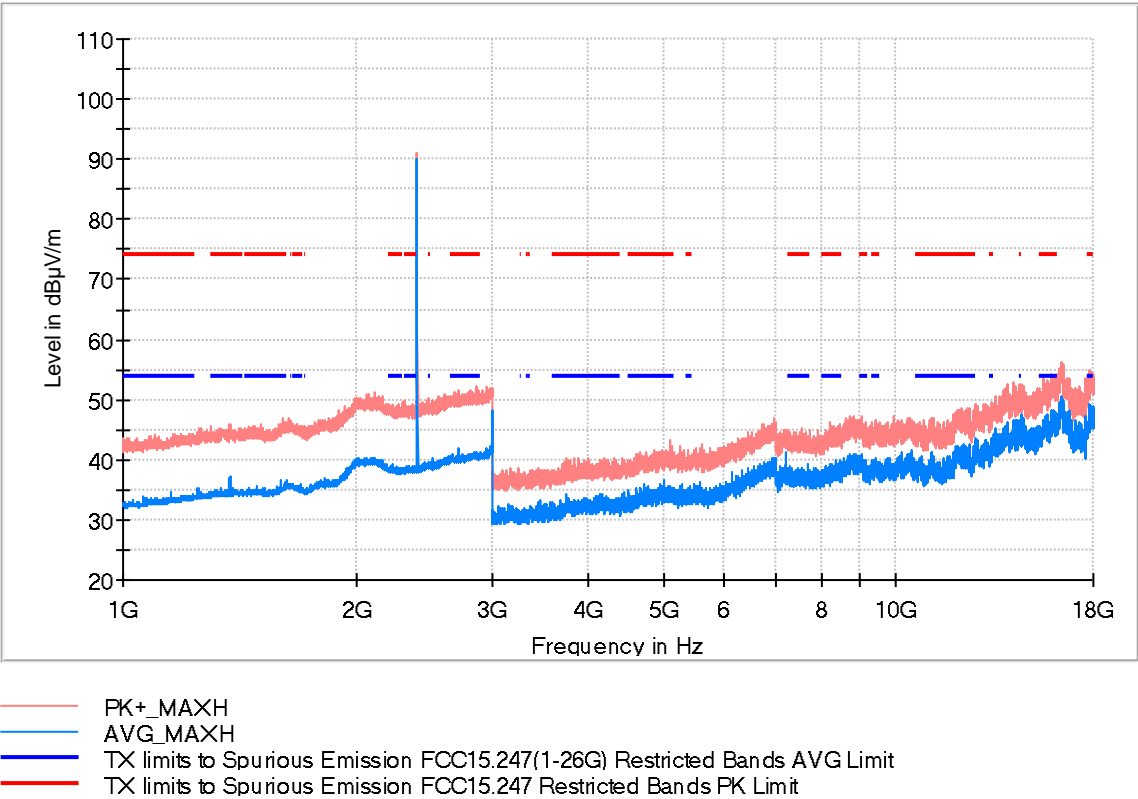

| Frequency (MHz) | PK+ MAXH (dBμV/m) | AVG MAXH (dBμV/m) | Pol | Margin - AVG (dB) | Limit - AVG (dBμV/m) | Comment |
|-----------------|-------------------|-------------------|-----|-------------------|----------------------|-------------|
| 2402.000000 | 90.9 | 90.2 | H | --- | --- | Fundamental |
| 12139.50000 | 46.0 | 41.2 | V | 12.8 | 54.0 | |
| 17935.50000 | 52.6 | 49.0 | V | 5.0 | 54.0 | |

Frequency range 18 - 26 GHz


Lowest Channel

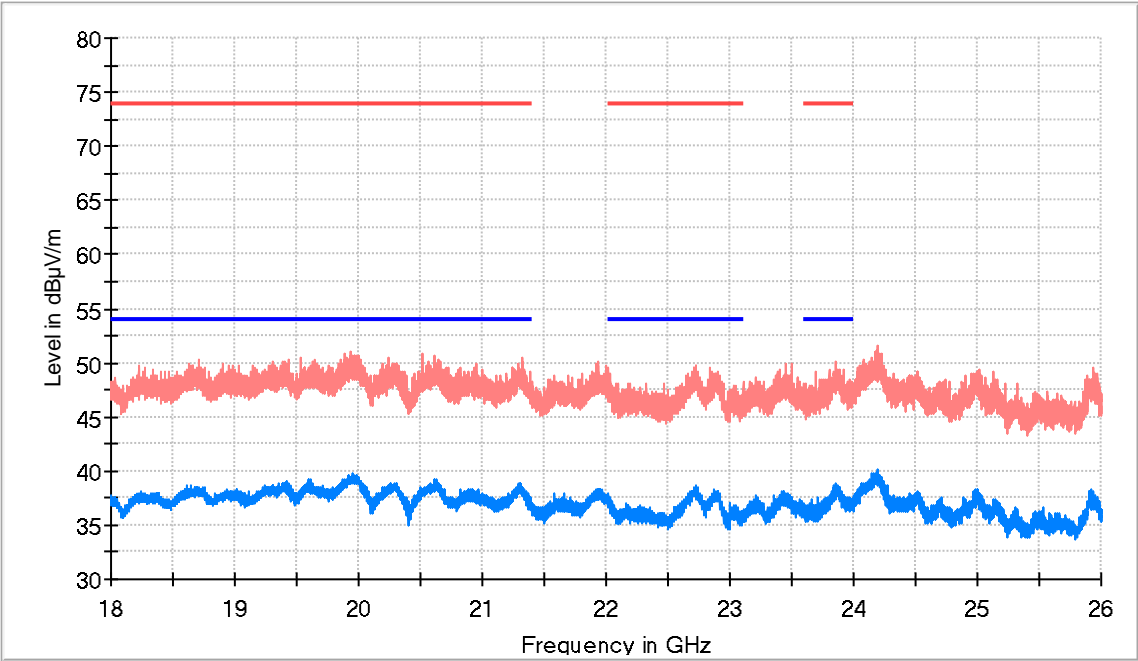

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit

| Frequency (MHz) | PK+_MAXH (dBµV/m) | AVG_MAXH (dBµV/m) | Pol | Margin - AVG (dB) | Limit - AVG (dBµV/m) |
|-----------------|-------------------|-------------------|-----|-------------------|----------------------|
| 19941.000000 | 50.9 | 39.4 | V | 14.6 | 54.0 |
| 22718.500000 | 49.8 | 38.1 | H | 15.9 | 54.0 |
| 23862.000000 | 50.0 | 38.1 | H | 15.9 | 54.0 |

Restricted Bands (2.31 GHz - 2.5 GHz)
Lowest Channel

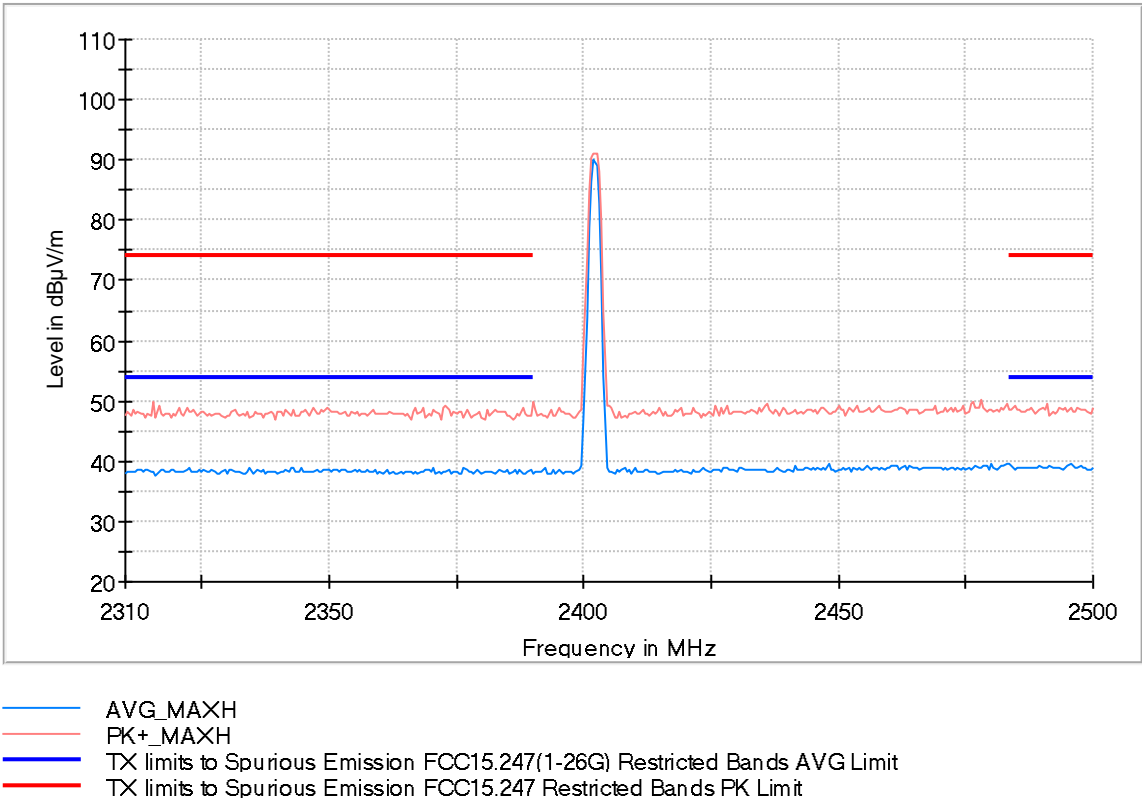

| Measurements | | | | | |
|-----------------|-----------|-----------|-----------|------------|--------|
| Subrange | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
| 30 MHz - 1 GHz | 48.5 kHz | PK+ | 100 kHz | 1 s | 20 dB |
| 1 GHz - 3 GHz | 500 kHz | PK+ ; AVG | 1 MHz | 0.1 s | 20 dB |
| 3 GHz - 18 GHz | 500 kHz | PK+ ; AVG | 1 MHz | 0.1 s | 30 dB |
| 18 GHz - 26 GHz | 500 kHz | PK+ ; AVG | 1 MHz | 1 s | 20 dB |

Appendix B: Test results. Wi-Fi 2.4GHz

Index

PRODUCT INFORMATION28

TEST CONDITIONS29

TEST CASES DETAILS33

Maximum Average Conducted Output Power33

Emission Limitations Radiated (Transmitter)39

PRODUCT INFORMATION

| Information | Description |
|------------------------------|------------------------|
| Modulation | DSSS, OFDM, MIMO-OFDM |
| Maximum RF Output Power | 20 dBm |
| Operation mode | |
| - Operating Frequency Range | 2400 – 2483.5 MHz |
| - Nominal Channel Bandwidth | 20 MHz 40 MHz |
| Extreme operating conditions | |
| - Temperature range | -40 °C to +65 °C |
| Antenna type | 1/4 wave coax |
| Antenna gain | -2.5 dBi |
| Nominal Voltage | |
| - Supply Voltage | 12 Vdc |
| - Type of power source | DC voltage |
| Equipment type | Wi-Fi 2.4 GHz b/g/n/ax |
| Geo-location capability | No |

TEST CONDITIONS

| TEST CONDITIONS | DESCRIPTION |
|---|---|
| TC#01 ⁽¹⁾ (b mode) | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth: 20 MHz</u> <u>Test Frequencies for Conducted/Radiated tests (Radio B & Radio A MIMO):</u> Middle channel: 2437 MHz |
| TC#02 ⁽¹⁾ (g mode) | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth: 20 MHz</u> <u>Test Frequencies for Conducted/Radiated tests (Radio B & Radio A MIMO):</u> Middle channel: 2437 MHz |
| TC#03 ⁽¹⁾ (n mode) | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth: 20 MHz</u> <u>Test Frequencies for Conducted/Radiated tests (Radio A + B MIMO):</u> Middle channel: 2437 MHz <u>Channel Bandwidth: 40 MHz</u> <u>Test Frequencies for Conducted/Radiated tests (Radio A + B MIMO):</u> Lowest channel: 2422 MHz |

| TEST CONDITIONS | DESCRIPTION |
|---|--|
| TC#04 ⁽¹⁾ (ax mode non-beam forming) | <u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ |
| | <u>Channel Bandwidth:</u> 20 MHz |
| | <u>Test Frequencies for Conducted/Radiated tests (Radio A + B MIMO):</u> |
| | Middle channel: 2437 MHz |
| | <u>Channel Bandwidth:</u> 40 MHz |
| | <u>Test Frequencies for Conducted/Radiated tests (Radio A + B MIMO):</u> Middle channel: 2437 MHz |


Note (1): For spurious emissions for OFDM modes 802.11g, 802.11n20 and 802.11ax20 a preliminary scan was performed to determine the worst case. The following tables and plots show the results for the worst case in DSSS modulation (802.11b).

The data rates of 11Mb/s for 802.11b, 54Mb/s for 802.11g, MCS7 for 802.11n20, 802.11 ax were selected based on preliminary testing that identified those rates corresponding to the worst cases.

See below the comparison table between previous test results (test report 3669ERM.006A1 and test results with the new sample shown in this test report:

| Bandwidth (MHz) | Mode | Frequency (MHz) | Maximum conducted power (dBm) | | Delta |
|-----------------|------|-----------------|-------------------------------|-----------------|--------------|
| | | | IDC23H - 3669 | IDC2385H - 4373 | 3669 vs 4373 |
| 20 | b | 2437 | 14.4 | 16.0 | 1.5 |
| | g | 2437 | 9.1 | 10.1 | 1.0 |
| | n | 2437 | 9.3 | 10.4 | 1.1 |
| | ax | 2437 | 12.6 | 12.8 | 0.2 |
| 40 | n | 2422 | 9.8 | 11.2 | 1.4 |
| | ax | 2437 | 12.0 | 11.7 | -0.3 |

CONDUCTED MEASUREMENTS:

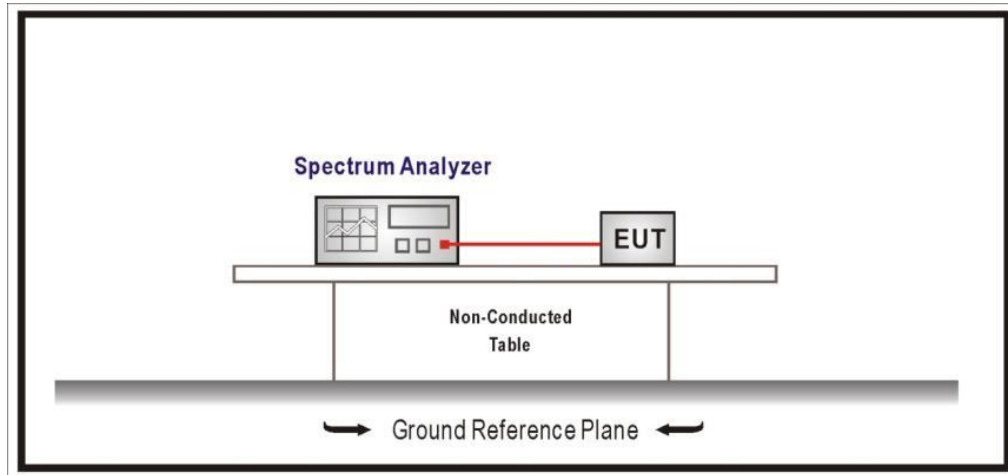

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz (Double ridge horn antenna), and 1m for the frequency range 18 GHz- 26 GHz (Double ridge horn antenna).

For radiated emissions in the range 18 - 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

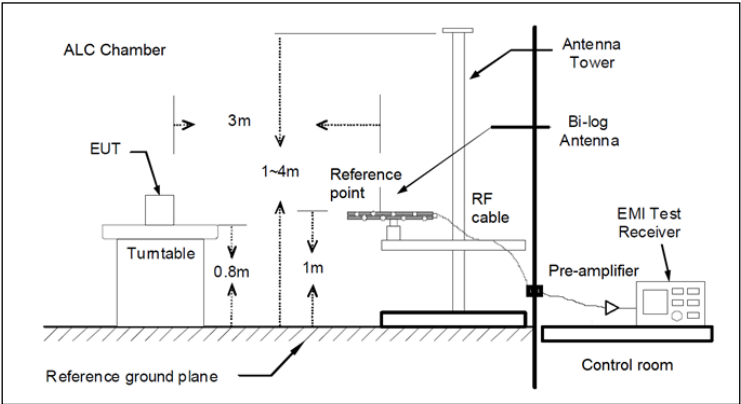


Fig A1: Radiated measurements Setup $f < 1$ GHz

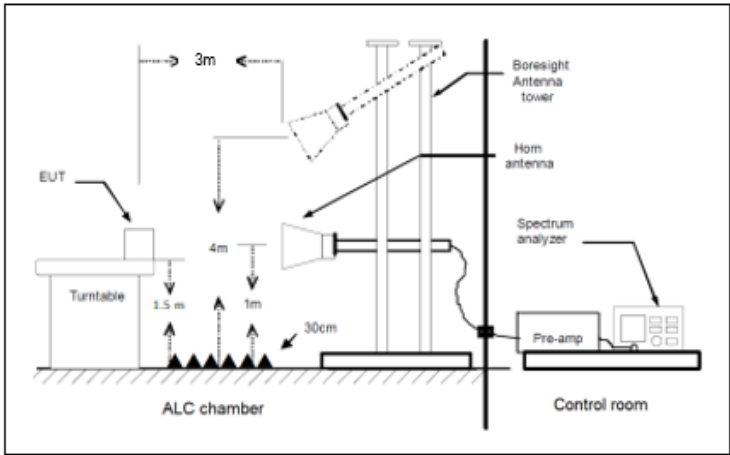


Fig A2: Radiated measurements setup $f > 1-18$ GHz

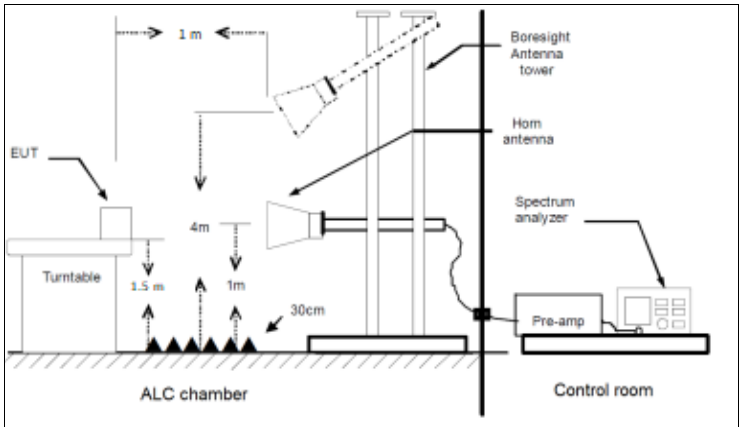


Fig A3: Radiated measurements setup $f > 18$ GHz

TEST CASES DETAILS

RSS-247 5.4 (a) / FCC 15.247 (b) (1) Maximum Average Conducted Output Power

Limits

For systems using digital modulation in the 2400 -2483.5 MHz band: 1 watt (30 dBm).
The e.i.r.p. shall not exceed 4 W (36 dBm) (RSS-247).

Results

Antenna gain: -2.5 dBi
Modulation: 802.11b

| Freq (MHz) | BW (MHz) | E.I.R.P. (dBm) |
|------------|----------|----------------|
| 2437.00000 | 20 | 13.5 |


Verdict

Pass

Attachments

Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11b , Number of Transmission Chains = 2,

Images:

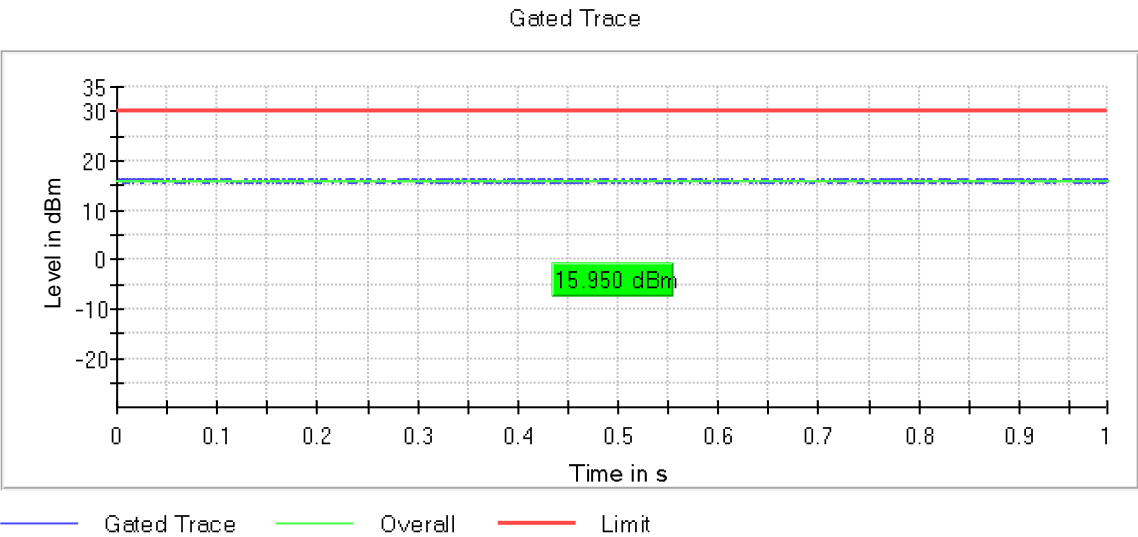

Antenna gain: -2.5 dBi

Modulation: 802.11g

Results

| Freq (MHz) | BW (MHz) | E.I.R.P. (dBm) |
|------------|----------|----------------|
| 2437.00000 | 20 | 7.6 |


Verdict

Pass

Attachments

Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11g, Number of Transmission Chains = 2,

Images:

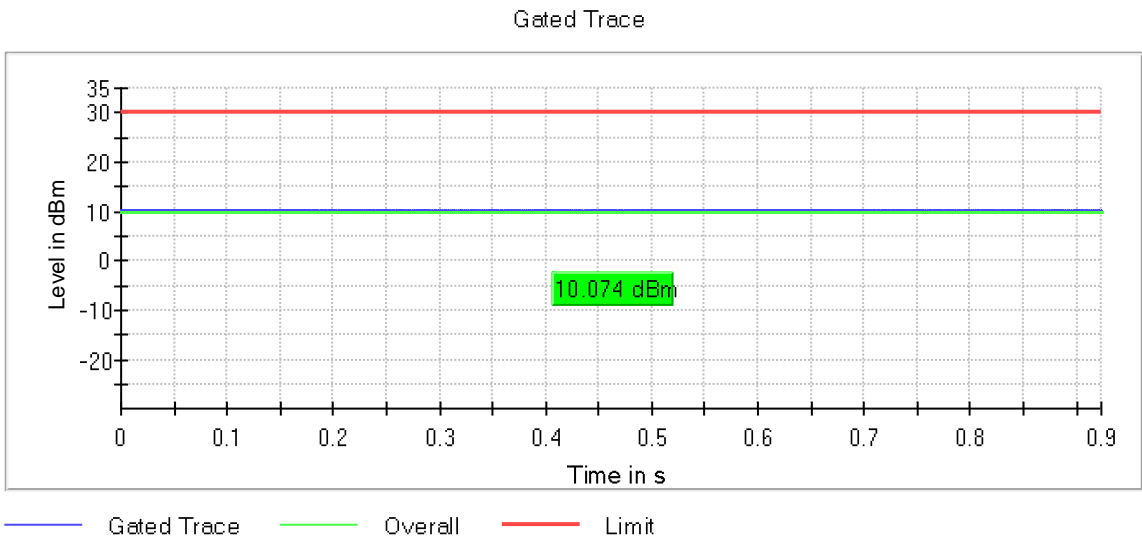

Antenna gain: -2.5 dBi

Modulation: 802.11n20

Results

| Freq (MHz) | BW (MHz) | E.I.R.P. (dBm) |
|------------|----------|----------------|
| 2437.00000 | 20 | 7.9 |

Modulation: 802.11n40

Results

| Freq (MHz) | BW (MHz) | E.I.R.P. (dBm) |
|------------|----------|----------------|
| 2422.00000 | 40 | 8.7 |


Verdict

Pass

Attachments


Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = 802.11n , Number of Transmission Chains = 2,

Images:

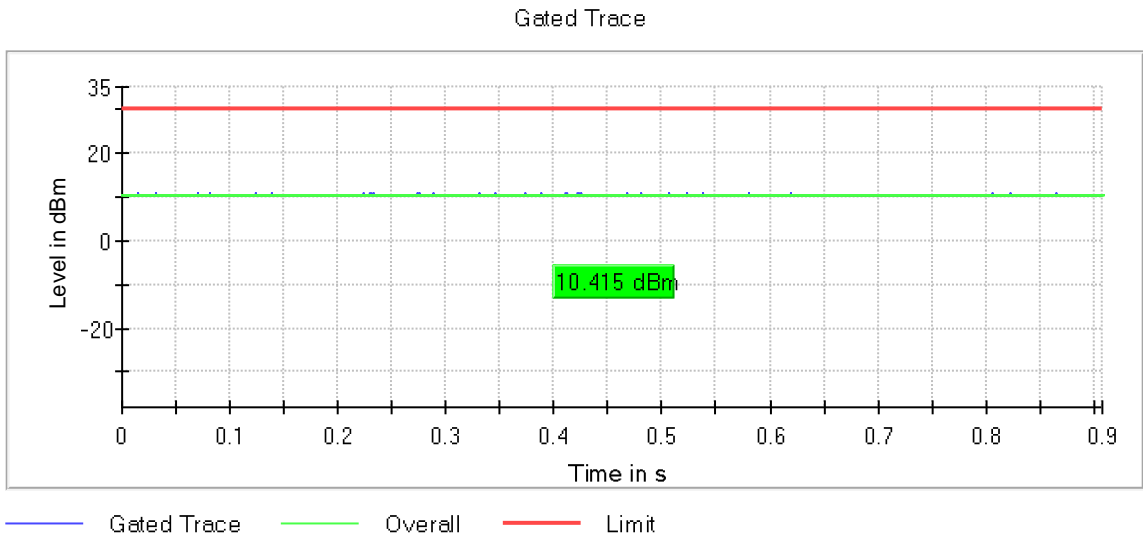

Frequency MHz = 2422.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = 802.11n , Number of Transmission Chains = 2,

Images:

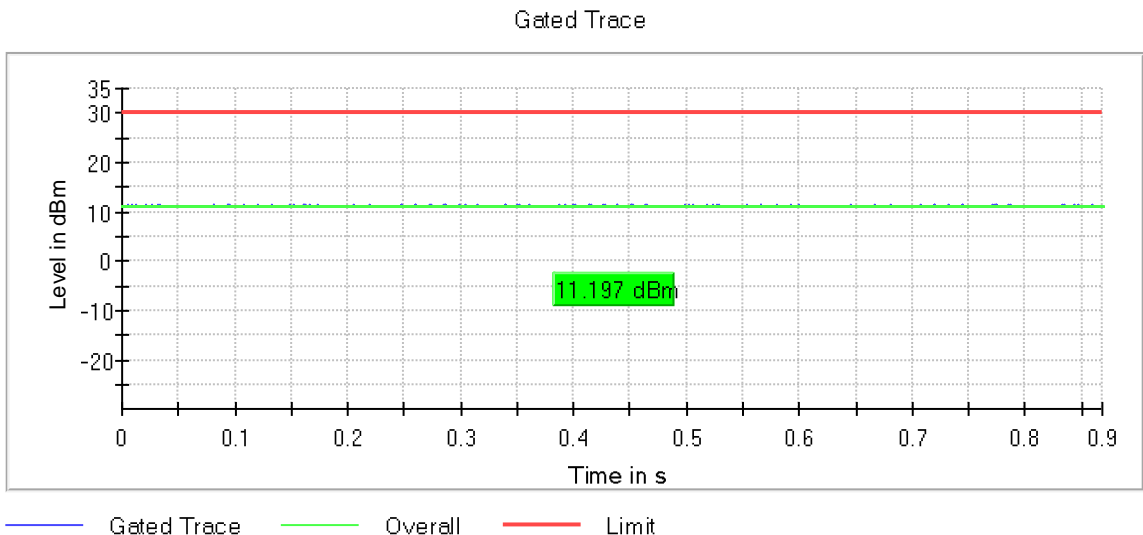

Antenna gain: -2.5 dBi

Modulation: 802.11ax HE20
Results

| Freq (MHz) | BW (MHz) | E.I.R.P. (dBm) |
|------------|----------|----------------|
| 2437.00000 | 20 | 10.3 |

Modulation: 802.11ax HE40
Results


| Freq (MHz) | BW (MHz) | E.I.R.P. (dBm) |
|------------|----------|----------------|
| 2437.00000 | 40 | 9.2 |

Verdict
Pass

Attachments


Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11ax HE SS1 MCS 8 (OFDM MCS8), Number of Transmission Chains = 2,

Images:

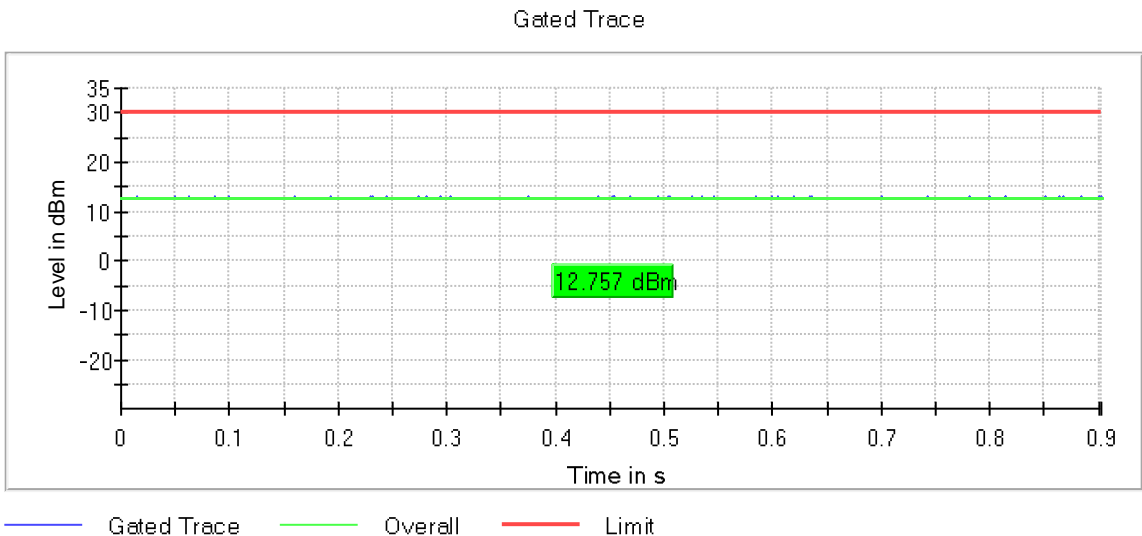

Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 40,
Modulation = 802.11ax HE SS1 MCS 8, Number of Transmission Chains = 2,

Images:

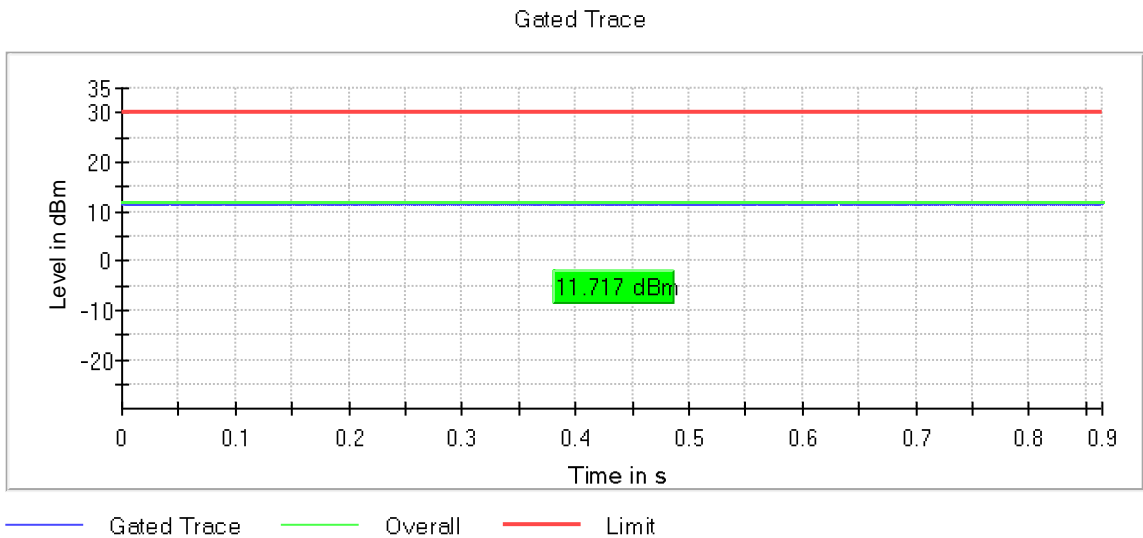

OSP PowerMeter settings

| Setting | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s | 1.000 s |
| Points | 1000000 | 1000000 |
| Time resolution | 1.000 µs | 1.000 µs |

RSS-247 5.5 / FCC 15.247 (d) Emission Limitations Radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

| Frequency Range (MHz) | Field strength (µV/m) | Field strength (dBµV/m) | Measurement distance (m) |
|-----------------------|-----------------------|-------------------------|--------------------------|
| 0.009-0.490 | 2400/F(kHz) | - | 300 |
| 0.490-1.705 | 24000/F(kHz) | - | 30 |
| 1.705 - 30.0 | 30 | - | 30 |
| 30 - 88 | 100 | 40 | 3 |
| 88 - 216 | 150 | 43.5 | 3 |
| 216 - 960 | 200 | 46 | 3 |
| 960 - 25000 | 500 | 54 | 3 |

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required


Verdict

Pass

Results

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel and mode selected in the EUT.

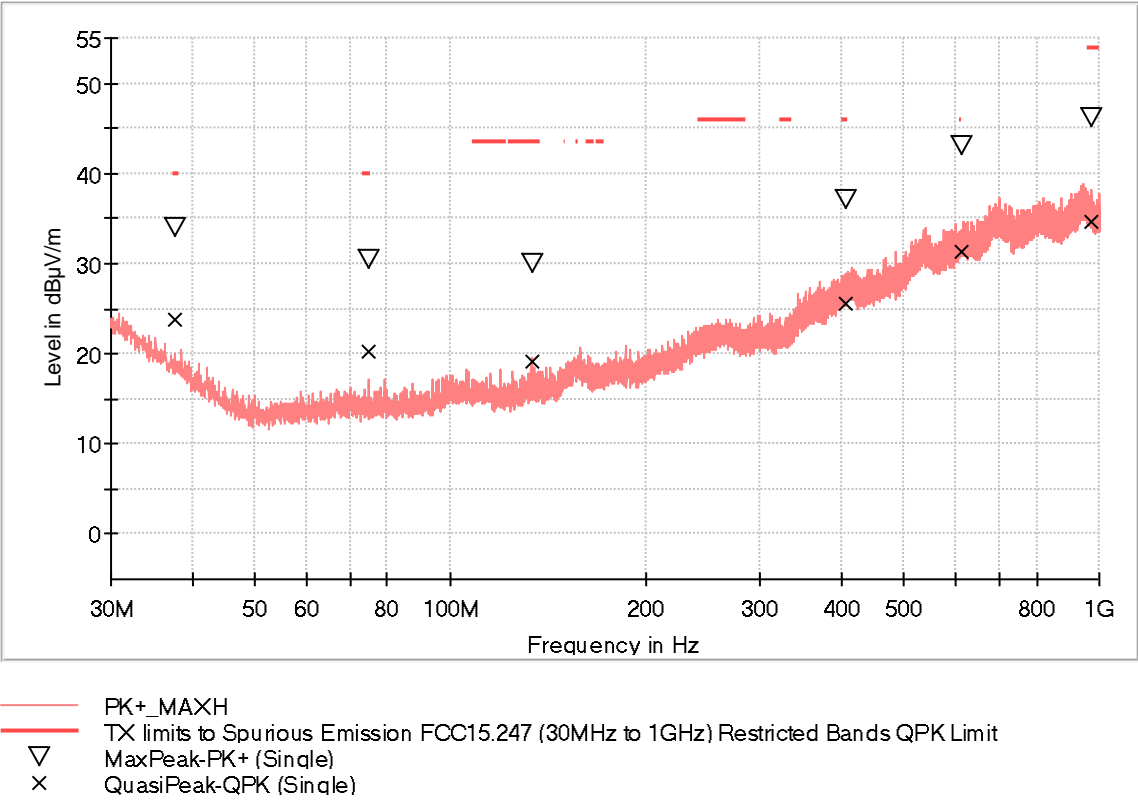

| Frequency (MHz) | MaxPeak (dBµV/m) | QuasiPeak (dBµV/m) | Pol | Margin - QPK (dB) | Limit - QPK (dBµV/m) |
|-----------------|------------------|--------------------|-----|-------------------|----------------------|
| 37.566000 | 33.9 | 23.9 | V | 16.1 | 40.0 |
| 74.959500 | 30.3 | 20.2 | V | 19.9 | 40.0 |
| 133.305000 | 30.1 | 19.2 | V | 24.4 | 43.5 |
| 406.845000 | 37.1 | 25.6 | H | 20.4 | 46.0 |
| 611.321000 | 43.0 | 31.2 | H | 14.8 | 46.0 |
| 968.766000 | 46.2 | 34.6 | H | 19.5 | 54.0 |

Frequency range 1 GHz – 26 GHz


The results for the 802.11b worst operation mode selected for this range are shown below.

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots). Please see the following results for worst operation mode selected for this range (1 Mbps).

Modulation: 802.11b

Frequency range: 1 – 18 GHz


Middle Channel

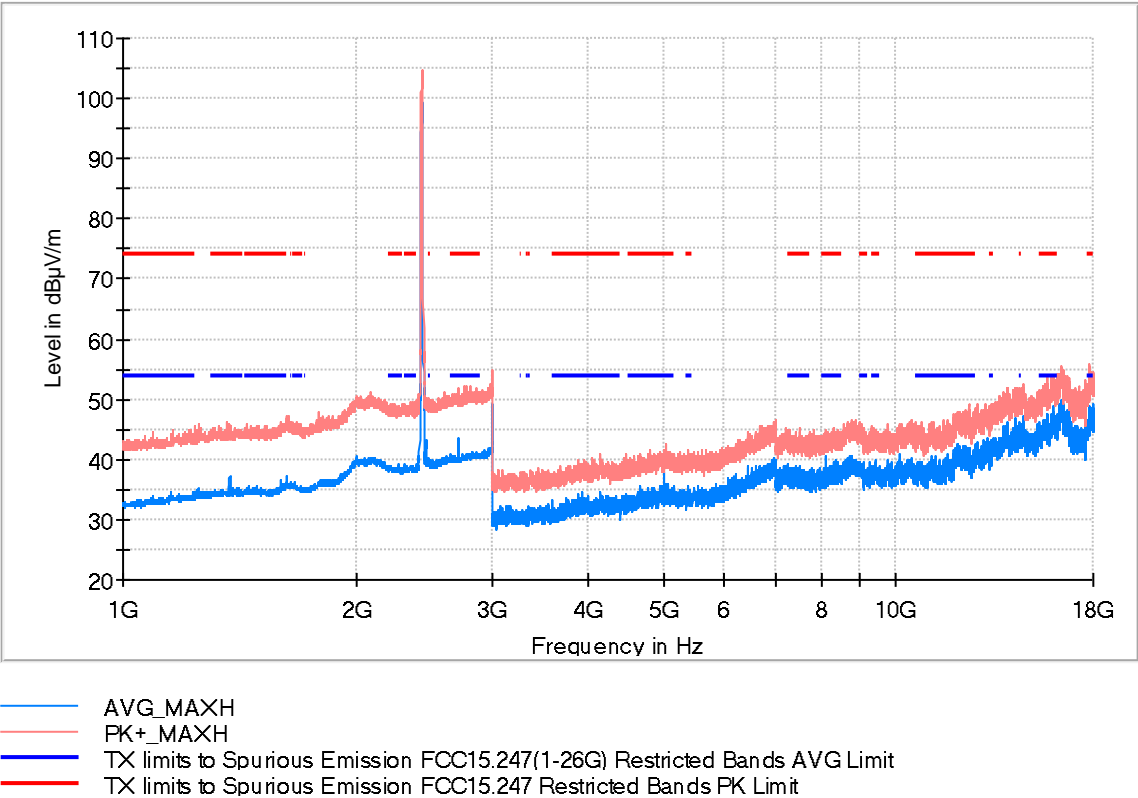

| Frequency (MHz) | PK+_MAXH (dBµV/m) | AVG_MAXH (dBµV/m) | PoI | Margin - AVG (dB) | Limit - AVG (dBµV/m) | Comment |
|-----------------|-------------------|-------------------|-----|-------------------|----------------------|-------------|
| 2438.000000 | 104.7 | 99.2 | H | --- | --- | Fundamental |
| 2719.000000 | 51.9 | 43.7 | V | 10.3 | 54.0 | |
| 8113.500000 | 44.8 | 40.7 | V | 13.3 | 54.0 | |
| 17780.000000 | 55.8 | 47.1 | H | 6.9 | 54.0 | |

Frequency range 18 - 26 GHz


Middle Channel

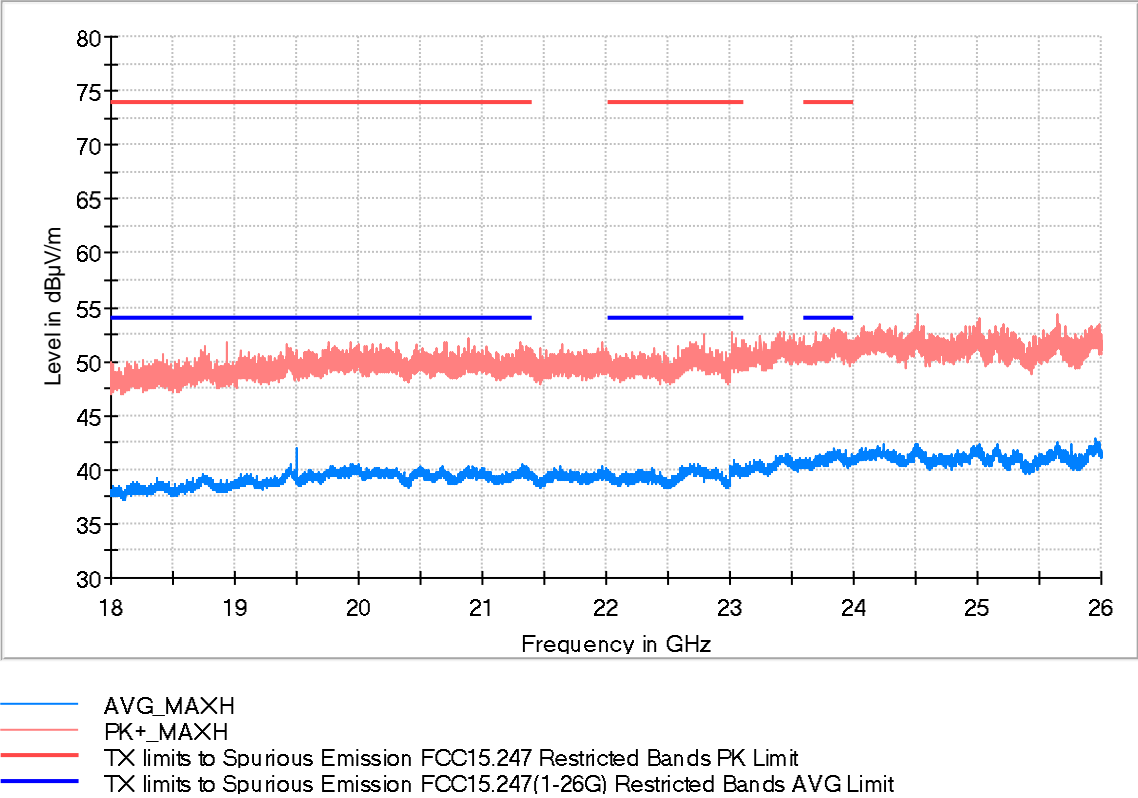

| Frequency (MHz) | PK+_MAXH (dBµV/m) | AVG_MAXH (dBµV/m) | Pol | Margin - AVG (dB) | Limit - AVG (dBµV/m) | Comment |
|-----------------|-------------------|-------------------|-----|-------------------|----------------------|--------------|
| 19496.000000 | 50.2 | 41.9 | V | 12.1 | 54.0 | 8th Harmonic |
| 23035.000000 | 49.9 | 40.8 | V | 13.2 | 54.0 | |
| 23846.500000 | 51.8 | 42.0 | H | 12.0 | 54.0 | |

Restricted Bands (2.31 GHz - 2.5 GHz)

Middle Channel

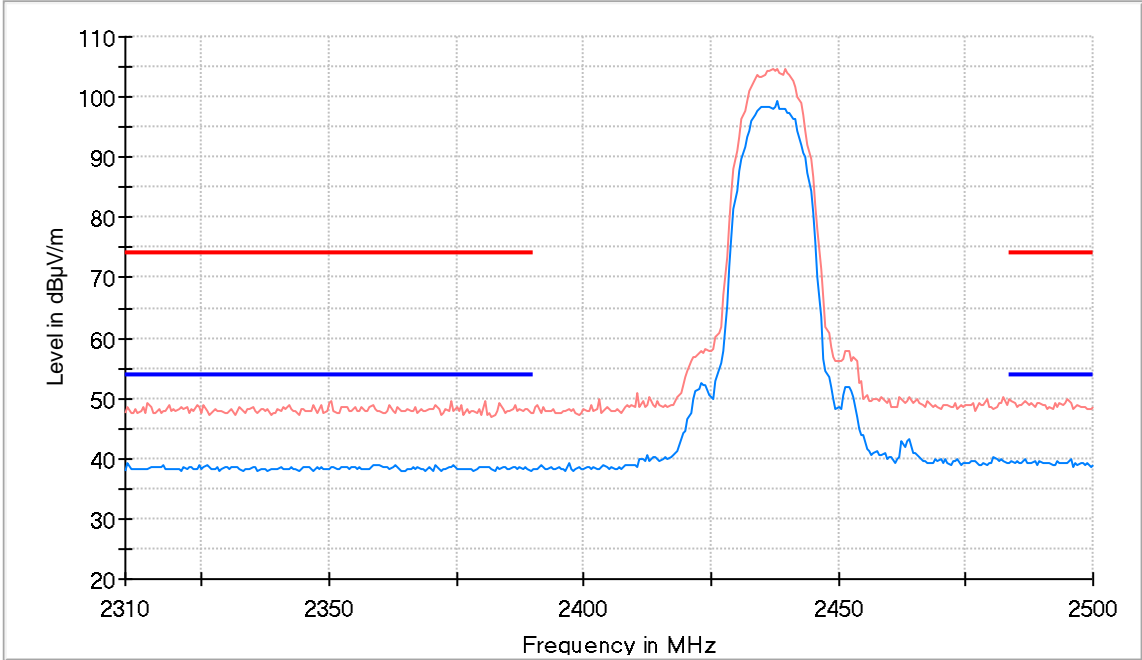

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit

Measurements

| Subrange | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|-----------------|-----------|-----------|-----------|------------|--------|
| 30 MHz - 1 GHz | 48.5 kHz | PK+ | 100 kHz | 1 s | 20 dB |
| 1 GHz - 3 GHz | 500 kHz | PK+ ; AVG | 1 MHz | 0.1 s | 20 dB |
| 3 GHz - 18 GHz | 500 kHz | PK+ ; AVG | 1 MHz | 0.1 s | 30 dB |
| 18 GHz - 26 GHz | 500 kHz | PK+ ; AVG | 1 MHz | 1 s | 20 dB |