



FCC LISTED, REGISTRATION  
 NUMBER: 2764.01

ISED LISTED REGISTRATION  
 NUMBER: 23595-1

Test Report No:

3817ERM.007

## Test report

**USA FCC Part 15.407 (U-NII), 15.209; & CANADA RSS-210, RSS-Gen**  
 Unlicensed National Information Infrastructure Devices. General technical requirements.  
 Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.  
 General Requirements and Information for the Certification of Radio Apparatus.

(*) Identification of item tested	Automotive infotainment System
(*) Trademark	BMW
(*) Model and /or type reference	MGU21A
Other identification of the product	FCC ID: T8GMGU21A IC: 6434A-MGU21A
(*) Features	USB 2.0 (including support for Apple Devices), Bluetooth, WLAN Modul 2.4 / 5 GHz, GNSS, AR-CAM input, Video-out APIX3, CAN, 100Base-T1 and 1000Base-T1. HW Version: 2.1 SW Version: 22w36.5-1
Manufacturer	HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH. Becker-Goering-Str. 16; 76307 Karlsbad, Germany
Test method requested, standard	USA FCC Part 15.407 10-1-21 Edition : Unlicensed National Information Infrastructure Devices. General technical requirements. USA FCC Part 15.209 10-1-21 Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (April 2018). 789033 D02 General UNII Test Procedures New Rules v02r01 Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	12-14-2022
Report template No	FDT08_23 (* "Data provided by the client")

## Index

---

INDEX .....	2
ACRONYMS .....	3
COMPETENCES AND GUARANTEES .....	3
GENERAL CONDITIONS .....	3
UNCERTAINTY .....	4
DATA PROVIDED BY THE CLIENT .....	4
USAGE OF SAMPLES .....	5
TEST SAMPLE DESCRIPTION .....	6
IDENTIFICATION OF THE CLIENT .....	7
TESTING PERIOD AND PLACE .....	8
DOCUMENT HISTORY .....	8
ENVIRONMENTAL CONDITIONS .....	8
REMARKS AND COMMENTS .....	8
TESTING VERDICTS .....	9
SUMMARY .....	9
LIST OF EQUIPMENT USED DURING THE TEST .....	10
APPENDIX A: DUT DESCRIPTION .....	11
APPENDIX B: TESTS RESULTS. WI-FI 5GHZ .....	13

## Acronyms

Acronym ID	Acronym Description
# of Tx Chains	Number of Transmission Chains
26Ebw	Emission Bandwidth
Avg Power	Maximum Average Conducted Output Power
DC	Duty Cycle
Freq	Frequency
Max EIRP	Maximum Burst EIRP
Mod	Modulation
Mode	SISO
Occ Ch BW	Occupied Channel Bandwidth
Operation Band	Operation Band
PSD	Power Spectrum Density
Port	Active Port
TPC	TPC

## Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Certification internal document PODT000.

Test case	Frequency (MHz)	U ( $k=2$ )	Units
RF Power and PSD	5150-5850	0.88	dB
Occupied Bandwidth		1.87	%
Band Edge		0.64	dB
Radiated Spurious Emission	30-180	4.27	dB
	180-1000	3.14	dB
	1000-18000	3.30	dB
	18000-40000	3.49	dB

## Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of an Automotive infotainment System to be installed in cars.
3. The main functionalities: Navigation, USB, voice recognition, and several interfaces to the vehicle and Bluetooth / WLAN.
4. The Head-unit provides different interfaces like: AR-CAM input, Video-out APIX3 (for the connection of an external Display), 3 USB interfaces (including support for Apple devices), CAN, 100BaseT1, and 1000Base-T1.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results

## Usage of samples

Samples used for testing have been selected by: The client.

Sample S/01 is composed of the following elements, accessories and auxiliary equipment:

Id	Control Number	Description	Manufacturer/ Model	Serial N°	Date of Reception	Application
S/01	3817/02	Infotainment Head Unit	Harman / MGU21A	B38229N181000014	10/07/2022	Element Under Test
S/01	3817/17	BR-Adapter	-	-	10/07/2022	Accessory
S/01	3817/22	HSD (male) to OABR cable	-	-	10/07/2022	Accessory
S/01	3817/23	Quad mate AXZ - High speed Fakra to SMA (male)	-	-	10/07/2022	Accessory
S/01	3817/24	Plug cable for BR-Adapter	-	-	10/07/2022	Accessory
S/01	3817/25	Harness	-	-	10/07/2022	Accessory
S/01	3669/44	Ethernet to USB Adapter	TP-Link / UE300	220B191005905	04/07/2022	Accessory
S/01	3810/17	Ethernet Cable RJ45 to RJ45	-	-	04/07/2022	Accessory
S/01	1482	Dekra Laptop	Lenovo / V14 G2 ITL	PF3QAFFH	-	Auxiliary

1. Sample S/01 was used for the test(s): All Conducted test(S) indicated in appendix B.

Sample S/02 is composed of the following elements, accessories and auxiliary equipment:

Id	Control Number	Description	Manufacturer/ Model	Serial N°	Date of Reception	Application
S/02	3817/03	Infotainment Head Unit	Harman / MGU21A	B38229N181000014	10/07/2022	Element Under Test
S/02	3817/05	Harness	-	-	10/07/2022	Accessory
S/02	3817/06	Quad mate AXZ - High speed Fakra to SMA (male)	-	-	10/07/2022	Accessory
S/02	3817/07	Plug cable for BR-Adapter	-	-	10/07/2022	Accessory
S/02	3817/08	HSD (male) to OABR cable	-	-	10/07/2022	Accessory
S/02	3817/09	BT/WLAN Antenna with SMA (male) connector			10/07/2022	Element Under Test
S/02	3817/10	BT/WLAN Antenna with SMA (male) connector			10/07/2022	Element Under Test
S/02	3817/12	BR-Adapter	-	-	10/07/2022	Accessory
S/02	3669/44	Ethernet to USB Adapter	TP-Link / UE300	220B191005905	04/07/2022	Accessory
S/02	3810/17	Ethernet Cable RJ45 to RJ45	-	-	04/07/2022	Accessory
S/02	1484	Dekra Laptop	Lenovo / V14 G2 ITL	PF3Q2NKL	-	Auxiliary

2. Sample S/02 was used for the test(s): All Radiated test(S) indicated in appendix B.


## Test sample description

Test Sample description (compulsory information for EMC and RF testing services)

Ports.....:	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>		
	BT/WIFI connector – 2X 1 POL ROS 59S2BT40MA5-1		[X]	[ ]	[ ]		
	USB1 connector – CONM-SM 4POL ROS D4S20Y-40MA5-B		[X]	[ ]	[ ]		
	USB2 connector – CONM-SM 4POL ROS D4S20Y-40MA5-C		[X]	[X]	[ ]		
	USB3 connector – CONM-SM 4POL ROS D4S20Y-40MA5-E		[X]	[X]	[ ]		
	APIX3 connector – CONM-SM 4+2POL ROS 99S22A-40MA5-D		[X]	[ ]	[ ]		
	Car Main-connector – ONM 16POL TYC 2300483-s		[X]	[X]	[ ]		
	AR-CAM connector – CONM 1POL ROS 59S2FT-40MA5-K		[X]	[X]	[ ]		
	Ethernet BroadR- Reach, 100 BASE-T1		[X]	[X]	[ ]		
	Ethernet, 1000 BASE- T1		[X]	[X]	[ ]		
	GNSS connector 1 POL ROS 59S2BT40MA5-C		[X]	[X]	[ ]		
Supplementary information to the ports..... :	No Data Provided						
Rated power supply .....	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	[ ]	AC: .....	[ ]	[ ]	[ ]	[ ]	[ ]
	[ ]	AC: .....	[ ]	[ ]	[ ]	[ ]	[ ]
	[ X ]	DC: 13.2 V					
Rated Power .....	No Data Provided						
Clock frequencies..... :	No Data Provided						
Other parameters .....	No Data Provided						
Software version .....	22w36.5-1						
Hardware version .....	2.1						
Dimensions in cm (W x H x D) .....	No Data Provided						

Mounting position .....	[ ]	Table top equipment	
	[ ]	Wall/Ceiling mounted equipment	
	[ ]	Floor standing equipment	
	[ ]	Hand-held equipment	
	[X]	Other: Automotive Infotainment Head Unit	
Modules/parts.....	Module/parts of test item	Type	Manufacturer
	N/A	.....	.....
	.....	.....	.....
Accessories (not part of the test item).....	Description	Type	Manufacturer
	HARMANeco (with Display or headless)		HBAS
	Cable harness		HBAS
	Display		L.G.
	BT/WLAN-Antenna		HIRSCHMANN
Documents as provided by the applicant.....	Description	File name	Issue date
	Declaration Equipment Data	FDT30_18 Declaration Equipment Data - MGU21A 2022.10.12	10/13/2022

Copy of marking plate:

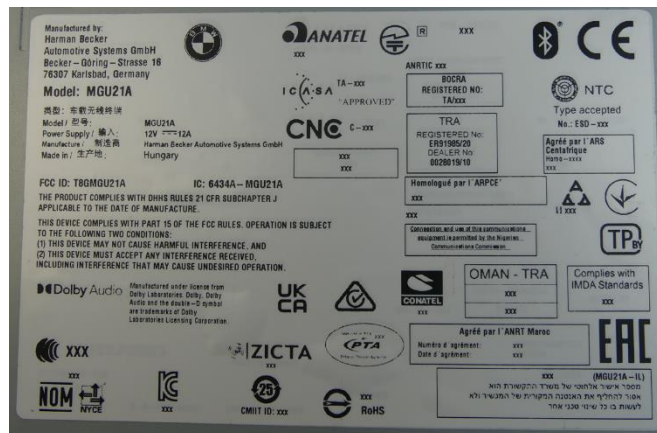

## Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH.  
Becker-Goering-Str. 16; 76307 Karlsbad,  
Germany

## Testing period and place

<b>Test Location</b>	DEKRA Certification Inc.
<b>Date (start)</b>	11-19-2022
<b>Date (finish)</b>	11-30-2022

## Document history

Report number	Date	Description
3817ERM.007	12-14-2022	First release.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %

## Remarks and comments

The tests have been performed by the technical personnel: Lakshmi Gollamudi, Juliana Cherry, Yuri Barone, Koji Nishimoto, and Victor Albrecht.



## Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P

## Summary

FCC PART 15 PARAGRAPH / RSS-247			
Requirement	Test case	Verdict	Remark
FCC 15.407 (a) / RSS-247 6.2	Power Limits. Maximum Output Power	P	
FCC 15.407 (a) / RSS-247 6.2	Maximum Power Spectral Density	P	
FCC 2.1049 / RSS-Gen 6.7	99% Occupied Bandwidth	P	
FCC 15.403 / RSS-Gen 6.7	26 dB Emission Bandwidth	P	
FCC 15.407 (b) / RSS-247 6.2	Band-edge Conducted Emissions	P	
FCC 15.407 (e) / RSS 247 6.2.4.1	6 dB Emission Bandwidth	P	Refer 1
FCC 15.407 (b), 15.205 & 15.209 / RSS-Gen 8.9 & 8.10	Undesirable radiated emissions	P	
<p><u>Supplementary information and remarks:</u></p> <p>1. Only applicable to sub-band U-NII-3: 5.725 - 5.85 GHz.</p>			

## List of equipment used during the test

### Conducted Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
897	AMETEK PROG DC Power supply	1707A01906	N/A	N/A
1014	FSV40 Signal Analyzer 40GHz	101626	2021-05-19	2023-05-19
1107	Ethernet SNMP Thermometer-RF1 Room	60038026952	2022-10-18	2024-10-18
1313	Wireless Measurement Software R&S EMC32	-	N/A	N/A

### Radiated Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
878	AMETEK PROG DC Power supply	1707A01783	N/A	N/A
982	Low Noise Preamplifier	1711156C	2020-11-10	2022-11-10
1012	ESR26 EMI Test Receiver	101478	2022-04-12	2024-04-12
1014	FSV40 Signal Analyzer 40GHz	101626	2021-05-19	2023-05-19
1056	3116C Double-Ridged Waveguide Horn Antenna 19-40 GHz	213179	2020-01-10	2023-01-10
1057	3115 Double-Ridged Waveguide Horn Antenna 1-18 GHz	211373	2020-06-03	2023-06-03
1065	3142E Biconilog Antenna	208587	2020-08-13	2023-08-13
1108	Ethernet SNMP Thermometer-CR Room	60038026954	2022-10-18	2024-10-18
1111	Ethernet SNMP Thermometer-SAC	60038026577	2022-10-18	2024-10-18
1179	Semi anechoic Absorber Lined Chamber	F169021	N/A	N/A
1314	Wireless Measurement Software R&S EMC32	-	N/A	N/A
1461	Low Noise Preamplifier	2213857B	2022-06-01	2024-06-01

## Appendix A: DUT DESCRIPTION

## DUT Description

The following information is provided by the client

Information	Description
Equipment type	Wi-Fi 5GHz
DFS Operating Mode	-
Antenna Specification	Equipment with only one antenna
Operating Frequency Range	U-NII-1: 5150 - 5250 MHz U-NII-3: 5725 - 5825 MHz
Nominal Channel Bandwidth	20/ 40/ 80 MHz
Antenna type	External Antenna
RF Output Power	17 dBm
Antenna gain	-2.8 dBi
Supply Voltage	13.2 Vdc
Modulation:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Communication Mode:	IP Based (Load Based)
Transmit Data Rate:	802 .11 a/n/ac Rates: IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: MCS0-8 IEEE 802.11ac: VHT SS1 MCS 0-9 VHT SS2 MCS 0-9

## Appendix B: Tests results. Wi-Fi 5GHz

## Appendix B

---

TEST CONDITIONS .....	15
TEST CASES DETAILS .....	19
<i>FCC 15.407 (a) / RSS-247 6.2 Power Limits. Maximum Output Power</i> .....	19
<i>FCC 15.407 (a) / RSS-247 6.2 Maximum Power Spectral Density</i> .....	37
<i>FCC 2.1049 / RSS-Gen 6.7 99% Occupied Bandwidth</i> .....	55
<i>FCC 15.403 / RSS-Gen 6.7 26 dB Emission Bandwidth</i> .....	73
<i>FCC 15.407 (b) / RSS-247 6.2 Band-edge Conducted Emissions</i> .....	90
<i>FCC 15.407 (e) / RSS 247 6.2.4.1 6 dB Emission Bandwidth</i> .....	110
<i>FCC 15.407 (b), 15.205 &amp; 15.209 / RSS-Gen 8.9 &amp; 8.10 Undesirable radiated emissions</i> .....	120

## TEST CONDITIONS

(\*): Data provided by the client.

TEST CONDITIONS	DESCRIPTION																		
<p>TC/01<sup>(1)</sup> <b>(a mode)</b></p>	<p><u>Power supply (V):</u> V<sub>nominal</sub>: 13.2 Vdc</p> <p><u>Temperature:</u> T<sub>nominal</sub>: +15 to +35 °C</p> <p><u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests:</u></p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><u>U-NII-1</u></td> <td style="text-align: center;"><u>U-NII-3</u></td> </tr> <tr> <td style="text-align: center;">Lowest range: 5180 MHz</td> <td style="text-align: center;">Lowest range: 5745 MHz</td> </tr> <tr> <td style="text-align: center;">Middle channel: 5200 MHz</td> <td style="text-align: center;">Middle channel: 5785 MHz</td> </tr> <tr> <td style="text-align: center;">Highest range: 5240 MHz</td> <td style="text-align: center;">Highest range: 5825 MHz</td> </tr> </table>	<u>U-NII-1</u>	<u>U-NII-3</u>	Lowest range: 5180 MHz	Lowest range: 5745 MHz	Middle channel: 5200 MHz	Middle channel: 5785 MHz	Highest range: 5240 MHz	Highest range: 5825 MHz										
<u>U-NII-1</u>	<u>U-NII-3</u>																		
Lowest range: 5180 MHz	Lowest range: 5745 MHz																		
Middle channel: 5200 MHz	Middle channel: 5785 MHz																		
Highest range: 5240 MHz	Highest range: 5825 MHz																		
<p>TC/02<sup>(1)</sup> <b>(n mode)</b></p>	<p><u>Power supply (V):</u> V<sub>nominal</sub>: 13.2 Vdc</p> <p><u>Temperature:</u> T<sub>nominal</sub>: +15 to +35 °C</p> <p><u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests:</u></p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><u>U-NII-1</u></td> <td style="text-align: center;"><u>U-NII-3</u></td> </tr> <tr> <td style="text-align: center;">Lowest range: 5180 MHz</td> <td style="text-align: center;">Lowest range: 5745 MHz</td> </tr> <tr> <td style="text-align: center;">Middle channel: 5200 MHz</td> <td style="text-align: center;">Middle channel: 5785 MHz</td> </tr> <tr> <td style="text-align: center;">Highest range: 5240 MHz</td> <td style="text-align: center;">Highest range: 5825 MHz</td> </tr> </table> <p><u>Channel Bandwidth:</u> 40 MHz <u>Test Frequencies for Conducted/Radiated tests:</u></p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><u>U-NII-1</u></td> <td style="text-align: center;"><u>U-NII-3</u></td> </tr> <tr> <td style="text-align: center;">Lowest range: 5190 MHz</td> <td style="text-align: center;">Lowest range: 5755 MHz</td> </tr> <tr> <td style="text-align: center;">Highest range: 5230 MHz</td> <td style="text-align: center;">Highest range: 5795 MHz</td> </tr> </table>	<u>U-NII-1</u>	<u>U-NII-3</u>	Lowest range: 5180 MHz	Lowest range: 5745 MHz	Middle channel: 5200 MHz	Middle channel: 5785 MHz	Highest range: 5240 MHz	Highest range: 5825 MHz	<u>U-NII-1</u>	<u>U-NII-3</u>	Lowest range: 5190 MHz	Lowest range: 5755 MHz	Highest range: 5230 MHz	Highest range: 5795 MHz				
<u>U-NII-1</u>	<u>U-NII-3</u>																		
Lowest range: 5180 MHz	Lowest range: 5745 MHz																		
Middle channel: 5200 MHz	Middle channel: 5785 MHz																		
Highest range: 5240 MHz	Highest range: 5825 MHz																		
<u>U-NII-1</u>	<u>U-NII-3</u>																		
Lowest range: 5190 MHz	Lowest range: 5755 MHz																		
Highest range: 5230 MHz	Highest range: 5795 MHz																		
<p>TC/03<sup>(1)</sup> <b>(ac mode)</b></p>	<p><u>Power supply (V):</u> V<sub>nominal</sub>: 13.2 Vdc</p> <p><u>Temperature:</u> T<sub>nominal</sub>: +15 to +35 °C</p> <p><u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests:</u></p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><u>U-NII-1</u></td> <td style="text-align: center;"><u>U-NII-3</u></td> </tr> <tr> <td style="text-align: center;">Lowest range: 5180 MHz</td> <td style="text-align: center;">Lowest range: 5745 MHz</td> </tr> <tr> <td style="text-align: center;">Middle channel: 5200 MHz</td> <td style="text-align: center;">Middle channel: 5785 MHz</td> </tr> <tr> <td style="text-align: center;">Highest range: 5240 MHz</td> <td style="text-align: center;">Highest range: 5825 MHz</td> </tr> </table> <p><u>Channel Bandwidth:</u> 40 MHz <u>Test Frequencies for Conducted/Radiated tests:</u></p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><u>U-NII-1</u></td> <td style="text-align: center;"><u>U-NII-3</u></td> </tr> <tr> <td style="text-align: center;">Lowest range: 5190 MHz</td> <td style="text-align: center;">Lowest range: 5755 MHz</td> </tr> <tr> <td style="text-align: center;">Highest range: 5230 MHz</td> <td style="text-align: center;">Highest range: 5795 MHz</td> </tr> </table> <p><u>Channel Bandwidth:</u> 80 MHz <u>Test Frequencies for Conducted/Radiated tests:</u></p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><u>U-NII-1</u></td> <td style="text-align: center;"><u>U-NII-3</u></td> </tr> <tr> <td style="text-align: center;">Single range: 5210 MHz</td> <td style="text-align: center;">Single range: 5755 MHz</td> </tr> </table>	<u>U-NII-1</u>	<u>U-NII-3</u>	Lowest range: 5180 MHz	Lowest range: 5745 MHz	Middle channel: 5200 MHz	Middle channel: 5785 MHz	Highest range: 5240 MHz	Highest range: 5825 MHz	<u>U-NII-1</u>	<u>U-NII-3</u>	Lowest range: 5190 MHz	Lowest range: 5755 MHz	Highest range: 5230 MHz	Highest range: 5795 MHz	<u>U-NII-1</u>	<u>U-NII-3</u>	Single range: 5210 MHz	Single range: 5755 MHz
<u>U-NII-1</u>	<u>U-NII-3</u>																		
Lowest range: 5180 MHz	Lowest range: 5745 MHz																		
Middle channel: 5200 MHz	Middle channel: 5785 MHz																		
Highest range: 5240 MHz	Highest range: 5825 MHz																		
<u>U-NII-1</u>	<u>U-NII-3</u>																		
Lowest range: 5190 MHz	Lowest range: 5755 MHz																		
Highest range: 5230 MHz	Highest range: 5795 MHz																		
<u>U-NII-1</u>	<u>U-NII-3</u>																		
Single range: 5210 MHz	Single range: 5755 MHz																		

(1) The test set-up was made in accordance to the general provisions of FCC Unlicensed National Information Infrastructure (U-NII) Devices 789033 D02 General U-NII Test Procedures New Rules v02r01 dated Dec 14, 2017. The EUT was tested in the following operating mode:

- Continuously transmitting with a modulated carrier at maximum power in all required channels using the supported data rates/modulation types.
- Preliminary tests determined the SISO worst case: Port 1.

The field strength at the band edges was evaluated for each mode on the lowest and highest channels at the rated power for the channel under test.

For all modes, the EUT was configured in test mode using a software application. The application was used to enable a continuous transmission and to select the test channels as required. The client supplied instructions to configure the EUT. The customer supplied a document containing the setup instructions.

The worst cases for SISO testing were identified for output power and spurious levels at the band edges which were selected based on preliminary testing that correspond to next data rates:

- 802.11 a20: 6 Mbps - SISO
- 802.11 n HT20/40: MCS0 - SISO
- 802.11 ac VHT20/40/80: MCS0 - SISO

The worst cases for SISO testing were identified for Unwanted Spurious emissions which were selected based on preliminary testing that correspond to next modes:

#### U-NII-1


- 802.11 a20: 6 Mbps - SISO
- 802.11 n HT40: MCS0 - SISO
- 802.11 ac VHT80: MCS0 - SISO

#### U-NII-3

- 802.11 ac VHT20: MCS0 - SISO
- 802.11 ac VHT40: MCS0 - SISO
- 802.11 ac VHT80: MCS0 - SISO



CONDUCTED MEASUREMENTS:

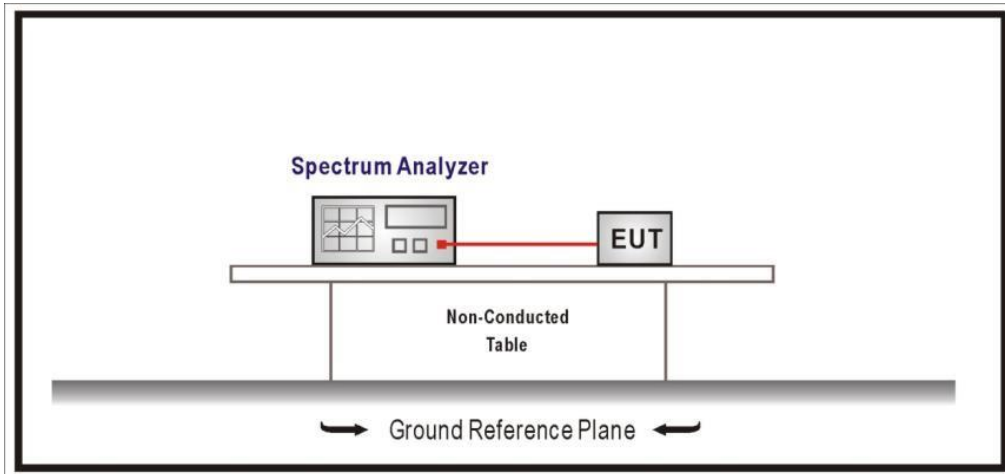

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bi-log antenna) and 1-18 GHz Double ridge horn antennas, and 1m for the frequency range 18 GHz- 40 GHz Double ridge horn antenna.

For radiated emissions in the range 18 - 40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

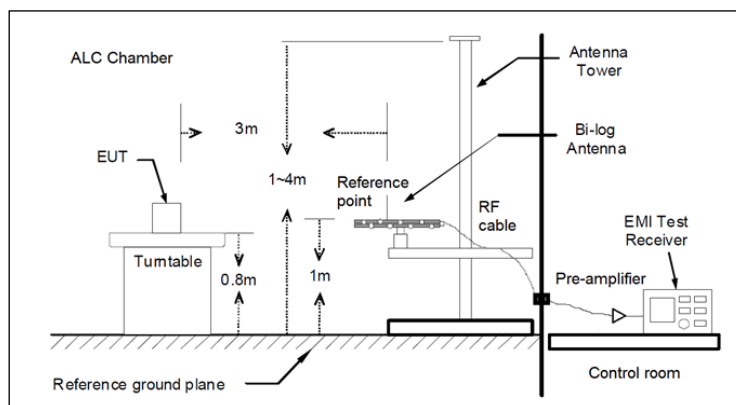


Fig A1: Radiated measurements Setup f < 1 GHz

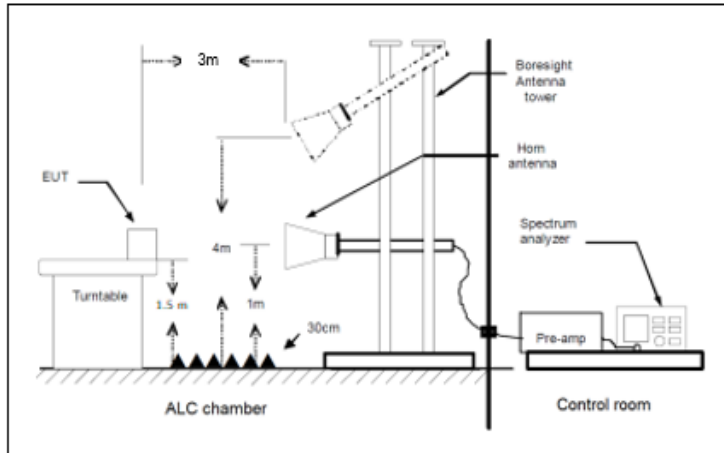


Fig A2: Radiated measurements setup  $f > 1-18$  GHz

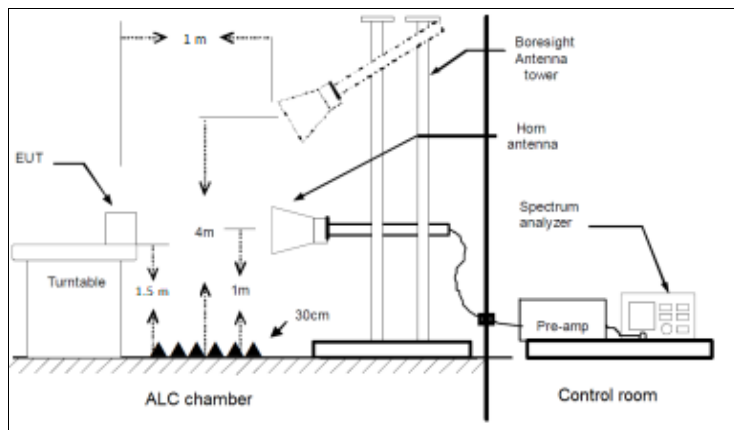


Fig A3: Radiated measurements setup  $f > 18$  GHz

## TEST CASES DETAILS

---

### FCC 15.407 (a) / RSS-247 6.2 Power Limits. Maximum Output Power

#### Limits

##### FCC 15.407:

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### RSS-247:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10} B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For devices other than devices installed in vehicles:

For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.25-5.35 GHz, 5.470-5.6 GHz, and 5.650-5.725 GHz bands, the maximum conducted output power shall not exceed 250 mW (24 dBm) or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less

For the band 5.725-5.850 GHz, the maximum conducted output power shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: The following test results are shown based on KDB 662911 D01 Multiple Transmitter Output v02r01 E) 1) In-Band Power Measurements.

Maximum declared antenna gain: -2.8 dBi

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
U-NII-1	1	5180.00000	14.2	11.4
		5200.00000	14.6	11.8
		5240.00000	15.2	12.4
U-NII-3	1	5745.00000	16.3	13.5
		5785.00000	15.5	12.7
		5825.00000	14.1	11.3

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
U-NII-1	1	5180.00000	14.1	11.3
		5200.00000	14.5	11.7
		5240.00000	14.1	11.3
U-NII-3	1	5745.00000	16.2	13.4
		5785.00000	15.4	12.6
		5825.00000	14.0	11.2

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
U-NII-1	1	5190.00000	14.4	11.6
		5230.00000	15.1	12.3
U-NII-3	1	5755.00000	15.5	12.7
		5795.00000	15.6	12.8

Modulation: 802.11ac VHT20 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
U-NII-1	1	5180.00000	14.3	11.5
		5200.00000	14.6	11.8
		5240.00000	14.2	11.4
U-NII-3	1	5745.00000	16.4	11.6
		5785.00000	15.5	12.7
		5825.00000	14.2	14.4

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
U-NII-1	1	5190.00000	14.4	11.6
		5230.00000	14.1	11.3
U-NII-3	1	5755.00000	15.5	12.7
		5795.00000	15.6	12.8

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
U-NII-1	1	5210.00000	10.9	8.1
U-NII-3	1	5775.00000	12.0	9.2


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1**

**Images:**

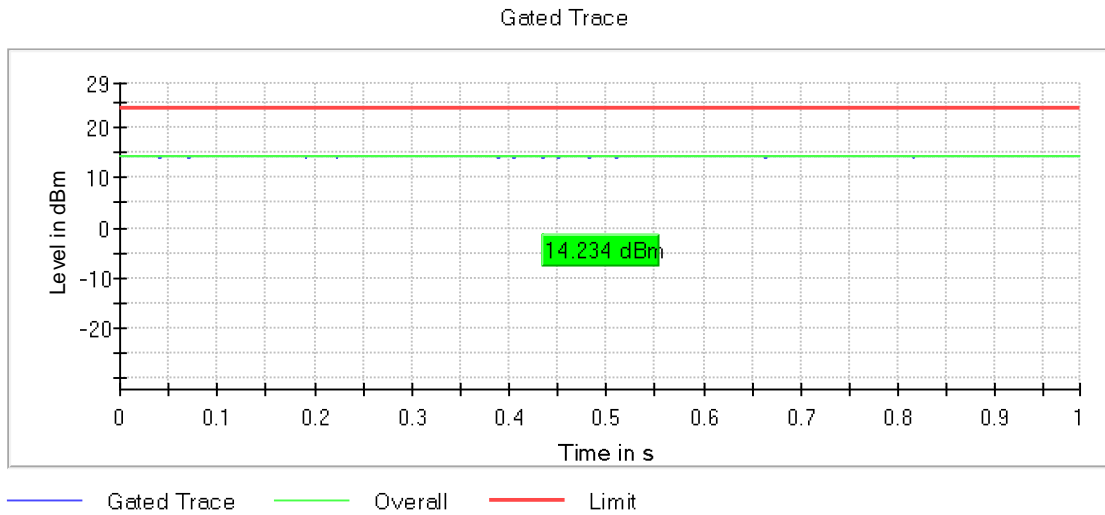


**Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1**

**Images:**

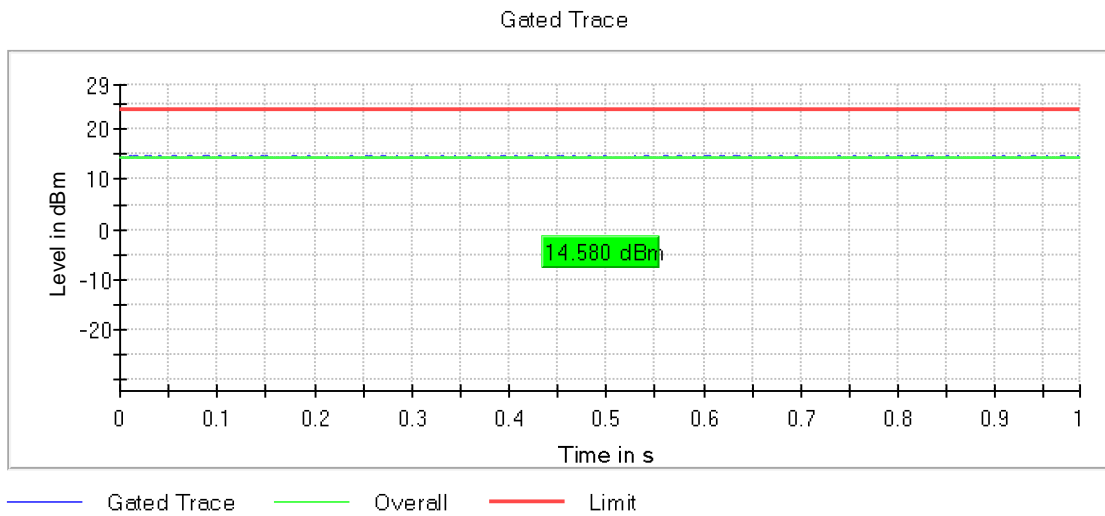


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

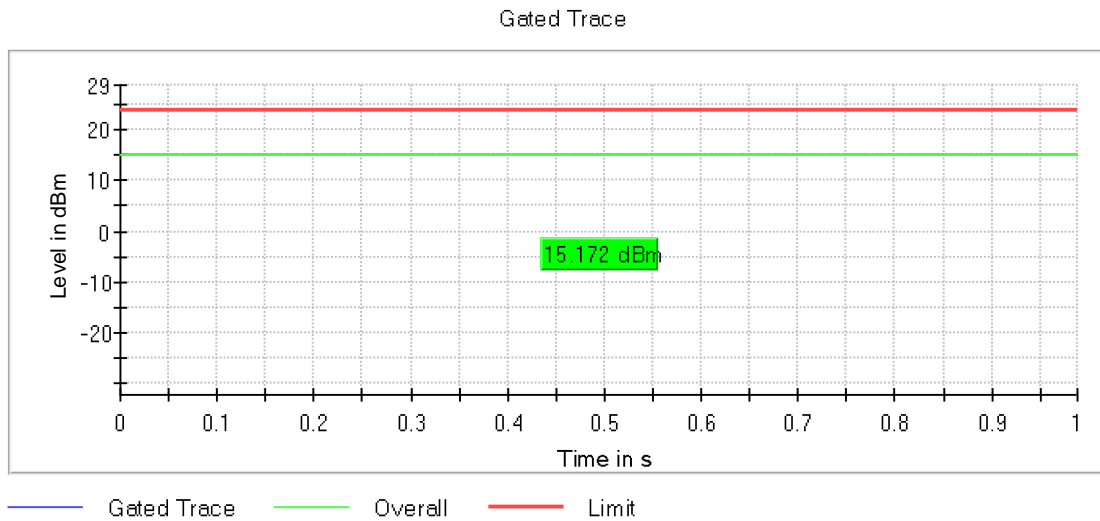


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

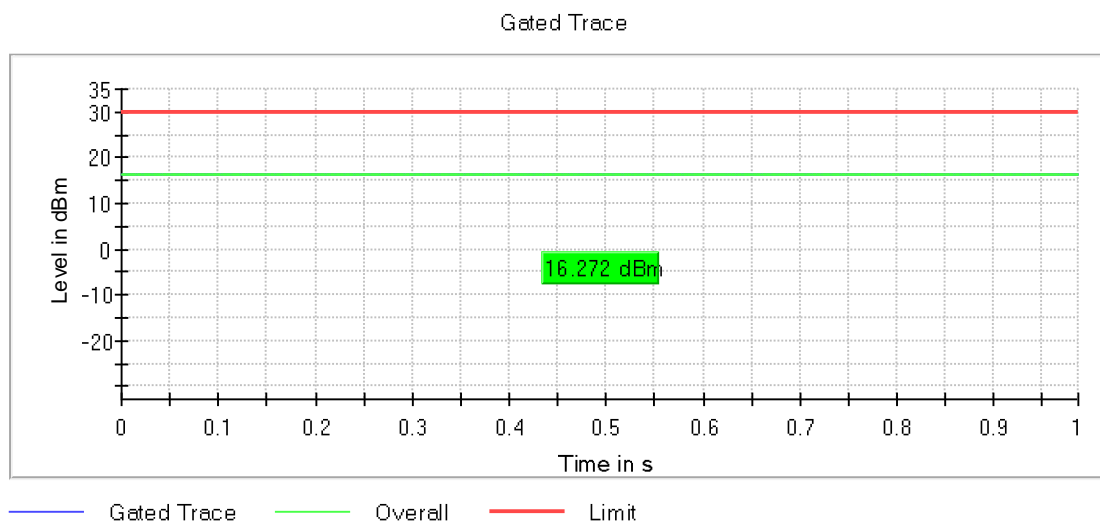


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

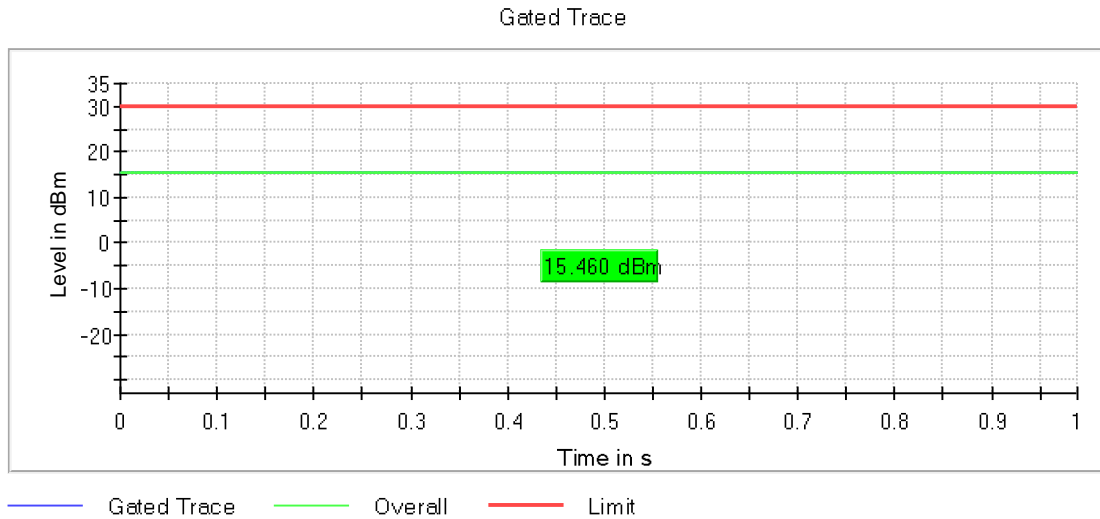

Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1


Images:

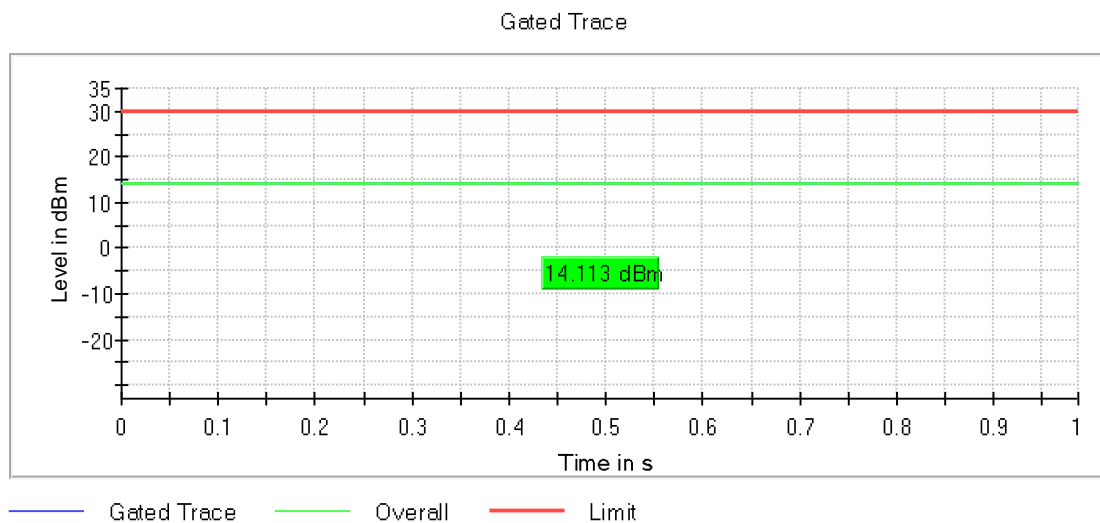




Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

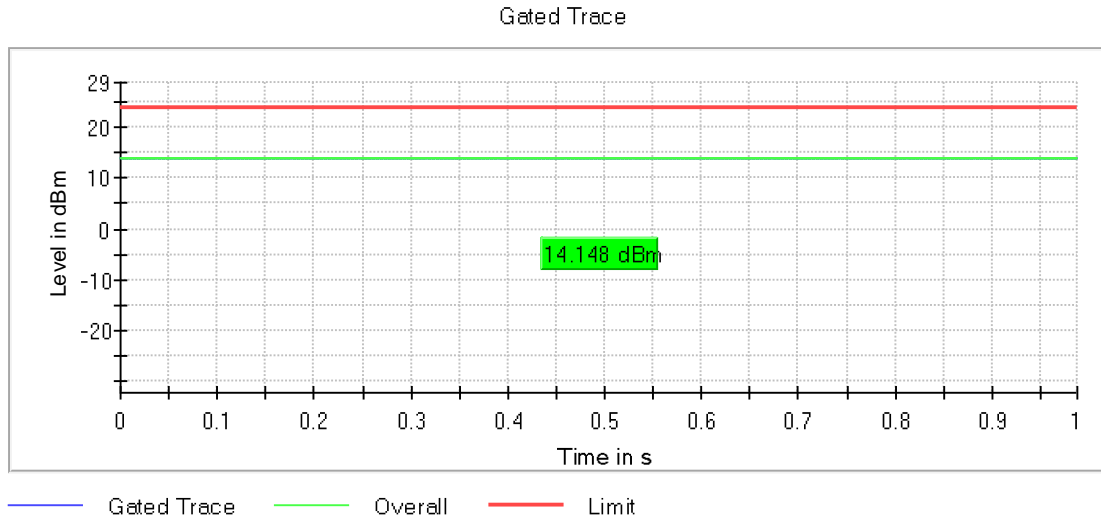


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

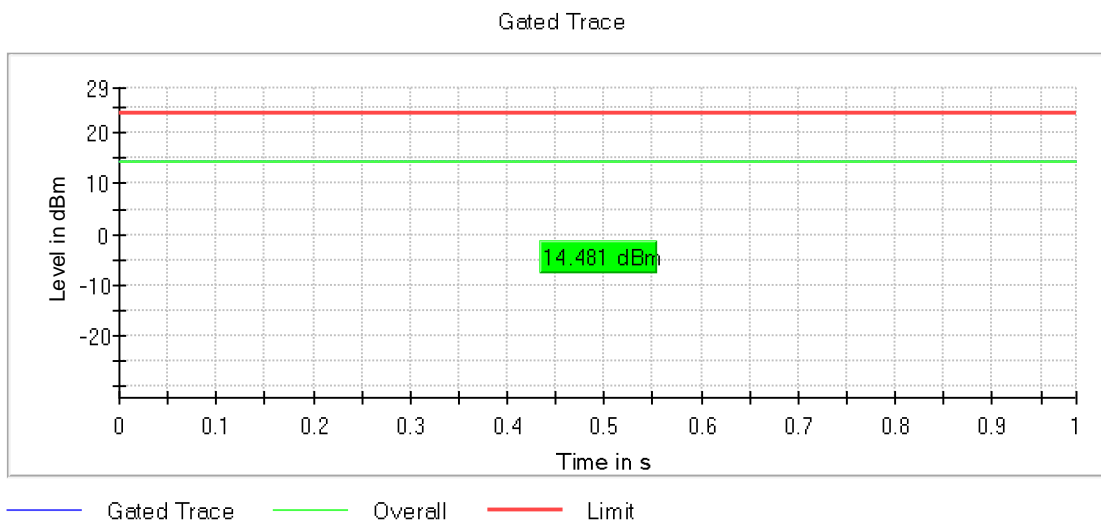


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

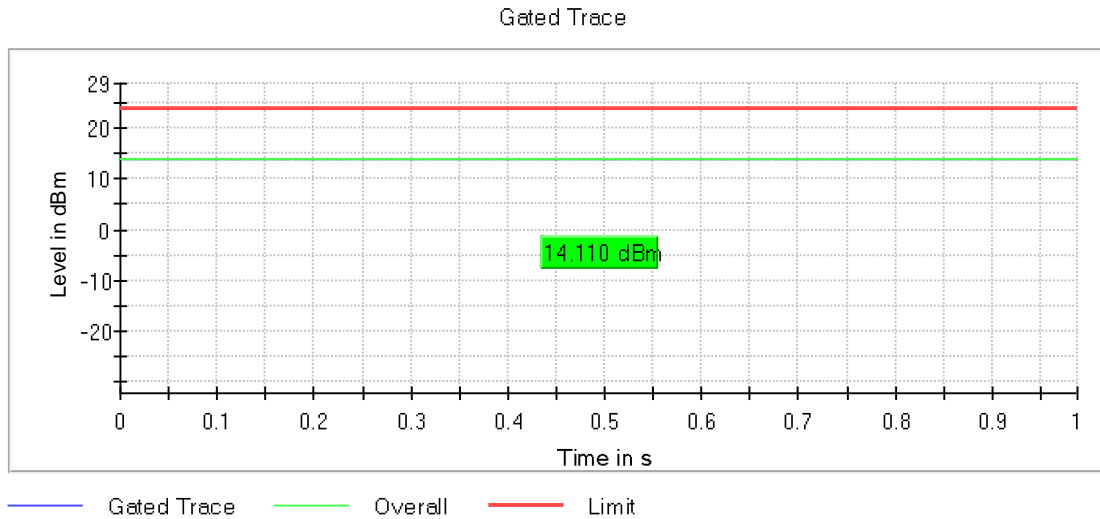


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

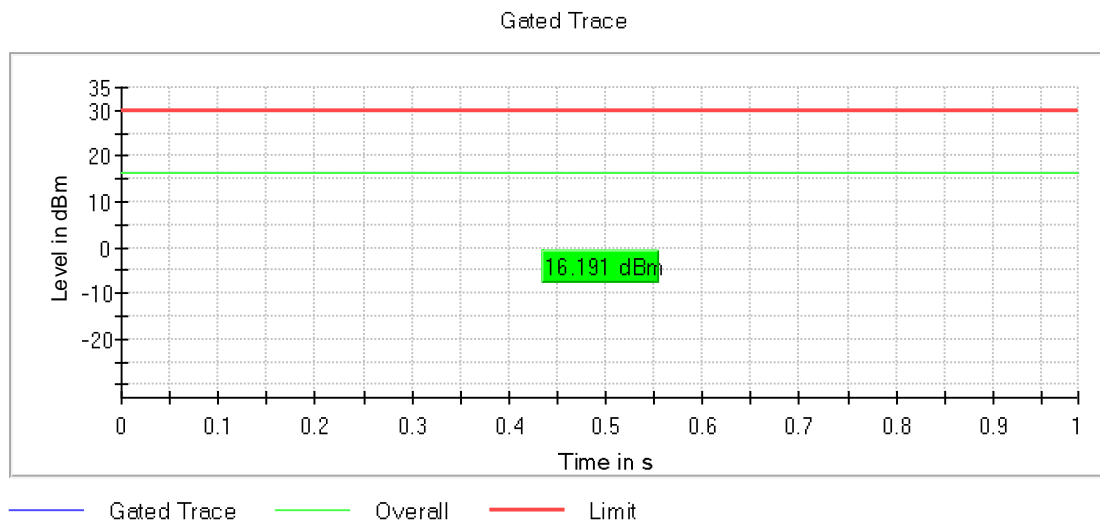


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

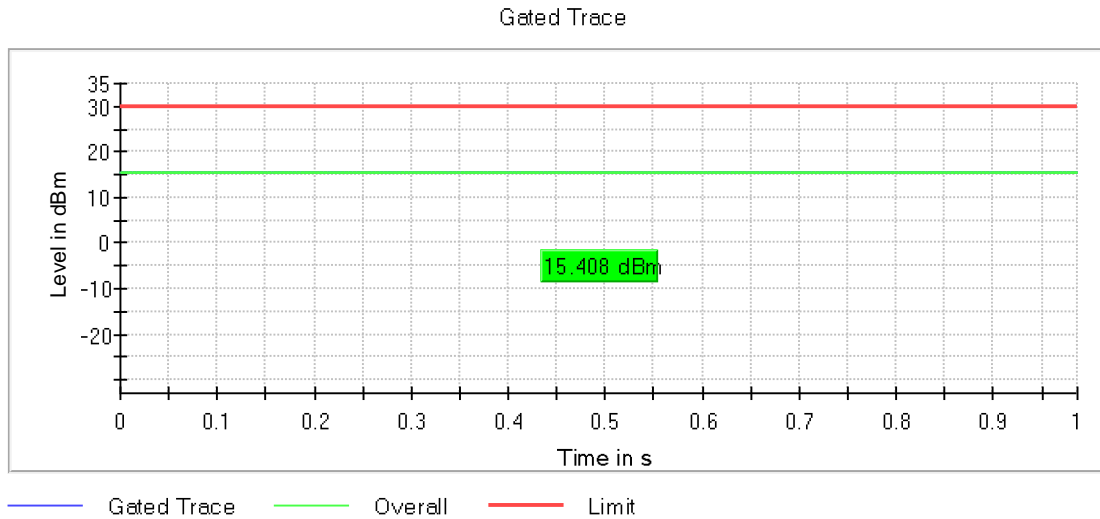


Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

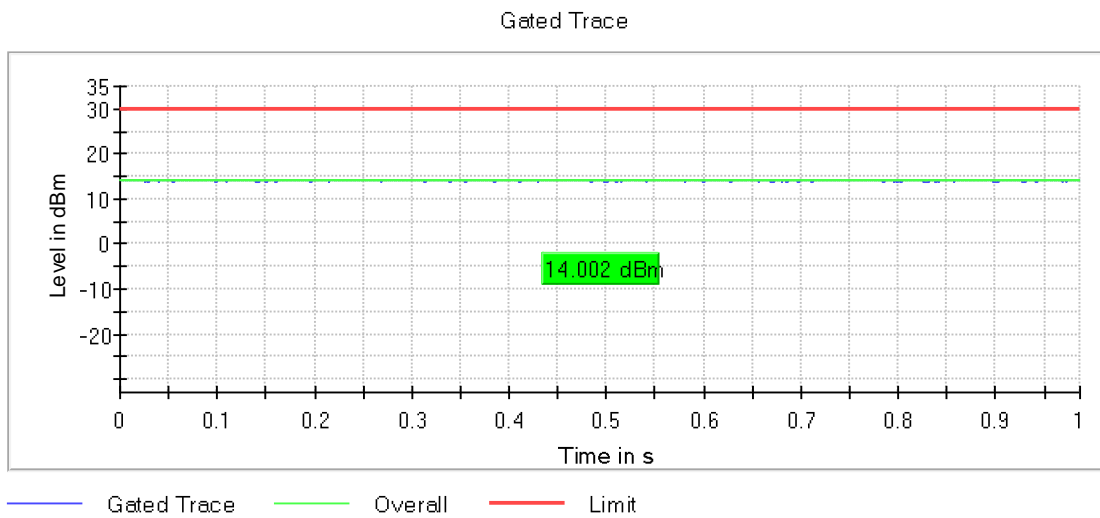


Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

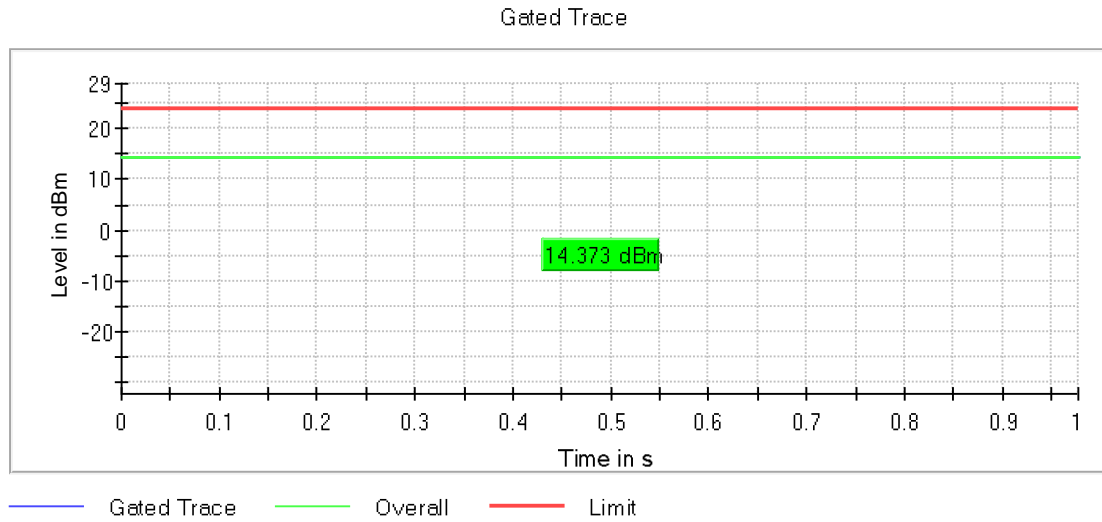


Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

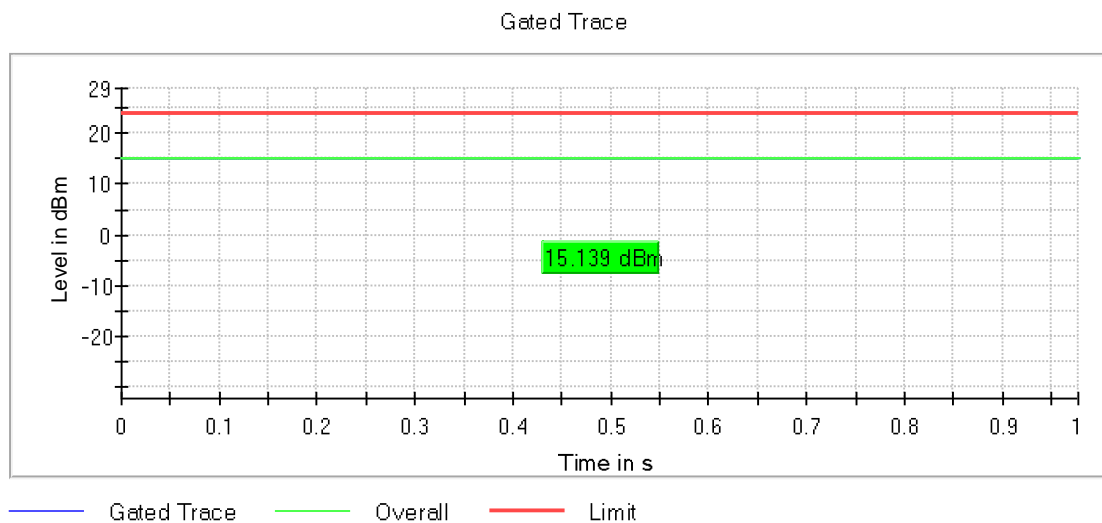


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

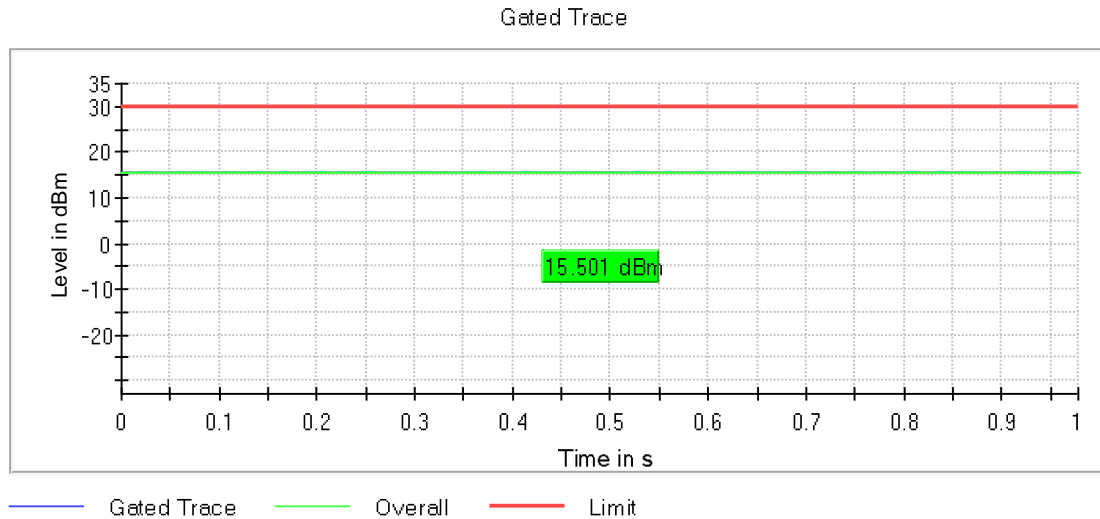


Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

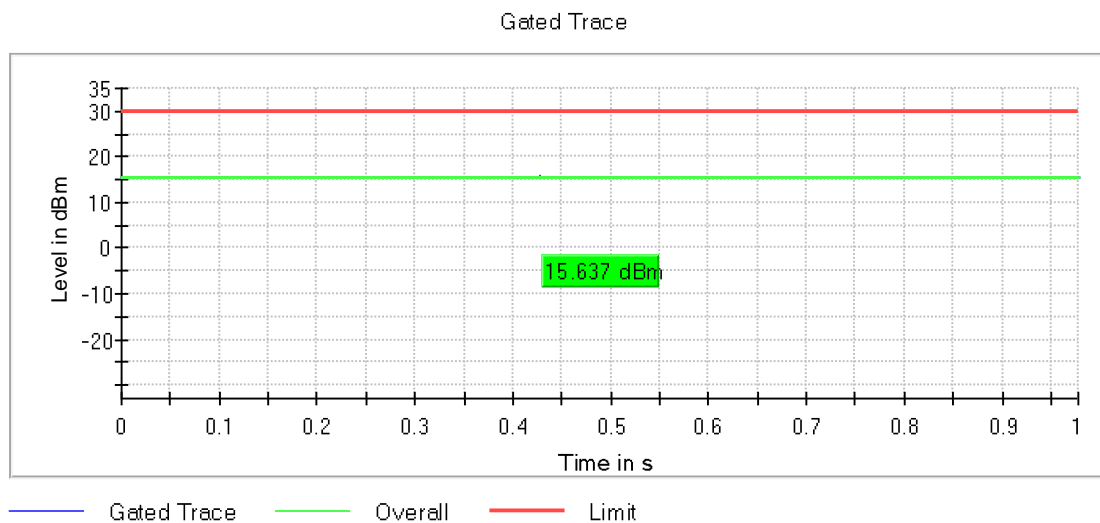


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
Mode = SISO, Number of Transmission Chains = 1

Images:

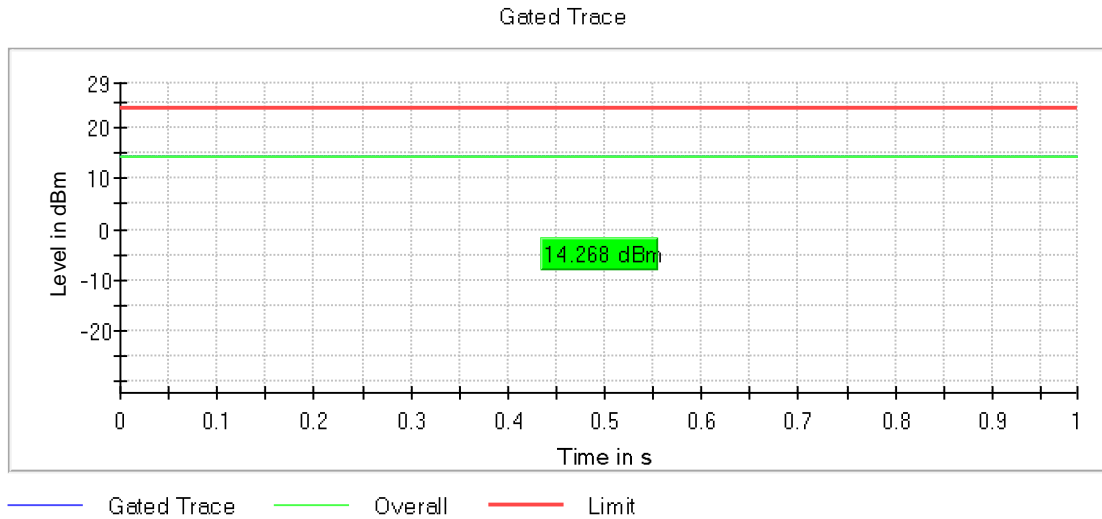


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
Mode = SISO, Number of Transmission Chains = 1

Images:

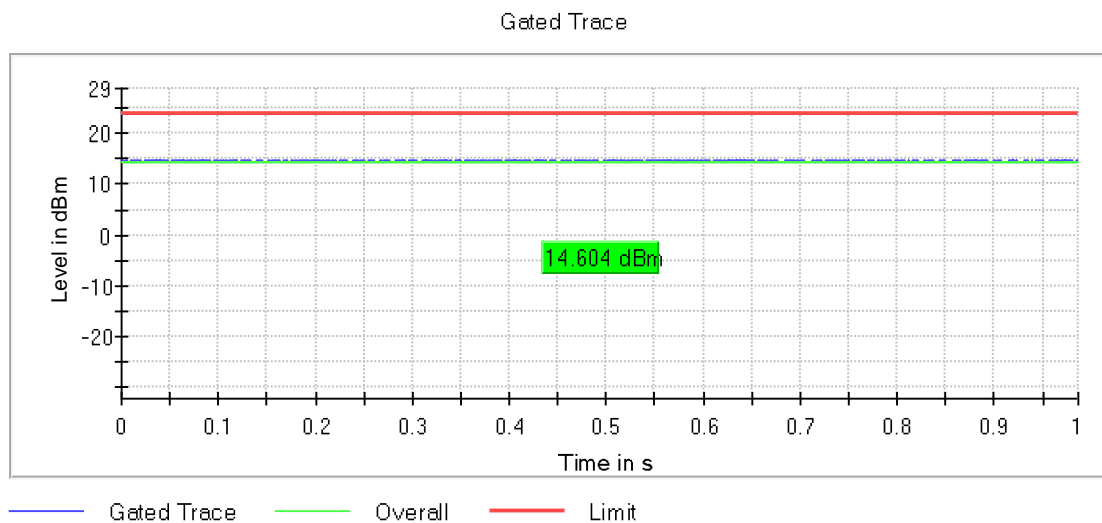


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
Mode = SISO, Number of Transmission Chains = 1

Images:

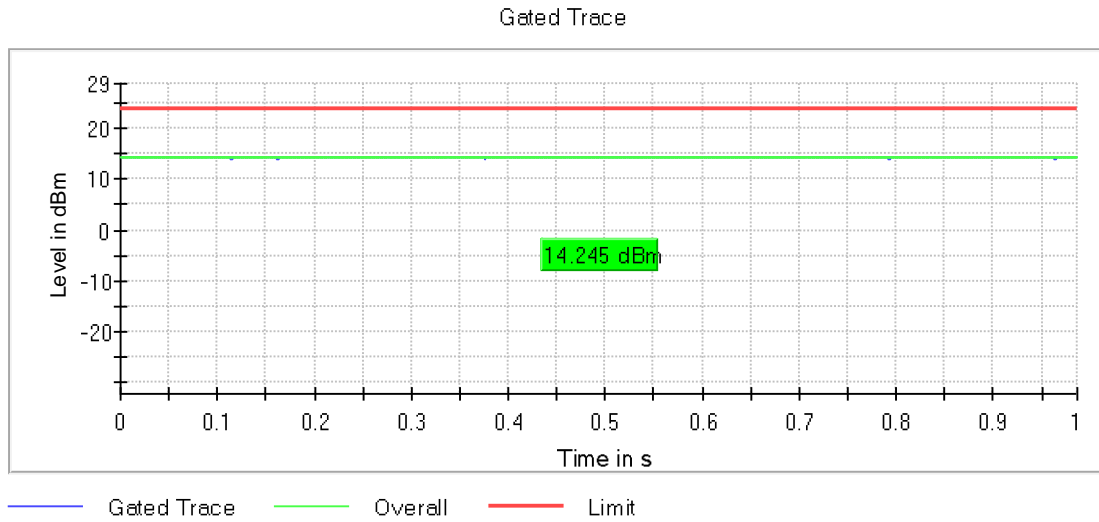


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
Mode = SISO, Number of Transmission Chains = 1

Images:

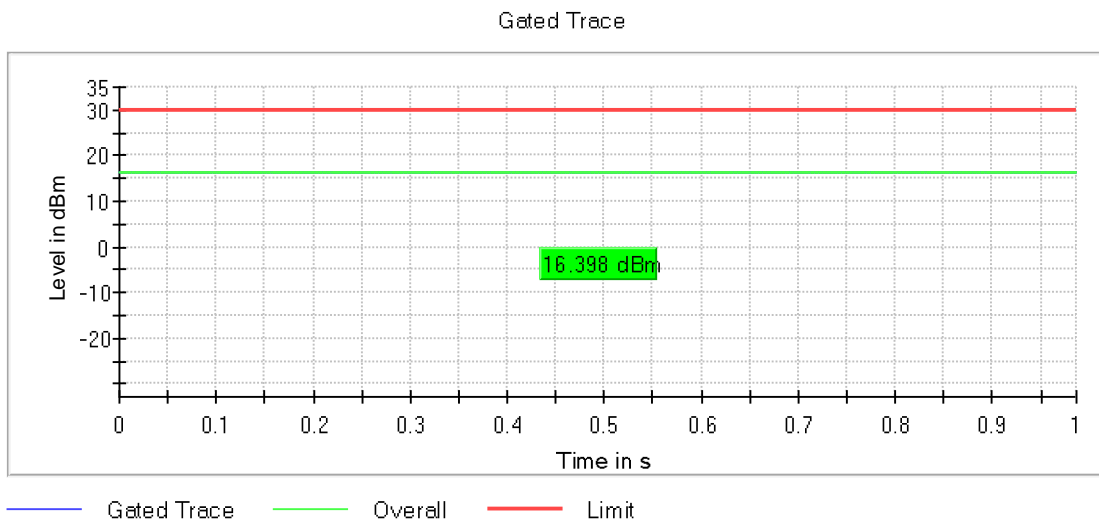


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
Mode = SISO, Number of Transmission Chains = 1

Images:

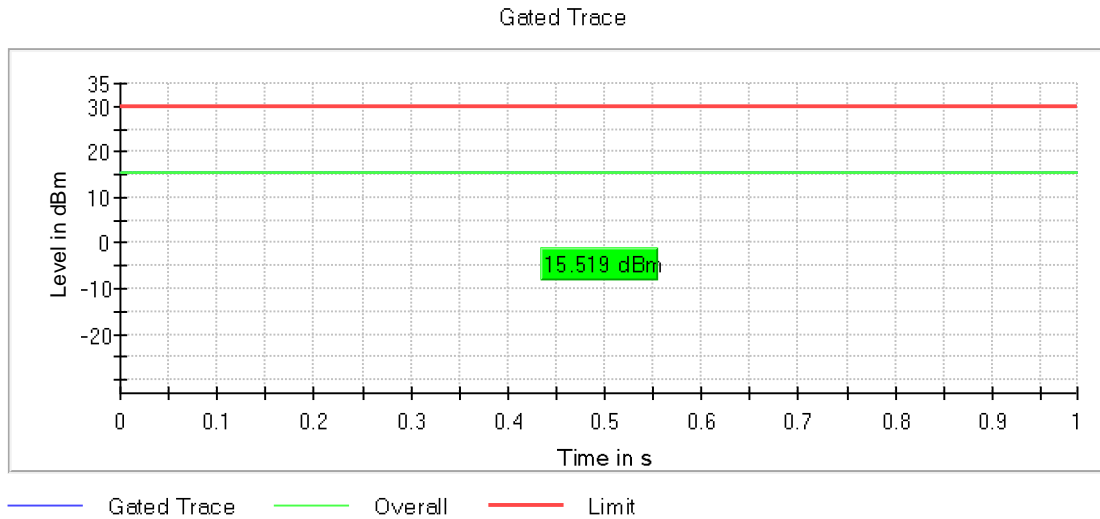

Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
Mode = SISO, Number of Transmission Chains = 1


Images:

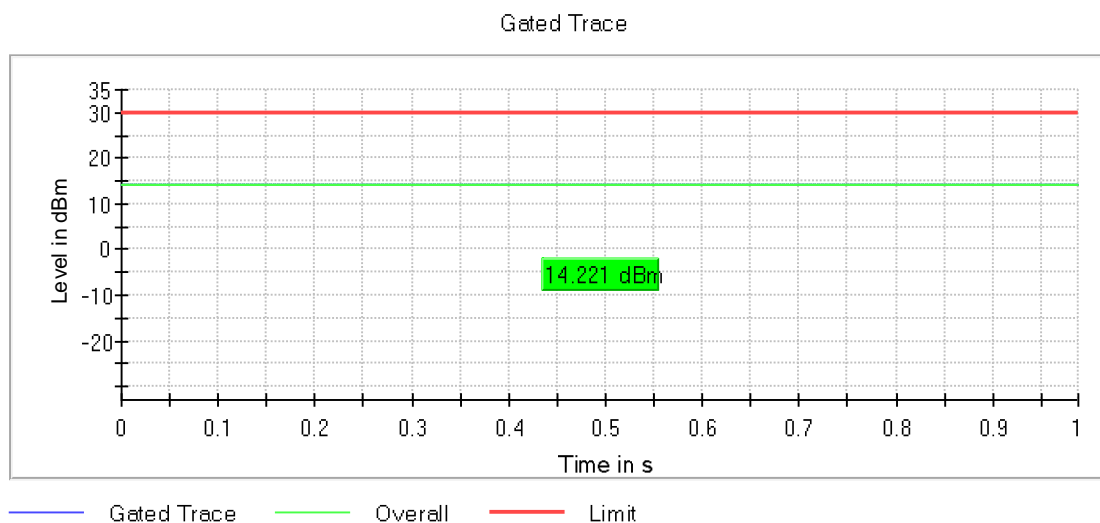




Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = Mode = SISO, Number of Transmission Chains = 1

Images:

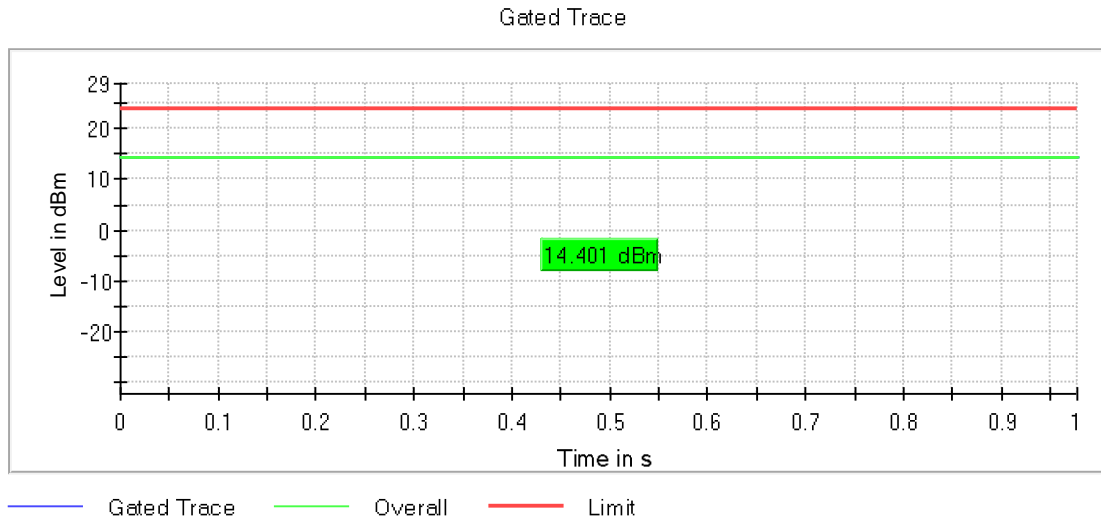


Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

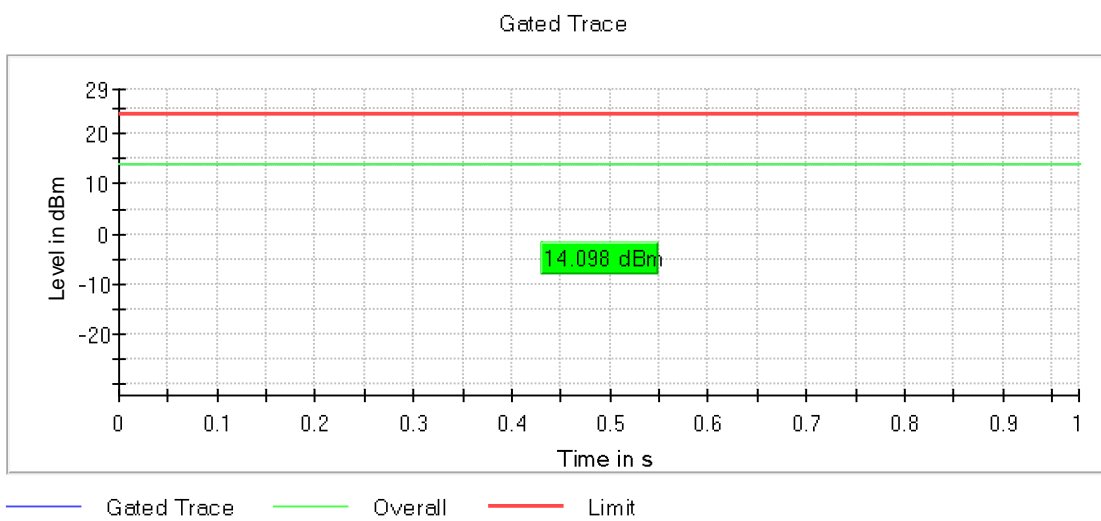


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

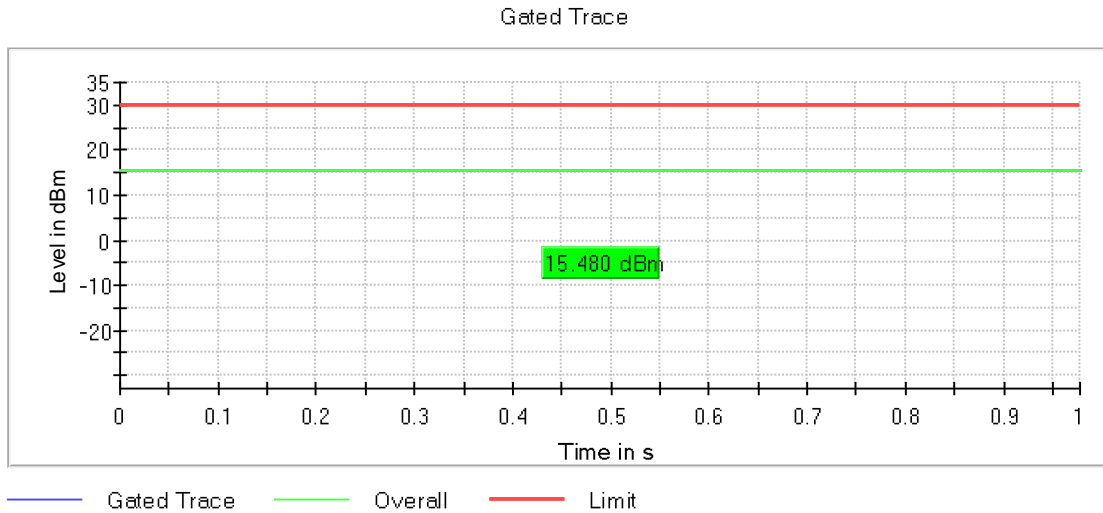


Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

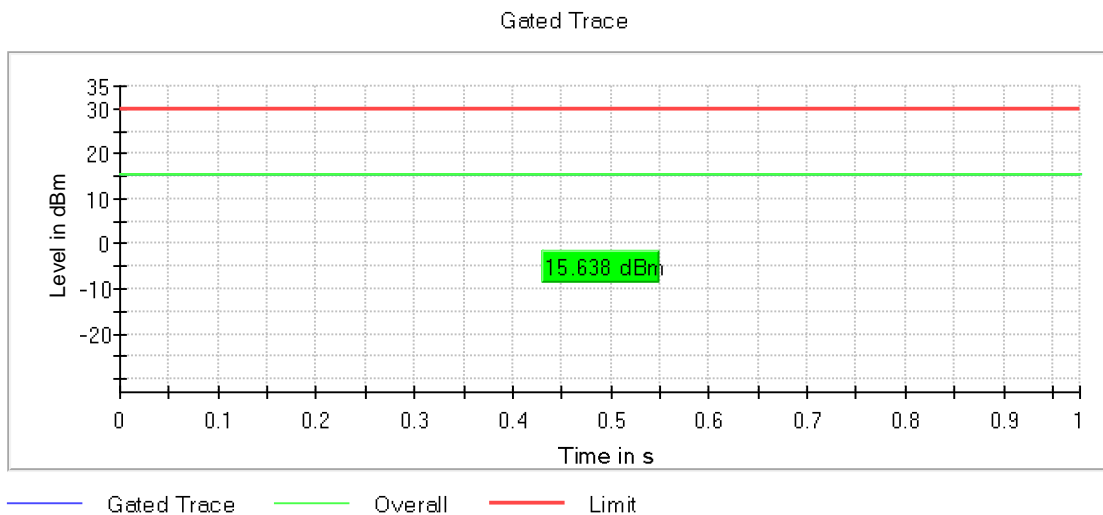


Active Port = 1, Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

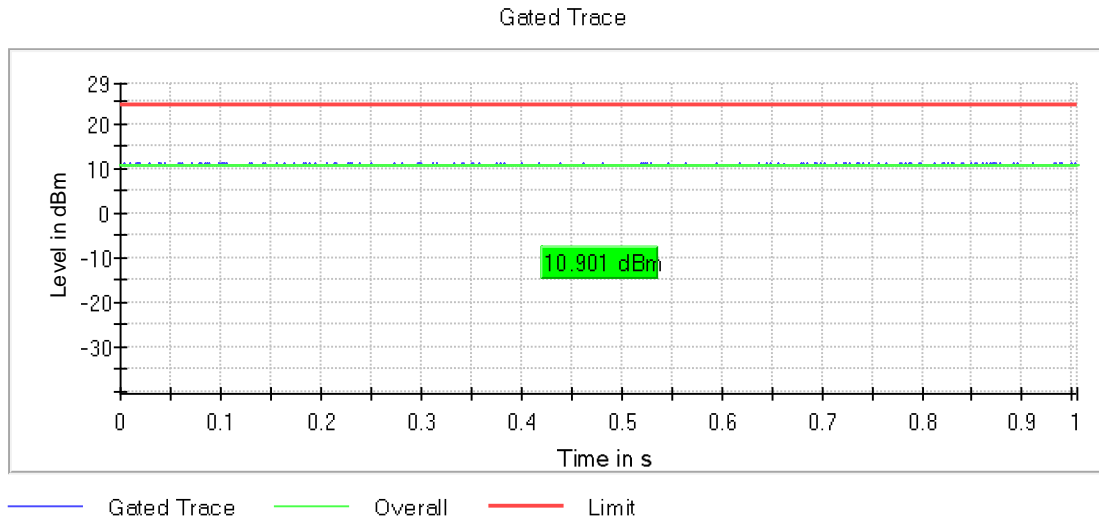

Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), TPC = No, Mode = SISO, Number of Transmission Chains = 1

Images:

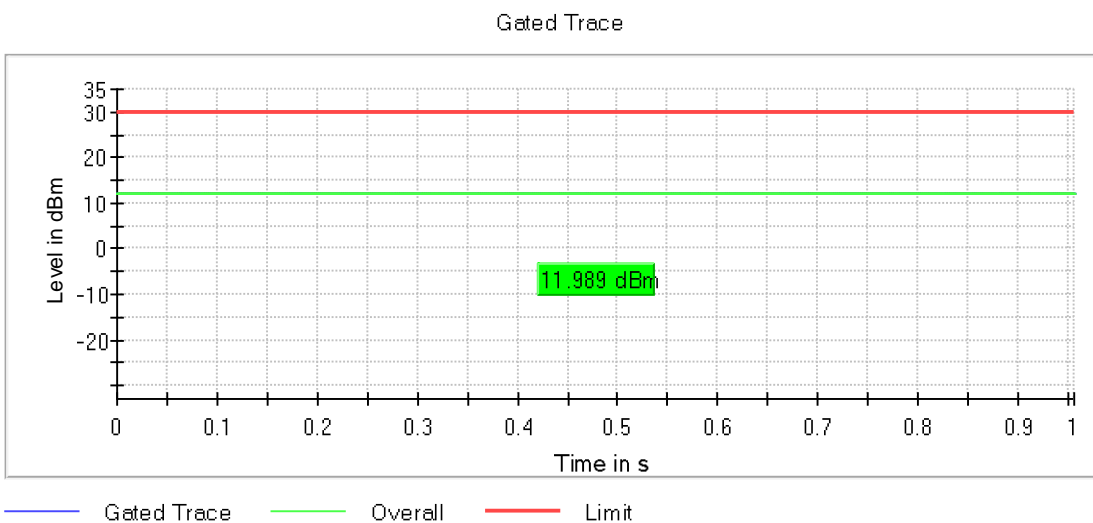

## Spectrum Analyzer Parameters

Setting	Instrument Value
Measurement Time	1.000 s
Points	1000000
Time resolution	1.000 $\mu$ s

## FCC 15.407 (a) / RSS-247 6.2 Maximum Power Spectral Density

### Limits

#### FCC 15.407:

For the band 5.15-5.25 GHz, The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### RSS-247:

For the 5.25-5.35 GHz, 5.470-5.6 GHz, and 5.650-5.725 GHz bands, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the band 5.725-5.850 GHz, the output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Note:

1. The following test results are shown based on KDB 662911 D01 Multiple Transmitter Output v02r01 E) 3) a) (ii) Measure and sum spectral maxima across the outputs as described in section E)2)b).
2. For 2Tx CDD MIMO modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)i), directional gain was calculated as follows:
  - For power spectral density (PSD) measurements:  
Directional gain PSD =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS})$  dBi  
NSS = 1 (worst case),  $N_{ANT} = 2$ ,  $G_{ANT} = +5$  dBi  
Directional gain PSD =  $2 + 10 \log(2/1) = 2 + 10 \log(2) = 5 + 3.01 = + 8.01$  dBi  
PSD Antenna Gain MIMO Chain 0 & 1: + 8.01 dBi

For MIMO CDD operation modes, the limit should be reduced by the amount in dB the antenna gain exceeds 6 dBi. In this case the values in the tables below include the 2.01 dB. due to the antenna gain calculations is 8.01 dBi.

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Freq (MHz)	PSD (dBm)
U-NII-1	1	5180.00000	5182.772277	4.209
		5200.00000	5202.574257	4.517
		5240.00000	5237.227723	4.999
U-NII-3	1	5745.00000	5742.425743	4.004
		5785.00000	5787.574257	3.835
		5825.00000	5817.475248	1.903

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Freq (MHz)	PSD (dBm)
U-NII-1	1	5180.00000	5182.574257	3.761
		5200.00000	5202.376238	4.182
		5240.00000	5242.376238	3.774
U-NII-3	1	5745.00000	5742.623762	3.905
		5785.00000	5792.524752	3.537
		5825.00000	5822.623762	1.972

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Freq (MHz)	PSD (dBm)
U-NII-1	1	5190.00000	5195.148515	1.212
		5230.00000	5225.247525	2.010
U-NII-3	1	5755.00000	5739.875000	0.453
		5795.00000	5800.125000	0.718

Modulation: 802.11ac VHT20 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Freq (MHz)	PSD (dBm)
U-NII-1	1	5180.00000	5182.376238	3.986
		5200.00000	5202.178218	4.334
		5240.00000	5237.227723	3.889
U-NII-3	1	5745.00000	5742.623762	4.194
		5785.00000	5792.524752	3.765
		5825.00000	5822.623762	2.313

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Freq (MHz)	PSD (dBm)
U-NII-1	1	5190.00000	5195.544554	1.351
		5230.00000	5226.039604	1.147
U-NII-3	1	5755.00000	5739.875000	0.470
		5795.00000	5800.125000	0.643

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Freq (MHz)	PSD (dBm)
U-NII-1	1	5210.00000	5222.750000	-6.553
U-NII-3	1	5775.00000	5806.375000	-6.200


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1**

**Images:**

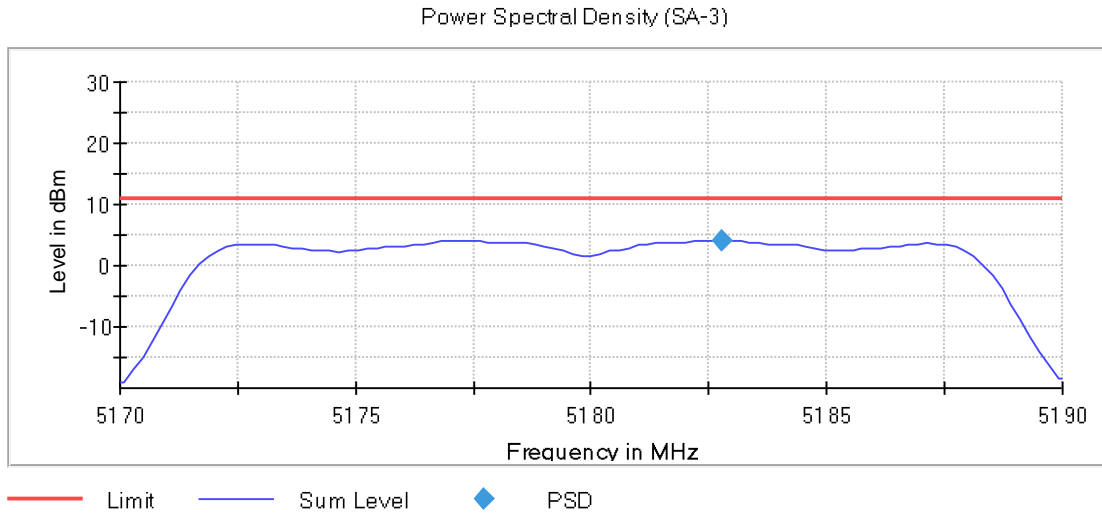

**Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1**


**Images:**

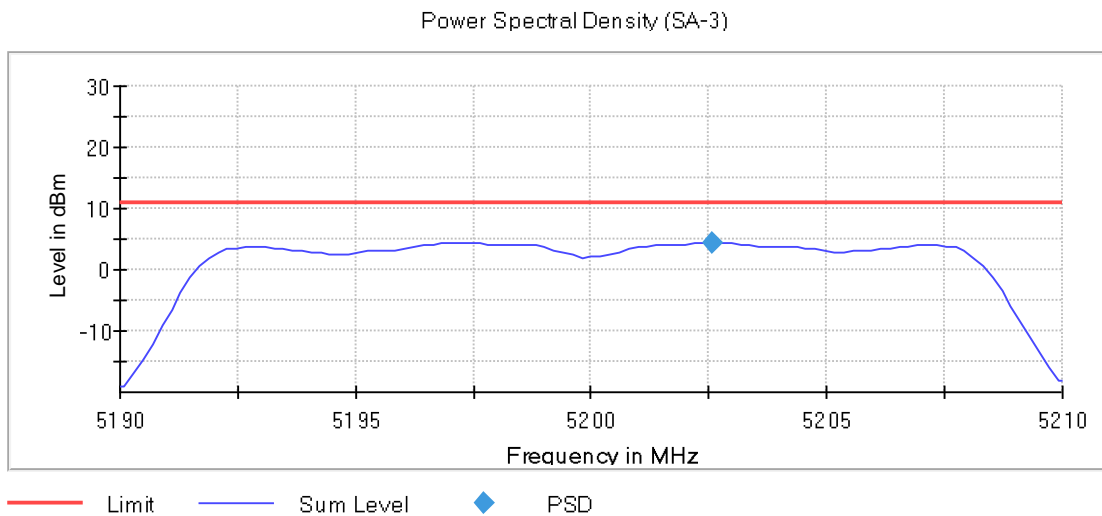




Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

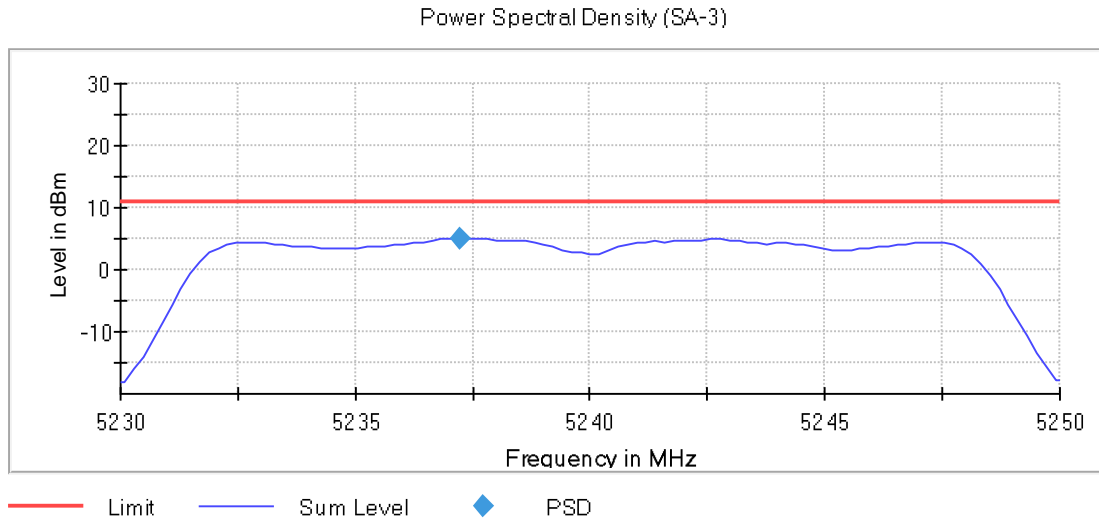


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

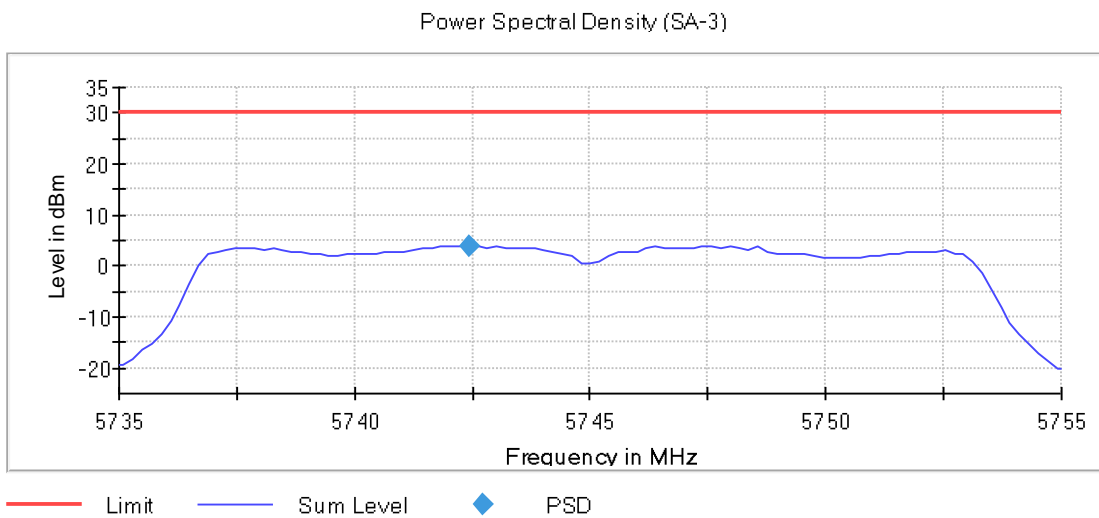


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

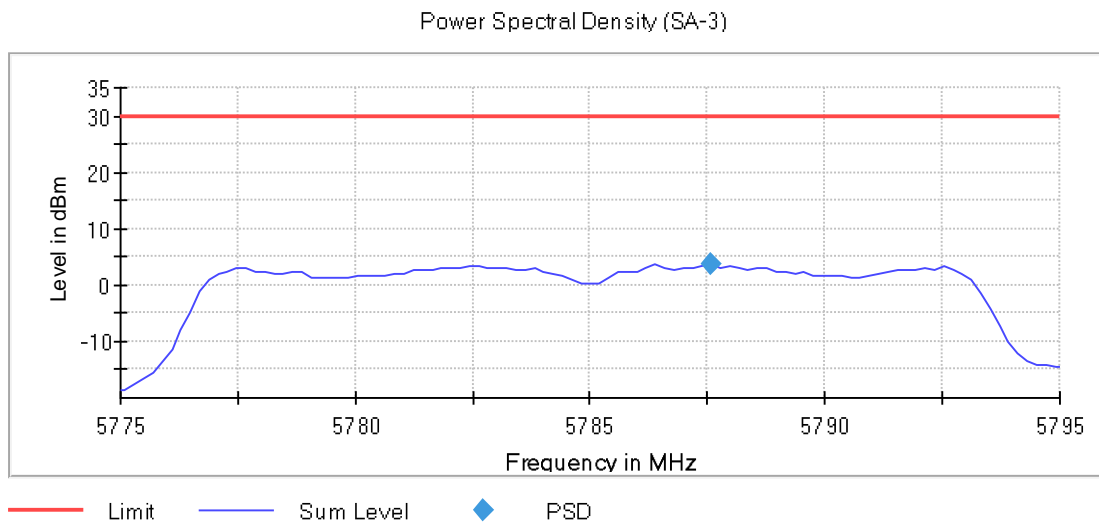


Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11a (OFDM 6 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

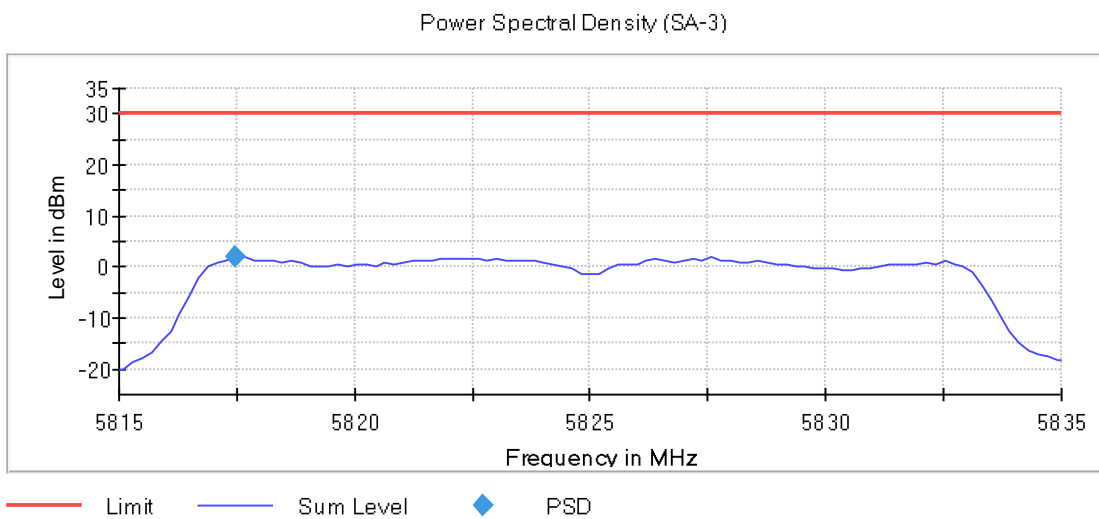


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

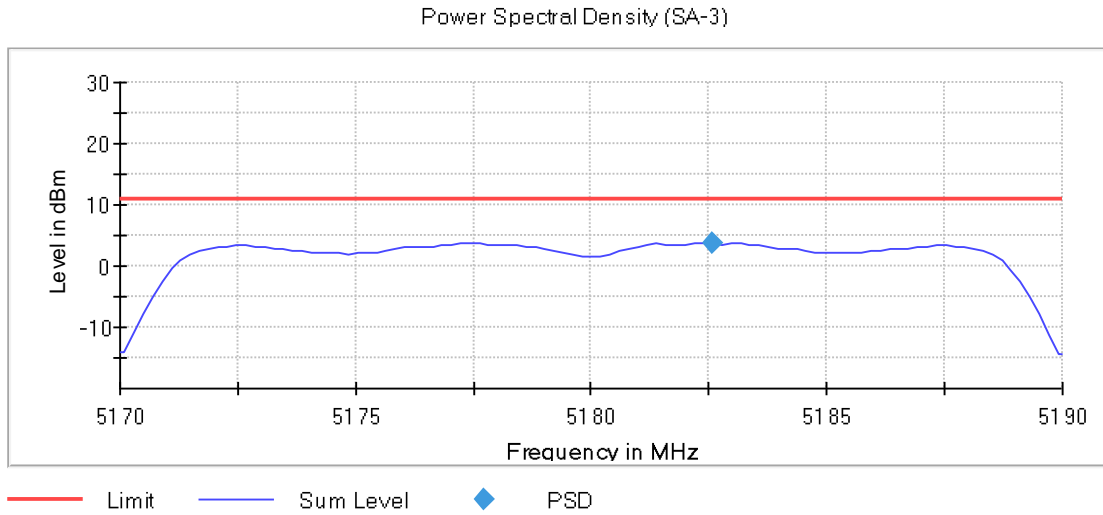


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

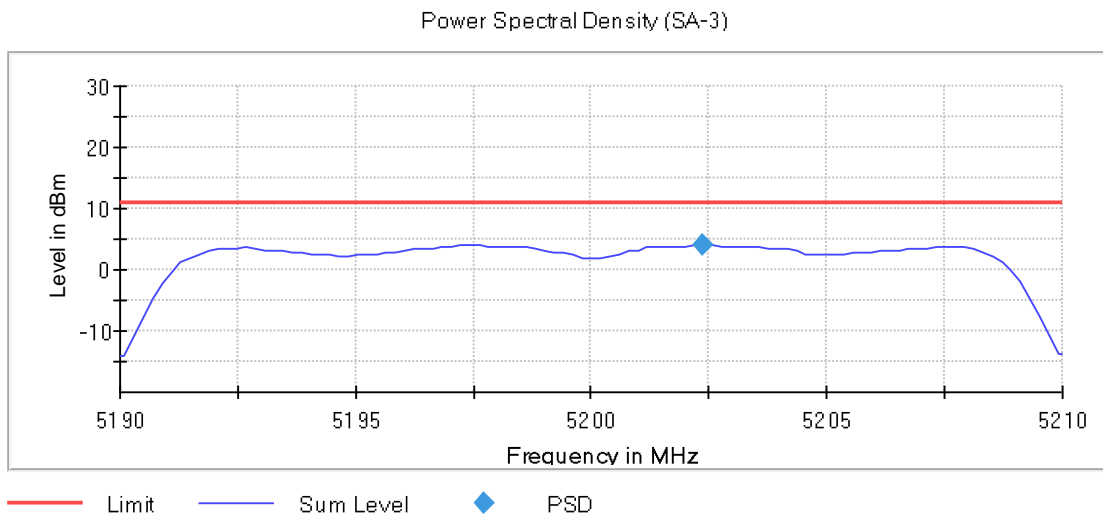


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

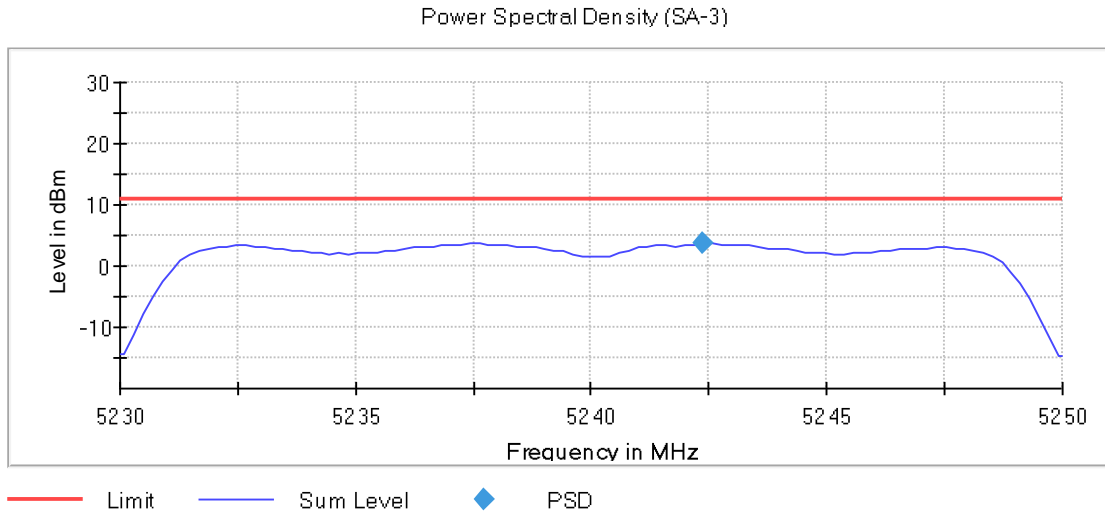


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

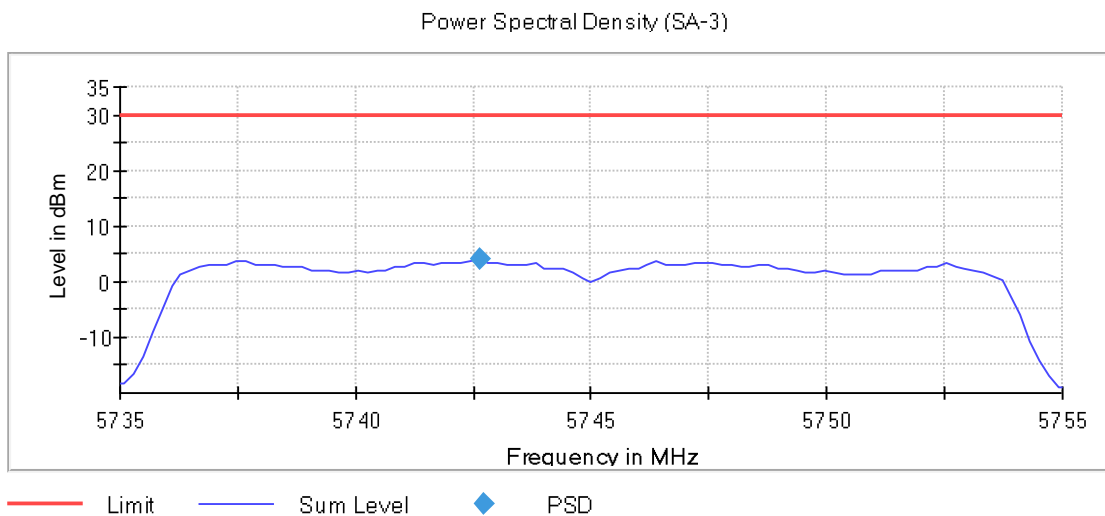


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

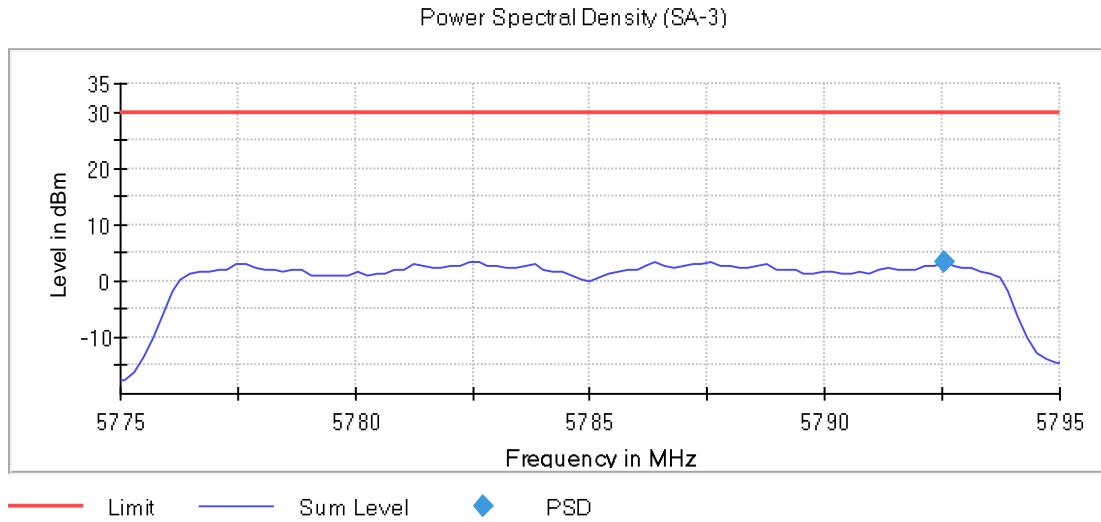


Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

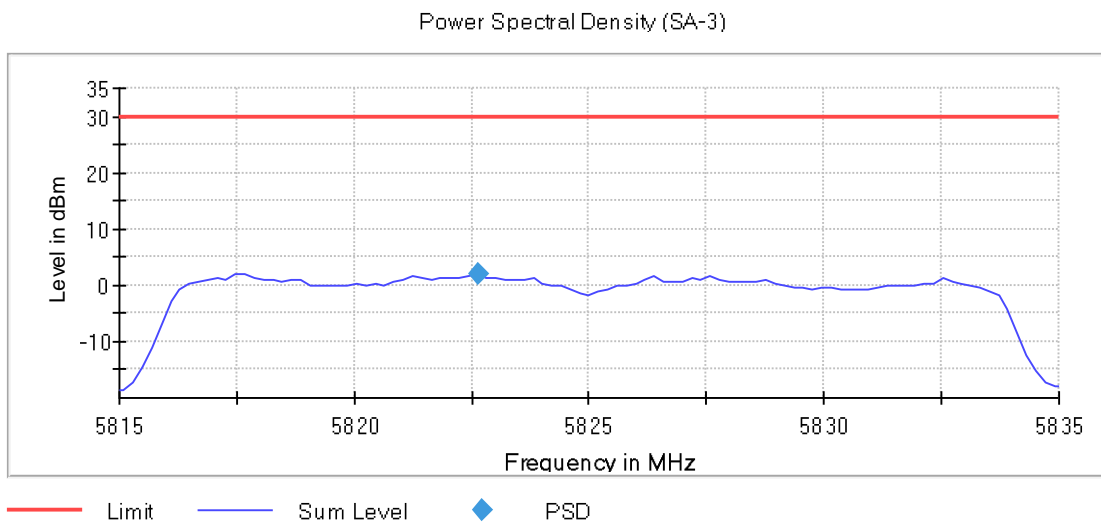


Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

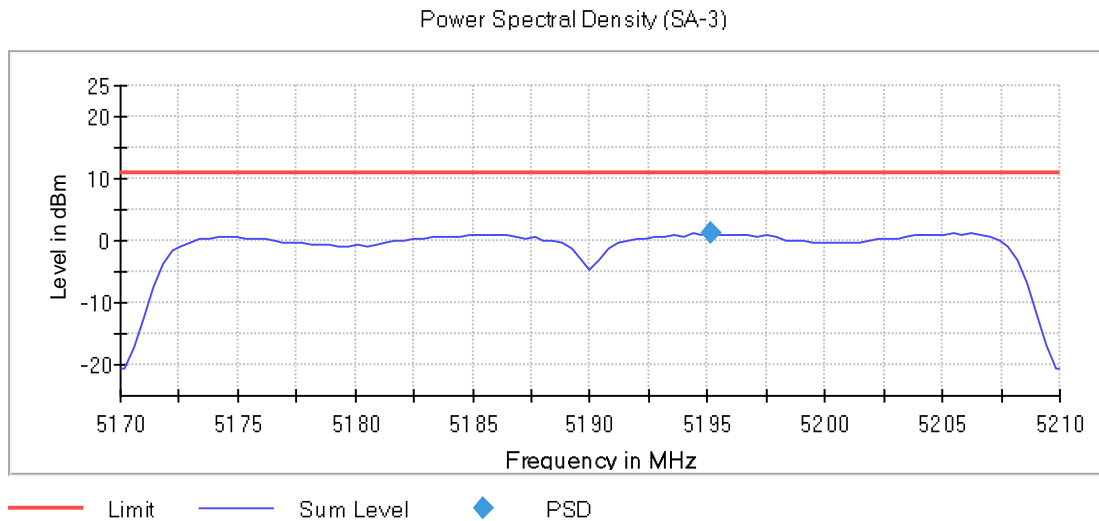


Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

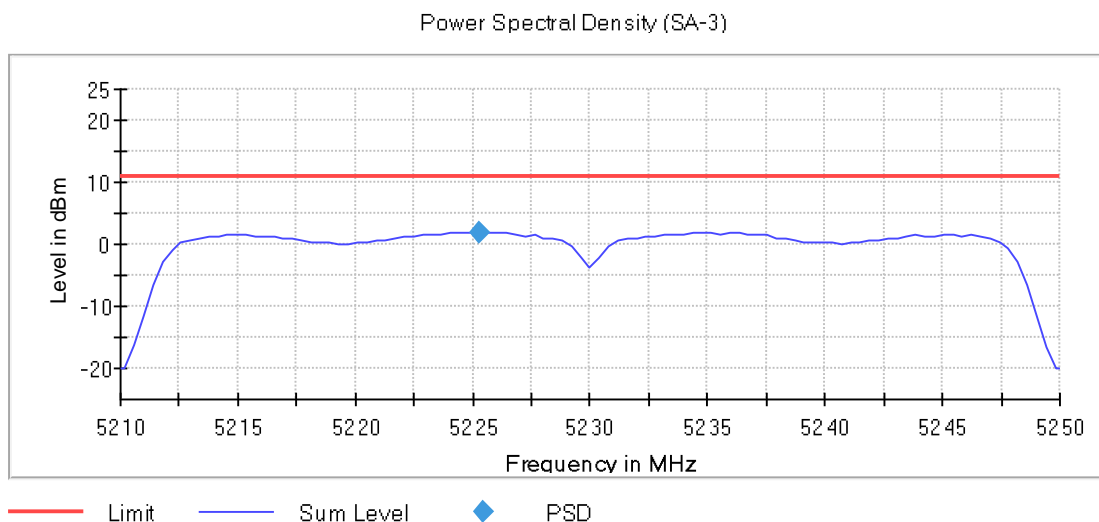


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

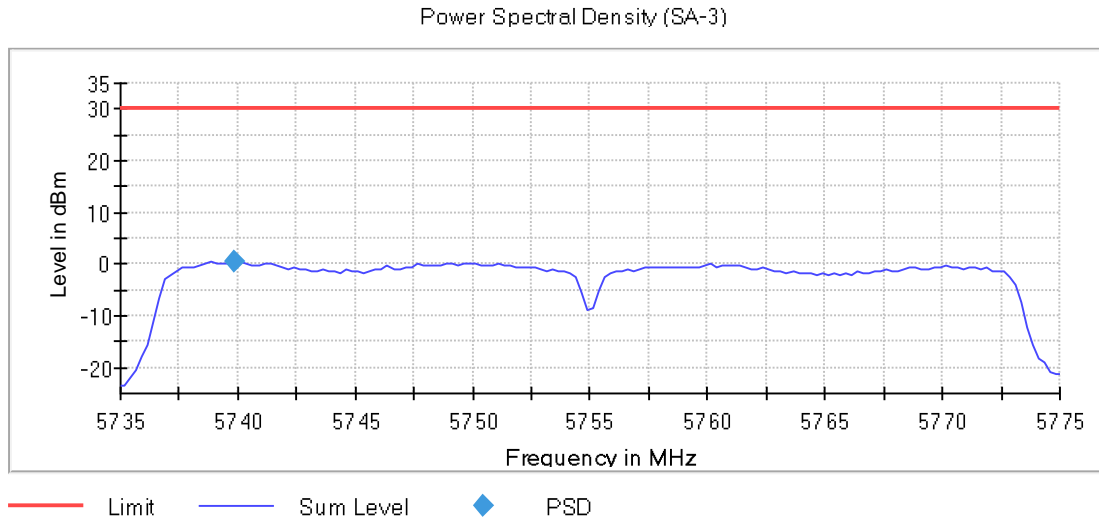


Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

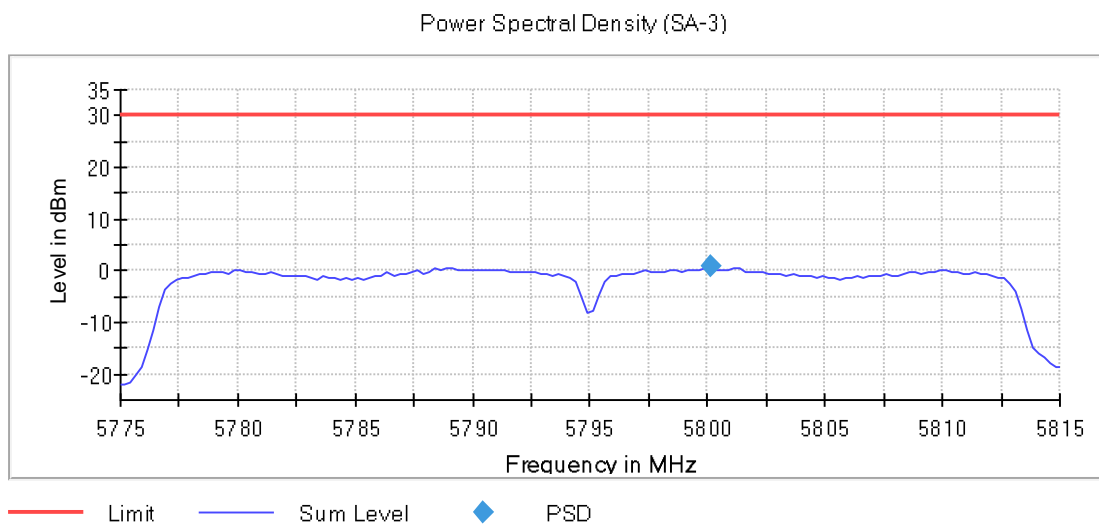


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
MODE = SISO, Number of Transmission Chains = 1**

Images:

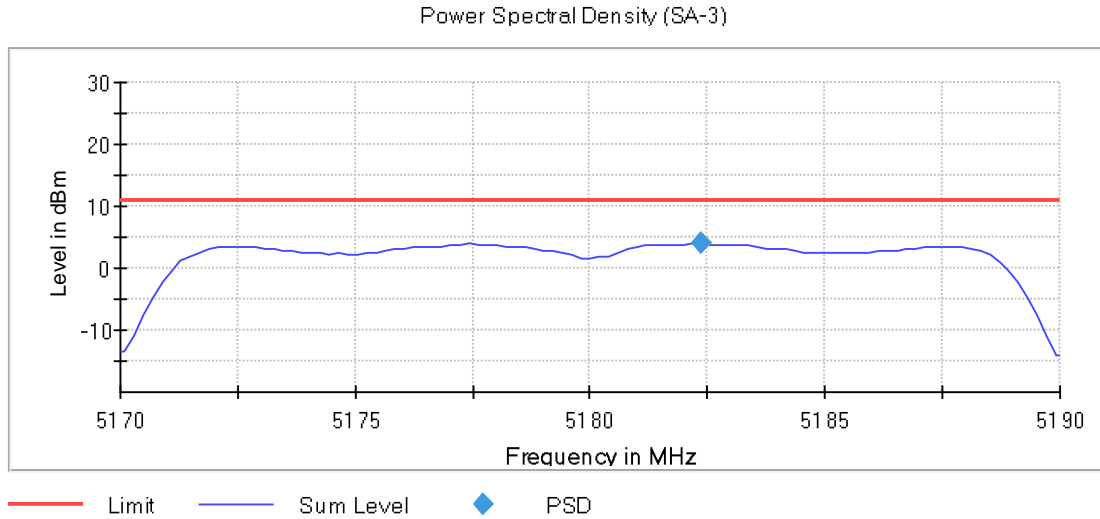

**Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
MODE = SISO, Number of Transmission Chains = 1**


Images:

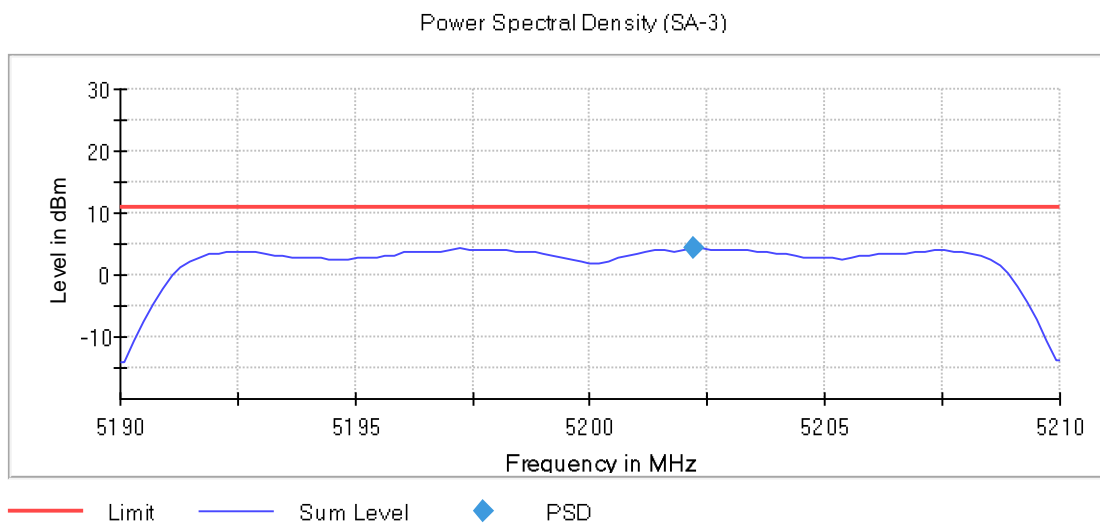




Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
MODE = SISO, Number of Transmission Chains = 1

Images:

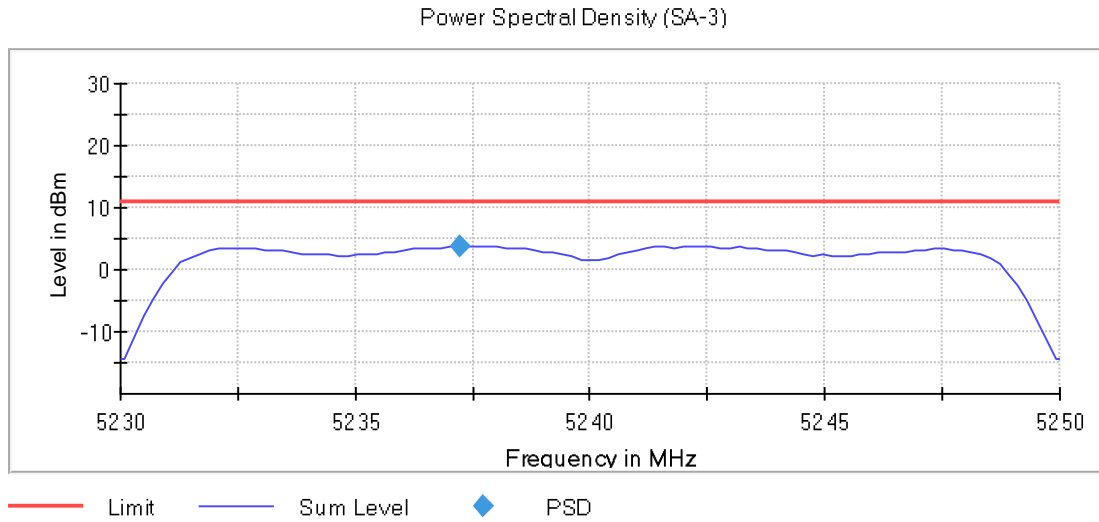


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
MODE = SISO, Number of Transmission Chains = 1

Images:

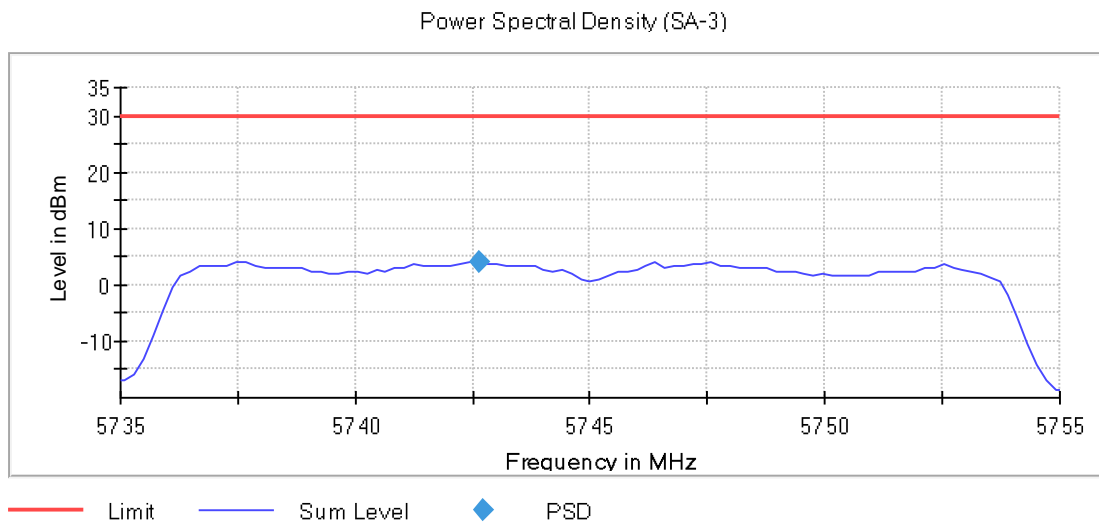


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
MODE = SISO, Number of Transmission Chains = 1

Images:

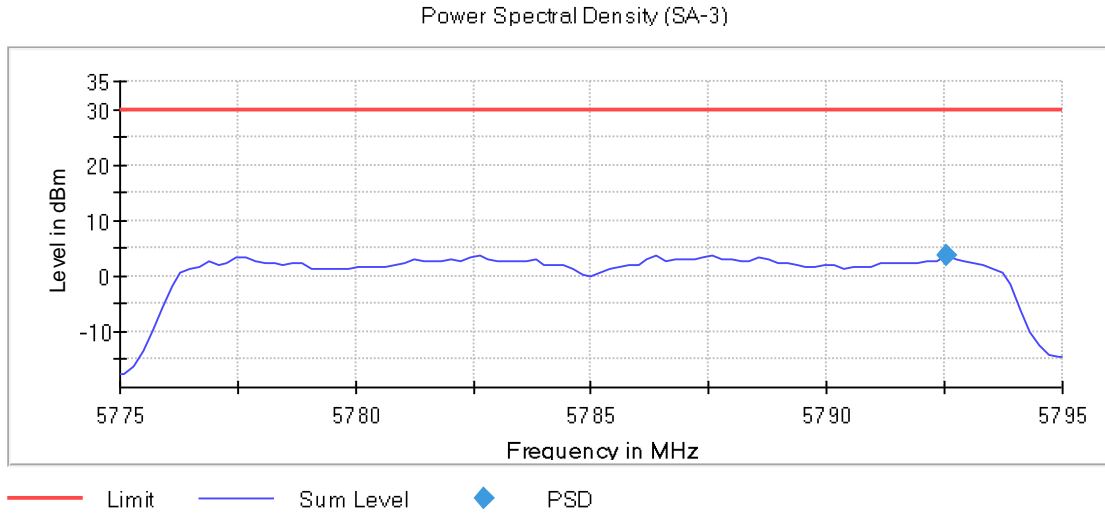


Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), TPC = No,  
MODE = SISO, Number of Transmission Chains = 1

Images:

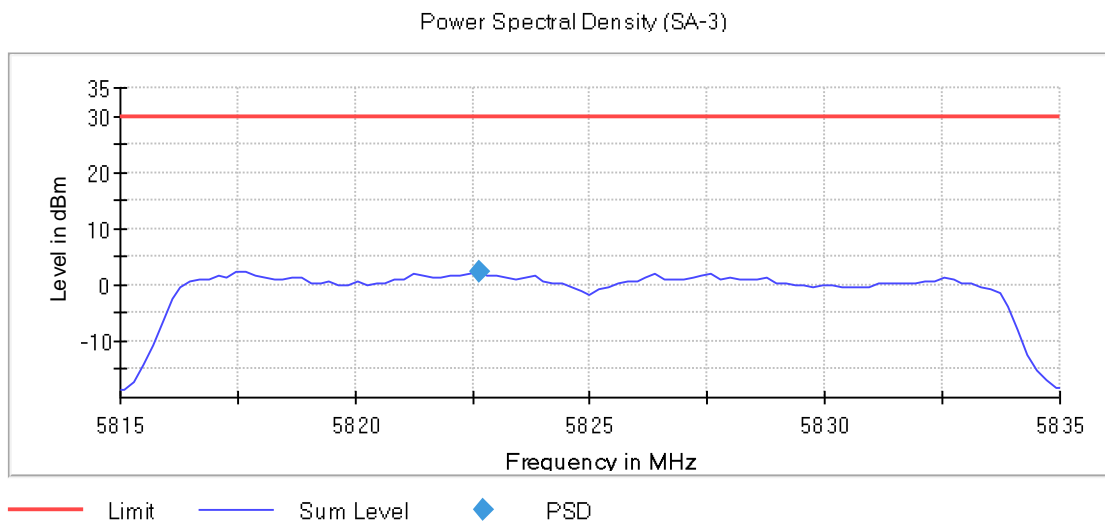


Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

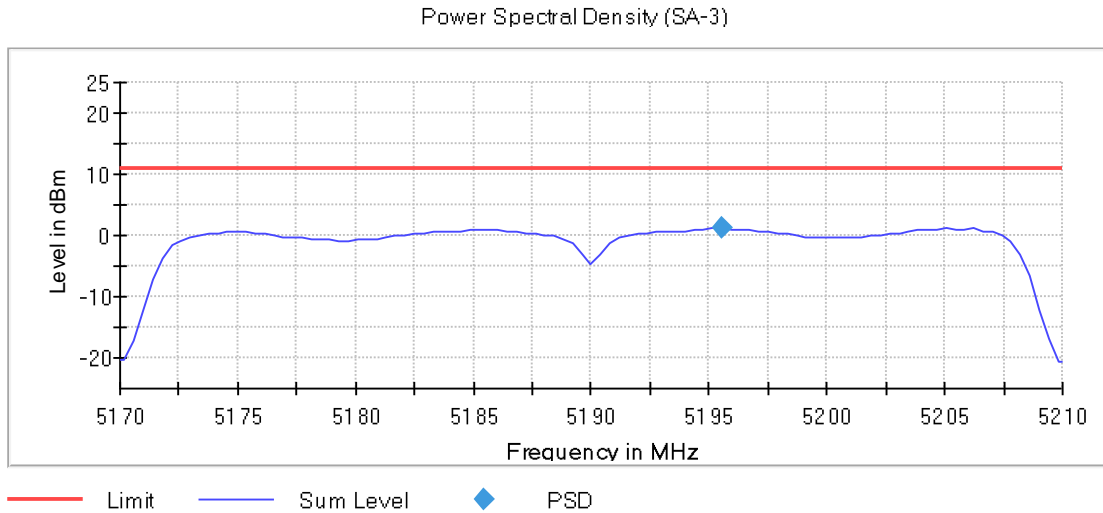


Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

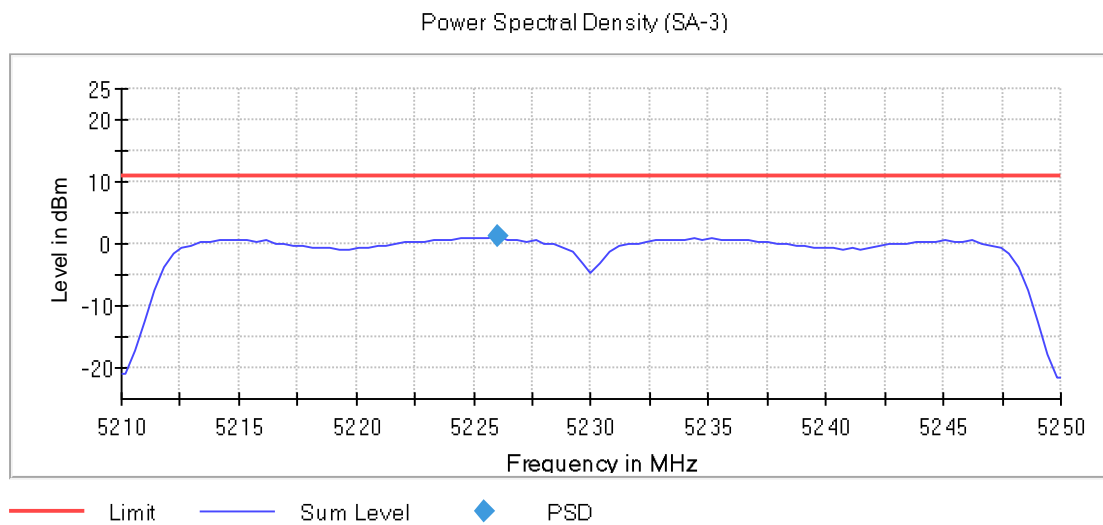


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

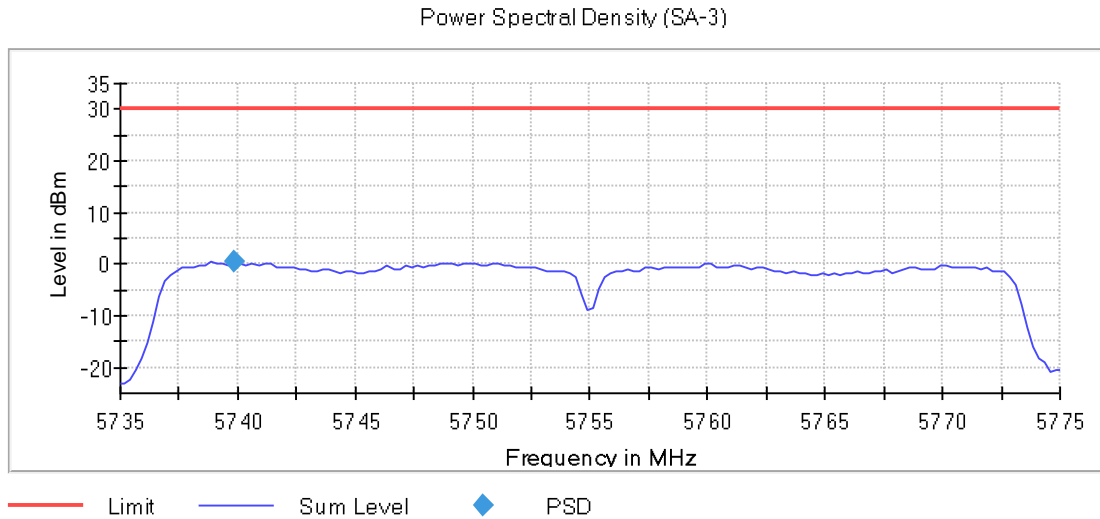


Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

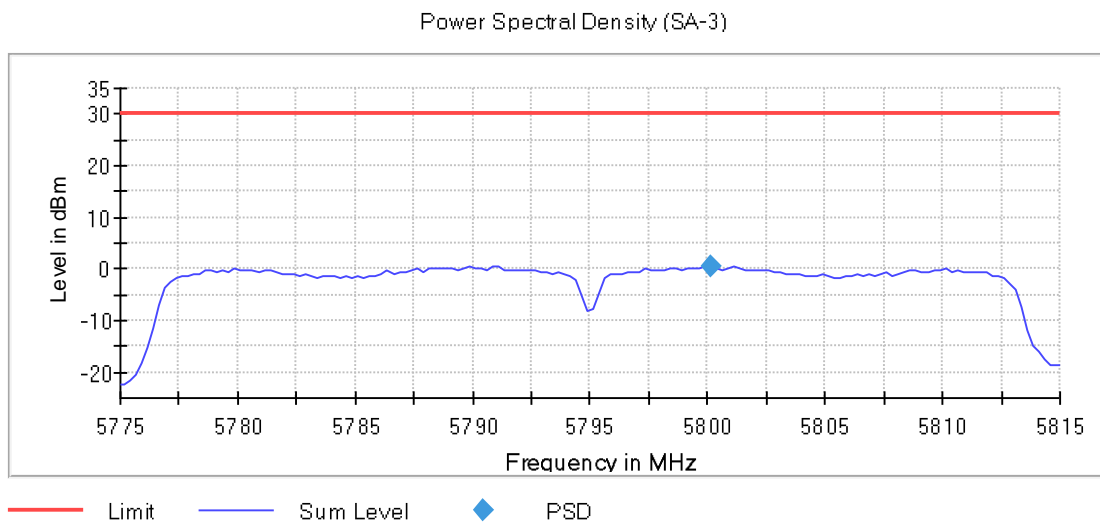


Active Port = 1, Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

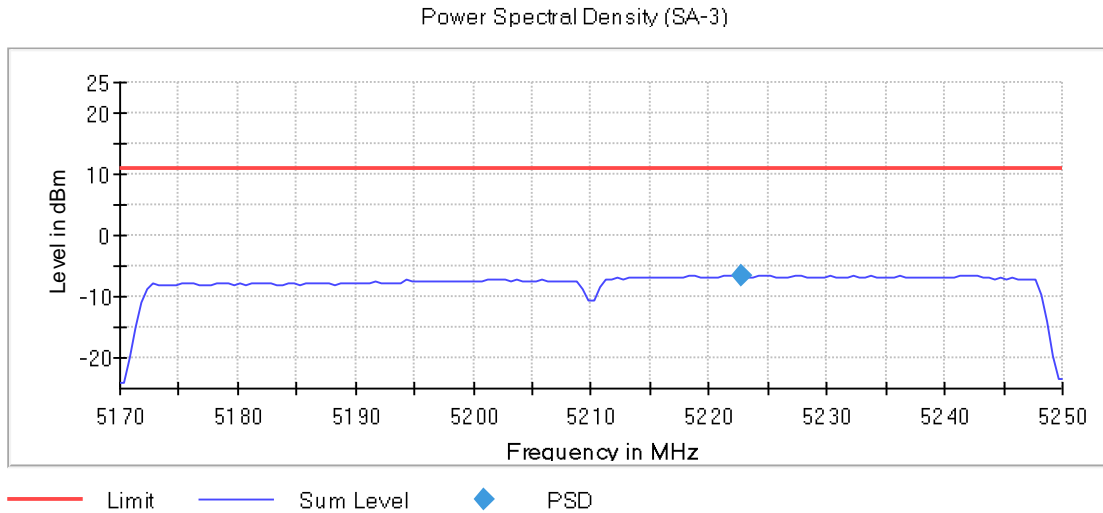

Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), TPC = No, MODE = SISO, Number of Transmission Chains = 1

Images:

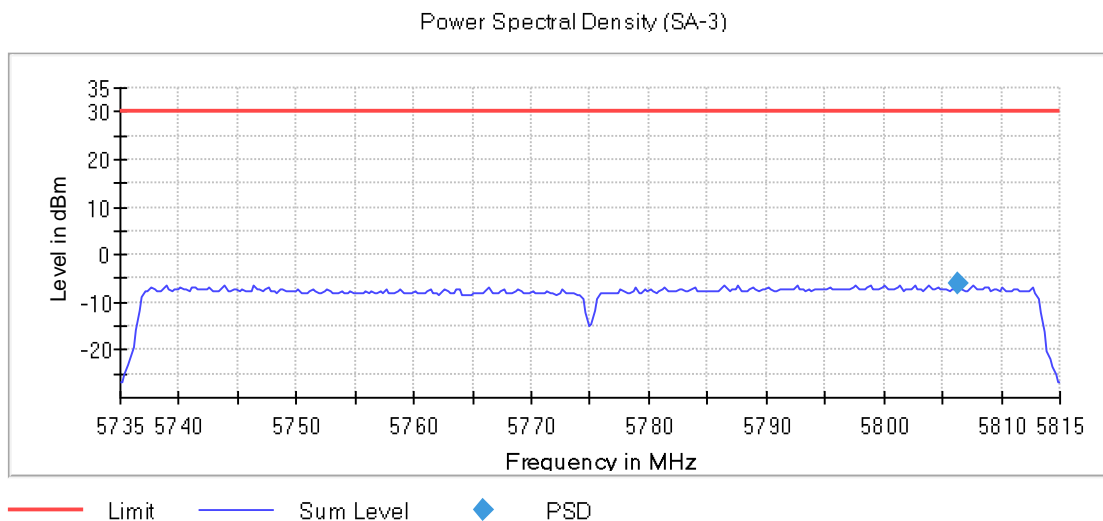

### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.17000 GHz	5.19000 GHz	5.23000 GHz
Stop Frequency	5.19000 GHz	5.21000 GHz	5.25000 GHz
Span	20.000 MHz	20.000 MHz	20.000 MHz
RBW	1.000 MHz	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz	3.000 MHz
Sweep Points	101	101	101
Sweep time	11.000 µs	11.000 µs	11.000 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	RMS	RMS	RMS
Sweep Count	0	0	0
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	13 / max. 15	15 / max. 15	13 / max. 15
Stable	3 / 3	1 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB	0.00 dB

### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.73500 GHz	5.77500 GHz	5.81500 GHz
Stop Frequency	5.75500 GHz	5.79500 GHz	5.83500 GHz
Span	20.000 MHz	20.000 MHz	20.000 MHz
RBW	500.000 kHz	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz	2.000 MHz
Sweep Points	101	101	101
Sweep time	11.000 µs	11.000 µs	11.000 µs
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	RMS	RMS	RMS
Sweep Count	0	0	0
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	15 / max. 15	15 / max. 15	15 / max. 15
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB	0.00 dB

## FCC 2.1049 / RSS-Gen 6.7 99% Occupied Bandwidth

### Specification:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

The following conditions shall be observed for measuring the occupied bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

**RESULTS:**

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Occ Ch BW (MHz)
U-NII-1	1	5180.00000	16.700
		5200.00000	16.700
		5240.00000	16.600
U-NII-3	1	5745.00000	16.700
		5785.00000	18.800
		5825.00000	17.200

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Occ Ch BW (MHz)
U-NII-1	1	5180.00000	17.700
		5200.00000	17.700
		5240.00000	17.800
U-NII-3	1	5745.00000	17.800
		5785.00000	20.000
		5825.00000	18.300

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	Occ Ch BW (MHz)
U-NII-1	1	5190.00000	36.500
		5230.00000	36.250
U-NII-3	1	5755.00000	37.000
		5795.00000	38.500

Modulation: 802.11ac VHT20 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Occ Ch BW (MHz)
U-NII-1	1	5180.00000	17.700
		5200.00000	17.700
		5240.00000	17.700
U-NII-3	1	5745.00000	17.800
		5785.00000	19.400



Band	Port	Freq (MHz)	Occ Ch BW (MHz)
		5825.00000	18.000

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Occ Ch BW (MHz)
U-NII-1	1	5190.00000	36.500
		5230.00000	36.250
U-NII-3	1	5755.00000	37.000
		5795.00000	38.250

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	Occ Ch BW (MHz)
U-NII-1	1	5210.00000	76.500
U-NII-3	1	5775.00000	77.500


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

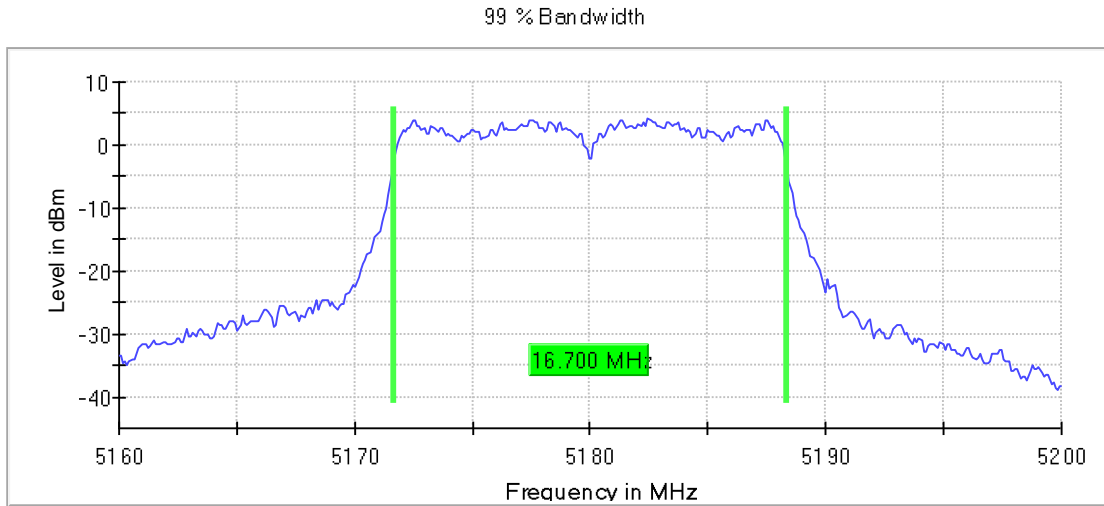


**Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

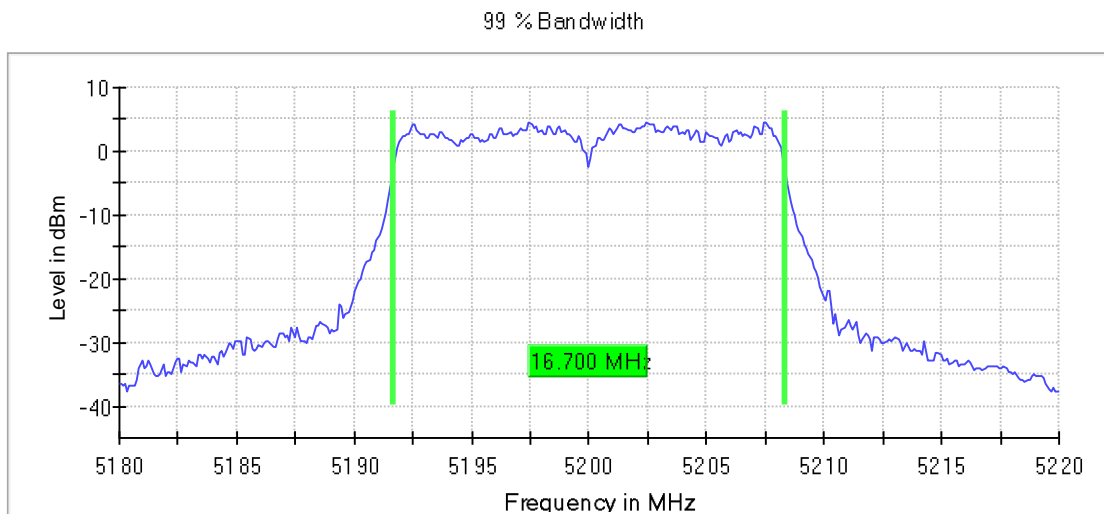


**Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

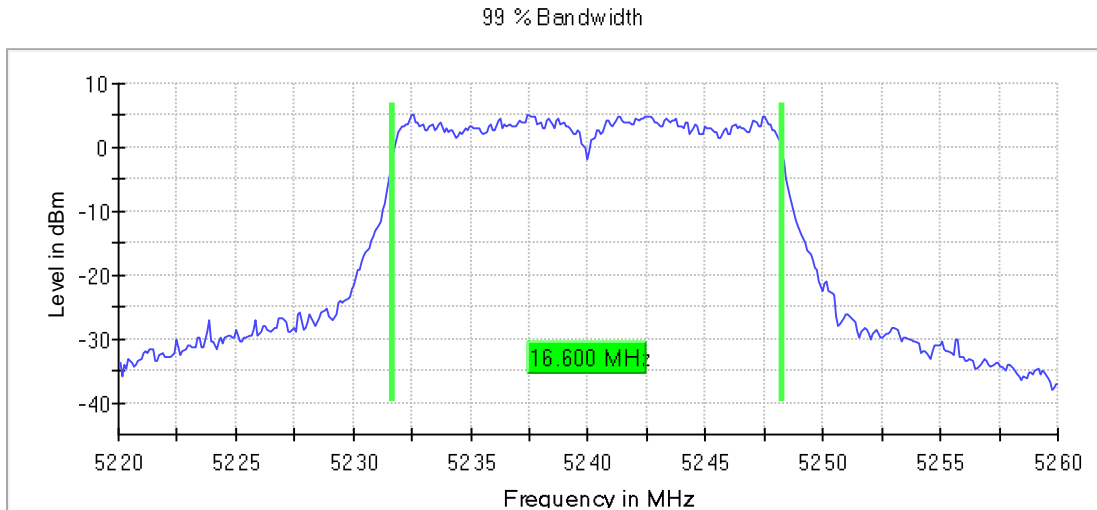


**Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

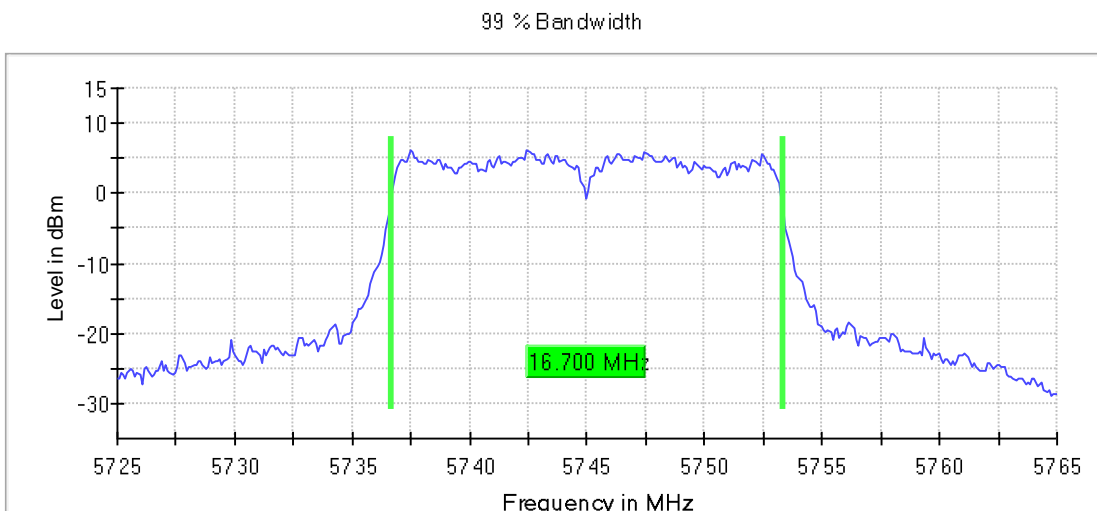


**Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

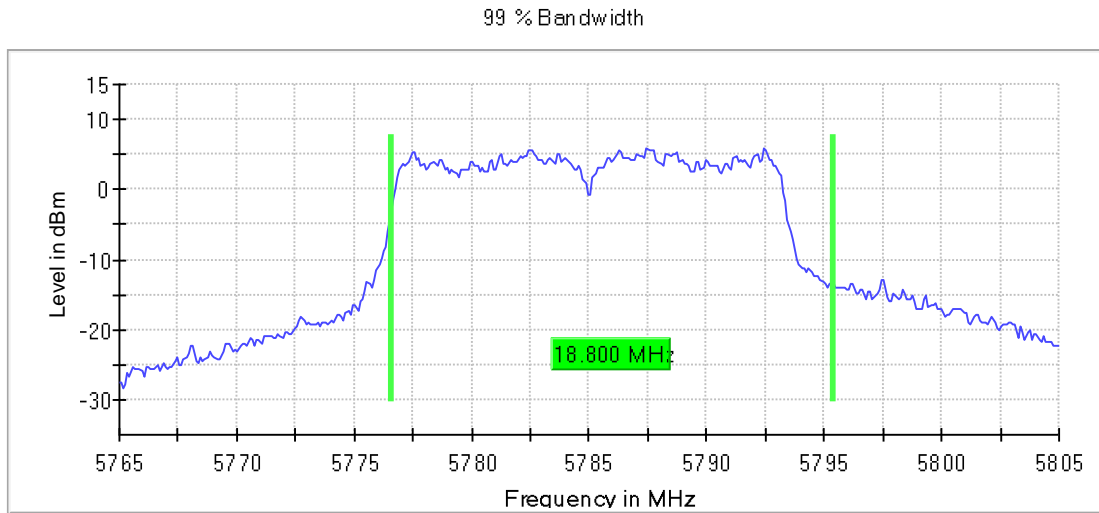


**Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

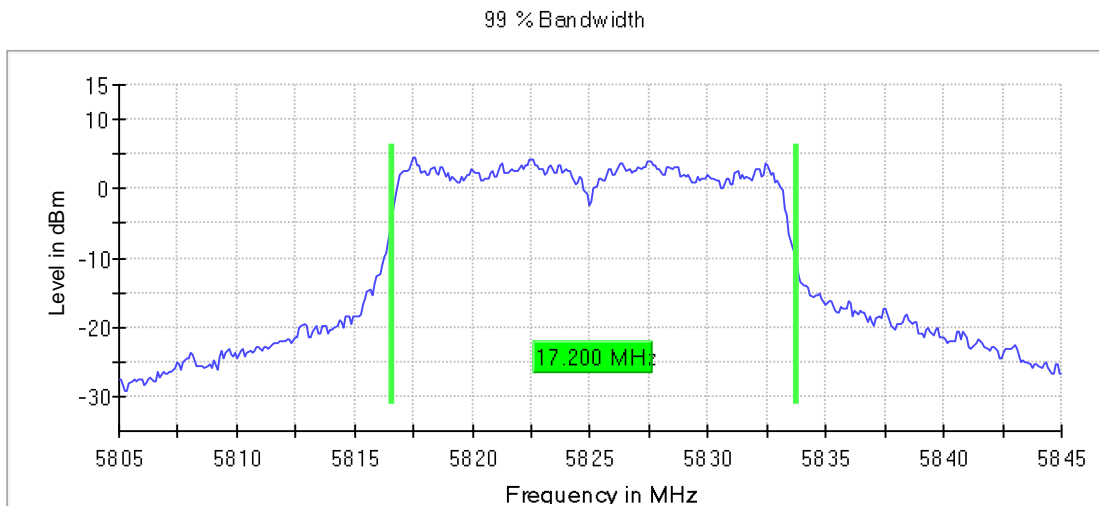


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

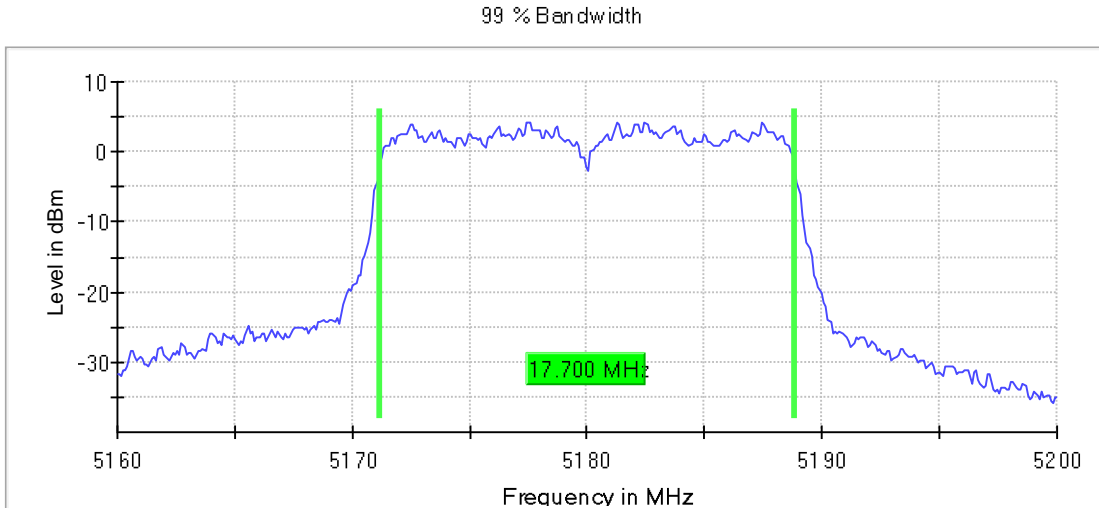


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

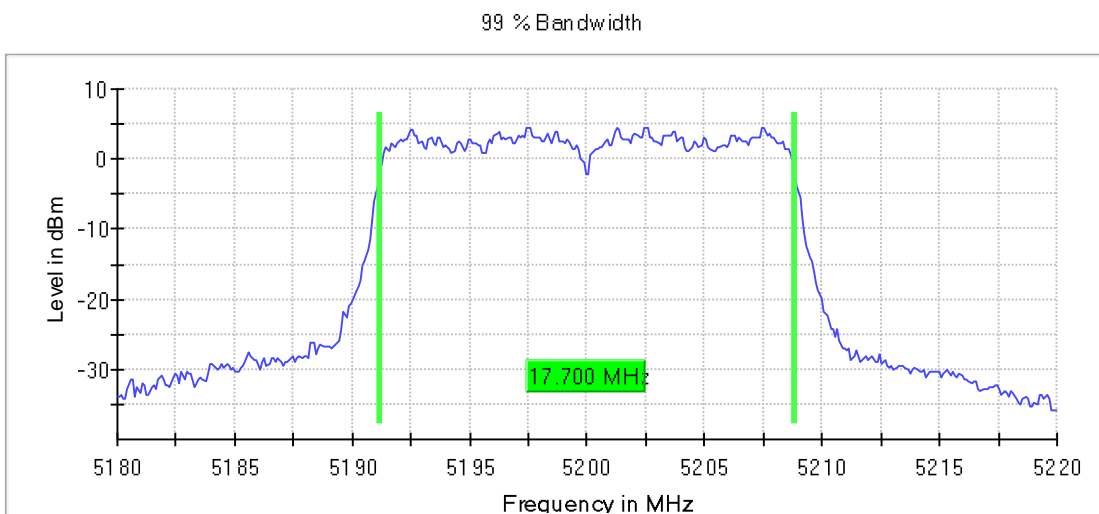


**Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

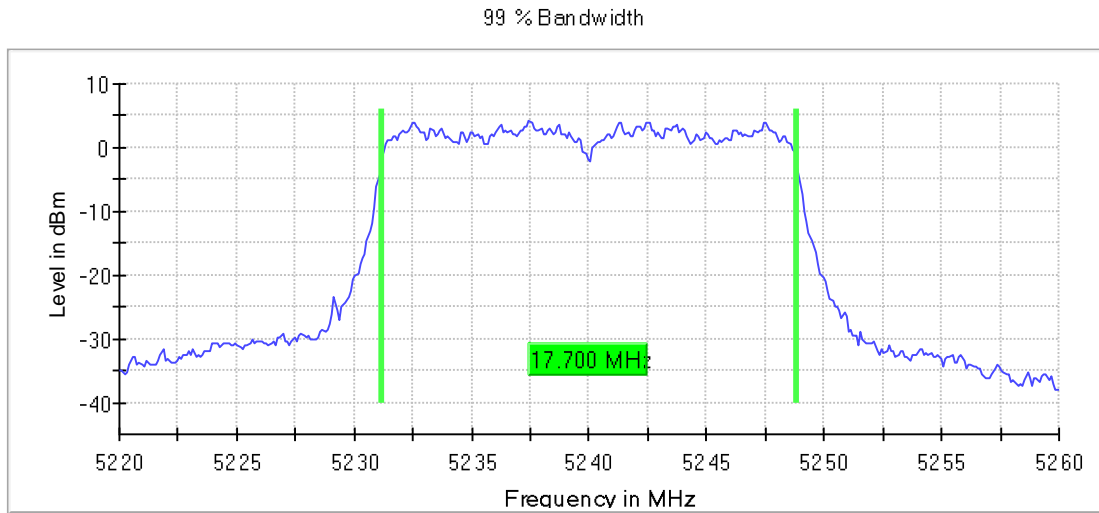


**Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

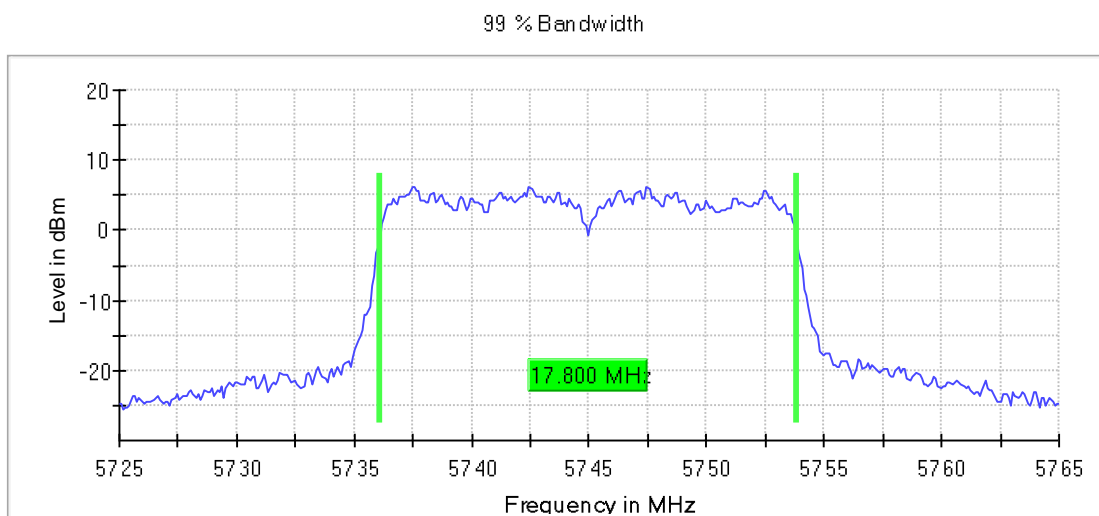


**Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

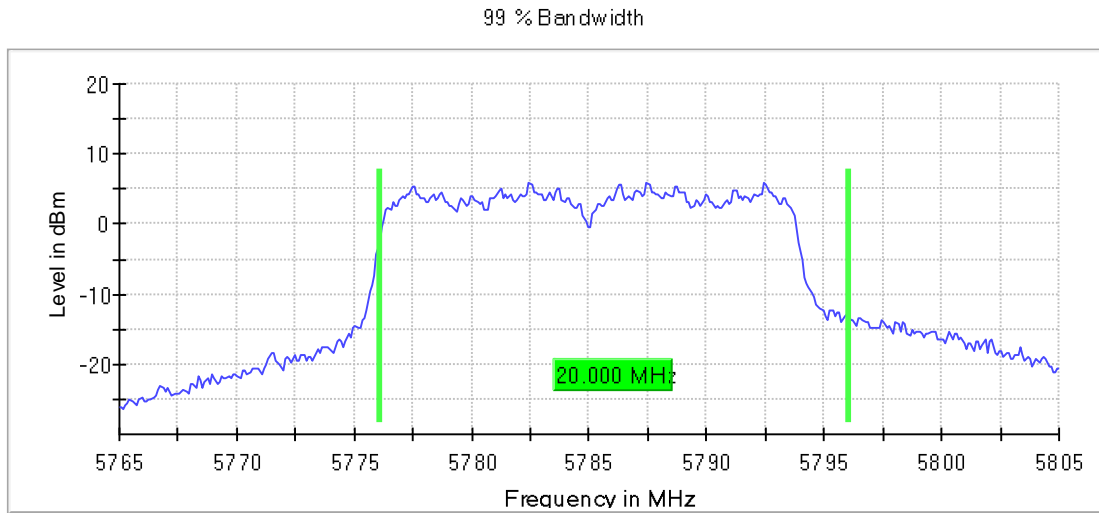


**Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

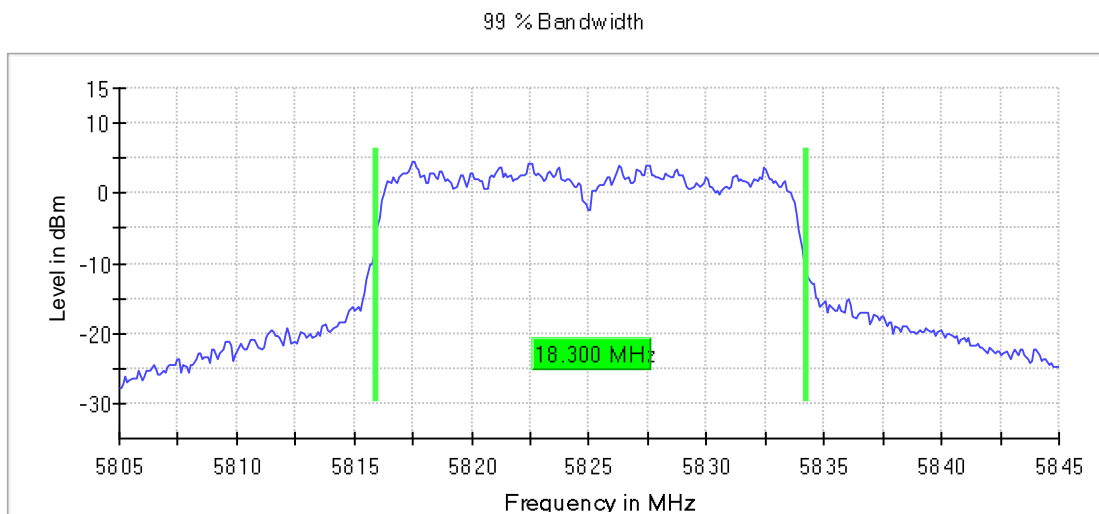


**Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

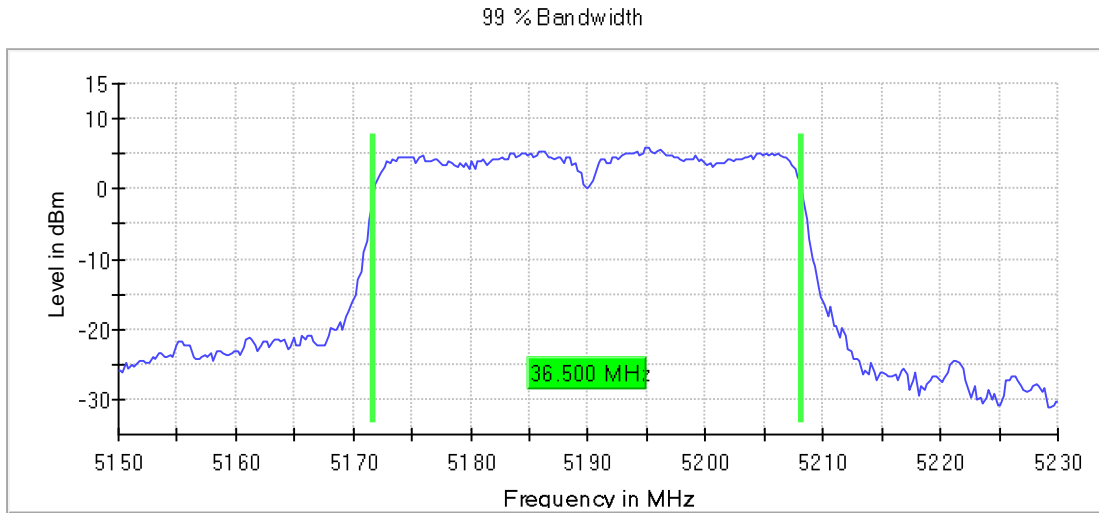

**Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**


**Images:**

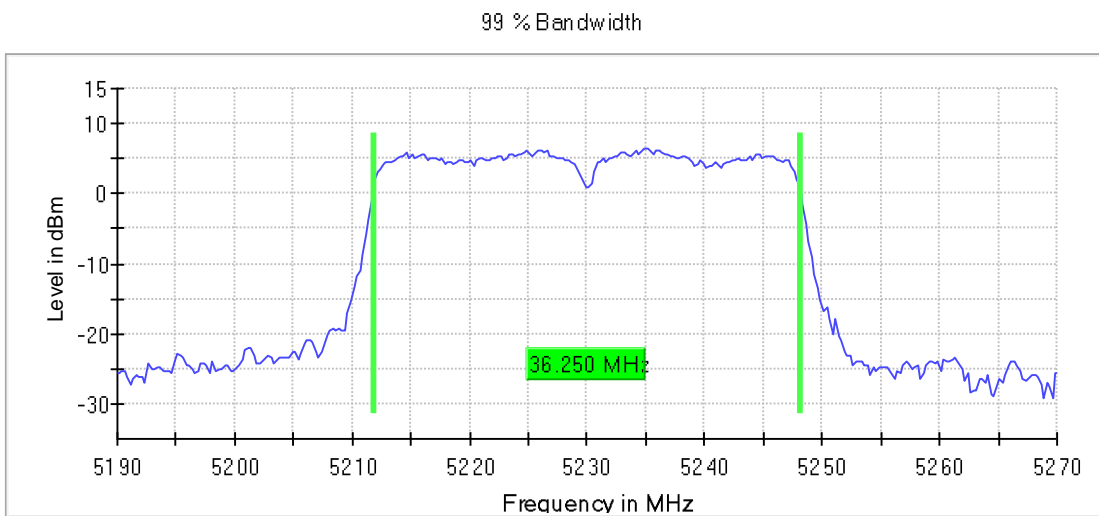




**Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

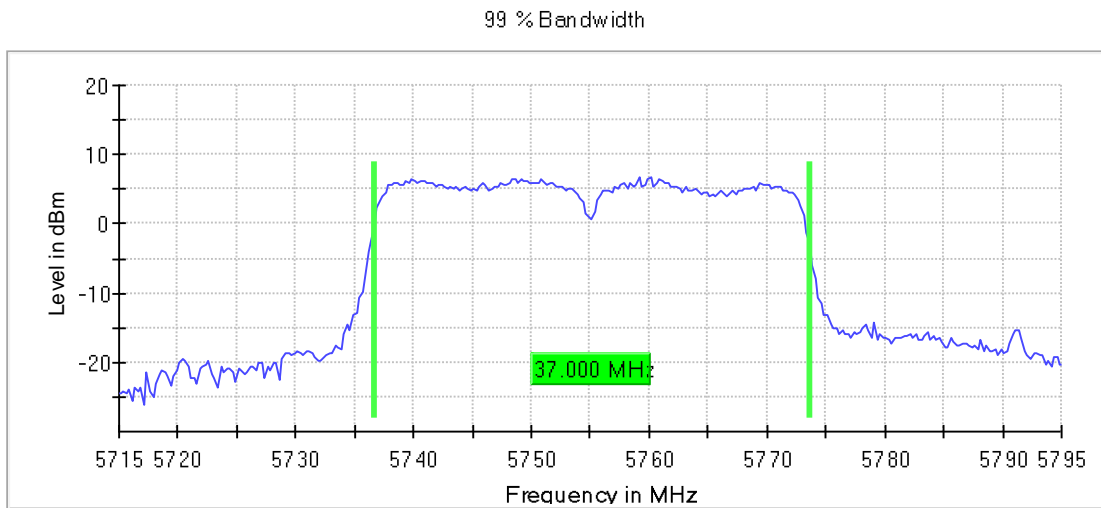


**Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

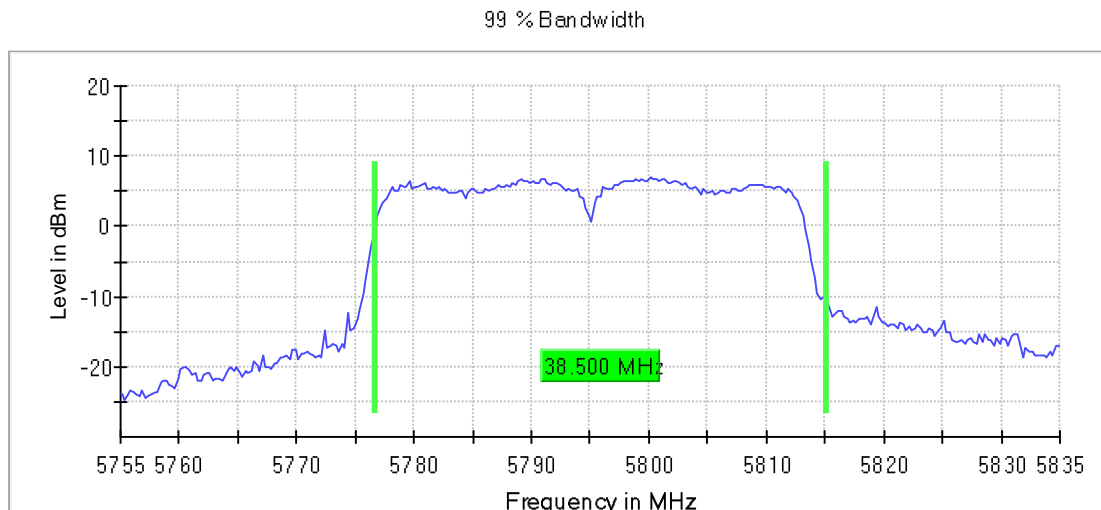


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

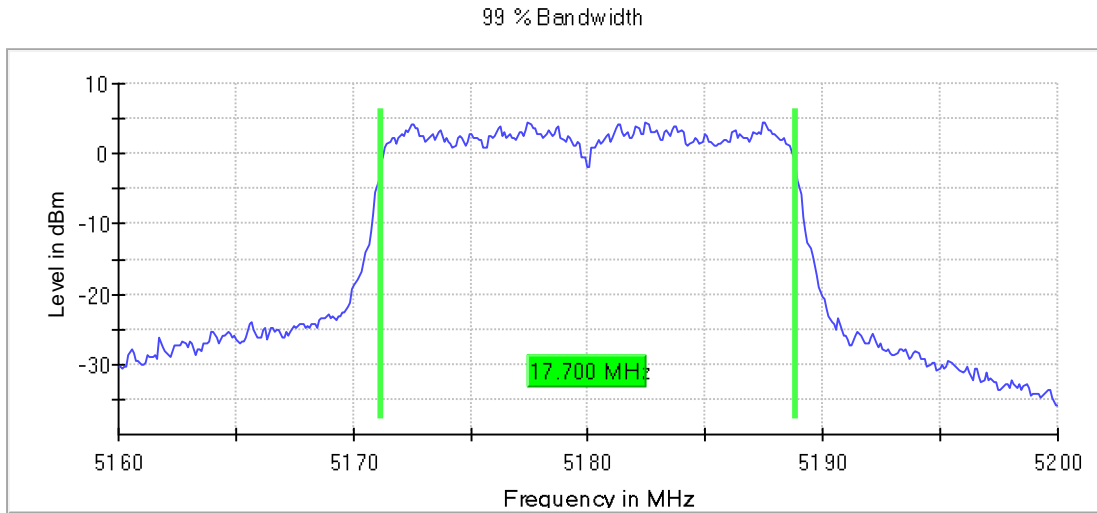


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

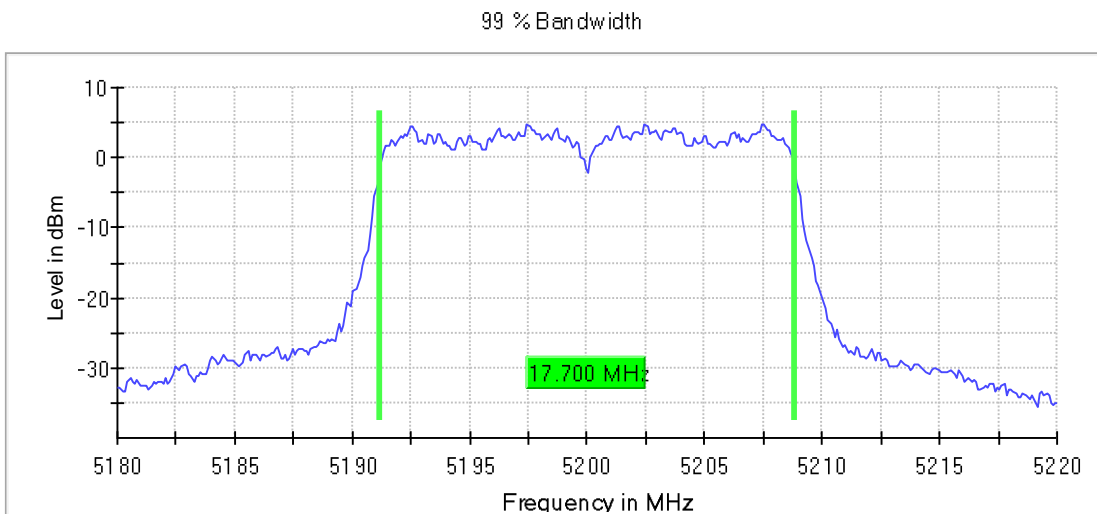


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

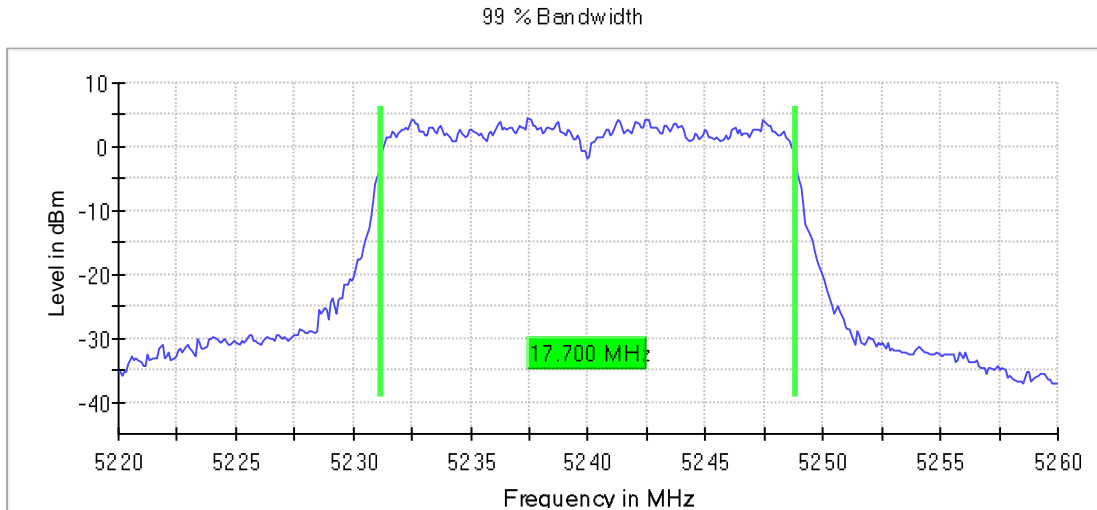


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

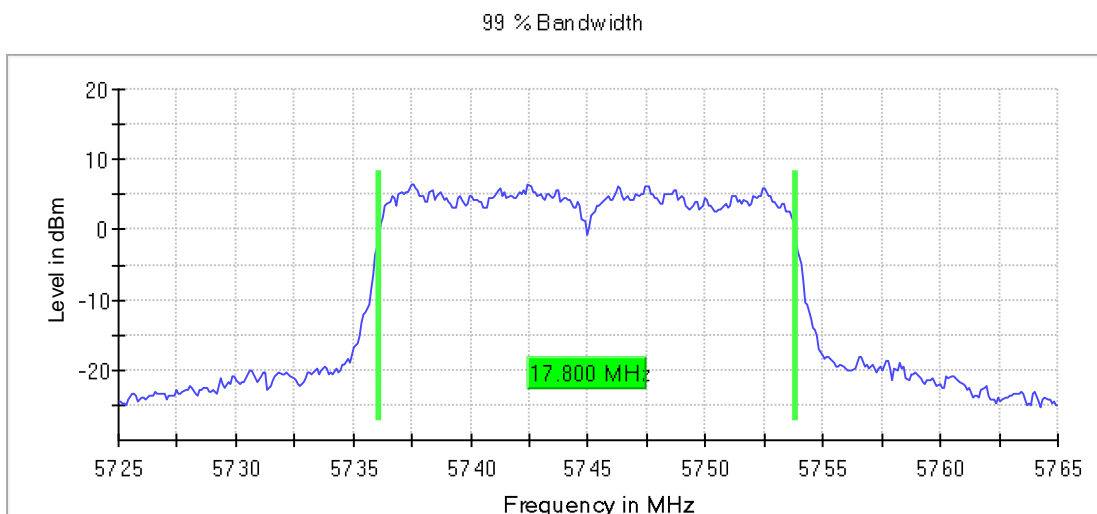


**Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

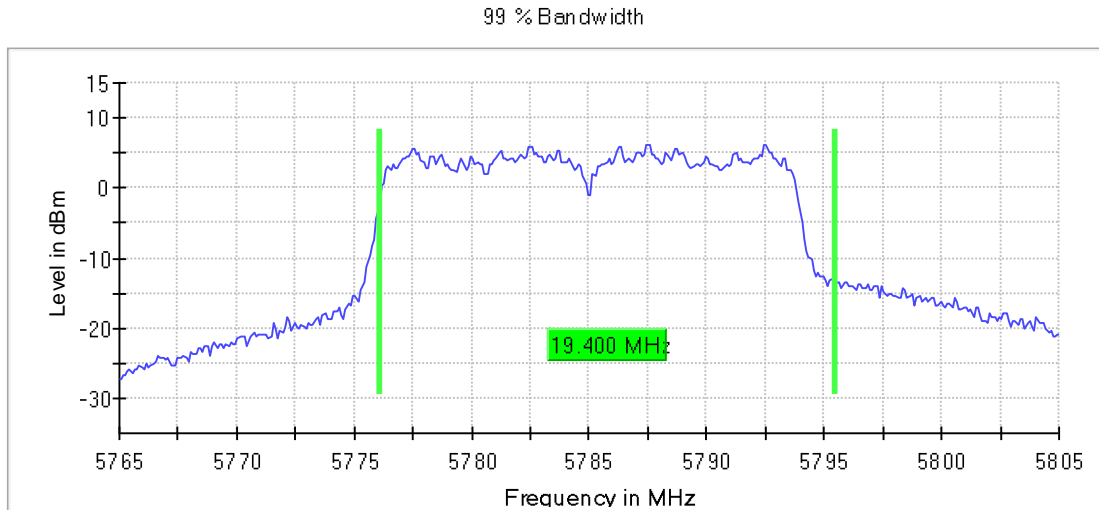


**Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

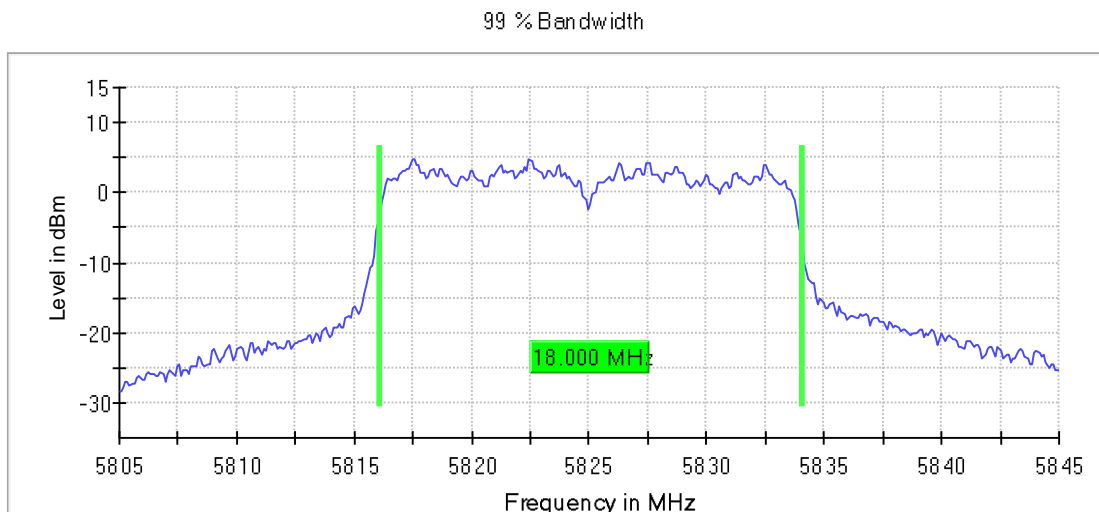


**Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

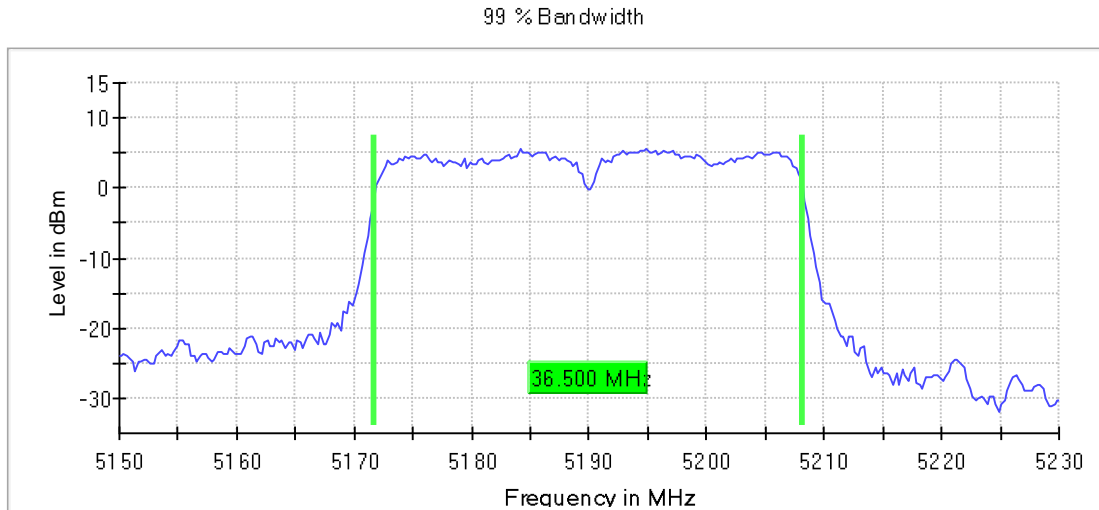


**Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

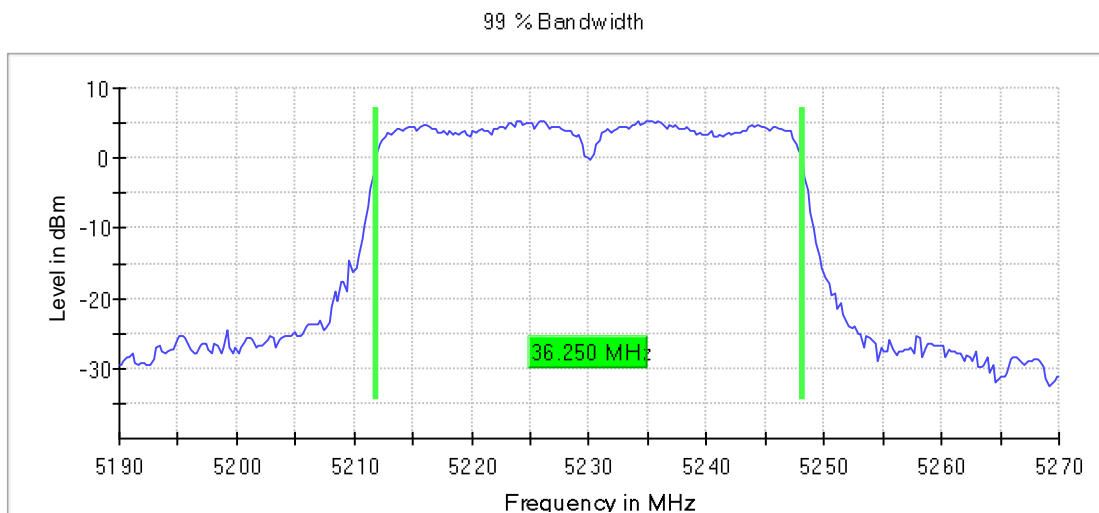


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

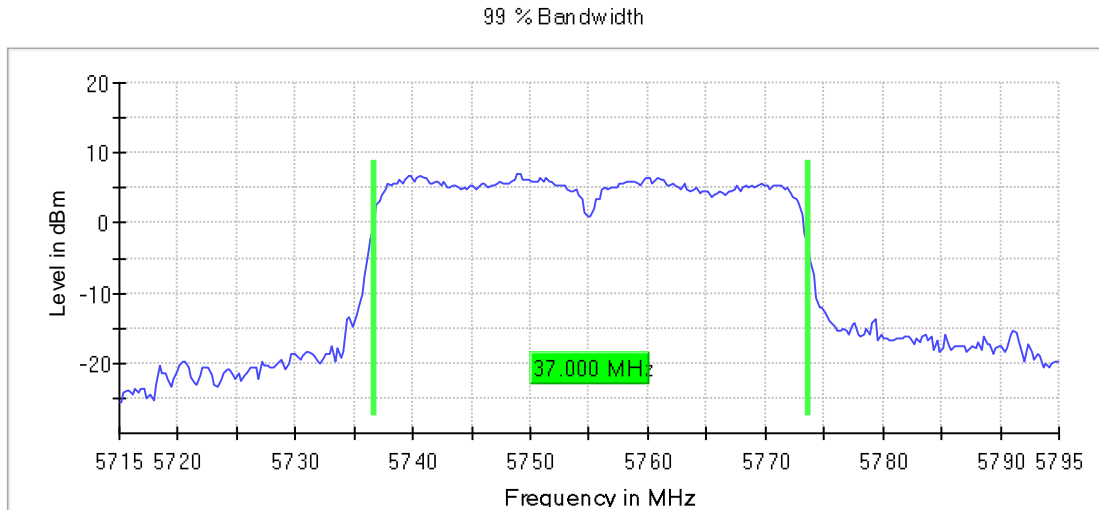


Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

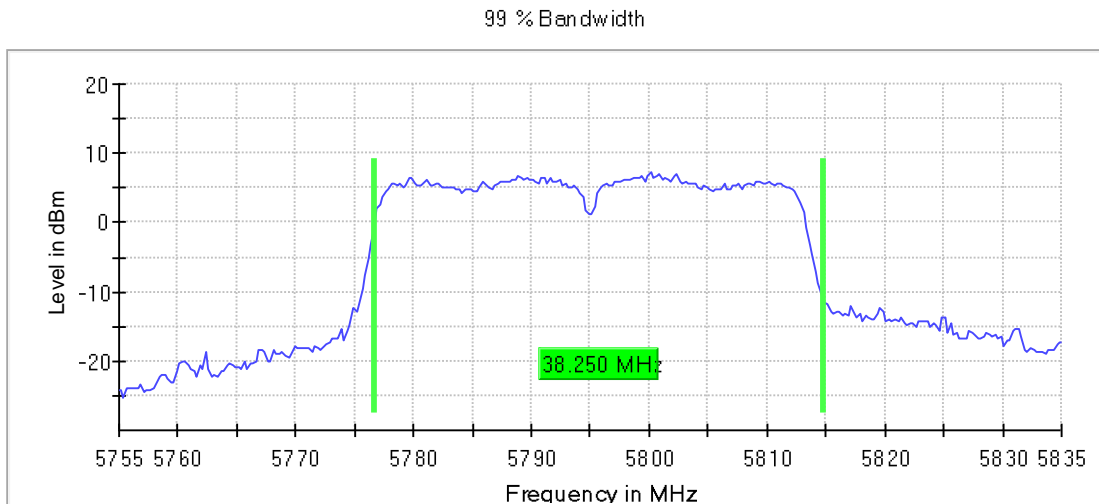


Active Port = 1, Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

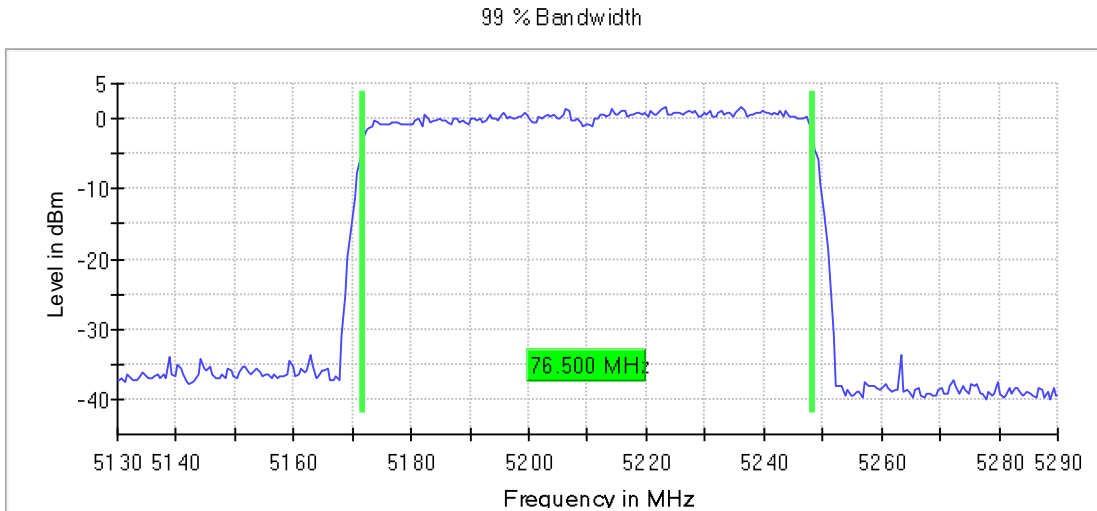

Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

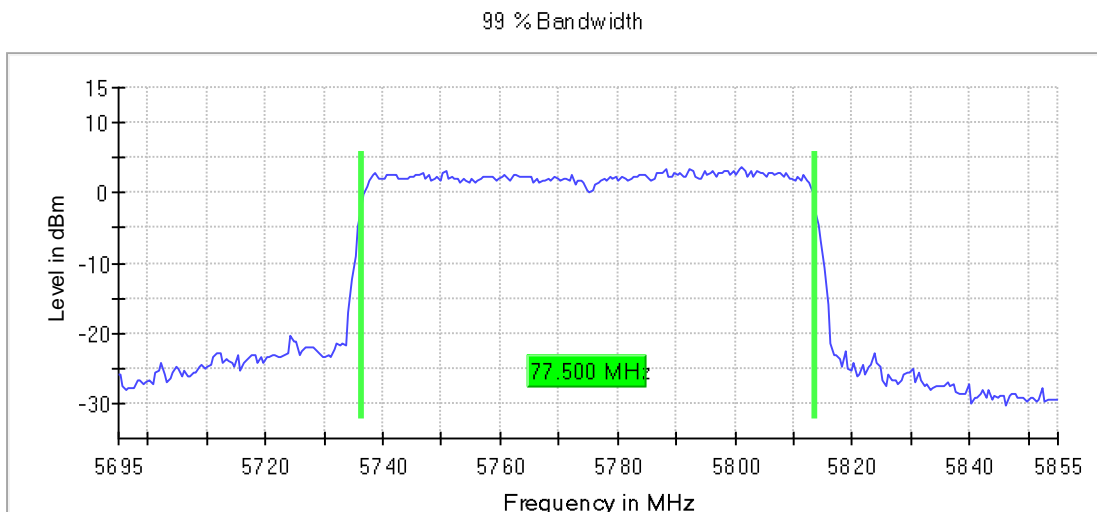

### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 $\mu$ s	28.477 $\mu$ s	28.477 $\mu$ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	40 / max. 150	66 / max. 150	43 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.23 dB	0.18 dB

### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.72500 GHz	5.76500 GHz	5.80500 GHz
Stop Frequency	5.76500 GHz	5.80500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 $\mu$ s	28.477 $\mu$ s	28.477 $\mu$ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	108 / max. 150	68 / max. 150	80 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB	0.07 dB



FCC 15.403 / RSS-Gen 6.7 26 dB Emission Bandwidth

**Specification:**

The 26 dB Emission Bandwidth was measured using the method according to clause C) 1) of 789033 D02 General UNII Test Procedures New Rules v02r01

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**

Band	Port	Freq (MHz)	26Ebw (MHz)
U-NII-1	1	5180.00000	20.200
		5200.00000	19.900
		5240.00000	19.800
U-NII-3	1	5745.00000	22.500
		5785.00000	31.900
		5825.00000	29.400

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	26Ebw (MHz)
U-NII-1	1	5180.00000	20.700
		5200.00000	20.300
		5240.00000	20.600
U-NII-3	1	5745.00000	25.500
		5785.00000	33.900
		5825.00000	32.300

SISO: SISO

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	26Ebw (MHz)
U-NII-1	1	5190.00000	42.176
		5230.00000	41.426
U-NII-3	1	5755.00000	41.426
		5795.00000	40.976

Modulation: 802.11ac VHT20 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	26Ebw (MHz)
U-NII-1	1	5180.00000	20.500
		5200.00000	20.500
		5240.00000	20.400
U-NII-3	1	5745.00000	25.200
		5785.00000	33.200
		5825.00000	29.700

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	26Ebw (MHz)
U-NII-1	1	5190.00000	41.876
		5230.00000	40.826
U-NII-3	1	5755.00000	42.026
		5795.00000	41.426

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	26Ebw (MHz)
U-NII-1	1	5210.00000	83.500
U-NII-3	1	5775.00000	115.500


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

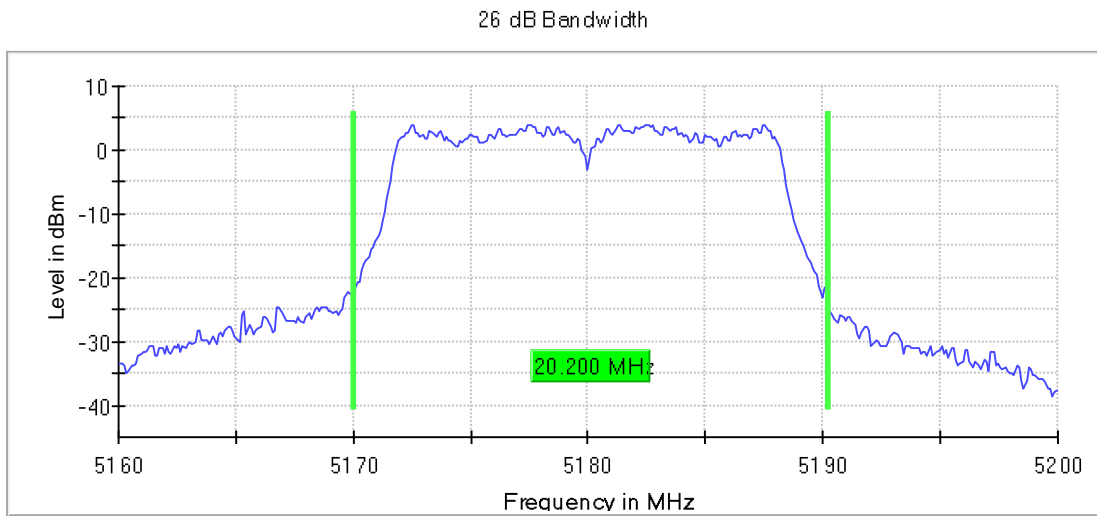


**Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

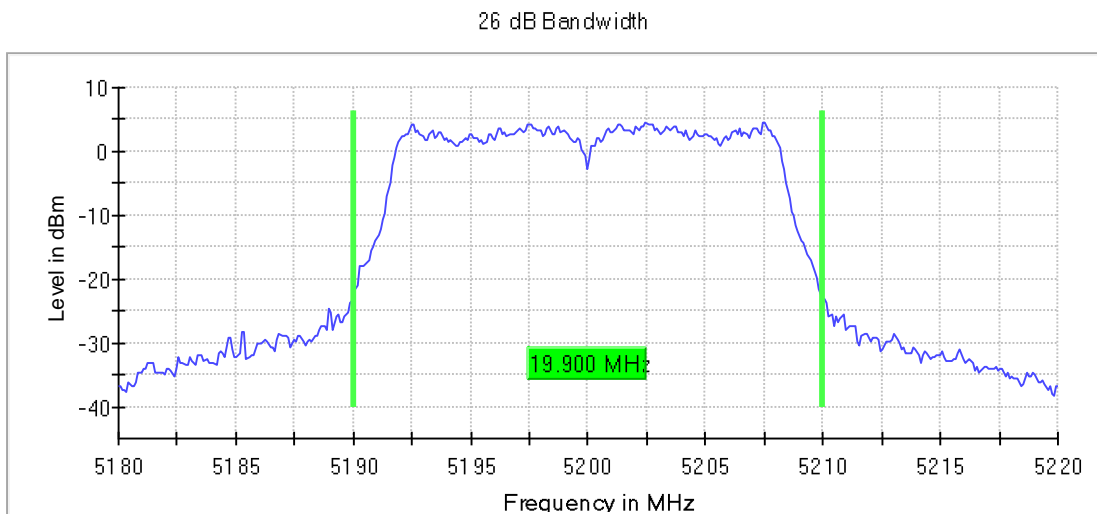


**Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

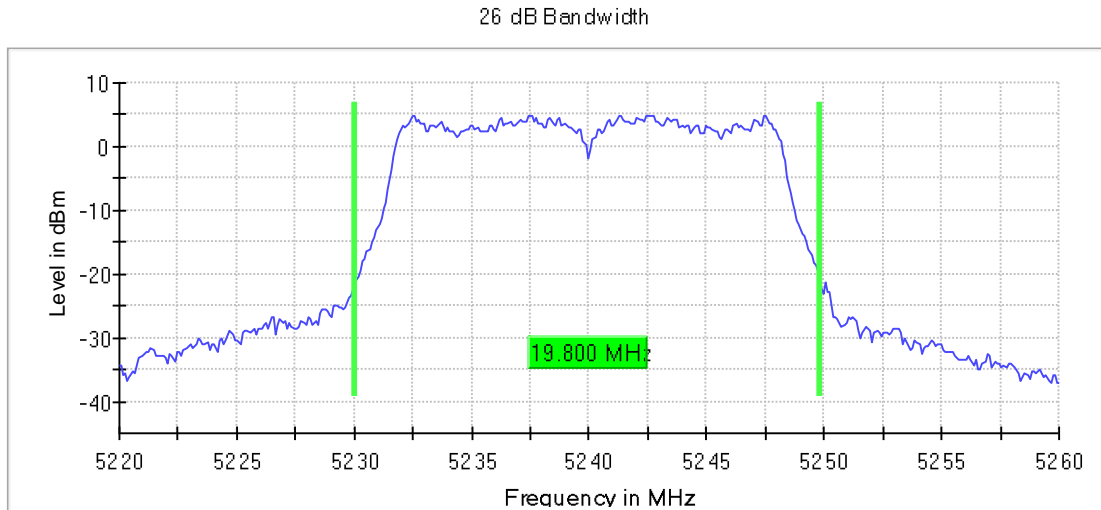


**Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

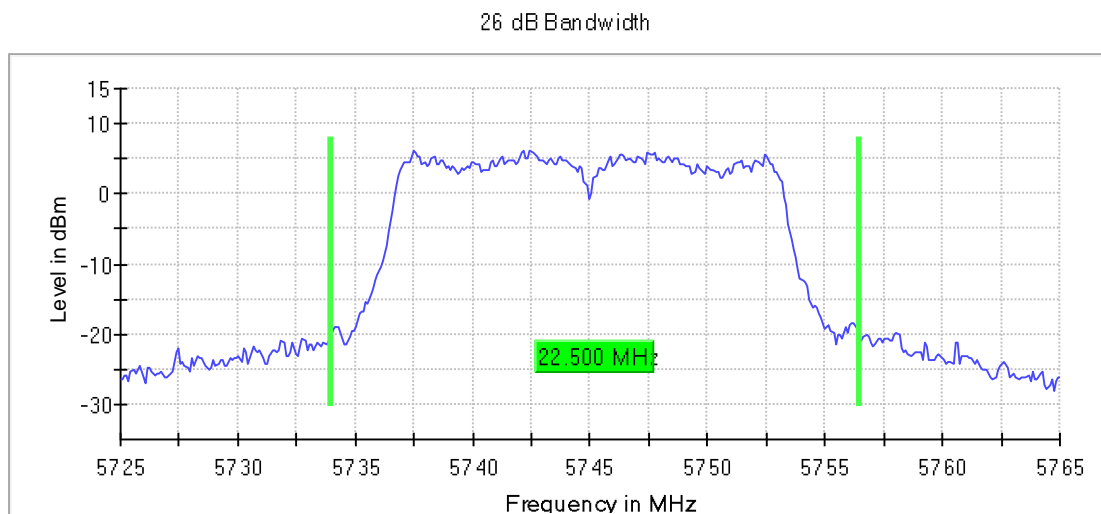


**Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

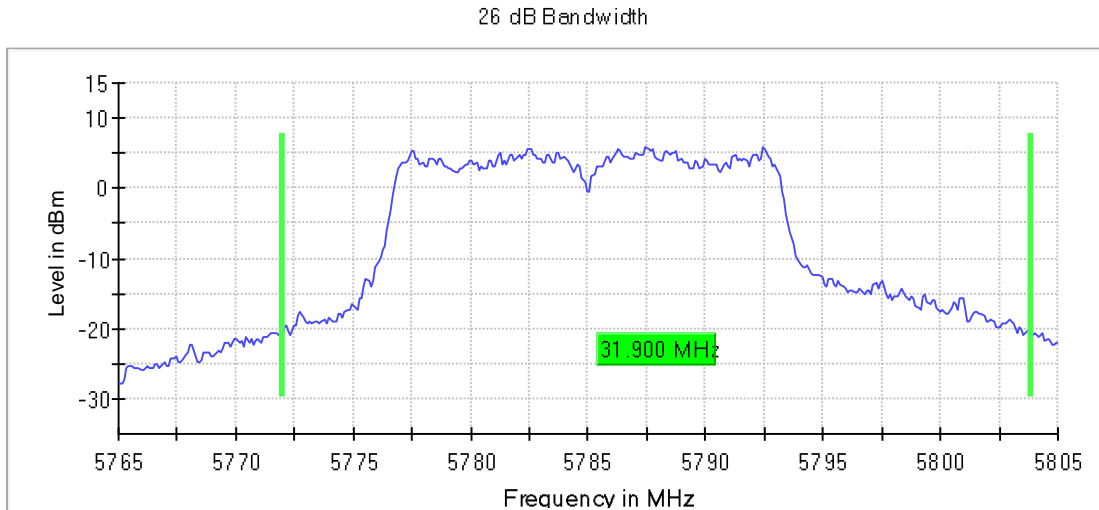


**Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

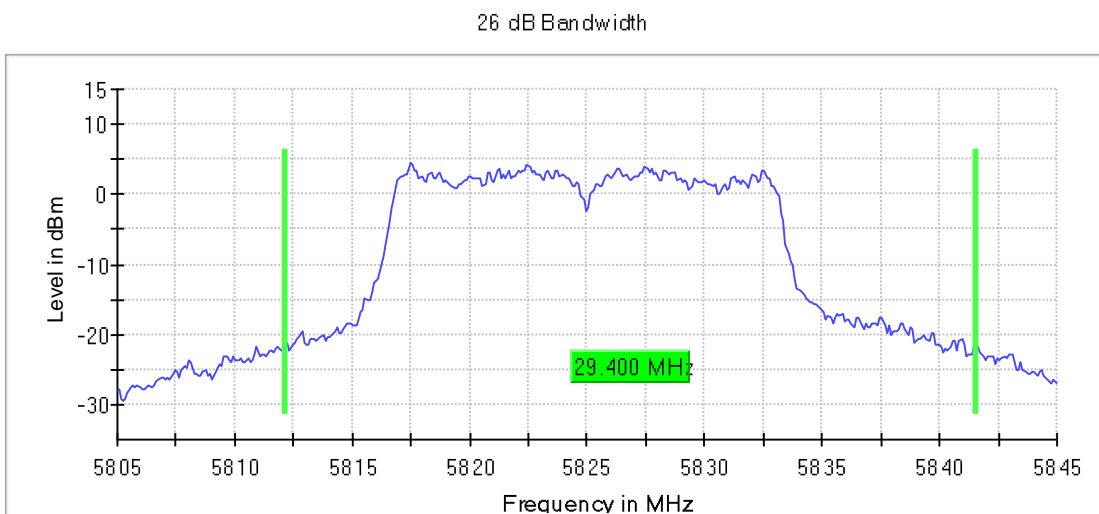


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

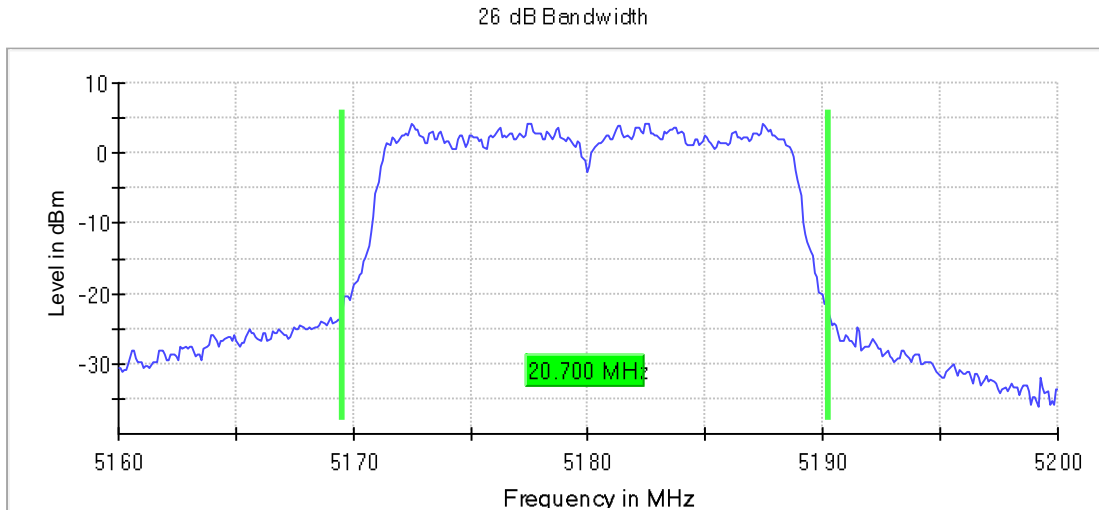


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

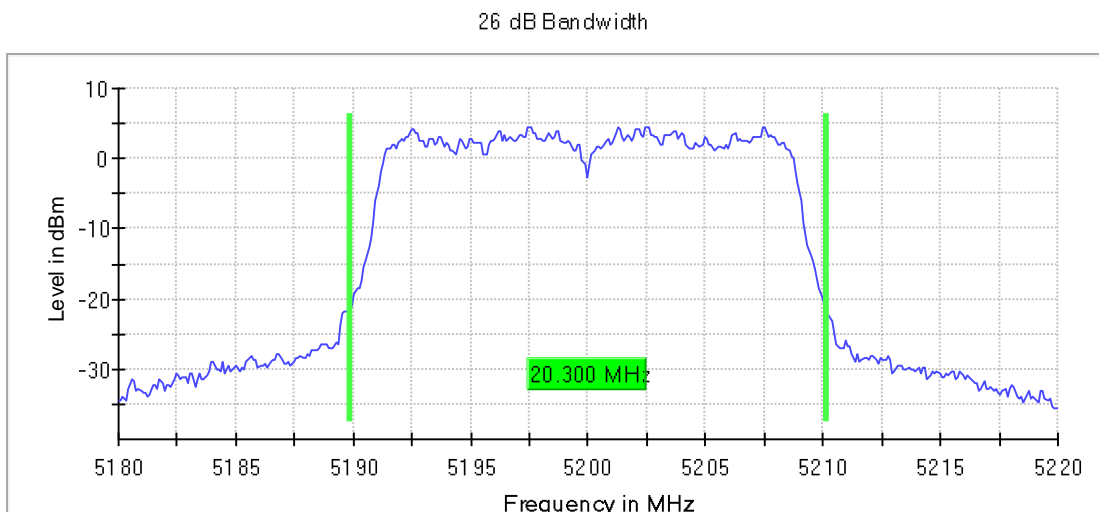


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

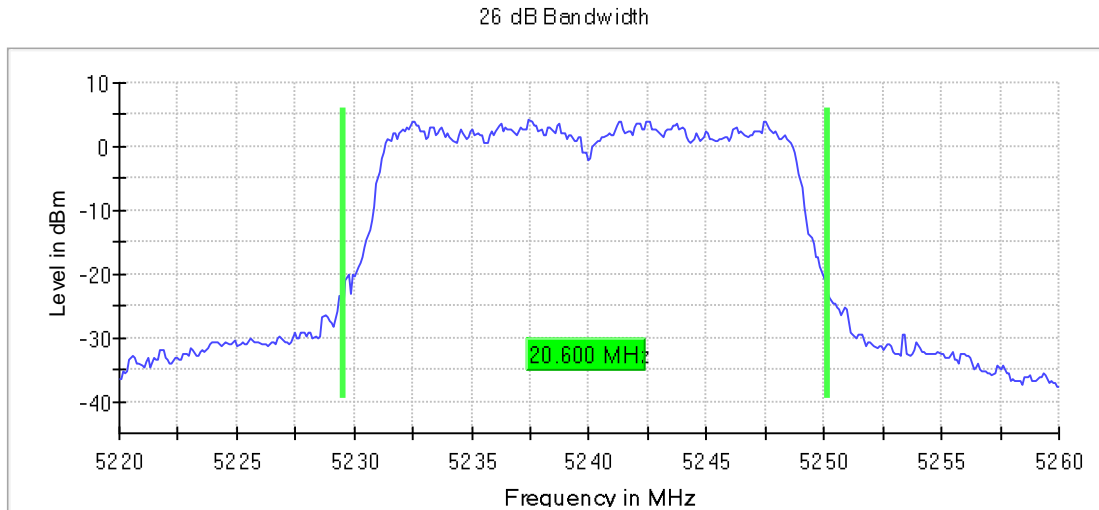


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

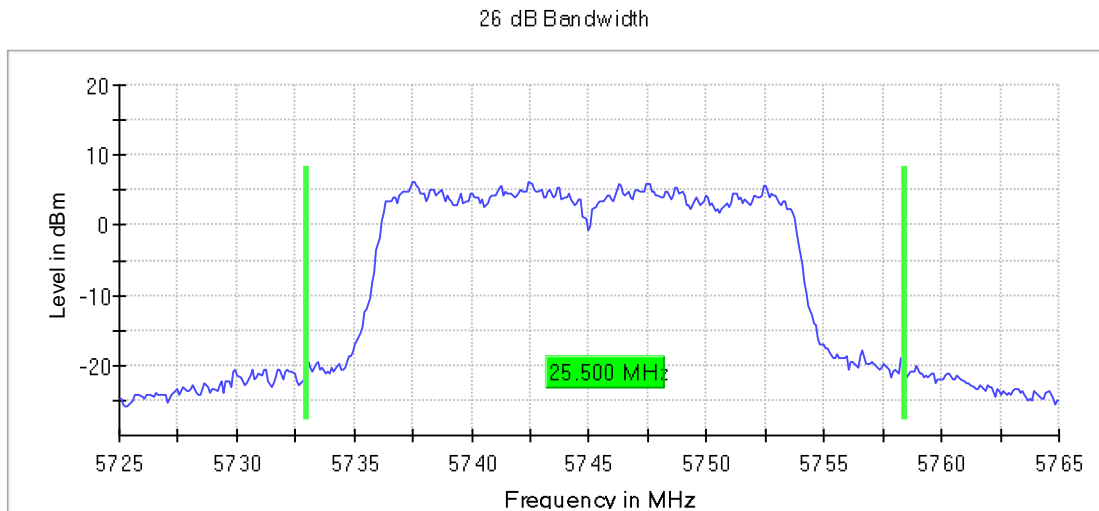


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1

Images:

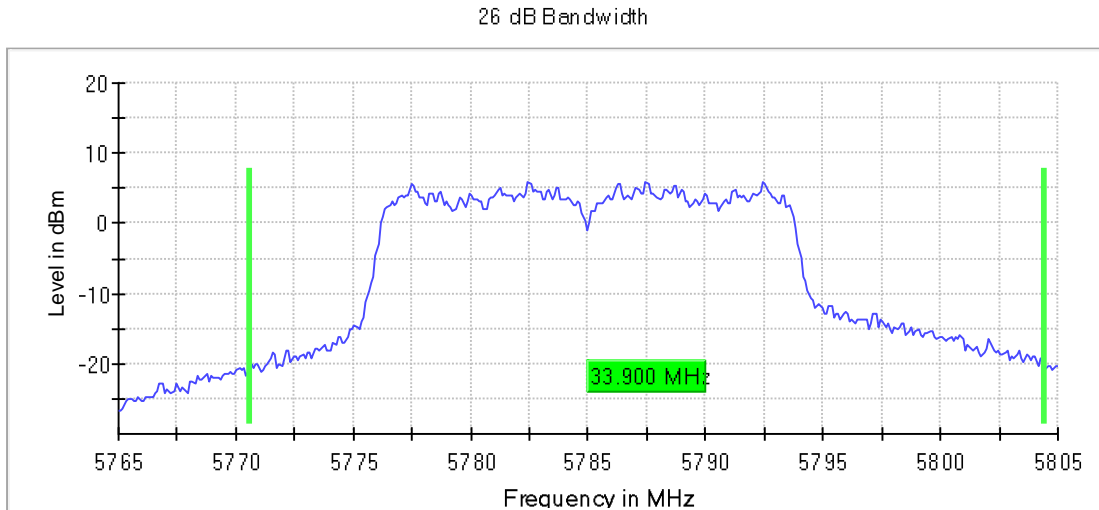

Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1


Images:

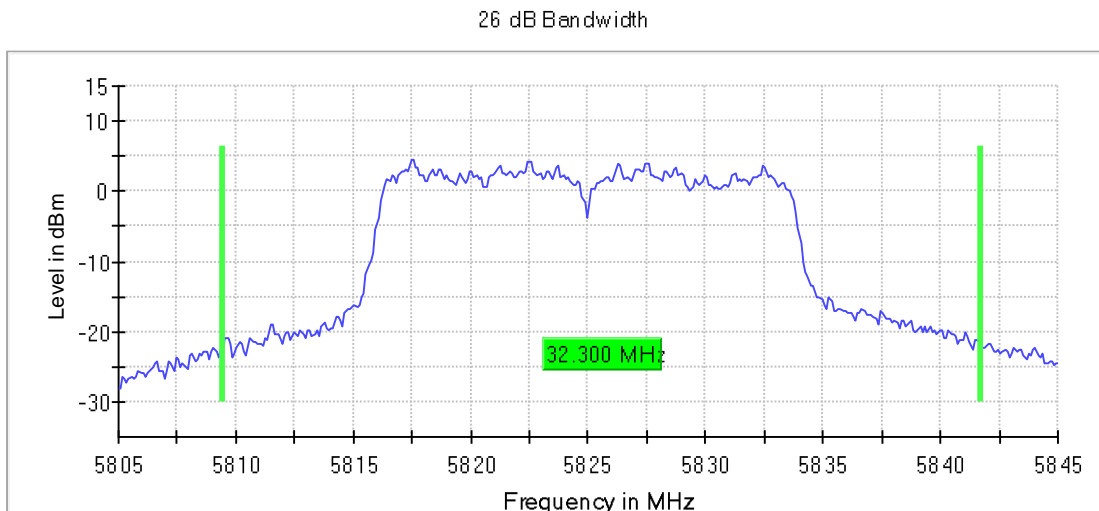




**Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

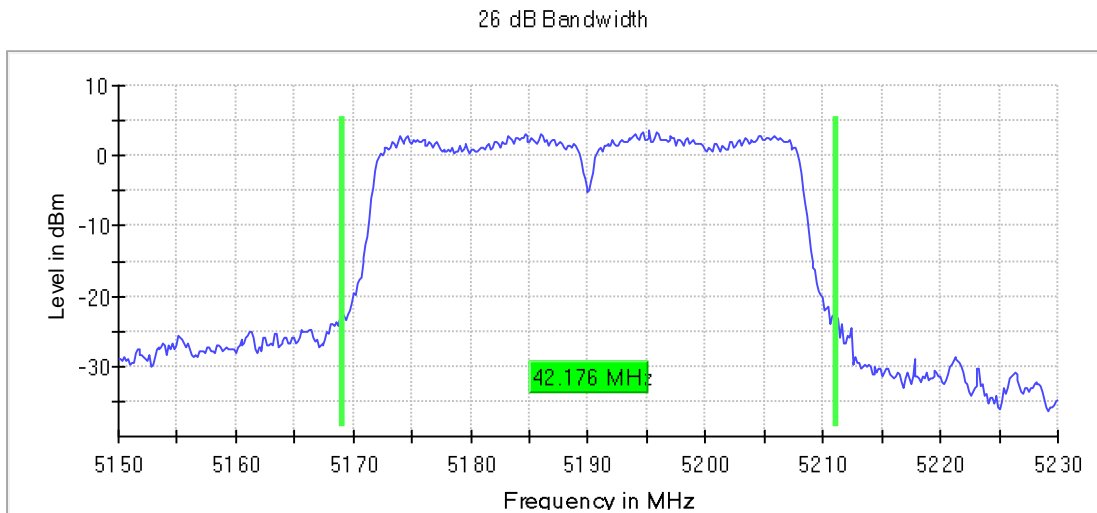


**Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

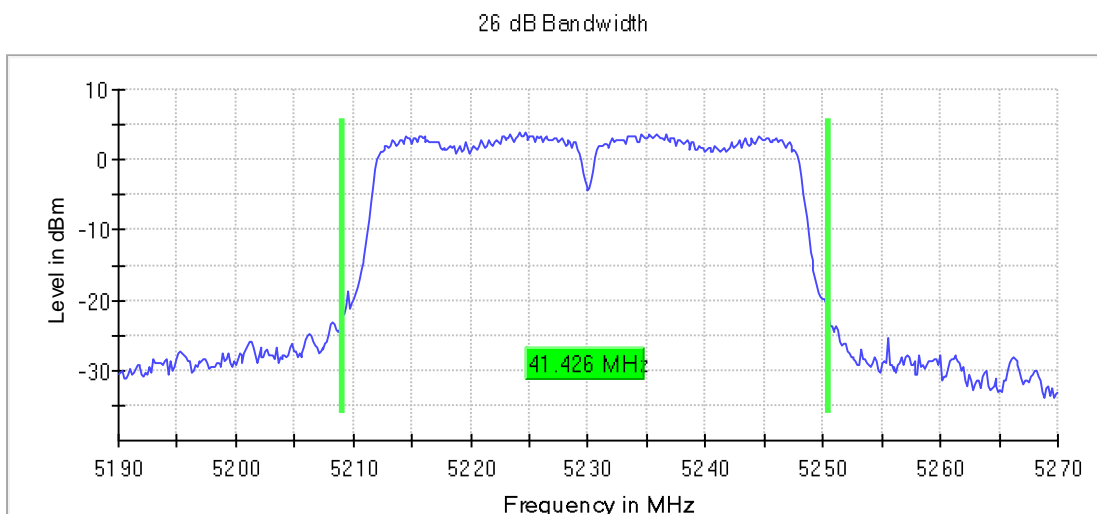


**Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

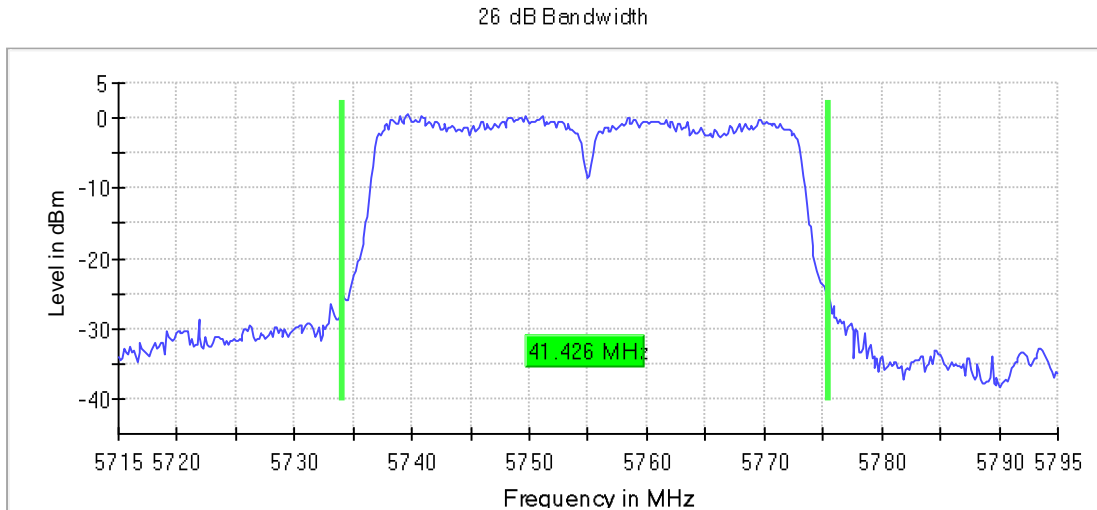


**Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

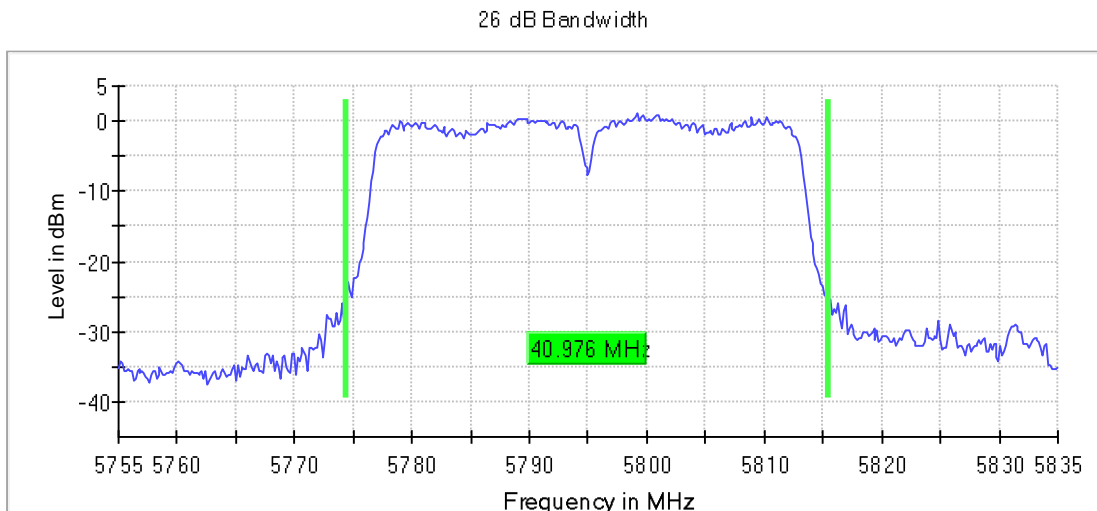


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

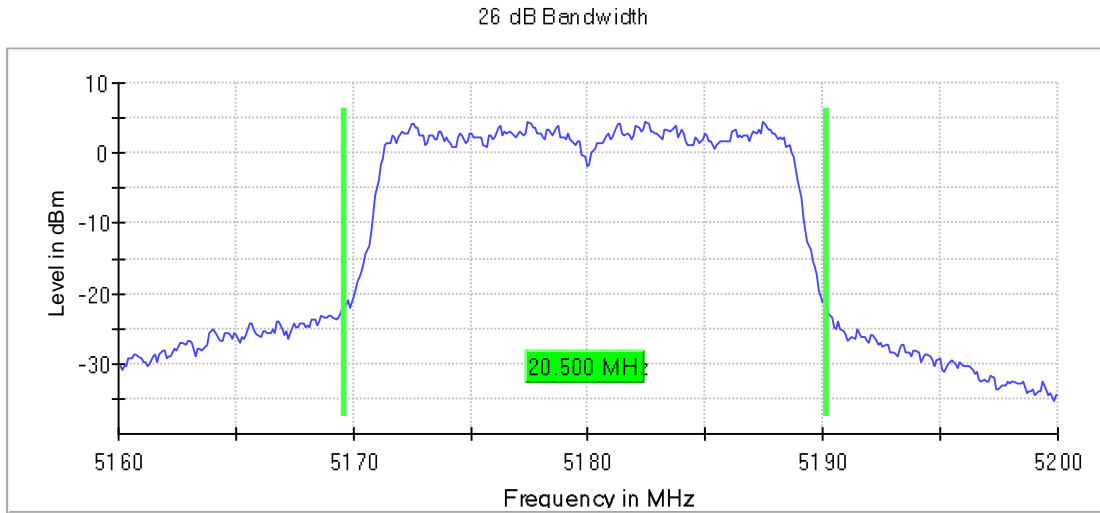


Active Port = 1, Frequency MHz = 5200.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

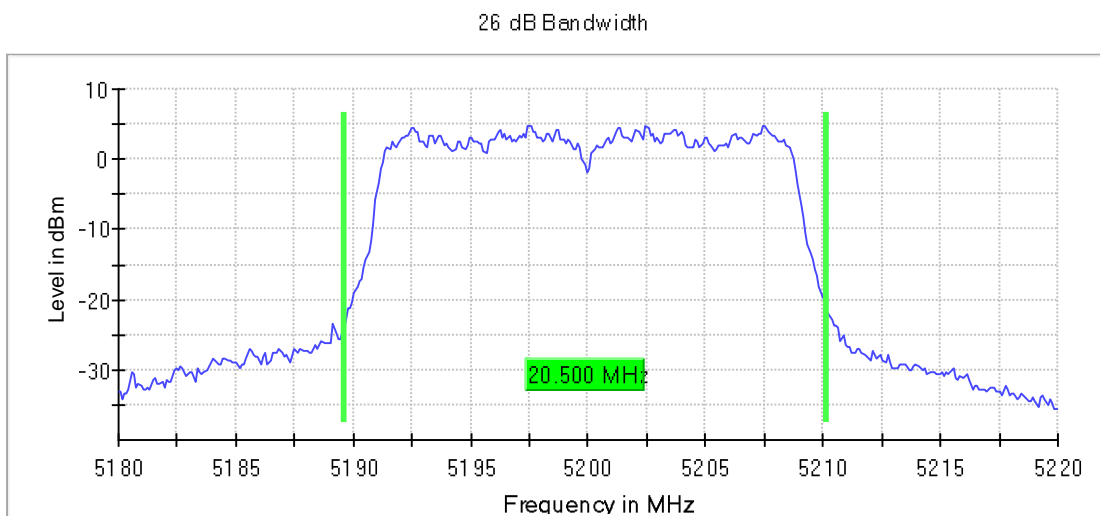


**Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

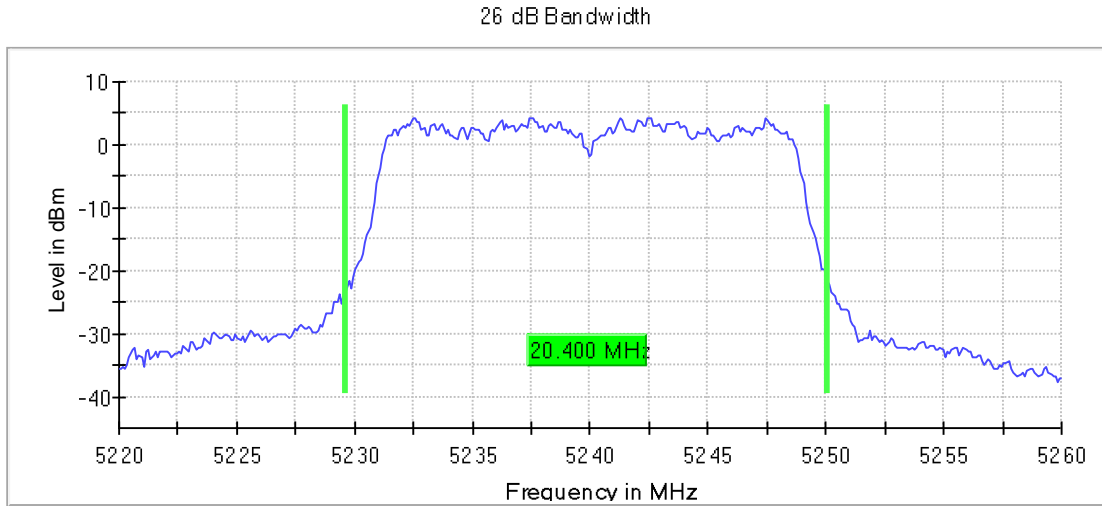


**Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

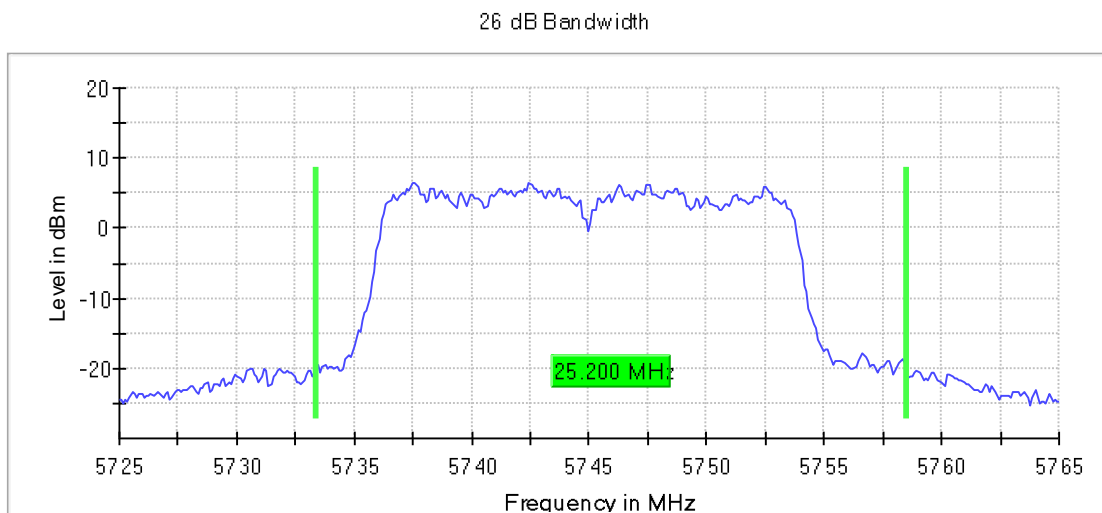


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

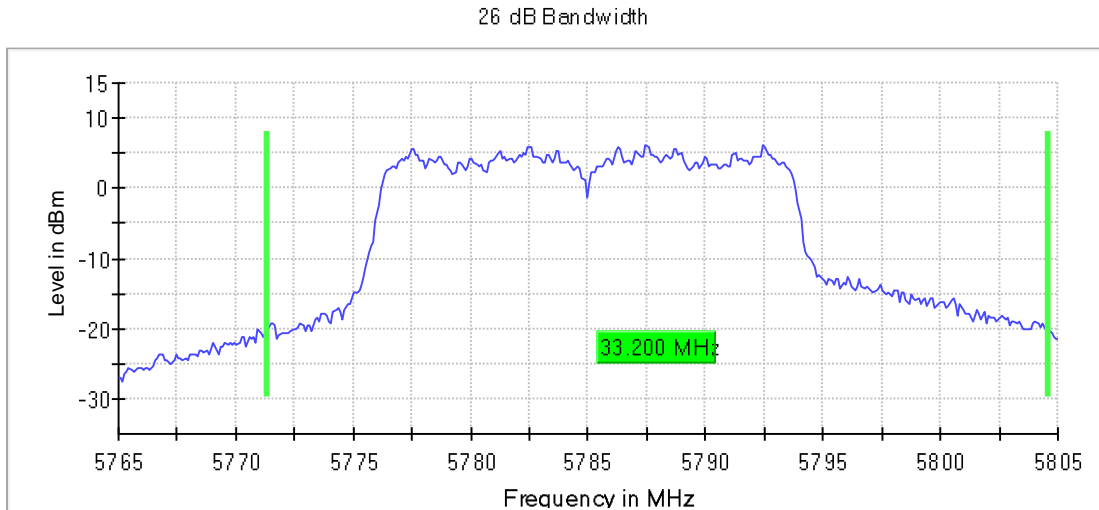


Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

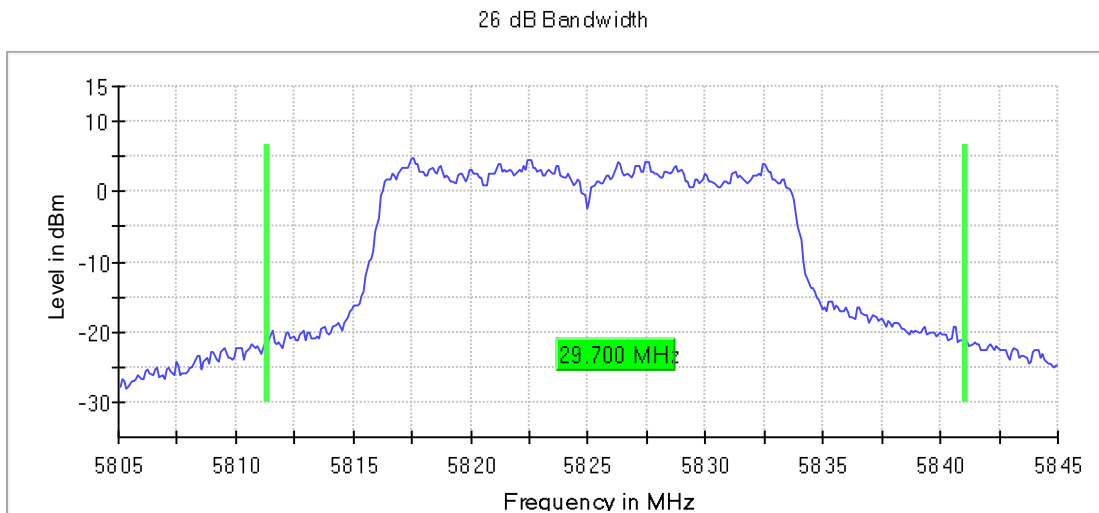


**Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

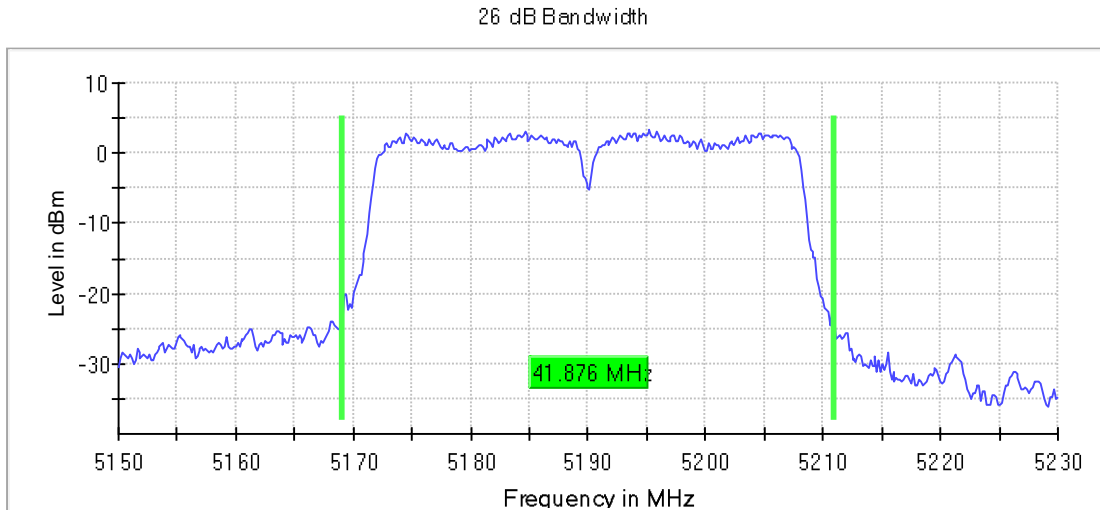


**Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

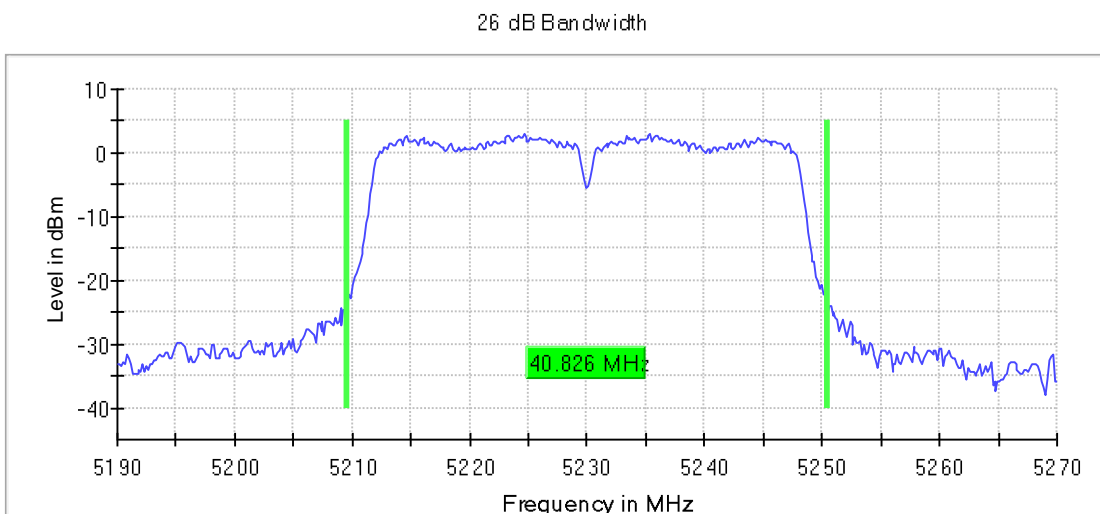


**Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

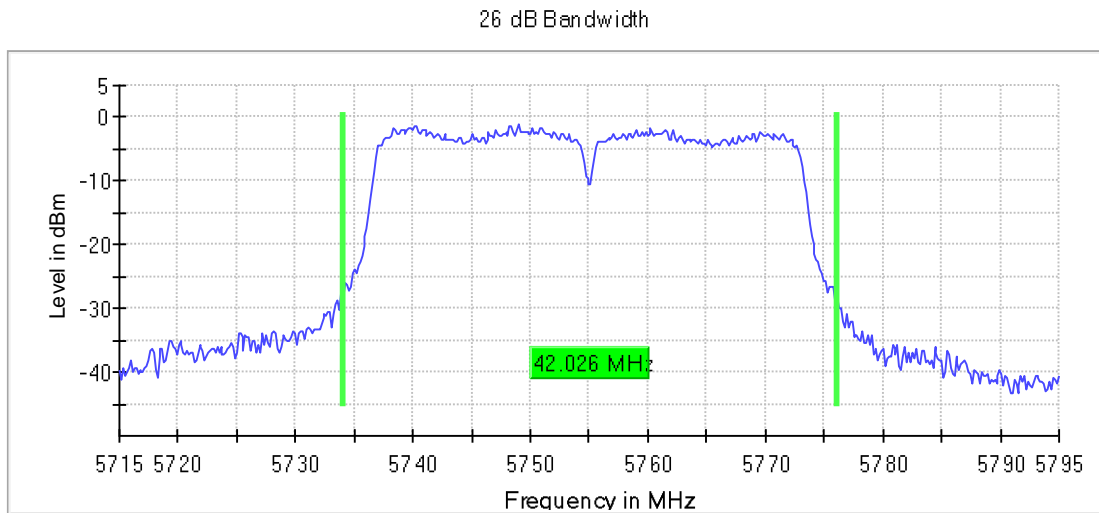


**Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

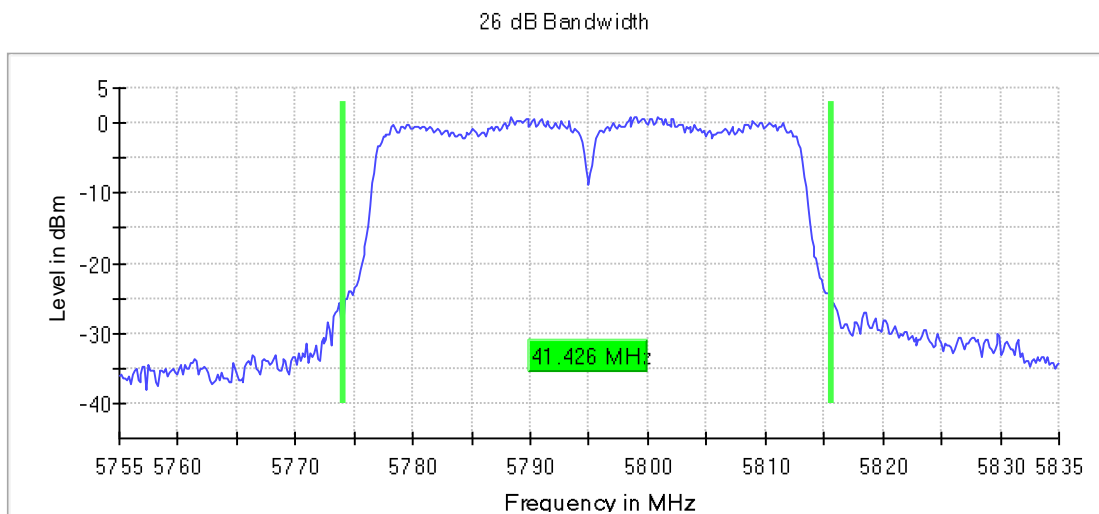


Active Port = 1, Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

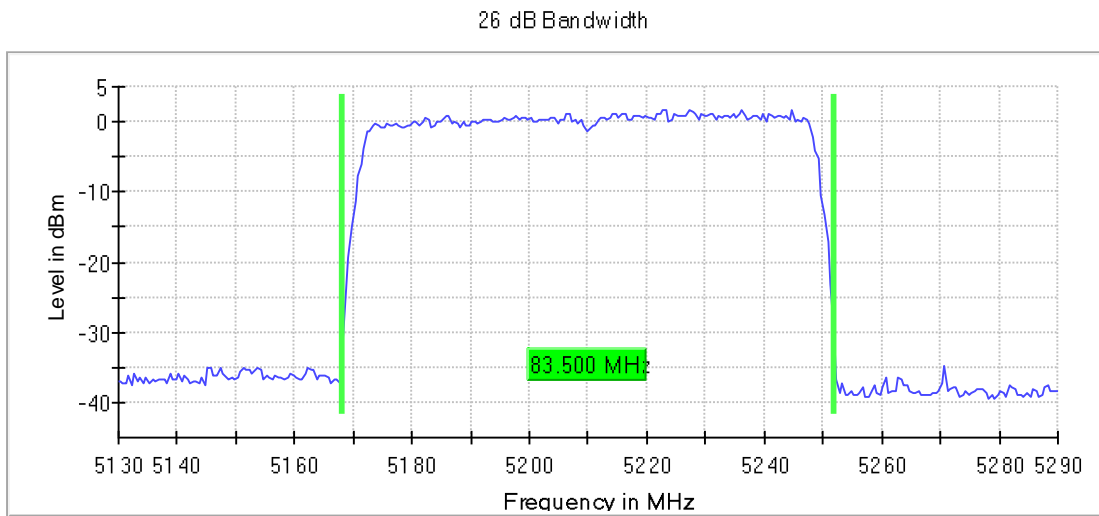

Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

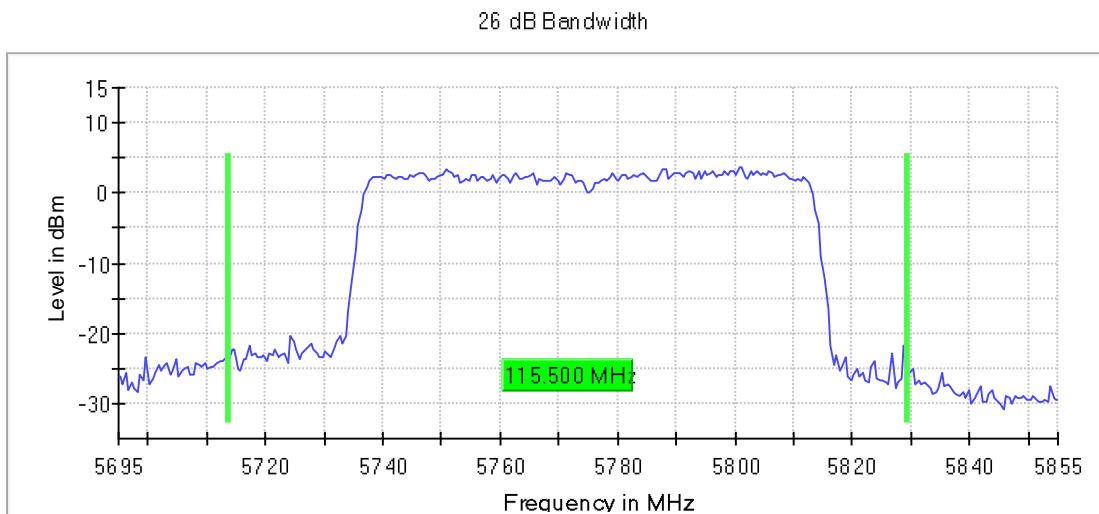



### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 µs	28.477 µs	28.477 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	67 / max. 150	82 / max. 150	92 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.01 dB	0.19 dB

### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.72500 GHz	5.76500 GHz	5.80500 GHz
Stop Frequency	5.76500 GHz	5.80500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 µs	28.477 µs	28.477 µs
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	39 / max. 150	82 / max. 150	45 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.18 dB	0.07 dB	0.29 dB

## FCC 15.407 (b) / RSS-247 6.2 Band-edge Conducted Emissions

### Limits

#### FCC 15.407:

For transmitters operating in the 5.15–5.25 and 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz (68.20 dB $\mu$ V/m at 3 m distance).

For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

#### RSS 247:

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**

U-NII-1

DUT Frequency	Result
5180.000000	PASS

DUT Frequency	Result
5240.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5149.750000	-32.4	5.4	-27.0	PASS
5149.250000	-33.1	6.1	-27.0	PASS
5148.750000	-33.6	6.6	-27.0	PASS
5147.750000	-34.6	7.6	-27.0	PASS
5147.250000	-34.7	7.7	-27.0	PASS
5148.250000	-34.7	7.7	-27.0	PASS
5146.750000	-36.2	9.2	-27.0	PASS
5144.750000	-36.4	9.4	-27.0	PASS
5146.250000	-36.5	9.5	-27.0	PASS
5145.750000	-36.6	9.6	-27.0	PASS
5144.250000	-36.8	9.8	-27.0	PASS
5145.250000	-37.5	10.5	-27.0	PASS
5143.750000	-38.0	11.0	-27.0	PASS
5143.250000	-38.2	11.2	-27.0	PASS
5142.750000	-39.4	12.4	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5354.250000	-52.5	25.5	-27.0	PASS
5351.750000	-52.7	25.7	-27.0	PASS
5361.750000	-52.8	25.8	-27.0	PASS
5357.750000	-52.8	25.8	-27.0	PASS
5400.250000	-52.8	25.8	-27.0	PASS
5355.250000	-52.9	25.9	-27.0	PASS
5355.750000	-52.9	25.9	-27.0	PASS
5359.750000	-52.9	25.9	-27.0	PASS
5354.750000	-53.0	26.0	-27.0	PASS
5359.250000	-53.1	26.1	-27.0	PASS
5399.250000	-53.1	26.1	-27.0	PASS
5350.750000	-53.2	26.2	-27.0	PASS
5353.750000	-53.3	26.3	-27.0	PASS
5352.250000	-53.3	26.3	-27.0	PASS
5356.750000	-53.3	26.3	-27.0	PASS

U-NII-3

DUT Frequency	Result
5745.000000	PASS

DUT Frequency	Result
5825.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5649.250000	-42.1	15.1	-27.0	PASS
5649.750000	-42.3	15.3	-27.0	PASS
5650.250000	-42.2	15.4	-26.8	PASS
5651.250000	-41.5	15.5	-26.1	PASS
5647.750000	-42.5	15.5	-27.0	PASS
5653.250000	-40.1	15.6	-24.6	PASS
5648.250000	-42.6	15.6	-27.0	PASS
5648.750000	-42.6	15.6	-27.0	PASS
5650.750000	-42.0	15.6	-26.4	PASS
5645.750000	-42.9	15.9	-27.0	PASS
5652.750000	-40.9	15.9	-25.0	PASS
5647.250000	-43.0	16.0	-27.0	PASS
5652.250000	-41.6	16.3	-25.3	PASS
5641.250000	-43.4	16.4	-27.0	PASS
5645.250000	-43.4	16.4	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5940.750000	-51.4	24.4	-27.0	PASS
5924.250000	-51.2	24.8	-26.4	PASS
5944.750000	-51.8	24.8	-27.0	PASS
5926.750000	-51.9	24.9	-27.0	PASS
5923.750000	-51.0	24.9	-26.1	PASS
5924.750000	-51.9	25.0	-26.8	PASS
5928.250000	-52.1	25.1	-27.0	PASS
5925.250000	-52.2	25.2	-27.0	PASS
5946.250000	-52.2	25.2	-27.0	PASS
5928.750000	-52.3	25.3	-27.0	PASS
5927.250000	-52.4	25.4	-27.0	PASS
5929.750000	-52.4	25.4	-27.0	PASS
5925.750000	-52.5	25.5	-27.0	PASS
5930.750000	-52.6	25.6	-27.0	PASS
5927.750000	-52.6	25.6	-27.0	PASS


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 1**

**Images:**

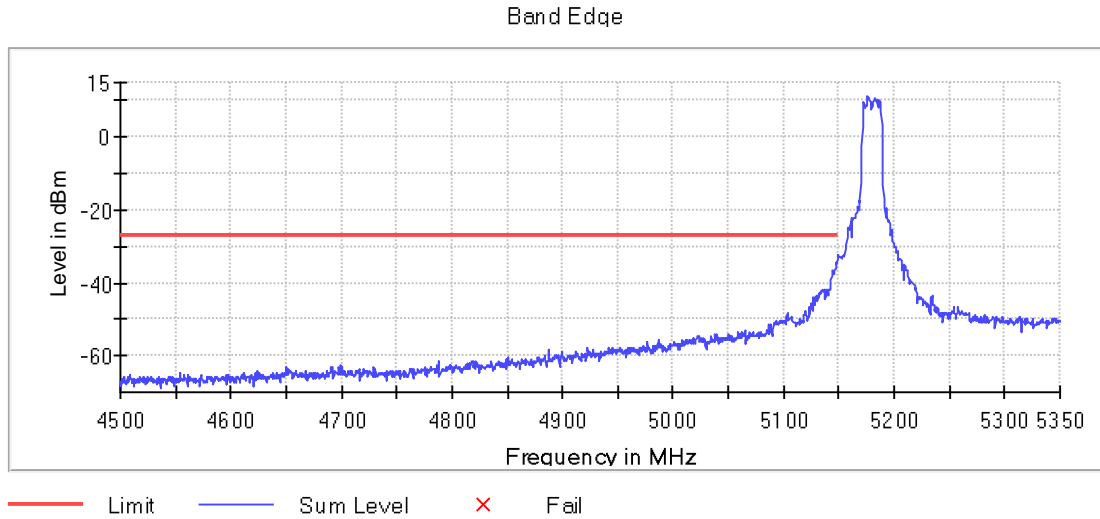


**Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 1**

**Images:**

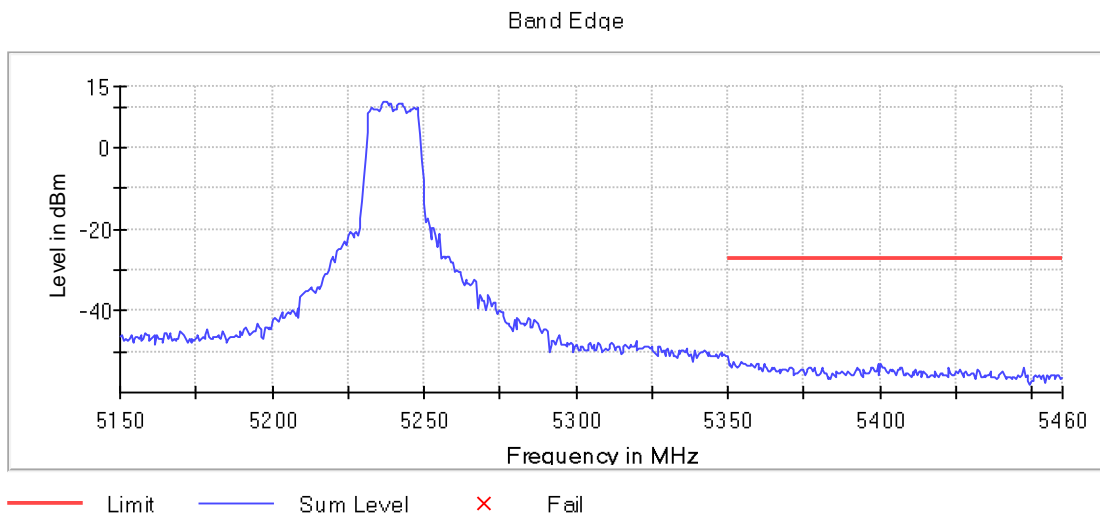


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Measurement Point = 1

Images:

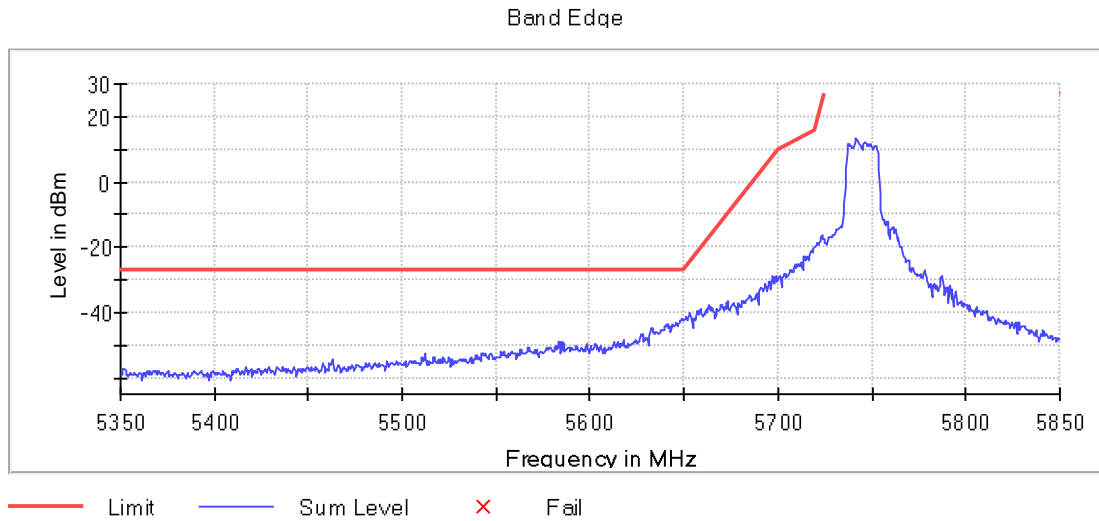

Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Measurement Point = 1

Images:

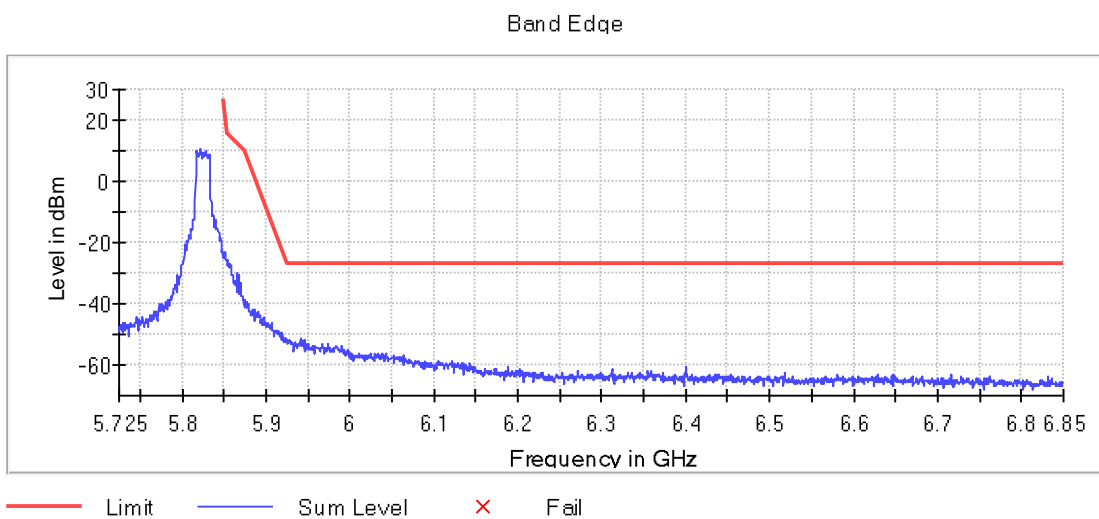

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

**Results**

U-NII-1

DUT Frequency	Result
5180.000000	PASS

DUT Frequency	Result
5240.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5146.750000	-33.5	6.5	-27.0	PASS
5147.750000	-33.6	6.6	-27.0	PASS
5147.250000	-33.9	6.9	-27.0	PASS
5148.750000	-34.1	7.1	-27.0	PASS
5148.250000	-34.2	7.2	-27.0	PASS
5149.750000	-34.2	7.2	-27.0	PASS
5149.250000	-34.2	7.2	-27.0	PASS
5143.250000	-34.5	7.5	-27.0	PASS
5146.250000	-34.6	7.6	-27.0	PASS
5145.750000	-35.0	8.0	-27.0	PASS
5142.750000	-35.0	8.0	-27.0	PASS
5145.250000	-35.0	8.0	-27.0	PASS
5144.250000	-35.1	8.1	-27.0	PASS
5144.750000	-35.2	8.2	-27.0	PASS
5143.750000	-35.4	8.4	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5353.750000	-52.9	25.9	-27.0	PASS
5362.250000	-53.0	26.0	-27.0	PASS
5353.250000	-53.1	26.1	-27.0	PASS
5360.250000	-53.1	26.1	-27.0	PASS
5407.750000	-53.2	26.2	-27.0	PASS
5351.750000	-53.3	26.3	-27.0	PASS
5352.250000	-53.3	26.3	-27.0	PASS
5354.250000	-53.5	26.5	-27.0	PASS
5433.250000	-53.8	26.8	-27.0	PASS
5404.250000	-53.8	26.8	-27.0	PASS
5433.750000	-53.8	26.8	-27.0	PASS
5367.250000	-53.9	26.9	-27.0	PASS
5357.250000	-53.9	26.9	-27.0	PASS
5354.750000	-53.9	26.9	-27.0	PASS
5364.250000	-54.0	27.0	-27.0	PASS

U-NII-3

DUT Frequency	Result
5745.000000	PASS

DUT Frequency	Result
5825.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5654.250000	-37.6	13.7	-23.9	PASS
5644.750000	-41.7	14.7	-27.0	PASS
5649.250000	-42.0	15.0	-27.0	PASS
5651.250000	-41.1	15.1	-26.1	PASS
5649.750000	-42.3	15.3	-27.0	PASS
5653.750000	-39.7	15.4	-24.2	PASS
5645.250000	-42.5	15.5	-27.0	PASS
5641.750000	-42.5	15.5	-27.0	PASS
5651.750000	-41.3	15.6	-25.7	PASS
5647.750000	-42.7	15.7	-27.0	PASS
5644.250000	-42.7	15.7	-27.0	PASS
5647.250000	-42.8	15.8	-27.0	PASS
5652.250000	-41.1	15.8	-25.3	PASS
5641.250000	-42.9	15.9	-27.0	PASS
5642.250000	-42.9	15.9	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5925.750000	-51.4	24.4	-27.0	PASS
5928.250000	-51.4	24.4	-27.0	PASS
5927.750000	-51.5	24.5	-27.0	PASS
5931.750000	-51.6	24.6	-27.0	PASS
5932.750000	-52.0	25.0	-27.0	PASS
5932.250000	-52.2	25.2	-27.0	PASS
5928.750000	-52.5	25.5	-27.0	PASS
5931.250000	-52.6	25.6	-27.0	PASS
5977.750000	-52.7	25.7	-27.0	PASS
5927.250000	-52.7	25.7	-27.0	PASS
5925.250000	-52.8	25.8	-27.0	PASS
5936.750000	-52.9	25.9	-27.0	PASS
5926.750000	-52.9	25.9	-27.0	PASS
5924.250000	-52.4	26.0	-26.4	PASS
5941.750000	-53.0	26.0	-27.0	PASS


**Verdict**

Pass

**Attachments**


Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 1

**Images:**

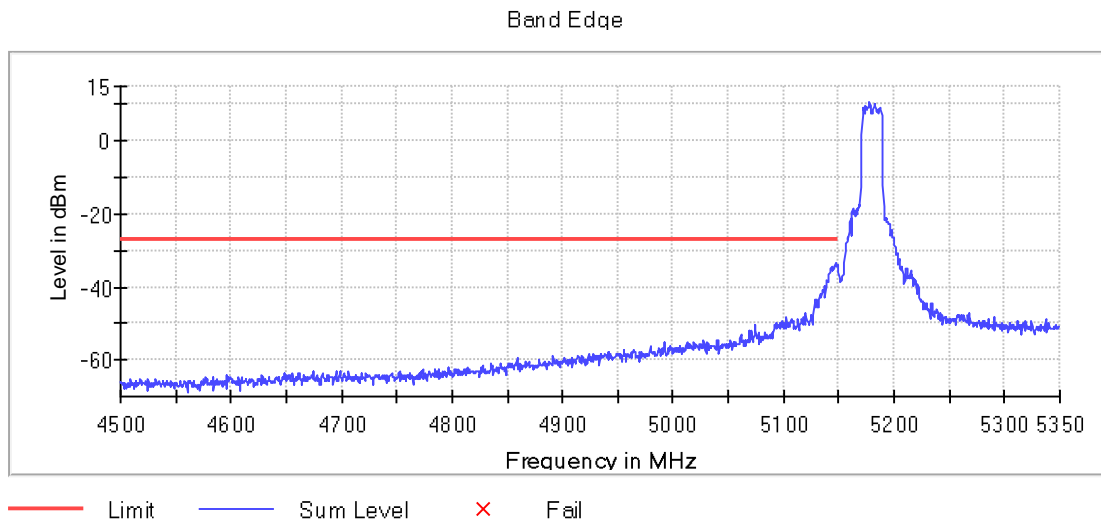


Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 1

**Images:**

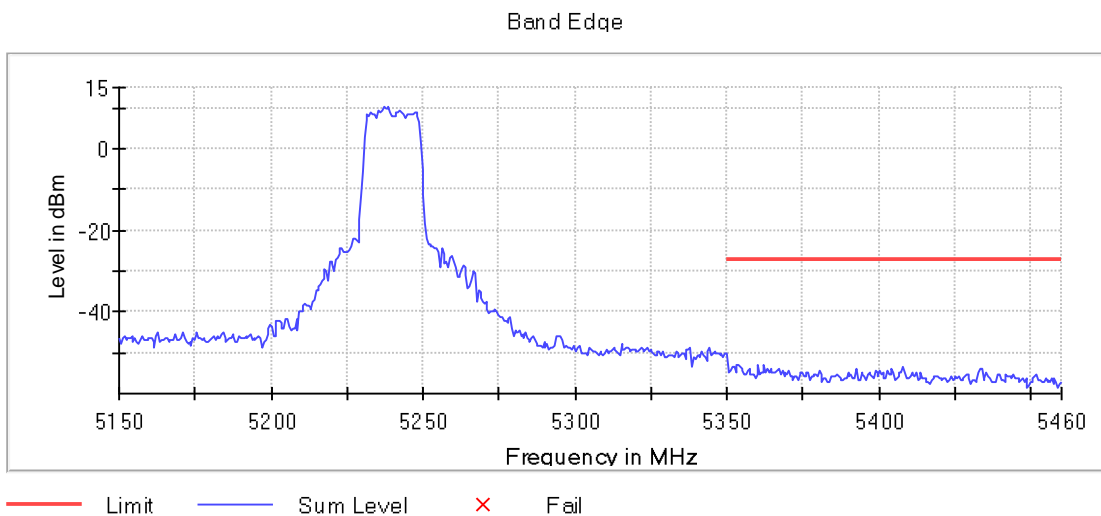


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 1

Images:

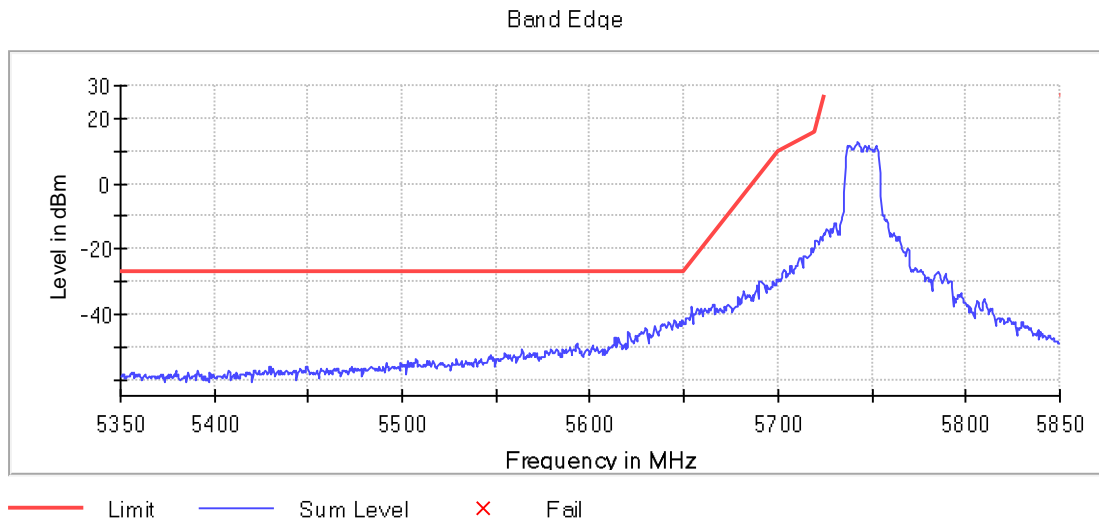

Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 1

Images:

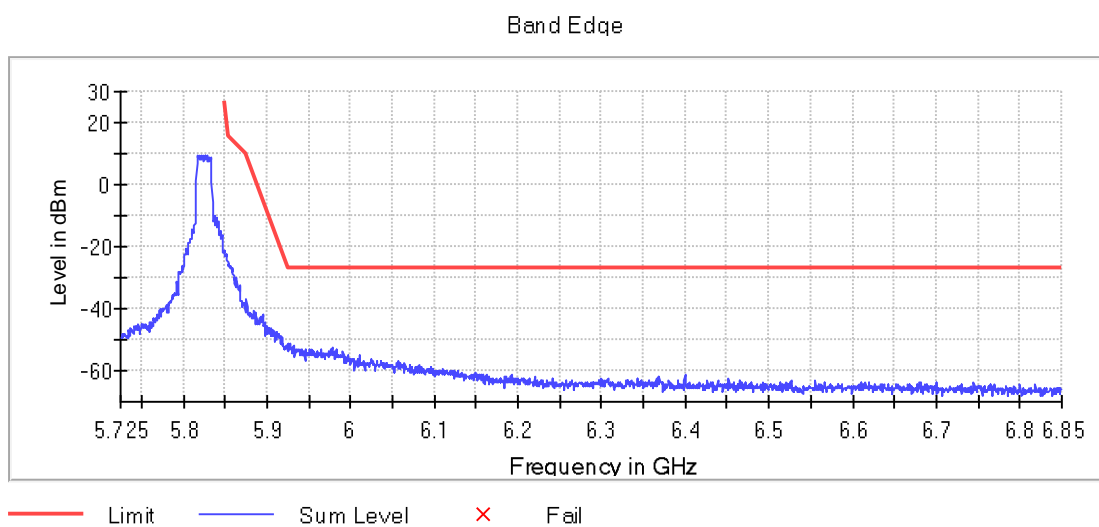



Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

**Results**

U-NII-1

DUT Frequency	Result
5190.000000	PASS

DUT Frequency	Result
5230.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5149.750000	-38.2	11.2	-27.0	PASS
5146.750000	-39.0	12.0	-27.0	PASS
5142.250000	-39.5	12.5	-27.0	PASS
5147.250000	-39.6	12.6	-27.0	PASS
5149.250000	-39.7	12.7	-27.0	PASS
5146.250000	-39.8	12.8	-27.0	PASS
5148.250000	-39.9	12.9	-27.0	PASS
5147.750000	-40.0	13.0	-27.0	PASS
5148.750000	-40.2	13.2	-27.0	PASS
5142.750000	-40.3	13.3	-27.0	PASS
5145.250000	-40.3	13.3	-27.0	PASS
5141.750000	-40.4	13.4	-27.0	PASS
5144.750000	-40.8	13.8	-27.0	PASS
5145.750000	-40.9	13.9	-27.0	PASS
5143.750000	-41.5	14.5	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5358.250000	-49.3	22.3	-27.0	PASS
5352.750000	-49.7	22.7	-27.0	PASS
5358.750000	-50.4	23.4	-27.0	PASS
5352.250000	-50.4	23.4	-27.0	PASS
5353.250000	-50.4	23.4	-27.0	PASS
5363.750000	-50.5	23.5	-27.0	PASS
5359.250000	-50.5	23.5	-27.0	PASS
5365.750000	-50.8	23.8	-27.0	PASS
5350.750000	-50.8	23.8	-27.0	PASS
5355.750000	-50.9	23.9	-27.0	PASS
5351.750000	-50.9	23.9	-27.0	PASS
5350.250000	-50.9	23.9	-27.0	PASS
5353.750000	-50.9	23.9	-27.0	PASS
5366.250000	-51.1	24.1	-27.0	PASS
5356.250000	-51.1	24.1	-27.0	PASS

U-NII-3

DUT Frequency	Result
5755.000000	PASS

DUT Frequency	Result
5795.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5641.250000	-36.8	9.8	-27.0	PASS
5640.750000	-37.7	10.7	-27.0	PASS
5641.750000	-37.8	10.8	-27.0	PASS
5639.250000	-38.7	11.7	-27.0	PASS
5639.750000	-39.5	12.5	-27.0	PASS
5634.250000	-39.5	12.5	-27.0	PASS
5638.750000	-39.8	12.8	-27.0	PASS
5633.750000	-40.2	13.2	-27.0	PASS
5634.750000	-40.4	13.4	-27.0	PASS
5640.250000	-40.7	13.7	-27.0	PASS
5635.750000	-40.9	13.9	-27.0	PASS
5642.250000	-41.4	14.4	-27.0	PASS
5647.750000	-41.4	14.4	-27.0	PASS
5631.750000	-41.5	14.5	-27.0	PASS
5650.250000	-41.4	14.6	-26.8	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5924.250000	-42.9	16.4	-26.4	PASS
5924.750000	-43.6	16.7	-26.8	PASS
5931.750000	-44.5	17.5	-27.0	PASS
5931.250000	-44.6	17.6	-27.0	PASS
5941.250000	-44.9	17.9	-27.0	PASS
5919.750000	-41.1	17.9	-23.1	PASS
5939.250000	-45.0	18.0	-27.0	PASS
5928.250000	-45.1	18.1	-27.0	PASS
5920.250000	-41.8	18.3	-23.5	PASS
5923.750000	-44.4	18.3	-26.1	PASS
5926.250000	-45.3	18.3	-27.0	PASS
5928.750000	-45.4	18.4	-27.0	PASS
5929.250000	-45.5	18.5	-27.0	PASS
5940.750000	-45.5	18.5	-27.0	PASS
5936.250000	-45.6	18.6	-27.0	PASS


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Measurement Point = 1**

**Images:**

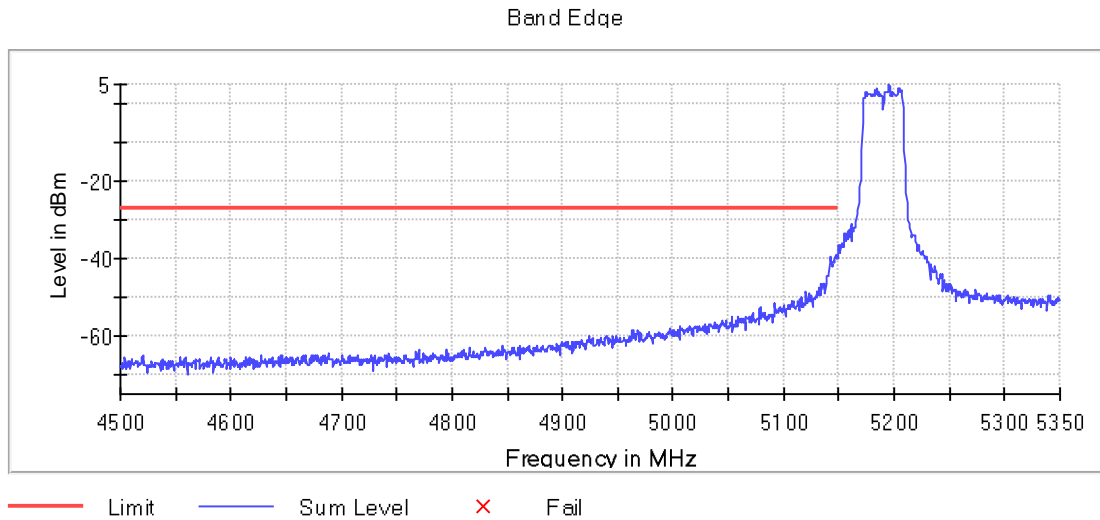


**Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Measurement Point = 1**

**Images:**

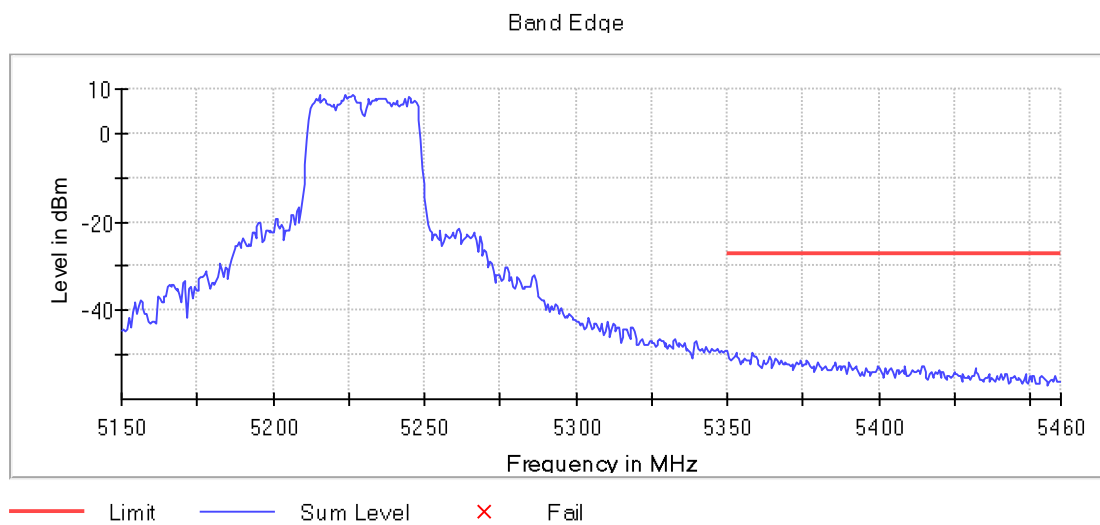


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Measurement Point = 1

Images:

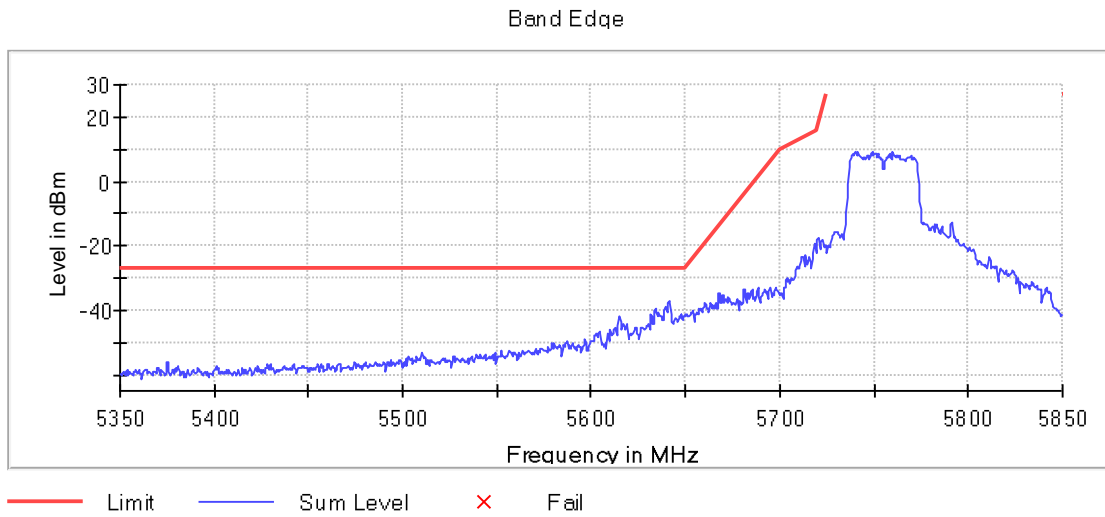

Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Measurement Point = 1

Images:

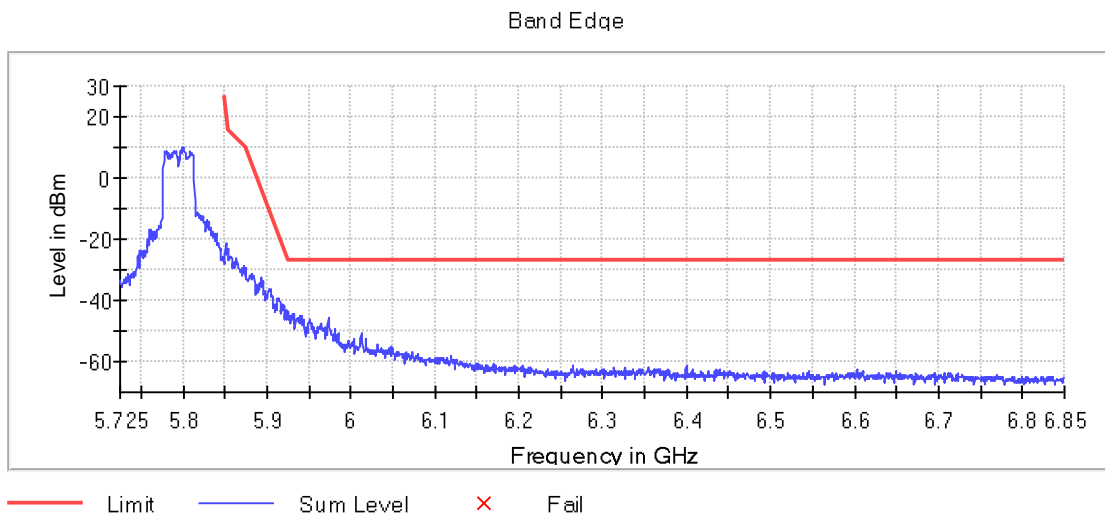

Modulation: 802.11ac VHT20 (OFDM MCS0)

**Results**

U-NII-1

DUT Frequency	Result
5180.000000	PASS

DUT Frequency	Result
5240.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5137.250000	-37.5	10.5	-27.0	PASS
5137.750000	-38.3	11.3	-27.0	PASS
5141.750000	-38.3	11.3	-27.0	PASS
5148.750000	-38.4	11.4	-27.0	PASS
5149.250000	-38.9	11.9	-27.0	PASS
5148.250000	-39.0	12.0	-27.0	PASS
5149.750000	-39.0	12.0	-27.0	PASS
5134.250000	-39.1	12.1	-27.0	PASS
5133.750000	-39.2	12.2	-27.0	PASS
5146.750000	-39.2	12.2	-27.0	PASS
5147.750000	-39.3	12.3	-27.0	PASS
5145.750000	-39.5	12.5	-27.0	PASS
5147.250000	-39.7	12.7	-27.0	PASS
5146.250000	-39.7	12.7	-27.0	PASS
5138.750000	-39.9	12.9	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5365.250000	-52.1	25.1	-27.0	PASS
5352.250000	-52.6	25.6	-27.0	PASS
5351.250000	-52.9	25.9	-27.0	PASS
5352.750000	-53.2	26.2	-27.0	PASS
5384.250000	-53.2	26.2	-27.0	PASS
5351.750000	-53.3	26.3	-27.0	PASS
5350.750000	-53.4	26.4	-27.0	PASS
5357.250000	-53.4	26.4	-27.0	PASS
5364.250000	-53.5	26.5	-27.0	PASS
5367.250000	-53.6	26.6	-27.0	PASS
5403.750000	-53.7	26.7	-27.0	PASS
5358.250000	-53.7	26.7	-27.0	PASS
5403.250000	-53.7	26.7	-27.0	PASS
5365.750000	-53.7	26.7	-27.0	PASS
5354.250000	-53.7	26.7	-27.0	PASS

U-NII-3

DUT Frequency	Result
5745.000000	PASS

DUT Frequency	Result
5825.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5648.750000	-39.8	12.8	-27.0	PASS
5649.750000	-40.2	13.2	-27.0	PASS
5649.250000	-40.6	13.6	-27.0	PASS
5645.250000	-40.8	13.8	-27.0	PASS
5641.250000	-41.4	14.4	-27.0	PASS
5640.750000	-41.5	14.5	-27.0	PASS
5644.750000	-41.6	14.6	-27.0	PASS
5653.750000	-39.0	14.8	-24.2	PASS
5648.250000	-42.0	15.0	-27.0	PASS
5650.750000	-41.5	15.0	-26.4	PASS
5654.250000	-39.0	15.1	-23.9	PASS
5651.250000	-41.3	15.3	-26.1	PASS
5647.250000	-42.4	15.4	-27.0	PASS
5656.250000	-37.9	15.5	-22.4	PASS
5646.750000	-42.5	15.5	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5923.250000	-49.8	24.1	-25.7	PASS
5926.250000	-51.3	24.3	-27.0	PASS
5932.750000	-51.4	24.4	-27.0	PASS
5926.750000	-51.4	24.4	-27.0	PASS
5924.750000	-51.4	24.6	-26.8	PASS
5925.250000	-51.9	24.9	-27.0	PASS
5923.750000	-51.2	25.2	-26.1	PASS
5929.250000	-52.3	25.3	-27.0	PASS
5967.250000	-52.3	25.3	-27.0	PASS
5927.250000	-52.4	25.4	-27.0	PASS
5924.250000	-51.9	25.4	-26.4	PASS
5939.750000	-52.5	25.5	-27.0	PASS
5928.750000	-52.5	25.5	-27.0	PASS
5925.750000	-52.5	25.5	-27.0	PASS
5961.250000	-52.6	25.6	-27.0	PASS


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5180.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 1**

**Images:**

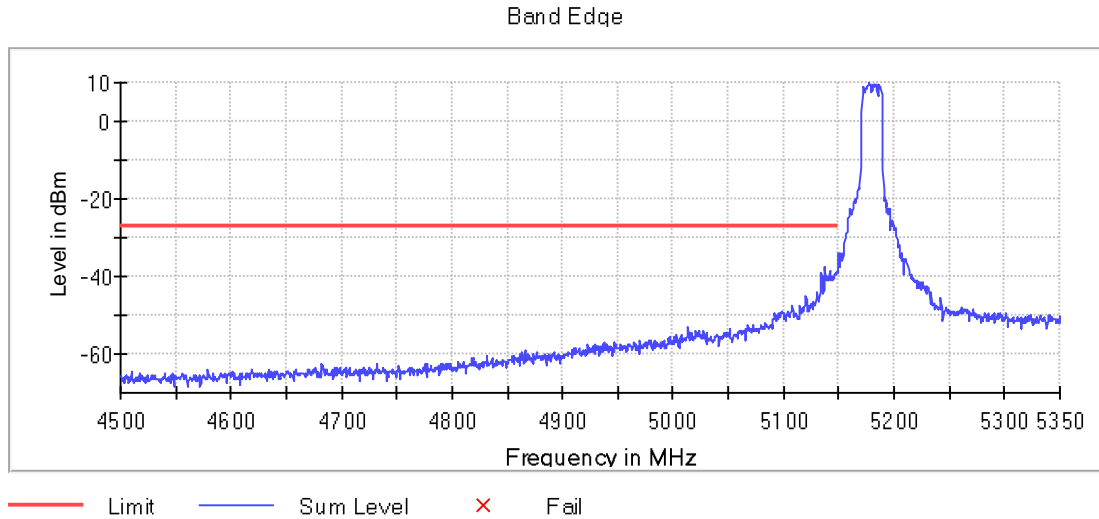


**Active Port = 1, Frequency MHz = 5240.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 1**

**Images:**

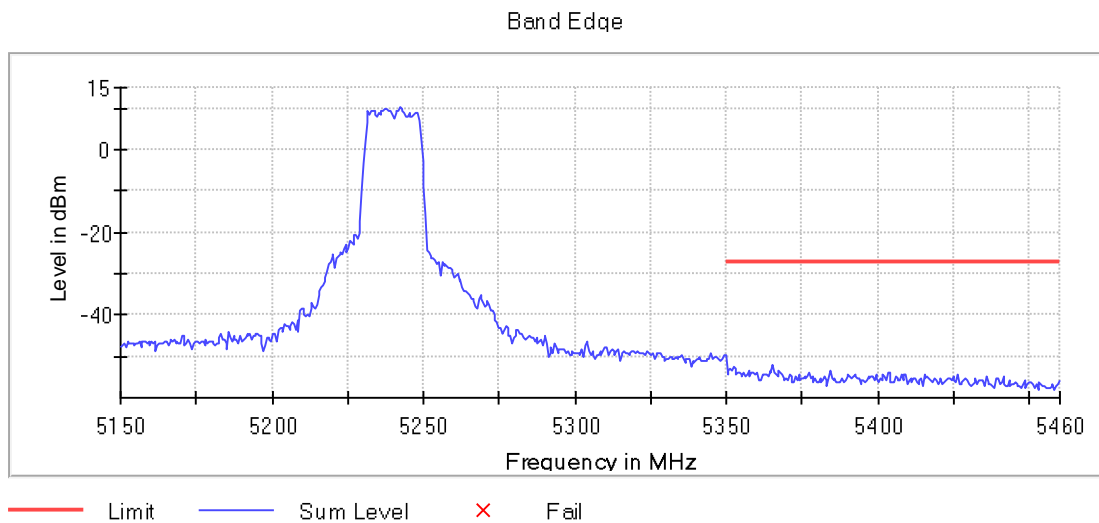


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 1

Images:

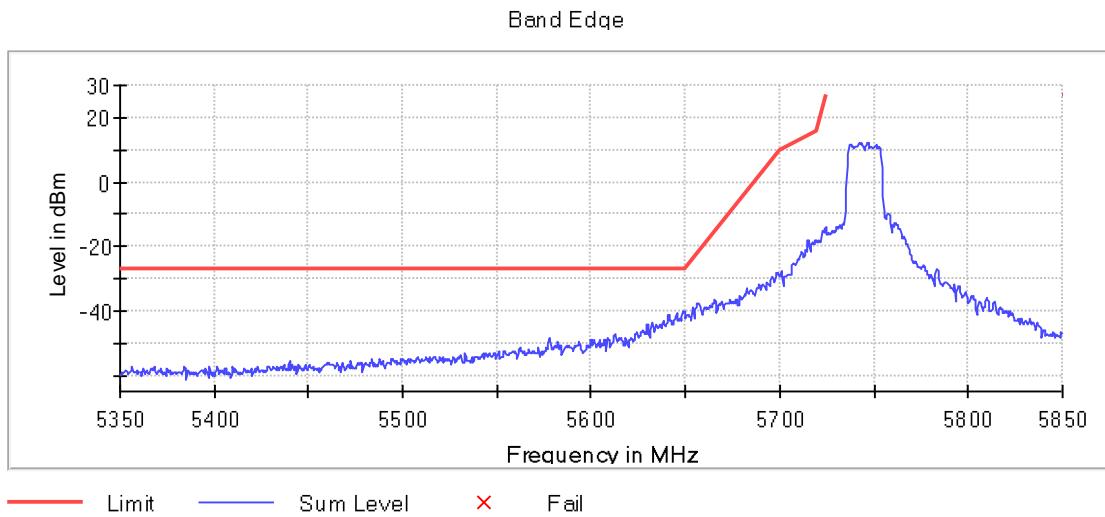

Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 1

Images:

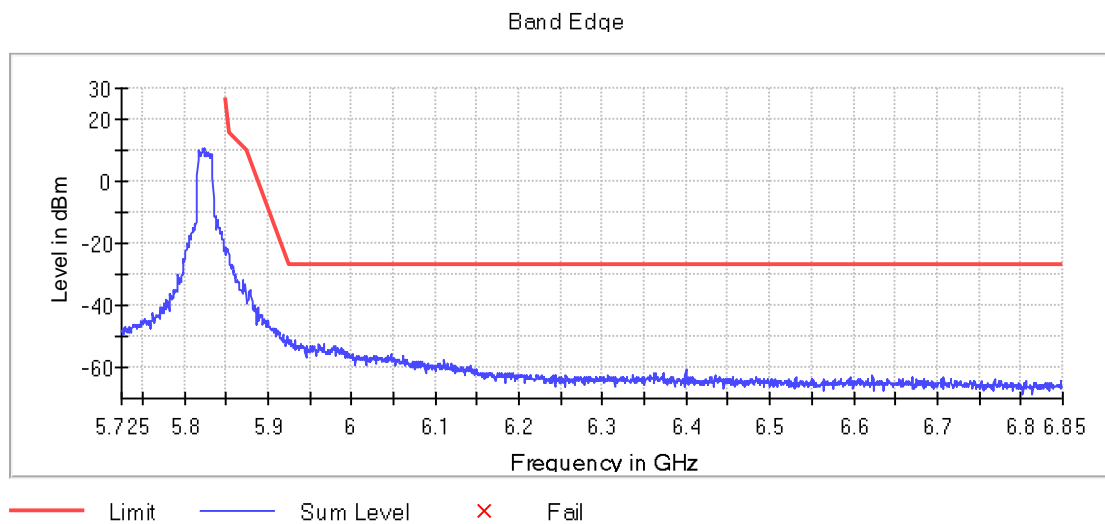

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)

**Results**

U-NII-1

DUT Frequency	Result
5190.000000	PASS

DUT Frequency	Result
5230.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5148.750000	-35.4	8.4	-27.0	PASS
5149.750000	-35.7	8.7	-27.0	PASS
5148.250000	-35.9	8.9	-27.0	PASS
5149.250000	-36.1	9.1	-27.0	PASS
5147.250000	-37.5	10.5	-27.0	PASS
5147.750000	-38.0	11.0	-27.0	PASS
5143.250000	-38.5	11.5	-27.0	PASS
5142.750000	-38.6	11.6	-27.0	PASS
5145.750000	-38.7	11.7	-27.0	PASS
5146.750000	-39.1	12.1	-27.0	PASS
5144.750000	-39.2	12.2	-27.0	PASS
5146.250000	-39.2	12.2	-27.0	PASS
5143.750000	-39.3	12.3	-27.0	PASS
5144.250000	-39.6	12.6	-27.0	PASS
5145.250000	-40.3	13.3	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5362.250000	-50.2	23.2	-27.0	PASS
5363.750000	-50.4	23.4	-27.0	PASS
5361.750000	-51.0	24.0	-27.0	PASS
5353.750000	-51.0	24.0	-27.0	PASS
5363.250000	-51.1	24.1	-27.0	PASS
5356.250000	-51.4	24.4	-27.0	PASS
5359.250000	-51.5	24.5	-27.0	PASS
5353.250000	-51.5	24.5	-27.0	PASS
5373.250000	-51.6	24.6	-27.0	PASS
5354.250000	-52.0	25.0	-27.0	PASS
5350.250000	-52.0	25.0	-27.0	PASS
5350.750000	-52.1	25.1	-27.0	PASS
5359.750000	-52.1	25.1	-27.0	PASS
5360.250000	-52.2	25.2	-27.0	PASS
5364.750000	-52.3	25.3	-27.0	PASS

U-NII-3

DUT Frequency	Result
5755.000000	PASS

DUT Frequency	Result
5795.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5650.750000	-36.6	10.2	-26.4	PASS
5645.250000	-37.2	10.2	-27.0	PASS
5645.750000	-37.3	10.3	-27.0	PASS
5651.250000	-37.0	10.9	-26.1	PASS
5648.250000	-38.4	11.4	-27.0	PASS
5644.750000	-38.5	11.5	-27.0	PASS
5650.250000	-38.4	11.5	-26.8	PASS
5647.750000	-38.6	11.6	-27.0	PASS
5648.750000	-38.6	11.6	-27.0	PASS
5647.250000	-39.0	12.0	-27.0	PASS
5652.250000	-37.6	12.2	-25.3	PASS
5646.250000	-39.3	12.3	-27.0	PASS
5640.250000	-39.5	12.5	-27.0	PASS
5643.750000	-39.5	12.5	-27.0	PASS
5649.750000	-39.6	12.6	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5923.250000	-43.7	18.0	-25.7	PASS
5923.750000	-44.1	18.0	-26.1	PASS
5924.750000	-45.0	18.2	-26.8	PASS
5924.250000	-44.8	18.4	-26.4	PASS
5951.750000	-45.6	18.6	-27.0	PASS
5925.250000	-45.7	18.7	-27.0	PASS
5926.750000	-45.8	18.8	-27.0	PASS
5926.250000	-45.8	18.8	-27.0	PASS
5927.750000	-45.9	18.9	-27.0	PASS
5921.750000	-43.5	18.9	-24.6	PASS
5928.250000	-45.9	18.9	-27.0	PASS
5933.750000	-45.9	18.9	-27.0	PASS
5927.250000	-46.1	19.1	-27.0	PASS
5951.250000	-46.1	19.1	-27.0	PASS
5925.750000	-46.3	19.3	-27.0	PASS


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5190.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1**

**Images:**

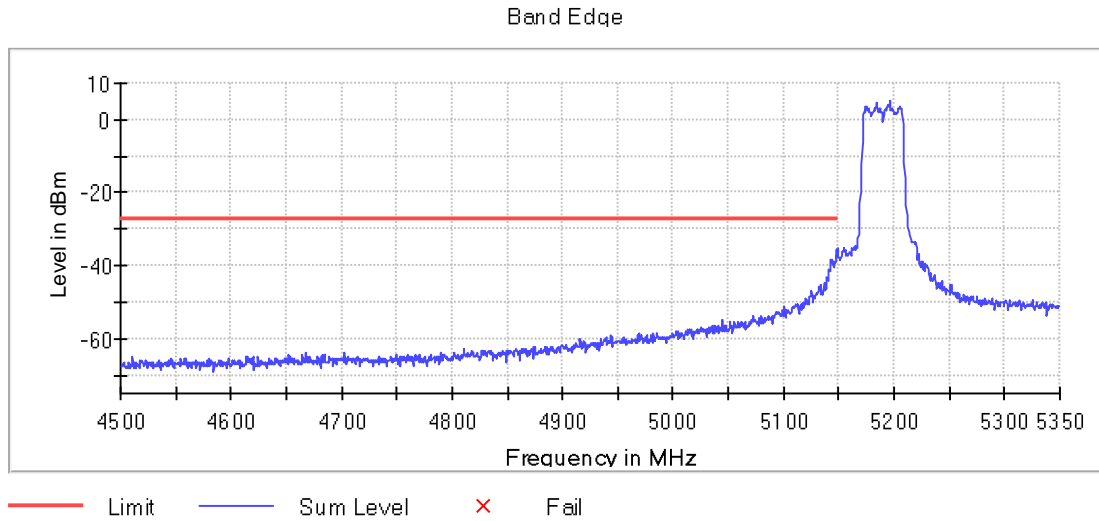

**Active Port = 1, Frequency MHz = 5230.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1**


**Images:**

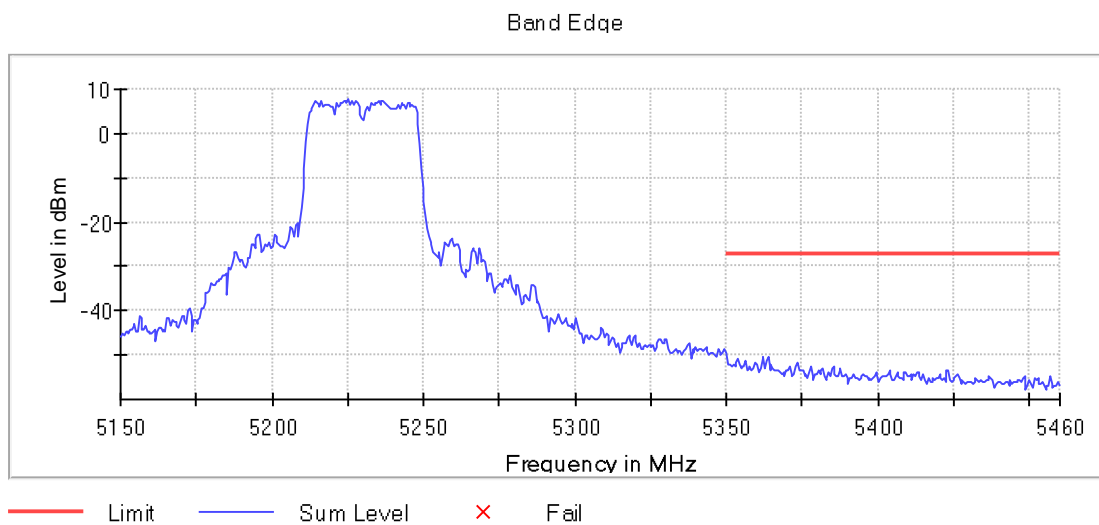




Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1

Images:

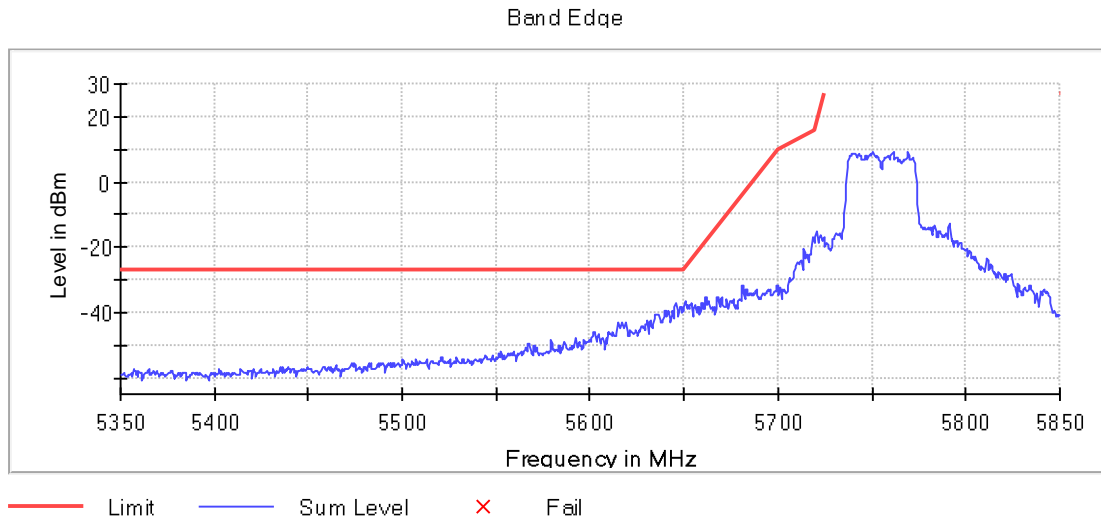

Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1

Images:

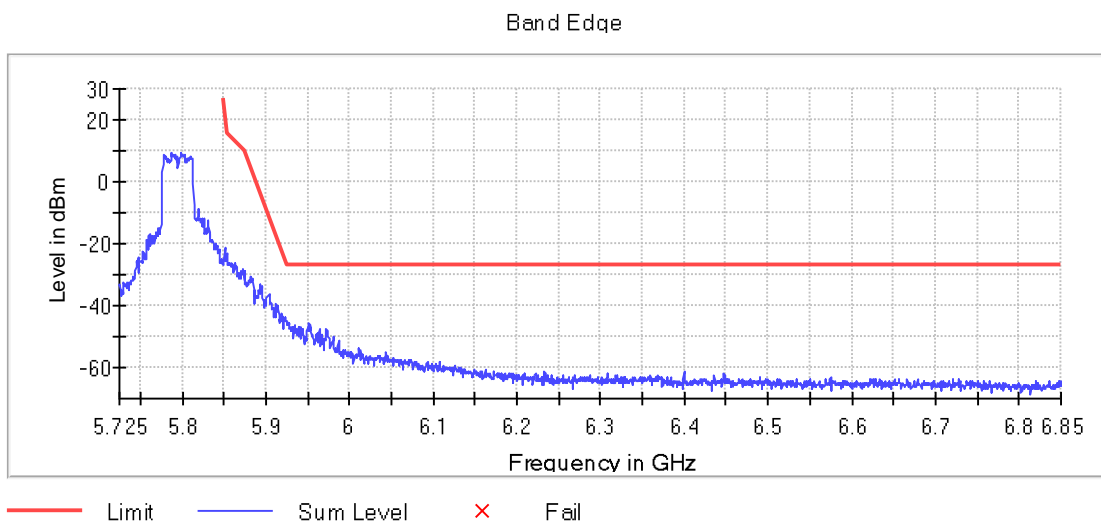

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)

**Results**

U-NII-1

DUT Frequency	Result
5210.000000	PASS

DUT Frequency	Result
5210.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5121.750000	-35.6	8.6	-27.0	PASS
5125.250000	-35.7	8.7	-27.0	PASS
5119.250000	-35.7	8.7	-27.0	PASS
5121.250000	-35.8	8.8	-27.0	PASS
5124.250000	-35.9	8.9	-27.0	PASS
5117.250000	-35.9	8.9	-27.0	PASS
5116.750000	-36.0	9.0	-27.0	PASS
5123.750000	-36.0	9.0	-27.0	PASS
5144.250000	-36.1	9.1	-27.0	PASS
5124.750000	-36.3	9.3	-27.0	PASS
5148.250000	-36.3	9.3	-27.0	PASS
5138.750000	-36.4	9.4	-27.0	PASS
5147.750000	-36.4	9.4	-27.0	PASS
5149.250000	-36.5	9.5	-27.0	PASS
5118.750000	-36.5	9.5	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5361.750000	-49.0	22.0	-27.0	PASS
5362.750000	-49.2	22.2	-27.0	PASS
5350.250000	-49.3	22.3	-27.0	PASS
5350.750000	-49.6	22.6	-27.0	PASS
5359.750000	-49.6	22.6	-27.0	PASS
5354.250000	-49.6	22.6	-27.0	PASS
5352.750000	-49.6	22.6	-27.0	PASS
5352.250000	-49.6	22.6	-27.0	PASS
5354.750000	-49.9	22.9	-27.0	PASS
5357.250000	-49.9	22.9	-27.0	PASS
5359.250000	-50.0	23.0	-27.0	PASS
5357.750000	-50.1	23.1	-27.0	PASS
5362.250000	-50.2	23.2	-27.0	PASS
5364.250000	-50.3	23.3	-27.0	PASS
5363.250000	-50.3	23.3	-27.0	PASS

U-NII-3

DUT Frequency	Result
5775.000000	PASS

DUT Frequency	Result
5775.000000	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5646.250000	-36.3	9.3	-27.0	PASS
5646.750000	-36.4	9.4	-27.0	PASS
5648.250000	-36.4	9.4	-27.0	PASS
5645.750000	-36.6	9.6	-27.0	PASS
5647.750000	-36.6	9.6	-27.0	PASS
5644.250000	-36.7	9.7	-27.0	PASS
5643.750000	-36.8	9.8	-27.0	PASS
5645.250000	-36.8	9.8	-27.0	PASS
5648.750000	-36.9	9.9	-27.0	PASS
5644.750000	-37.1	10.1	-27.0	PASS
5649.250000	-37.1	10.1	-27.0	PASS
5650.250000	-37.0	10.2	-26.8	PASS
5650.750000	-36.7	10.3	-26.4	PASS
5642.250000	-37.5	10.5	-27.0	PASS
5647.250000	-37.6	10.6	-27.0	PASS

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5934.250000	-43.1	16.1	-27.0	PASS
5933.750000	-43.1	16.1	-27.0	PASS
5934.750000	-43.4	16.4	-27.0	PASS
5935.750000	-44.2	17.2	-27.0	PASS
5922.250000	-42.5	17.5	-25.0	PASS
5936.250000	-44.6	17.6	-27.0	PASS
5923.750000	-43.7	17.6	-26.1	PASS
5929.250000	-44.7	17.7	-27.0	PASS
5927.750000	-44.9	17.9	-27.0	PASS
5935.250000	-45.0	18.0	-27.0	PASS
5924.250000	-44.4	18.0	-26.4	PASS
5928.750000	-45.0	18.0	-27.0	PASS
5927.250000	-45.0	18.0	-27.0	PASS
5922.750000	-43.7	18.3	-25.3	PASS
5936.750000	-45.3	18.3	-27.0	PASS


**Verdict**

Pass

**Attachments**


**Active Port = 1, Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1**

**Images:**

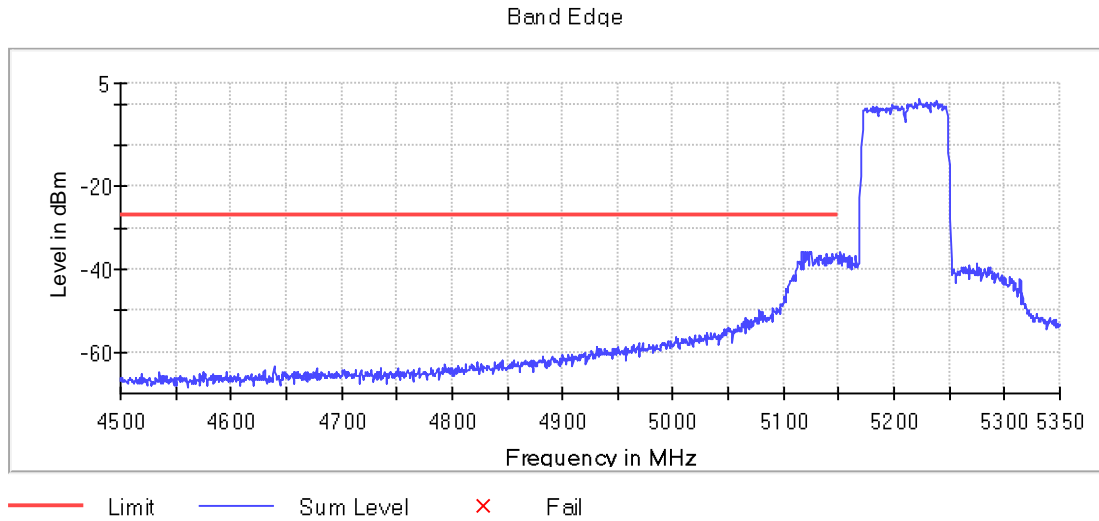


**Active Port = 1, Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1**

**Images:**

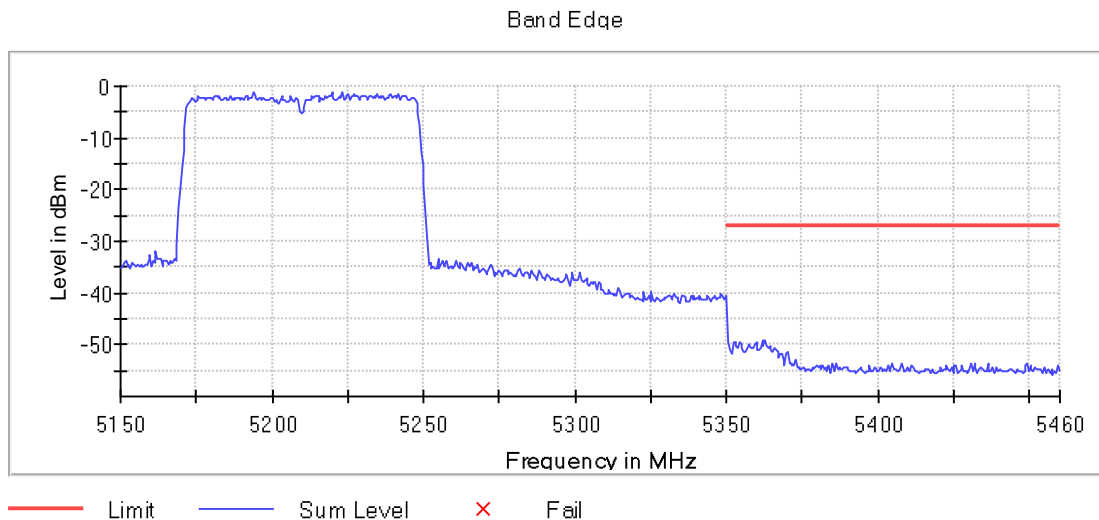


Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1

Images:

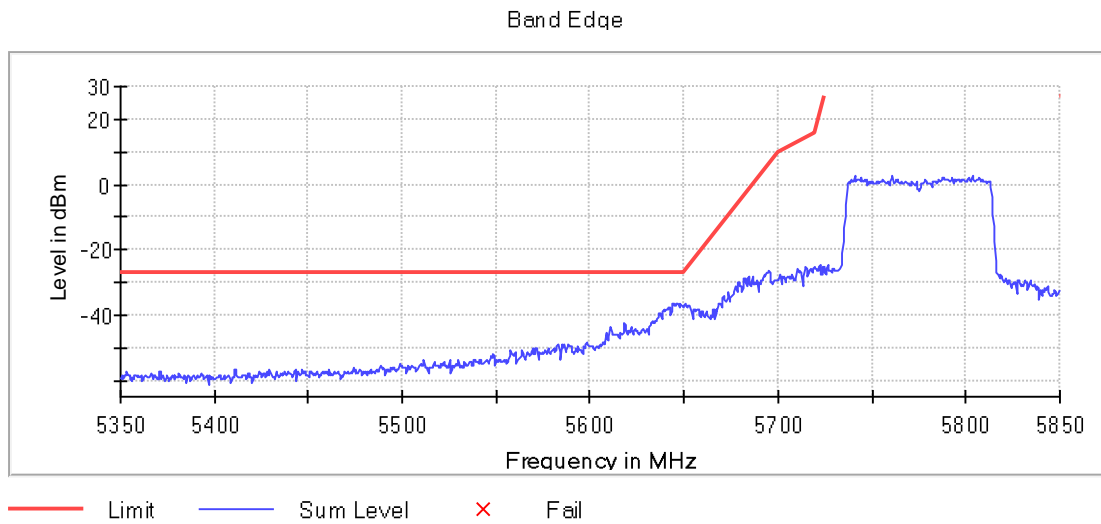

Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 1

Images:

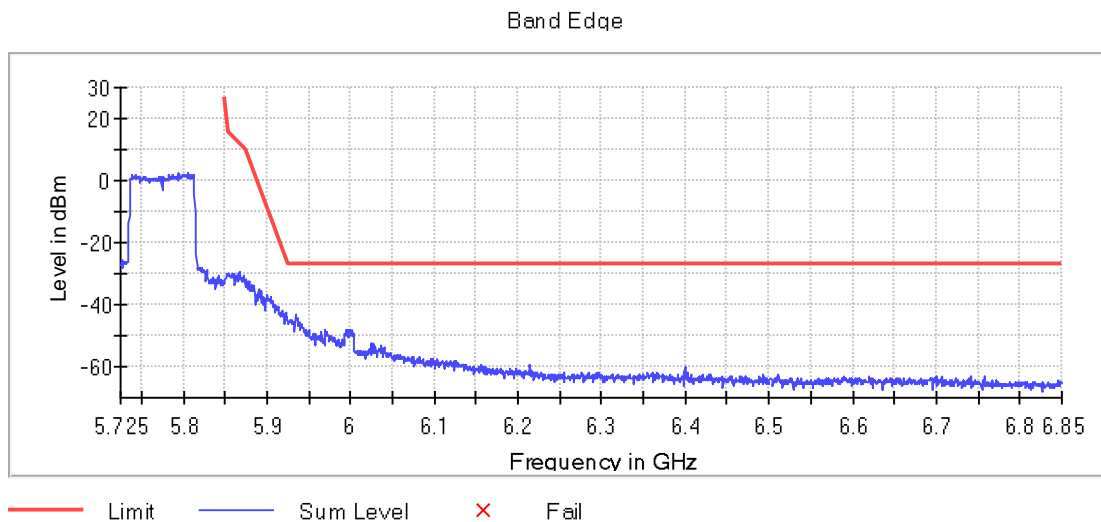

### Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.72500 GHz
Stop Frequency	5.35000 GHz	5.85000 GHz
Span	200.000 MHz	125.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	250
Sweeptime	40.000 ms	25.000 ms
Reference Level	0.000 dBm	10.000 dBm
Attenuation	20.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	Channel	Channel
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	11 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.03 dB	0.09 dB

FCC 15.407 (e) / RSS 247 6.2.4.1 6 dB Emission Bandwidth

**Limits**

FCC 15.407:

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

RSS-247:

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**

Band	Port	Freq (MHz)	# of Tx Chains	6dB BW (MHz)
U-NII-3	1	5745.00000	1	16.400
	1	5785.00000	1	16.400
	1	5825.00000	1	16.400

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	# of Tx Chains	6dB BW (MHz)
U-NII-3	1	5745.00000	1	17.450
	1	5785.00000	1	17.350
	1	5825.00000	1	17.400

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

**Results**

Band	Port	Freq (MHz)	# of Tx Chains	6dB BW (MHz)
U-NII-3	1	5755.00000	1	35.750
	1	5795.00000	1	35.200

Modulation: 802.11ac VHT20 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	# of Tx Chains	6dB BW (MHz)
U-NII-3	1	5745.00000	1	17.450
	1	5785.00000	1	17.400
	1	5825.00000	1	17.400

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)

**Results**

Band	Port	Freq (MHz)	# of Tx Chains	6dB BW (MHz)
U-NII-3	1	5755.00000	1	35.750
	1	5795.00000	1	35.200

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)

**Results**


Band	Port	Freq (MHz)	# of Tx Chains	6dB BW (MHz)
U-NII-3	1	5775.00000	1	76.450

**Verdict**

Pass


**Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**

**Images:**

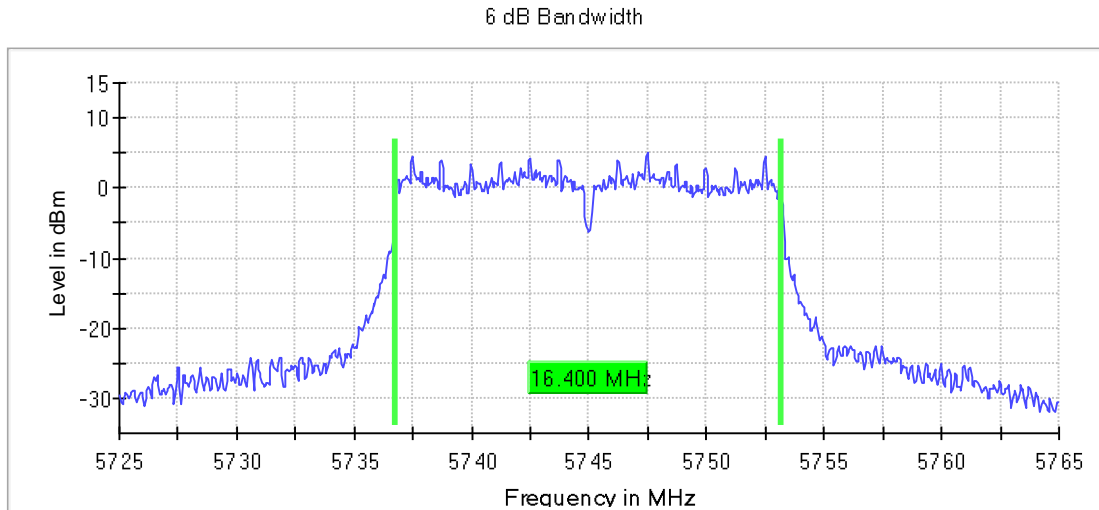

**Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO,  
Number of Transmission Chains = 1**


**Images:**

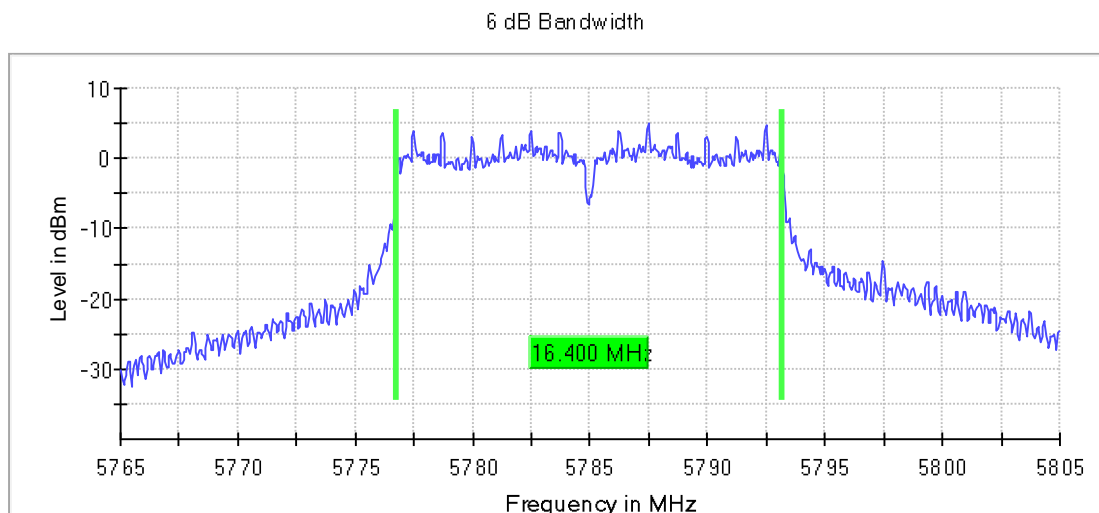




**Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

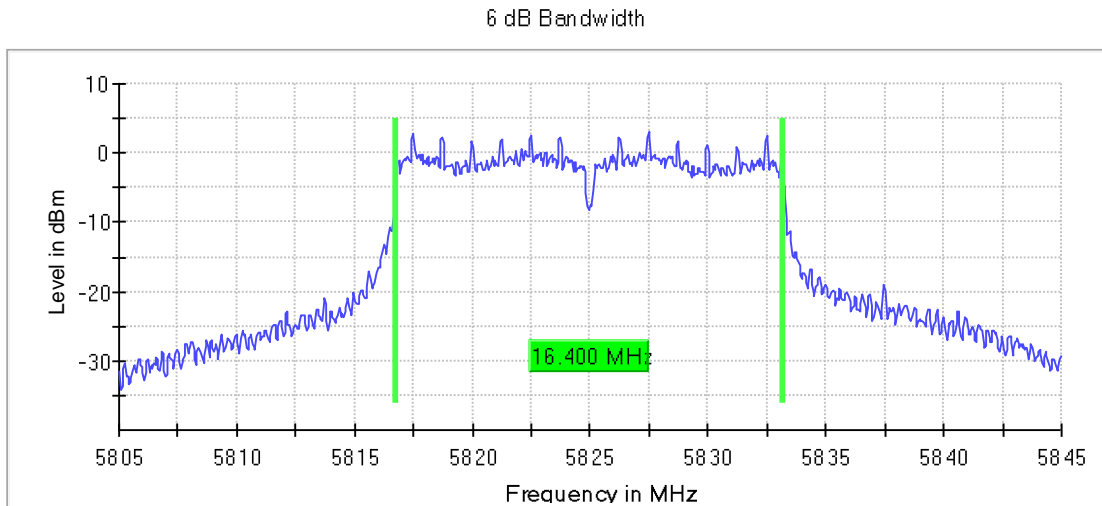


**Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

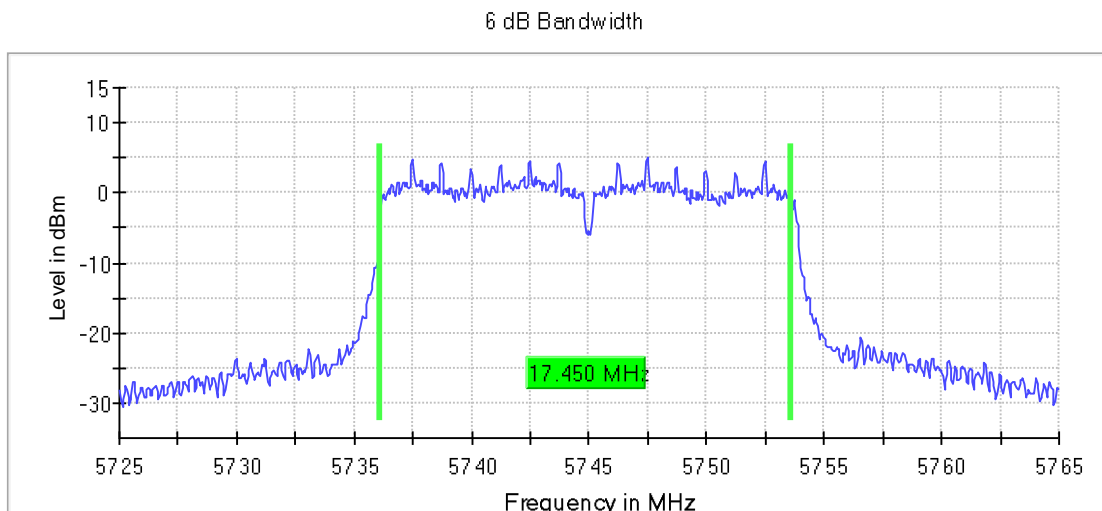


**Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

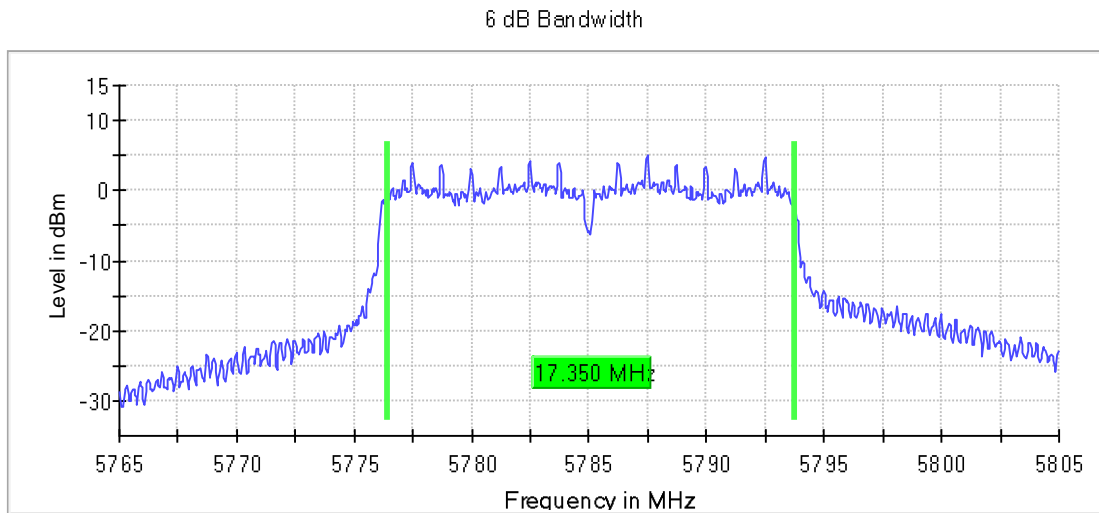


**Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

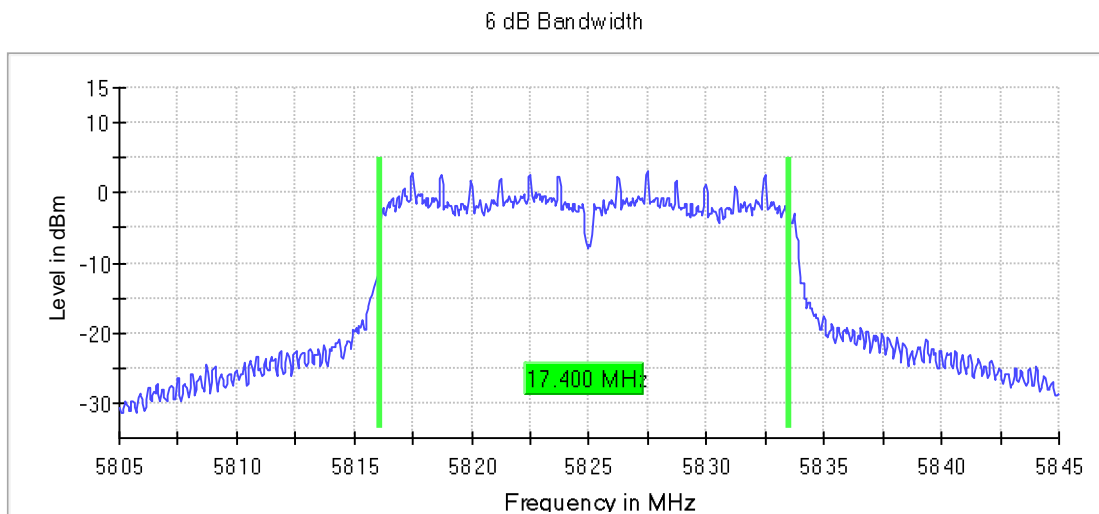


**Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

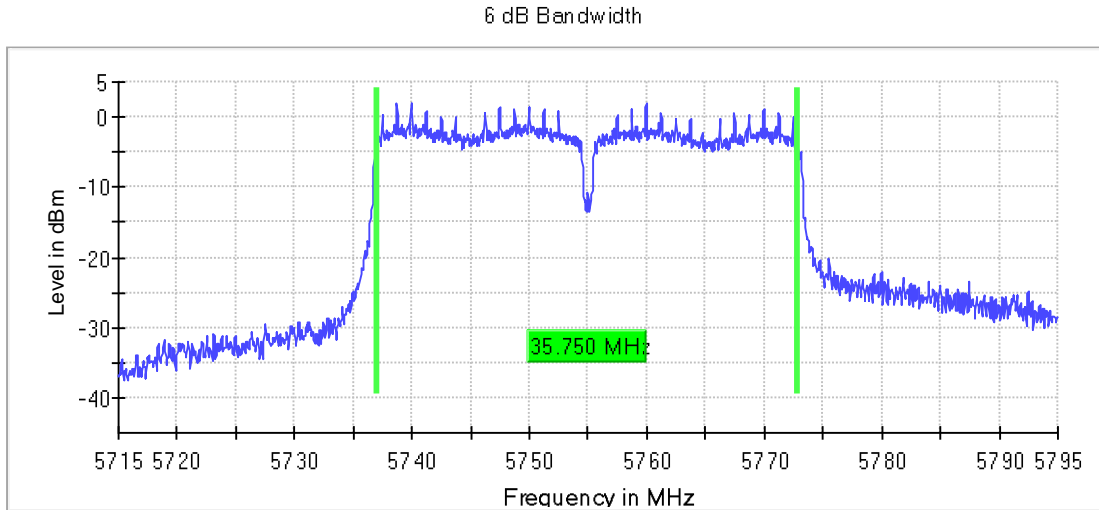


**Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s),  
MODE = SISO, Number of Transmission Chains = 1**

**Images:**

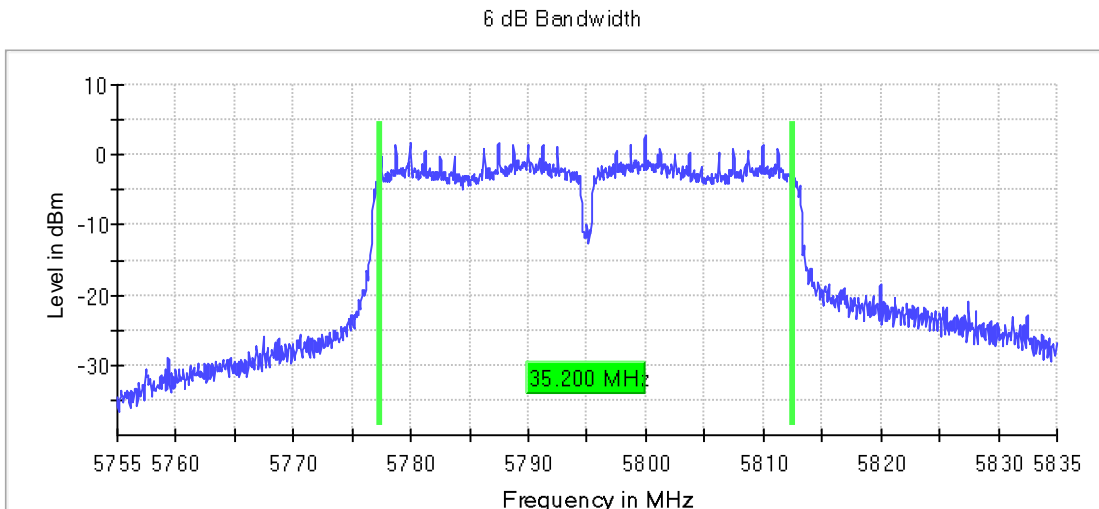


Active Port = 1, Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

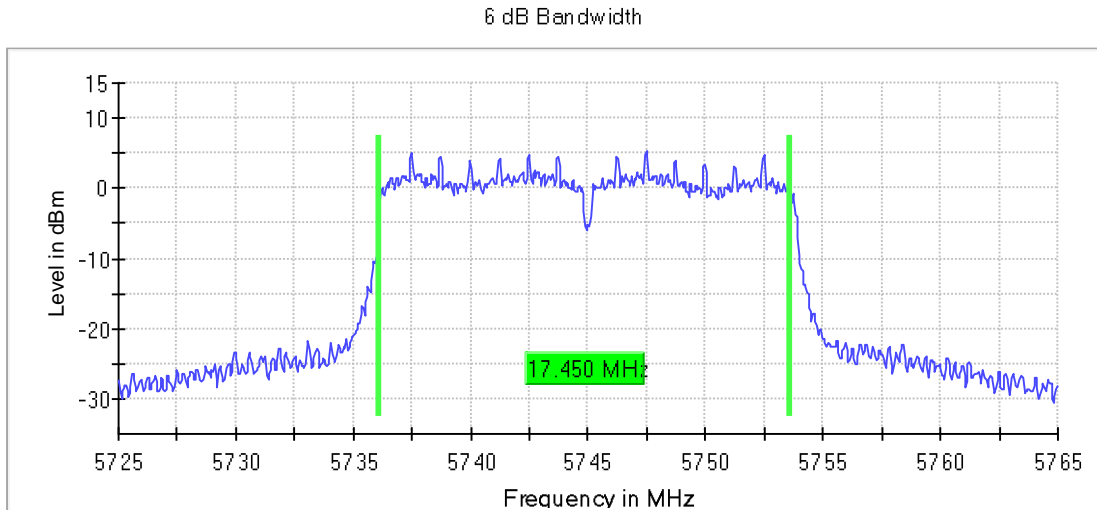


Active Port = 1, Frequency MHz = 5785.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

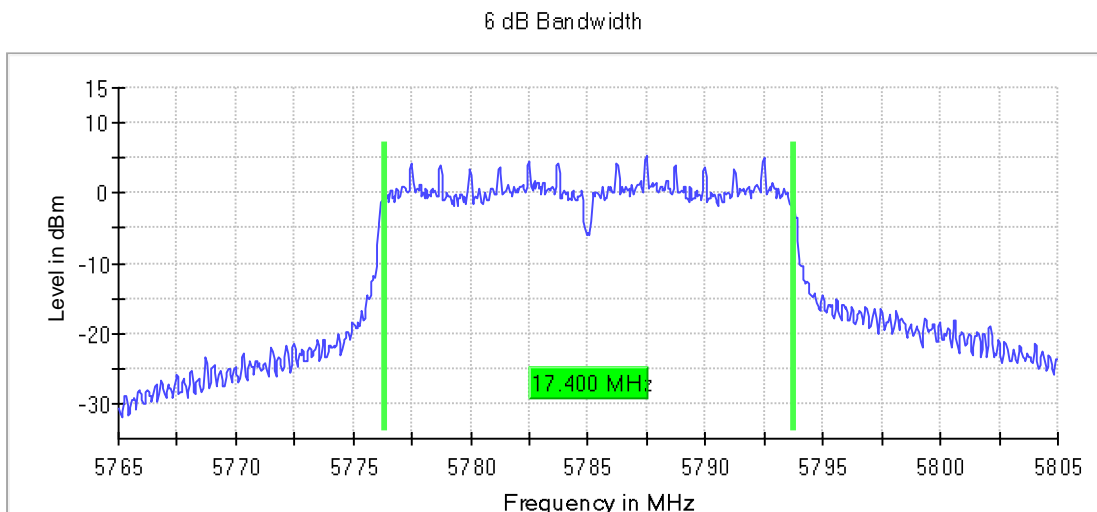


Active Port = 1, Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

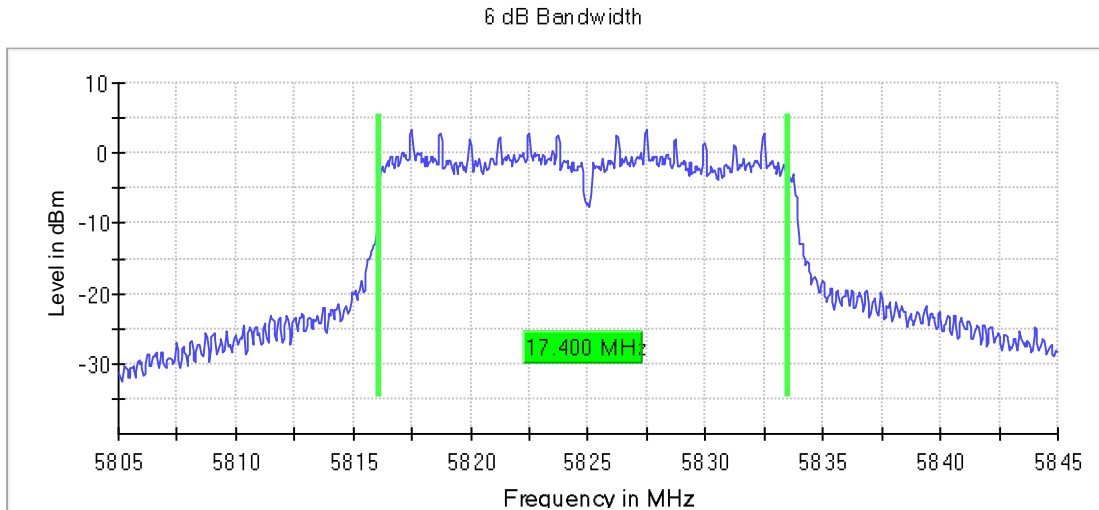


Active Port = 1, Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1

Images:

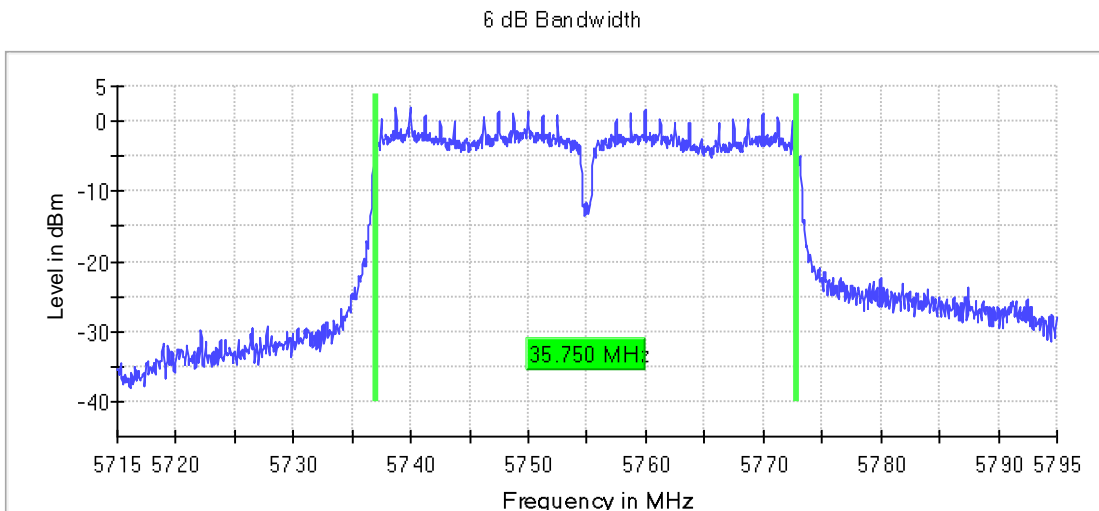


**Active Port = 1, Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

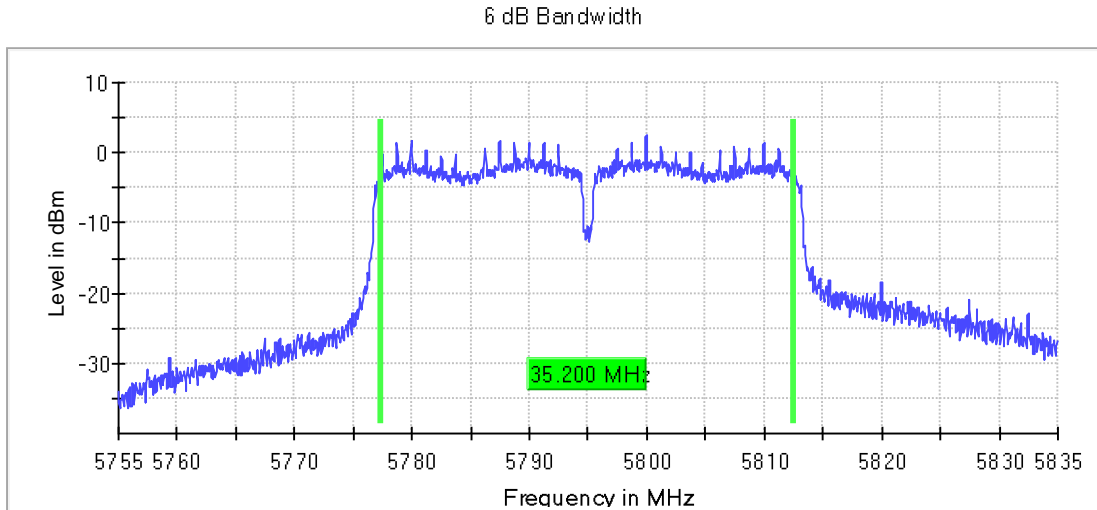

**Active Port = 1, Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Number of Transmission Chains = 1**

**Images:**

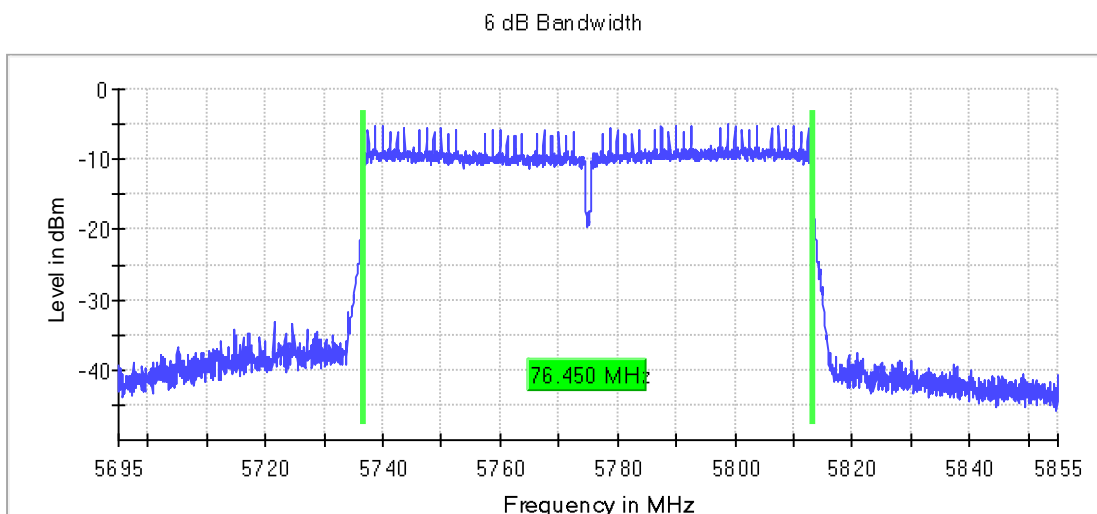

## Spectrum Analyzer Parameters

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.72500 GHz	5.76500 GHz	5.80500 GHz
Stop Frequency	5.76500 GHz	5.80500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	200.000 kHz	200.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 $\mu$ s	56.836 $\mu$ s	56.836 $\mu$ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	50 / max. 150	72 / max. 150	62 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.19 dB	0.14 dB	0.19 dB

FCC 15.407 (b), 15.205 & 15.209 / RSS-Gen 8.9 & 8.10 Undesirable radiated emissions

**Limits**

For transmitters operating in the 5.150–5.250 GHz band:  
 All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725–5.85 GHz band:  
 All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

**Verdict**

Pass



U-NII-1: 5.15 GHz – 5.25 GHz Band

Modulation: 802.11a (OFDM 6 Mbit/s)

**Results**


**Frequency range 0.03 - 1 GHz**

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.

**Middle Channel**

**Active Port = 1, Frequency Range GHz = [0.03, 1], Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 6**

Images:

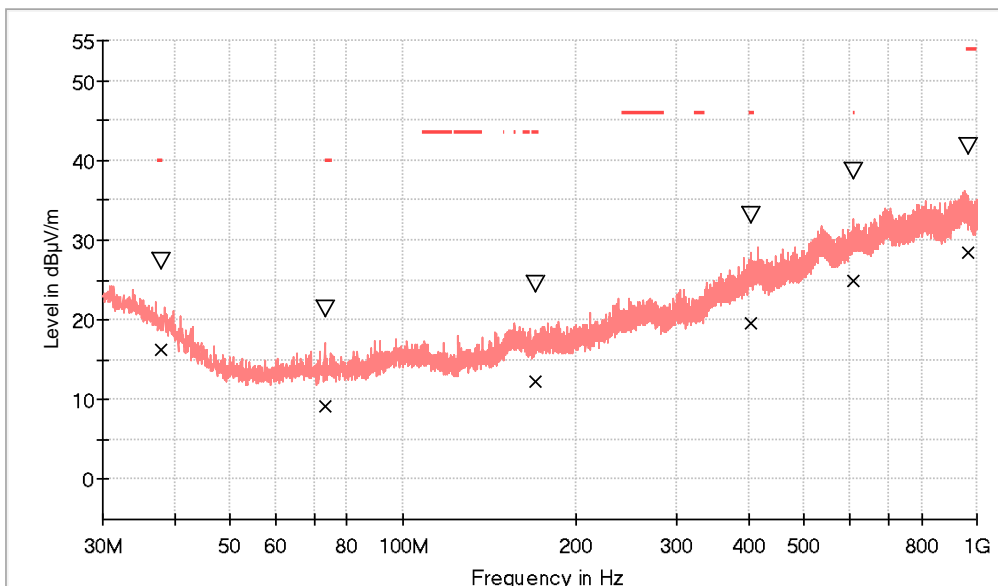

- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)


Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)
37.808500	27.3	16.2	V	23.8	40.0
73.019500	21.5	9.2	V	30.8	40.0
169.680000	24.4	12.2	V	31.3	43.5
404.711000	33.0	19.7	V	26.4	46.0
610.108500	38.7	24.9	V	21.1	46.0
964.498000	41.8	28.4	V	25.6	54.0

**Frequency range 1 - 18 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

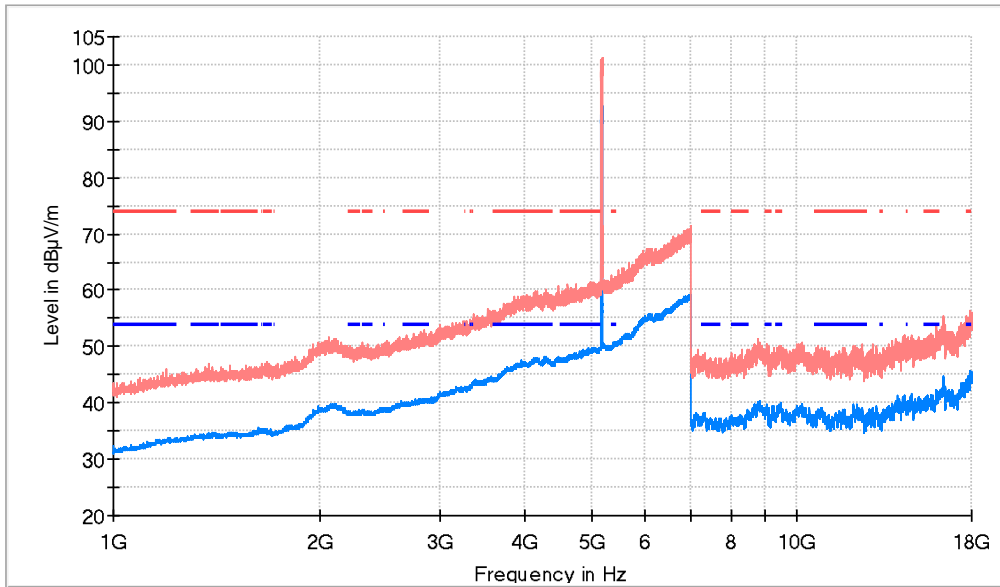

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5182.000000	99.8	92.5	H	---	---	Fundamental
5365.000000	62.8	50.1	H	3.9	54.0	
17943.50000	55.0	45.9	H	8.1	54.0	

**Frequency range 1 - 18 GHz**

**Middle Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

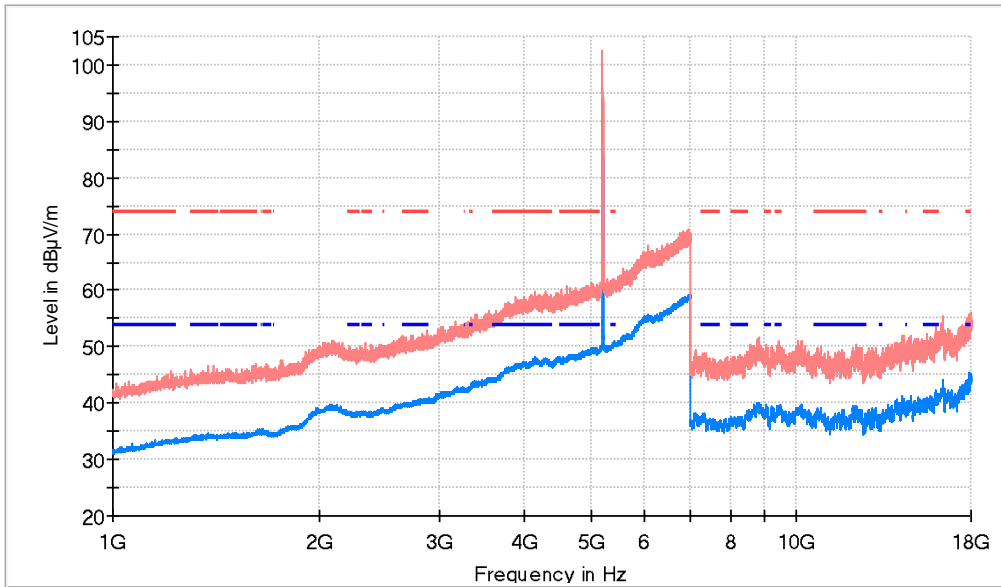

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5198.000000	102.6	93.7	H	---	---	Fundamental
5416.000000	60.6	51.0	H	3.0	54.0	
17942.500000	54.2	45.4	H	8.6	54.0	

**Frequency range 1 - 18 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

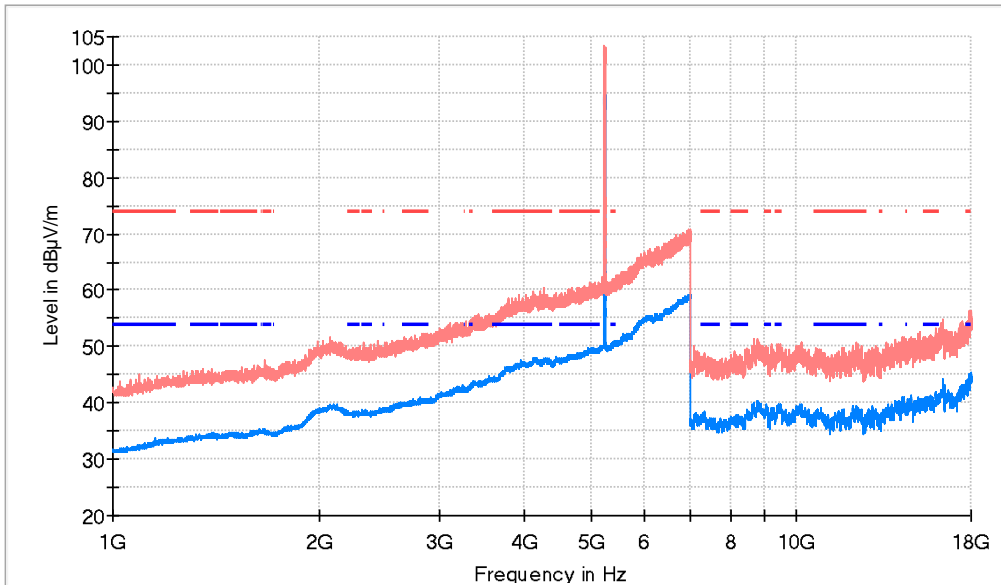

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5242.000000	102.8	94.7	H	---	---	Fundamental
5414.000000	60.7	50.9	H	3.1	54.0	
17999.50000	55.4	45.4	H	8.6	54.0	

**Frequency range 18 - 40 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5180.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

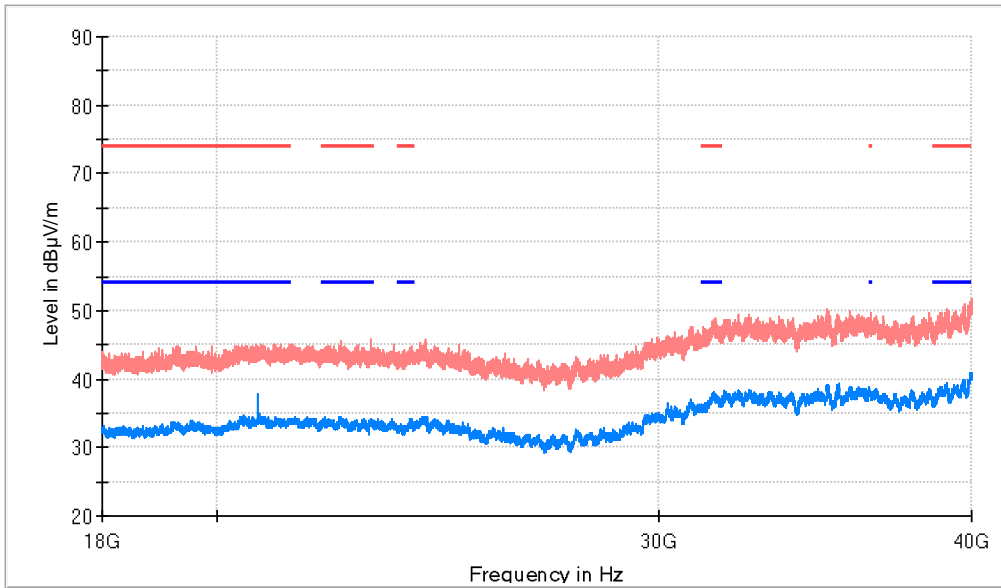

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20759.620000	43.2	37.6	H	16.4	54.0

**Frequency range 18 - 40 GHz**

**Middle Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5200.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

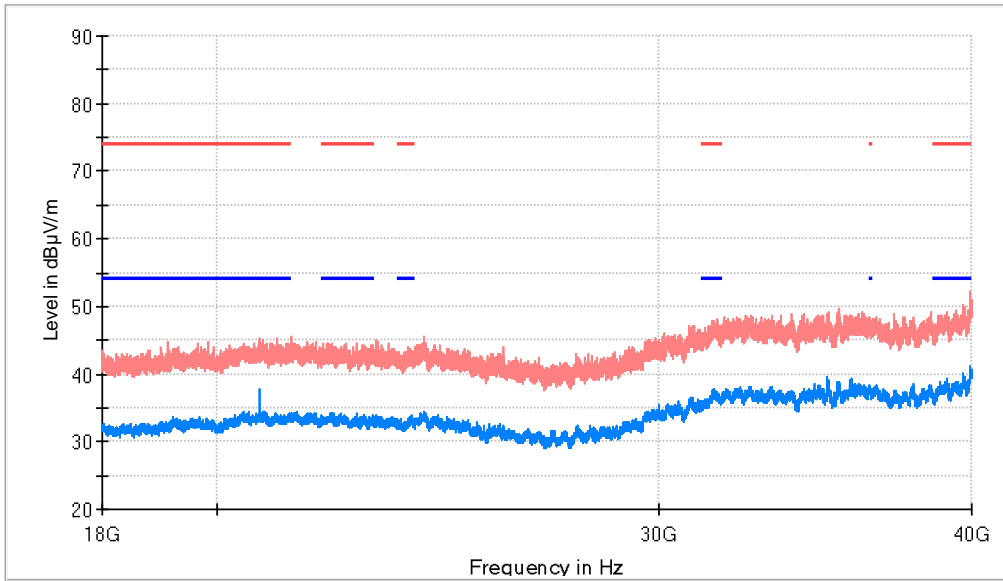

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20799.510000	44.7	37.7	V	16.3	54.0

**Frequency range 18 - 40 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

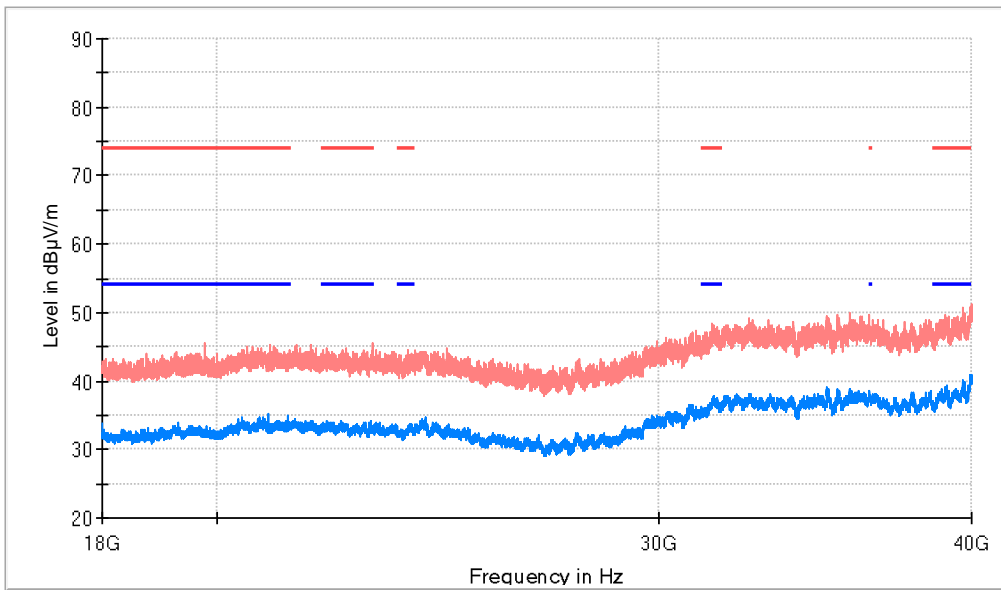


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20959.689000	43.4	35.1	V	18.9	54.0

### Restricted Bands (4.9 GHz - 5.46 GHz)

#### Lowest Channel


Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5180.00000, Modulation = 802.11a  
(OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3

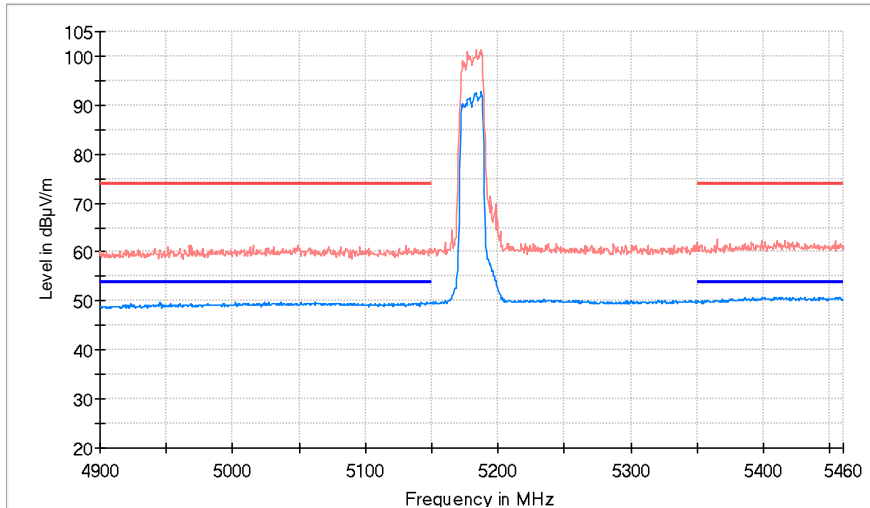

- AVG\_MAXH
- PK+ \_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

#### Middle Channel

Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5200.00000, Modulation = 802.11a  
(OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3

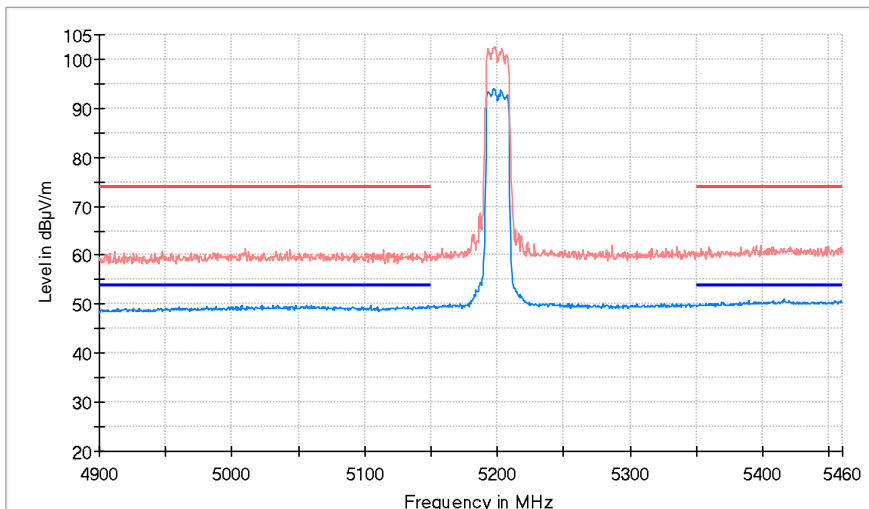


- AVG\_MAXH
- PK+ \_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit



### Highest Channel

Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5240.00000, Modulation = 802.11a (OFDM 6 Mbit/s), MODE = SISO, Measurement Point = 3

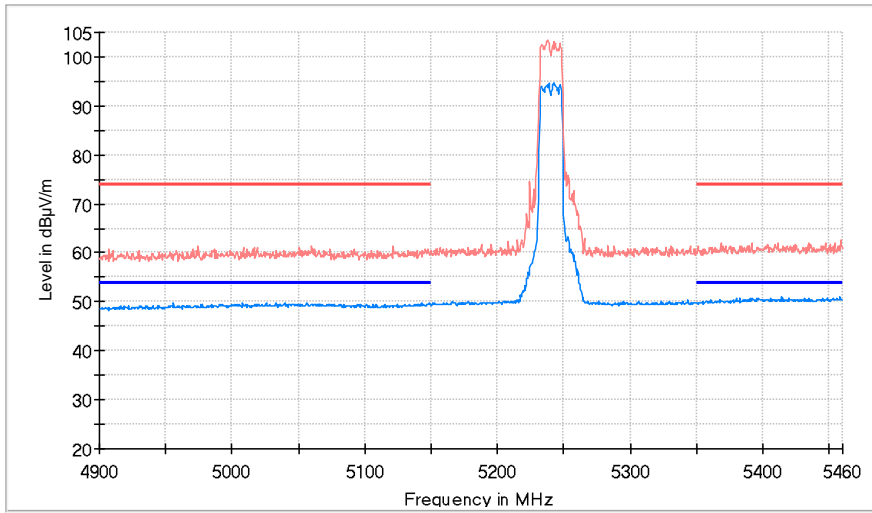

- AVG\_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)


**Results**

**Frequency range 1 - 18 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

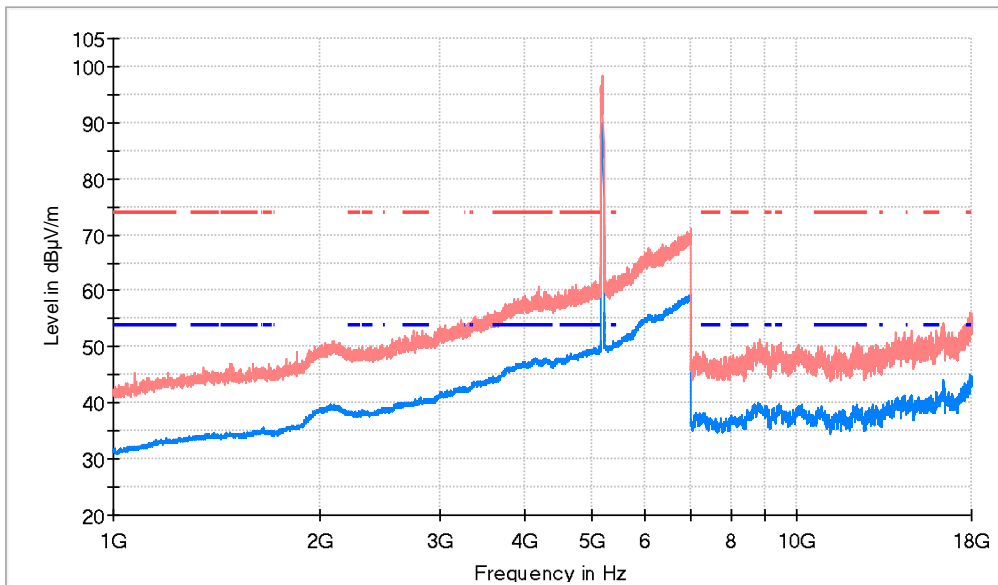

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5184.000000	96.3	89.7	H	---	---	Fundamental
5379.500000	60.4	51.0	H	3.0	54.0	
17901.50000	53.9	45.0	H	9.0	54.0	

**Frequency range 1 - 18 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

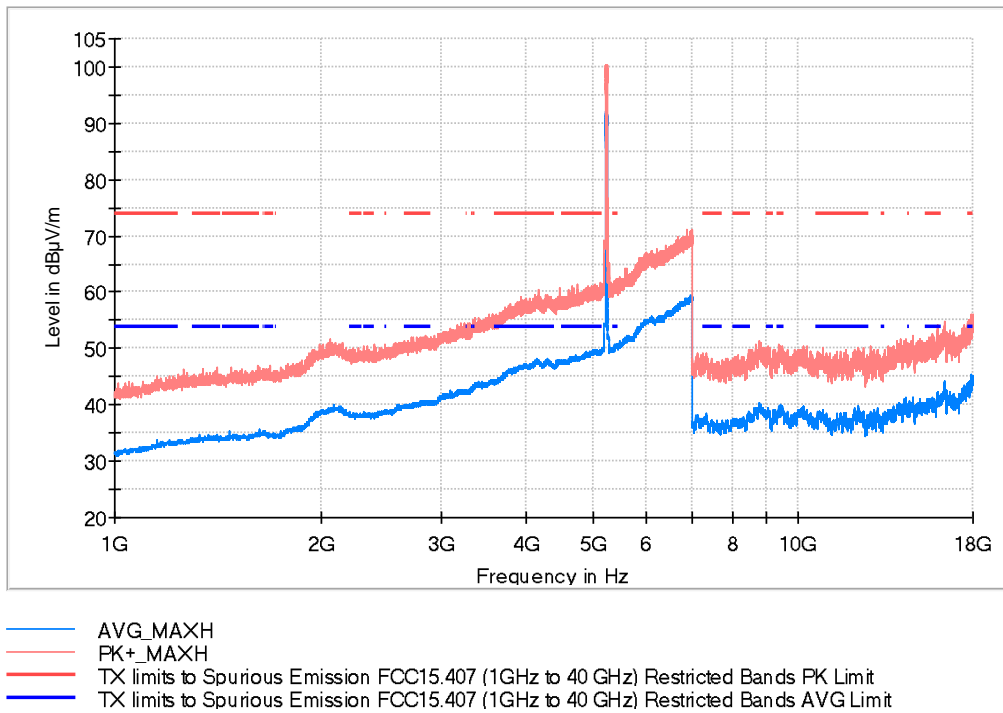


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5233.500000	100.4	91.2	H	---	---	Fundamental
5396.500000	60.3	50.8	V	3.2	54.0	
17931.50000	56.2	44.9	H	9.1	54.0	

**Frequency range 18 - 40 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

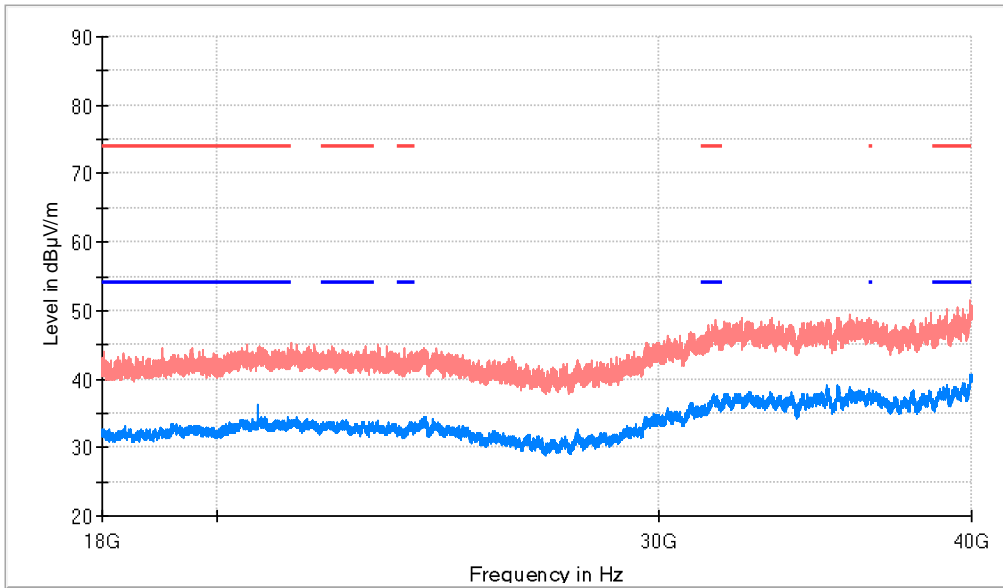

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20759.630000	44.4	36.2	V	17.8	54.0

**Frequency range 18 - 40 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

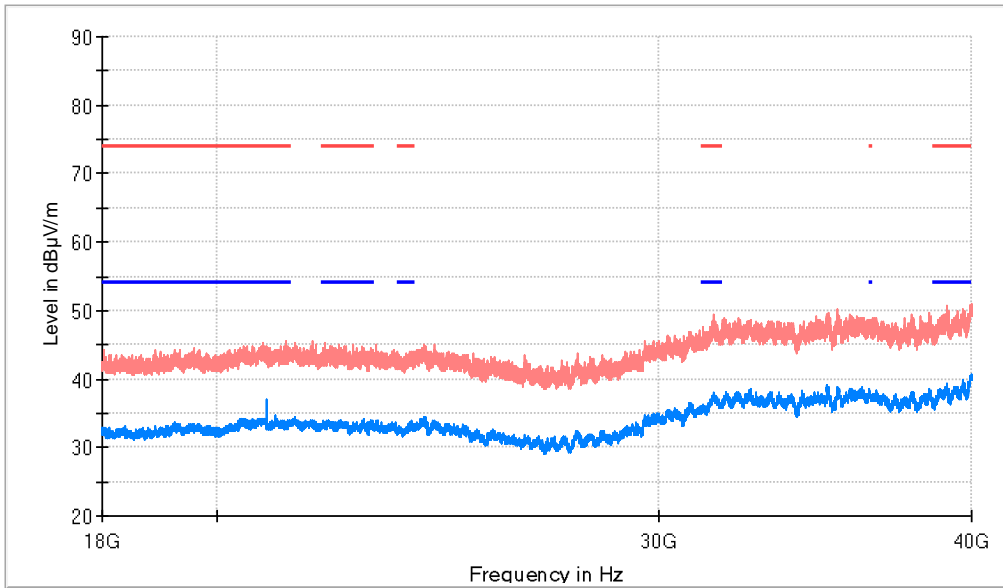


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20919.812700	44.3	36.7	V	17.3	54.0

**Restricted Bands (4.9 GHz - 5.46 GHz)**

**Lowest Channel**


Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5190.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), MODE = SISO, Measurement Point = 3

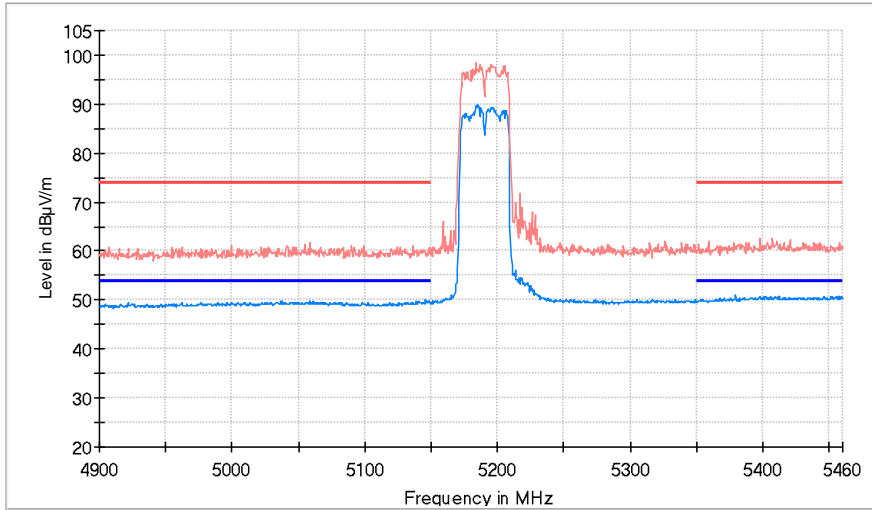

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

**Highest Channel**

Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5230.00000, Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s), MODE = SISO, Measurement Point = 3

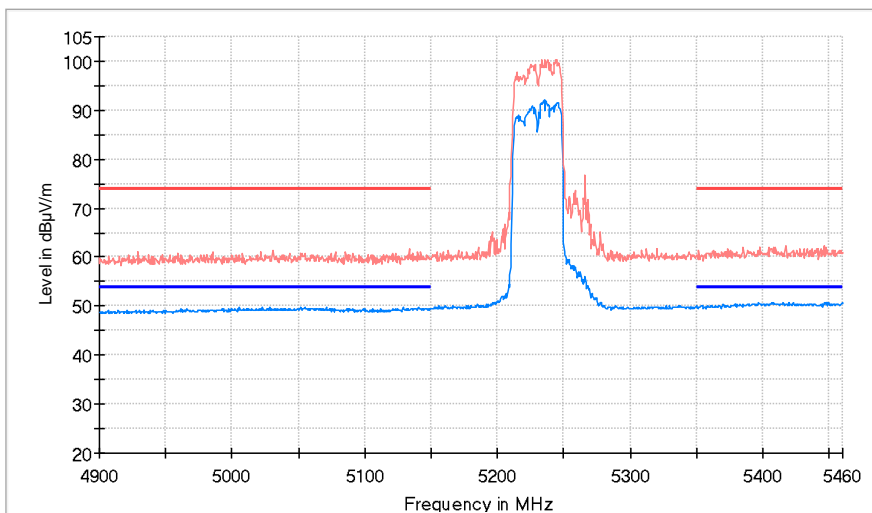

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)


**Results**

**Frequency range 1 - 18 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

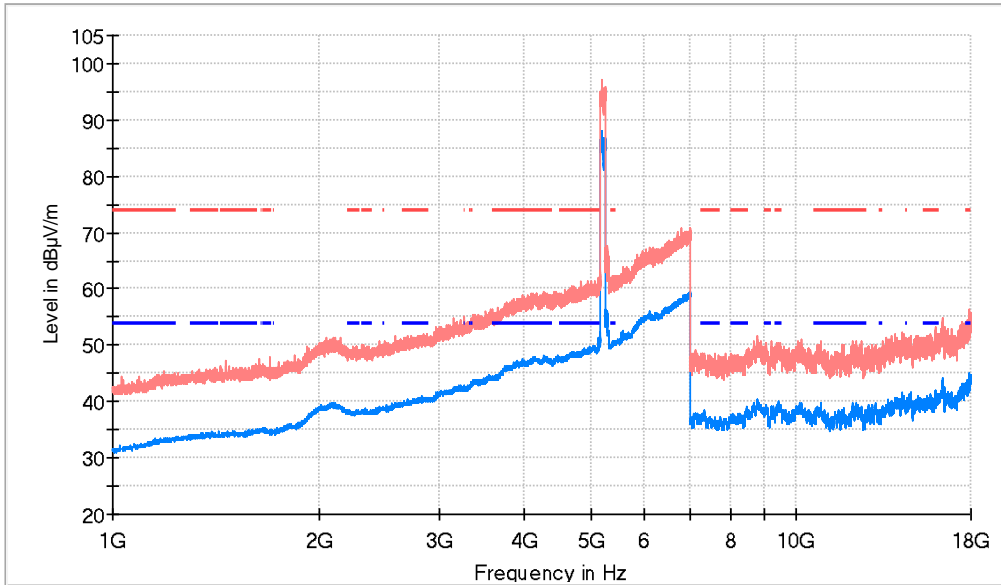

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5190.500000	97.2	87.5	H	---	---	Fundamental
5441.000000	62.4	50.3	H	3.7	54.0	
17926.00000	56.3	44.4	V	9.6	54.0	

**Frequency range 18 - 40 GHz**

**Single Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

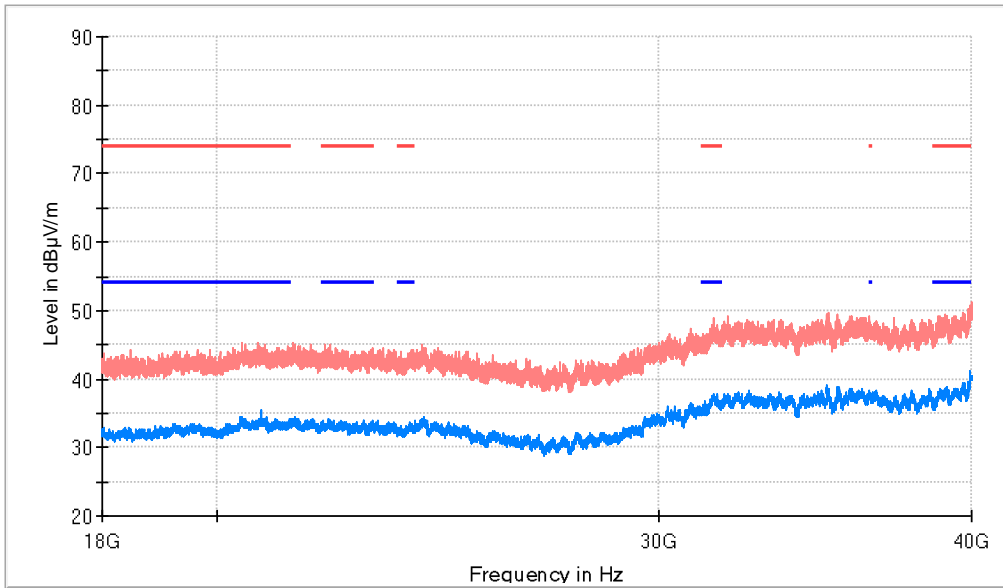

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20840.063000	44.1	35.3	V	18.7	54.0



### Restricted Bands (4.9 GHz - 5.46 GHz)

#### Single Channel

Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5210.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3

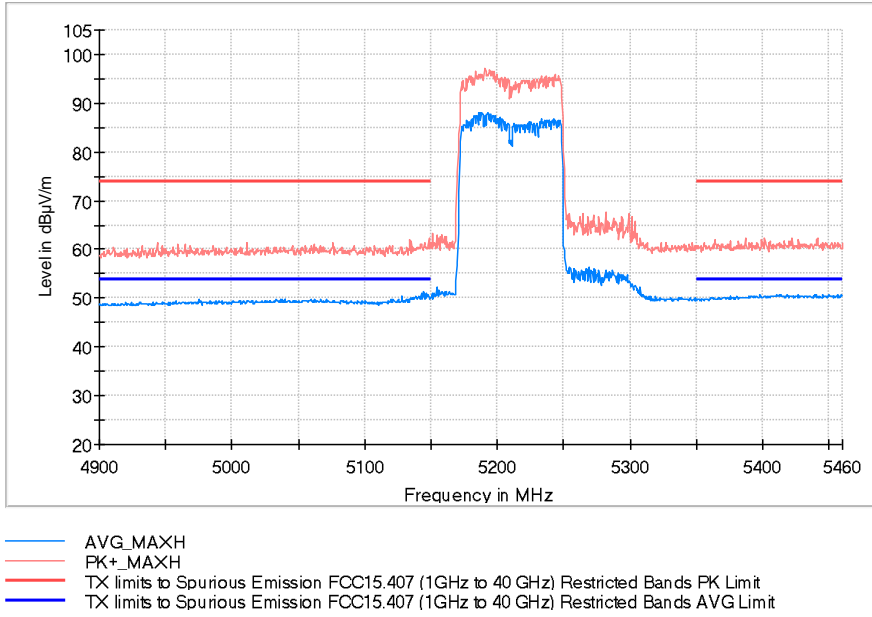

U-NII-3: 5.725 GHz – 5.85GHz Band

Modulation: 802.11ac VHT20 (OFDM MCS0)


**Results**

**Frequency range 1 - 18 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5745.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

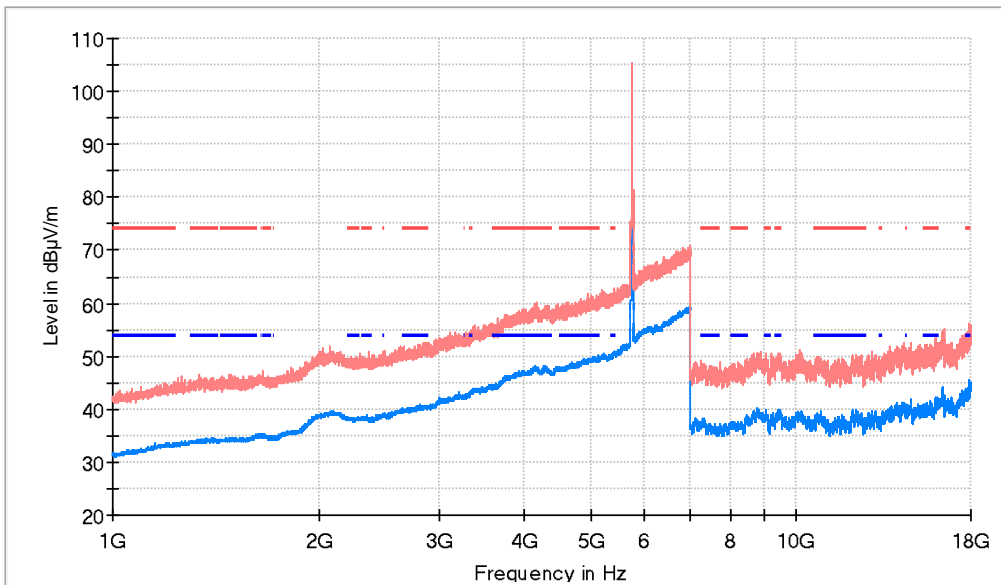

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5407.000000	60.9	50.8	H	3.2	54.0	
5743.500000	105.4	96.4	H	---	---	Fundamental
17938.00000	54.7	45.4	V	8.6	54.0	

**Frequency range 1 - 18 GHz**

**Middle Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5785.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

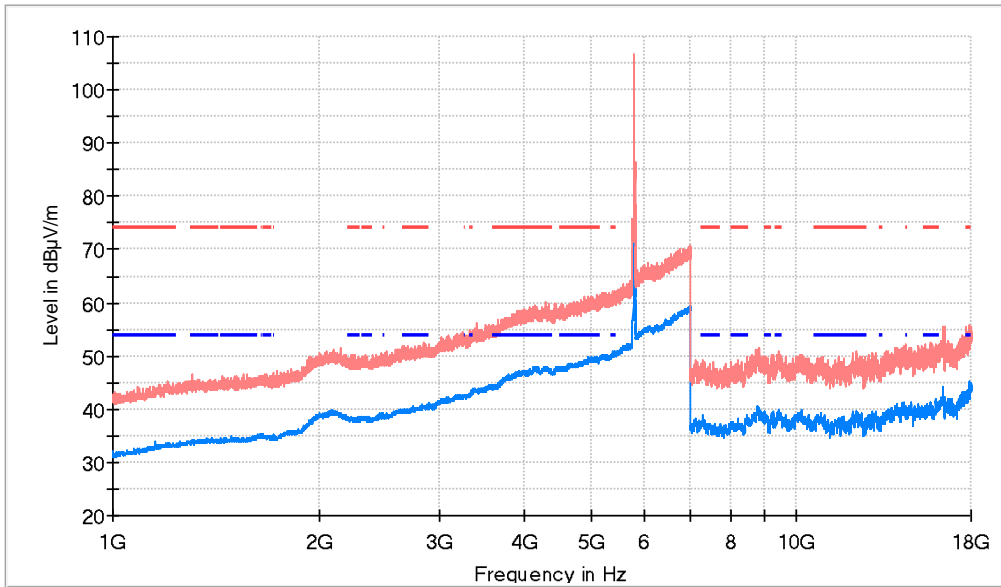

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5396.500000	60.7	50.9	H	3.1	54.0	
5783.500000	105.7	97.3	H	---	---	Fundamental
17943.500000	54.2	45.2	H	8.8	54.0	

**Frequency range 1 - 18 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5825.00000, Modulation = 802.11ac VHT20 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

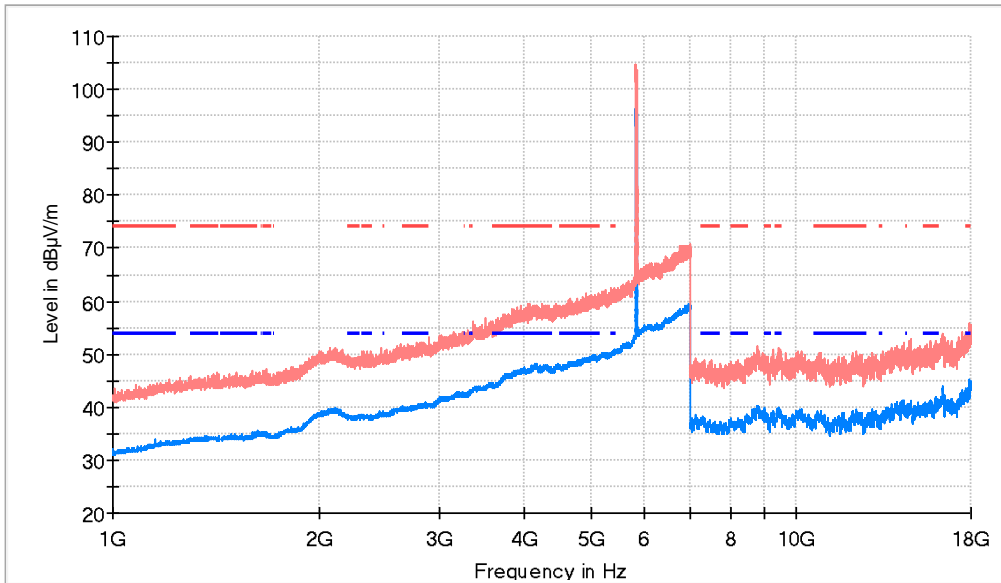

- AVG\_MAXH
- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5422.000000	60.4	51.0	H	3.0	54.0	
5824.000000	104.8	95.8	H	---	---	Fundamental
17945.00000	55.3	45.4	V	8.6	54.0	

**Frequency range 18 - 40 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5745.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

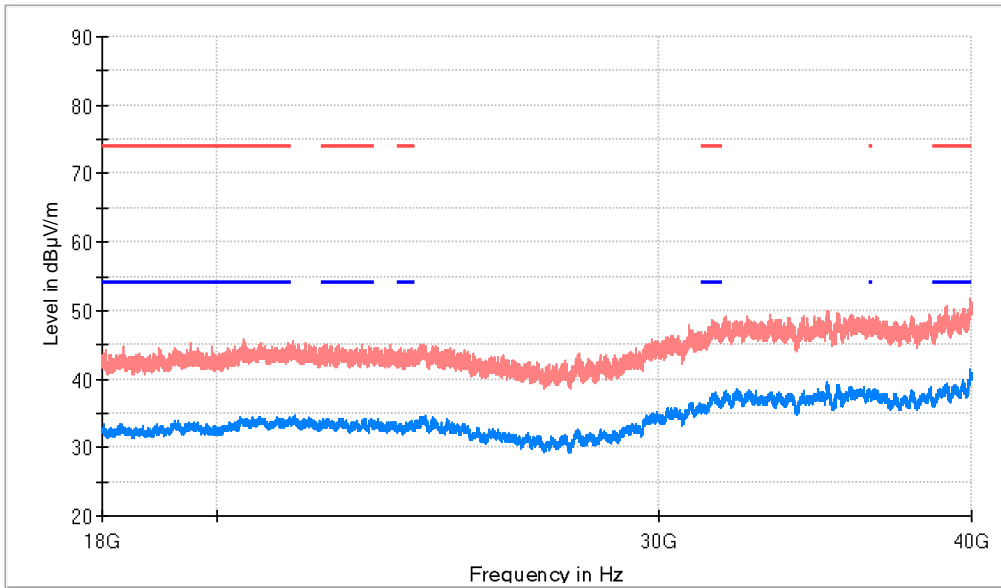

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
24205.380000	43.8	34.7	V	---	---
39960.813000	50.7	41.2	V	12.8	54.0

**Frequency range 18 - 40 GHz**

**Middle Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5785.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

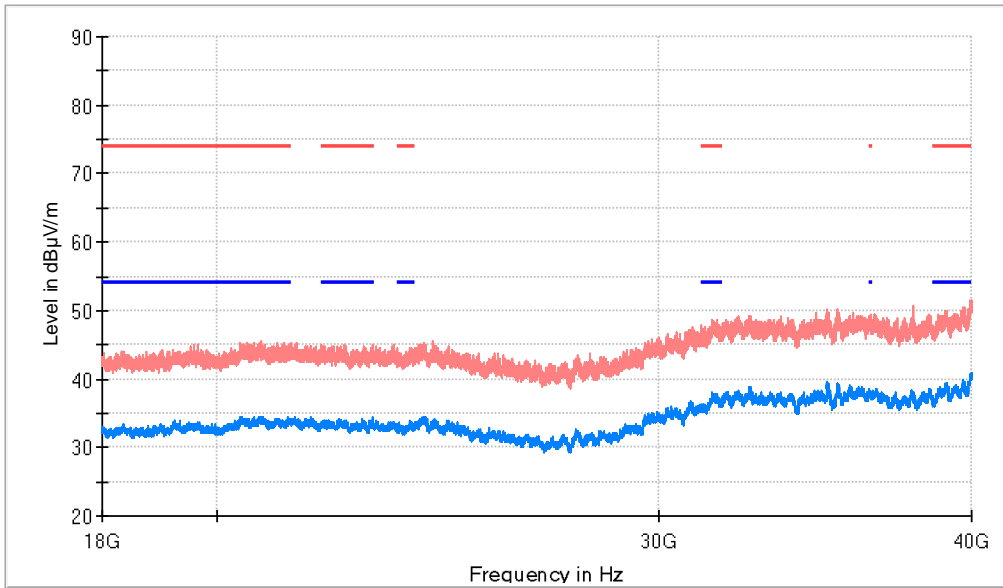

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
24205.379000	43.8	34.7	V	---	---
39960.813000	50.7	41.3	V	12.7	54.0

**Frequency range 18 - 40 GHz**

**Highest Channel**

**Active Port = 1+2, Frequency Range GHz = [18, 40], Frequency MHz = 5825.00000, Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), MODE = SISO, Measurement Point = 3**

**Images:**

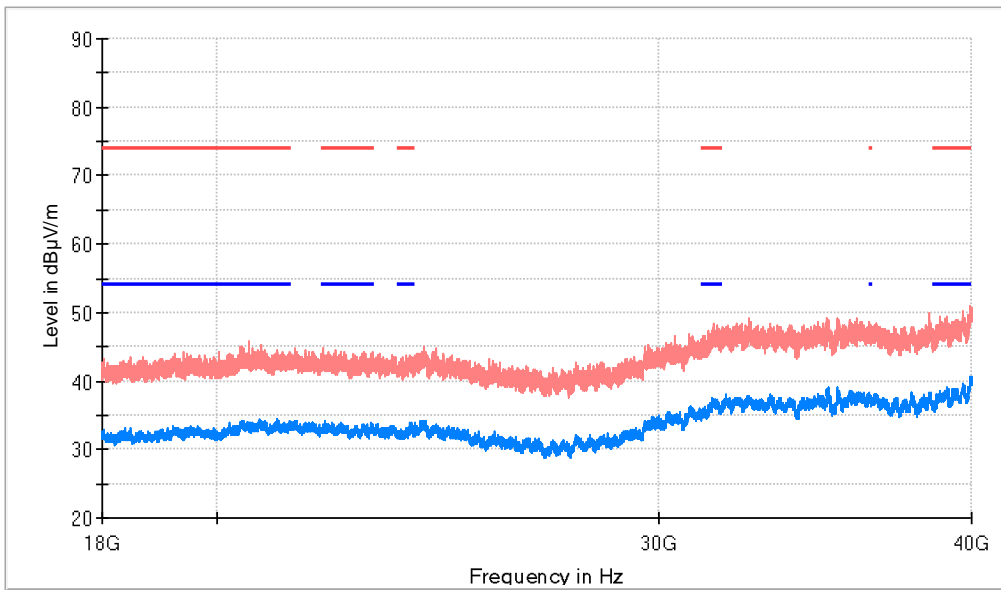

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
22100.937000	41.9	34.1	H	19.9	54.0

Modulation: 802.11ac VHT40 SS1 (OFDM MCS0)


**Results**

**Frequency range 1 - 18 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

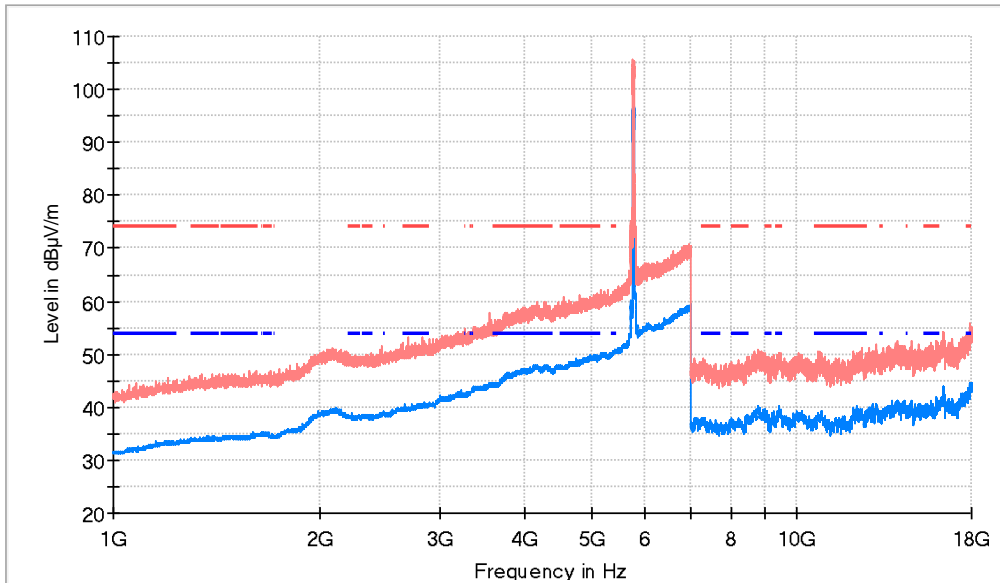

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5408.500000	61.1	51.0	V	3.0	54.0	
5759.500000	105.6	96.4	H	---	---	Fundamental
17951.00000	53.7	44.7	H	9.3	54.0	




**Frequency range 1 - 18 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

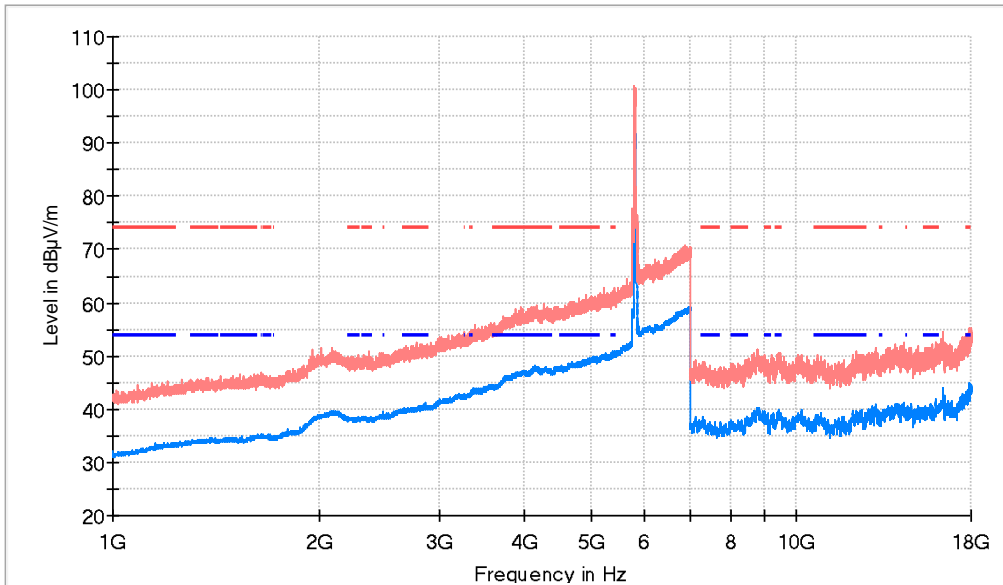

- AVG\_MAXH
- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5410.500000	62.8	50.4	H	3.6	54.0	
5790.000000	100.5	91.3	H	---	---	Fundamental
17943.50000	54.2	44.9	V	9.1	54.0	

**Frequency range 18 - 40 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5755.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

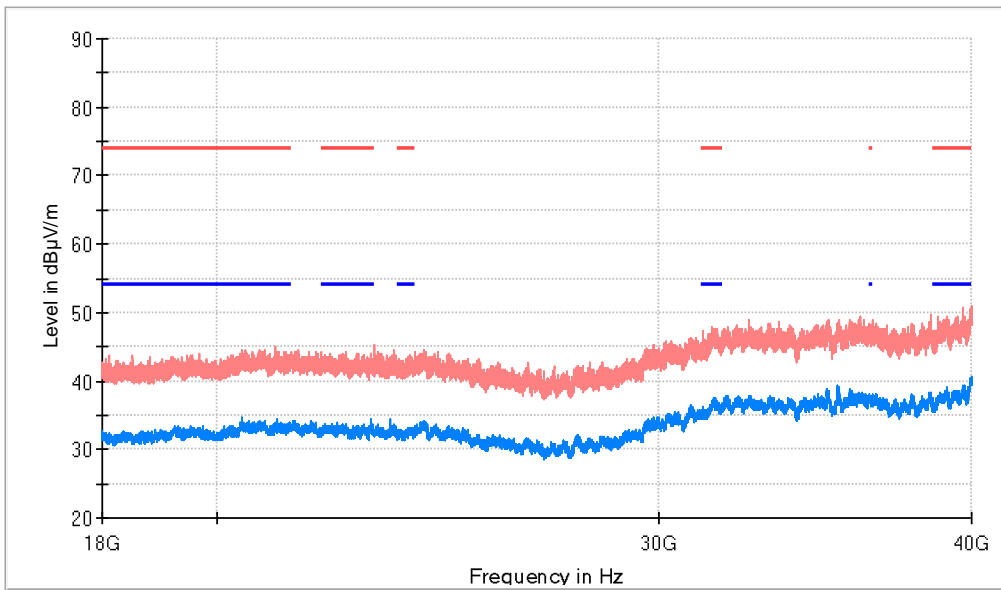

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
22100.938000	41.9	34.1	H	19.9	54.0

**Frequency range 18 - 40 GHz**

**Highest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5795.00000, Modulation = 802.11ac VHT40 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

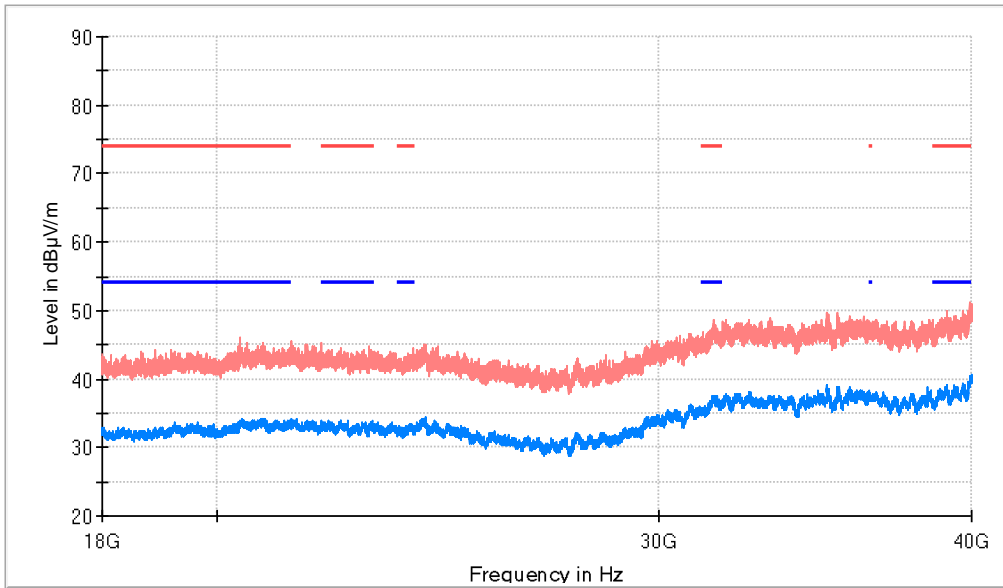

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20840.063000	42.9	34.2	V	19.8	54.0

Modulation: 802.11ac VHT80 SS1 (OFDM MCS0)


**Results**

**Frequency range 1 - 18 GHz**

**Lowest Channel**

Active Port = 1, Frequency Range GHz = [1, 18], Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3

Images:

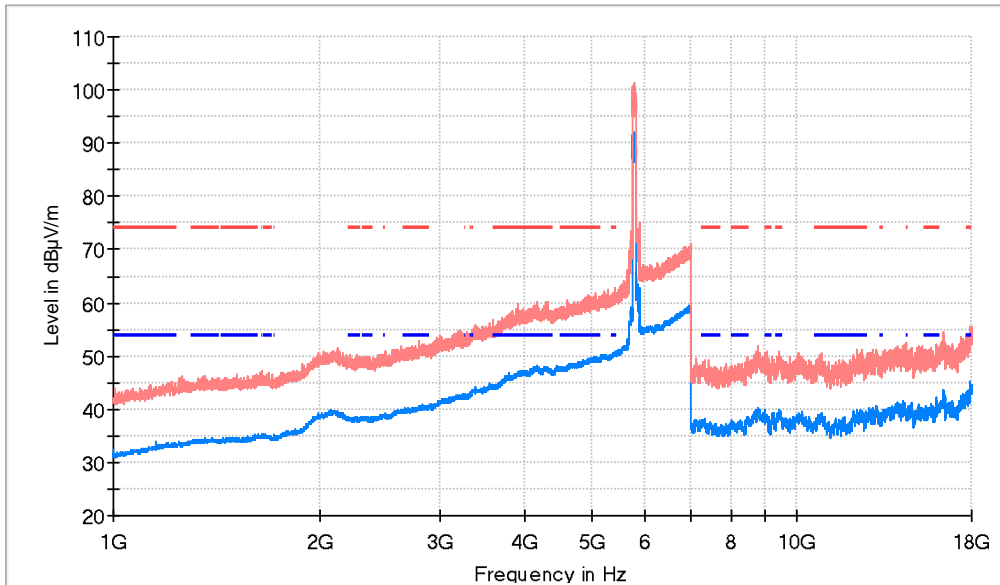

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5439.500000	60.5	50.9	V	3.1	54.0	
5769.500000	101.3	91.4	H	---	---	Fundamental
17938.50000	55.4	45.1	H	8.9	54.0	

**Frequency range 18 - 40 GHz**

**Lowest Channel**

**Active Port = 1, Frequency Range GHz = [18, 40], Frequency MHz = 5775.00000, Modulation = 802.11ac VHT80 SS1 (OFDM MCS0), MODE = SISO, Measurement Point = 3**

**Images:**

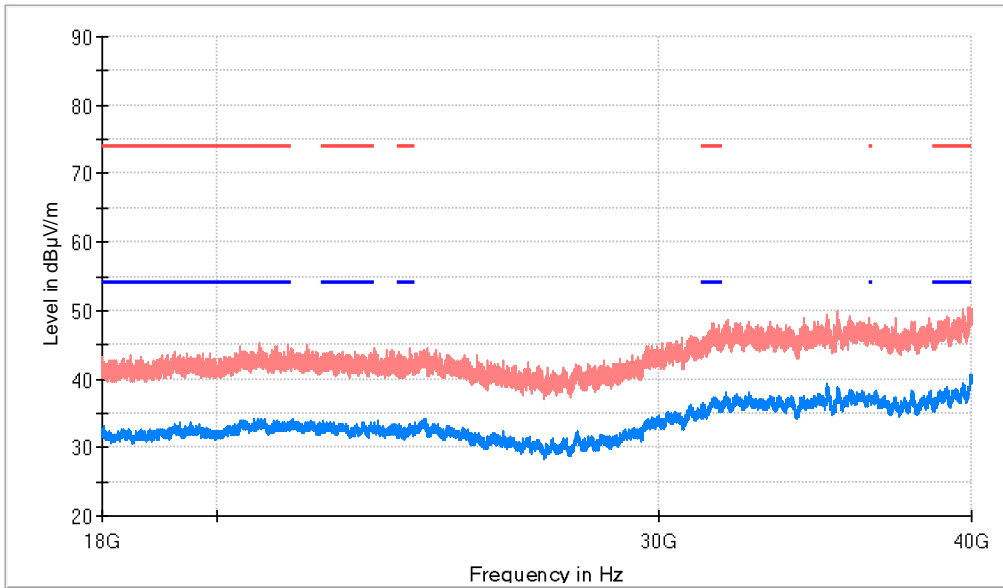

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
23099.189000	42.4	33.4	V	20.6	54.0

### Spectrum Analyzer Parameters

Subrange	Detectors	Bandwidth	Preamp
30 MHz - 1 GHz	PK+	100 kHz	20 dB

### Spectrum Analyzer Parameters

Subrange	Detectors	Bandwidth	Preamp
1 GHz - 7 GHz	PK+ ; AVG	1 MHz	20 dB
7 GHz - 18 GHz	PK+ ; AVG	1 MHz	20 dB

### Spectrum Analyzer Parameters

Subrange	Detectors	Bandwidth	Preamp
18 GHz - 40 GHz	PK+ ; AVG	1 MHz	20 dB