

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20dB Bandwidth (kHz)	930	930	930
Occupied bandwidth (kHz)	865	865	870

Measurement Set up


Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900	2.47900
Stop Frequency	2.40300 GHz	2.44100	2.48100
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 us	189.648 us	189.648 us
Reference Level	10.000 dBm	10.000 dBm	10.000
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	12 / max. 150	8 / max.	9 / max.
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.09 dB	0.10 dB	0.04 dB

TEST RESULTS (Cont.):	20 dB BANDWIDTH
------------------------------	------------------------


Lowest Channel

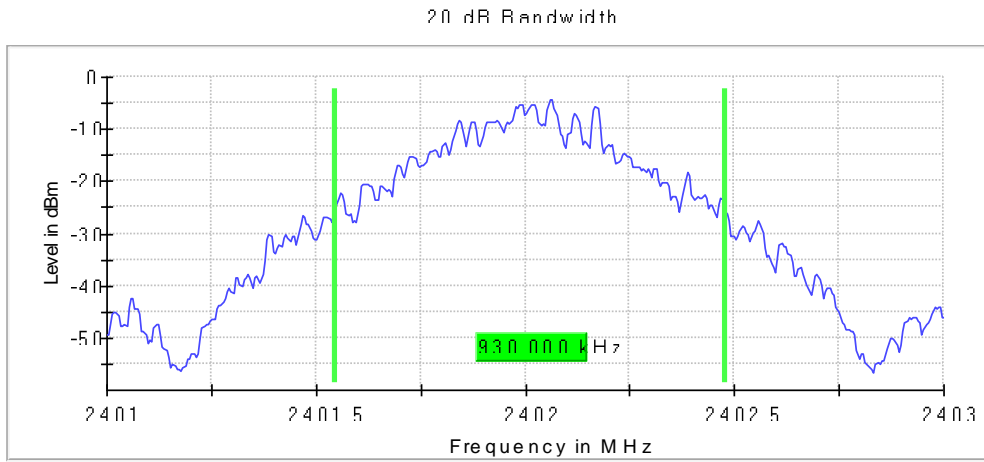

Middle Channel

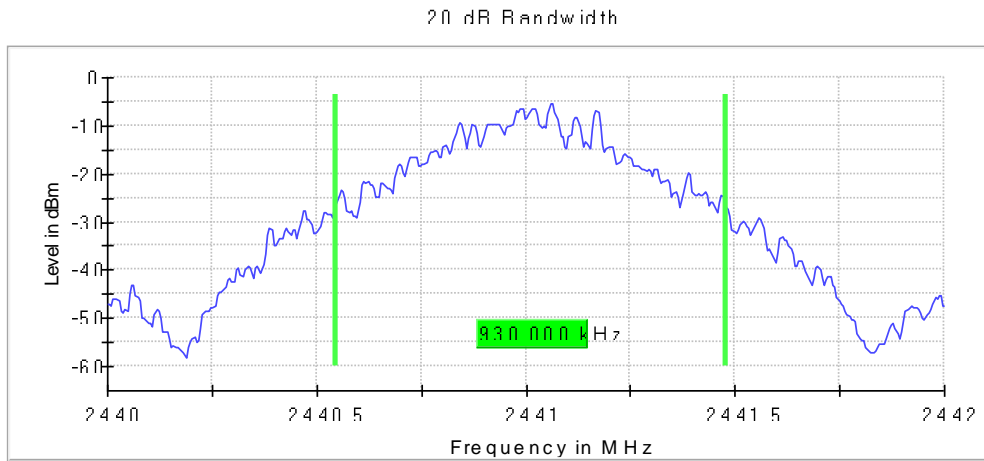


Highest Channel

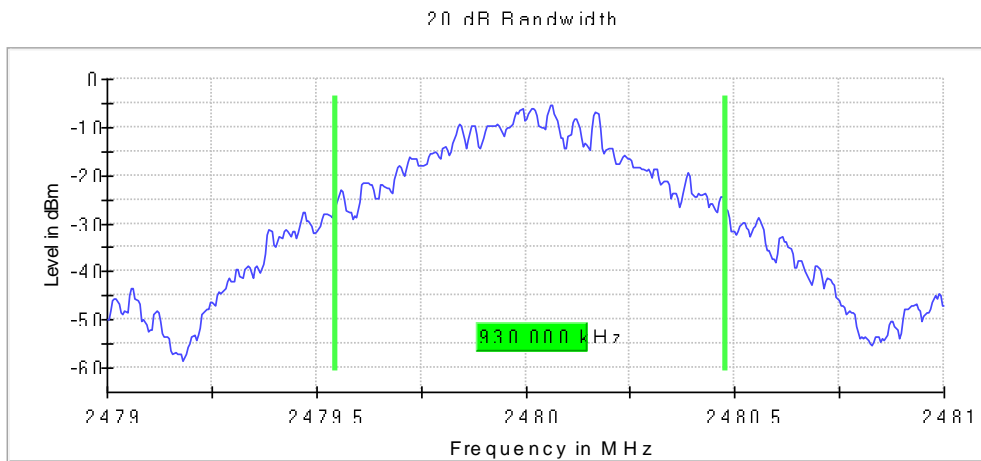


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------


Lowest Channel

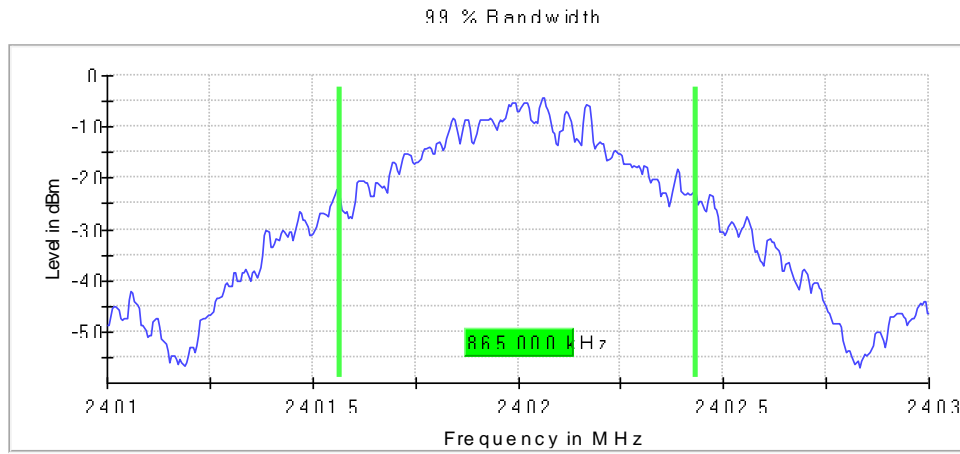

Middle Channel

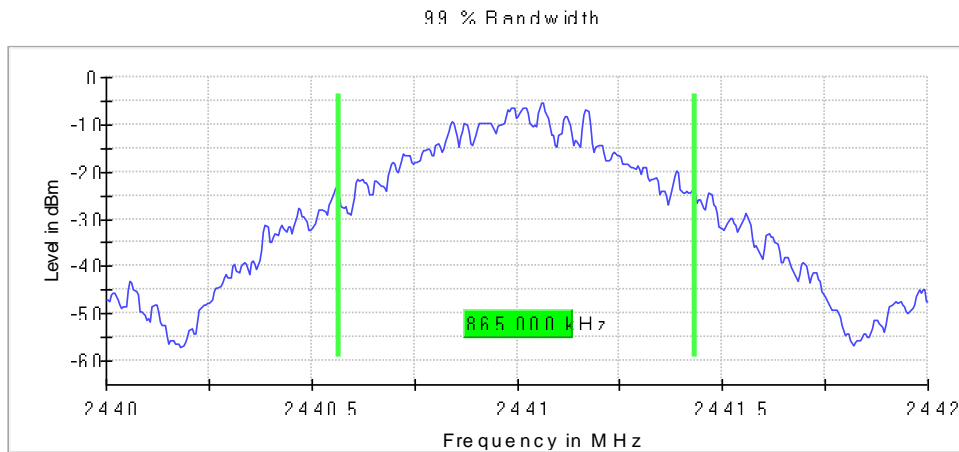


Highest Channel

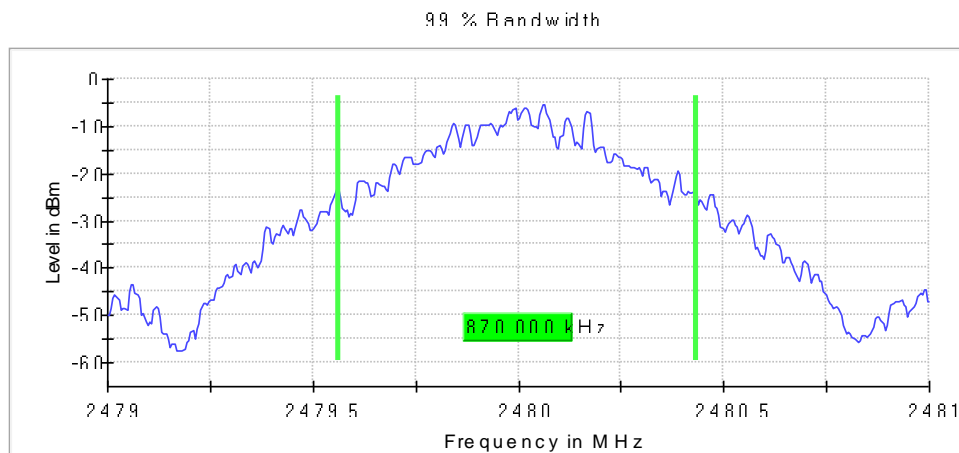

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH		
Measurement Set- up			
Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 μ s	189.648 μ s	189.648 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	500	500	500
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	5 / max.150	5 / max.150	6 / max.150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.17 dB	0.08 dB	0.12 dB

TEST RESULTS (Cont.)	CARRIER FREQUENCY SEPARATION
-----------------------------	-------------------------------------

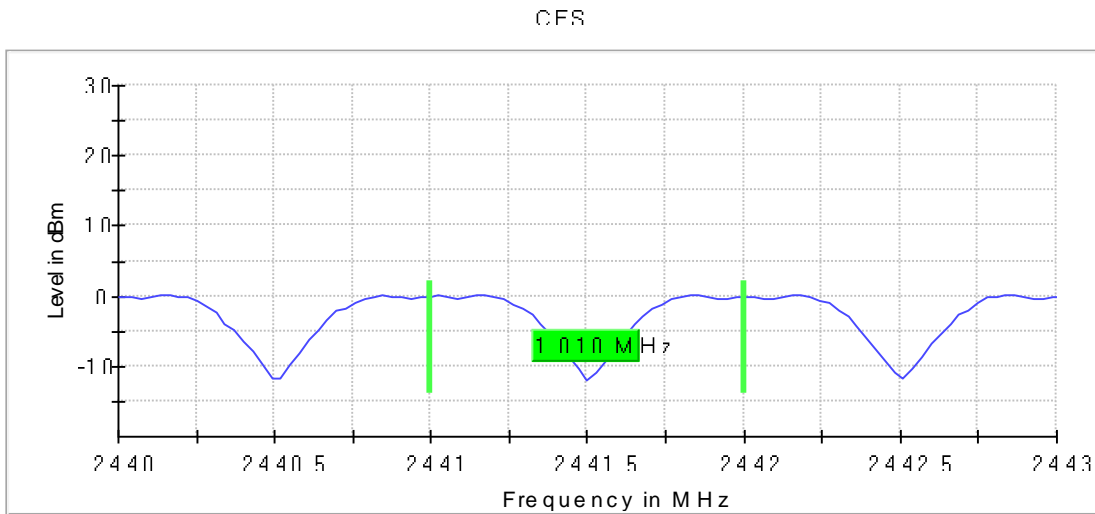

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.00000	1.00990	0.62000	---	2440.99505	2442.00495




The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20dB bandwidth of the hopping channel.

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20dB bandwidth (MHz)	1.265	1.265	1.225
Occupied bandwidth (MHz)	1.170	1.165	1.165


Measurement Setup

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.00 MHz	2.00 MHz	2.00 MHz
RBW	10.000 KHz	10.000 KHz	10.000 KHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 μ s	189.648 μ s	189.648 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	10 / max. 150	7 / max. 150	8 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable	0.10 dB	0.10 dB	0.07 dB

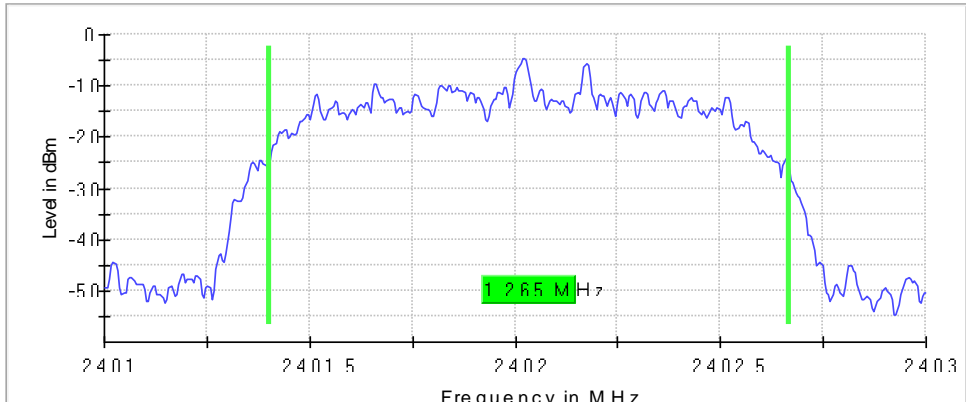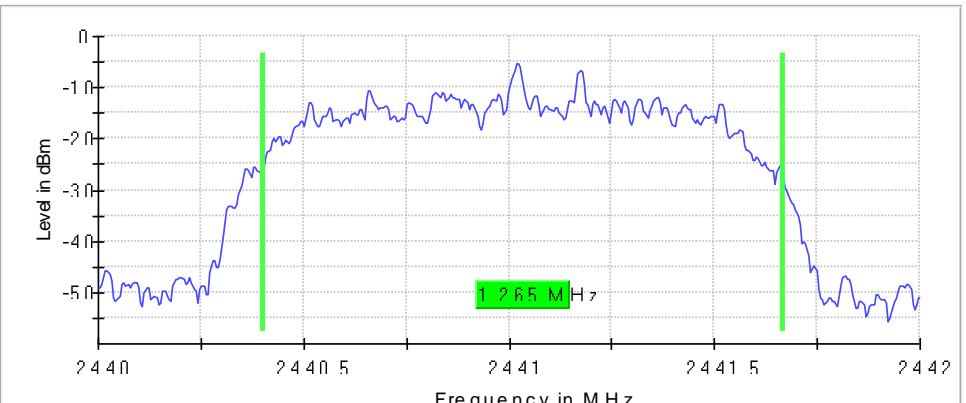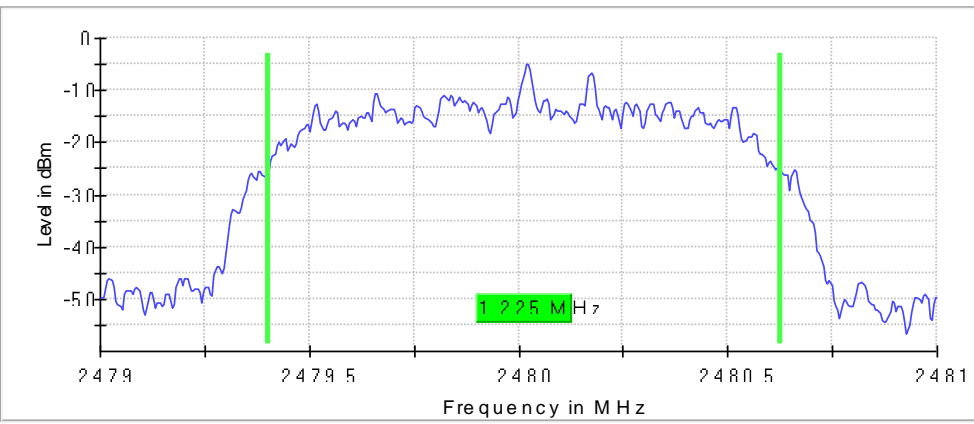
TEST RESULTS (Cont.):	20 dB BANDWIDTH
Lowest Channel	
<p style="text-align: center;">20 dB Bandwidth</p>  <p style="text-align: center;">Frequency in MHz</p>	
Middle Channel	
<p style="text-align: center;">20 dB Bandwidth</p>  <p style="text-align: center;">Frequency in MHz</p>	
Highest Channel	
<p style="text-align: center;">20 dB Bandwidth</p>  <p style="text-align: center;">Frequency in MHz</p>	

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

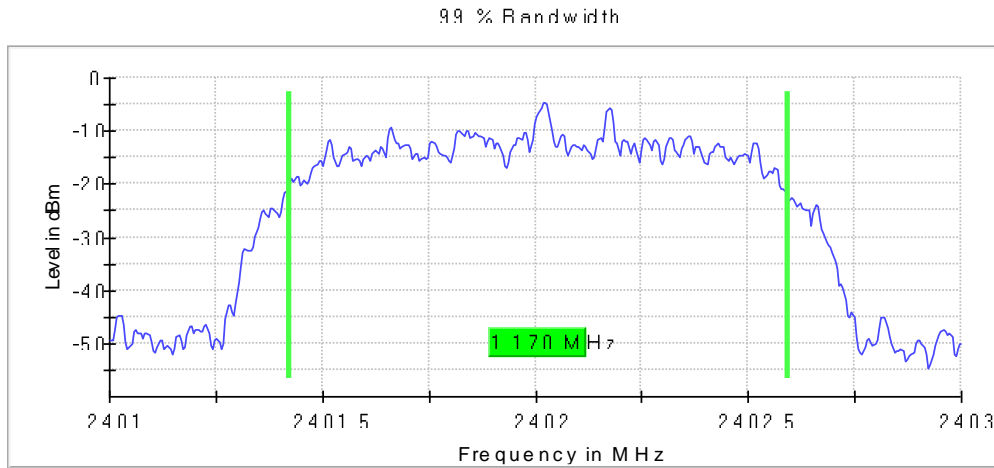


Middle Channel

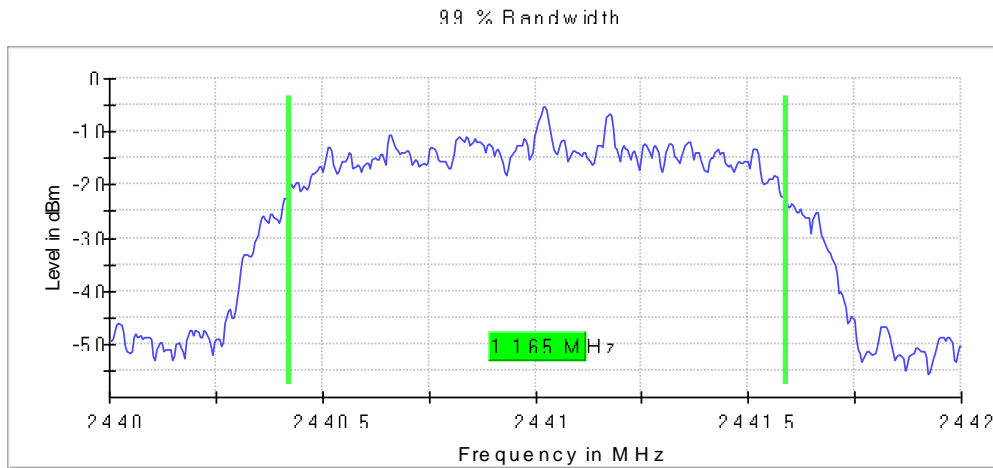

Highest Channel

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH		
Highest Channel			
99 % Bandwidth			
Measurement Set-up			
Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 us	189.648 us	189.648 us
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	500	500	500
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	5 / max. 150	5 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.10 dB	0.16 dB	0.12 dB

TEST RESULTS (Cont.)	CARRIER FREQUENCY SEPARATION
-----------------------------	-------------------------------------

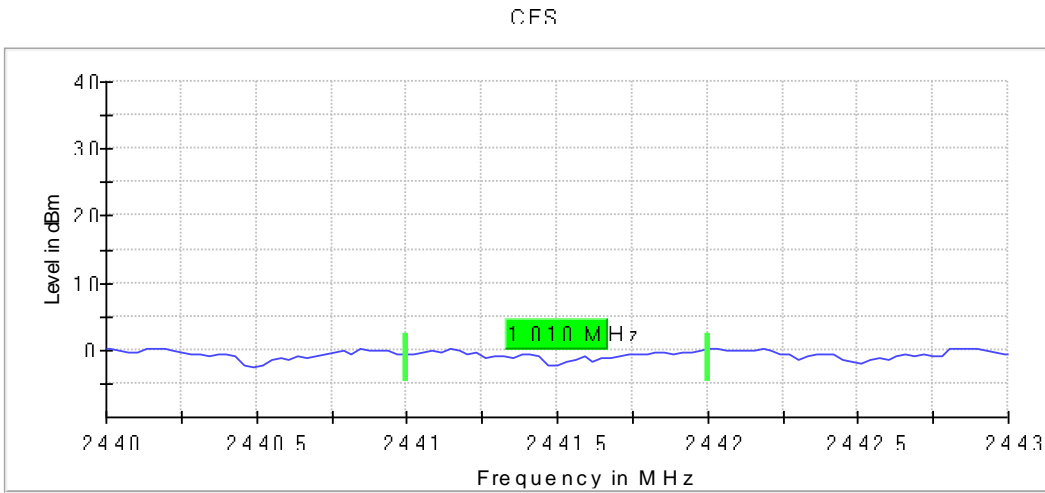

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	1.009900	0.843333	---	2440.995050	2442.004950

The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel.

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20dB bandwidth (MHz)	1.270	1.270	1.255
Occupied bandwidth (MHz)	1.175	1.175	1.170

Measurement Setup


Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.00 MHz	2.00 MHz	2.00 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 us	189.648 us	189.648 us
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	7 / max. 150	7 / max. 150	8 / max. 150
Stable	5 / 5	3 / 3	5 / 5
Max Stable	0.07 dB	0.04 dB	0.09 dB

TEST RESULTS (Cont.):	20 dB BANDWIDTH
------------------------------	------------------------


Lowest Channel

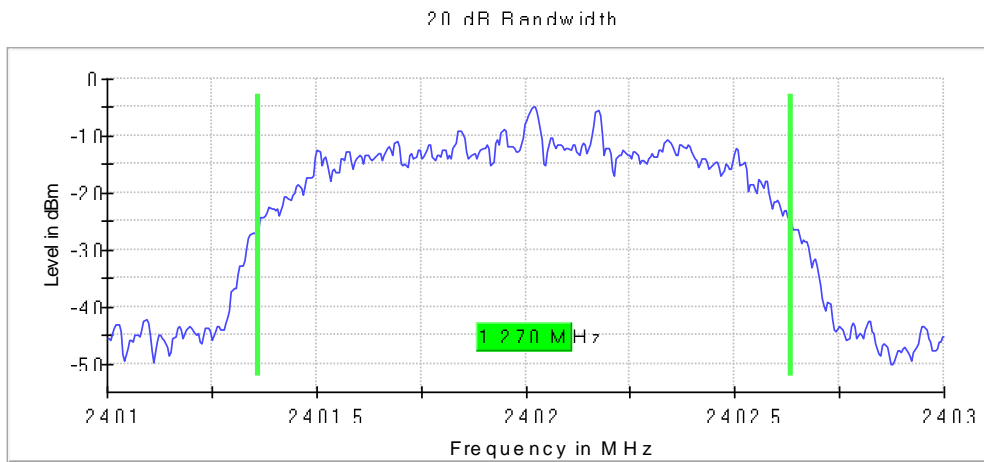

Middle Channel

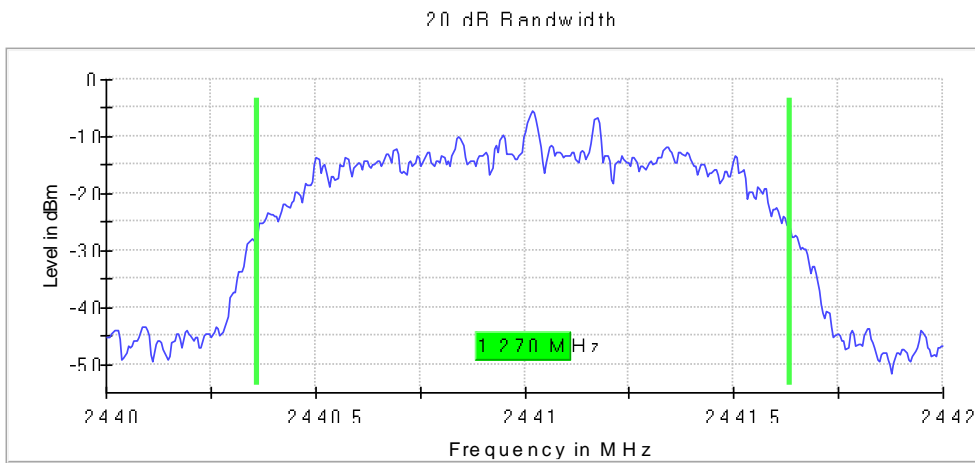


Highest Channel

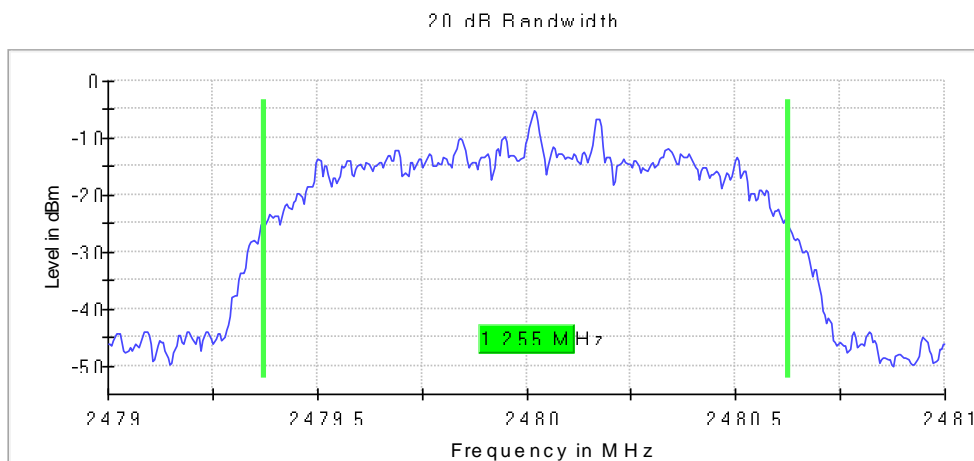


TEST RESULTS (Cont.)	OCCUPIED BANDWIDTH
-----------------------------	---------------------------


Lowest Channel

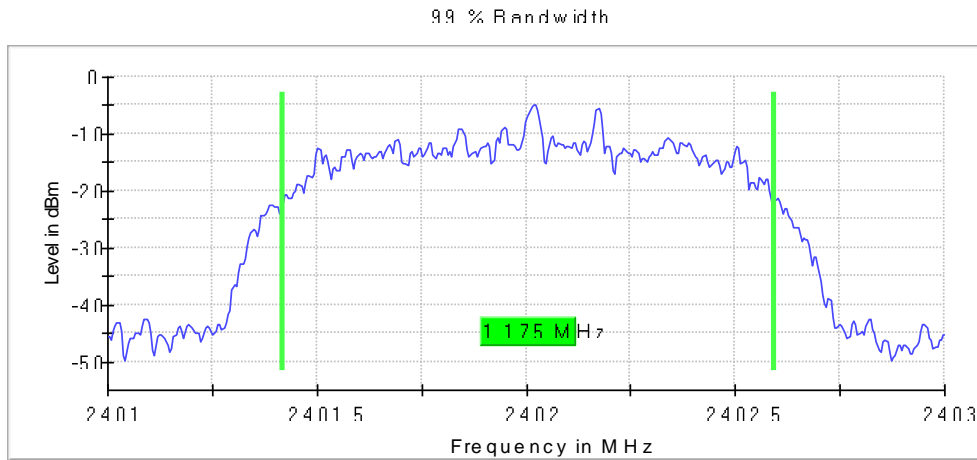

Middle Channel

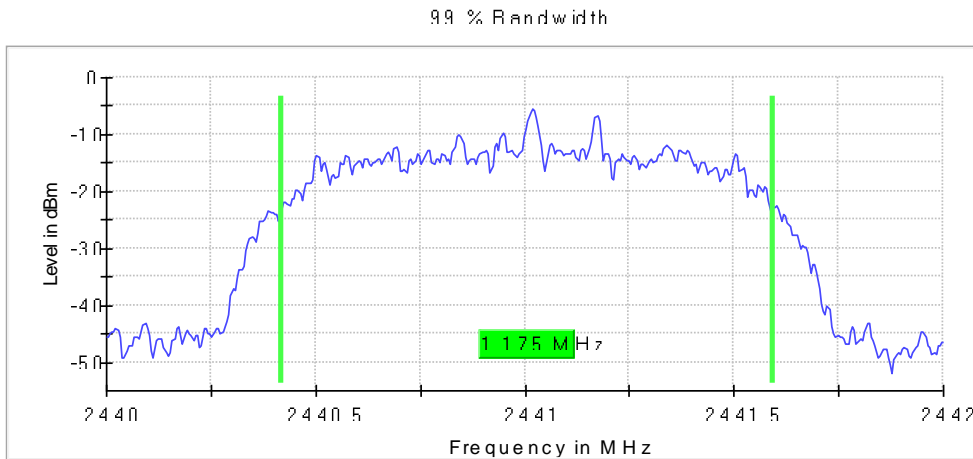

Highest Channel

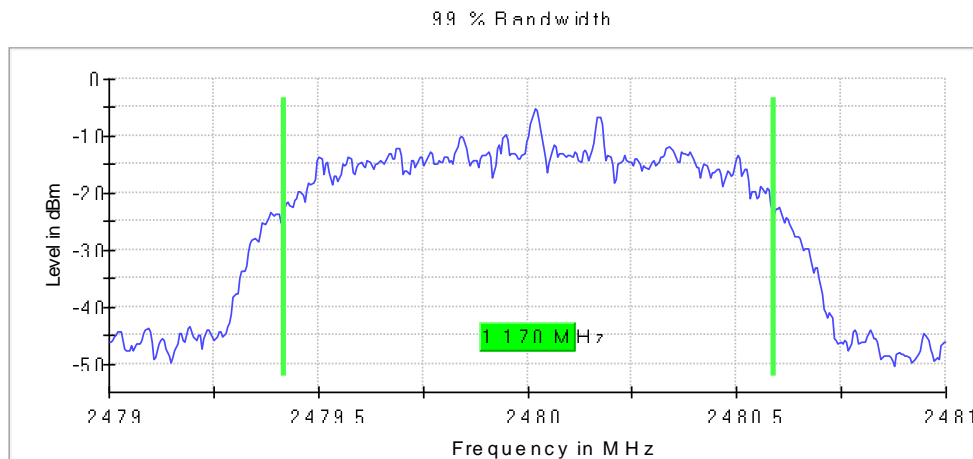


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Measurement Set- up

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 us	189.648 us	189.648 us
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	500	500	500
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	5 / max. 150	5 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.11 dB	0.10 dB	0.11 dB

TEST RESULTS (Cont.)	CARRIER FREQUENCY SEPARATION
-----------------------------	-------------------------------------

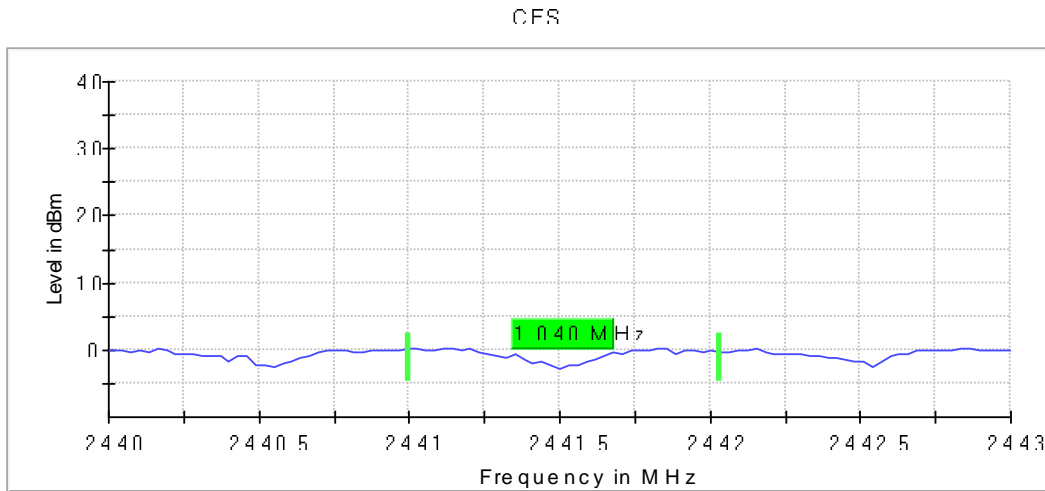

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	1.039603	0.846667	---	2440.995050	2442.034653


The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel.

TEST B.2: NUMBER OF HOPPING CHANNELS



LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a) (1) (iii) and RSS-247 5.1 (d)

LIMITS
 Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

TEST SETUP:


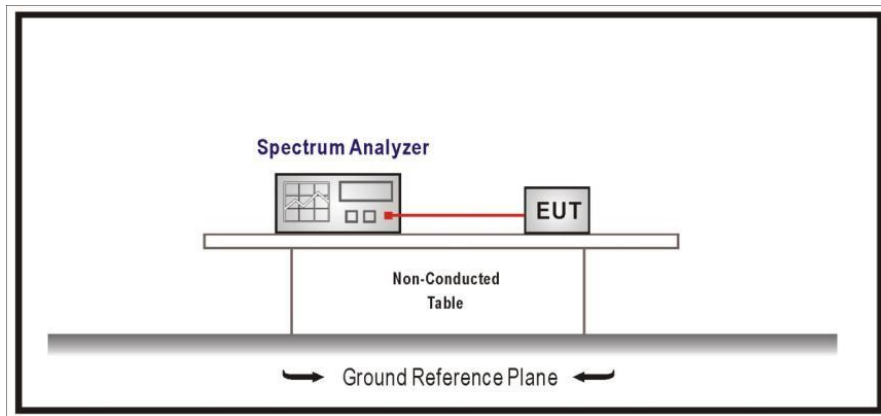


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

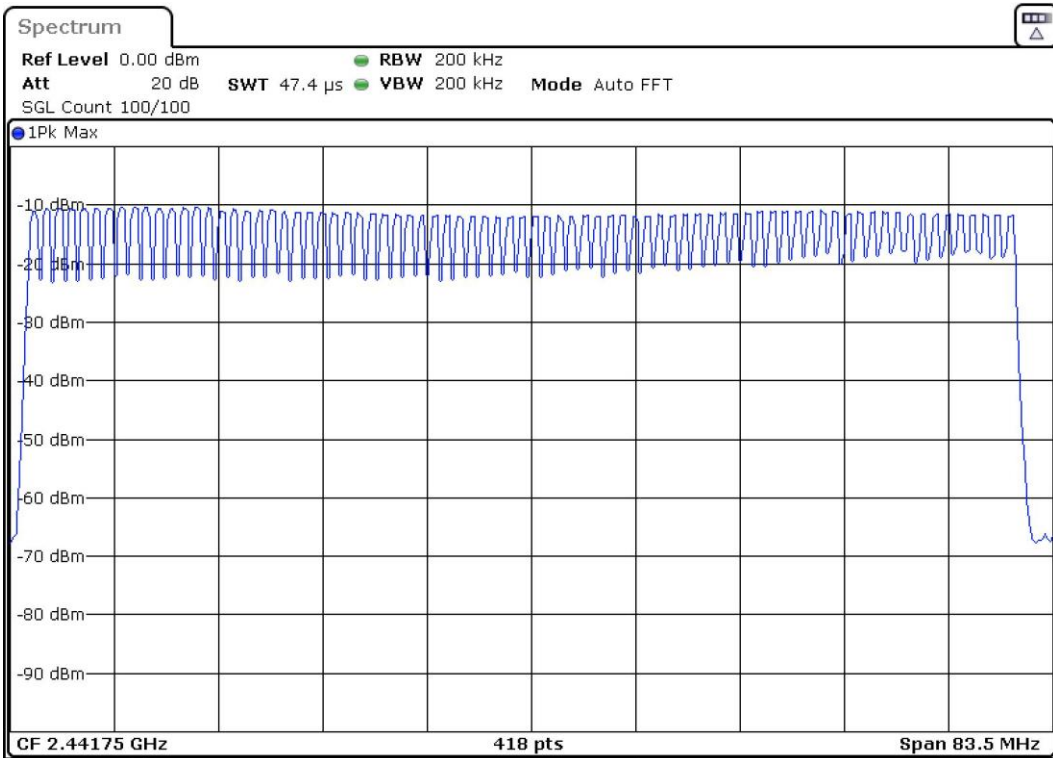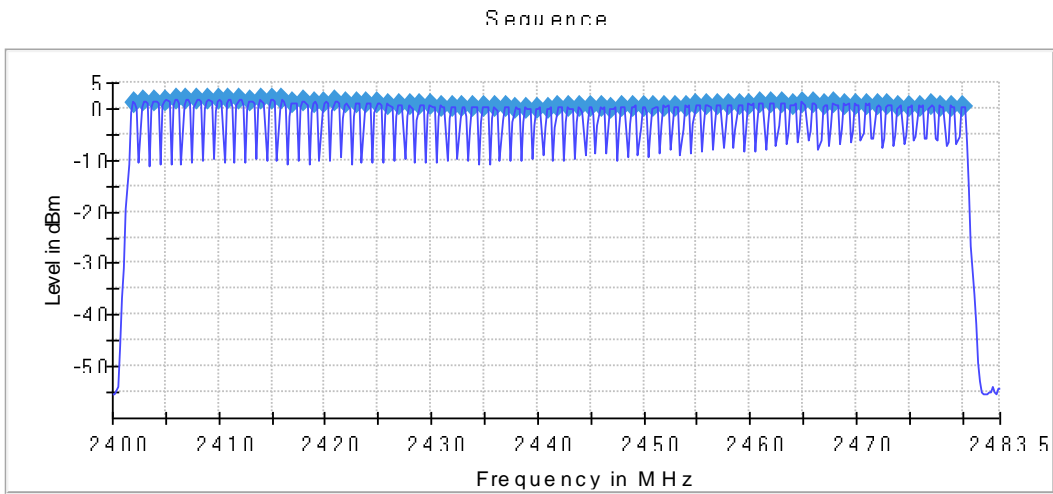



Number of Hopping Frequencies: 79

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

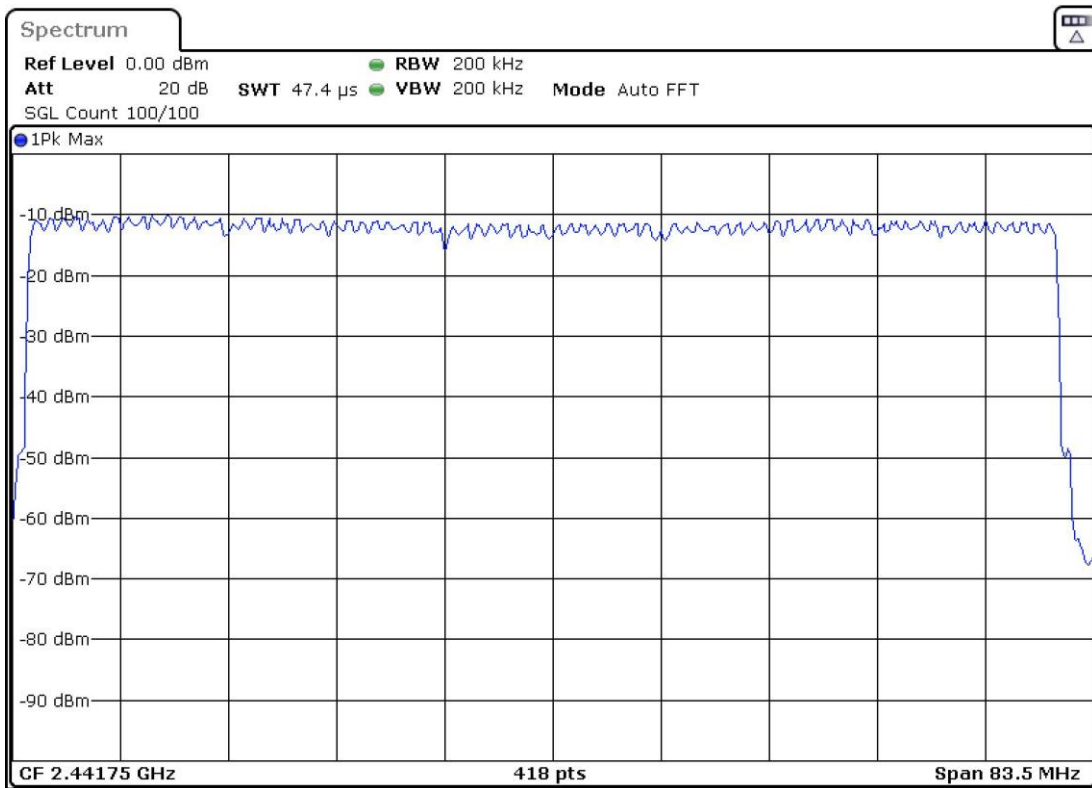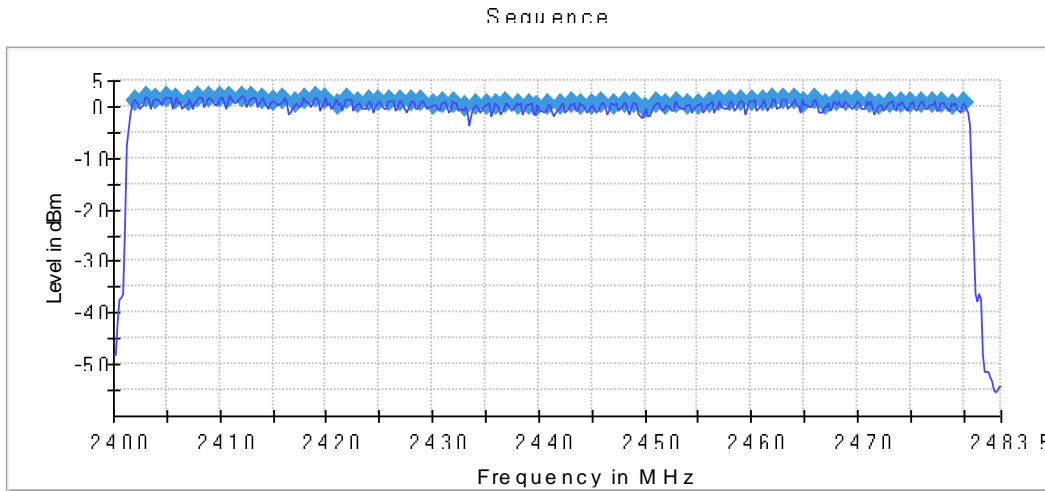

Number of Hopping Frequencies: 79

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

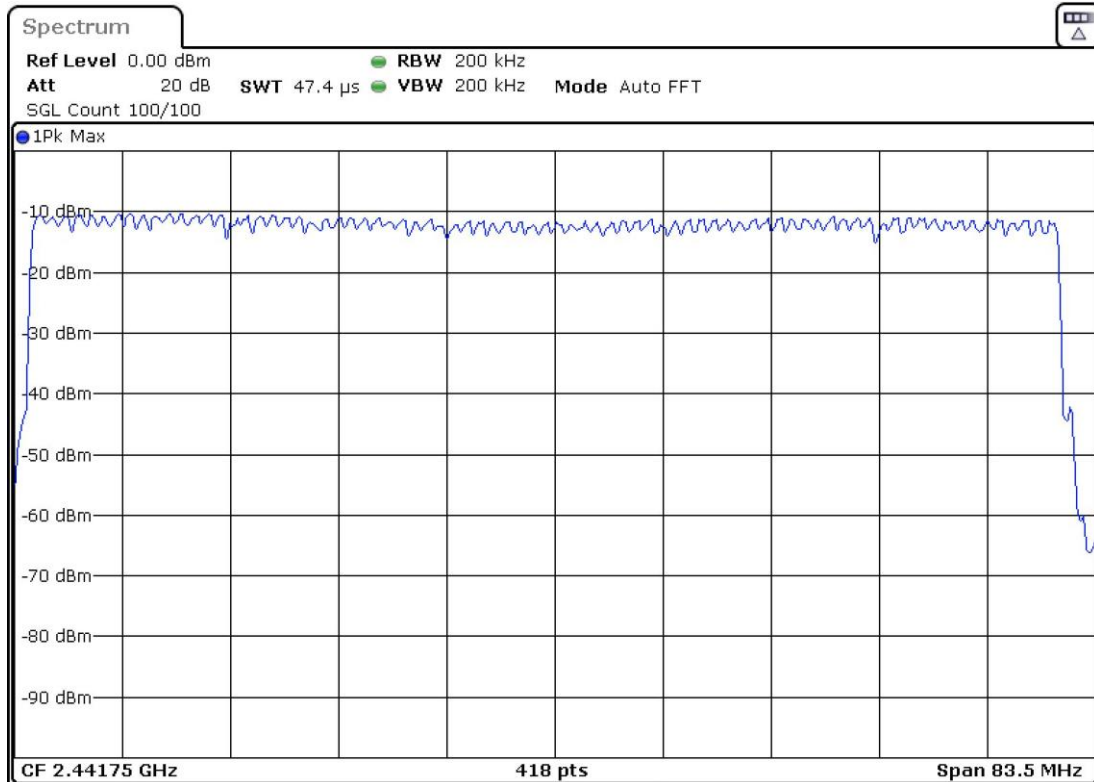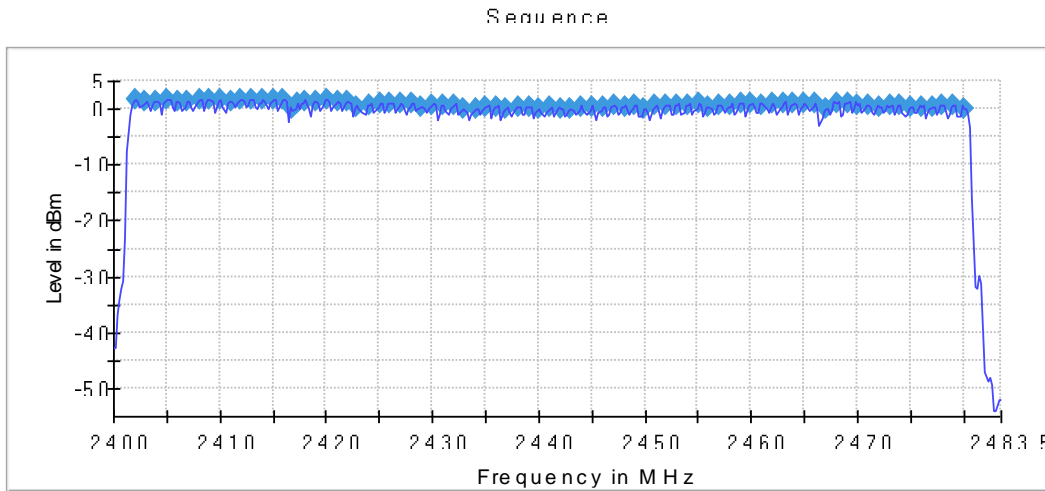


Number of Hopping Frequencies: 80

TEST B.3: TIME OF OCCUPANCY (DWELL TIME)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a)(1)(iii) and RSS-247 5.1(d)



LIMITS
 The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.

TEST SETUP:

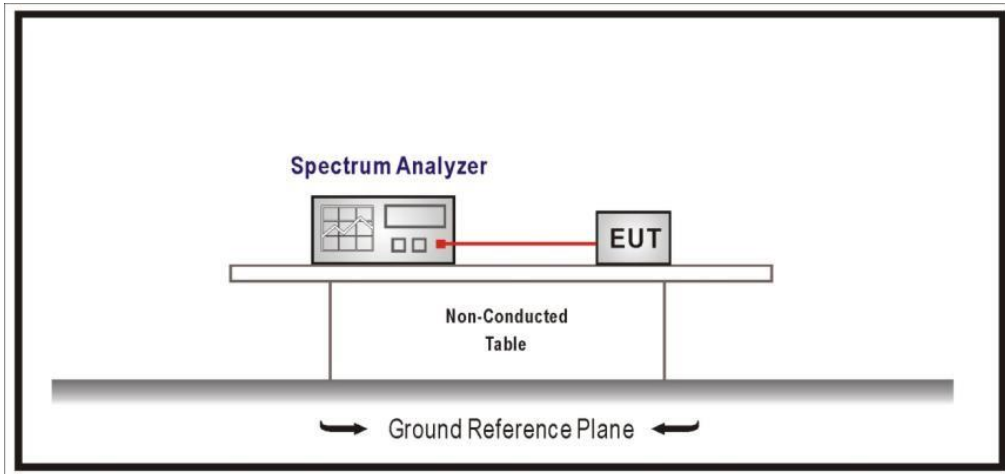

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (GFSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE DH1



Transmit Time per Hop: 0.388 ms

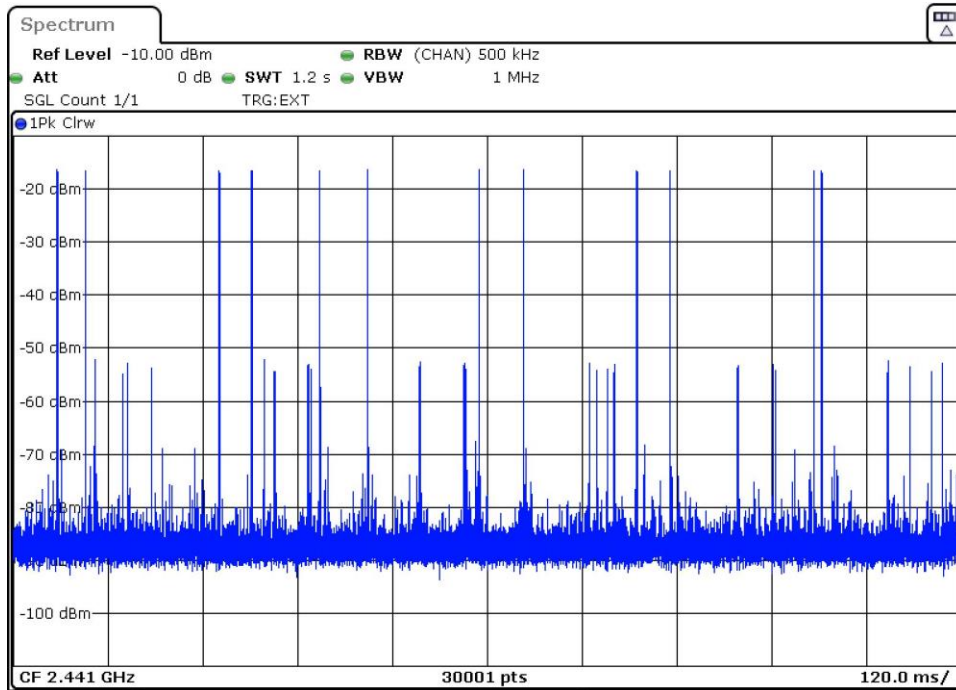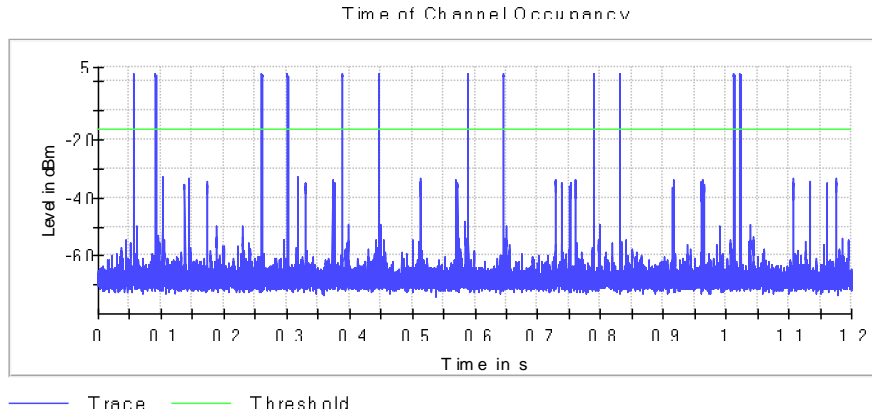

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	11	4.651	112

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (GFSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE DH3



Transmit Time per Hop: 1.644 ms

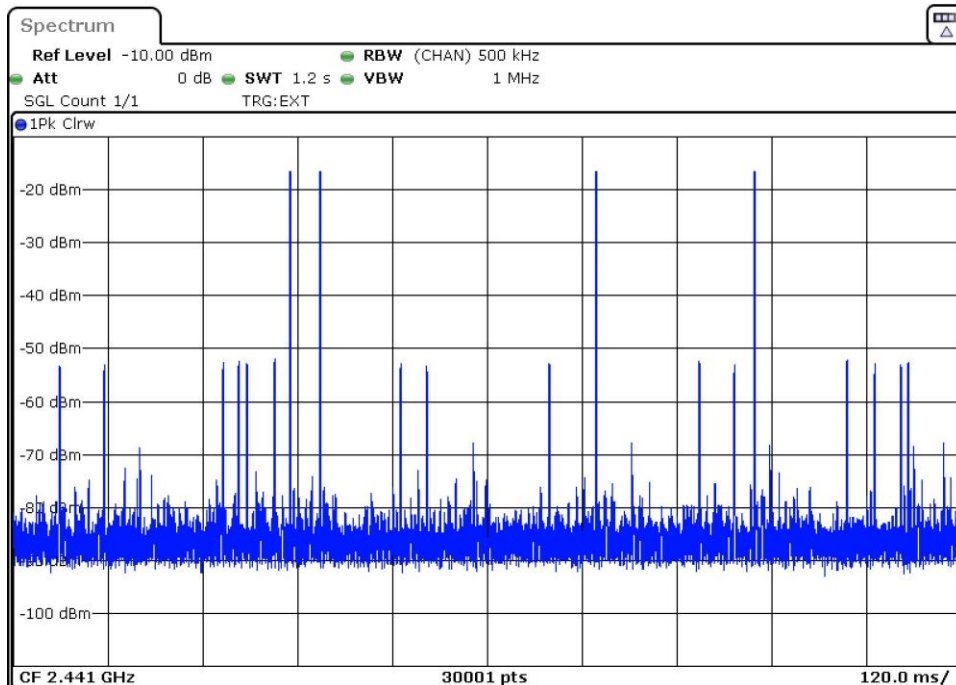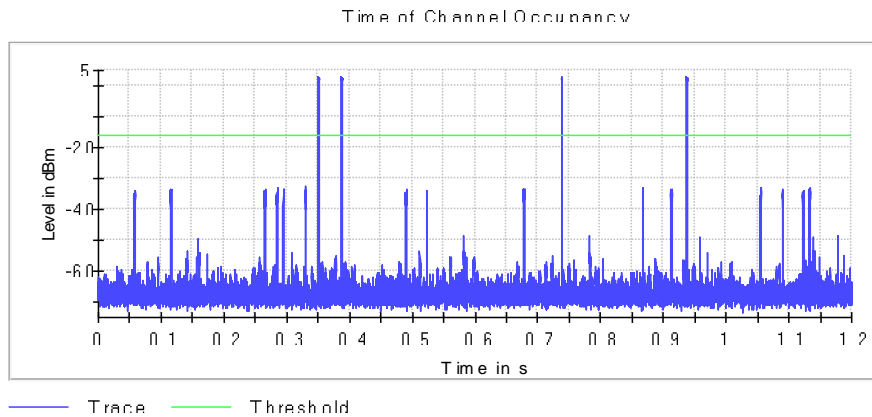

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	4	6.575	173

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (GFSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE DH5



Transmit Time per Hop: 2.892 ms

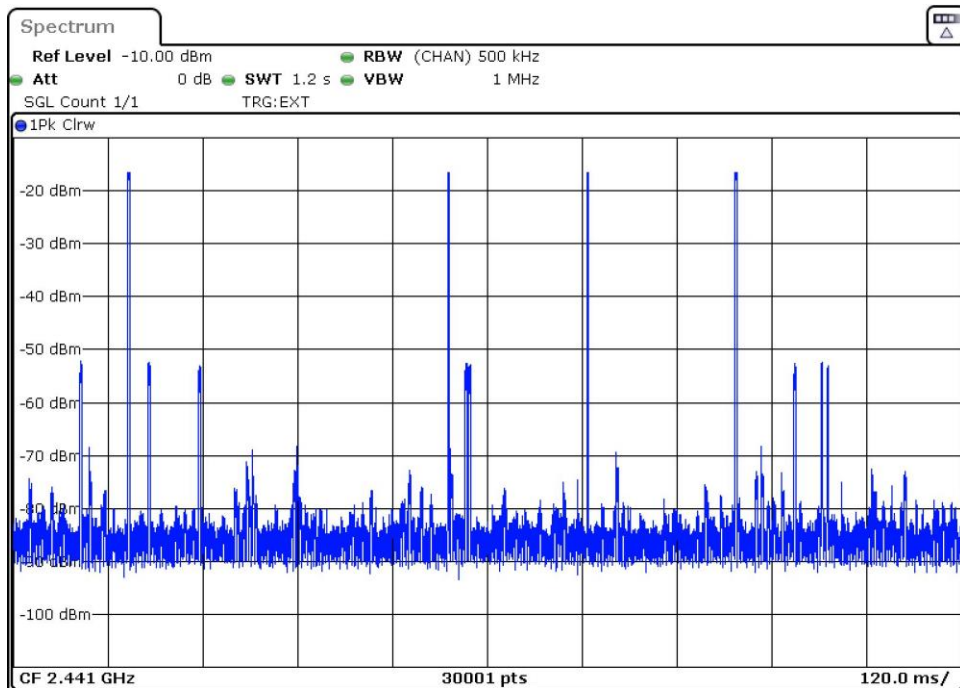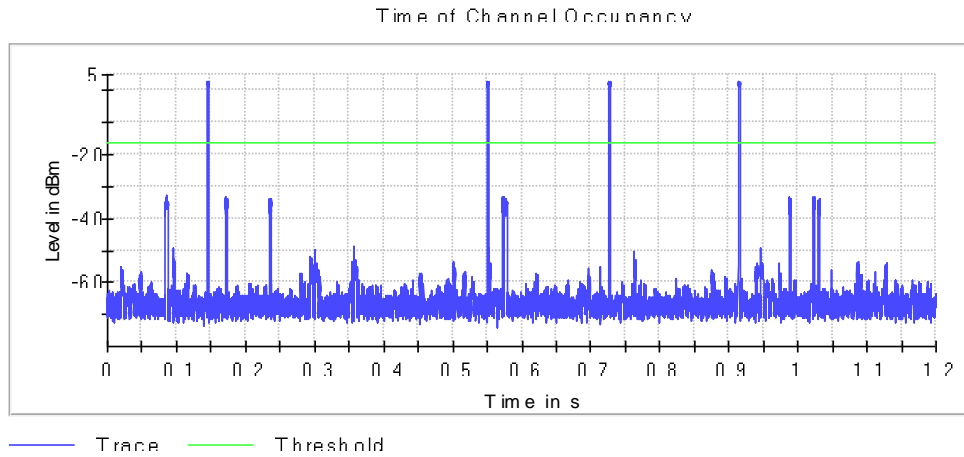

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	4	11.567	304

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 ($\pi/4$ -DQPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 2DH1



Transmit Time per Hop: 0.384 ms

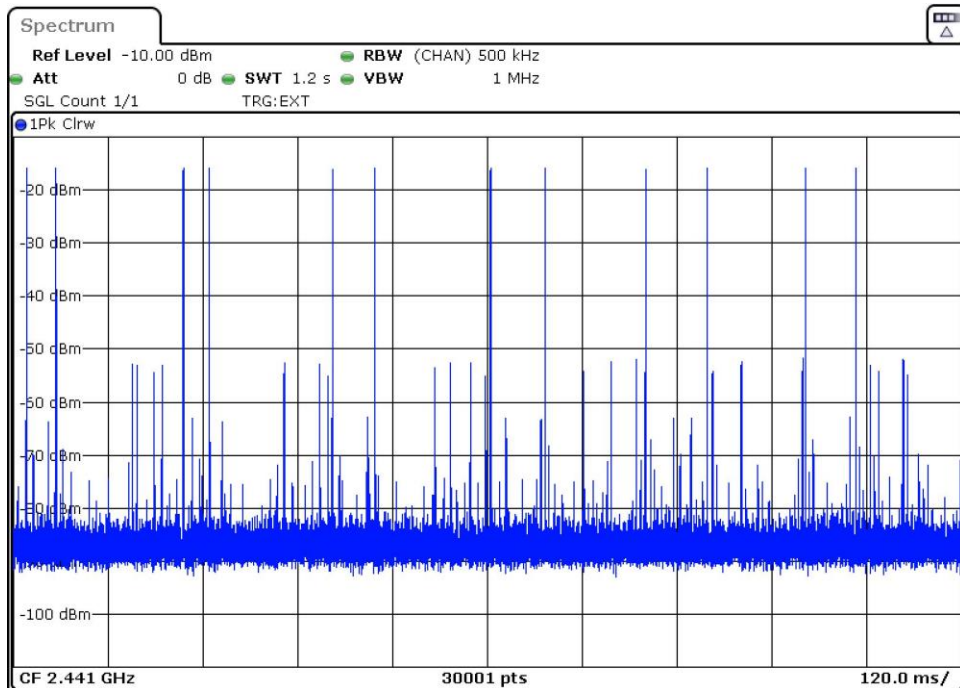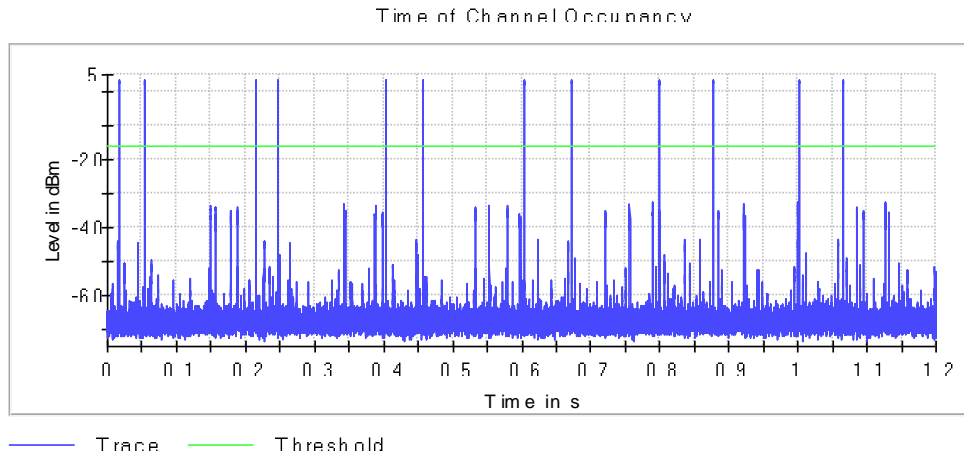

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	12	4.605	121

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 ($\pi/4$ -DQPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 2DH3



Transmit Time per Hop: 1.624 ms

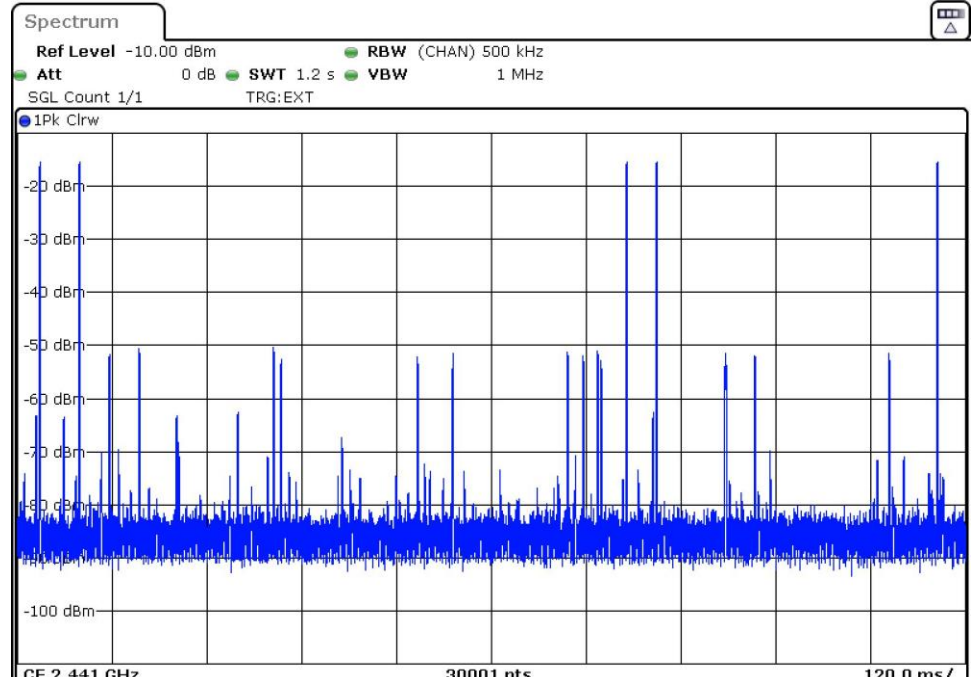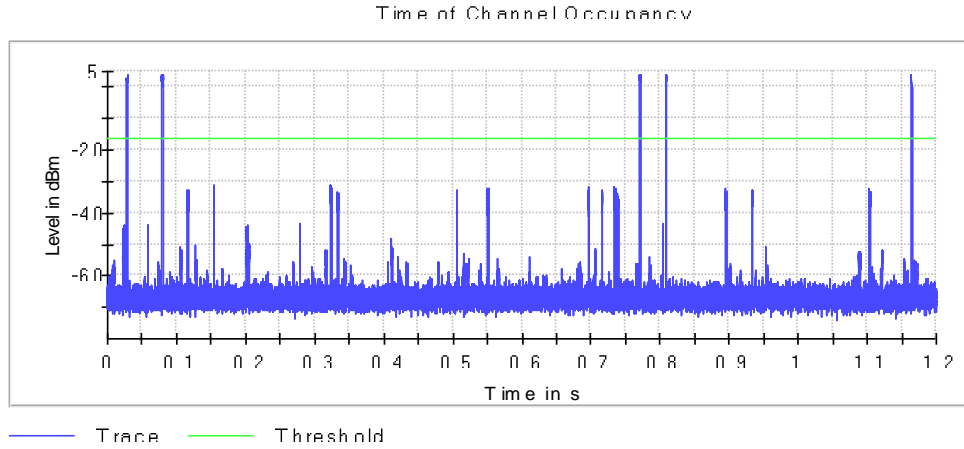

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	5	8.127	213

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 ($\pi/4$ -DQPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 2DH5



Transmit Time per Hop: 2.865 ms

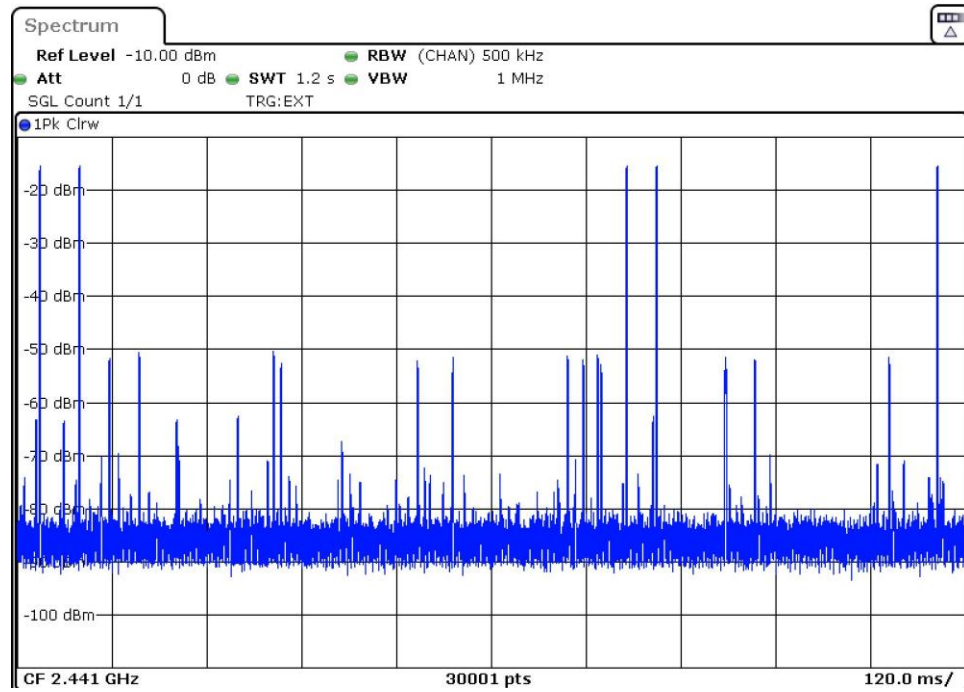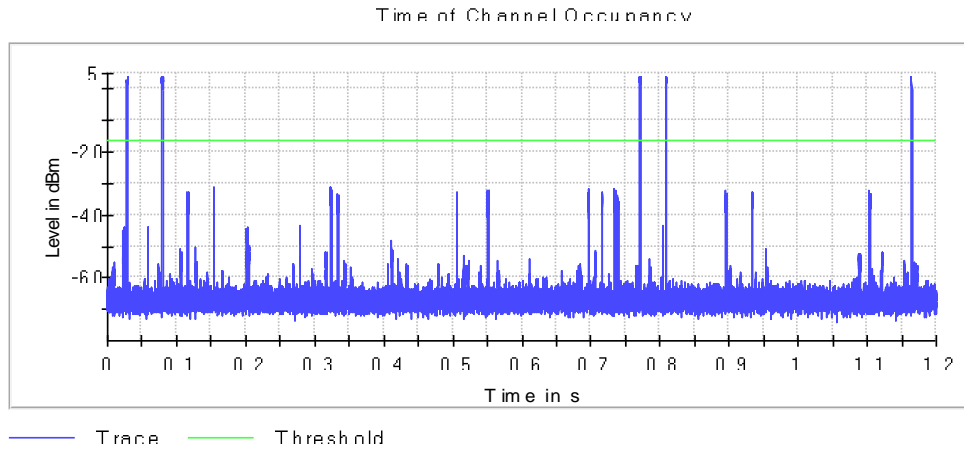

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	5	14.325	377

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 3DH1



Transmit Time per Hop: 0.387 ms

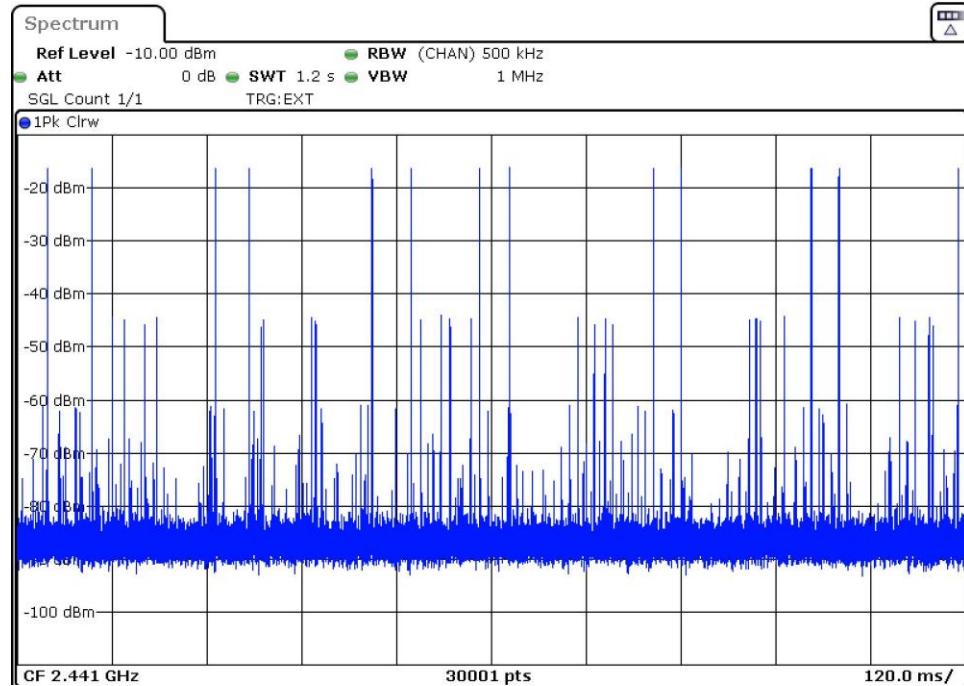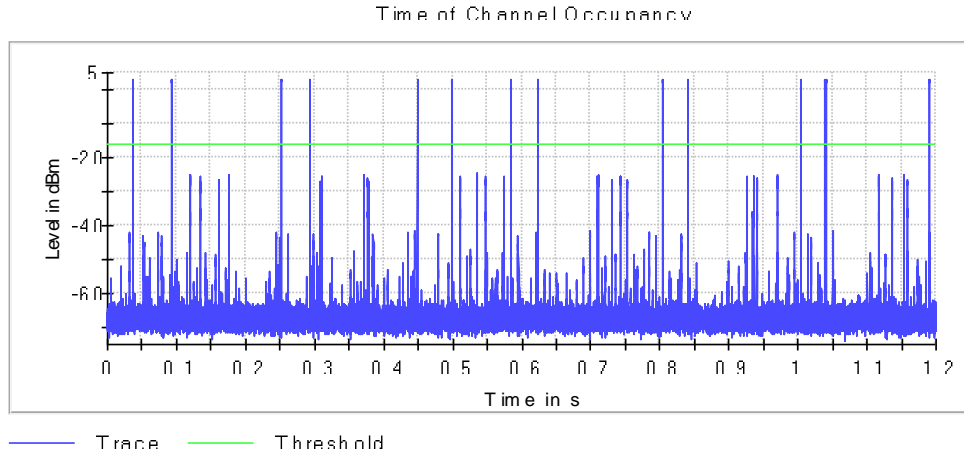

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	13	5.031	132

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 3DH3



Transmit Time per Hop: 2.890 ms

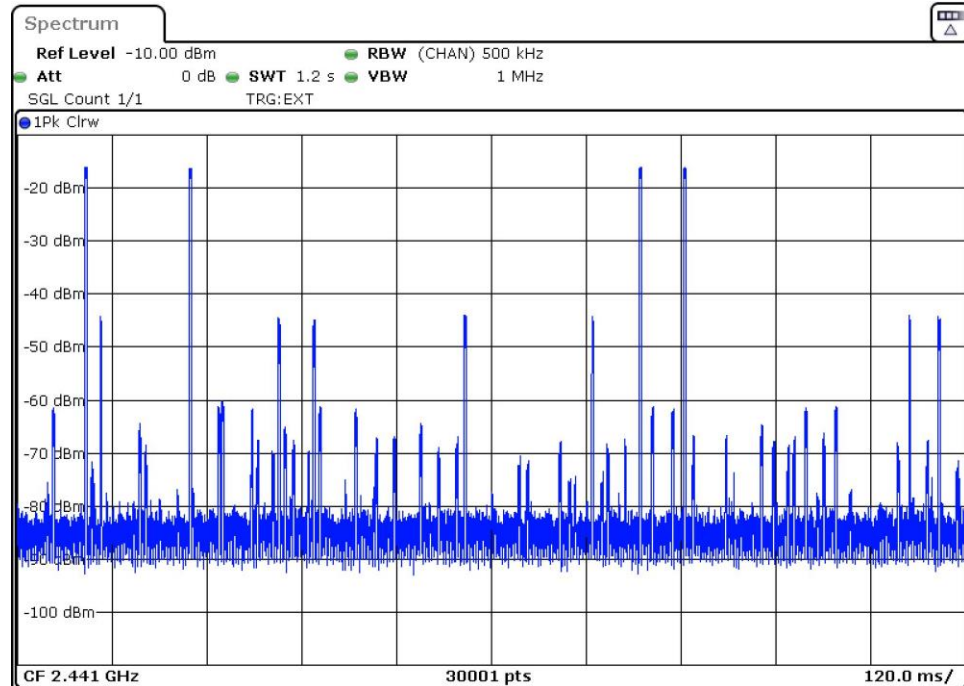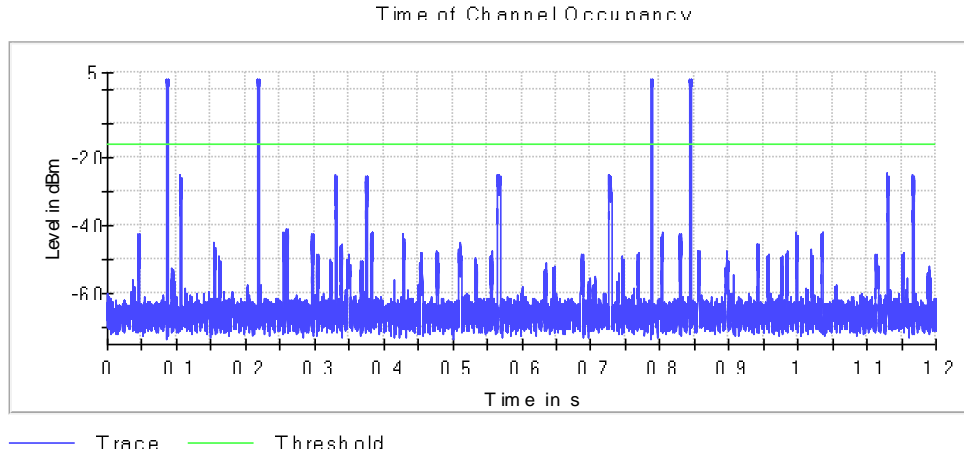

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
441.000000	PASS	4	11.560	304

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 3DH5

Transmit Time per Hop: 2.890 ms

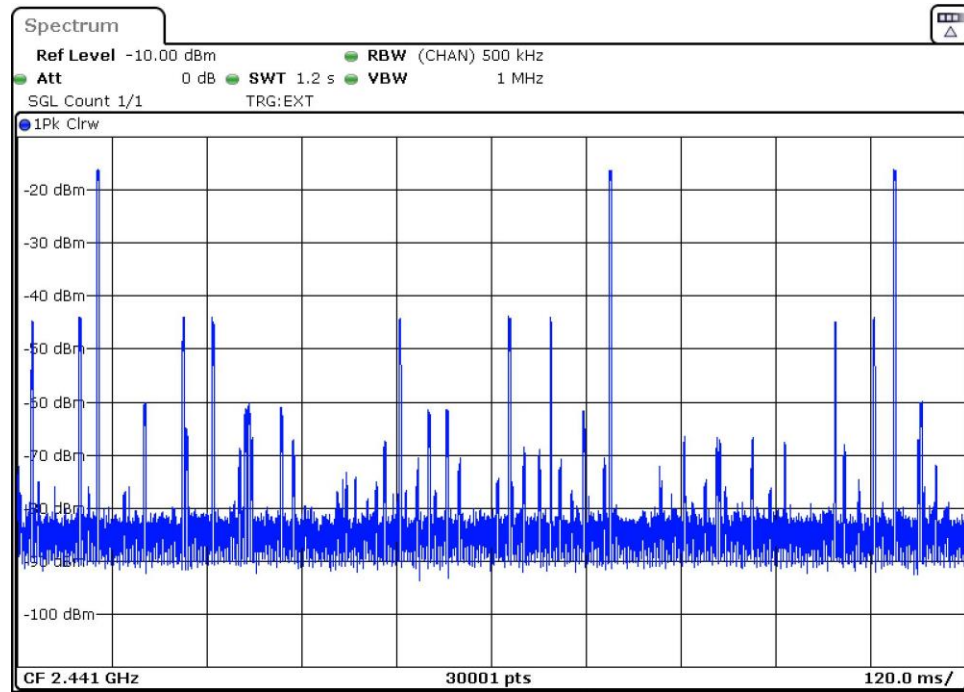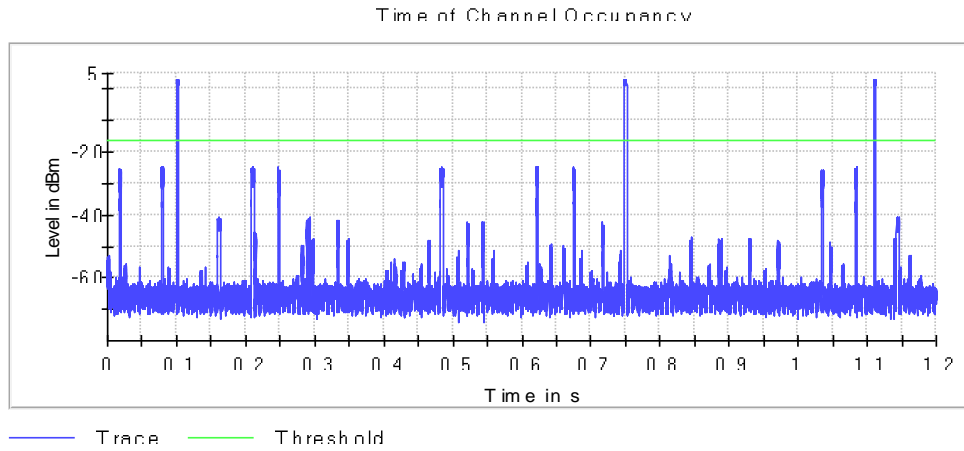

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Total time of occupancy per 31.6 seconds (ms)
2441.000000	PASS	3	8.668	228


TEST B.4: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(b) (3) and RSS-247 5.4(b)

LIMITS
 For Frequency Hopping systems operating in the 2400 – 2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm). (Part 15 Subpart C §15.247).
 The e.i.r.p. shall not exceed 4 W (RSS-247).

TEST SETUP

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

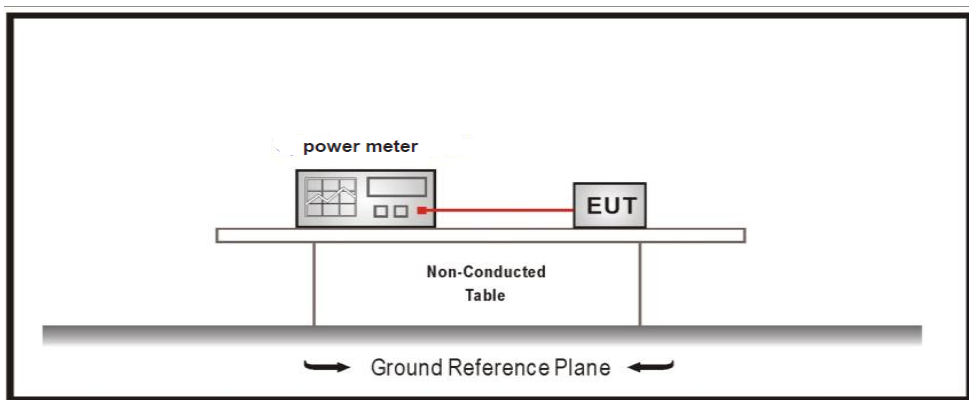

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS


Maximum declared antenna gain: -2.5 dBi

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	1.5	0.3	0.4
Maximum EIRP power (dBm)	-1.0	-2.2	-2.1


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------


Lowest Channel

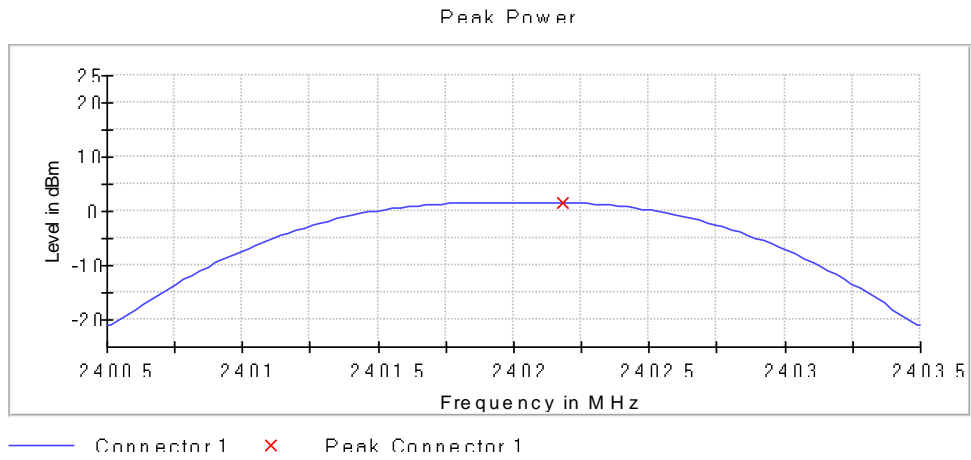

Middle Channel

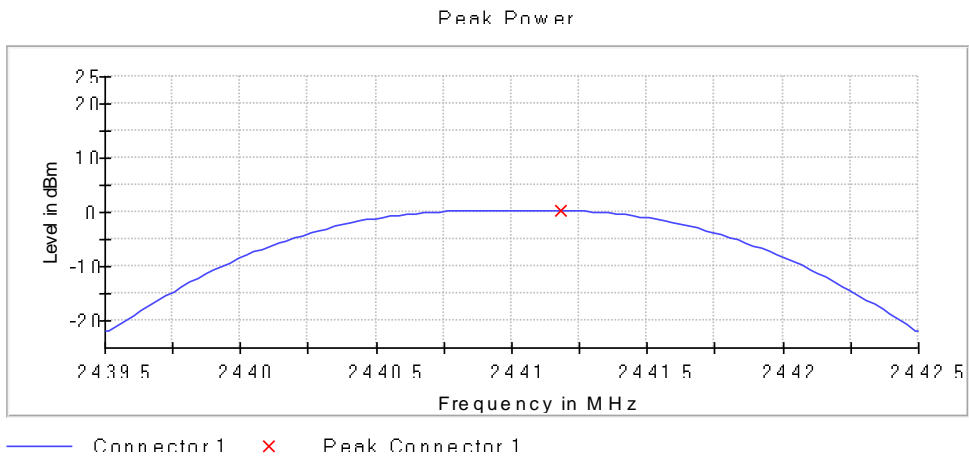

Highest Channel

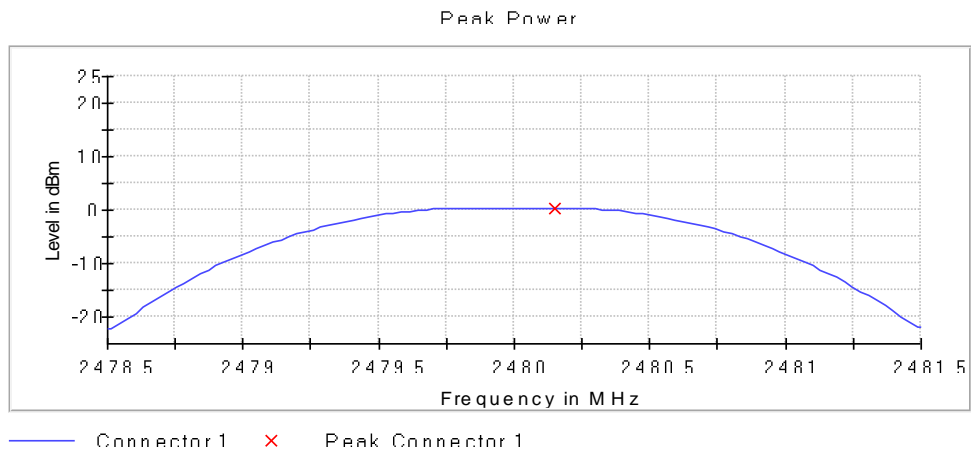


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

Maximum declared antenna gain: -2.5 dBi

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	3.7	2.4	2.5
Maximum EIRP power (dBm)	1.2	-0.1	-0.0


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

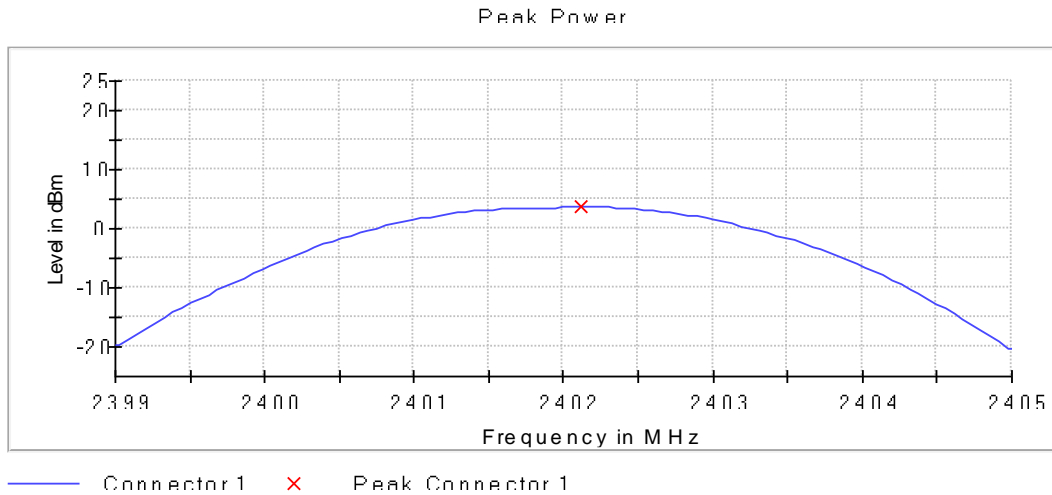


TEST RESULTS (Cont.)	CONDUCTED OUTPUT POWER
-----------------------------	-------------------------------

Middle Channel

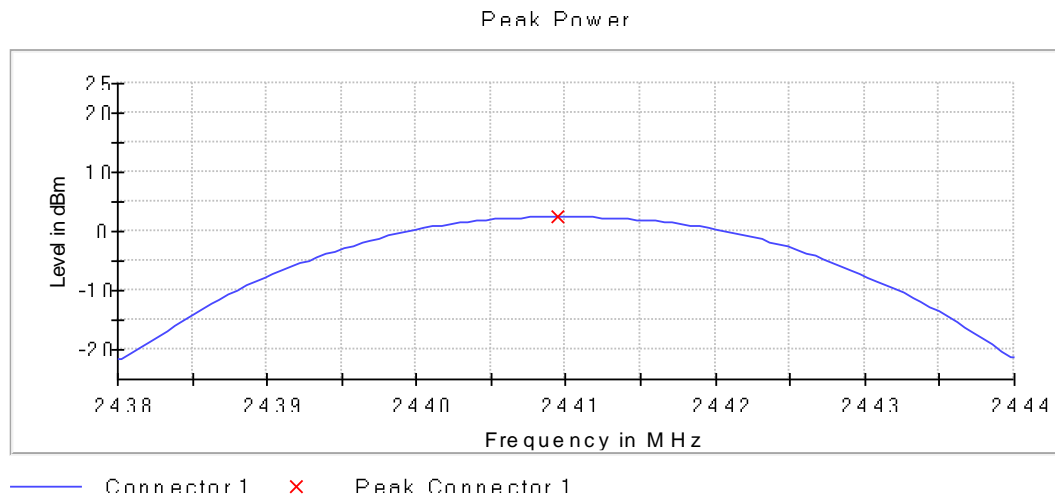

Highest Channel

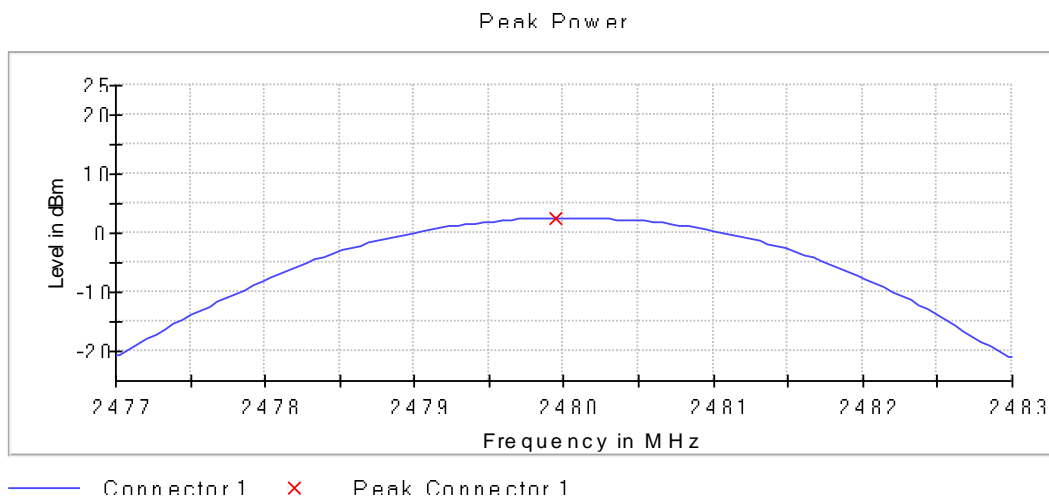


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

Maximum declared antenna gain: -2.5 dBi

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	3.9	2.8	2.8
Maximum EIRP power (dBm)	1.4	0.3	0.3


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

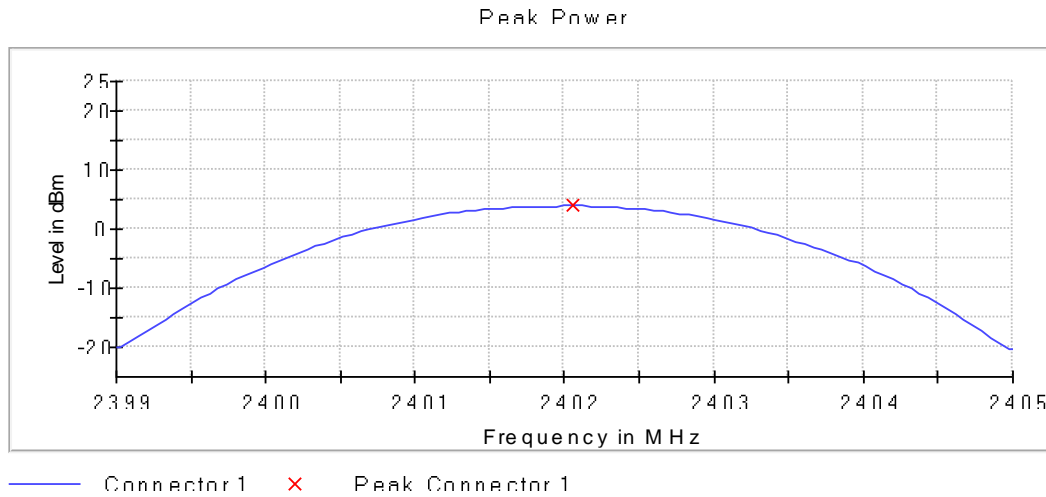


TEST RESULTS (Cont.)

Middle Channel

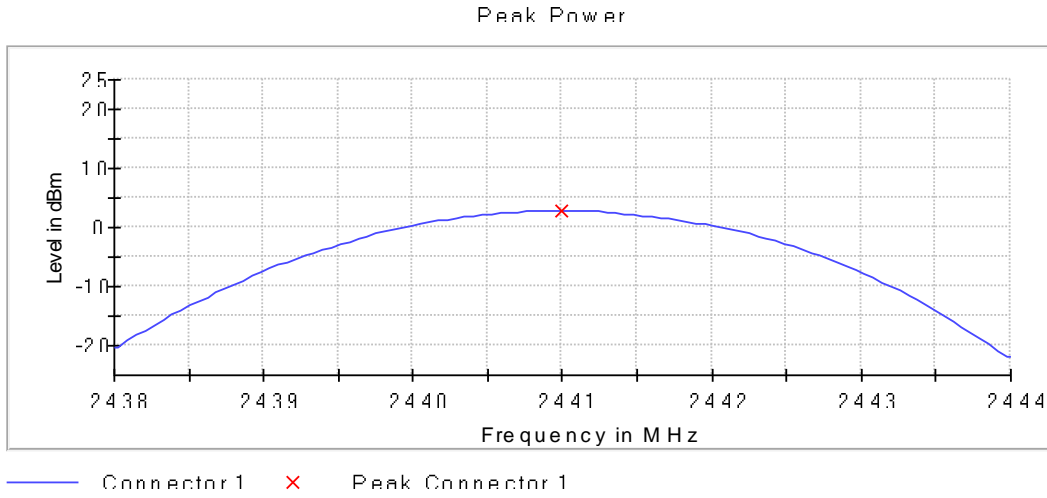

Highest Channel

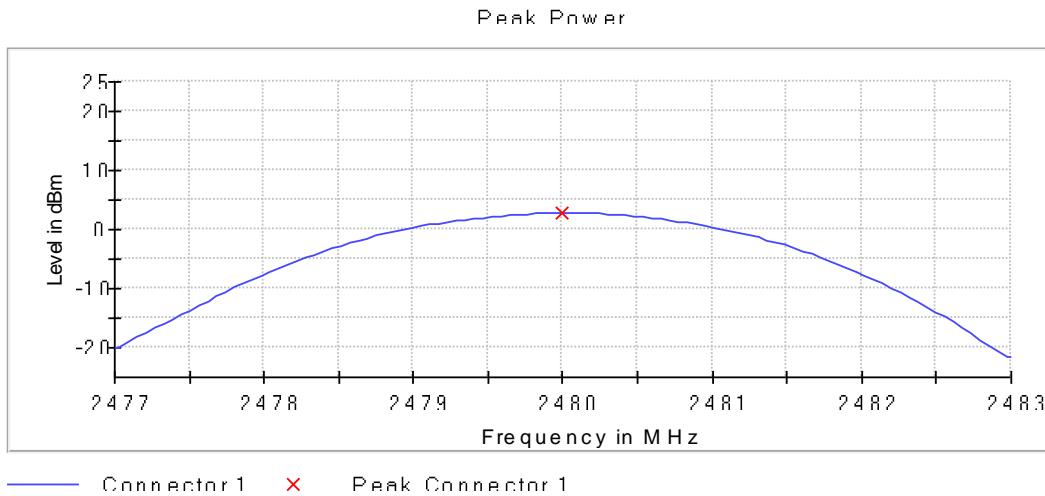


TEST B.5: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)


LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS
 Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

TEST SETUP

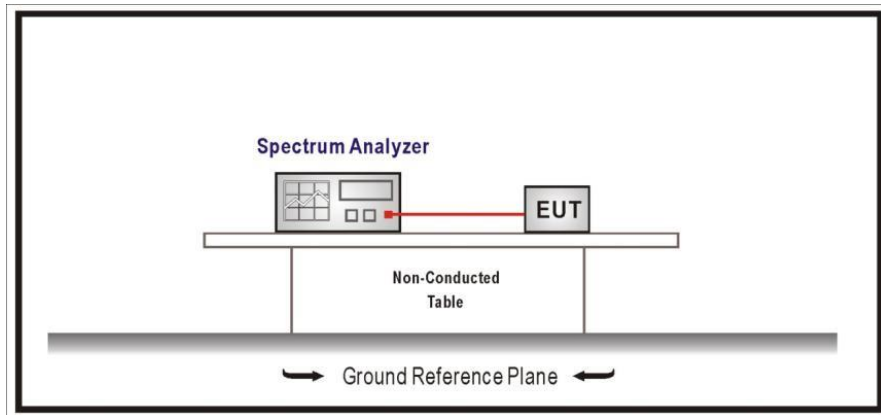



TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	HOPPING OFF (Lowest channel)

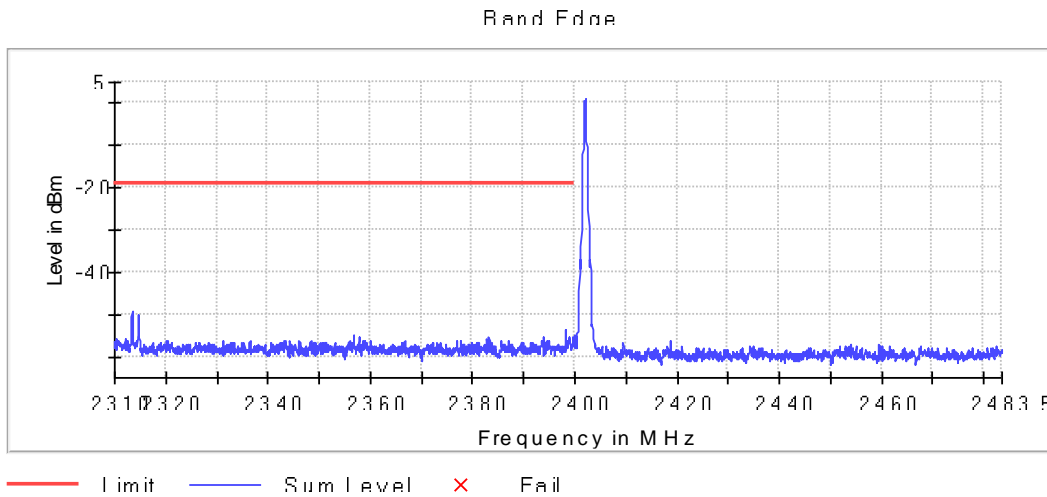


Measurement


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2313.425000	-49.4	30.4	-19.1	PASS
2313.475000	-49.8	30.7	-19.1	PASS
2314.675000	-50.1	31.0	-19.1	PASS
2313.375000	-50.5	31.5	-19.1	PASS
2314.625000	-50.5	31.5	-19.1	PASS
2314.725000	-51.8	32.7	-19.1	PASS
2313.325000	-53.0	34.0	-19.1	PASS
2313.525000	-53.3	34.2	-19.1	PASS
2398.175000	-53.8	34.7	-19.1	PASS
2398.125000	-54.0	34.9	-19.1	PASS
2314.575000	-54.0	35.0	-19.1	PASS
2313.575000	-54.3	35.2	-19.1	PASS
2313.275000	-54.5	35.5	-19.1	PASS
2314.525000	-54.8	35.7	-19.1	PASS
2399.975000	-54.8	35.8	-19.1	PASS

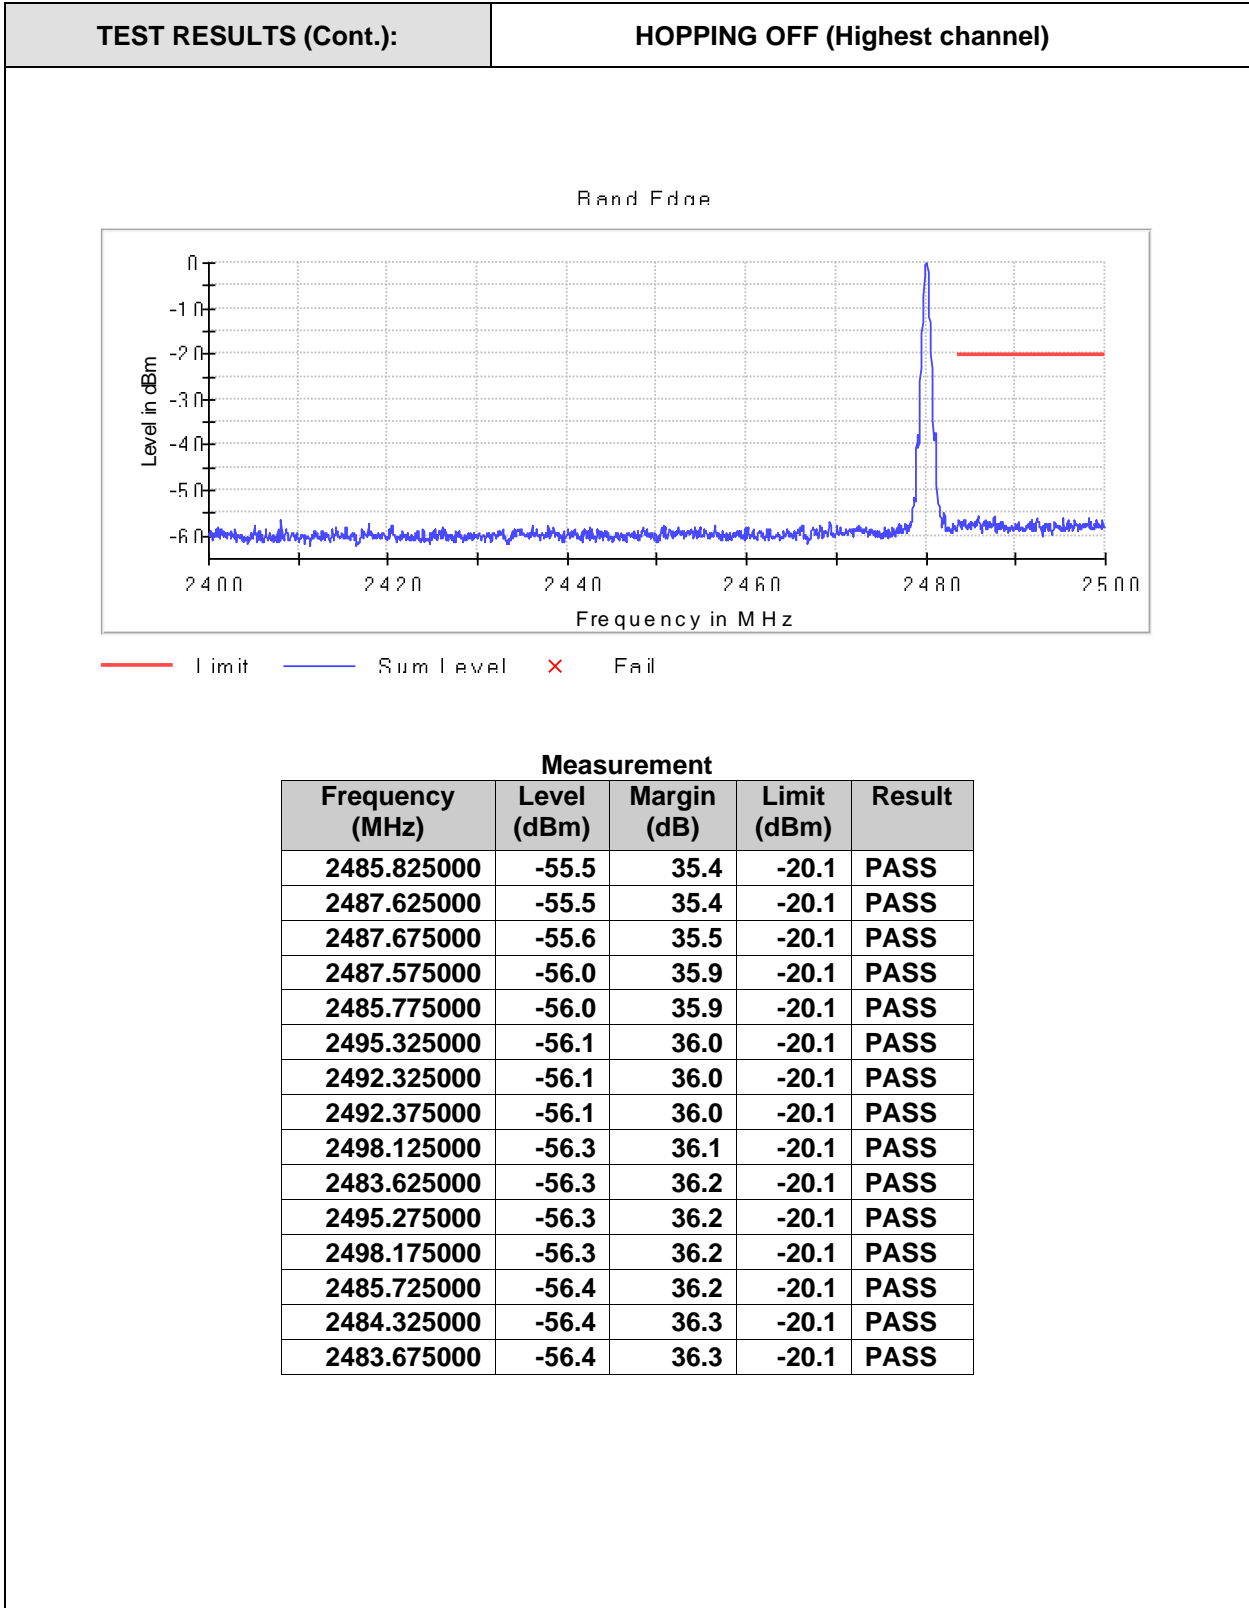

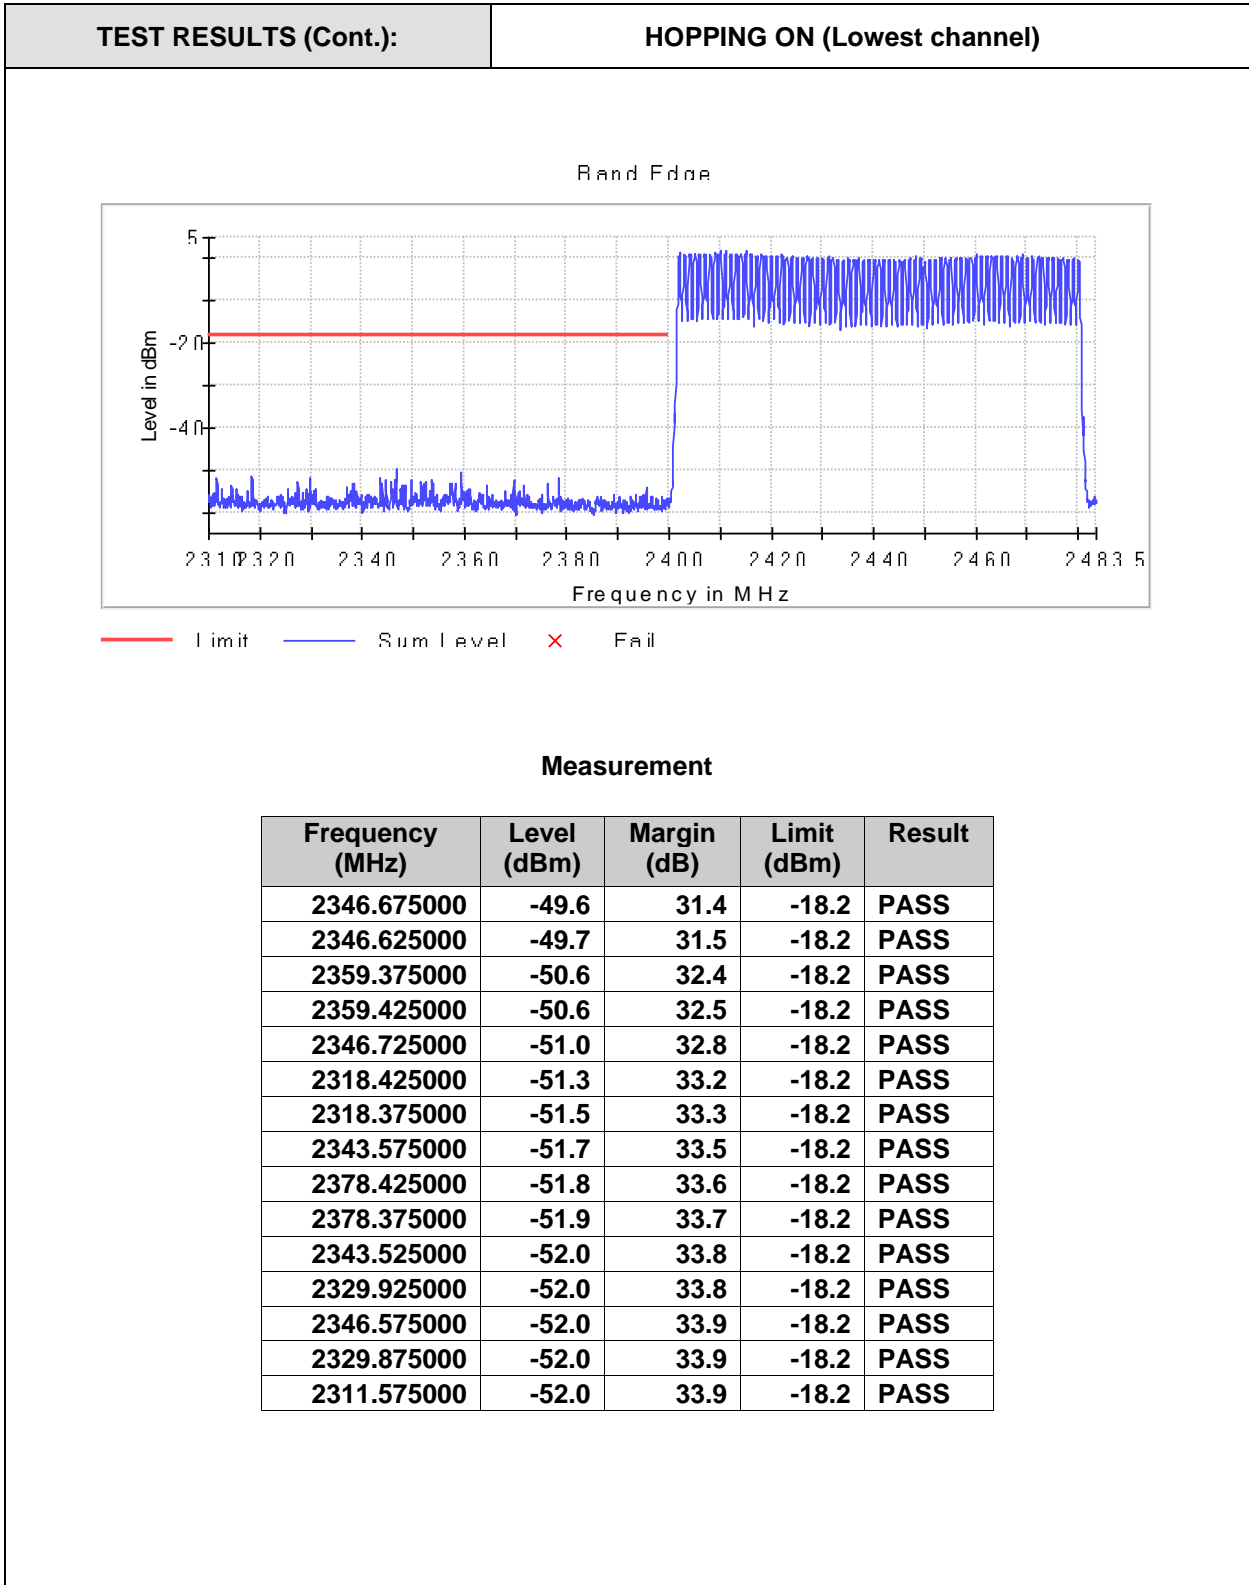

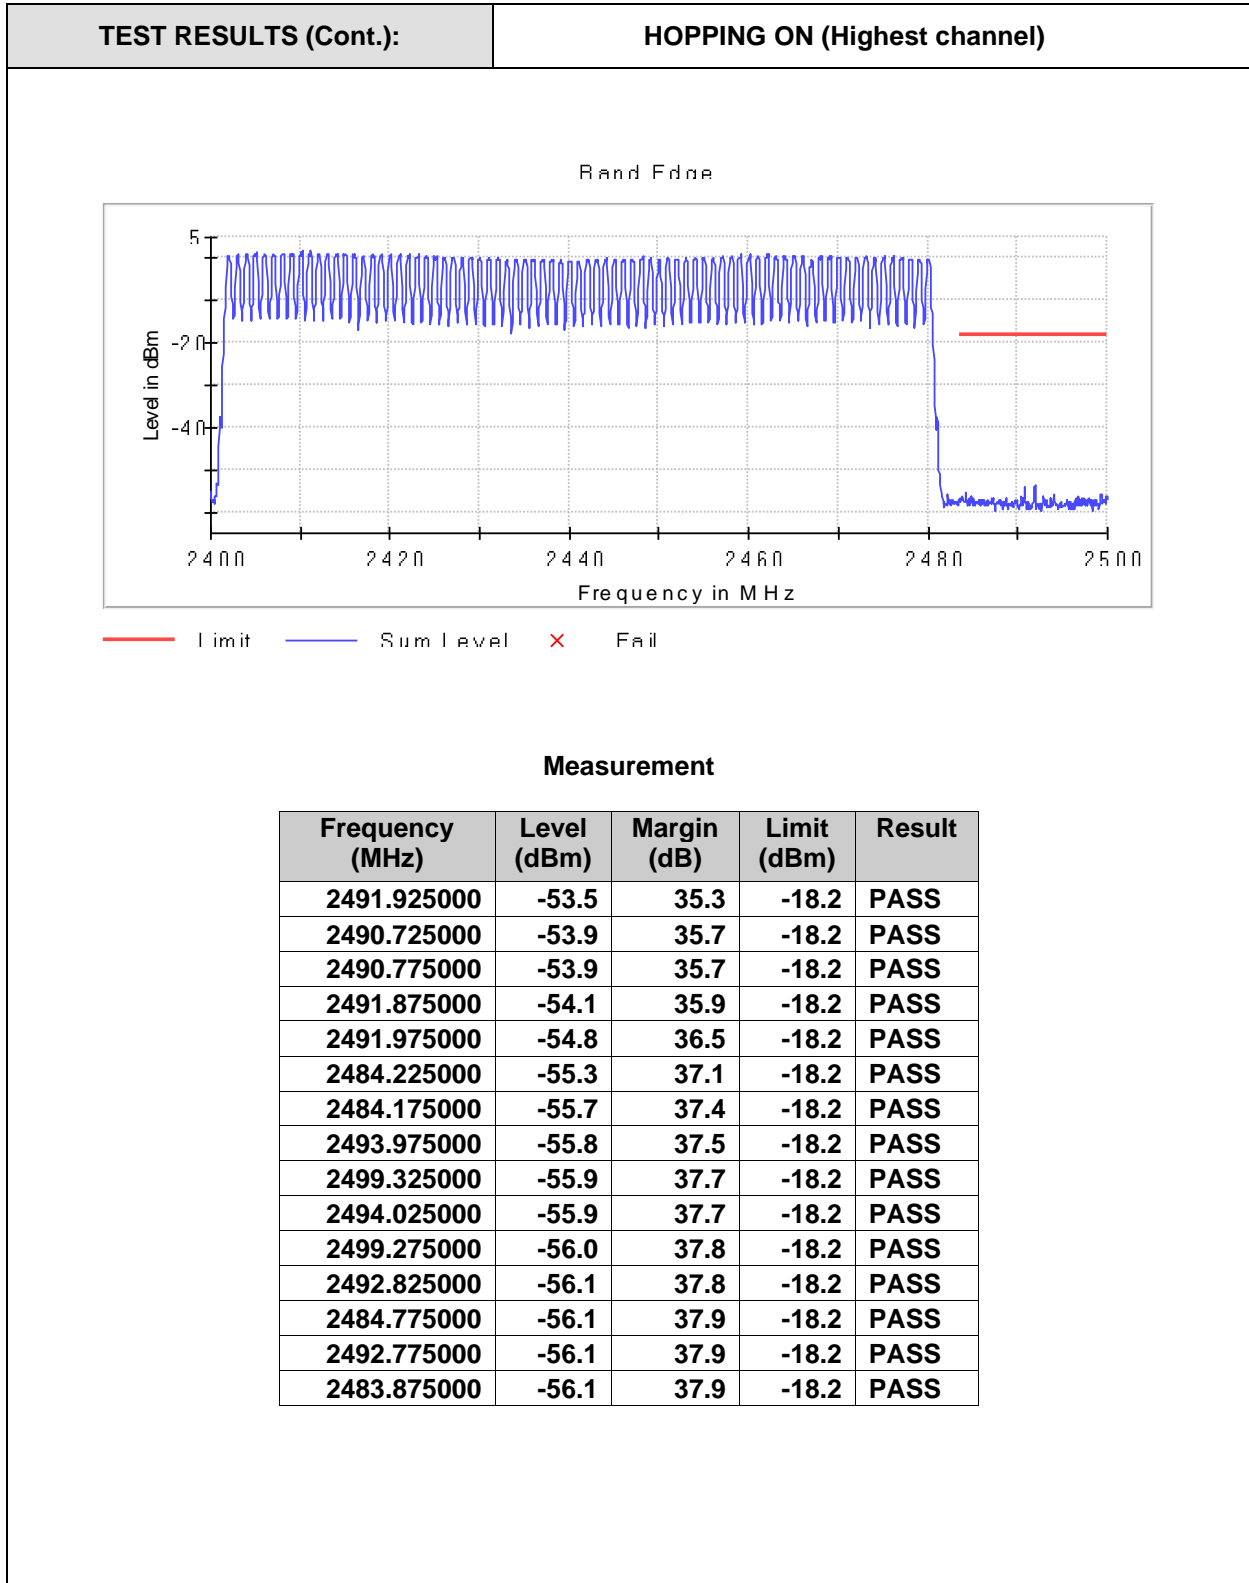



TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 ($\pi/4$ -DQPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	HOPPING OFF (Lowest channel)

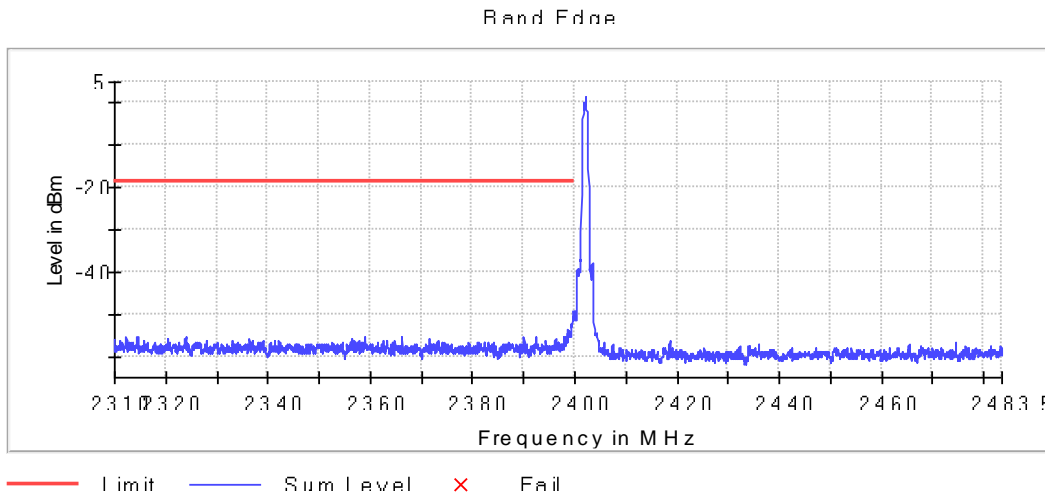


Measurement


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.925000	-49.1	30.5	-18.5	PASS
2399.975000	-49.2	30.7	-18.5	PASS
2399.775000	-49.4	30.8	-18.5	PASS
2399.875000	-49.4	30.8	-18.5	PASS
2399.825000	-49.6	31.1	-18.5	PASS
2399.725000	-50.1	31.5	-18.5	PASS
2399.625000	-50.7	32.2	-18.5	PASS
2399.575000	-50.8	32.3	-18.5	PASS
2399.525000	-51.2	32.7	-18.5	PASS
2399.675000	-51.3	32.8	-18.5	PASS
2399.475000	-51.4	32.9	-18.5	PASS
2399.375000	-52.3	33.8	-18.5	PASS
2399.325000	-52.3	33.8	-18.5	PASS
2399.275000	-53.0	34.4	-18.5	PASS
2399.425000	-53.4	34.9	-18.5	PASS

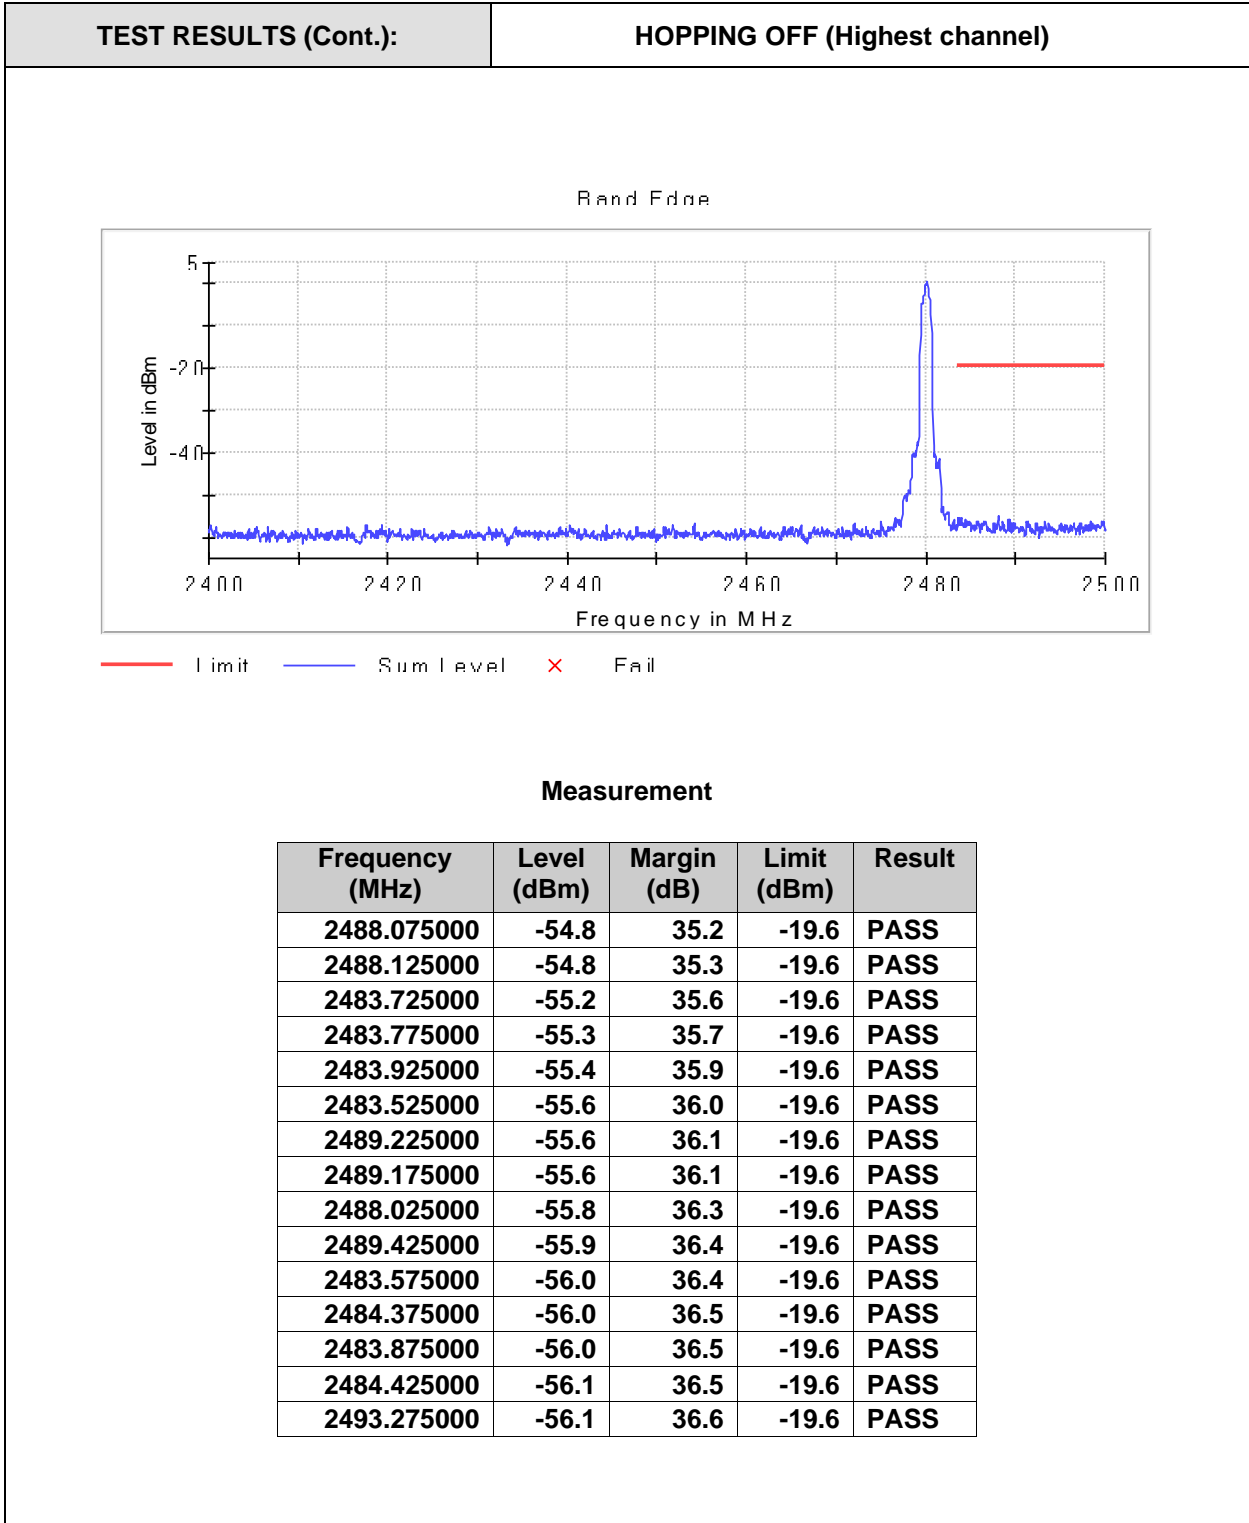

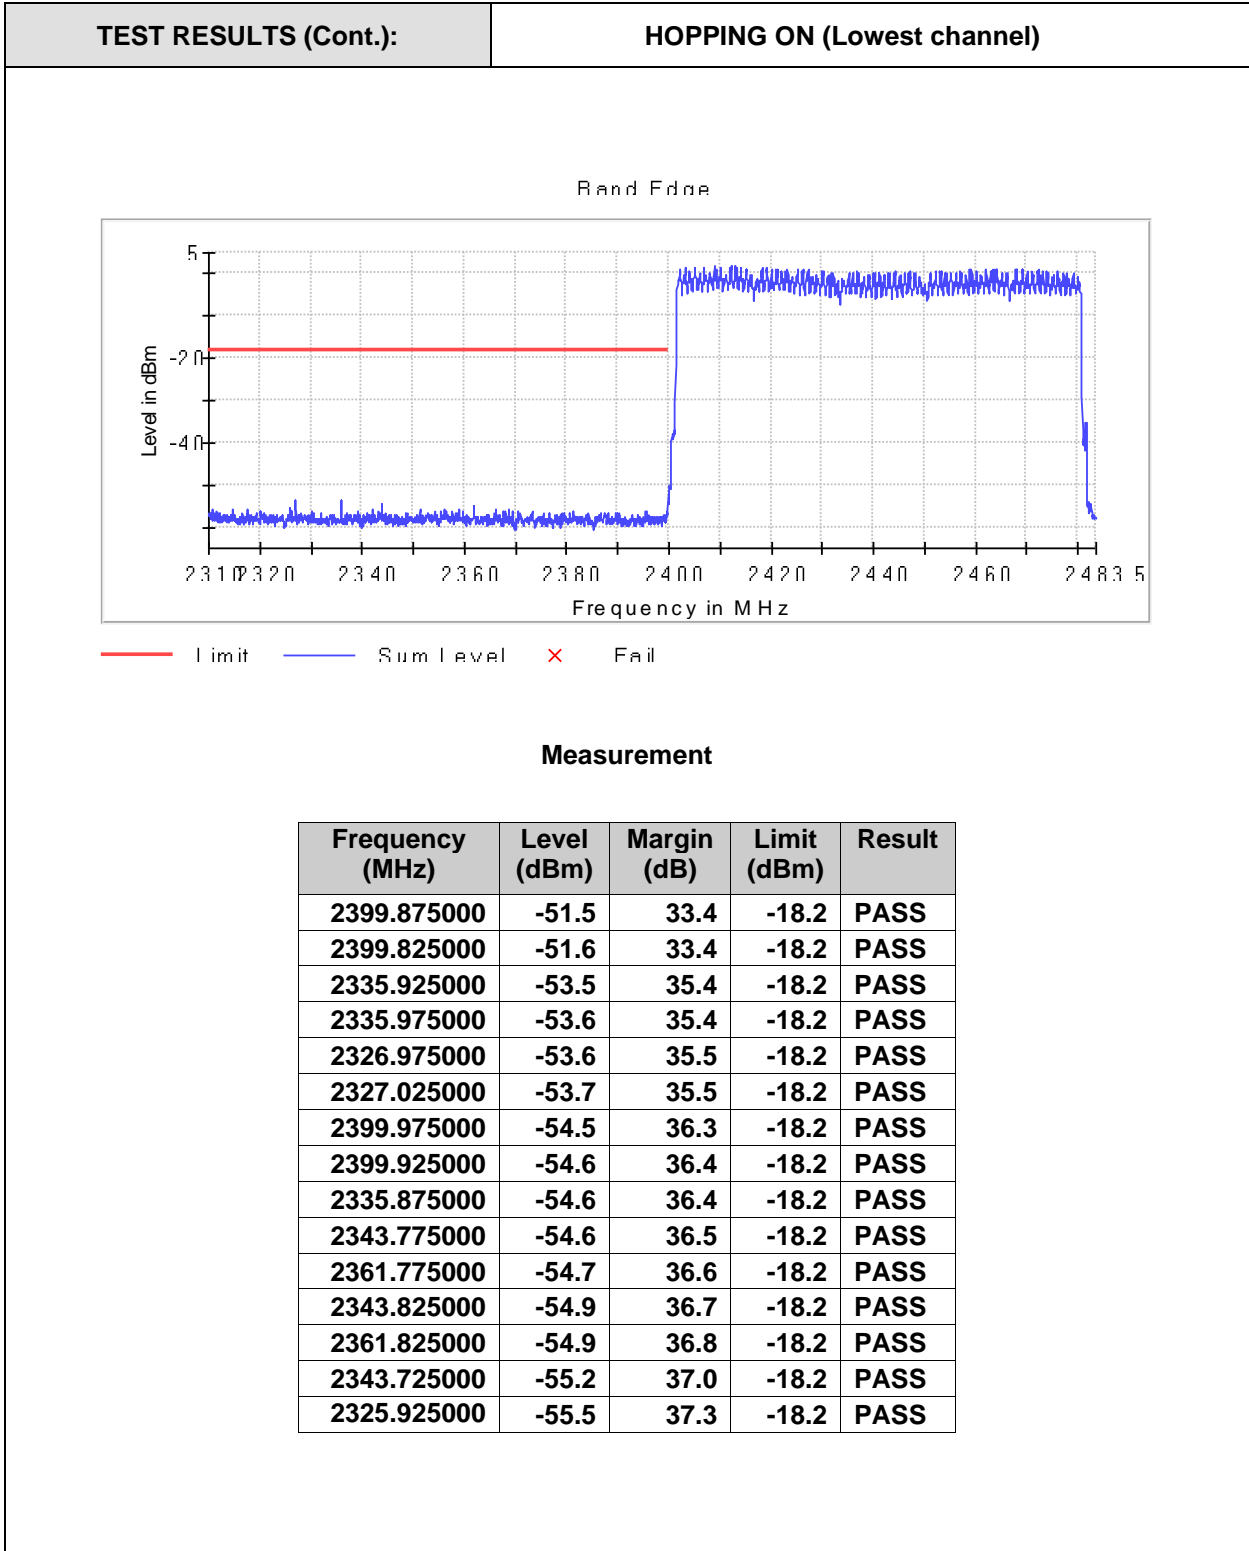

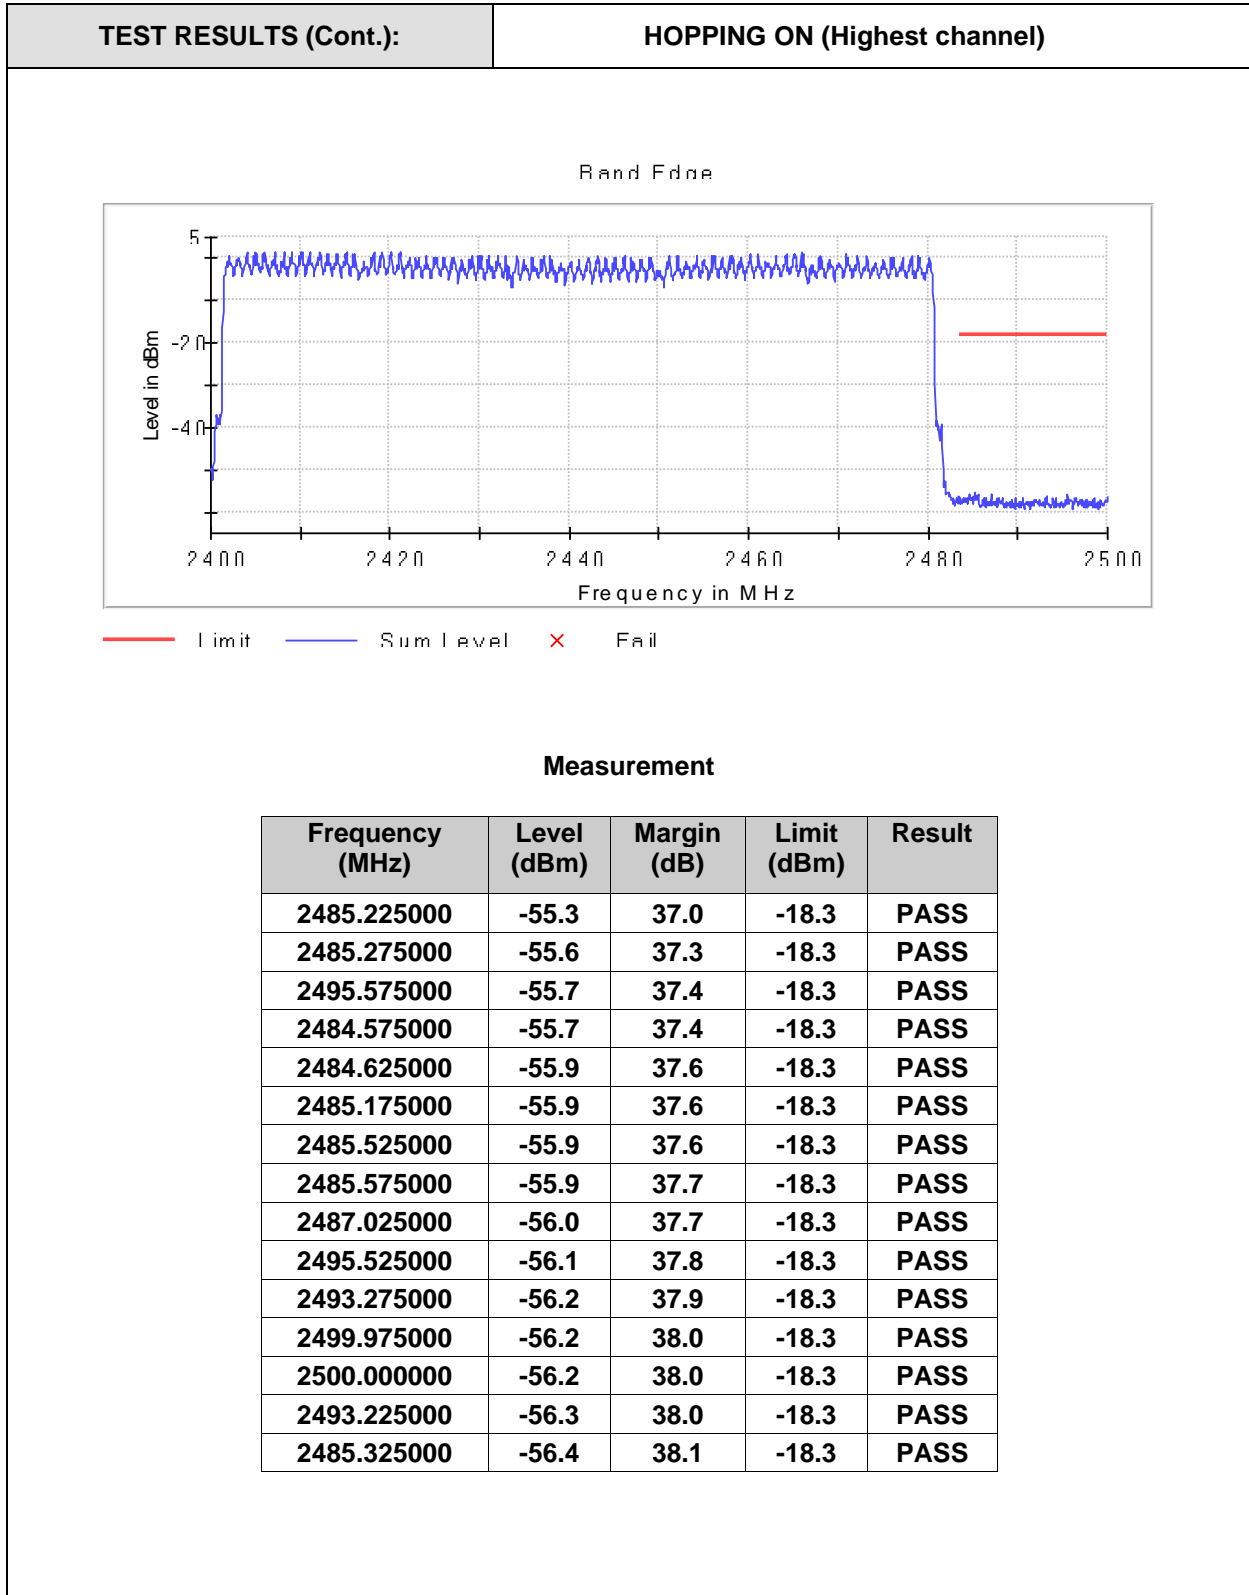



TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	HOPPING OFF (Lowest channel)

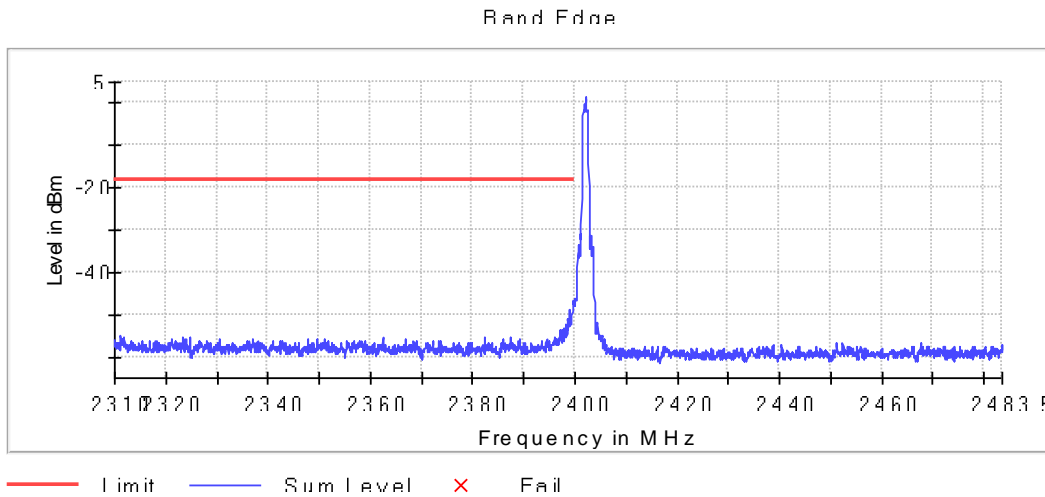


Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.925000	-46.3	27.8	-18.4	PASS
2399.875000	-46.6	28.2	-18.4	PASS
2399.775000	-46.7	28.2	-18.4	PASS
2399.625000	-47.1	28.7	-18.4	PASS
2399.975000	-47.1	28.7	-18.4	PASS
2399.825000	-47.3	28.9	-18.4	PASS
2399.675000	-47.4	29.0	-18.4	PASS
2399.725000	-47.6	29.2	-18.4	PASS
2399.575000	-48.4	30.0	-18.4	PASS
2398.925000	-48.8	30.4	-18.4	PASS
2399.525000	-49.1	30.7	-18.4	PASS
2399.475000	-49.2	30.8	-18.4	PASS
2398.875000	-49.4	31.0	-18.4	PASS
2398.975000	-49.7	31.3	-18.4	PASS
2399.425000	-50.0	31.6	-18.4	PASS

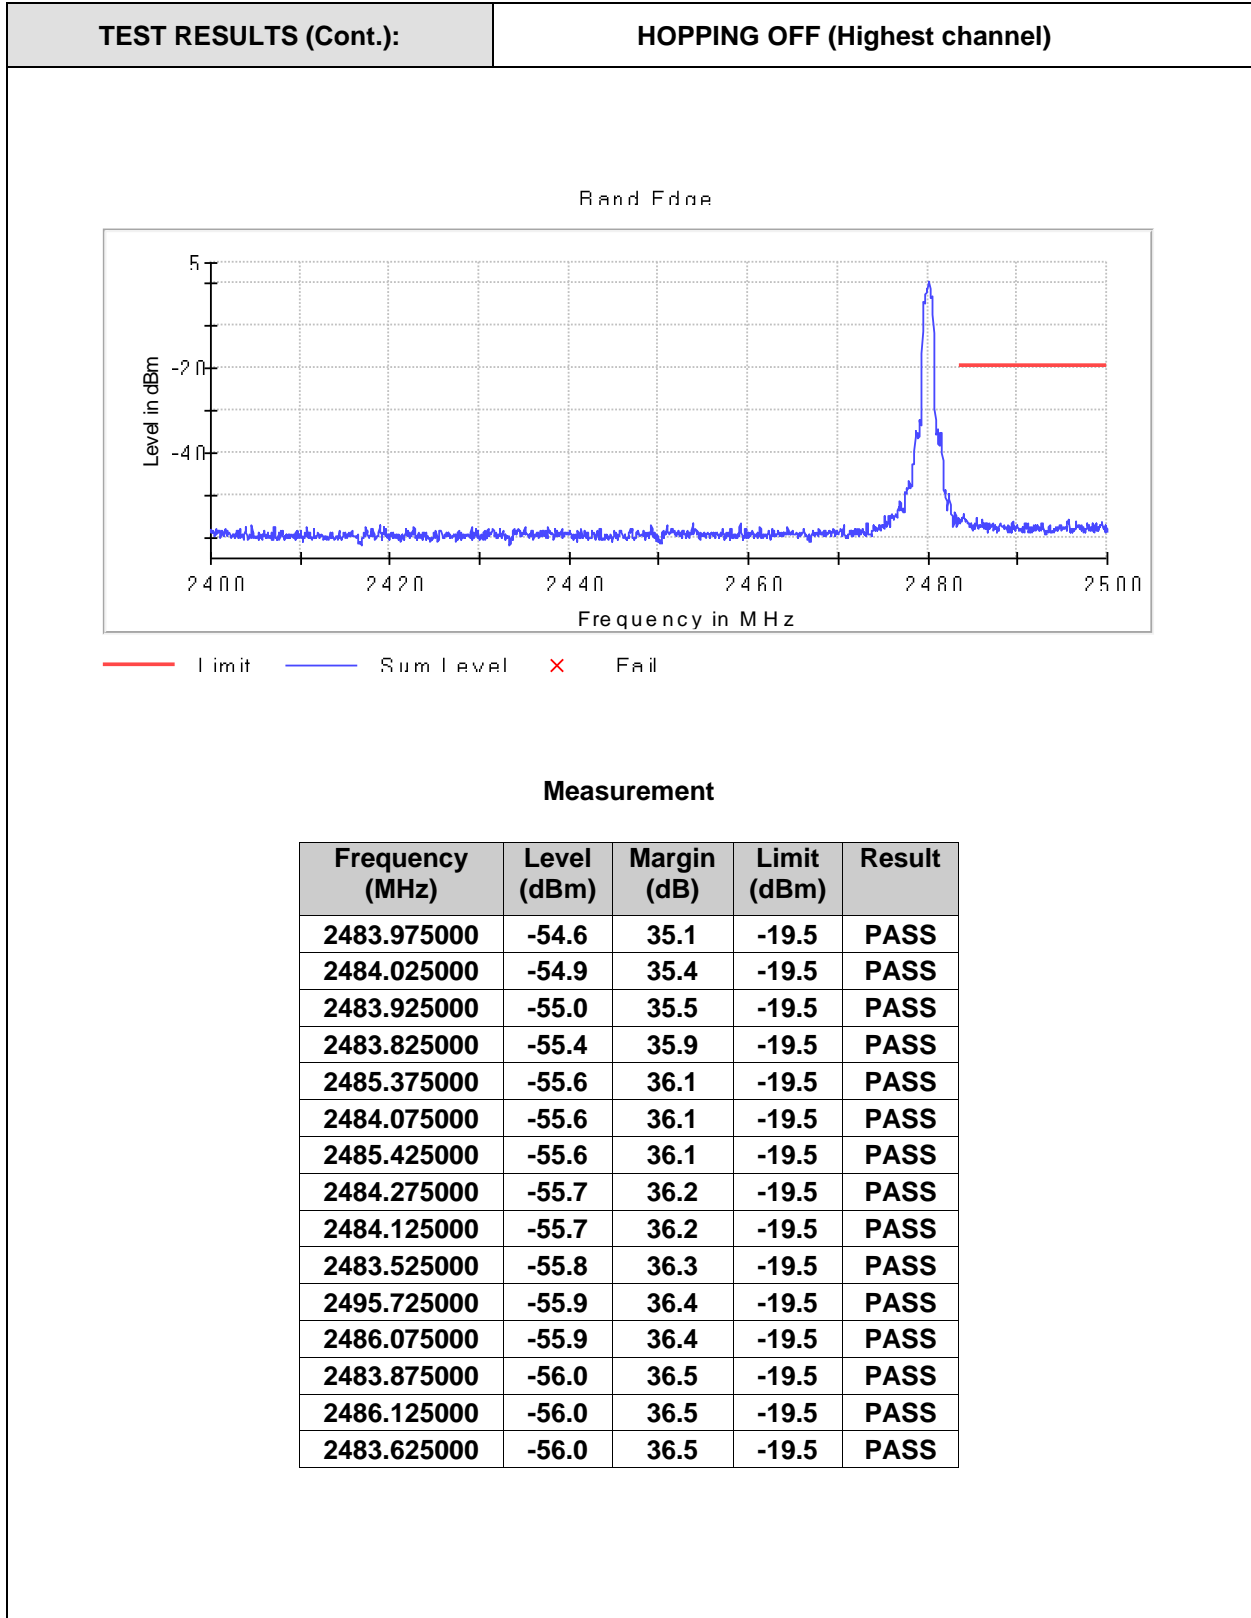

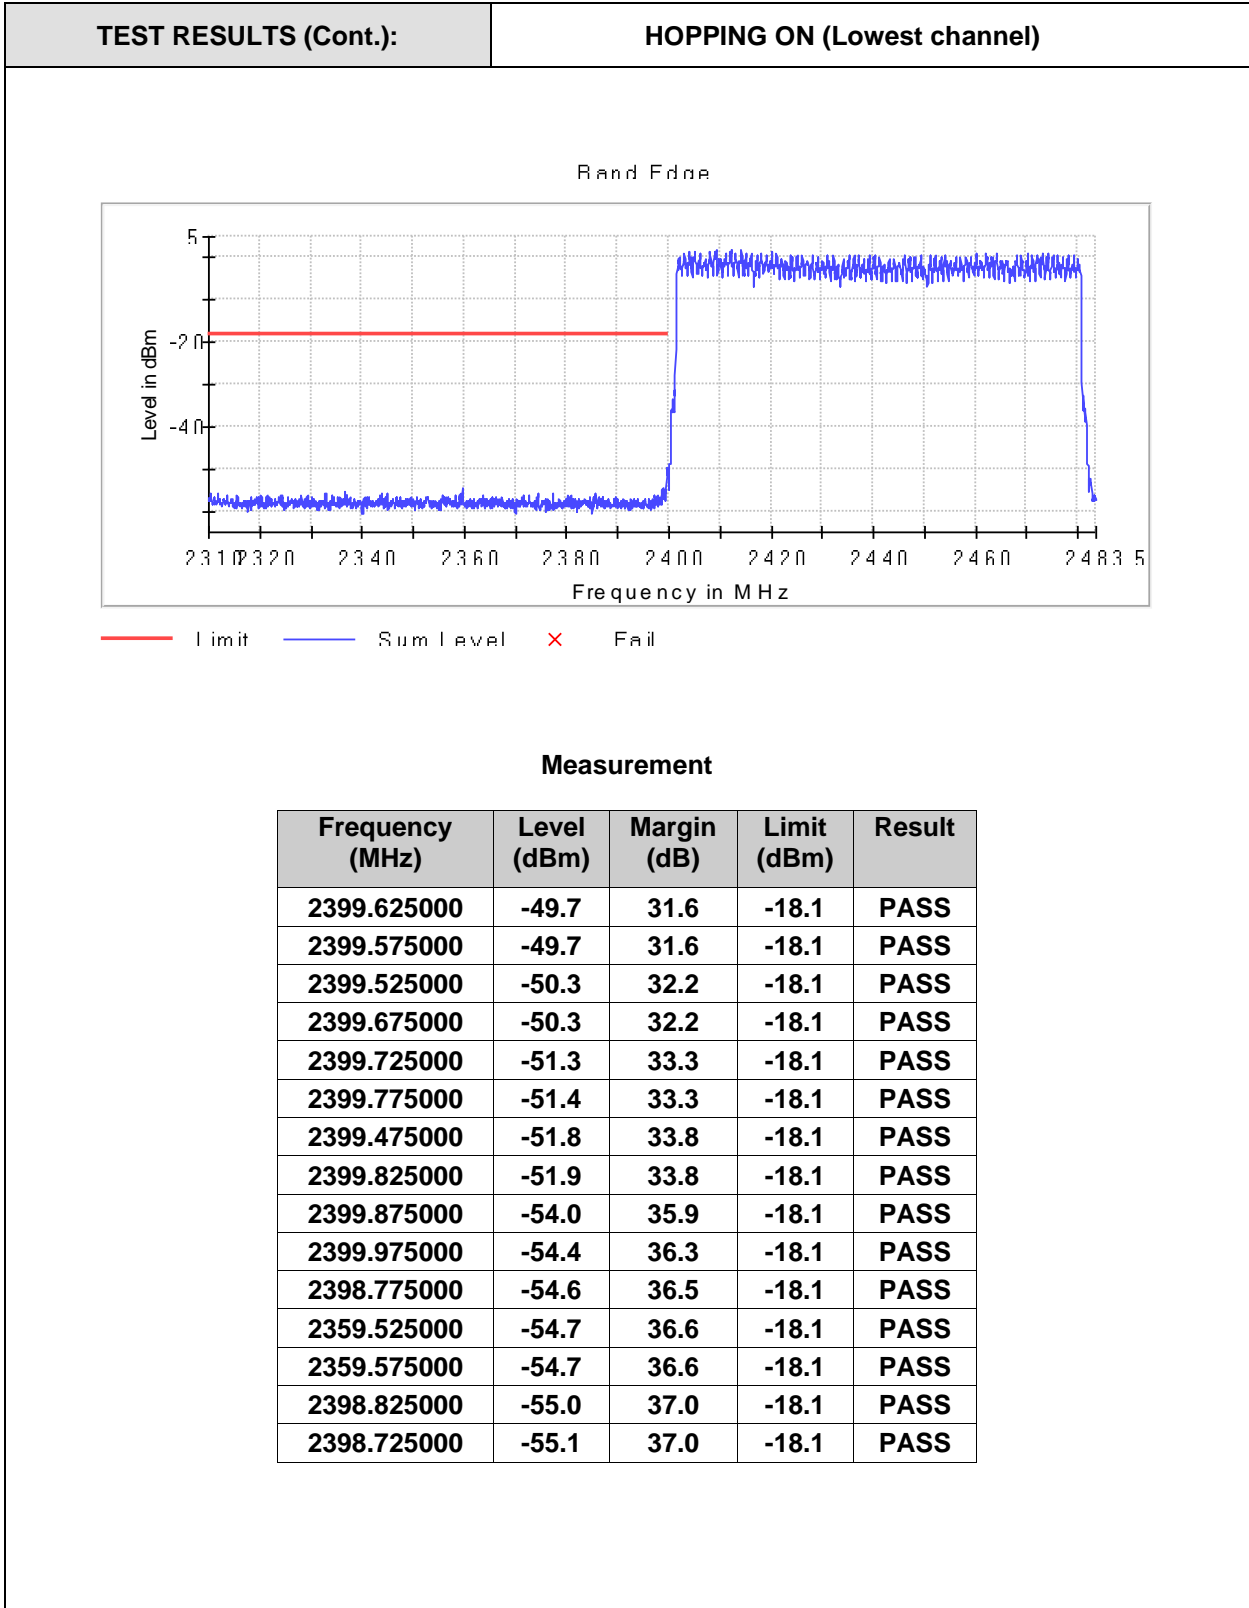

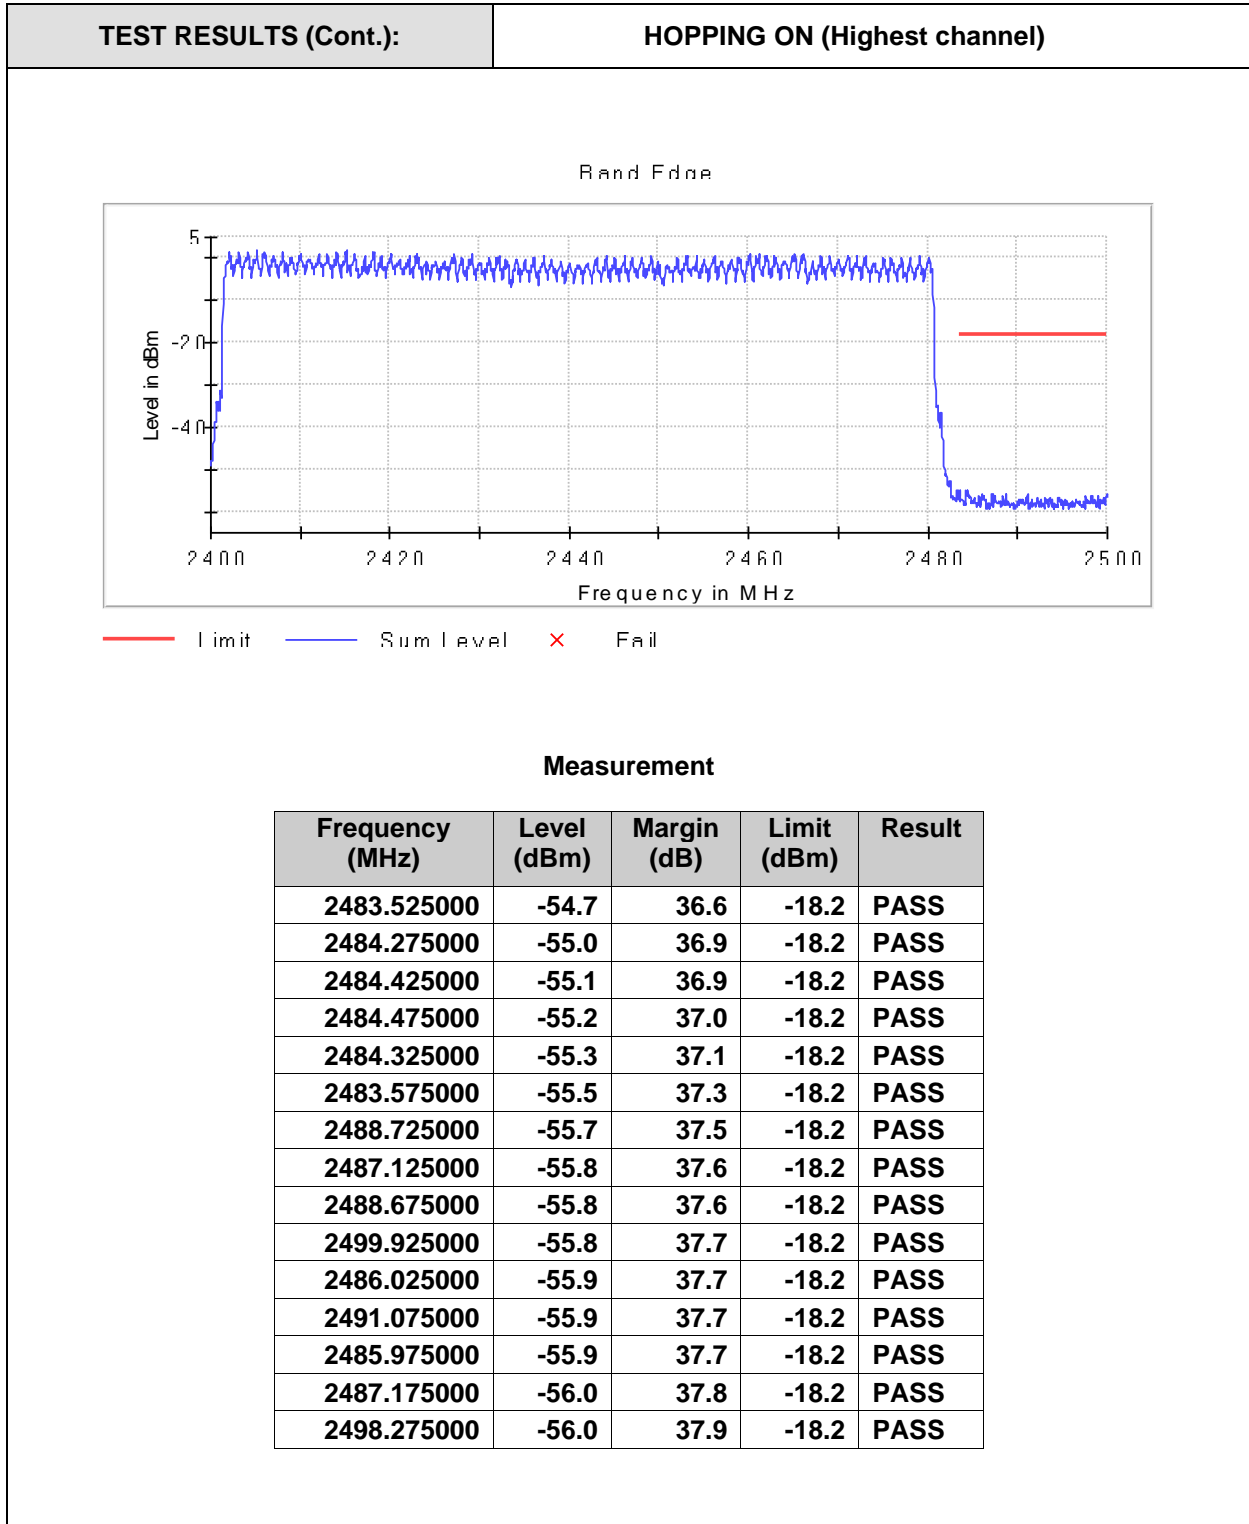


TEST B.6: EMISSION LIMITATIONS CONDUCTED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-Gen 8.9 and 8.10

SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP

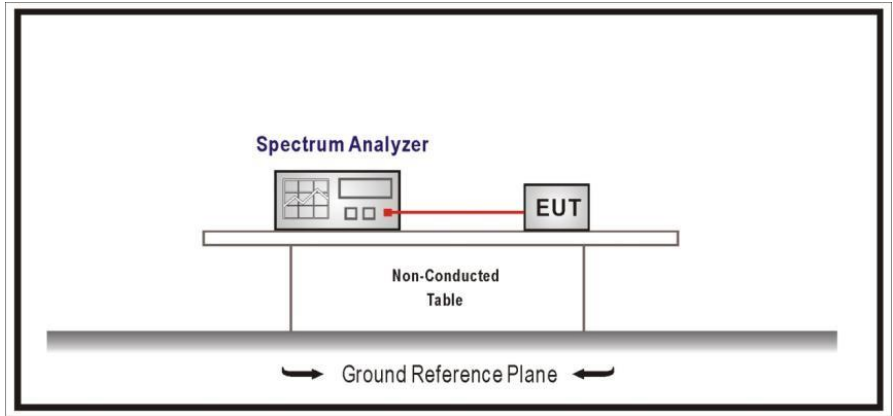


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (GFSK)
TEST RESULTS:	PASS


Frequency range 30 MHz – 26 GHz

Conducted spurious signals detected were minimum 20 dB below the reference limit for low, mid and high operating channels.

Low Channel:

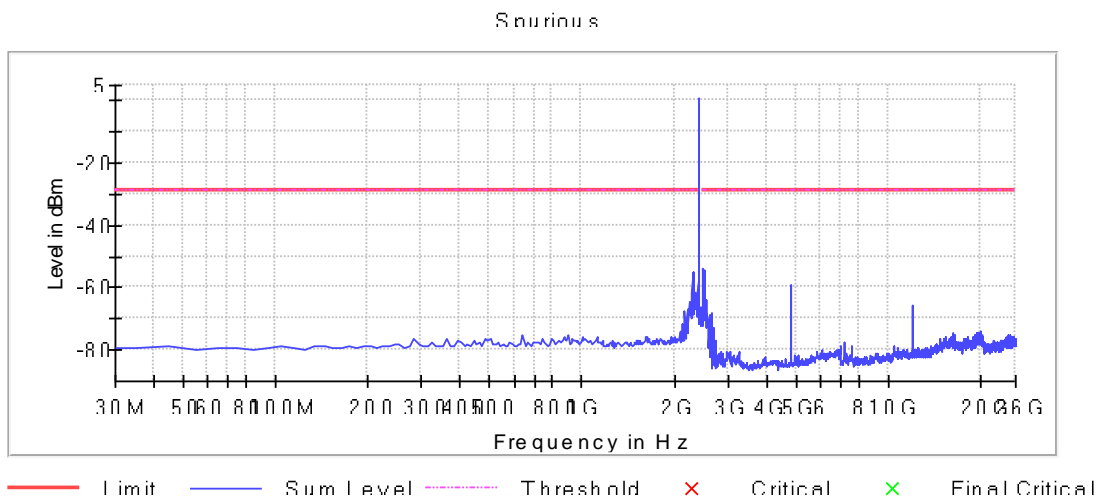


Mid Channel:

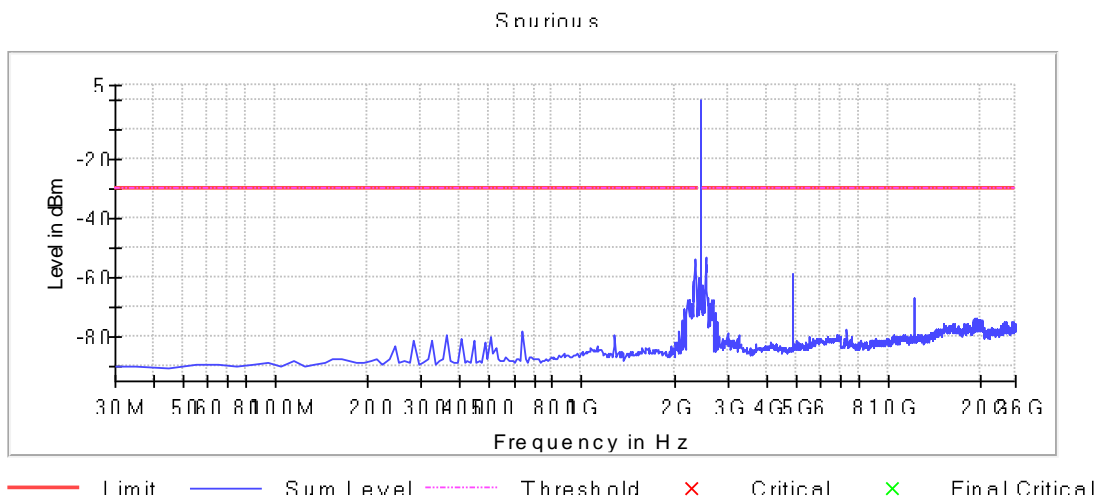

TEST RESULTS (Cont.):

High Channel:

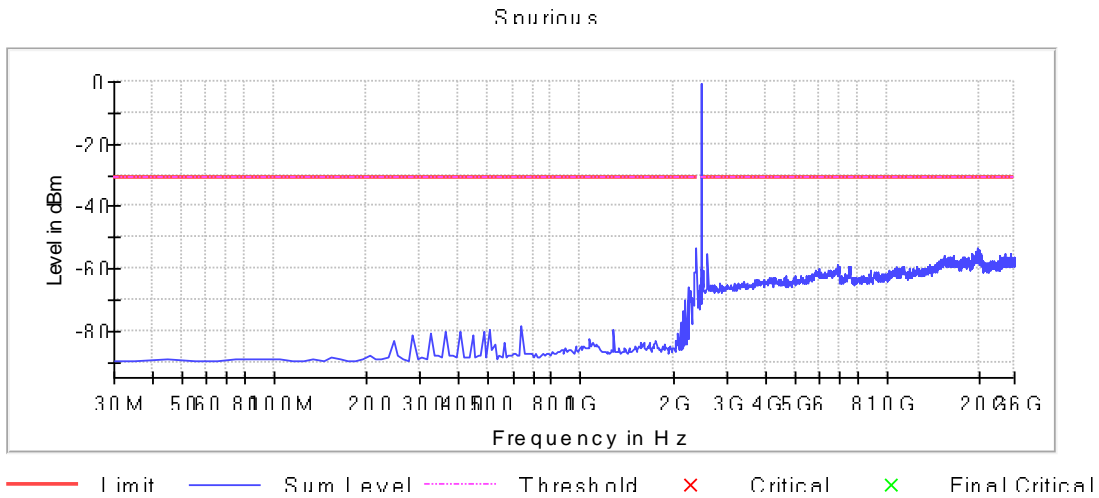

Measurement Settings


Setting	Instrument Value
Start Frequency	30.000 MHz
Stop Frequency	26 GHz
RBW	100.000 kHz
VBW	300.000 kHz
Sweep Points	32001
Sweep time	32.100 ms
Reference Level	-30.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
Sweep Count	30
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	1.00 dB
Run	10 / max. 40
Stable	3 / 3
Max Stable	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 ($\pi/4$ -DQPSK)
TEST RESULTS:	PASS


Frequency range 30 MHz – 26 GHz

Conducted spurious signals detected were minimum 20 dB below the reference limit for low and high operating channels.

Low Channel:

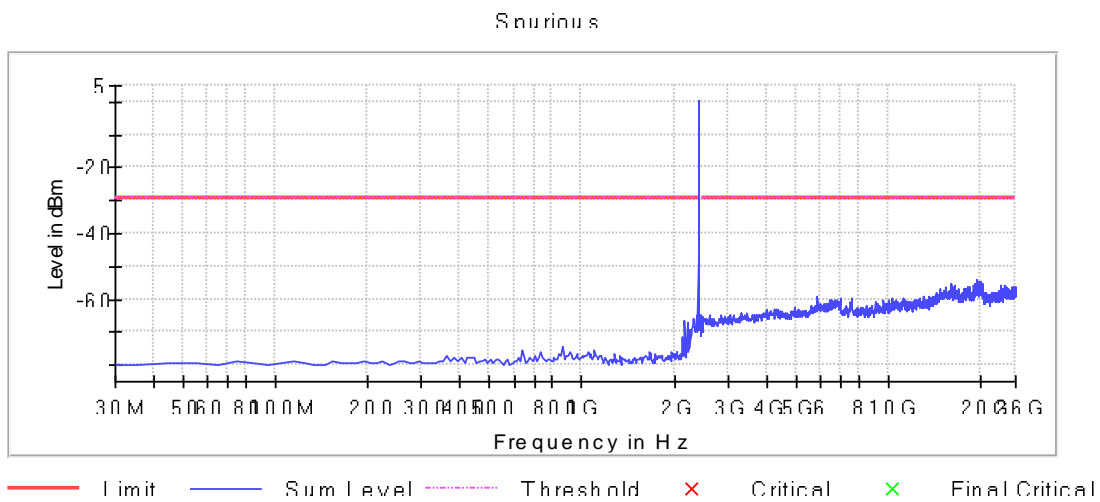


Mid Channel:

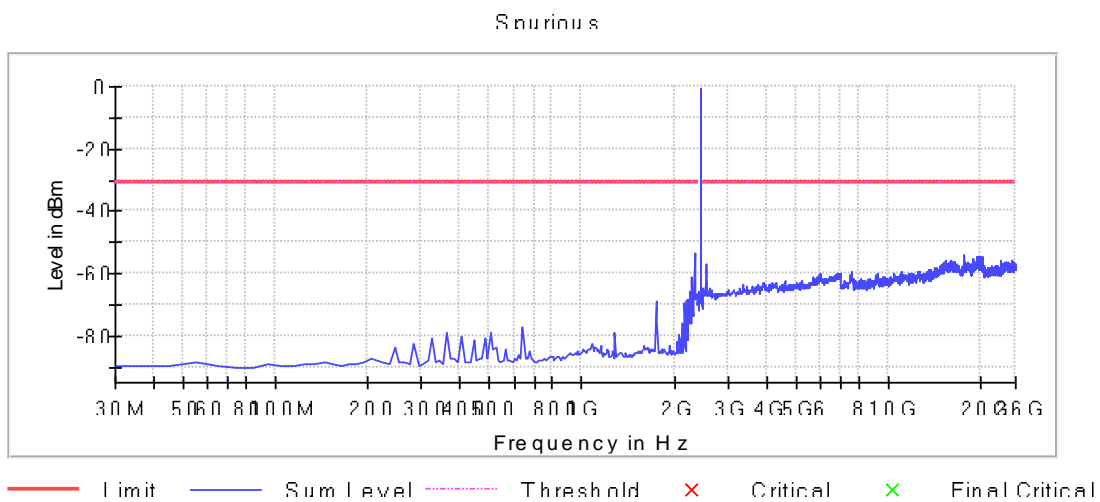

TEST RESULTS (Cont.):

High Channel:

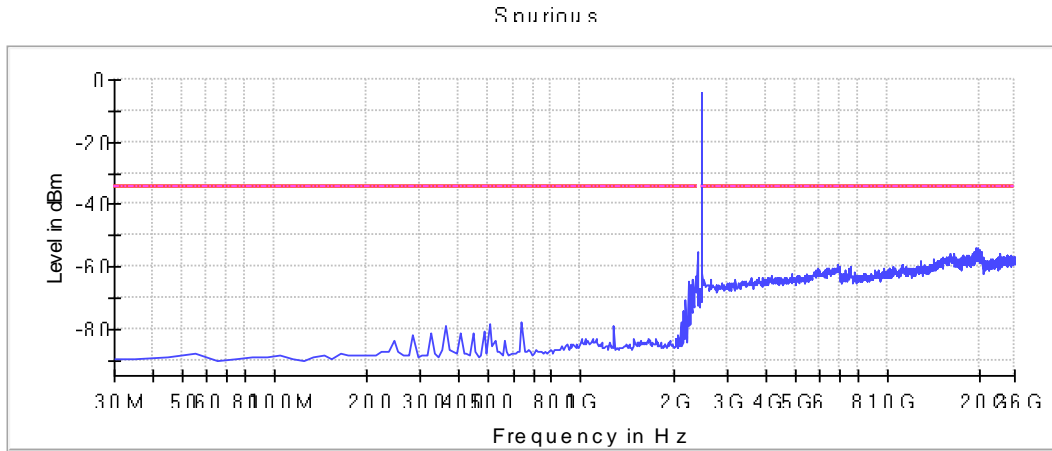

— Limit — Sum Level - - - Threshold × Critical × Final Critical

Measurement Settings


Setting	Instrument Value
Start Frequency	30.000 MHz
Stop Frequency	26 GHz
RBW	100.000 kHz
VBW	300.000 kHz
Sweep Points	32001
Sweep time	32.100 ms
Reference Level	-30.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
Sweep Count	30
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	1.00 dB
Run	3 / max. 40
Stable	1 / 1
Max Stable	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS


Frequency range 30 MHz – 26 GHz

Conducted spurious signals detected were minimum 20 dB below the reference limit for low and high operating channels.

Low Channel:

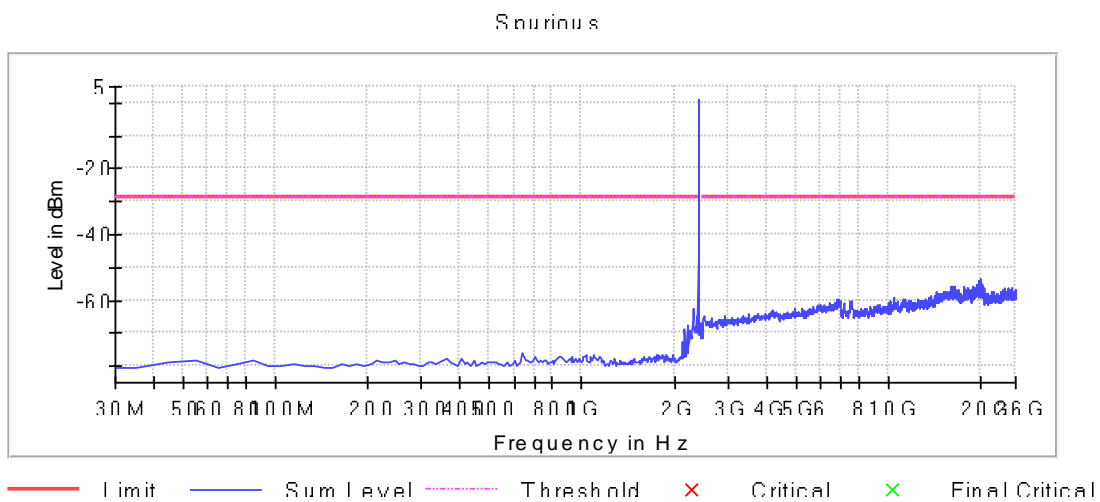


Mid Channel:

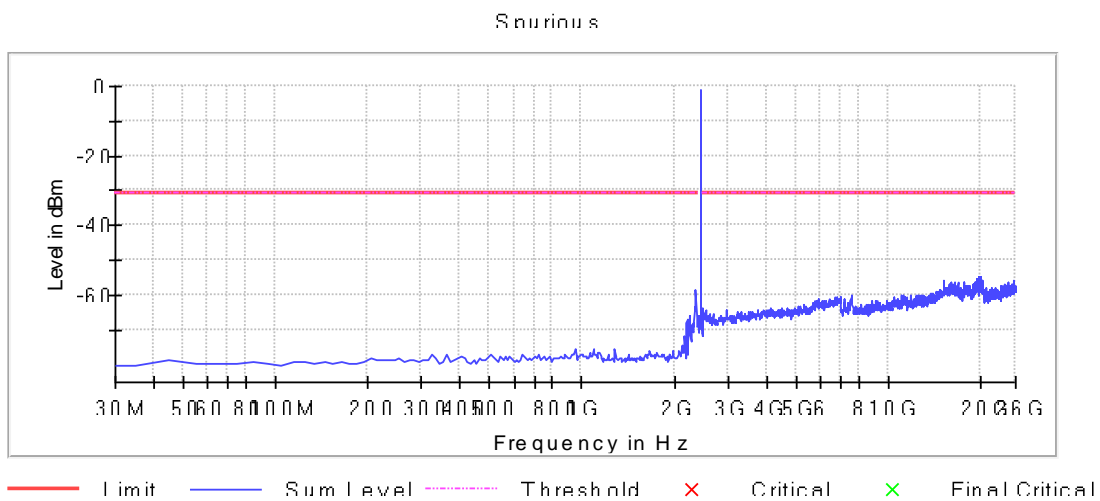

TEST RESULTS (Cont.):

High Channel:

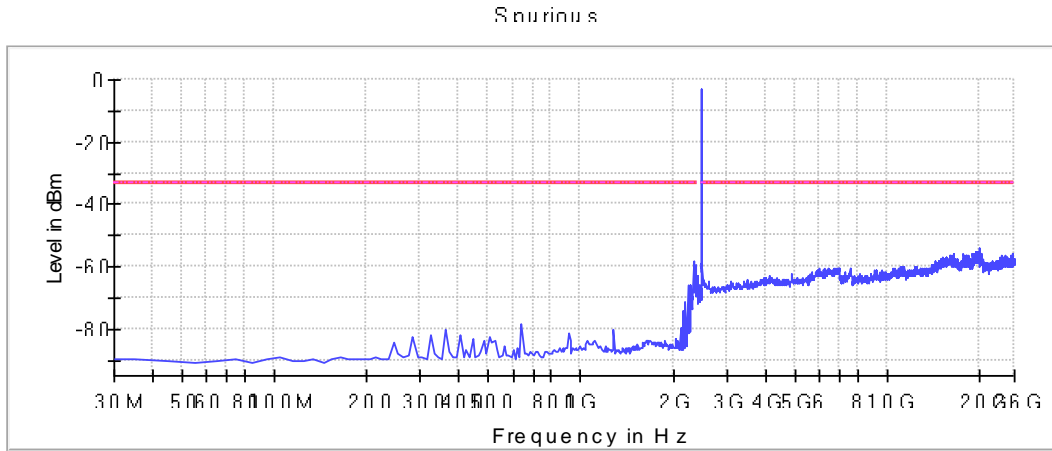

— Limit — Sum Level - - - Threshold × Critical × Final Critical

Measurement Settings

Setting	Instrument Value
Start Frequency	30.000 MHz
Stop Frequency	26 GHz
RBW	100.000 kHz
VBW	300.000 kHz
Sweep Points	32001
Sweep time	32.100 ms
Reference Level	-30.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
Sweep Count	30
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	1.00 dB
Run	3 / max. 40
Stable	1 / 1
Max Stable	0.00 dB

TEST B.7: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz (Double ridge horn antenna), and 1m for the frequency range 18 GHz- 26 GHz (Double ridge horn antenna).

For radiated emissions in the range 18 - 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)


Radiated measurements Setup $f < 1$ GHz

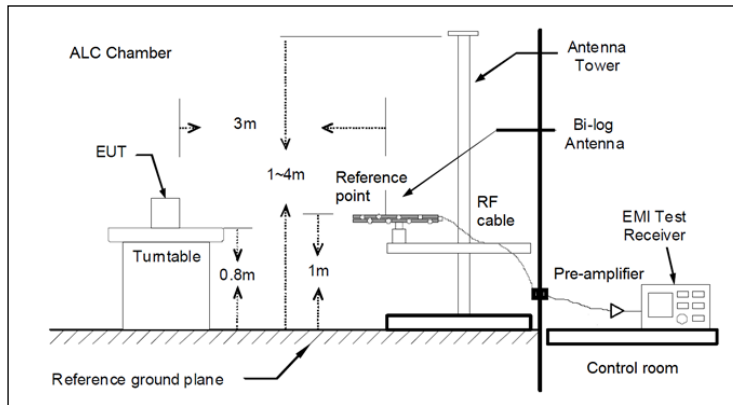

Radiated measurements setup $f > 1-18$ GHz

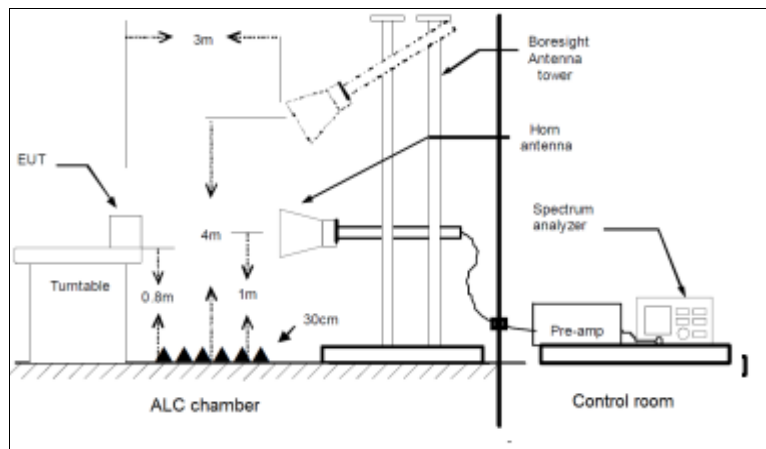

Radiated measurements setup $f > 18$ GHz

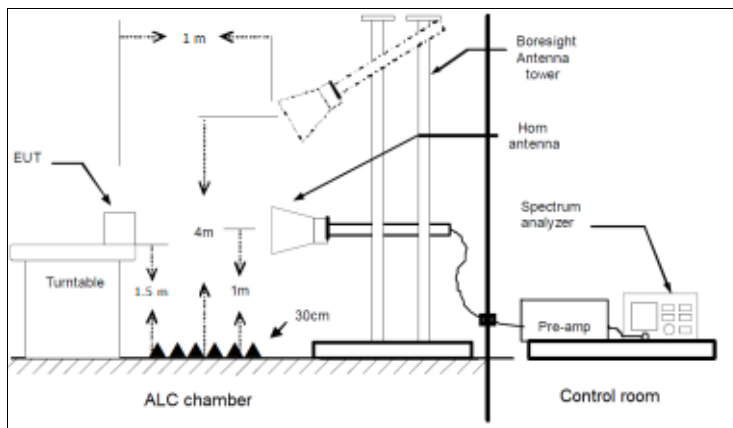

TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#01 (GFSK)
TEST RESULTS:	PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.


Frequency range 1 GHz – 26 GHz

The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz.

TEST RESULTS (Cont.):	30 MHz – 1000 MHz
------------------------------	--------------------------

Low Channel

RF_FCC_15.247_E Field_30MHz_1GHz

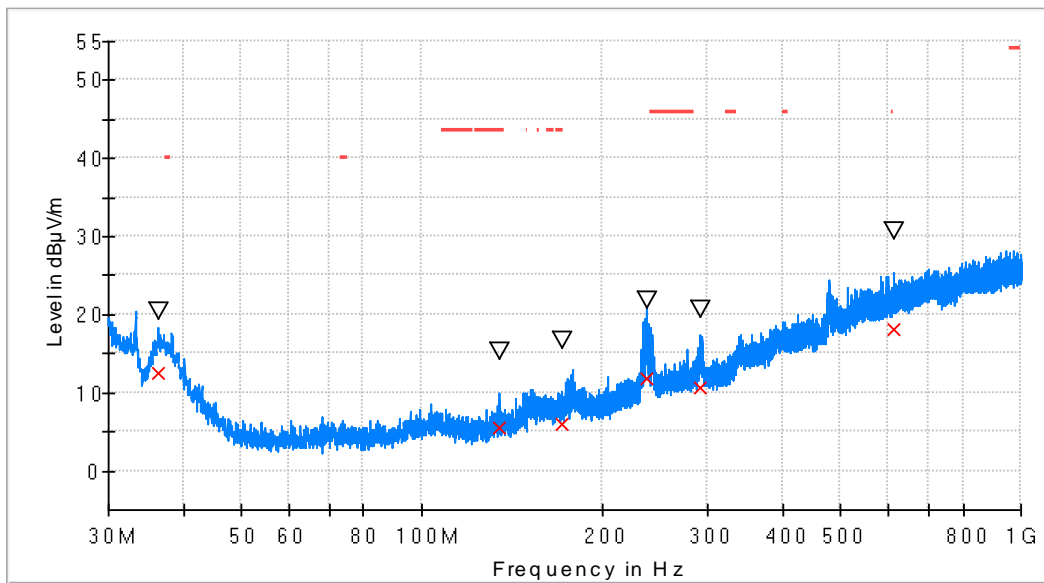


- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Lim
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)
36.353500	20.6	12.5	V	---	---
134.566000	15.3	5.6	V	37.9	43.5
171.717000	16.8	6.1	H	37.5	43.5
236.901000	21.8	11.8	V	---	---
291.706000	20.7	10.7	V	---	---
615.395000	30.7	18.1	H	---	---

TEST RESULTS (Cont.) **1 GHz – 18 GHz (GFSK)**

CHANNEL: Lowest (2402 MHz).

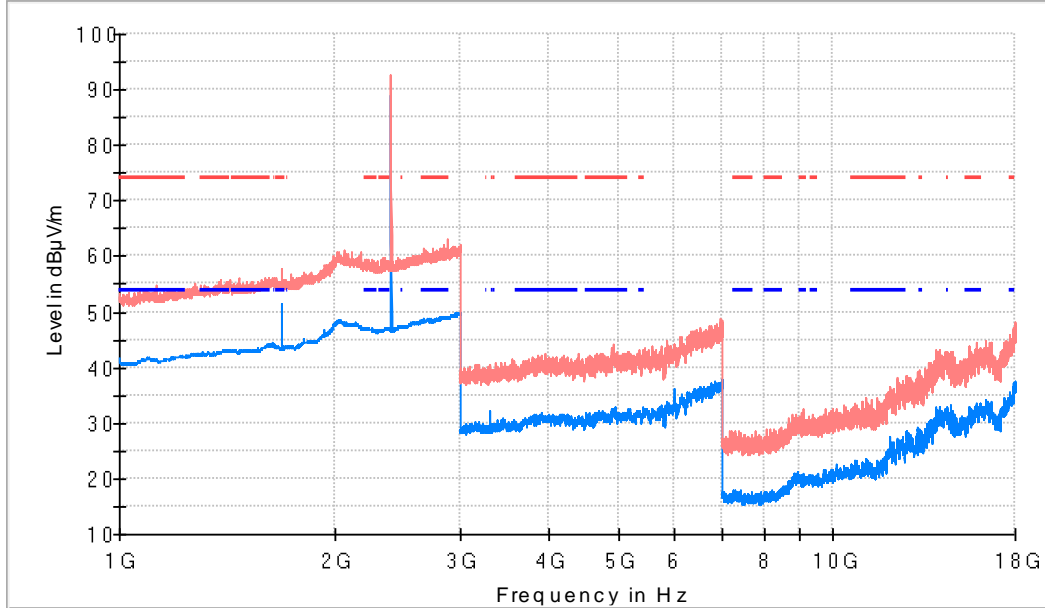


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
1687.500000	57.8	51.6	H	2.4	54.0	
2402.000000	92.6	89.2	V	---	---	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Middle (2441 MHz).

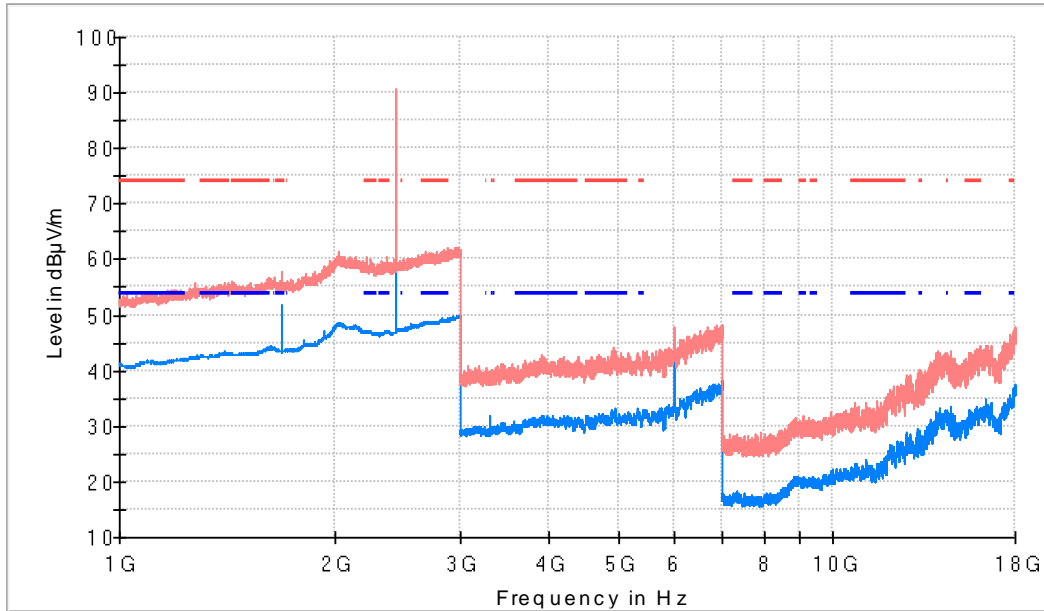

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	PoI	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
1687.500000	57.9	51.8	H	2.2	54.0	
2441.500000	90.8	88.7	H	---	---	Fundamental