

Test report No:  
 NIE: 66084RRF.020

# Partial Test Report

## USA FCC Part 15.247, 15.209

## CANADA RSS-247, RSS-Gen

(*) Identification of item tested	Automotive infotainment System	
(*) Trademark	Mercedes-Benz	
(*) Model and /or type reference	NTG6N HIGH2	
Other identification of the product	HW version: D9 SW version: E870 FCC ID: T8GNTG6NH2 IC: 6434A-NTG6NH2	
(*) Features	FM, AM, DAB,GNSS, USB, Bluetooth, WLAN	
Applicant	HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY	
Test method requested, standard	USA FCC Part 15.247 (10-1-19) Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-19) Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 Amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.	
Approved by (name / position & signature)	Rafael López EMC Consumer & RF Lab. Manager	 2021.03.12 13:28:18 +01'00'
Date of issue	2021-03-12	
Report template No	FDT08_23 (* "Data provided by the client")	

## Index

Competences and guarantees .....	3
General conditions.....	3
Uncertainty.....	3
Data provided by the client .....	3
Usage of samples .....	3
Test sample description.....	5
Identification of the client .....	6
Testing period and place .....	6
Document history.....	6
Environmental conditions .....	6
Remarks and comments.....	7
Testing verdicts.....	8
Summary .....	8
Appendix A: Test results. Bluetooth EDR (GFSK, Pi/4-DQPSK, 8DPSK) .....	9
Appendix B: Test results. 802.11 bgn20 1x1.....	39

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model NTG6N HIGH2 is an automotive head unit to be installed in cars with the following features: FM, AM, DAB,GNSS, USB, Bluetooth, WLAN.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

## Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
66084/018	Automotive infotainment System	NTG6N HIGH2	HBM736L4999000	2020/12/23
56848G/050	Harness	--	--	2019/01/11

Auxiliary elements used with the Sample S/01:

Control N°	Description	Model	Serial N°	Date of reception
56848G/014	Ethernet Cable	--	--	2019/01/08
56848G/144	HMI-CAN Box	--	H0034731	2019/01/11
56848G/102	Antenna	--	--	2019/01/11
56848G/109	Antenna	--	--	2019/01/11
56848G/110	Antenna	--	--	2019/01/11
56848G/111	Antenna	--	--	2019/01/11

Sample S/01 has undergone the following test(s): The Radiated tests indicated in the Appendixes A, B.

- Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
66084/018	Automotive infotainment System	NTG6N HIGH2	HBM736L4999000	2020/12/23
56848G/050	Harness	--	--	2019/01/11

Auxiliary elements used with the Sample S/02:

Control N°	Description	Model	Serial N°	Date of reception
56848G/014	Ethernet Cable	--	--	2019/01/08
56848G/144	HMI-CAN Box	--	H0034731	2019/01/11

Sample S/02 has undergone the following test(s): The Conducted tests indicated in the Appendix B

## Test sample description

Ports..... :	Port name and description		Cable				
			Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>	
	Car Connector A		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	Car Connector B		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	Display Connector CID/PIP / RVC		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	USB Connector		<3m <sup>(x2)</sup>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	Eth Connector		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	BT/WLAN-Antenna		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	FM/AM, TV/SDARS Ant		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
GPS Antenna		>3m <sup>(x1)</sup>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... :	For EMC-Testing all cables should be connected to the connectors!						
Rated power supply .....	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 12V Car battery / attenuator (9,5-15,5V normal operation)					
<input type="checkbox"/>	DC:						
Rated Power .....	9,5-15,5V normal operation						
Clock frequencies.....	see schematics						
Other parameters .....	FCC ID: T8GNTG6NH / IC: 6434A-NTG6NH						
Software version .....	E870						
Hardware version .....	D9						
Dimensions in cm (W x H x D) .....	182 x 78 x 160 mm						
Mounting position .....	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input checked="" type="checkbox"/>	Other: automotive headunit					
Modules/parts.....	Module/parts of test item		Type	Manufacturer			
	N/A						
Accessories (not part of the test item) .....	Description		Type	Manufacturer			
	Display		A247 905 69	Daimler OEM Displ.			
	CAN-Box		-	HBAS			
	Cable harness		-	HBAS			
	BT/WLAN-Antenna		A247 905 83	Hirschmann			
	-						
Documents as provided by the applicant.....	Description		File name	Issue date			
	Technical Description						
	-						

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH  
BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-02-12
Date (finish)	2021-02-19

## Document history

Report number	Date	Description
66084RRF.020	2021-03-12	First release.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

## Remarks and comments

The tests have been performed by the technical personnel: Verónica García and Javier Miguel Nadales.

Used instrumentation:

### Conducted Measurements:

	Last Calibration	Due Calibration
1. Shielded Room ETS LINDGREN S101	N.A.	N.A.
2. Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2019/09	2021/09
3. Digital Multimeter FLUKE 179	2020/10	2021/10
4. DC Power Supply, GW INSTEK GPS-3030D	N.A.	N.A.

### Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber III FRANKONIA SAC-3	N.A.	N.A.
2. Shielded Room FRANKONIA	N.A.	N.A.
3. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2018/07	2021/07
4. RF Preamplifier 40 dB, 10 MHz - 6 GHz BONN ELEKTRONIK BLNA 0160-01N	N.A.	N.A.
5. EMI Test Receiver 20Hz-40GHz ROHDE AND SCHWARZ ESU40	2019/09	2021/09
6. DC Power Supply 150V/22A, AGILENT TECHNOLOGIES N8740A	N.A.	N.A.
7. Digital Multimeter FLUKE 175	2020/11	2021/11
8. Horn Antenna 1-18GHz SCHWARZBECK MESS- ELEKTRONIK BBHA 9120 D	2018/06	2021/06
9. Horn Antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2018/07	2021/07
10. Preamplifier, G>55dB 1-18GHz NARDA AMF-7D-01001800-22-10P	2020/05	2021/05
11. RF Preamplifier, 40 dB ,1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2020/05	2021/05
12. Low Noise Amplifier G>30dB, 18 - 40 GHz BONN ELEKTRONIK BLMA 1840-1M	2019/02	2021/02
13. EMI Test Receiver 20Hz-40GHz ROHDE AND SCHWARZ ESU40	2019/09	2021/09
14. DC Power Supply 30V/5A KEYSIGHT TECHNOLOGIES U8002A	N.A.	N.A.
15. RF Preamplifier G>30dB, 1-18GHz BONN ELEKTRONIK BLMA 0118-3A	2020/10	2021/10

## Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

## Summary

### Bluetooth EDR:

FCC PART 15 PARAGRAPH / RSS-247			
Requirement – Test case		Verdict	Remark
15.247 (a) (1) / RSS-247 5.1. (b)	20 dB Bandwidth and Carrier frequency separation	N/M	
15.247 (a)(1)(iii) / RSS-247 Clause 5.1 (d)	Number of hopping channels	N/M	
15.247 (a)(1)(iii) / RSS-247 Clause 5.1 (d)	Time of occupancy (Dwell Time)	N/M	
15.247 (b) / RSS-247 5.4. (b)	Maximum peak output power and antenna gain	N/M	
15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	N/M	
15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	(1)
<u>Supplementary information and remarks:</u> (1) Only test requested.			

### WLAN 2.4 GHz (802.11 b/g/n20 1x1):

FCC PART 15 PARAGRAPH / RSS-247			
Requirement – Test case		Verdict	Remark
15.247 (a) (2) / RSS-247 5.2. (a)	6 dB Bandwidth	N/M	
15.247 (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain	P	(1)
15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	N/M	
15.247 (e) / RSS-247 5.2. (b)	Power spectral density	N/M	
15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	(1)
<u>Supplementary information and remarks:</u> (1) Only tests requested.			



## Appendix A: Test results. Bluetooth EDR (GFSK, Pi/4-DQPSK, 8DPSK)

## INDEX

TEST CONDITIONS .....	11
FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated. (Transmitter).....	14

## TEST CONDITIONS

### POWER SUPPLY (V):

V nominal:	12 Vdc.
Type of Power Supply:	DC External (Car Battery).

### ANTENNA:

Type of Antenna:	External.
Maximum Declared Antenna Gain:	+0.7 dBi (antenna gain plus antenna cable loss).

### TEST FREQUENCIES:

Low Channel:	2402 MHz
Middle Channel:	2441 MHz
High Channel:	2480 MHz

### CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the spectrum analyser using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



The DC supply voltage is applied using an external calibrated power supply with a multimeter.

### RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz) and 1 GHz-18 GHz Double ridge horn antenna is situated at a distance of 3 m and a distance of 1 m for the frequency range 17 GHz-26 GHz (18 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth / video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

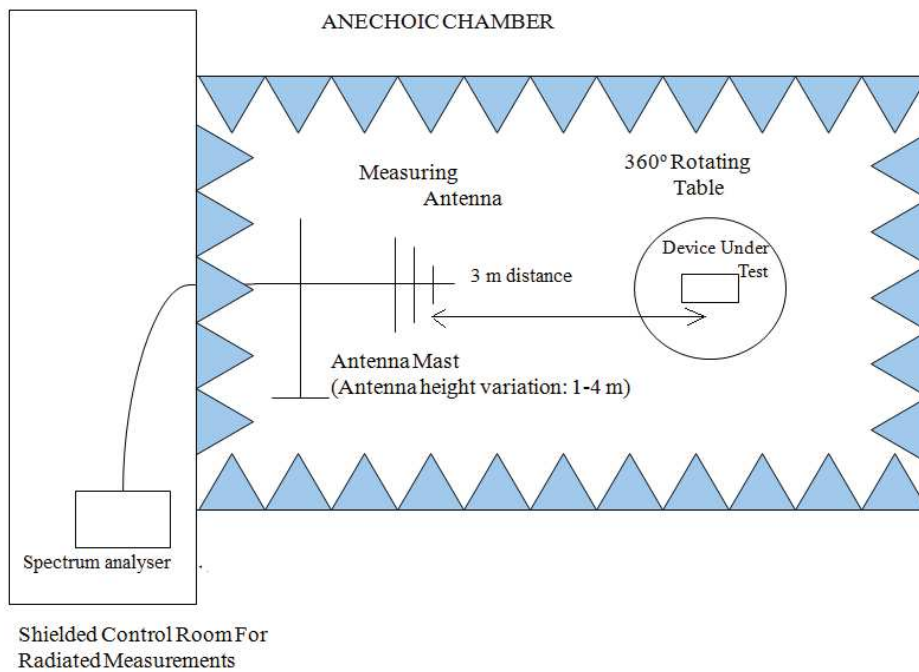

Radiated measurements setup from 1 GHz to 17 GHz:

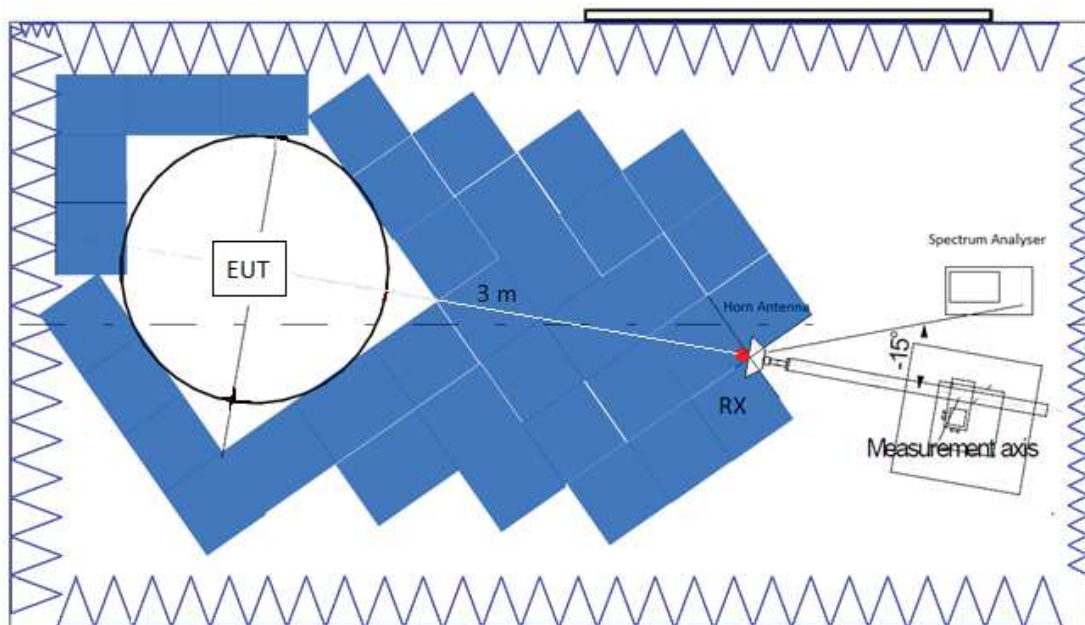

Radiated measurements setup  $f > 17$  GHz:

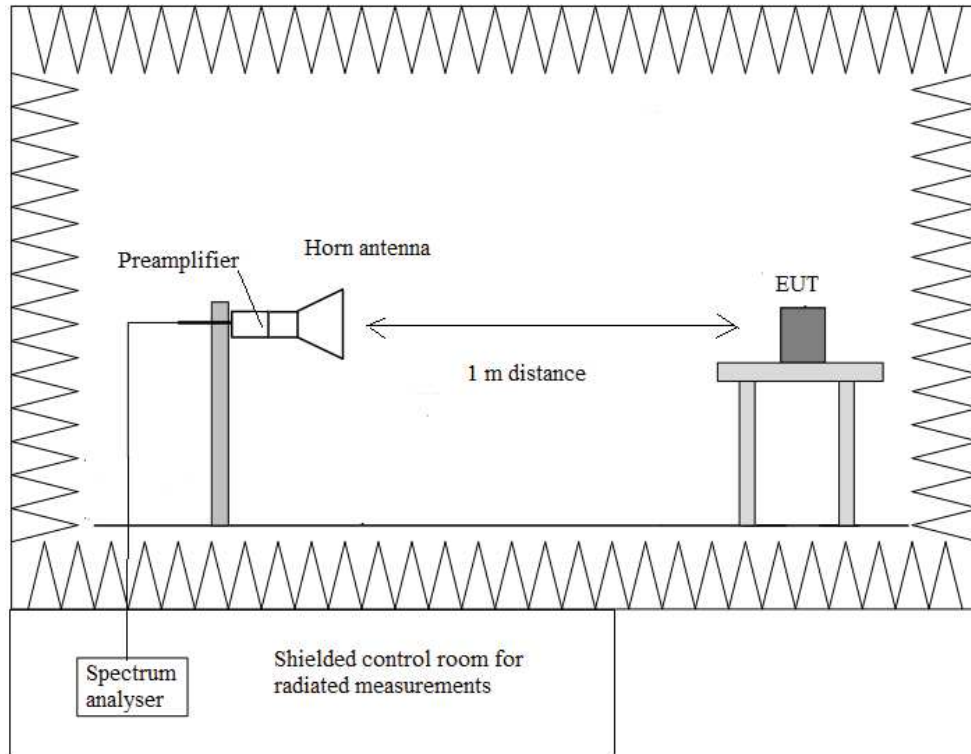

## FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated. (Transmitter)

### SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Field strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1 m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

### Frequency range 30 MHz - 1 GHz:

The spurious frequencies detected below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level ( $\text{dB}\mu\text{V}/\text{m}$ )	Polarization	Detector	Measurement Uncertainty (dB)
578.874500	26.25	V	Quasi-peak	$<\pm 5.08$
884.764000	33.94	V	Quasi-peak	$<\pm 5.08$

Measurement Uncertainty:  $<\pm 5.08$  dB

**Frequency range 1 - 26 GHz:**

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dBµV/m at 3 m) are measured with average detector for checking compliance with the average limit.

• **GFSK modulation (DH5):**

- LOW CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- MIDDLE CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- HIGH CHANNEL. No spurious frequencies at less than 20 dB below the limit.

• **Pi/4-DQPSK modulation (2-DH5):**

- LOW CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- MIDDLE CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- HIGH CHANNEL. No spurious frequencies at less than 20 dB below the limit.

• **8-DPSK modulation (3-DH5):**

- LOW CHANNEL. Spurious frequencies at less than 20 dB below the limit:
- MIDDLE CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- HIGH CHANNEL. No spurious frequencies at less than 20 dB below the limit.


Spurious Frequency (GHz)	Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.759466667	57.66	V	Peak	<± 5.13
	44.12		Average	<± 5.13

Measurement Uncertainty (dB): 1 GHz ≤ f ≤ 17 GHz: <± 5.13  
 17 GHz ≤ f ≤ 26 GHz: <± 4.82

Verdict: PASS

### FREQUENCY RANGE 30 MHz - 1 GHz:

This plot is valid for the Low, Middle and High Channels and all the modulation modes.

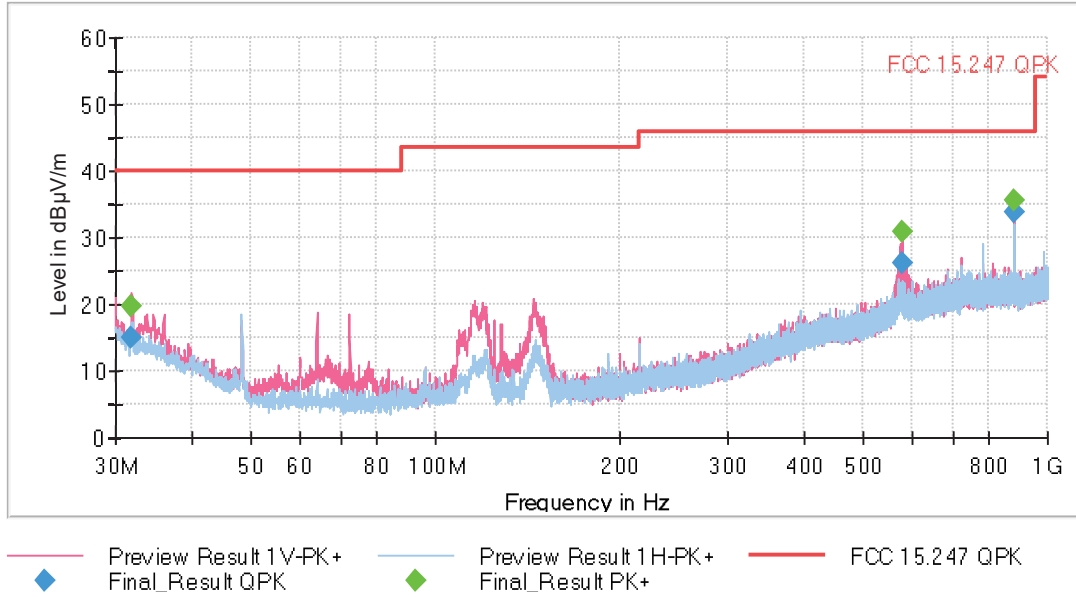




**FREQUENCY RANGE 1 - 3 GHz:**

• **GFSK modulation (DH5)**


- Low Channel:

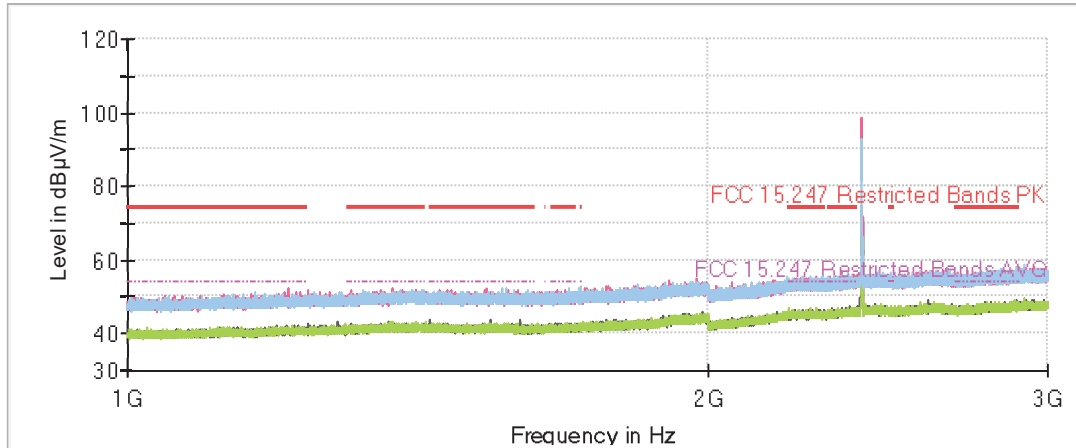

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- \* Critical\_Freqs AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- \* Critical\_Freqs PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

The peak above the limit is the carrier frequency.


- Middle Channel:

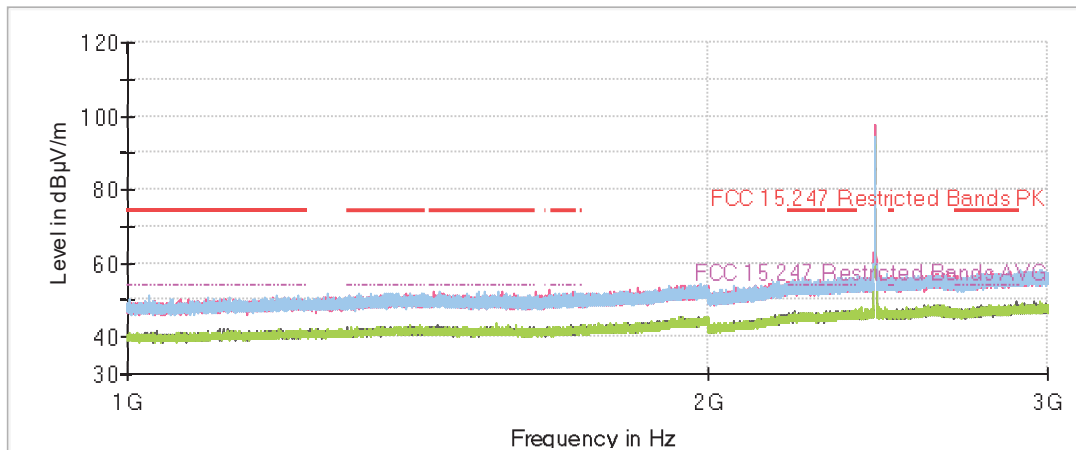

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- \* Critical\_Freqs AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- \* Critical\_Freqs PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

The peak above the limit is the carrier frequency.


- High Channel:

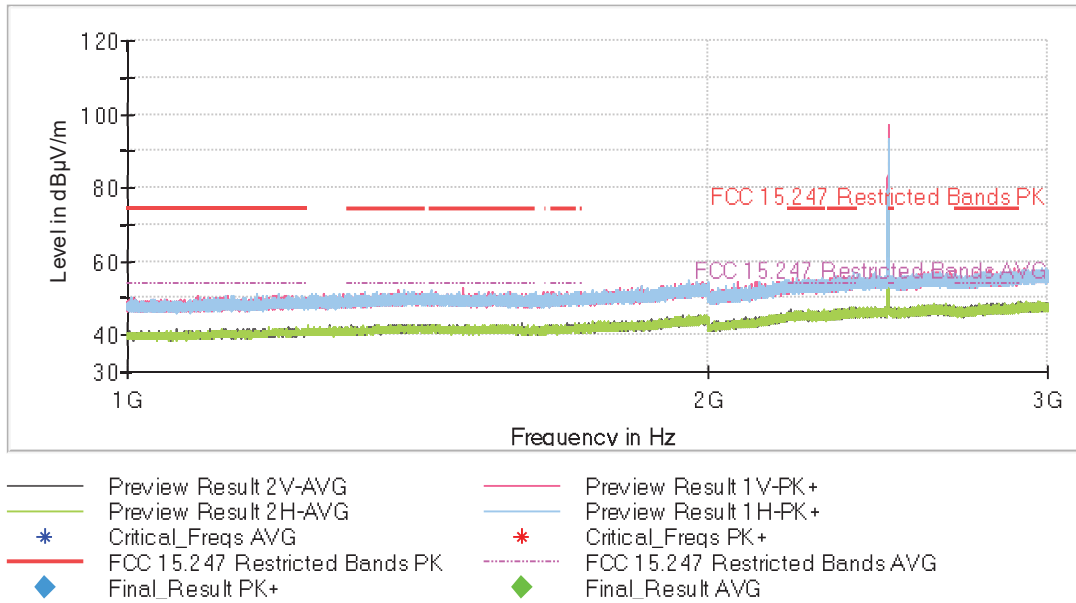

The peak above the limit is the carrier frequency.

• **Pi/4-DQPSK modulation (2DH5)**

- Low Channel:

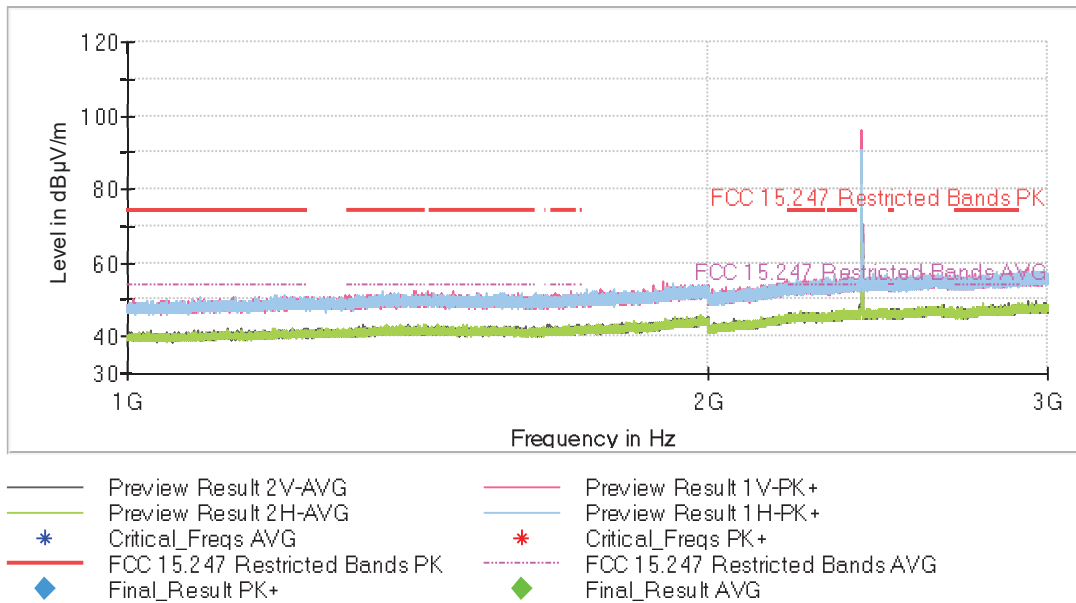

The peak above the limit is the carrier frequency.