



FREQUENCY RANGE 7 - 17 GHz (worst-case):

- Low Channel:

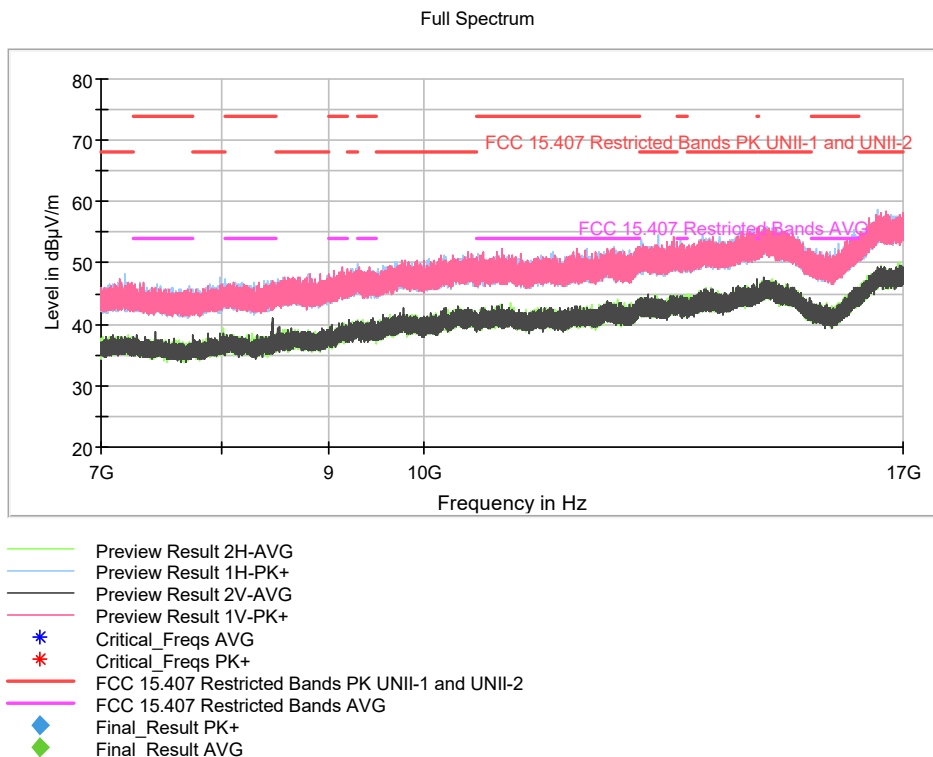


- Middle Channel:

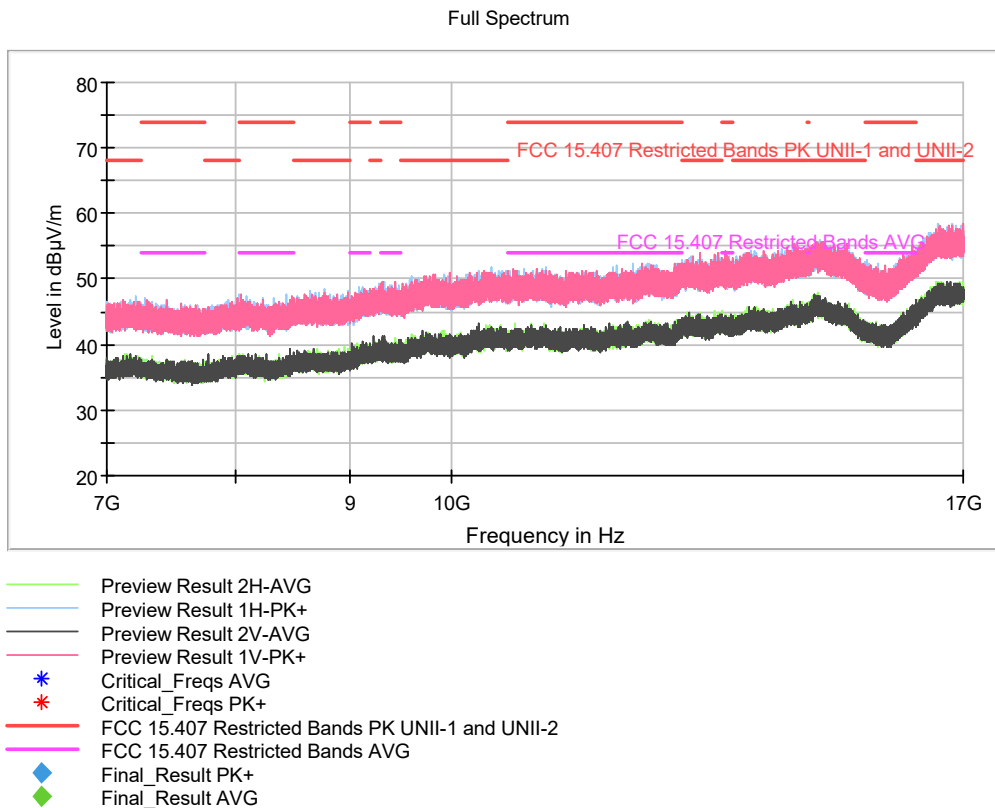

- High Channel:


Full Spectrum

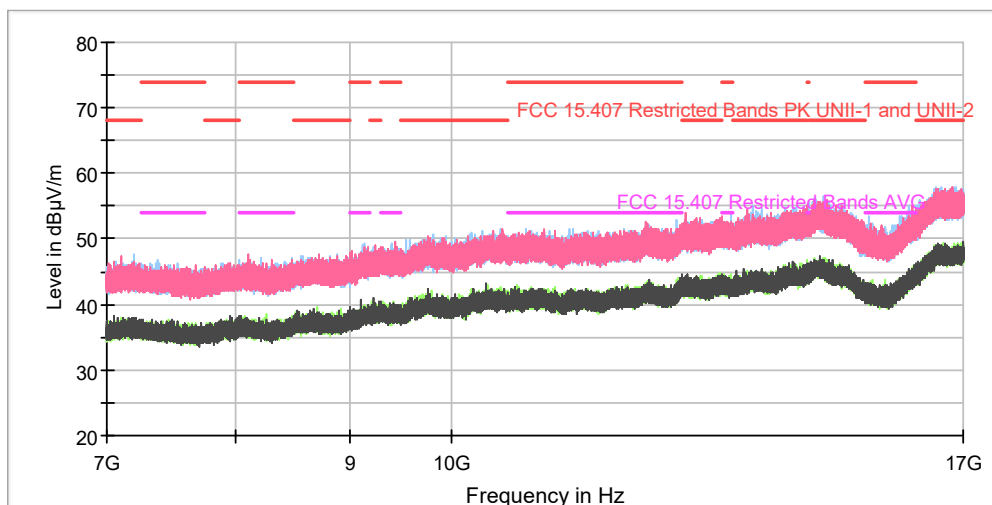


- Preview Result 2H-AVG
- Preview Result 1H-PK+
- Preview Result 2V-AVG
- Preview Result 1V-PK+
- * Critical_Freqs AVG
- * Critical_Freqs PK+
- FCC 15.407 Restricted Bands PK UNII-1 and UNII-2
- FCC 15.407 Restricted Bands AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG

FREQUENCY RANGE 17 - 40 GHz:


- Low Channel:

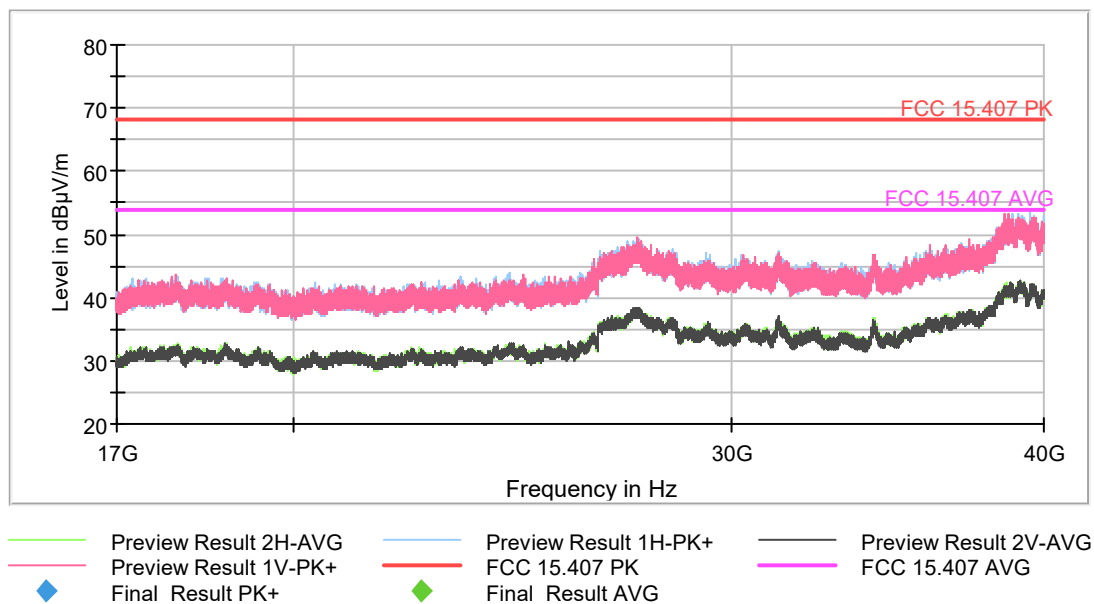

- Middle Channel:

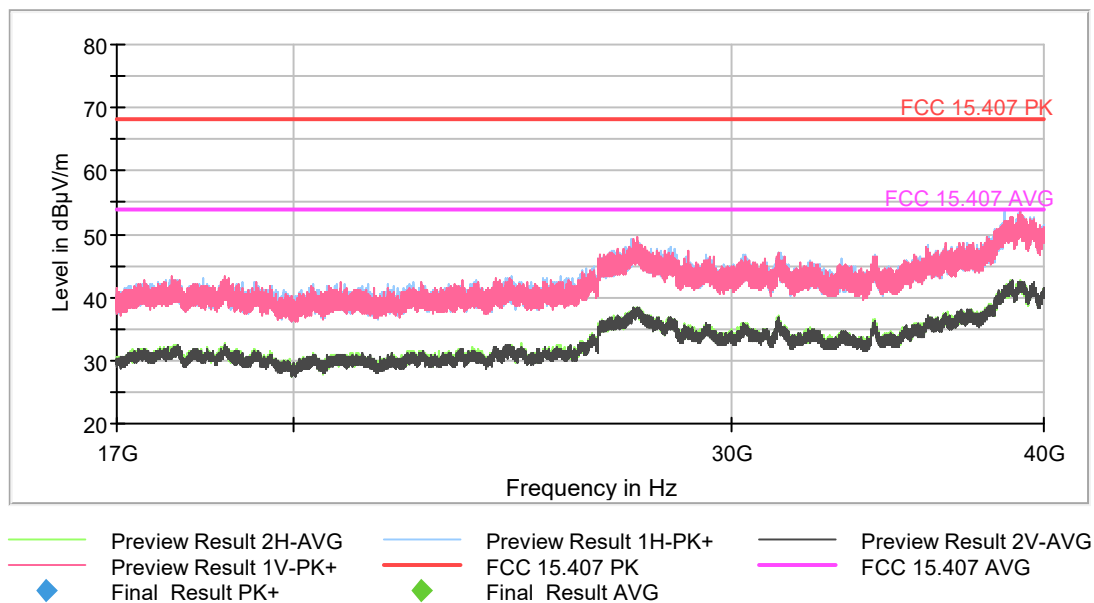

- High Channel:

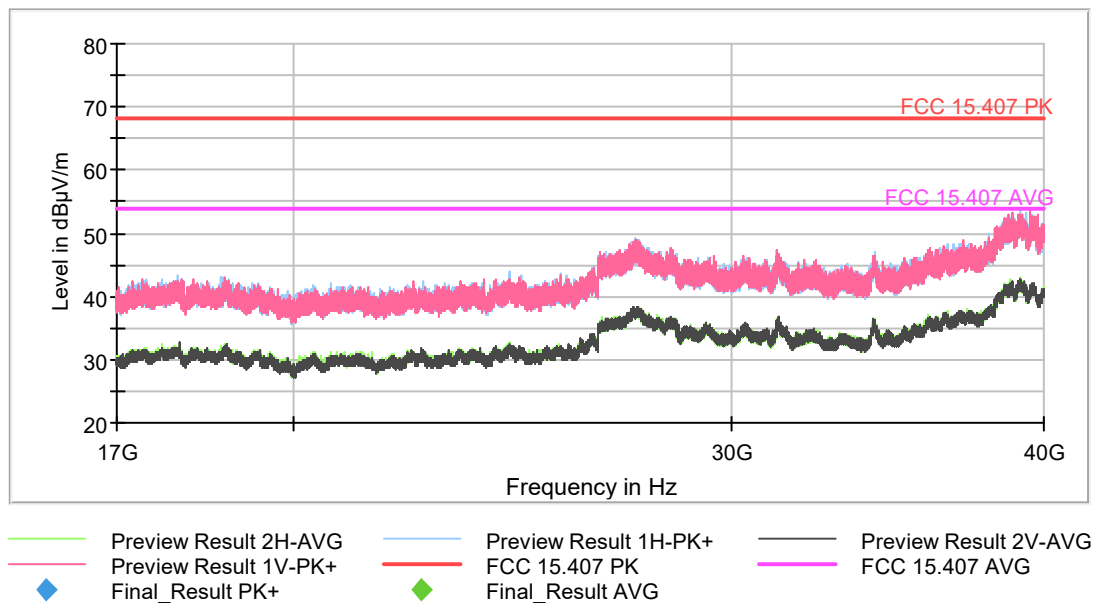

FCC 15.407 (b)(1) / RSS-247 6.2.1.2. Transmitter Band Edge Radiated Emissions

SPECIFICATION:

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz (68.23 dBμV/m at 3 m distance).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Measurements were made in both horizontal and vertical planes of polarization.

All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. There are restricted bands of operation below band edge at 4.50-5.15 GHz also above the upper band edge at 5.35-5.46 GHz therefore the provision of FCC Part 15.205 apply.

Field strength measurements using peak and average detector performed in the restricted bands below 5.15 GHz and above 5.35 GHz.

Test performed on the following worst-cases modes in all relevant tests channels:

- 802.11a: 6 Mbit/s.
- 802.11n HT20: MCS0.
- 802.11ac VHT20: MCS0.
- 802.11n HT40: MCS0.
- 802.11ac VHT40: MCS0.
- 802.11ac VHT80: MCS0.

BAND EDGE EMISSIONS: For U-NII-1 band edge spurious emissions inside of the Restricted Bands 4.50-5.15 GHz and 5.35-5.46 GHz.

The Lower Band Edge Channel and the Upper Band Edge Channel were tested for all modes.

BAND EDGE EMISSIONS:

• **802.11 a20:**

- Lower Band Edge Channel 36 (5180 MHz). Spurious emissions inside the Restricted Band 4.50-5.15 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5143.100000	56.09	H	Peak
	44.72		Average

- Upper Band Edge Channel 48 (5240 MHz). Spurious emissions inside the Restricted Band 5.35-5.46 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5350.030000	54.23	H	Peak
	42.99		Average

• **802.11 n20:**

- Lower Band Edge Channel 36 (5180 MHz). Spurious emissions inside the Restricted Band 4.50-5.15 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5140.700000	49.69	H	Peak
5148.500000	53.96	H	Peak

- Upper Band Edge Channel 48 (5240 MHz). Spurious emissions inside the Restricted Band 5.35-5.46 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5353.000000	49.65	H	Peak

• **802.11 ac20:**

- Lower Band Edge Channel 36 (5180 MHz). Spurious emissions inside the Restricted Band 4.50-5.15 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5136.700000	52.01	H	Peak
5143.300000	55.80	H	Peak
	42.34		Average
5148.640000	50.41	H	Peak

- Upper Band Edge Channel 48 (5240 MHz). Spurious emissions inside the Restricted Band 5.35-5.46 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5351.330000	49.83	H	Peak

• **802.11 n40:**

- Lower Band Edge Channel 38 (5190 MHz). Spurious emissions inside the Restricted Band 4.50-5.15 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5120.300000	56.13	H	Peak
	42.88		Average
5131.500000	61.90	H	Peak
	44.36		Average
5143.900000	63.60	H	Peak
	46.18		Average

- Upper Band Edge Channel 46 (5230 MHz). No spurious emissions inside the Restricted Band 5.35-5.46 GHz.

• **802.11 ac40:**

- Lower Band Edge Channel 38 (5190 MHz). Spurious emissions inside the Restricted Band 4.50-5.15 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5148.000000	59.24	H	Peak
	44.79		Average

- Upper Band Edge Channel 46 (5230 MHz). No spurious emissions inside the Restricted Band 5.35-5.46 GHz.

• **802.11 ac80:**

- Lower Band Edge Channel 42 (5210 MHz). Spurious emissions inside the Restricted Band 4.50-5.15 GHz:

Spurious frequency (MHz)	Emission Level (dBμV/m)	Polarization	Detector
5057.400000	56.79	H	Peak
	42.04		Average
5135.500000	67.99	H	Peak
	53.47		Average


- Upper Band Edge Channel 42 (5210 MHz). No spurious emissions inside the Restricted Band 5.35-5.46 GHz.

Measurement Uncertainty (dB) $\leq \pm 5.13$


Verdict: PASS

• 802.11 a20:

- Lower Band Edge Channel 36 (Restricted Band 4.50-5.15 GHz)

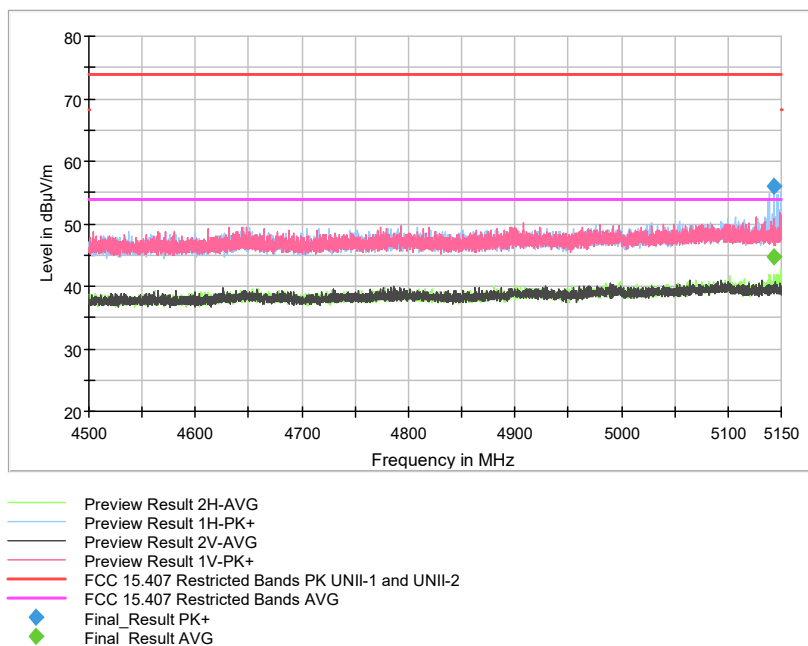


- Upper Band Edge Channel 48 (Restricted Band 5.35-5.46 GHz)

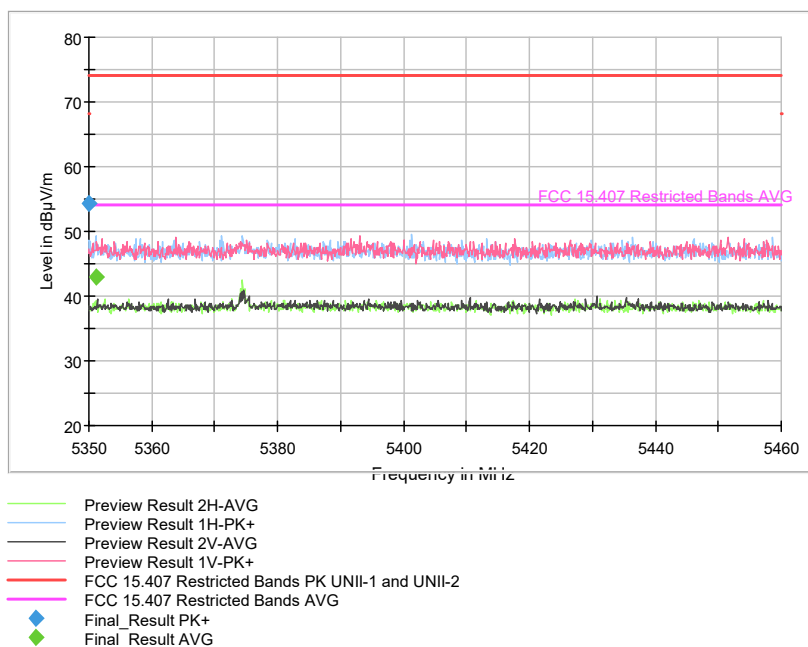


• 802.11 n20:

- Lower Band Edge Channel 36 (Restricted Band 4.50-5.15 GHz)

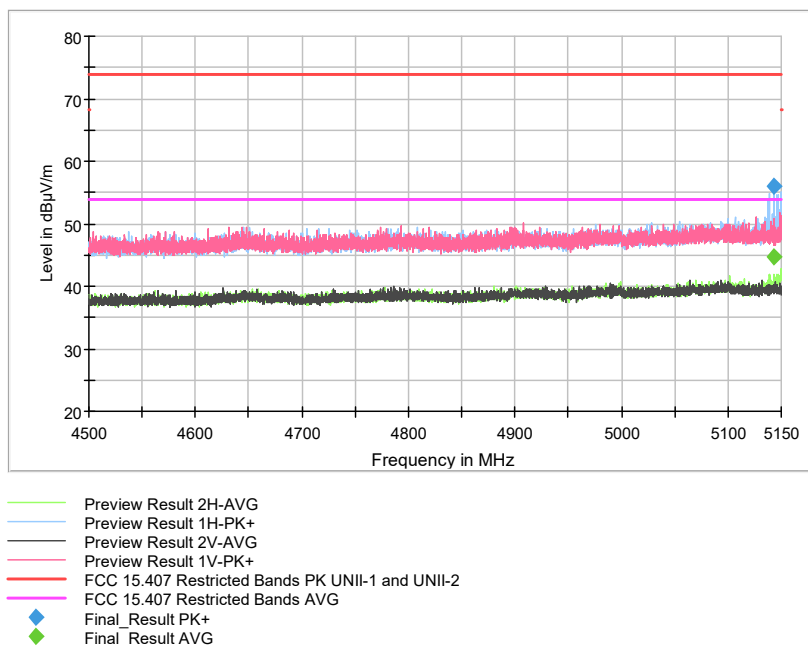


- Upper Band Edge Channel 48 (Restricted Band 5.35-5.46 GHz)

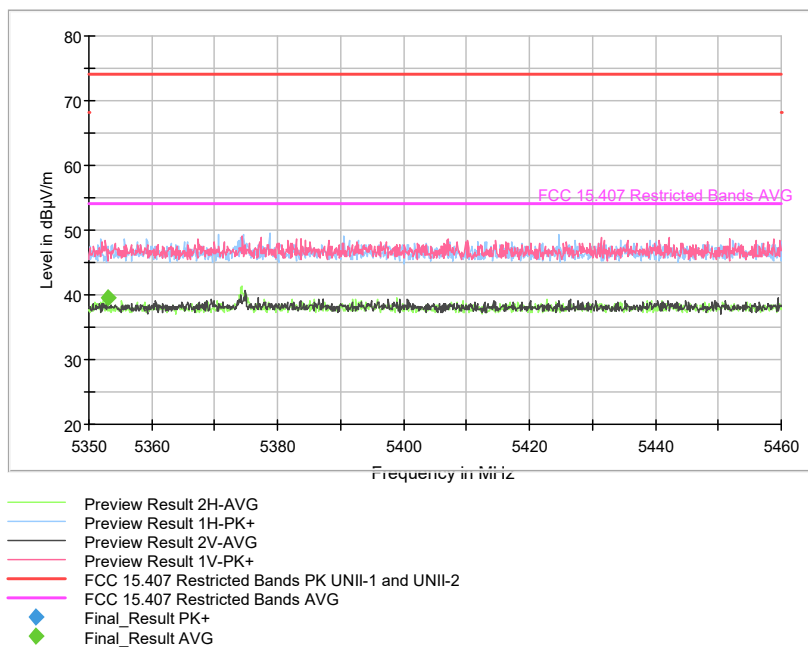


• **802.11 ac20:**

- Lower Band Edge Channel 36 (Restricted Band 4.50-5.15 GHz)

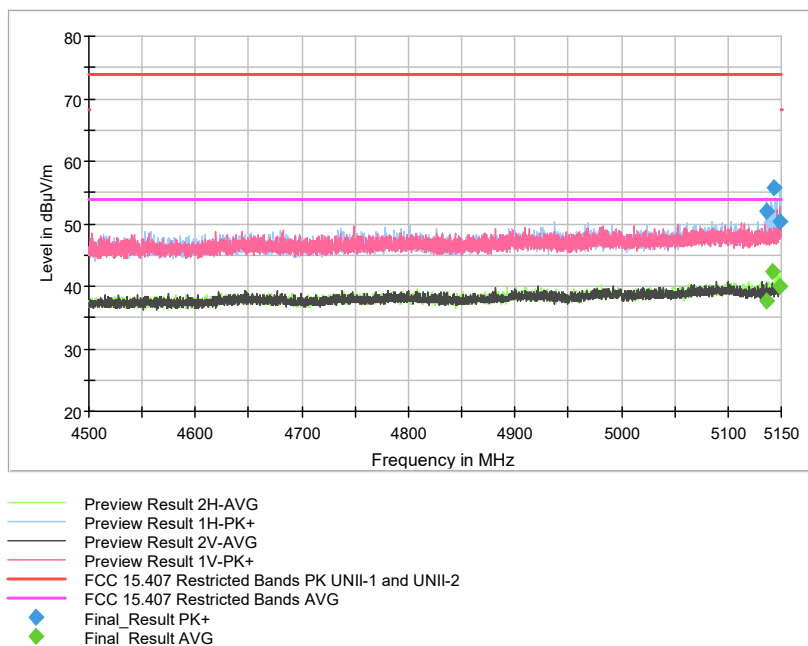


- Upper Band Edge Channel 48 (Restricted Band 5.35-5.46 GHz)

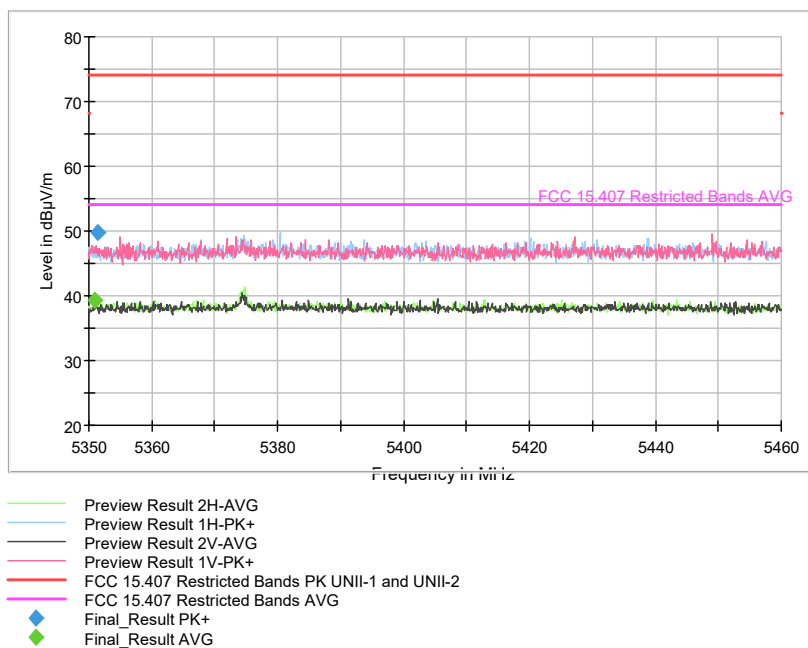


• 802.11 n40:

- Lower Band Edge Channel 38 (Restricted Band 4.50-5.15 GHz)

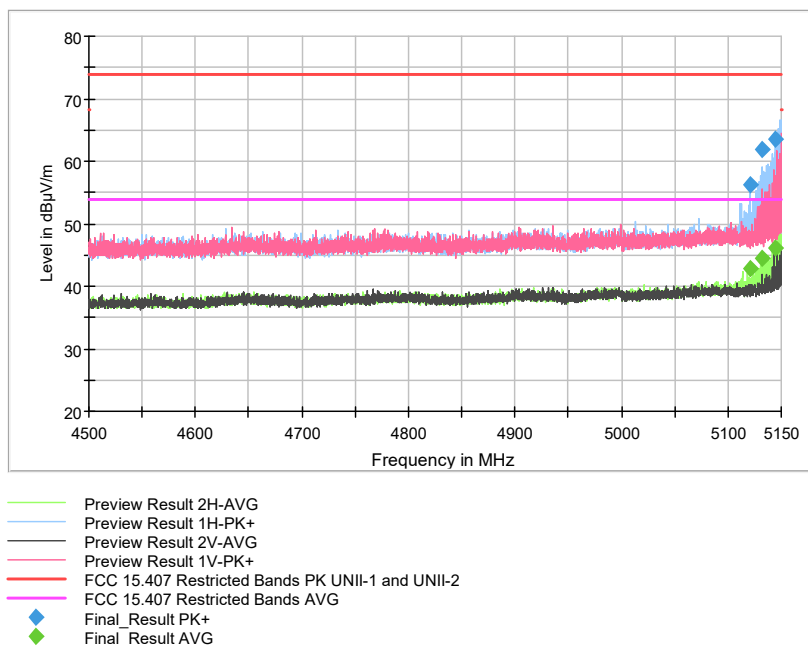


- Upper Band Edge Channel 46 (Restricted Band 5.35-5.46 GHz)

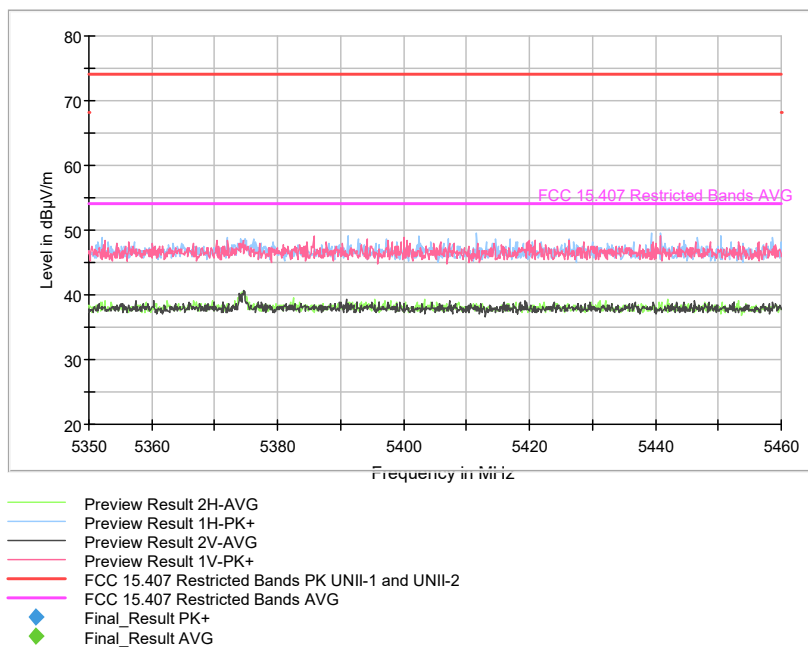


• 802.11 ac40:

- Lower Band Edge Channel 38 (Restricted Band 4.50-5.15 GHz)

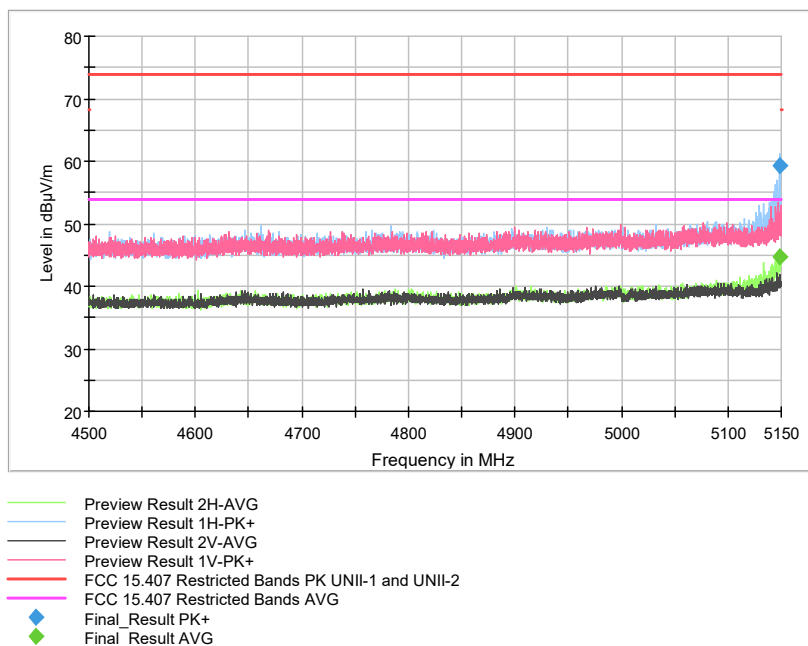


- Upper Band Edge Channel 46 (Restricted Band 5.35-5.46 GHz)

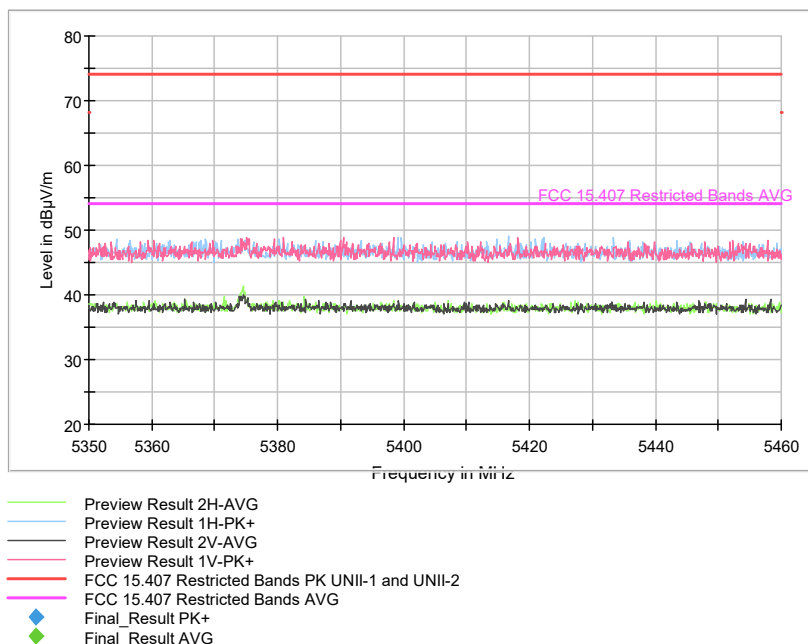


• 802.11 ac80:

- Lower Band Edge Channel 42 (Restricted Band 4.50-5.15 GHz)

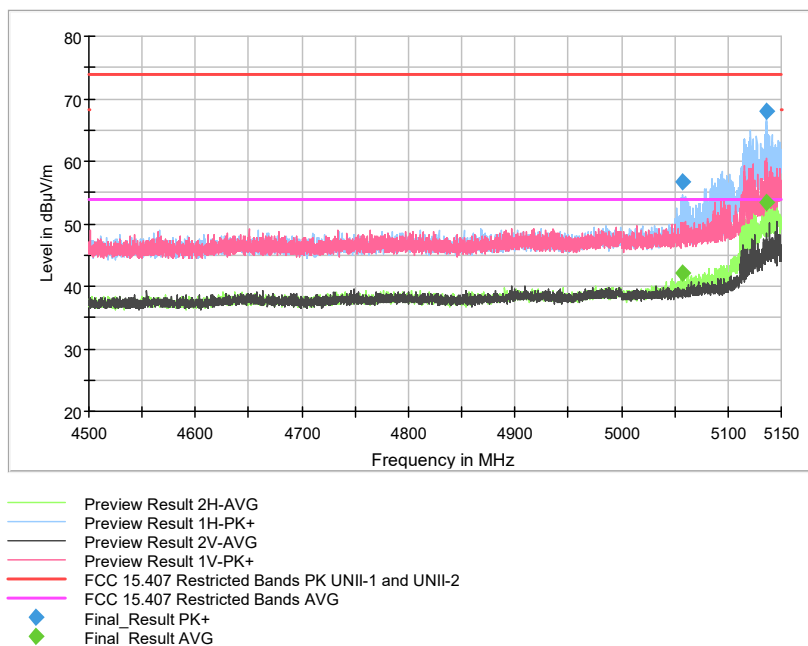

- Upper Band Edge Channel 42 (Restricted Band 5.35-5.46 GHz)

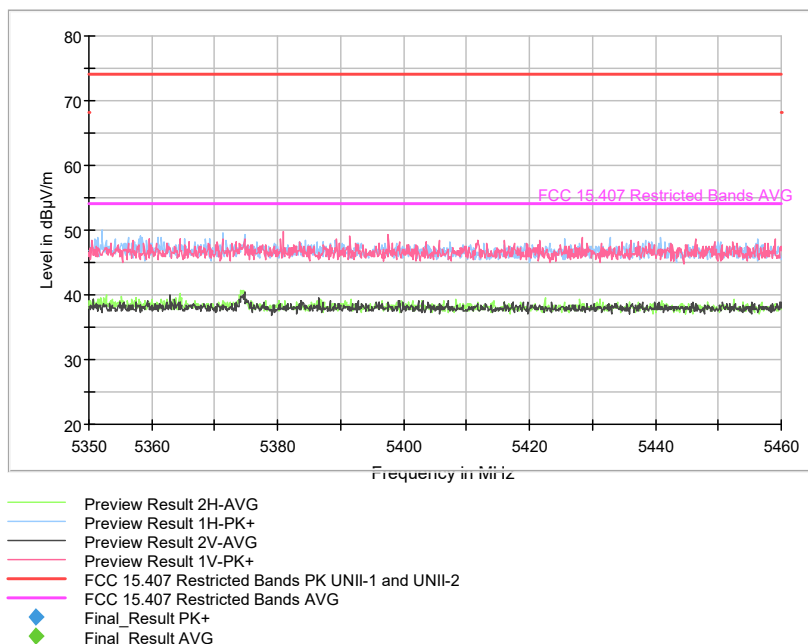

Appendix C: Test results for the U-NII-3 Band 5.725 – 5.85 GHz

INDEX

TEST CONDITIONS	116
FCC 15.247 (e) / RSS-247 6.2.4.1. 6 dB Bandwidth	120
FCC 15.407 (a)(3) / RSS-247 6.2.4.1. Transmitter Maximum Conducted Output Power	129
FCC 15.407 (a)(3) / RSS-247 6.2.4.1. Transmitter Maximum Power Spectral Density	138
FCC 15.407 (b)(4)(6) / RSS-247 6.2.4.2. Transmitter Out of Band Radiated Emissions and Transmitter Band Edge Radiated Emissions	147

TEST CONDITIONS

POWER SUPPLY (V):

V nominal: 12 Vdc.
Type of Power Supply: DC External (Car Battery).

ANTENNA:

Type of Antenna: External.
Maximum Declared Antenna Gain: +0.9 dBi (antenna gain plus antenna cable loss).

Technology Tested:	WLAN (IEEE 802.11 a/n/ac): U-NII-3 band	
Modes:	802.11a: 6, 9, 12, 18, 24, 36, 48 & 54 Mbps	
	802.11n HT20: MCS0 to MCS7	
	802.11n HT40: MCS0 to MCS7	
	802.11ac VHT20: MCS0 to MCS8	
	802.11ac VHT40: MCS0 to MCS9	
	802.11ac VHT80: MCS0 to MCS9	
Setting of cores / ports:	One port.	
Beamforming:	No	
Frequency Range:	5725 MHz to 5850 MHz	
Channel Spacing:	20 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Low: 149	5745
	Middle: 157	5785
	High: 165	5825
Channel Spacing:	40 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Low: 151	5755
	High: 159	5795
Channel Spacing:	80 MHz	
Transmit Channels	Middle: 155	5775

The test set-up was made in accordance to the general provisions of ANSI C63.10: 2013 and FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated 12/14/2017.

The EUT was tested in the following operating mode:

- Continuously transmitting with a modulated carrier at maximum power in all required channels using the supported data rates/modulations types.

The field strength at the band edges was evaluated for each mode individually on the lowest and highest channels at the rated power for the channel under test.

For all modes, the EUT was configured in test mode using a software application. The application was used to enable a continuous transmission and to select the test channels as required. The client supplied scripts to configure the EUT. The customer supplied a document containing the setup instructions.

The worst-cases for testing were identified for output power and spurious levels at the band edges which were selected based on preliminary testing that correspond to next data rates:

- 802.11a20: 6 Mbit/s
- 802.11n HT20: MCS0
- 802.11n HT40: MCS0
- 802.11ac VHT20: MCS0
- 802.11ac VHT40: MCS0
- 802.11ac VHT80: MCS0

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and connected to the spectrum analyzer using a low loss RF cable. The reading in the spectrum analyzer is corrected taking into account the internal and external RF cable loss.

For all modes:



The DC supply voltage is applied using an external power supply.

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz) and 1 GHz-18 GHz Double ridge horn antenna is situated at a distance of 3 m and a distance of 1m for the frequency range 17 GHz-40 GHz (18 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth / video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

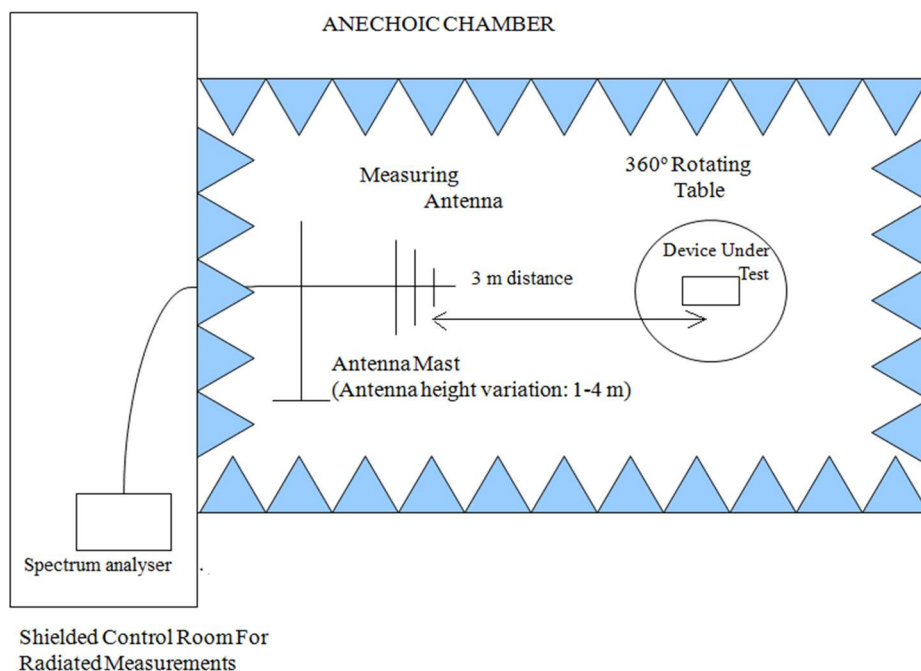

Radiated measurements setup from 1 GHz to 17 GHz:

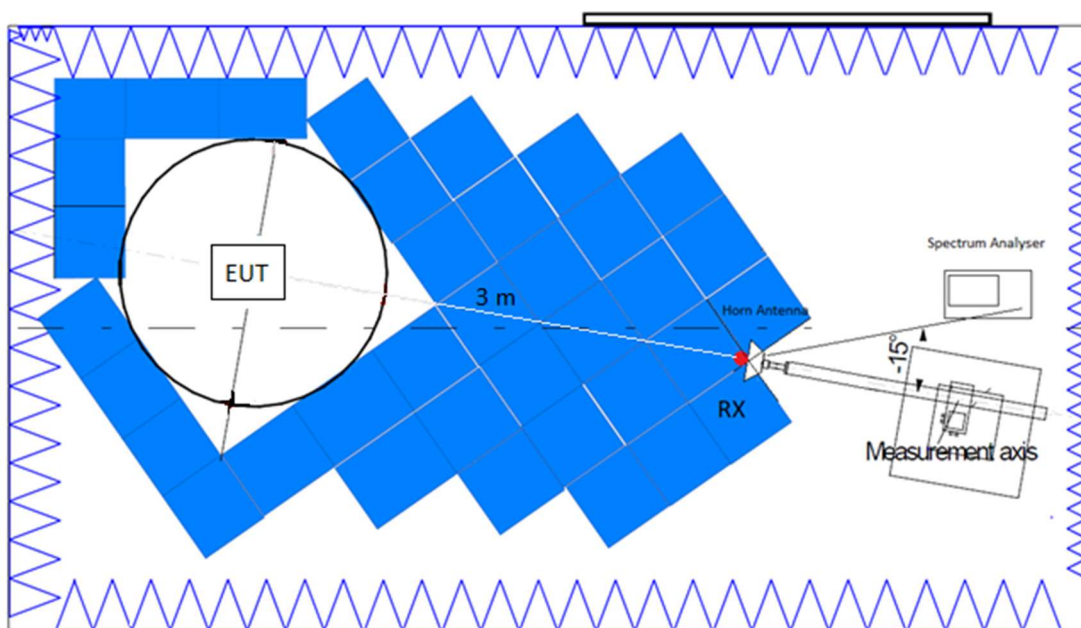

Radiated measurements setup $f > 17$ GHz:

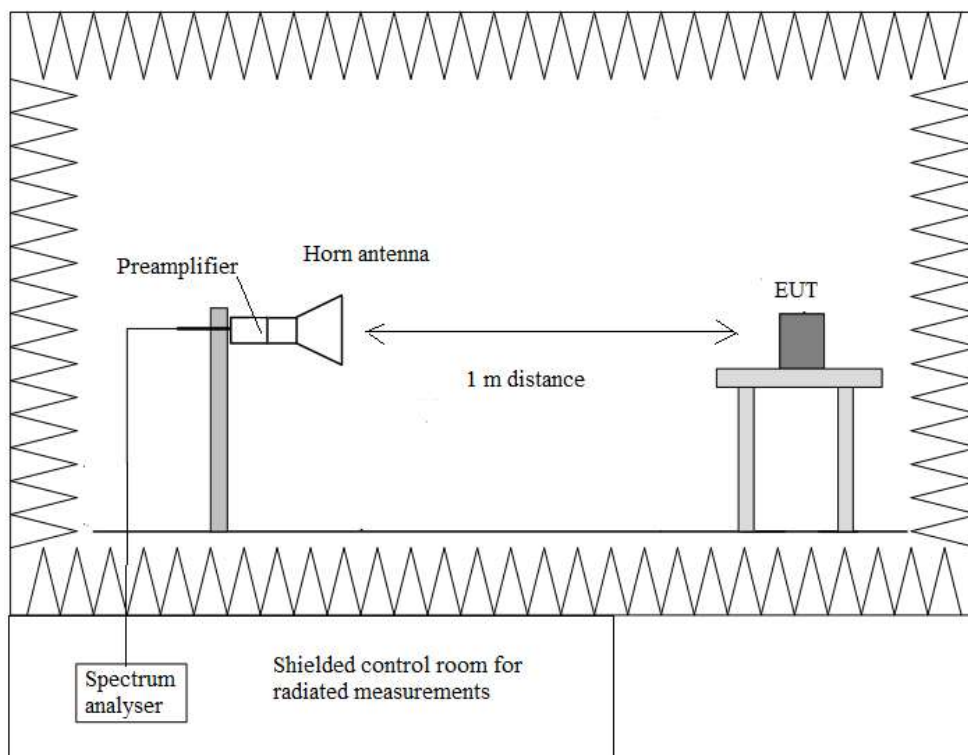

FCC 15.247 (e) / RSS-247 6.2.4.1. 6 dB Bandwidth

SPECIFICATION:

- * FCC 15.407: The minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
- * RSS-247: For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS:

Mode 802.11 a20:

	Low Channel 149 (5745 MHz)	Middle Channel 157 (5785 MHz)	High Channel 165 (5825 MHz)
6 dB Bandwidth (MHz)	16.400000	16.450000	16.400000
Measurement uncertainty (%)	<±2.00		

Mode 802.11 n20 (HT20):

	Low Channel 149 (5745 MHz)	Middle Channel 157 (5785 MHz)	High Channel 165 (5825 MHz)
6 dB Bandwidth (MHz)	17.400000	17.400000	17.150000
Measurement uncertainty (%)	<±2.00		

Mode 802.11 ac20 (VHT20):

	Low Channel 149 (5745 MHz)	Middle Channel 157 (5785 MHz)	High Channel 165 (5825 MHz)
6 dB Bandwidth (MHz)	17.400000	17.400000	17.400000
Measurement uncertainty (%)	<±2.00		

Mode 802.11 n40 (HT40):

	Low Channel 151 (5755 MHz)	High Channel 159 (5795 MHz)
6 dB Bandwidth (MHz)	35.550000	35.900000
Measurement uncertainty (%)	<±2.00	

Mode 802.11 ac40 (VHT40):

	Low Channel 151 (5755 MHz)	High Channel 159 (5795 MHz)
6 dB Bandwidth (MHz)	35.550000	35.850000
Measurement uncertainty (%)	<±2.00	