


Mode 802.11 a20:

- Low Channel:


Power Spectral Density (SA-1)

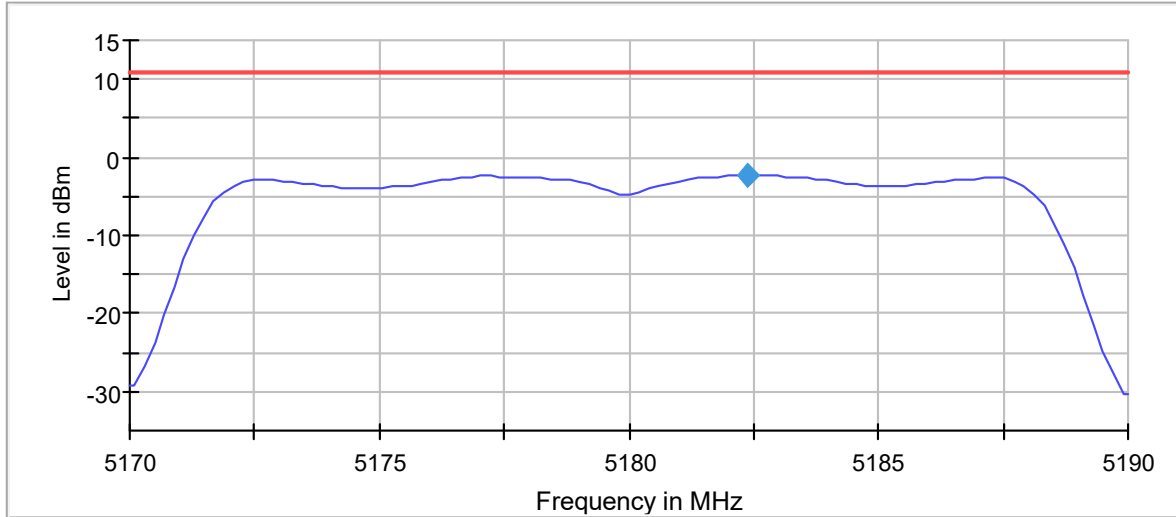

— Limit — Sum Level ◆ PSD

- Middle Channel:


Power Spectral Density (SA-1)

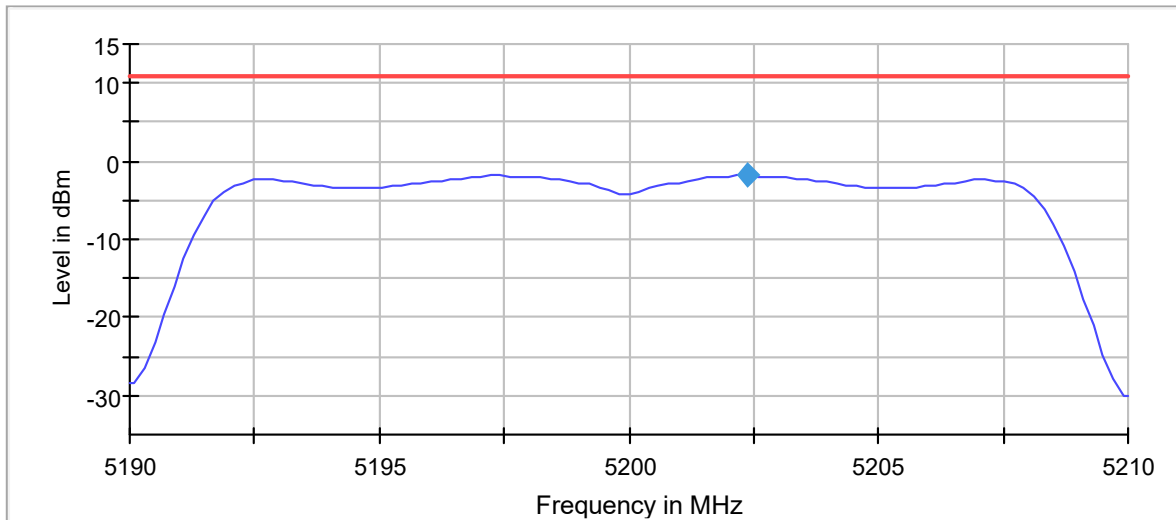

— Limit — Sum Level ◆ PSD

- High Channel:

Power Spectral Density (SA-1)

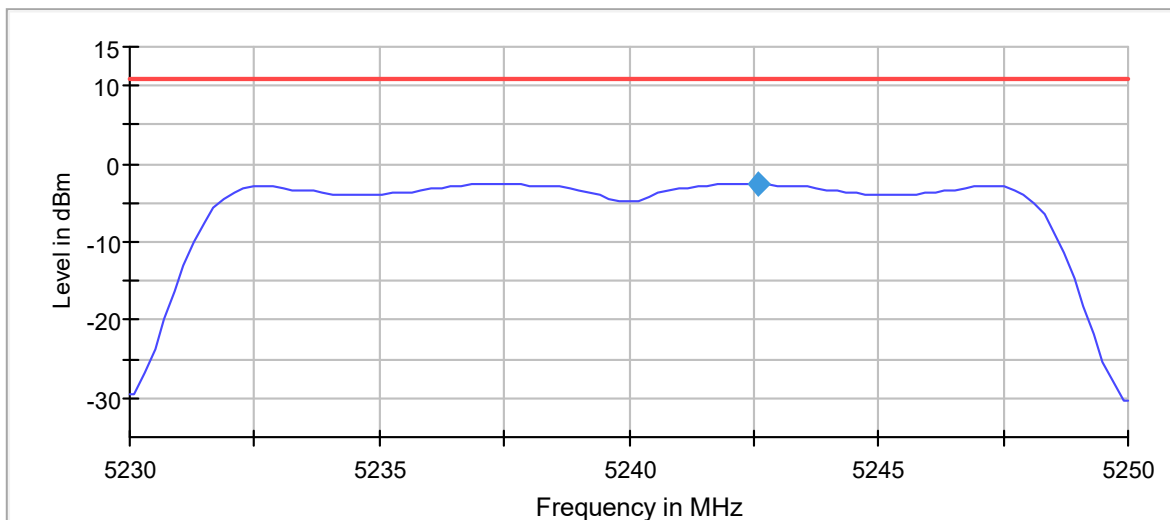


— Limit — Sum Level ◆ PSD

Mode 802.11 n20 (HT20):

- Low Channel:


Power Spectral Density (SA-1)

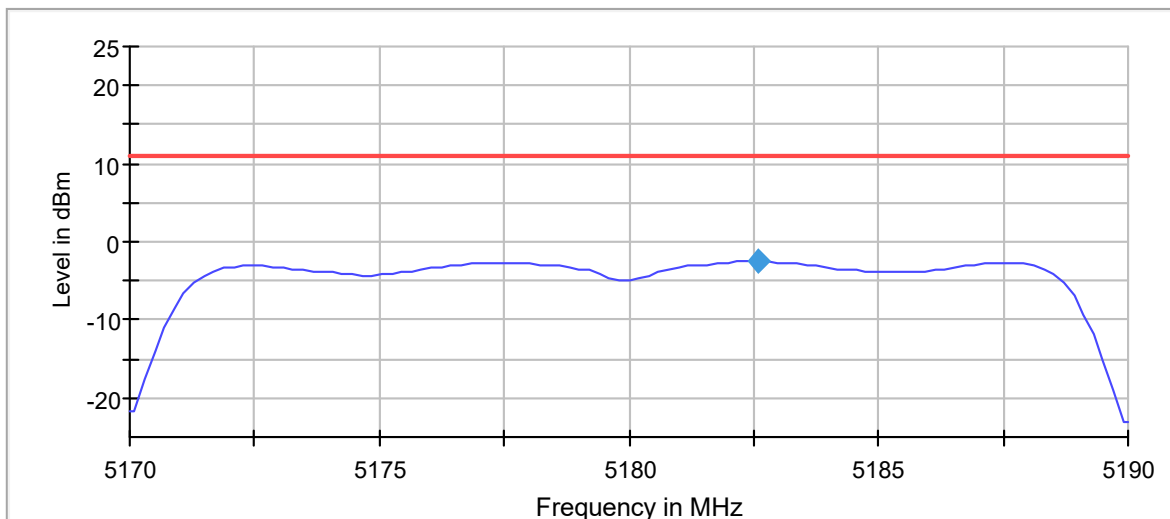

— Limit — Sum Level ◆ PSD

- Middle Channel:


Power Spectral Density (SA-1)

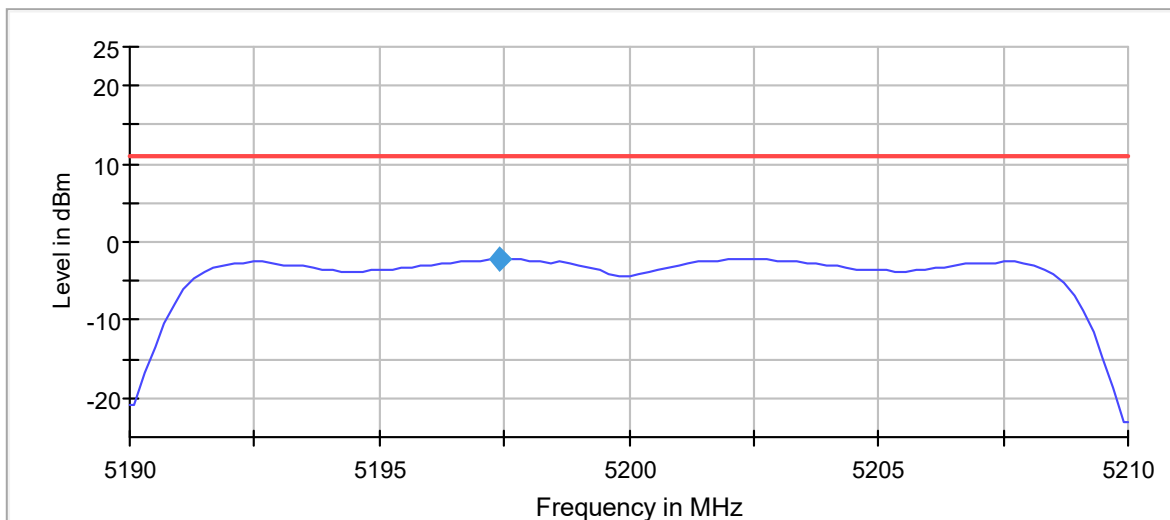

— Limit — Sum Level ◆ PSD

- High Channel:

Power Spectral Density (SA-1)

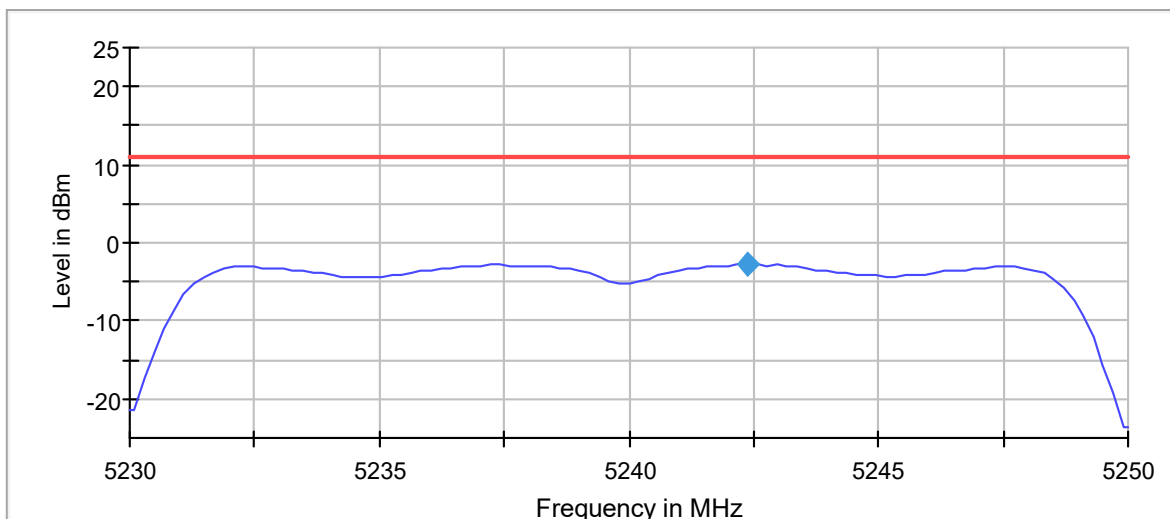


— Limit — Sum Level ◆ PSD

Mode 802.11 ac20 (VHT20):

- Low Channel:


Power Spectral Density (SA-1)

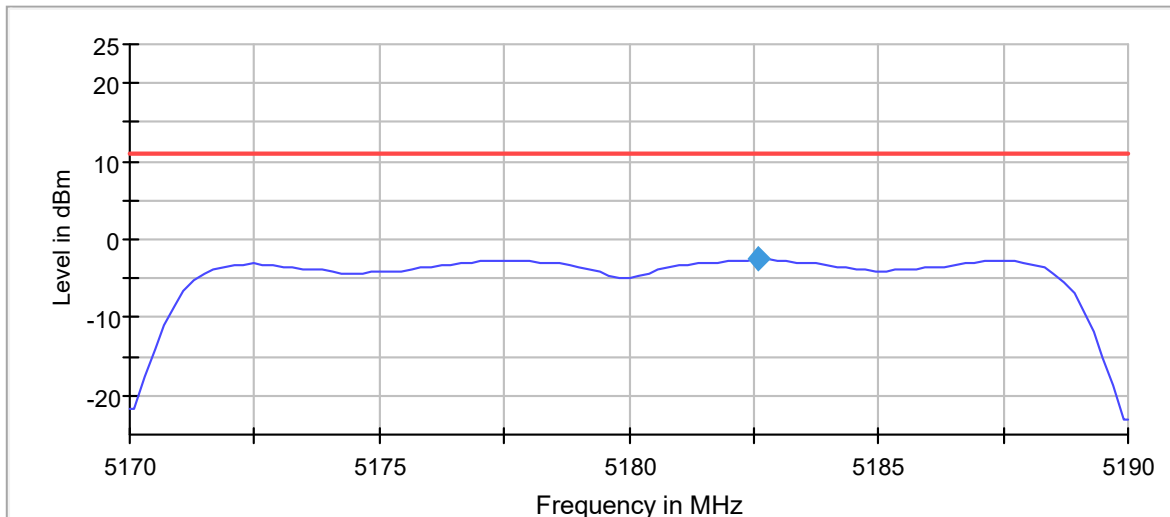

— Limit — Sum Level ◆ PSD

- Middle Channel:


Power Spectral Density (SA-1)

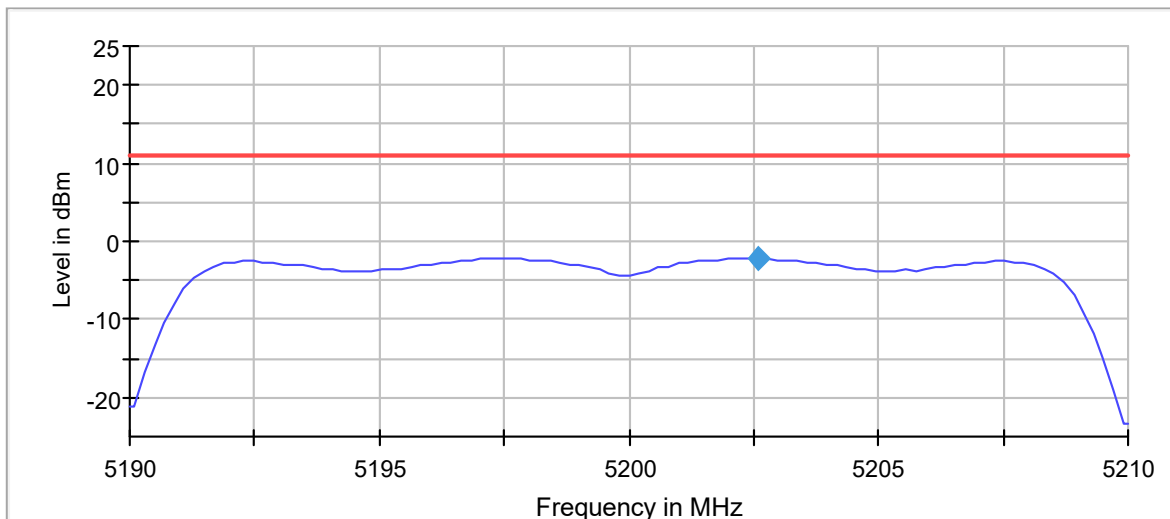

— Limit — Sum Level ◆ PSD

- High Channel:

Power Spectral Density (SA-1)

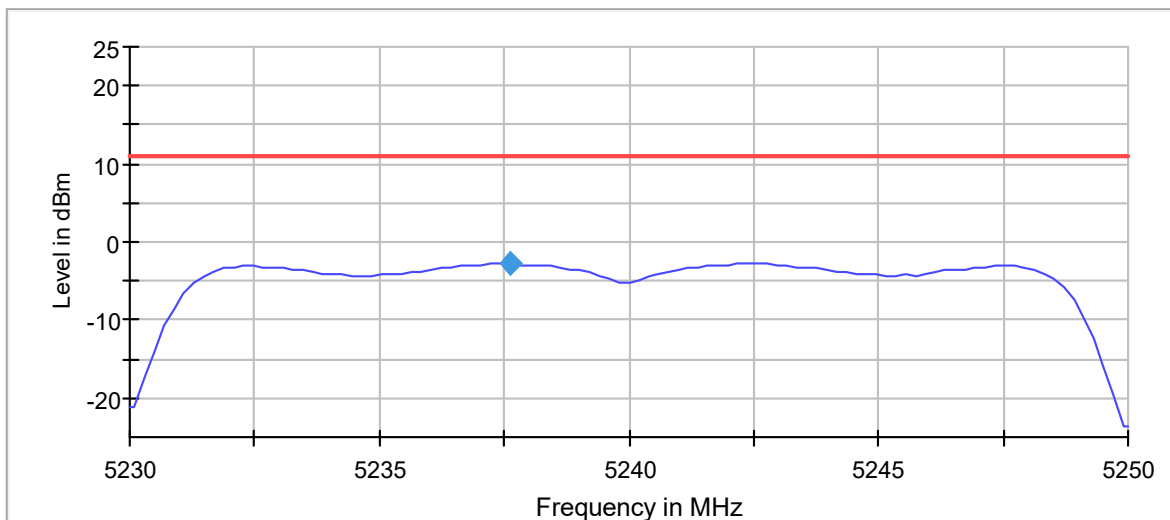


— Limit — Sum Level ◆ PSD

Mode 802.11 n40 (HT40):

- Low Channel:


Power Spectral Density (SA-1)

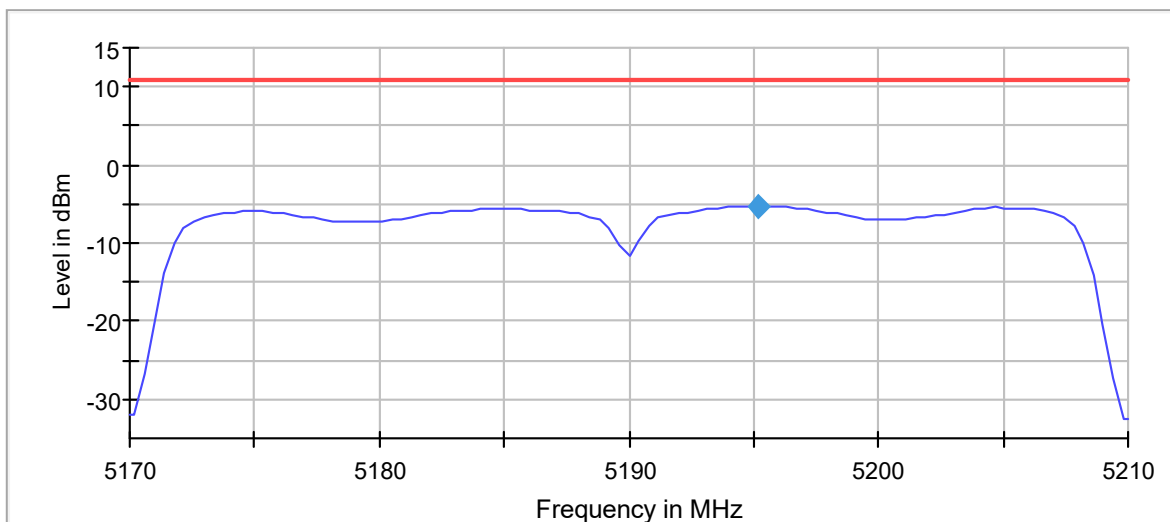

— Limit — Sum Level ◆ PSD

- High Channel:

Power Spectral Density (SA-1)

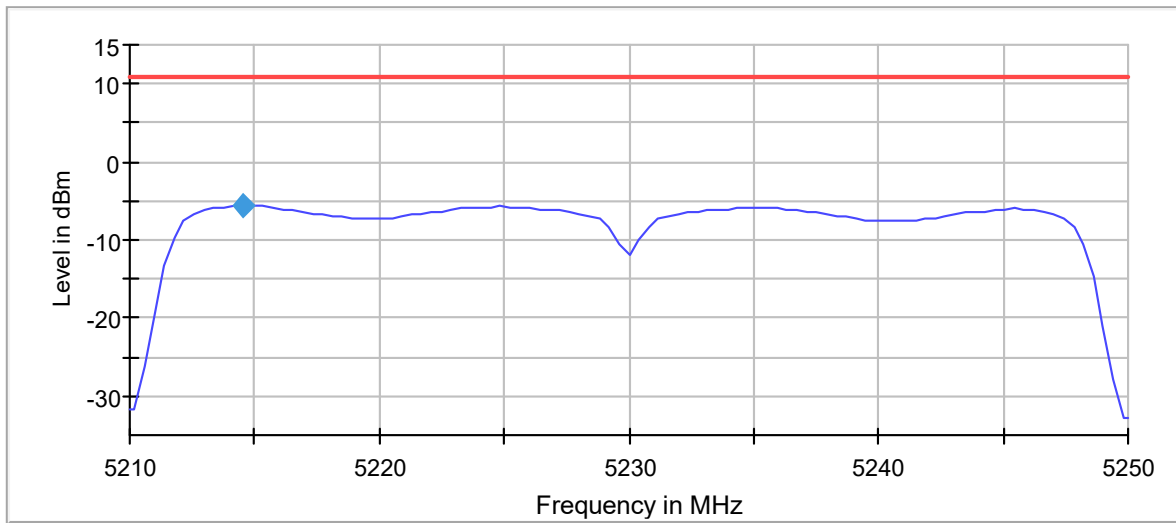


— Limit — Sum Level ◆ PSD

Mode 802.11 ac40 (VHT40):

- Low Channel:


Power Spectral Density (SA-1)

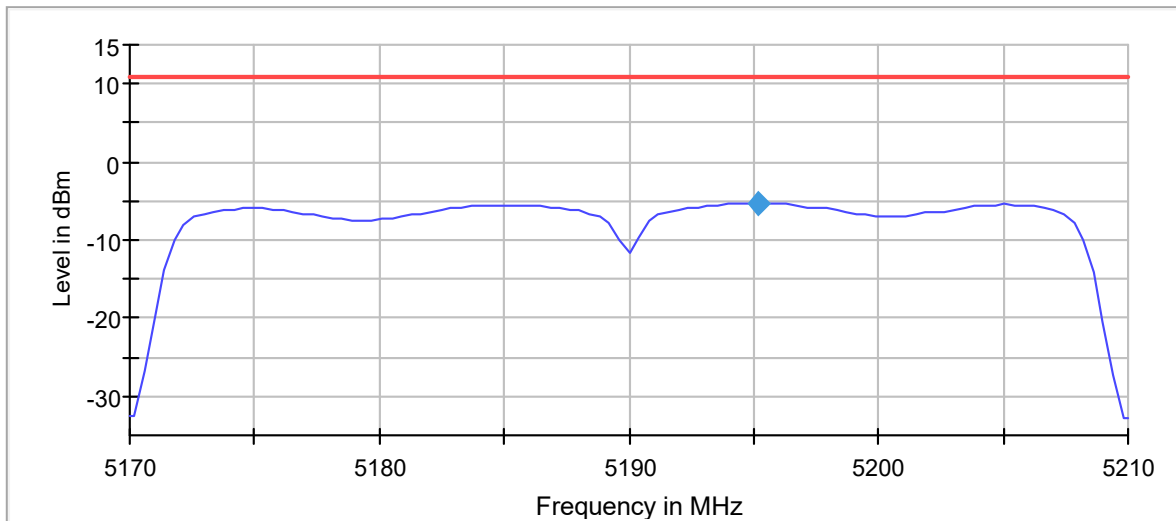

— Limit — Sum Level ◆ PSD

- High Channel:

Power Spectral Density (SA-1)

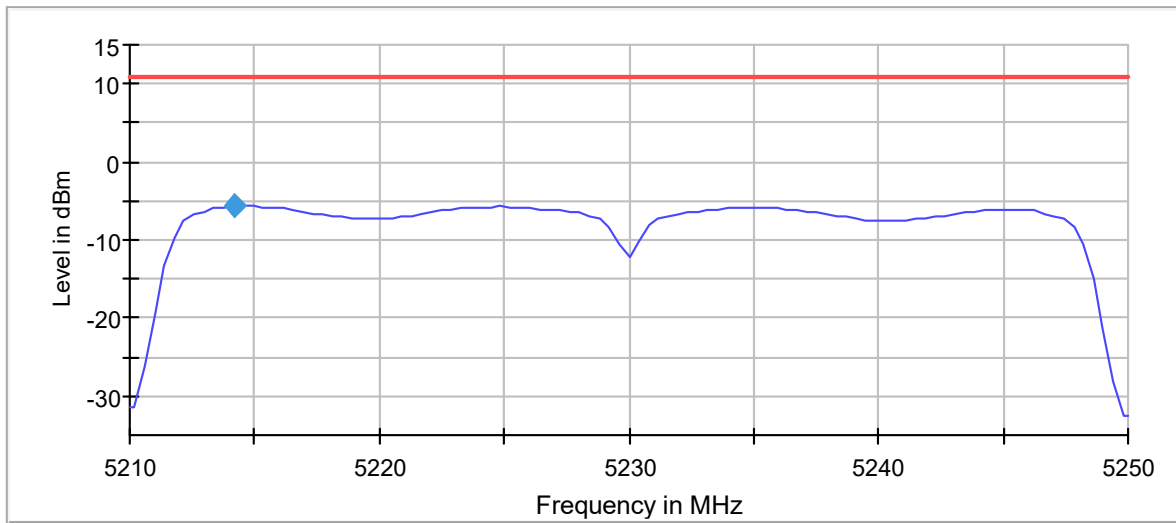


— Limit — Sum Level ◆ PSD

Mode 802.11 ac80 (VHT80):

- Single Channel:

Power Spectral Density (SA-1)

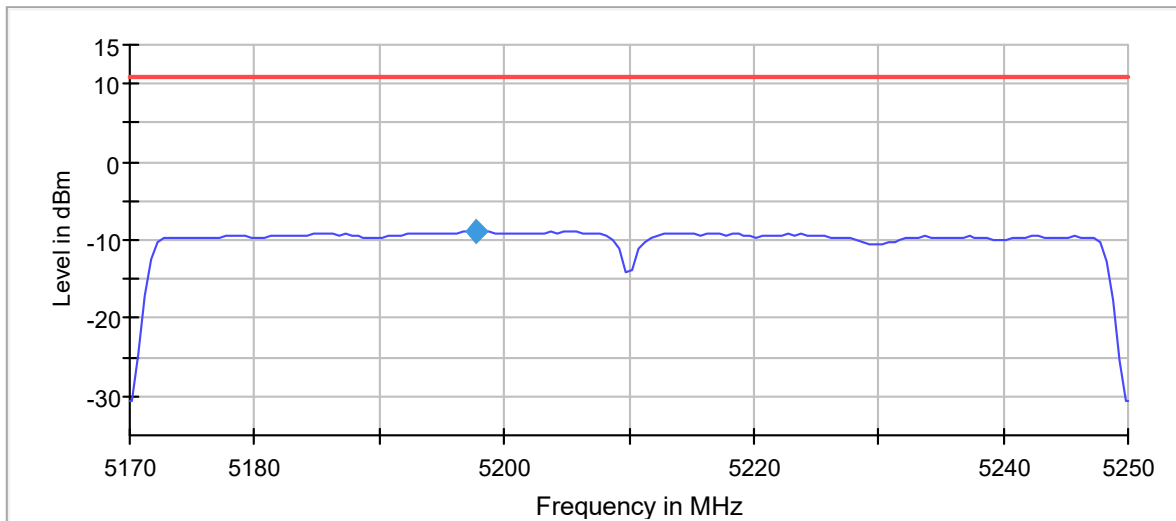

— Limit — Sum Level ◆ PSD

Canada power setting

The Canada graphs are the same as *FCC section 15.407 (a)(1)(ii) Transmitter Maximum Conducted Output Power* Canada setting power.

Mode 802.11 a20:

	Low Channel 36 (5180 MHz)	Middle Channel 40 (5200 MHz)	High Channel 48 (5240 MHz)
Maximum Average PSD (dBm/MHz)	-3.01	-3.24	-3.36
Maximum EIRP PSD (dBm/MHz)	-2.11	-2.34	-2.46
Measurement uncertainty (dB)	<±0.99		

Mode 802.11 n20 (HT20):

	Low Channel 36 (5180 MHz)	Middle Channel 40 (5200 MHz)	High Channel 48 (5240 MHz)
Maximum Average PSD (dBm/MHz)	-3.47	-3.60	-3.17
Maximum EIRP PSD (dBm/MHz)	-2.57	-2.70	-2.27
Measurement uncertainty (dB)	<±0.99		

Mode 802.11 ac20 (VHT20):

	Low Channel 36 (5180 MHz)	Middle Channel 40 (5200 MHz)	High Channel 48 (5240 MHz)
Maximum Average PSD (dBm/MHz)	-3.53	-3.46	-3.63
Maximum EIRP PSD (dBm/MHz)	-2.63	-2.56	-2.73
Measurement uncertainty (dB)	<±0.99		

Mode 802.11 n40 (HT40):

	Low Channel 38 (5190 MHz)	High Channel 46 (5230 MHz)
Maximum Average PSD (dBm/MHz)	-6.42	-6.26
Duty Cycle Correction Factor (dB)	0.10	
Maximum Average PSD Corrected (dBm/MHz)	-6.32	-6.16
Maximum EIRP PSD Corrected (dBm/MHz)	-5.42	-5.26
Measurement uncertainty (dB)	<±0.99	

Mode 802.11 ac40 (VHT40):

	Low Channel 38 (5190 MHz)	High Channel 46 (5230 MHz)
Maximum Average PSD (dBm/MHz)	-6.47	-6.27
Duty Cycle Correction Factor (dB)	0.10	
Maximum Average PSD Corrected (dBm/MHz)	-6.37	-6.17
Maximum EIRP PSD Corrected (dBm/MHz)	-5.47	-5.27
Measurement uncertainty (dB)	<±0.99	

Mode 802.11 ac80 (VHT80):

	Single Channel 42 (5210 MHz)
Maximum Average PSD (dBm/MHz)	-9.55
Duty Cycle Correction Factor (dB)	0.21
Maximum Average PSD Corrected (dBm/MHz)	-9.34
Maximum EIRP PSD Corrected (dBm/MHz)	-8.44
Measurement uncertainty (dB)	<±0.99

Verdict: PASS

FCC 15.407 (b)(1)(6) / RSS-247 6.2.1.2. Transmitter Out of Band Radiated Emissions

SPECIFICATION:

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz (68.23 dBμV/m at 3 m distance).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 1m for the frequency range 1 GHz-40 GHz and a distance of 3m for frequency range 30 MHz-1 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The next results are for the FCC power adjustment. The RSS power adjustment is lower, hence results also comply with the applicable standards.

OUT OF BAND EMISSIONS: For spurious emissions outside of the U-NII-1 band edge Restricted Bands 4.50-5.15 GHz and 5.35-5.46 GHz, the OFDM worst mode case was determined after preliminary measurements of the E.I.R.P. density (radiated).

The Low, Middle and High Channels were tested.

- **Worst case:** **802.11 a20** (index 6 Mbps).

Frequency range 30 MHz - 1 GHz (worst case):

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level (dBµV/m)	Polarization	Detector
350.9083	28.08	H	Quasi-Peak

Measurement Uncertainty (dB): $<\pm 5.10$

Frequency range 1 - 40 GHz (worst case):

The results in the next tables show the maximum measured levels in the 1 - 40 GHz frequency range.

The Low, Middle and High Channels were measured for out-of-band emissions for the worst mode.

Spurious frequencies in the restricted bands with peak levels above the average limit (54 dBµV/m at 3 m) are measured with an average detector for checking compliance with the average limit.


- LOW CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- MIDDLE CHANNEL. No spurious frequencies at less than 20 dB below the limit.
- HIGH CHANNEL. No spurious frequencies at less than 20 dB below the limit.

Measurement Uncertainty (dB):
 1 GHz - 7 GHz $<\pm 4.60$
 7 GHz - 17 GHz $<\pm 5.13$
 17 GHz - 26.5 GHz $<\pm 5.08$
 26.5 GHz - 40 GHz $<\pm 5.33$

Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz (worst case):


This plot is valid for the Low, Middle and High Channels and all the modulation modes.

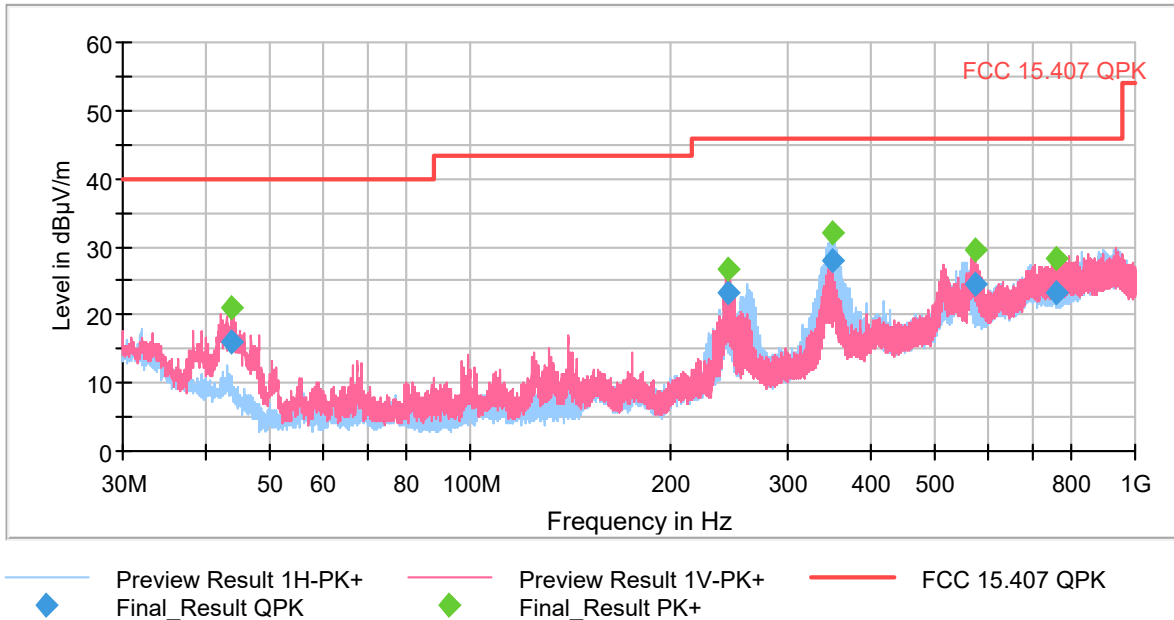

FREQUENCY RANGE 1 - 7 GHz (worst mode):

- Low Channel:


Full Spectrum

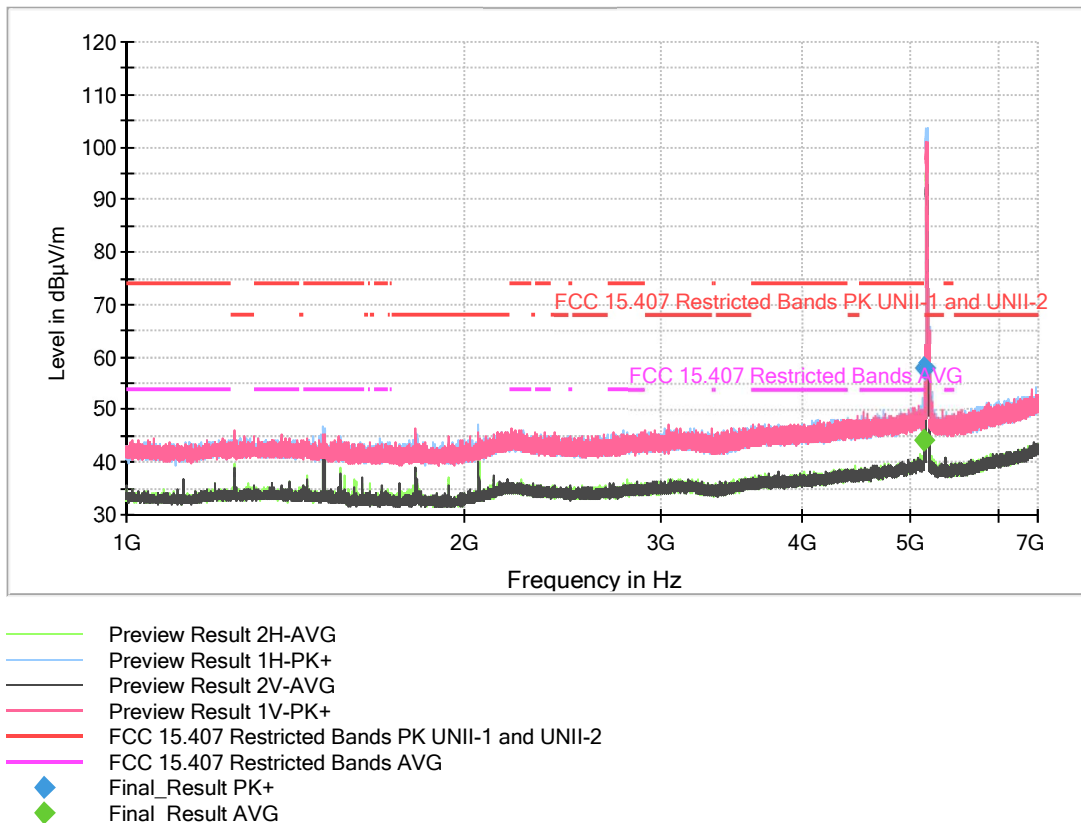

The peak above the limit is the carrier frequency.

- Middle Channel:

Full Spectrum

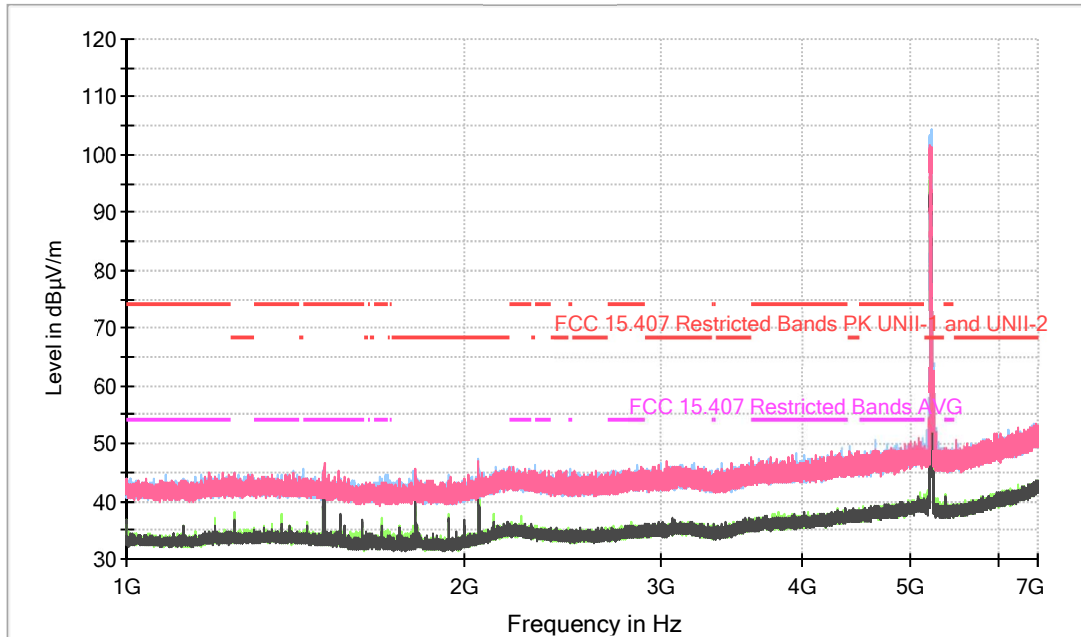


- Preview Result 2H-AVG
- Preview Result 1H-PK+
- Preview Result 2V-AVG
- Preview Result 1V-PK+
- FCC 15.407 Restricted Bands PK UNII-1 and UNII-2
- FCC 15.407 Restricted Bands AVG

The peak above the limit is the carrier frequency.

- High Channel:

Full Spectrum

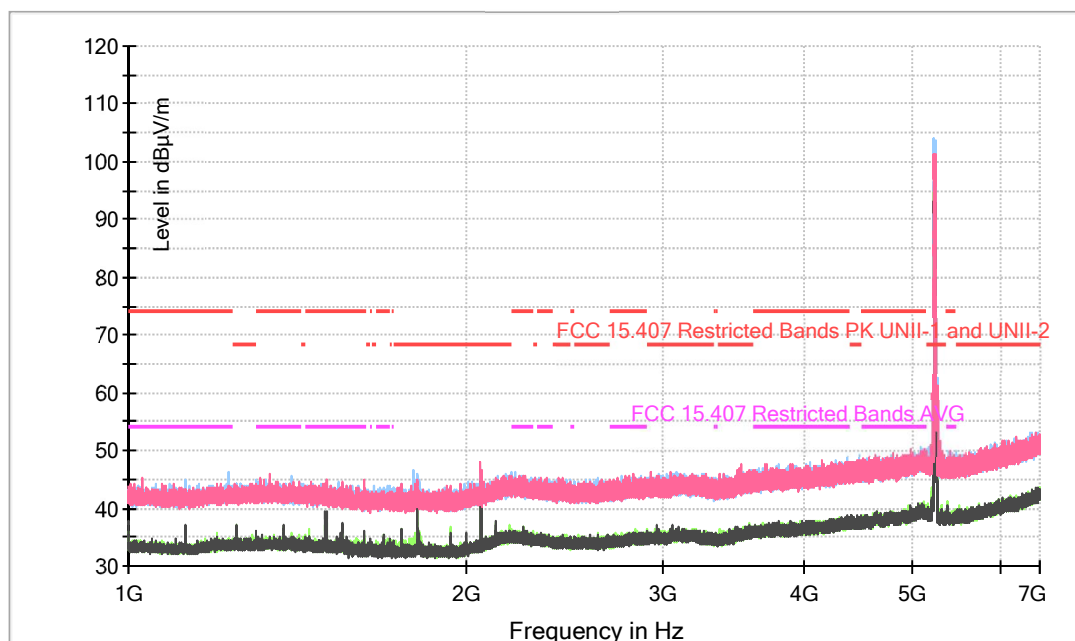


- Preview Result 2H-AVG
- Preview Result 1H-PK+
- Preview Result 2V-AVG
- Preview Result 1V-PK+
- FCC 15.407 Restricted Bands PK UNII-1 and UNII-2
- FCC 15.407 Restricted Bands AVG

The peak above the limit is the carrier frequency.

FREQUENCY RANGE 7 - 17 GHz (worst mode):

- Low Channel:

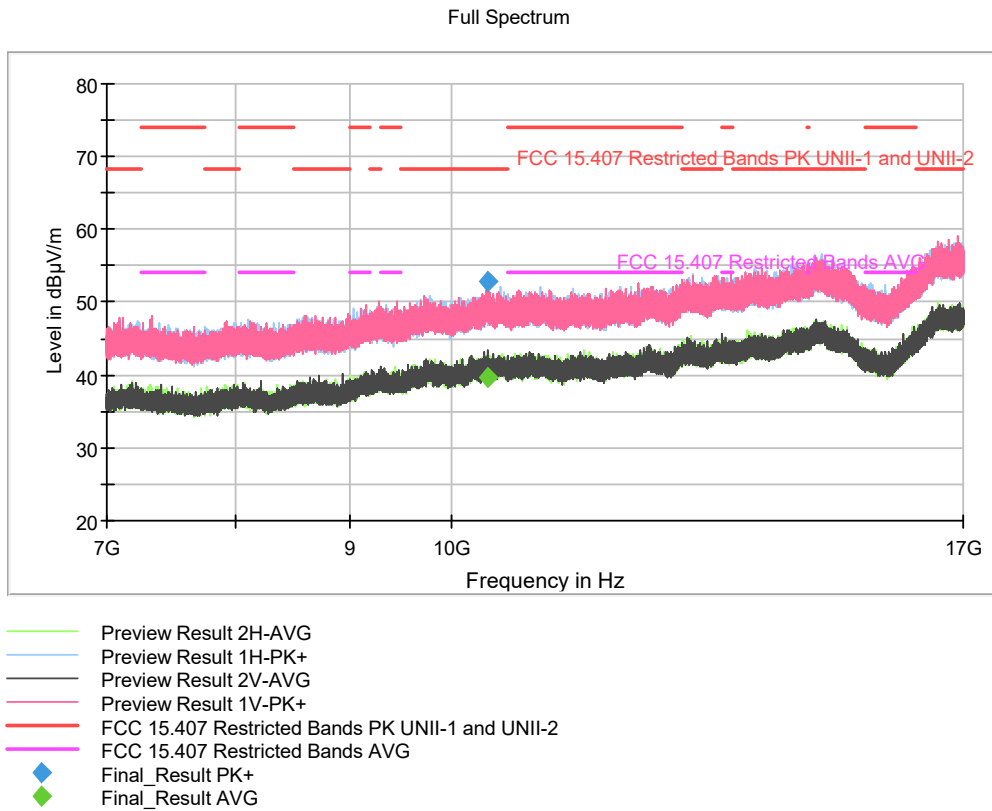

- Middle Channel:

