

FCC Test Report

(Spot Check: Part 24, Part 27 – NSA Mode: n71A + LTE Band 2 / 66)

Report No.: RF200514C16B-6

FCC ID: T8GSAN9001

Original FCC ID: T8GSAN9000

Test Model: SA-N9001 CUS D1

Received Date: May 14, 2020

Test Date: Nov. 29 ~ Dec. 24, 2020

Issued Date: Dec. 30, 2020

Applicant: Harman Connected Car Division

Address: Parking 3, 85748 Garching Germany

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units.....	10
3.3 Test Mode Applicability and Tested Channel Detail.....	11
3.4 EUT Operating Conditions.....	14
3.5 General Description of Applied Standards and References.....	14
4 Test Types and Results	15
4.1 Output Power Measurement.....	15
4.1.1 Limits of Output Power Measurement.....	15
4.1.2 Test Procedures.....	15
4.1.3 Test Setup.....	16
4.1.4 Test Results.....	17
4.2 Radiated Emission Measurement.....	49
4.2.1 Limits of Radiated Emission Measurement.....	49
4.2.2 Test Procedure.....	49
4.2.3 Deviation from Test Standard.....	49
4.2.4 Test Setup.....	50
4.2.5 Test Results.....	51
5 Pictures of Test Arrangements	60
Appendix – Information of the Testing Laboratories	61

Release Control Record

Issue No.	Description	Date Issued
RF200514C16B-6	Original release	Dec. 30, 2020

1 Certificate of Conformity

Product: Module

Brand: Harman

Test Model: SA-N9001 CUS D1

Sample Status: Standard Sample

Applicant: Harman Connected Car Division

Test Date: Nov. 29 ~ Dec. 24, 2020

Standards: FCC Part 24, Subpart E
FCC Part 27, Subpart L, N

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Dec. 30, 2020
Celine Chou / Senior Specialist

Approved by : Bruce Chen , **Date:** Dec. 30, 2020
Bruce Chen / Senior Project Engineer

2 Summary of Test Results

For LTE Band 2

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective radiated power	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -36.50dB at 101.23MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

For n71, LTE Band 66

Applied Standard: FCC Part 27 & Part 2				
FCC Clause		Test Item	Result	Remarks
LTE B66	n71			
2.1046 27.50 (d)(4)	2.1046 27.50 (c)	Equivalent Isotropically Radiated Powe	Pass	Meet the requirement of limit.
2.1053 27.53(h)	2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -32.00dB at 37.26MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 06, 2020	Jul. 05, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 18, 2020	Feb. 17, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8 000	CABLE-CH9-02 (248780+171006)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021
UXM 5G Wireless Test Platform Keysight	E7515B	MY58300759	Apr. 18, 2020	Apr. 17, 2021
Standard Temperature And Humidity Chamber TERCHY	MHU-225AU	920842	May 27, 2020	May 31, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 06, 2020	Jun. 05, 2021
DC power supply	U8002A	MY56330015	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

3 General Information

3.1 General Description of EUT

Product	Module
Brand	Harman
Test Model	SA-N9001 CUS D1
Sample Status	Standard Sample
Power Supply rating	4.2Vdc

n71

Modulation Type	$\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM					
Waveform Type	CP-OFDM, DFT-s-OFDM					
Operating Frequency	n71 (Channel Bandwidth: 5MHz)	665.5 ~ 695.5MHz				
	n71 (Channel Bandwidth: 10MHz)	668.0 ~ 693.0MHz				
	n71 (Channel Bandwidth: 15MHz)	670.5 ~ 690.5MHz				
	n71 (Channel Bandwidth: 20MHz)	673.0 ~ 688.0MHz				
Max. ERP Power		$\pi/2$ BPSK	QPSK	16QAM	64QAM	256QAM
	n71 (Channel Bandwidth: 5MHz)	211.349mW (23.25dBm)	169.824mW (22.30dBm)	134.586mW (21.29dBm)	121.339mW (20.84dBm)	76.033mW (18.81dBm)
	n71 (Channel Bandwidth: 10MHz)	207.491mW (23.17dBm)	169.044mW (22.28dBm)	135.207mW (21.31dBm)	121.899mW (20.86dBm)	77.804mW (18.91dBm)
	n71 (Channel Bandwidth: 15MHz)	208.449mW (23.19dBm)	169.824mW (22.30dBm)	134.276mW (21.28dBm)	121.619mW (20.85dBm)	75.509mW (18.78dBm)
	n71 (Channel Bandwidth: 20MHz)	207.970mW (23.18dBm)	174.181mW (22.41dBm)	135.519mW (21.32dBm)	122.180mW (20.87dBm)	78.705mW (18.96dBm)
Emission Designator		$\pi/2$ BPSK	QPSK	16QAM	64QAM	256QAM
	n71 (Channel Bandwidth: 5MHz)	4M49G7D	4M49G7D	4M46D7W	4M47D7W	4M46D7W
	n71 (Channel Bandwidth: 10MHz)	8M95G7D	9M30G7D	9M27D7W	9M27D7W	9M27D7W
	n71 (Channel Bandwidth: 15MHz)	13M5G7D	14M2G7D	14M1D7W	14M1D7W	14M1D7W
	n71 (Channel Bandwidth: 20MHz)	18M1G7D	19M1G7D	18M9D7W	18M9D7W	18M9D7W

LTE Band

Modulation Type	QPSK, 16QAM, 64QAM, 256QAM				
Operating Frequency	LTE Band 2 (Channel Bandwidth: 1.4MHz)	1850.7 ~ 1909.3MHz			
	LTE Band 2 (Channel Bandwidth: 3MHz)	1851.5 ~ 1908.5MHz			
	LTE Band 2 (Channel Bandwidth: 5MHz)	1852.5 ~ 1907.5MHz			
	LTE Band 2 (Channel Bandwidth: 10MHz)	1855.0 ~ 1905.0MHz			
	LTE Band 2 (Channel Bandwidth: 15MHz)	1857.5 ~ 1902.5MHz			
	LTE Band 2 (Channel Bandwidth: 20MHz)	1860.0 ~ 1900.0MHz			
	LTE Band 66 (Channel Bandwidth: 1.4MHz)	1710.7 ~ 1779.3MHz			
	LTE Band 66 (Channel Bandwidth: 3MHz)	1711.5 ~ 1778.5MHz			
	LTE Band 66 (Channel Bandwidth: 5MHz)	1712.5 ~ 1777.5MHz			
	LTE Band 66 (Channel Bandwidth: 10MHz)	1715.0 ~ 1775.0MHz			
	LTE Band 66 (Channel Bandwidth: 15MHz)	1717.5 ~ 1772.5MHz			
	LTE Band 66 (Channel Bandwidth: 20MHz)	1720.0 ~ 1770.0MHz			
Max. EIRP Power		QPSK	16QAM	64QAM	256QAM
	LTE Band 2 (Channel Bandwidth: 1.4MHz)	366.438mW (25.64dBm)	287.078mW (24.58dBm)	235.505mW (23.72dBm)	143.880mW (21.58dBm)
	LTE Band 2 (Channel Bandwidth: 3MHz)	370.681mW (25.69dBm)	290.402mW (24.63dBm)	230.144mW (23.62dBm)	144.212mW (21.59dBm)
	LTE Band 2 (Channel Bandwidth: 5MHz)	363.078mW (25.60dBm)	287.740mW (24.59dBm)	228.560mW (23.59dBm)	145.211mW (21.62dBm)
	LTE Band 2 (Channel Bandwidth: 10MHz)	359.749mW (25.56dBm)	283.792mW (24.53dBm)	226.464mW (23.55dBm)	145.546mW (21.63dBm)
	LTE Band 2 (Channel Bandwidth: 15MHz)	363.915mW (25.61dBm)	296.483mW (24.72dBm)	230.675mW (23.63dBm)	145.881mW (21.64dBm)
	LTE Band 2 (Channel Bandwidth: 20MHz)	366.438mW (25.64dBm)	291.072mW (24.64dBm)	233.884mW (23.69dBm)	147.571mW (21.69dBm)
	LTE Band 66 (Channel Bandwidth: 1.4MHz)	432.514mW (26.36dBm)	347.536mW (25.41dBm)	274.157mW (24.38dBm)	167.880mW (22.25dBm)
	LTE Band 66 (Channel Bandwidth: 3MHz)	432.514mW (26.36dBm)	334.965mW (25.25dBm)	267.917mW (24.28dBm)	172.982mW (22.38dBm)
	LTE Band 66 (Channel Bandwidth: 5MHz)	422.669mW (26.26dBm)	337.287mW (25.28dBm)	265.461mW (24.24dBm)	172.187mW (22.36dBm)
	LTE Band 66 (Channel Bandwidth: 10MHz)	427.563mW (26.31dBm)	338.844mW (25.30dBm)	265.461mW (24.24dBm)	174.582mW (22.42dBm)
	LTE Band 66 (Channel Bandwidth: 15MHz)	433.511mW (26.37dBm)	336.512mW (25.27dBm)	267.917mW (24.28dBm)	169.044mW (22.28dBm)
	LTE Band 66 (Channel Bandwidth: 20MHz)	436.516mW (26.40dBm)	346.737mW (25.40dBm)	273.527mW (24.37dBm)	171.002mW (22.33dBm)

Emission Designator		QPSK	16QAM	64QAM	256QAM
	LTE Band 2 (Channel Bandwidth: 1.4MHz)	1M09G7D	1M09G7D	1M09D7W	1M09D7W
	LTE Band 2 (Channel Bandwidth: 3MHz)	2M68G7D	2M69G7D	2M68D7W	2M69D7W
	LTE Band 2 (Channel Bandwidth: 5MHz)	4M50G7D	4M50G7D	4M50D7W	4M50D7W
	LTE Band 2 (Channel Bandwidth: 10MHz)	8M99G7D	8M97G7D	8M98D7W	8M97D7W
	LTE Band 2 (Channel Bandwidth: 15MHz)	13M5G7D	13M4G7D	13M4D7W	13M4D7W
	LTE Band 2 (Channel Bandwidth: 20MHz)	18M0G7D	18M0G7D	18M0D7W	18M0D7W
	LTE Band 66 (Channel Bandwidth: 1.4MHz)	1M09G7D	1M09G7D	1M09D7W	1M09D7W
	LTE Band 66 (Channel Bandwidth: 3MHz)	2M69G7D	2M69G7D	2M68D7W	2M69D7W
	LTE Band 66 (Channel Bandwidth: 5MHz)	4M50G7D	4M50G7D	4M50D7W	4M50D7W
	LTE Band 66 (Channel Bandwidth: 10MHz)	8M98G7D	8M98G7D	8M99D7W	8M98D7W
	LTE Band 66 (Channel Bandwidth: 15MHz)	13M5G7D	13M5G7D	13M4D7W	13M4D7W
	LTE Band 66 (Channel Bandwidth: 20MHz)	18M0G7D	18M0G7D	18M0D7W	18M0D7W
Antenna Type	Refer to note				
Antenna Connector	Refer to note				
Accessory Device	NA				
Cable Supplied	NA				

Note:

1. This report is a supplementary report to the original BV CPS report no.: RF200514C16A-6. Exhibit prepared for FCC Spot Check Verification report, the format, test items and amount of spot-check test data are decided by applicant's engineering judgment, for more details please refer to declaration letter exhibit. Radiated emission and output power verification worst test refer to original report.
2. The antenna information is listed as below.


Operating frequency band	Antenna	Gain (dBi)	Connector Type
Band 2	5G/4G Terminal Mount Monopole Antenna	2.92	SMA
Band 5		1.01	
Band 7		2.20	
Band 12		-1.17	
Band 25		2.97	
Band 38		2.18	
Band 41		2.20	
Band 66		3.44	
Band 71		1.72	
Band 77		2.61	

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3. The EUT supports the following ENDC configuration.

5GNR	FCC 5G FR1			ENDC
	Band	SCS	Bandwidth (MHz)	
n5	15kHz	5/10/15/20		Band 2/66
n41	30kHz	10/15/20/40/50/60/80/90/100		Band 26
n66	15kHz	5/10/15/20/40		Band 5/12
n71	15kHz	5/10/15/20		Band 2/66

3.2 Configuration of System under Test

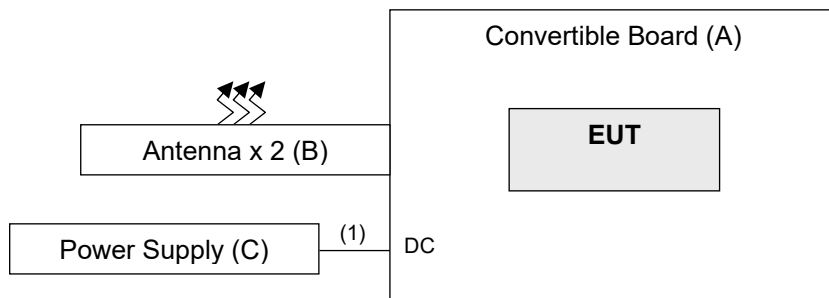

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Convertible Board	NA	NA	NA	NA	Provided by client
B.	Antenna x 2	TAOGLAS	TG.55.8113	NA	NA	Provided by client
C.	DC Power supply	TECPEL	GPS-3030DD	GEO855739	NA	-

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC cable	1	1	N	0	-

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane. Following channel(s) was (were) selected for the final test as listed below.

n71

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	ERP	133100 to 139100	133100 (665.5MHz), 136100 (680.5MHz), 139100 (695.5MHz)	5MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 12 RB Offset 1 RB / 24 RB Offset 12 RB / 0 RB Offset 12 RB / 6 RB Offset 12 RB / 13 RB Offset 25 RB / 0 RB Offset
		133600 to 138600	133600 (668.0MHz), 136100 (680.5MHz), 138600 (693.0MHz)	10MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 26 RB Offset 1 RB / 51 RB Offset 26 RB / 0 RB Offset 26 RB / 13 RB Offset 26 RB / 26 RB Offset 52 RB / 0 RB Offset
		134100 to 138100	134100 (670.5MHz), 136100 (680.5MHz), 138100 (690.5MHz)	15MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 39 RB Offset 1 RB / 78 RB Offset 39 RB / 0 RB Offset 39 RB / 19 RB Offset 39 RB / 40 RB Offset 79 RB / 0 RB Offset
		134600 to 137600	134600 (673.0MHz), 136100 (680.5MHz), 137600 (688.0MHz)	20MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 53 RB Offset 1 RB / 105 RB Offset 53 RB / 0 RB Offset 53 RB / 27 RB Offset 53 RB / 53 RB Offset 106 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	134600 to 137600	136100 (680.5MHz)	20MHz	$\pi/2$ BPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	134600 to 137600	136100 (680.5MHz)	20MHz	$\pi/2$ BPSK	1 RB / 0 RB Offset

LTE Band 2

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607 (1850.70MHz), 18900 (1880.00MHz), 19193 (1909.30MHz)	1.4MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 2 RB Offset 1 RB / 5 RB Offset 3 RB / 0 RB Offset 3 RB / 1 RB Offset 3 RB / 3 RB Offset 6 RB / 0 RB Offset
		18615 to 19185	18615 (1851.50MHz), 18900 (1880.00MHz), 19185 (1908.50MHz)	3MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 7 RB Offset 1 RB / 14 RB Offset 8 RB / 0 RB Offset 8 RB / 3 RB Offset 8 RB / 7 RB Offset 15 RB / 0 RB Offset
		18625 to 19175	18625 (1852.50MHz), 18900 (1880.00MHz), 19175 (1907.50MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 12 RB Offset 1 RB / 24 RB Offset 12 RB / 0 RB Offset 12 RB / 6 RB Offset 12 RB / 13 RB Offset 25 RB / 0 RB Offset
		18650 to 19150	18650 (1855.00MHz), 18900 (1880.00MHz), 19150 (1905.00MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 1 RB / 49 RB Offset 25 RB / 0 RB Offset 25 RB / 12 RB Offset 25 RB / 25 RB Offset 50 RB / 0 RB Offset
		18675 to 19125	18675 (1857.50MHz), 18900 (1880.00MHz), 19125 (1902.50MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 37 RB Offset 1 RB / 74 RB Offset 36 RB / 0 RB Offset 36 RB / 19 RB Offset 36 RB / 39 RB Offset 75 RB / 0 RB Offset
		18700 to 19100	18700 (1860.00MHz), 18900 (1880.00MHz), 19100 (1900.00MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 50 RB Offset 1 RB / 99 RB Offset 50 RB / 0 RB Offset 50 RB / 25 RB Offset 50 RB / 50 RB Offset 100 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	18700 to 19100	18900 (1880.00MHz)	20MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	18700 to 19100	18900 (1880.00MHz)	20MHz	QPSK	1 RB / 0 RB Offset

LTE Band 66

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	131979 to 132665	131979 (1710.7MHz), 132322 (1745.0MHz), 132665 (1779.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 2 RB Offset 1 RB / 5 RB Offset 3 RB / 0 RB Offset 3 RB / 1 RB Offset 3 RB / 3 RB Offset 6 RB / 0 RB Offset
		131987 to 132657	131987 (1711.5MHz), 132322 (1745.0MHz), 132657 (1778.5MHz)	3MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 7 RB Offset 1 RB / 14 RB Offset 8 RB / 0 RB Offset 8 RB / 3 RB Offset 8 RB / 7 RB Offset 15 RB / 0 RB Offset
		131997 to 132647	131997 (1712.5MHz), 132322 (1745.0MHz), 132647 (1777.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 12 RB Offset 1 RB / 24 RB Offset 12 RB / 0 RB Offset 12 RB / 6 RB Offset 12 RB / 13 RB Offset 25 RB / 0 RB Offset
		132022 to 132622	132022 (1715.0MHz), 132322 (1745.0MHz), 132622 (1775.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 1 RB / 49 RB Offset 25 RB / 0 RB Offset 25 RB / 12 RB Offset 25 RB / 25 RB Offset 50 RB / 0 RB Offset
		132047 to 132597	132047 (1717.5MHz), 132322 (1745.0MHz), 132597 (1772.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 37 RB Offset 1 RB / 74 RB Offset 36 RB / 0 RB Offset 36 RB / 19 RB Offset 36 RB / 39 RB Offset 75 RB / 0 RB Offset
		132072 to 132572	132072 (1720.0MHz), 132322 (1745.0MHz), 132572 (1770.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 50 RB Offset 1 RB / 99 RB Offset 50 RB / 0 RB Offset 50 RB / 25 RB Offset 50 RB / 50 RB Offset 100 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	132072 to 132572	132322 (1745.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	132072 to 132572	132322 (1745.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
ERP / EIRP	25deg. C, 70%RH	4.2Vdc	James Yang
Radiated Emission	22deg. C, 66%RH	120Vac, 60Hz	Jones Chang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and References:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-D-2010

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

For n71:

Control and mobile stations in the 698-746 MHz, 746-757 MHz, 787-788 MHz and 805-806 MHz band are limited to 30 watts ERP.

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink, 746-757 MHz, 787-788 MHz and 805-806 MHz band are limited to 3 watts ERP.

For LTE Band 2:

Mobile / Portable station are limited to 2 watts e.r.p.

For LTE Band 66:

Mobile / Portable station are limited to 1 watts e.i.r.p.

4.1.2 Test Procedures

Conducted Power Measurement:

1. Connect the DUT transmitter output to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
4. Set VBW $\geq 3 \times$ RBW.
5. Set number of points in sweep $\geq 2 \times$ span / RBW.
6. Sweep time = auto-couple.
7. Detector = RMS (power averaging).
8. If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
9. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
10. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
11. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

$$\text{ERP} = P_{\text{Meas}} + G_{\text{T}} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

Conducted Output Power (dBm)

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		134600	136100	137600
		Frequency (MHz)		673	680.5	688
20M	pi/2 BPSK	1	0	22.35	22.60	22.85
		1	53	23.17	23.29	23.61
		1	105	23.01	23.20	23.58
		53	0	22.75	22.73	23.03
		53	27	23.00	23.23	23.22
		53	53	23.43	23.44	23.39
		106	0	22.80	22.80	23.25
	QPSK	1	0	21.66	21.77	22.13
		1	53	22.33	22.52	22.84
		1	105	22.37	22.45	22.66
		53	0	21.89	21.93	22.40
		53	27	22.21	22.49	22.47
		53	53	22.54	22.52	22.63
		106	0	21.95	22.17	22.49
	16QAM	1	0	20.59	20.88	21.07
		1	53	21.46	21.53	21.75
		1	105	21.39	21.41	21.67
		53	0	20.97	20.96	21.31
		53	27	21.28	21.44	21.48
		53	53	21.51	21.67	21.53
		106	0	20.94	21.16	21.47
	64QAM	1	0	20.05	20.31	20.69
		1	53	20.94	20.93	21.30
		1	105	20.76	20.98	21.21
		53	0	20.43	20.57	20.73
		53	27	20.71	20.93	20.85
		53	53	21.01	21.17	21.14
		106	0	20.48	20.52	20.91
	256QAM	1	0	18.13	18.24	18.66
		1	53	18.88	19.07	19.39
1		105	18.88	18.96	19.17	
53		0	18.32	18.60	18.73	
53		27	18.79	19.00	18.82	
53		53	19.13	19.03	19.04	
106		0	18.58	18.60	18.93	

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		134100	136100	138100
		Frequency (MHz)		670.5	680.5	690.5
15M	pi/2 BPSK	1	0	22.48	22.62	22.88
		1	39	23.10	23.39	23.62
		1	78	23.18	23.29	23.60
		39	0	22.68	22.84	23.19
		39	19	23.05	23.11	23.18
		39	40	23.34	23.43	23.45
		79	0	22.82	22.91	23.30
	QPSK	1	0	21.65	21.85	22.10
		1	39	22.42	22.53	22.70
		1	78	22.26	22.34	22.73
		39	0	21.82	22.00	22.31
		39	19	22.24	22.31	22.42
		39	40	22.57	22.61	22.69
		79	0	22.10	22.18	22.41
	16QAM	1	0	20.53	20.80	21.06
		1	39	21.48	21.50	21.71
		1	78	21.26	21.32	21.70
		39	0	20.89	21.02	21.21
		39	19	21.21	21.43	21.35
		39	40	21.50	21.60	21.50
		79	0	20.95	21.17	21.56
	64QAM	1	0	20.14	20.28	20.62
		1	39	20.91	20.98	21.28
		1	78	20.83	20.82	21.20
		39	0	20.42	20.45	20.70
		39	19	20.77	20.80	20.89
		39	40	21.05	21.11	21.14
		79	0	20.45	20.55	21.03
	256QAM	1	0	18.17	18.39	18.52
		1	39	18.87	19.01	19.21
		1	78	18.87	18.83	19.17
		39	0	18.41	18.46	18.86
		39	19	18.89	18.97	18.92
		39	40	19.17	19.19	19.08
		79	0	18.57	18.60	19.02

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133600	136100	138600
		Frequency (MHz)		668	680.5	693
10M	pi/2 BPSK	1	0	22.35	22.70	22.83
		1	26	23.30	23.20	23.60
		1	51	23.06	23.20	23.54
		26	0	22.73	22.72	23.19
		26	13	23.10	23.22	23.12
		26	26	23.34	23.49	23.38
		52	0	22.72	22.80	23.36
	QPSK	1	0	21.64	21.72	22.03
		1	26	22.42	22.43	22.71
		1	51	22.20	22.30	22.63
		26	0	21.84	21.90	22.40
		26	13	22.30	22.46	22.48
		26	26	22.70	22.66	22.67
		52	0	21.96	22.03	22.50
	16QAM	1	0	20.52	20.81	21.08
		1	26	21.45	21.44	21.72
		1	51	21.26	21.32	21.74
		26	0	20.86	20.91	21.39
		26	13	21.20	21.30	21.32
		26	26	21.58	21.54	21.57
		52	0	20.97	21.07	21.52
	64QAM	1	0	20.05	20.33	20.64
		1	26	20.83	21.03	21.29
		1	51	20.90	20.92	21.24
		26	0	20.45	20.60	20.90
		26	13	20.76	20.86	20.81
		26	26	21.08	21.05	21.17
		52	0	20.58	20.65	20.97
	256QAM	1	0	18.12	18.38	18.50
		1	26	18.83	19.04	19.34
		1	51	18.88	18.89	19.13
		26	0	18.38	18.56	18.88
		26	13	18.86	18.95	18.98
		26	26	19.06	19.10	19.18
		52	0	18.58	18.55	19.09

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133100	136100	139100
		Frequency (MHz)		665.5	680.5	695.5
5M	pi/2 BPSK	1	0	22.31	22.50	22.95
		1	12	23.24	23.29	23.68
		1	24	23.06	23.17	23.45
		12	0	22.79	22.81	23.19
		12	6	23.07	23.24	23.11
		12	13	23.43	23.34	23.36
		25	0	22.74	23.00	23.22
	QPSK	1	0	21.68	21.85	22.07
		1	12	22.37	22.52	22.73
		1	24	22.21	22.39	22.60
		12	0	21.96	21.99	22.25
		12	6	22.38	22.32	22.40
		12	13	22.58	22.58	22.50
		25	0	22.07	22.16	22.41
	16QAM	1	0	20.61	20.70	21.04
		1	12	21.32	21.46	21.72
		1	24	21.25	21.37	21.71
		12	0	20.80	21.02	21.34
		12	6	21.29	21.43	21.47
		12	13	21.67	21.64	21.60
		25	0	20.95	21.07	21.46
	64QAM	1	0	20.10	20.24	20.66
		1	12	20.87	21.00	21.23
		1	24	20.75	20.92	21.27
		12	0	20.34	20.42	20.74
		12	6	20.87	20.82	20.94
		12	13	21.12	21.09	21.14
		25	0	20.44	20.62	21.04
	256QAM	1	0	18.00	18.23	18.68
		1	12	18.94	18.91	19.24
		1	24	18.73	18.99	19.22
		12	0	18.32	18.57	18.72
		12	6	18.81	18.97	18.81
		12	13	19.07	19.15	19.17
		25	0	18.50	18.59	18.95

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	22.72	22.45	22.35
		1	50	22.70	22.30	22.49
		1	99	22.53	22.58	22.48
		50	0	21.70	21.62	21.34
		50	25	21.79	21.70	21.38
		50	50	21.70	21.66	21.34
		100	0	21.43	21.45	21.34
	16QAM	1	0	21.72	21.50	21.27
		1	50	21.54	21.33	21.53
		1	99	21.65	21.48	21.58
		50	0	20.69	20.60	20.33
		50	25	20.73	20.68	20.37
		50	50	20.60	20.71	20.45
		100	0	20.51	20.56	20.34
	64QAM	1	0	20.77	20.44	20.33
		1	50	20.61	20.33	20.41
		1	99	20.55	20.49	20.50
		50	0	19.60	19.78	19.22
		50	25	19.80	19.72	19.49
		50	50	19.77	19.78	19.49
		100	0	19.40	19.53	19.36
	256QAM	1	0	18.77	18.44	18.25
		1	50	18.52	18.50	18.49
		1	99	18.53	18.59	18.49
		50	0	17.62	17.70	17.28
		50	25	17.62	17.63	17.33
		50	50	17.68	17.76	17.38
		100	0	17.51	17.46	17.33

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	22.69	22.31	22.40
		1	37	22.62	22.32	22.47
		1	74	22.54	22.56	22.50
		36	0	21.75	21.77	21.23
		36	19	21.65	21.62	21.30
		36	39	21.62	21.74	21.49
		75	0	21.58	21.52	21.39
	16QAM	1	0	21.80	21.46	21.24
		1	37	21.57	21.47	21.43
		1	74	21.57	21.48	21.52
		36	0	20.66	20.75	20.23
		36	19	20.76	20.64	20.46
		36	39	20.71	20.74	20.36
		75	0	20.42	20.58	20.28
	64QAM	1	0	20.71	20.42	20.37
		1	37	20.63	20.43	20.59
		1	74	20.66	20.50	20.52
		36	0	19.68	19.74	19.25
		36	19	19.61	19.65	19.33
		36	39	19.60	19.79	19.50
		75	0	19.58	19.43	19.35
	256QAM	1	0	18.72	18.32	18.33
		1	37	18.60	18.45	18.41
		1	74	18.70	18.44	18.59
		36	0	17.62	17.74	17.34
		36	19	17.62	17.63	17.33
		36	39	17.68	17.67	17.45
		75	0	17.58	17.43	17.21

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	22.64	22.49	22.26
		1	24	22.62	22.49	22.54
		1	49	22.61	22.54	22.41
		25	0	21.71	21.61	21.33
		25	12	21.68	21.63	21.45
		25	25	21.60	21.77	21.33
		50	0	21.58	21.51	21.34
	16QAM	1	0	21.61	21.36	21.37
		1	24	21.59	21.41	21.45
		1	49	21.61	21.43	21.60
		25	0	20.61	20.63	20.20
		25	12	20.80	20.67	20.38
		25	25	20.76	20.67	20.45
		50	0	20.44	20.57	20.23
	64QAM	1	0	20.63	20.44	20.36
		1	24	20.51	20.44	20.44
		1	49	20.57	20.57	20.58
		25	0	19.65	19.72	19.38
		25	12	19.64	19.79	19.46
		25	25	19.77	19.76	19.46
		50	0	19.54	19.58	19.27
	256QAM	1	0	18.71	18.41	18.35
		1	24	18.55	18.44	18.55
		1	49	18.58	18.49	18.57
		25	0	17.68	17.74	17.32
		25	12	17.72	17.62	17.50
		25	25	17.75	17.73	17.39
		50	0	17.49	17.47	17.33

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	22.60	22.38	22.32
		1	12	22.68	22.30	22.41
		1	24	22.59	22.51	22.55
		12	0	21.74	21.68	21.29
		12	6	21.61	21.61	21.41
		12	13	21.73	21.69	21.47
		25	0	21.49	21.56	21.36
	16QAM	1	0	21.67	21.40	21.31
		1	12	21.59	21.38	21.42
		1	24	21.64	21.47	21.49
		12	0	20.75	20.80	20.25
		12	6	20.60	20.76	20.48
		12	13	20.78	20.80	20.50
		25	0	20.43	20.57	20.26
	64QAM	1	0	20.67	20.38	20.22
		1	12	20.54	20.41	20.47
		1	24	20.63	20.47	20.54
		12	0	19.73	19.64	19.23
		12	6	19.78	19.68	19.48
		12	13	19.79	19.80	19.41
		25	0	19.52	19.54	19.30
	256QAM	1	0	18.70	18.49	18.21
		1	12	18.68	18.34	18.56
		1	24	18.53	18.53	18.60
		12	0	17.79	17.69	17.26
		12	6	17.60	17.80	17.34
		12	13	17.61	17.77	17.50
		25	0	17.43	17.42	17.31

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	22.77	22.48	22.23
		1	7	22.66	22.47	22.54
		1	14	22.57	22.59	22.44
		8	0	21.76	21.71	21.35
		8	3	21.78	21.79	21.45
		8	7	21.63	21.60	21.44
		15	0	21.46	21.42	21.21
	16QAM	1	0	21.71	21.41	21.37
		1	7	21.56	21.43	21.56
		1	14	21.52	21.57	21.59
		8	0	20.60	20.72	20.27
		8	3	20.69	20.78	20.49
		8	7	20.72	20.65	20.46
		15	0	20.54	20.53	20.21
	64QAM	1	0	20.68	20.35	20.29
		1	7	20.60	20.48	20.42
		1	14	20.70	20.48	20.47
		8	0	19.66	19.70	19.31
		8	3	19.80	19.63	19.40
		8	7	19.68	19.73	19.36
		15	0	19.44	19.51	19.33
	256QAM	1	0	18.61	18.38	18.26
		1	7	18.67	18.40	18.49
		1	14	18.64	18.46	18.54
		8	0	17.75	17.63	17.34
		8	3	17.66	17.71	17.41
		8	7	17.76	17.61	17.49
		15	0	17.46	17.43	17.28

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	22.72	22.31	22.33
		1	2	22.59	22.43	22.60
		1	5	22.55	22.55	22.59
		3	0	21.65	21.73	21.38
		3	1	21.80	21.60	21.35
		3	3	21.74	21.76	21.44
		6	0	21.59	21.44	21.31
	16QAM	1	0	21.66	21.48	21.27
		1	2	21.54	21.43	21.54
		1	5	21.62	21.43	21.41
		3	0	20.80	20.80	20.28
		3	1	20.62	20.74	20.44
		3	3	20.79	20.73	20.50
		6	0	20.58	20.40	20.23
	64QAM	1	0	20.80	20.50	20.28
		1	2	20.59	20.44	20.58
		1	5	20.70	20.49	20.50
		3	0	19.78	19.79	19.39
		3	1	19.72	19.60	19.42
		3	3	19.77	19.69	19.48
		6	0	19.42	19.48	19.32
	256QAM	1	0	18.66	18.44	18.28
		1	2	18.63	18.46	18.57
		1	5	18.61	18.56	18.50
		3	0	17.74	17.63	17.27
		3	1	17.62	17.68	17.50
		3	3	17.71	17.63	17.31
		6	0	17.53	17.58	17.40

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132072	132322	132575
		Frequency (MHz)		1720	1745	1770
20M	QPSK	1	0	22.96	22.41	22.36
		1	50	22.63	22.45	22.43
		1	99	22.77	22.41	22.44
		50	0	21.70	21.78	21.29
		50	25	21.60	21.76	21.44
		50	50	21.77	21.67	21.37
		100	0	21.70	21.46	21.21
	16QAM	1	0	21.96	21.43	21.46
		1	50	21.56	21.43	21.40
		1	99	21.77	21.40	21.50
		50	0	20.64	20.68	20.22
		50	25	20.60	20.62	20.34
		50	50	20.78	20.77	20.40
		100	0	20.57	20.38	20.25
	64QAM	1	0	20.93	20.34	20.50
		1	50	20.66	20.45	20.51
		1	99	20.78	20.42	20.58
		50	0	19.71	19.72	19.28
		50	25	19.76	19.64	19.32
		50	50	19.63	19.61	19.39
		100	0	19.62	19.50	19.23
	256QAM	1	0	18.89	18.42	18.35
		1	50	18.64	18.40	18.55
		1	99	18.74	18.43	18.49
		50	0	17.70	17.78	17.25
		50	25	17.73	17.77	17.44
		50	50	17.77	17.67	17.30
		100	0	17.55	17.34	17.39

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132047	132322	132597
		Frequency (MHz)		1717.5	1745	1772.5
15M	QPSK	1	0	22.93	22.50	22.50
		1	37	22.64	22.43	22.51
		1	74	22.71	22.41	22.40
		36	0	21.66	21.64	21.30
		36	19	21.75	21.80	21.48
		36	39	21.66	21.75	21.43
		75	0	21.59	21.35	21.38
	16QAM	1	0	21.83	21.50	21.35
		1	37	21.61	21.46	21.58
		1	74	21.79	21.48	21.43
		36	0	20.60	20.60	20.26
		36	19	20.63	20.77	20.38
		36	39	20.71	20.76	20.49
		75	0	20.69	20.49	20.37
	64QAM	1	0	20.84	20.30	20.47
		1	37	20.67	20.41	20.47
		1	74	20.68	20.60	20.59
		36	0	19.64	19.62	19.23
		36	19	19.79	19.71	19.43
		36	39	19.63	19.65	19.44
		75	0	19.70	19.46	19.37
	256QAM	1	0	18.84	18.44	18.35
		1	37	18.65	18.56	18.52
		1	74	18.77	18.41	18.42
		36	0	17.72	17.61	17.27
		36	19	17.69	17.75	17.35
		36	39	17.69	17.76	17.49
		75	0	17.67	17.49	17.36

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132022	132322	132622
		Frequency (MHz)		1715	1745	1775
10M	QPSK	1	0	22.87	22.49	22.48
		1	24	22.55	22.55	22.50
		1	49	22.75	22.50	22.52
		25	0	21.60	21.63	21.27
		25	12	21.62	21.76	21.30
		25	25	21.73	21.72	21.45
		50	0	21.66	21.30	21.29
	16QAM	1	0	21.86	21.41	21.37
		1	24	21.66	21.51	21.58
		1	49	21.66	21.50	21.41
		25	0	20.71	20.70	20.21
		25	12	20.61	20.61	20.38
		25	25	20.78	20.80	20.37
		50	0	20.69	20.48	20.32
	64QAM	1	0	20.80	20.44	20.44
		1	24	20.63	20.58	20.51
		1	49	20.67	20.52	20.59
		25	0	19.64	19.60	19.25
		25	12	19.78	19.71	19.37
		25	25	19.74	19.64	19.45
		50	0	19.66	19.31	19.35
	256QAM	1	0	18.98	18.44	18.37
		1	24	18.61	18.44	18.50
		1	49	18.69	18.59	18.40
		25	0	17.62	17.75	17.28
		25	12	17.71	17.63	17.40
		25	25	17.80	17.78	17.44
		50	0	17.56	17.45	17.33

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131997	132322	132647
		Frequency (MHz)		1712.5	1745	1777.5
5M	QPSK	1	0	22.82	22.38	22.30
		1	12	22.69	22.41	22.41
		1	24	22.67	22.49	22.46
		12	0	21.74	21.72	21.27
		12	6	21.64	21.64	21.42
		12	13	21.60	21.66	21.32
		25	0	21.56	21.34	21.32
	16QAM	1	0	21.84	21.38	21.47
		1	12	21.54	21.41	21.51
		1	24	21.75	21.60	21.48
		12	0	20.74	20.66	20.30
		12	6	20.76	20.61	20.36
		12	13	20.78	20.62	20.50
		25	0	20.60	20.45	20.31
	64QAM	1	0	20.80	20.41	20.49
		1	12	20.54	20.47	20.41
		1	24	20.71	20.60	20.54
		12	0	19.66	19.72	19.25
		12	6	19.70	19.78	19.48
		12	13	19.78	19.61	19.41
		25	0	19.63	19.43	19.37
	256QAM	1	0	18.92	18.44	18.36
		1	12	18.70	18.53	18.42
		1	24	18.69	18.45	18.49
		12	0	17.63	17.74	17.23
		12	6	17.74	17.78	17.40
		12	13	17.72	17.78	17.47
		25	0	17.70	17.44	17.26

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131987	132322	132657
		Frequency (MHz)		1711.5	1745	1778.5
3M	QPSK	1	0	22.92	22.47	22.38
		1	7	22.65	22.49	22.55
		1	14	22.69	22.51	22.47
		8	0	21.68	21.69	21.22
		8	3	21.76	21.60	21.36
		8	7	21.60	21.70	21.47
		15	0	21.55	21.38	21.26
	16QAM	1	0	21.81	21.35	21.39
		1	7	21.53	21.53	21.54
		1	14	21.60	21.58	21.53
		8	0	20.68	20.76	20.25
		8	3	20.68	20.78	20.37
		8	7	20.62	20.66	20.50
		15	0	20.51	20.50	20.30
	64QAM	1	0	20.84	20.34	20.31
		1	7	20.69	20.45	20.48
		1	14	20.70	20.46	20.48
		8	0	19.78	19.69	19.23
		8	3	19.73	19.66	19.48
		8	7	19.62	19.65	19.34
		15	0	19.50	19.48	19.35
	256QAM	1	0	18.94	18.34	18.46
		1	7	18.62	18.58	18.58
		1	14	18.75	18.49	18.60
		8	0	17.74	17.79	17.28
		8	3	17.69	17.72	17.48
		8	7	17.72	17.71	17.48
		15	0	17.69	17.44	17.25

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131979	132322	132665
		Frequency (MHz)		1710.7	1745	1779.3
1.4M	QPSK	1	0	22.92	22.48	22.47
		1	2	22.50	22.50	22.57
		1	5	22.62	22.56	22.60
		3	0	21.73	21.79	21.25
		3	1	21.70	21.70	21.42
		3	3	21.75	21.79	21.33
		6	0	21.54	21.34	21.32
	16QAM	1	0	21.97	21.43	21.30
		1	2	21.61	21.40	21.59
		1	5	21.74	21.48	21.58
		3	0	20.79	20.73	20.30
		3	1	20.65	20.63	20.49
		3	3	20.61	20.80	20.31
		6	0	20.69	20.35	20.25
	64QAM	1	0	20.94	20.32	20.32
		1	2	20.56	20.43	20.52
		1	5	20.70	20.45	20.51
		3	0	19.72	19.78	19.27
		3	1	19.77	19.70	19.30
		3	3	19.64	19.79	19.32
		6	0	19.57	19.50	19.37
	256QAM	1	0	18.81	18.47	18.37
		1	2	18.69	18.60	18.48
		1	5	18.70	18.52	18.52
		3	0	17.64	17.61	17.28
		3	1	17.80	17.61	17.35
		3	3	17.68	17.71	17.36
		6	0	17.69	17.30	17.25

ERP Power (dBm)

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		134600	136100	137600
		Frequency (MHz)		673	680.5	688
20M	pi/2 BPSK	1	0	21.92	22.17	22.42
		1	53	22.74	22.86	23.18
		1	105	22.58	22.77	23.15
		53	0	22.32	22.30	22.60
		53	27	22.57	22.80	22.79
		53	53	23.00	23.01	22.96
		106	0	22.37	22.37	22.82
	QPSK	1	0	21.23	21.34	21.70
		1	53	21.90	22.09	22.41
		1	105	21.94	22.02	22.23
		53	0	21.46	21.50	21.97
		53	27	21.78	22.06	22.04
		53	53	22.11	22.09	22.20
		106	0	21.52	21.74	22.06
	16QAM	1	0	20.16	20.45	20.64
		1	53	21.03	21.10	21.32
		1	105	20.96	20.98	21.24
		53	0	20.54	20.53	20.88
		53	27	20.85	21.01	21.05
		53	53	21.08	21.24	21.10
		106	0	20.51	20.73	21.04
	64QAM	1	0	19.62	19.88	20.26
		1	53	20.51	20.50	20.87
		1	105	20.33	20.55	20.78
		53	0	20.00	20.14	20.30
		53	27	20.28	20.50	20.42
		53	53	20.58	20.74	20.71
		106	0	20.05	20.09	20.48
	256QAM	1	0	17.70	17.81	18.23
		1	53	18.45	18.64	18.96
1		105	18.45	18.53	18.74	
53		0	17.89	18.17	18.30	
53		27	18.36	18.57	18.39	
53		53	18.70	18.60	18.61	
106		0	18.15	18.17	18.50	

*ERP = Conducted + antenna gain - 2.15

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		134100	136100	138100
		Frequency (MHz)		670.5	680.5	690.5
15M	pi/2 BPSK	1	0	22.05	22.19	22.45
		1	39	22.67	22.96	23.19
		1	78	22.75	22.86	23.17
		39	0	22.25	22.41	22.76
		39	19	22.62	22.68	22.75
		39	40	22.91	23.00	23.02
		79	0	22.39	22.48	22.87
	QPSK	1	0	21.22	21.42	21.67
		1	39	21.99	22.10	22.27
		1	78	21.83	21.91	22.30
		39	0	21.39	21.57	21.88
		39	19	21.81	21.88	21.99
		39	40	22.14	22.18	22.26
		79	0	21.67	21.75	21.98
	16QAM	1	0	20.10	20.37	20.63
		1	39	21.05	21.07	21.28
		1	78	20.83	20.89	21.27
		39	0	20.46	20.59	20.78
		39	19	20.78	21.00	20.92
		39	40	21.07	21.17	21.07
		79	0	20.52	20.74	21.13
	64QAM	1	0	19.71	19.85	20.19
		1	39	20.48	20.55	20.85
		1	78	20.40	20.39	20.77
		39	0	19.99	20.02	20.27
		39	19	20.34	20.37	20.46
		39	40	20.62	20.68	20.71
		79	0	20.02	20.12	20.60
	256QAM	1	0	17.74	17.96	18.09
		1	39	18.44	18.58	18.78
		1	78	18.44	18.40	18.74
		39	0	17.98	18.03	18.43
		39	19	18.46	18.54	18.49
		39	40	18.74	18.76	18.65
		79	0	18.14	18.17	18.59

*ERP = Conducted + antenna gain - 2.15

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133600	136100	138600
		Frequency (MHz)		668	680.5	693
10M	pi/2 BPSK	1	0	21.92	22.27	22.40
		1	26	22.87	22.77	23.17
		1	51	22.63	22.77	23.11
		26	0	22.30	22.29	22.76
		26	13	22.67	22.79	22.69
		26	26	22.91	23.06	22.95
		52	0	22.29	22.37	22.93
	QPSK	1	0	21.21	21.29	21.60
		1	26	21.99	22.00	22.28
		1	51	21.77	21.87	22.20
		26	0	21.41	21.47	21.97
		26	13	21.87	22.03	22.05
		26	26	22.27	22.23	22.24
		52	0	21.53	21.60	22.07
	16QAM	1	0	20.09	20.38	20.65
		1	26	21.02	21.01	21.29
		1	51	20.83	20.89	21.31
		26	0	20.43	20.48	20.96
		26	13	20.77	20.87	20.89
		26	26	21.15	21.11	21.14
		52	0	20.54	20.64	21.09
	64QAM	1	0	19.62	19.90	20.21
		1	26	20.40	20.60	20.86
		1	51	20.47	20.49	20.81
		26	0	20.02	20.17	20.47
		26	13	20.33	20.43	20.38
		26	26	20.65	20.62	20.74
		52	0	20.15	20.22	20.54
	256QAM	1	0	17.69	17.95	18.07
		1	26	18.40	18.61	18.91
		1	51	18.45	18.46	18.70
		26	0	17.95	18.13	18.45
		26	13	18.43	18.52	18.55
		26	26	18.63	18.67	18.75
		52	0	18.15	18.12	18.66

*ERP = Conducted + antenna gain - 2.15

NR Band 71 (SCS 15kHz)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133100	136100	139100
		Frequency (MHz)		665.5	680.5	695.5
5M	pi/2 BPSK	1	0	21.88	22.07	22.52
		1	12	22.81	22.86	23.25
		1	24	22.63	22.74	23.02
		12	0	22.36	22.38	22.76
		12	6	22.64	22.81	22.68
		12	13	23.00	22.91	22.93
		25	0	22.31	22.57	22.79
	QPSK	1	0	21.25	21.42	21.64
		1	12	21.94	22.09	22.30
		1	24	21.78	21.96	22.17
		12	0	21.53	21.56	21.82
		12	6	21.95	21.89	21.97
		12	13	22.15	22.15	22.07
		25	0	21.64	21.73	21.98
	16QAM	1	0	20.18	20.27	20.61
		1	12	20.89	21.03	21.29
		1	24	20.82	20.94	21.28
		12	0	20.37	20.59	20.91
		12	6	20.86	21.00	21.04
		12	13	21.24	21.21	21.17
		25	0	20.52	20.64	21.03
	64QAM	1	0	19.67	19.81	20.23
		1	12	20.44	20.57	20.80
		1	24	20.32	20.49	20.84
		12	0	19.91	19.99	20.31
		12	6	20.44	20.39	20.51
		12	13	20.69	20.66	20.71
		25	0	20.01	20.19	20.61
	256QAM	1	0	17.57	17.80	18.25
		1	12	18.51	18.48	18.81
		1	24	18.30	18.56	18.79
		12	0	17.89	18.14	18.29
		12	6	18.38	18.54	18.38
		12	13	18.64	18.72	18.74
		25	0	18.07	18.16	18.52

*ERP = Conducted + antenna gain - 2.15

EIRP Power (dBm)

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	25.64	25.37	25.27
		1	50	25.62	25.22	25.41
		1	99	25.45	25.50	25.40
		50	0	24.62	24.54	24.26
		50	25	24.71	24.62	24.30
		50	50	24.62	24.58	24.26
		100	0	24.35	24.37	24.26
	16QAM	1	0	24.64	24.42	24.19
		1	50	24.46	24.25	24.45
		1	99	24.57	24.40	24.50
		50	0	23.61	23.52	23.25
		50	25	23.65	23.60	23.29
		50	50	23.52	23.63	23.37
		100	0	23.43	23.48	23.26
	64QAM	1	0	23.69	23.36	23.25
		1	50	23.53	23.25	23.33
		1	99	23.47	23.41	23.42
		50	0	22.52	22.70	22.14
		50	25	22.72	22.64	22.41
		50	50	22.69	22.70	22.41
		100	0	22.32	22.45	22.28
	256QAM	1	0	21.69	21.36	21.17
		1	50	21.44	21.42	21.41
		1	99	21.45	21.51	21.41
		50	0	20.54	20.62	20.20
		50	25	20.54	20.55	20.25
		50	50	20.60	20.68	20.30
		100	0	20.43	20.38	20.25

*EIRP = Conducted + antenna gain

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	25.61	25.23	25.32
		1	37	25.54	25.24	25.39
		1	74	25.46	25.48	25.42
		36	0	24.67	24.69	24.15
		36	19	24.57	24.54	24.22
		36	39	24.54	24.66	24.41
		75	0	24.50	24.44	24.31
	16QAM	1	0	24.72	24.38	24.16
		1	37	24.49	24.39	24.35
		1	74	24.49	24.40	24.44
		36	0	23.58	23.67	23.15
		36	19	23.68	23.56	23.38
		36	39	23.63	23.66	23.28
		75	0	23.34	23.50	23.20
	64QAM	1	0	23.63	23.34	23.29
		1	37	23.55	23.35	23.51
		1	74	23.58	23.42	23.44
		36	0	22.60	22.66	22.17
		36	19	22.53	22.57	22.25
		36	39	22.52	22.71	22.42
		75	0	22.50	22.35	22.27
	256QAM	1	0	21.64	21.24	21.25
		1	37	21.52	21.37	21.33
		1	74	21.62	21.36	21.51
36		0	20.54	20.66	20.26	
36		19	20.54	20.55	20.25	
36		39	20.60	20.59	20.37	
75		0	20.50	20.35	20.13	

*EIRP = Conducted + antenna gain

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	25.56	25.41	25.18
		1	24	25.54	25.41	25.46
		1	49	25.53	25.46	25.33
		25	0	24.63	24.53	24.25
		25	12	24.60	24.55	24.37
		25	25	24.52	24.69	24.25
		50	0	24.50	24.43	24.26
	16QAM	1	0	24.53	24.28	24.29
		1	24	24.51	24.33	24.37
		1	49	24.53	24.35	24.52
		25	0	23.53	23.55	23.12
		25	12	23.72	23.59	23.30
		25	25	23.68	23.59	23.37
		50	0	23.36	23.49	23.15
	64QAM	1	0	23.55	23.36	23.28
		1	24	23.43	23.36	23.36
		1	49	23.49	23.49	23.50
		25	0	22.57	22.64	22.30
		25	12	22.56	22.71	22.38
		25	25	22.69	22.68	22.38
		50	0	22.46	22.50	22.19
	256QAM	1	0	21.63	21.33	21.27
		1	24	21.47	21.36	21.47
		1	49	21.50	21.41	21.49
		25	0	20.60	20.66	20.24
		25	12	20.64	20.54	20.42
		25	25	20.67	20.65	20.31
		50	0	20.41	20.39	20.25

*EIRP = Conducted + antenna gain

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	25.52	25.30	25.24
		1	12	25.60	25.22	25.33
		1	24	25.51	25.43	25.47
		12	0	24.66	24.60	24.21
		12	6	24.53	24.53	24.33
		12	13	24.65	24.61	24.39
		25	0	24.41	24.48	24.28
	16QAM	1	0	24.59	24.32	24.23
		1	12	24.51	24.30	24.34
		1	24	24.56	24.39	24.41
		12	0	23.67	23.72	23.17
		12	6	23.52	23.68	23.40
		12	13	23.70	23.72	23.42
		25	0	23.35	23.49	23.18
	64QAM	1	0	23.59	23.30	23.14
		1	12	23.46	23.33	23.39
		1	24	23.55	23.39	23.46
		12	0	22.65	22.56	22.15
		12	6	22.70	22.60	22.40
		12	13	22.71	22.72	22.33
		25	0	22.44	22.46	22.22
	256QAM	1	0	21.62	21.41	21.13
		1	12	21.60	21.26	21.48
		1	24	21.45	21.45	21.52
		12	0	20.71	20.61	20.18
		12	6	20.52	20.72	20.26
		12	13	20.53	20.69	20.42
		25	0	20.35	20.34	20.23

*EIRP = Conducted + antenna gain

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	25.69	25.40	25.15
		1	7	25.58	25.39	25.46
		1	14	25.49	25.51	25.36
		8	0	24.68	24.63	24.27
		8	3	24.70	24.71	24.37
		8	7	24.55	24.52	24.36
		15	0	24.38	24.34	24.13
	16QAM	1	0	24.63	24.33	24.29
		1	7	24.48	24.35	24.48
		1	14	24.44	24.49	24.51
		8	0	23.52	23.64	23.19
		8	3	23.61	23.70	23.41
		8	7	23.64	23.57	23.38
		15	0	23.46	23.45	23.13
	64QAM	1	0	23.60	23.27	23.21
		1	7	23.52	23.40	23.34
		1	14	23.62	23.40	23.39
		8	0	22.58	22.62	22.23
		8	3	22.72	22.55	22.32
		8	7	22.60	22.65	22.28
		15	0	22.36	22.43	22.25
	256QAM	1	0	21.53	21.30	21.18
		1	7	21.59	21.32	21.41
		1	14	21.56	21.38	21.46
		8	0	20.67	20.55	20.26
		8	3	20.58	20.63	20.33
		8	7	20.68	20.53	20.41
		15	0	20.38	20.35	20.20

*EIRP = Conducted + antenna gain

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	25.64	25.23	25.25
		1	2	25.51	25.35	25.52
		1	5	25.47	25.47	25.51
		3	0	24.57	24.65	24.30
		3	1	24.72	24.52	24.27
		3	3	24.66	24.68	24.36
		6	0	24.51	24.36	24.23
	16QAM	1	0	24.58	24.40	24.19
		1	2	24.46	24.35	24.46
		1	5	24.54	24.35	24.33
		3	0	23.72	23.72	23.20
		3	1	23.54	23.66	23.36
		3	3	23.71	23.65	23.42
		6	0	23.50	23.32	23.15
	64QAM	1	0	23.72	23.42	23.20
		1	2	23.51	23.36	23.50
		1	5	23.62	23.41	23.42
		3	0	22.70	22.71	22.31
		3	1	22.64	22.52	22.34
		3	3	22.69	22.61	22.40
		6	0	22.34	22.40	22.24
	256QAM	1	0	21.58	21.36	21.20
		1	2	21.55	21.38	21.49
		1	5	21.53	21.48	21.42
		3	0	20.66	20.55	20.19
		3	1	20.54	20.60	20.42
		3	3	20.63	20.55	20.23
		6	0	20.45	20.50	20.32

*EIRP = Conducted + antenna gain

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132072	132322	132575
		Frequency (MHz)		1720	1745	1770
20M	QPSK	1	0	26.40	25.85	25.80
		1	50	26.07	25.89	25.87
		1	99	26.21	25.85	25.88
		50	0	25.14	25.22	24.73
		50	25	25.04	25.20	24.88
		50	50	25.21	25.11	24.81
		100	0	25.14	24.90	24.65
	16QAM	1	0	25.40	24.87	24.90
		1	50	25.00	24.87	24.84
		1	99	25.21	24.84	24.94
		50	0	24.08	24.12	23.66
		50	25	24.04	24.06	23.78
		50	50	24.22	24.21	23.84
		100	0	24.01	23.82	23.69
	64QAM	1	0	24.37	23.78	23.94
		1	50	24.10	23.89	23.95
		1	99	24.22	23.86	24.02
		50	0	23.15	23.16	22.72
		50	25	23.20	23.08	22.76
		50	50	23.07	23.05	22.83
		100	0	23.06	22.94	22.67
	256QAM	1	0	22.33	21.86	21.79
		1	50	22.08	21.84	21.99
		1	99	22.18	21.87	21.93
		50	0	21.14	21.22	20.69
		50	25	21.17	21.21	20.88
		50	50	21.21	21.11	20.74
		100	0	20.99	20.78	20.83

*EIRP = Conducted + antenna gain

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132047	132322	132597
		Frequency (MHz)		1717.5	1745	1772.5
15M	QPSK	1	0	26.37	25.94	25.94
		1	37	26.08	25.87	25.95
		1	74	26.15	25.85	25.84
		36	0	25.10	25.08	24.74
		36	19	25.19	25.24	24.92
		36	39	25.10	25.19	24.87
		75	0	25.03	24.79	24.82
	16QAM	1	0	25.27	24.94	24.79
		1	37	25.05	24.90	25.02
		1	74	25.23	24.92	24.87
		36	0	24.04	24.04	23.70
		36	19	24.07	24.21	23.82
		36	39	24.15	24.20	23.93
		75	0	24.13	23.93	23.81
	64QAM	1	0	24.28	23.74	23.91
		1	37	24.11	23.85	23.91
		1	74	24.12	24.04	24.03
		36	0	23.08	23.06	22.67
		36	19	23.23	23.15	22.87
		36	39	23.07	23.09	22.88
		75	0	23.14	22.90	22.81
	256QAM	1	0	22.28	21.88	21.79
		1	37	22.09	22.00	21.96
		1	74	22.21	21.85	21.86
		36	0	21.16	21.05	20.71
		36	19	21.13	21.19	20.79
		36	39	21.13	21.20	20.93
		75	0	21.11	20.93	20.80

*EIRP = Conducted + antenna gain

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132022	132322	132622
		Frequency (MHz)		1715	1745	1775
10M	QPSK	1	0	26.31	25.93	25.92
		1	24	25.99	25.99	25.94
		1	49	26.19	25.94	25.96
		25	0	25.04	25.07	24.71
		25	12	25.06	25.20	24.74
		25	25	25.17	25.16	24.89
		50	0	25.10	24.74	24.73
	16QAM	1	0	25.30	24.85	24.81
		1	24	25.10	24.95	25.02
		1	49	25.10	24.94	24.85
		25	0	24.15	24.14	23.65
		25	12	24.05	24.05	23.82
		25	25	24.22	24.24	23.81
		50	0	24.13	23.92	23.76
	64QAM	1	0	24.24	23.88	23.88
		1	24	24.07	24.02	23.95
		1	49	24.11	23.96	24.03
		25	0	23.08	23.04	22.69
		25	12	23.22	23.15	22.81
		25	25	23.18	23.08	22.89
		50	0	23.10	22.75	22.79
	256QAM	1	0	22.42	21.88	21.81
		1	24	22.05	21.88	21.94
		1	49	22.13	22.03	21.84
		25	0	21.06	21.19	20.72
		25	12	21.15	21.07	20.84
		25	25	21.24	21.22	20.88
		50	0	21.00	20.89	20.77

*EIRP = Conducted + antenna gain

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131997	132322	132647
		Frequency (MHz)		1712.5	1745	1777.5
5M	QPSK	1	0	26.26	25.82	25.74
		1	12	26.13	25.85	25.85
		1	24	26.11	25.93	25.90
		12	0	25.18	25.16	24.71
		12	6	25.08	25.08	24.86
		12	13	25.04	25.10	24.76
		25	0	25.00	24.78	24.76
	16QAM	1	0	25.28	24.82	24.91
		1	12	24.98	24.85	24.95
		1	24	25.19	25.04	24.92
		12	0	24.18	24.10	23.74
		12	6	24.20	24.05	23.80
		12	13	24.22	24.06	23.94
		25	0	24.04	23.89	23.75
	64QAM	1	0	24.24	23.85	23.93
		1	12	23.98	23.91	23.85
		1	24	24.15	24.04	23.98
		12	0	23.10	23.16	22.69
		12	6	23.14	23.22	22.92
		12	13	23.22	23.05	22.85
		25	0	23.07	22.87	22.81
	256QAM	1	0	22.36	21.88	21.80
		1	12	22.14	21.97	21.86
		1	24	22.13	21.89	21.93
		12	0	21.07	21.18	20.67
		12	6	21.18	21.22	20.84
		12	13	21.16	21.22	20.91
		25	0	21.14	20.88	20.70

*EIRP = Conducted + antenna gain

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131987	132322	132657
		Frequency (MHz)		1711.5	1745	1778.5
3M	QPSK	1	0	26.36	25.91	25.82
		1	7	26.09	25.93	25.99
		1	14	26.13	25.95	25.91
		8	0	25.12	25.13	24.66
		8	3	25.20	25.04	24.80
		8	7	25.04	25.14	24.91
		15	0	24.99	24.82	24.70
	16QAM	1	0	25.25	24.79	24.83
		1	7	24.97	24.97	24.98
		1	14	25.04	25.02	24.97
		8	0	24.12	24.20	23.69
		8	3	24.12	24.22	23.81
		8	7	24.06	24.10	23.94
		15	0	23.95	23.94	23.74
	64QAM	1	0	24.28	23.78	23.75
		1	7	24.13	23.89	23.92
		1	14	24.14	23.90	23.92
		8	0	23.22	23.13	22.67
		8	3	23.17	23.10	22.92
		8	7	23.06	23.09	22.78
		15	0	22.94	22.92	22.79
	256QAM	1	0	22.38	21.78	21.90
		1	7	22.06	22.02	22.02
		1	14	22.19	21.93	22.04
		8	0	21.18	21.23	20.72
		8	3	21.13	21.16	20.92
		8	7	21.16	21.15	20.92
		15	0	21.13	20.88	20.69

*EIRP = Conducted + antenna gain

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131979	132322	132665
		Frequency (MHz)		1710.7	1745	1779.3
1.4M	QPSK	1	0	26.36	25.92	25.91
		1	2	25.94	25.94	26.01
		1	5	26.06	26.00	26.04
		3	0	25.17	25.23	24.69
		3	1	25.14	25.14	24.86
		3	3	25.19	25.23	24.77
		6	0	24.98	24.78	24.76
	16QAM	1	0	25.41	24.87	24.74
		1	2	25.05	24.84	25.03
		1	5	25.18	24.92	25.02
		3	0	24.23	24.17	23.74
		3	1	24.09	24.07	23.93
		3	3	24.05	24.24	23.75
		6	0	24.13	23.79	23.69
	64QAM	1	0	24.38	23.76	23.76
		1	2	24.00	23.87	23.96
		1	5	24.14	23.89	23.95
		3	0	23.16	23.22	22.71
		3	1	23.21	23.14	22.74
		3	3	23.08	23.23	22.76
		6	0	23.01	22.94	22.81
	256QAM	1	0	22.25	21.91	21.81
		1	2	22.13	22.04	21.92
		1	5	22.14	21.96	21.96
		3	0	21.08	21.05	20.72
		3	1	21.24	21.05	20.79
		3	3	21.12	21.15	20.80
		6	0	21.13	20.74	20.69

*EIRP = Conducted + antenna gain

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

For n71:

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

For LTE Band 2:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For LTE Band 66:

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. Correction Factor (includes EIRP and ERP unit conversion factor) = Antenna gain of substitution horn. – Tx cable loss. Measurement method refers to ANSI C63.26 section 5.5.3.2.
- c. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}$.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz: The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

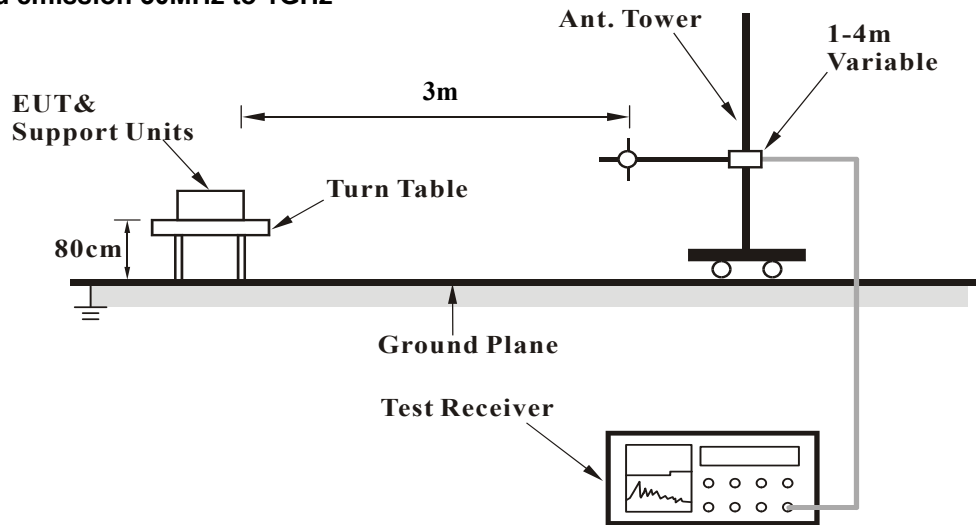

For radiated emission above 1GHz

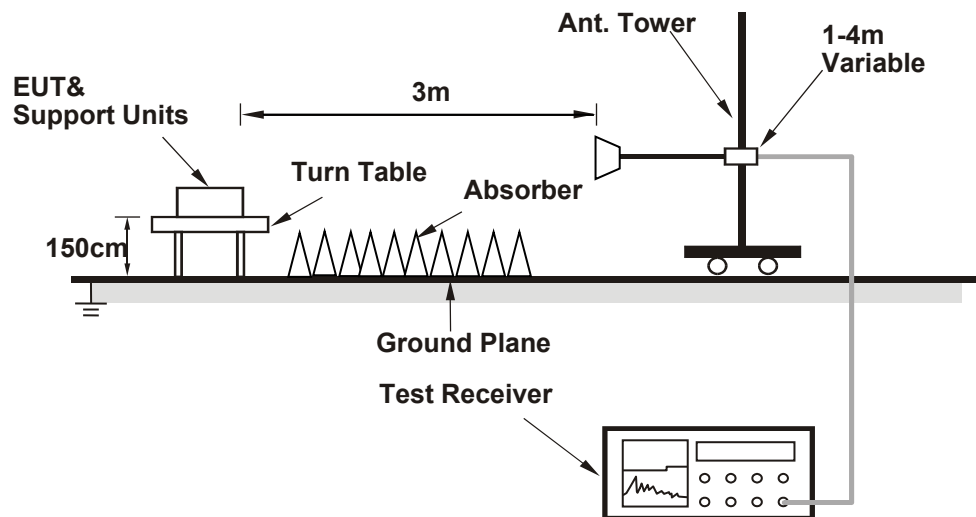

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Below 1GHz


n71, Channel Bandwidth: 20MHz

Mode	TX channel 136100 (680.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.35	-48.70	-28.20	-17.50	-45.70	-13.00	-32.70
2	101.56	-44.00	-50.70	-1.60	-52.30	-13.00	-39.30
3	255.69	-50.20	-54.00	-1.50	-55.50	-13.00	-42.50
4	392.69	-58.50	-62.20	3.30	-58.90	-13.00	-45.90
5	501.20	-60.50	-64.40	3.80	-60.60	-13.00	-47.60
6	673.89	-71.60	-72.50	3.60	-68.90	-13.00	-55.90

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB) + 2.15dB.

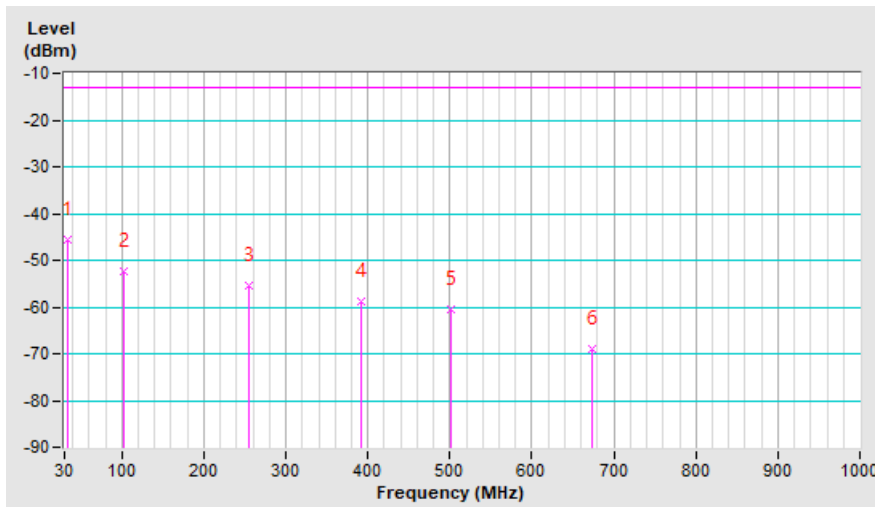


Mode	TX channel 136100 (680.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	37.26	-35.50	-30.00	-15.00	-45.00	-13.00	-32.00
2	114.50	-53.00	-57.50	-2.80	-60.30	-13.00	-47.30
3	256.12	-62.50	-60.60	-1.50	-62.10	-13.00	-49.10
4	389.29	-65.50	-69.50	3.40	-66.10	-13.00	-53.10
5	501.26	-62.00	-65.90	3.80	-62.10	-13.00	-49.10
6	603.90	-68.40	-68.10	3.60	-64.50	-13.00	-51.50

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB) + 2.15dB.

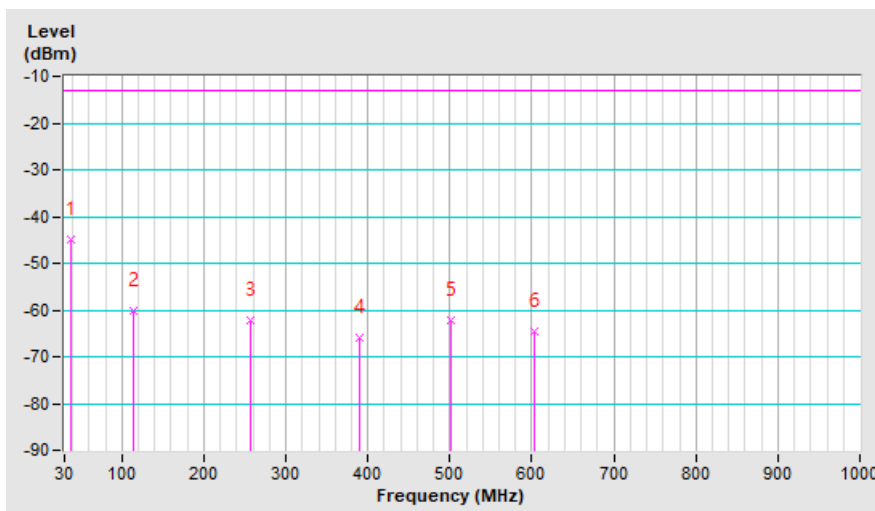


LTE Band 2, Channel Bandwidth: 20MHz

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.10	-57.80	-36.60	-19.30	-55.90	-13.00	-42.90
2	101.23	-39.00	-47.90	-1.60	-49.50	-13.00	-36.50
3	255.01	-49.70	-55.80	-1.40	-57.20	-13.00	-44.20
4	392.63	-54.70	-60.50	3.30	-57.20	-13.00	-44.20
5	499.20	-60.40	-66.40	3.80	-62.60	-13.00	-49.60
6	623.30	-68.00	-71.90	3.70	-68.20	-13.00	-55.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

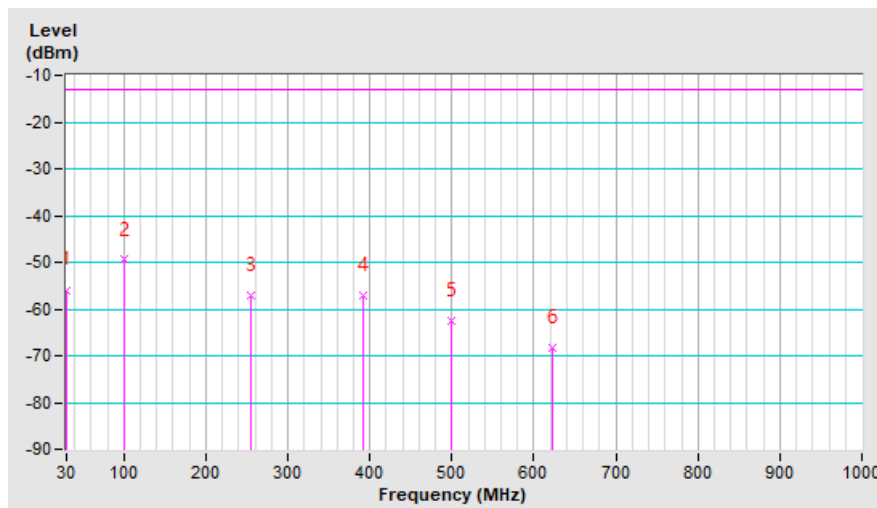


Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	56.32	-47.20	-51.20	-5.00	-56.20	-13.00	-43.20
2	149.56	-51.80	-53.10	-3.00	-56.10	-13.00	-43.10
3	210.51	-59.30	-62.80	-2.00	-64.80	-13.00	-51.80
4	248.12	-62.50	-63.70	-1.50	-65.20	-13.00	-52.20
5	458.21	-65.00	-70.80	3.50	-67.30	-13.00	-54.30
6	712.01	-68.30	-68.00	3.50	-64.50	-13.00	-51.50

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

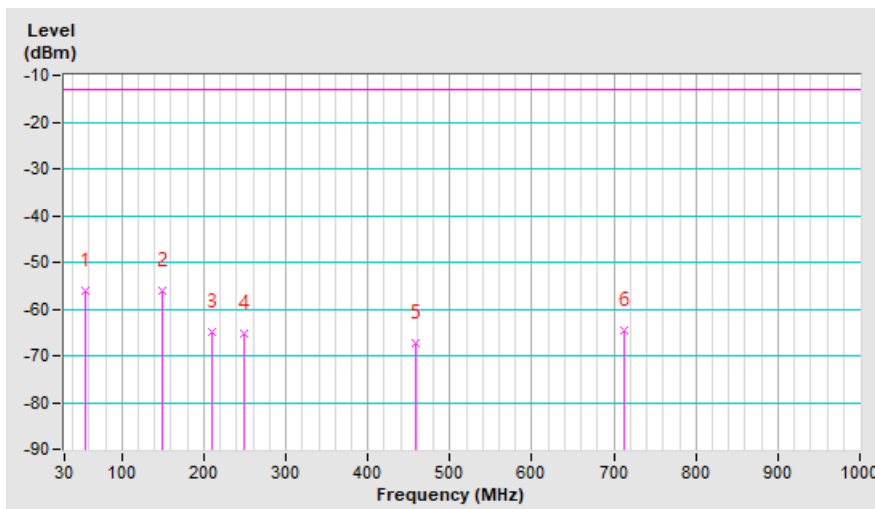


LTE Band 66, Channel Bandwidth: 20MHz

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.35	-48.80	-30.40	-17.50	-47.90	-13.00	-34.90
2	101.56	-44.00	-52.90	-1.60	-54.50	-13.00	-41.50
3	255.69	-50.20	-56.20	-1.50	-57.70	-13.00	-44.70
4	392.69	-58.50	-64.30	3.30	-61.00	-13.00	-48.00
5	501.20	-60.50	-66.60	3.80	-62.80	-13.00	-49.80
6	673.89	-71.50	-74.60	3.60	-71.00	-13.00	-58.00

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

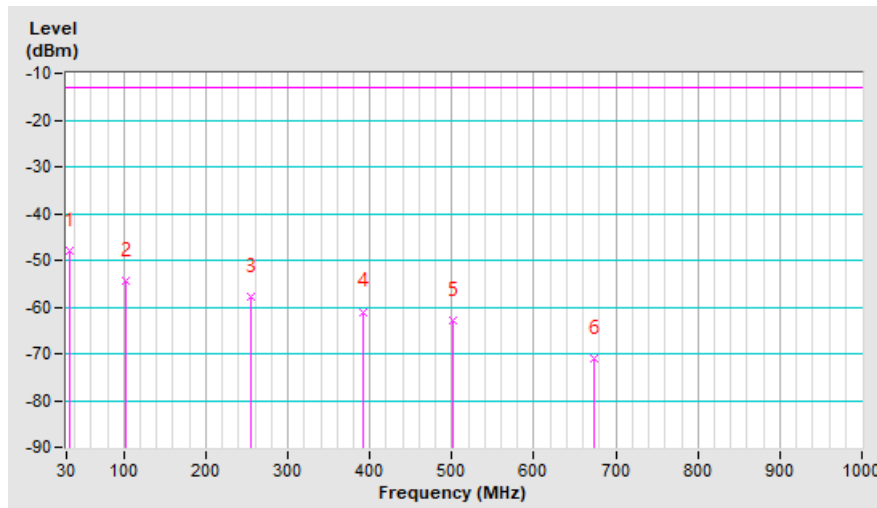


Mode	TX channel 132322 (1745.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.26	-35.50	-32.10	-15.00	-47.10	-13.00	-34.10
2	114.50	-53.00	-59.70	-2.80	-62.50	-13.00	-49.50
3	256.12	-62.50	-62.70	-1.50	-64.20	-13.00	-51.20
4	389.29	-65.50	-71.60	3.40	-68.20	-13.00	-55.20
5	501.26	-62.00	-68.00	3.80	-64.20	-13.00	-51.20
6	603.90	-68.50	-70.30	3.60	-66.70	-13.00	-53.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

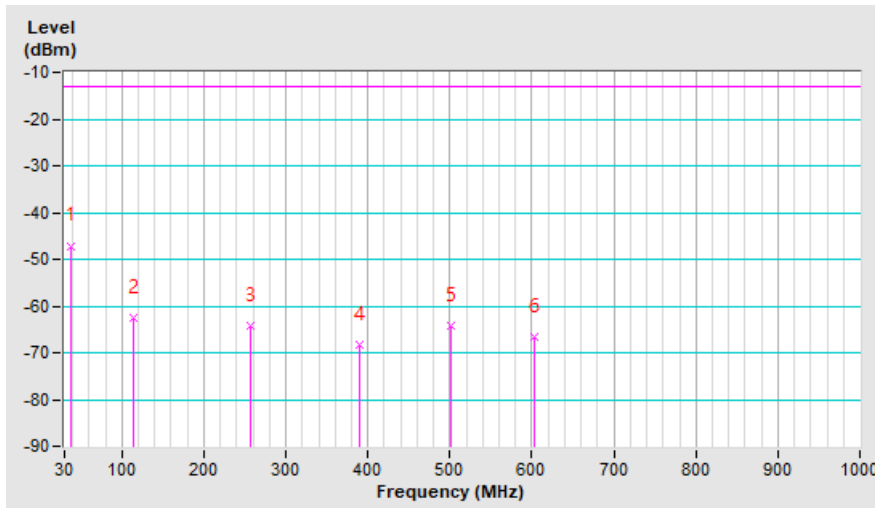

Above 1GHz
n71, Channel Bandwidth: 20MHz

Mode	TX channel 136100 (680.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1361.00	-59.60	-53.80	0.60	-53.20	-13.00	-40.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1361.00	-59.90	-55.10	0.60	-54.50	-13.00	-41.50

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB) + 2.15dB.

LTE Band 2, Channel Bandwidth: 20MHz

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-64.60	-56.10	1.30	-54.80	-13.00	-41.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-67.50	-59.20	1.30	-57.90	-13.00	-44.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 66, Channel Bandwidth: 20MHz

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3490.00	-67.80	-59.60	1.50	-58.10	-13.00	-45.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3490.00	-64.00	-56.40	1.50	-54.90	-13.00	-41.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---