

Test report No:
NIE: 64848RRF.005

Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

(*) Identification of item tested	Automotive infotainment System
(*) Trademark	Audi
(*) Model and /or type reference	SCON2
Other identification of the product	HW version: C1 SW version: 0107 FCC ID: T8GSCON2 IC: 6434A-SCON2
(*) Features	Wi-Fi
Applicant	HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY
Test method requested, standard	USA FCC Part 15.247 (10-1-19) Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-19) Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 Amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Carlos Luque RF Lab. Supervisor
Date of issue	2021-02-15
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees3

General conditions.....3

Uncertainty.....3

Data provided by the client3

Usage of samples3

Test sample description.....5

Identification of the client5

Testing period and place5

Document history.....6

Environmental conditions6

Remarks and comments.....7

Testing verdicts.....8

Summary8

Appendix A: Test results. 802.11 bgn20 1x1.....9

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model SCON2 is a rear seat control unit.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
64848/100	Automotive infotainment System	SCON2	HBV066L666RPWY8	2021/01/21
64848/009	Harness	--	--	2020/12/15

Auxiliary elements used with the Sample S/01:

Control N°	Description	Model	Serial N°	Date of reception
64848/015	USB Adapter	--	--	2020/12/15

Sample S/01 has undergone the following test(s): All Conducted tests indicated in the Appendix A.

- Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
64848/005	Automotive infotainment System	SCON2	HBC006L673MZ58	2020/12/15
64848/011	Harness	--	--	2020/12/15

Auxiliary elements used with the Sample S/02:

Control N°	Description	Model	Serial N°	Date of reception
64848/015	USB Adapter	--	--	2020/12/15

Sample S/02 has undergone the following test(s): All Radiated tests indicated in the Appendix A.

Test sample description

Ports..... :	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾
	Harness		☐	☐	☐
	-		☐	☐	☐
Supplementary information to the ports..... :	-				
Rated power supply	Voltage and Frequency				
	☒ DC: DC: 12V Car battery / attenuator (9,5-15,5V normal operation)				
Rated Power	-				
Clock frequencies..... :	-				
Other parameters	-				
Software version	0107				
Hardware version	C1				
Dimensions in cm (W x H x D)	-				
Mounting position	☐ Table top equipment				
	☐ Wall/Ceiling mounted equipment				
	☐ Floor standing equipment				
	☐ Hand-held equipment				
	☒ Other:				
Modules/parts..... :	Module/parts of test item		Type	Manufacturer	
	-				
Accessories (not part of the test item)	Description		Type	Manufacturer	
	-				
Documents as provided by the applicant	Description		File name	Issue date	
	-				

⁽³⁾ Only for Medical Equipment

Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH
BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-02-08
Date (finish)	2021-02-10

Document history

Report number	Date	Description
64848RRF.005	2021-02-15	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Alfonso Gutiérrez, Verónica García, Cristina Calle, Javier Miguel Nadales and Rosa María Gallardo.

Used instrumentation:

Conducted Measurements:

		Last Calibration	Due Calibration
1.	Shielded Room ETS LINDGREN S101	N.A.	N.A.
2.	Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2019/09	2021/09
3.	Open Switch Unit ROHDE AND SCHWARZ OSP120	2019/10	2021/10
4.	Open Switch Unit up to 18 GHz ROHDE AND SCHWARZ OSP 150	2019/09	2021/09
5.	DC Power Supply, 30V/5A KEYSIGHT TECHNOLOGIES U8002A	N.A.	N.A.
6.	Digital Multimeter FLUKE 179	2020/10	2021/10

Radiated Measurements:

		Last Calibration	Due Calibration
1.	Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
2.	Shielded Room ETS LINDGREN S101	N.A.	N.A.
3.	Biconical/Log Antenna 30MHz - 6GHz ETS LINDGREN 3142E	2020/10	2023/10
4.	RF Preamplifier 40 dB, 10 MHz - 6 GHz BONN ELEKTRONIK BLNA 0160-01N	2020/02	2021/02
5.	EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
6.	DC Power Supply, 30V/5A KEYSIGHT TECHNOLOGIES U8002A	N.A.	N.A.
7.	Digital Multimeter, FLUKE 175	2020/11	2021/11
8.	Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2018/01	2021/01
9.	Horn Antenna 18-40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2020/05	2023/05
10.	RF Preamplifier G>30dB, 1-18GHz BONN ELEKTRONIK BLMA 0118-3A	2020/10	2021/10
11.	Low Noise Amplifier G>30dB, 18 - 40 GHz BONN ELEKTRONIK BLMA 1840-1M	2019/02	2021/02
12.	Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2019/10	2021/10

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

1. WLAN 2.4 GHz (802.11 b/g/n20 1x1):

FCC PART 15 PARAGRAPH / RSS-247			
Requirement – Test case		Verdict	Remark
15.247 (a) (2) / RSS-247 5.2. (a)	6 dB Bandwidth	P	
15.247 (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain	P	
15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	P	
15.247 (e) / RSS-247 5.2. (b)	Power spectral density	P	
15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	
<u>Supplementary information and remarks:</u> None.			

Appendix A: Test results. 802.11 bgn20 1x1

TEST CONDITIONS	11
Occupied Bandwidth	13
FCC 15.247 (a) (2) / RSS-247 5.2 (a) 6 dB Bandwidth	21
FCC 15.35 (c) / RSS-Gen 6.10. Transmitter Duty Cycle	27
FCC 15.247 (b) / RSS-247 5.4 (d) Maximum output power and antenna gain	27
FCC 15.247 (d) / RSS-247 5.5. Band-edge emissions compliance (Transmitter)	37
FCC 15.247 (e) / RSS-247 5.2. (b) Power spectral density	39
FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated (Transmitter).....	45

TEST CONDITIONS

POWER SUPPLY (V):

V nominal:	12 Vdc.
Type of Power Supply:	DC External (Car Battery).

ANTENNA:

Type of Antenna:	Internal.
Maximum Declared Antenna Gain:	+2 dBi

TEST FREQUENCIES:

802.11 bgn20:

Low Channel:	2412 MHz
Middle Channel:	2437 MHz
High Channel:	2462 MHz

The sample was used to configure the EUT to continuously transmit at a specified output power in all channels with different modes and modulation schemes.

The field strength at the band edges was evaluated for each mode for the channel under test.

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

The data rates of 1 Mbps for 802.11 b, 6.5 Mbps for 802.11 g, index of MCS0 for 802.11 n20, were selected based on preliminary testing that identified those rates corresponding to the worst cases for output power and band edge levels at restricted bands.

802.11 b:	Adjustment of Maximum RF Output Power:	+10 dBm
802.11 g:	Adjustment of Maximum RF Output Power:	+10 dBm
802.11 n20:	Adjustment of Maximum RF Output Power:	+10 dBm

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the spectrum analyser using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



The DC supply voltage is applied using an external calibrated power supply with a multimeter.

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz) and 1 GHz-18 GHz Double ridge horn antenna is situated at a distance of 3 m and a distance of 1 m for the frequency range 17 GHz-26 GHz (18 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth / video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

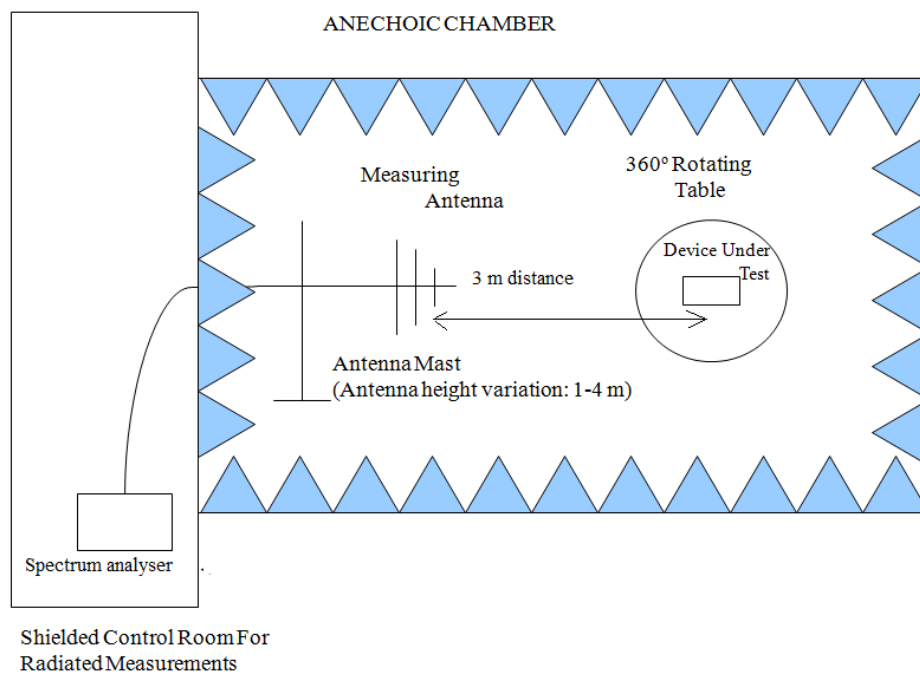

Radiated measurements setup from 1 GHz to 17 GHz:

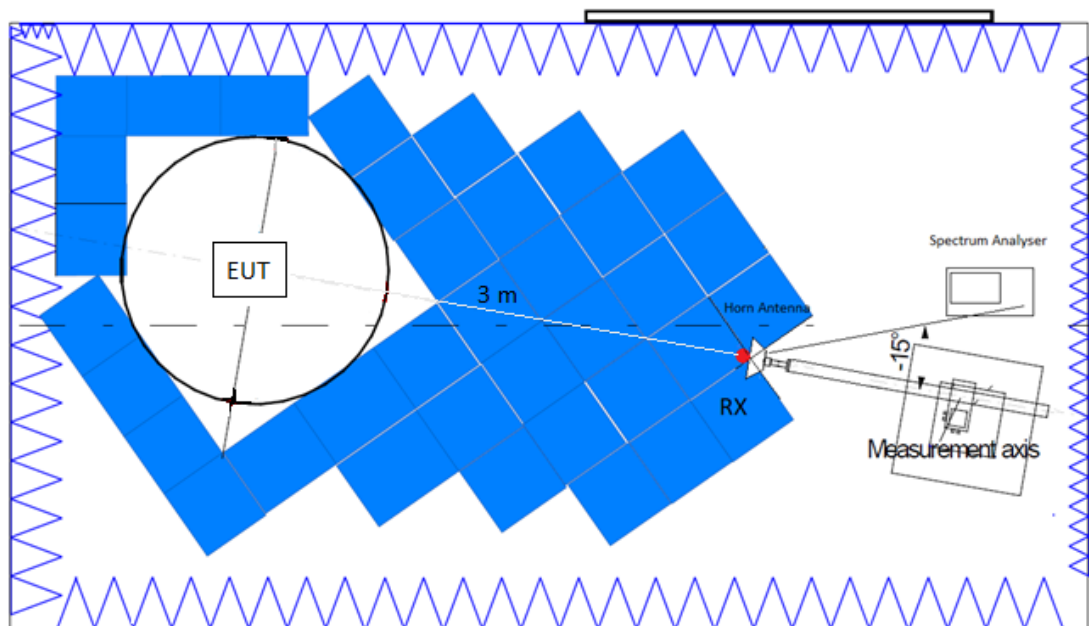

Radiated measurements setup $f > 17$ GHz:

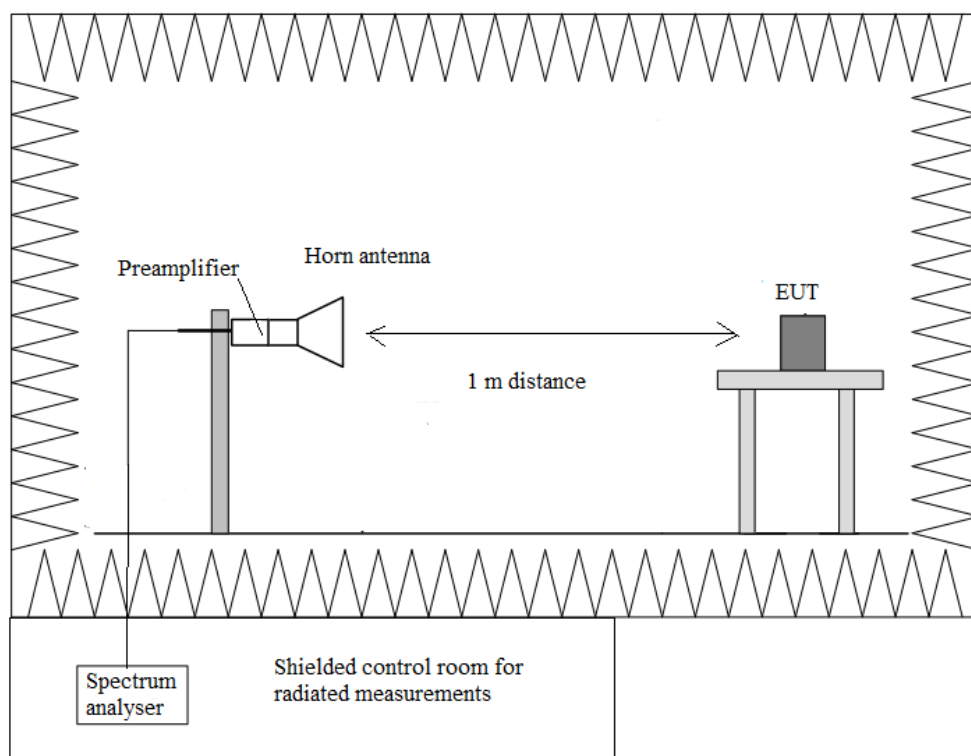

Occupied Bandwidth

RESULTS:

- **Mode 802.11 b:**

	Low Channel 2412 MHz	Middle Channel 2437 MHz	High Channel 2462 MHz
99% Bandwidth (MHz)	13.200000	13.200000	13.300000
Measurement uncertainty (%)	<± 1.23%		

- **Mode 802.11 g:**

	Low Channel 2412 MHz	Middle Channel 2437 MHz	High Channel 2462 MHz
99% Bandwidth (MHz)	16.700000	16.600000	16.800000
Measurement uncertainty (%)	<± 1.19%		


- **Mode 802.11 n20:**

	Low Channel 2412 MHz	Middle Channel 2437 MHz	High Channel 2462 MHz
99% Bandwidth (MHz)	17.600000	17.600000	17.600000
Measurement uncertainty (%)	<± 1.19%		


Verdict: PASS

- **Mode 802.11 b – Occupied Bandwidth:**


- Low Channel:

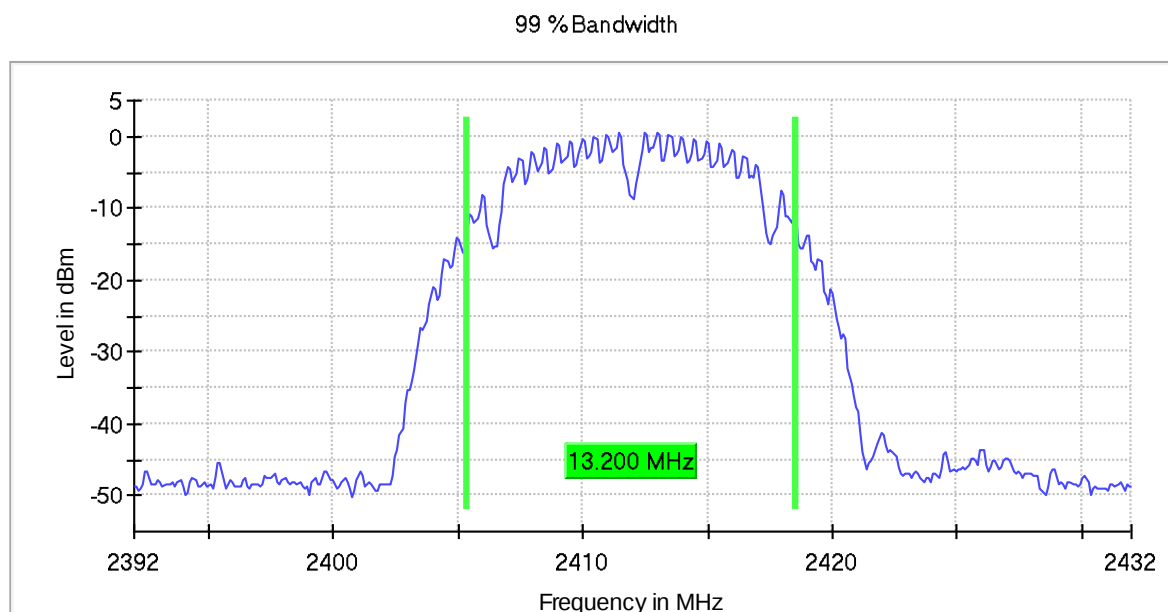

- Middle Channel:

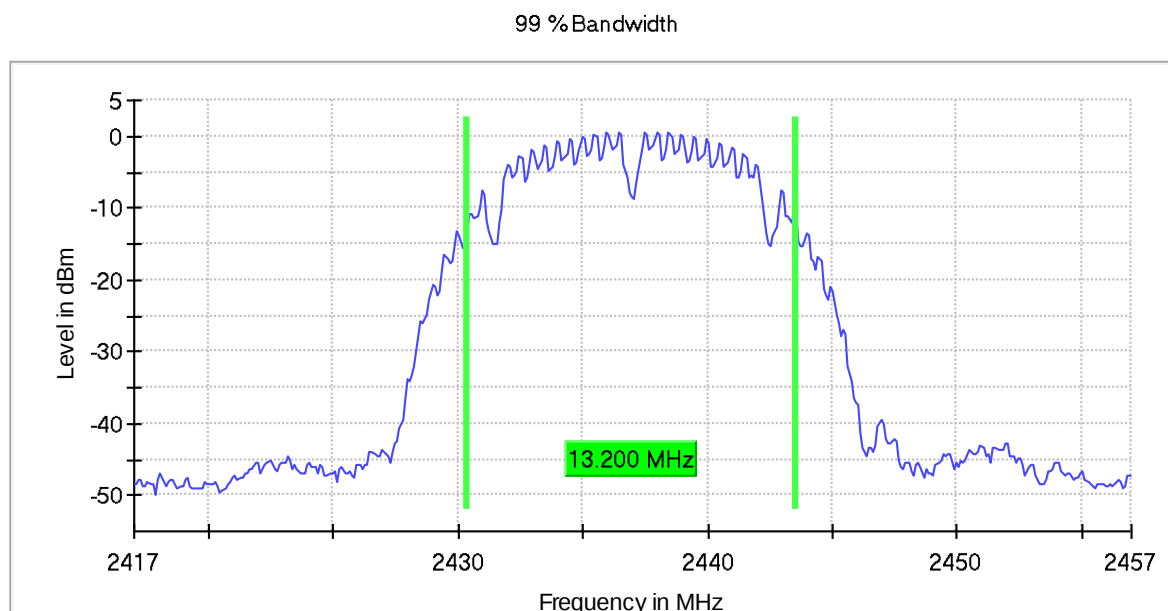


- High Channel:

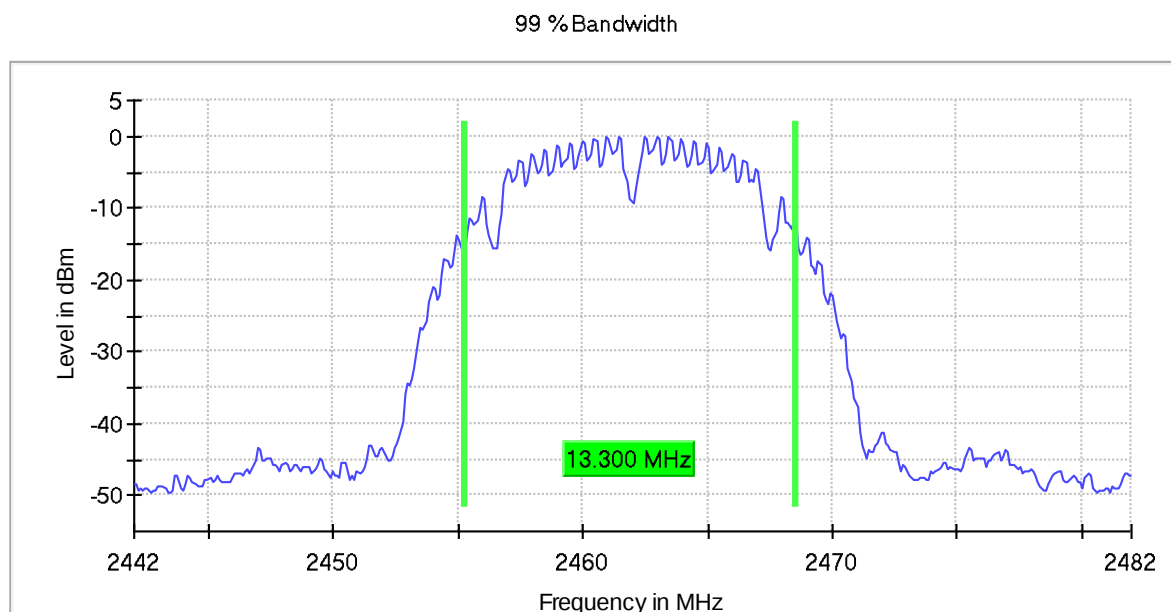


- **Mode 802.11 g – Occupied Bandwidth:**

- Low Channel:

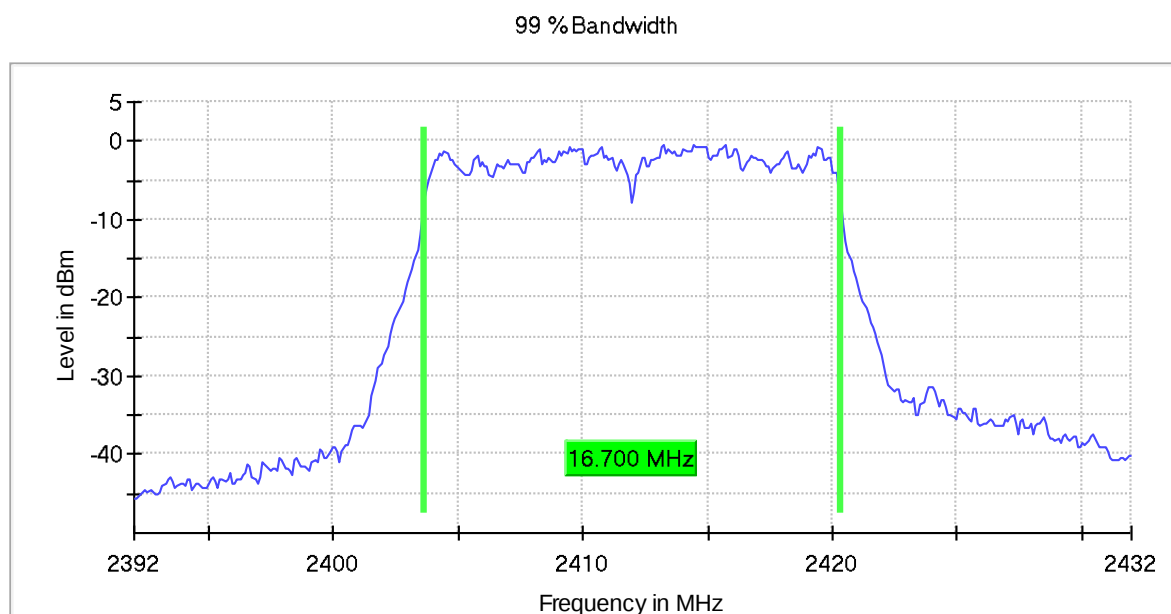


- Middle Channel:

99 % Bandwidth

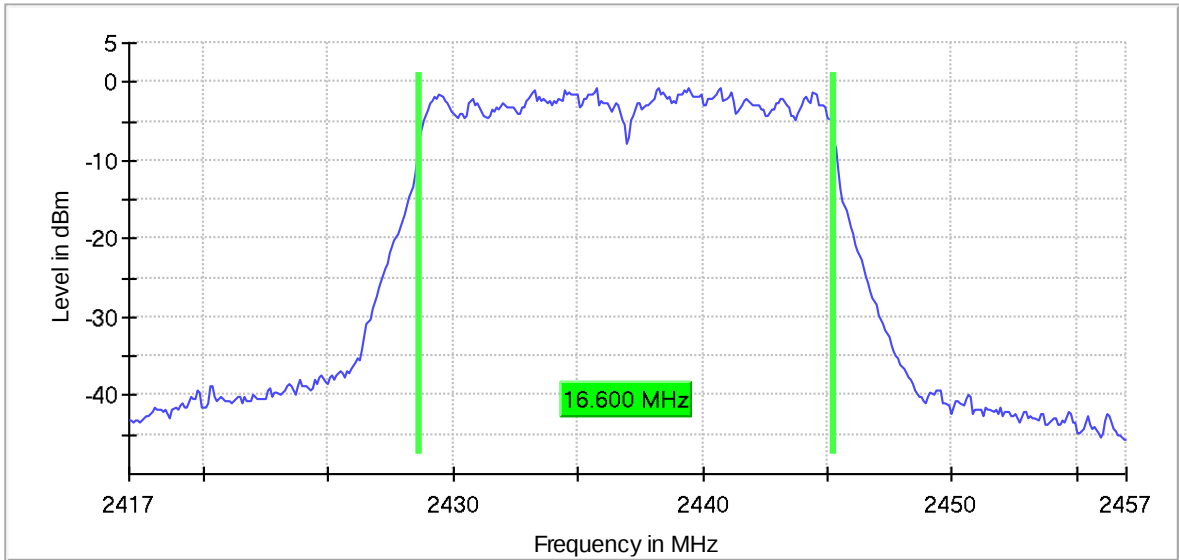

- High Channel:


99 % Bandwidth

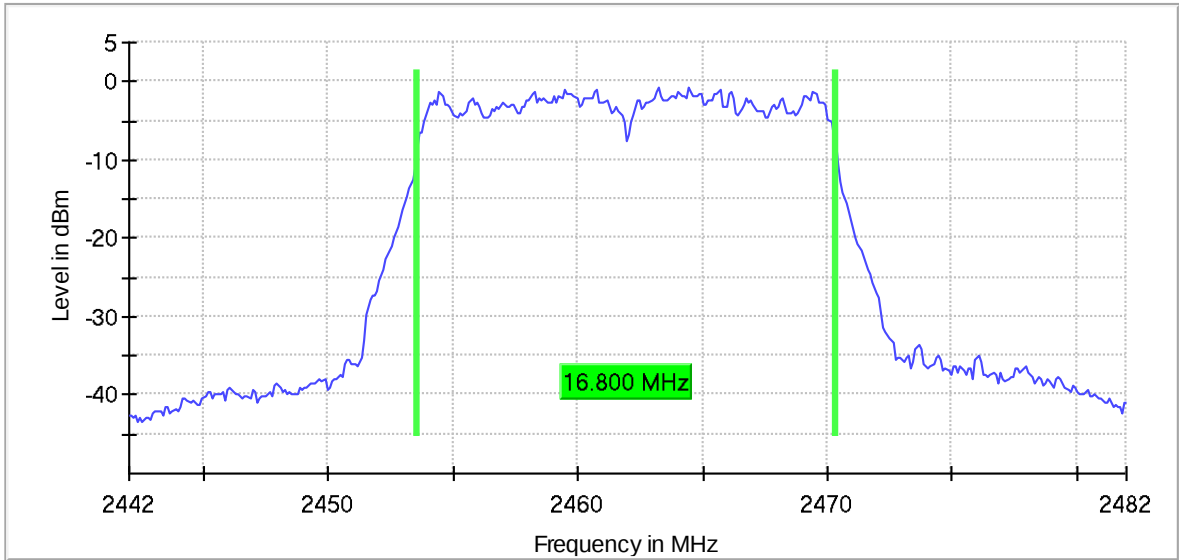

- **Mode 802.11 n20 – Occupied Bandwidth:**


- Low Channel:

99 %Bandwidth

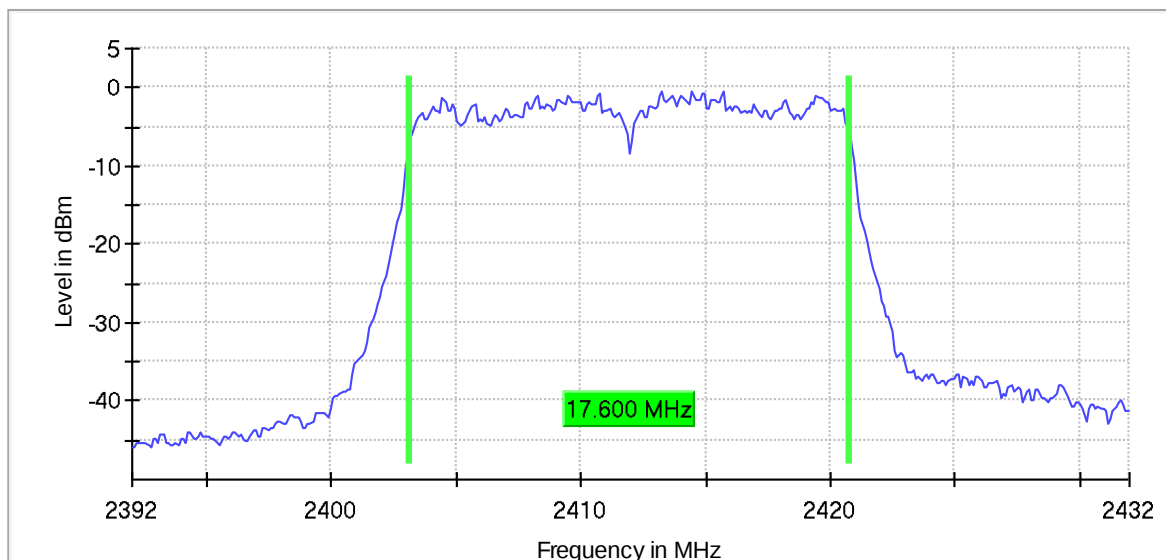


- Middle Channel:

99 %Bandwidth

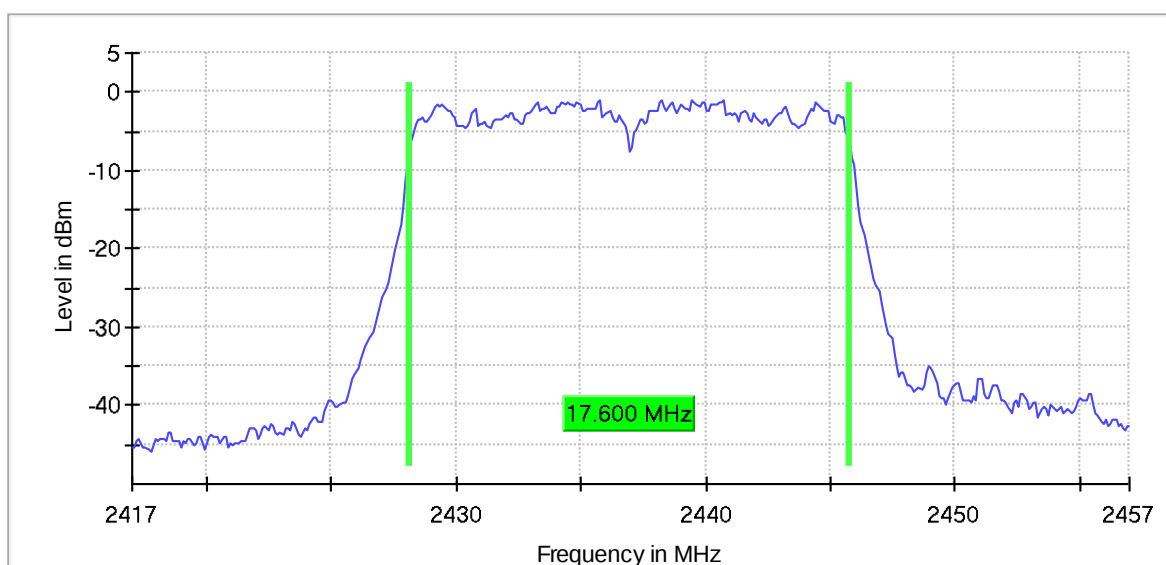

- High Channel:

99 % Bandwidth

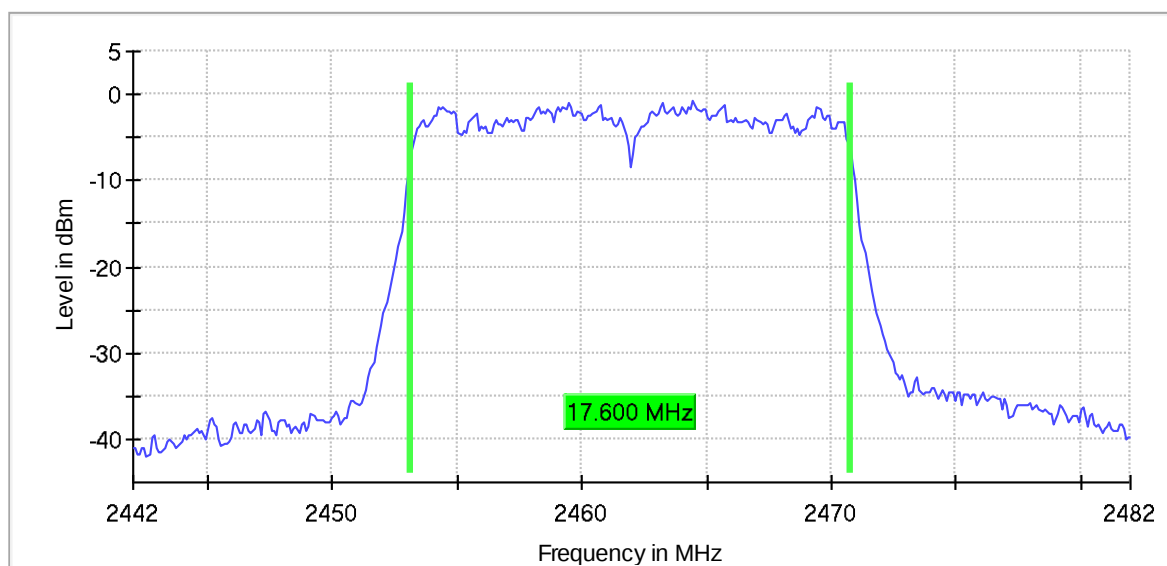

FCC 15.247 (a) (2) / RSS-247 5.2 (a) 6 dB Bandwidth

SPECIFICATION:

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS:

- Mode 802.11 b:**

	Low Channel	Middle Channel	High Channel
6 dB Spectrum Bandwidth (MHz)	10.200000	10.200000	10.200000
Measurement uncertainty (%)	<± 1.17%		

- Mode 802.11 g:**

	Low Channel	Middle Channel	High Channel
6 dB Spectrum Bandwidth (MHz)	16.400000	16.400000	16.400000
Measurement uncertainty (%)	<± 1.14%		


- Mode 802.11 n20:**

	Low Channel	Middle Channel	High Channel
6 dB Spectrum Bandwidth (MHz)	17.600000	17.600000	17.600000
Measurement uncertainty (%)	<± 1.14%		


Verdict: PASS

- **Mode 802.11 b – 6 dB Bandwidth:**


- Low Channel:

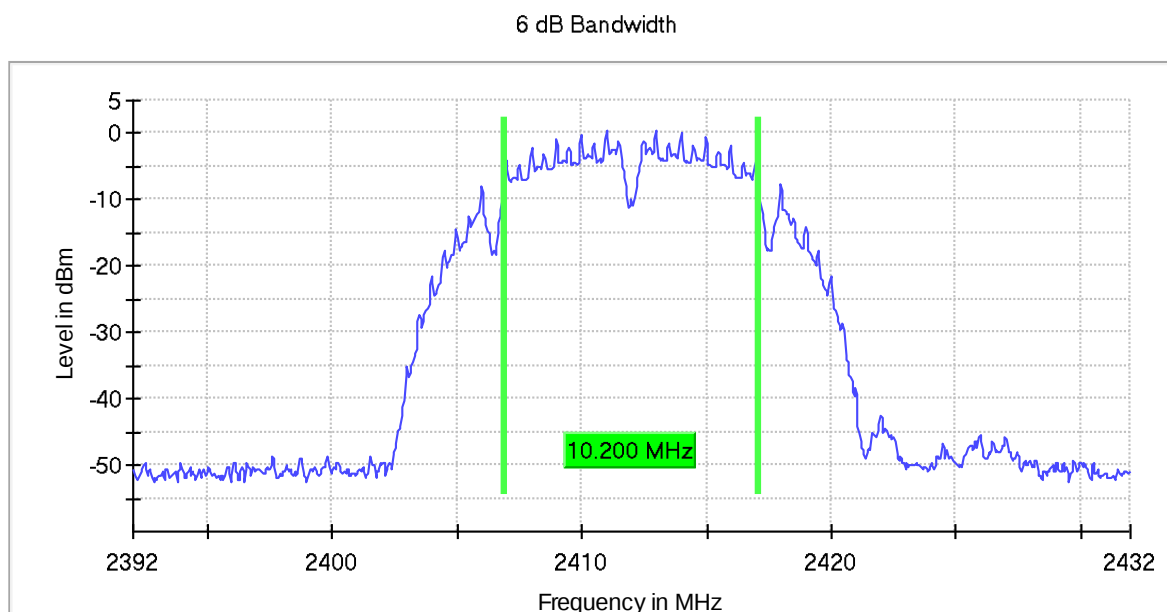

- Middle Channel:

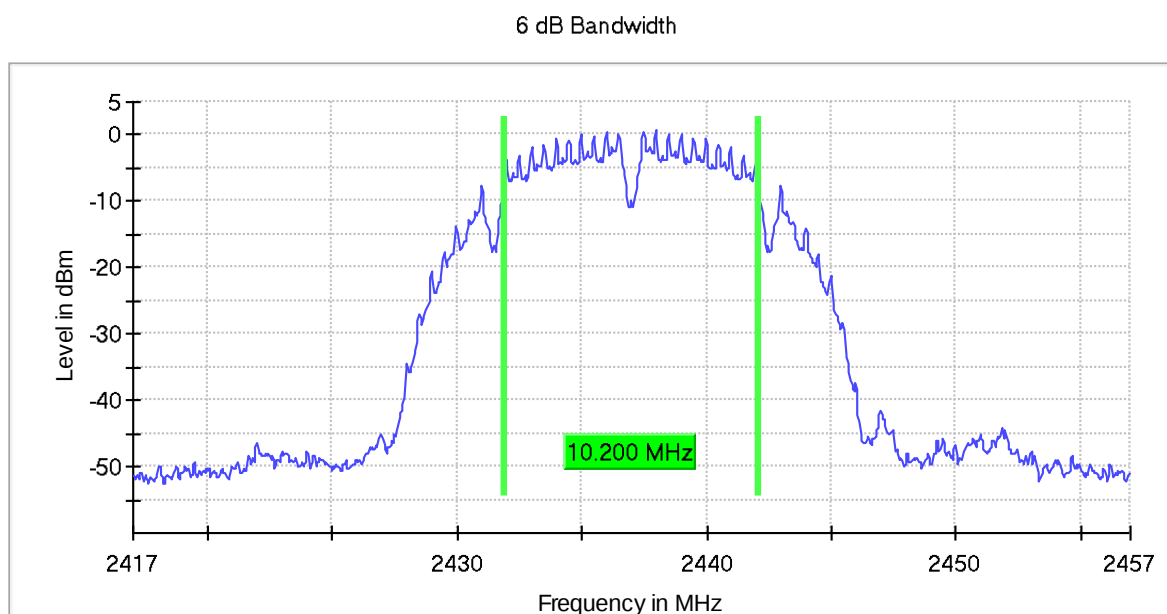


- High Channel:

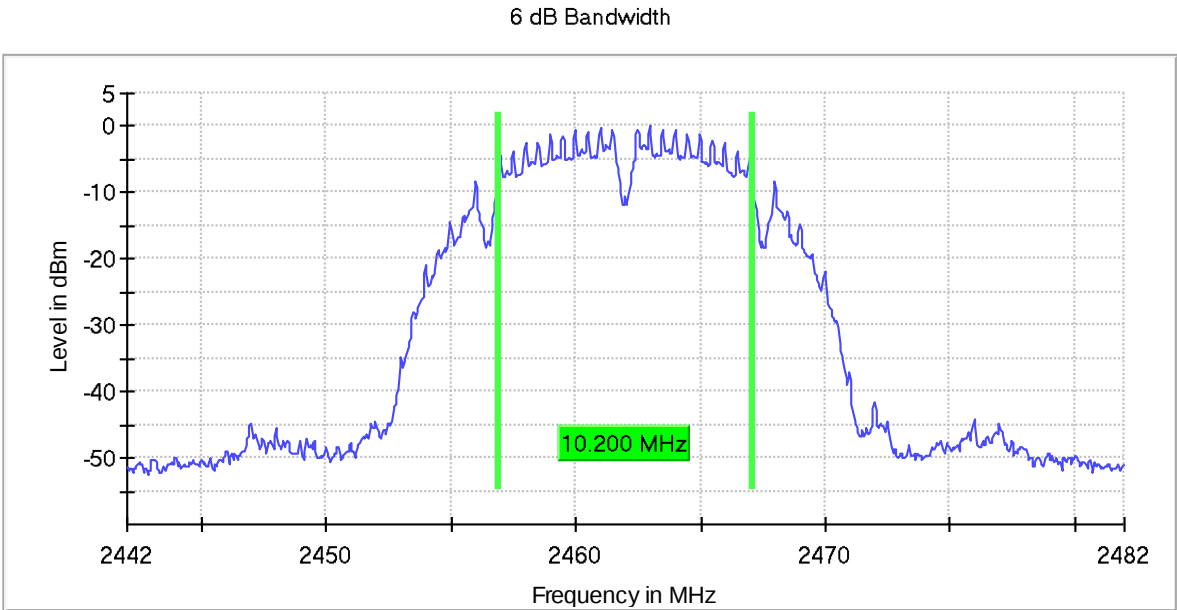


- Mode 802.11 g – 6 dB Bandwidth:


- Low Channel:

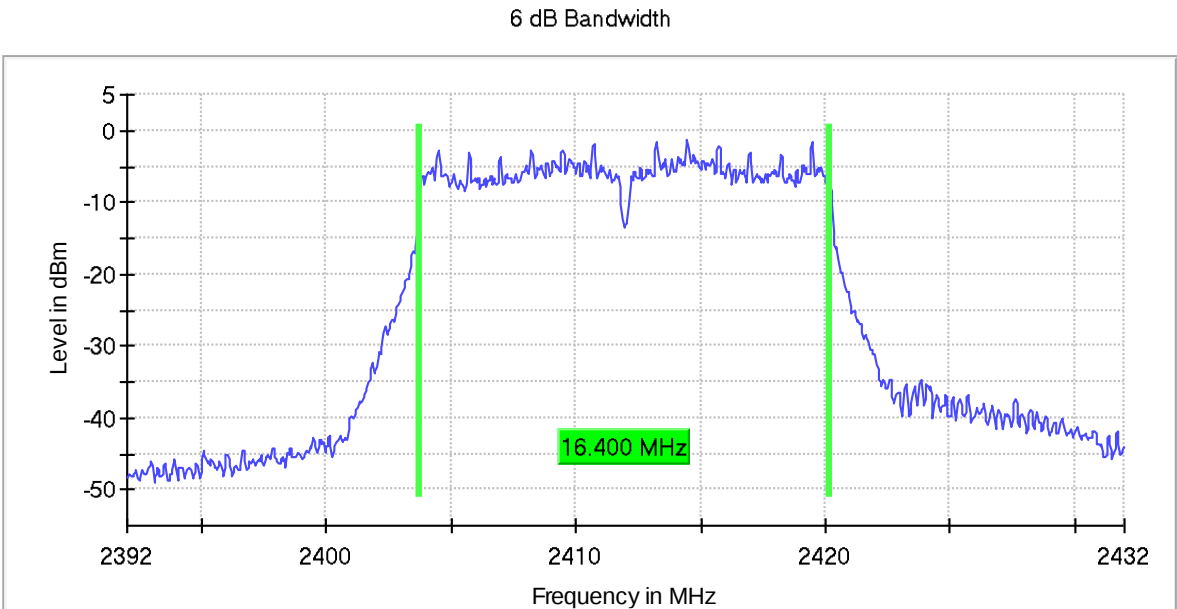

- Middle Channel:

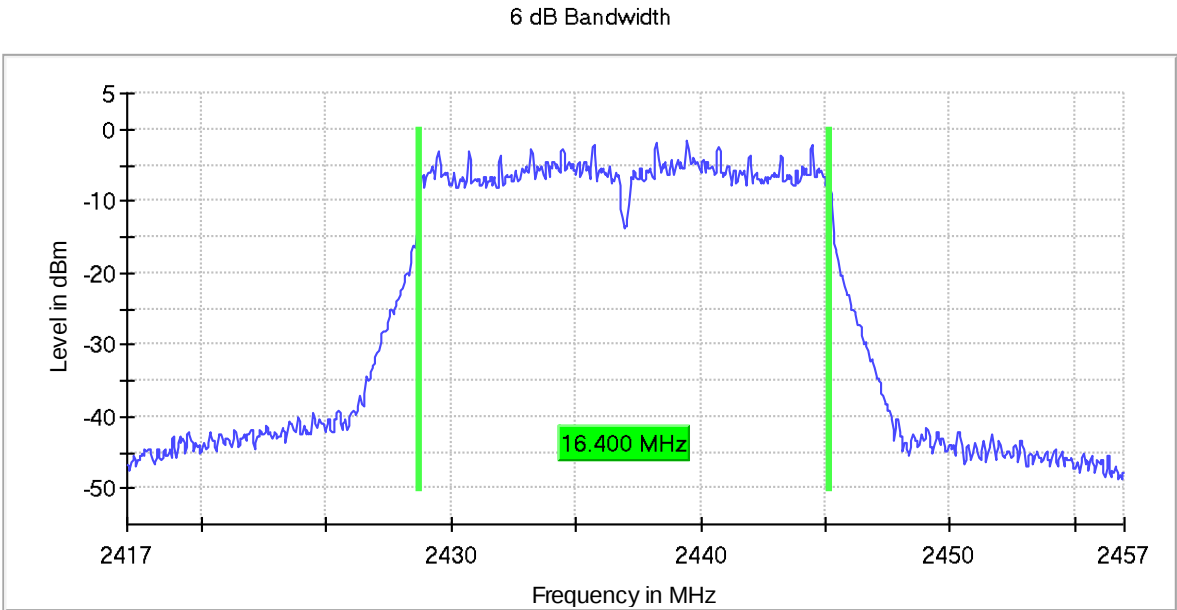


- High Channel:

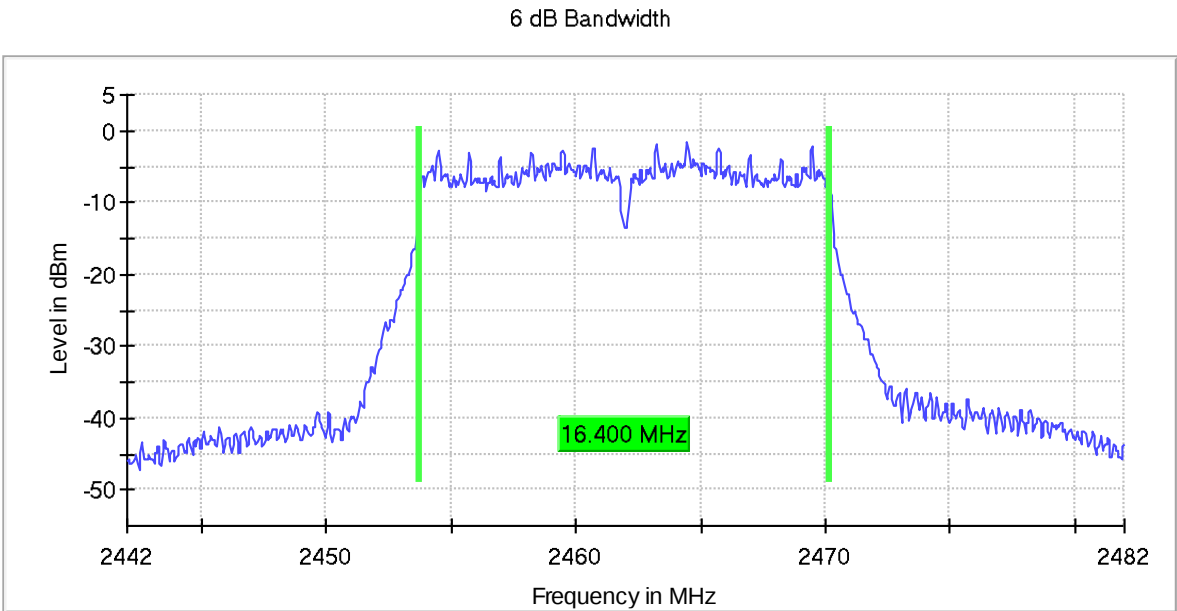


- **Mode 802.11 n20 – 6 dB Bandwidth:**

- Low Channel:

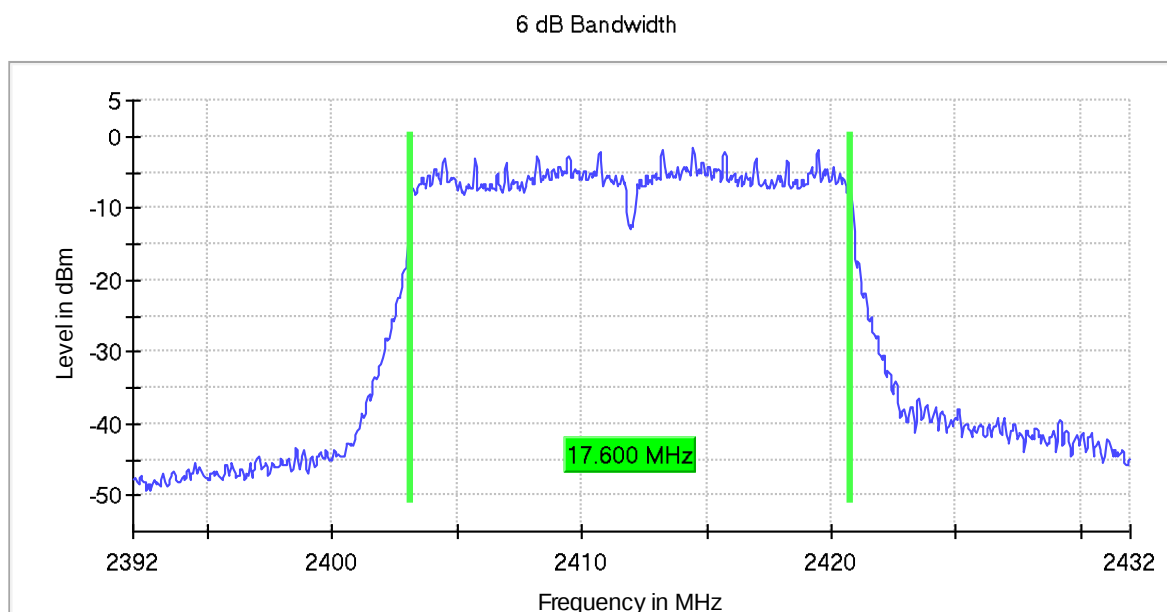

- Middle Channel:

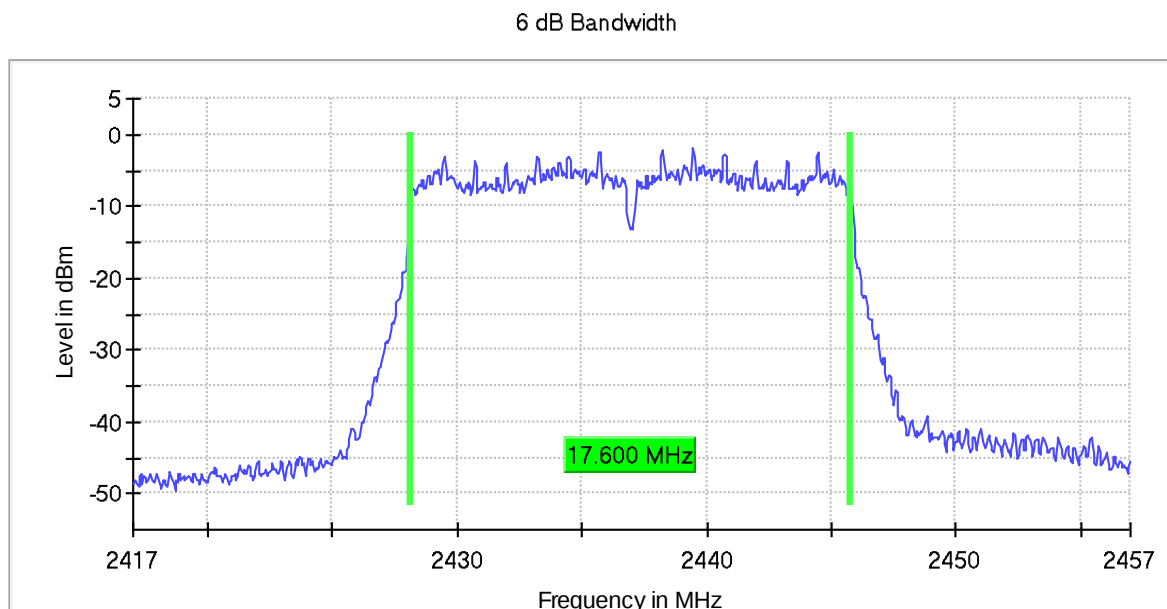

- High Channel:



FCC 15.35 (c) / RSS-Gen 6.10. Transmitter Duty Cycle


SPECIFICATION:

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


RESULTS:

The results for all modes having a value > 98%.


• Mode 802.11 b:

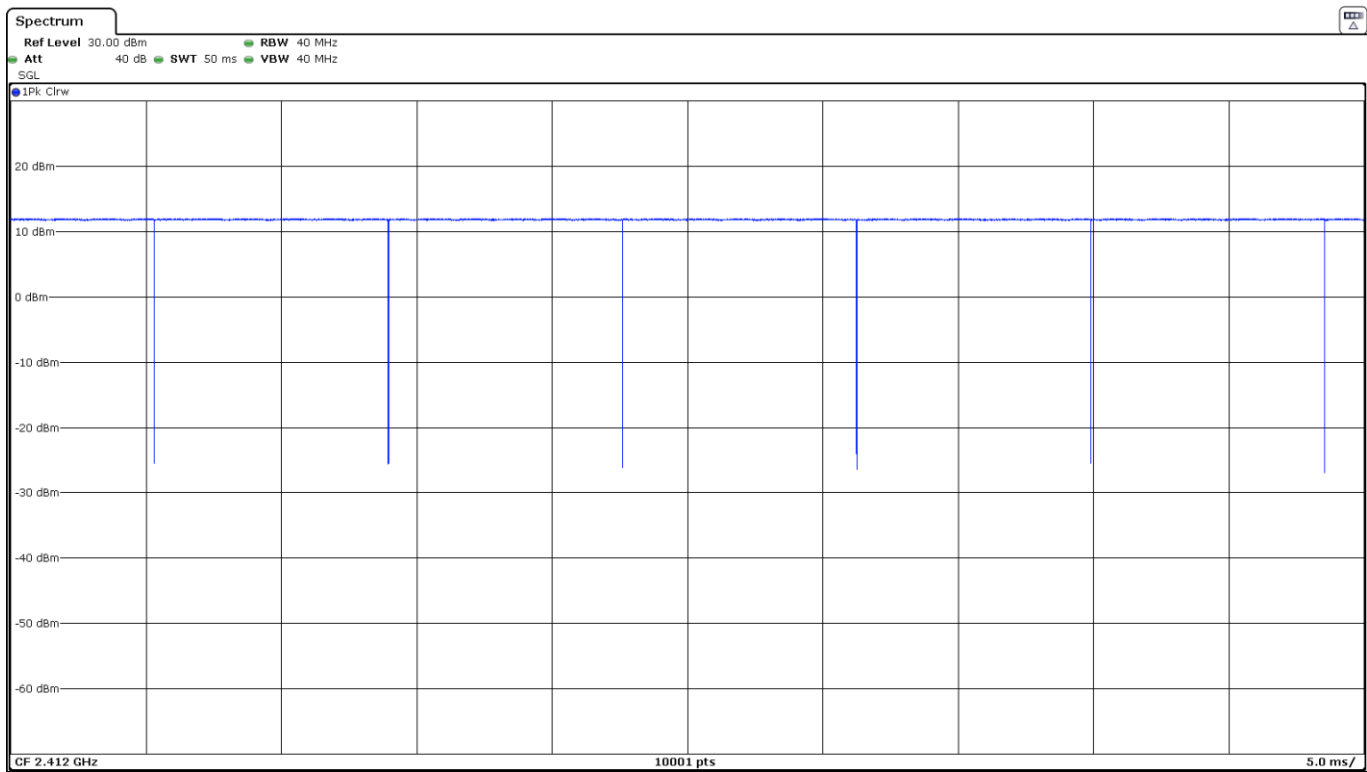

• Mode 802.11 g:

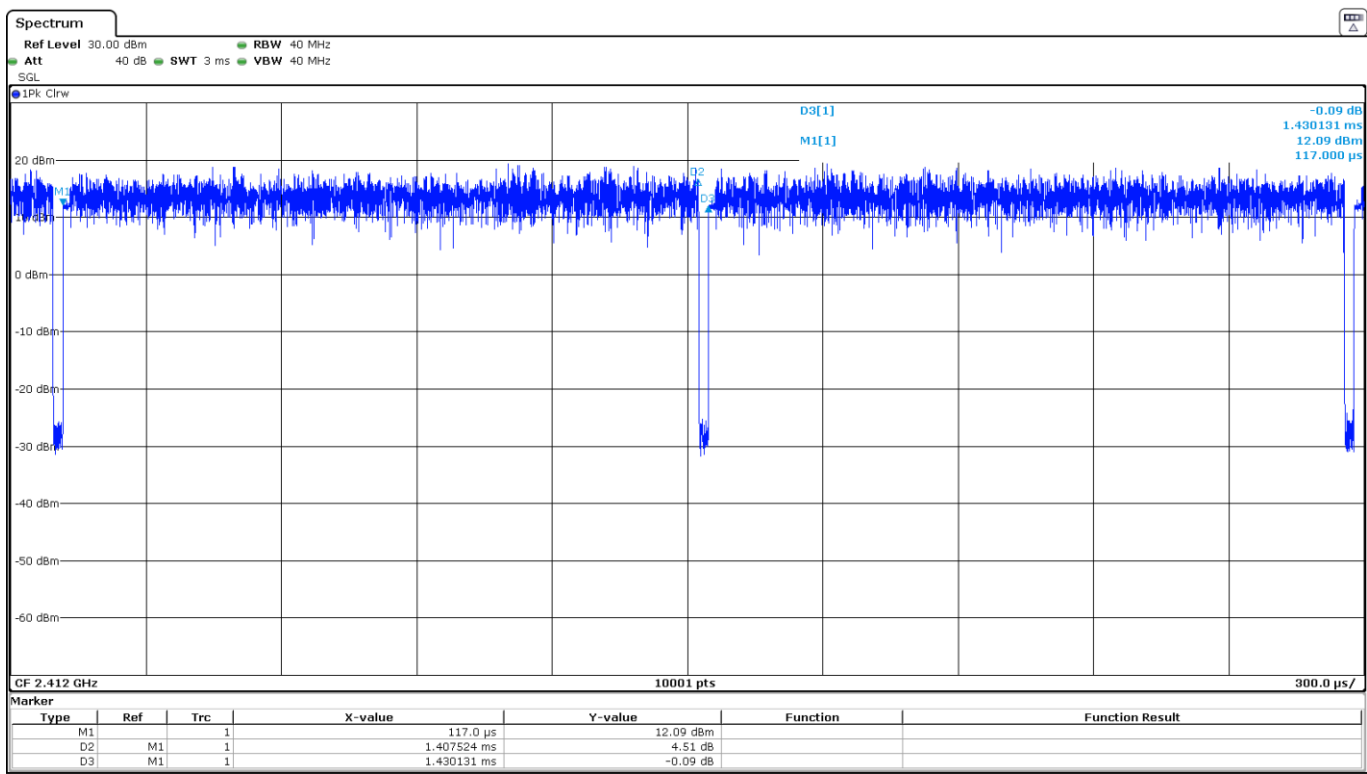

• Mode 802.11 n20:

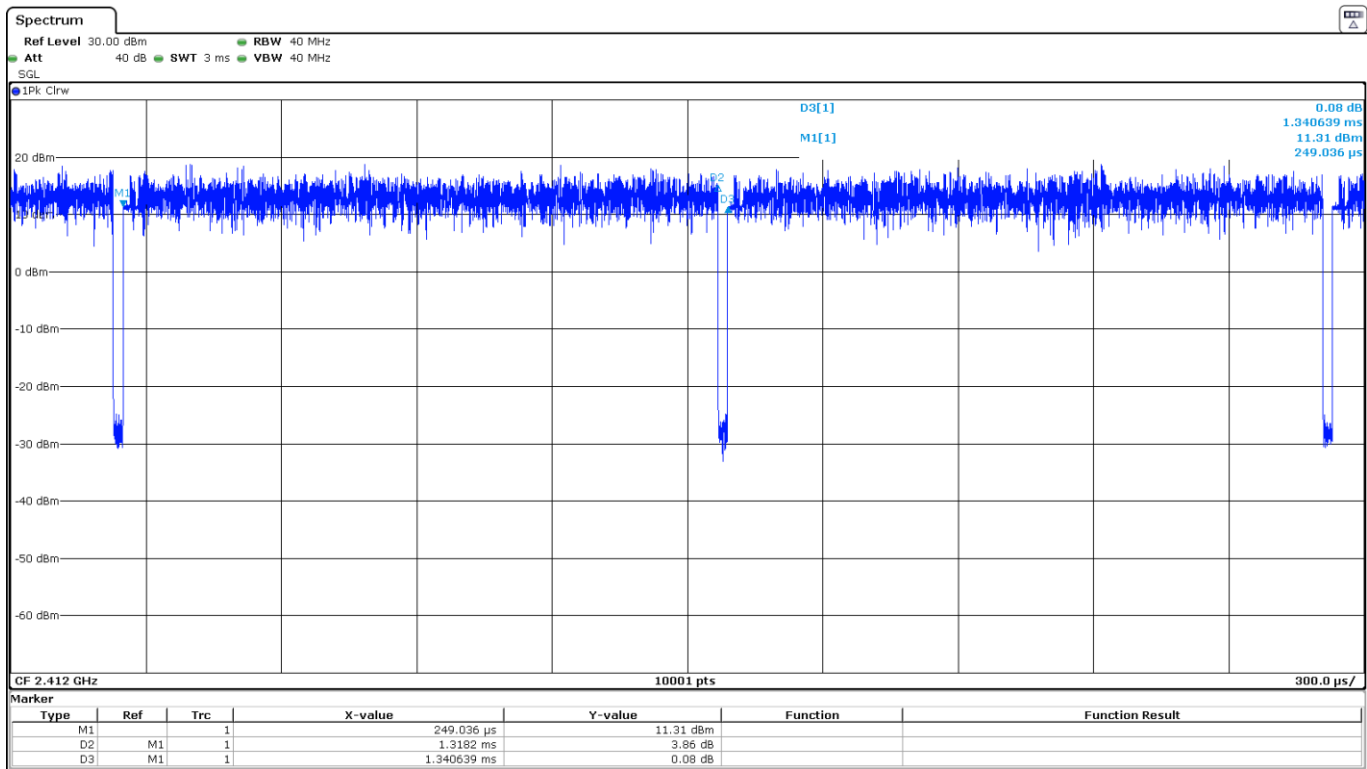

FCC 15.247 (b) / RSS-247 5.4 (d) Maximum output power and antenna gain

SPECIFICATION:

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).
The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

RESULTS:

Maximum Declared Antenna Gain: +2 dBi

For modes b, g, n20, the maximum conducted output power was measured using the method according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 11.9.2.3.2.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

- **Mode 802.11 b:**

	Low Channel	Middle Channel	High Channel
Maximum Average Conducted Power (dBm)	9.120	8.811	8.638
Maximum EIRP (dBm)	11.120	10.811	10.638
Measurement uncertainty (dB)	<± 0.99		

- **Mode 802.11 g:**

	Low Channel	Middle Channel	High Channel
Maximum Average Conducted Power (dBm)	9.402	9.091	8.697
Maximum EIRP Power (dBm)	11.402	11.091	10.697
Measurement uncertainty (dB)	<± 0.99		


- **Mode 802.11 n20:**

	Low Channel	Middle Channel	High Channel
Maximum Average Conducted Power (dBm)	9.353	9.062	8.677
Maximum EIRP Power (dBm)	11.353	11.062	10.677
Measurement uncertainty (dB)	<± 0.99		


Verdict: PASS

- **Mode 802.11 b:**


- Low Channel:

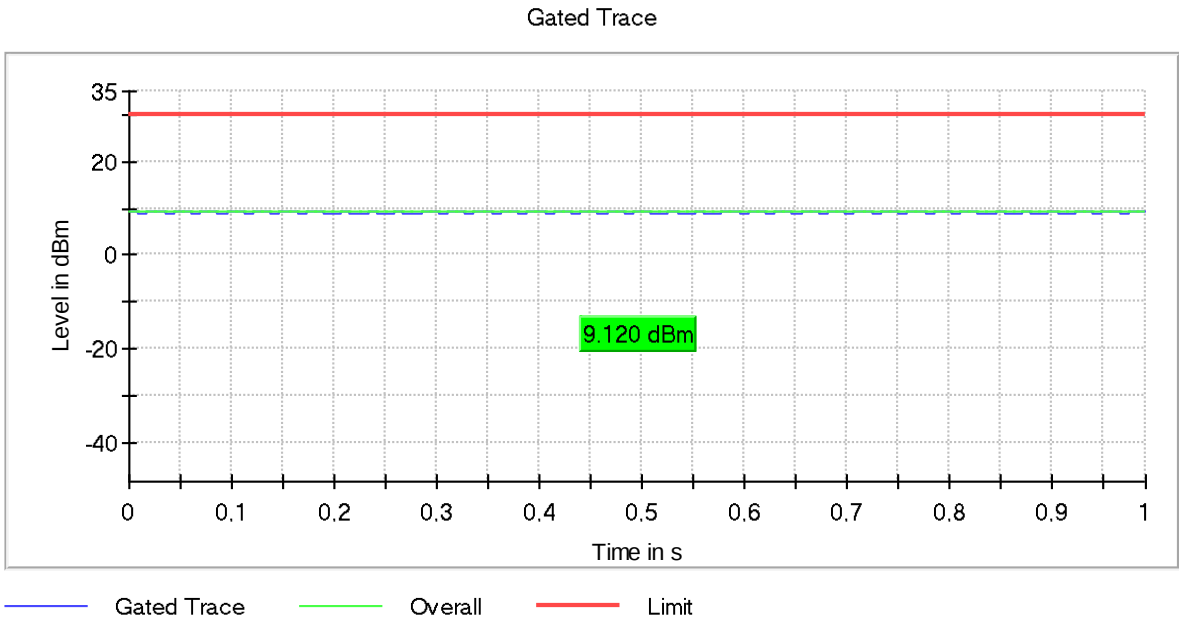

- Middle Channel:

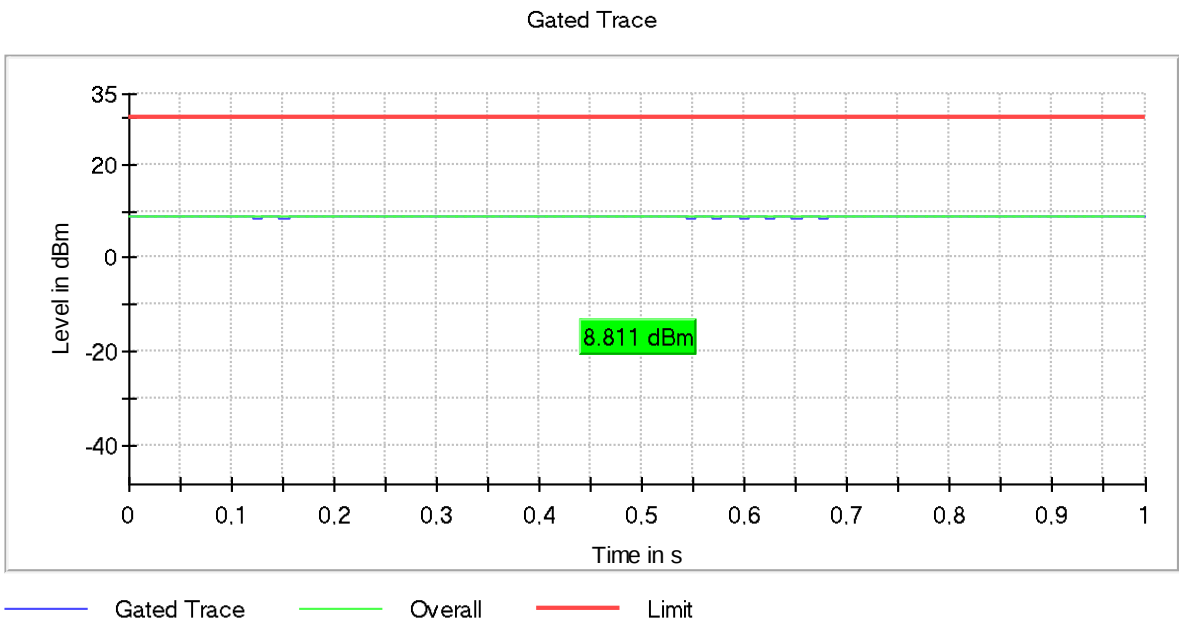


- High Channel:

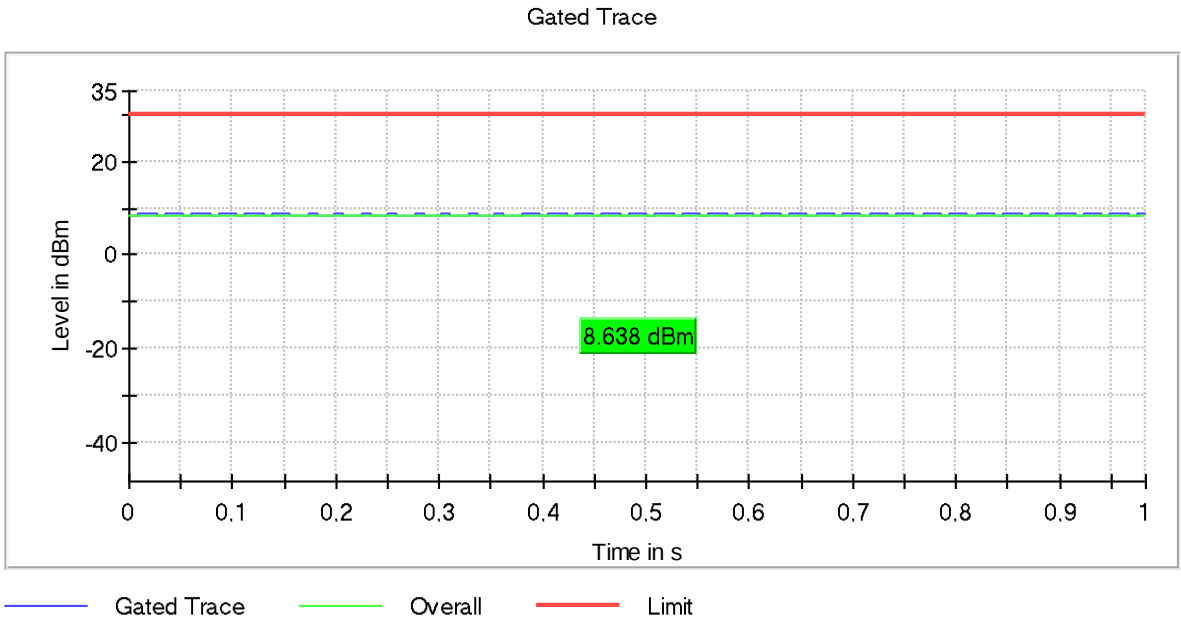


- **Mode 802.11 g:**


- Low Channel:

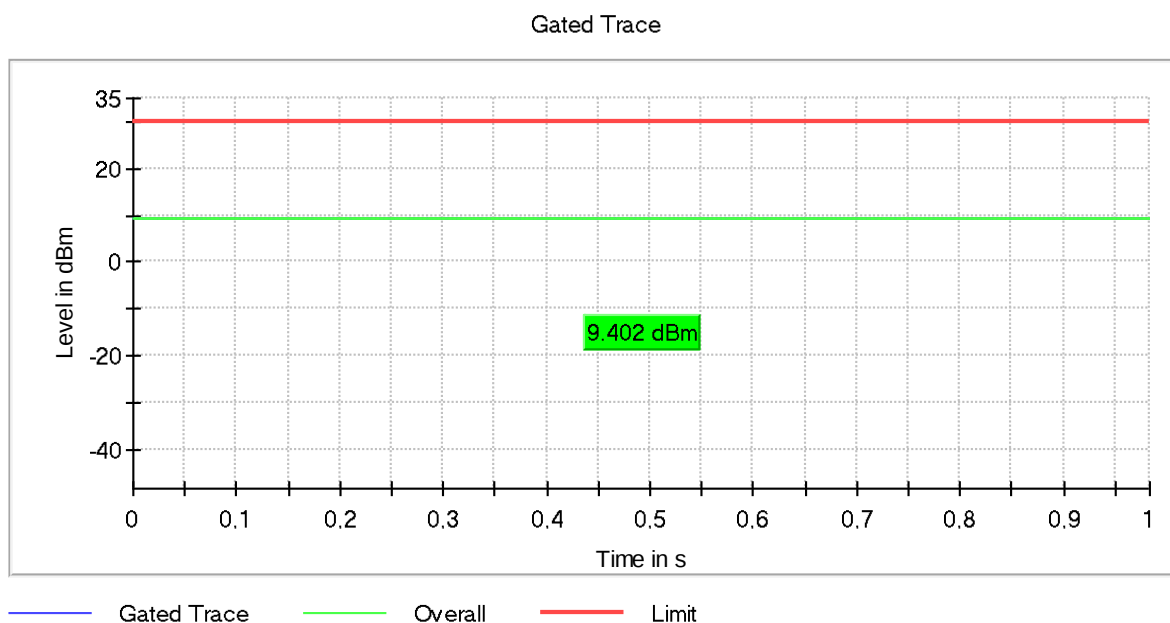

- Middle Channel:

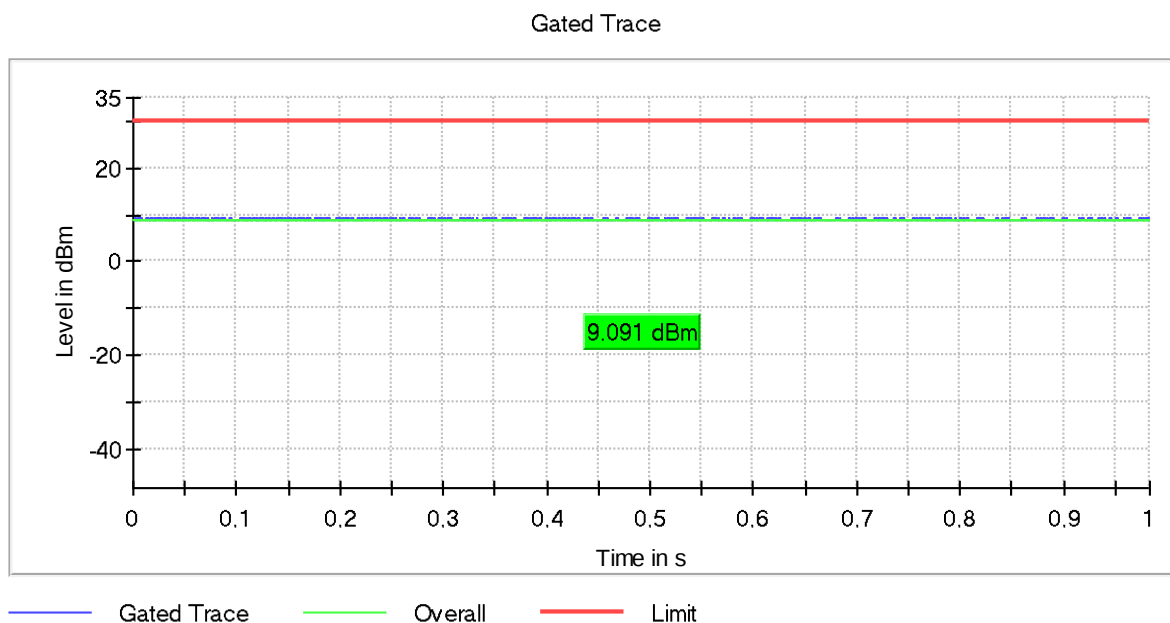


- High Channel:

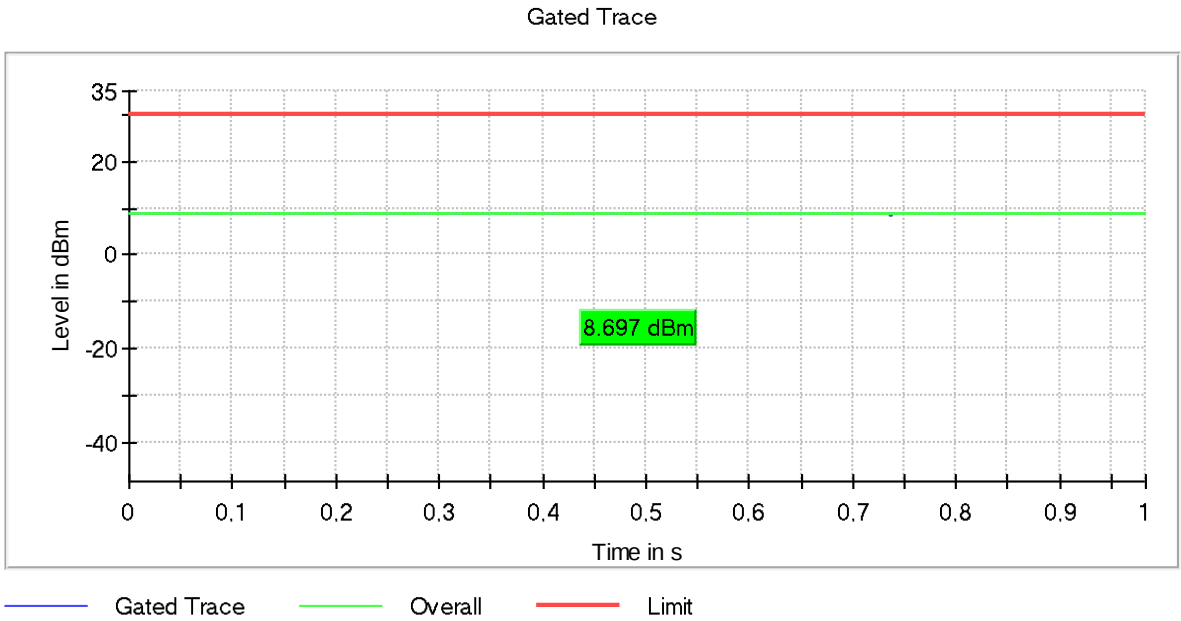


- **Mode 802.11 n20:**


- Low Channel:

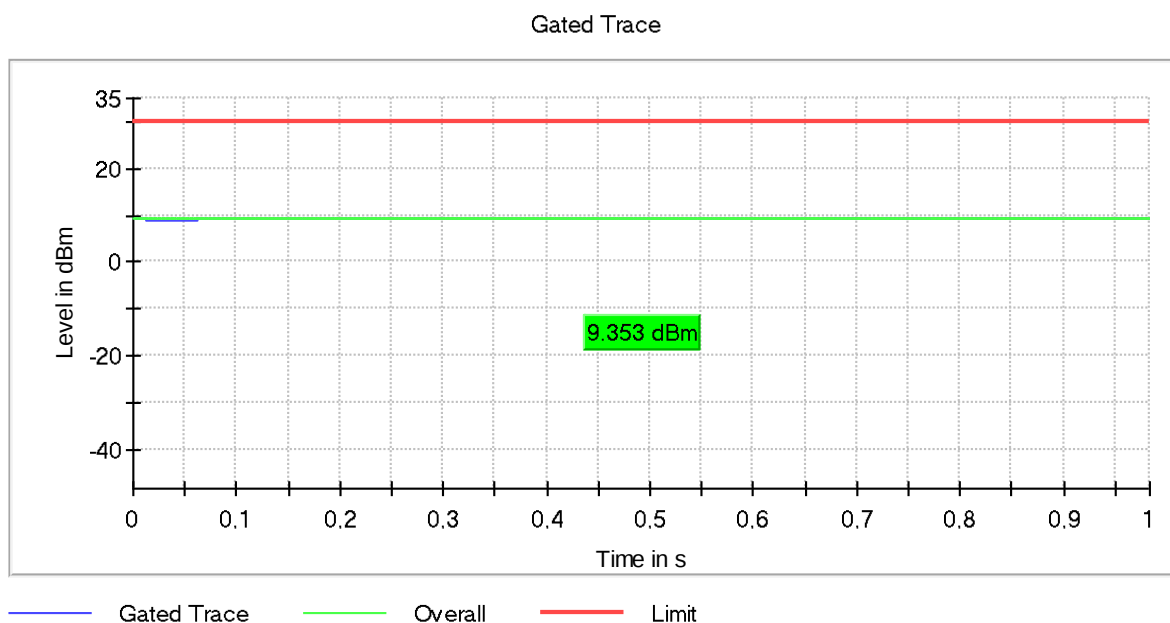

- Middle Channel:

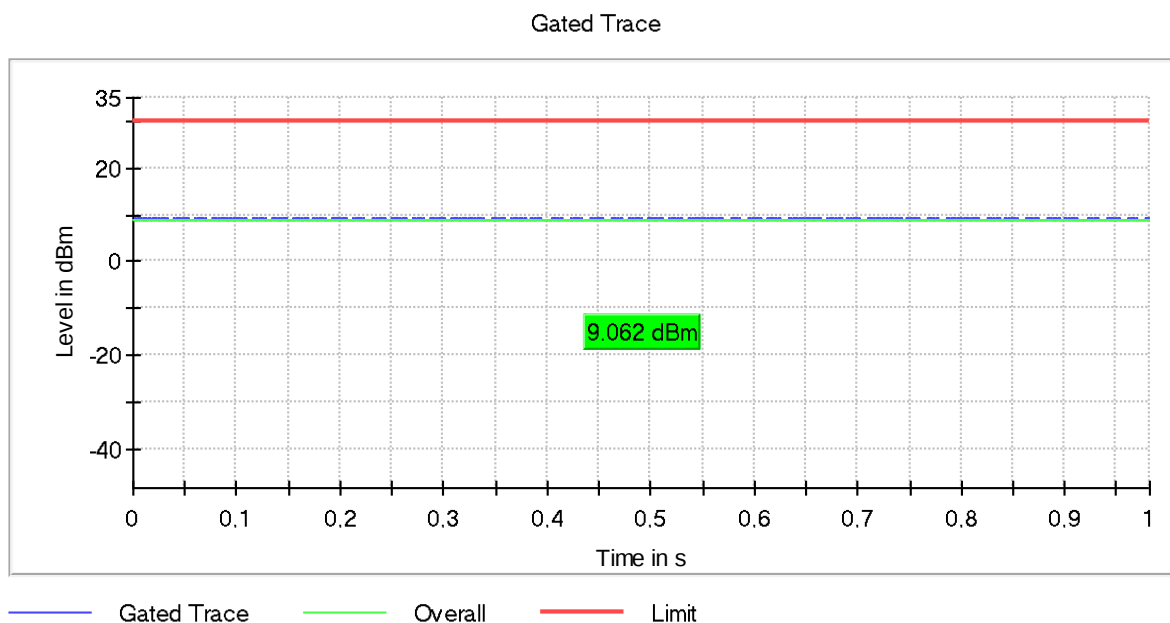

- High Channel:

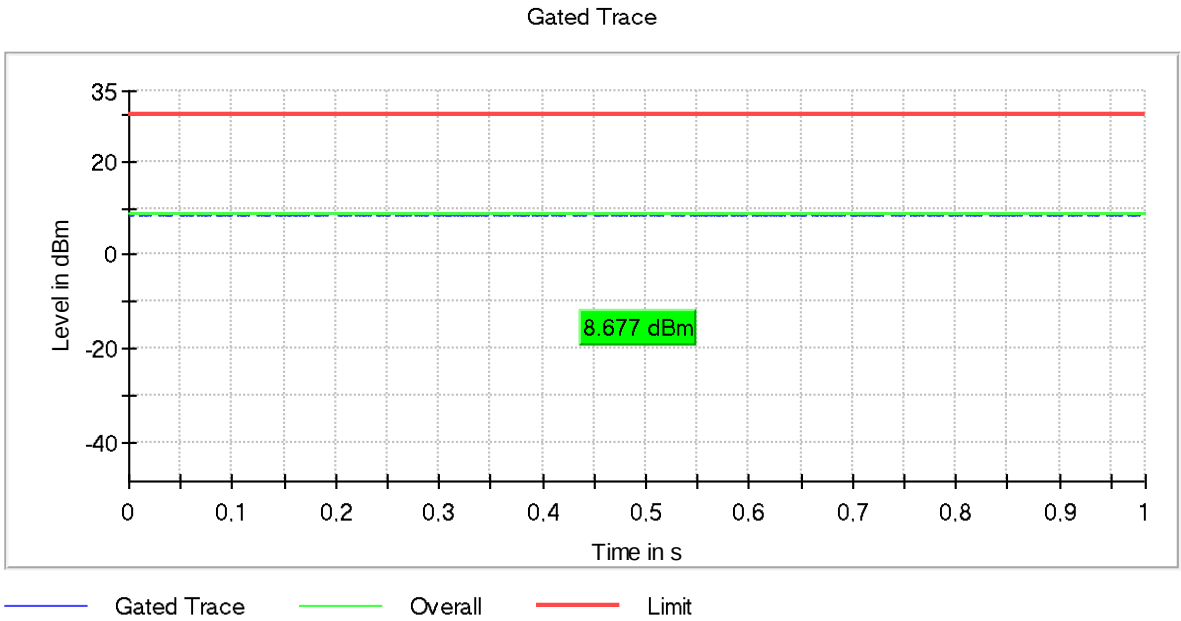

FCC 15.247 (d) / RSS-247 5.5. Band-edge emissions compliance (Transmitter)

SPECIFICATION:

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


RESULTS:

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Measurement uncertainty (dB)	<± 1.53
------------------------------	---------

- Mode 802.11 b – Band-edge emissions compliance:**


- Low Channel:

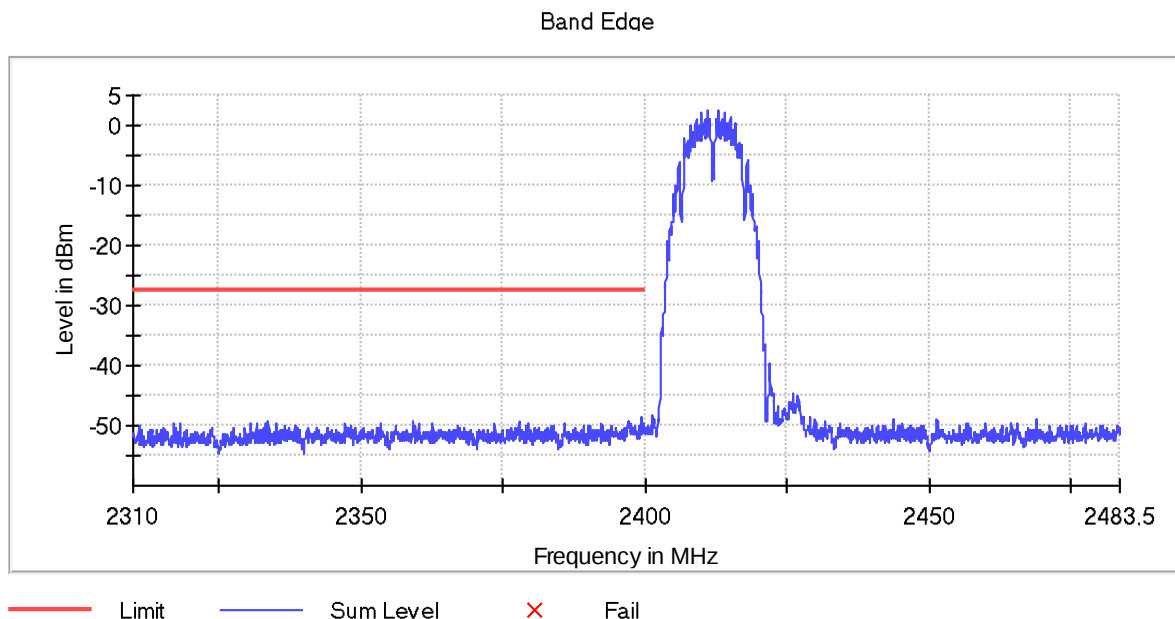

Verdict: PASS

- **Mode 802.11 g – Band-edge emissions compliance:**


- Low Channel:

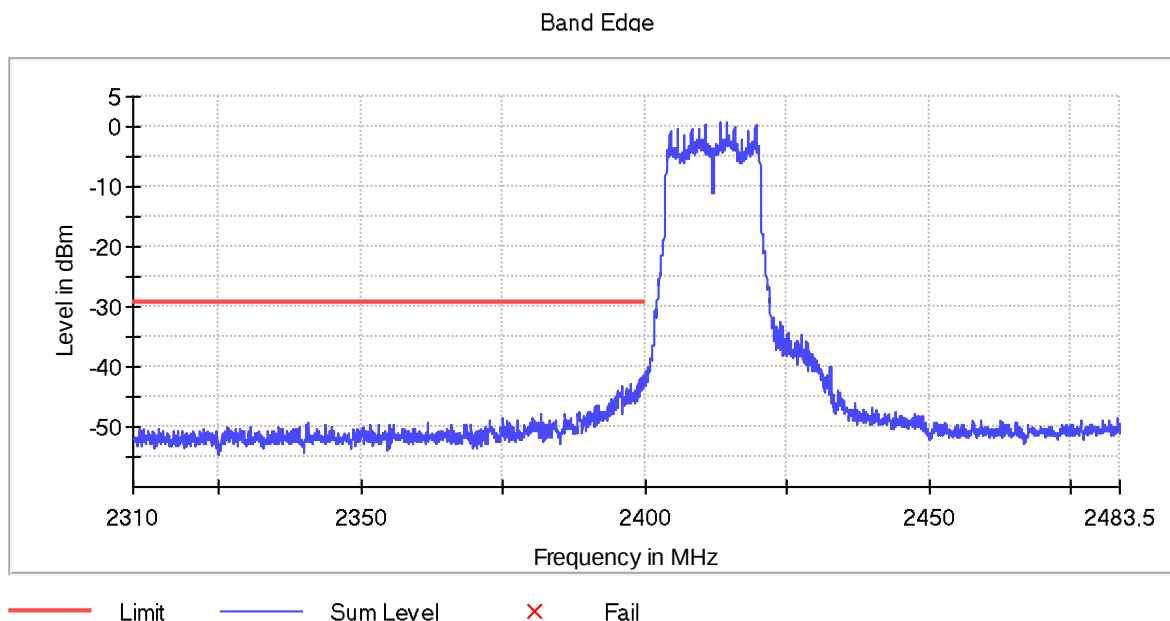

Verdict: PASS

- **Mode 802.11 n20 – Band-edge emissions compliance:**

- Low Channel:

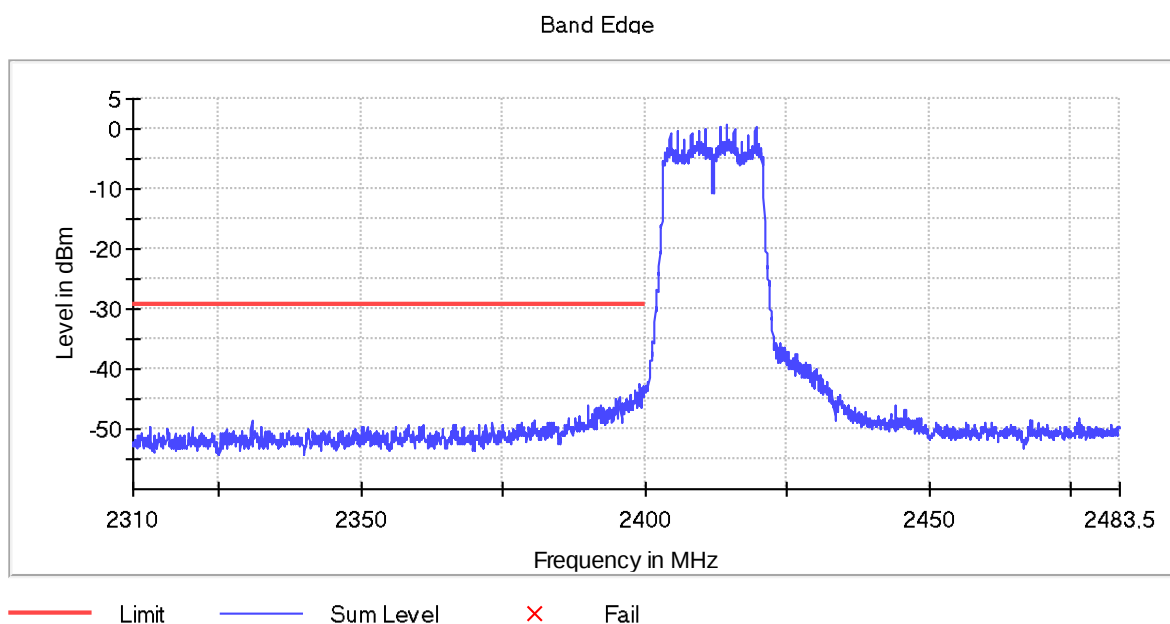

Verdict: PASS

FCC 15.247 (e) / RSS-247 5.2. (b) Power spectral density

SPECIFICATION:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS:

The power spectral density was measured using the method according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05r02 F and ANSI C63.10-2013.

- Mode 802.11 b:**

	Low Channel	Middle Channel	High Channel
Average Power Spectral Density (dBm)	-8.232	-8.266	-8.864
Measurement uncertainty (dB)	<± 0.99		

- Mode 802.11 g:**

	Low Channel	Middle Channel	High Channel
Average Power Spectral Density (dBm)	-10.076	-10.523	-10.710
Measurement uncertainty (dB)	<± 0.99		


- Mode 802.11 n20:**

	Low Channel	Middle Channel	High Channel
Average Power Spectral Density (dBm)	-10.499	-10.881	-10.865
Measurement uncertainty (dB)	<±0.99		


Verdict: PASS

• Mode 802.11 b – Power Spectral Density:


- Low Channel:

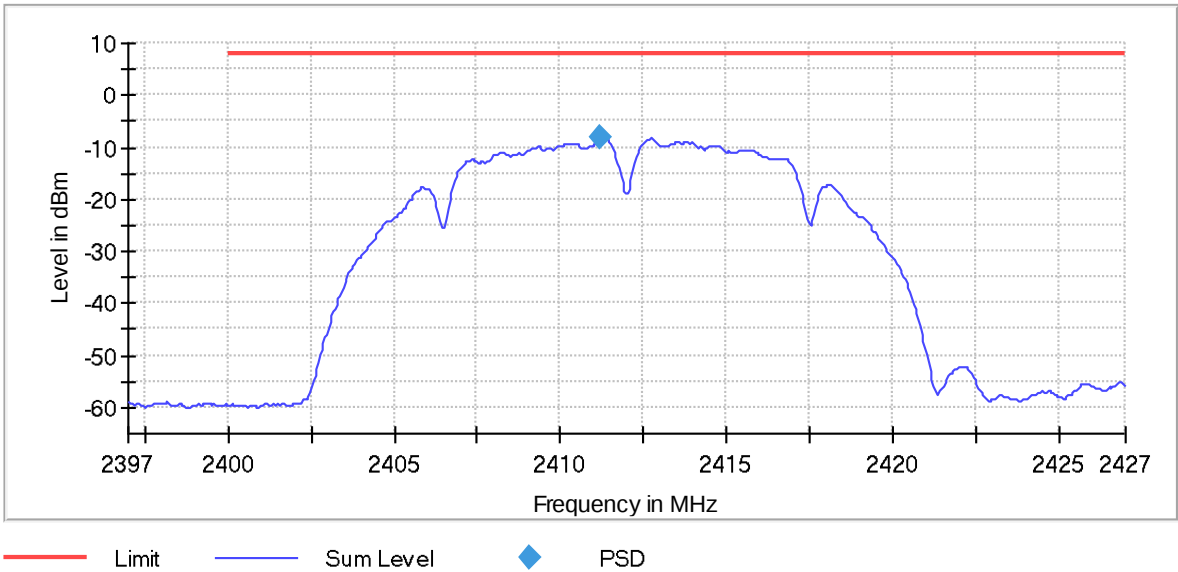

- Middle Channel:

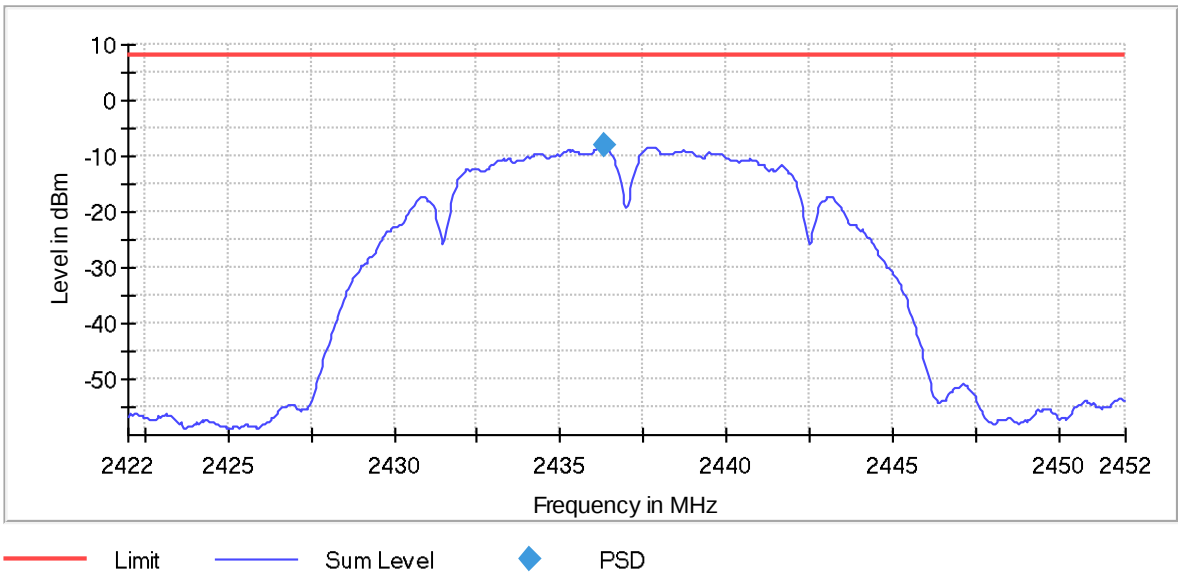


- High Channel:

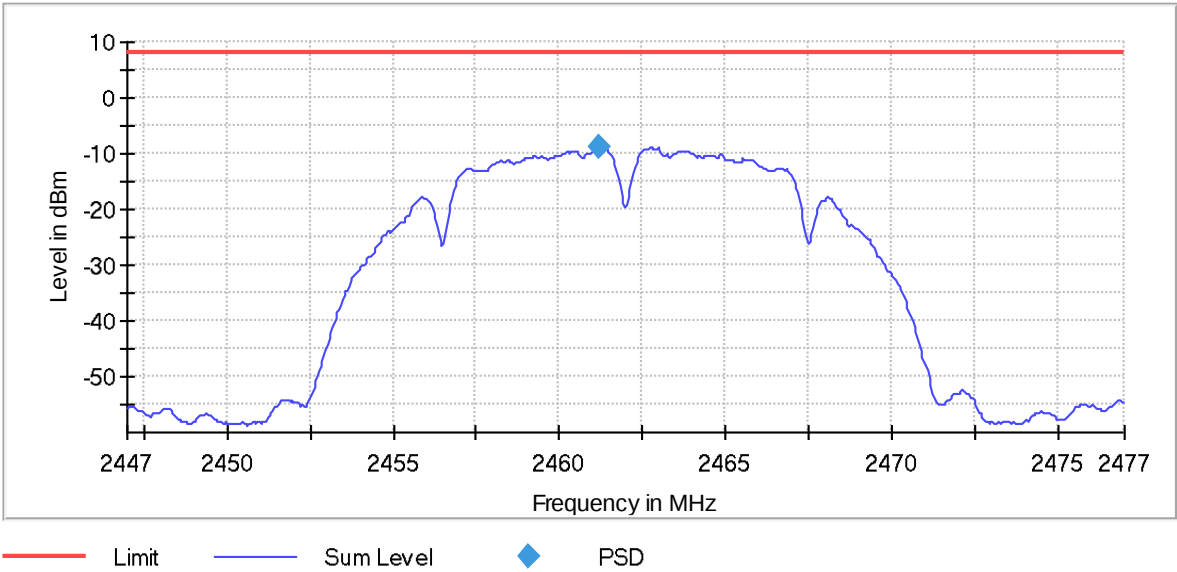


• Mode 802.11 g – Power Spectral Density:


- Low Channel:

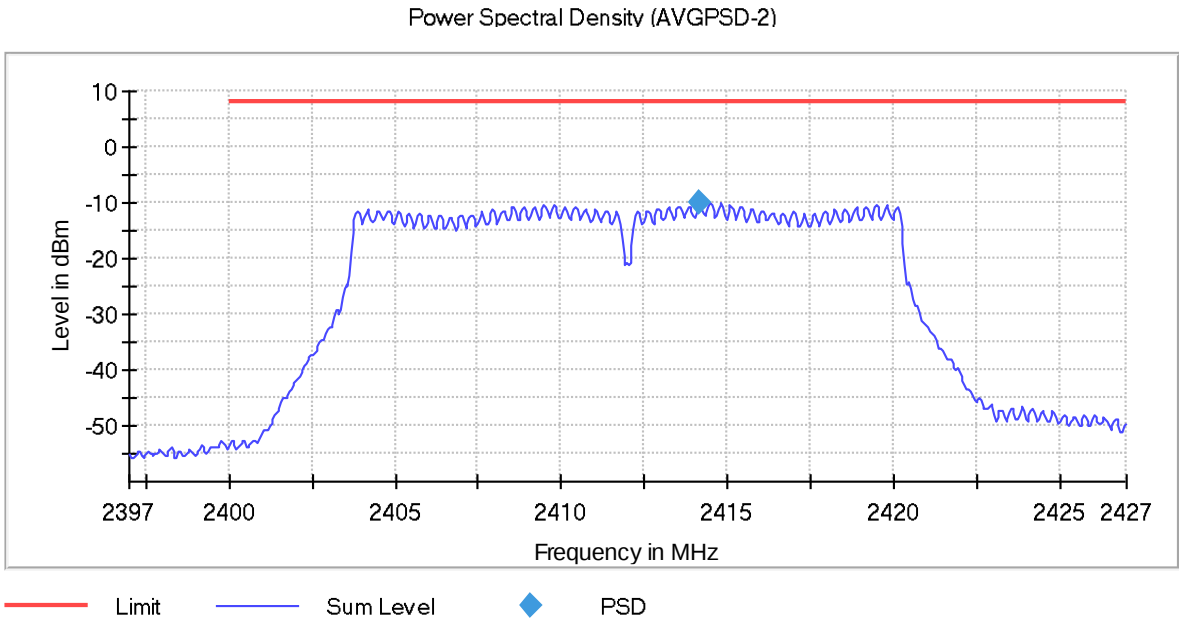

- Middle Channel:

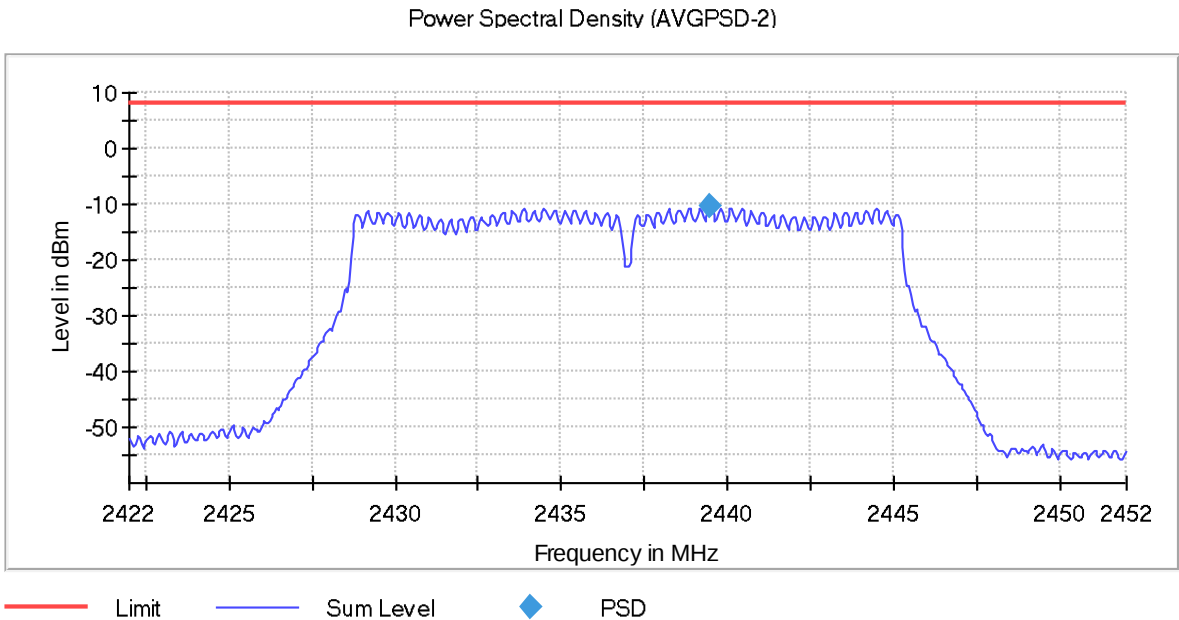


- High Channel:

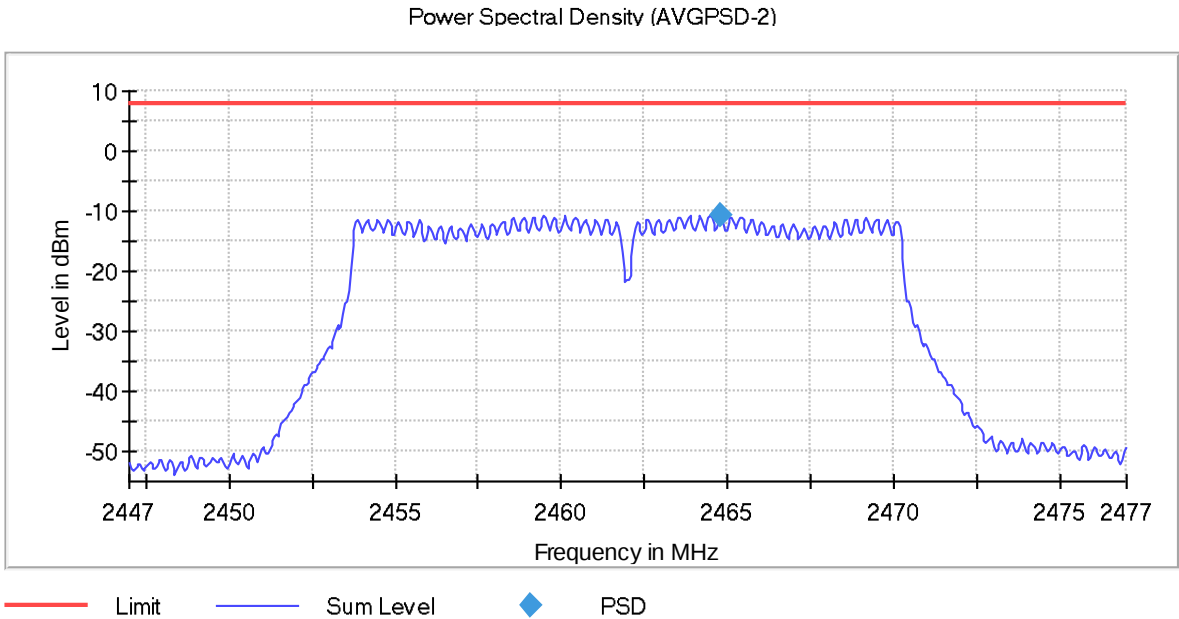


• Mode 802.11 n20 – Power Spectral Density:


- Low Channel:

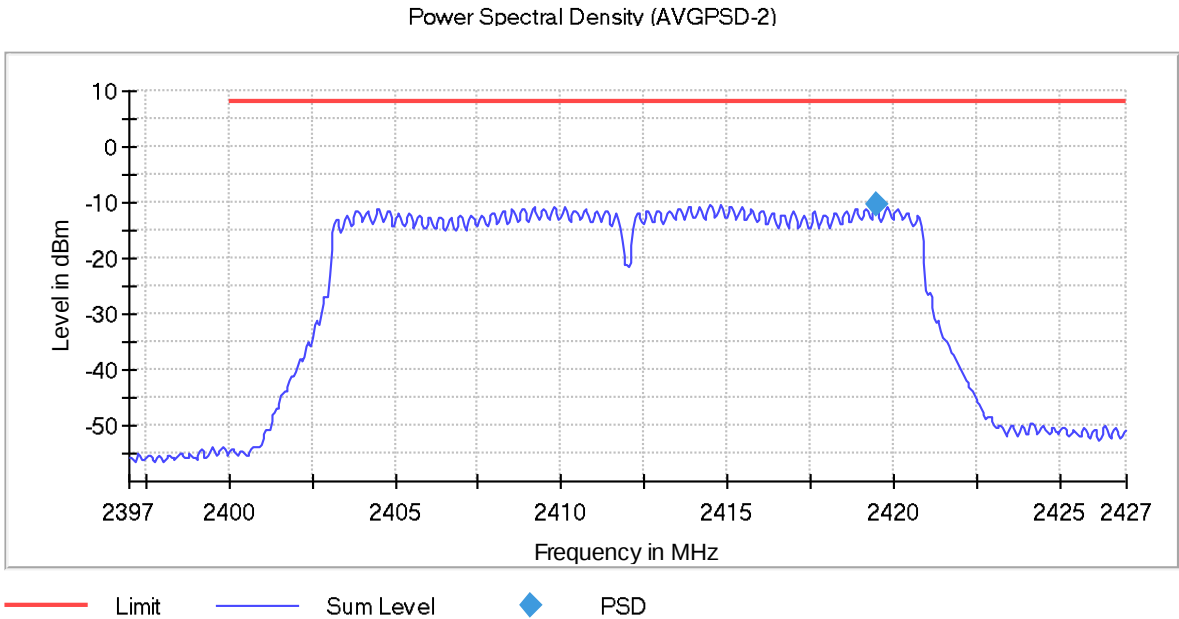

- Middle Channel:

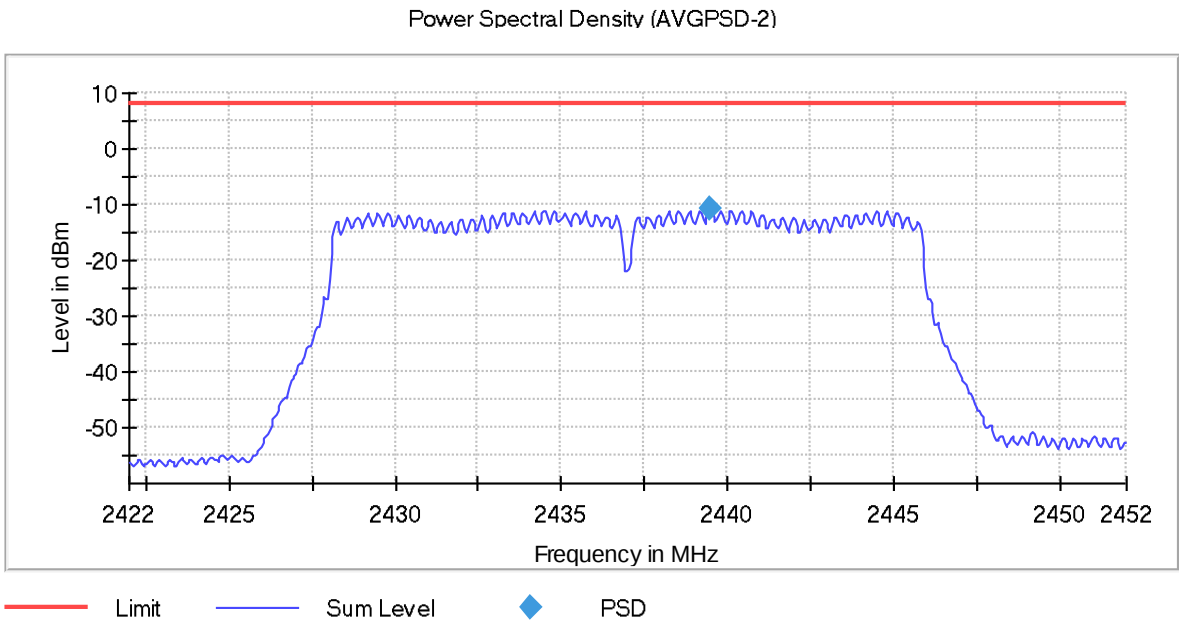

- High Channel:

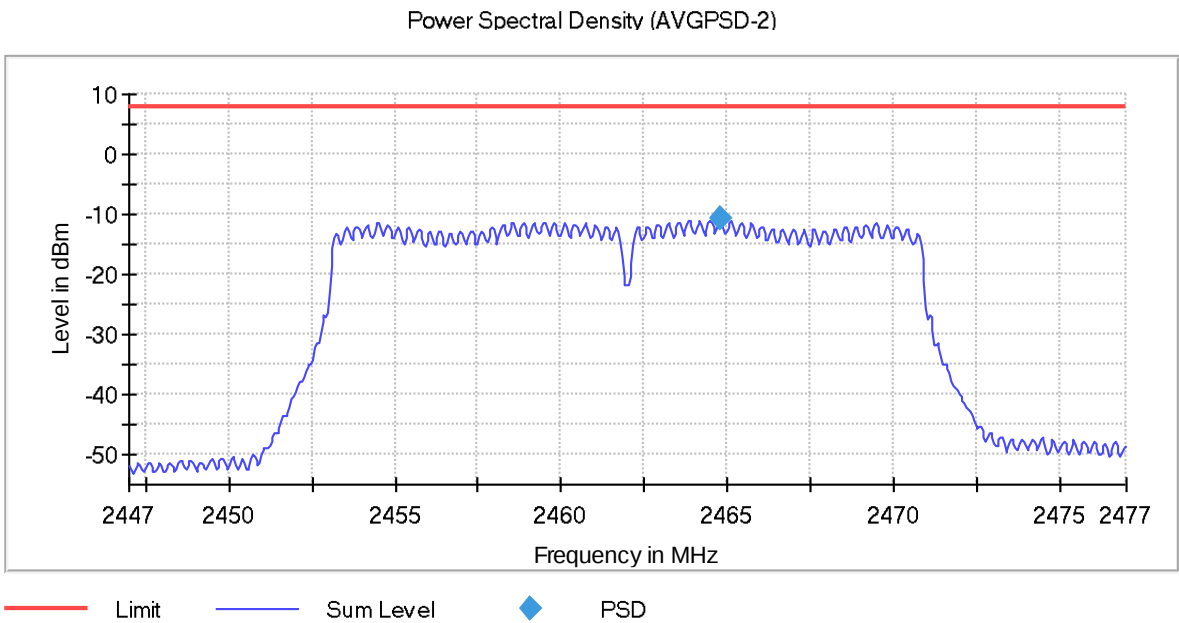

FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)

SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1 m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz (worst case):

The spurious frequencies do not depend neither on the operating channel nor the modulation mode.

Spurious frequencies at less than 20 dB below the limit:

Frequency (MHz)	Emission Level ($\text{dB}\mu\text{V/m}$)	Polarization	Detector	Measurement Uncertainty (dB)
53.4255	23.89	V	Quasi-peak	$<\pm 5.08$
585.0825	37.69	H	Quasi-peak	$<\pm 5.08$
657.2020	32.21	H	Quasi-peak	$<\pm 5.08$

802.11 b:

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- LOW CHANNEL. Spurious frequencies at less than 20 dB below the limit:

Spurious Frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
3.9035	50.83	V	Peak	< $\pm$ 5.13
6.506	45.09	V	Peak	< $\pm$ 5.13

- MIDDLE CHANNEL. Spurious frequencies at less than 20 dB below the limit:

Spurious Frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
3.9165	50.54	V	Peak	< $\pm$ 5.13

- HIGH CHANNEL. Spurious frequencies at less than 20 dB below the limit:

Spurious Frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
3.9135	50.44	V	Peak	< $\pm$ 5.13

Measurement Uncertainty (dB): 1 GHz - 17 GHz < $\pm$ 5.13
17 GHz - 26 GHz < $\pm$ 4.82

Verdict: PASS

OFDM modes:

For spurious emissions in the range 30 MHz - 26 GHz (except field strength at the band edges that was performed for all modes) a preliminary scan was performed to determine the worst case mode.

Spurious emissions in the Restricted Bands 2.31-2.39 GHz and 2.4835-2.5 GHz are measured for all modes. The following results and plots are for the worst case OFDM mode.

- **Worst case OFDM mode: 802.11 g.**

- **802.11 g (OFDM worst case for spurious emissions):**

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- LOW CHANNEL. Spurious frequencies closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
3.8975	49.14	V	Peak	< $\pm$ 5.13

- MIDDLE CHANNEL. Spurious frequencies closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
3.249	40.15	V	Peak	< $\pm$ 5.13
3.8975	47.88	V	Peak	< $\pm$ 5.13
6.4885	50.70	V	Peak	< $\pm$ 5.13

- HIGH CHANNEL. Spurious frequencies closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
3.9055	48.82	H	Peak	< $\pm$ 5.13

Measurement Uncertainty (dB): 1 GHz - 17 GHz < $\pm$ 5.13
17 GHz - 26 GHz < $\pm$ 4.82

Verdict: PASS

- **802.11 n20:**

The results in the next tables show the maximum measured levels in the Restricted Bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- RESTRICTED BAND 2.31-2.39 GHz. LOW CHANNEL. Spurious frequencies closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.3886	61.44	H	Peak	< $\pm$ 5.13
	46.09		Average	
2.389133333	63.45	H	Peak	< $\pm$ 5.13
	46.52		Average	


- RESTRICTED BAND 2.4835-2.5 GHz. HIGH CHANNEL. Spurious frequencies closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.483666667	61.73	H	Peak	< $\pm$ 5.13
	46.95		Average	

Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz (worst case):

The spurious frequencies detected do not depend on either the operating channel or the modulation mode.

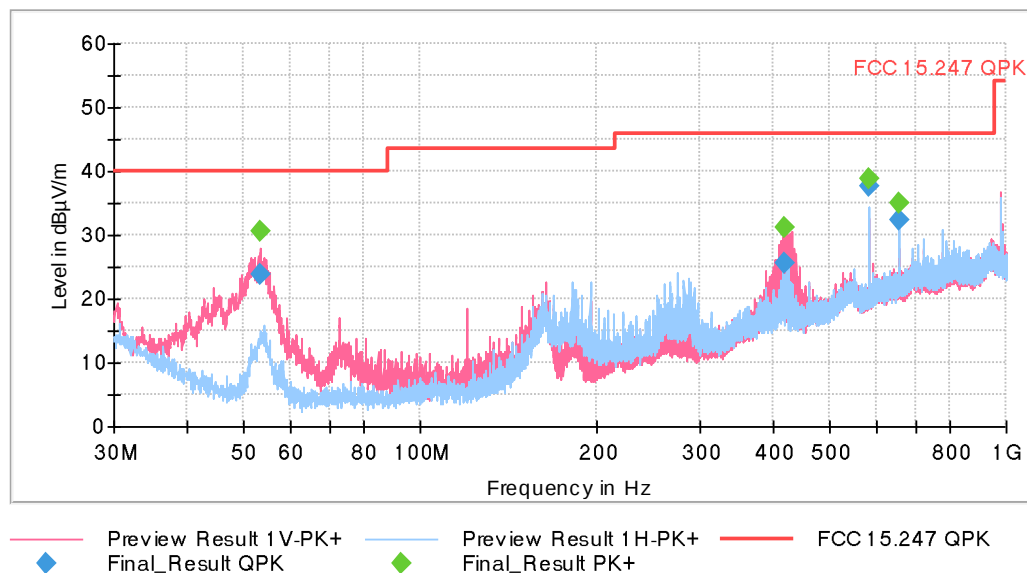


The above plot shows the results of the scan using peak detector.

• **802.11 b:**


FREQUENCY RANGE 1 - 3 GHz:

- Low Channel:

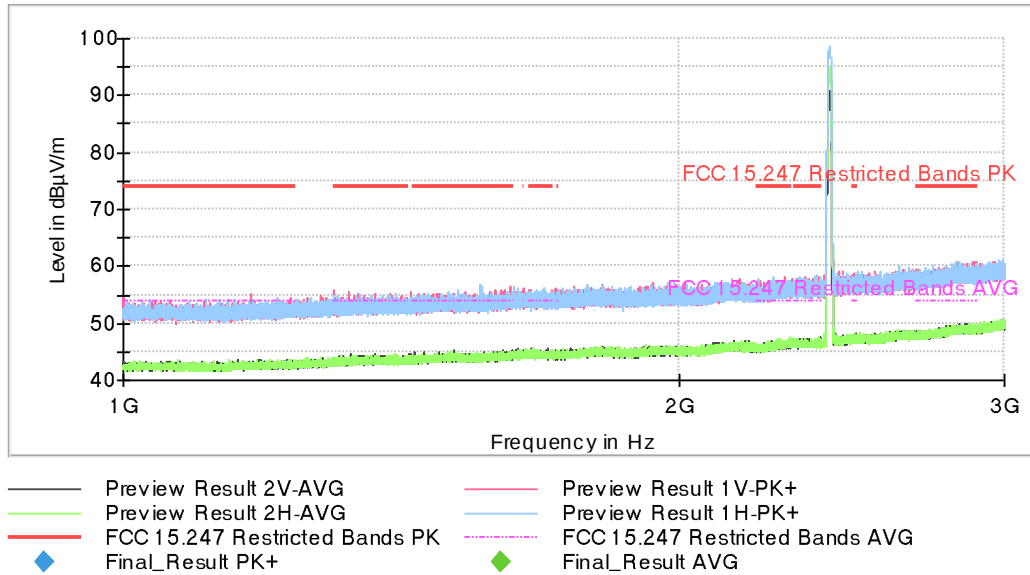


The peak above the limit is the carrier frequency.

- Middle Channel:

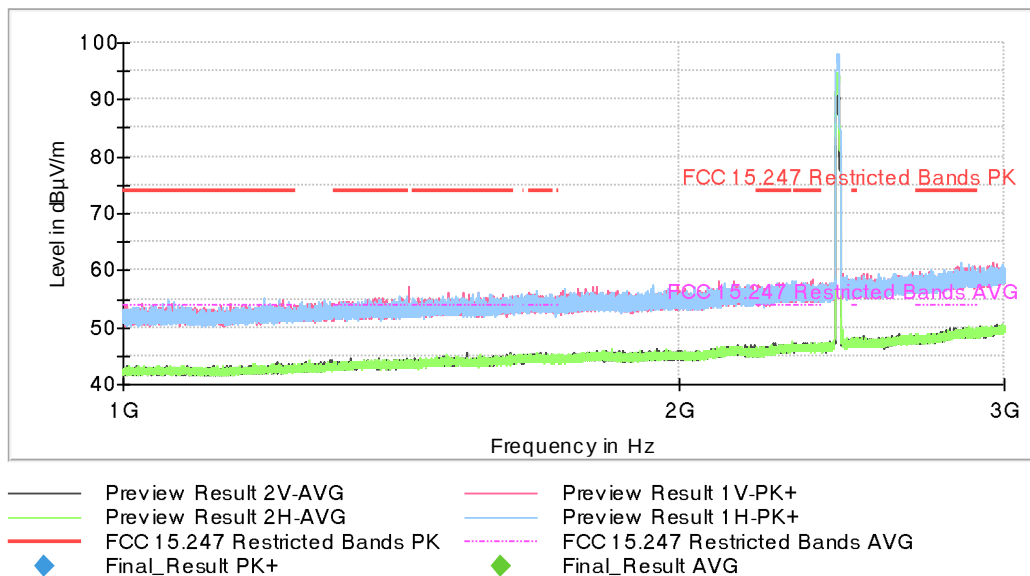

The peak above the limit is the carrier frequency.


- High Channel:

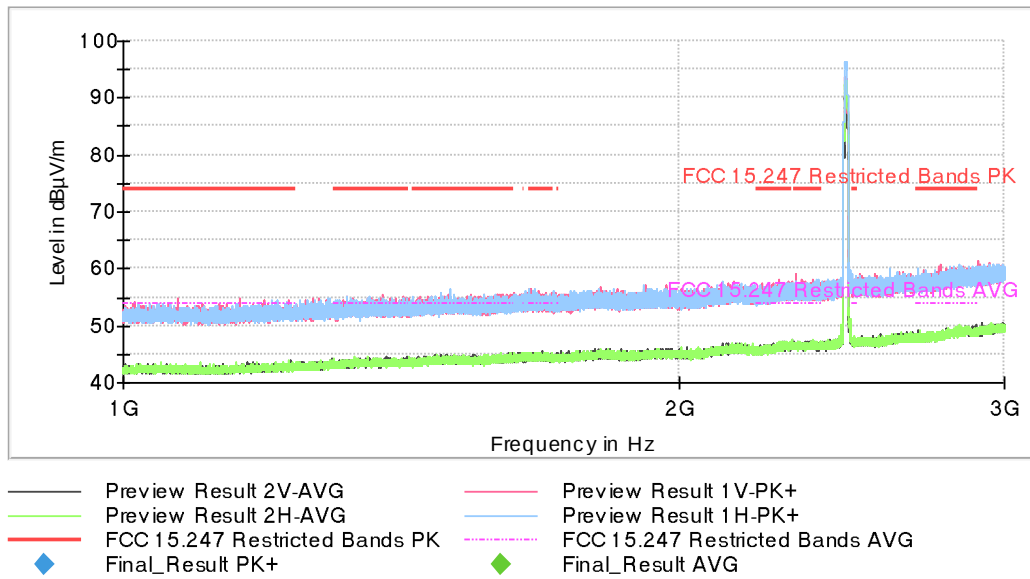


The peak above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz:


- Low Channel:

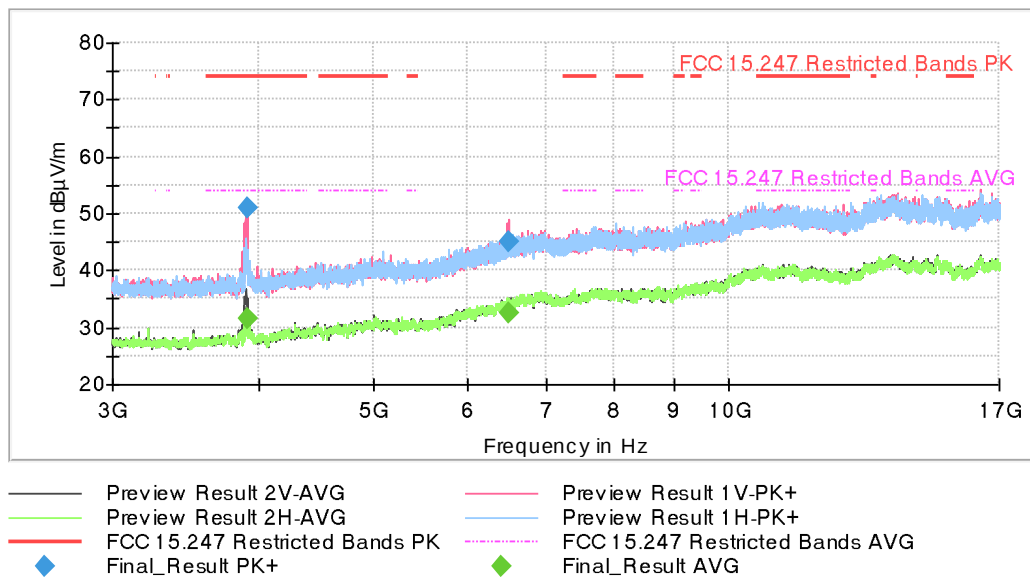

- Middle Channel:

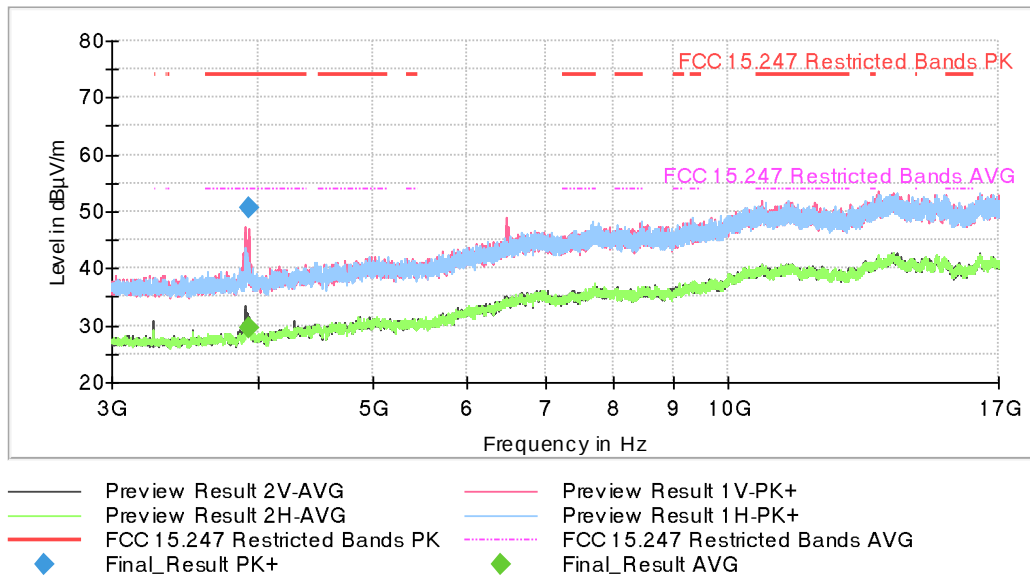


- High Channel:

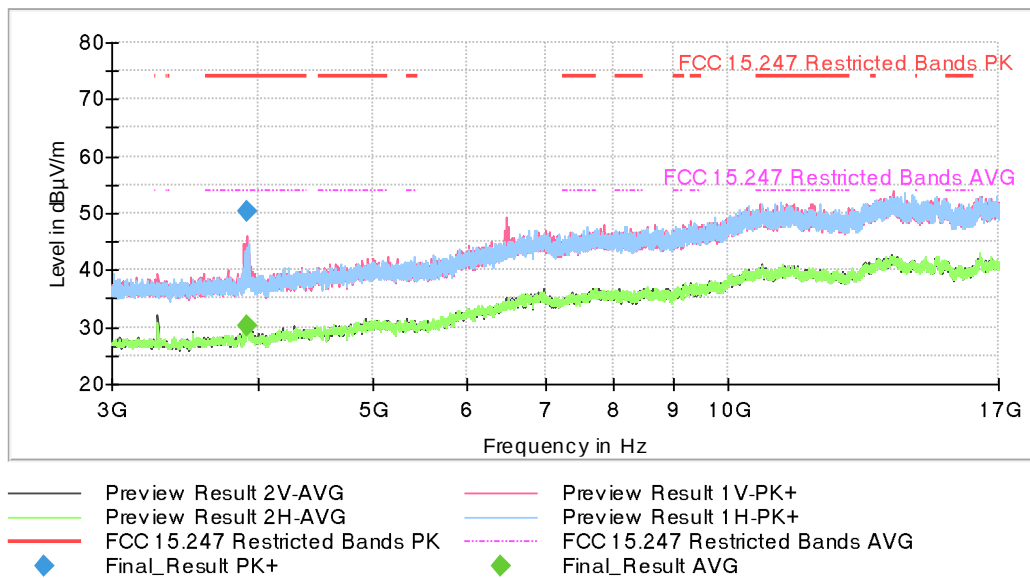

FREQUENCY RANGE 17 - 26 GHz:


The spurious frequencies detected do not depend on the operating channel.

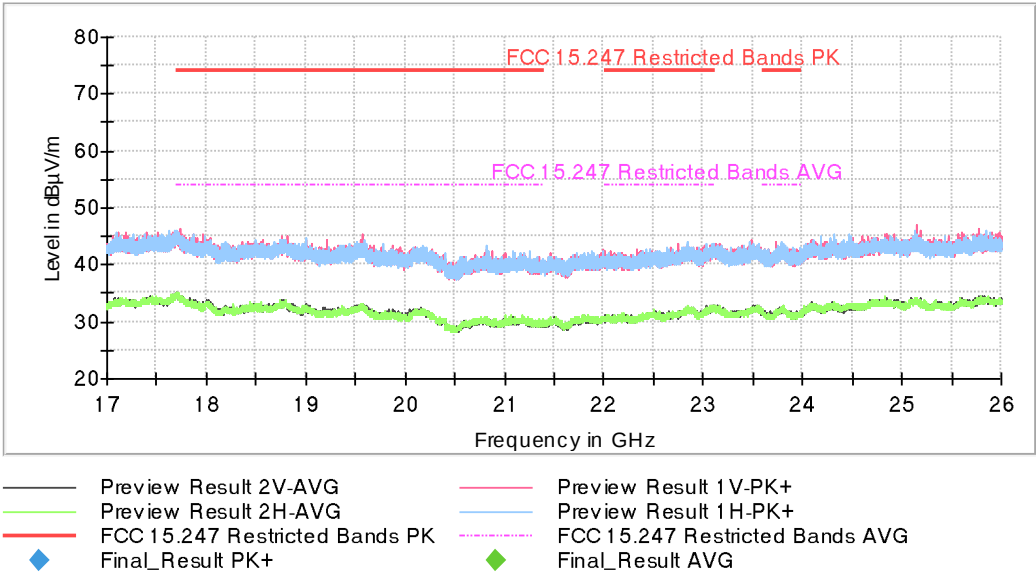

RESTRICTED BAND 2.31-2.39 GHz:

- Low Channel:


Full Spectrum

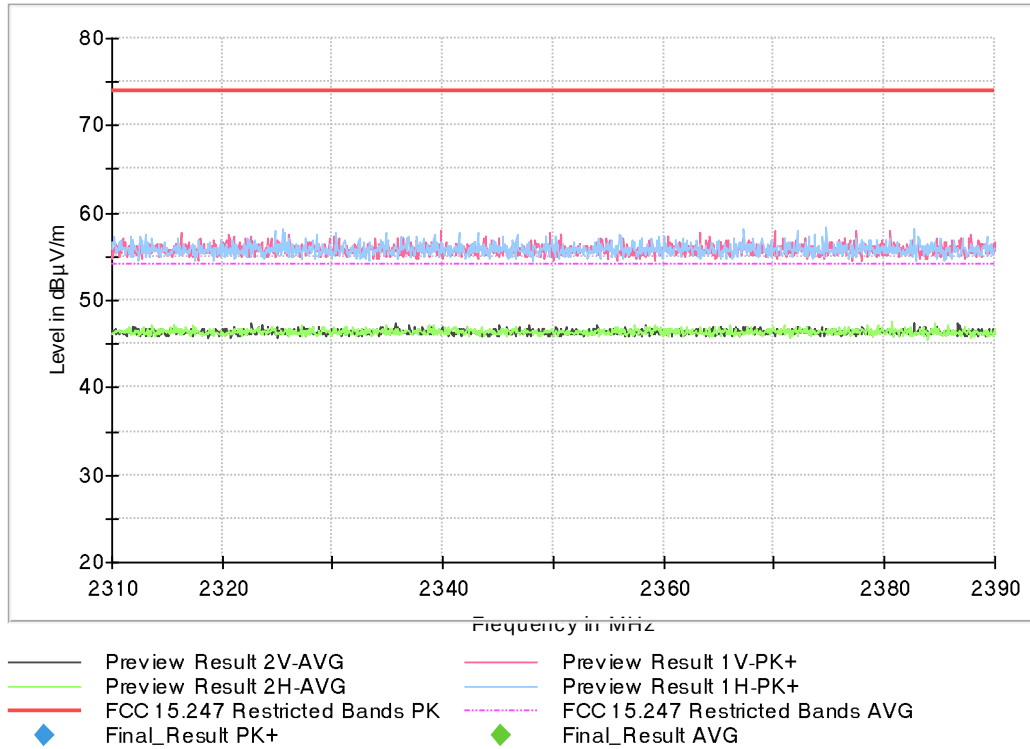

RESTRICTED BAND 2.4835-2.5 GHz:

- High Channel:


Full Spectrum

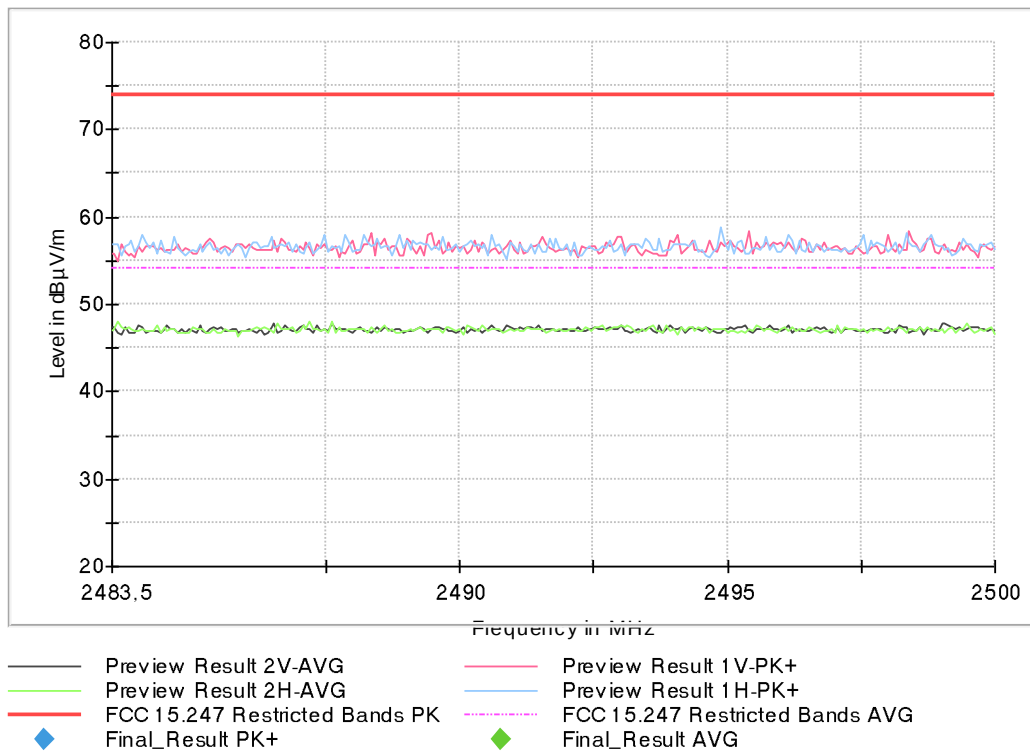

- 802.11 g (OFDM worst case for spurious emissions):


FREQUENCY RANGE 1 - 3 GHz:

- Low Channel:

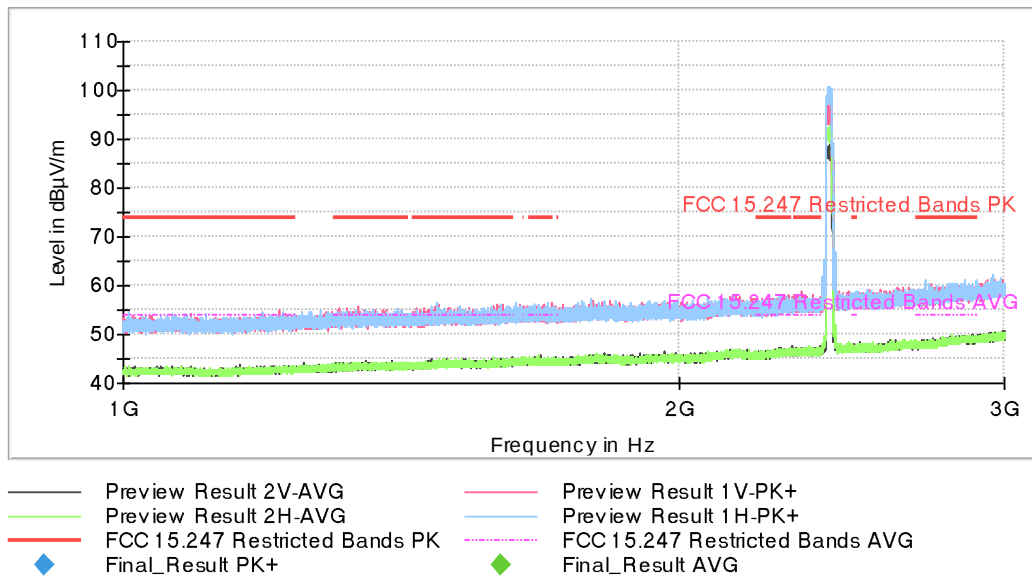


The peak above the limit is the carrier frequency.

- Middle Channel:

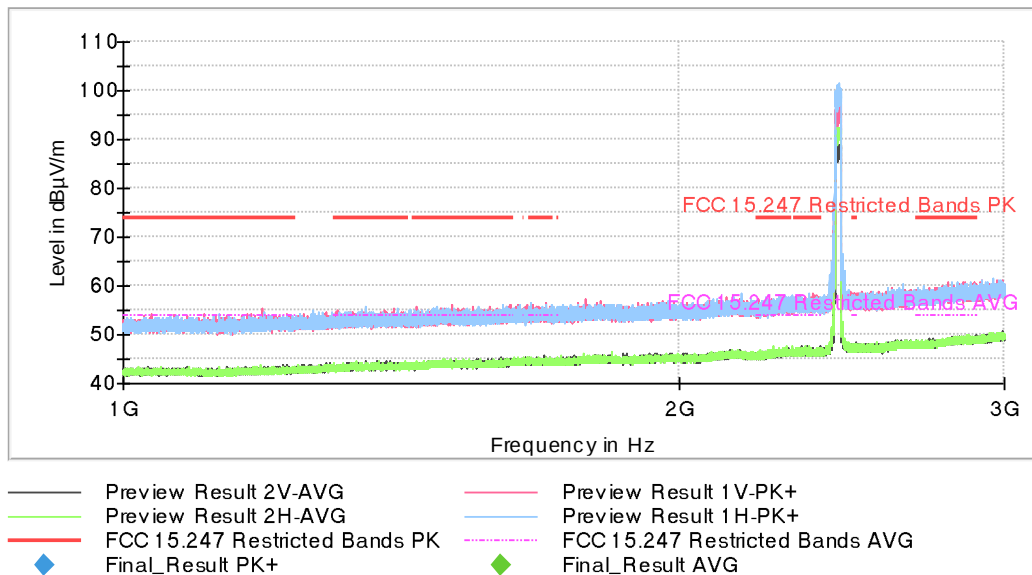

The peak above the limit is the carrier frequency.


- High Channel:

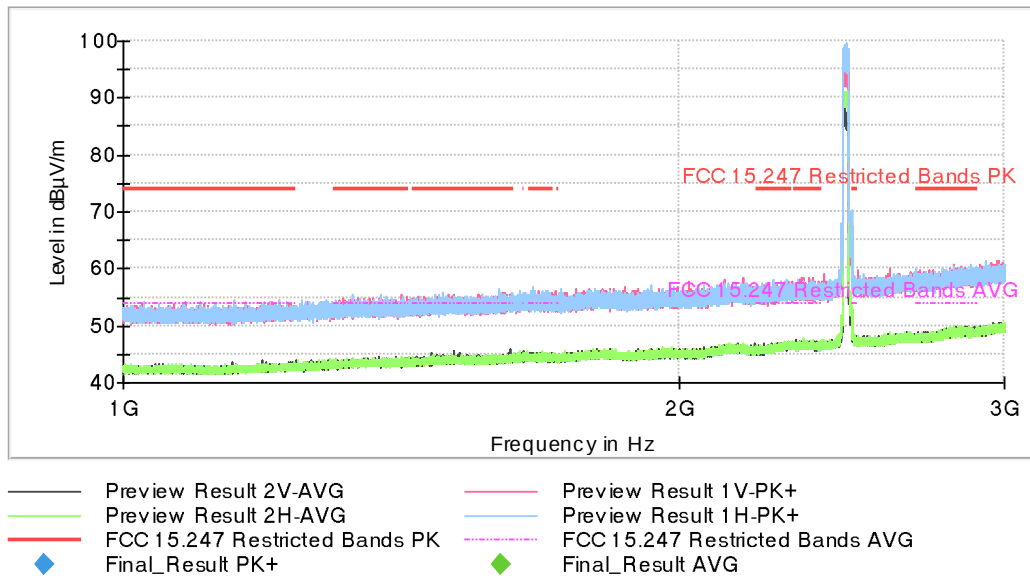


The peak above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz:


- Low Channel:

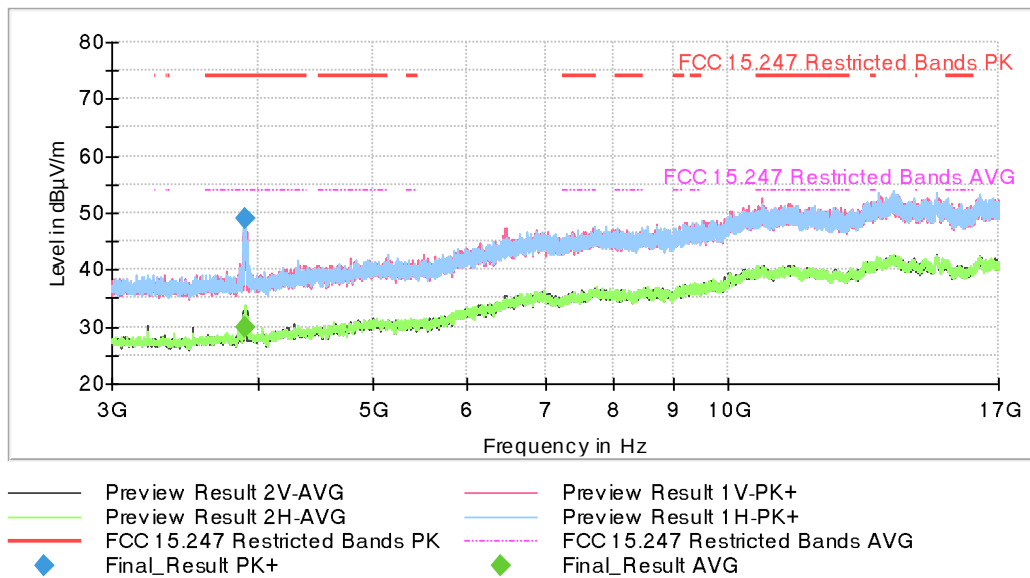

- Middle Channel:

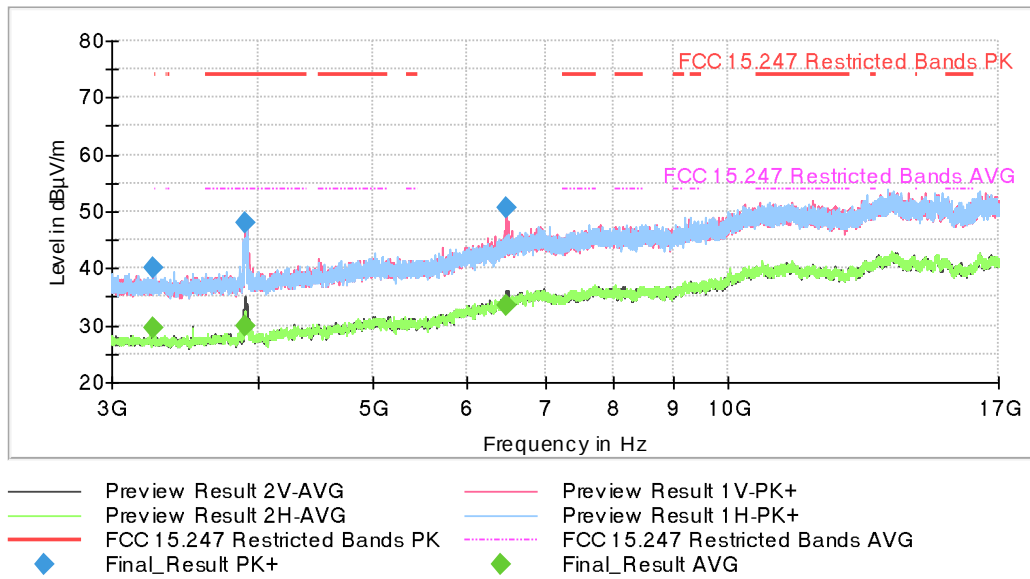


- High Channel:

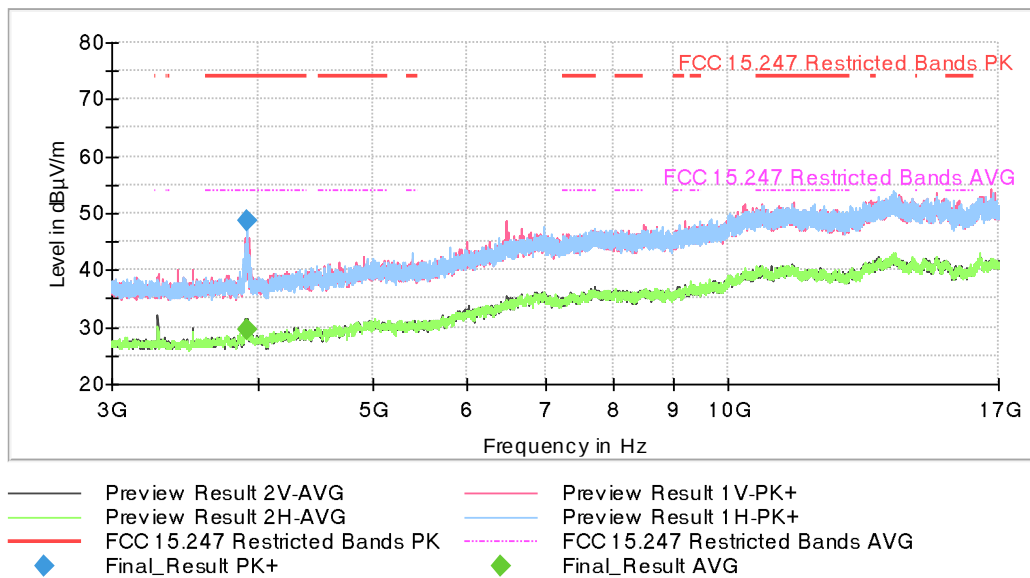

FREQUENCY RANGE 17 - 26 GHz:


The spurious frequencies detected do not depend on the operating channel.

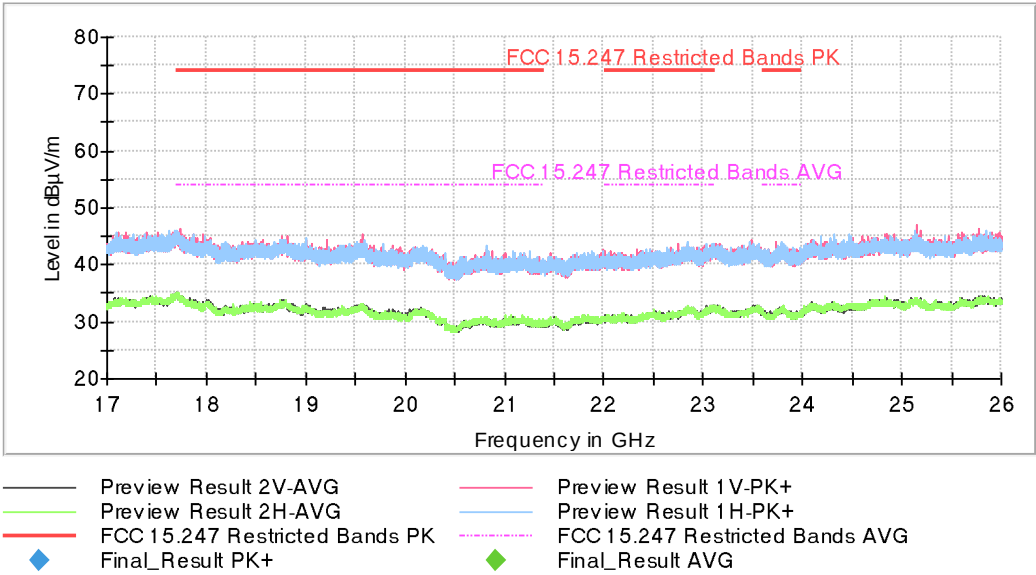

RESTRICTED BAND 2.31-2.39 GHz:

- Low Channel:


Full Spectrum

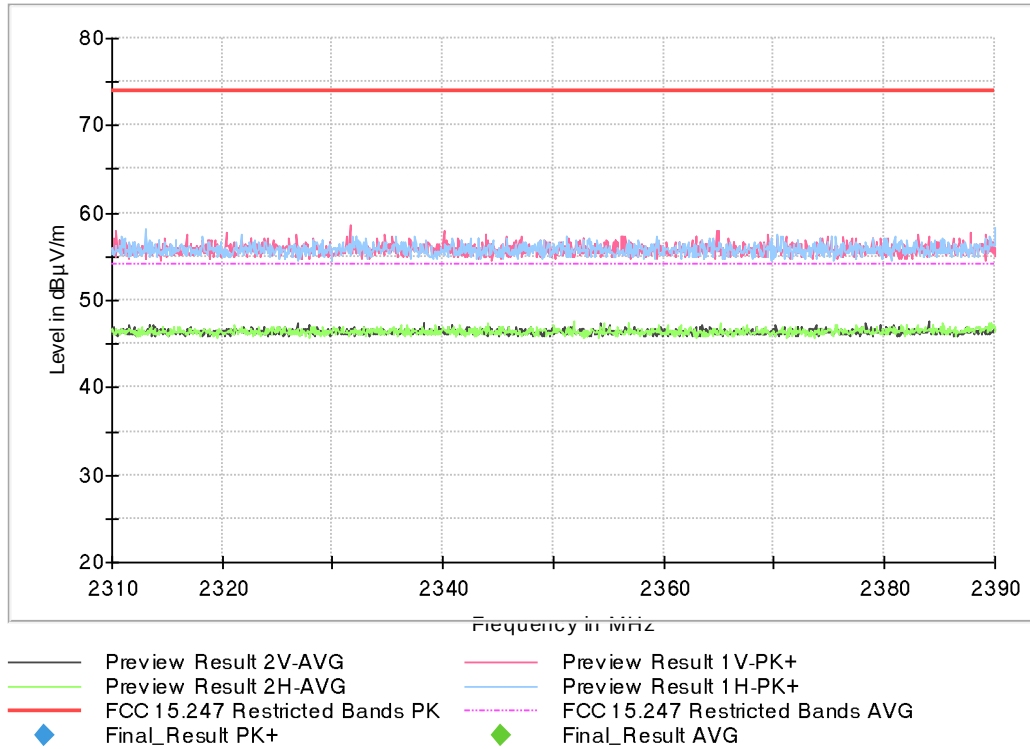

RESTRICTED BAND 2.4835-2.5 GHz:

- High Channel:


Full Spectrum

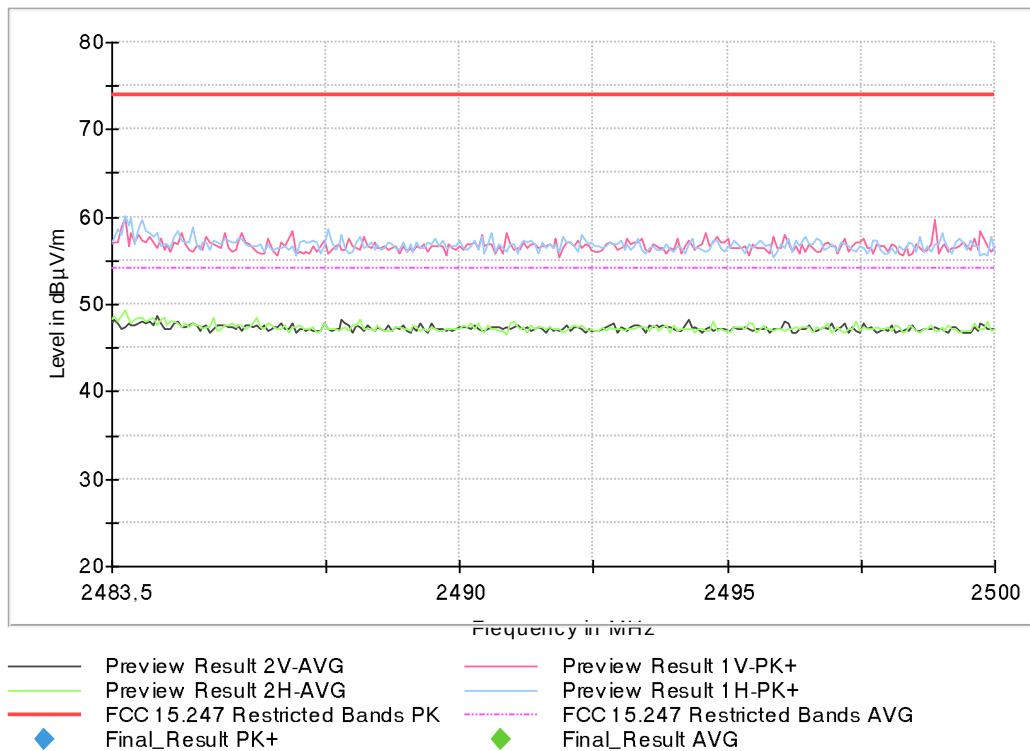

• 802.11 n20:

RESTRICTED BAND 2.31-2.39 GHz:

- Low Channel:

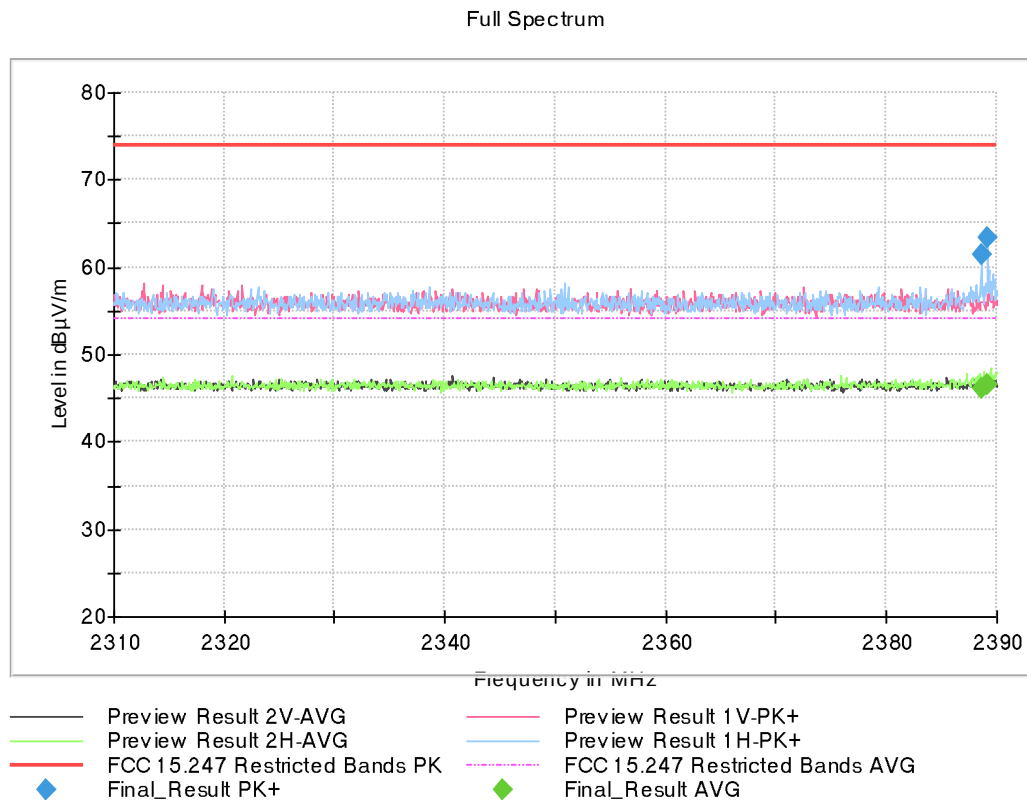

RESTRICTED BAND 2.4835-2.5 GHz:

- High Channel:

