

ISED CABid: ES1909

Test Report No:
NIE: 68918RRF.004

Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	SMART REMOTE CONTROL UNIT with WLAN
(*) Trademark	Audi
(*) Model and /or type reference	SCON2
Other identification of the product	HW version: D0 SW version: 214 FCC ID: T8GSCON2 IC: 6434A-SCON2
(*) Features	Wi-Fi
Applicant	HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH BECKER-GOERING-STR. 16; 76307 KARLSBAD GERMANY
Test method requested, standard	USA FCC Part 15.247 (10-1-20 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-20 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager
Date of issue	2022-01-27
Report template No	FDT08_23 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	3
UNCERTAINTY	3
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	4
TEST SAMPLE DESCRIPTION	5
IDENTIFICATION OF THE CLIENT	6
TESTING PERIOD AND PLACE	6
DOCUMENT HISTORY	6
ENVIRONMENTAL CONDITIONS	6
REMARKS AND COMMENTS	7
TESTING VERDICTS	8
SUMMARY	8
APPENDIX A: TEST RESULTS. 802.11 B/G/N 20 MHZ 1X1	9

Acronyms

Acronym ID	Acronym Description
Detector	Detector used
Equipment	Equipment Type
Freq	Frequency
Freq Rng	Frequency Range
MP	Measurement Point
Mod	Modulation
Operation Band	Operation Band
Pol	Polarization
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model SCON2 is a smart remote control unit.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	68918_16.1	Display	SCON2	HBV006M6436BMH	2021-08-24	Element Under Test
S/01	68918_7.1	Harness	--	--	2021-08-10	Element Under Test
S/01	68918_9.1	CAN box #013	--	--	2021-08-10	Auxiliary Element

Samples have been used for the following test(s):

Id	Type
S/01	Radiated

Test sample description

Ports..... :	Port name and description		Cable				
			Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾	
	Harness		☐	☐	☐		
-		☐	☐	☐			
Supplementary information to the ports..... :	-						
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	☐	AC:	☐	☐	☐	☐	☐
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: DC: 12V Car battery / attenuator (9,5-15,5V normal operation)					
☐	DC:						
Rated Power	-						
Clock frequencies..... :	-						
Other parameters	-						
Software version	214						
Hardware version	D0						
Dimensions in cm (W x H x D)	-						
Mounting position	☐	Table top equipment					
	☐	Wall/Ceiling mounted equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
	☒	Other:					
Modules/parts..... :	Module/parts of test item		Type		Manufacturer		
	-						
	-						
	-						
Accessories (not part of the test item)	Description		Type		Manufacturer		
	-						
	-						
	-						
Documents as provided by the applicant..... :	Description		File name		Issue date		
	-						
	-						
	-						

³⁾ Only for Medical Equipment

Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH
BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-12-16
Date (finish)	2022-01-03

Document history

Report number	Date	Description
68918RRF.004	2022-01-27	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Alfonso Gutiérrez Martínez, Miguel Manuel López Guzmán and Nicolás Salguero Camarena.

Used instrumentation:

Equipment	Model	Manufacturer	Next Calibration
SEMIANECHOIC ABOSORBER LINED CHAMBER	FACT 3 200 STP	ETS LINDGREN	N/A
EMI TEST RECEIVER 9kHz-7GHz	ESR7	ROHDE AND SCHWARZ	2022-12-12
EMI TEST RECEIVER 9kHz-7GHz	ESR7	ROHDE AND SCHWARZ	2023-11-08
HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK	2023-08-24
HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	2022-11-18
HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2023-05-05
PRE-AMPLIFIER G>30dB 17-40GHz	BLMA 1840-4A	BONN ELEKTRONIK	2021-09-08
HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2023-04-30
HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2023-10-29
PRE-AMPLIFIER G>30dB 1GHz-18GHz	BLMA 0118-3A	BONN ELEKTRONIK	2022-12-01
PRE-AMPLIFIER G>40dB 10MHz-6GHz	BLNA 0160-01	BONN ELEKTRONIK	2022-03-09
SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2023-10-22
SIGNAL AND SPECTRUM ANALYZER 2Hz-50GHz	FSW50	ROHDE AND SCHWARZ	2022-07-06
DIGITAL MULTIMETER	175	FLUKE	2022-11-01
DC POWER SUPPLY 30V/5A	U8002A	KEYSIGHT	N/A

Testing verdicts

Fail	F
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

802.11 B/G/N 20 MHz 1x1

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth		N/M	(1)
RSS-247 5.2 (b) / FCC 15.247 (e) [Psd] Power spectral density		N/M	(1)
RSS-247 5.4 (d) / FCC 15.247 (b) [Pkcp] Maximum output power and antenna gain		N/M	(1)
RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)		N/M	(1)
RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)		P	
<u>Supplementary information and remarks:</u> 1. Test not requested.			

Appendix A: Test results. 802.11 B/G/N 20 MHz 1x1

INDEX

TEST CONDITIONS	11
TEST CASES DETAILS	14
FCC 47 CFR PART 15.247 / RSS-247	14
RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)	14

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (V):

V nominal:	12 Vdc.
Type of Power Supply:	DC External (Car Battery).

ANTENNA:

Type of Antenna:	Integral.
Maximum Declared Assembly Antenna Gain:	2 dBi (effective)

TEST FREQUENCIES (*):

Low Channel:	2412 MHz
Middle Channel:	2437 MHz
High Channel:	2462 MHz

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

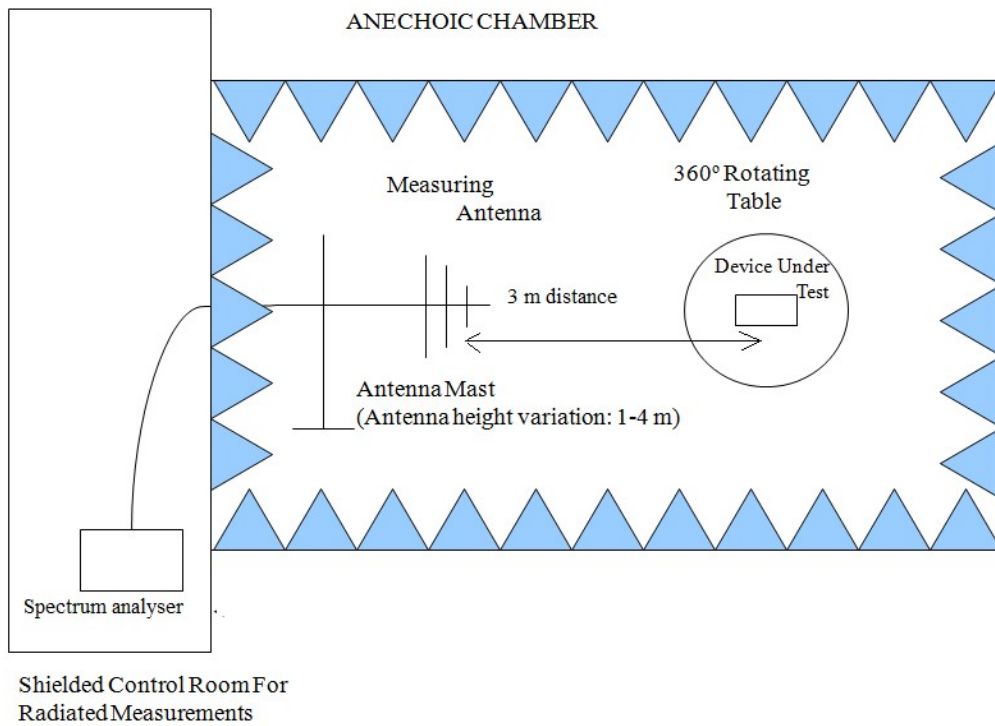

Radiated measurements setup from 1 GHz to 17 GHz:

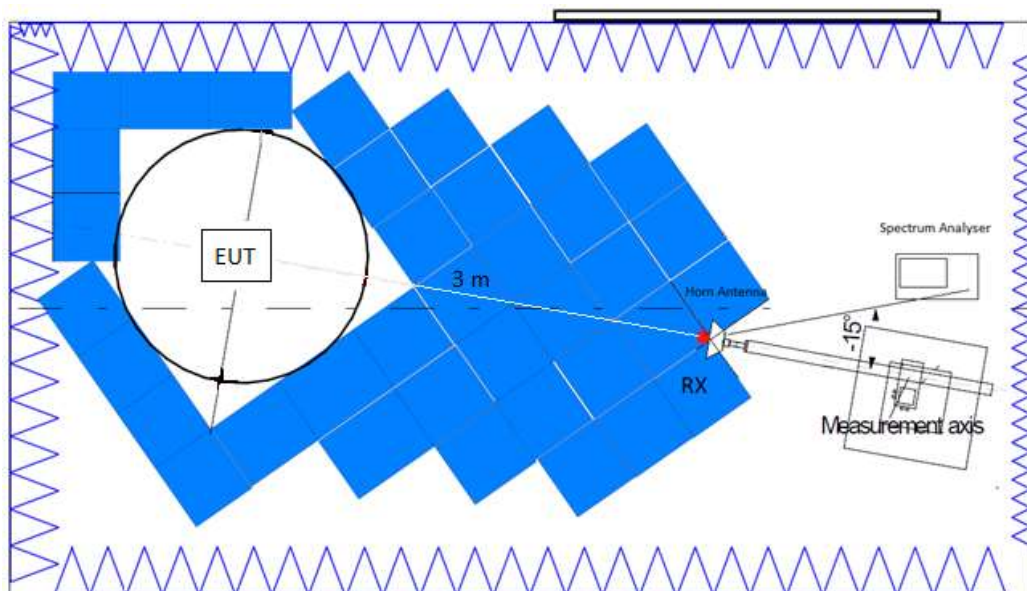

Radiated measurements setup $f > 17$ GHz:

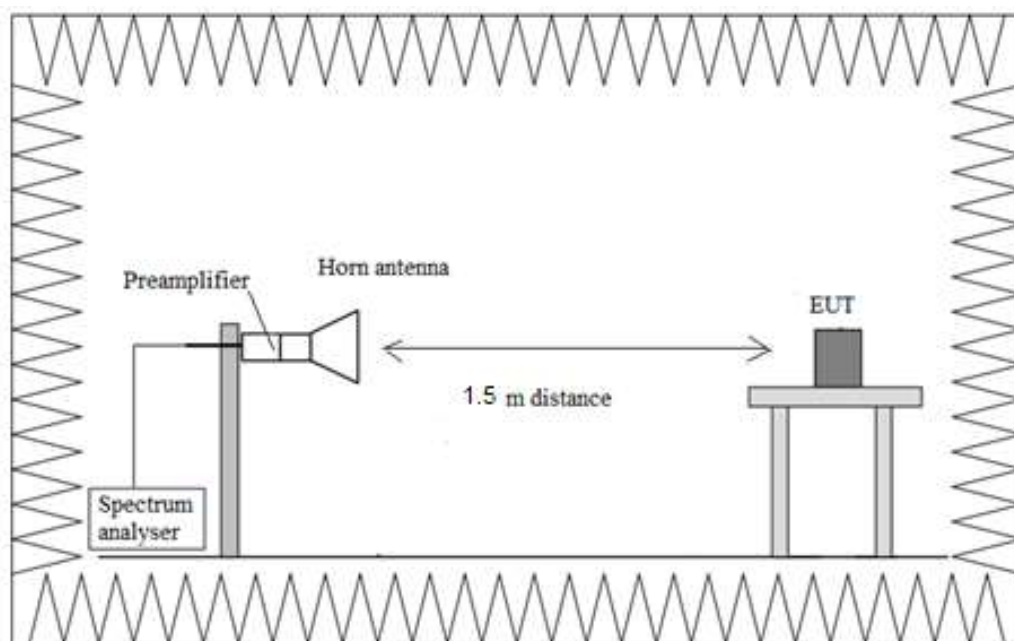

TEST CASES DETAILS

FCC 47 CFR Part 15.247 / RSS-247

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range 30 MHz - 1 GHz (worst-case):

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Results

Freq (MHz)	Freq Rng (GHz)	Unwanted Freq (MHz)	Unwanted Lvl (dB μ V/m)	Pol	Detector
2412.00000	[0.03, 1]	151.977500	23.64	V	PK
		151.977500	22.89	V	QP
		288.020000	23.21	V	PK
		288.020000	21.47	V	QP
		423.850313	26.86	V	PK
		423.850313	19.67	V	QP
		544.009063	27.07	V	PK
		544.009063	23.31	V	QP
		935.889063	27.61	V	PK
		935.889063	21.97	V	QP

Verdict

Pass


Uncertainty

Measurement Uncertainty (dB): 0.03 GHz $\leq f \leq$ 1 GHz: $\leq \pm 5.07$

Attachments

Operation Band MHz = [2400, 2483.5], Frequency MHz = The spurious frequencies detected do not depend neither on the operating channel, Equipment Type = Digital Transmission System (DTS), Modulation = The spurious frequencies detected do not depend neither on the modulation, Frequency Range GHz = [0.03, 1], Measurement Point = 1

Images:

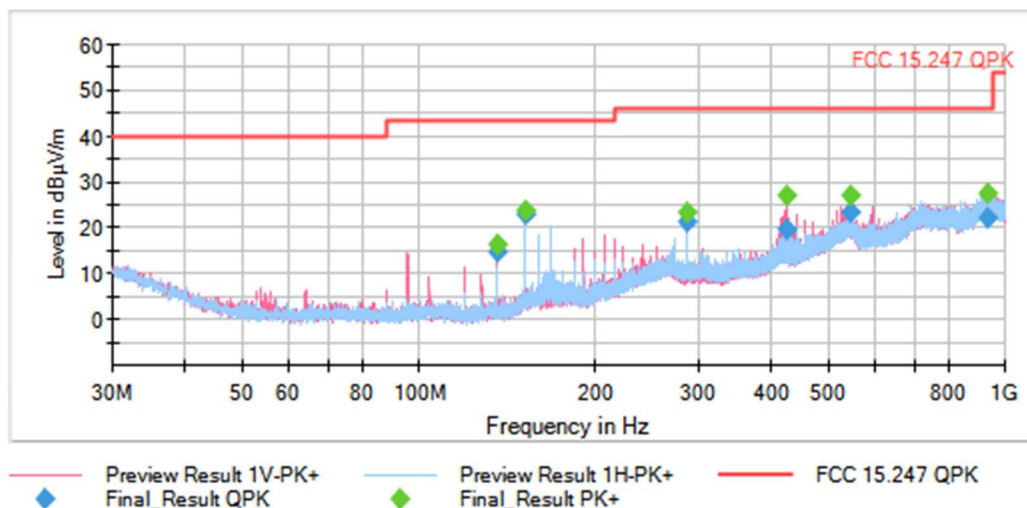

Modulation: 802.11b (DSSS 1 Mbit/s)

Results

No spurious frequencies found at less than 20 dB below the limit.

Verdict

Pass

Uncertainty


Measurement Uncertainty (dB):



1 GHz - 17 GHz <± 4.99
17 GHz - 26.5 GHz <± 5.08

Attachments

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [1, 3],
Measurement Point = 1


Images:

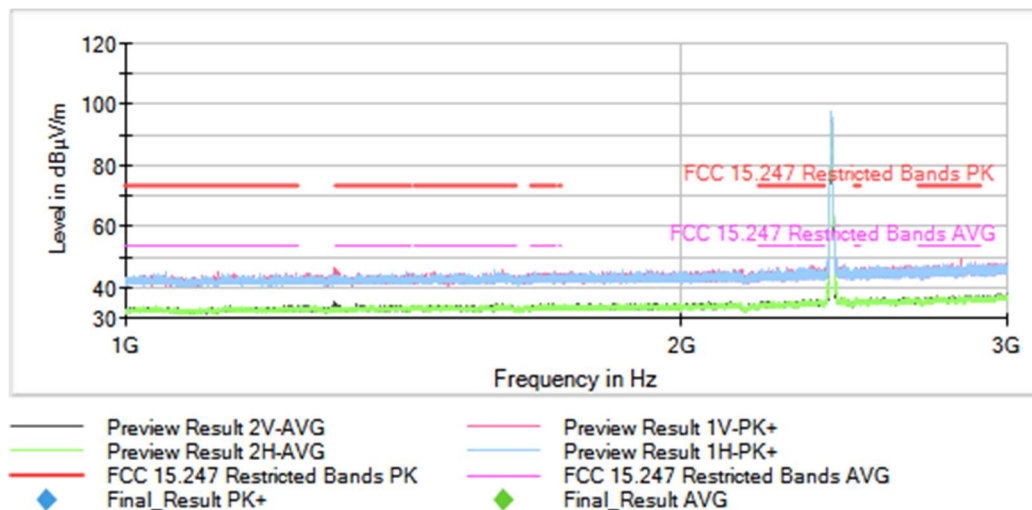

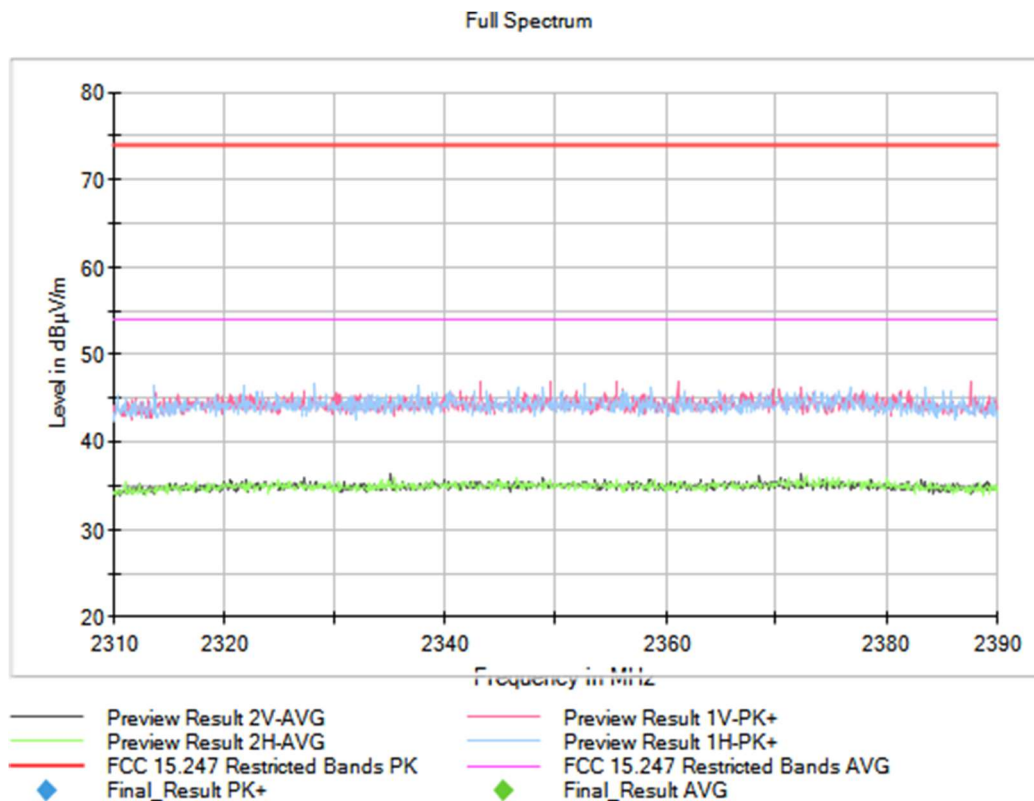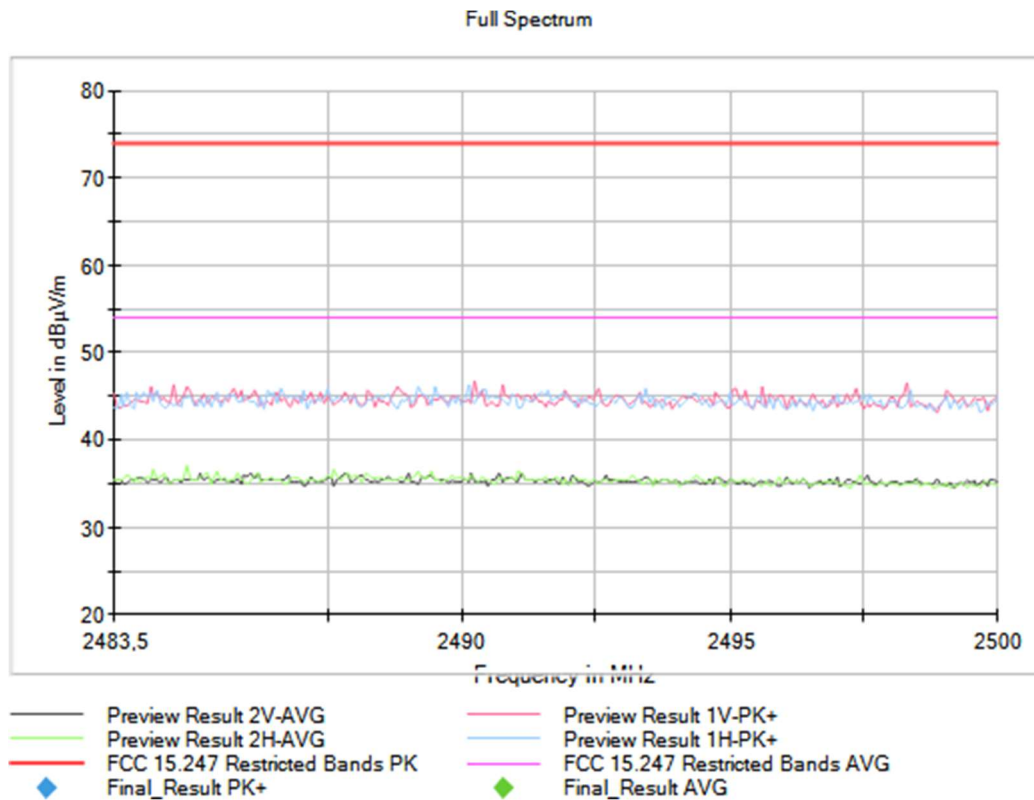


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

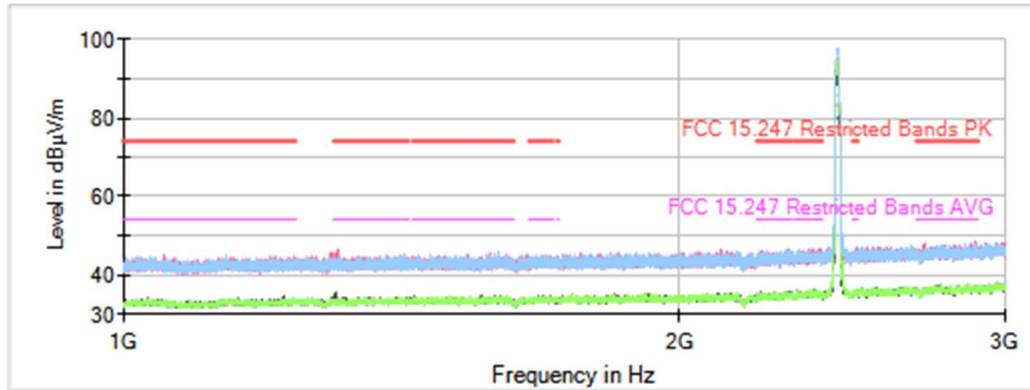


— Preview Result 2V-AVG	— Preview Result 1V-PK+
— Preview Result 2H-AVG	— Preview Result 1H-PK+
— FCC 15.247 Restricted Bands PK	— FCC 15.247 Restricted Bands AVG
◆ Final_Result PK+	◆ Final_Result AVG

Full Spectrum

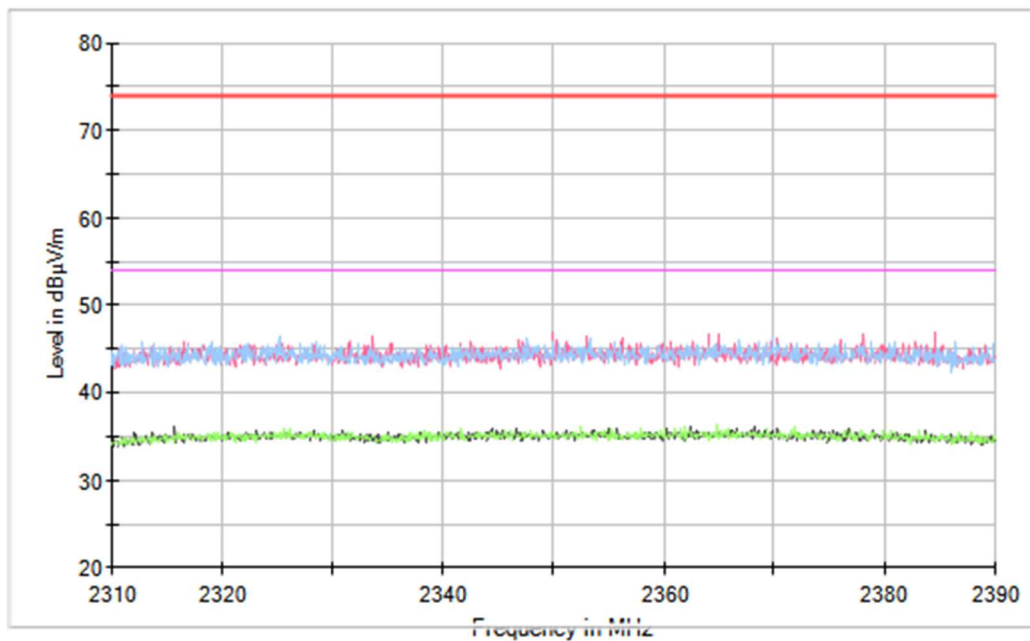


— Preview Result 2V-AVG	— Preview Result 1V-PK+
— Preview Result 2H-AVG	— Preview Result 1H-PK+
— FCC 15.247 Restricted Bands PK	— FCC 15.247 Restricted Bands AVG
◆ Final_Result PK+	◆ Final_Result AVG

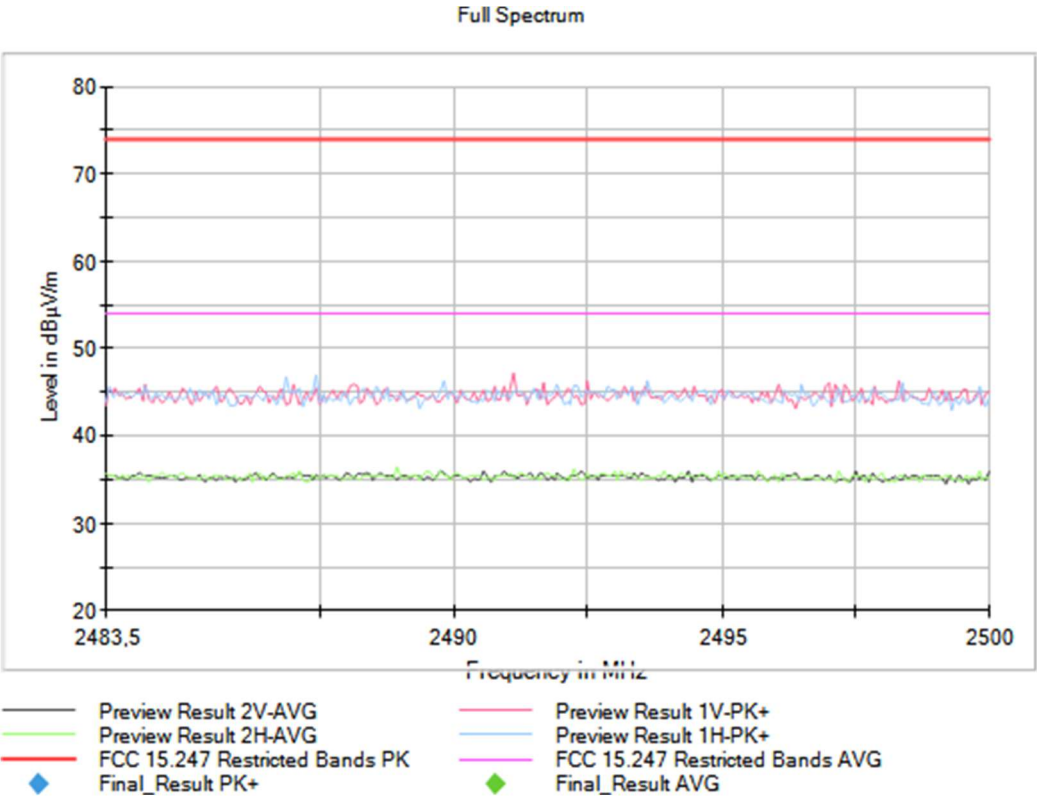


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

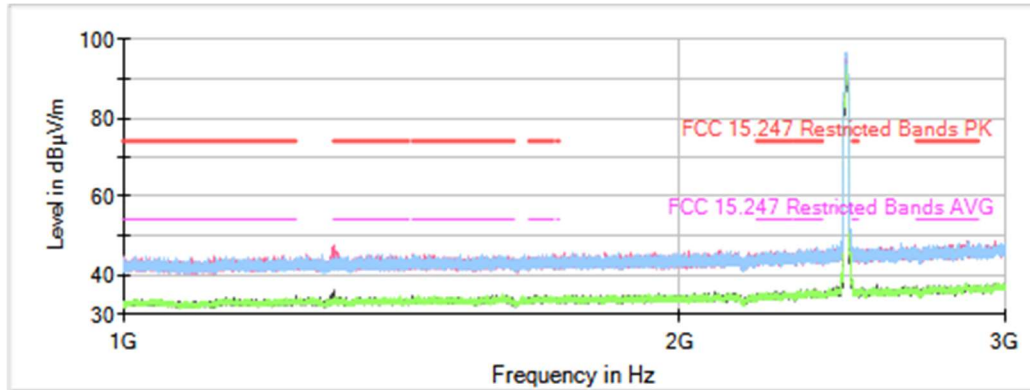


Preview Result 2V-AVG	Preview Result 1V-PK+
Preview Result 2H-AVG	Preview Result 1H-PK+
FCC 15.247 Restricted Bands PK	FCC 15.247 Restricted Bands AVG
Final_Result PK+	Final_Result AVG

Full Spectrum

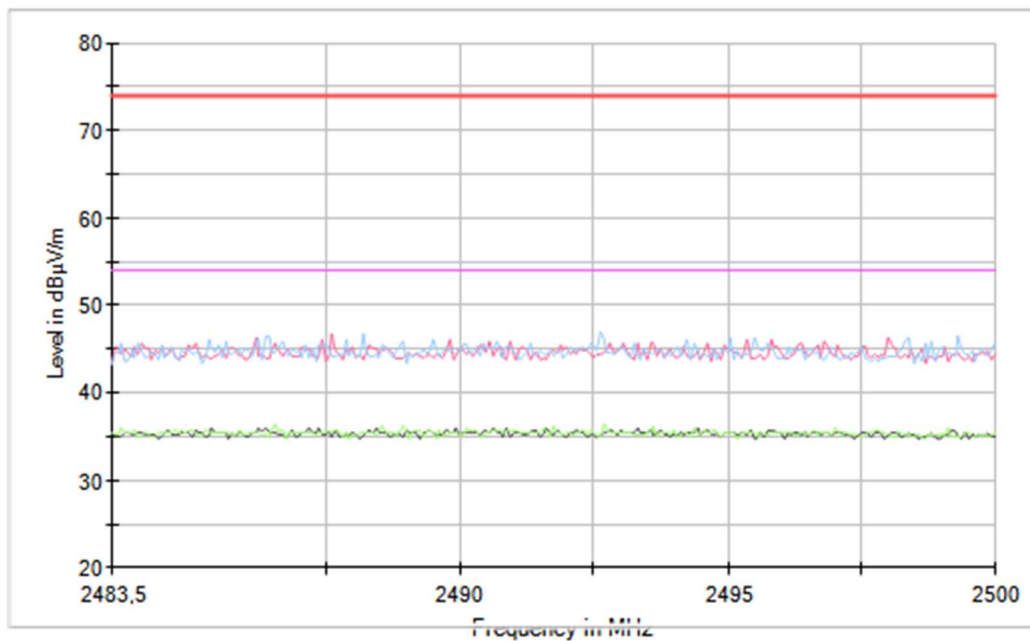


Preview Result 2V-AVG	Preview Result 1V-PK+
Preview Result 2H-AVG	Preview Result 1H-PK+
FCC 15.247 Restricted Bands PK	FCC 15.247 Restricted Bands AVG
Final_Result PK+	Final_Result AVG

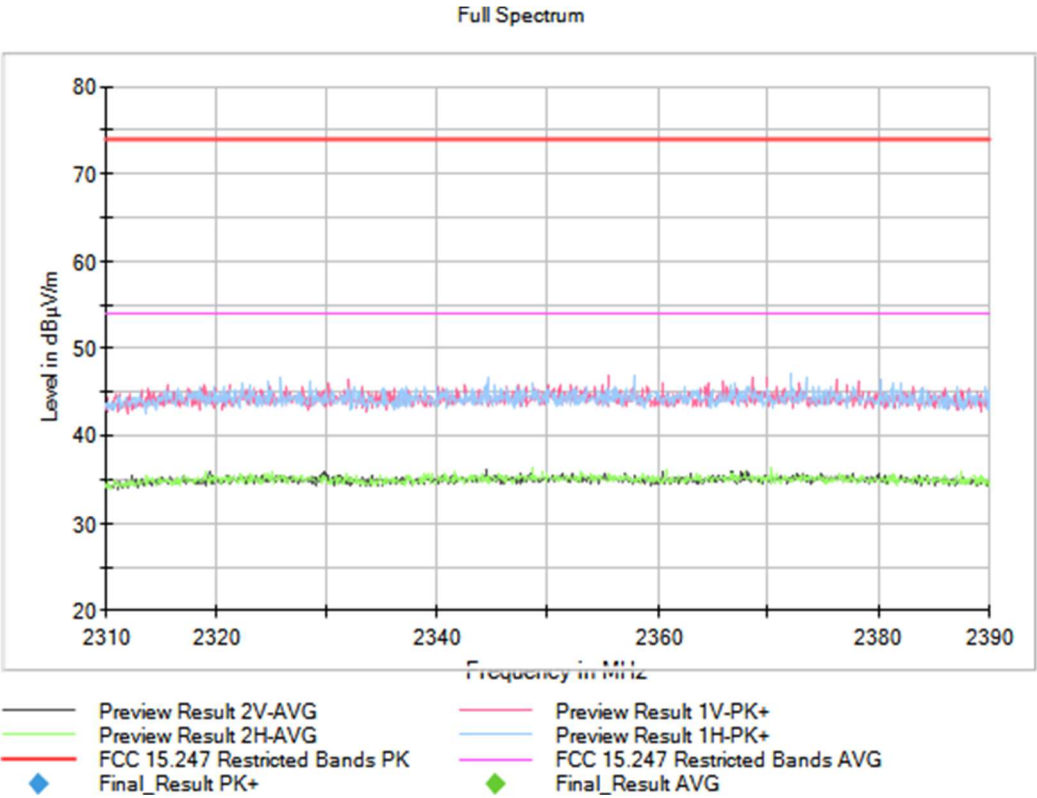


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

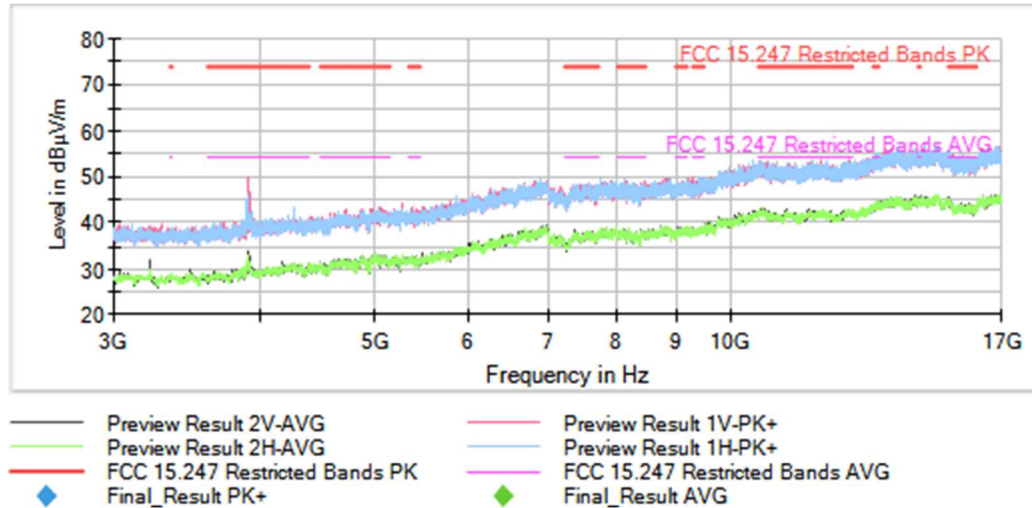


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

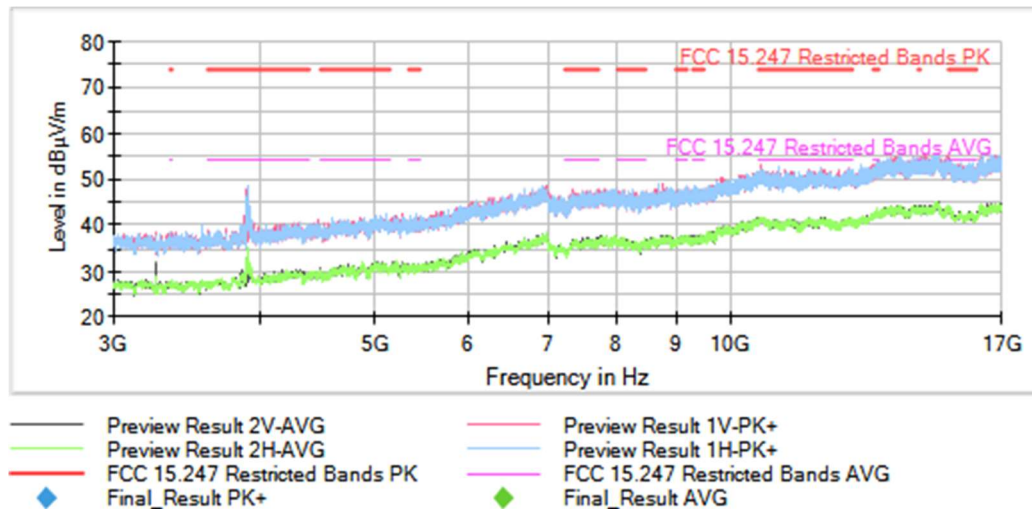


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

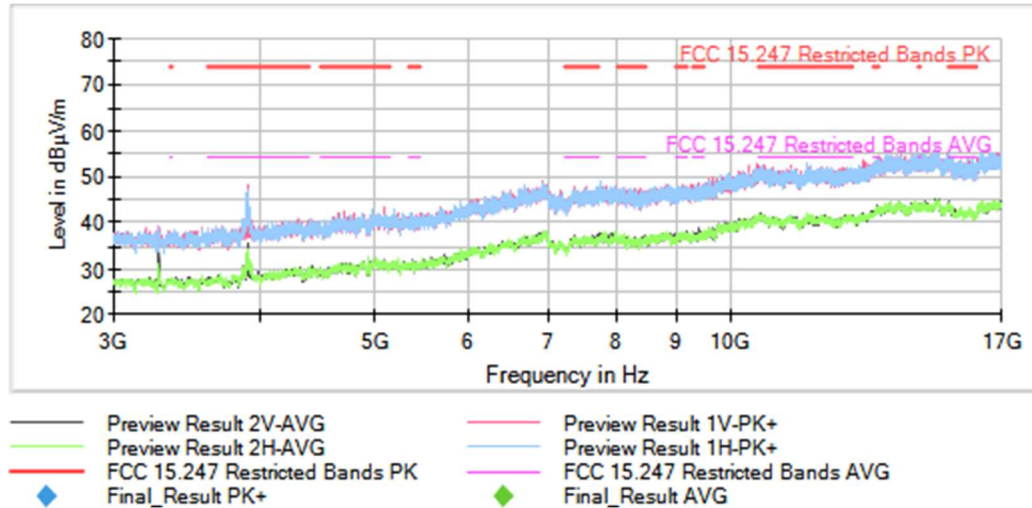


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [17, 26], Measurement Point = 1

Images:

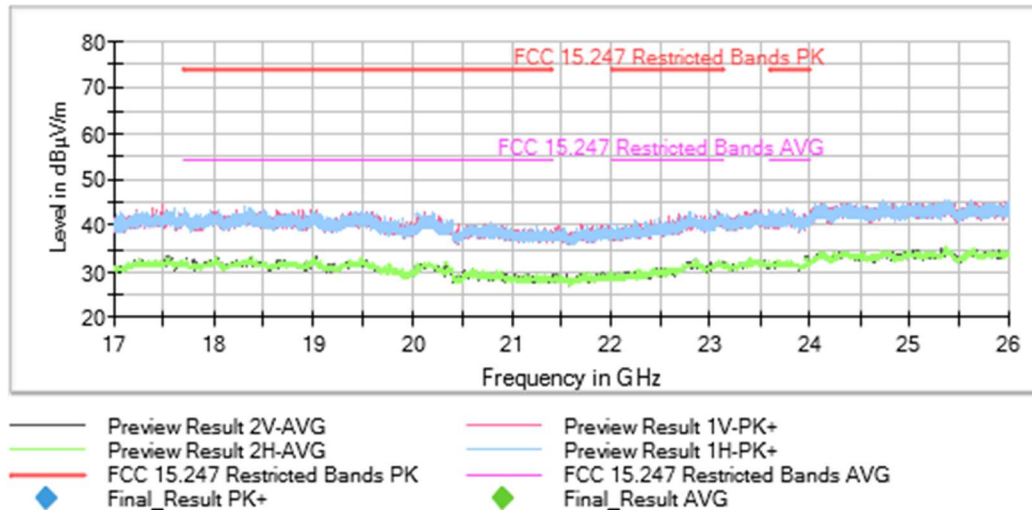


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [17, 26], Measurement Point = 1

Images:

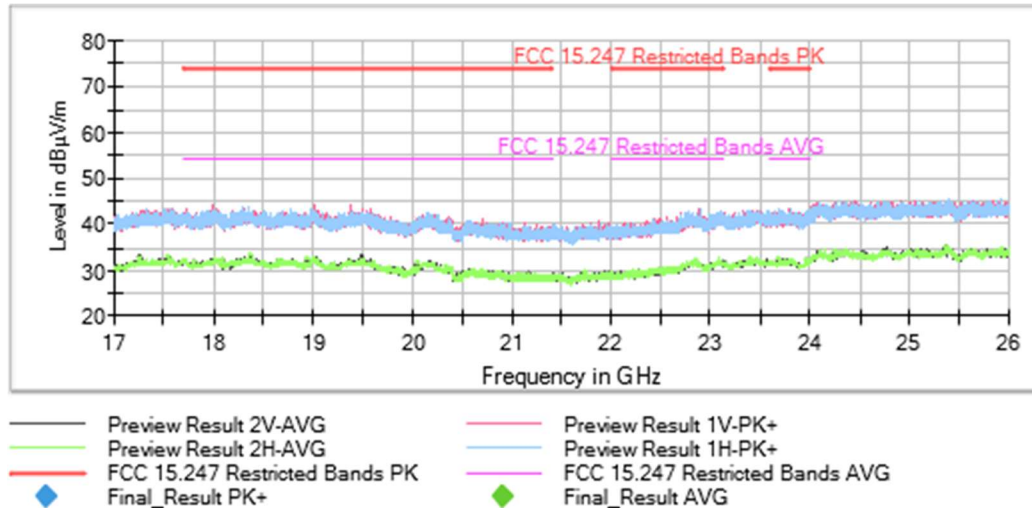

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11b (DSSS 1 Mbit/s), Frequency Range GHz = [17, 26], Measurement Point = 1

Images:

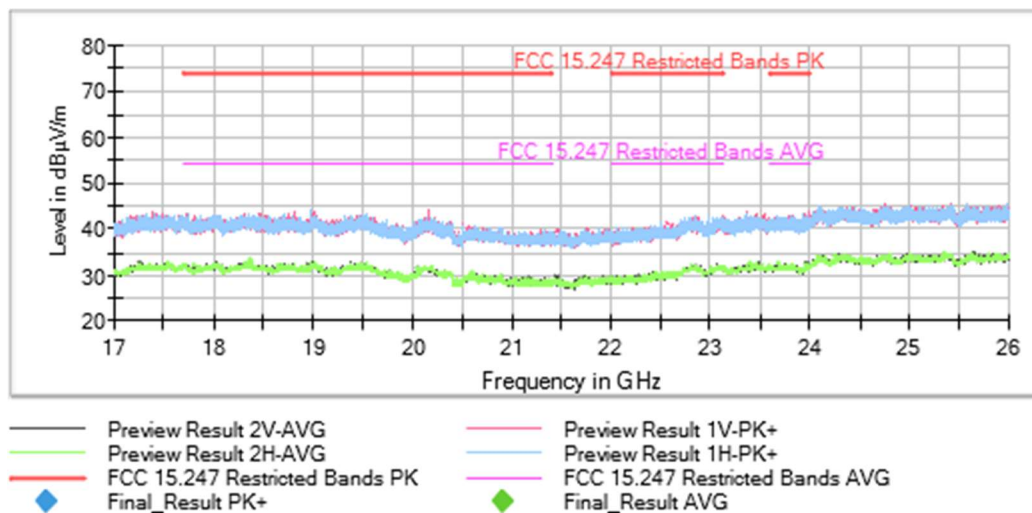

Modulation: 802.11g (OFDM 6 Mbit/s)

Results

Freq (MHz)	Freq Rng (GHz)	Unwanted Freq (MHz)	Unwanted Lvl (dBμV/m)	Pol	Detector
2462.00000	[1, 3]	2484.125000	60.40	V	PK
2462.00000	[1, 3]	2484.125000	45.18	V	AVG

Verdict

Pass


Uncertainty

Measurement Uncertainty (dB):
1 GHz - 17 GHz $\leq \pm 4.99$
17 GHz - 26.5 GHz $\leq \pm 5.08$


Attachments

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1


Images:

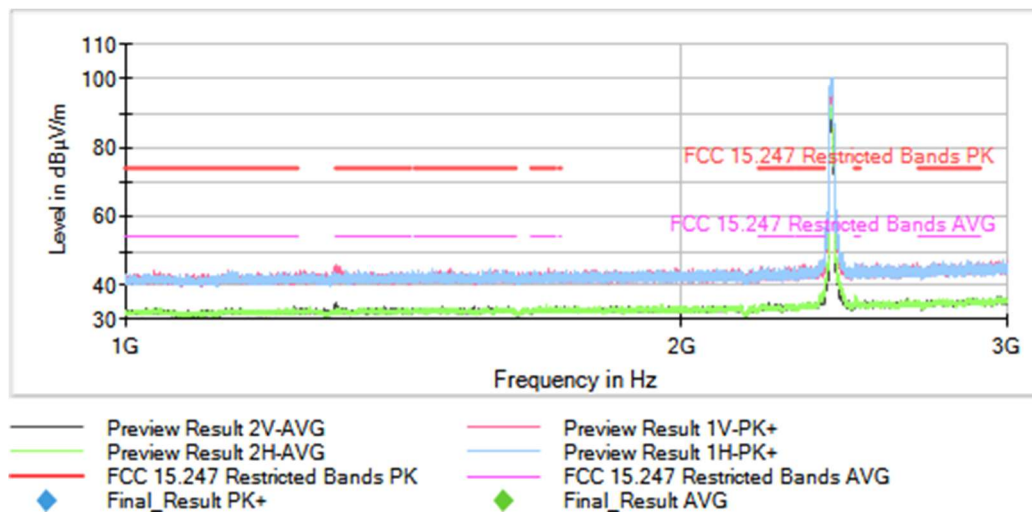

Full Spectrum

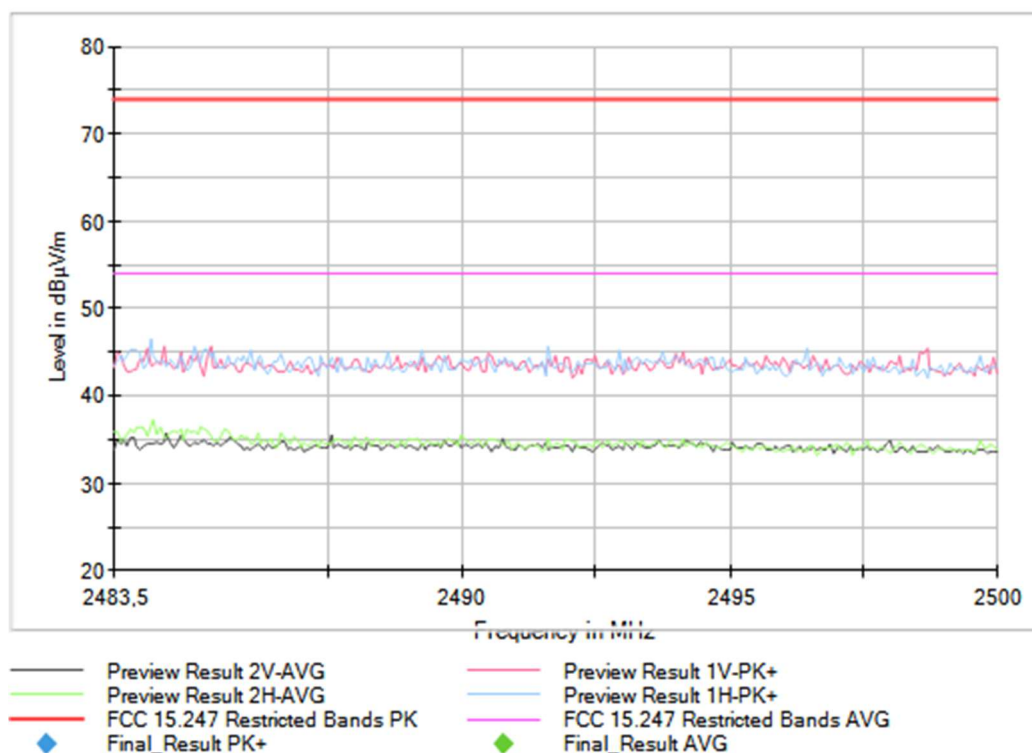


Full Spectrum

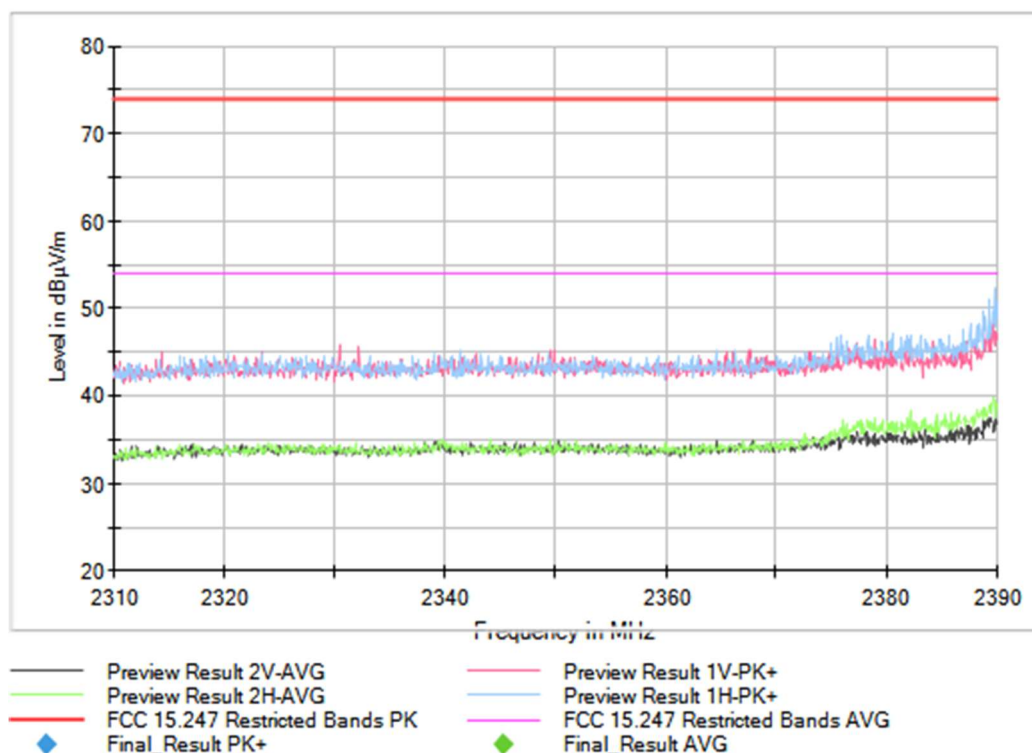


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

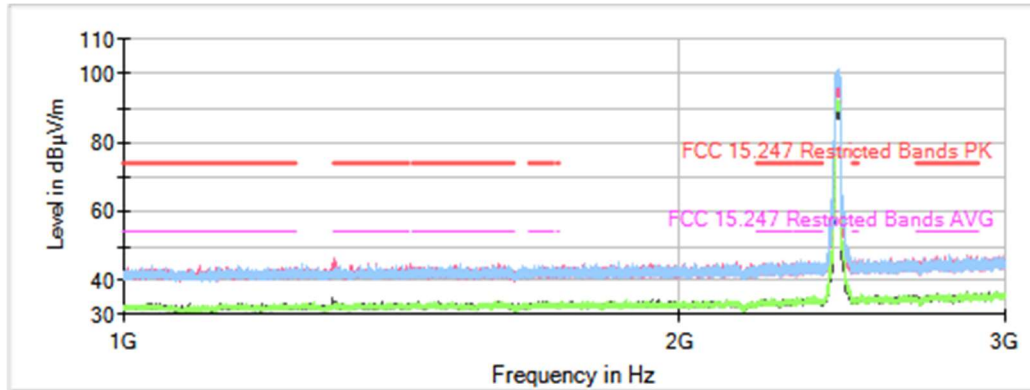


— Preview Result 2V-AVG
 — Preview Result 2H-AVG
 — FCC 15.247 Restricted Bands PK
 ◆ Final_Result PK+
 — Preview Result 1V-PK+
 — Preview Result 1H-PK+
 — FCC 15.247 Restricted Bands AVG
 ◆ Final_Result AVG

Full Spectrum

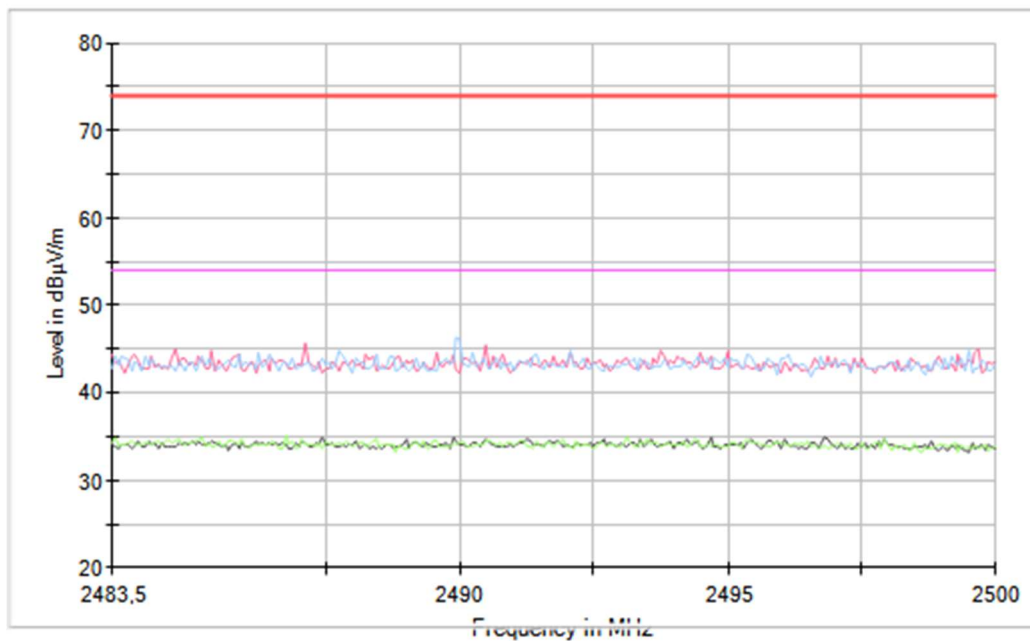


— Preview Result 2V-AVG
 — Preview Result 2H-AVG
 — FCC 15.247 Restricted Bands PK
 ◆ Final_Result PK+
 — Preview Result 1V-PK+
 — Preview Result 1H-PK+
 — FCC 15.247 Restricted Bands AVG
 ◆ Final_Result AVG

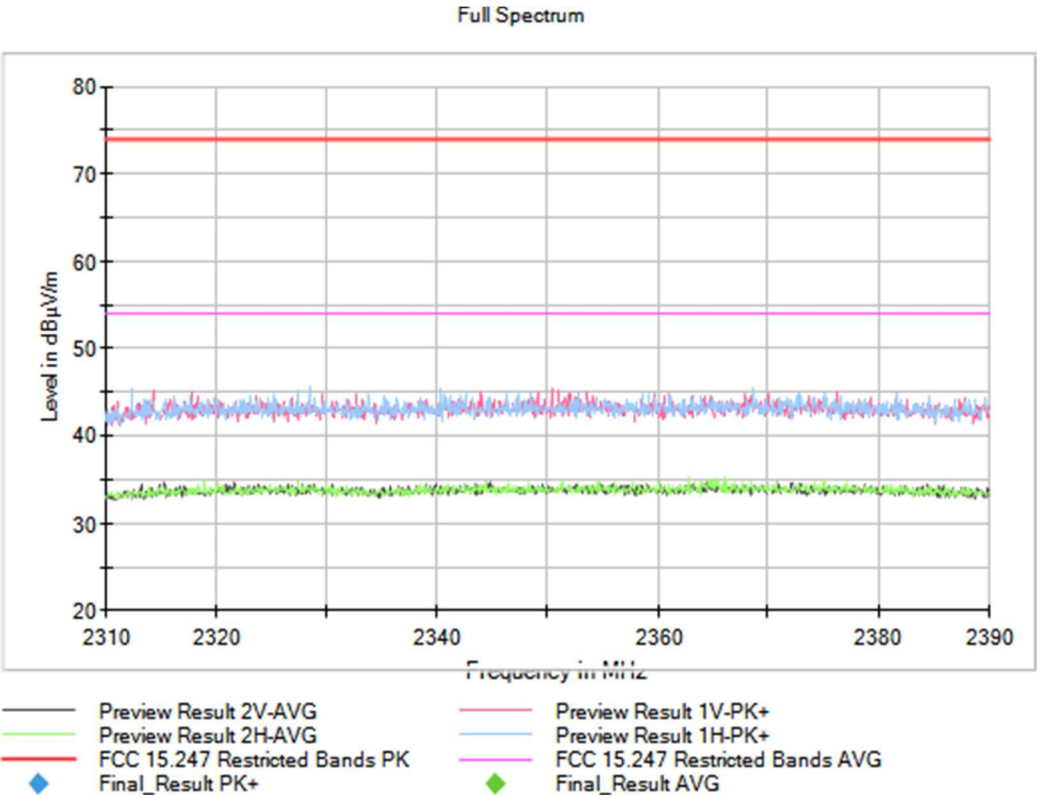



Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

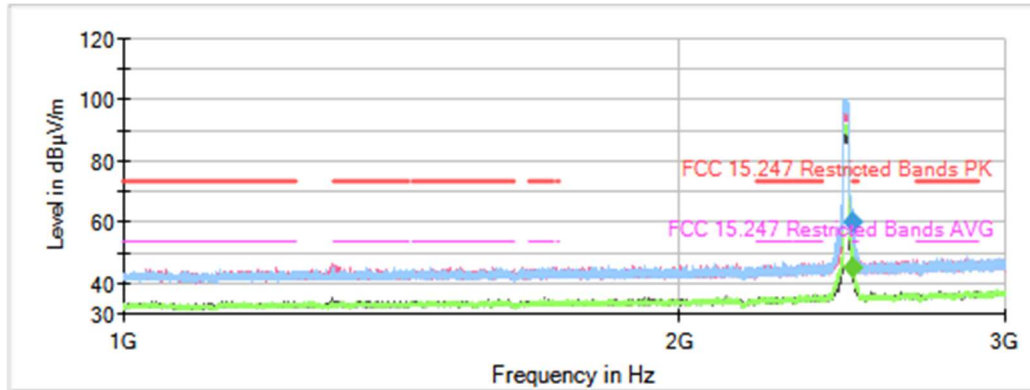


Full Spectrum

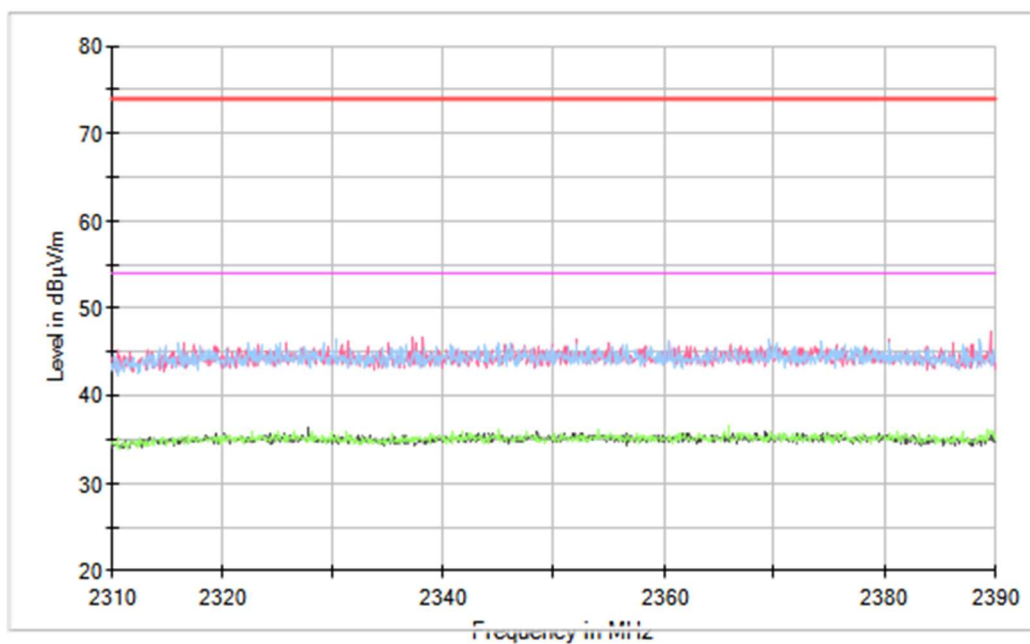

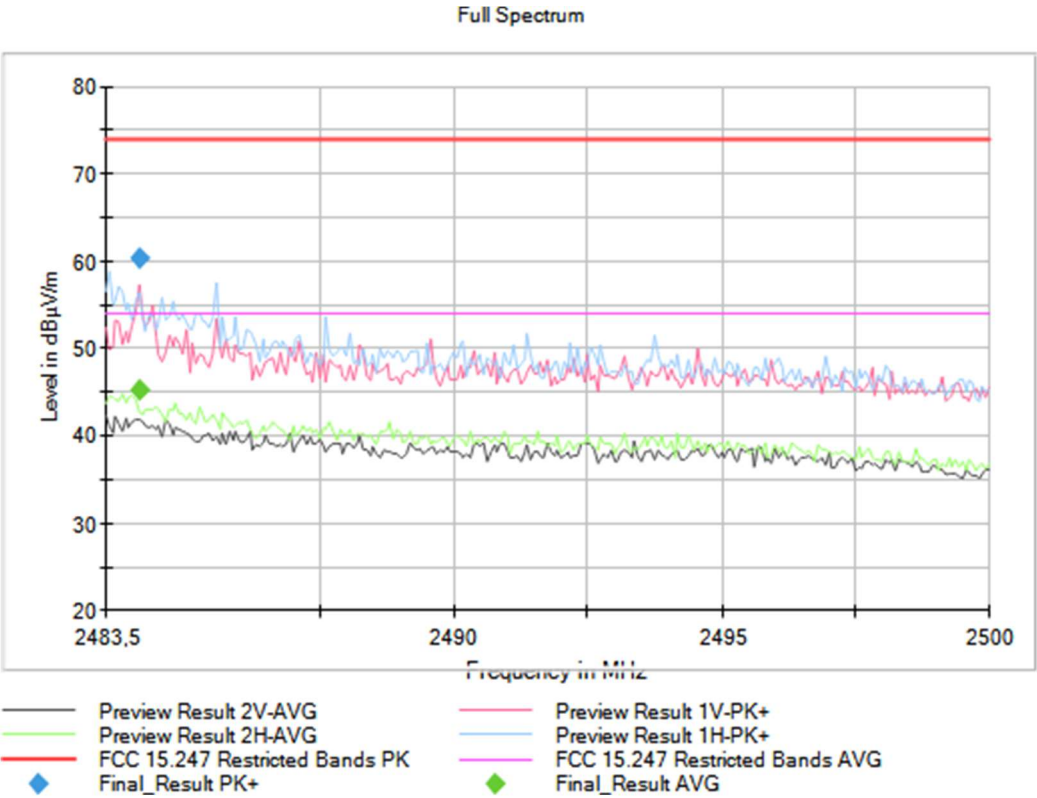


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

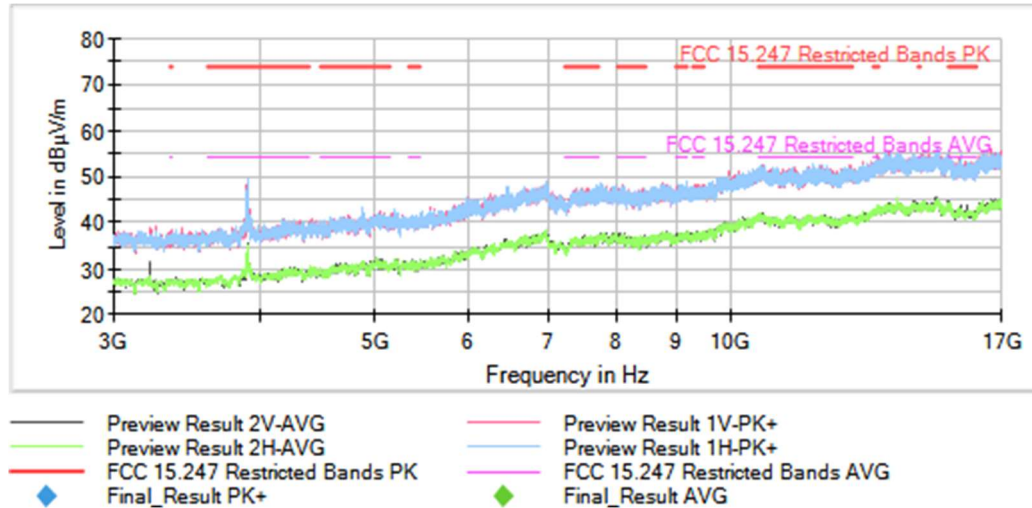


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

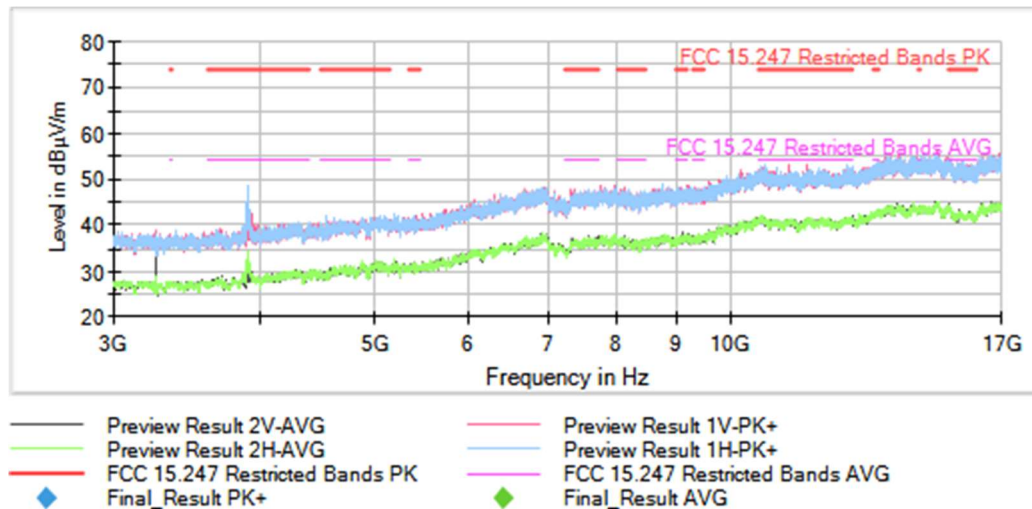


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

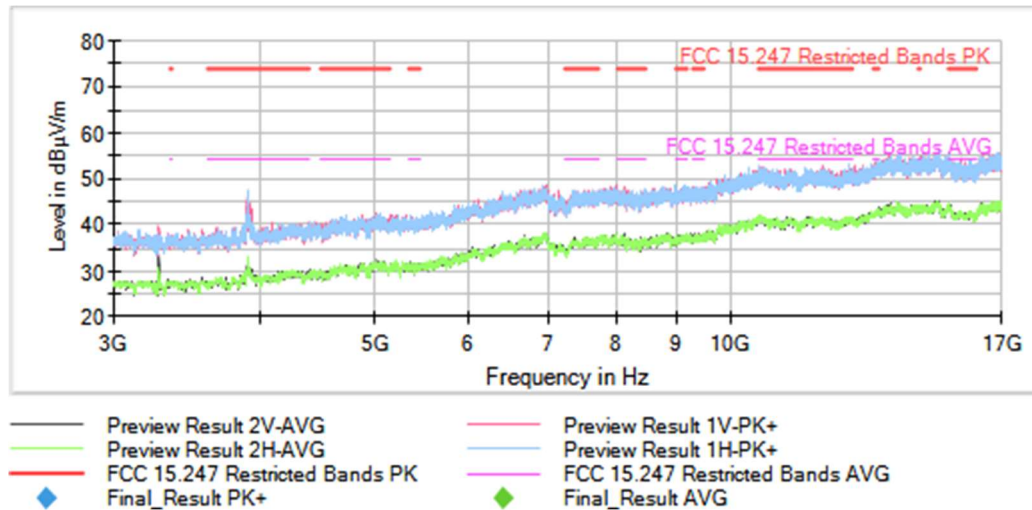

Operation Band MHz = [2400, 2483.5], Frequency MHz = The spurious frequencies detected do not depend neither on the operating channel, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11g (OFDM 6 Mbit/s), Frequency Range GHz = [17, 26], Measurement Point = 1

Images:

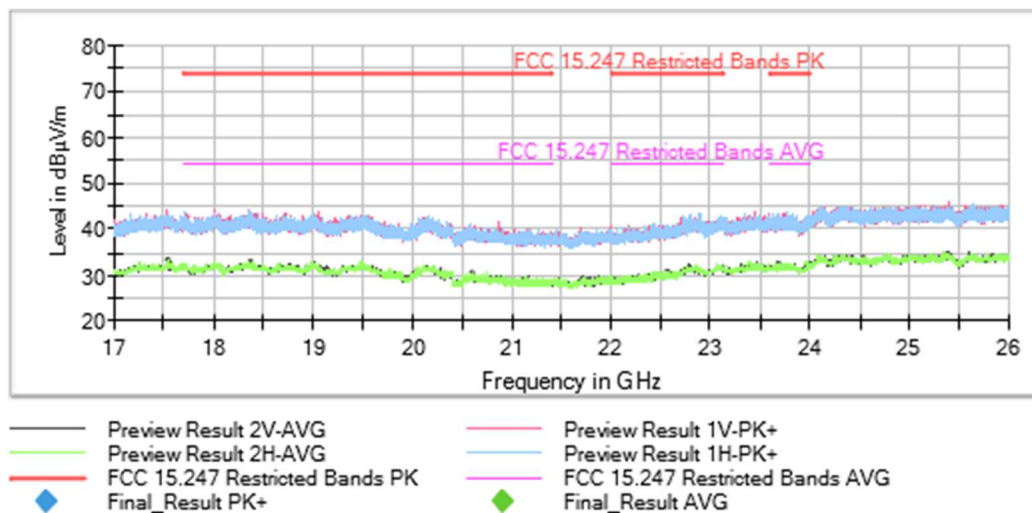

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Results

Freq (MHz)	Freq Rng (GHz)	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector
2412.00000	[1, 3]	2389.062500	59.074	H	PK
2412.00000	[1, 3]	2389.062500	43.84	H	AVG
2462.00000	[1, 3]	2483.875000	60.45	H	PK
2462.00000	[1, 3]	2483.875000	45.74	H	AVG

Verdict

Pass


Uncertainty

Measurement Uncertainty (dB):
1 GHz - 17 GHz $\leq \pm 5.07$
17 GHz - 26.5 GHz $\leq \pm 4.99$


Attachments

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1


Images:

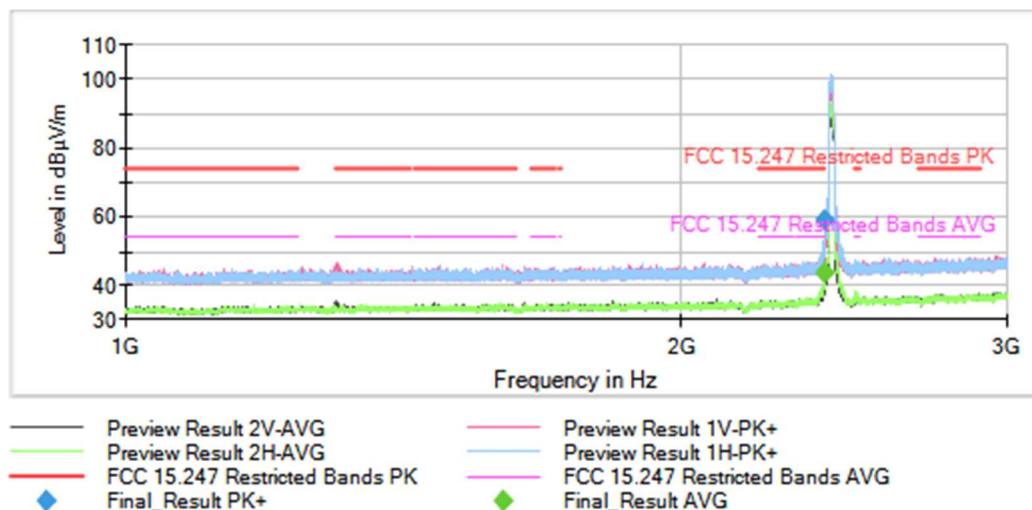

Full Spectrum

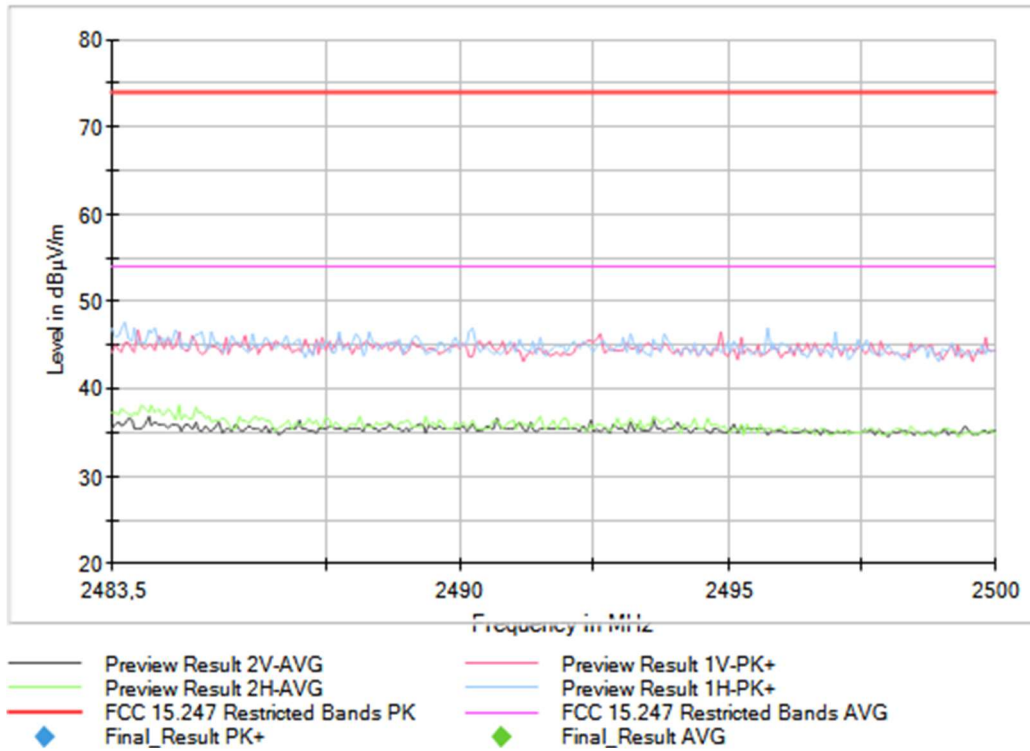


Full Spectrum

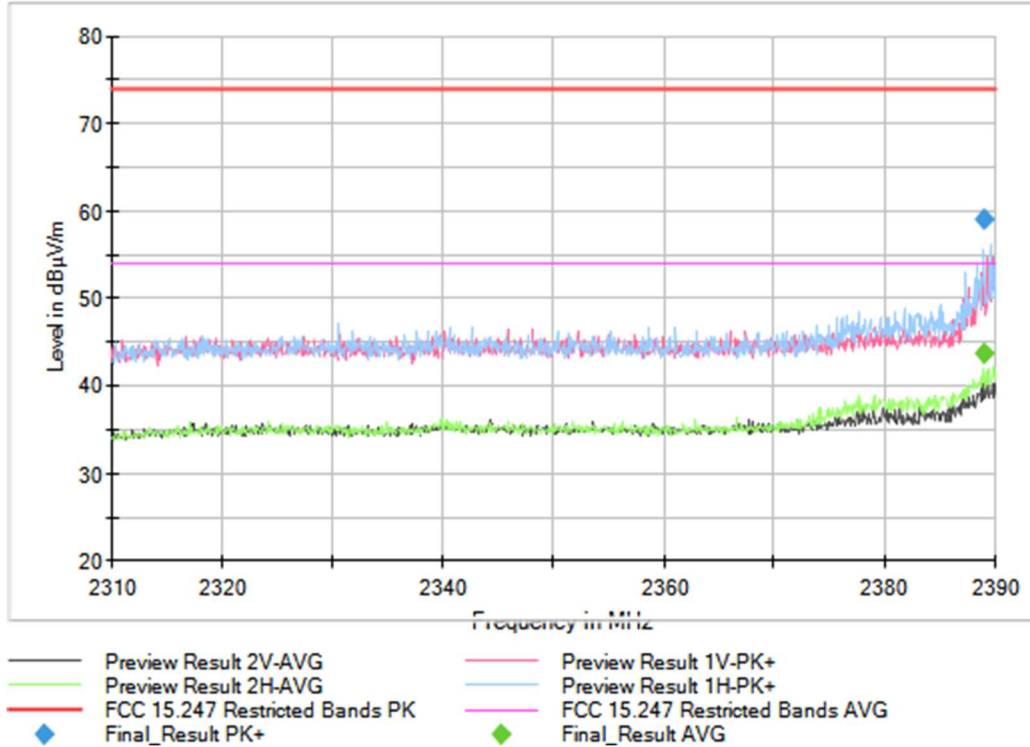


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

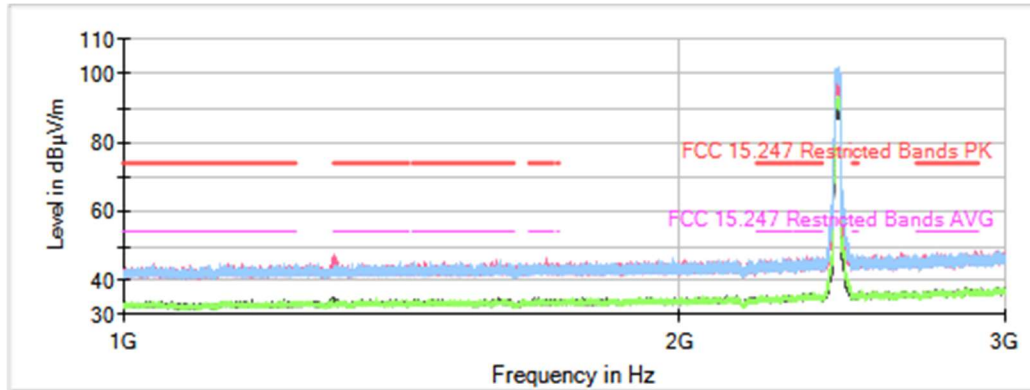


— Preview Result 2V-AVG	— Preview Result 1V-PK+
— Preview Result 2H-AVG	— Preview Result 1H-PK+
— FCC 15.247 Restricted Bands PK	— FCC 15.247 Restricted Bands AVG
◆ Final_Result PK+	◆ Final_Result AVG

Full Spectrum

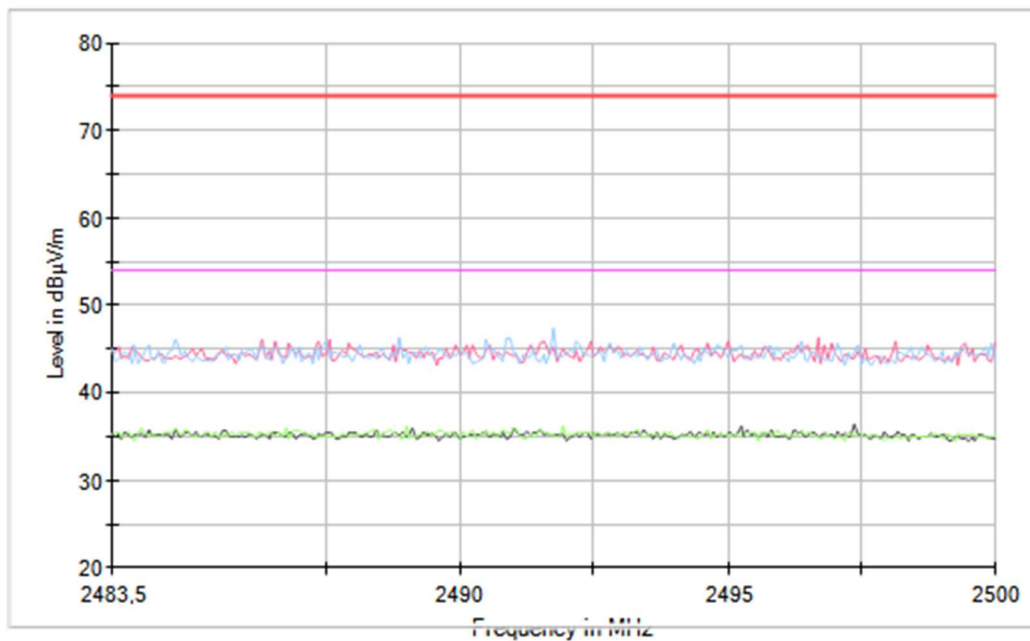


— Preview Result 2V-AVG	— Preview Result 1V-PK+
— Preview Result 2H-AVG	— Preview Result 1H-PK+
— FCC 15.247 Restricted Bands PK	— FCC 15.247 Restricted Bands AVG
◆ Final_Result PK+	◆ Final_Result AVG

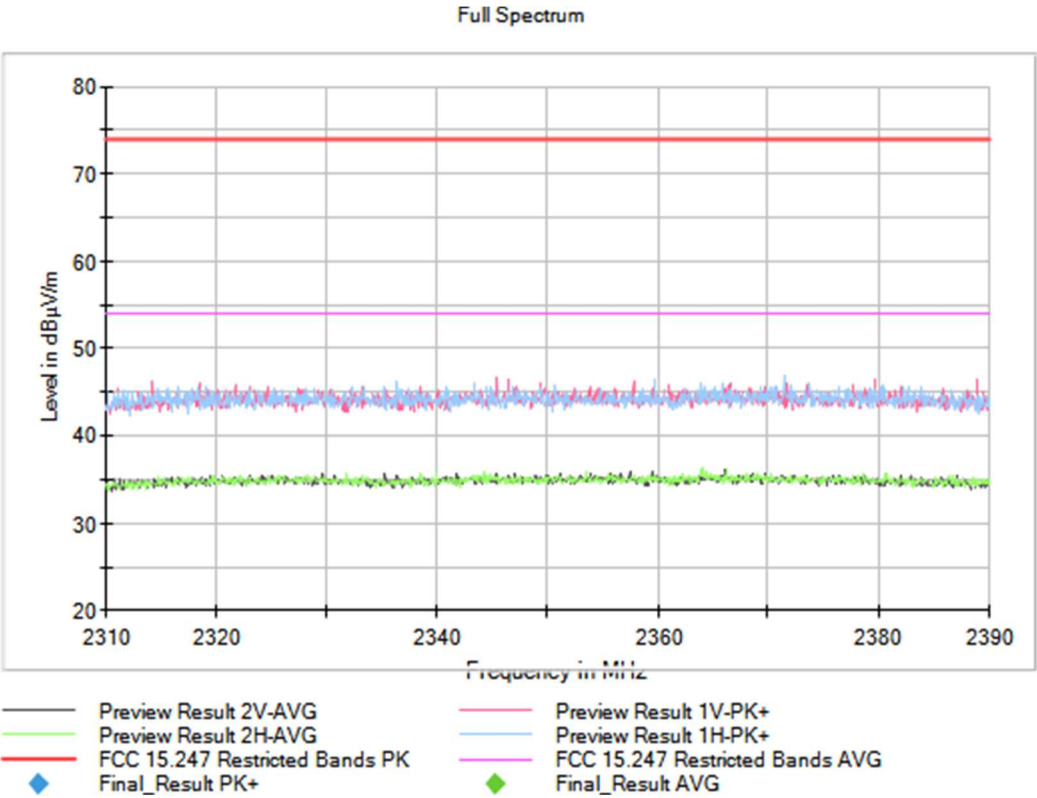



Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

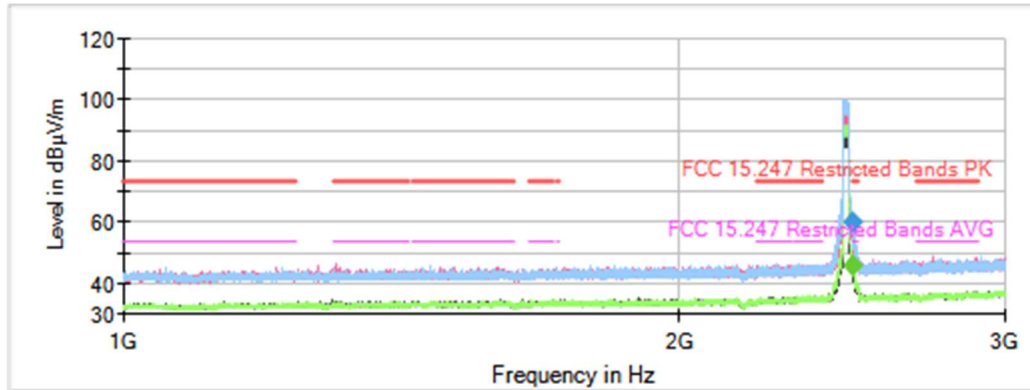


Full Spectrum

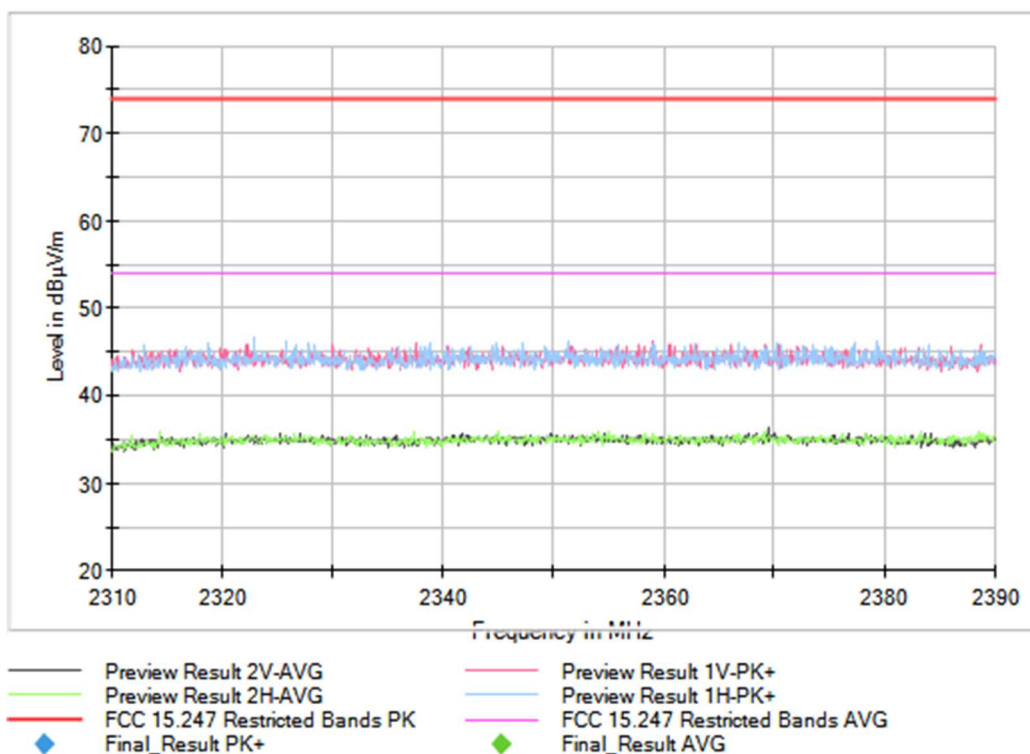

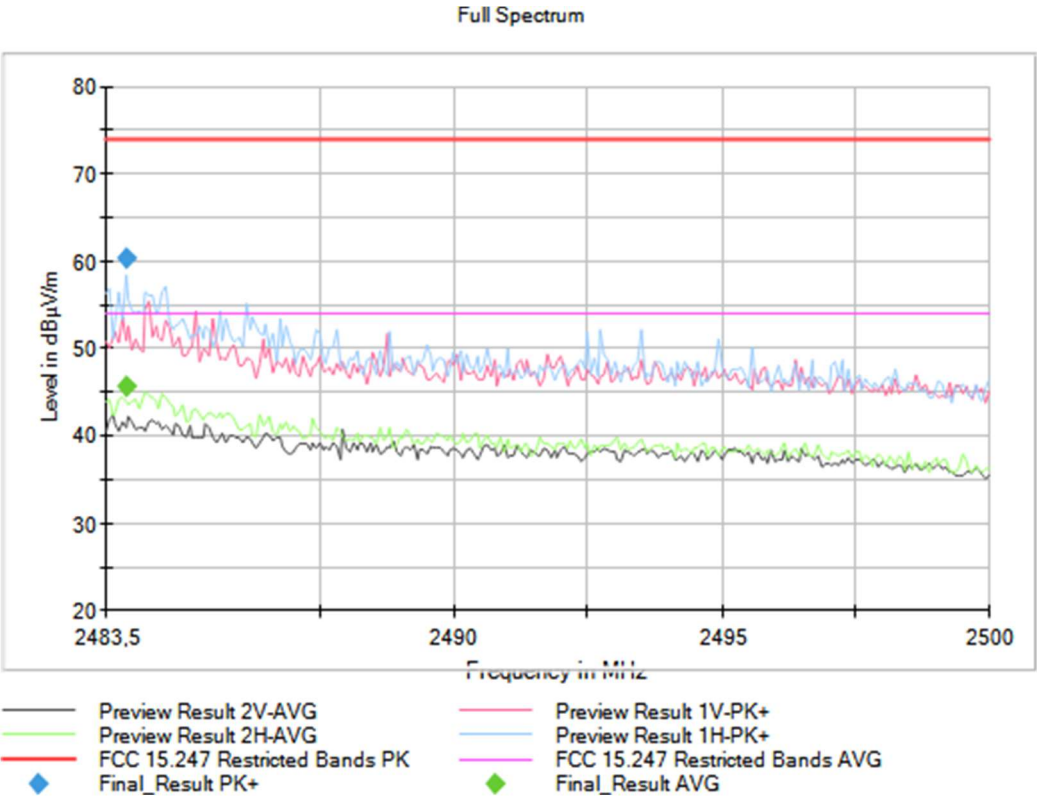


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2412.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz =
[3, 17], Measurement Point = 1

Images:

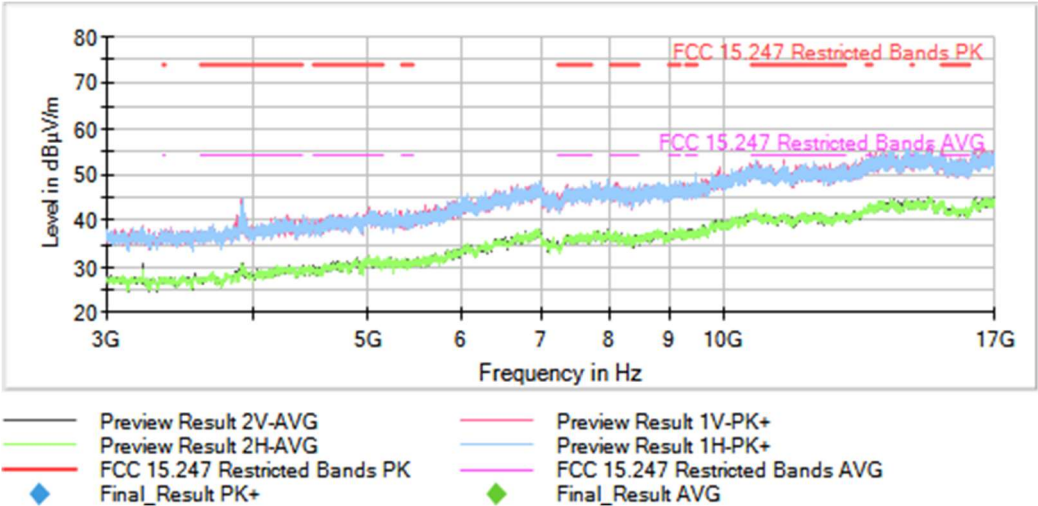


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2437.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz =
[3, 17], Measurement Point = 1

Images:

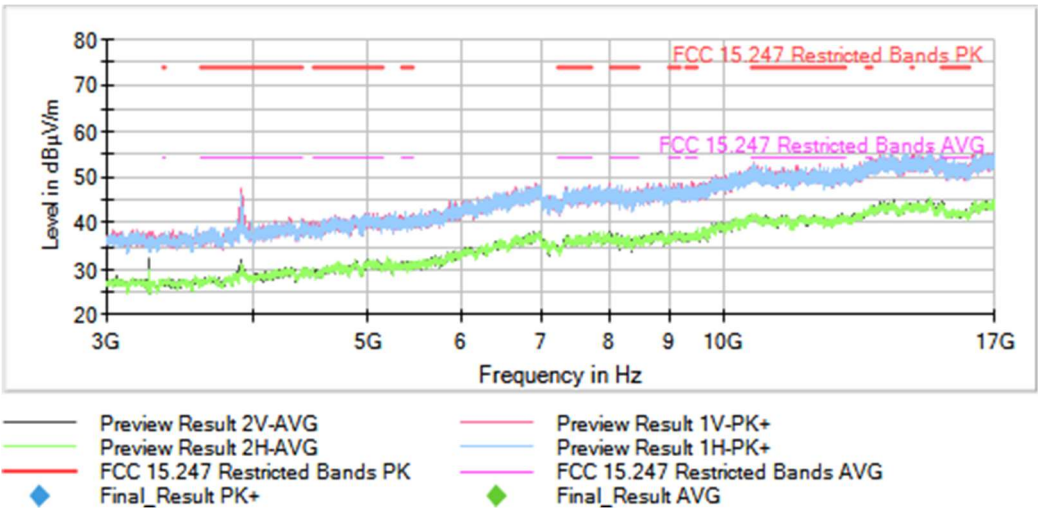

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2462.00000, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

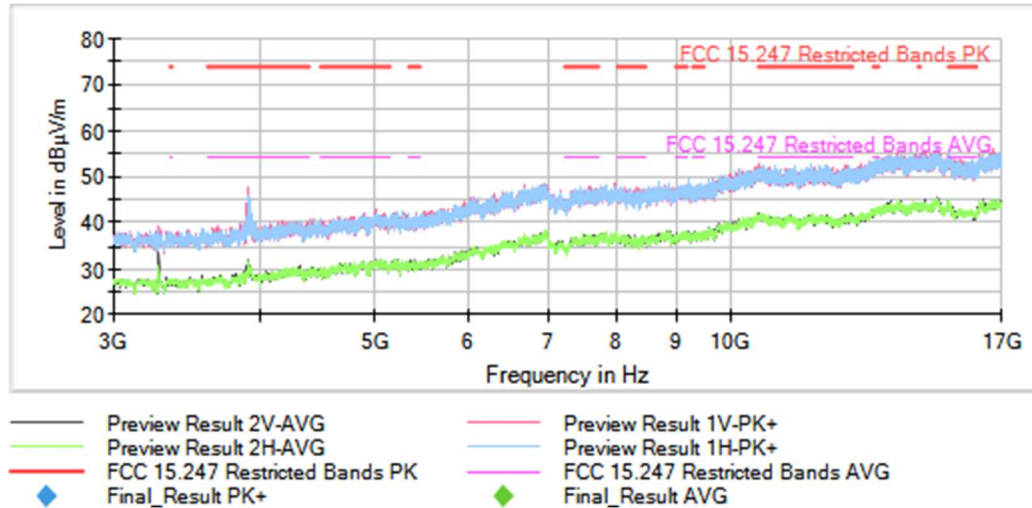

Operation Band MHz = [2400, 2483.5], Frequency MHz = The spurious frequencies detected do not depend neither on the operating channel, Equipment Type = Digital Transmission System (DTS), Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s), Frequency Range GHz = [17, 26], Measurement Point = 1

Images:

