

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 1 of 65

Applicant : AiRISTA Flow, Inc.
Address of Applicant : 1966 Greenspring Drive, Suite 125
Timonium, Maryland 21093.

Product Name : BLE BEACONING GATEWAY + AOA
Brand Name : AiRISTA Flow
Model Name : BGU.AOA.C
Sample Acquisition Method : Sent by Client
Sample No. : E24050068-02#01
E24050068-02#02

FCC ID : TA7-BGU-AOA

Standards : FCC CFR47 Part 15, Subpart C

Date of Receipt : 2024-05-24
Date of Test : 2024-05-28~ 2024-06-07
Date of Issue : 2024-06-07

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:



(Erik Yang)

Reviewed by:



(Jennifer Zhou)

Approved by:



(Authorized signatory: Echo Mu)

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 2 of 65

Contents

1	GENERAL INFORMATION	3
1.1	TESTING LABORATORY	3
1.2	DETAILS OF APPLICATION	3
1.3	DETAILS OF EUT	3
1.4	TEST METHODOLOGY	4
1.5	TEST SUMMARY	5
2	TEST CONDITION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	EQUIPMENT LIST	6
2.3	MEASUREMENT UNCERTAINTY	7
3	TEST SET-UP AND OPERATION MODES	8
3.1	DETAILS OF TEST MODE	8
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
3.3	SUPPORT SOFTWARE	9
3.4	TEST SETUP DIAGRAM	9
4	TEST RESULTS	11
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
4.1.1	<i>Antenna Requirement</i>	<i>11</i>
4.1.2	<i>Maximum conducted (average) output power</i>	<i>12</i>
4.1.3	<i>6dB Bandwidth</i>	<i>13</i>
4.1.4	<i>Maximum conducted output power spectral density</i>	<i>20</i>
4.1.5	<i>Conducted Spurious Emission & Authorized-band band-edge</i>	<i>27</i>
4.1.6	<i>Radiated Emission</i>	<i>50</i>
4.1.7	<i>Band Edge (Restricted-band band-edge)</i>	<i>51</i>
4.2	MAINS EMISSIONS	52
4.2.1	<i>Conducted Emission on AC Mains</i>	<i>52</i>
5	APPENDIXES	57
5.1	PHOTOGRAPHS OF THE SAMPLE	57
5.2	SET-UP FOR CONDUCTED EMISSIONS	63
5.3	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	64
5.4	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ	64
5.5	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ	65

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 3 of 65

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	AiRISTA Flow, Inc.
Address	1966 Greenspring Drive, Suite 125 Timonium, Maryland 21093.
Contact Person	Patrick Jenkins
Telephone	(443) 212-4251
Email	Patrick.Jenkins@Airista.com
Manufacturer Company Name	AiRISTA Flow, Inc.
Address	1966 Greenspring Drive, Suite 125 Timonium, Maryland 21093.
Factory Company Name	AiRISTA Flow, Inc.
Address	1966 Greenspring Drive, Suite 125 Timonium, Maryland 21093.

1.3 Details of EUT

Product Name	BLE BEACONING GATEWAY + AOA
Brand Name	AiRISTA Flow
Test Model Name	BGU.AOA.C
FCC ID	TA7-BGU-AOA
Mode of Operation	WLAN 802.11b/g/n(HT20/40)
Conducted (average) output power	IEEE 802.11b: 17.90dBm IEEE 802.11g: 13.52dBm IEEE 802.11n(20): 13.85dBm IEEE 802.11n(40): 11.96dBm
Frequency Range	2400MHz ~ 2483.5MHz
Channel Separation	5 MHz
Number of channels	11
Modulation Type	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n(20M/40M): OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	PCB Antenna
Antenna Gain	0.43dBi
Extreme Temperature Range	0℃~ +55℃

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 4 of 65

Test Voltage	Input(POE): DC 37-57V Input(USB): DC 5V 1A
Hardware Version	1.0
Software Version	1002.2338
RF power setting in TEST SW	802.11b: AmebaD_mptool_2V2_TX Power Index_105 802.11g: AmebaD_mptool_2V2_TX Power Index_86 802.11n(HT20): AmebaD_mptool_2V2_TX Power Index_87 802.11n(HT40): AmebaD_mptool_2V2_TX Power Index_80

- Note:
- 1. The above information was declared by the manufacture.
 - 2. For more details, please refer to the User's manual of the EUT.

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2.412GHz	5	2.432GHz	9	2.452GHz
2	2.417GHz	6	2.437GHz	10	2.457GHz
3	2.422GHz	7	2.442GHz	11	2.462GHz
4	2.427GHz	8	2.447GHz		

- Note:
- For 20MHz bandwidth system use Channel 1 to Channel 11
 - For 40MHz bandwidth system use Channel 3 to Channel 9

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 5 of 65

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	PASS
Maximum conducted (average) output power	FCC Part 15.247(b)(3)	PASS
6dB Bandwidth	FCC Part 15.247(a)(2)	PASS
Maximum conducted output power spectral density	FCC Part 15.247(e)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 6 of 65

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020B	MY59260184	2023-07-27	2024-07-26
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2023-06-08	2024-06-07
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2024-06-04	2025-06-03
Signal Generator	Rohde & Schwarz	SMR27	100184	2023-07-27	2024-07-26
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2023-06-08	2024-06-07
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2024-06-05	2025-06-04
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2023-06-08	2024-06-07
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2024-06-04	2025-06-03
V-network	SCHWARZBECK	NSLK 8127	8127-902	2023-06-07	2024-06-06
V-network	SCHWARZBECK	NSLK 8127	8127-902	2024-06-05	2025-06-04
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2023-06-06	2024-06-05
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2024-06-05	2025-06-04
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2023-03-22	2025-03-21
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2023-06-13	2025-06-12
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2023-06-09	2025-06-08
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2023-06-18	2025-06-17
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2023-06-08	2024-06-07
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2024-06-04	2025-06-03
EMC chamber 9*6*6(L*W*H)	CHANGNING	966	N/A	2023-06-09	2025-06-08
Shielded Enclosure 8*5*4(L*W*H)	CHANGNING	854	N/A	2023-06-09	2025-06-08
Test Software	BL	BL410_E	Version:1.0.0.117	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 7 of 65

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter		Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	9KHz – 30MHz	± 3.42 dB
	30 MHz – 1GHz	± 5.01 dB
	> 1GHz	± 5.21 dB
Conducted Emission on AC Mains	150kHz-30MHz	± 2.68 dB
Occupied Channel Bandwidth		± 5 %
Maximum Conducted Output Power		± 0.64 dB
Maximum Conducted Output Power Spectral Density		± 1.18 dB

TEST REPORT

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software (AmebaD_mptool_2V2) was control EUT work in continuous transmitting mode. Select test channel as below:

For 802.11b/g/n (HT20)

Channel	Frequency
The lowest channel (CH1)	2412MHz
The middle channel (CH6)	2437MHz
The highest channel (CH11)	2462MHz

For 802.11n(HT40)

Channel	Frequency
The lowest channel (CH3)	2422MHz
The middle channel (CH6)	2437MHz
The highest channel (CH9)	2452MHz

Through Pre-scan under all rate at lowest channel, the data rate as below table described is the worst case, so we choose these data rate for test.

Type	Data rate
802.11b	5.5Mbps
802.11g	18Mbps
802.11n(20M)	MCS4
802.11n(40M)	MCS4

The basic operation modes are:

- A. On
 - 1. WLAN mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
- B. Standby
- C. Off

TEST REPORT

3.2 Special Accessories and Auxiliary Equipment


Description	Manufacturer	Model Name	Serial No.
Laptop 1	Lenovo	TP00083A	PF-0PRDGN
Laptop 2	HP	HP ZHAN 66 PRO G1	5CD7438R1J
POE Switch	MERCURY	MSG05CP	1242079001044
Adapter	UGREEN	CD112	50714
USB Cable	N/A	N/A	1.00m Unshielded

3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	AmebaD_mptool_2V2

3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

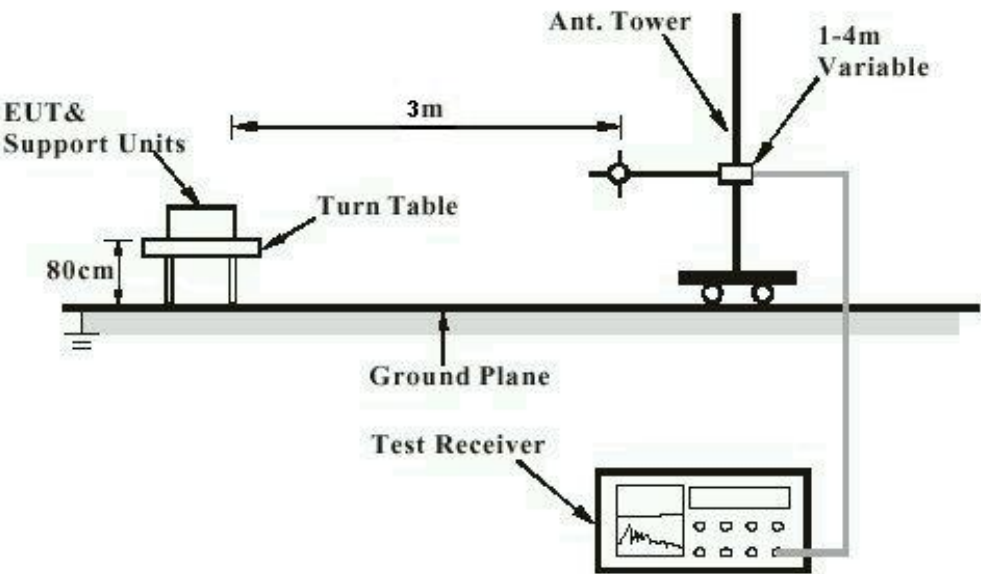

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

TEST REPORT

Diagram of Measurement Equipment Configuration for Conduction Measurement


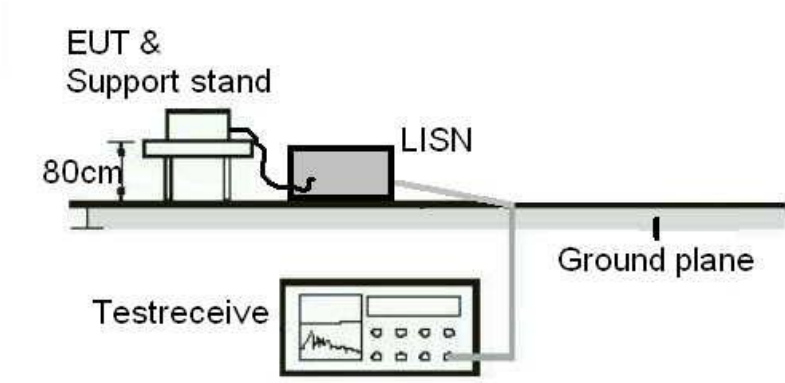


Diagram of Measurement Equipment Configuration for Transmitter Measurement

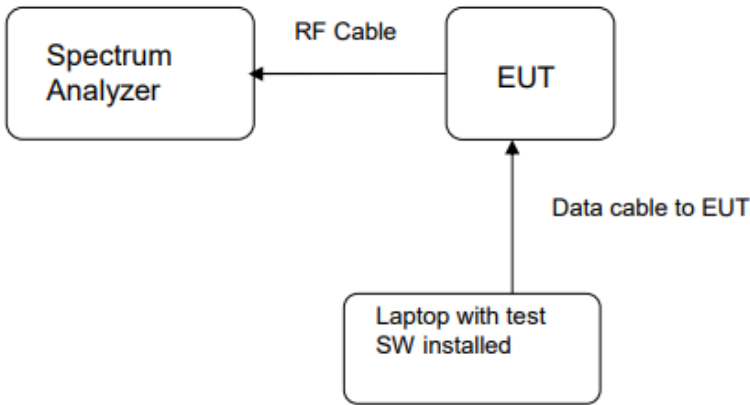

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 11 of 65

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	: FCC Part 15.247(b)(4), Part 15.203
Requirement	: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. In addition, If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 0.43dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 12 of 65

4.1.2 Maximum conducted (average) output power

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)

Requirement : ANSI C63.10-2013, Clause 11.9.2
KDB 558074 D01 v05r02, Clause 8.3.2

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 23.1°C

Relative humidity : 52%

Table 1: Maximum conducted (average) output power

Test Mode	Duty Cycle (%)	Test Channel (MHz)	Maximum conducted (average) output power		Limit (W)
			(dBm)	(mW)	
802.11b	100	2412	17.34	54.20	≤1
		2437	17.61	57.68	
		2462	17.90	61.66	
802.11g	100	2412	13.34	21.58	
		2437	13.52	22.49	
		2462	12.32	17.06	
802.11n(HT20)	100	2412	13.79	23.93	
		2437	13.85	24.27	
		2462	13.20	20.89	
802.11n(HT40)	100	2422	11.86	15.35	
		2437	11.93	15.60	
		2452	11.96	15.70	

Notes:

1. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 13 of 65

4.1.3 6dB Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)

Requirement : ANSI C63.10-2013, Clause 11.8.1
KDB 558074 D01 v05r02, Clause 8.2

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 23.1°C

Relative humidity : 52%

Table 2: 6dB Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Bandwidth Applicable Limit (MHz)
802.11b	2412	10.13	14.434	≥0.5
	2437	10.09	14.416	
	2462	10.09	14.400	
802.11g	2412	16.49	16.668	
	2437	16.47	16.593	
	2462	15.36	16.090	
802.11n(HT20)	2412	17.70	17.759	
	2437	17.70	17.810	
	2462	15.76	17.274	
802.11n(HT40)	2422	36.33	35.790	
	2437	35.98	35.885	
	2452	36.42	35.867	

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 14 of 65

Figure 1: 6dB Bandwidth, 802.11b, 2412MHz



Figure 2: 6dB Bandwidth, 802.11b, 2437MHz



TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 15 of 65

Figure 3: 6dB Bandwidth, 802.11b, 2462MHz



Figure 4: 6dB Bandwidth, 802.11g, 2412MHz

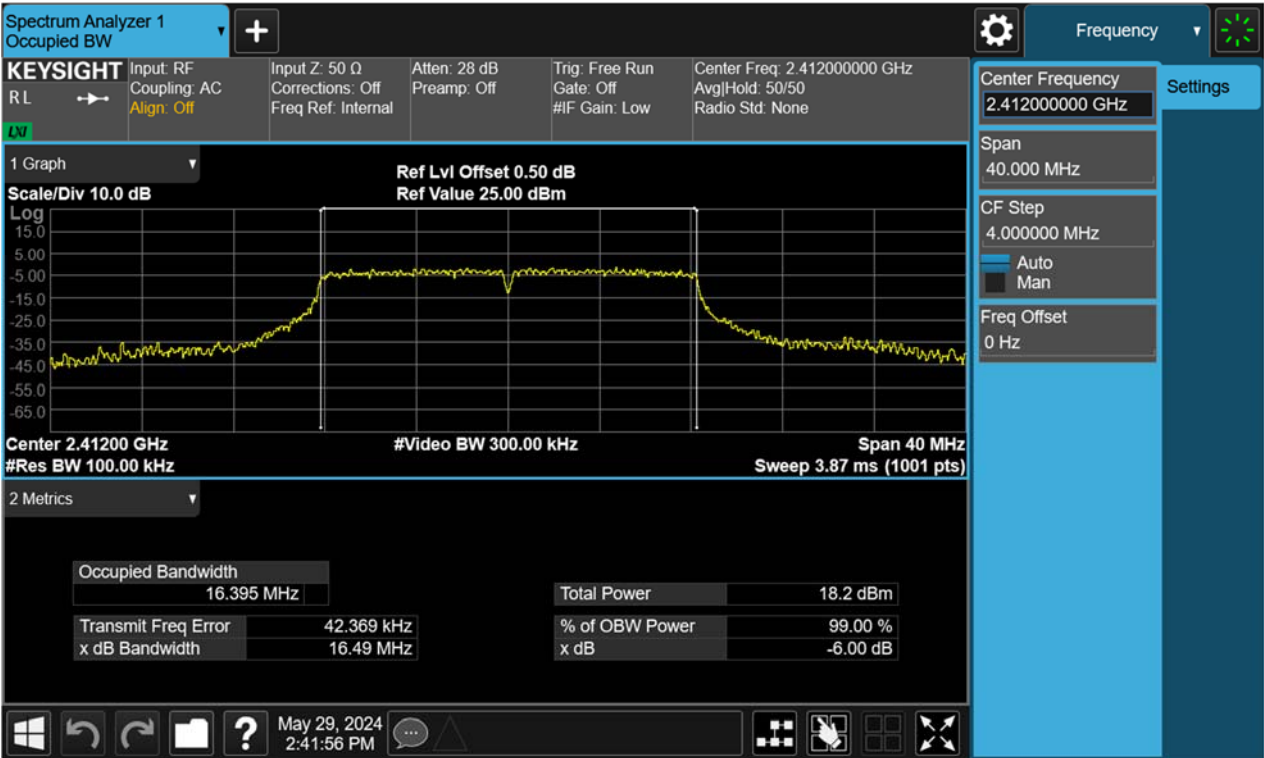

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 16 of 65

Figure 5: 6dB Bandwidth, 802.11g, 2437MHz


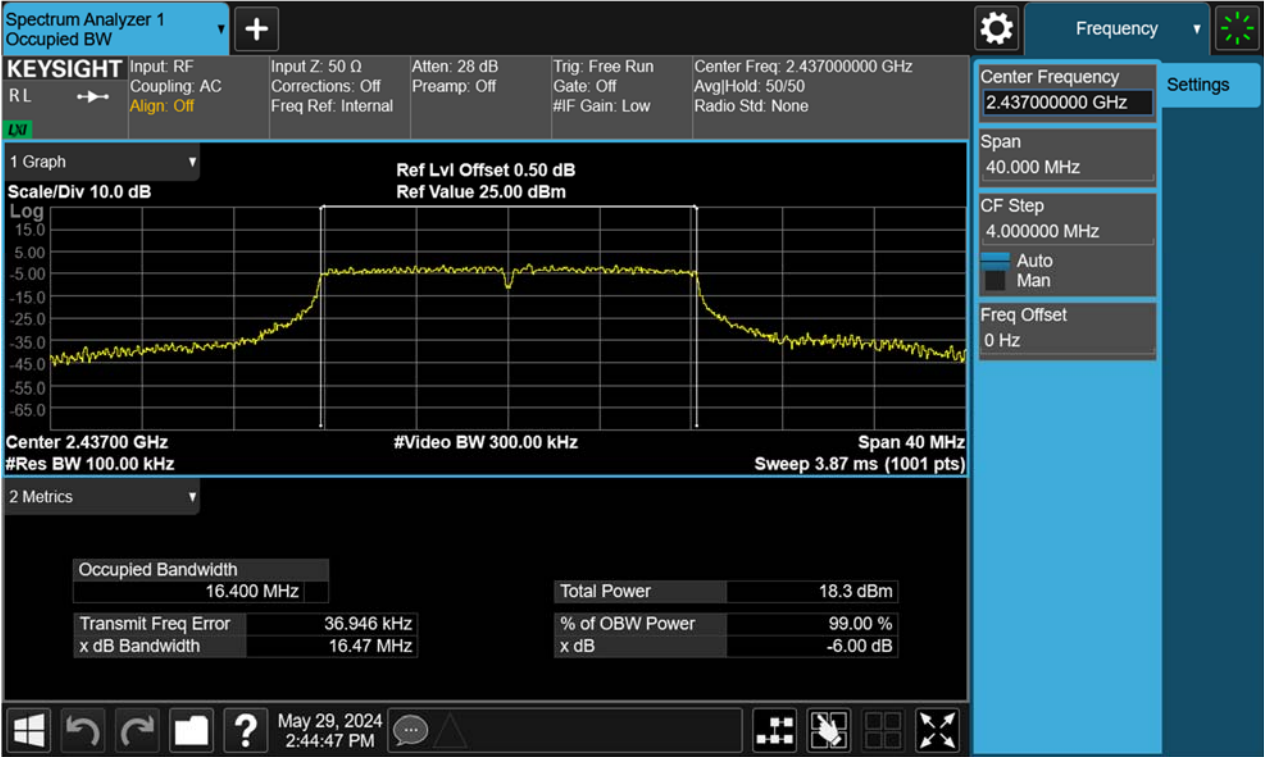


Figure 6: 6dB Bandwidth, 802.11g, 2462MHz

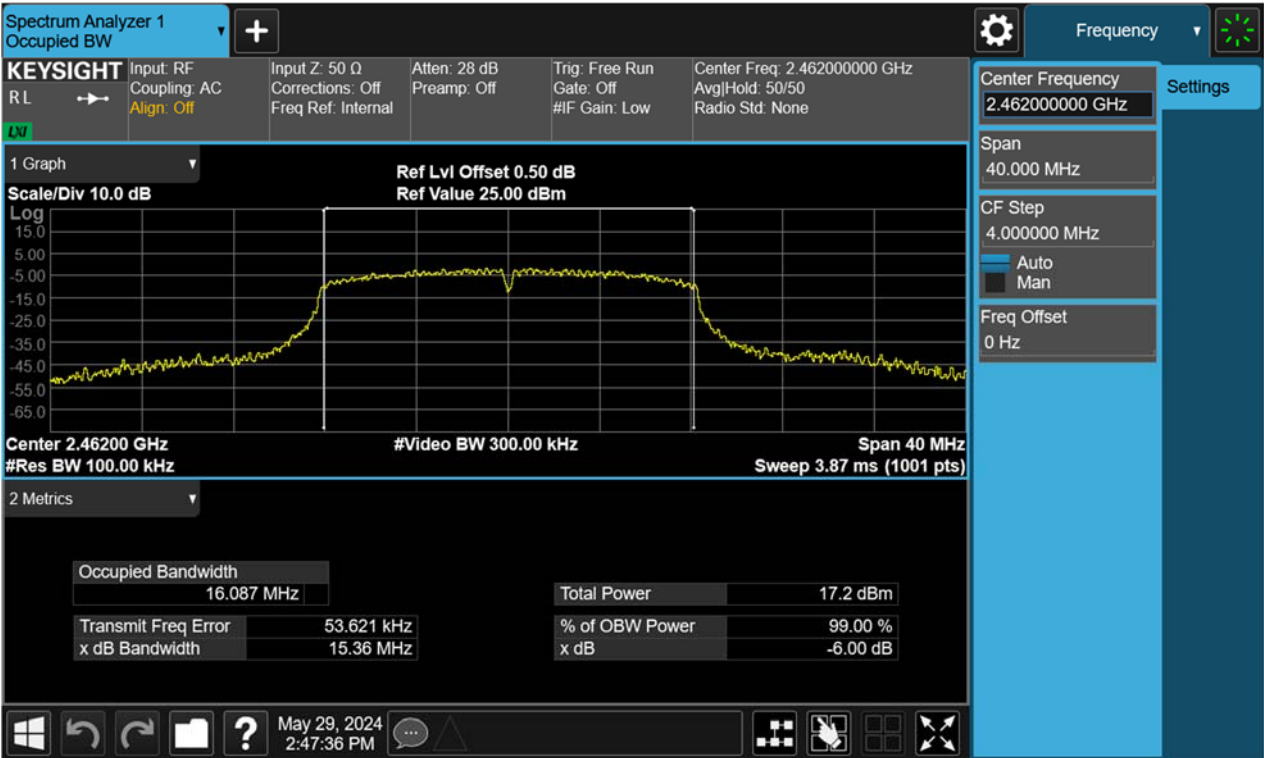

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 17 of 65

Figure 7: 6dB Bandwidth, 802.11n(HT20), 2412MHz


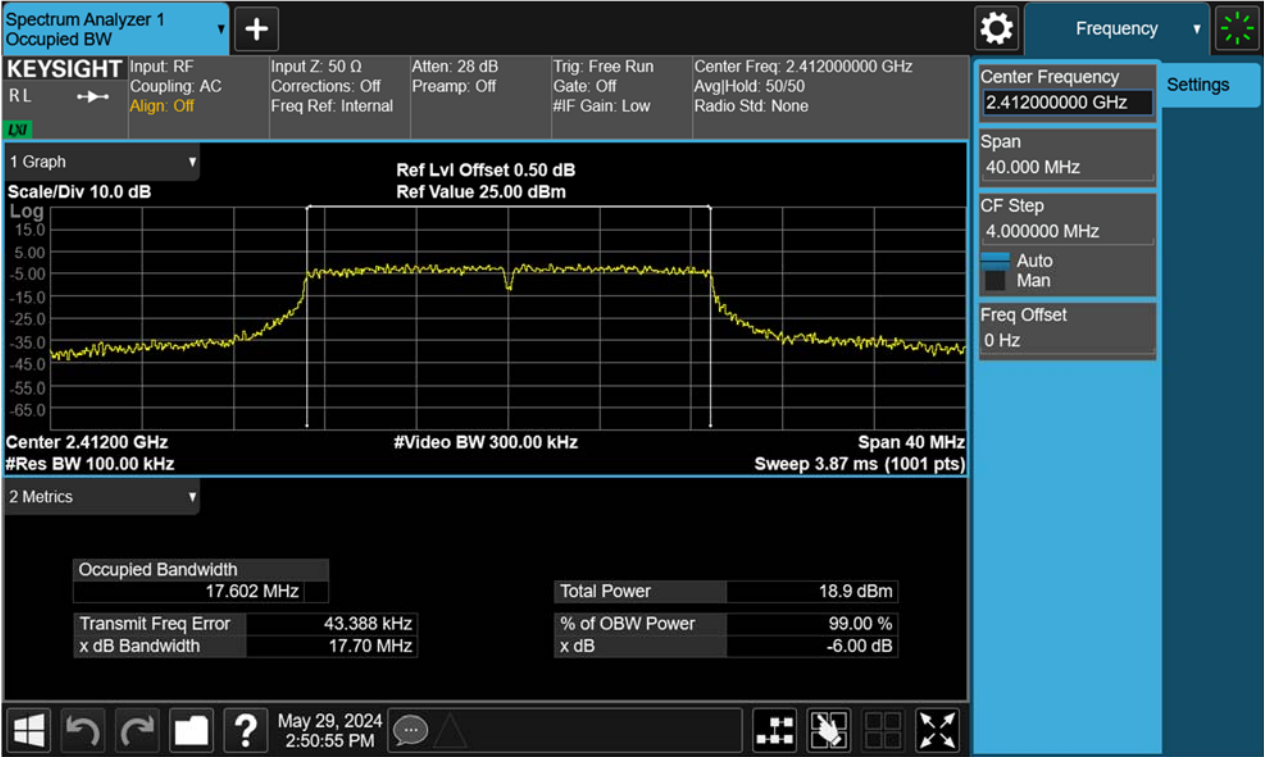


Figure 8: 6dB Bandwidth, 802.11n(HT20), 2437MHz

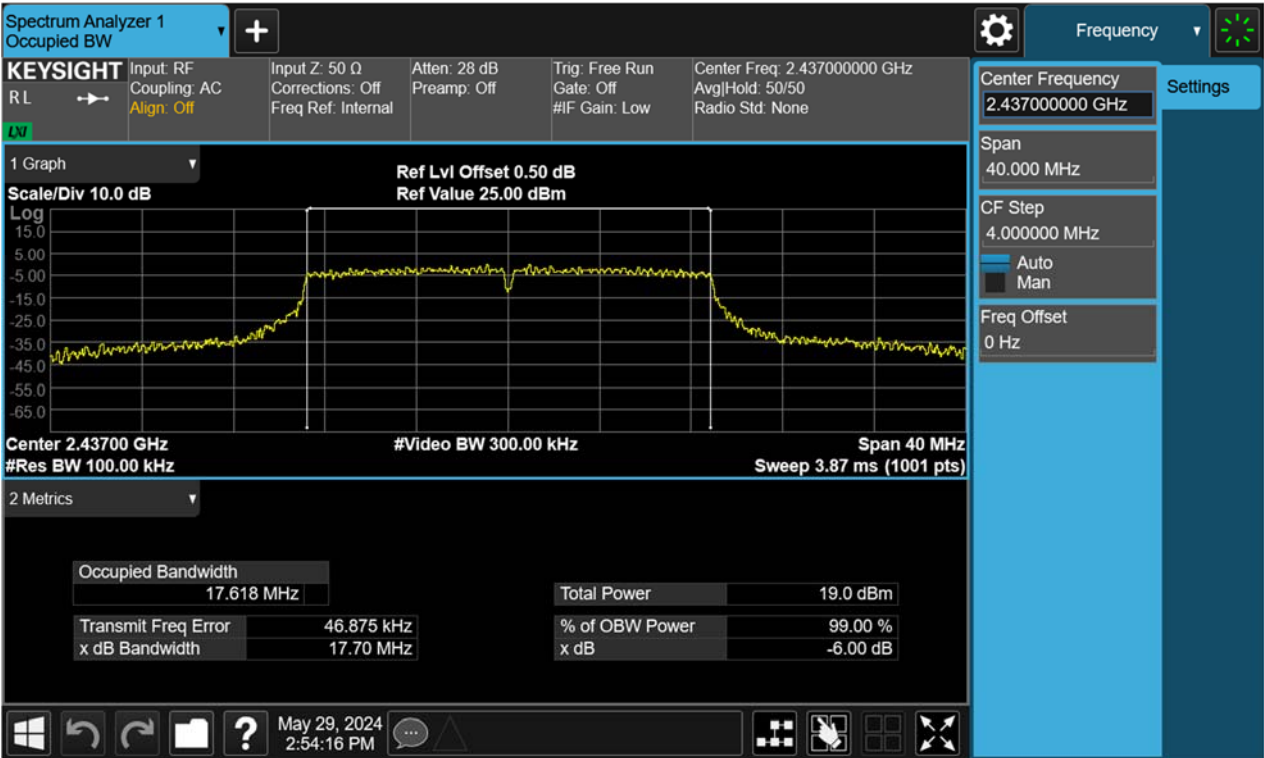

TEST REPORT

Report No.: SHE24050068-01CE Date: 2024-06-07 Page 18 of 65

Figure 9: 6dB Bandwidth, 802.11n(HT20), 2462MHz


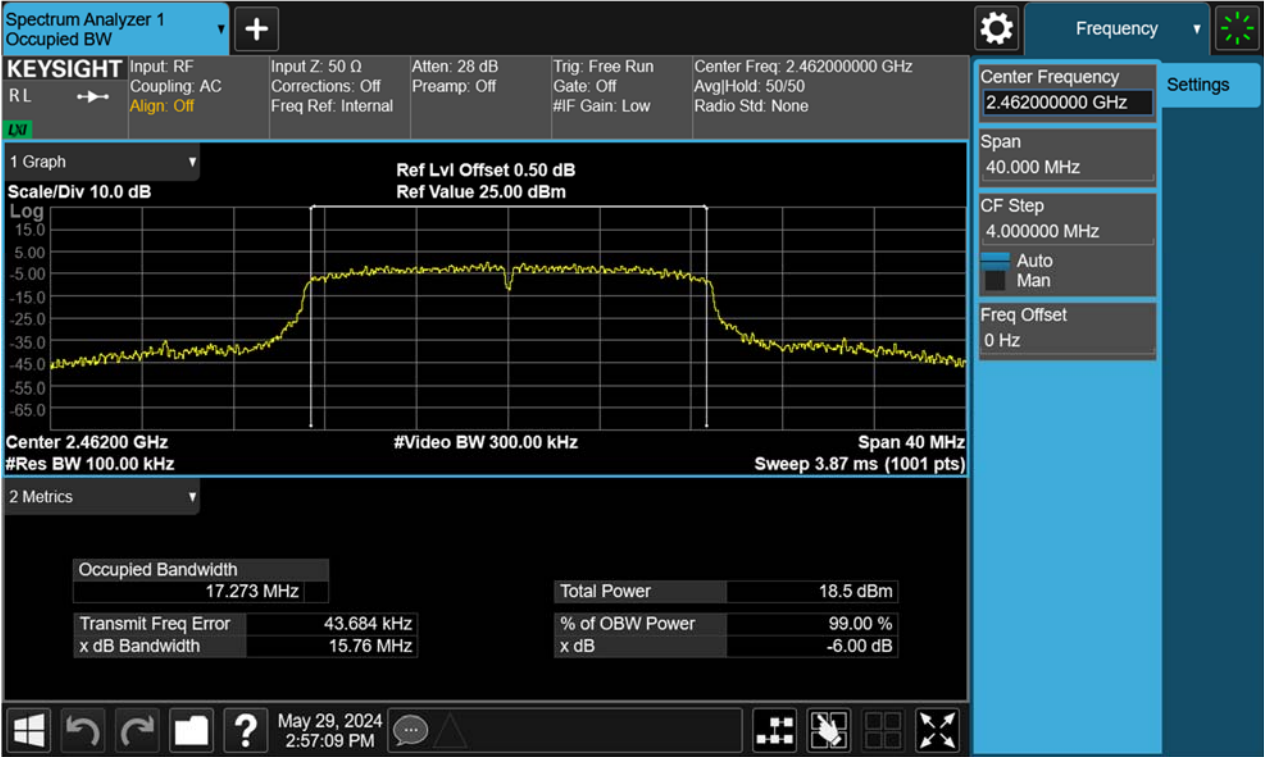


Figure 10: 6dB Bandwidth, 802.11n(HT40), 2422MHz

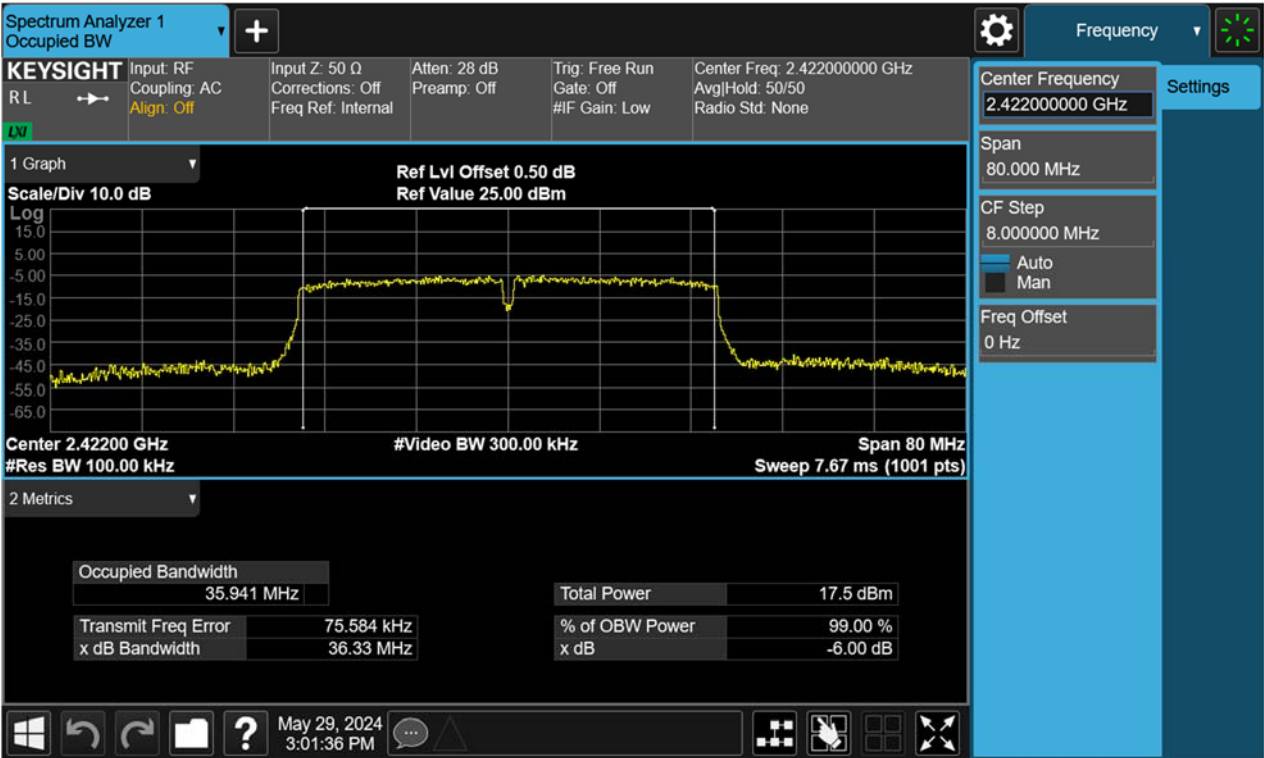

TEST REPORT

Report No.: SHE24050068-01CE Date: 2024-06-07 Page 19 of 65

11: 6dB Bandwidth, 802.11n(HT40), 2437MHz


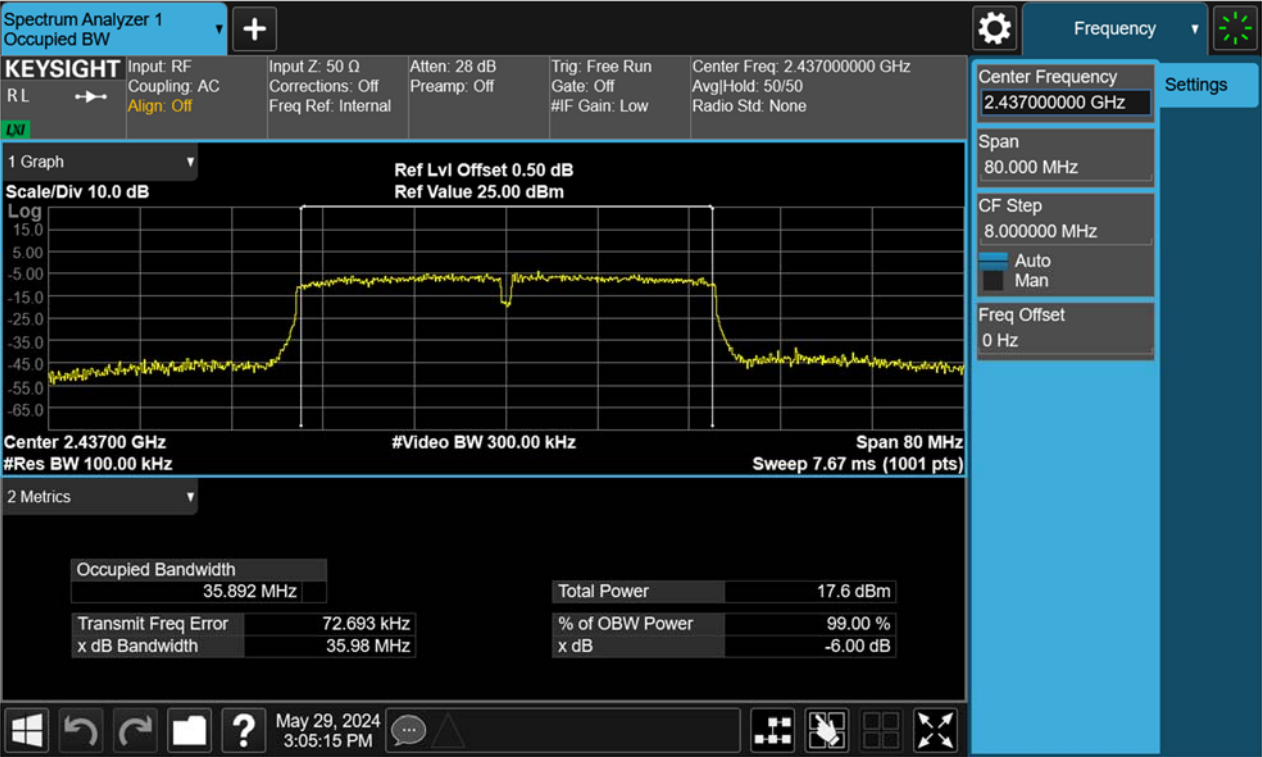


Figure 12: 6dB Bandwidth, 802.11n(HT40), 2452MHz

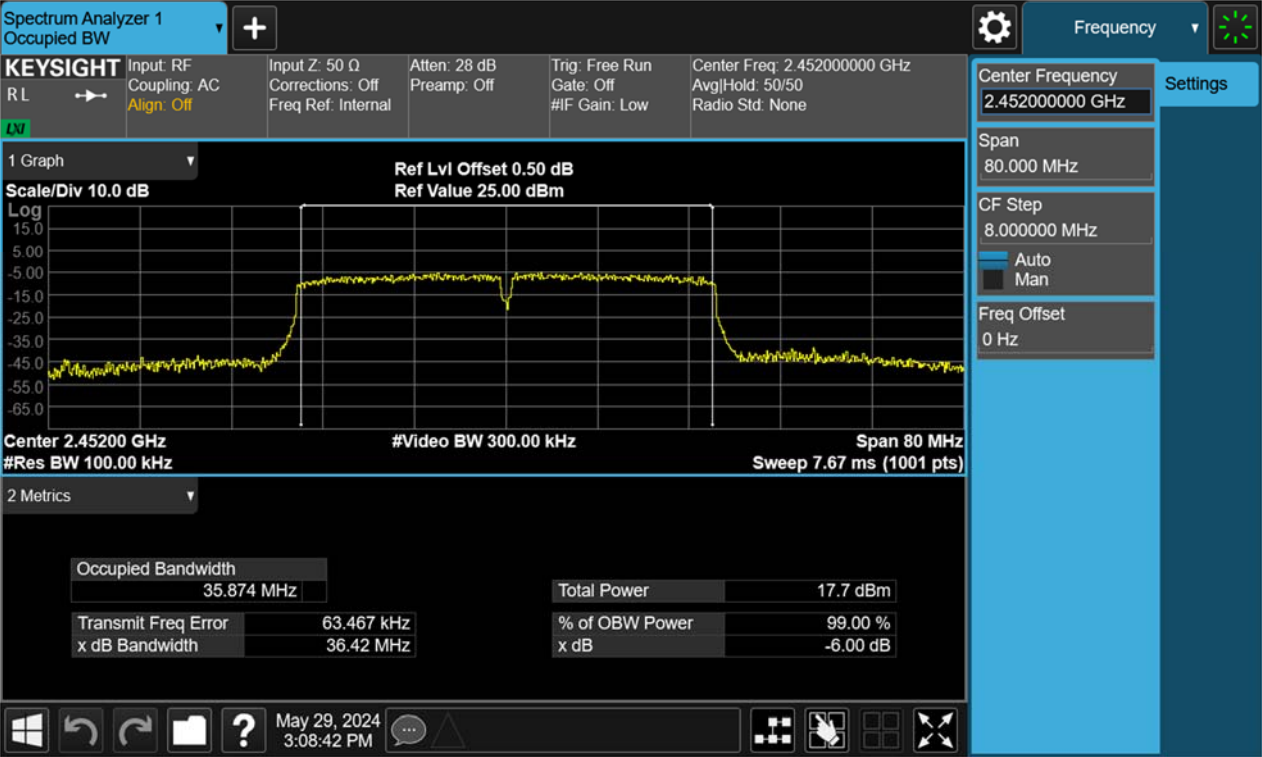

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 20 of 65

4.1.4 Maximum conducted output power spectral density

RESULT:

PASS

Test standard : FCC Part 15.247(e)

Requirement : ANSI C63.10-2013, Clause 11.10.4
KDB 558074 D01 v05r02, Clause 8.4

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 23.1°C

Relative humidity : 52%

Table 3: Maximum (average) conducted output power spectral density

Test Mode	Test Channel (MHz)	Maximum (average) conducted output power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-15.32	≤8
	2437	-14.88	
	2462	-14.58	
802.11g	2412	-21.88	
	2437	-21.65	
	2462	-21.79	
802.11n(HT20)	2412	-21.61	
	2437	-21.46	
	2462	-21.49	
802.11n(HT40)	2422	-26.92	
	2437	-26.85	
	2452	-27.13	

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 21 of 65

Figure 13: Power Spectral Density, 802.11b, 2412MHz



Figure 14: Power Spectral Density, 802.11b, 2437MHz



TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 22 of 65

Figure 15: Power Spectral Density, 802.11b, 2462MHz



Figure 16: Power Spectral Density, 802.11g, 2412MHz

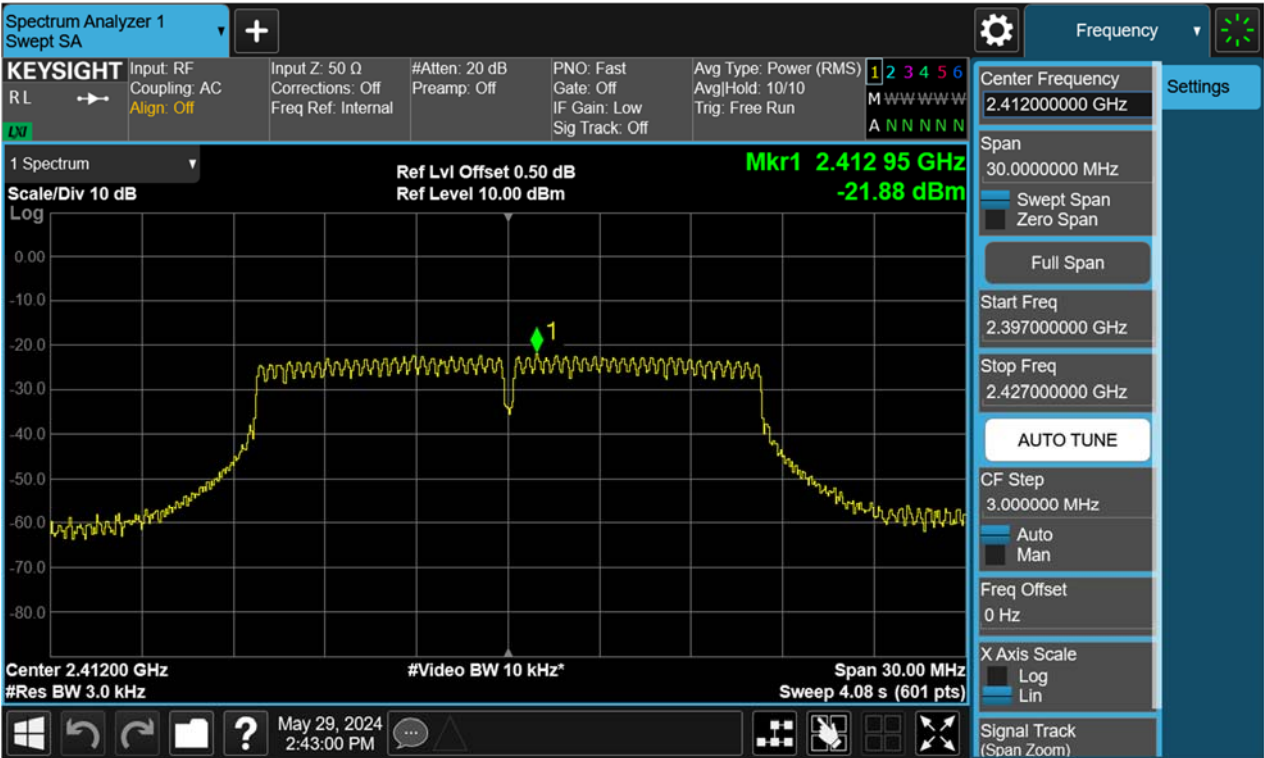

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 23 of 65

Figure 17: Power Spectral Density, 802.11g, 2437MHz


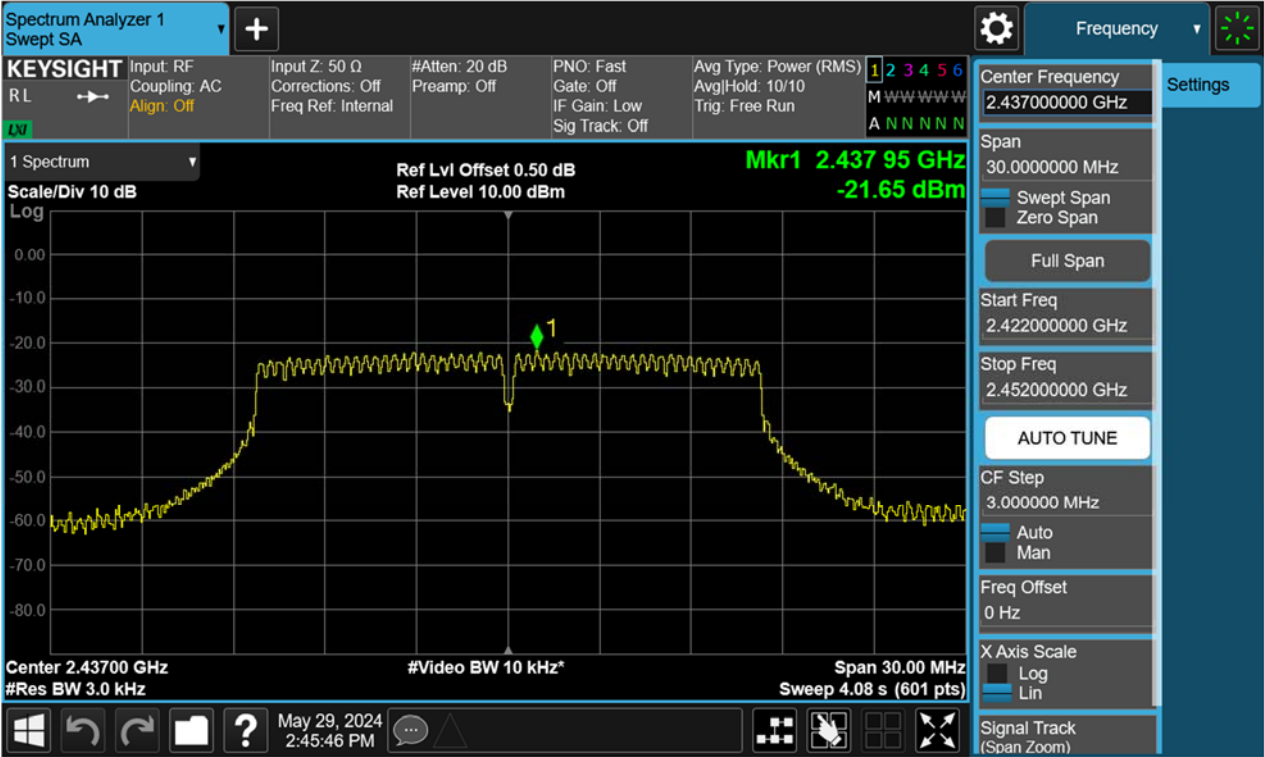


Figure 18: Power Spectral Density, 802.11g, 2462MHz

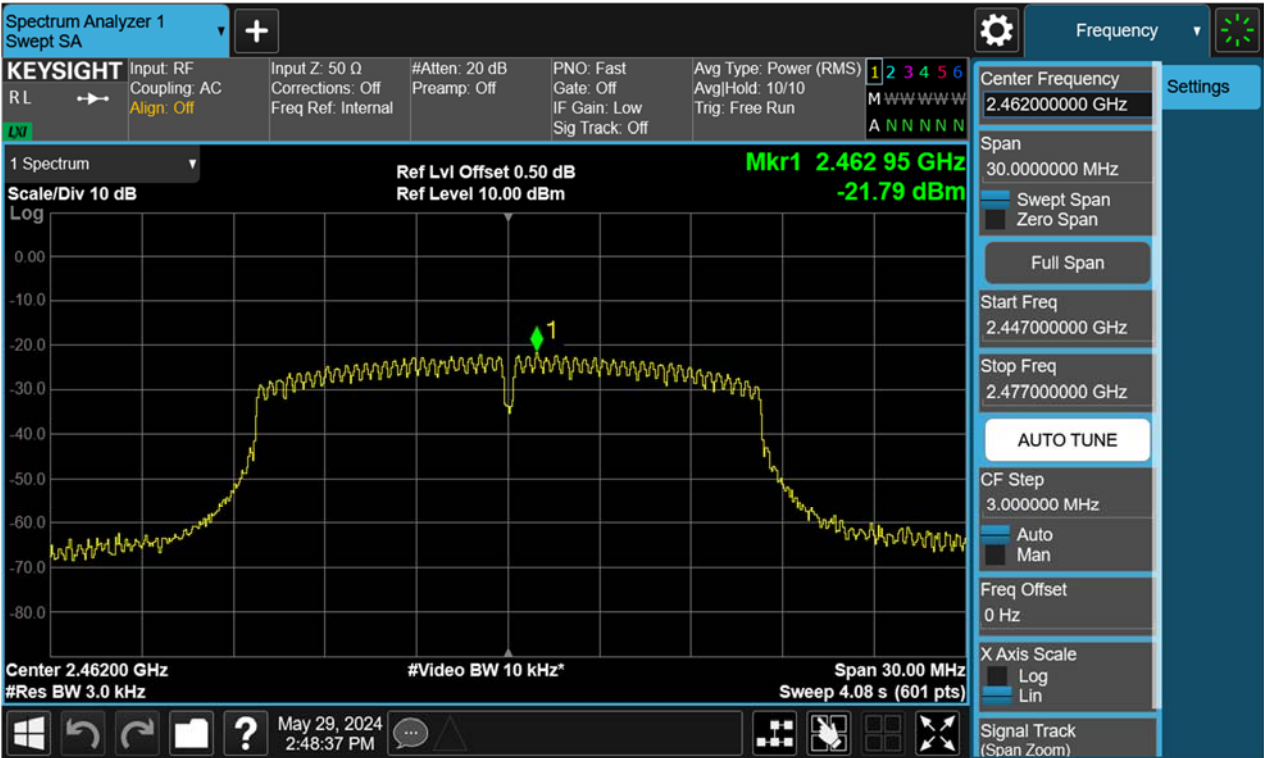

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 24 of 65

Figure 19: Power Spectral Density, 802.11n(HT20), 2412MHz


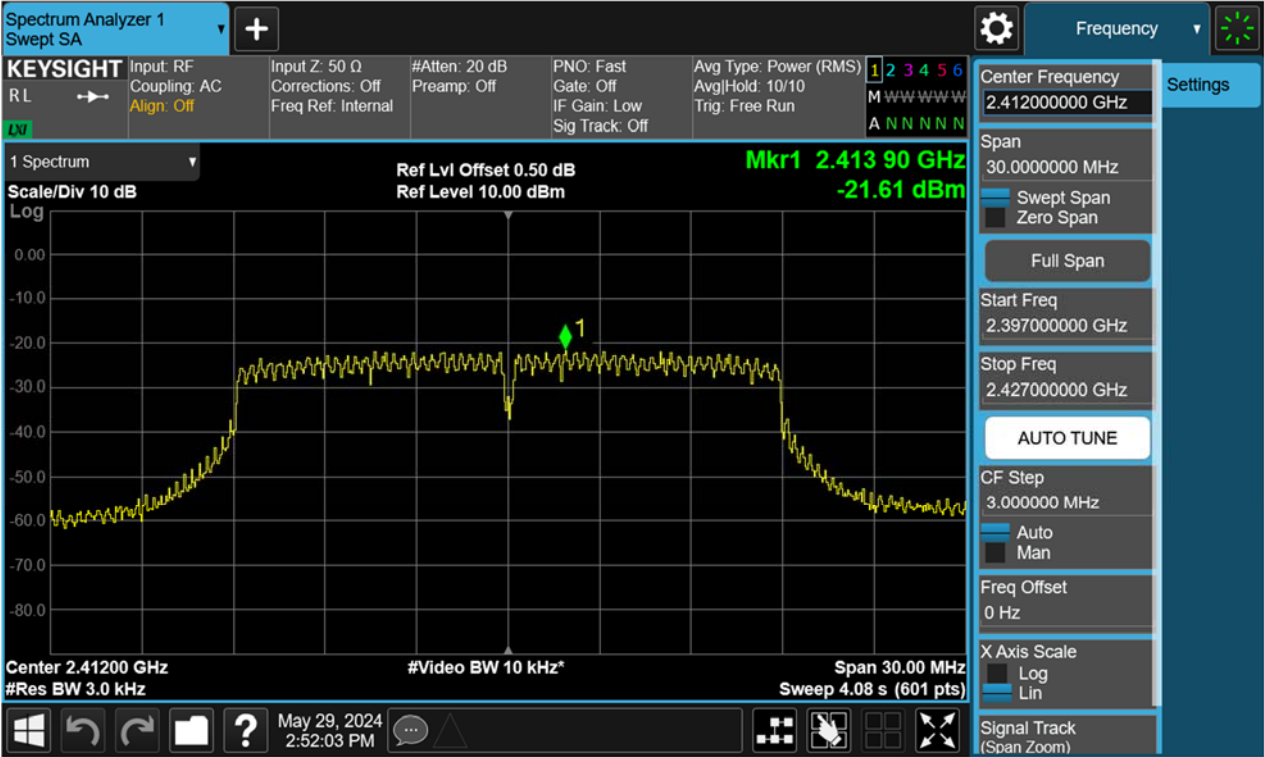


Figure 20: Power Spectral Density, 802.11n(HT20), 2437MHz

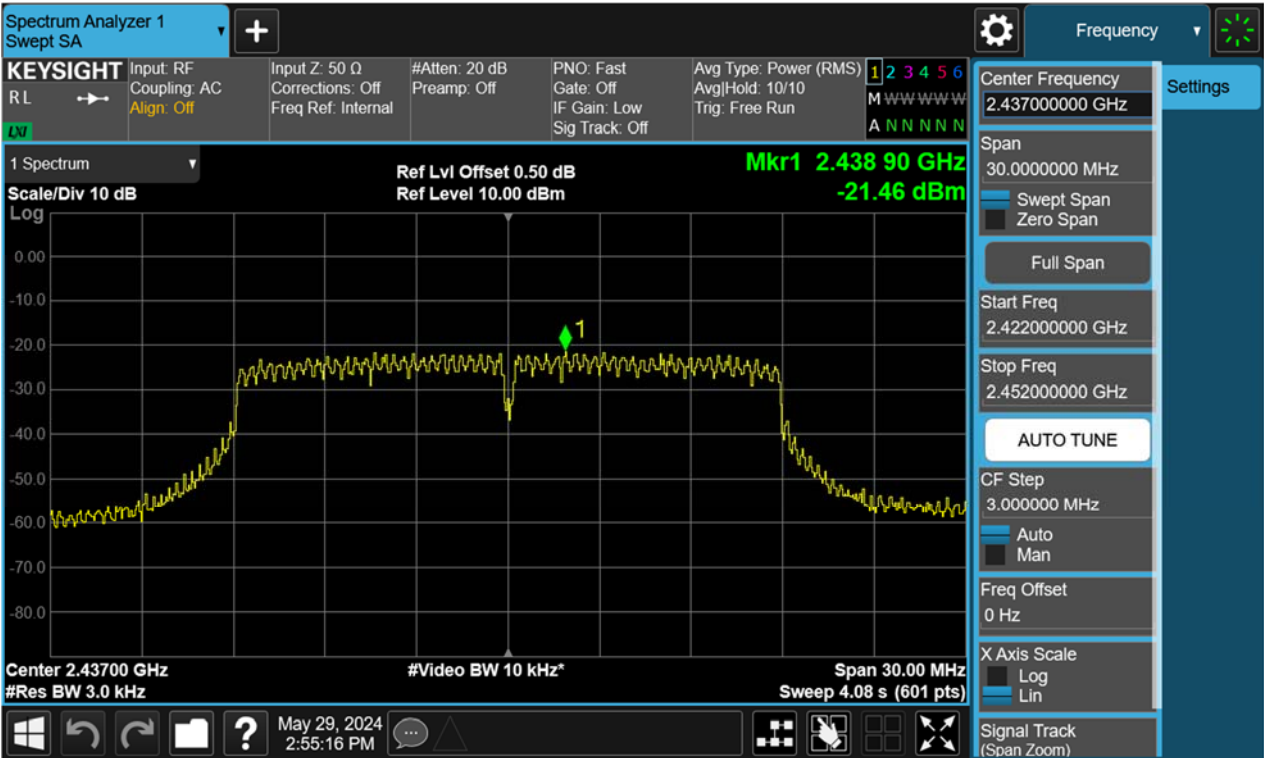

TEST REPORT

Report No.: SHE24050068-01CE Date: 2024-06-07 Page 25 of 65

Figure 21: Power Spectral Density, 802.11n(HT20), 2462MHz


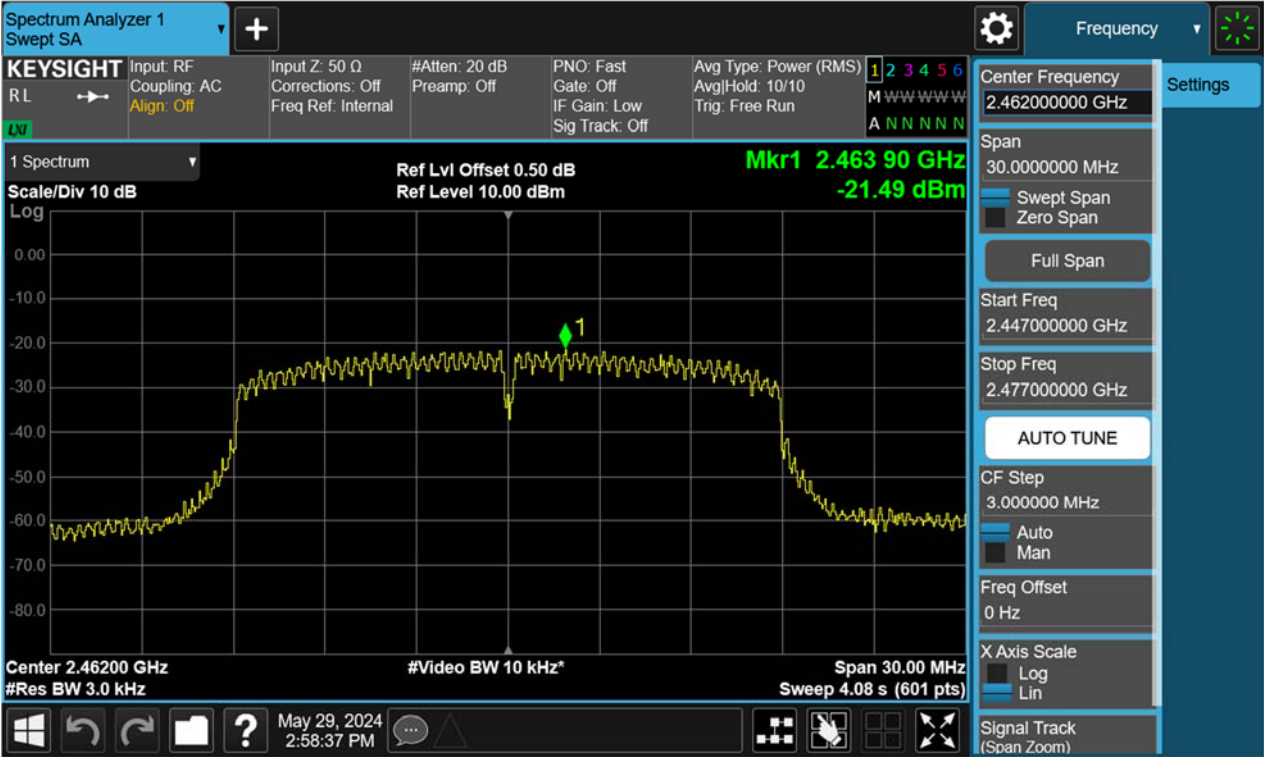


Figure 22: Power Spectral Density, 802.11n(HT40), 2422MHz

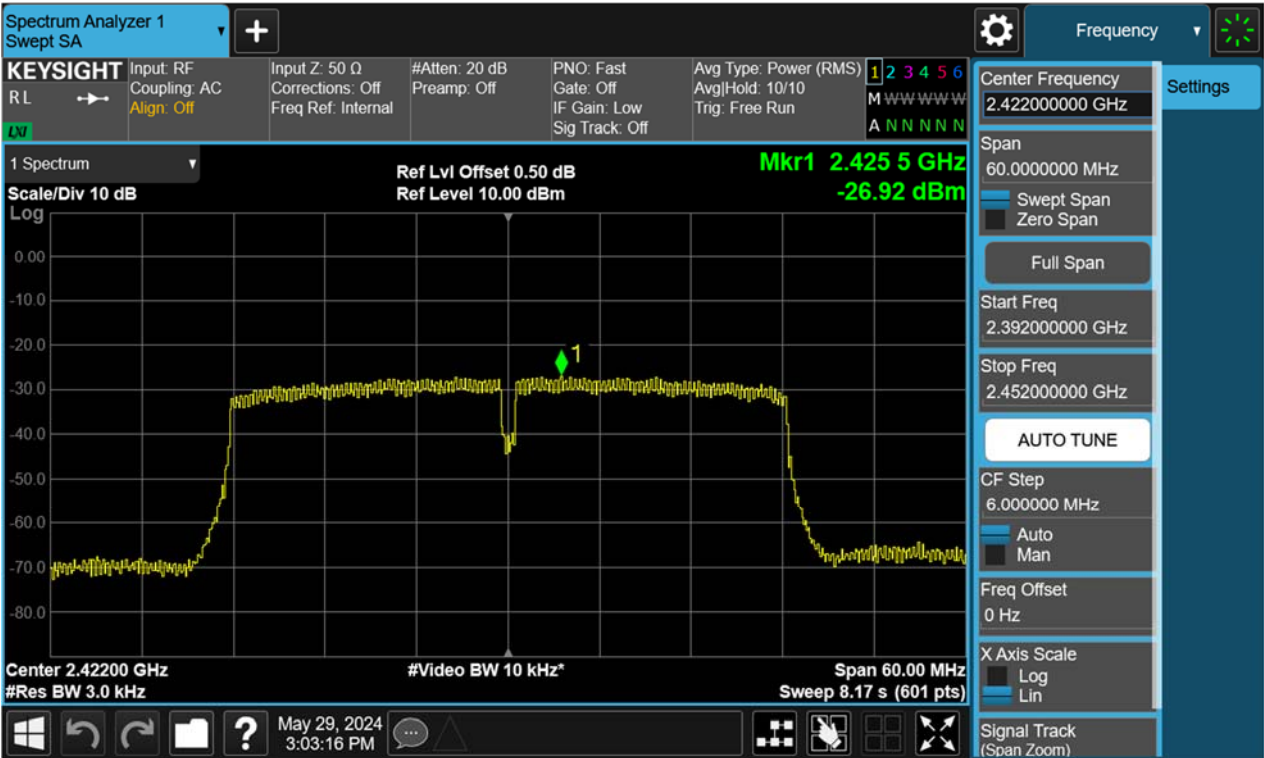

TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 26 of 65

Figure 23: Power Spectral Density, 802.11n(HT40), 2437MHz



Figure 24: Power Spectral Density, 802.11n(HT40), 2452MHz

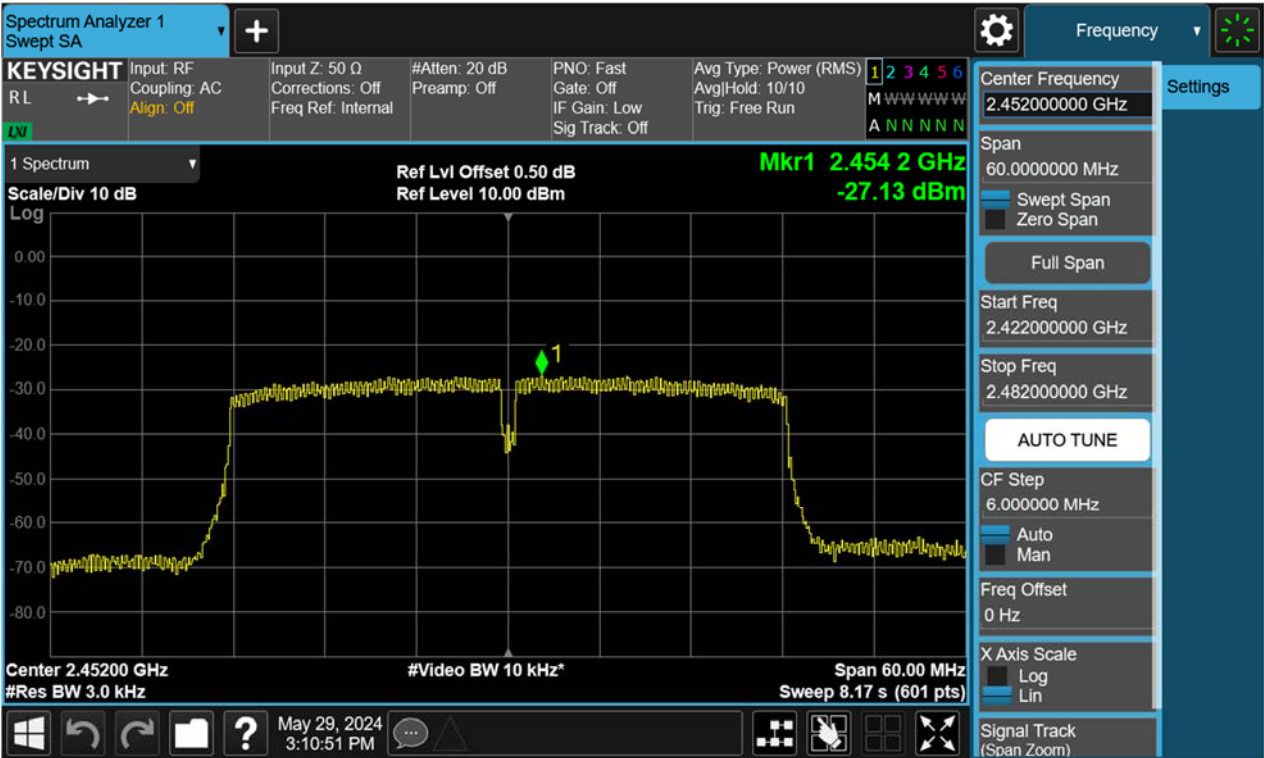

TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 27 of 65

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.209
Requirement	: ANSI C63.10-2013, Clause 11.11.1(b) KDB 558074 D01 v05r02, Clause 8.5
Kind of test site	: Shielded room

Test setup

Test Channel	: Low/Middle/High for spurious, Low/High for Band Edge
Operation Mode	: A.1.a
Ambient temperature	: 23.1°C
Relative humidity	: 52%

For details refer to following test plot.


TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 28 of 65

Figure 25: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2412MHz Carrier Level

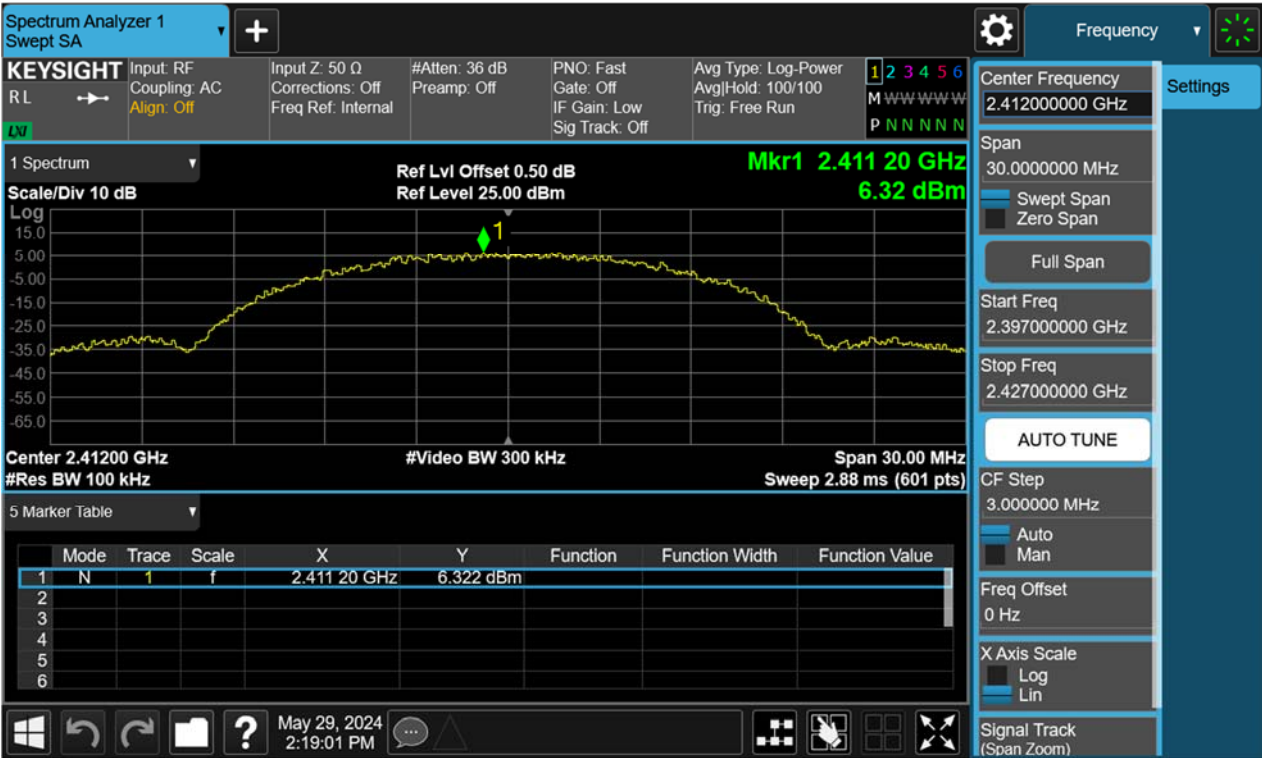

Band Edge

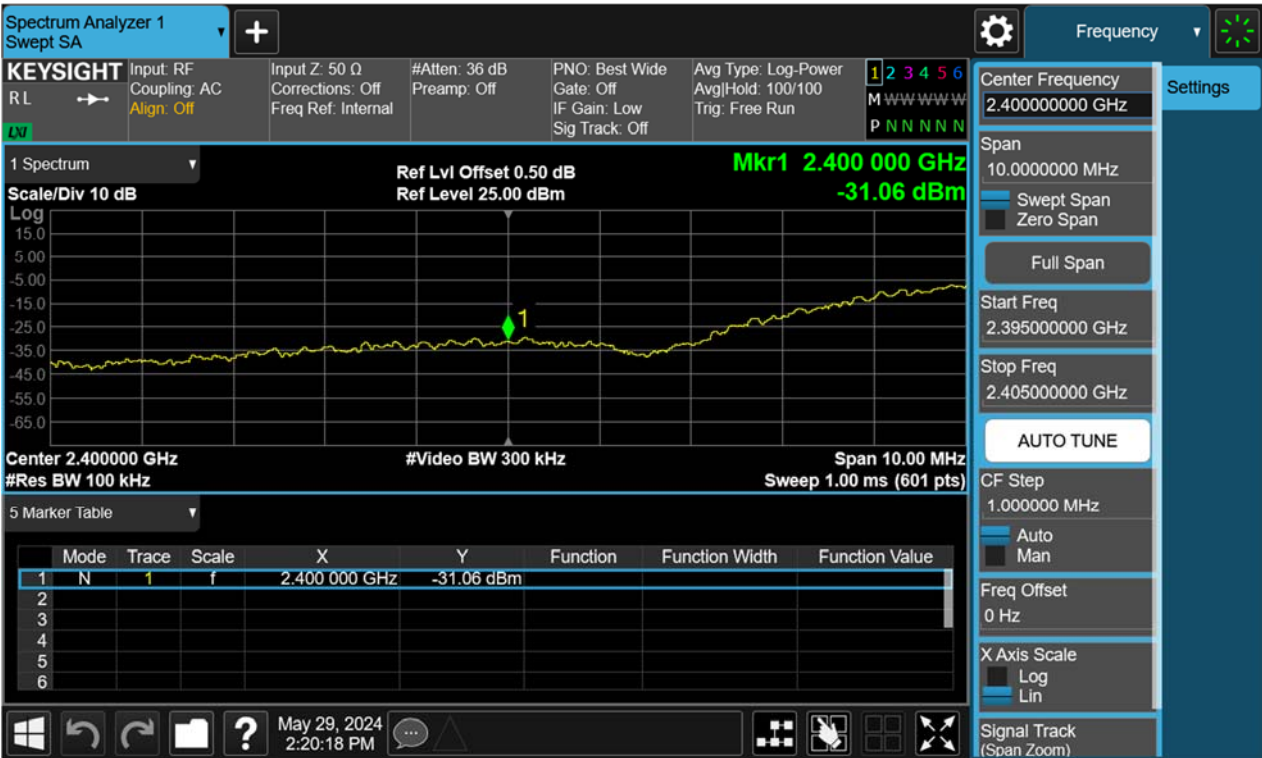


TEST REPORT

Report No.: SHE24050068-01CE

Date: 2024-06-07

Page 29 of 65

Conducted spurious emissions 30MHz-25GHz

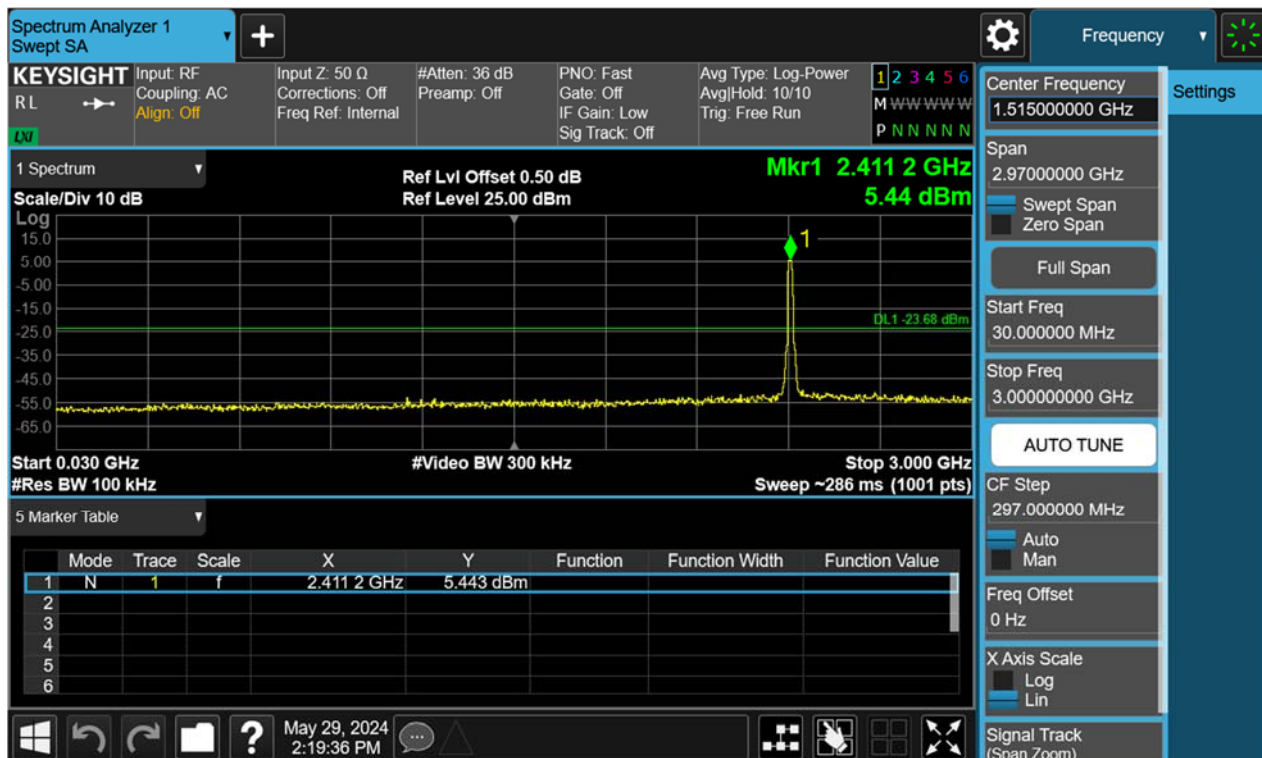


TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 30 of 65

Figure 26: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2437MHz Carrier Level

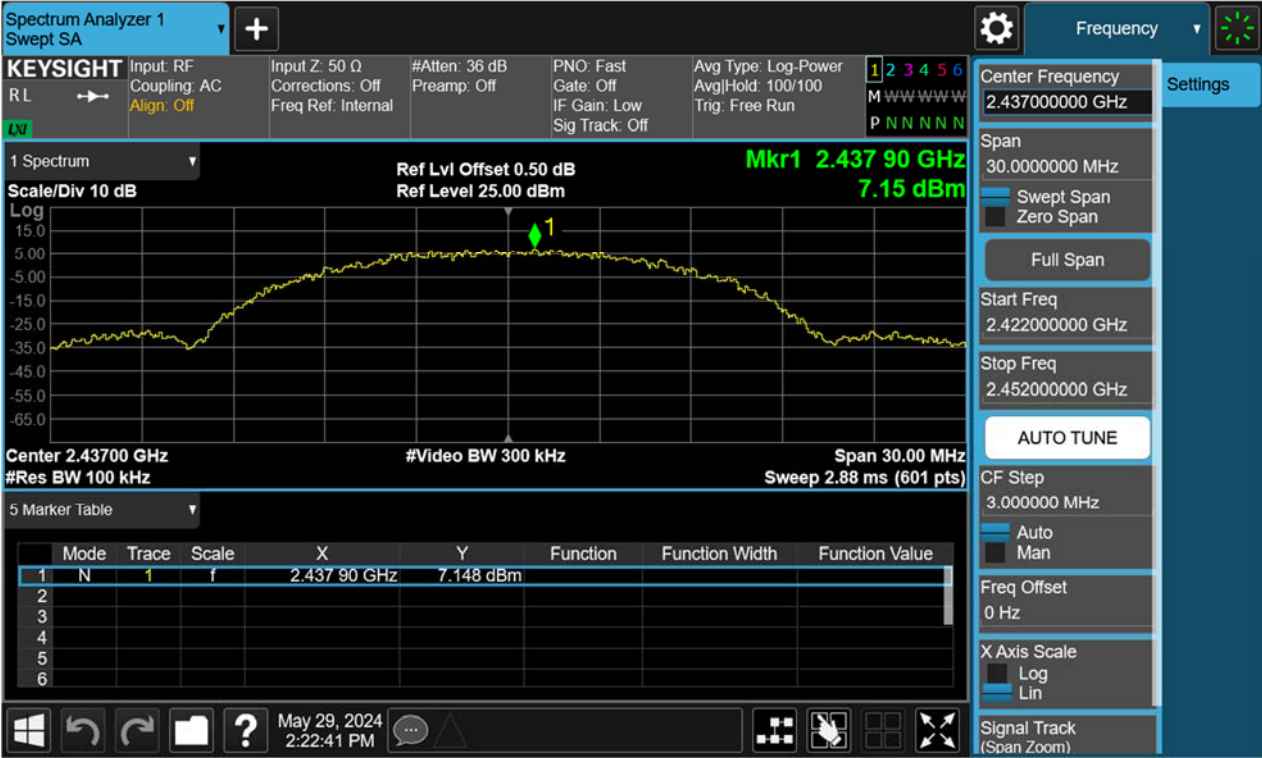

Conducted spurious emissions 30MHz-25GHz

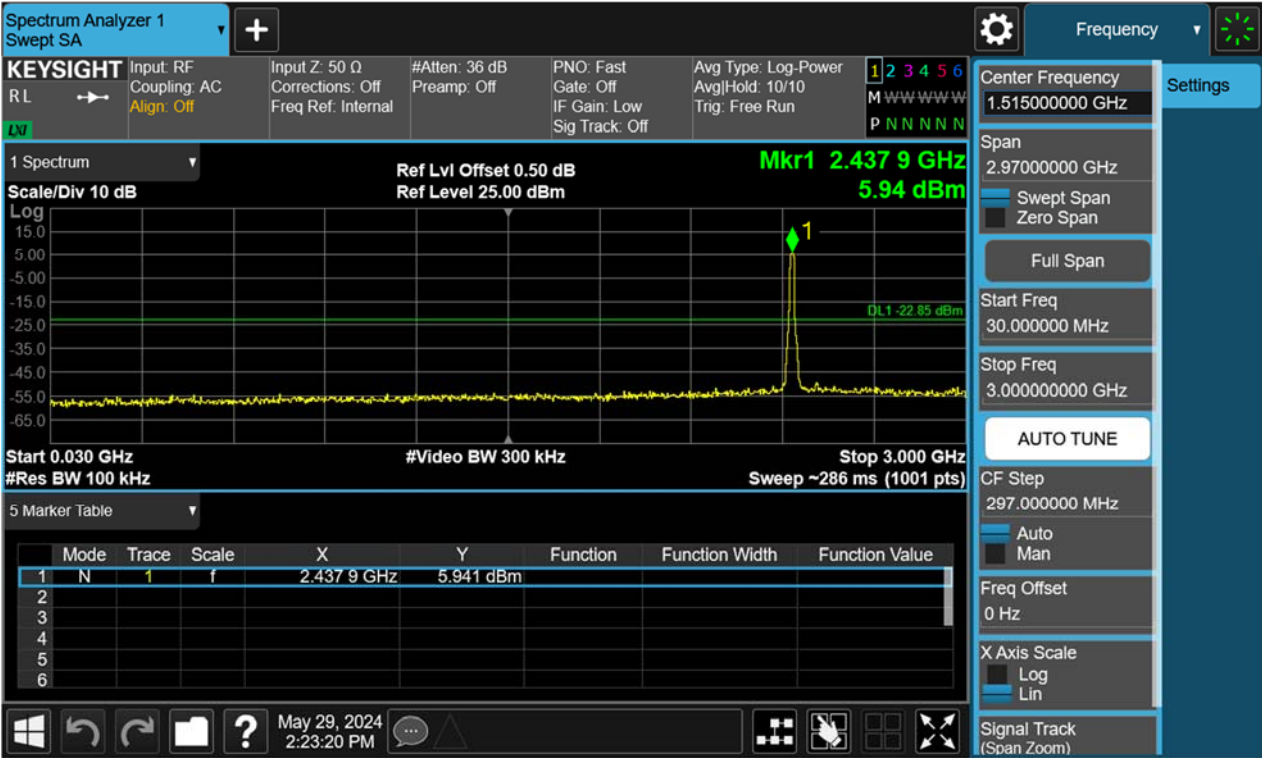

TEST REPORT

Report No.: SHE24050068-01CE Date: 2024-06-07 Page 31 of 65


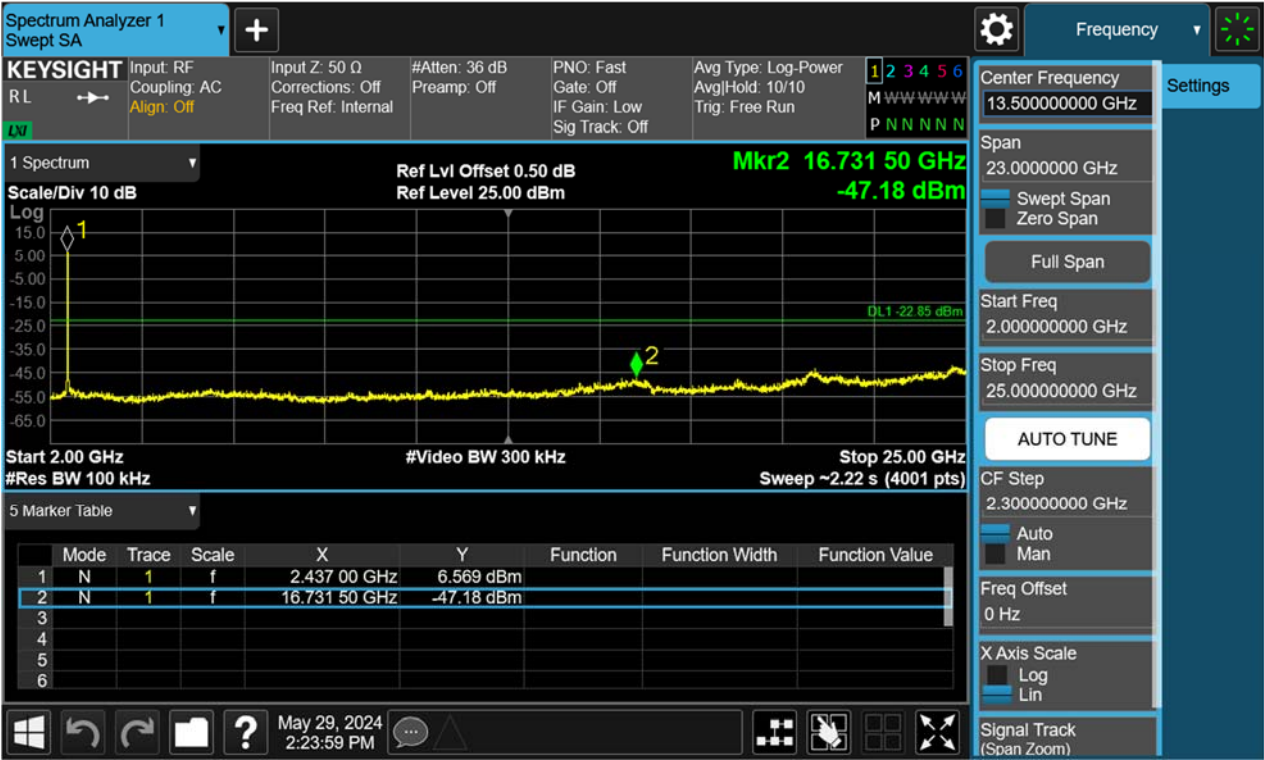


Figure 27: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2462MHz Carrier Level

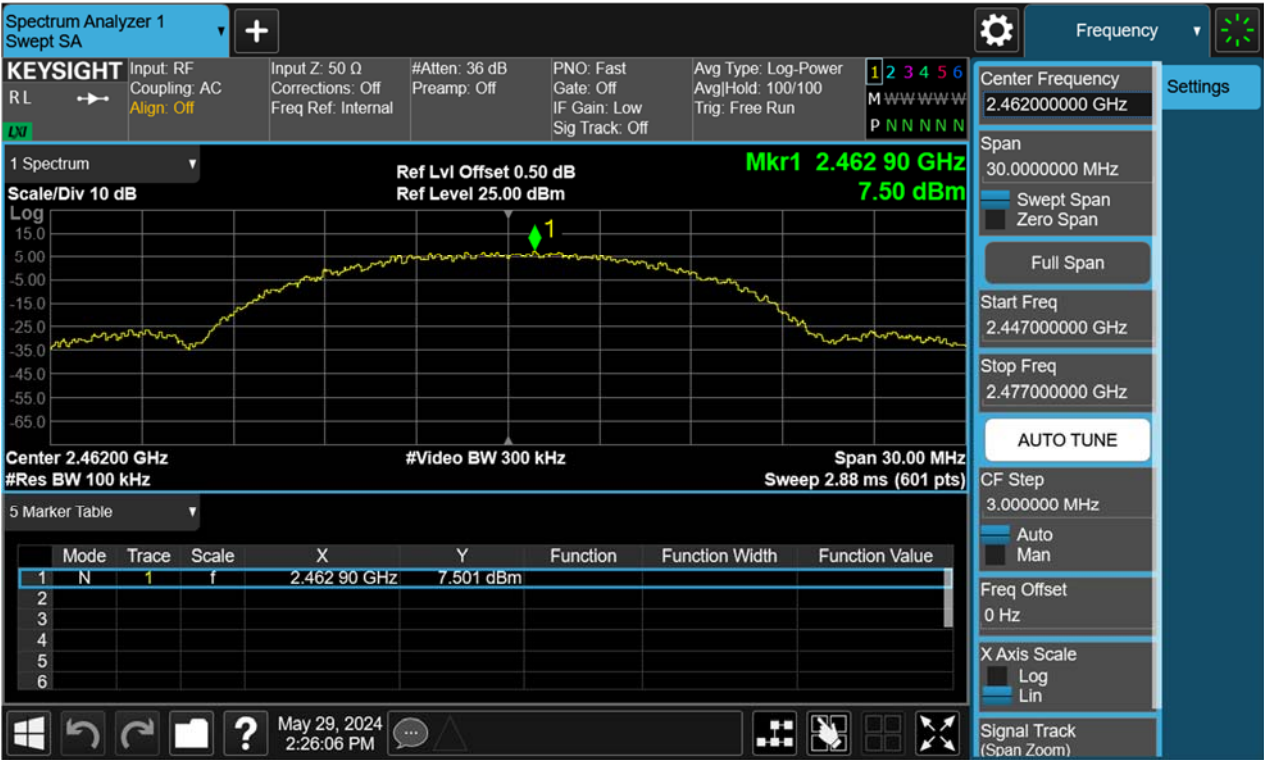

TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 32 of 65

Band Edge



Conducted spurious emissions 30MHz-25GHz

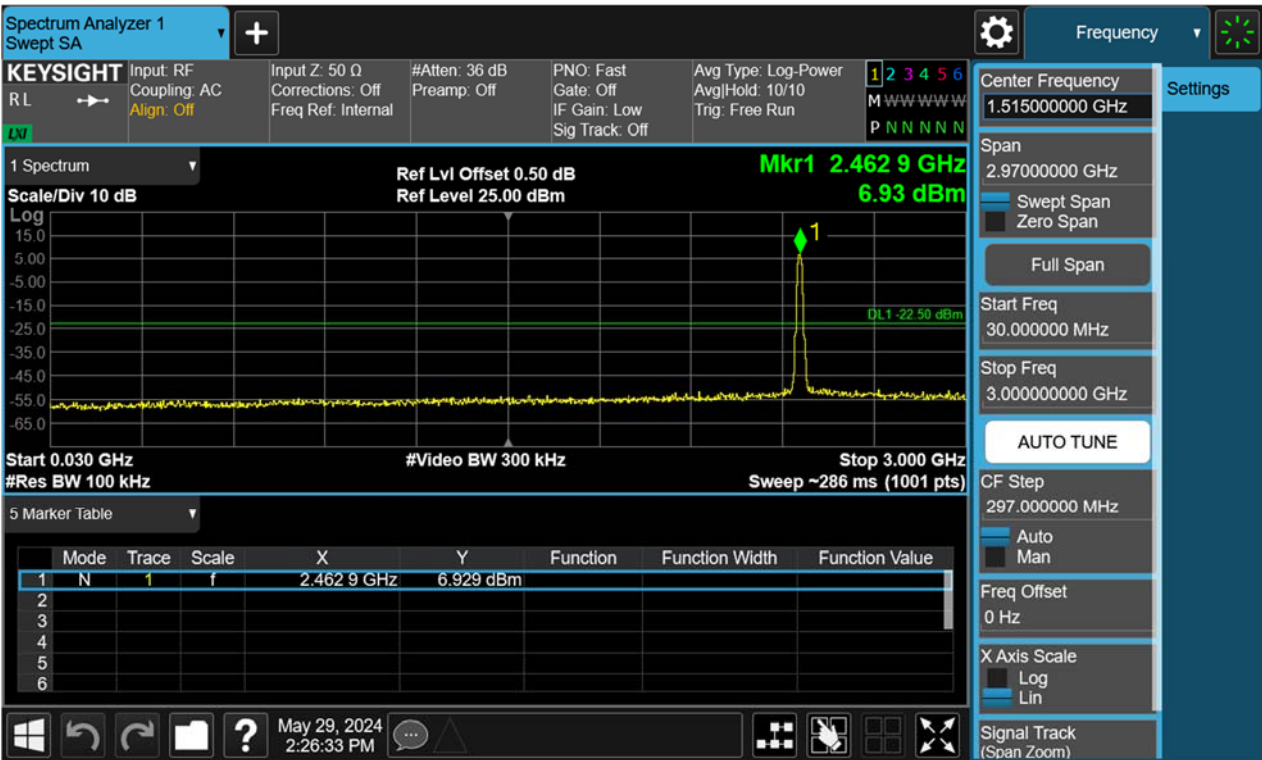

TEST REPORT

Report No.: SHE24050068-01CE Date: 2024-06-07 Page 33 of 65


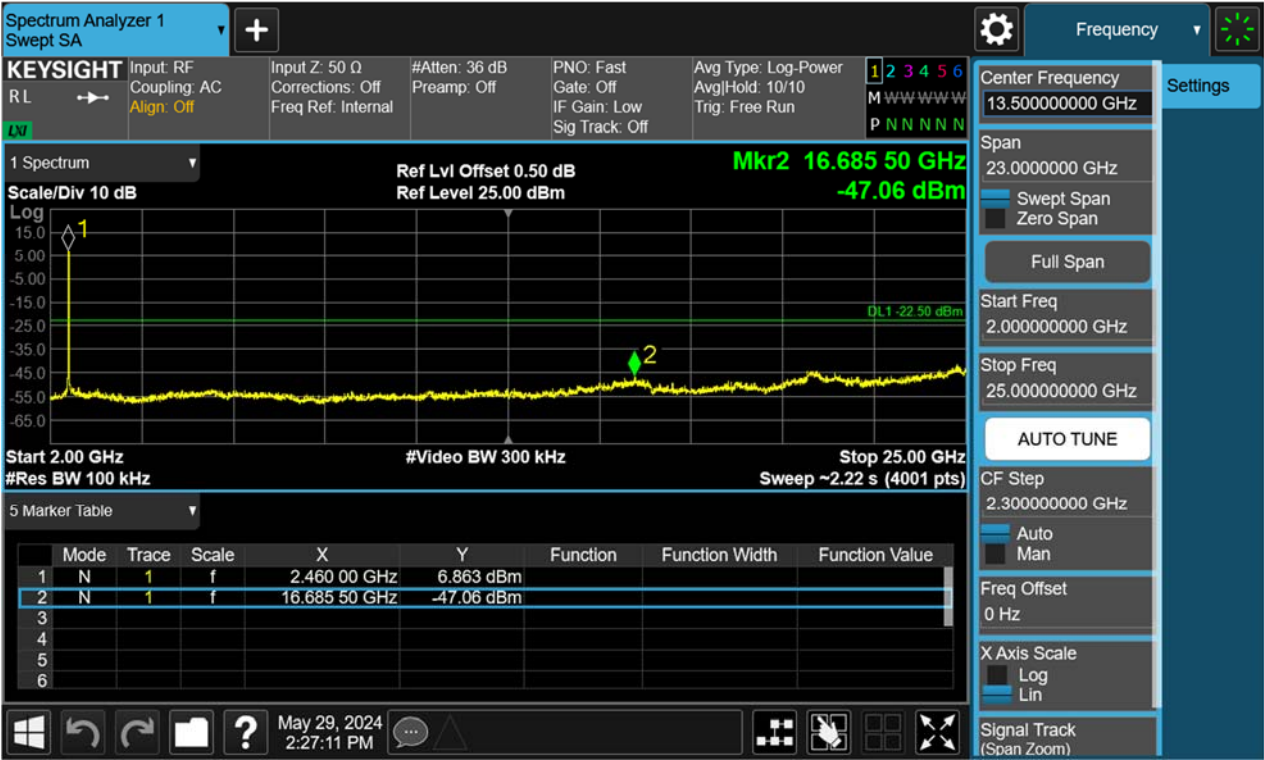


Figure 28: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2412MHz Carrier Level

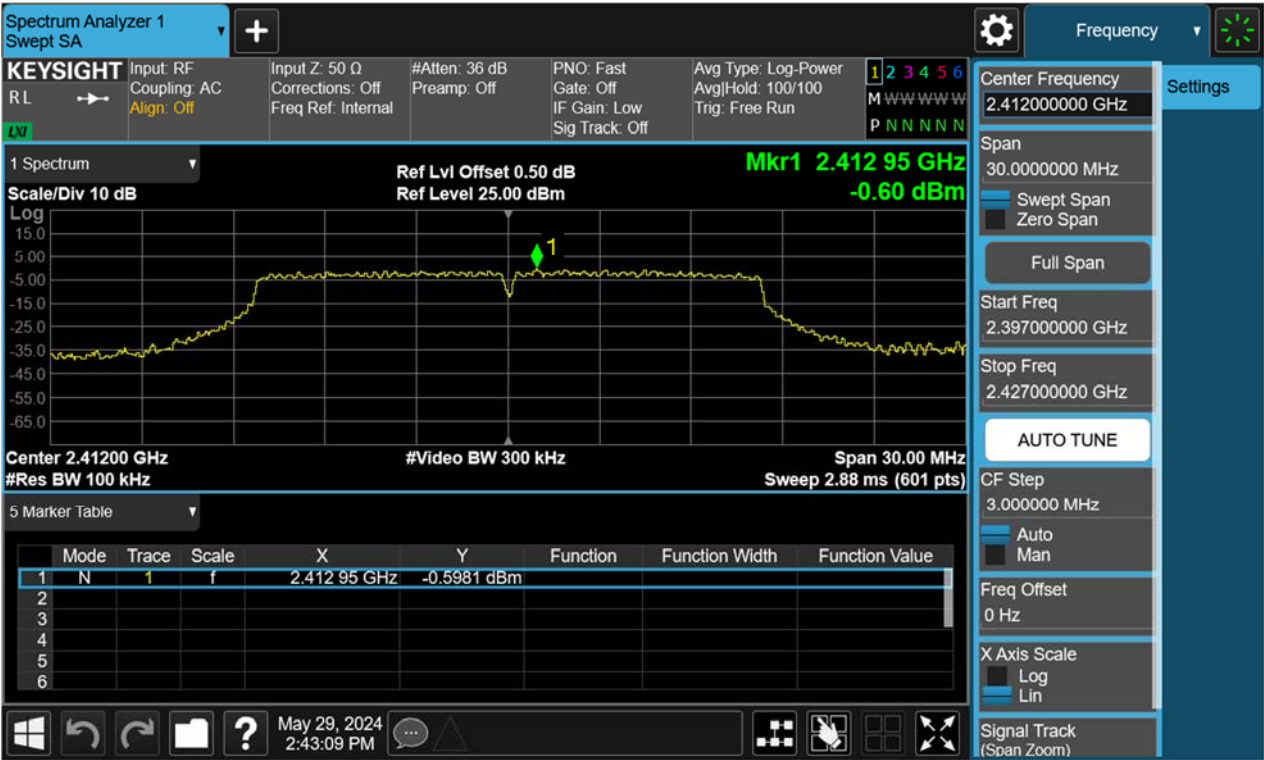

TEST REPORT

Report No.: SHE24050068-01CE


Date: 2024-06-07

Page 34 of 65

Band Edge



Conducted spurious emissions 30MHz-25GHz

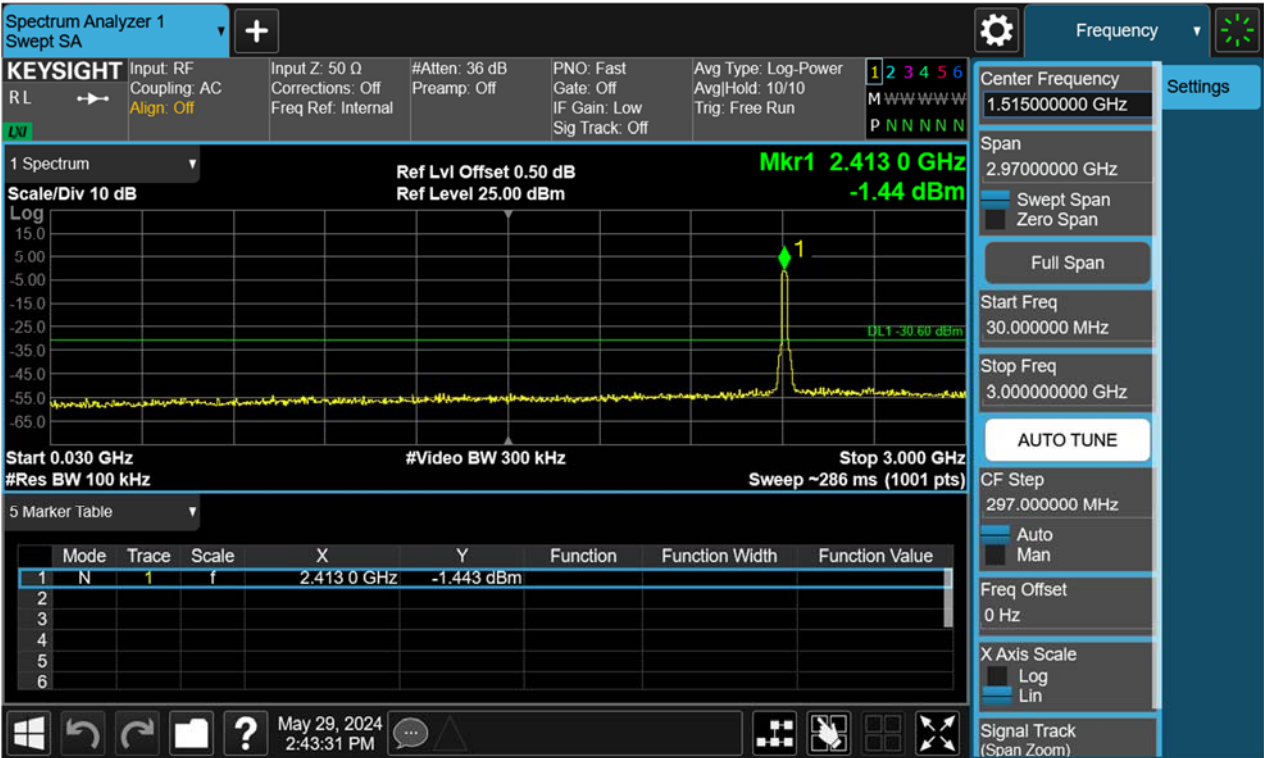

TEST REPORT

Report No.: SHE24050068-01CE Date: 2024-06-07 Page 35 of 65

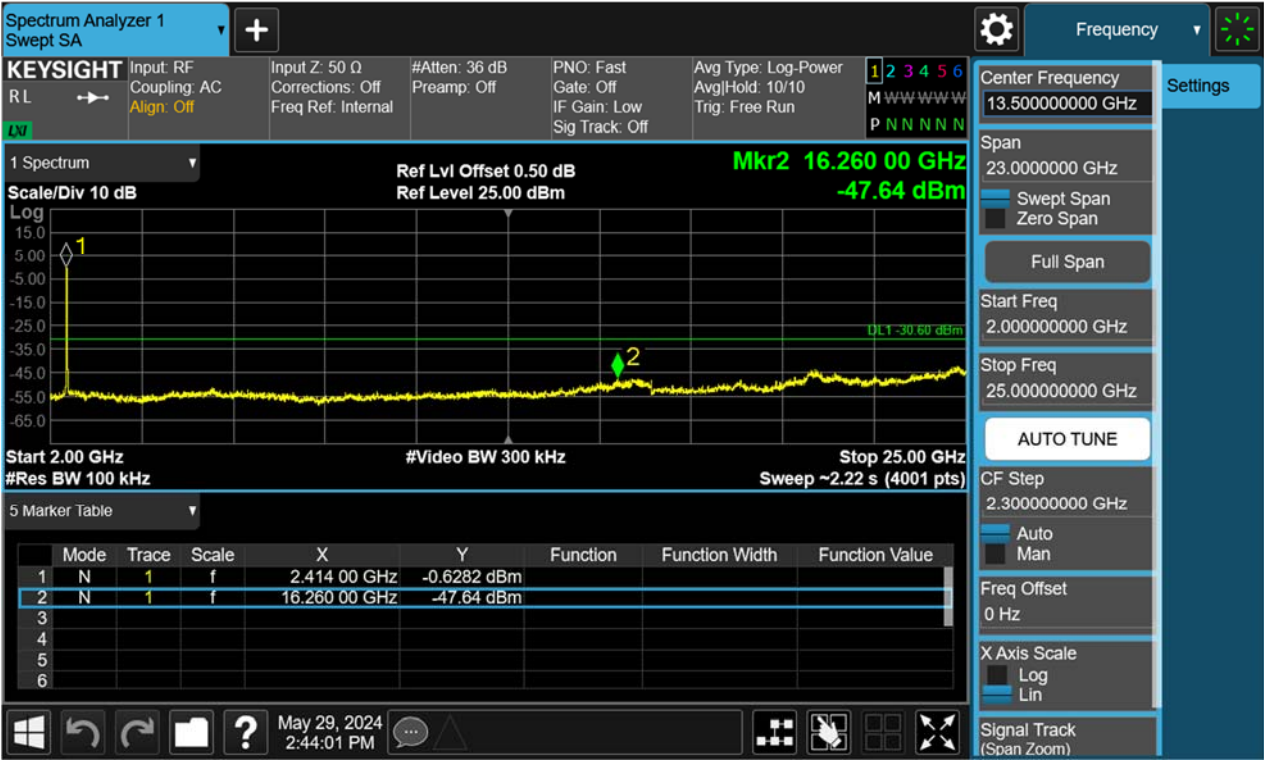


Figure 29: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2437MHz Carrier Level

