

Handled by, department
Reinhold Reul
Electronics
+46 10 516 55 84, reinhold.reul@sp.se

Ericsson AB
Jan Rimming
PDU Base Stations
164 80 Stockholm

Permissive change measurements on WCDMA 850 MHz Transceiver unit with FCC ID: TA8AKRC11822-2 (7 appendices)

Test object

Radio Unit KRC 118 22/2, rev. R1B, S/N AE54296386

Appendix 1 provides information about the test object and the test set-up.
Appendix 7 provides external photos of the test object.

Summary

This report is a justification of a Class II permissive change for the equipment grant to also comprise use of 64QAM modulation.

Standard	Compliant	Appendix
FCC CFR 47		
2.1046 RF power output	Yes	2
2.1049 Occupied bandwidth	Yes	3
2.1051 Band edge	Yes	4
2.1051 Spurious emission at antenna terminals	Yes	5
2.1053 Field strength of spurious radiation	Yes	6

SP Technical Research Institute of Sweden Electronics - EMC



Christer Karlsson
Technical Manager



Reinhold Reul
Technical Officer

SP Technical Research Institute of Sweden

Postal address
SP
Box 857
SE-501 15 Borås
SWEDEN

Office location
Västerås
Brinellgatan 4
SE-504 62 Borås
SWEDEN

Phone / Fax / E-mail
+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.



FCC ID: TA8AKRC11822-2

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Purpose of test	Appendix 1
Test setups	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Photos	Appendix 7

Description – Test object

Equipment: WCDMA Transceiver unit (RU) 850 MHz, single and multi carrier

Tx Frequency range: 871.4 – 891.6 MHz

Modulations: QPSK, 16QAM and 64QAM

Maximum output power: Single carrier: 1x47.8 dBm (1x60 W)
Multi carrier: 2x44.8 dBm (2x30 W)

Nominal power voltage: -48 VDC

Tested channel

UARFCN Frequency
4357 871.4 MHz

Operation mode during measurements**Test models**

All measurements were performed with the test object configured with the Test models 1 and 6 as defined in 3GPP TS 25.141. Test model 1 uses the QPSK modulation only, and Test model 6 includes the 64QAM modulation as follows:

Test model 1 (TM1): 64 DPCHs with at 30 ksps (SF=128) with QPSK modulation
Test model 6 (TM6): 30 DPCHs at 30 ksps (SF=128) with QPSK modulation and
8 HS-PDSCHs at 240 ksps (SF=16) with 64QAM modulation

Conducted measurements

All RF conducted measurements were performed with the test object configured for single carrier, installed in a RBS 3206 and powered with -48 VDC. All measurements were done at the output connector (Ant A) of the Filter Unit (FU) KRC 118 21/1. The measurements were performed at maximum output power with both Test models.

Radiated measurements

All radiated measurements were performed with the test object configured for single carrier, installed in a wooden frame without EMC shielding. This configuration represents worst case for radiated spurious emission measurements. The test object was powered with -48 VDC.

The test object was activated at maximum output power (47.8 dBm). The RF output power port was via a RF attenuator connected to functional test equipment for supervision.

The test object was allocated to the following UARFCN:

Cell	1	1
Downlink	4357 (871.4 MHz)	4357 (871.4 MHz)
Uplink	4132 (826.4 MHz)	4132 (826.4 MHz)
Test model	1	6

Purpose of test

The purpose of this test is to justify a Class II permissive change of the test object to include the use of 64QAM modulation. This report verifies maintained performance characteristics of affected items according FCC CFR47 by re-testing the updated equipment with QPSK, using Test model 1, and with a combination of QPSK and 64QAM, using Test model 6.

Summary of results

Measurement results for both set-ups are near identical and Test model 1 can be considered a worst case set-up.

References

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2003

ANSI/TIA/EIA-603-B-2002

3GPP TS 25.141

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2008-10-21

Manufacturer's representative

Jan Rimming, Ericsson AB


Test engineers

Jörgen Wassholm, Andreas Johnson, Stefan Larsson, Jonas Bremholt and Reinhold Reul

Test witness

Samir Catic, Ericsson AB

Test set-up, conducted measurements

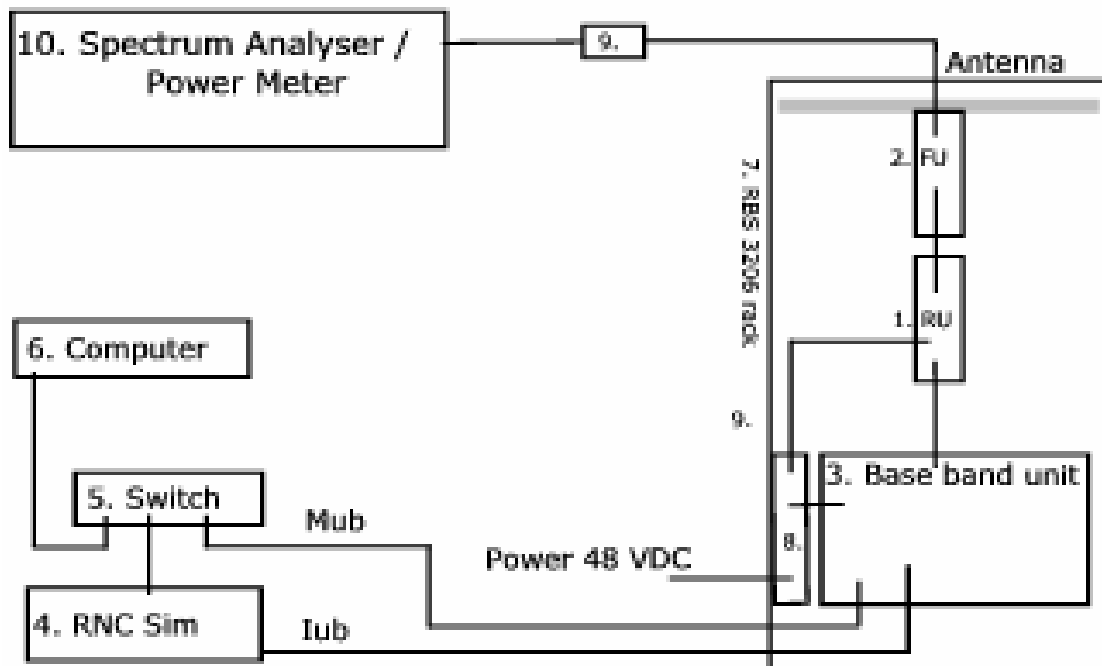


Test object

1. RU KRC 118 22/2, rev. R1B, S/N AE54296386
(FCC ID: TA8AKRC11822-2)
2. FU KRC 118 21/1, rev. R1E, S/N: TU8F196324

Functional test equipment

3. Base band sub rack S/N AB20215079 with SW CXP 901 2959, rev. R6T/9
4. RNC: Mini-sim #51 4780 DA S/N 0205 REV BAA
5. Switch: HP ProCurve Networking HP innovation S/N CN629XI3T2
6. Computer: SunBlade 2500 S/N 42520484 P/N 380-0986-02
7. RBS 3206 rack frame P/N: 2/BFE 401 1012 R1K
8. PDU 02, product BMG 980 33/02, rev. R1A, S/N (S)T671366182
9. Attenuator (SP 504 159)
10. Test equipment

Test set-up, radiated measurements

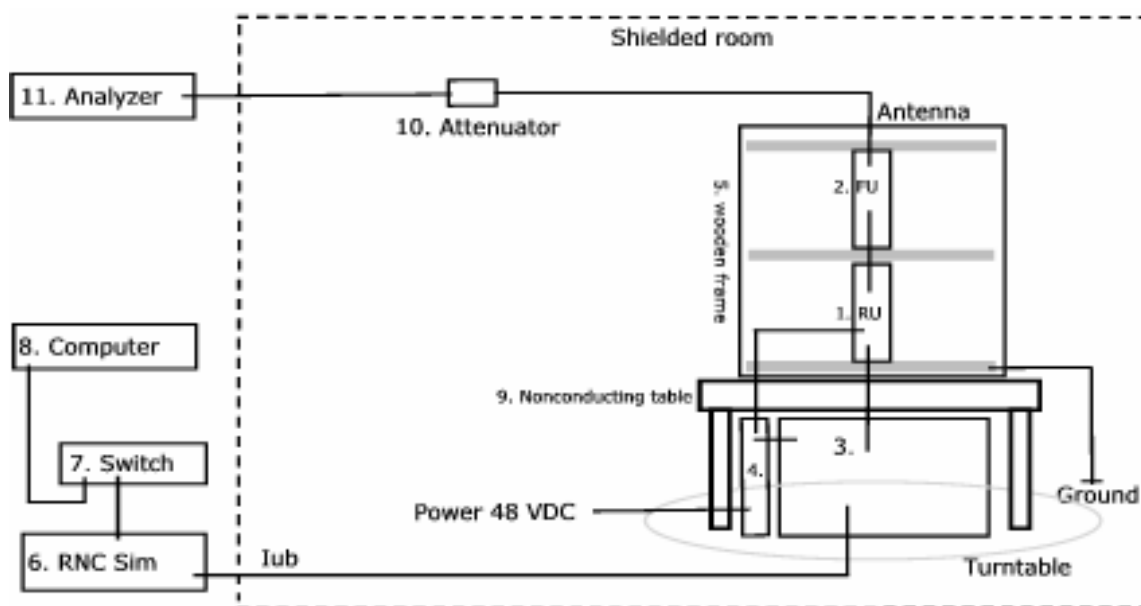

Test object

1. Test object, RU KRC 118 22/4 rev. R1A, Serial No: AE55467842 (FCC ID: TA8AKRC11822-2 and)
2. FU KRC 118 21/1 rev. R1E, Serial No: TU8F196324

Functional test equipment

3. Base band sub rack S/N AB20199733 with SW CXP 901 2959, rev. R6T/9
4. PDU 02, product BMG 980 33/02, rev. R1A, S/N (S)T671498775
5. Wooden rack
6. RNC: Mini-sim #51 4780 DA S/N 0205 REV BAA
7. Switch: HP ProCurve Networking HP innovation S/N CN629XI3T2
8. Computer: SunBlade 2500 S/N 42520484 P/N 380-0986-02
9. Non conductive table
10. Attenuator, Weinschel model 49-40-33 , s/n 656
11. Anritsu Signal Analyzer, MS2691A, SN 6200750255

**RF power output measurements according to 47 CFR 2.1046**

Date 2008-10-27	Temperature 23 °C ± 3 °C	Humidity 31 % ± 5 %
--------------------	-----------------------------	------------------------

Test set-up and procedure

The output was connected to a Peak power analyzer. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
Boonton RF Peak power meter/analyzer	2009-09	503 144
Boonton Power sensor 56518-S/4	2009-09	503 145
Multimeter Fluke 87	2009-01	502 190
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 0.5 dB

Results

Maximum rated output power level after FU unit: 47.8 dBm (60 W)

Test conditions T_{nom} 22 °C V_{nom} -48 V DC	Transmitter power (dBm) RMS
	Frequency 871.4 MHz
TM1 with only QPSK	48.0
TM6 incl. 64QAM	48.1

Limit

According to CFR § 22 there are no conducted limits at the antenna connector.

CFR § 22.913: The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts (57 dBm).

Complies?	Yes
-----------	-----

Occupied bandwidth measurements according to 47 CFR 2.1049

Date 2008-10-27	Temperature 23 °C ± 3 °C	Humidity 31 % ± 5 %
--------------------	-----------------------------	------------------------

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ	2009-08	503 738
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 3.7 dB

Results

The results are shown in appendix 3.1

TM1 with only QPSK

	Frequency	OBW
Diagram 1:	871.4 MHz	4.1 MHz

TM6 incl. 64QAM


	Frequency	OBW
Diagram 2:	871.4 MHz	4.1 MHz



FCC ID: TA8AKRC11822-2


Appendix 3.1

Diagram 1

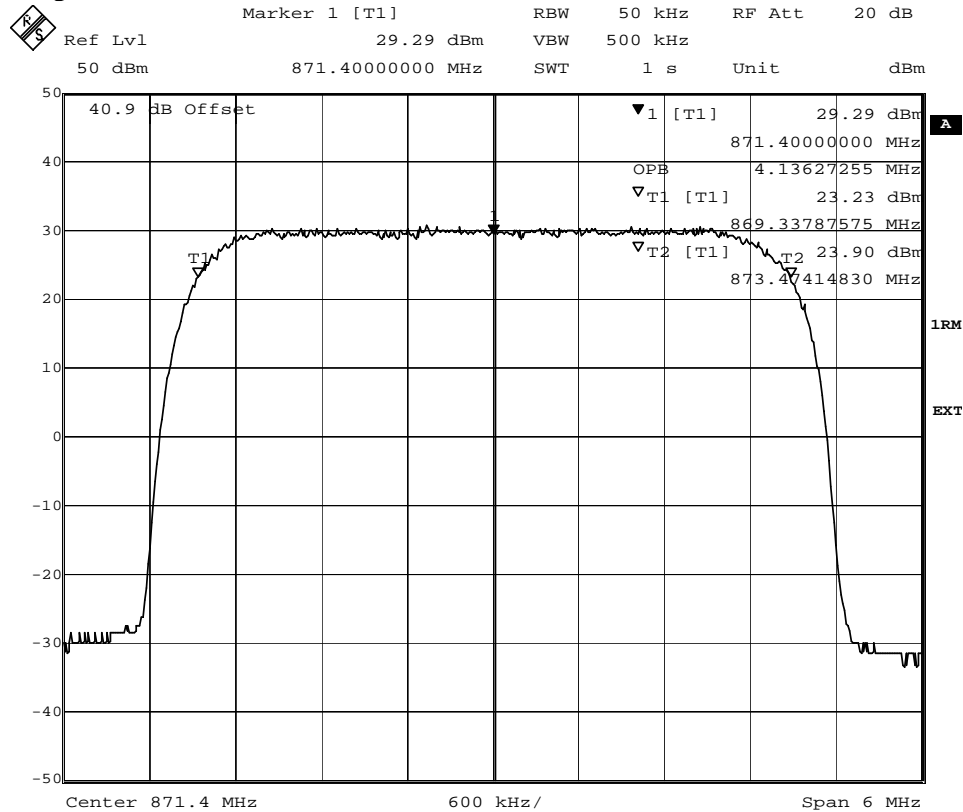

Date: 27.OCT.2008 13:48:11

Diagram 2

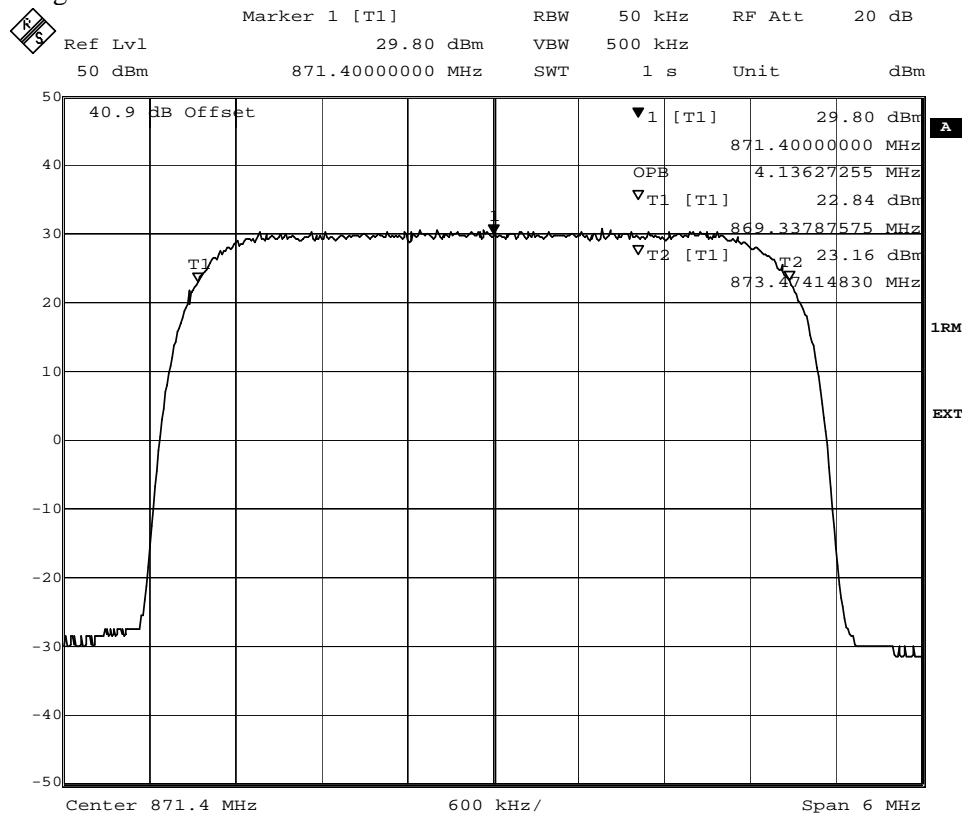

Date: 27.OCT.2008 14:15:18

**Band edge measurements according to 47 CFR 2.1051**

Date 2008-10-27	Temperature 23 °C ± 3 °C	Humidity 31 % ± 5 %
--------------------	-----------------------------	------------------------

Test set-up and procedure

The measurements were made per definition in §22.917. The output was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. A resolution bandwidth of 30 kHz was used up to 3.25 MHz away from the band edges. 30 kHz is <1% of the Emission BW(4.25 MHz between the 26 dB points). To compensate for the reduced measurement band width, the limit was adjusted with 1.5 dB to -14.5 dBm up to 1 MHz away from the band edges and with 15.2 dB to -28.2 dBm between 1 MHz to 3.25 MHz away from the band edges. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ	2009-08	503 738
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 3.7 dB**Results**

The results are shown in appendix 4.1

	TM1 with only QPSK		TM6 incl. 64QAM
Diagram	1: 871.4 MHz	Diagram	2: 871.4 MHz

Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.


Complies?	Yes
-----------	-----




FCC ID: TA8AKRC11822-2

Appendix 4.1

Diagram 1

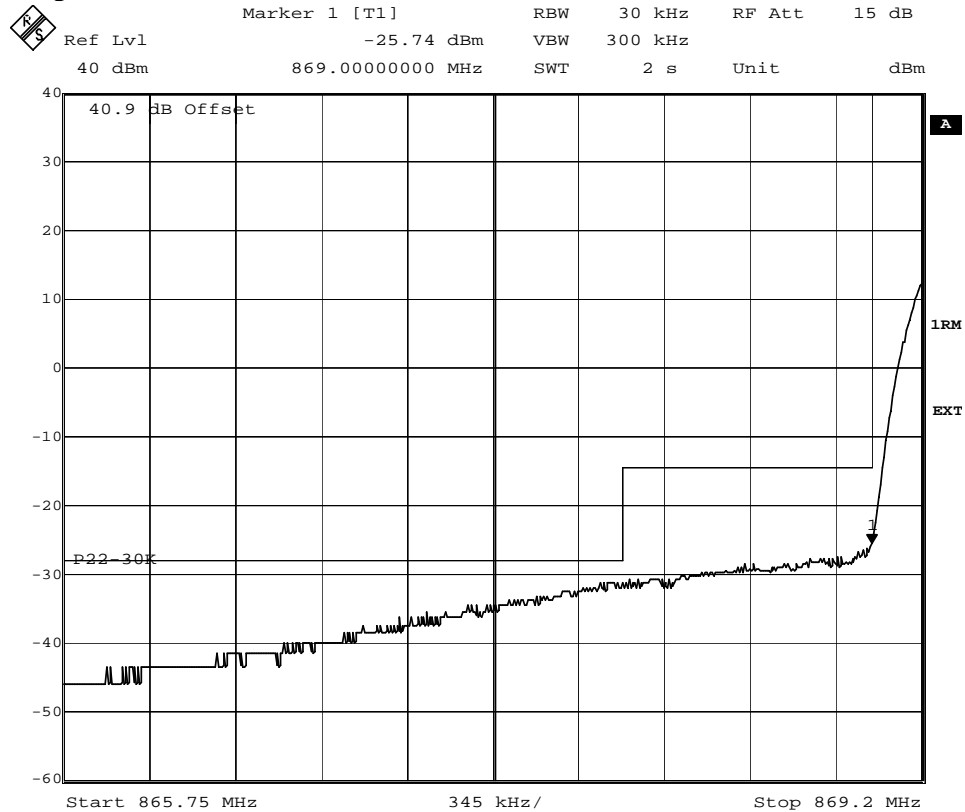

Date: 27.OCT.2008 13:50:39

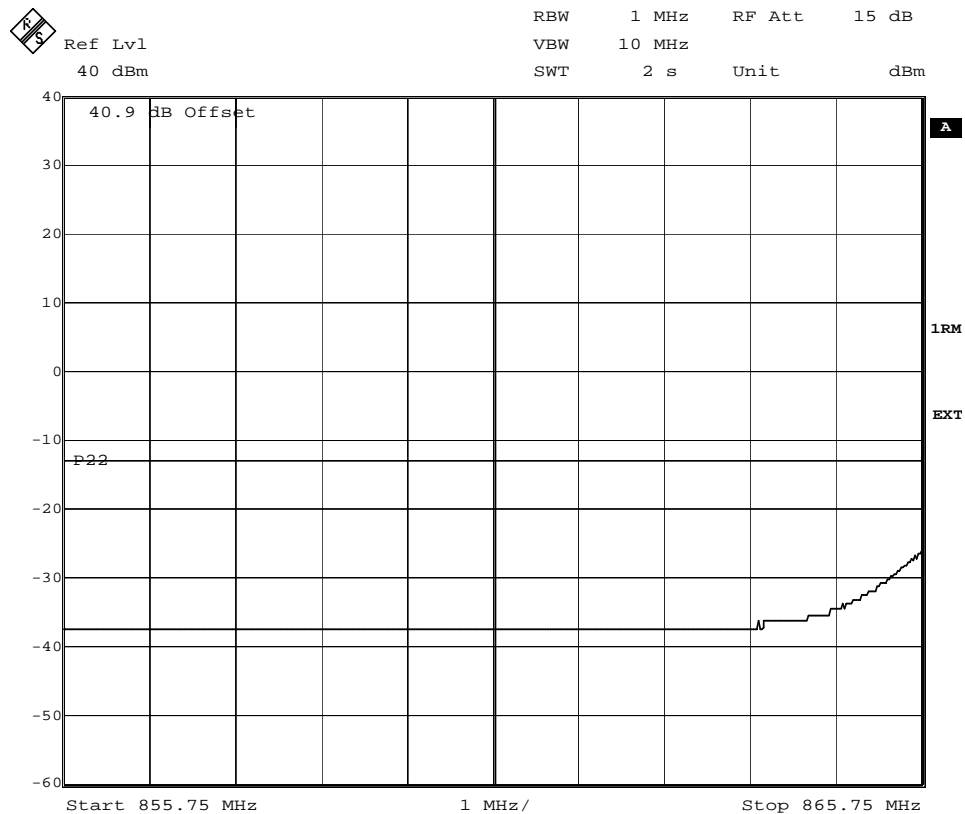


Date: 27.OCT.2008 13:51:05




FCC ID: TA8AKRC11822-2

Appendix 4.1

Diagram 2

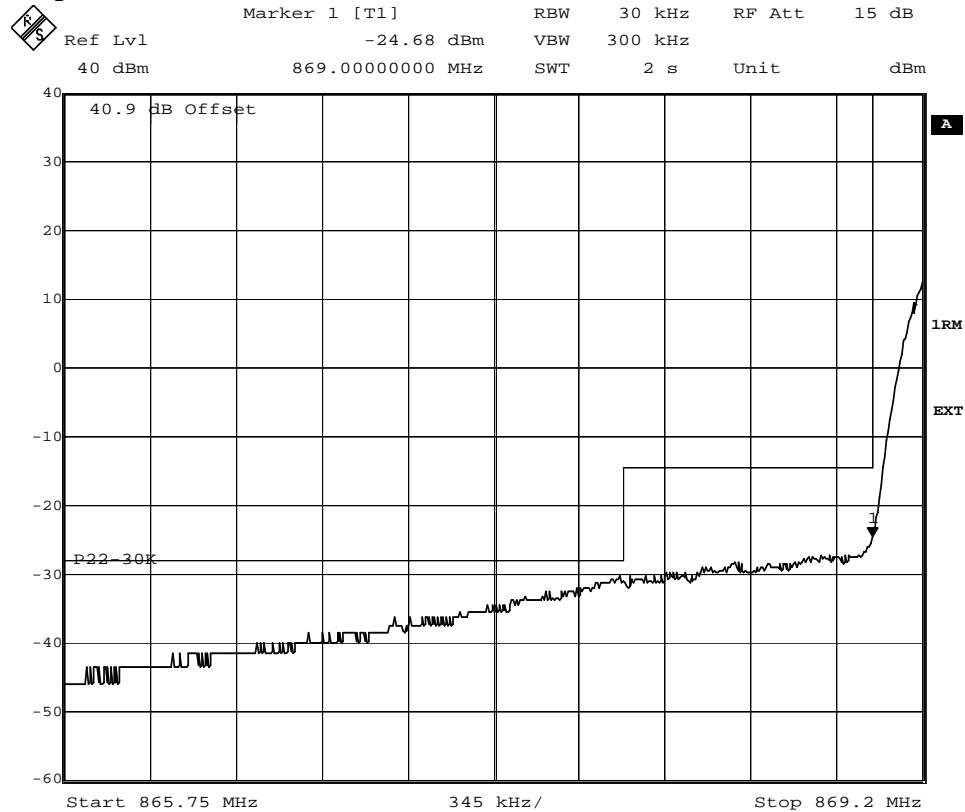

Date: 27.OCT.2008 14:16:35

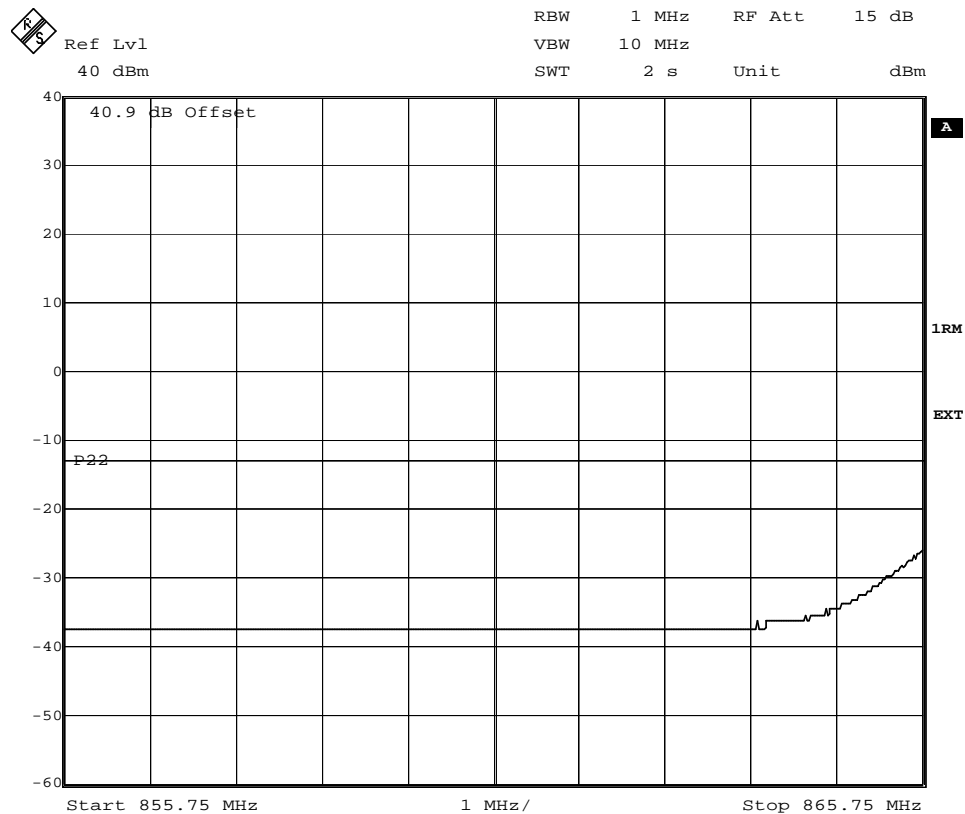

Date: 27.OCT.2008 14:17:40

**Conducted spurious emission measurements according to 47 CFR 2.1051**

Date 2008-10-27	Temperature 23 °C ± 3 °C	Humidity 31 % ± 5 %
--------------------	-----------------------------	------------------------

Test set-up and procedure

The measurements were made per definition in §22.917, with a RBW of 1 MHz. The output was connected to a spectrum analyzer. A pre-measurement was performed with the PEAK detector activated. Emission above the limit with the PEAK detector is re-measured with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ	2009-08	503 738
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 3.7 dB**Results**

The results are shown in appendix 5.1

	TM1 with only QPSK		TM6 incl. 64QAM
Diagram	1: 871.4 MHz	Diagram	2: 871.4 MHz

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feedthrough.

Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.


Complies?	Yes
-----------	-----




FCC ID: TA8AKRC11822-2

Appendix 5.1

Diagram 1

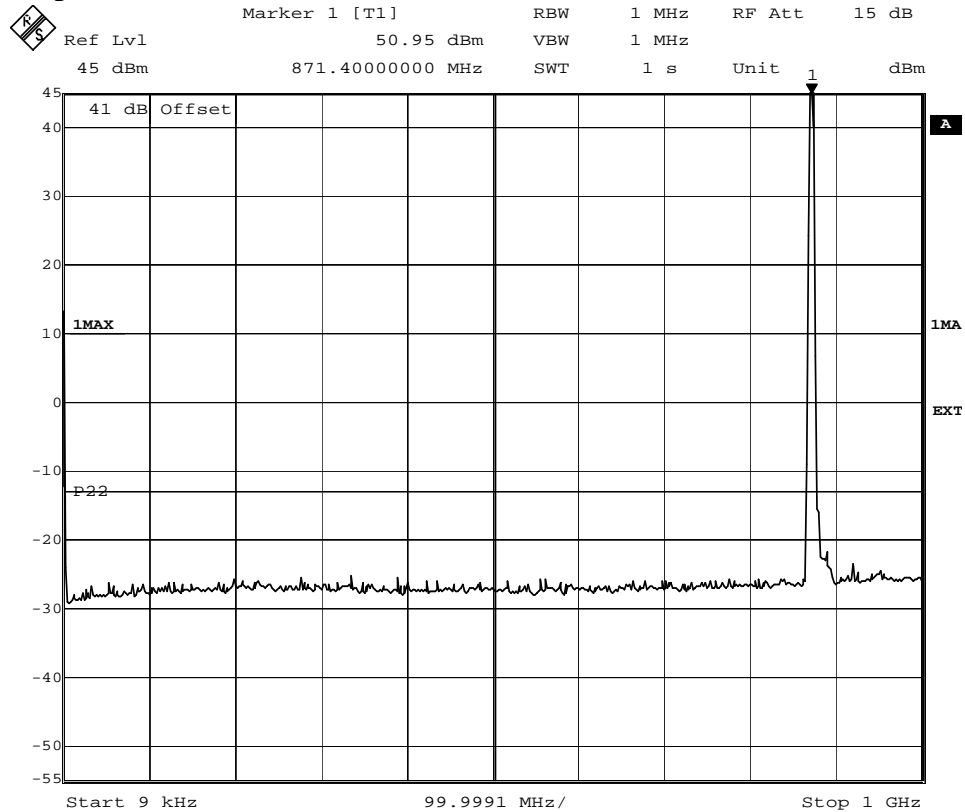

Date: 27.OCT.2008 13:51:57

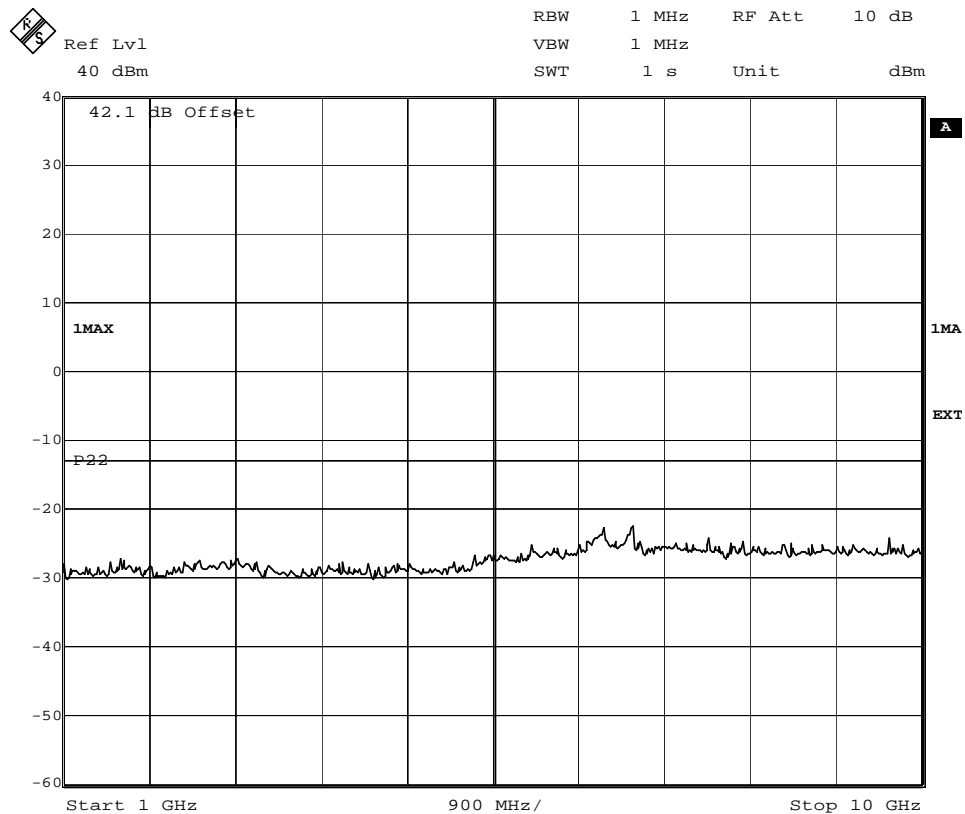


Date: 27.OCT.2008 13:56:12




FCC ID: TA8AKRC11822-2

Appendix 5.1

Diagram 2

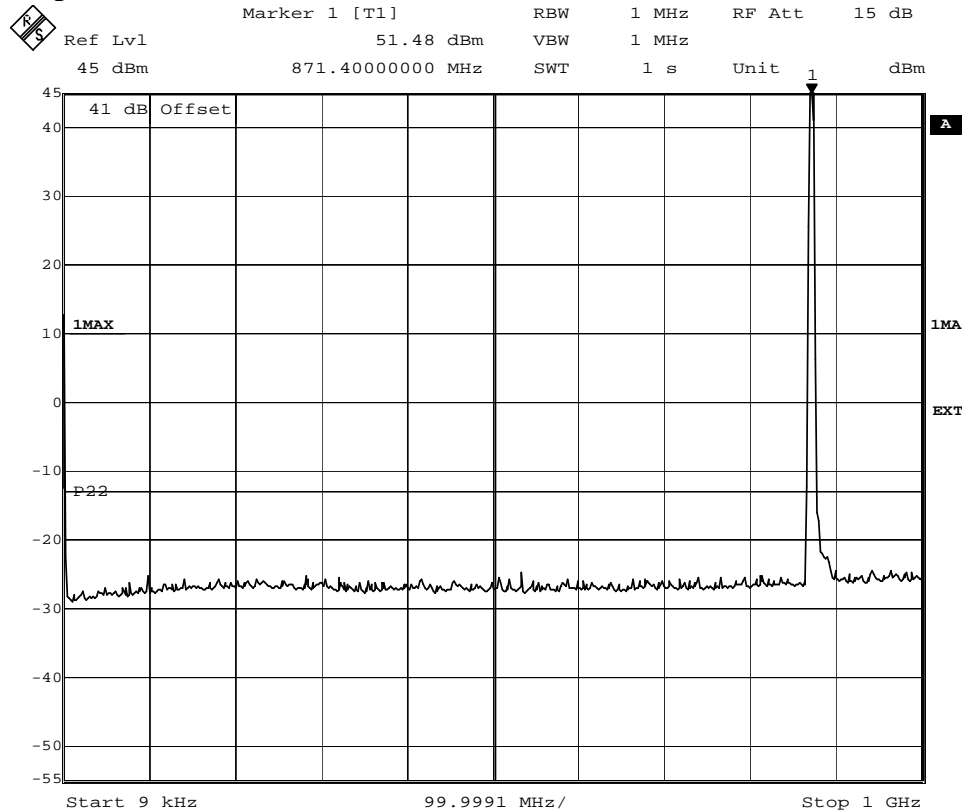

Date: 27.OCT.2008 14:12:41

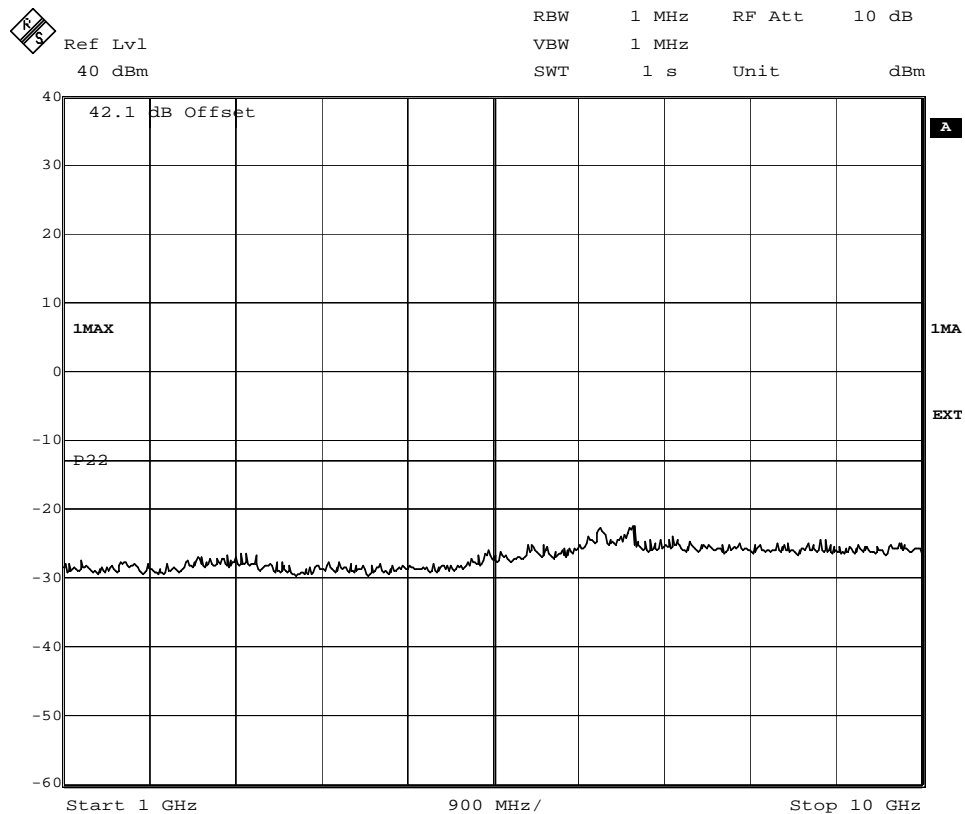

Date: 27.OCT.2008 14:09:07

Field strength of spurious radiation measurements according to 47 CFR 2.1053

Date 2008-10-28	Temperature 23 °C ± 3 °C	Humidity 31 % ± 5 %
--------------------	-----------------------------	------------------------

Test set-up and procedure

The test site is listed at FCC, Columbia with registration number: 93866. The test site also complies with RSS-Gen, Industry Canada file no.:IC 3482.

The transmitter was set up according to Test model 1 and Test model 6 during the measurements. The antenna port was terminated into functional test equipment with 50 ohm load impedance.

The measurements were performed with both horizontal and vertical polarisation of the antenna. The antenna distance was 3 m.

A pre-measurement was first performed:

In the frequency range 30 MHz-10 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was,

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:


1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit is scanned 0-360 degrees and the antenna is scanned 1-4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported, frequencies closer than 10 dB to the limit measured with the RMS detector were measured with the substitution method according to the standard

Measurement equipment	Calibration Due	SP number
Test site Tesla	2010-10	503 881
R&S ESI 26	2009-07	503 292
Control computer	-	A700307
Software: R&S EMC32, Ver. 6.30	-	-
Chase Bilog antenna CBL 6111A	2008-11	503 182
EMCO Horn Antenna 3115	2011-01	502 175
MITEQ Low Noise Amplifier	2009-06	503 285
Testo 610, Temperature and humidity meter	2009-04	502 658

FCC ID: TA8AKRC11822-2

Appendix 6

The test set-ups during the spurious radiation measurements are shown in the picture below.

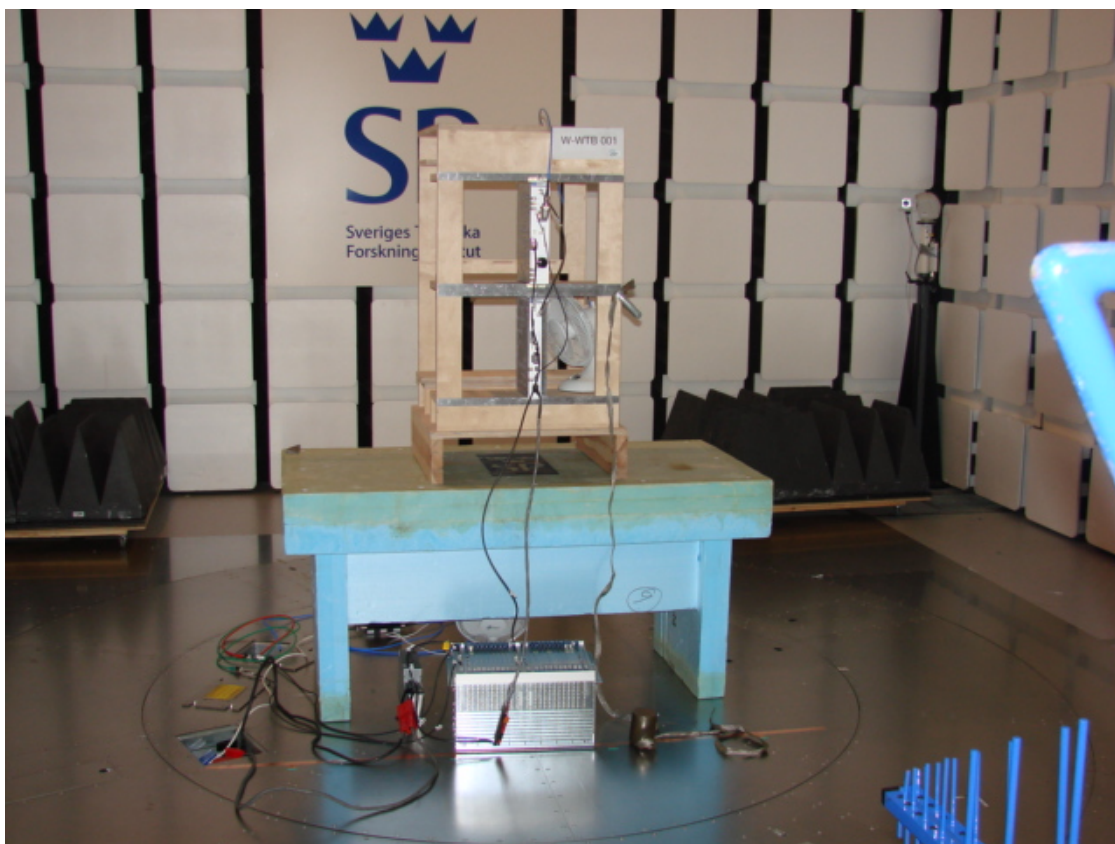

**Results****TM1 with only QPSK**

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-10 000	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty 4.7 dB		

TM6 incl. 64QAM

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-10 000	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty 4.7 dB		

Limits


The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

Complies?	Yes
-----------	-----

Photos

Radio Unit KRC 118 22/2


Front side

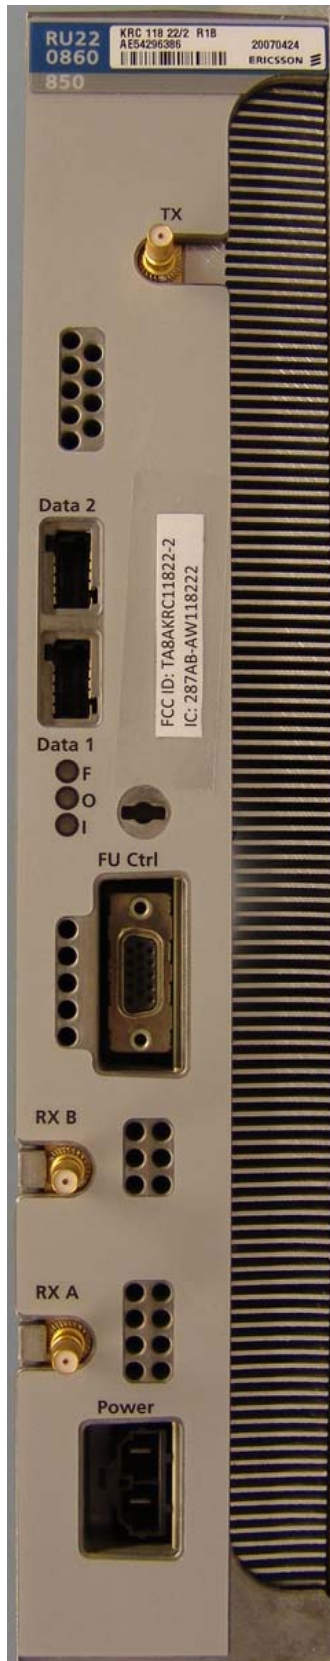

Rear side



Left side

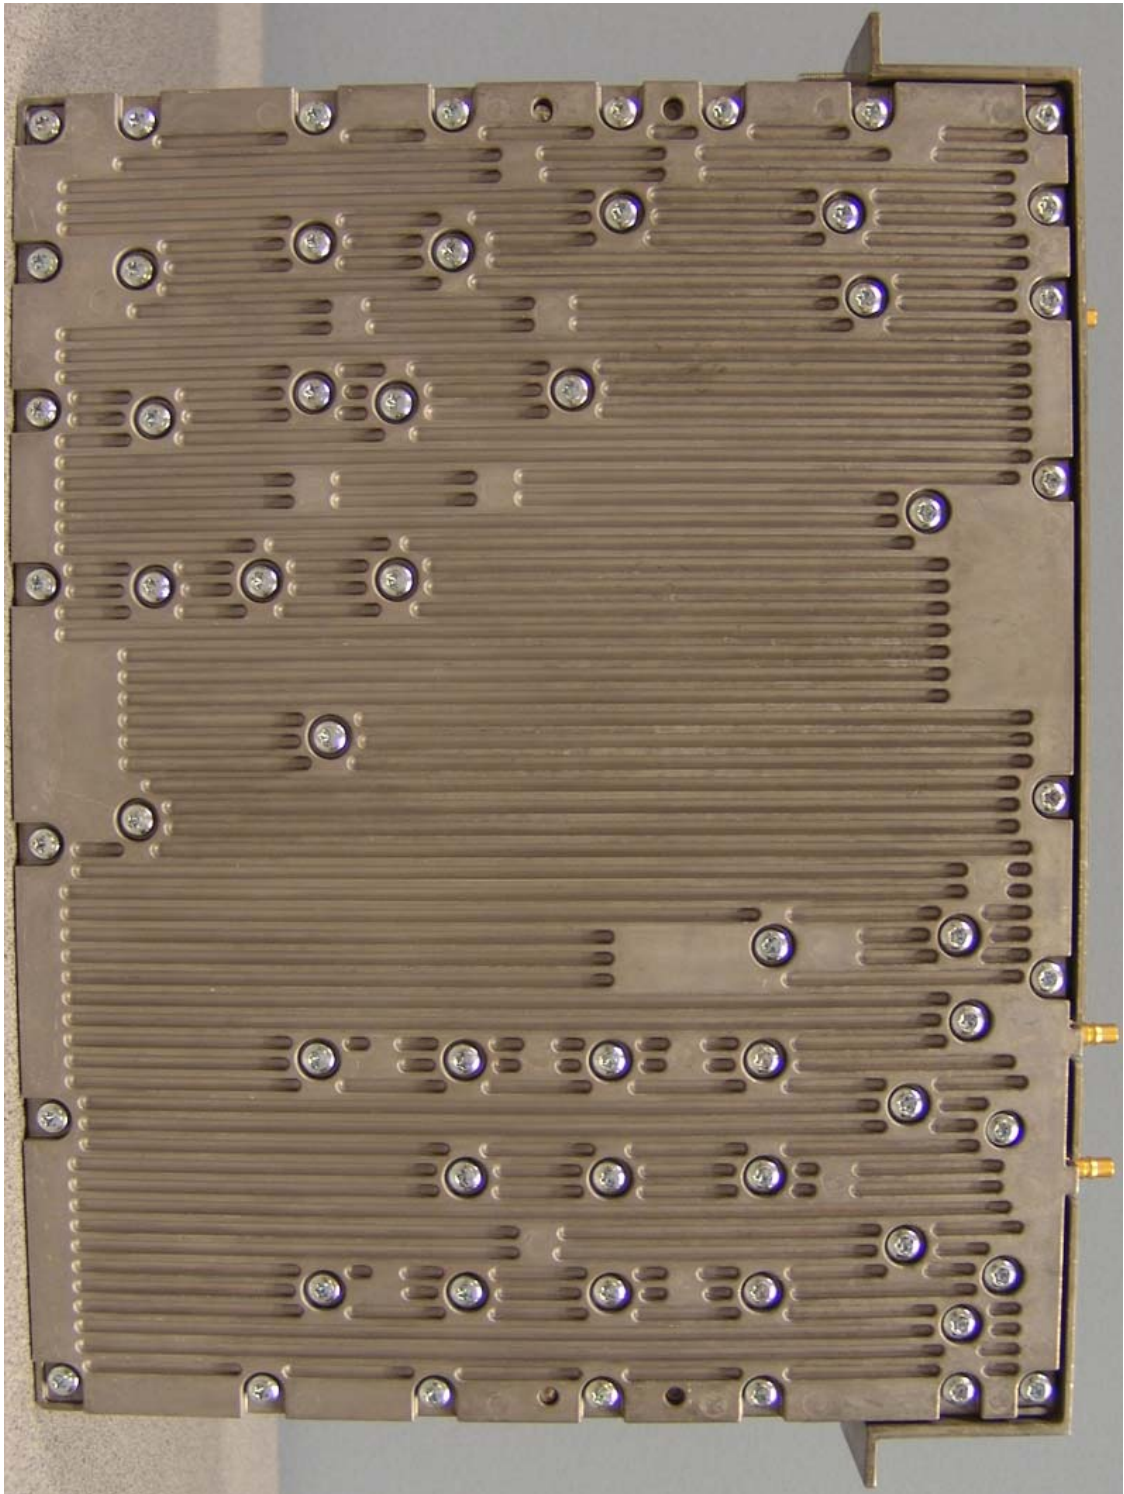

Right side

