



Product Service

Choose certainty.
Add value.



Report On

FCC Testing of the
Ericsson LTE and NB-IoT KRC 118 56/1 RUL 01 B13 (700 MHz) Base
Station in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRC11856-1

PREPARED BY

Maggie Whiting
Key Account Manager

APPROVED BY

Steve Scarfe
Authorised Signatory

DATED

21 February 2018

Document 75941045 Report 01 Issue 1

February 2018



CONTENTS

Section		Page No
1	REPORT INFORMATION	2
1.1	Report Details	3
1.2	Brief Summary of Results	4
1.3	Configuration Description	5
1.4	Declaration of Build Status	6
1.5	Product Information	6
1.6	Test Setup	8
1.7	Test Conditions.....	9
1.8	Deviation From The Standard	9
1.9	Modification Record.....	9
1.10	Alternative Test Site	9
2	TEST DETAILS	10
2.1	Maximum Peak Output Power and Peak to Average Ratio - Conducted.....	11
2.2	Occupied Bandwidth.....	16
2.3	Band Edge.....	20
2.4	Transmitter Spurious Emissions.....	24
2.5	Radiated Spurious Emissions.....	31
3	TEST EQUIPMENT USED	41
3.1	Test Equipment Used	42
3.2	Measurement Uncertainty	44
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	45
4.1	Accreditation, Disclaimers and Copyright.....	46
ANNEX A	Module Lists	A.2



Product Service

SECTION 1

REPORT INFORMATION



Product Service

1.1 REPORT DETAILS

Manufacturer	Ericsson
Address	Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden
Product Name	RUL 01 B13
Product Number	KRC 118 56/1
Serial Number(s)	CC49876086
Software Version	CXP9013268/6 R66BM
Hardware Version	R1D
Start of Test	02 February 2018
Finish of Test	07 February 2018
Name of Engineer(s)	Raj Kumar Kallem Graeme Lawler
Related Document(s)	KDB 971168 D01 v02r02 KDB 662911 D01 v02r01



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27, Industry Canada RSS-GEN and Industry Canada RSS-139 is shown below.

Section	Specification Clause		Test Description	Result
	FCC CFR 47 Part 2	FCC CFR 47 Part 27		
2.1	2.1046	27.50	Maximum Peak Output Power and Peak to Average Ratio - Conducted	Pass
2.2	2.1049	27.53	Occupied Bandwidth	Pass
2.3	2.1051	27.53 (h)	Band Edge	Pass
2.4	2.1051	27.53 (h)	Transmitter Spurious Emissions	Pass
2.5	2.1053	27.53 (c)	Radiated Spurious Emissions	Pass



Product Service

1.3 CONFIGURATION DESCRIPTION

Configuration	RAT	No. Of carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
				Bottom	Middle	Top
A	LTE+NB IoT GB	1	10 MHz	-	751.0	-
B	NB IoT SA	1	0.18 MHz	746.2	751.4	756.8



1.4 DECLARATION OF BUILD STATUS

MAIN EUT	
MANUFACTURING DESCRIPTION	Radio Unit
MANUFACTURER	Ericsson AB
PRODUCT NAME	RUL01 B13
PART NUMBER	KRC 118 56/1
SERIAL NUMBER	CC49876086
HARDWARE VERSION	R1D
SOFTWARE VERSION	xrus_NBIoT_GB_SA_for_FCC_test (based on CXP9013268/6 R66BM)
TRANSMITTER OPERATING RANGE	746-756 MHz NB-IoT SA 746-757 MHz
MODULATIONS	QPSK, 16QAM, 64QAM, 256QAM
HIGHEST INTERNALLY GENERATED FREQUENCY	800MHz
ITU DESIGNATION OF EMISSION	5 MHz BW channel: 4M50F9W 10 MHz BW channel ¹ : 9M40F9W NB-IoT SA 200 kHz BW channel: 210KW7D
OUTPUT POWER (RMS) (W or dBm)	1x60W ¹ NB-IoT SA 1x20W
FCC ID	TA8AKRC11856-1
TECHNICAL DESCRIPTION (a brief description of the intended use and operation)	Base station radio

¹ Including 2 NB-IoT GB carriers.

Signature 
Linda Grell

Date 2018-02-15


No responsibility will be accepted by TÜV SÜD Product Service UK Limited as to the accuracy

1.5 OF THE INFORMATION DECLARED IN THIS DOCUMENT BY THE MANUFACTURER PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) KRC 118 56/1 is an Ericsson AB Radio Unit working in the public mobile service (Band) band which provides communication connections to (Band) network. The KRC 118 56/1 operates from a -48V DC supply.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

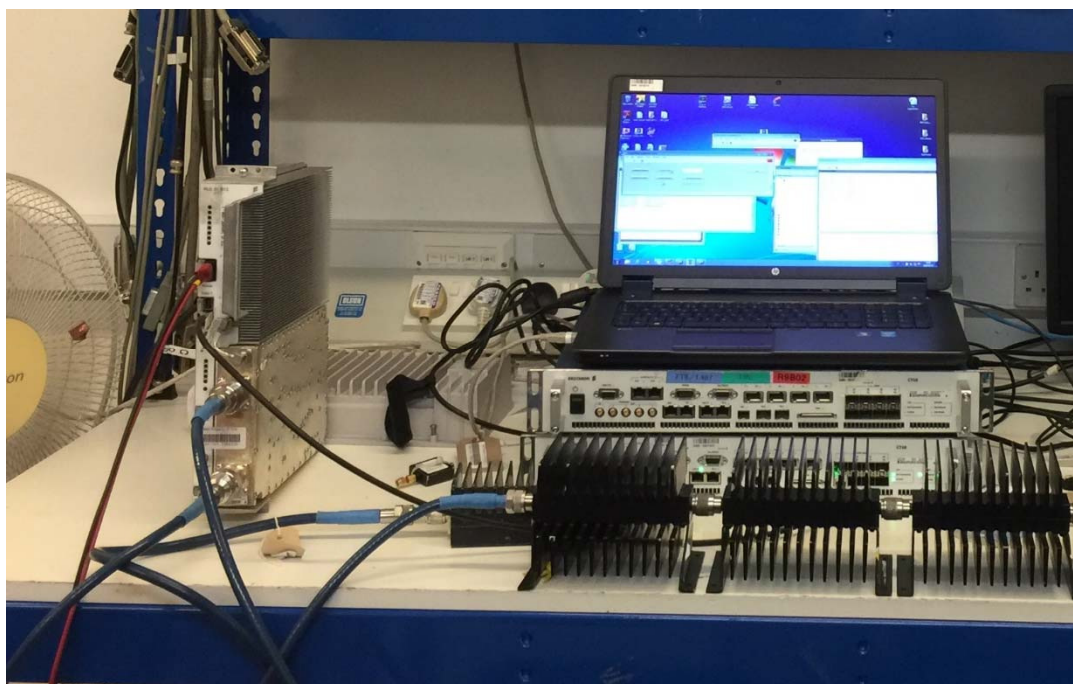

Equipment Under Test

1.6 TEST SETUP

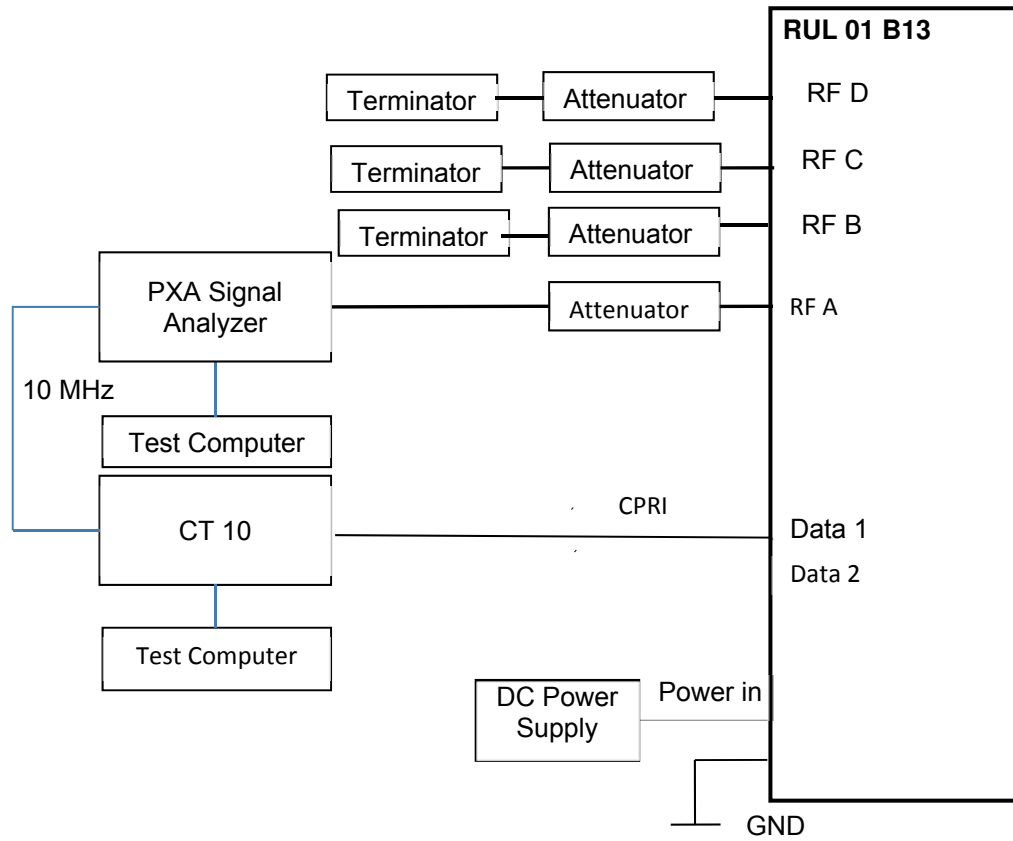


Figure 1, Block diagram of RUL 01 B13 with cables and auxiliary equipment



Product Service

1.7 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or a chamber as appropriate.

The EUT was powered from a -48V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.8 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.9 MODIFICATION RECORD

No modifications were made to the EUT during testing.

1.10 ALTERNATIVE TEST SITE

Under our group UKAS Accreditation, TÜV SÜD Product Service conducted the following tests at Ericsson in Fareham, UK.

Test Name	Name of Engineer(s)
Maximum Peak Output Power and Peak to Average Ratio - Conducted	Raj Kumar Kallem
Occupied Bandwidth	Raj Kumar Kallem
Band Edge	Raj Kumar Kallem
Transmitter Spurious Emissions	Raj Kumar Kallem
Radiated Spurious Emissions	Graeme Lawler



Product Service

SECTION 2

TEST DETAILS



Product Service

2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1046
 FCC CFR 47 Part 27, Clause 27.50

2.1.2 Date of Test and Modification State

06 February 2018 - Modification State 0

2.1.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.4 Environmental Conditions

Ambient Temperature 20.1°C
 Relative Humidity 21.1%

2.1.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, clause 5.2.1 and summed in accordance with FCC KDB 662911 D01.

2.1.6 Test Results

Configuration A


Maximum Output Power 47.8 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			PAR (dB)	Channel Position M	
				Average Power	
			dBm	dBm/MHz	
A	64QAM	10.0 MHz	7.30	47.96	39.37



Product Service

Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M

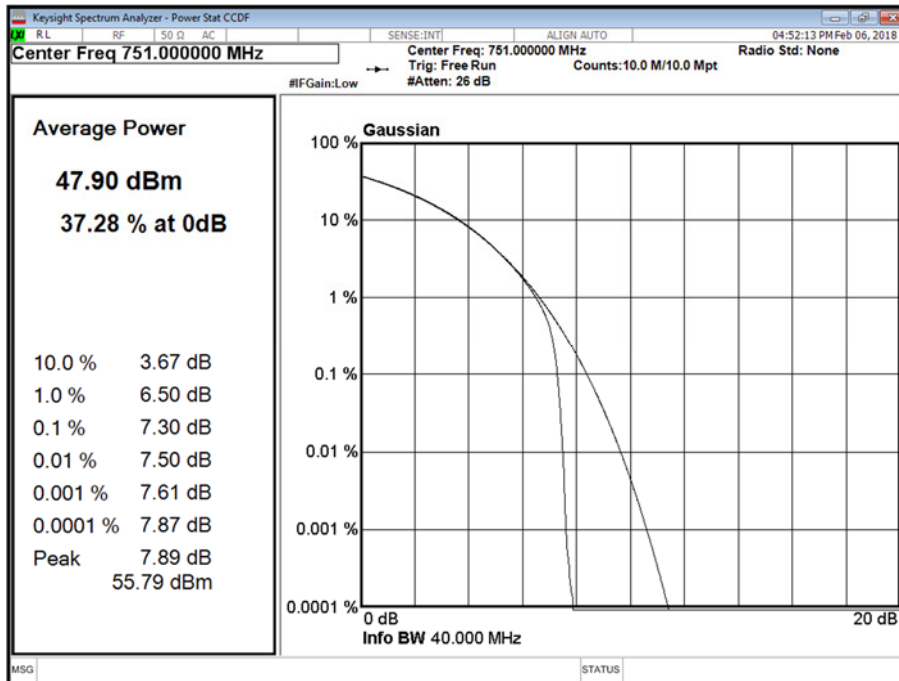

Configuration B


Maximum Output Power 43 dBm

Antenna	NB IoT Modulation	NB IoT Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position B		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	QPSK	0.2 MHz	4.10	42.28	-



Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position B

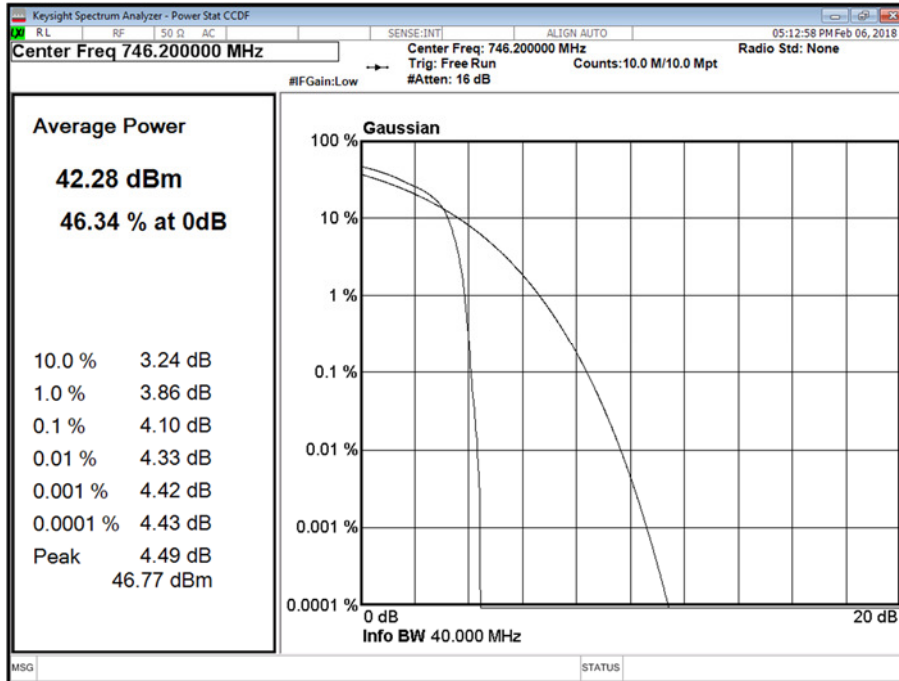

Configuration B


Maximum Output Power 43 dBm

Antenna	NB IoT Modulation	NB IoT Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position M		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	QPSK	0.2 MHz	4.08	42.61	-



Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position M

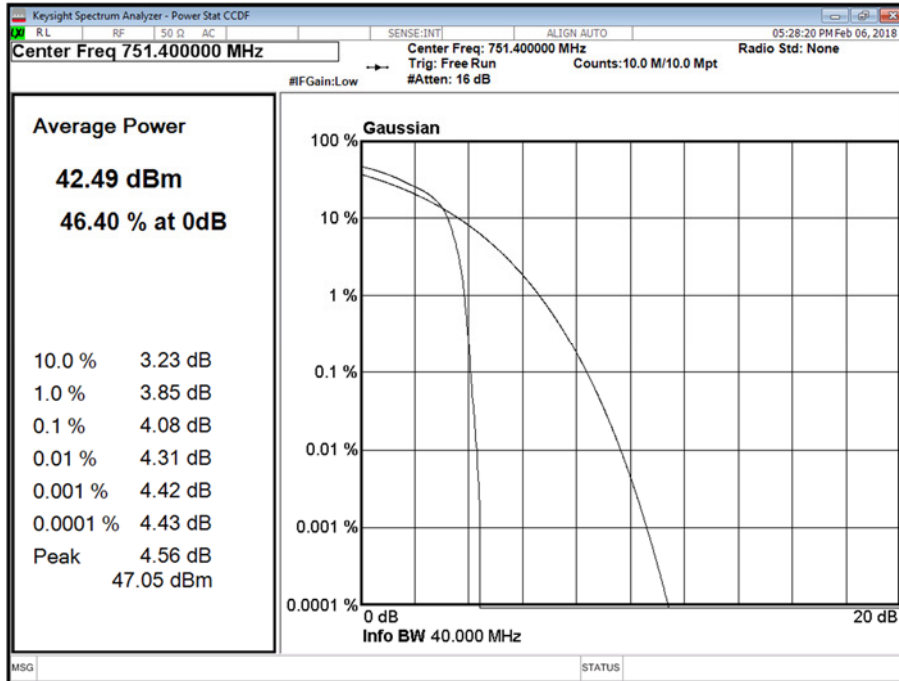

Configuration B


Maximum Output Power 43 dBm

Antenna	NB IoT Modulation	NB IoT Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position T		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	QPSK	0.2 MHz	4.04	42.27	-



Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position T

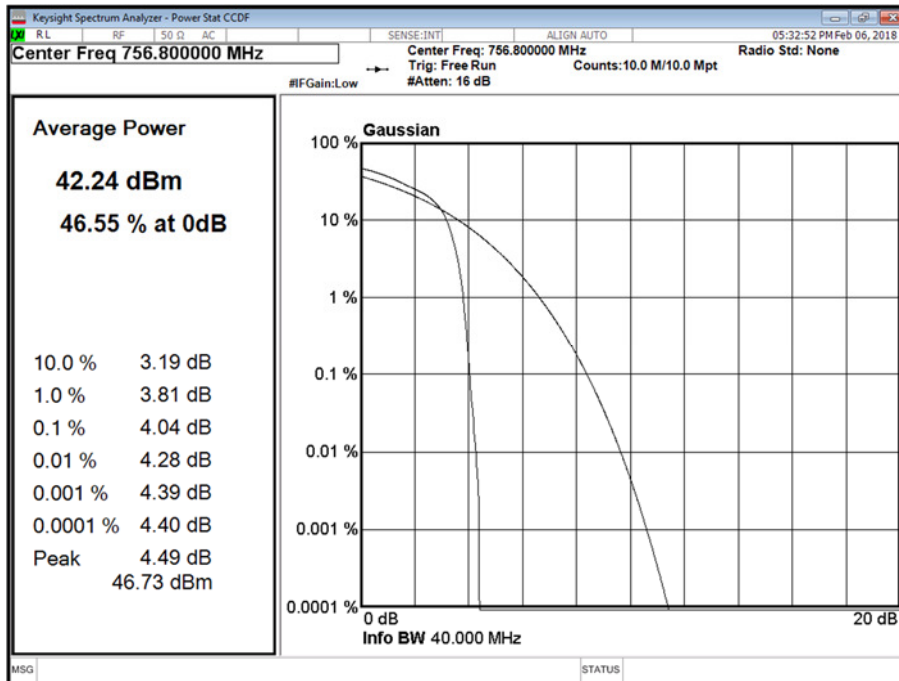

Limit	
Peak Power	≤500 W or ≤+57 dBm
Peak to Average Ratio	13 dB



Product Service

2.2 OCCUPIED BANDWIDTH

2.2.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1049
FCC CFR 47 Part 27, Clause 27.53

2.2.2 Date of Test and Modification State

06 February 2018 - Modification State 0

2.2.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.4 Environmental Conditions

Ambient Temperature 20.1°C
Relative Humidity 21.1%

2.2.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

2.2.6 Test Results

Configuration A


Maximum Output Power 47.8 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Result (KHz)					
			Channel Position B		Channel Position M		Channel Position T	
			Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth
A	64QAM	10.0 MHz	-	-	9405.58	9774.13	-	-



Product Service

Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M

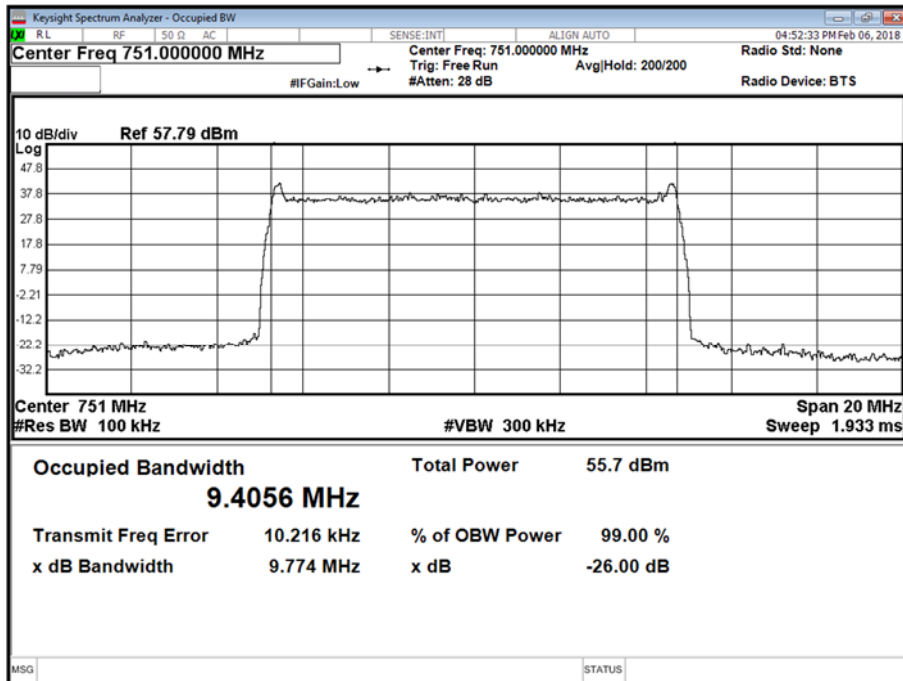

Configuration B


Maximum Output Power 43 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Result (KHz)					
			Channel Position B		Channel Position M		Channel Position T	
			Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth
A	QPSK	0.2 MHz	209.58	318.30	209.44	318.20	209.56	318.30




Product Service

Antenna A - Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.2 MHz - Channel Position B

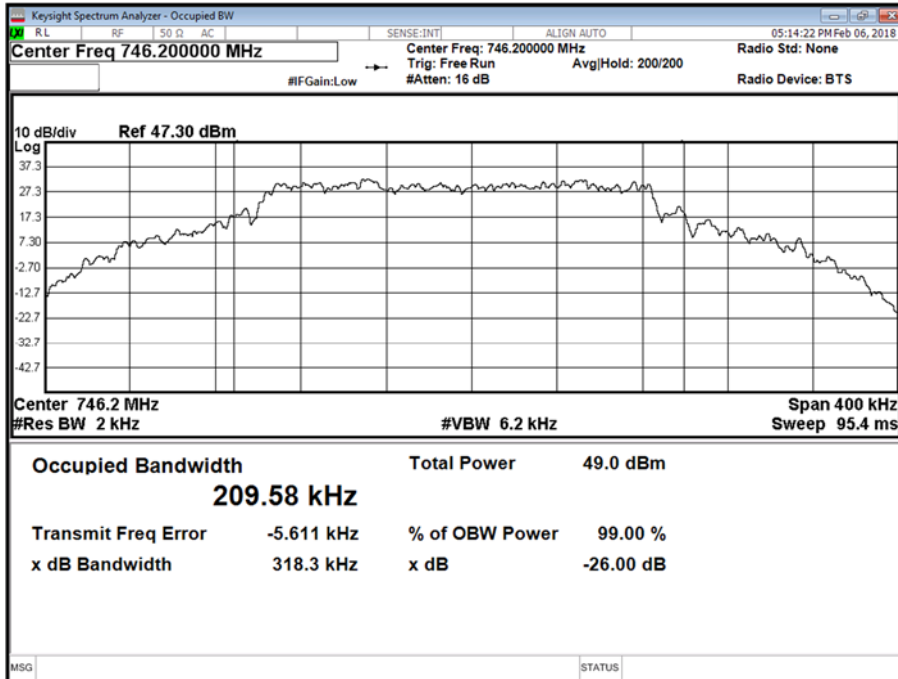


Antenna A - Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.2 MHz - Channel Position M

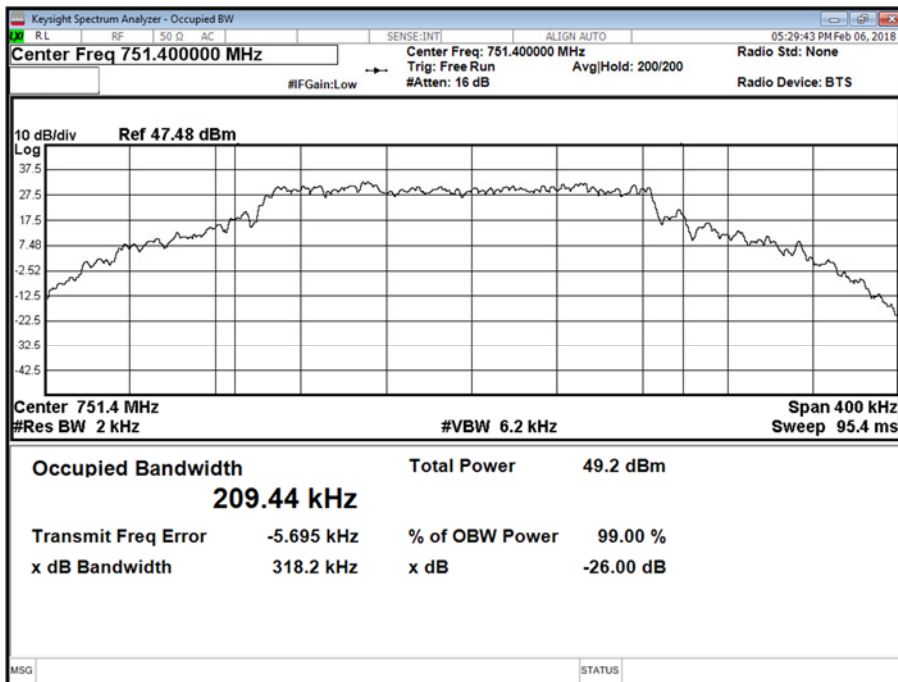



Product Service

Antenna A - Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.2 MHz - Channel Position T

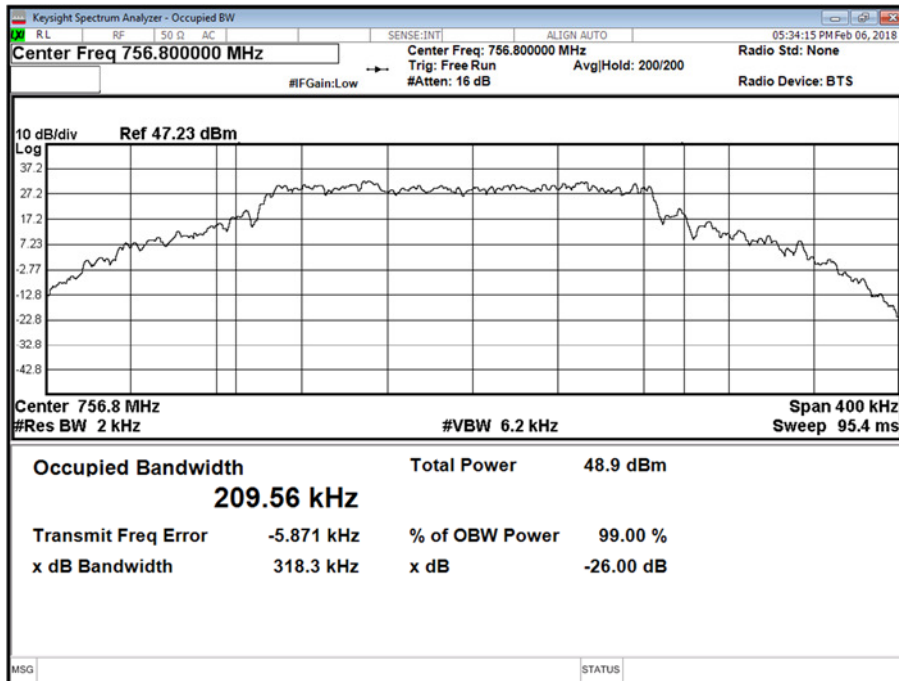



2.3 BAND EDGE

2.3.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 27, Clause 27.53 (h)
Date of Test and Modification State
06 and 07 February 2018 - Modification State 0

2.3.2 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.3 Environmental Conditions

Ambient Temperature 19.7 - 20.1°C
Relative Humidity 21.1 - 21.9%

2.3.4 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \text{Log}(N)$, where N is equal to the number of MIMO antenna ports.

For single carrier, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(4) = -19 \text{ dBm}$.

For dual carrier, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$.

2.3.5 Test Results

Configuration A


Maximum Output Power 47.8 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	64QAM	10.0 MHz	751.0	752.0




Product Service

Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B

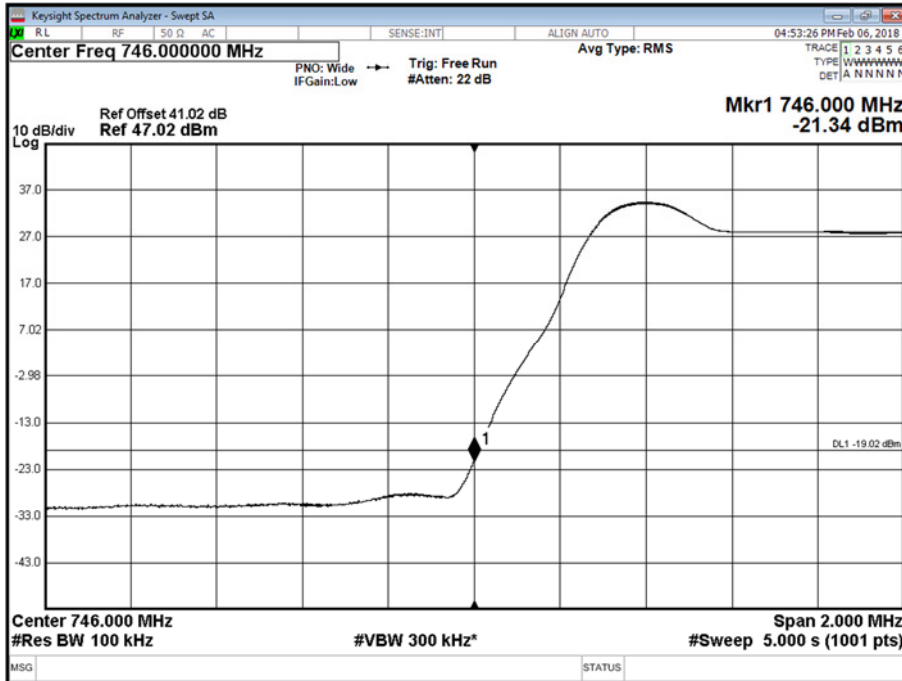

Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T

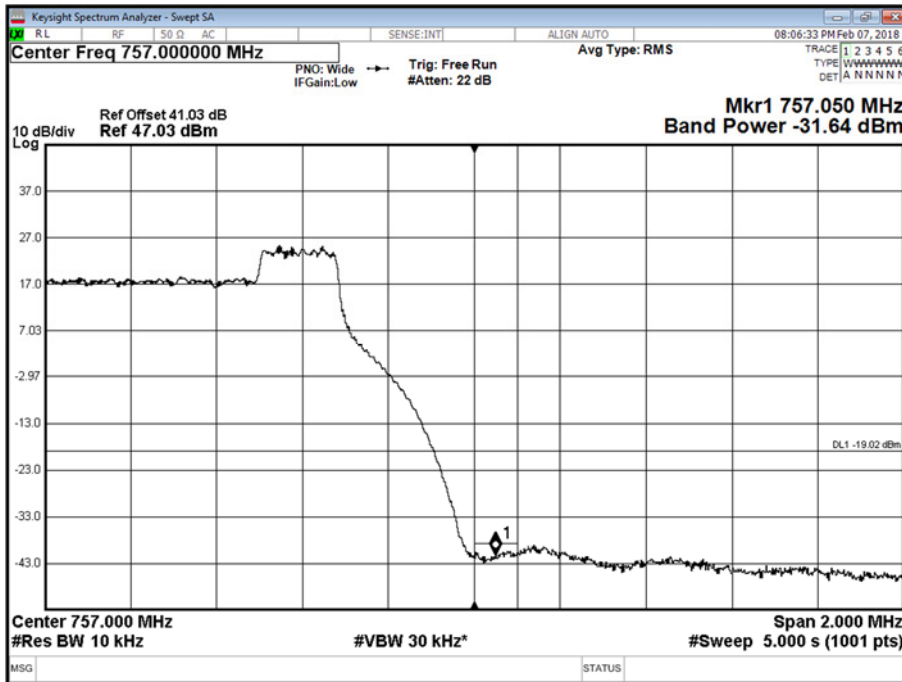




Product Service

Configuration B

Maximum Output Power 43 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	QPSK	0.2 MHz	746.0	757.0


Antenna A - Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.2 MHz - Channel Position B

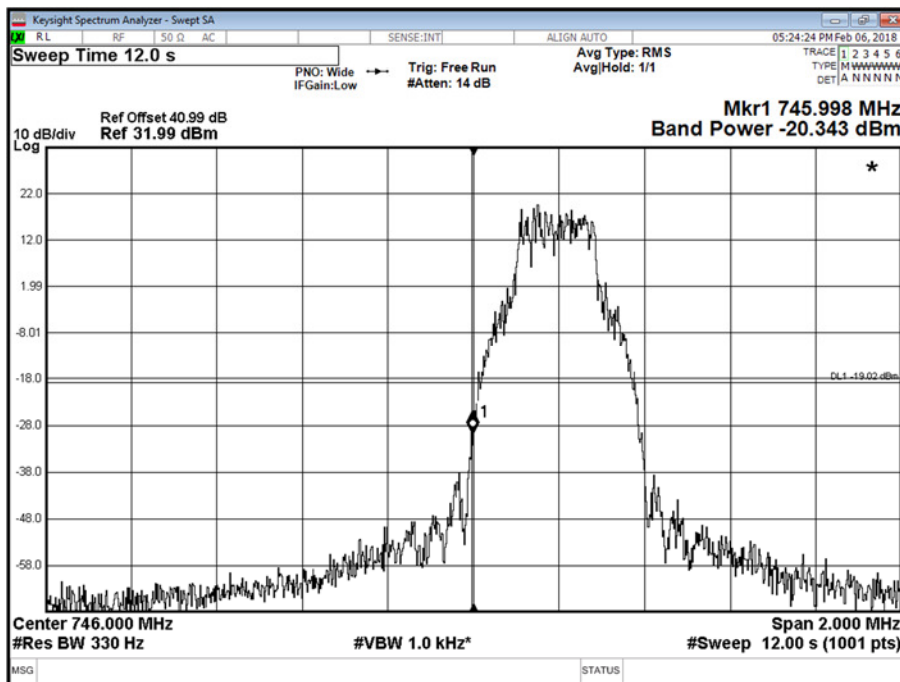



Product Service

Antenna A - Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.2 MHz - Channel Position T

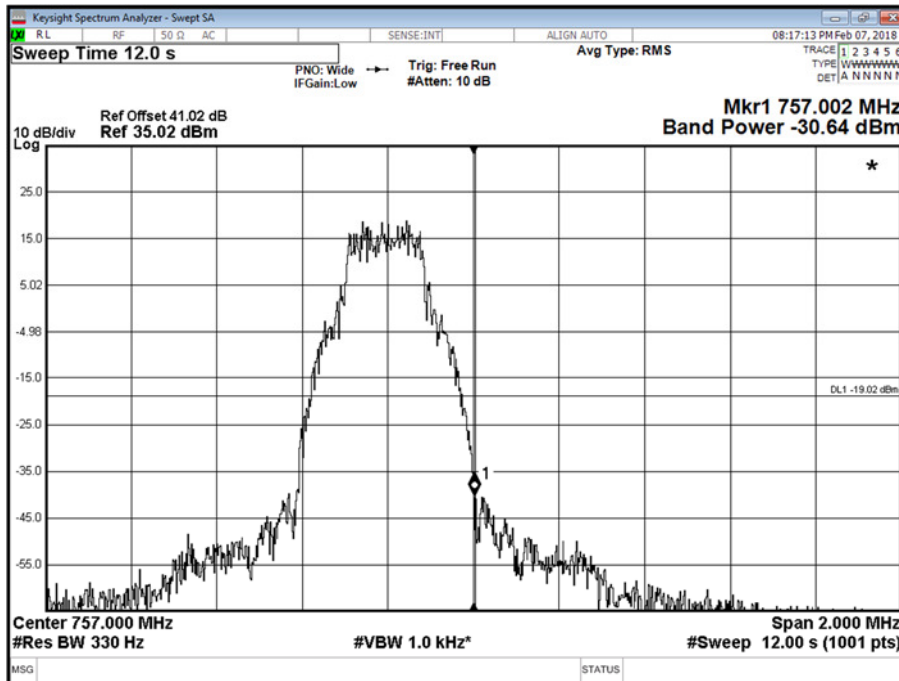

Limit MIMO	-19 dBm
------------	---------



Product Service

2.4 TRANSMITTER SPURIOUS EMISSIONS

2.4.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 27, Clause 27.53 (h)

2.4.2 Date of Test and Modification State

07 February 2018 - Modification State 0

2.4.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.4 Environmental Conditions

Ambient Temperature	19.7°C
Relative Humidity	21.9%

2.4.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \text{Log}(N)$, where N is equal to the number of MIMO antenna ports.

For single carrier, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(4) = -19 \text{ dBm}$.

For dual carrier, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$.

2.4.6 Test Results


Configuration A

Maximum Output Power 47.8 dBm




Product Service

Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 1 - Range 0.009 to 1000 MHz

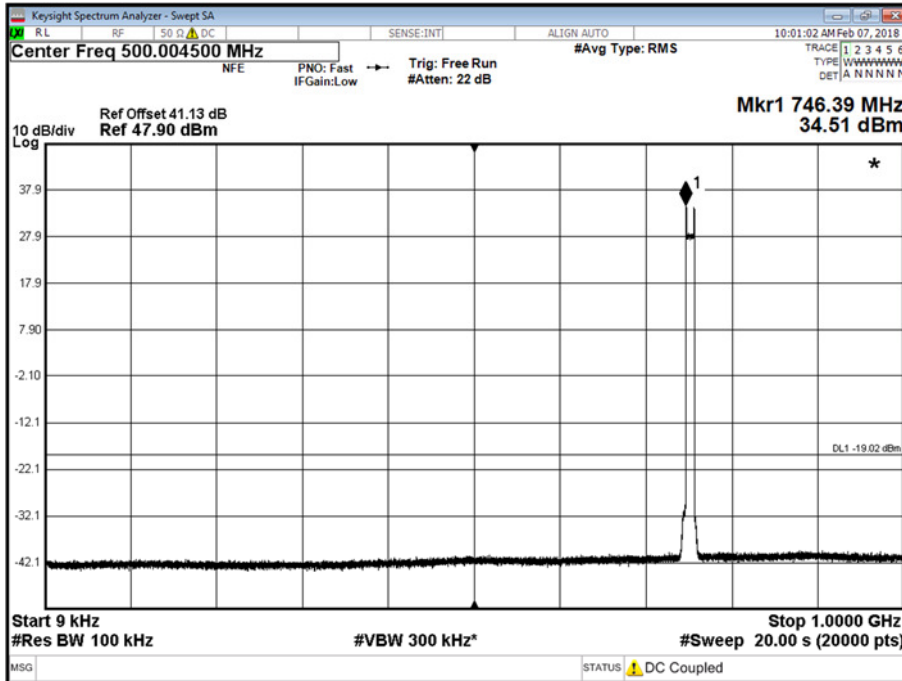


Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 2 - Range 1000 to 4000 MHz

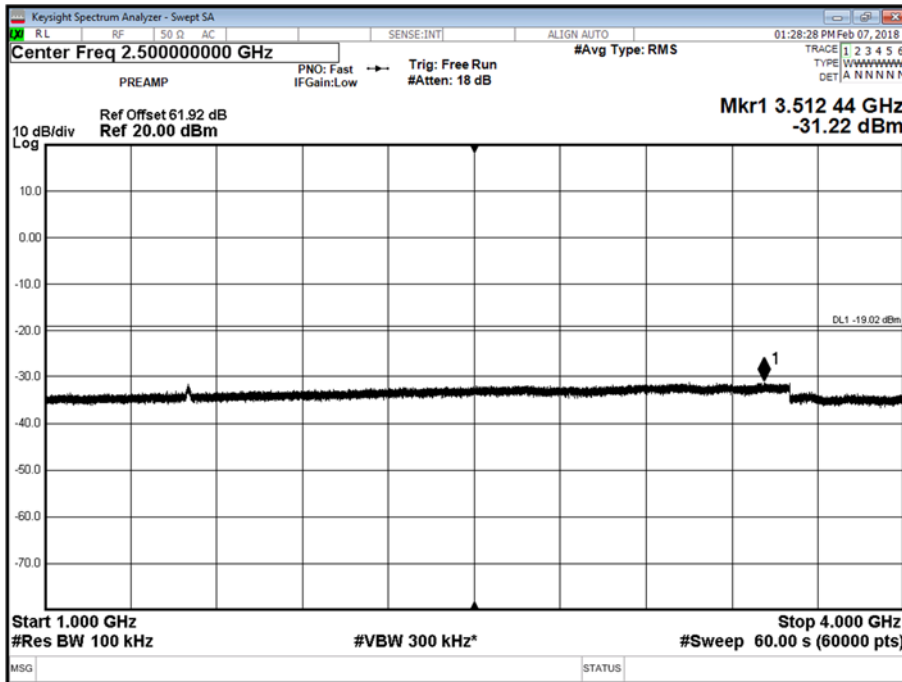



Product Service


Antenna A - Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 3 - Range 4000 to 8000 MHz

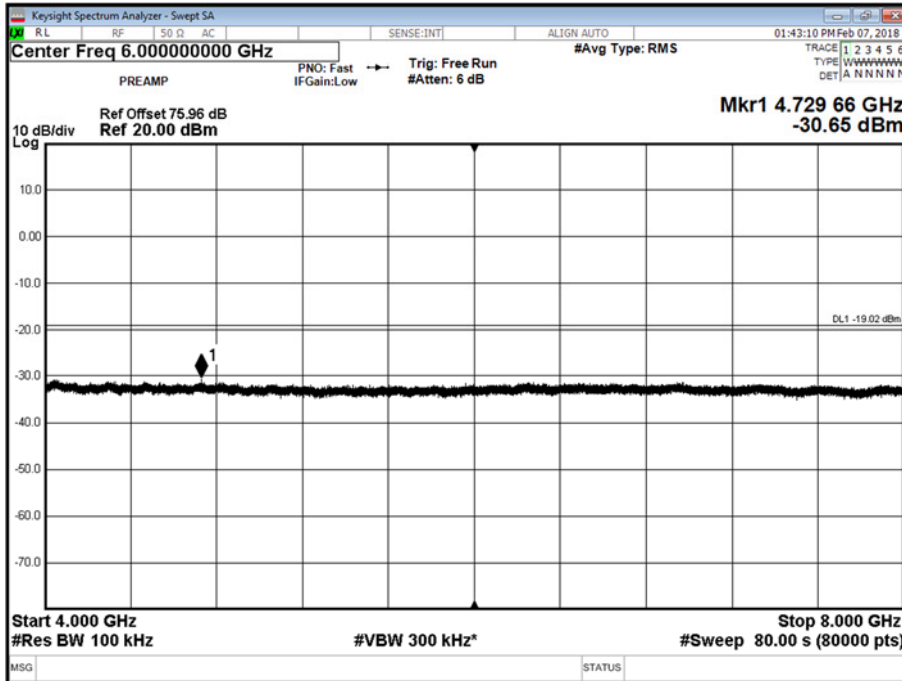

Configuration B

Maximum Output Power 43 dBm


Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position B - Band 1 - Range 0.009 to 1000 MHz

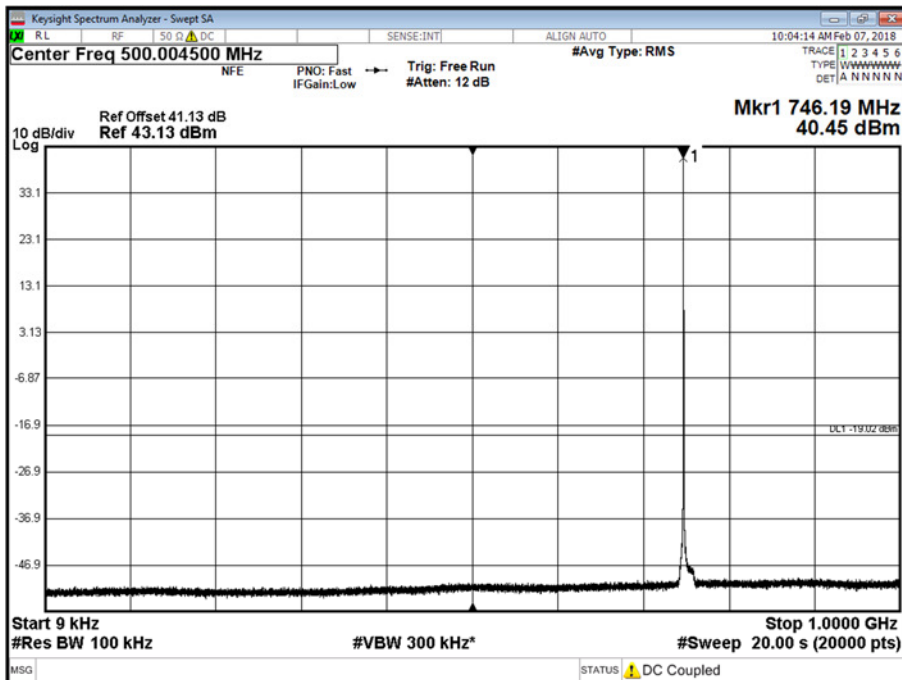




Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position B - Band 2 - Range 1000 to 4000 MHz

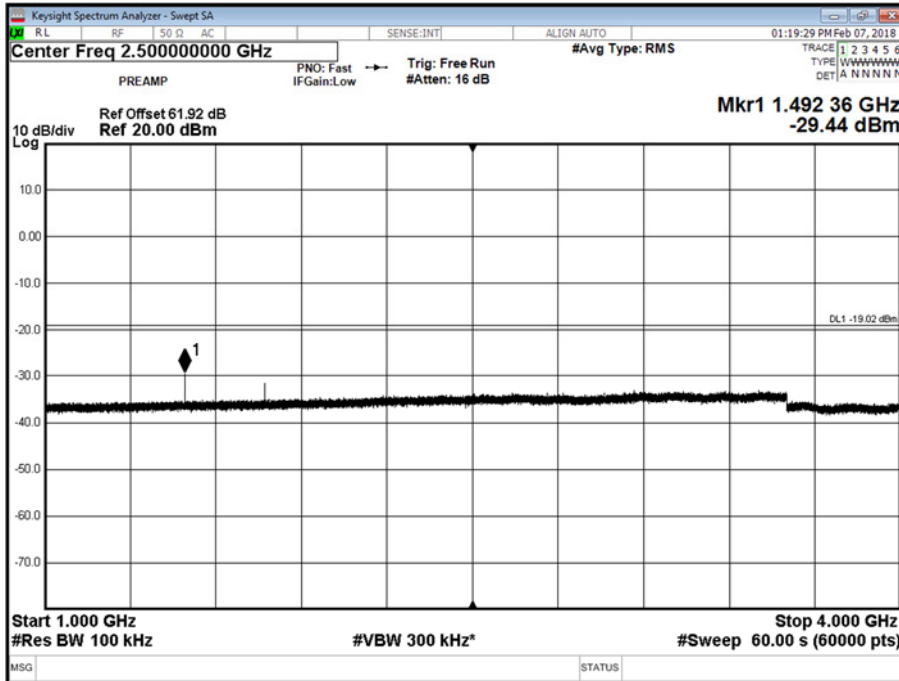


Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position B - Band 3 - Range 4000 to 8000 MHz

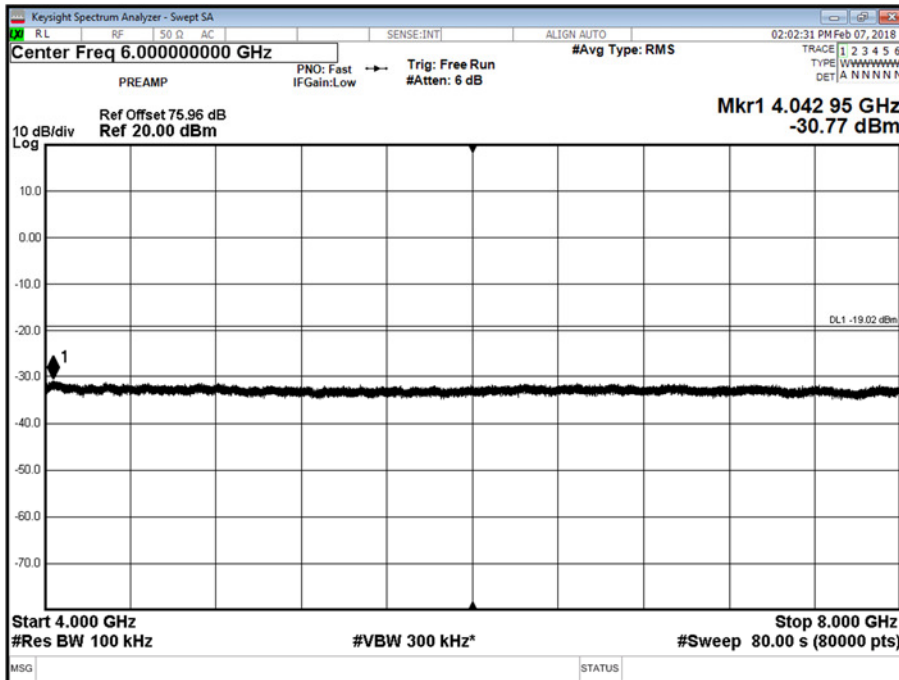




Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position M - Band 1 - Range 0.009 to 1000 MHz

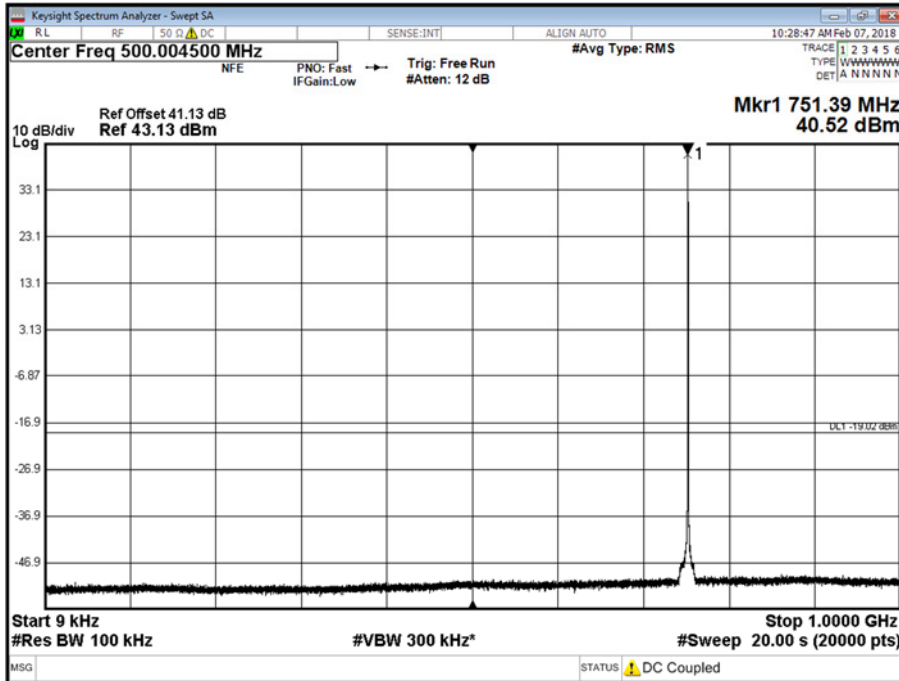


Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position M - Band 2 - Range 1000 to 4000 MHz

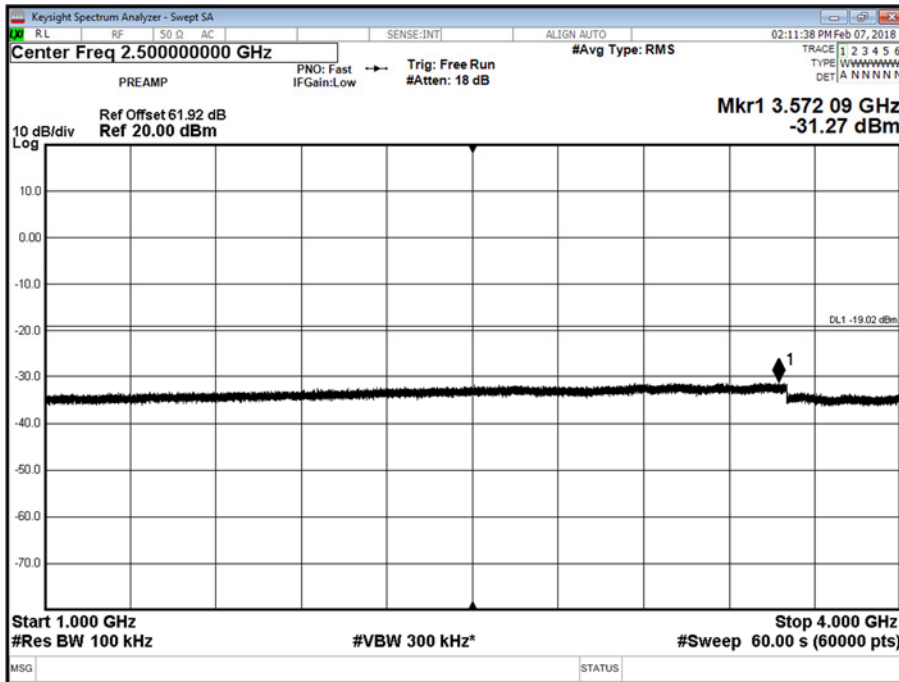




Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position M - Band 3 - Range 4000 to 8000 MHz

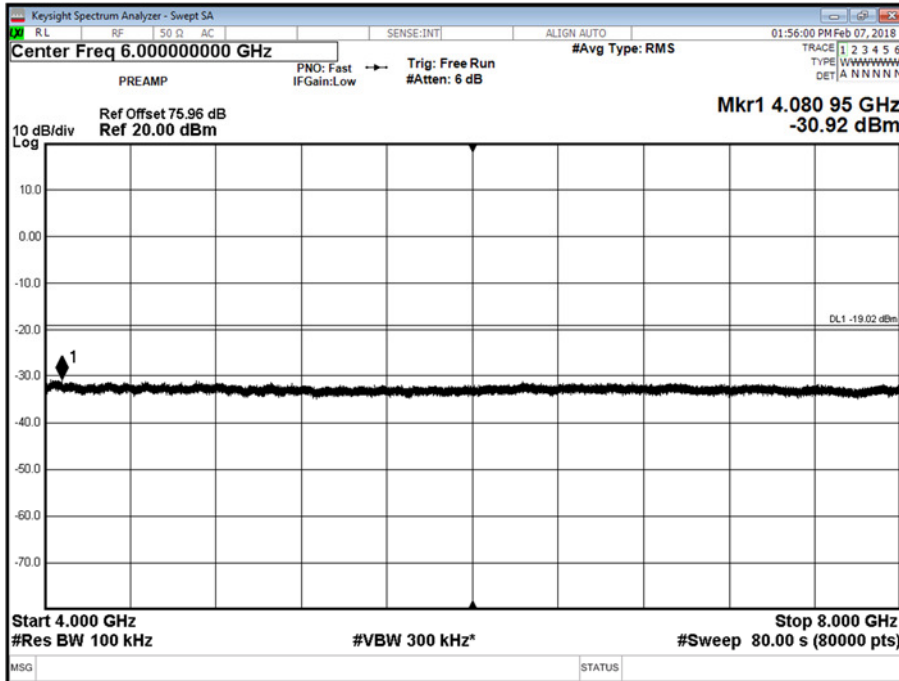


Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 1 - Range 0.009 to 1000 MHz

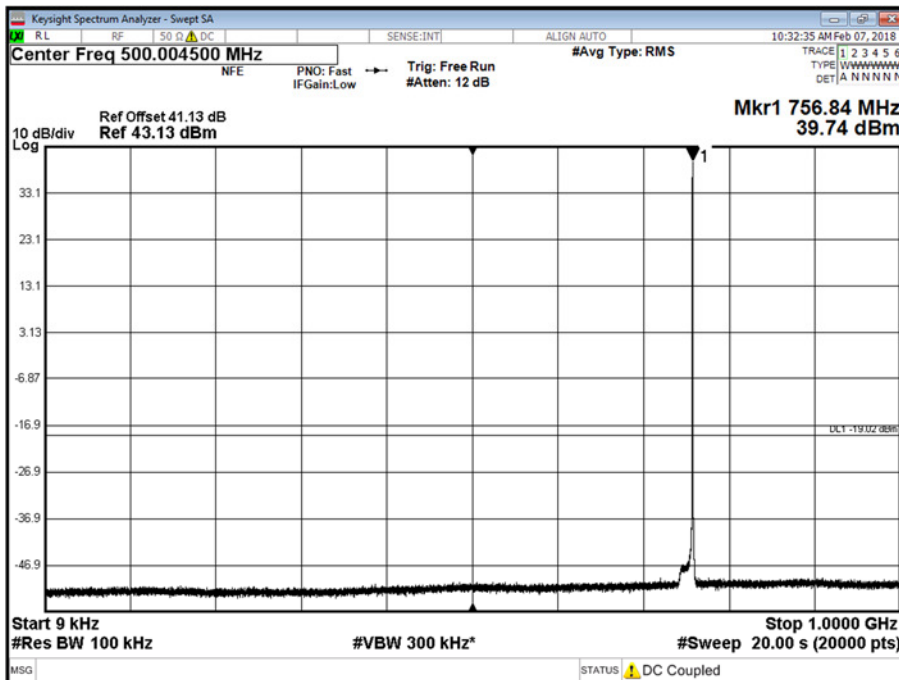




Product Service

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 2 - Range 1000 to 4000 MHz

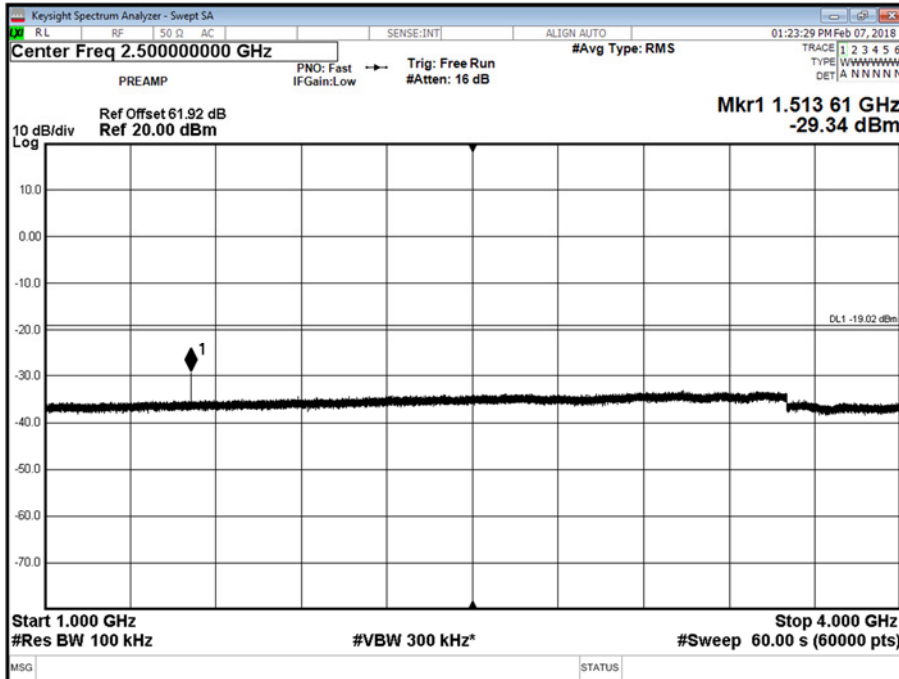

Antenna A - Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 3 - Range 4000 to 8000 MHz

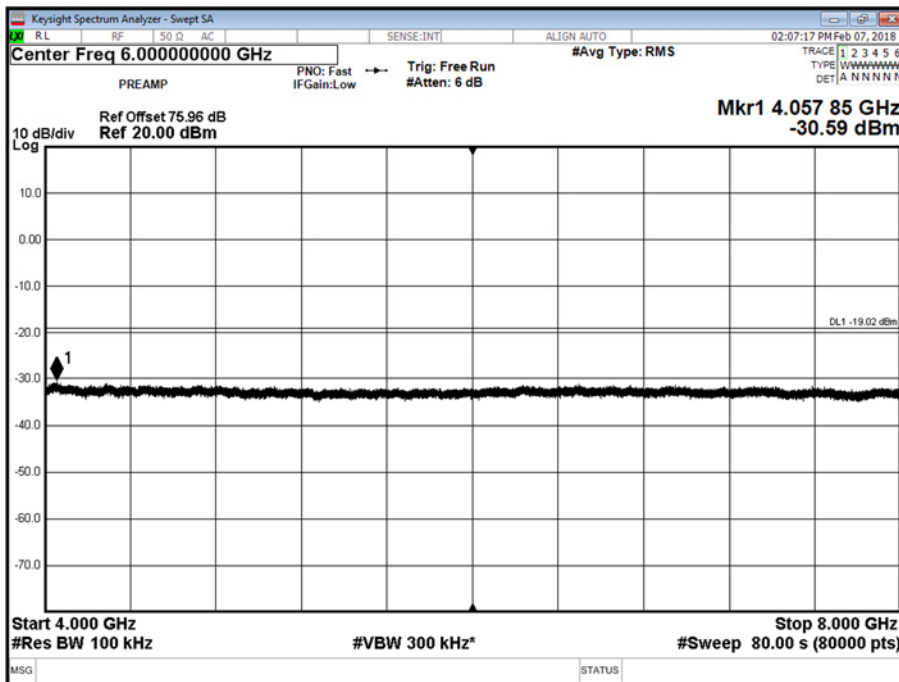

Limit MIMO	-19dBm
------------	--------



Product Service

2.5 RADIATED SPURIOUS EMISSIONS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1053
FCC CFR 47 Part 27, Clause 27.53(m)

2.5.2 Date of Test and Modification State

31 January 2018 - Modification State 0

2.5.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.4 Environmental Conditions

Ambient Temperature	18.9°C
Relative Humidity	33 %

2.5.5 Test Method

The test was applied in accordance with test method requirements of ANSI/TIA-603-C-2004.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisation.

The Applicant declared that the highest internally generated frequency would be up to 800MHz and so the upper limit for measurement was calculated at 10 times this, which is 8GHz.

Emissions identified within the range 30MHz – 8GHz were then formally measured using a Peak detector as the worst case.

In the frequency Range 30MHz – 1GHz, the measurement was performed with a resolution bandwidth of 100kHz.

In the frequency Ranges between 763-775MHz and 793-805MHz, the measurement was performed with a resolution bandwidth of 10kHz.

In the frequency Range 1GHz – 8GHz, the measurement was performed with a resolution bandwidth of 1MHz.

The measurements were performed at a 3m distance unless otherwise stated.

The limits for Spurious Emissions have been calculated, as shown below using the following formula:

Field Strength of Carrier - $(43 + 10\text{Log}(P))$ dB

Where:

Field Strength is measured in dB μ V/m

P is measured Transmitter Power in Watts



Product Service

Determination of Spurious Emission Limit

As the EUT does not have an integral antenna, the field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipole as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where G_i is the antenna gain of an ideal half-wave dipole,
 P_o is the power out of the transceiver in W,
 d is the measurement distance in meter.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 60)^{0.5} / 3 = 9.84V/m = 139.86dB\mu V/m$$

As per 27.53 (c)(1)) the spurious emission must be attenuated by $43 + 10\log(P_o)$ dB this gives:

$$43 + 10\log(60) = 60.78dB$$

Therefore the limit at 3m measurement distance is:

$$139.86 - 60.78 = 79.08 \text{ dB}\mu V/m$$

This limit has been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

2.5.6 Test Results


Configuration A-SC (1C)

Maximum Output Power 47.8dBm per port, LTE Bandwidth 10.0MHz




Product Service

Channel Position M – QPSK / Bandwidth 10.0MHz – 30MHz – 1GHz

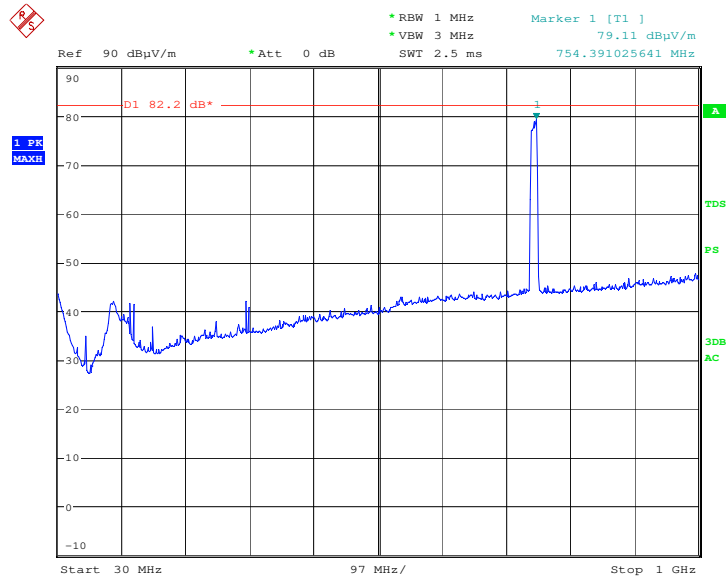

Date: 31.JAN.2018 19:47:19

Channel Position M – QPSK / Bandwidth 10.0MHz – 763MHz – 775MHz

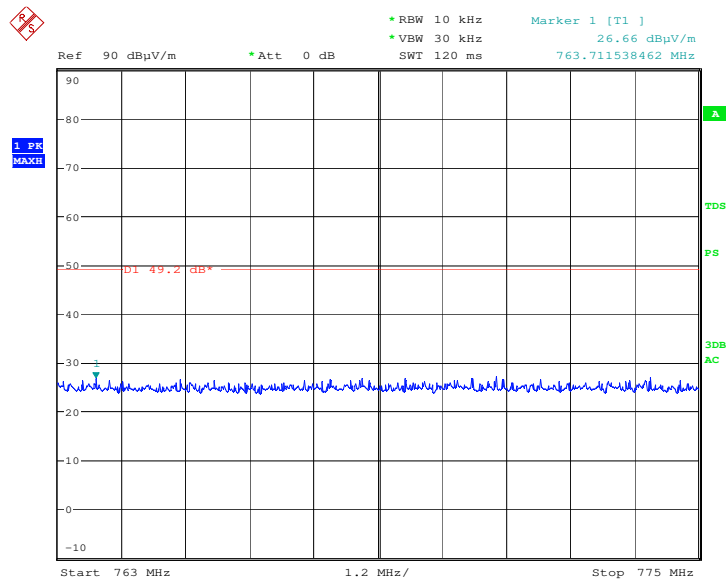


Date: 31.JAN.2018 19:52:27




Product Service

Channel Position M – QPSK / Bandwidth 10.0MHz – 793MHz – 805MHz

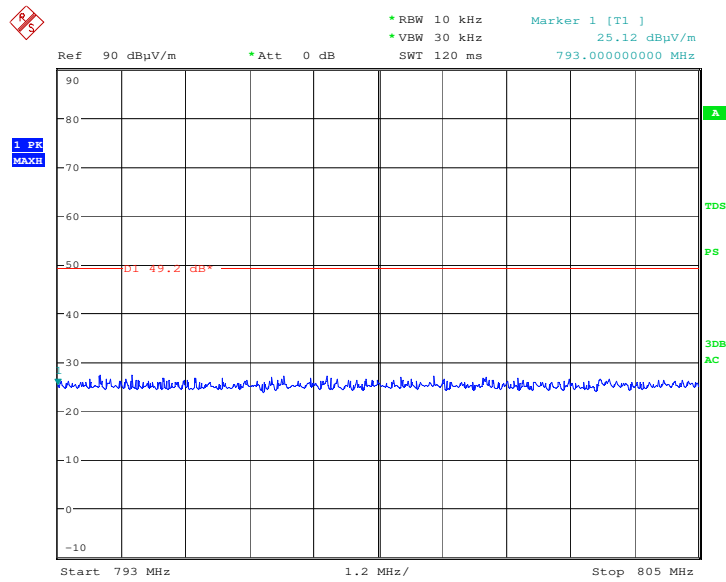

Date: 31.JAN.2018 19:50:51

Channel Position M – QPSK / Bandwidth 10.0MHz – 1GHz – 8GHz

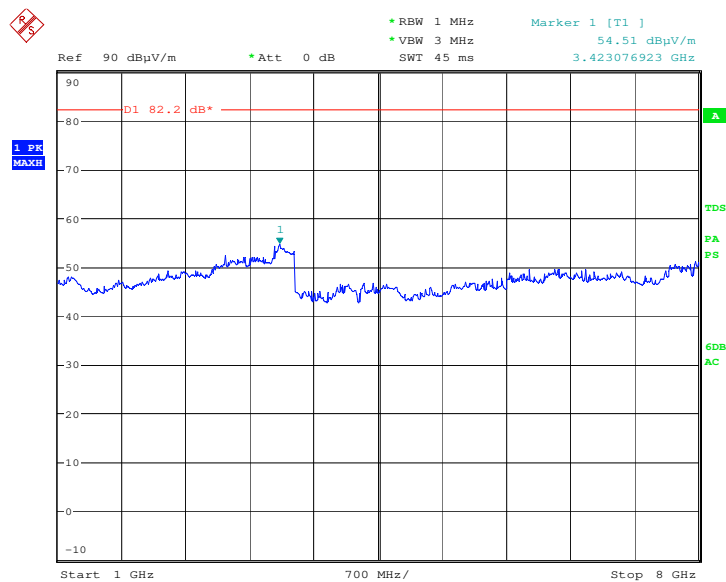

Date: 31.JAN.2018 22:12:20




Product Service

Configuration B-SC (1C)


Maximum Output Power 47.8dBm per port, LTE Bandwidth 10.0MHz

Channel Position B – QPSK / Bandwidth 10.0MHz – 30MHz – 1GHz

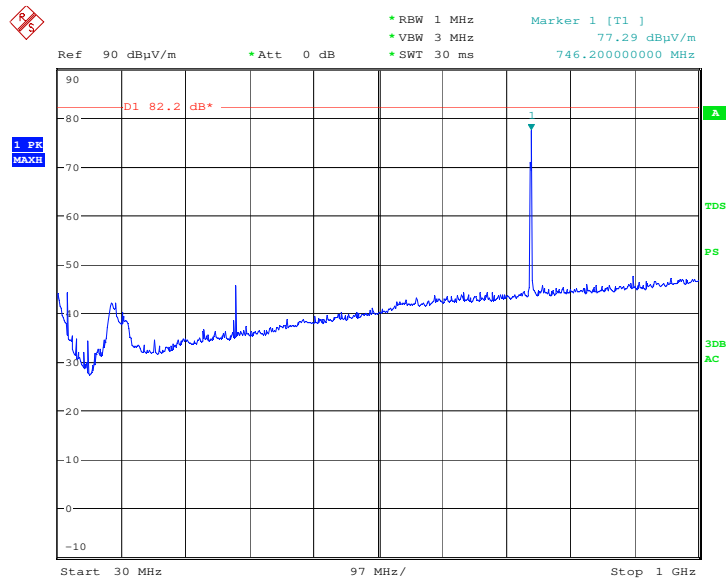

Date: 31.JAN.2018 20:24:25

Channel Position B – QPSK / Bandwidth 10.0MHz – 763MHz – 775MHz

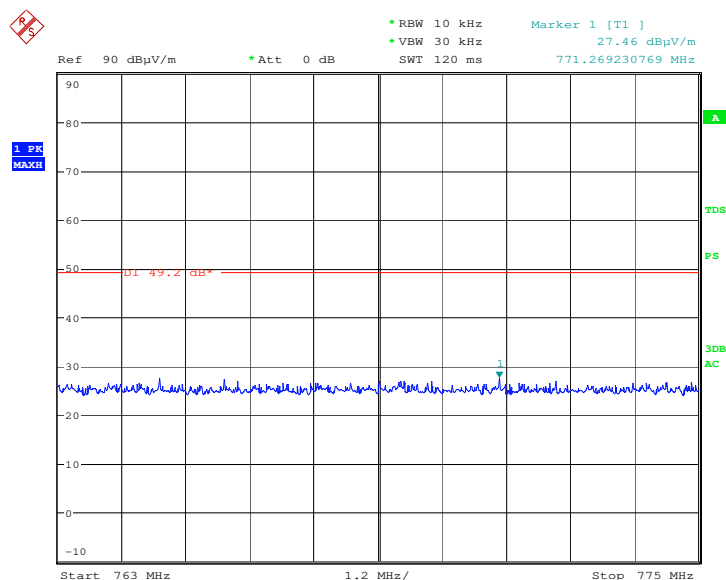


Date: 31.JAN.2018 20:21:42




Product Service

Channel Position B – QPSK / Bandwidth 10.0MHz – 793MHz – 805MHz

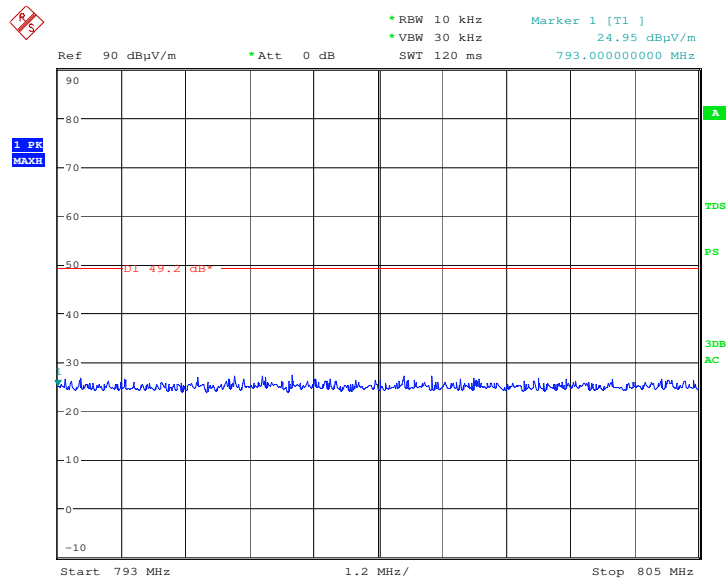

Date: 31.JAN.2018 20:18:51

Channel Position B – QPSK / Bandwidth 10.0MHz – 1GHz – 8GHz

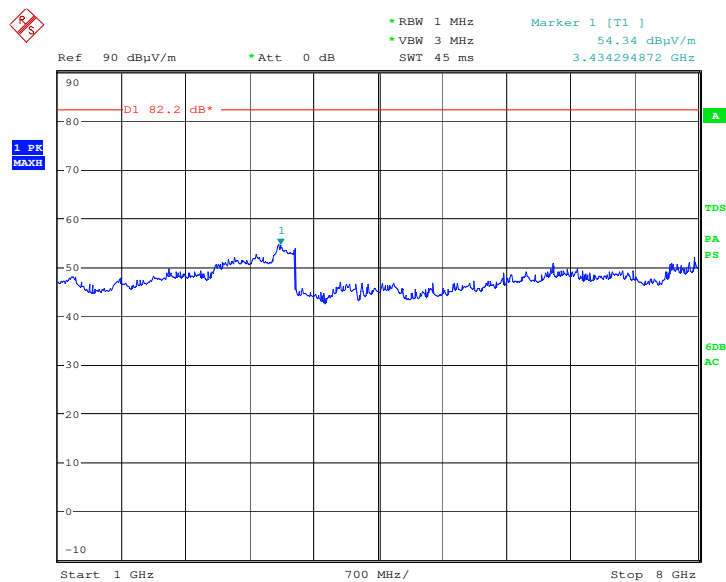


Date: 31.JAN.2018 22:29:16




Product Service

Channel Position M – QPSK / Bandwidth 10.0MHz – 30MHz – 1GHz

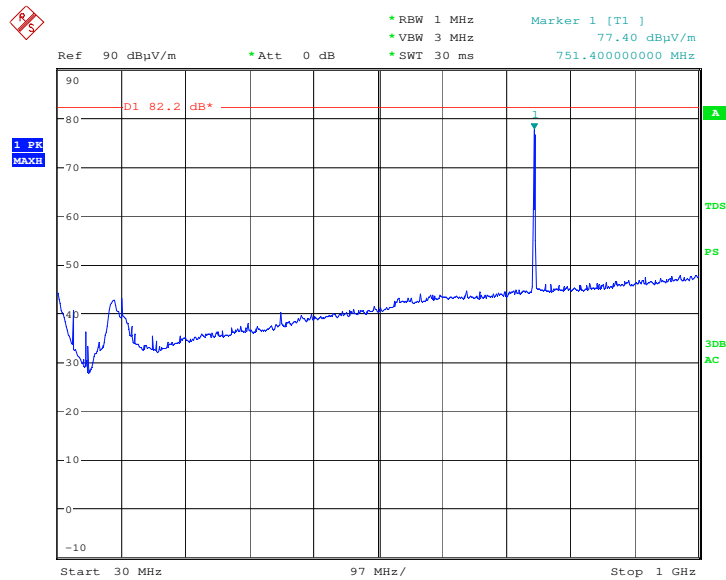

Date: 31.JAN.2018 20:38:00

Channel Position M – QPSK / Bandwidth 10.0MHz – 763MHz – 775MHz

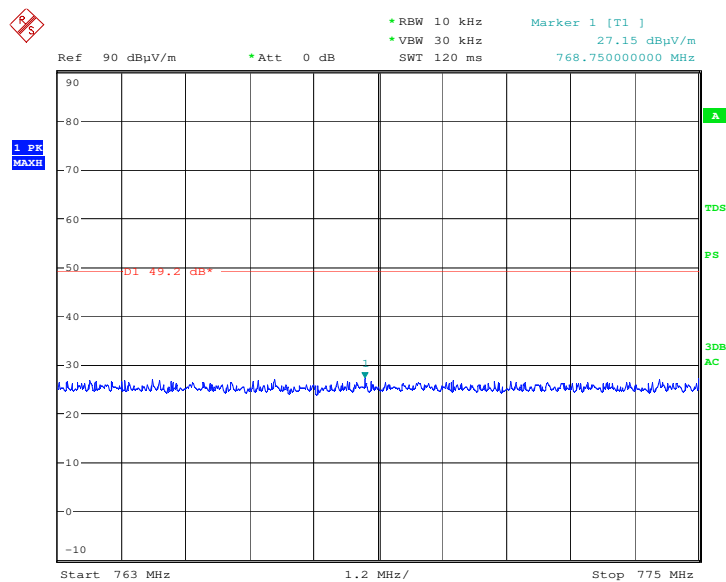


Date: 31.JAN.2018 20:43:58




Product Service

Channel Position M – QPSK / Bandwidth 10.0MHz – 793MHz – 805MHz

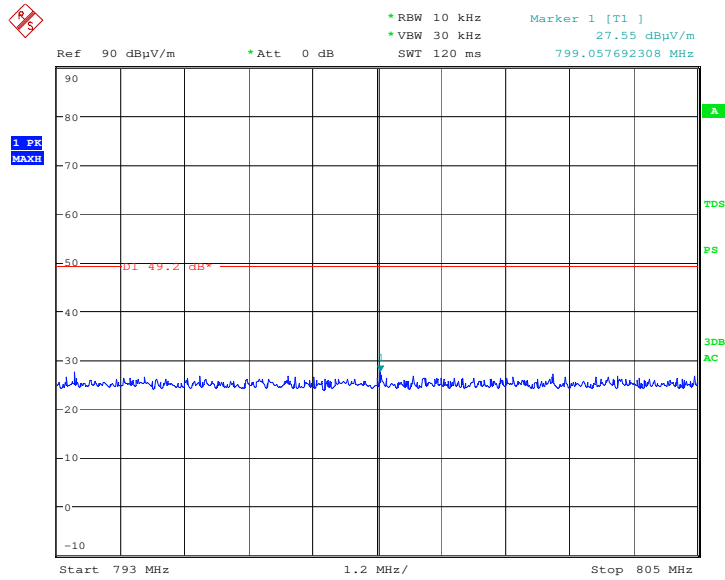

Date: 31.JAN.2018 20:46:10

Channel Position M – QPSK / Bandwidth 10.0MHz – 1GHz – 8GHz

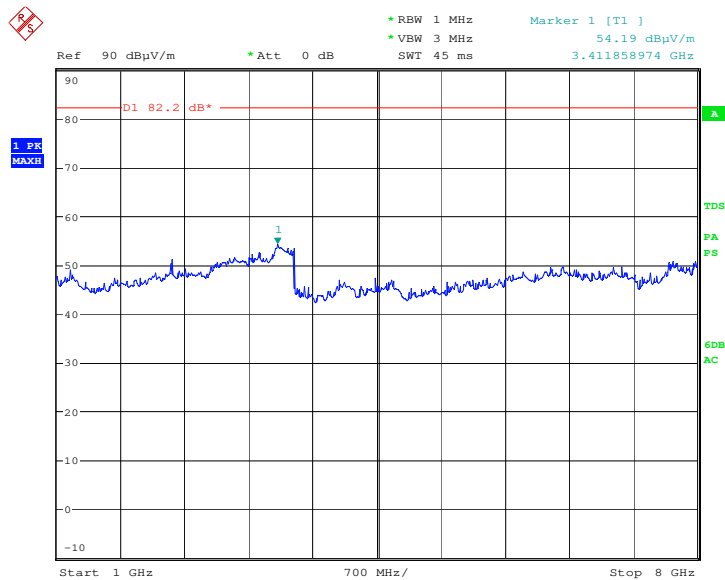


Date: 31.JAN.2018 22:24:00




Product Service

Channel Position T – QPSK / Bandwidth 10.0MHz – 30MHz – 1GHz

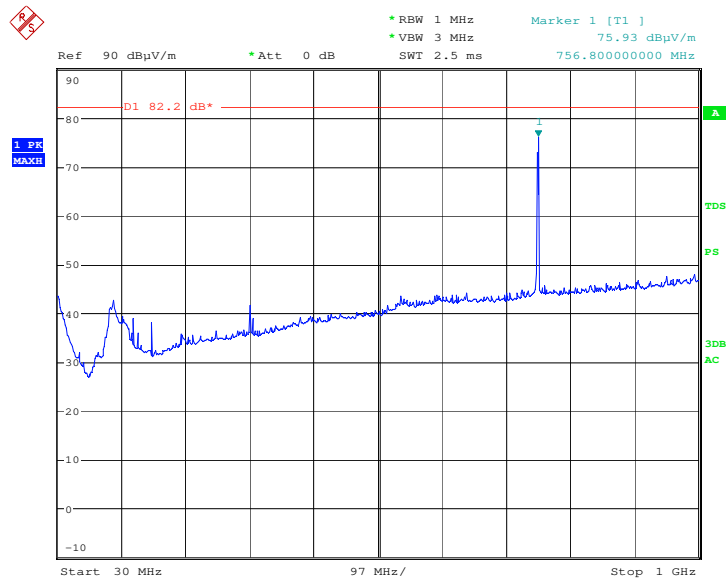

Date: 31.JAN.2018 20:57:10

Channel Position T – QPSK / Bandwidth 10.0MHz – 763MHz – 775MHz

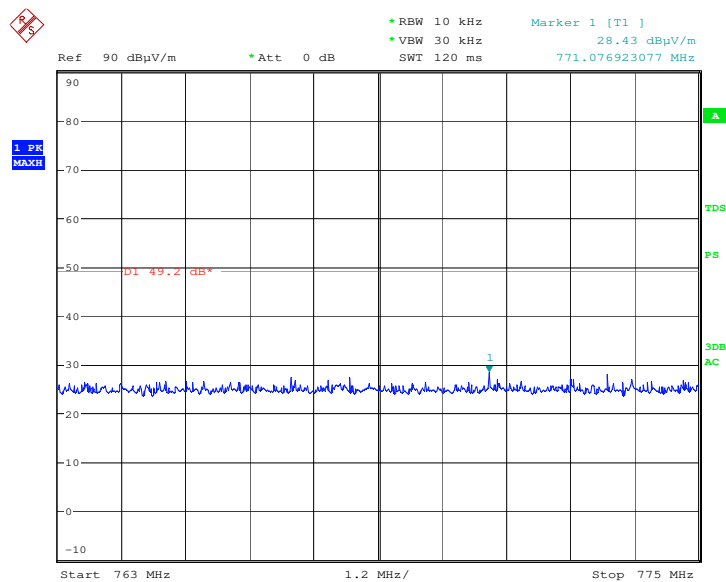


Date: 31.JAN.2018 20:55:25




Product Service

Channel Position T – QPSK / Bandwidth 10.0MHz – 793MHz – 805MHz

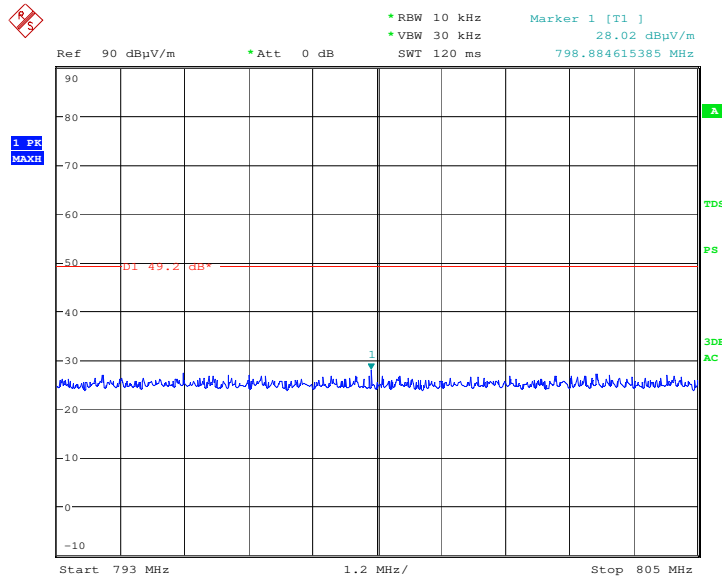

Date: 31.JAN.2018 20:53:41

Channel Position T – QPSK / Bandwidth 10.0MHz – 1GHz – 8GHz

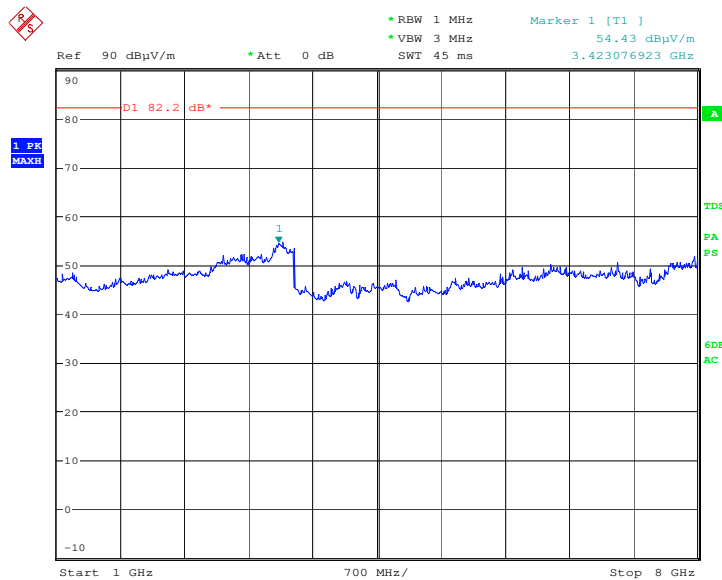

Date: 31.JAN.2018 22:18:20

Remarks

Limit	-13dBm / 79.08 dB μ V/m
-------	-----------------------------

The EUT does not exceed -13dBm / 79.08dB μ V/m at the measured frequencies.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Maximum Peak Output Power and Peak to Average Ratio - Conducted					
Spectrum Analyser	Keysight	PXA	MY54410231	12	30-Nov-2018
Network Analyser	Rohde&Schwarz	ZVA40	TE3548	12	02-Oct-2018
Calibration unit	Rohde&Schwarz	ZV-Z54	TE4368	12	19-Sep-2018
RF Load	Ericsson China	TR10	09121624	N/A	OP MON
Attenuator	Ericsson China	TSG150R	1504020007	N/A	OP MON
Power Supply	Ericsson China	PSU-AC 02	N/A	N/A	OP MON
Hygromer	RS	TE3220	0427452	12	30-Aug-2018
Digital Volt Meter	White gold	79 III	TE00190	12	24-Nov-2018
Band Edge					
Spectrum Analyser	Keysight	PXA	MY54410231	12	30-Nov-2018
Network Analyser	Rohde&Schwarz	ZVA40	TE3548	12	02-Oct-2018
Calibration unit	Rohde&Schwarz	ZV-Z54	TE4368	12	19-Sep-2018
RF Load	Ericsson china	TR10	09121624	N/A	OP MON
Attenuator	Ericsson china	TSG150R	1504020007	N/A	OP MON
Power Supply	Ericsson China	PSU-AC 02	N/A	N/A	OP MON
Hygromer	RS	TE3220	0427452	12	30-Aug-2018
Digital Volt Meter	White gold	79 III	TE00190	12	24-Nov-2018
Transmitter Spurious Emissions					
Spectrum Analyser	Keysight	PXA	MY54410231	12	30-Nov-2018
Network Analyser	Rohde&Schwarz	ZVA40	TE3548	12	02-Oct-2018
Calibration unit	Rohde&Schwarz	ZV-Z54	TE4368	12	19-Sep-2018
Attenuator	Narda	769-10	TE33368	12	31-May-2018
Attenuator	Narda	769-20	TE3367	12	31-May-2018
Attenuator	Narda	769-30	TE3369	12	31-May-2018
RF Load	Ericsson china	TR10	09121624	N/A	OP MON
Attenuator	Ericsson china	TSG150R	1504020007	N/A	OP MON
Power Supply	Ericsson China	PSU-AC 02	N/A	N/A	OP MON
Hygromer	RS	TE3220	0427452	12	30-Aug-2018
Digital Volt Meter	White gold	79 III	TE00190	12	24-Nov-2018



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Spurious Radiated Emissions					
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Apr-2018
Filter (High Pass)	Lorch	SHP7-7000-SR	566	12	5-Apr-2018
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	1002	12	20-Oct-2018
Power Supply Unit	Farnell	H 60/50	1095	-	TU
Antenna 18-40GHz (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	7-Dec-2018
Pre-Amplifier	Phase One	PS04-0086	1533	12	12-Jan-2019
18GHz - 40GHz Pre-Amplifier	Phase One	PSO4-0087	1534	12	27-Feb-2018
Screened Room (5)	Rainford	Rainford	1545	36	08-Jul-2019
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Multimeter	Iso-tech	IDM 101	2118	12	7-Feb-2018
Digital Multimeter	Iso-tech	IDM-101	2895	12	20-Jul-2018
Comb Generator	Schaffner	RSG1000	3034	-	TU
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	12	2-May-2018
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Nov-2018
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
1 Metre SMA Cable	Rhophase	3PS-1801A-1000-3PS	4099	12	19-Sep-2018
Cable 1503 2M 2.92(P)m 2.92(P)m	Rhophase	KPS-1503A-2000-KPS	4293	12	27-Feb-2018
Digital thermo Hygrometer	Radio Spares	1260	4300	12	30-Aug-2018
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	22-May-2018
Cable (Rx, SMAm-SMAm 0.5m)	Scott Cables	SLSL18-SMSM-00.50M	4528	-	OP Mon
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	17-Feb-2018
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	17-Feb-2018

N/A – Not Applicable

OP Mon – Output Monitored with Calibrated Equipment



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Conducted Maximum Peak Output Power	30 MHz to 20 GHz Amplitude	± 0.1 dB
Conducted Emissions	30 MHz to 20 GHz Amplitude	± 2.3 dB
Frequency Stability	30 MHz to 2 GHz	± 5.0 Hz
Occupied Bandwidth	Up to 20 MHz Bandwidth	± 1.1 Hz
Band Edge	30 MHz to 20 GHz Amplitude	± 2.3 dB
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Worst case error for both Time and Frequency measurement 12 parts in 10 ⁶		



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

© 2018 TÜV SÜD Product Service



Product Service

ANNEX A

MODULE LIST



Product Service

Configurations A-B			
Product	Product No	R-State	Serial No
CT10	KDU 137 624/1	R7B	TU8XV49142
RUL 01 B13	KRC 118 56/1	R1D	CC49876086
Software Version:	???	Revision:	???