



REPORT

issued by an FCC listed Laboratory Reg. no. 93866
The test sites comply with RSS-Gen, IC file no: 3482A

Date
2012-08-28

Reference
FX208975-F27

Page
1 (2)



Contact person
Jörgen Wassholm
Electronics
+46 10 516 57 06
jorgen.wassholm@sp.se

Ericsson AB
Klas Holm
PDU Radio Base Station
164 80 Stockholm

Class II permissive change measurements RUS 01 B12 700 MHz radio equipment with FCC ID:TA8AKRC11894-1 (9 appendices)

Test object

RUS 01 B12, KRC 118 94/1 Rev R1D, serial no: C826008120

Summary

Standard	Compliant	Appendix
FCC CFR 47		
2.1046 RF power output	Yes	2
2.1049 Occupied bandwidth	Yes	3
2.1051 Band edge	Yes	4
2.1051 Spurious emission at antenna terminals	Yes	5
2.1053 Field strength of spurious radiation	Yes	6
2.1055 Frequency stability	Yes	7
15.111 Receiver spurious emissions	Yes	8

SP Technical Research Institute of Sweden

Electronics - EMC

Performed by

Jörgen Wassholm

Examined by

Christer Karlsson

SP Technical Research Institute of Sweden

Postal address
SP
Box 857
SE-501 15 Borås
SWEDEN

Office location
Västeråsen
Brinellgatan 4
SE-504 62 Borås
SWEDEN

Phone / Fax / E-mail
+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Test setups	Appendix 1
Purpose of test	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
Receiver spurious emissions	Appendix 8
External photos	Appendix 9

Appendix 1

Description of test object

Equipment:	Radio equipment RUS 01 B12 running in LTE mode	
Frequency bands:	TX: 729 – 745 MHz RX: 699 – 715 MHz The highest and lowest EARFCNs and the corresponding frequencies for each supported channel BW configuration are listed below and are pursuant to 3GPP TS 36.141 section 5.7 Channel arrangement	
Supported channel bandwidth configurations	5, 10 and 15 MHz	
Modulation and access scheme	OFDMA in FDD	
OFDM subcarrier modulation	System information and pilots use BPSK and QPSK. For payload data QPSK, 16QAM and 64QAM can be used.	
Maximum rated output power:	Single carrier 1x 47.8 dBm (1x60 W)	
Number of antenna ports:	TX/RX: 1	RX only: 1
Nominal supply voltage:	-48 VDC	

Tested frequencies and EARFCNs for TX measurements

EARFCN	Frequency [MHz]	Comment
Downlink		
5035	731.5	TX bottom (B) frequency in 5 MHz BW configuration
5060	734.0	TX bottom (B) frequency in 10 MHz BW configuration
5085	736.5	TX bottom (B) frequency in 15 MHz BW configuration
5090	737.0	TX band mid (M) frequency in 5,10 and 15 MHz BW configurations
5095	737.5	TX top (T) frequency in 15 MHz BW configuration
5120	740.0	TX top (T) frequency in 10 MHz BW configuration
5145	742.5	TX top (T) frequency in 5 MHz BW configuration

Tested frequency and EARFCN for RX measurement

EARFCN	Frequency [MHz]	Comment
23035	701.5	RX band bottom (B) frequency in 5 MHz BW configuration
23090	707.0	RX band bottom (M) frequency in 5 MHz BW configuration
23145	712.5	RX band bottom (T) frequency in 5 MHz BW configuration

Each corresponding uplink (RX) channel was offset by +18000 from above given downlink EARFCN.

Note: EARFCN are derived according 3GPP TS 36.141, table 5.7.3-1.

Appendix 1

Operation modes during measurements

Measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 was used to represent QPSK, test model E-TM3.2 to represent 16QAM and test model E-TM3.1 to represent 64QAM payload modulation.

The setting TX single carrier with test model E-TM1.1 in channel bandwidth configuration 5 MHz was found to be representative for all traffic scenarios when several settings with different modulations and channel bandwidth configurations were compared to find a worst case setting. This setting was used for all measurements unless noted otherwise.

The test object was powered with -48 VDC unless noted otherwise. All measurements were performed with the test object configured for maximum transmit power.

Conducted measurements

The EUT was mounted into a RBS 6202 cabinet and supplied by the cabinet's internal -48 V DC. TX parameters were measured at port RF A. RX spurious emission conducted was measured at port RF B with port RF A activated with E-TM1.1. Port RF A was terminated into 50 ohm.

Radiated measurements

The test object was tested stand-alone. It was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmitter output power at port RF A. Antenna port RF B was unterminated.

Purpose of test

The purpose of the test is to verify compliance of applicable parts of FCC CFR 47 with changes and correction concerning PIS (Preinstalled software), replacements of outgoing components and increased yield at factory.

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2009

ANSI/TIA/EIA-603-C-2004

3GPP TS 36.141, version 8.5.0

CFR 47 part 2, October 1st, 2011

CFR 47 Part 15, October 1st, 2011

CFR 47 part 27 Subpart H, October 1st, 2011

Appendix 1

Measurement equipment

Measurement equipment	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S ESIB 26	2012-07	503 885
R&S FSIQ 40	2012-07	503 738
R&S FSQ, BAMS 1000294394	2013-03	-
R&S FSQ 40	2012-07	504 143
R&S ESI 26	2012-07	503 292
Control computer with R&S software EMC32 version 8.51.0	-	503 889
Control computer with R&S software EMC32 version 8.20.1	-	503 479
High pass filter	2012-07	504 199
High pass filter	2012-07	504 200
High pass filter	2012-07	503 739
High pass filter	2012-07	503 740
High pass filter	2013-01	901 373
RF attenuator	2012-07	504 159
RF attenuator	2012-07	900 229
RF attenuator	2012-07	900 118
RF attenuator	2012-08	900 116
RF attenuator	2012-07	900 690
RF attenuator	2012-07	900 691
Directional coupler	2013-10	504 134
Chase Bilog Antenna CBL 6111A	2014-10	503 182
Antenna Schaffner CBL 6143	2013-04	504 079
EMCO Horn Antenna 3115	2014-01	502 175
Std.gain horn FLANN model 20240-20	-	503 674
µComp Nordic, Low Noise Amplifier	2012-07	504 160
MITEQ Low Noise Amplifier	2012-07	503 285
Temperature cabinet	-	503 360
Testo 625, Temperature and humidity meter	2012-06	504 188
Testo 635 Temperature and humidity meter	2013-05	504 203

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Appendix 1

Delivery of test object

The test object was delivered: 2012-04-20.

Manufacturer's representative

Christer Gustavsson, Ericsson AB

Test engineers


Andreas Johnson, Tomas Lennhager, and Jörgen Wassholm

Test participant

None

Appendix 1

Test set-up conducted TX measurements at port RF A

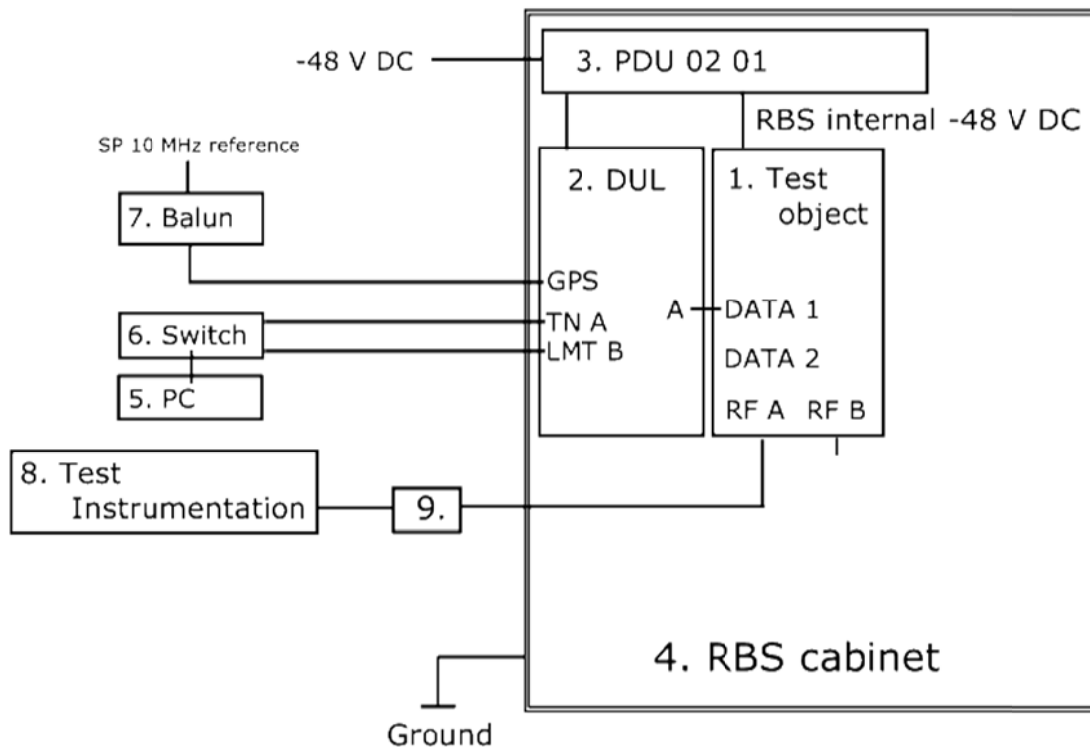

Test object


1. RUS 01 B12, KRC 118 94/1, rev. R1D, s/n: C826008120
FCC ID:TA8AKRC11894-1, with software (PIS): CXP 901 7316/1 rev. R32NF

Functional test equipment

2. DUL 20 01 KDU 137 533/4, revision R1D C823997199
3. PDU 02 02, BMG 980 336/5, revision R1E, S/N: C941030896
4. RBS 6202 cabinet, BAMS 1000961945
5. Controlling laptop HP Elitebook 8730w, , BAMS 1000757968
running software MOSHELL V8.0k
6. Fast Ethernet Switch: NETGEAR 10/100 Mbps model: FS108
7. Balun for 10 MHz reference, converting BNC to RJ-45 connector
8. SP test instrument according measurement equipment list
9. Attenuator and filter according measurement equipment list

Appendix 1

Test set-up conducted RX measurements at port RF B

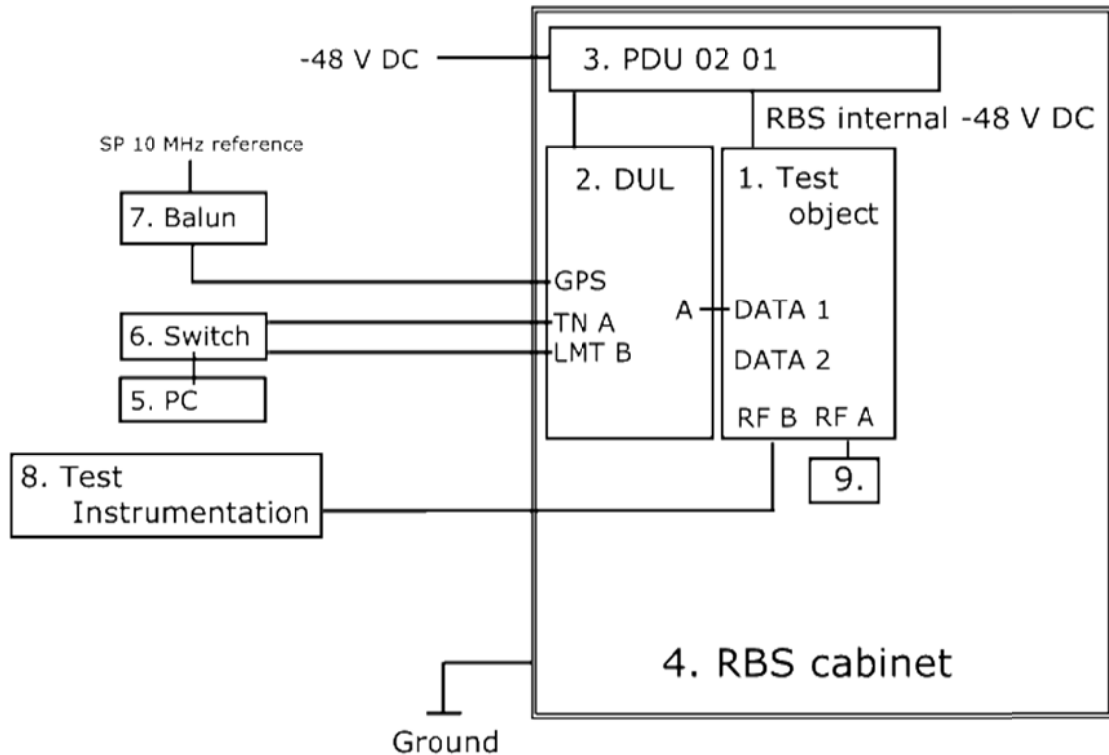

Test object


1. RUS 01 B12, KRC 118 94/1, rev. R1D, s/n: C826008120
FCC ID:TA8AKRC11894-1, with software (PIS): CXP 901 7316/1 rev. R32NF

Functional test equipment

2. DUL 20 01 KDU 137 533/4, revision R1D C823997199
3. PDU 02 02, BMG 980 336/5, revision R1E, S/N: C941030896
4. RBS 6202 cabinet, BAMS 1000961945
5. Controlling laptop HP Elitebook 8730w, , BAMS 1000757968
running software MOSHELL V8.0k
6. Fast Ethernet Switch: NETGEAR 10/100 Mbps model: FS108
7. Balun for 10 MHz reference, converting BNC to RJ-45 connector
8. SP test instrument according measurement equipment list
9. 50 ohm termination

Appendix 1

Test set-up, radiated measurements

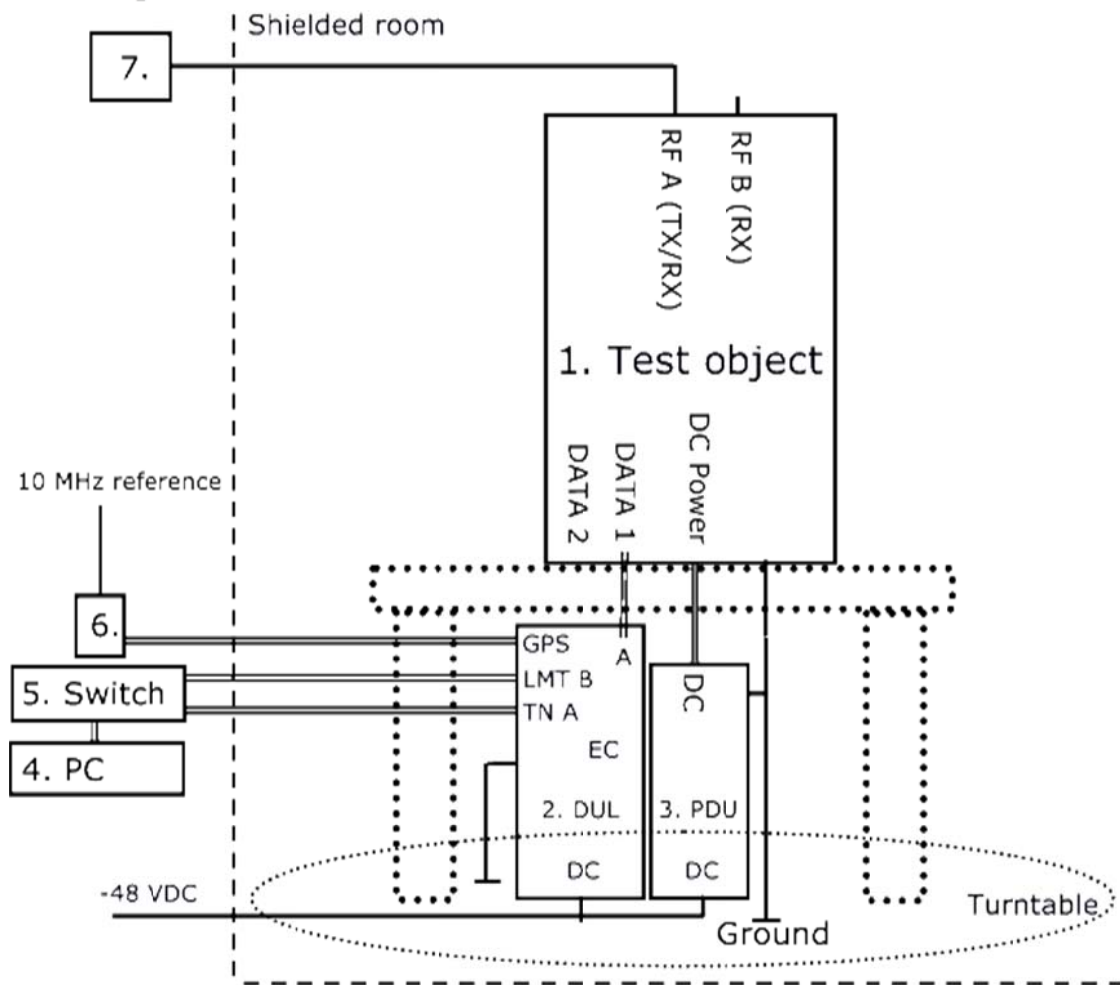

Test object

- 1 RUS 01 B12, KRC 118 94/1, rev. R1D, s/n: C826008120
FCC ID:TA8AKRC11894-1, with software (PIS): CXP 901 7316/1 rev. R32NF

Functional test equipment

2. DUL 20 01 KDU 137 533/4 R1D C823997199,
hosted in SUP 6601 1/BFL 901 009/1 Rev R3B, S/N. BR81526585
3. Power Subrack:
PDU 01 01, BMG 980 336/1, R4F, BJ31532384
PDU 01 01, BMG 980 336/1, R4F, BJ31532382
SHU 01 01, BGK 901 18/1, R3C, BJ31446269
PFU 01 01, KFE 101 1162/1, R1B, BR80910495
PCF 02 01, KFE 101 1157/1, R1C, BW95301450
DUMMY x4, SXK 109 8257/1, R1F
4. Computer, HP EliteBook 8540w, BAMS - 1001052043
5. Switch, Netgear GS108E
6. Balun (Jointing box) NCD 901 40/1, R1A, s/ n: A401222750
7. Attenuator 30 dB and Signal Analyzer FSIQ40 SP 503 738

Appendix 1

Test object ports

Interface:	Type of port:
Ground connection during stand-alone radiated emission test, in normal use grounded via cabinet	Ground
Supply power -48 VDC	DC Power
Antenna port 1 "RF A", 7/16 connector, female, combined TX/RX	Antenna
Antenna port 2 "RF B", 7/16 connector, female, RX only	Antenna
Data 1, connected to Port "A" at DUL	Signal
Data 2, unused	Signal
RXA I/O cross connector, unused	Signal
RXA OUT cross connector, unused	Signal
RXB I/O cross connector, unused	Signal

RBS software

Software	Revision
CXP 102 051/12	R20G

Appendix 2

RF power output measurements according to CFR 47 §27.50

Date	Temperature	Humidity
2012-05-29	23 °C ± 3 °C	35 % ± 5 %
2012-05-30	23 °C ± 3 °C	30 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
RF attenuator	900 229
R&S FSQ, BAMS 1000294394	--
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results

Measured output power level at connector RF A

Test conditions	Transmitter power RMS (dBm) / PAR (dB)		
	Frequency B	Frequency M	Frequency T
BW configuration 5 MHz	47.41/ 6.94	47.42/ 6.66	47.31/ 6.77
BW configuration 10 MHz	47.40/ 7.24	47.32/ 6.76	47.34/ 6.81
BW configuration 15 MHz	47.20/ 7.44	47.17/ 7.25	47.18/ 7.11

Limit

Derived from CFR 47 § 27.50 (c) (3): Base stations transmitting in the 698 –746 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz.

The peak-to-average ratio (PAR) shall not exceed 13 dB.

Complies?	Yes
-----------	-----

Appendix 3

Occupied bandwidth measurements according to CFR 47 2.1049

Date	Temperature	Humidity
2012-05-29	23 °C ± 3 °C	35 % ± 5 %
2012-05-30	23 °C ± 3 °C	30 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSIQ40	503 738
RF attenuator	900 229
Testo 635, Temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Diagram	BW configuration	Tested frequency	Occupied BW (99%) [MHz]
1	5 MHz	B	4.473
2	15 MHz	B	13.411
3	5 MHz	M	4.473
4	10 MHz	M	8.934
5	15 MHz	M	13.411
6	5 MHz	T	4.473
7	15 MHz	T	13.467

Appendix 3

Diagram 1


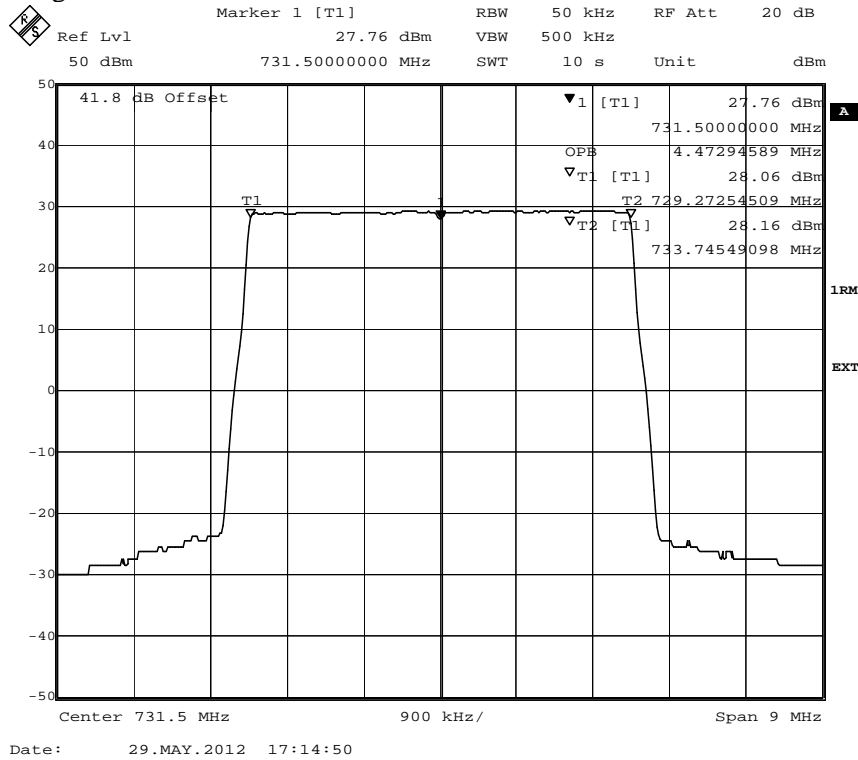


Diagram 2

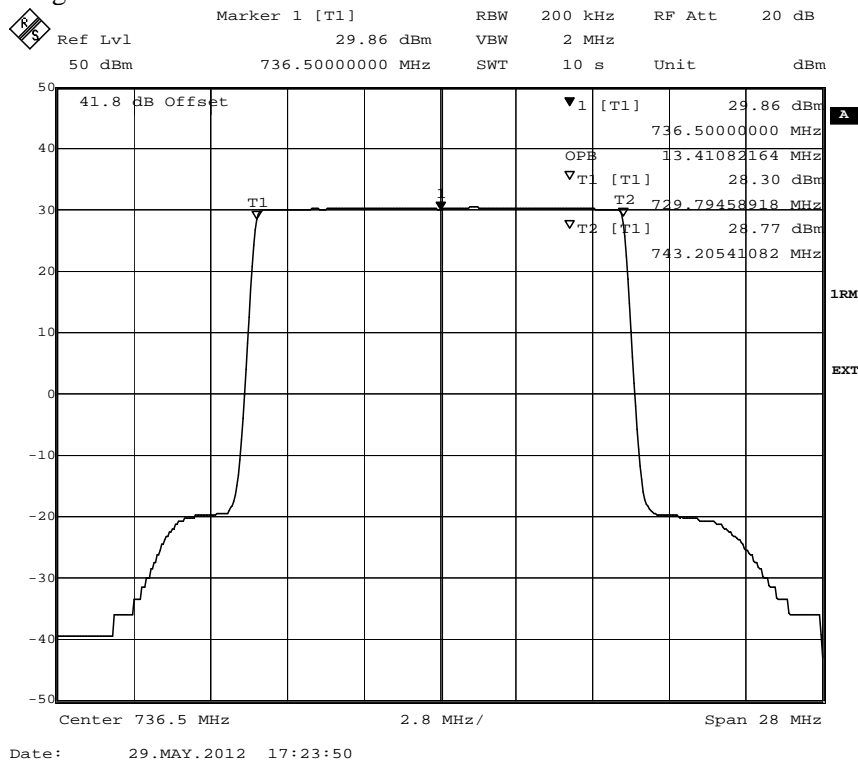

Appendix 3

Diagram 3


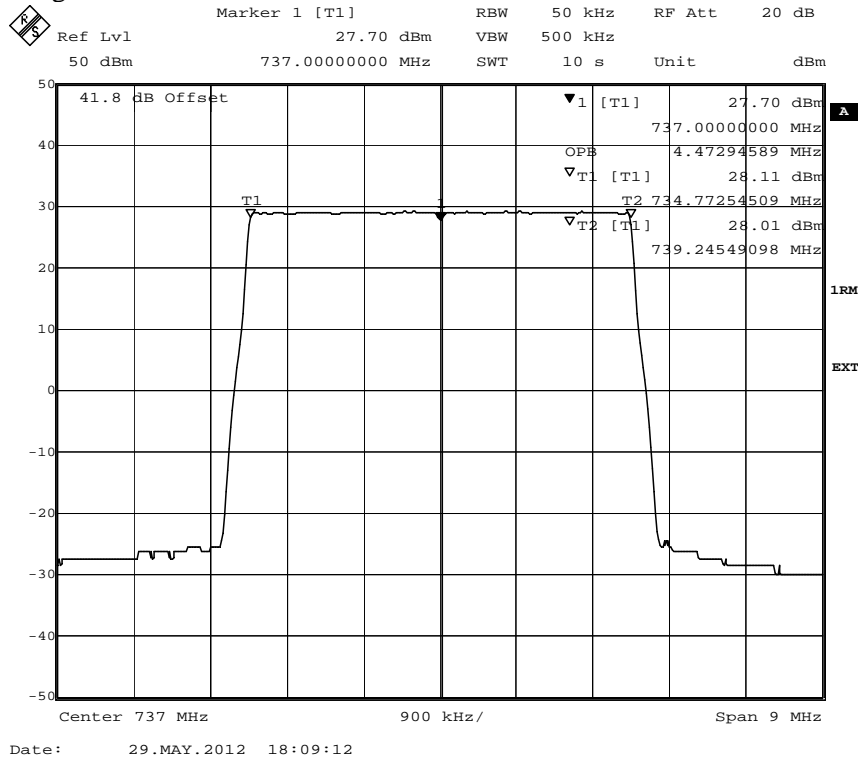


Diagram 4

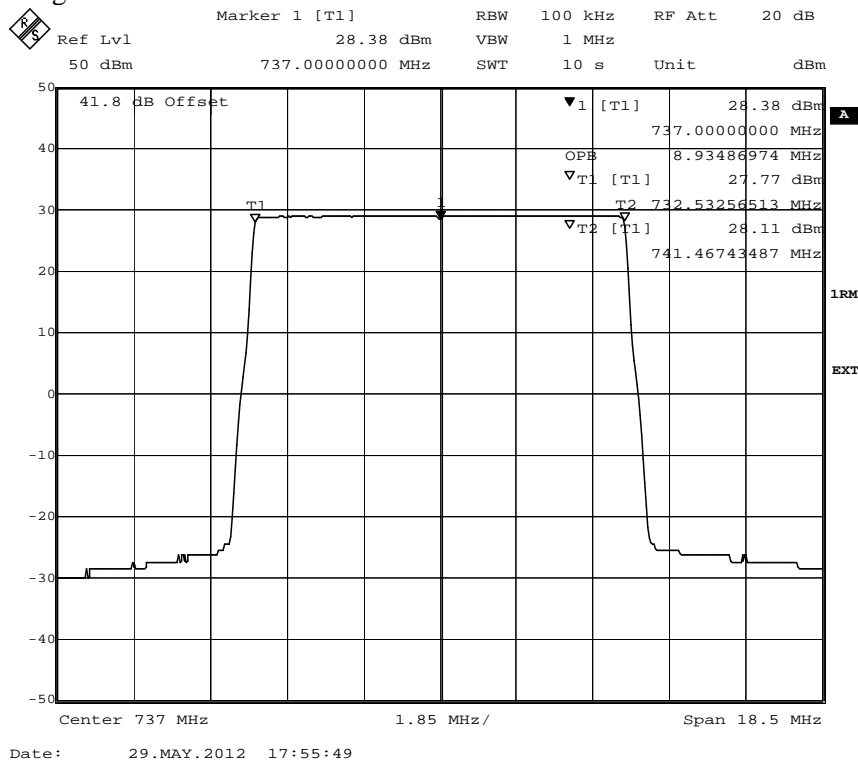

Appendix 3

Diagram 5



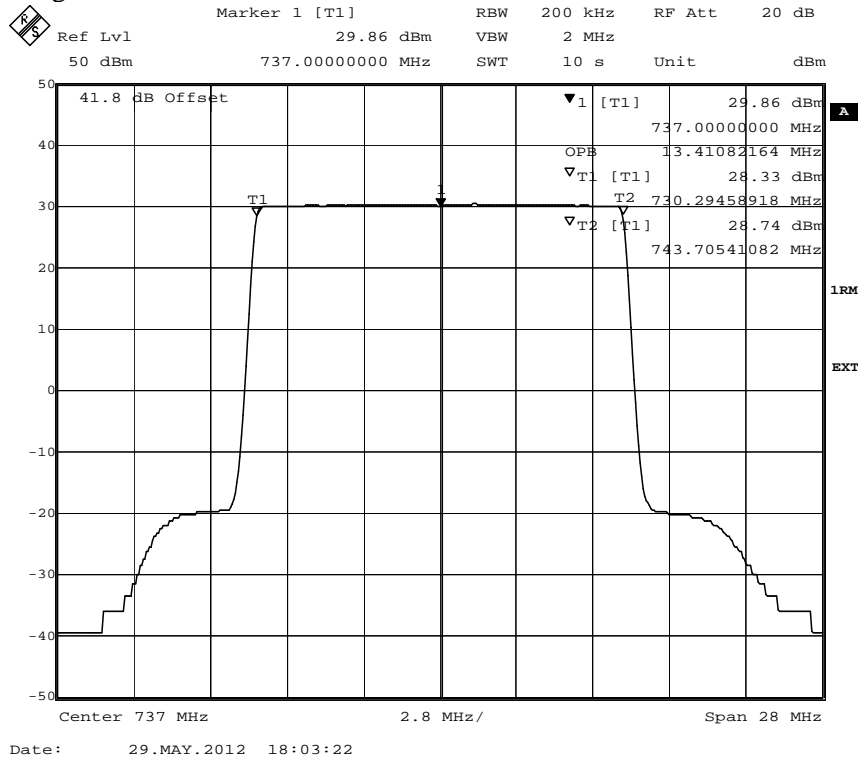


Diagram 6

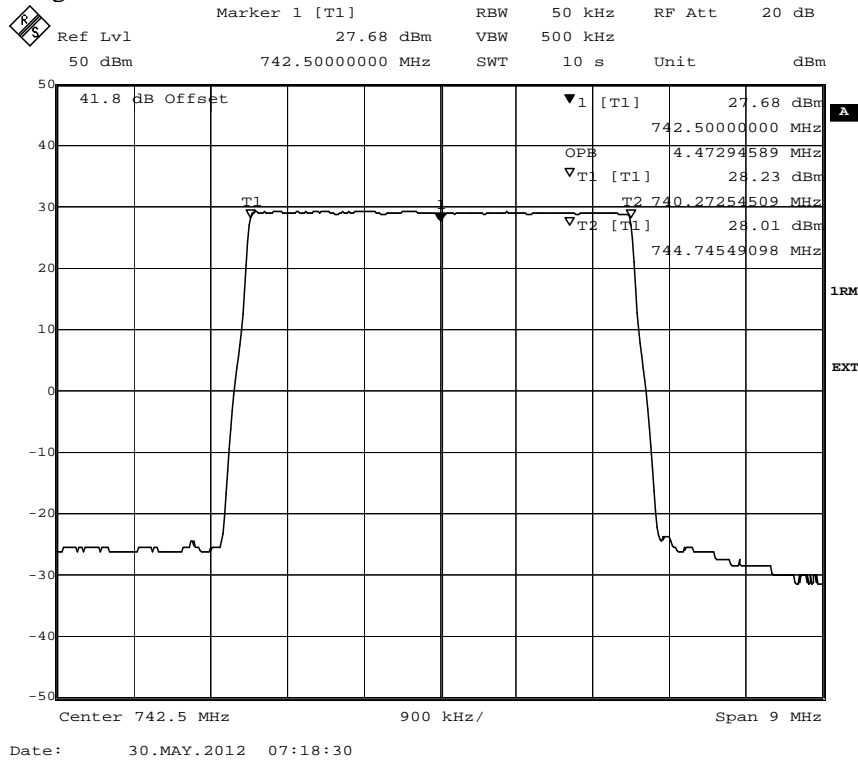

Appendix 3

Diagram 7

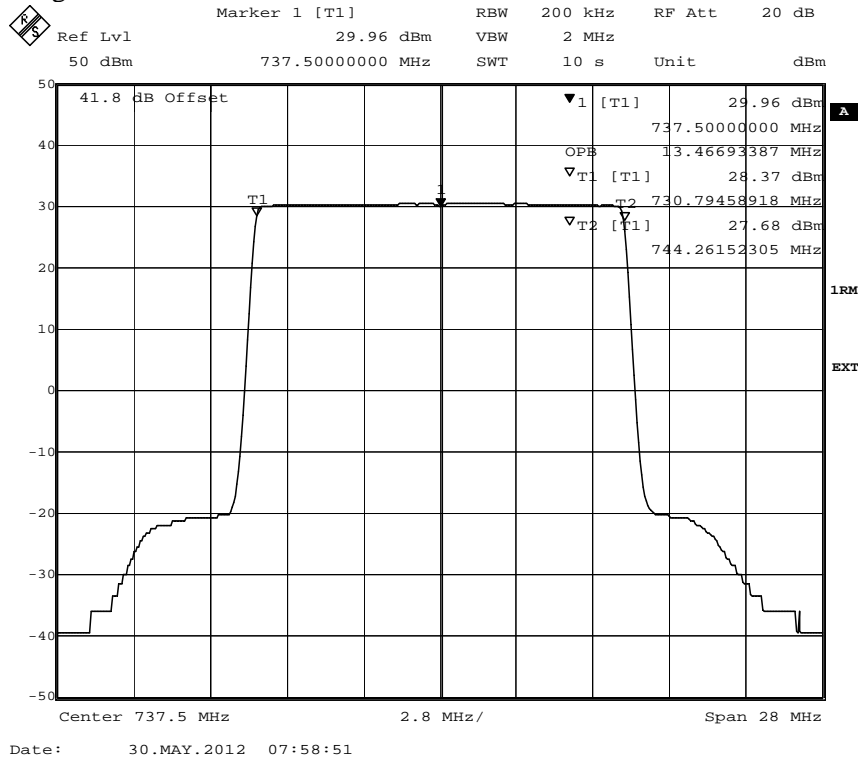

Appendix 4

Band edge measurements according to CFR 47 §27.53

Date	Temperature	Humidity
2012-05-29	23 °C ± 3 °C	35 % ± 5 %
2012-05-30	23 °C ± 3 °C	30 % ± 5 %

Test set-up and procedure

The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

The measurements were made as defined in §27.53 (g). The FCC rules, specifying a RBW of at least 30kHz up to 100 kHz away from the band edges and a RBW of 100 kHz for measurements of emissions more than 100 kHz away from the band edges. A resolution bandwidth of 30 kHz was used up to 1 MHz from the band edges. After the 100 kHz immediately outside the band edges the limit was adjusted -5.23 dB (10 log (30/100)) to -18.23 dBm in order to compensate for the reduced measurement bandwidth. The measurement from 1 MHz to 10 MHz were made with a RBW of 100 kHz

Measurement equipment	SP number
R&S FSIQ	503 738
RF attenuator	900 229
Testo 635, Temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Diagram	BW configuration	Tested frequency
1 a+b	5 MHz	B
2 a+b	10 MHz	B
3 a+b	15 MHz	B
4 a+b	5 MHz	T
5 a+b	10 MHz	T
6 a+b	15 MHz	T

Limits

Derived from CFR 47 § 27.53 (g): Outside outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----

Appendix 4

Diagram 1 a


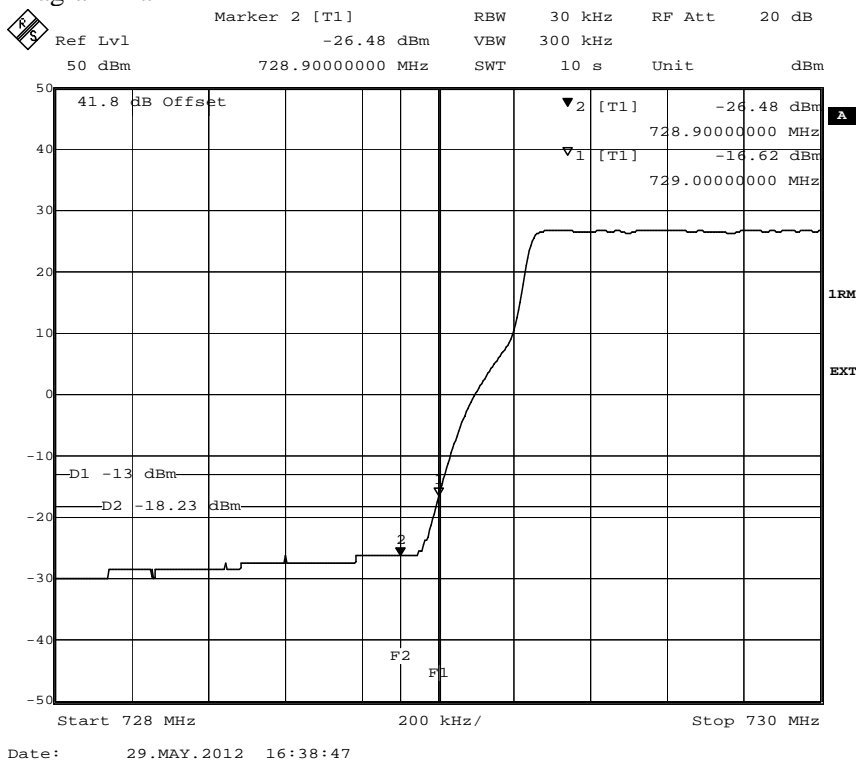


Diagram 1 b

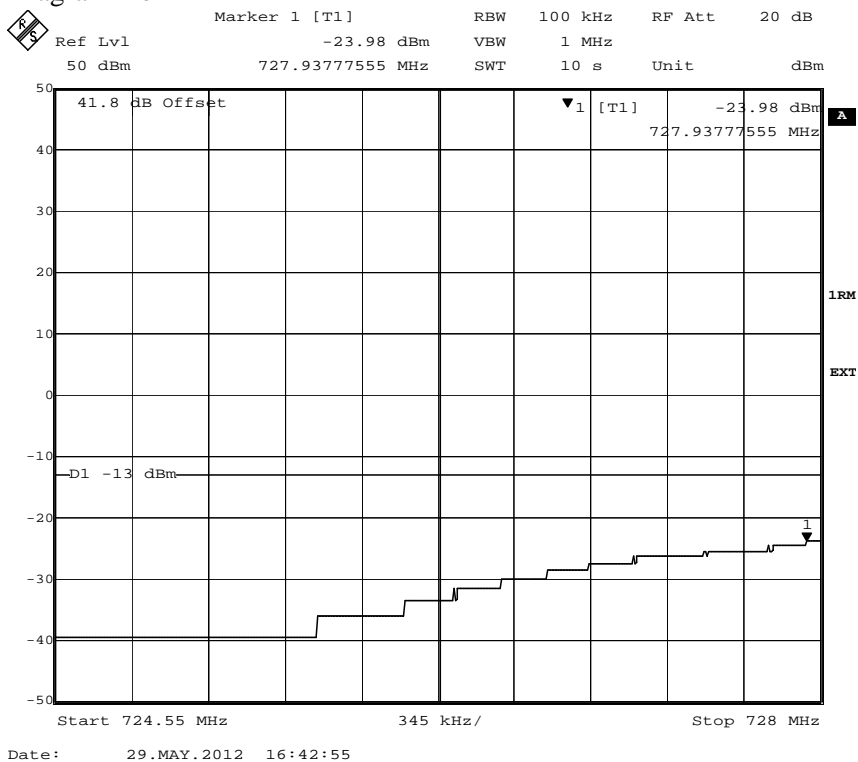

Appendix 4

Diagram 2 a



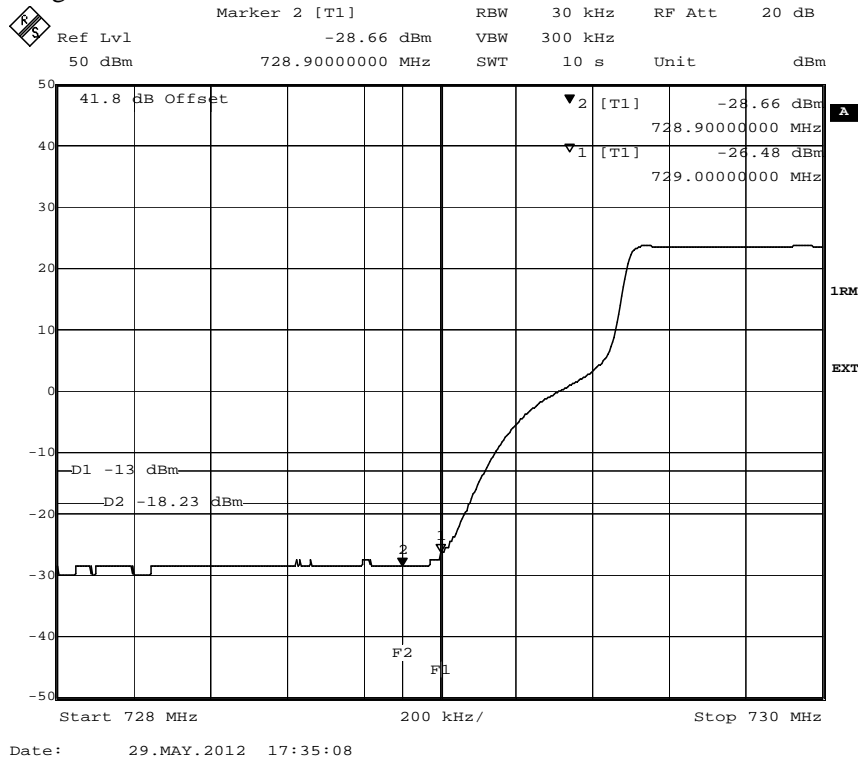


Diagram 2 b

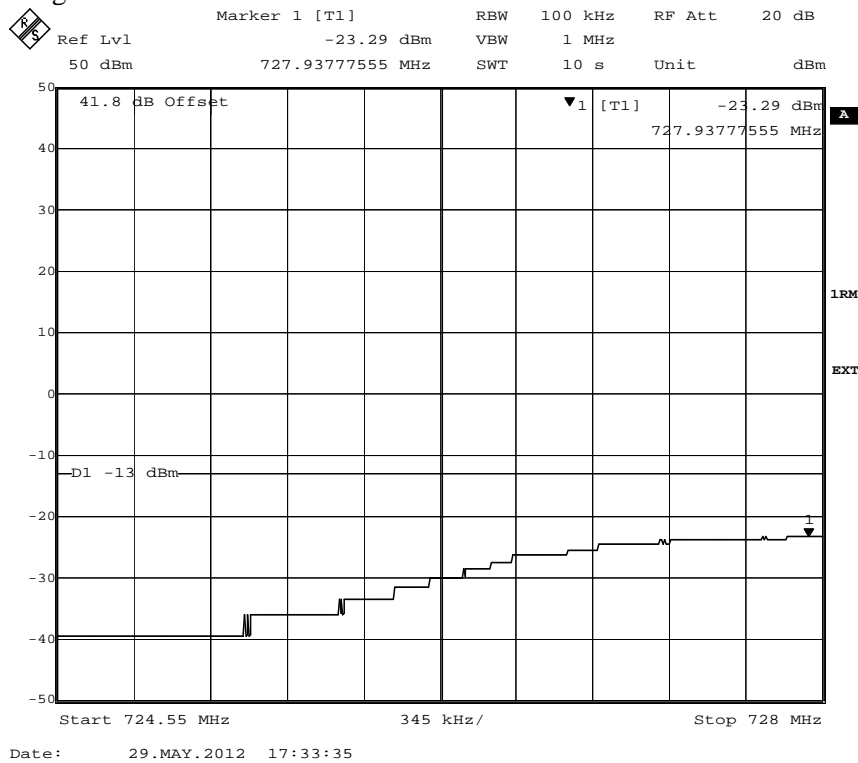


Appendix 4

Diagram 3 a

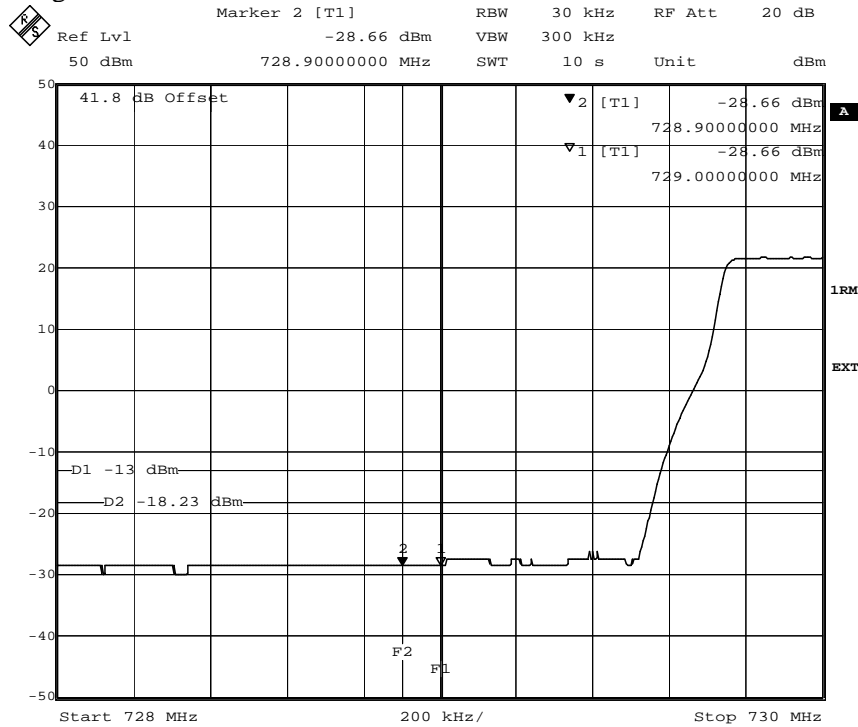

Date: 29.MAY.2012 17:26:21


Diagram 3 b

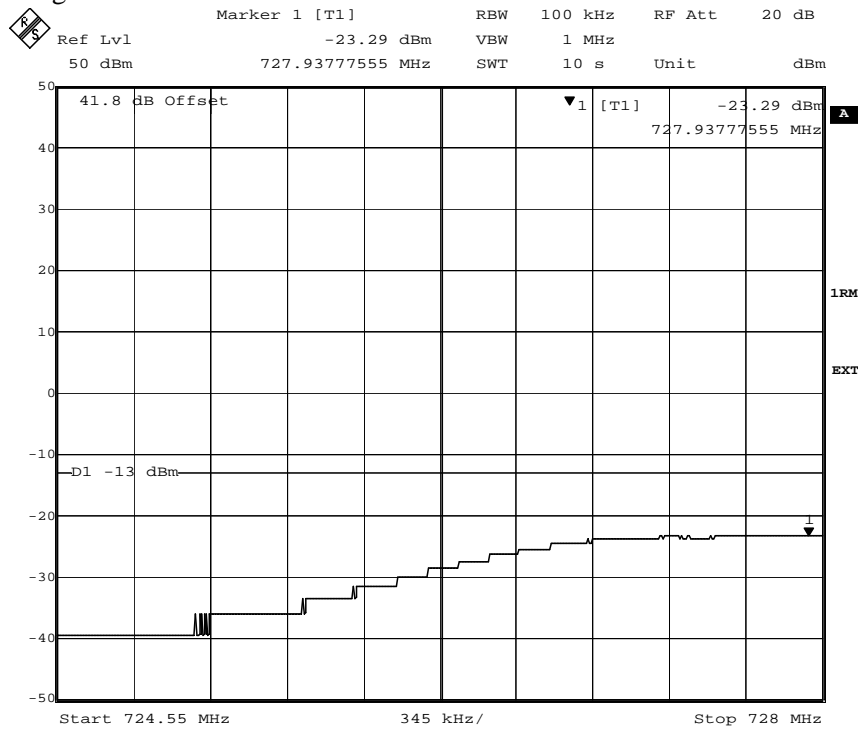

Date: 29.MAY.2012 17:27:59


Appendix 4

Diagram 4 a

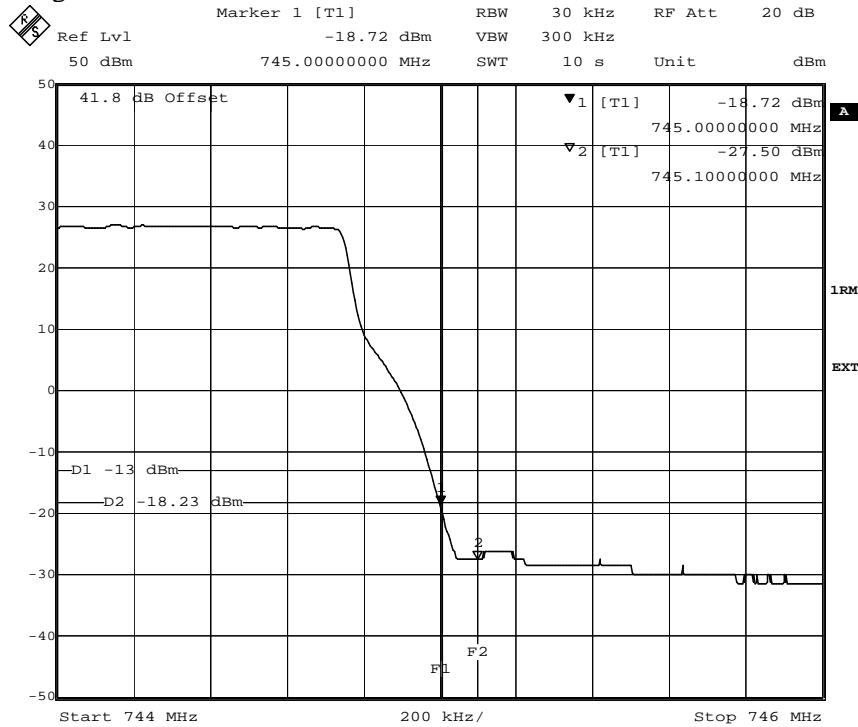

Date: 30.MAY.2012 07:27:18

Diagram 4 b

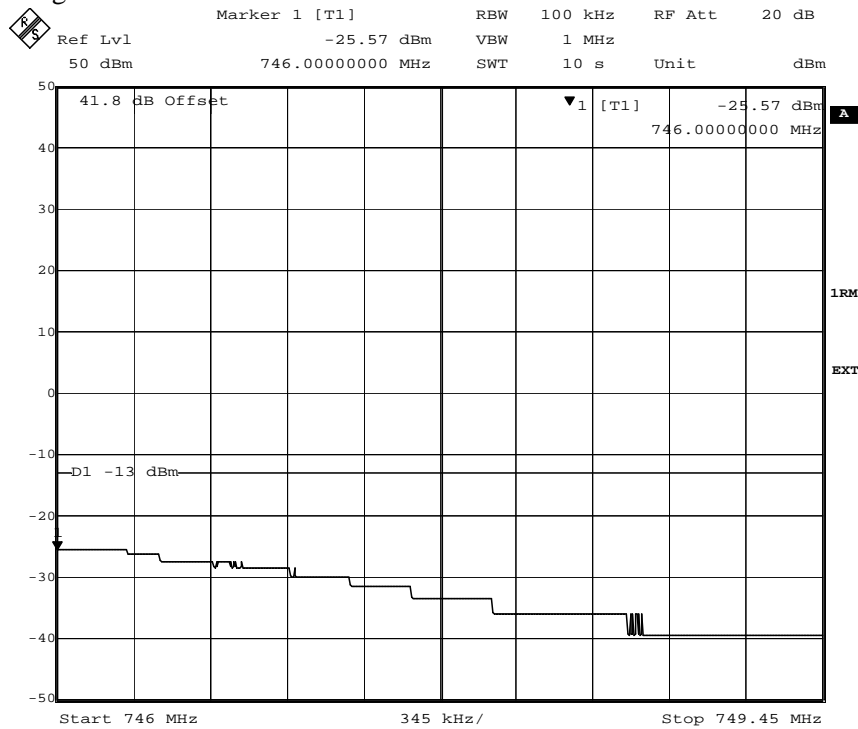

Date: 30.MAY.2012 07:33:21

Appendix 4

Diagram 5 a


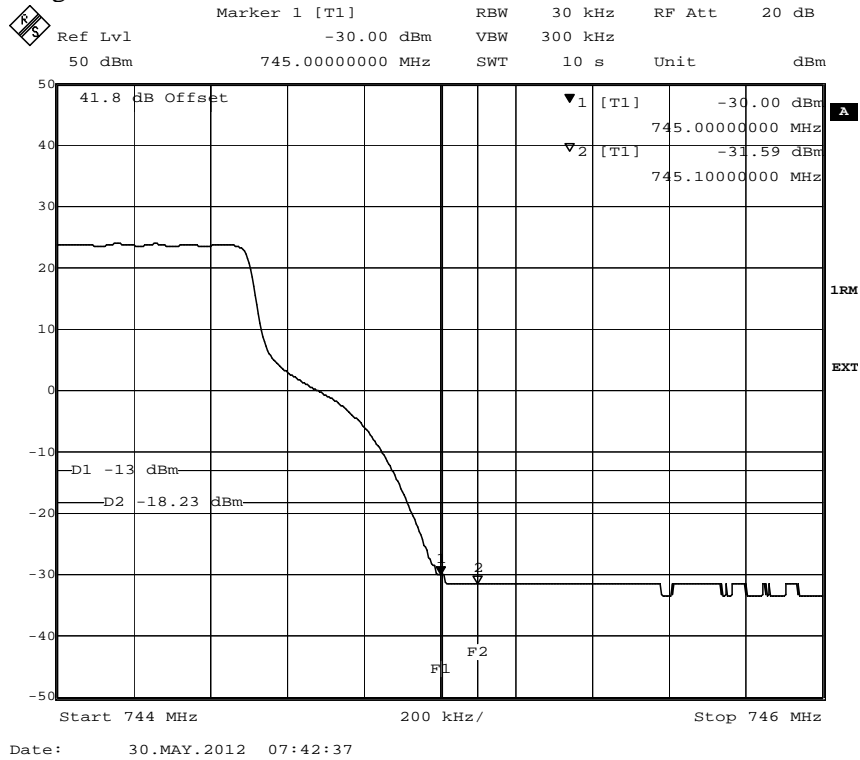


Diagram 5 b

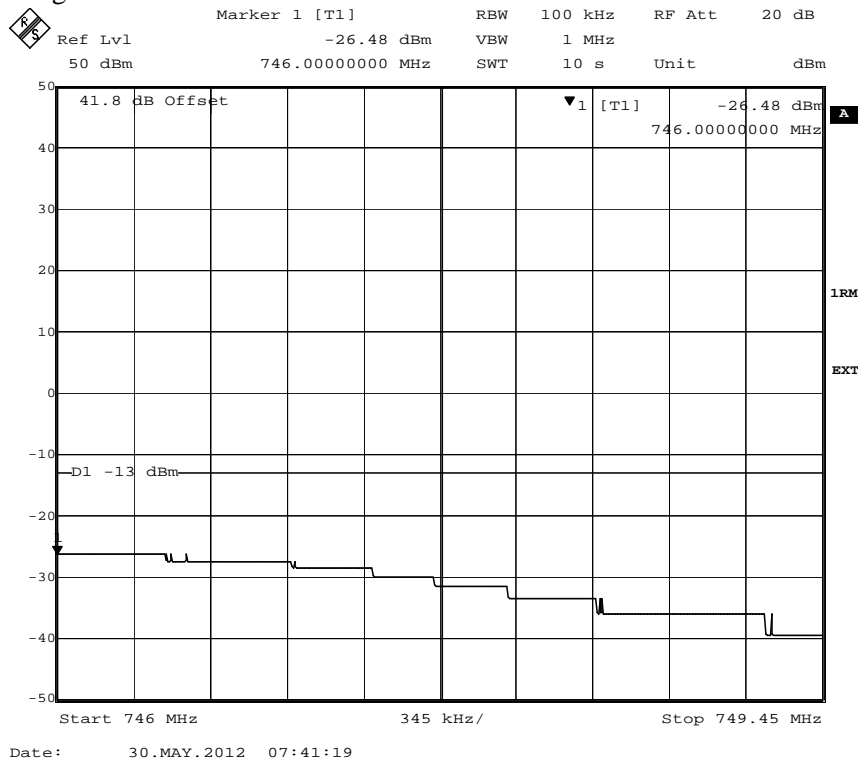

Appendix 4

Diagram 6 a


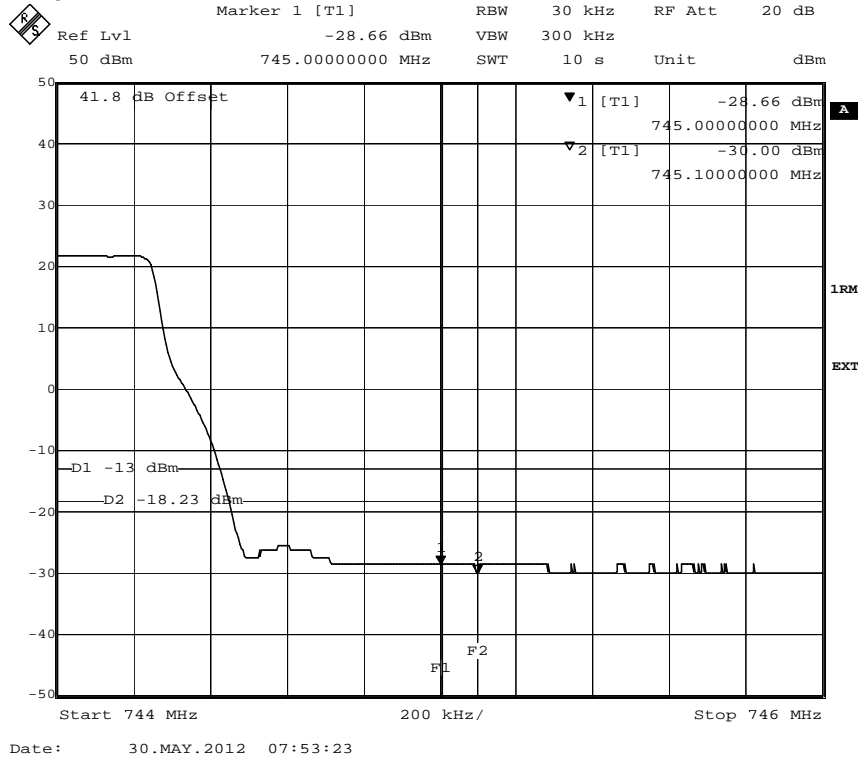


Diagram 6 b

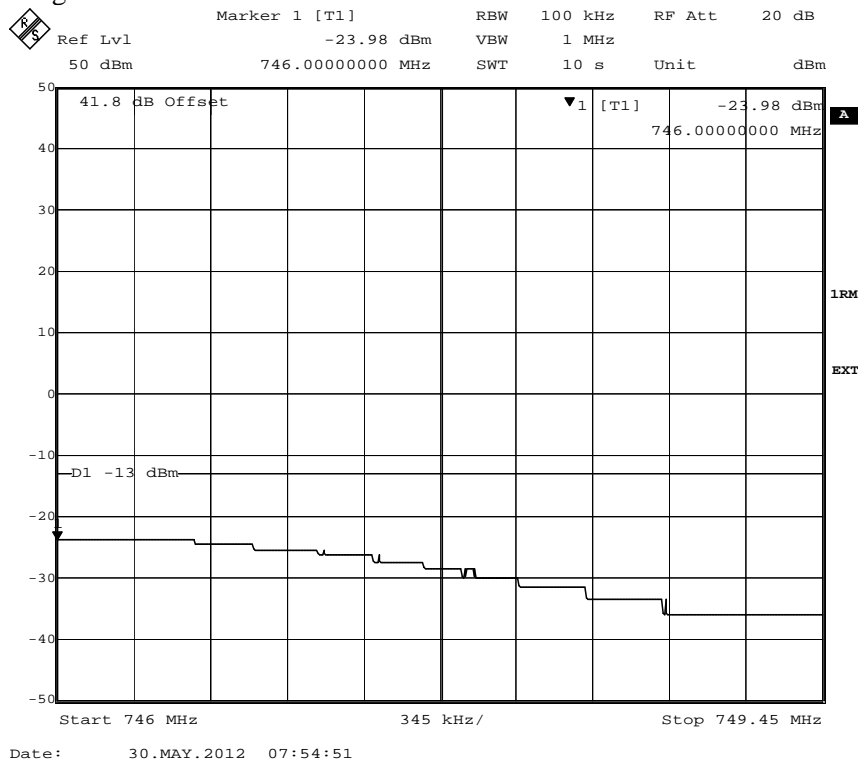

Appendix 5

Conducted spurious emission measurements according to CFR 47 §27.53

Date	Temperature	Humidity
2012-05-29	23 °C ± 3 °C	35 % ± 5 %
2012-05-30	23 °C ± 3 °C	30 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. A pre-measurement was performed with the PEAK detector activated. Emission close to or above the limit with the PEAK detector is measured with the RMS detector activated and the level of the emission is determined with the substitution method.

Measurement equipment	SP number
R&S FSIQ	503 738
High pass filter	901 373
High pass filter	503 740
Directional coupler	504 134
RF attenuator	900 691
RF attenuator	900 229
RF Attenuator	900 116
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Diagram	BW configuration / [MHz]	Tested frequency
1 a+b+c+d	5	B
2 a+b+c+d	15	B
3 a+b+c+d	5	M
4 a+b+c+d	10	M
5 a+b+c+d	15	M
6 a+b+c+d	5	T
7 a+b+c+d	15	T

Remark

The emission at 9 kHz on some plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

The highest internal frequency as declared by the client was 2.4576 GHz, thus the choice of the upper frequency boundary was set to $10 \times 2.5 \text{ GHz} = 25 \text{ GHz}$ for emission measurements.

Limits

Derived from CFR 47 § 27.53 (g): Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 100 kHz RBW.

Complies?	Yes
-----------	-----

Appendix 5

Diagram 1 a:


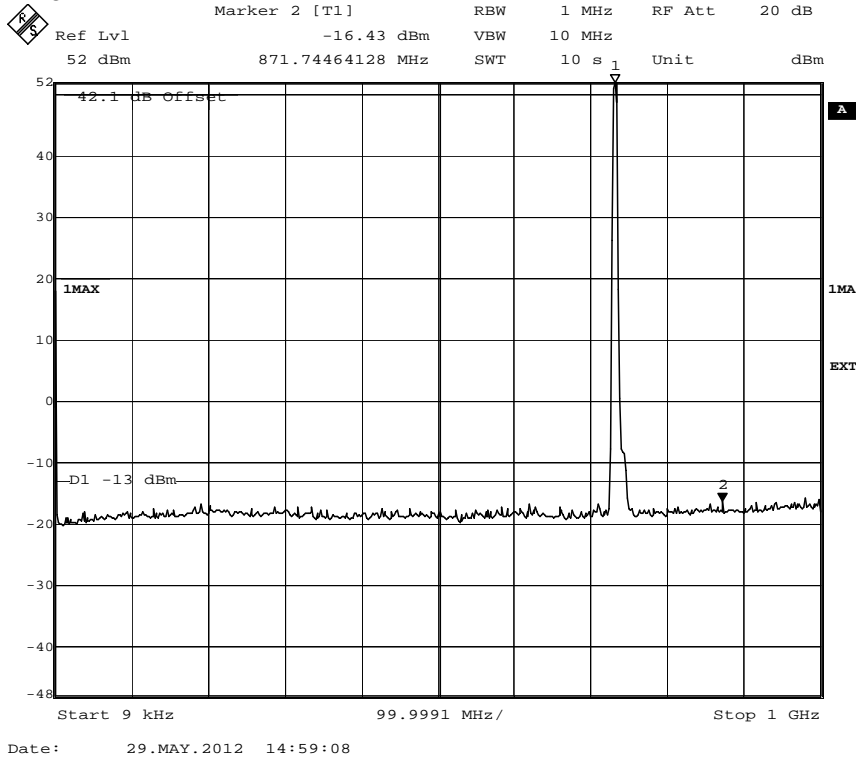


Diagram 1 b:

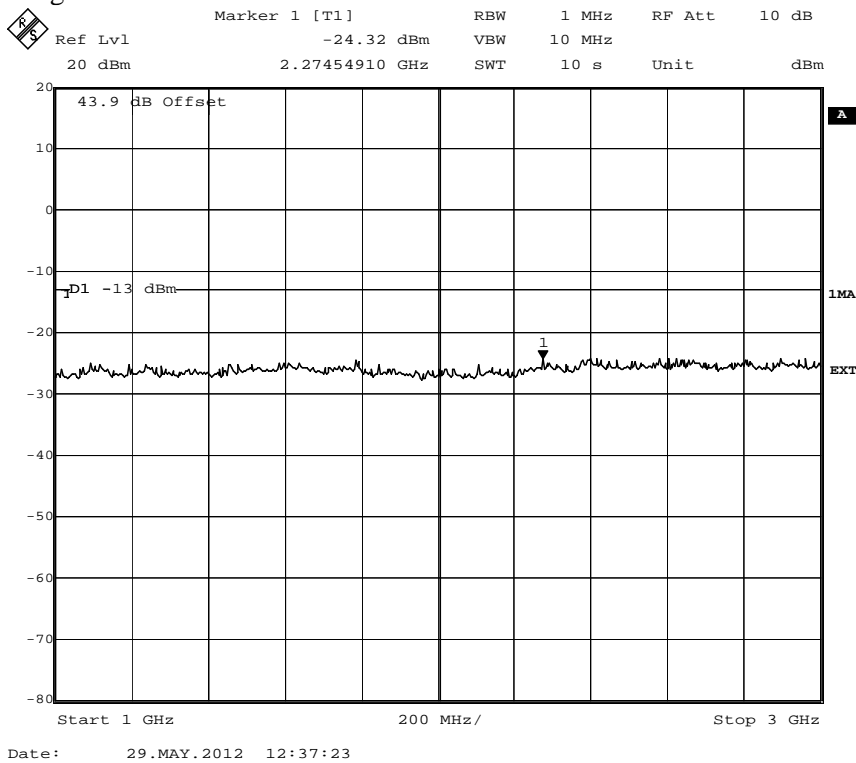

Appendix 5

Diagram 1 c:



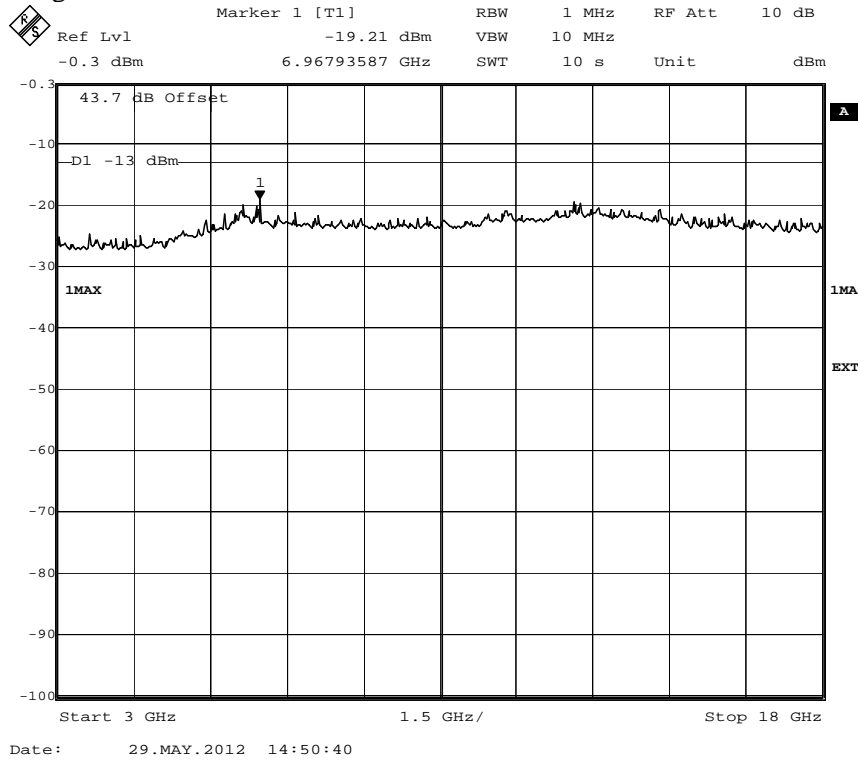


Diagram 1 d:

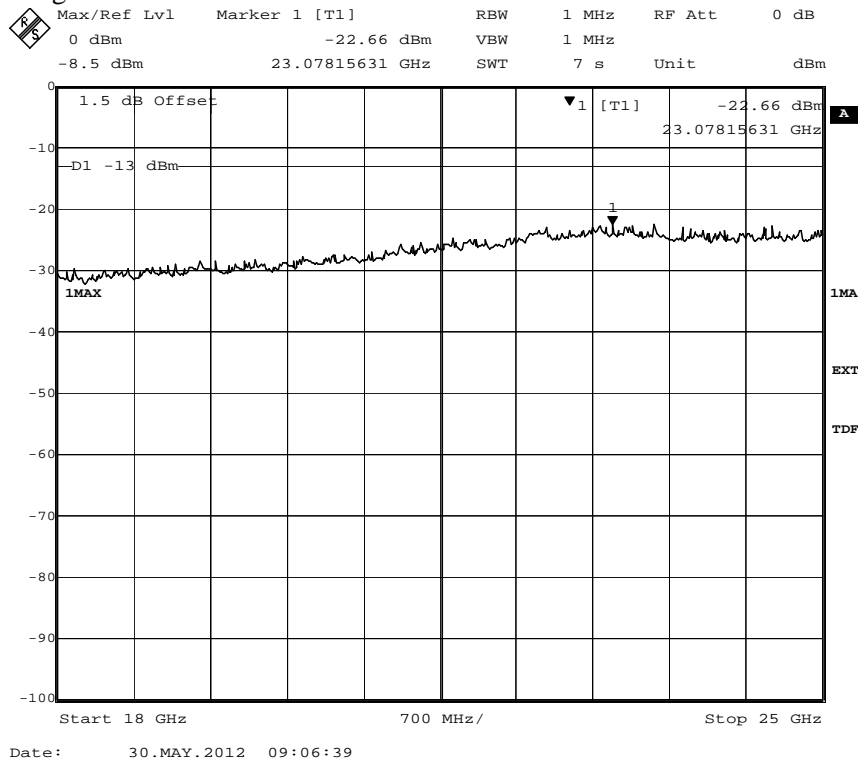


Appendix 5

Diagram 2a:

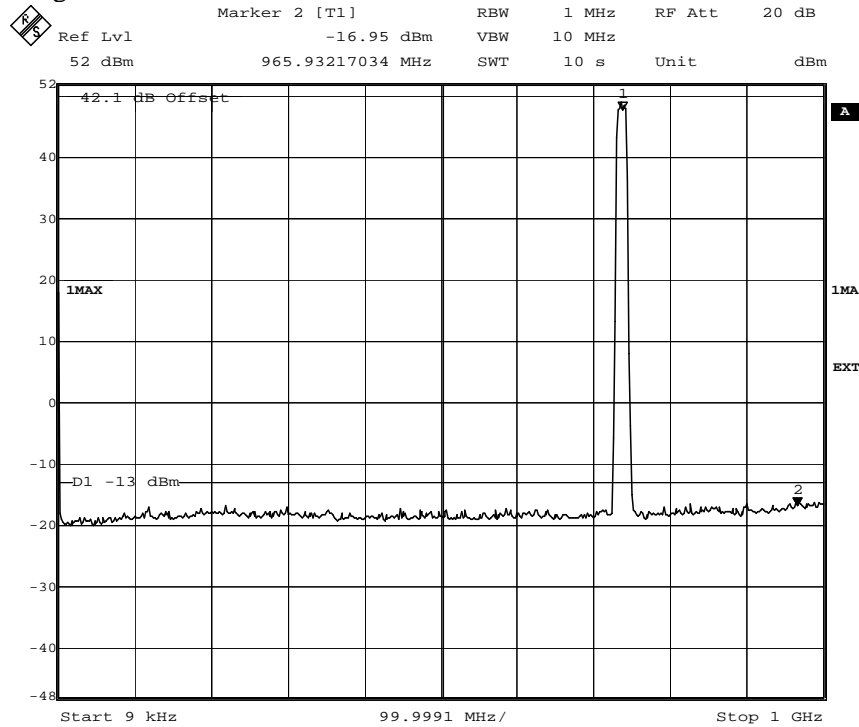

Date: 29.MAY.2012 15:07:12

Diagram 2b:

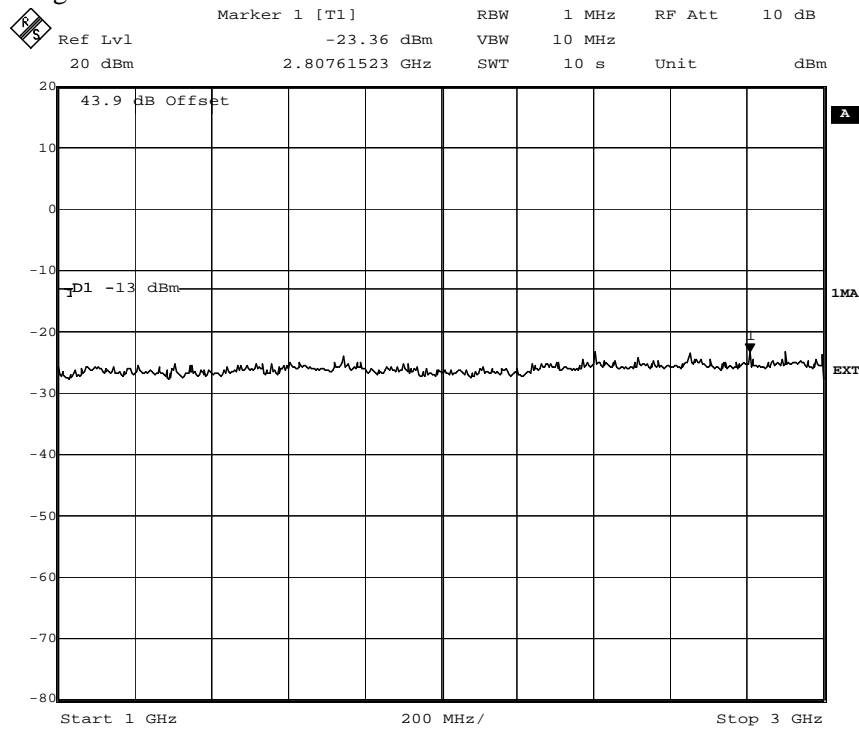

Date: 29.MAY.2012 12:29:46

Appendix 5

Diagram 2c:


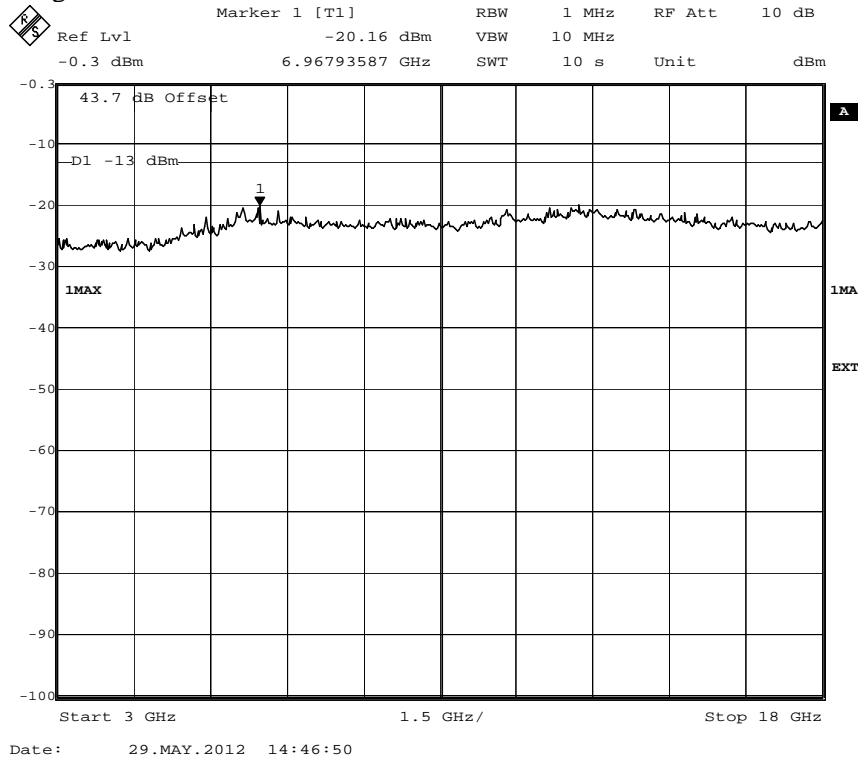


Diagram 2d:

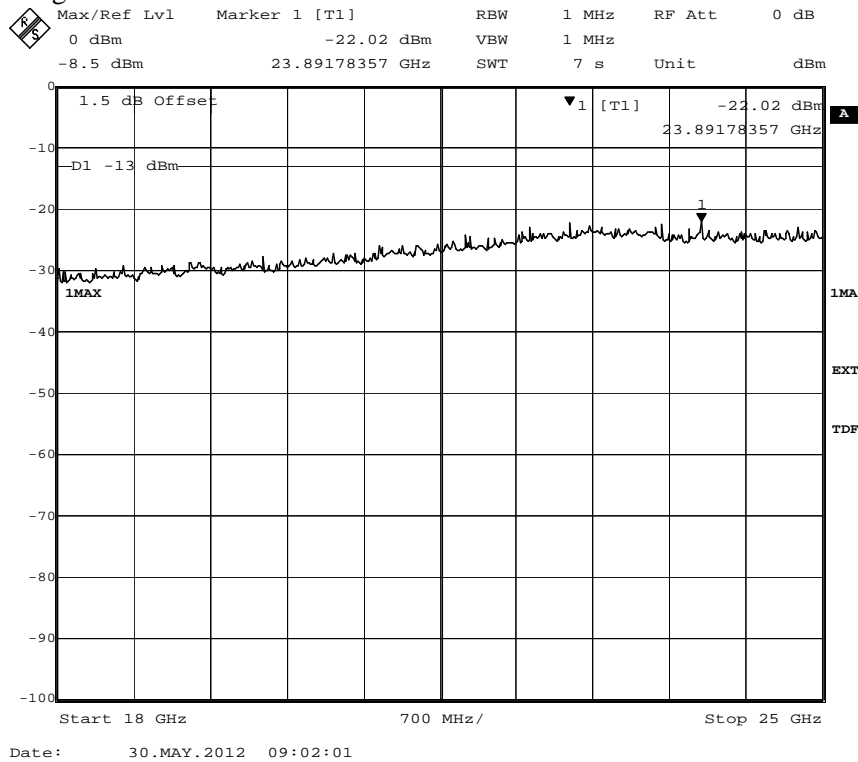

Appendix 5

Diagram 3a:


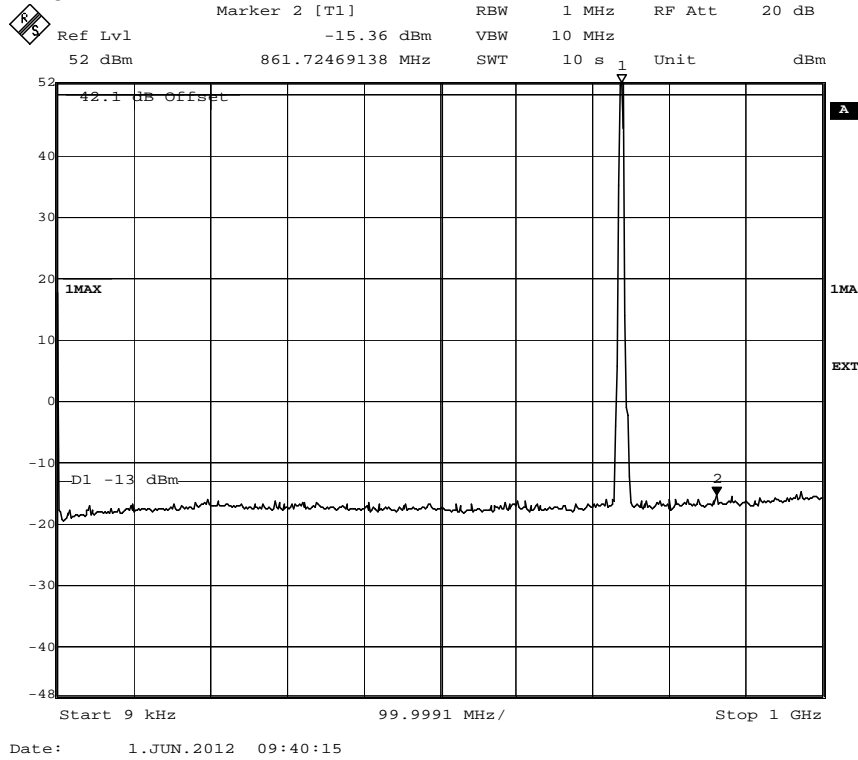


Diagram 3b:

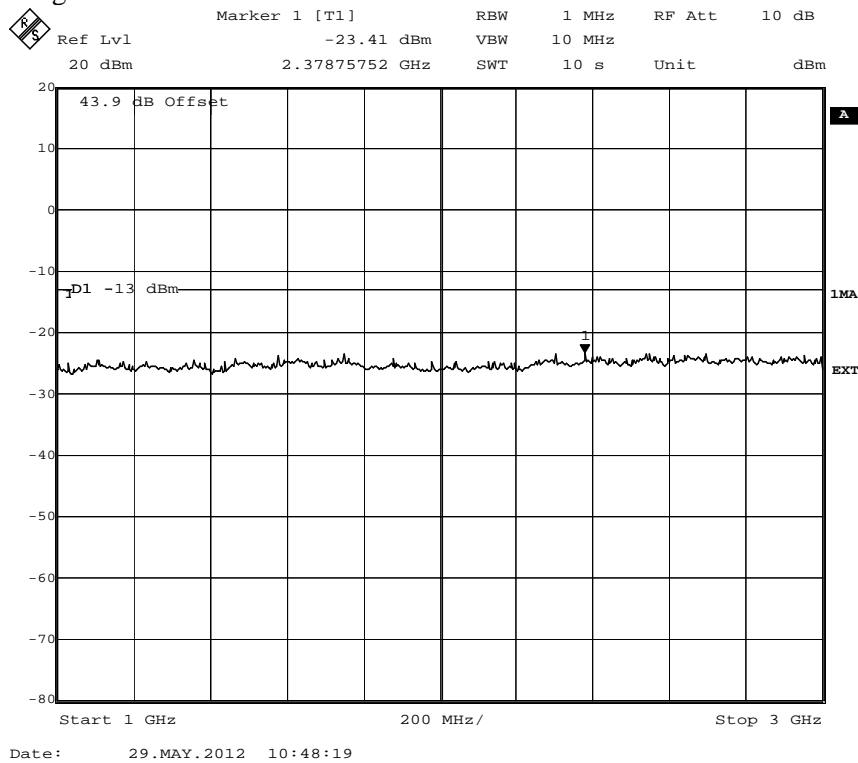

Appendix 5

Diagram 3c:



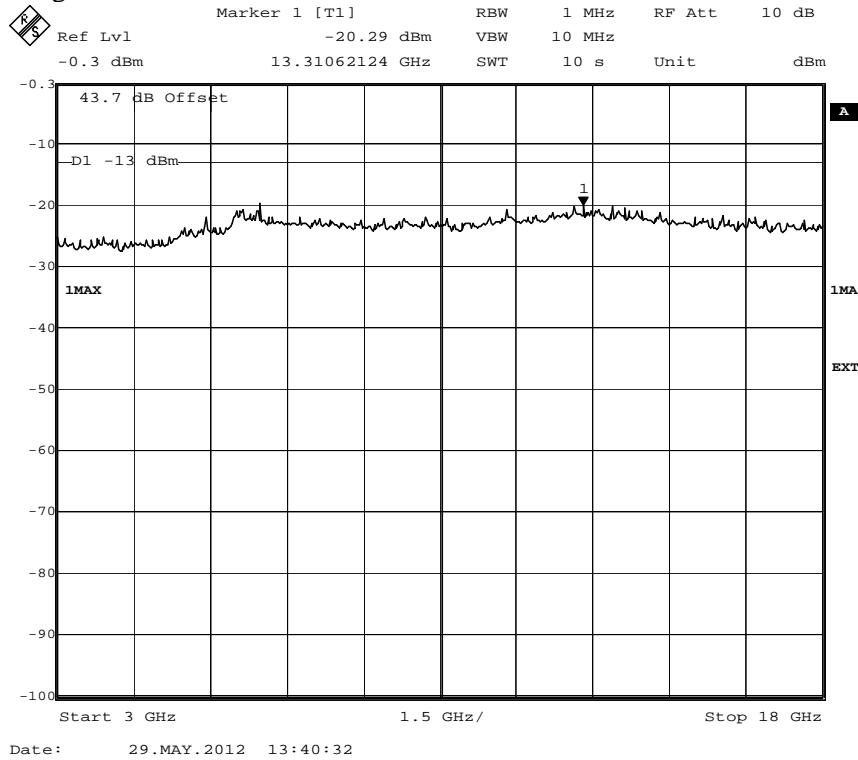


Diagram 3d:

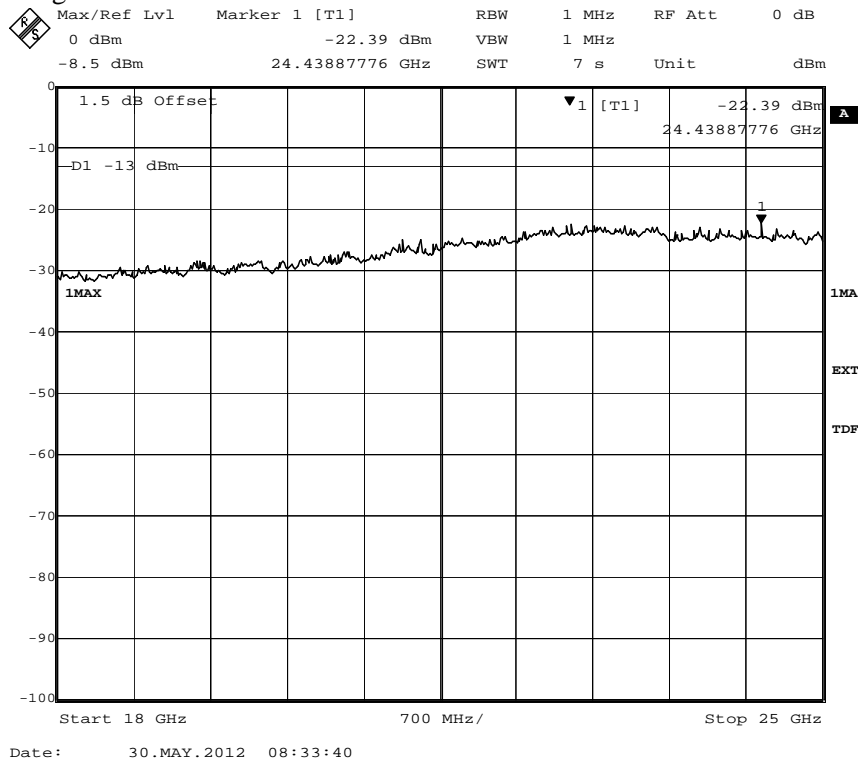


Appendix 5

Diagram 4a:

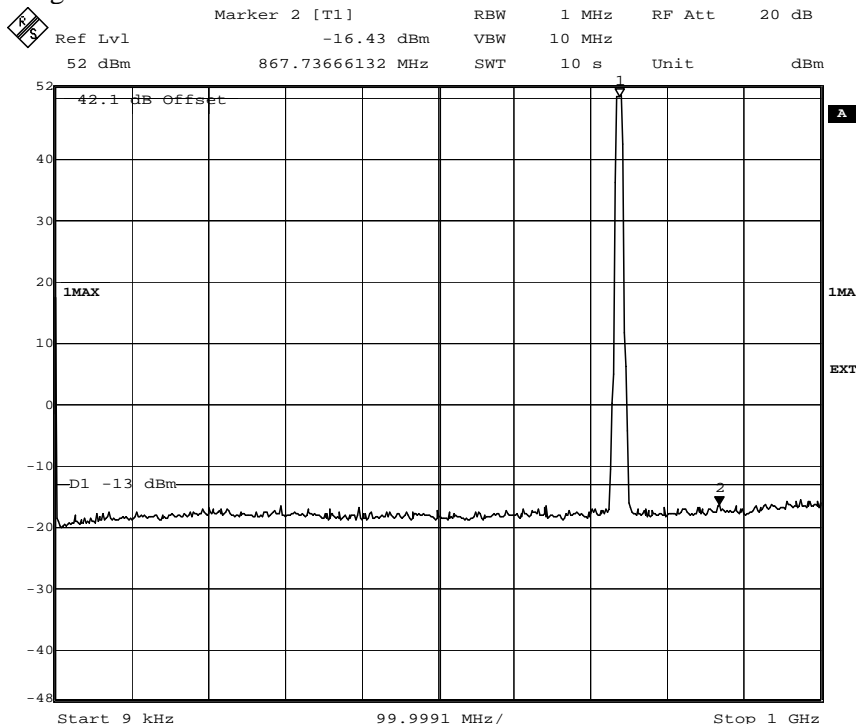

Date: 29.MAY.2012 17:40:10

Diagram 4b:

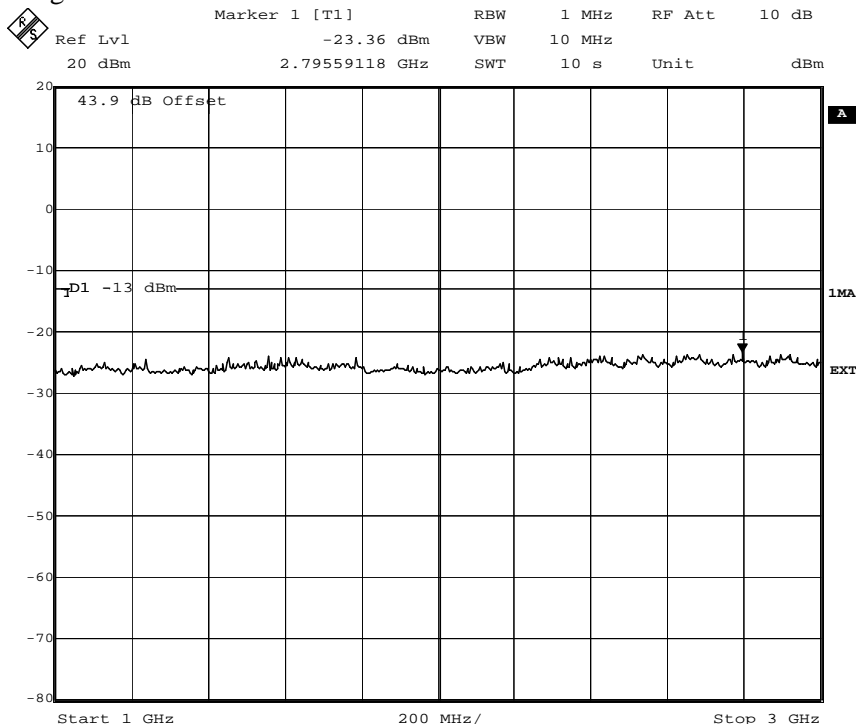

Date: 29.MAY.2012 11:57:43

Appendix 5

Diagram 4c:


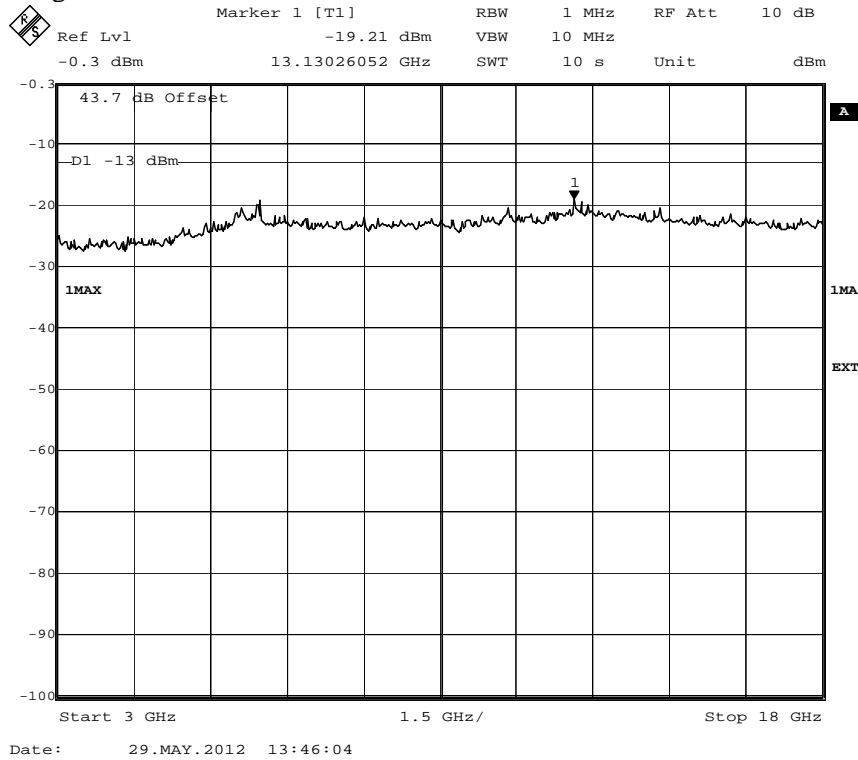


Diagram 4d:

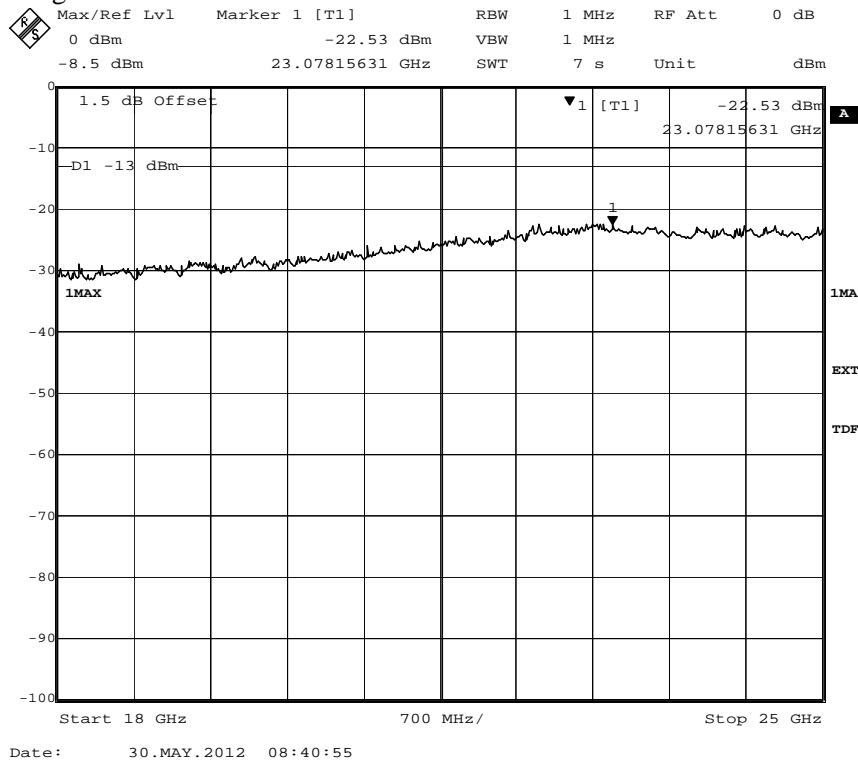

Appendix 5

Diagram 5a:


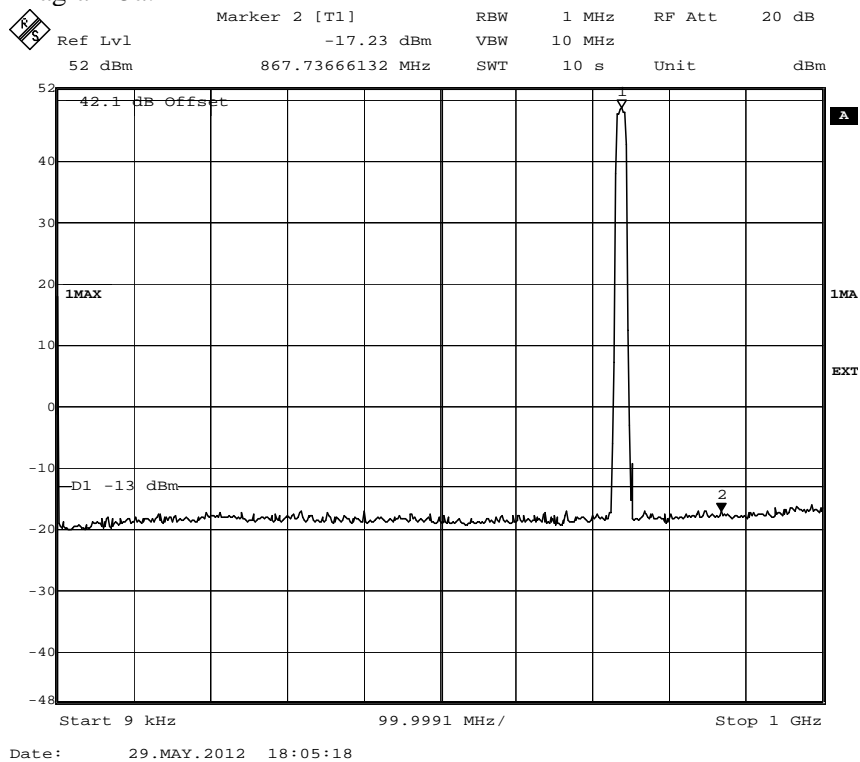


Diagram 5b:

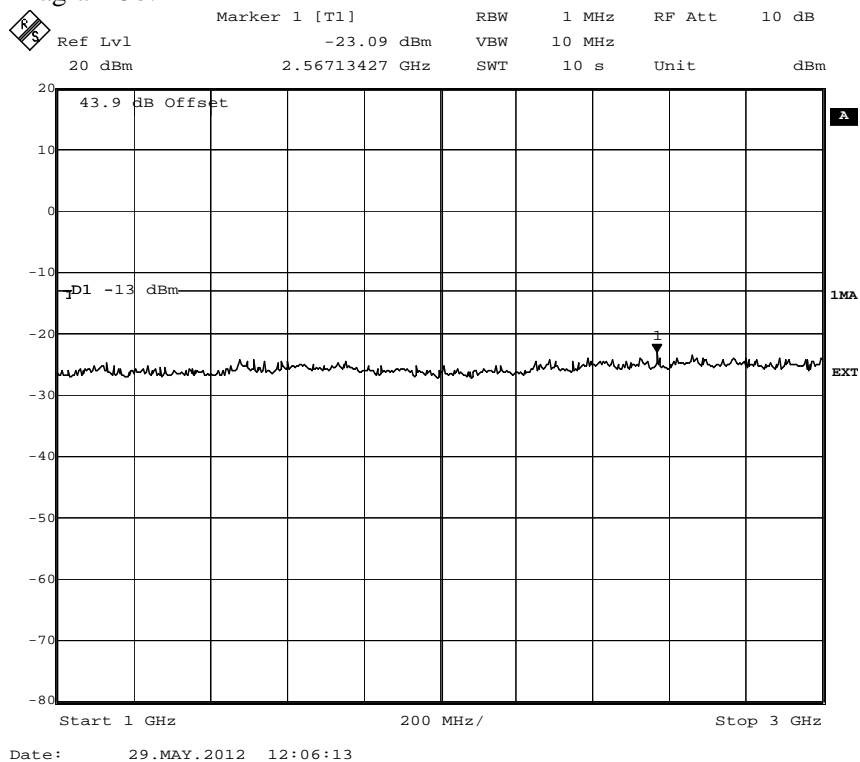

Appendix 5

Diagram 5c:


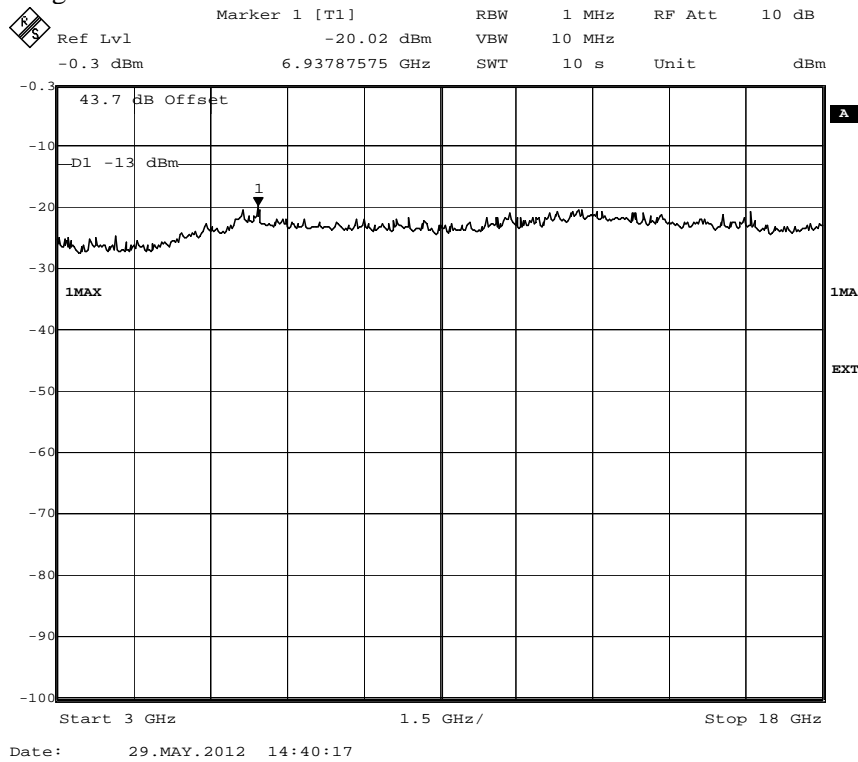


Diagram 5d:

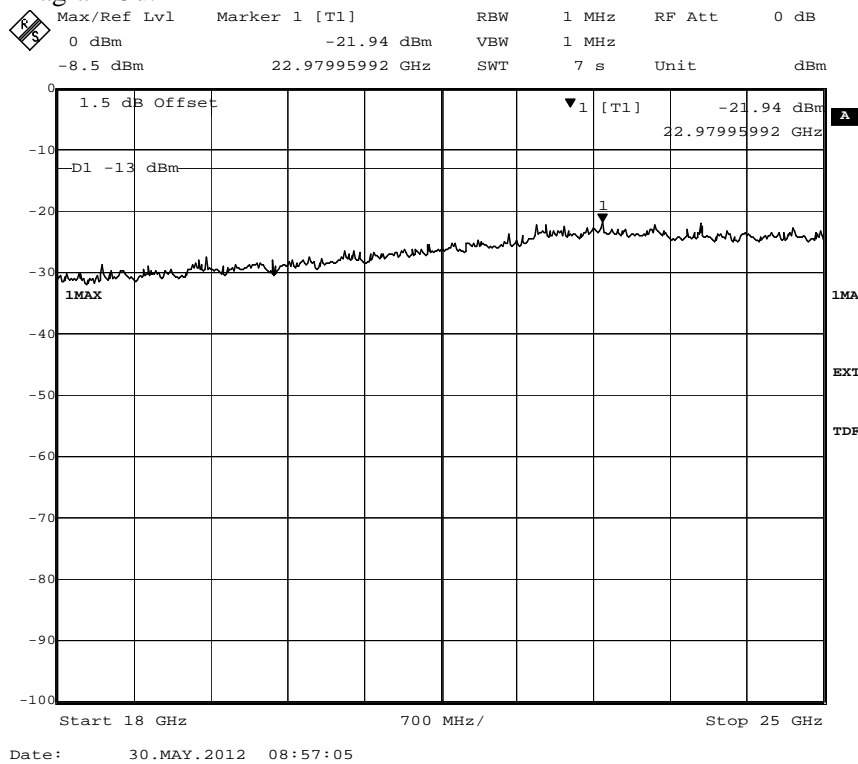

Appendix 5

Diagram 6a:


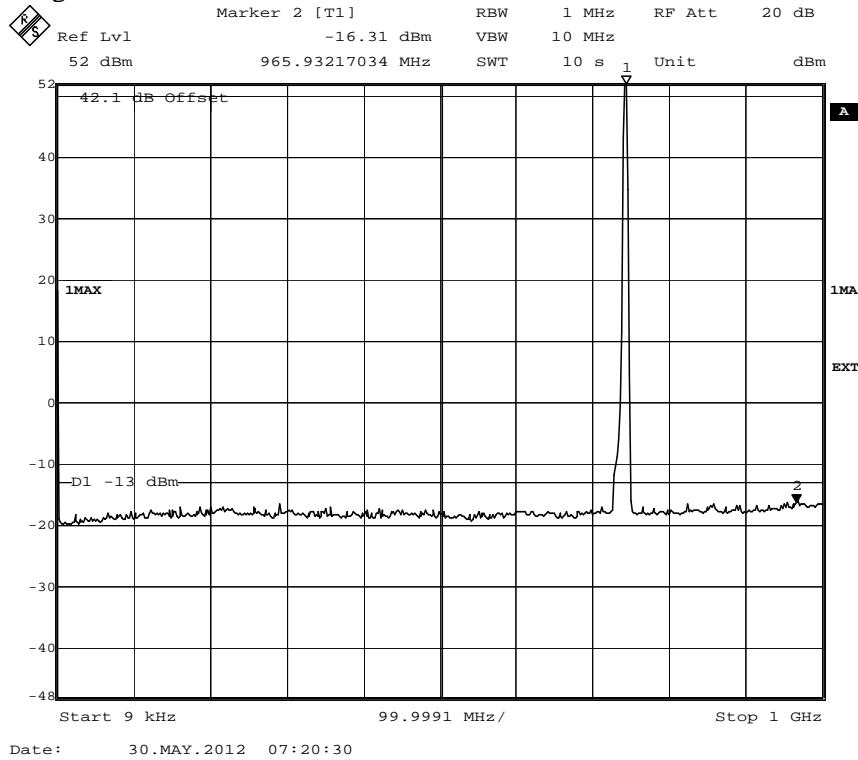


Diagram 6b:

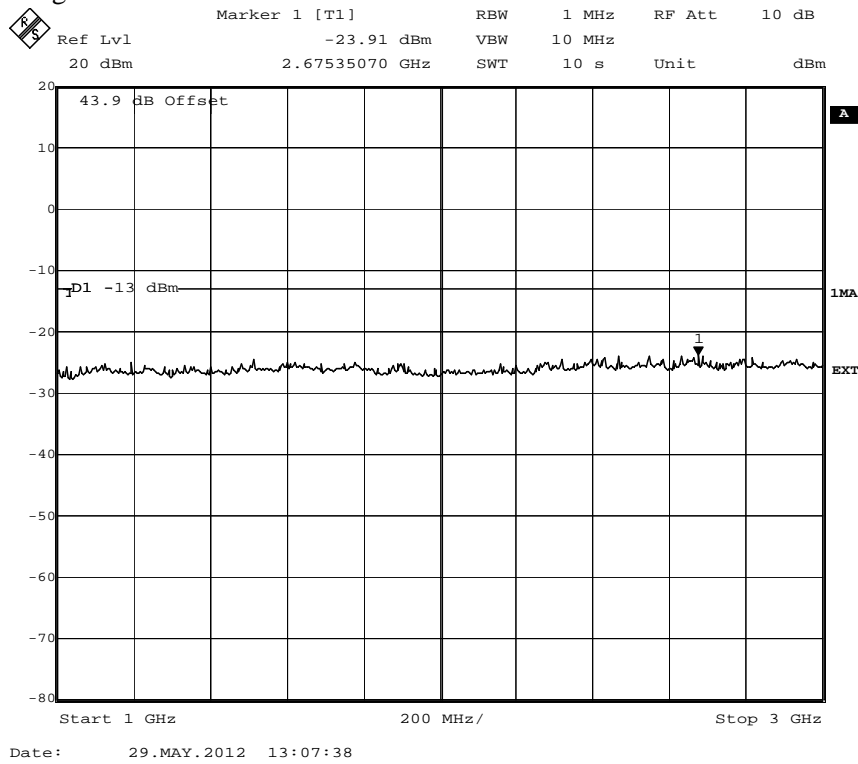

Appendix 5

Diagram 6c:



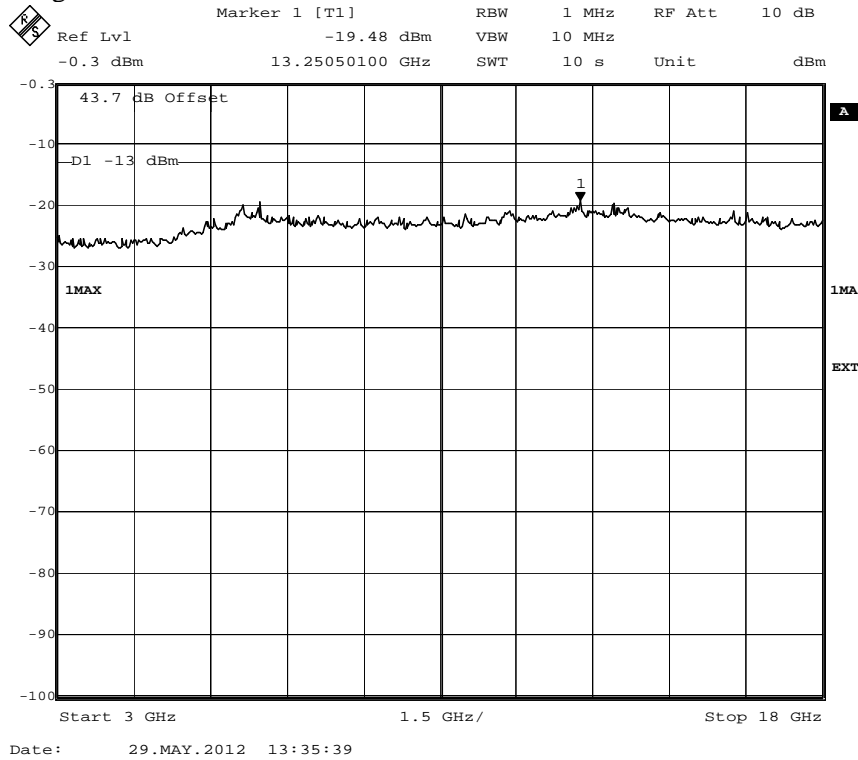


Diagram 6d:

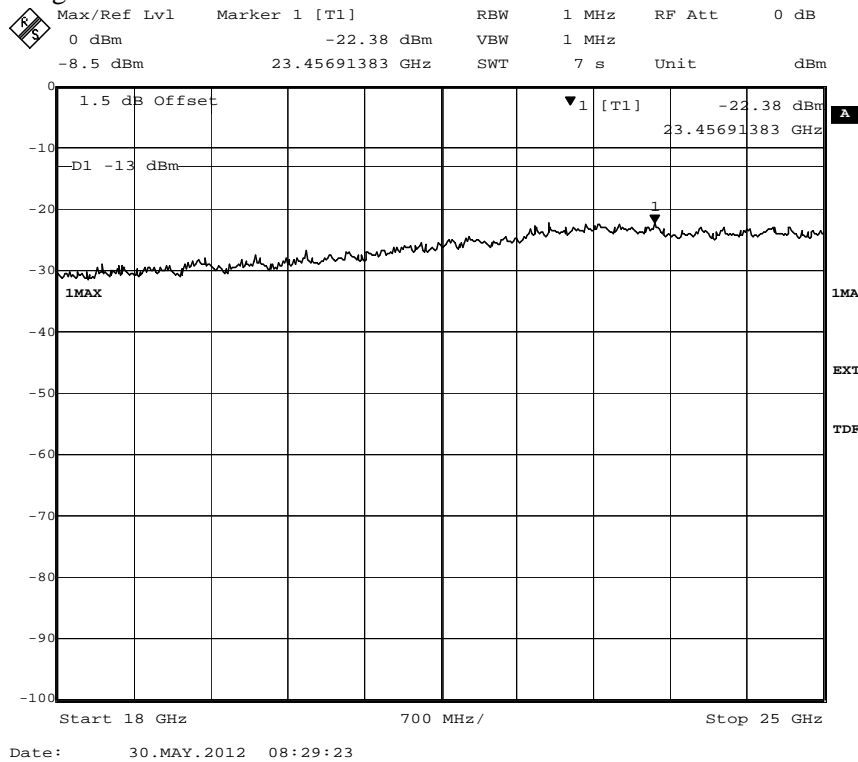


Appendix 5

Diagram 7a:

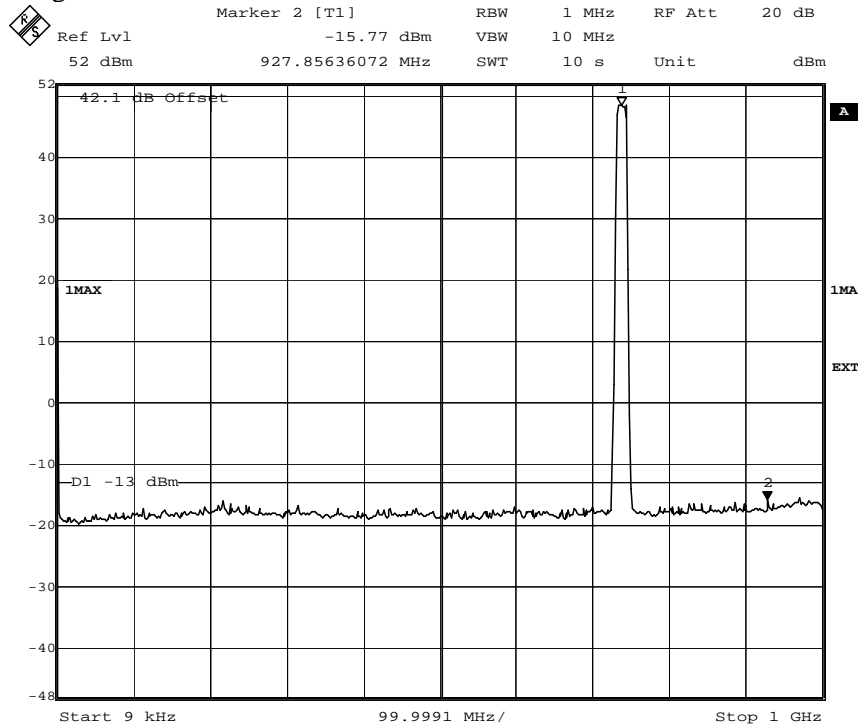

Date: 30.MAY.2012 08:04:10

Diagram 7b:

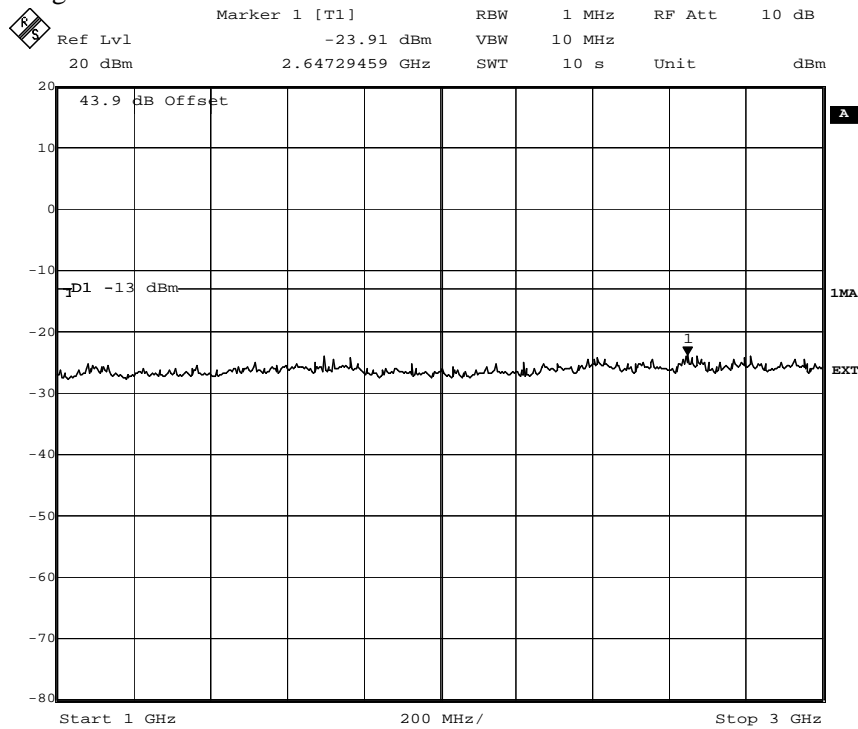

Date: 29.MAY.2012 13:18:08

Appendix 5

Diagram 7c:


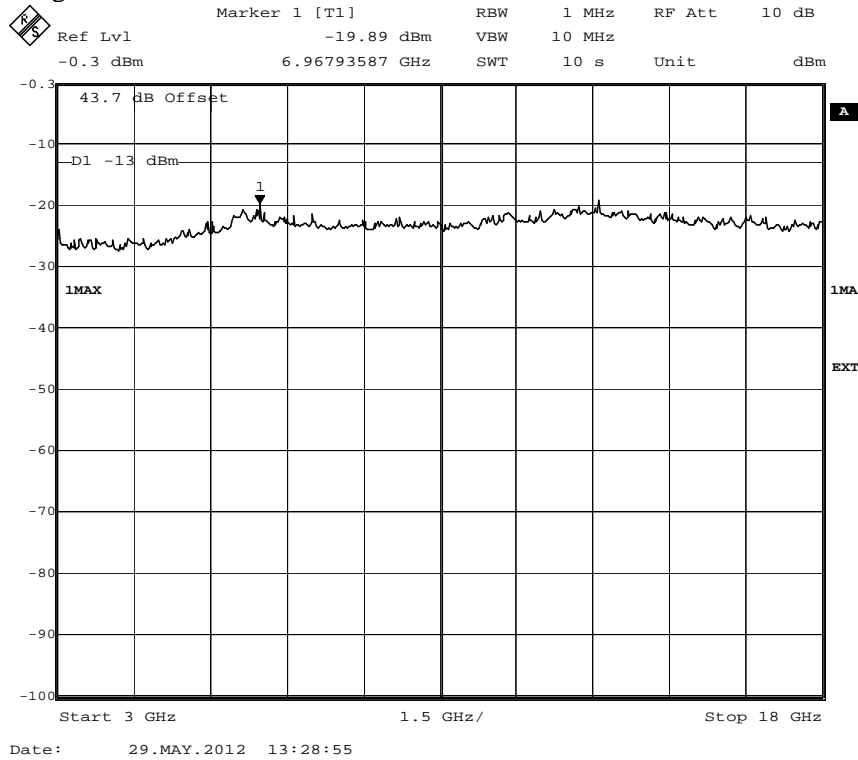


Diagram 7d:

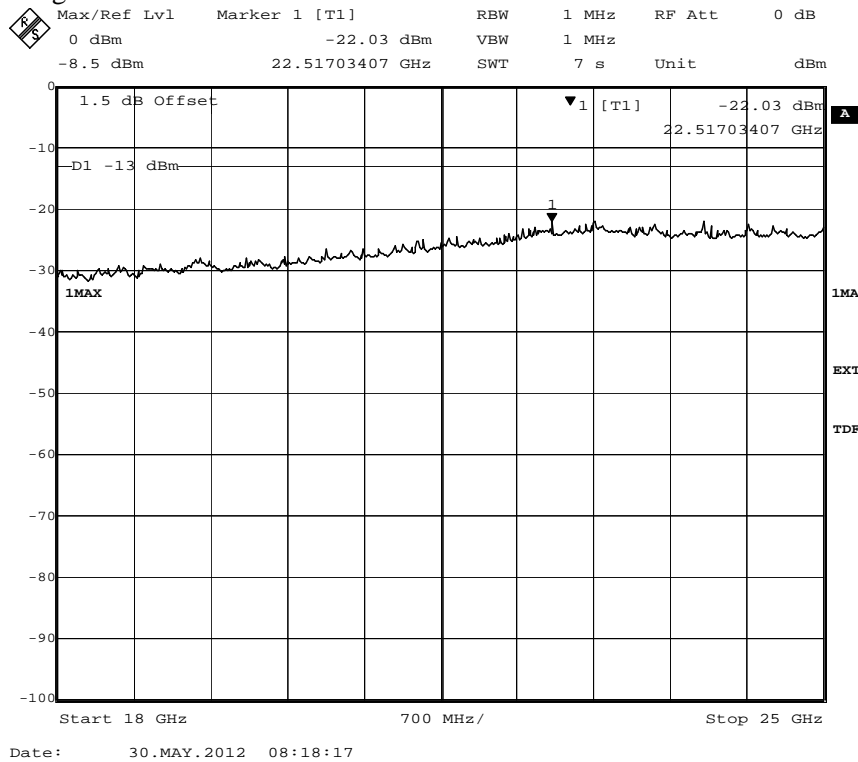

Field strength of spurious radiation measurements according to CFR 47 §27.53

Date 2012-04-24	Temperature 23°C ± 3°C	Humidity 29 % ± 5 %
--------------------	---------------------------	------------------------

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test sites complies with RSS-Gen, Industry Canada file no. 3482A-1 and no. 3482A-2.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 – 25 GHz.

In the frequency range 30 MHz – 25 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was


$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

The test set-up during the spurious radiation measurement are shown in the pictures below:

Test site Tesla

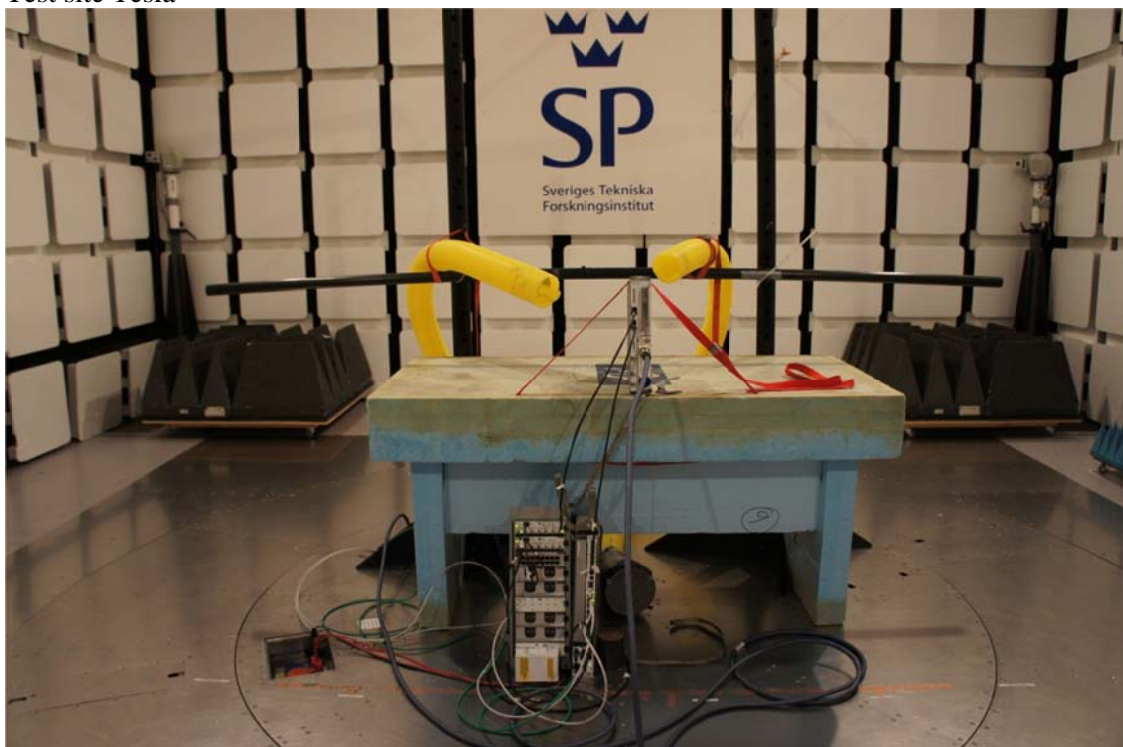

Appendix 6

Measurement equipment

Measurement equipment	SP number
Test site Tesla	503 881
R&S ESU 26	901 553
Software: R&S EMC32, ver. 8.52.0	503 745
Chase Bilog antenna CBL 6111A	503 182
EMCO Horn Antenna 3115	502 175
Standard gain antenna 20240-20	503 674
µComp Nordic, Low Noise Amplifier	901 545
Miteq, Low Noise Amplifier	503 285
High pass filter, Wainright WHKX1.0/18G-10SS	901 373
Testo 625 temperature and humidity meter	504 188

Results, representing worst case

Diagram 1:a-c 0.03-25 GHz E-TM1.1 BW 5.0 MHz (T)

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-25 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz


Limits

Derived from CFR 47 § 27.53 (g): Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, resulting in a limit of -13 dBm per 100 kHz RBW.

Complies?	Yes
-----------	-----


Appendix 6

Diagram 1a

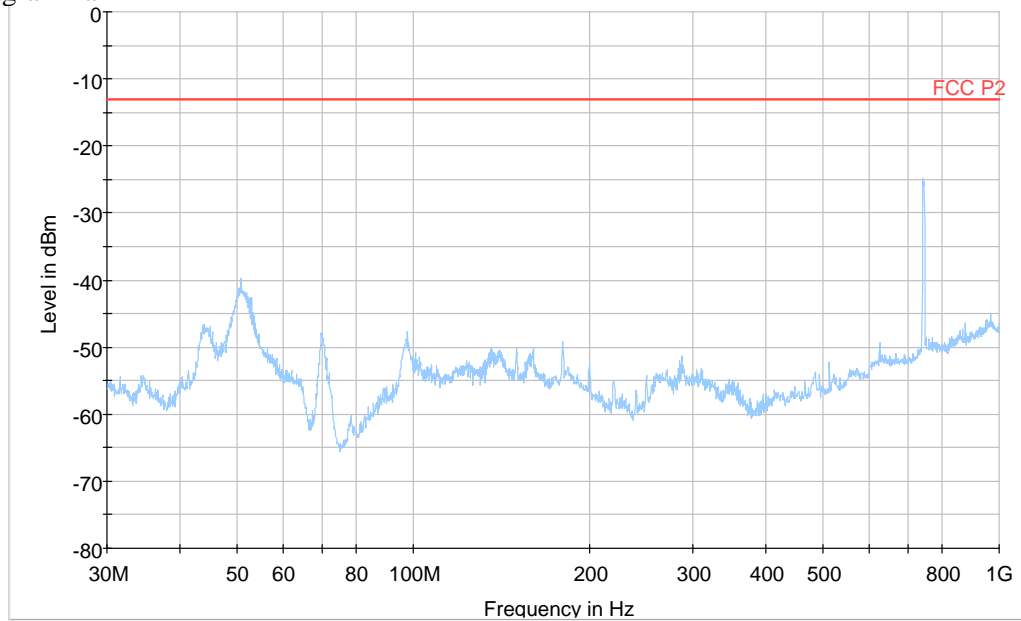


Note: The emission at 742.5 MHz is the carrier frequency and shall be ignored in the context.

Diagram 1b

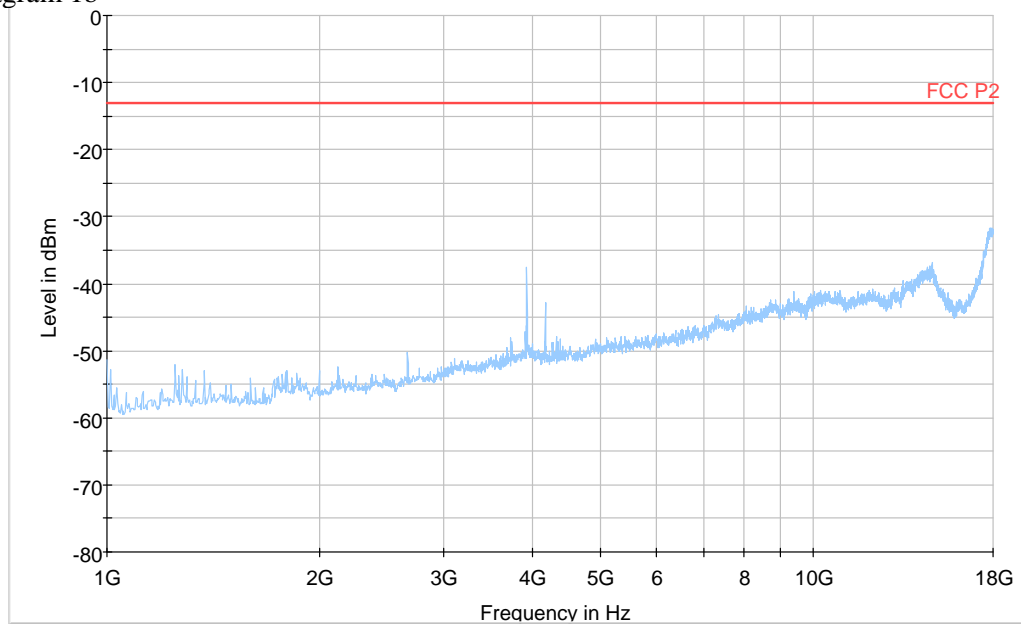

Appendix 6

Diagram 1c

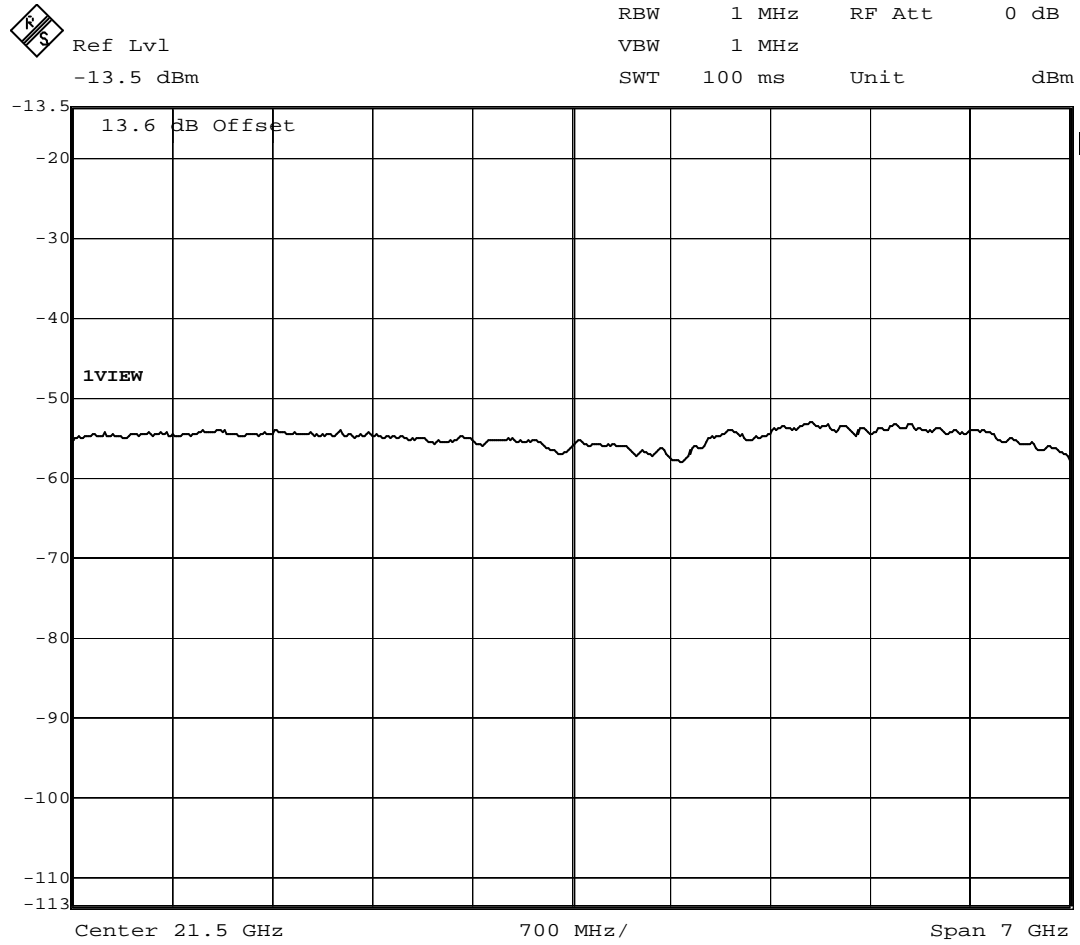

Date: 24.APR.2012 19:16:36

Appendix 7

Frequency stability measurements according to CFR 47 § 27.54

Date 2012-05-10 to 2012-05-14	Temperature (test equipment) 22-24°C ± 3 °C	Humidity (test equipment) 43-58% ± 5 %
----------------------------------	--	---

Test set-up and procedure

The measurement was made per 3GPP TS 36.141. The output was connected to a spectrum analyser. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Temperature cabinet	503 360
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	504 159
Testo 635, Temperature and humidity meter	504 203
Multimeter Fluke 87	502 190

Results

Nominal transmitter frequency was 737.0 MHz in channel bandwidth configuration 5 MHz. with setting for maximum output power.

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	T (°C)	Test model E-TM1.1
-48.0	+20	+3
-55.2	+20	+3
-40.8	+20	+4
-48.0	+30	+6
-48.0	+40	+3
-48.0	+50	+3
-48.0	+10	+4
-48.0	0	-3
-48.0	-10	-3
-48.0	-20	-2
-48.0	-30	+3
Maximum freq. error (Hz)		6
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Appendix 7

Remark

It was deemed sufficient to test one combination of TX frequency, channel bandwidth configuration and test model (modulation), as all combinations share a common internal reference to derive the TX frequency from.

Limits

According to 3GPP TS 36.141, section 6.5.1.5:
The frequency Error shall be within $\pm(0.05 \text{ PPM} + 12 \text{ Hz})$ ($\pm 48.85 \text{ Hz}$).

§ 27.54 Frequency stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Complies?	Yes
-----------	-----

Appendix 8

Receiver spurious emissions measurements according to CFR 47 § 15.111

Date	Temperature	Humidity
2012-05-30	23 °C ± 3 °C	30 % ± 5 %
2012-05-31	23 °C ± 3 °C	28 % ± 5 %

Test set-up and procedure

The measurements were performed according to ANSI C63.4.

Measurements were performed on port “RF B”. The measurement was first performed with peak detector. Emission on frequencies close to or above the limit was re-measured with quasi-peak detector below 1 GHz and with average detector above 1GHz.

During the measurement at the receiver port “RF B” the combined TX/RX port “RF A” was terminated into 50 ohm. The TX was active at maximum power at the TX band center frequency with test model E-TM1.1 in channel bandwidth configuration 5 MHz.

Measurement equipment	SP number
R&S FSIQ40	503 738
RF attenuator	503 248
Testo 635 temperature and humidity meter	504 203

Result

	Channel	Tested port, frequency range
Diagram 1a+b	dl 5035, B	RX B, 9 kHz – 12.5 GHz
Diagram 2a+b	dl 5090, M	RX B, 9 kHz – 12.5 GHz
Diagram 3a+b	dl 5145, T	RX B, 9 kHz – 12.5 GHz

Remark

The highest internal frequency as declared by the client was 2.4576 GHz, thus the choice of the upper frequency boundary was set to $5 \times 2.5 \text{ GHz} = 12.5 \text{ GHz}$ for emission measurements.

Limit

§15.111 Antenna power conduction limits for receivers

The power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts (-57 dBm).

Emission below limit?	Yes
-----------------------	-----

Appendix 8

Diagram 1a:


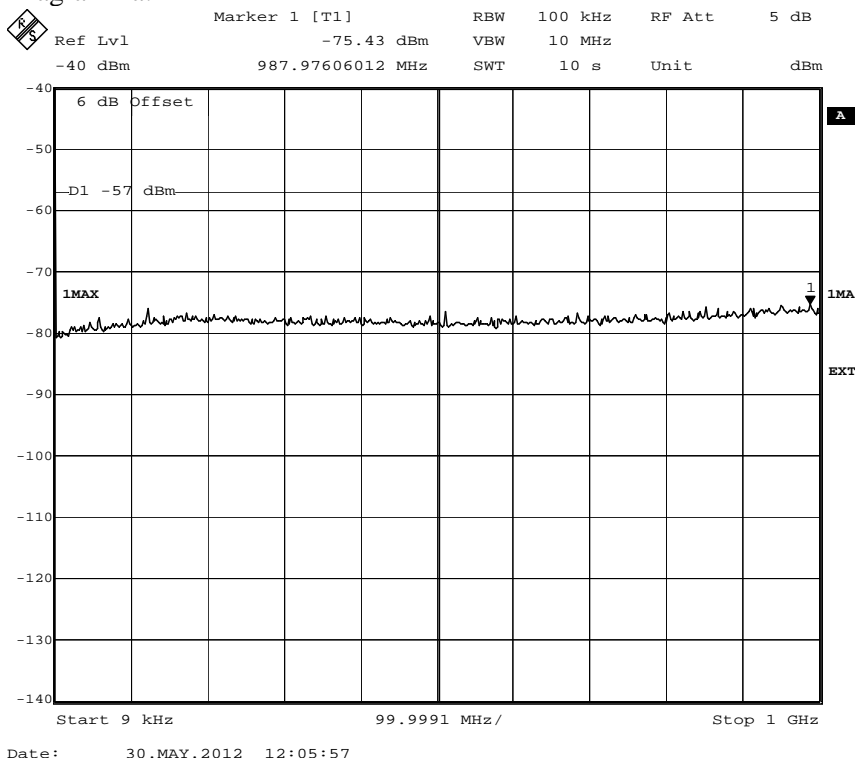


Diagram 1b:

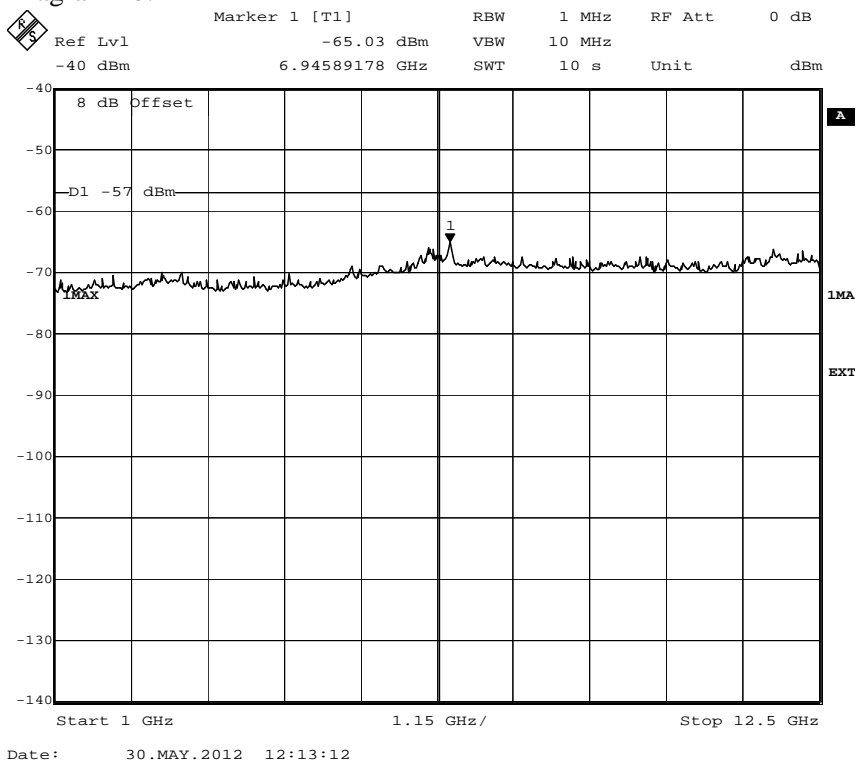

Appendix 8

Diagram 2a:


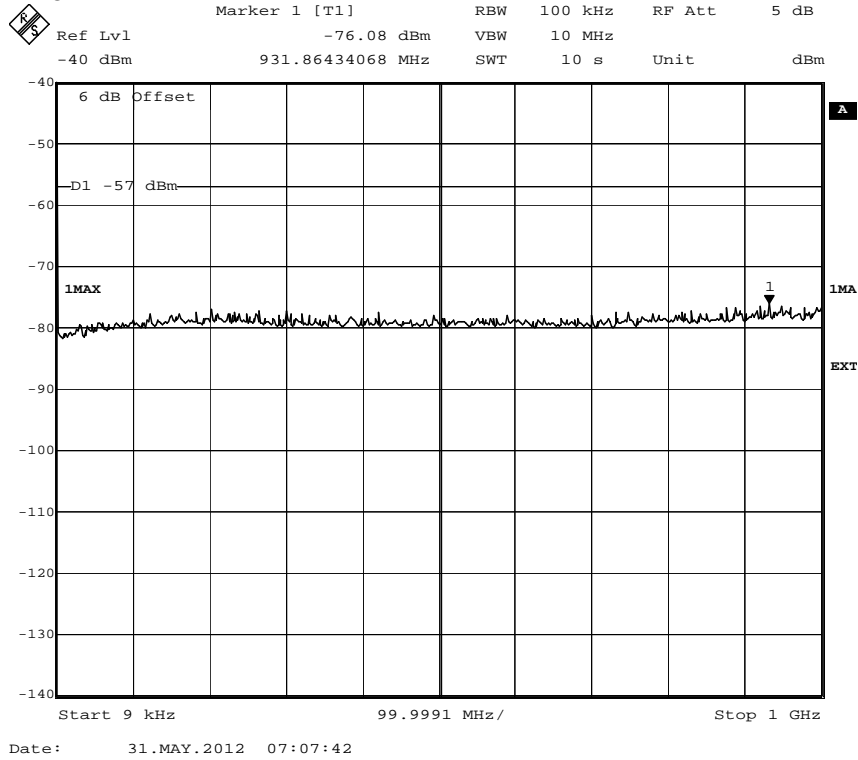


Diagram 2b:

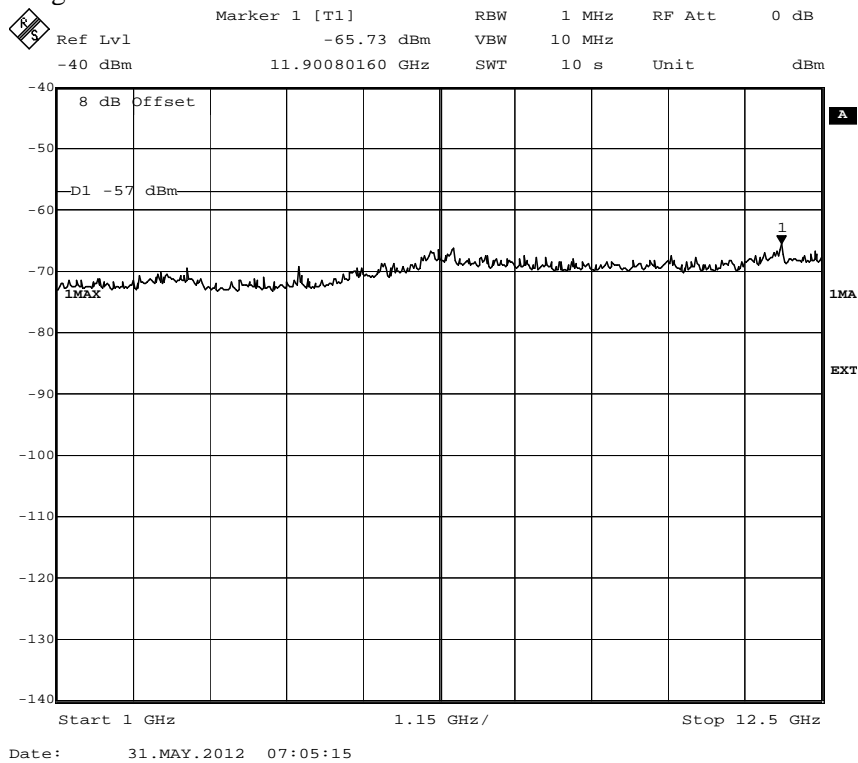

Appendix 8

Diagram 3a:


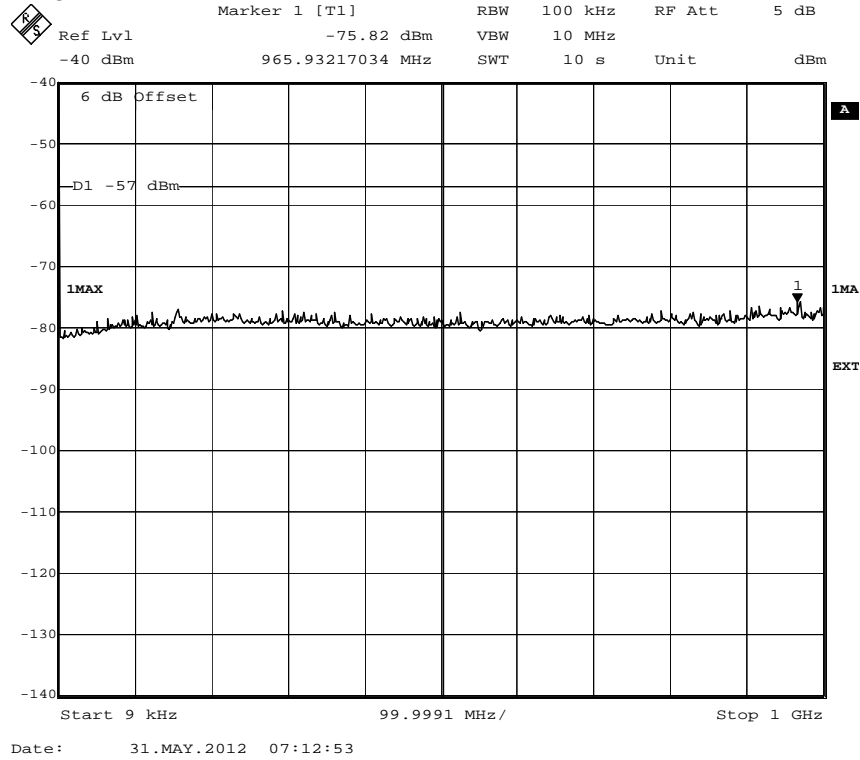


Diagram 3b:

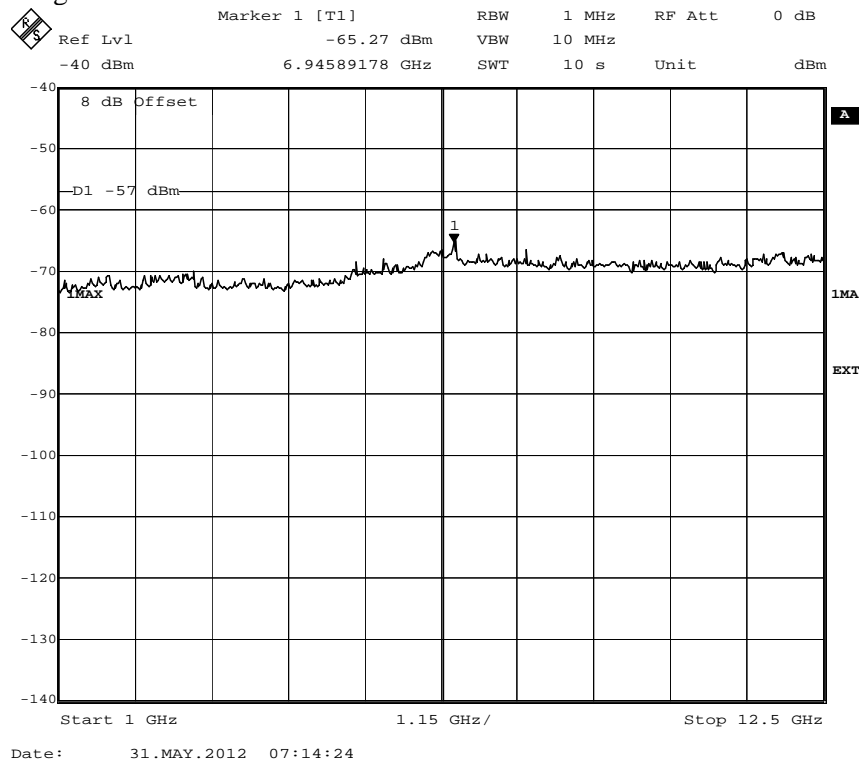

Appendix 9

External photos

Front side



Rear side



Appendix 9

Left side



Right side



Appendix 9

Top side



Bottom side

