



REPORT

issued by an FCC listed Laboratory Reg. no. 93866.
The test site complies with RSS-Gen, IC file no. 3482A-1.

issued by an Accredited Testing Laboratory.

Contact person

Jörgen Wassholm
Electronics
+46 10 516 57 06
jorgen.wassholm@sp.se

Date

2013-12-12 3P06723-01-F24

Reference

Page

1 (2)

SWEDAC
ACKREDITERING
1002
ISO/IEC 17025

Ericsson AB
Camilla Karlsson
PDU HW
Lindholmspiren 11
417 56 Göteborg

Radio measurements on mRRUS 12 B2 radio equipment with FCC ID: TA8AKRC161328 and IC: 287AB-AS161328 (9 appendices)

Test object

Product name: mRRUS 12 B2

Product number: KRC 161 328/X, see appendix 1 for details.

Summary

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-133 ISSUE 6		
2.1046 / RSS-133 6.4 RF power output conducted	Yes	2
2.1046 / RSS-133 6.4 RF power output radiated	Yes	3
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	4
2.1051 / RSS-133 6.5 Band edge	Yes	5
2.1051 / RSS-133 6.5 Spurious emission at antenna terminals	Yes	6
2.1053 / RSS-133 6.5 Field strength of spurious radiation	Yes	7
2.1055 / RSS-133 6.3 Frequency stability	Yes	8

Note: Above RSS-133 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Technical Research Institute of Sweden Electronics – EMC

Performed by

Jörgen Wassholm

Examined by

Anders Nordlöf

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 BORÅS
Sweden

Office location

Västeråsen
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Test setups	Appendix 1
Purpose of test	Appendix 1
RF power output conducted	Appendix 2
RF power output radiated	Appendix 3
Occupied bandwidth	Appendix 4
Band edge	Appendix 5
Spurious emission at antenna terminals	Appendix 6
Field strength of spurious radiation	Appendix 7
Frequency stability	Appendix 8
External photos	Appendix 9



Appendix 1

Description of the test object

Equipment:	Radio equipment mRRUS 12 B2 supporting LTE KRC 161 328/1, 110-240 VAC internal antenna KRC 161 328/2, -48 VDC internal antenna KRC 161 328/3, 110-240 VAC no internal antenna KRC 161 328/4, -48 VDC no internal antenna FCC ID: TA8AKRC161328 IC: 287AB-AS161328
IC model numbers:	
IC MODEL NO:	AS1613281
IC MODEL NO:	AS1613282
IC MODEL NO:	AS1613283
IC MODEL NO:	AS1613284
Antenna ports:	2 TX/RX ports
RF configurations:	Single carrier, multi carrier, MIMO 2x2
Frequency bands:	TX: 1930 – 1990 MHz RX: 1850 – 1910 MHz
Nominal output power per antenna port:	Single carrier: 1x 37.0 dBm (1 x 5 W) 2 – carriers: 2 x 34.0 dBm (2 x 2.5 W) 3 – carriers: 3 x 32.2 dBm (3 x 1.67 W) 4 – carriers: 4 x 31.0 dBm (4 x 1.25 W)
Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidth:	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz and 20 MHz
Nominal power voltage:	-48VDC, 120 VAC 60 Hz

Appendix 1

Operation mode during measurements

LTE Single RAT, MIMO mode

Measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 was used to represent QPSK, test model E-TM3.2 to represent 16QAM and test model E-TM3.1 to represent 64QAM modulation.

The settings below were deemed representative for all traffic scenarios when settings with different modulations, channel bandwidths, number of carriers and RF configurations has been tested to find the worst case setting. The settings below were used for all measurements if not otherwise noted.

MIMO mode single carrier: E-TM1.1

MIMO mode 2 carriers: E-TM1.1

All measurements were performed with the test object configured for the maximum transmit power applicable for the tested configuration.

Conducted measurements

The test object was supplied with -48 VDC by an external power supply. Additional connections are documented in the set-up drawings below. All measurements were made on RF A and additional measurements on RF B to verify that the ports were electrical identical, as declared by the client.

Frequency stability measurements were also tested using 120VAC.

Radiated measurements

The test object was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmit power

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47, IC RSS-133 and IC RSS-Gen.

References

Measurements were done according to relevant parts of the following standards:

- ANSI 63.4-2009
- ANSI/TIA/EIA-603-C-2004
- CFR 47 part 2, October 1st, 2012
- CFR 47 part 24, October 1st, 2012
- 3GPP TS 36.141, version 11.4.0
- RSS-Gen Issue 3
- RSS-133 Issue 6



Appendix 1

Measurement equipment

	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S FSIQ 40	2014-07	503 738
R&S ESU 26	2014-05	901 553
R&S ESI 26	2014-07	503 292
R&S FSQ 40	2014-03	504 143
R&S ESU 40	2014-07	901 385
R&S SME 06	2014-07	502 755
Control computer with R&S software EMC32 version 8.52.0	-	503 899
High pass filter	2014-07	901 501
High pass filter	2014-07	901 502
High pass filter	2014-07	504 199
High pass filter	2014-07	503 740
RF attenuator	2014-07	504 159
RF attenuator	2014-07	900 233
RF attenuator	2014-07	900 691
RF attenuator	2013-12	901 508
Chase Bilog Antenna CBL 6111A	2014-10	503 182
EMCO Horn Antenna 3115	2015-09	502 175
ETS Lindgren Horn Antenna 3115	2015-03	902 212
EMCO Horn Antenna 3115	2015-09	501 548
Std.gain horn FLANN model 20240-20	-	503 674
μComp Nordic, Low Noise Amplifier	2014-04	901 545
MITEQ Low Noise Amplifier	2014-09	503 285
Multimeter Fluke 87	2014-08	502 190
Temperature and humidity meter, Testo 635	2014-06	504 203
Temperature and humidity meter, Testo 635	2014-06	504 188
Temperature Chamber	-Note ¹⁾	503 360

Note ¹⁾: The temperature and humidity meter testo 635 SP number 504 203 was used to monitor the temperature.



Appendix 1

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor k=2 (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered 2013-10-21.

Manufacturer's representative

Mihai Simon, Ericsson AB.

Test engineers

Tomas Isbring, Andreas Johnson, Kexin Chen, Hyder Khalaf and Jörgen Wassholm, SP.

Test participant

Mihai Simon.

Appendix 1
Test frequencies used for conducted and radiated measurements

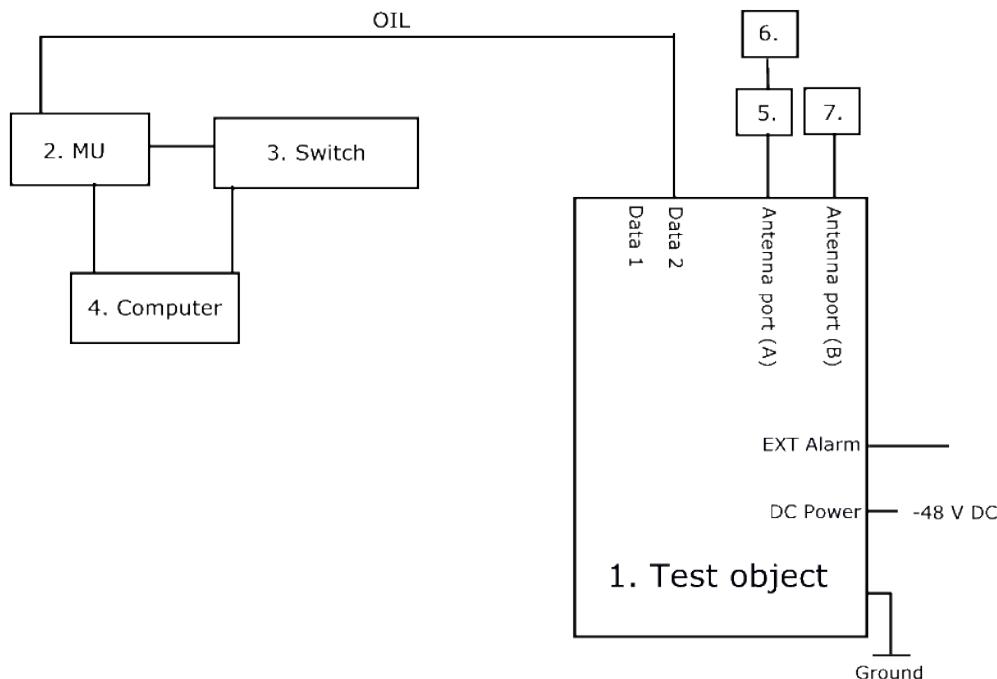
EARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
607	1930.7	B	TX band bottom (B) frequency in 1.4 MHz BW configuration.
615	1931.5	B	TX band bottom (B) frequency in 3 MHz BW configuration.
625	1932.5	B	TX band bottom (B) frequency in 5 MHz BW configuration.
650	1935.0	B	TX band bottom (B) frequency in 10 MHz BW configuration.
675	1937.5	B	TX band bottom (B) frequency in 15 MHz BW configuration.
700	1940.0	B	TX band bottom (B) frequency in 20 MHz BW configuration.
607 657	1930.7 1935.7	B2	TX band bottom (B) frequency in 1.4 MHz BW configuration 2 carriers.
615 665	1931.5 1936.5	B3	TX band bottom (B) frequency in 3 MHz BW configuration 2 carriers.
607 622 657 682	1930.7 1932.2 1935.7 1938.2	B4	TX band bottom (B) frequency in 1.4 MHz BW configuration 4 carriers.
615 640 665 680	1931.5 1934 1936.5 1938	B4-3	TX band bottom (B) frequency in 3 MHz BW configuration 4 carriers.
625 675 725 775	1932.5 1937.5 1942.5 1947.5	B4-5	TX band bottom (B) frequency in 5 MHz BW configuration 4 carriers.
607 621	1930.7 1932.1	B2im1	TX band bottom (B) frequency in 1.4 MHz BW configuration 2 carriers.
700 812	1940.0 1951.2	B2im2	TX band bottom (B) frequency in 1.4 MHz BW configuration 2 carriers.
900	1960.0	M	TX band mid (M) frequency in all BW configurations.
850 950	1955.0 1965.0	M2	TX band mid (M) frequency in 1.4 MHz BW configuration 2 carriers.
875 925	1957.5 1962.5	M3	TX band mid (M) frequency in 1.4 MHz BW configuration 2 carriers.
850 875 925 950	1955.0 1957.5 1962.5 1965.0	M4	TX band mid (M) frequency in 1.4 MHz BW configuration 4 carriers.

Appendix 1

800	1950		
850	1955		
900	1960	M4-5	TX band mid (M) frequency in 5 MHz BW configuration 4 carriers.
950	1965		
1100	1980.0	T	TX band top (T) frequency in 20 MHz BW configuration.
1125	1982.5	T	TX band top (T) frequency in 15 MHz BW configuration.
1150	1985.0	T	TX band top (T) frequency in 10 MHz BW configuration.
1175	1987.5	T	TX band top (T) frequency in 5 MHz BW configuration.
1185	1988.5	T	TX band top (T) frequency in 3 MHz BW configuration.
1193	1989.3	T	TX band top (T) frequency in 1.4 MHz BW configuration.
1193	1989.3	T2	TX band top (T) frequency in 1.4 MHz BW configuration 2 carriers.
1143	1984.3		
1185	1988.5	T3	TX band (T) frequency in 1.4 MHz BW configuration 2 carriers.
1135	1983.5		
1193	1989.3		
1168	1986.8	T4	TX band top (T) frequency in 1.4 MHz BW configuration 4 carriers.
1143	1984.3		
1116	1981.8		
1185	1988.5		
1160	1986.0	T4-3	TX band top (T) frequency in 3 MHz BW configuration 4 carriers.
1135	1983.5		
1110	1981.0		
1175	1987.5		
1125	1982.5	T4-5	TX band top (T) frequency in 5 MHz BW configuration 4 carriers.
1075	1977.5		
1025	1972.5		
1193	1989.3	T2im1	TX band top (T) frequency in 1.4 MHz BW configuration 2 carriers.
1179	1987.9		
1100	1980.0	T2im2	TX band top (T) frequency in 1.4 MHz BW configuration 2 carriers.
988	1968.8		

Note: EARFCN are derived according to 3GPP TS 36.141, table 5.7.3-1.

Appendix 1

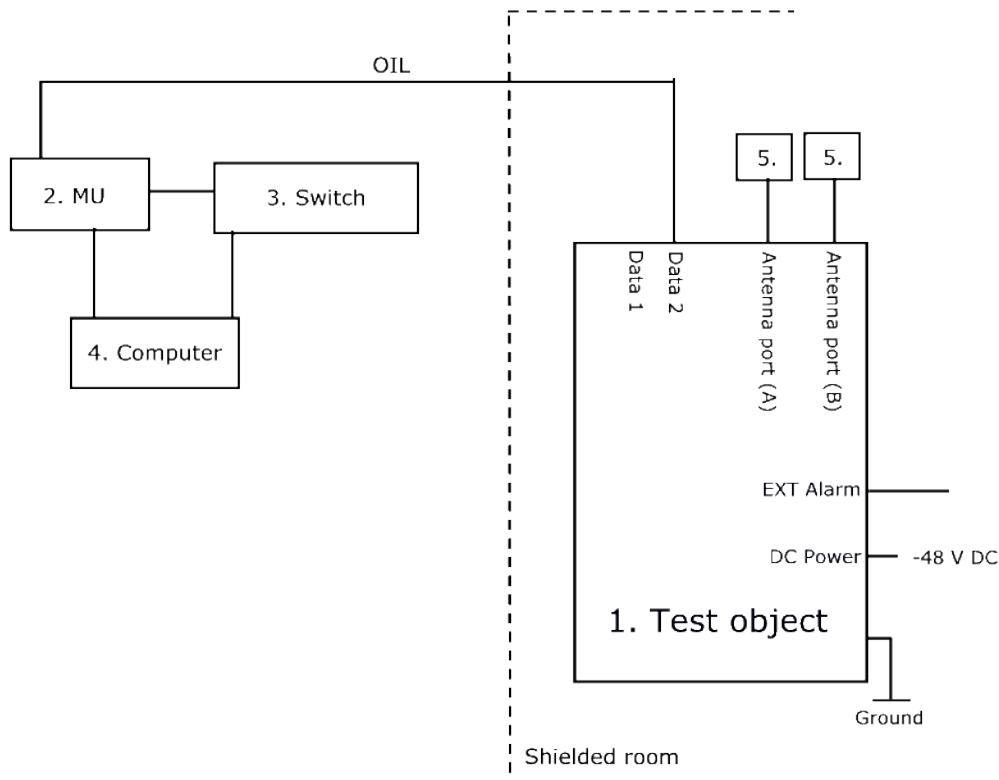
Test set-up conducted measurements**Test object**

1.	mRRUS 12 B2, KRC 161 328/4, revision R1A, s/n: D16A183078 working software CXP 901 7316/2, rev. R51NK with FCC ID: TA8AKRC161328 and IC: 287AB-AS161328
----	---

Functional test equipment

2.	DUS 41 01 KDU 137 624/1 R5A, s/n: D168382143, hosted in SUP 6601 1/BFL 901 009/4, rev. R1E, s/n. BR88237597
3.	Netgear Switch GSM7212, BAMS – 1000517289
4.	Computer I-ultra27-06 standalone, BAMS – 1000758439
5.	SP test Instrumentation according to measurement equipment list
6.	SP test Instrumentation according to measurement equipment list
7.	Terminator, 50 ohm

Appendix 1

Test set-up radiated measurements**Test object:**

1.	mRRUS 12 B2, KRC 161 328/4, revision R1A, s/n: D16A183078 working software CXP 901 7316/2, rev. R51NK with FCC ID: TA8AKRC161328 and IC: 287AB-AS161328
----	---

Functional test equipment:

2.	Main Unit SUP 6601 1/BFL 901 009/4, rev. R1E, s/n. BR88258944 DUS 41 01, KDU 137 624/1, rev. R5A, s/n: D168382181
3.	Netgear Switch GSM7212, BAMS – 1000517299
4.	Computer Sun ultra27-01, BAMS – 1000758436
5.	Terminator

Interfaces:	Type of port:
Power: -48 VDC	DC Power
Data 1, optical interface, not used in this configuration	Signal
Data 2, optical interface	Signal
Ext Alarm, unshielded multi wire	Signal
Ground wire	Ground

RBS software:

Software	Revision
CXP 102 051/19	R28AT



Appendix 2

RF power output measurements according to CFR 47 §2.1046 / IC RSS-133 6.4, conducted

Date	Temperature	Humidity
2013-11-04	23 °C ± 3 °C	33 % ± 5 %
2013-11-05	20 °C ± 3 °C	30 % ± 5 %
2013-11-06	22 °C ± 3 °C	29 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyser measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	901 508
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB



Appendix 2

Results

MIMO mode, Single carrier

Rated output power level at RF connector 1x 37 dBm.

Tested configuration	Transmitter power [RMS dBm/ dB PAR]		
	Port RF A	Port RF B	Total power ¹⁾
BW and frequency			
1.4 MHz, B	36.36/ 6.92	36.41/ 6.92	39.40
20 MHz, B	36.98/ 7.04	36.82/ 7.12	39.91
1.4 MHz, M	36.86/ 6.92	36.80/ 6.92	39.84
3 MHz, M	36.90/ 6.83	36.91/ 6.83	39.92
5 MHz, M	36.82/ 6.80	36.89/ 6.83	39.87
10 MHz, M	36.95/ 6.83	36.97/ 6.83	39.97
15 MHz, M	36.89/ 6.83	36.96/ 6.85	39.94
20 MHz, M	36.91/ 6.83	36.92/ 6.85	39.92
1.4 MHz, T	36.72/ 6.92	36.65/ 6.92	39.70
20 MHz, T	36.91/ 6.88	36.89/ 6.88	39.91

MIMO mode, 2-carriers

Rated output power level at RF connector 2x 34 dBm.

Tested configuration	Transmitter power [RMS dBm/ dB PAR]		
	Port RF A	Port RF B	Total power ¹⁾
BW and frequency			
1.4 MHz, B2	36.57/ 7.21	36.54/ 7.26	39.57
1.4 MHz, M3	36.87/ 7.19	36.39/ 7.24	39.65
1.4 MHz, T2	36.71/ 7.19	36.32/ 7.24	39.53

¹⁾: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.



Appendix 2

MIMO mode, 4-carriers

Rated output power level at RF connector 4x 30 dBm (1 dB power back-off at BW 1.4 MHz).

Tested configuration	Transmitter power [RMS dBm/ dB PAR]		
BW and frequency	Port RF A	Port RF B	Total power ¹⁾
1.4 MHz, B4	35.60/ 7.36	35.39/ 7.38	38.51

MIMO mode, 4-carriers

Rated output power level at RF connector 4x 31 dBm.

Tested configuration	Transmitter power [RMS dBm/ dB PAR]		
BW and frequency	Port RF A	Port RF B	Total power ¹⁾
3 MHz, B4-3	36.70/ 6.90	36.68/ 6.95	39.70
5 MHz, B4-5	36.75/ 7.14	36.74/ 7.24	39.75
5 MHz., M4-5	36.78/ 6.85	36.69/ 6.88	39.75
5 MHz, T4-5	36.70/ 6.90	36.64/ 6.92	39.54

¹⁾: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.



MIMO mode, single carrier

Appendix 2

Measured output power per 1 MHz

BW and frequency	RFA [RMS dBm]	RF B [RMS dBm]	Total power ¹⁾ [RMS dBm]
1.4 MHz, B	35.46	35.48	38.48
20 MHz, B	25.23	24.80	28.43
1.4 MHz, M	35.71	35.86	38.86
3 MHz, M	32.84	32.05	35.84
5 MHz, M	30.80	30.97	33.97
10 MHz, M	27.86	27.97	30.97
15 MHz, M	26.14	26.26	29.26
20 MHz, M	24.95	24.92	27.95
1.4 MHz, T	35.82	35.62	38.82
20 MHz, T	25.04	24.90	28.04

¹⁾: Measured according to FCC KDB662911 D01 Multiple Transmitter Output v02r01.
Method E), 2), c). “Measure and add $10 \log(N_{Ant})$ ”.

Limits

- §24.232: The maximum output power may not exceed 3280 W (e.i.r.p)/ MHz.
The Peak to Average Ratio (PAR) may not exceed 13 dB.
- RSS-133 6.4: The average equivalent isotropically radiated power (e.i.r.p.) limits in SRSP-510 apply, resulting in a maximum output power of 3280 W (e.i.r.p)/ MHz for the scope of this report. Moreover, base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts. The peak-to-average ratio of the power shall not exceed 13 dB.

Complies?	Yes
-----------	-----

Appendix 3

RF power output measurements according to CFR 47 §2.1046 / IC RSS-133 6.4 radiated

Date	Temperature	Humidity
2013-11-05	23°C ± 3°C	34 % ± 5 %
2013-11-06	23°C ± 3°C	31 % ± 5 %

Test set-up and procedure

The measurements were performed according to ANSI/TIA/EIA-603-C-2004.

The test of radiated emission was performed in a fully anechoic chamber. The measurements were performed with both horizontal and vertical polarizations of the antenna. The antenna distance was 3.0 m.

The fundamental was scanned with PEAK-detector and the turntable was rotated between 0-360 degrees for maximum response. The carrier power was measured with RMS- detector activated with a RBW of 1 MHz. The (e.i.r.p) output power was verified with the substitution method.

Measurement equipment

Measurement equipment	SP number
Anechoic chamber	15:116
R&S ESU 40	901 385
EMC 32 ver. 8.52.0	503 889
EMCO Horn Antenna 3115	501 548
EMCO Horn Antenna 3115	902 212
R&S SME 06	502 755
Attenuator	504 159
Testo 635 temperature and humidity meter	504 188

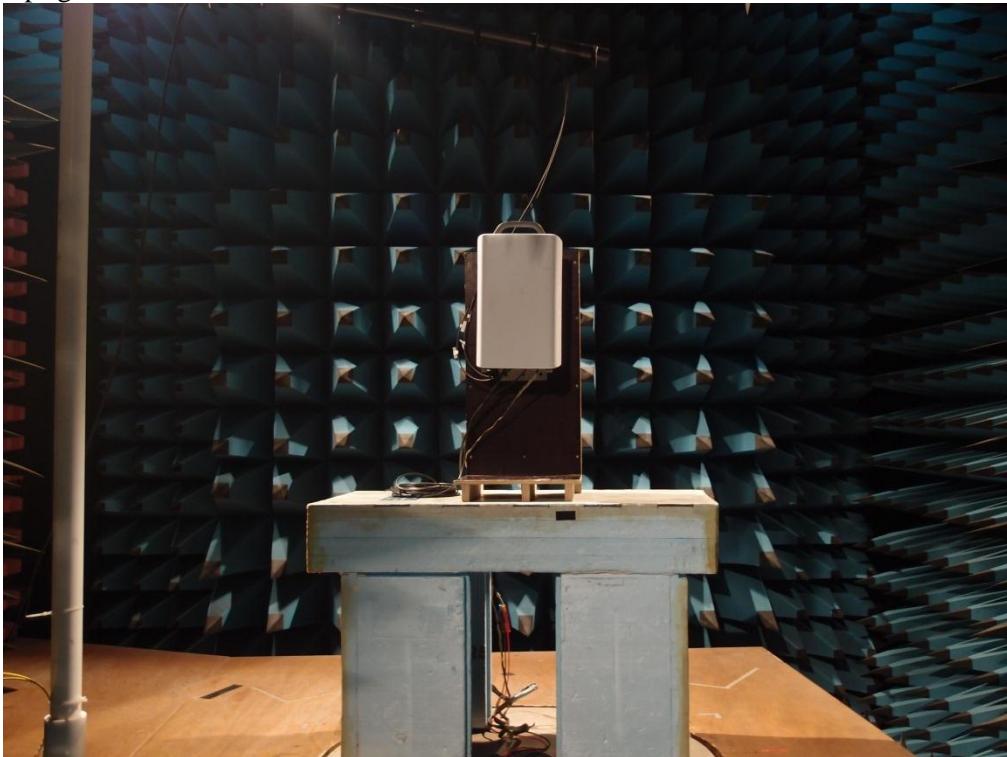
Measurement uncertainty:

3.2 dB

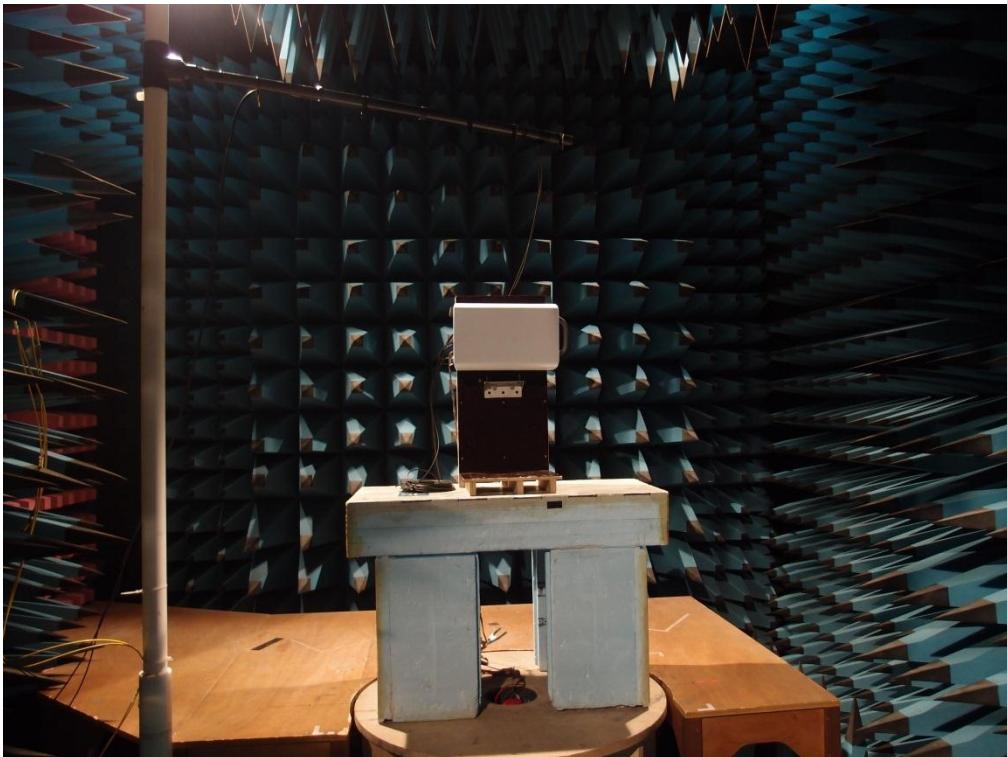
Appendix 3

The test set-up during the spurious radiation measurements is shown in the pictures below:

Upright mounted with internal antenna

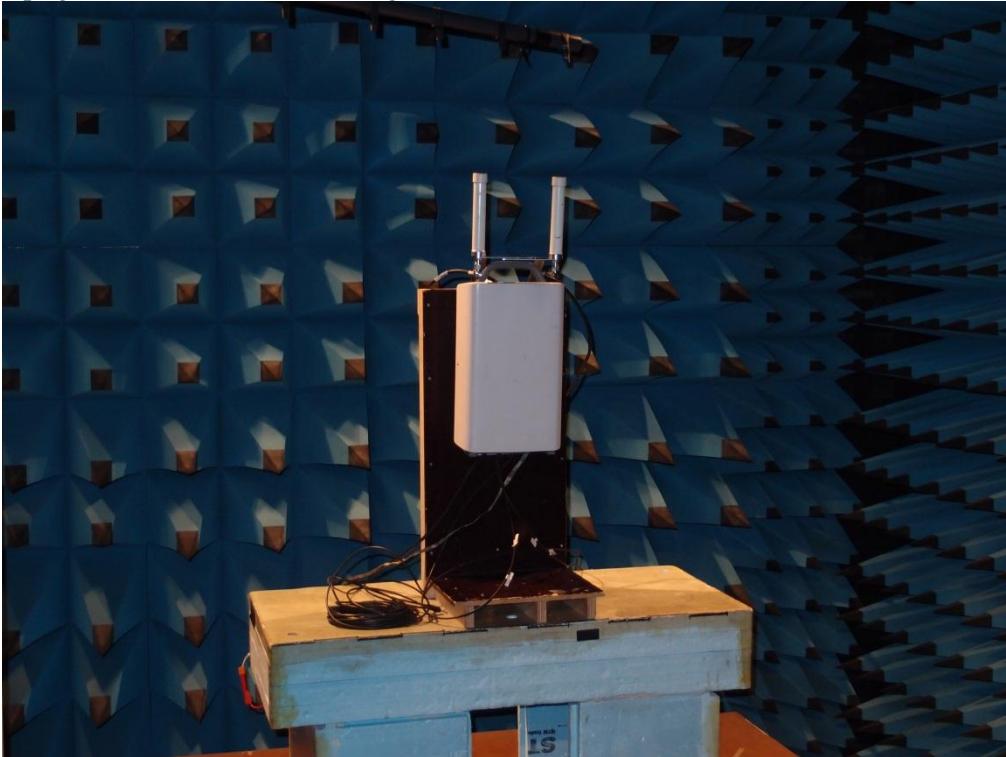


Side mounted with internal antenna

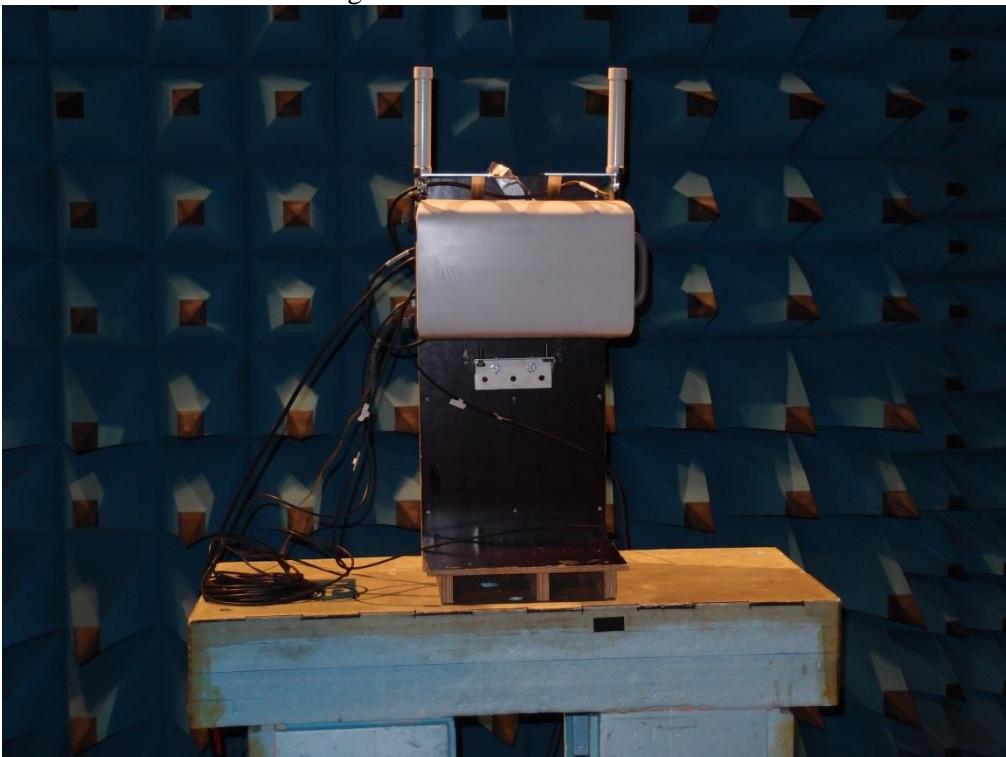


Appendix 3

Upright mounted with Semi-Integrated Omni Antenna KRE 101 2233/1



Side mounted with Semi-Integrated Omni Antenna KRE 101 2233/1



Appendix 3

Results

Internal antenna, upright mounted

Bandwidth configuration (MHz)	Tested frequency B		Tested frequency M		Tested frequency T	
	Vertical/Horizontal RMS power		Vertical/Horizontal RMS power		Vertical/Horizontal RMS power	
	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz
1.4	41.8/ 40.6	15.0/ 11.4	42.9/ 41.9	19.3/ 15.3	42.3/ 42.1	16.8/ 16.0
3	-	-	40.1/ 39.2	10.1/ 8.2	-	-
5	-	-	38.1/ 37.2	6.4/ 5.2	-	-
10	-	-	35.3/ 34.2	3.3/ 2.6	-	-
15	-	-	33.5/ 32.5	2.2/ 1.8	-	-
20	-	-	32.3/ 31.2	1.7/ 1.3	-	-

Internal antenna, side mounted

Bandwidth configuration (MHz)	Tested frequency B		Tested frequency M		Tested frequency T	
	Vertical/Horizontal RMS power		Vertical/Horizontal RMS power		Vertical/Horizontal RMS power	
	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz
1.4	41.6/ 42.8	14.3/ 18.8	42.5/ 43.9	17.6/ 24.3	42.3/ 42.8	16.8/ 18.8
3	-	-	39.7/ 41.1	9.2/ 12.7	-	-
5	-	-	37.7/ 39.0	5.8/ 7.9	-	-
10	-	-	34.8/ 36.1	3.0/ 4.0	-	-
15	-	-	33.1/ 34.5	2.0/ 2.8	-	-
20	-	-	31.8/ 33.2	1.5/ 2.1	-	-



Appendix 3

External antenna, upright mounted (Semi-Integrated Omni Antenna KRE 101 2233/1)

Bandwidth configuration (MHz)	Tested frequency B		Tested frequency M		Tested frequency T	
	Vertical/Horizontal RMS power		Vertical/Horizontal RMS power		Vertical/Horizontal RMS power	
	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz
1.4	40.7/ 30.6	11.6/ 1.1	41.4/ 30.0	13.6/ 1.0	41.2/ 29.7	13.0/ 0.9
3	-	-	38.6/ 27.1	7.2/ 0.5	-	-
5	-	-	36.6/ 25.0	4.5/ 0.3	-	-
10	-	-	33.6/ 22.3	2.3/ 0.2	-	-
15	-	-	31.8/ 20.3	1.5/ 0.1	-	-
20	-	-	30.7/ 19.1	1.2/ 0.1	-	-

External antenna, side mounted (Semi-Integrated Omni Antenna KRE 101 2233/1)

Bandwidth configuration (MHz)	Tested frequency B		Tested frequency M		Tested frequency T	
	Vertical/Horizontal RMS power		Vertical/Horizontal RMS power		Vertical/Horizontal RMS power	
	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz	dBm/ MHz	W/ MHz
1.4	39.4/ 31.6	8.6/ 1.4	40.4/ 32.0	10.8/ 1.6	40.0/ 30.9	9.9/ 1.2
3	-	-	37.6/ 29.1	5.7/ 0.8	-	-
5	-	-	35.5/ 26.8	3.5/ 0.5	-	-
10	-	-	32.6/ 24.0	1.8/ 0.2	-	-
15	-	-	31.0/ 22.3	1.2/ 0.2	-	-
20	-	-	29.8/ 20.9	0.9/ 0.1	-	-



Appendix 3

Limits

- §24.232: The maximum output power may not exceed 3280 W (e.i.r.p)/ MHz.
The Peak to Average Ratio (PAR) may not exceed 13 dB.
- RSS-133 6.4: The average equivalent isotropically radiated power (e.i.r.p.) limits in SRSP-510 apply, resulting in a maximum output power of 3280 W (e.i.r.p)/ MHz for the scope of this report. Moreover, base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts. The peak-to-average ratio of the power shall not exceed 13 dB.

Complies?	Yes
-----------	-----

Appendix 4
Occupied bandwidth measurements according to 47 CFR 2.1049 / RSS-Gen 4.6.1

Date	Temperature	Humidity
2013-11-04	23 °C ± 3 °C	33 % ± 5 %
2013-11-05	20 °C ± 3 °C	30 % ± 5 %
2013-11-06	22 °C ± 3 °C	29 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyser with the RMS detector activated. The signal analyser was connected to an external 10 MHz reference standard during the measurements.

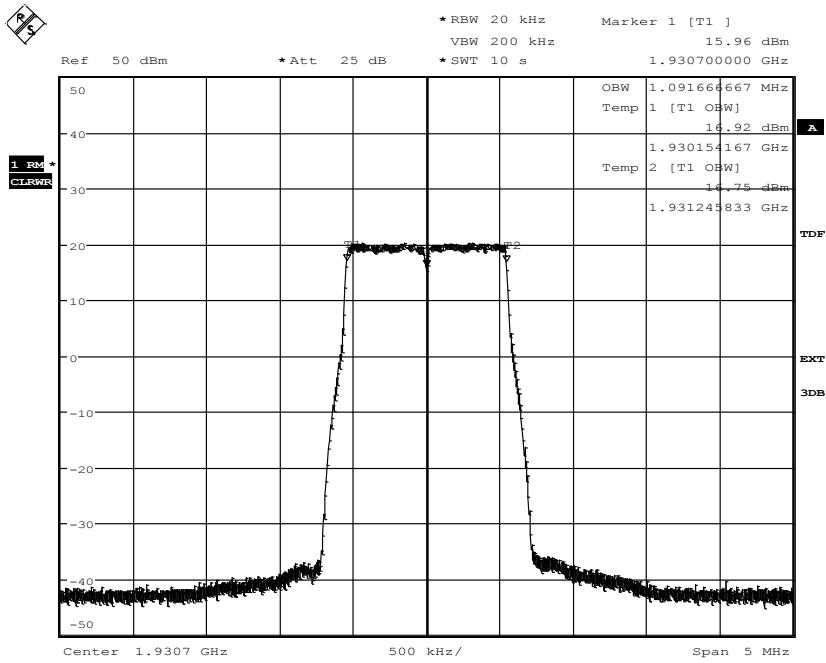
Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	901 508
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

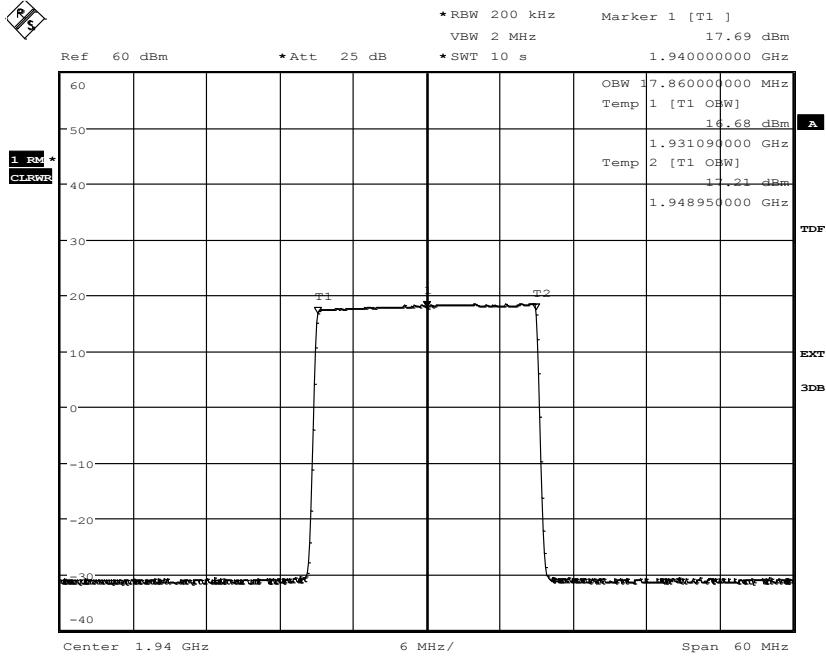
Results

MIMO mode, single carrier

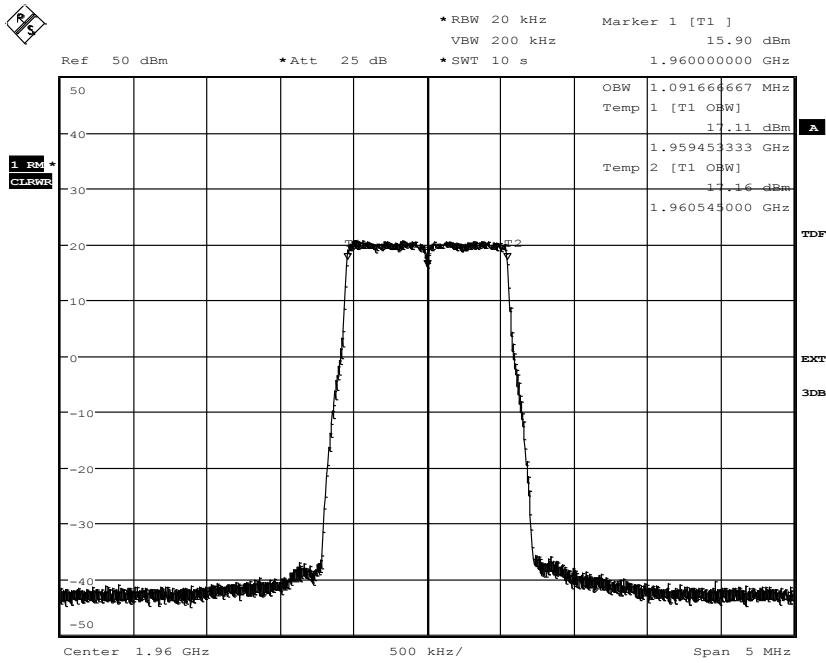
Diagram	BW configuration	Tested frequency	Tested Port	Occupied BW (99%) [MHz]
1	1.4 MHz	B	RF A	1.09
2	20 MHz	B	RF A	17.86
3	1.4 MHz	M	RF A	1.09
4	1.4 MHz	M	RF B	1.09
5	3 MHz	M	RF A	2.69
6	5 MHz	M	RF A	4.48
7	10 MHz	M	RF A	8.94
8	15 MHz	M	RF A	13.42
9	20 MHz	M	RF A	17.87
10	20 MHz	M	RF B	17.86
11	1.4 MHz	T	RF A	1.09
12	20 MHz	T	RF A	17.87

Appendix 4
Diagram 1:


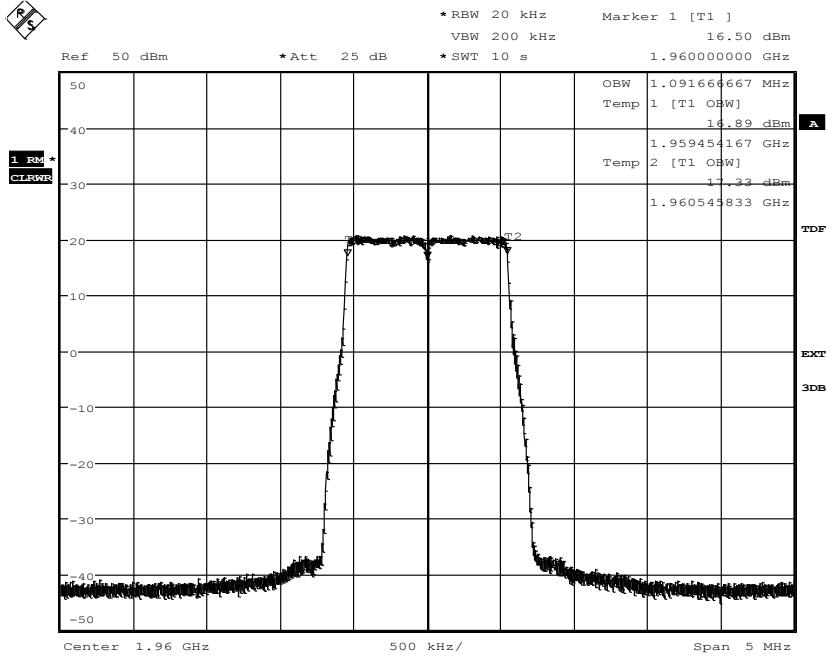
Date: 4.NOV.2013 18:45:30

Diagram 2:


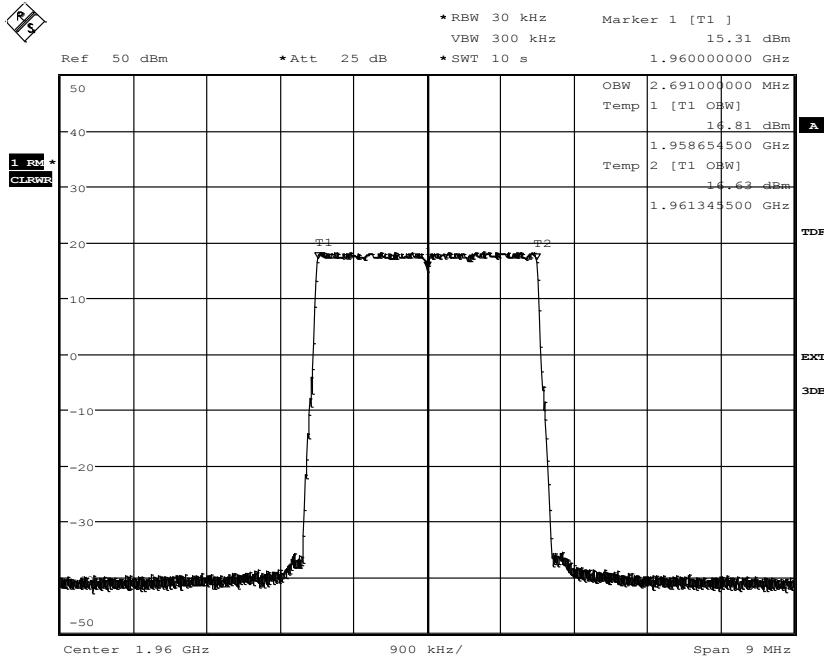
Date: 5.NOV.2013 13:51:47

Appendix 4
Diagram 3:


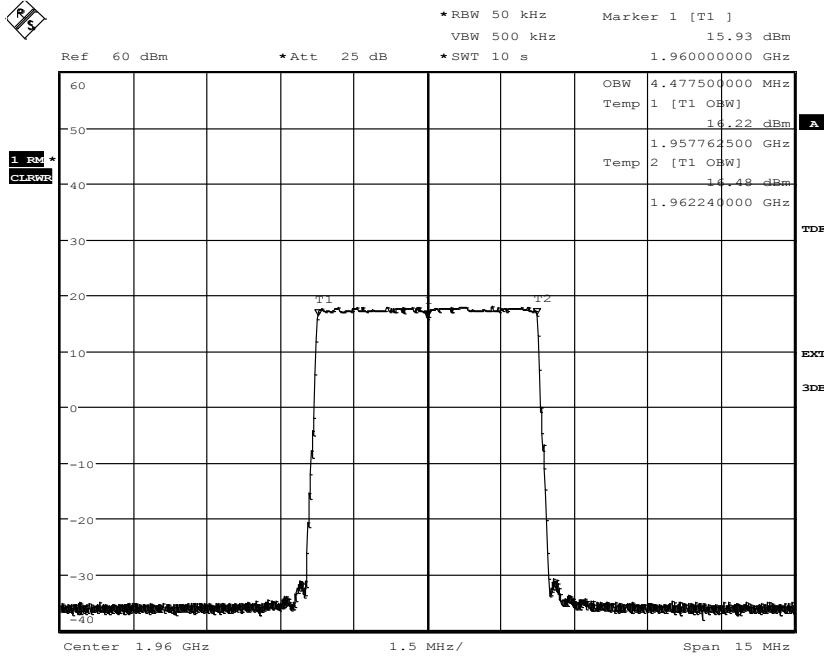
Date: 5.NOV.2013 15:02:13

Diagram 4:


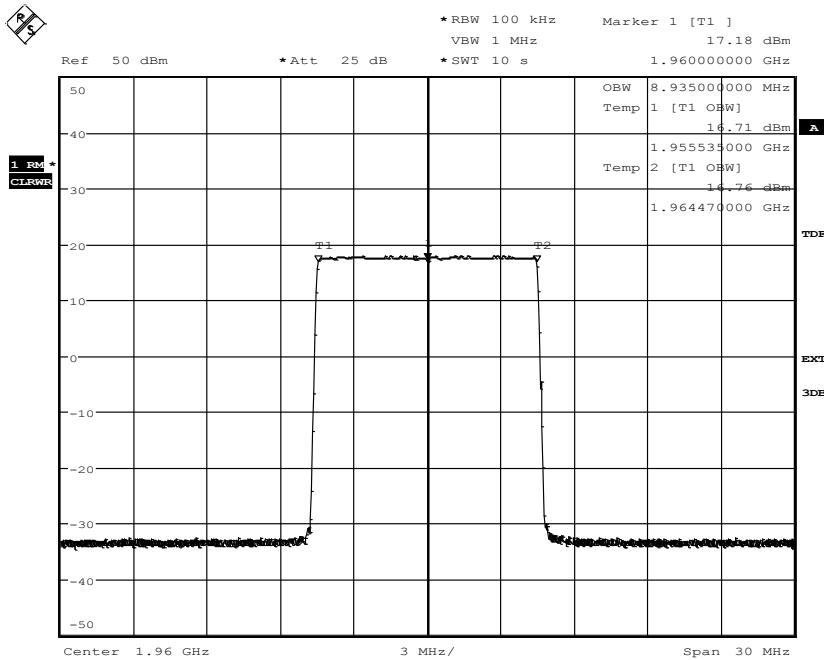
Date: 5.NOV.2013 14:37:50

Appendix 4
Diagram 5:


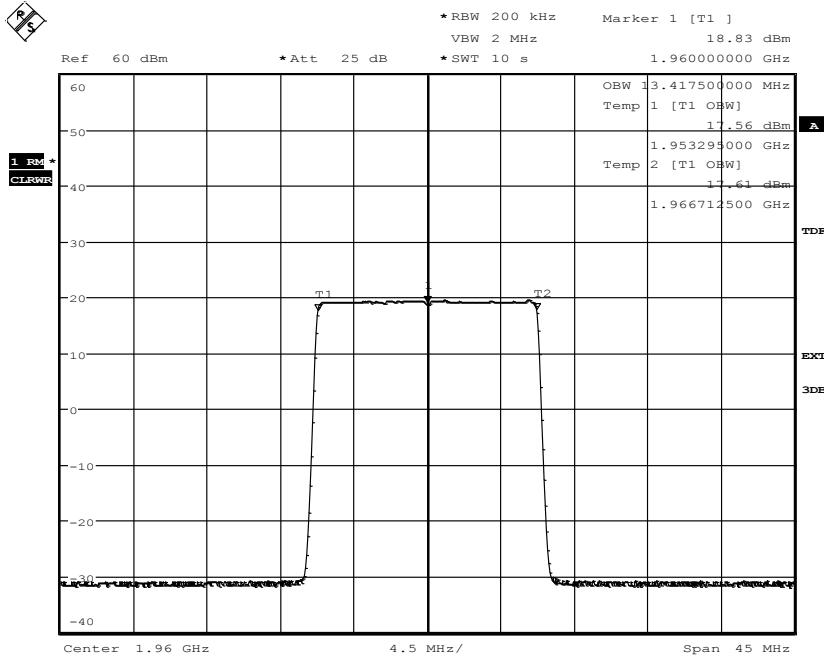
Date: 5.NOV.2013 15:11:44

Diagram 6:


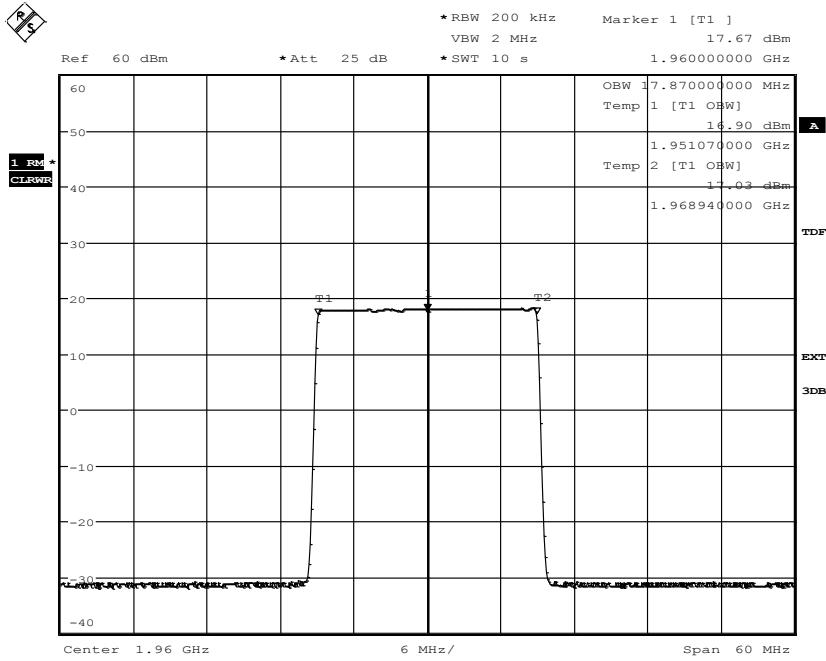
Date: 5.NOV.2013 15:32:24

Appendix 4
Diagram 7:


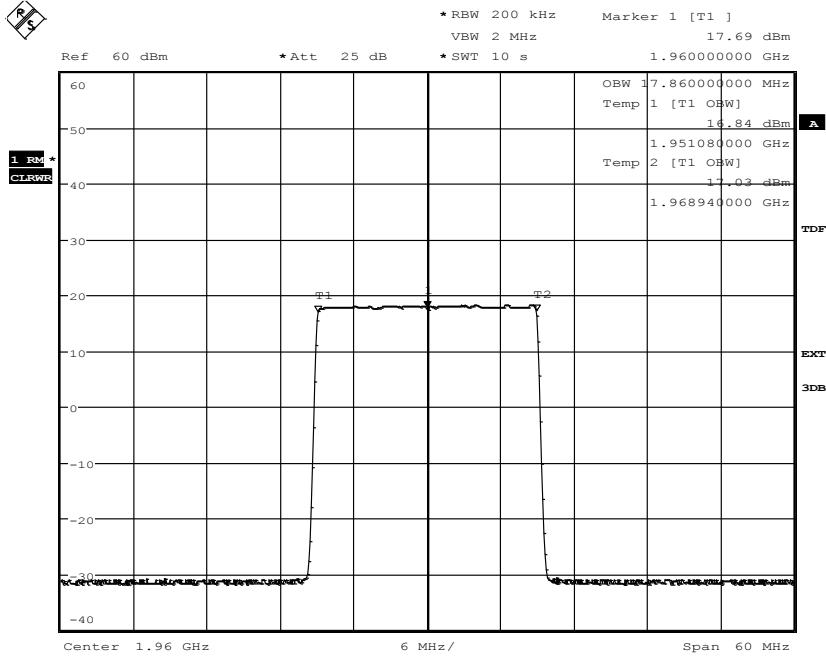
Date: 5.NOV.2013 15:49:21

Diagram 8:


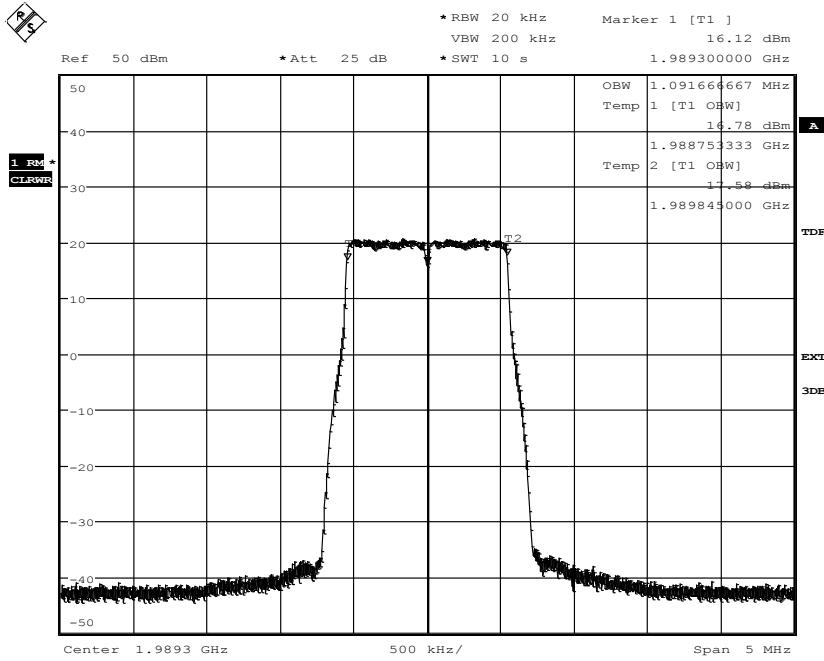
Date: 5.NOV.2013 15:58:20

Appendix 4
Diagram 9:


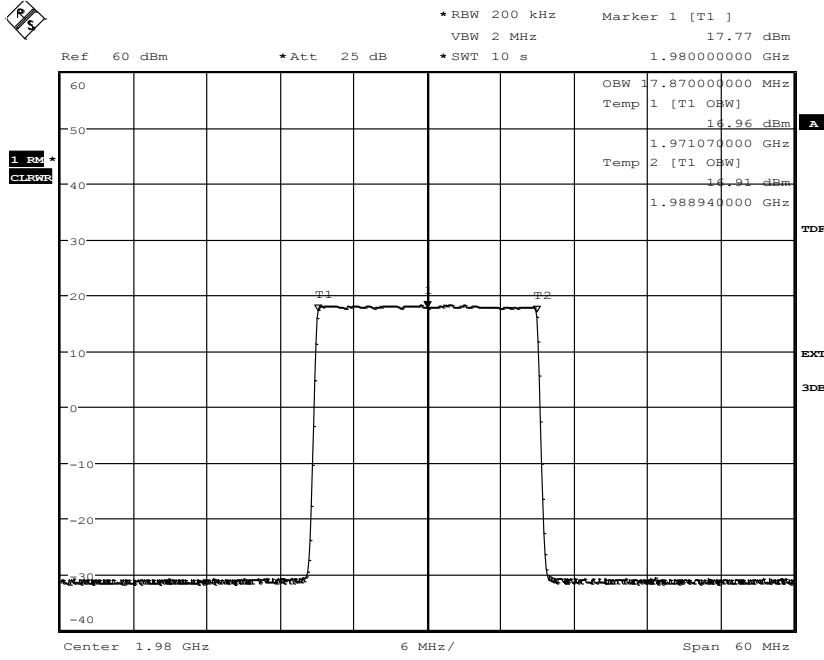
Date: 5.NOV.2013 16:13:37

Diagram 10:


Date: 5.NOV.2013 16:15:28

Appendix 4
Diagram 11:


Date: 5.NOV.2013 17:29:23

Diagram 12:


Date: 5.NOV.2013 17:02:30

Appendix 5

Band edge measurements according to CFR 47 §2.1051 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-04	23 °C ± 3 °C	33 % ± 5 %
2013-11-05	20 °C ± 3 °C	30 % ± 5 %
2013-11-06	22 °C ± 3 °C	29 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The test object was connected to a spectrum analyser with the RMS detector activated. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

FCC rules specify a RBW of at least 1% of the fundamental emission bandwidth (EBW) for offsets up to 1 MHz from the band edge and a RBW of 1 MHz for measurements of emissions more than 1 MHz away from the band edges.

A resolution bandwidth of 100 kHz was used 1 MHz to 6 MHz away from the band edges, to compensate for the reduced resolution bandwidth the limit was adjusted by 10 dB to -23 dBm.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), a), (iii) Measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v02r01

Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	901 508
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB



Appendix 5

Results

MIMO mode, single carrier

Diagram	BW configuration	Tested frequency	Tested Port
1 a+c	1.4 MHz	B	RFA
2 a+c	3 MHz	B	RFA
3 a+c	3 MHz	B	RF B
4 a+c	5 MHz	B	RFA
5 a+c	10 MHz	B	RFA
6 a+c	15 MHz	B	RFA
7 a+c	20 MHz	B	RFA
8 a+c	1.4 MHz	T	RFA
9 a+c	3 MHz	T	RFA
10 a+c	3 MHz	T	RF B
11 a+c	5 MHz	T	RFA
12 a+c	10 MHz	T	RFA
13 a+c	15 MHz	T	RFA
14 a+c	20 MHz	T	RFA

MIMO mode, 2 carriers

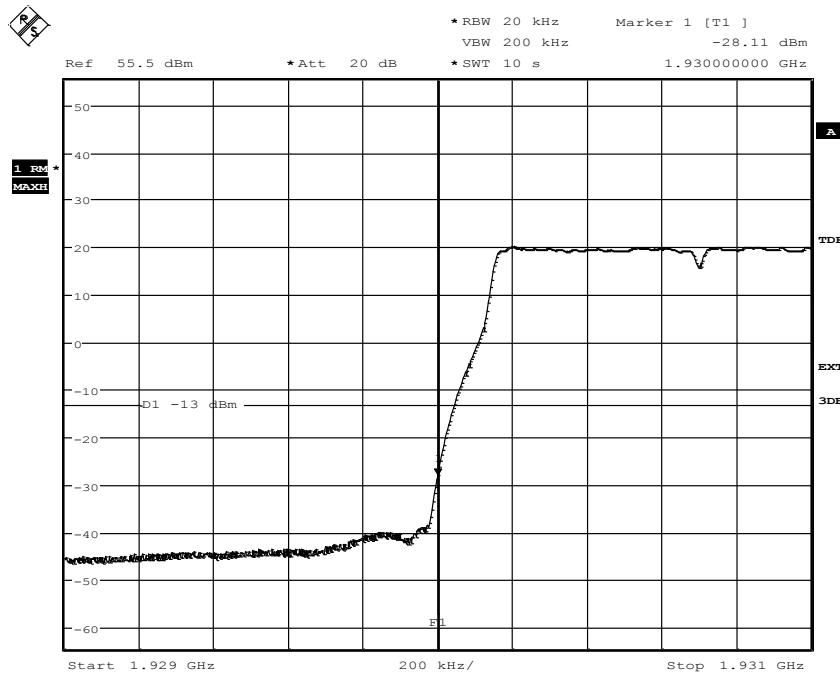
Diagram	BW configuration	Tested frequency	Tested Port
15 a+c	3 MHz	B3	RFA
16 a+c	3 MHz	T3	RFA

Limits

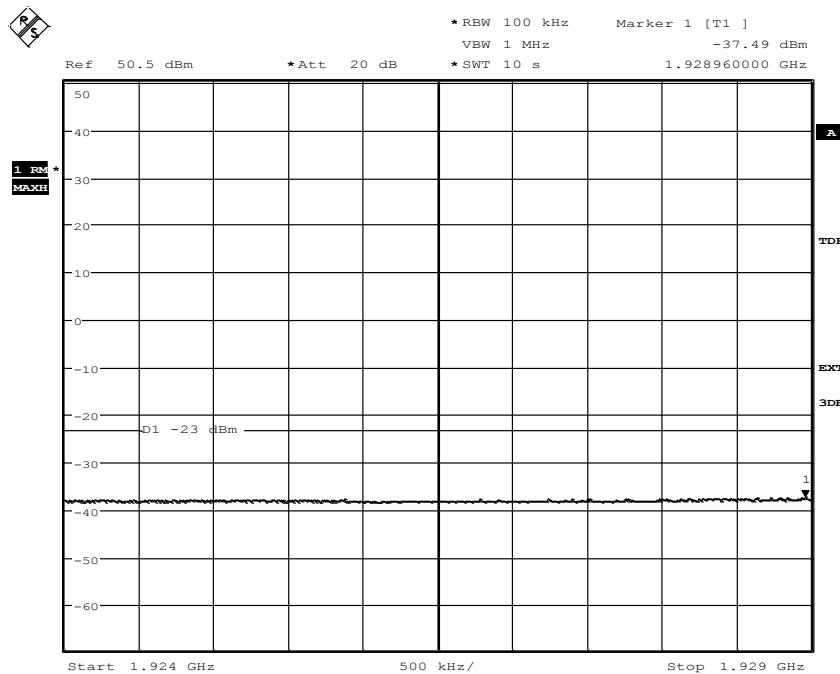
CFR 47 §24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----

Appendix 5
Diagram 1a:


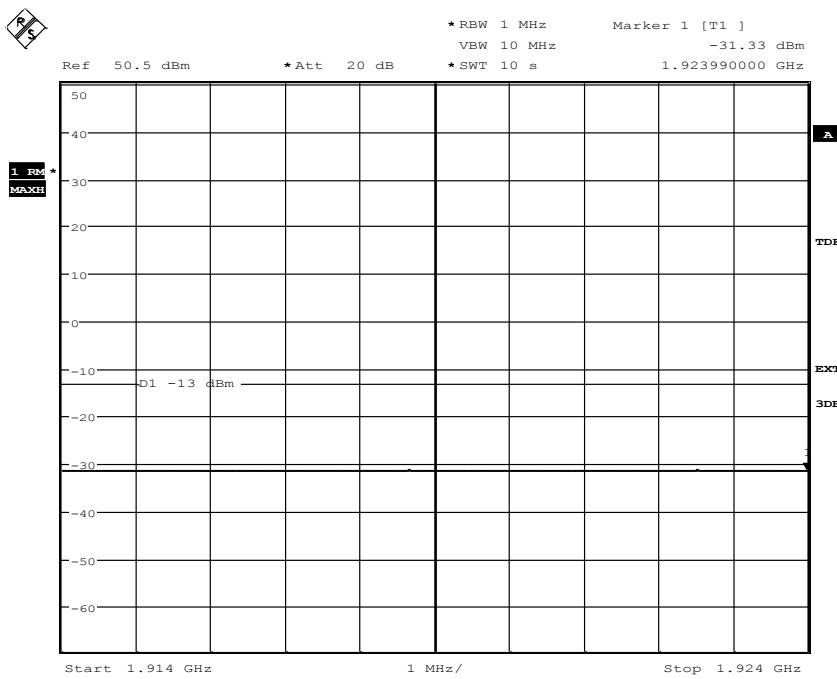
Date: 5.NOV.2013 08:37:32

Diagram 1b:


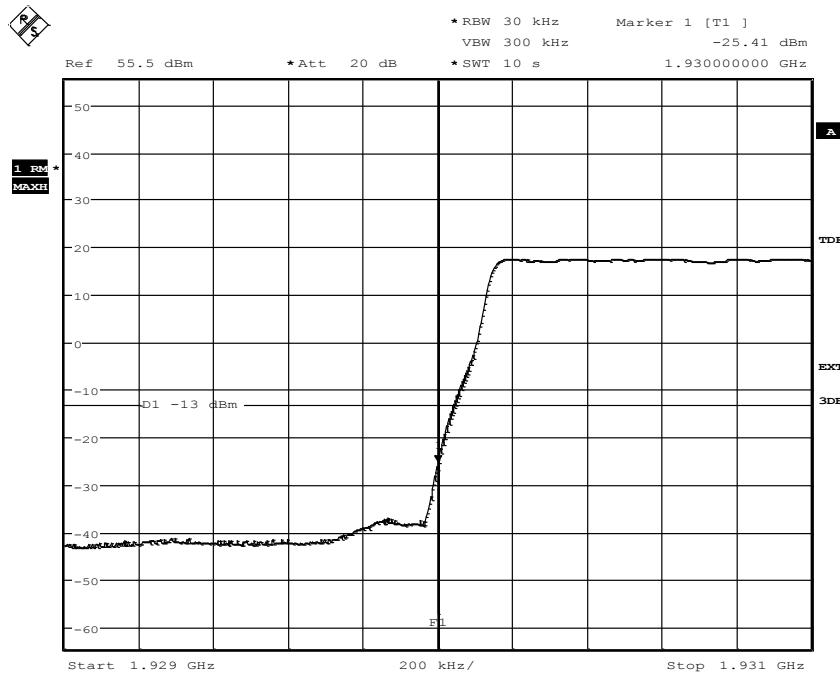
Date: 4.NOV.2013 18:49:09

Appendix 5

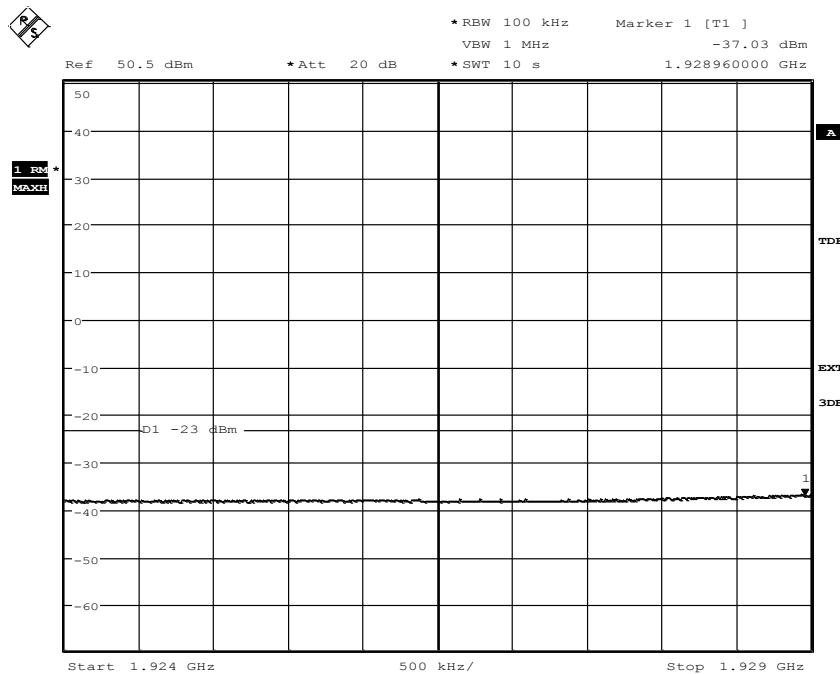
Diagram 1c



Date: 4.NOV.2013 18:50:24

Appendix 5
Diagram 2a:


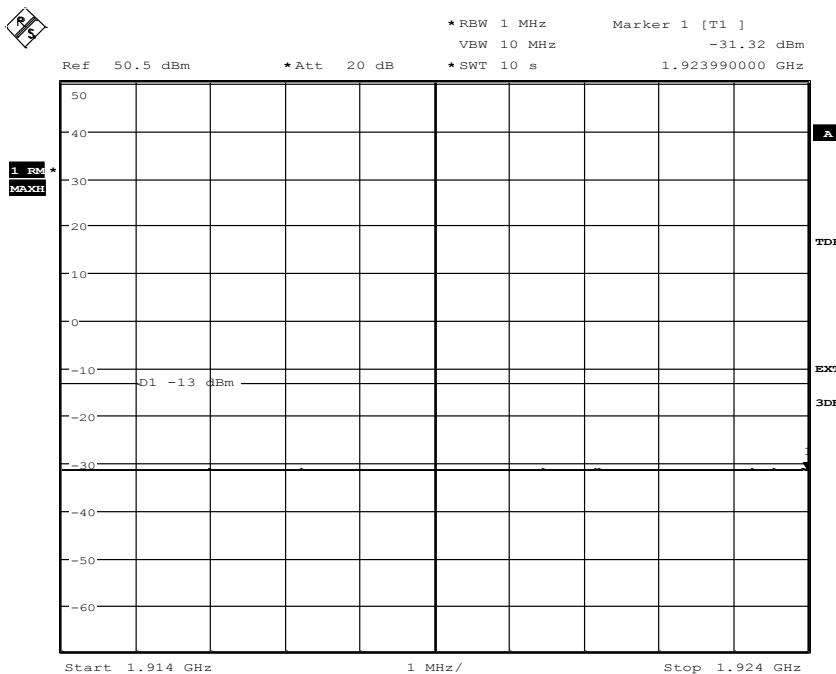
Date: 4.NOV.2013 17:15:21

Diagram 2b:


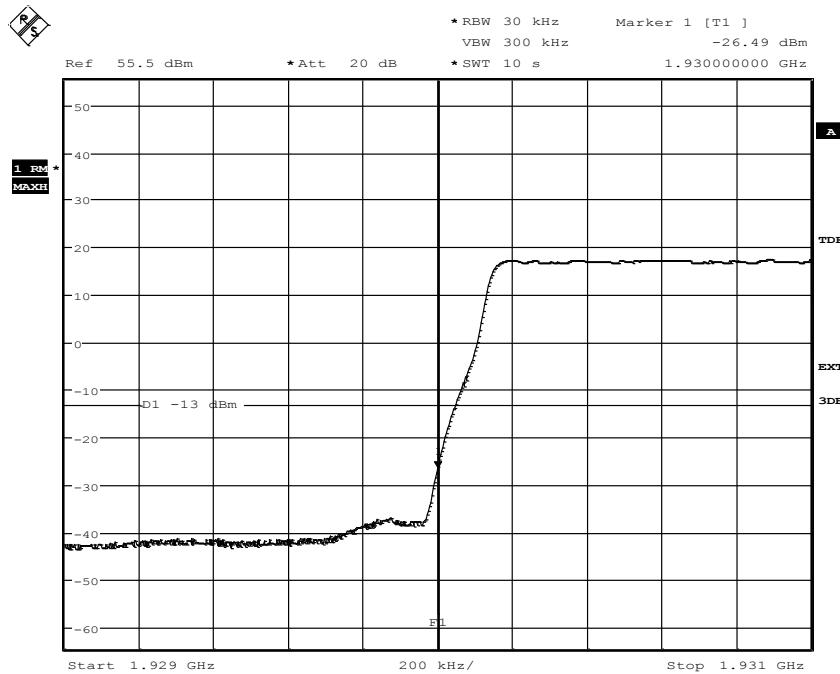
Date: 4.NOV.2013 17:18:11

Appendix 5

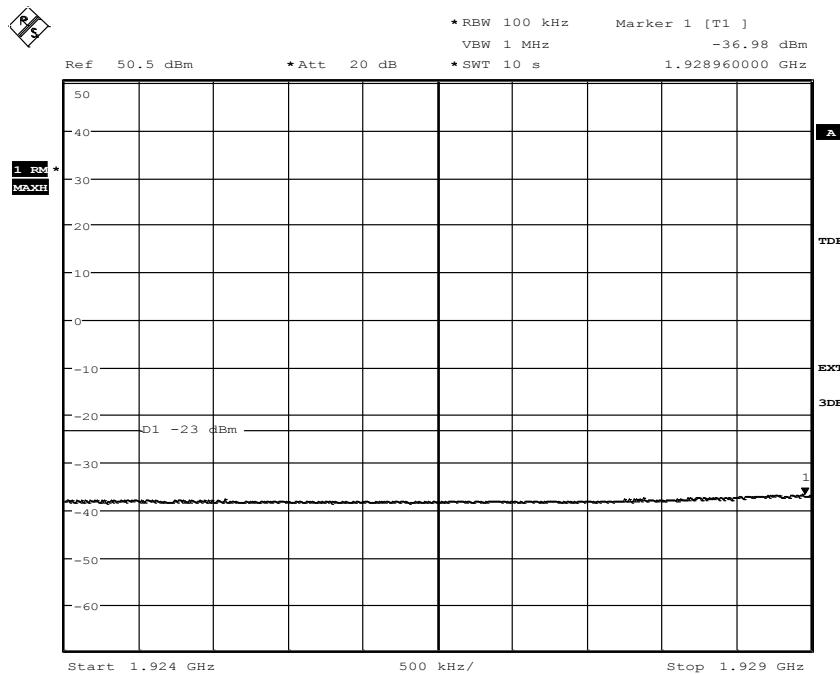
Diagram 2c:



Date: 4.NOV.2013 17:19:27

Appendix 5
Diagram 3a:


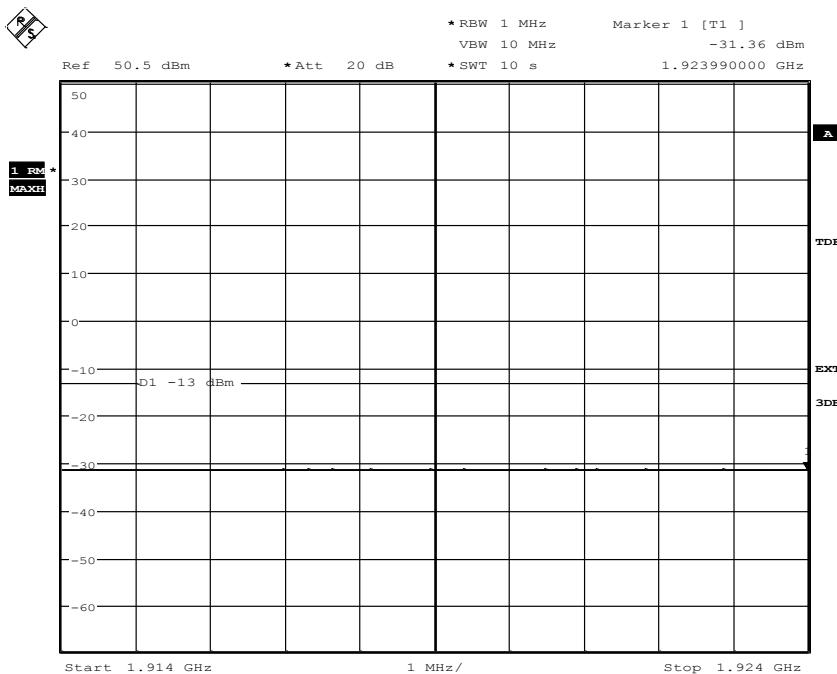
Date: 4.NOV.2013 17:25:15

Diagram 3b:


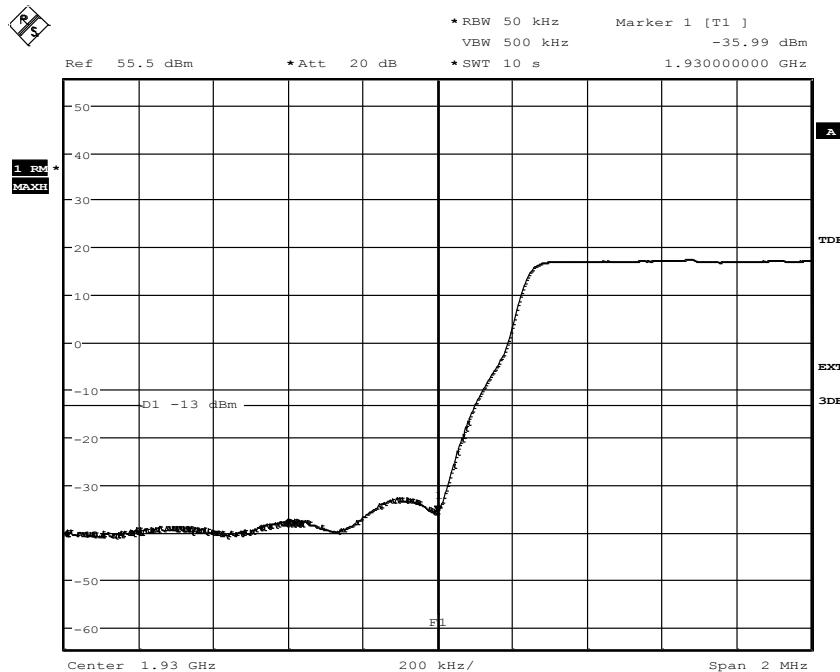
Date: 4.NOV.2013 17:24:06

Appendix 5

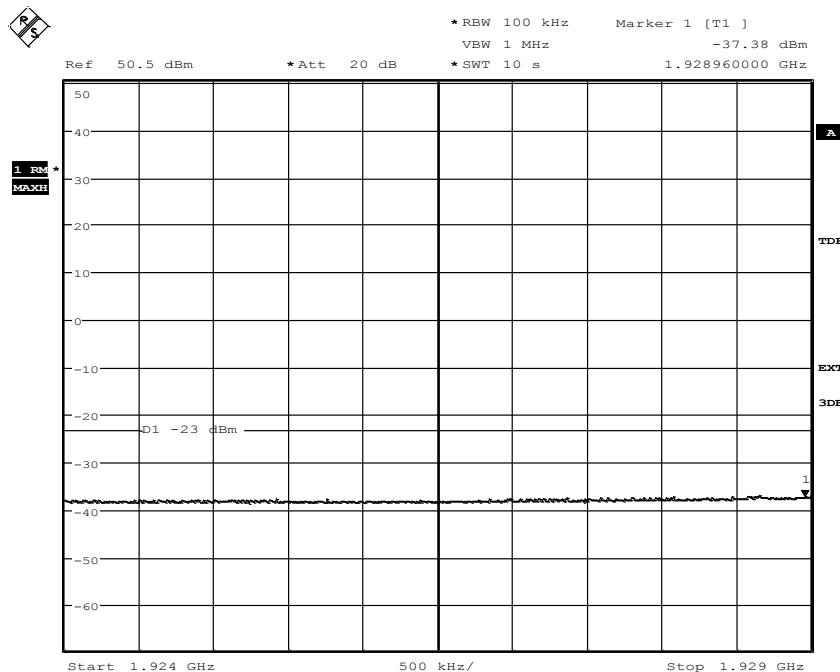
Diagram 3c:



Date: 4.NOV.2013 17:22:53

Appendix 5
Diagram 4a:


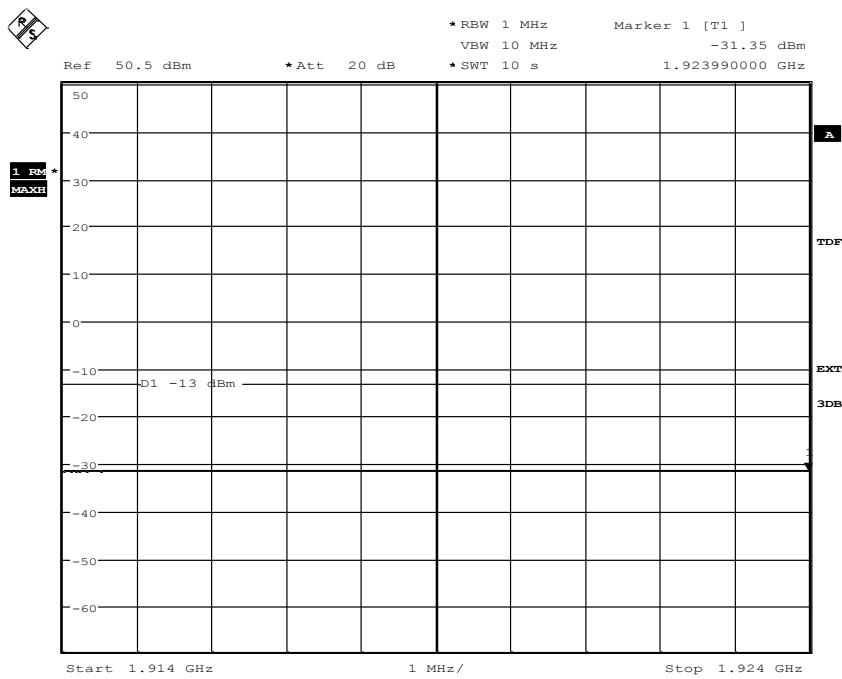
Date: 5.NOV.2013 13:38:41

Diagram 4b:


Date: 4.NOV.2013 20:31:11

Appendix 5

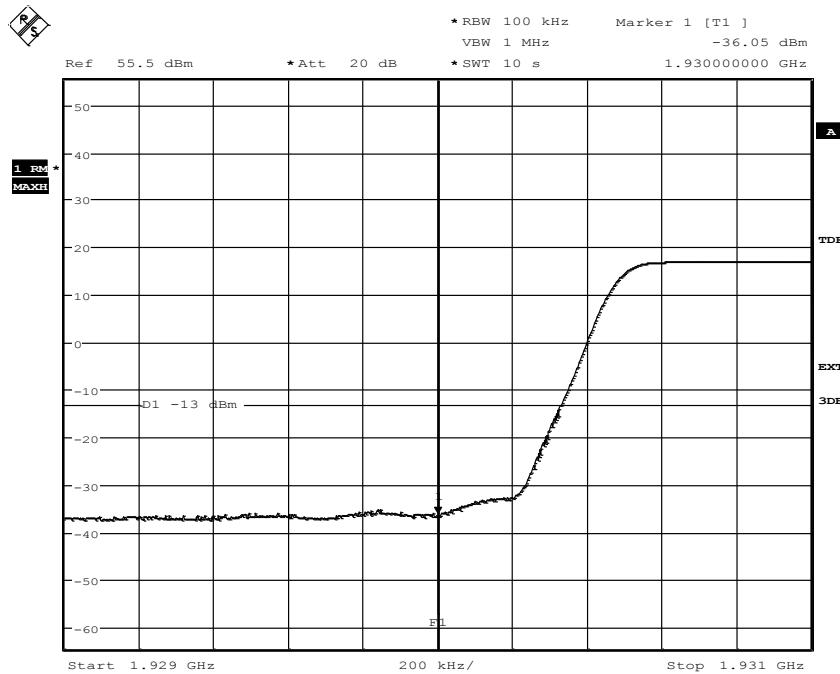
Diagram 4c:



Date: 4.NOV.2013 20:30:12

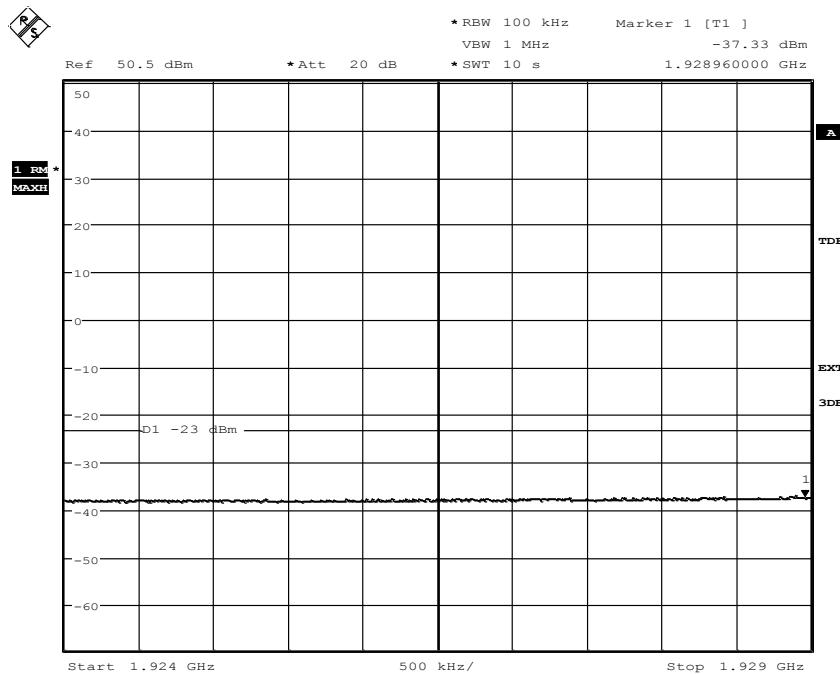
Appendix 5

Diagram 5a:



Date: 5.NOV.2013 13:42:33

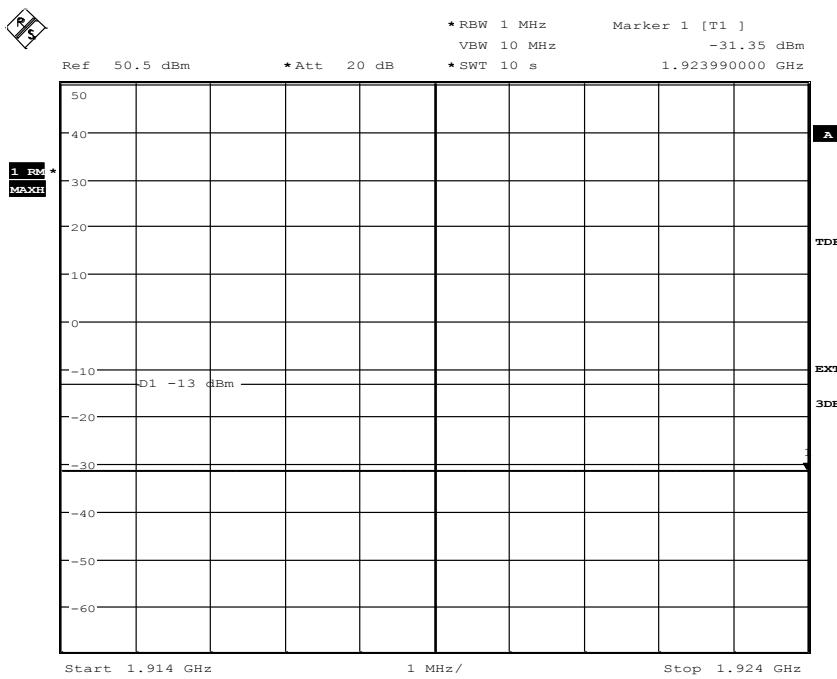
Diagram 5b:



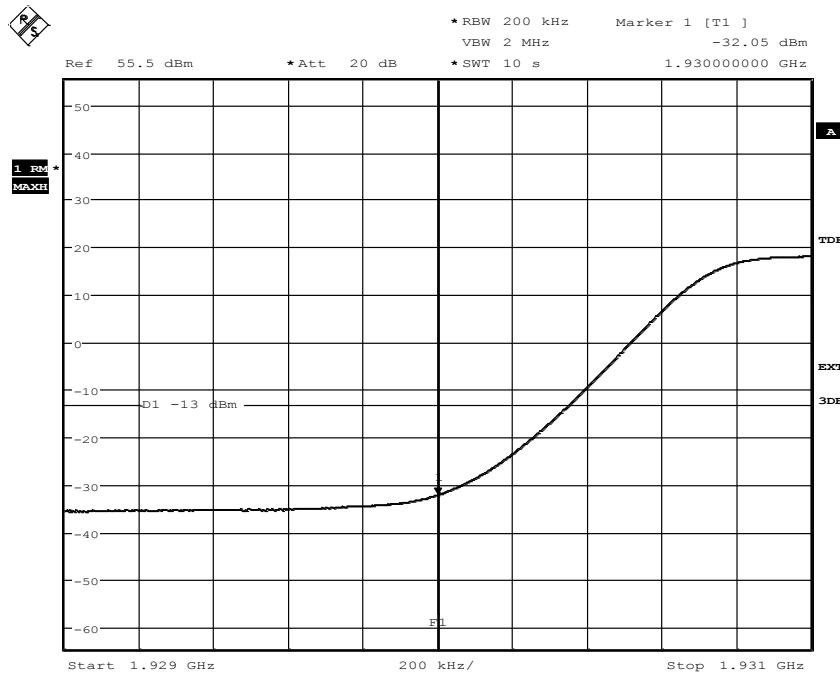
Date: 4.NOV.2013 21:07:40

Appendix 5

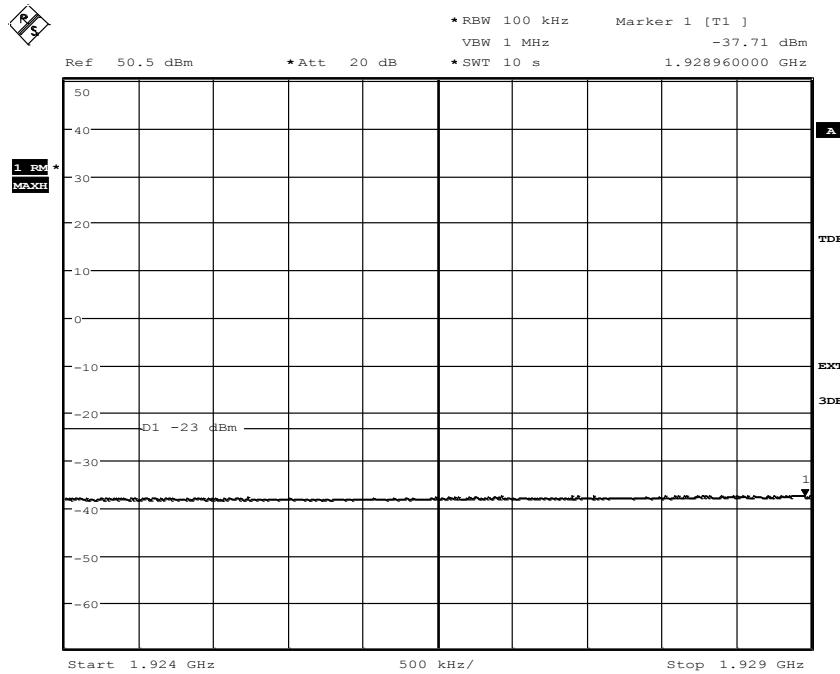
Diagram 5c:



Date: 4.NOV.2013 21:09:07

Appendix 5
Diagram 6a:


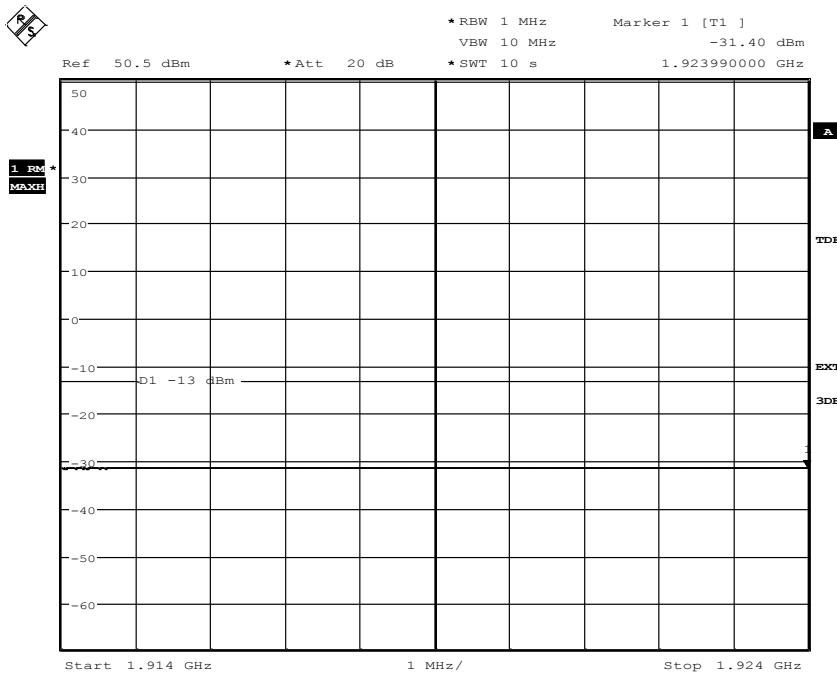
Date: 4.NOV.2013 21:43:06

Diagram 6b:


Date: 4.NOV.2013 21:46:33

Appendix 5

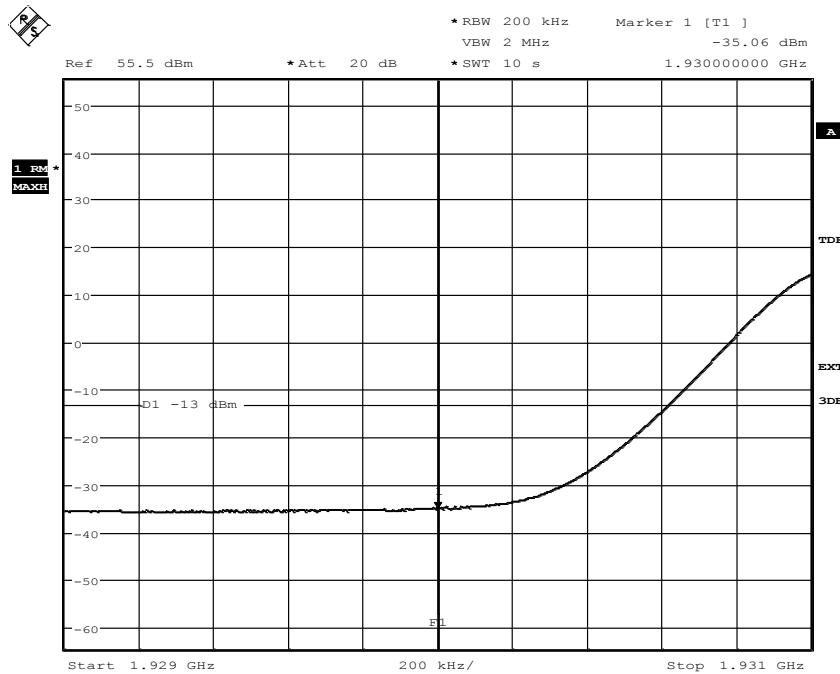
Diagram 6c:



Date: 4.NOV.2013 21:49:05

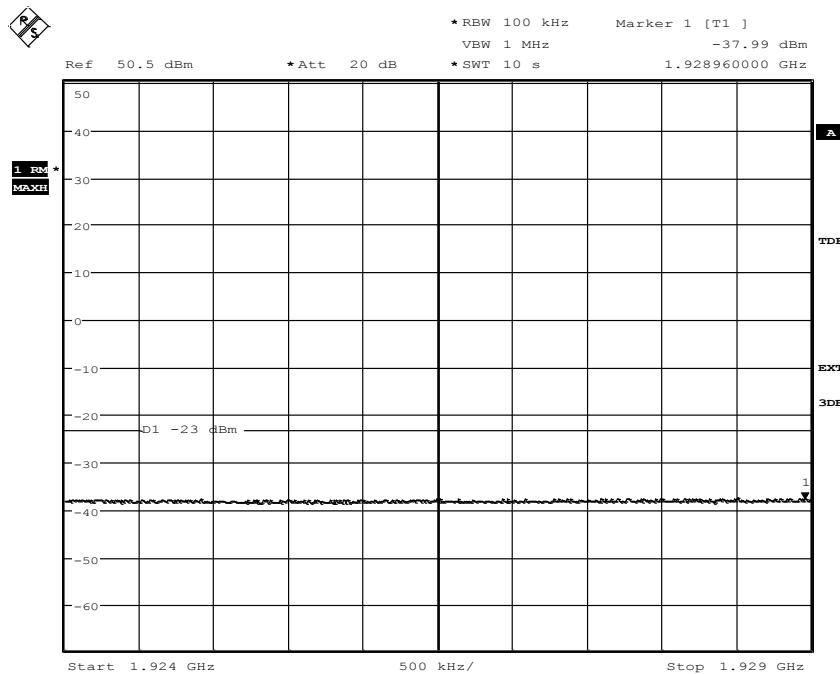
Appendix 5

Diagram 7a:



Date: 5.NOV.2013 13:46:02

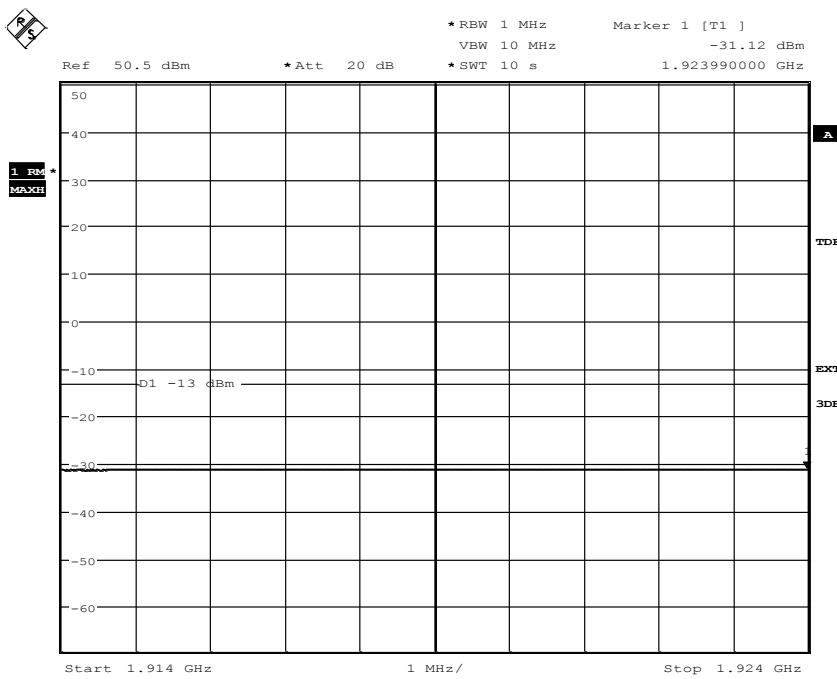
Diagram 7b:



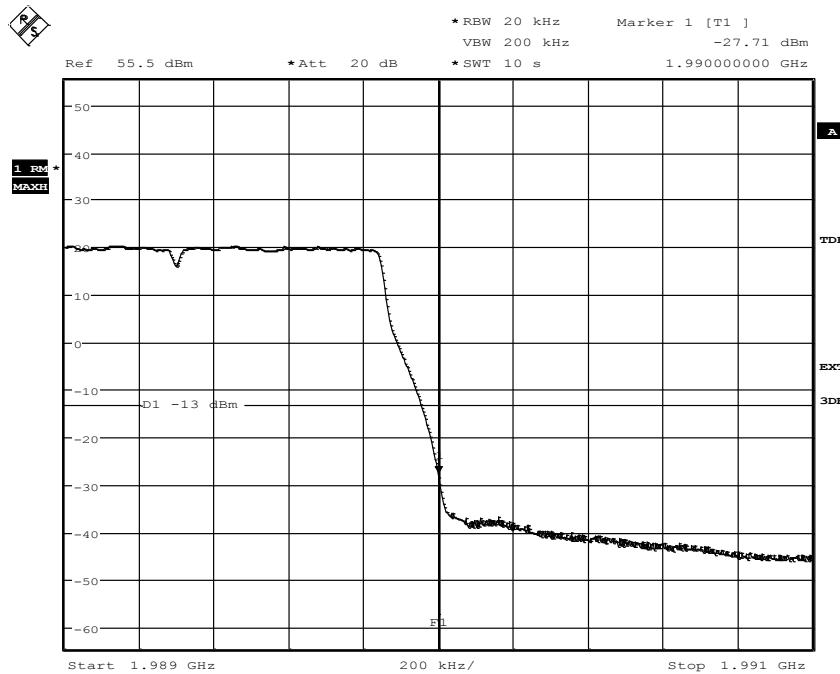
Date: 5.NOV.2013 13:47:01

Appendix 5

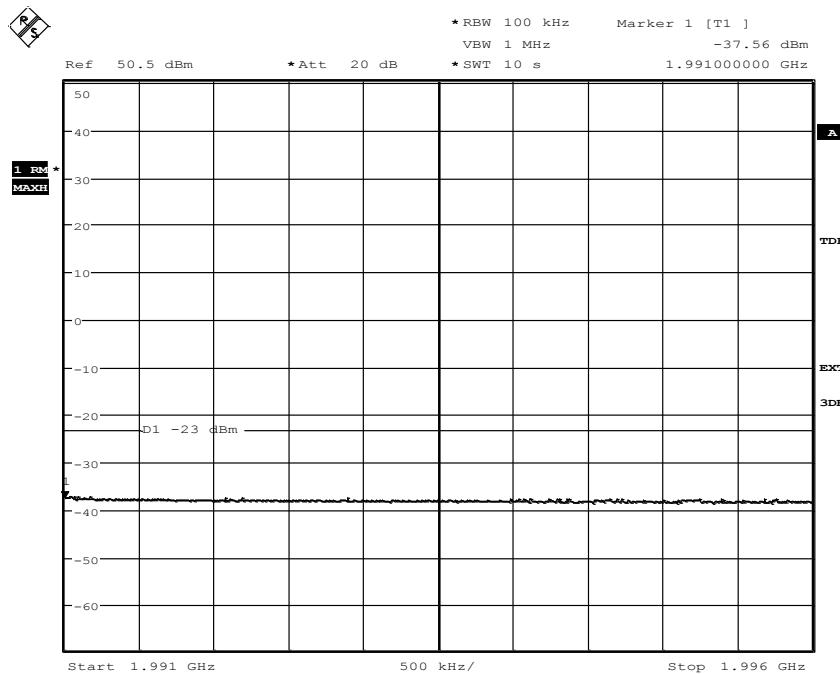
Diagram 7c:



Date: 5.NOV.2013 13:48:14

Appendix 5
Diagram 8a:


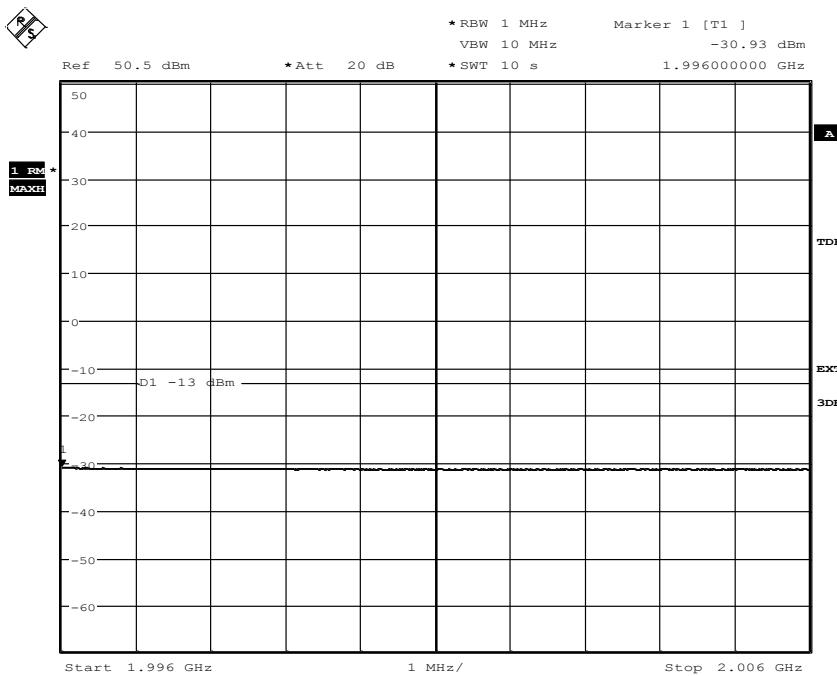
Date: 5.NOV.2013 17:25:05

Diagram 8b:


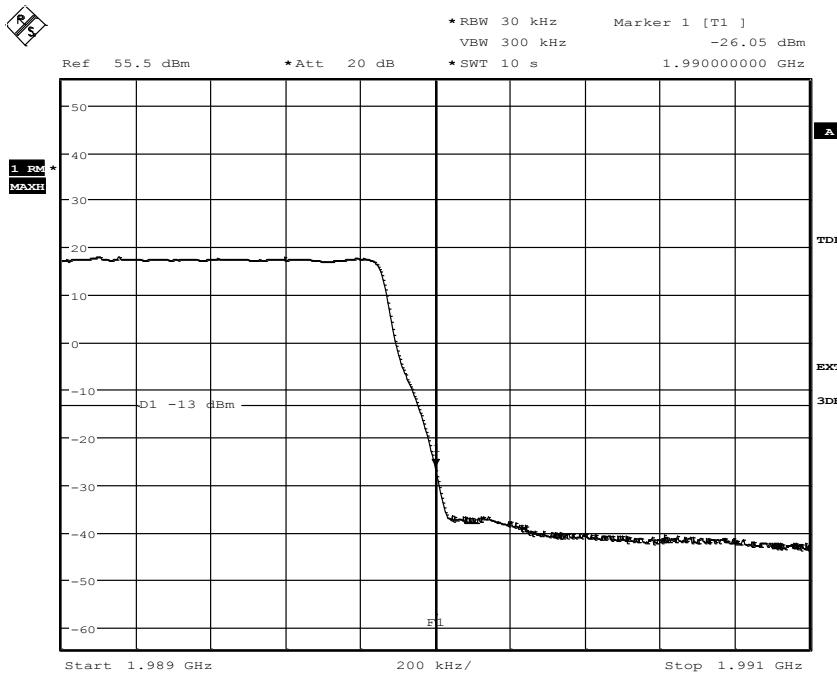
Date: 5.NOV.2013 17:26:08

Appendix 5

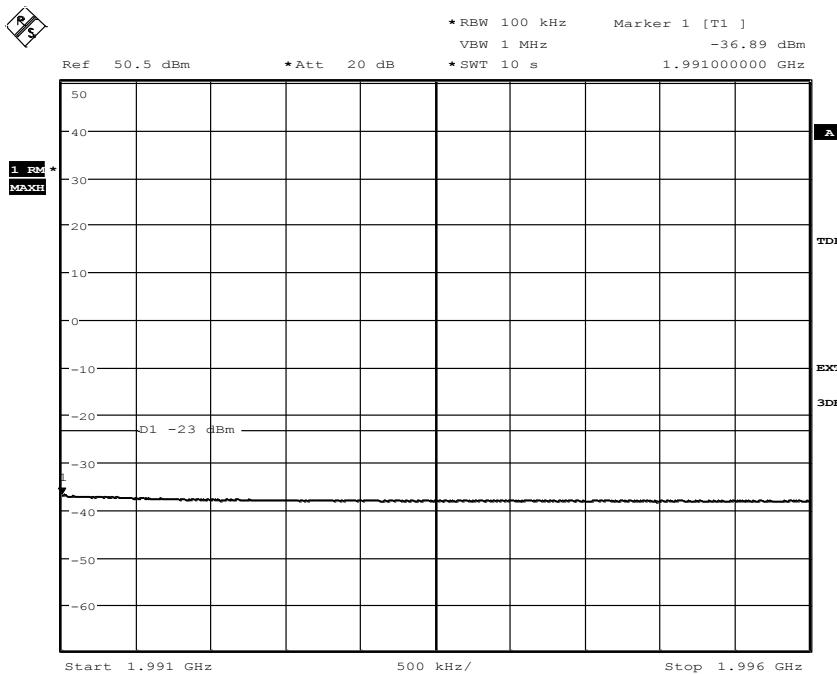
Diagram 8c:



Date: 5.NOV.2013 17:26:54

Appendix 5
Diagram 9a:


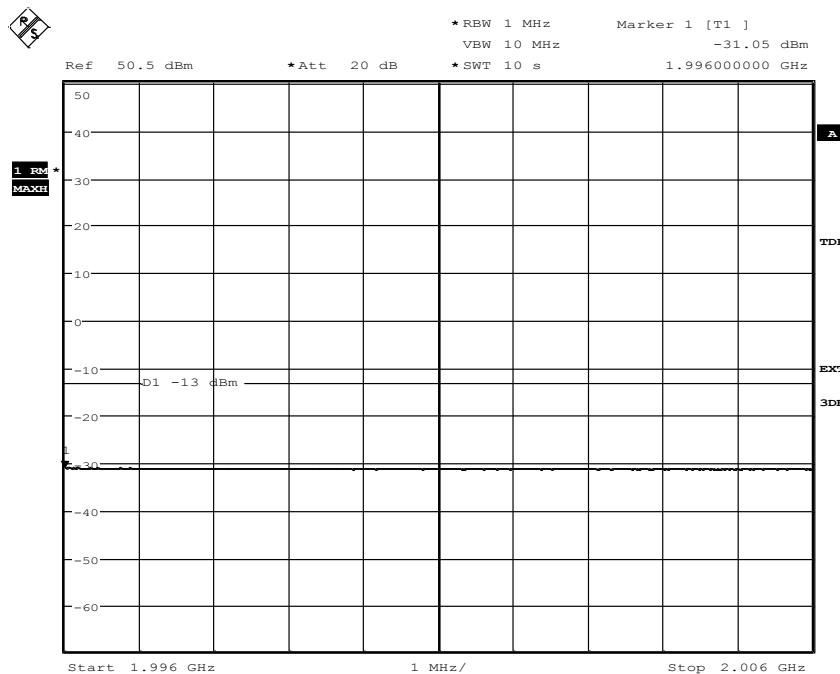
Date: 5.NOV.2013 17:53:23

Diagram 9b:


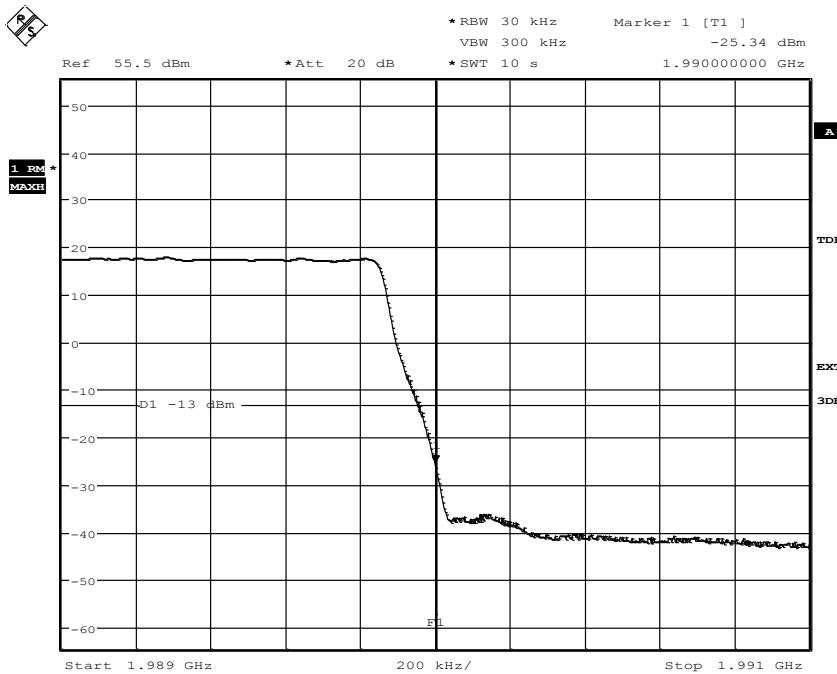
Date: 5.NOV.2013 17:54:43

Appendix 5

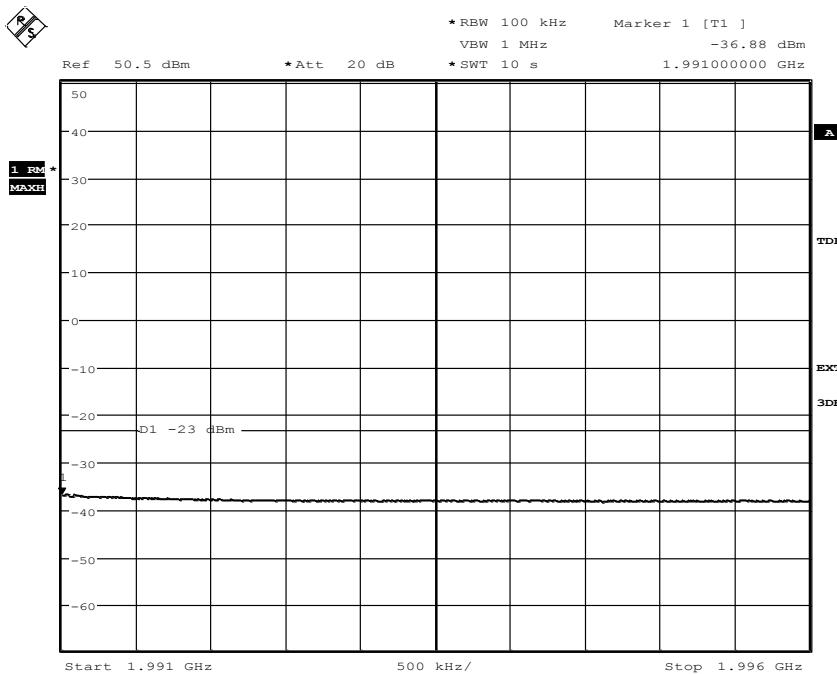
Diagram 9c



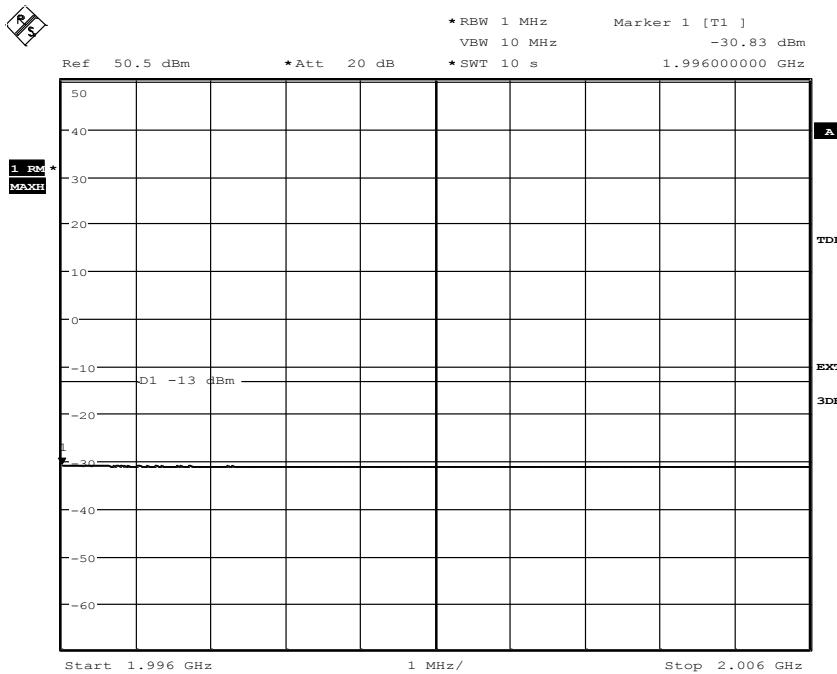
Date: 5.NOV.2013 17:55:56

Appendix 5
Diagram 10a:


Date: 5.NOV.2013 17:50:37

Diagram 10b:


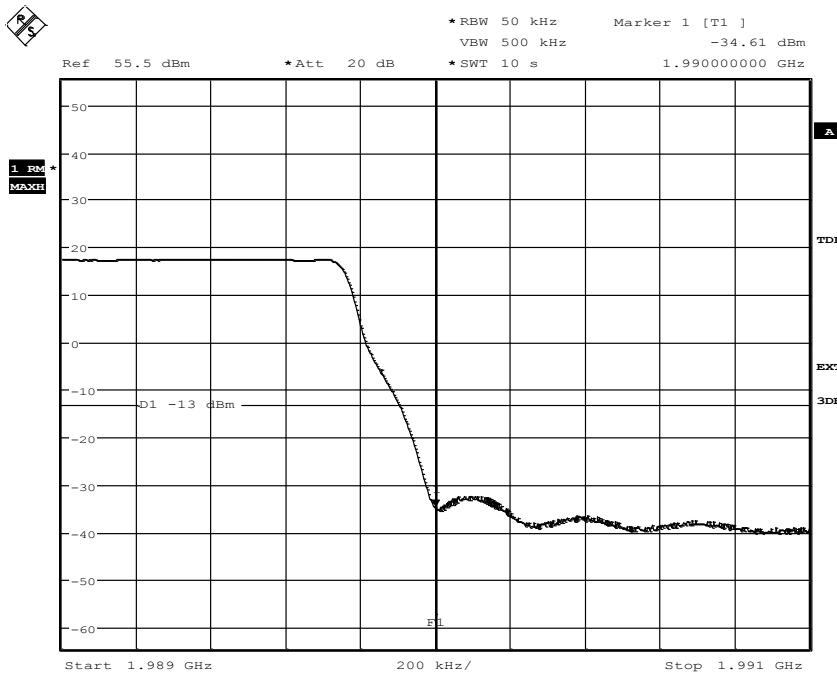
Date: 5.NOV.2013 17:48:47

Appendix 5
Diagram 10c:


Date: 5.NOV.2013 17:47:14

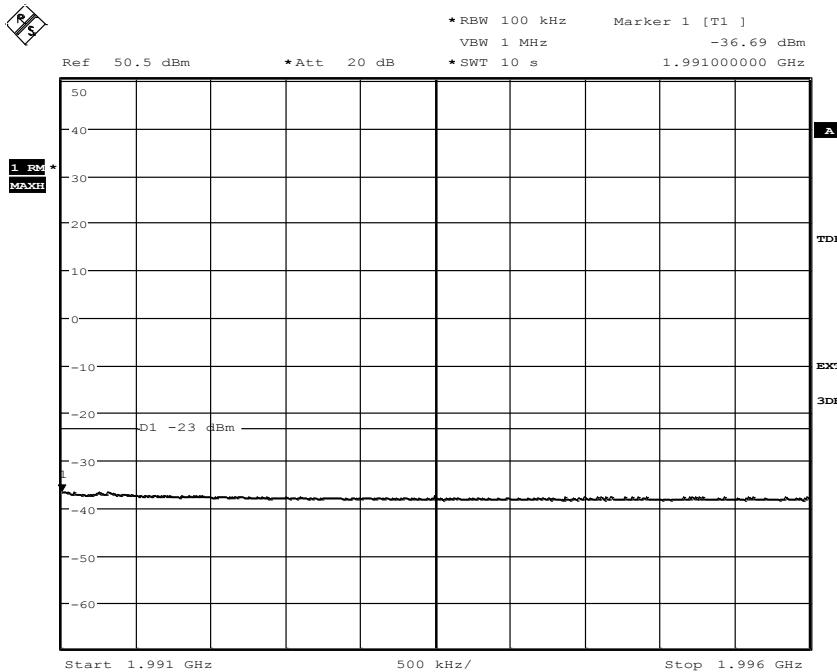
Appendix 5

Diagram 11a:



Date: 5.NOV.2013 18:10:32

Diagram 11b:

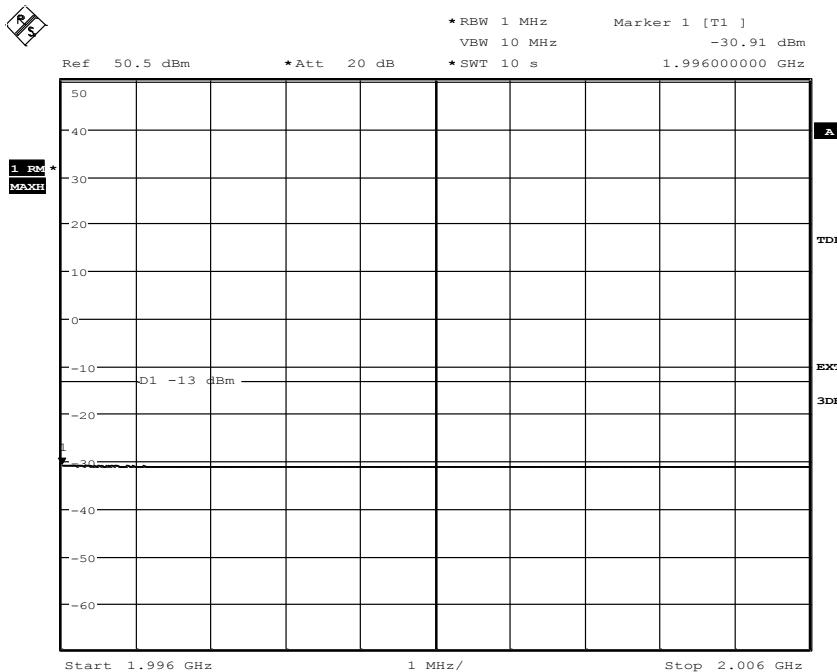


Date: 5.NOV.2013 18:09:15

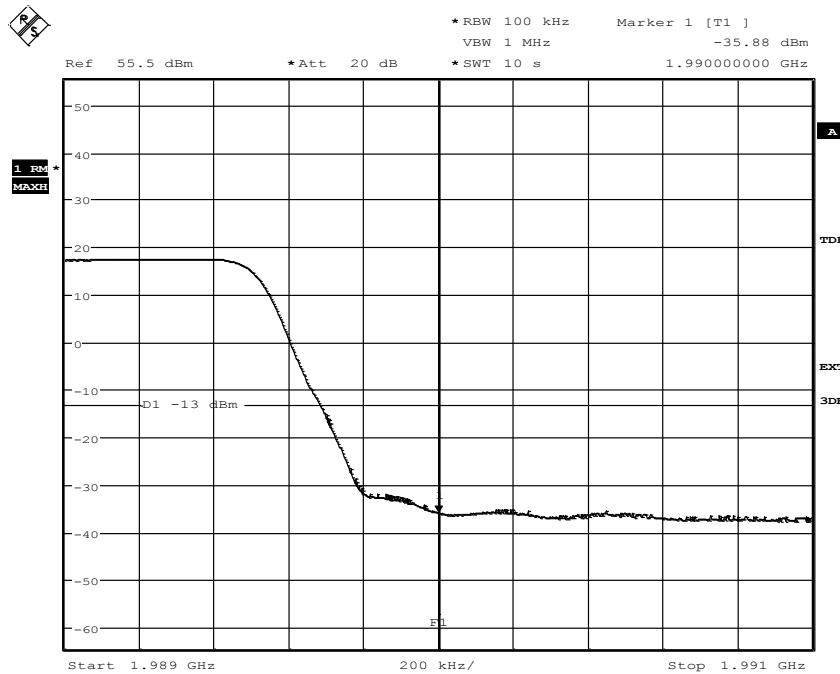
your
Science Partner

Appendix 5

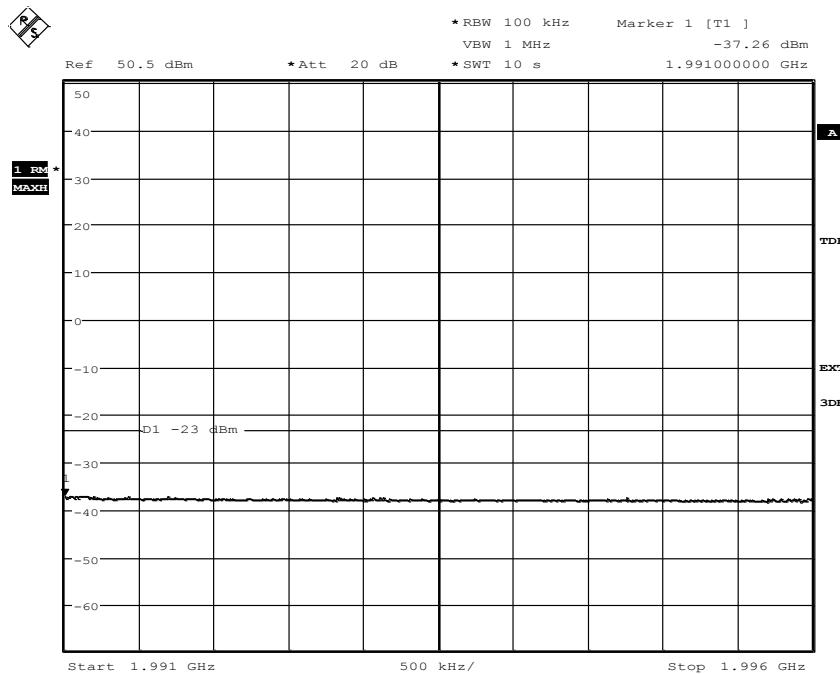
Diagram 11c:



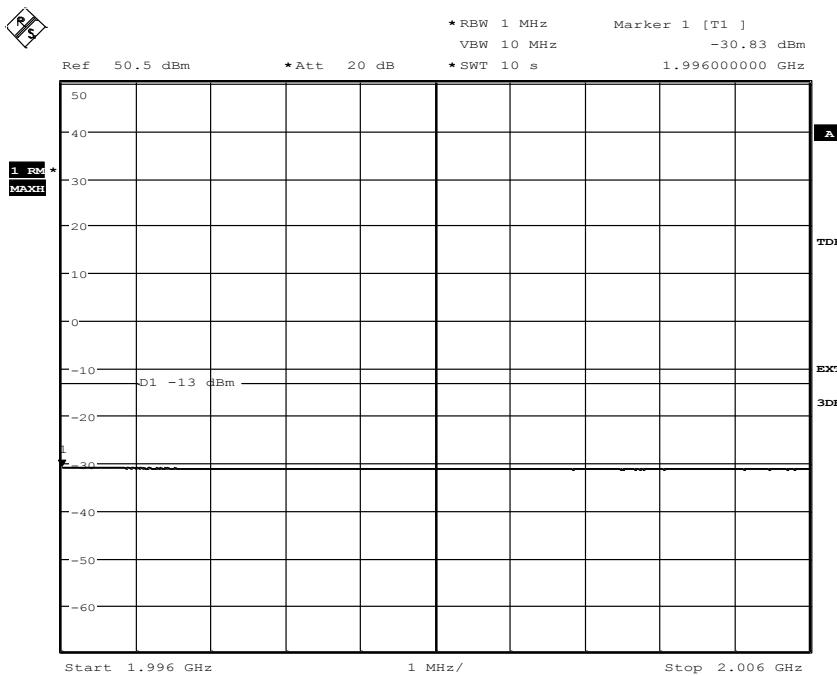
Date: 5.NOV.2013 18:08:16

Appendix 5
Diagram 12a:


Date: 5.NOV.2013 18:22:29

Diagram 12b:


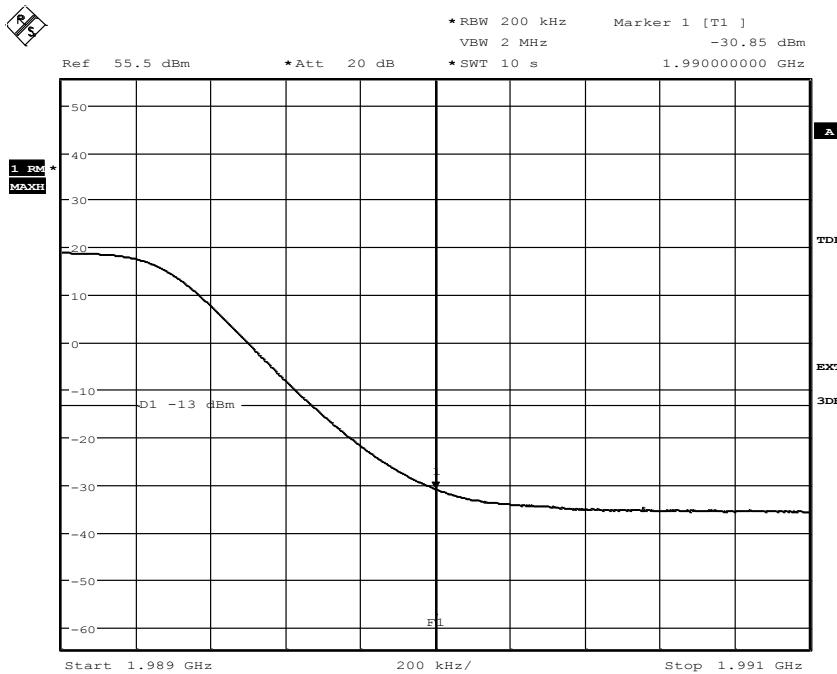
Date: 5.NOV.2013 18:21:25

Appendix 5
Diagram 12c:


Date: 5.NOV.2013 18:20:01

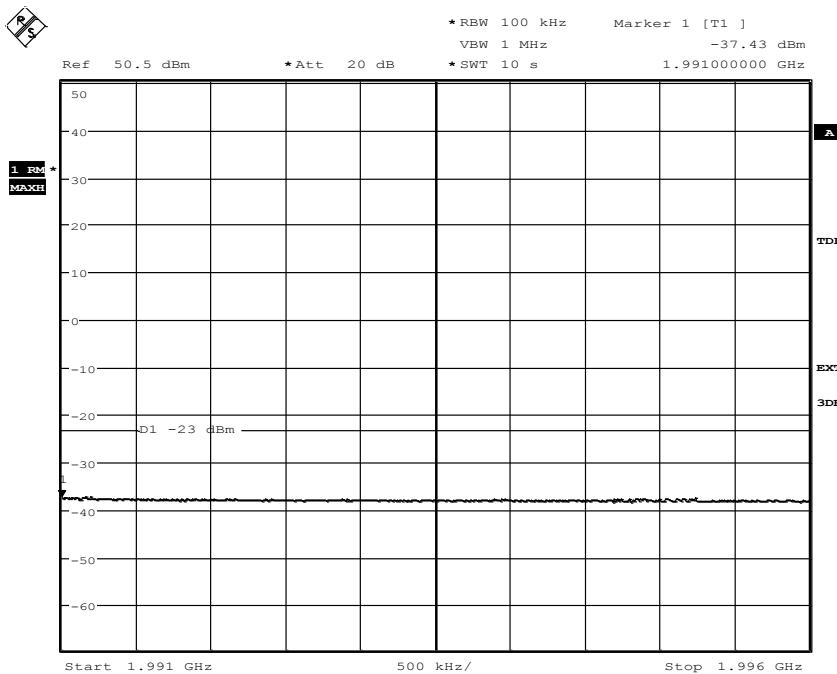
Appendix 5

Diagram 13a:



Date: 5.NOV.2013 18:25:22

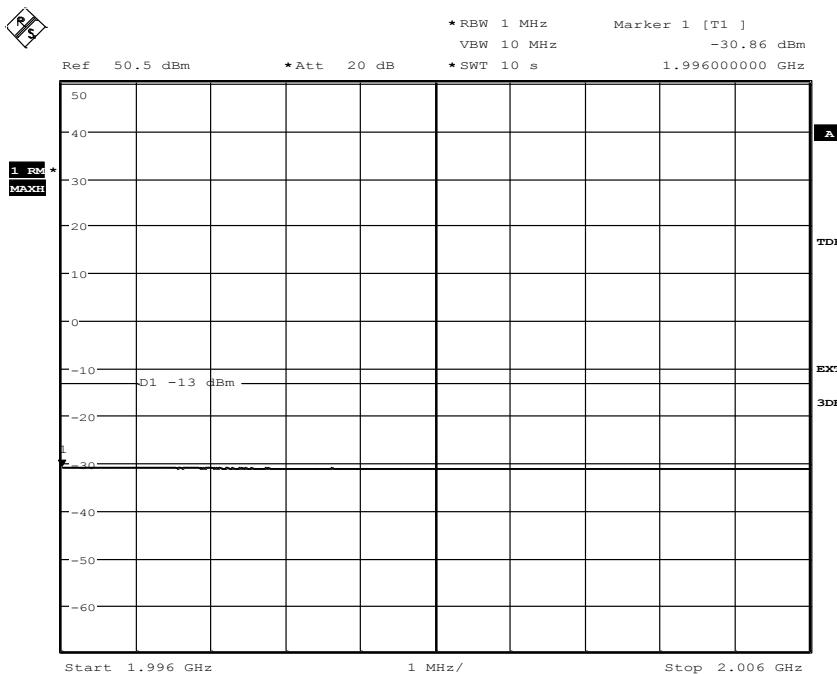
Diagram 13b:



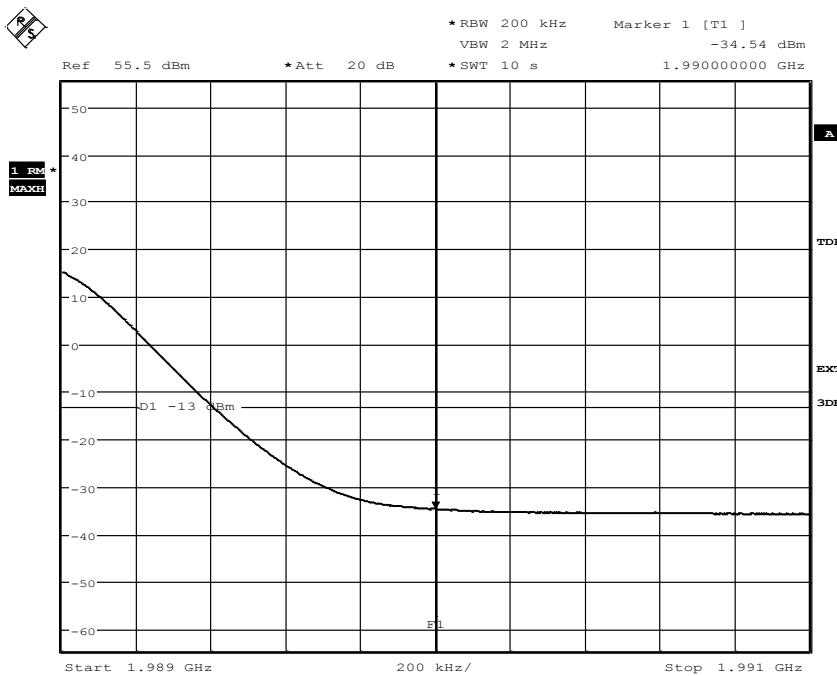
Date: 5.NOV.2013 18:26:23

Appendix 5

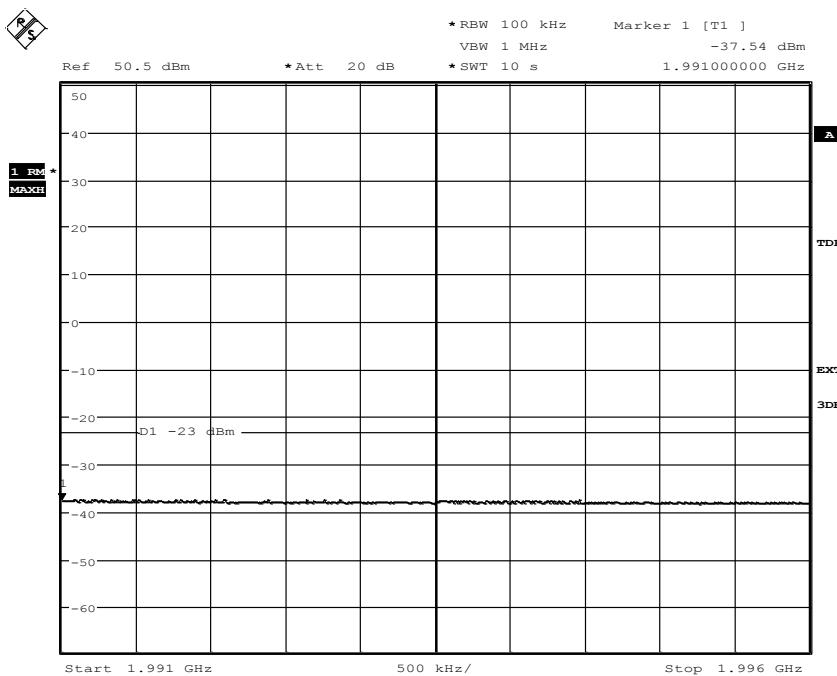
Diagram 13c:



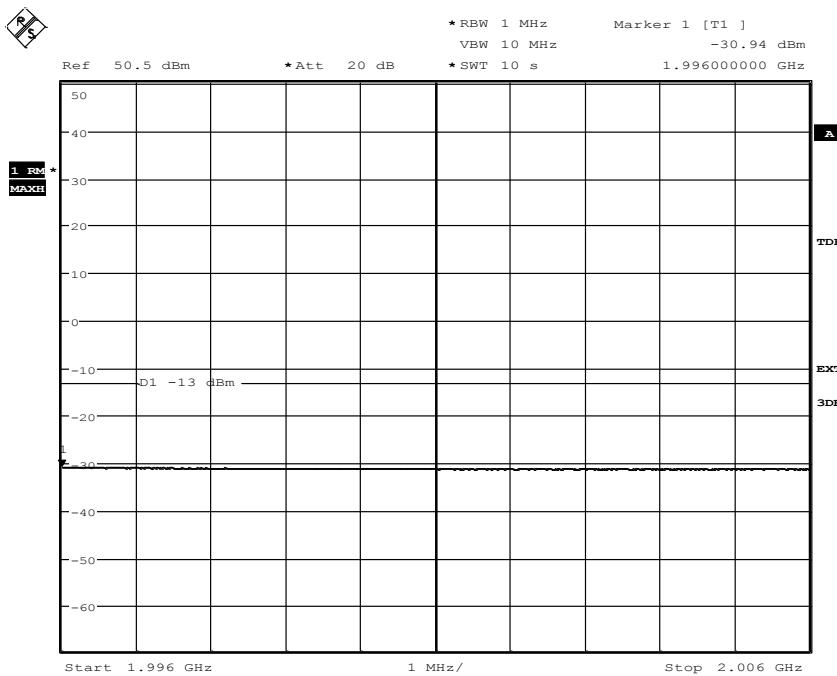
Date: 5.NOV.2013 18:28:06

Appendix 5
Diagram 14a:


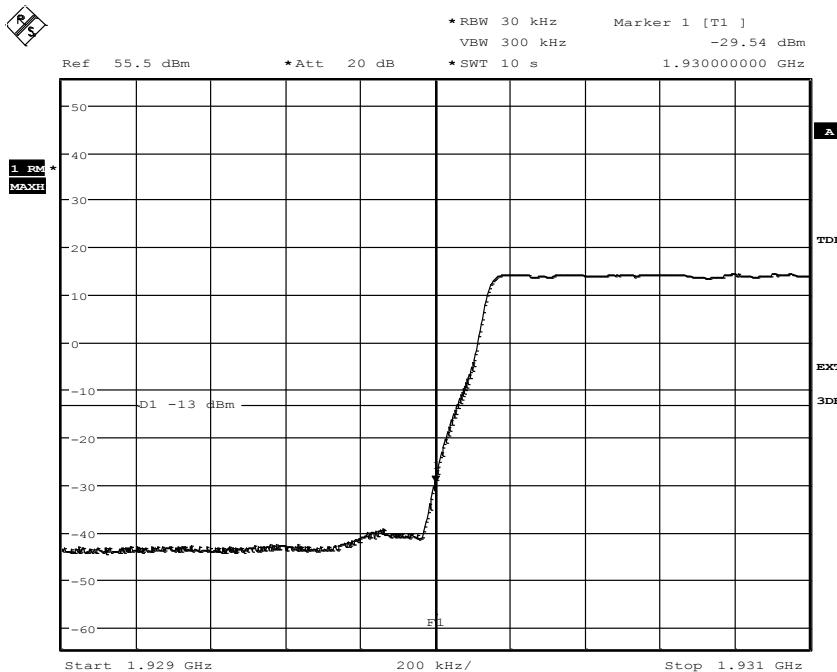
Date: 5.NOV.2013 17:06:45

Diagram 14b:


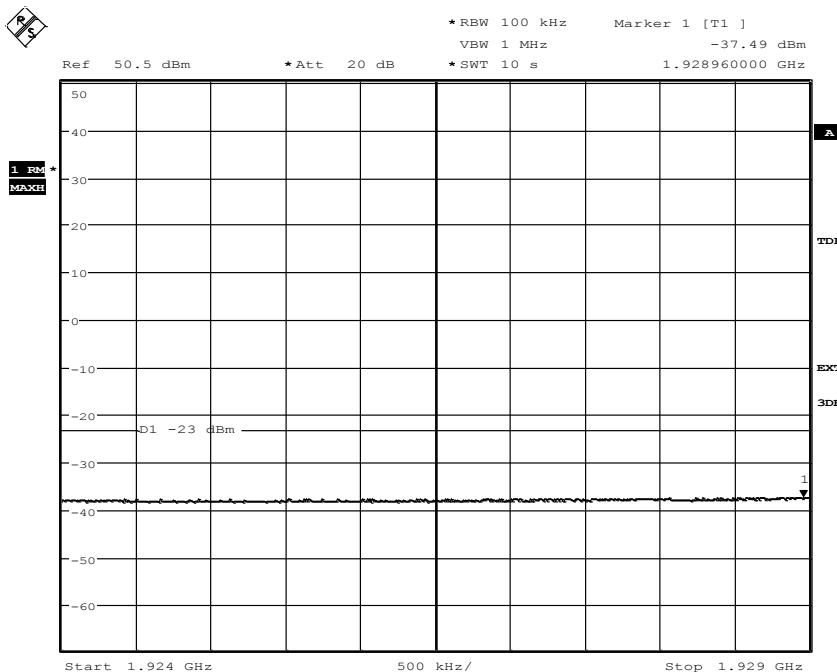
Date: 5.NOV.2013 17:08:13

Appendix 5
Diagram 14c:


Date: 5.NOV.2013 17:09:06

Appendix 5
Diagram 15a:


Date: 6.NOV.2013 11:52:46

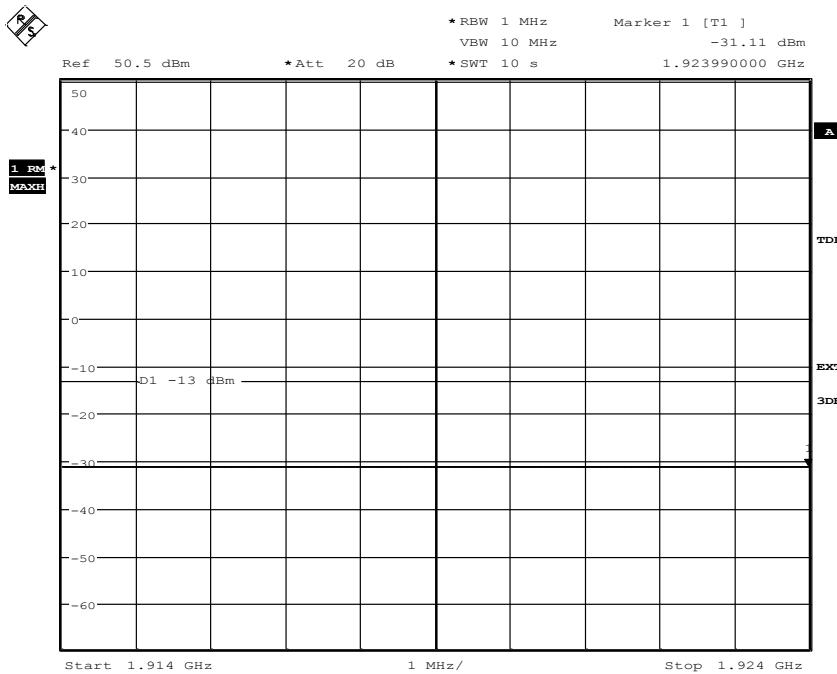
Diagram 15b:


Date: 6.NOV.2013 11:51:27

your
Science Partner

Appendix 5

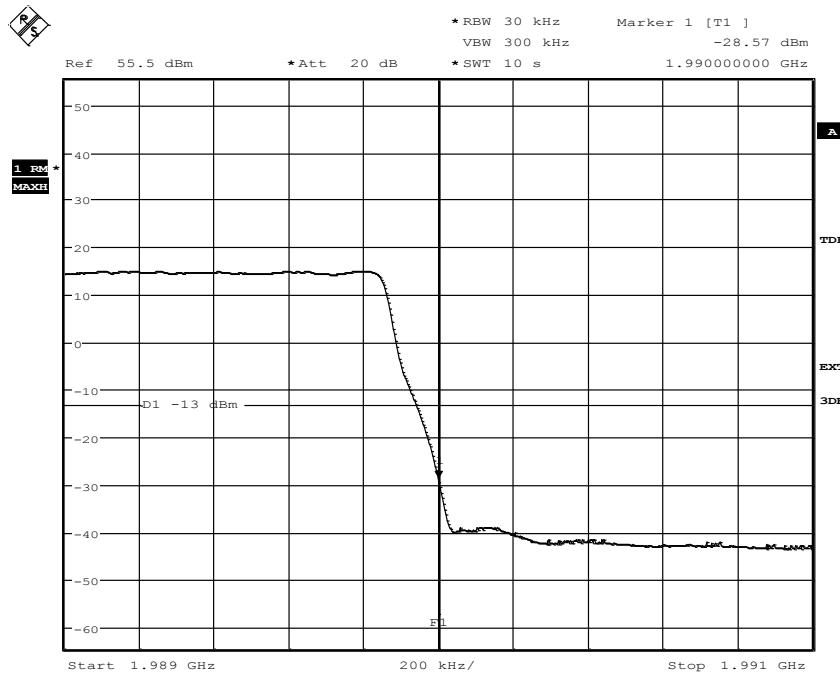
Diagram 15c:



Date: 6.NOV.2013 11:50:13

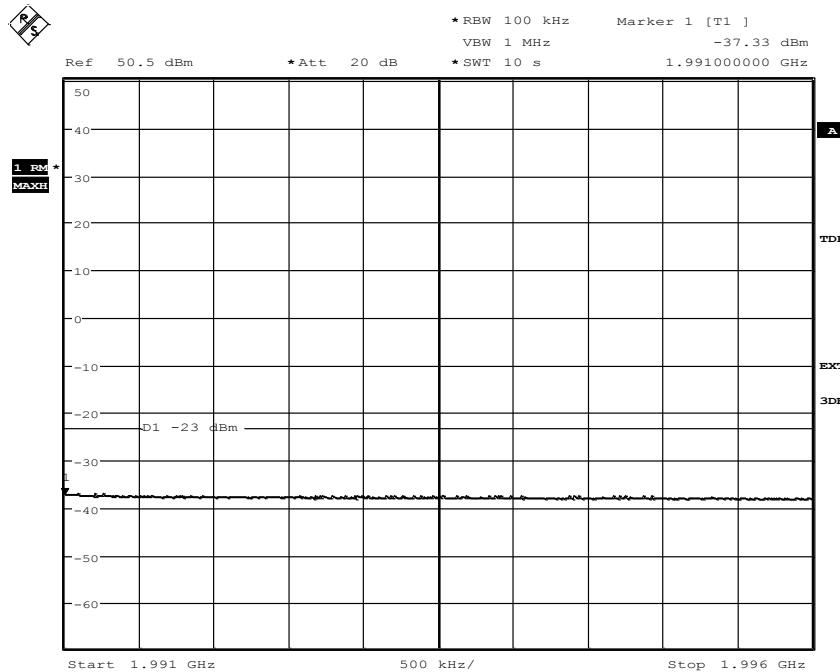
Appendix 5

Diagram 16a:

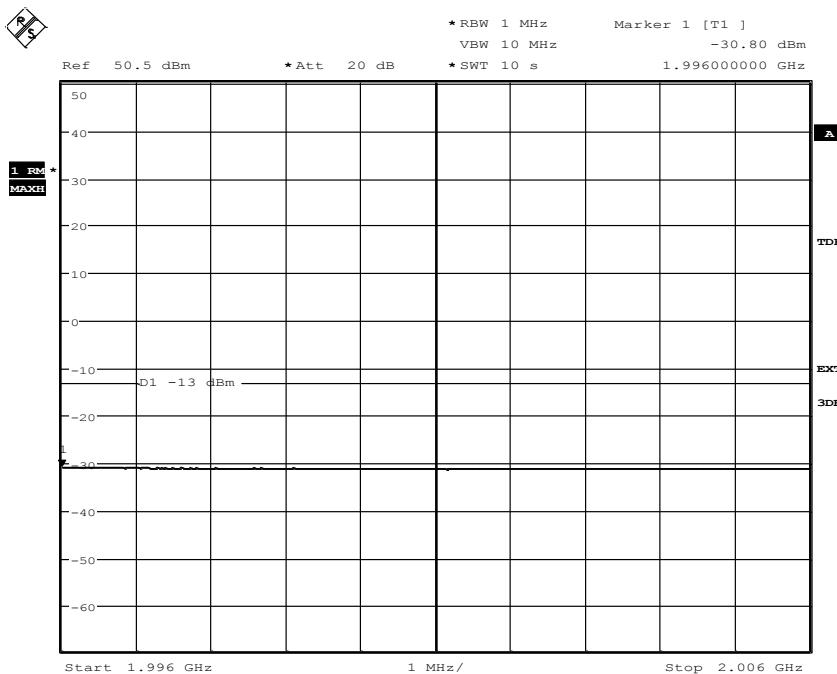


Date: 6.NOV.2013 12:08:54

Diagram 16b:



Date: 6.NOV.2013 12:10:26

Appendix 5
Diagram 16c:


Date: 6.NOV.2013 12:11:30

Appendix 6

Conducted spurious emission measurements according to CFR 47 §2.1051 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-04	23 °C ± 3 °C	33 % ± 5 %
2013-11-05	20 °C ± 3 °C	30 % ± 5 %
2013-11-06	22 °C ± 3 °C	29 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyser with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), (iii) “measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v02.

Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	901 508
HP filter	901 502
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 6

Results

MIMO mode: Single carrier

Diagram	BW configuration [MHz]	Tested frequency	Tested Port
1 a+b+c+d	1.4 MHz	B	RF A
2 a+b+c+d	20 MHz	B	RF A
3 a+b+c+d	1.4 MHz	M	RF A
4 a+b+c+d	1.4 MHz	M	RF B
5 a+b+c+d	3 MHz	M	RF A
6 a+b+c+d	5 MHz	M	RF A
7 a+b+c+d	10 MHz	M	RF A
8 a+b+c+d	15 MHz	M	RF A
9 a+b+c+d	20 MHz	M	RF A
10 a+b+c+d	20 MHz	M	RF B
11 a+b+c+d	1.4 MHz	T	RF A
12 a+b+c+d	20 MHz	T	RF A

MIMO mode: 2 carriers

Diagram	BW configuration	Tested frequency	Tested Port
13 a+b+c+d+e	1.4 MHz	B2im1	RF A
14 a+b+c+d+e	1.4 MHz	B2im2	RF A
15 a+b+c+d	1.4 MHz	M2	RF A
16 a+b+c+d+e	1.4 MHz	T2im1	RF A
17 a+b+c+d+e	1.4 MHz	T2im2	RF A

MIMO mode: 4 carriers

Diagram	BW configuration	Tested frequency	Tested Port
18 a+b+c+d+e	5 MHz	B4-5	RF A
19 a+b+c+d+e	5 MHz	M4-5	RF A
20 a+b+c+d+e	5 MHz	T4-5	RF A



Appendix 6

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

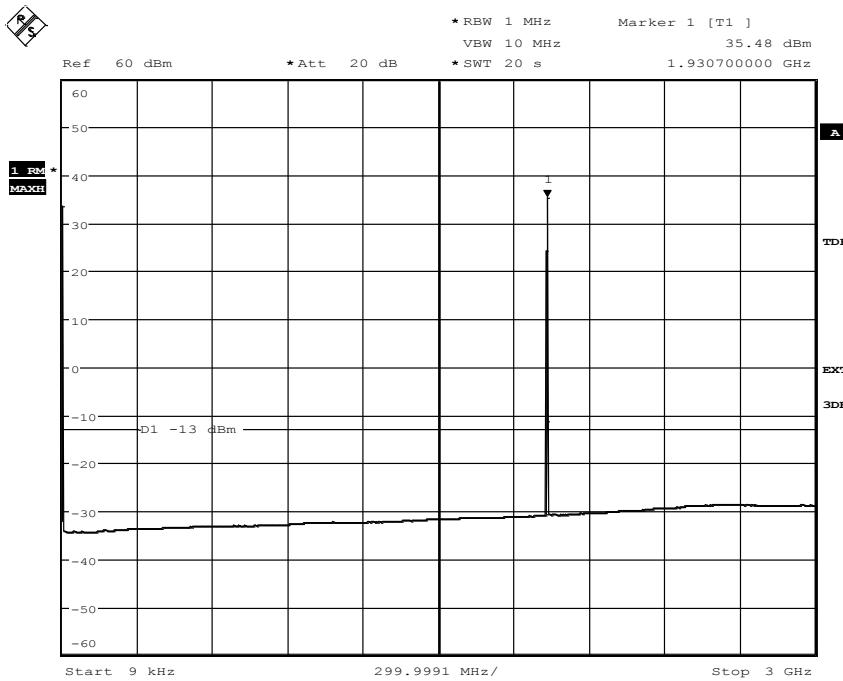
The highest fundamental frequency is 1.990 GHz. The measurements were made up to 20 GHz (10x1.990 GHz = 19.90 GHz).

Limits

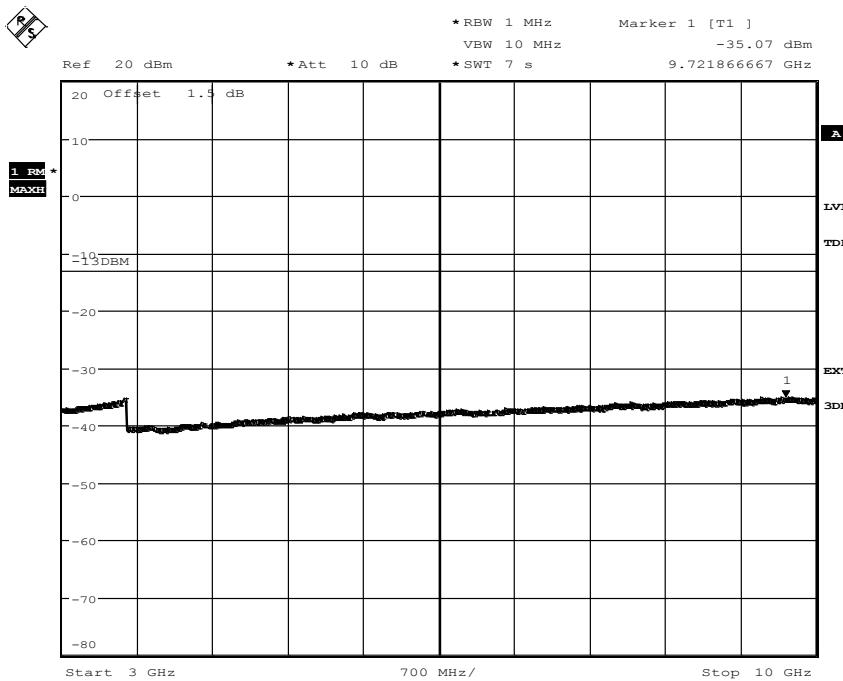
CFR 47 §24.238 and IC RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

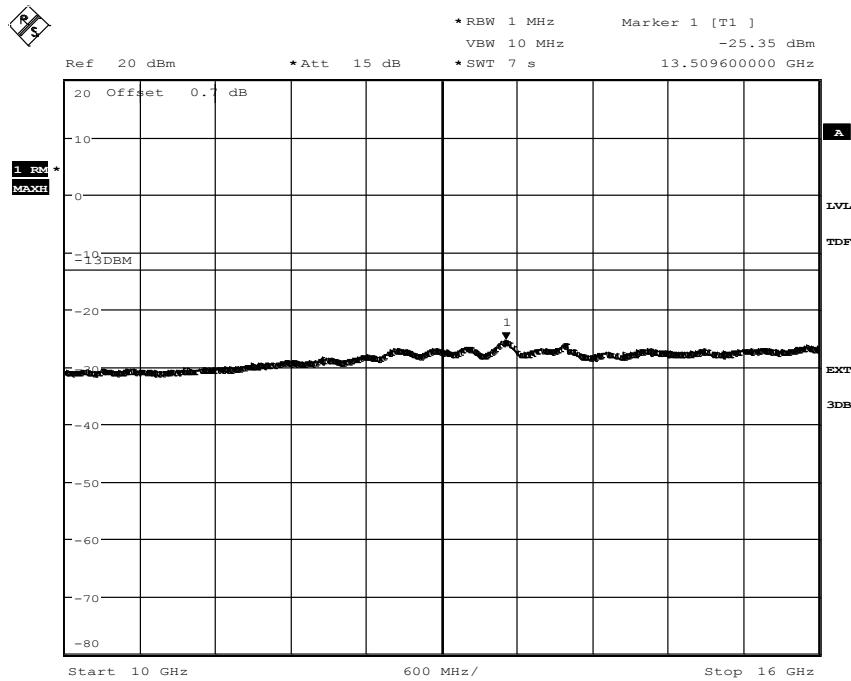
Complies?	Yes
-----------	-----

Appendix 6
Diagram 1a:


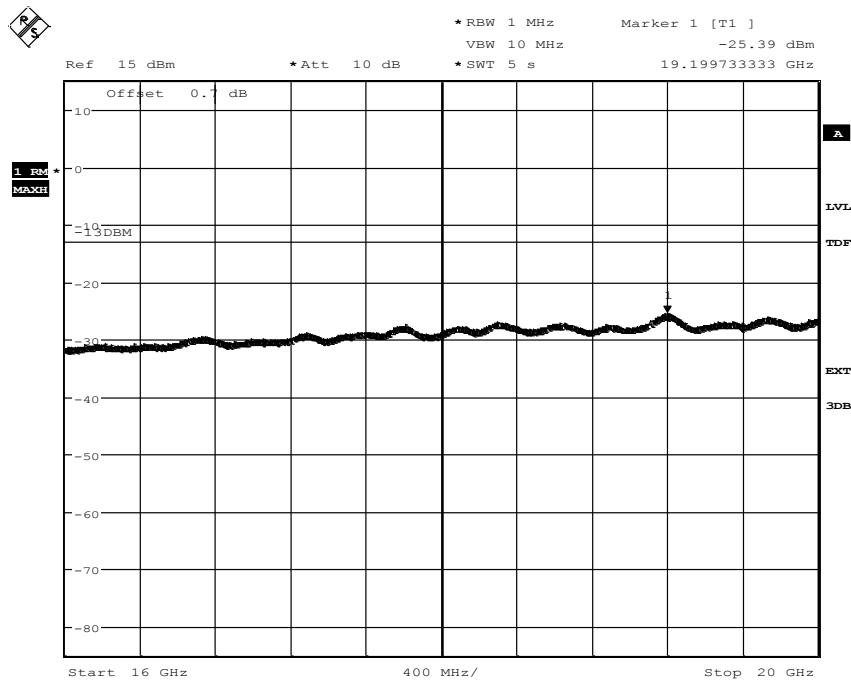
Date: 4.NOV.2013 18:52:25

Diagram 1b:


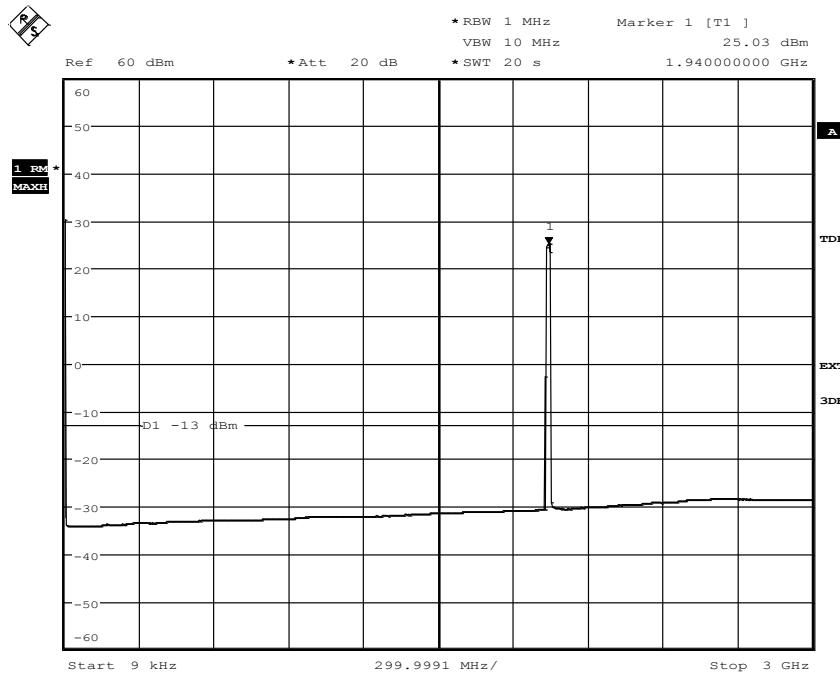
Date: 4.NOV.2013 18:56:38

Appendix 6
Diagram 1c:


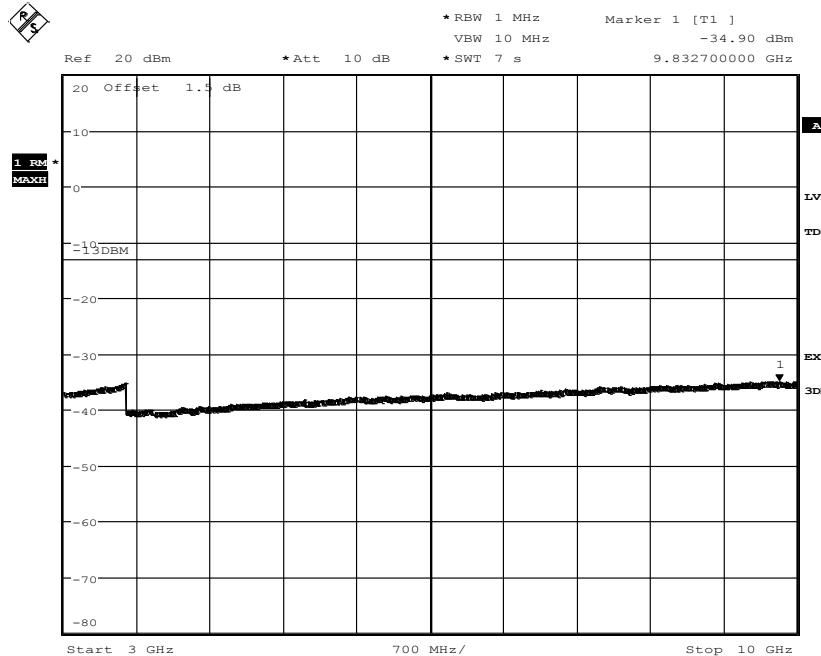
Date: 4.NOV.2013 18:58:00

Diagram 1d:


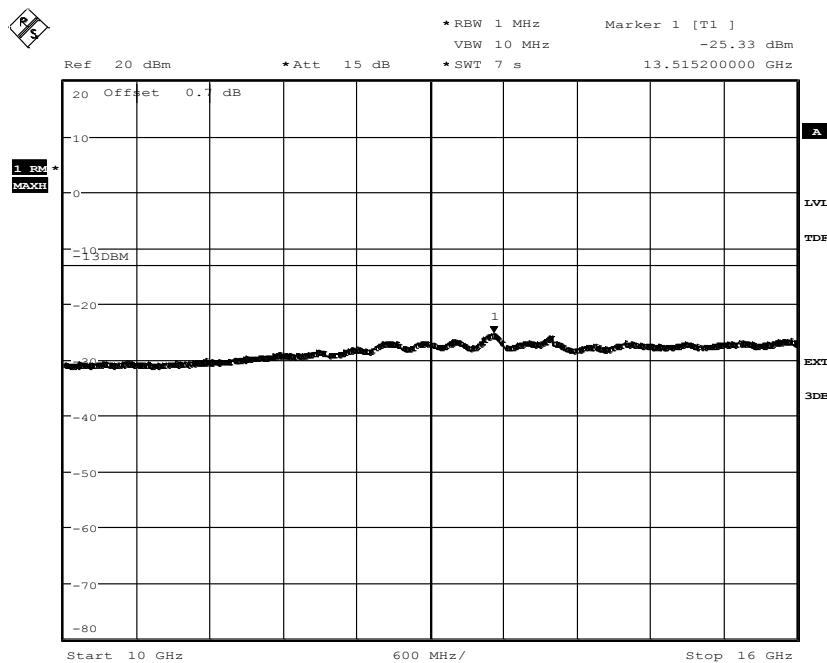
Date: 4.NOV.2013 18:59:19

Appendix 6
Diagram 2a:


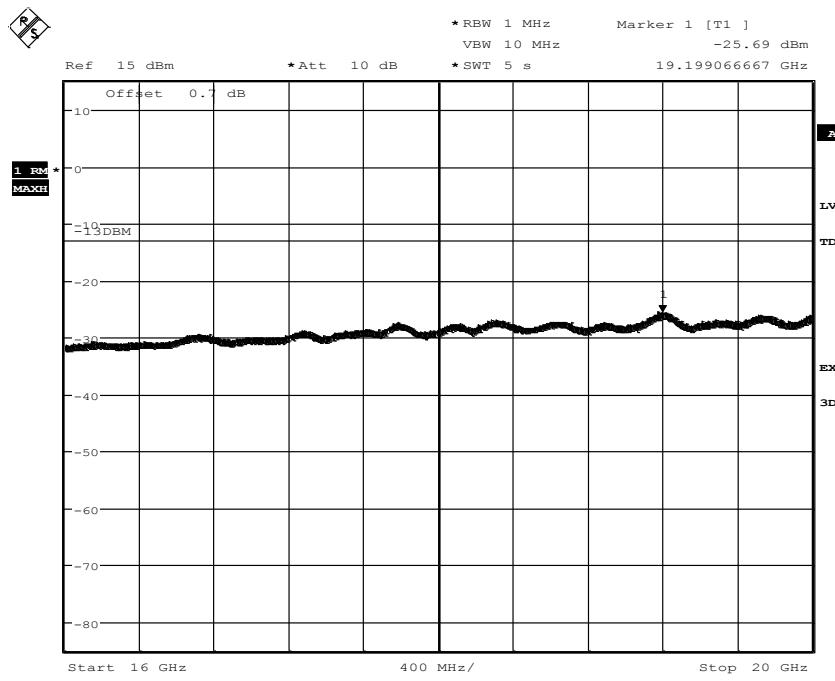
Date: 5.NOV.2013 14:11:29

Diagram 2b:


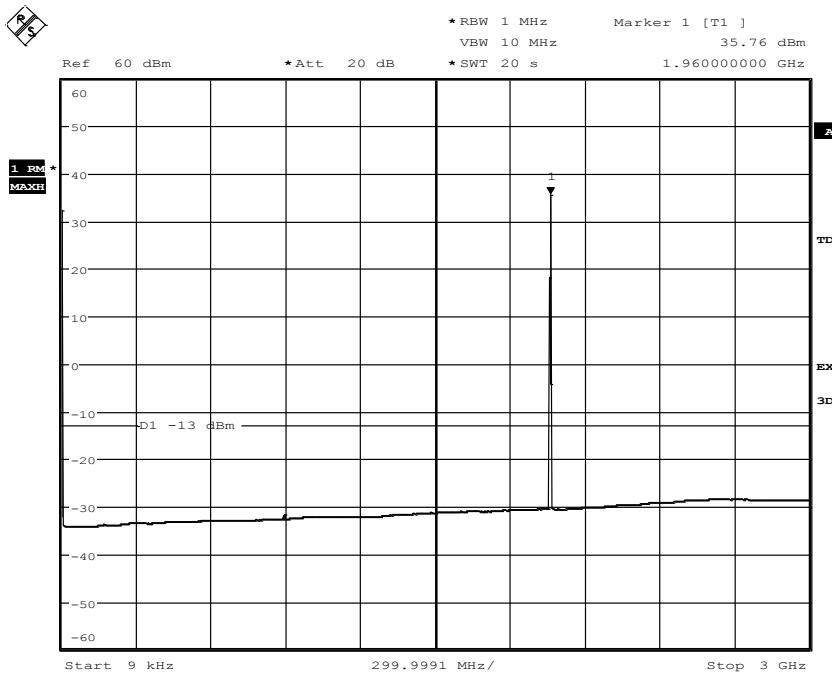
Date: 5.NOV.2013 14:13:45

Appendix 6
Diagram 2c:


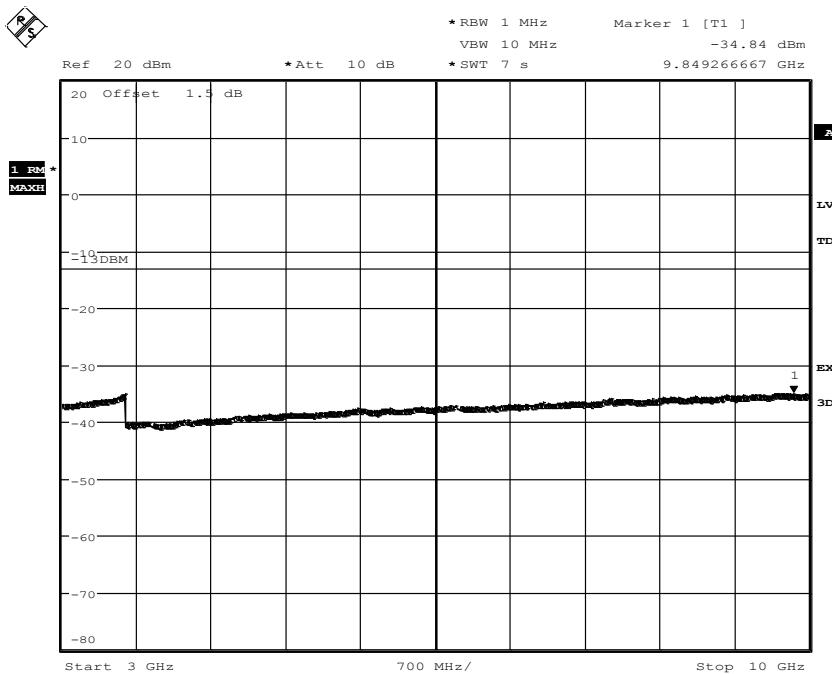
Date: 5.NOV.2013 14:15:01

Diagram 2d:


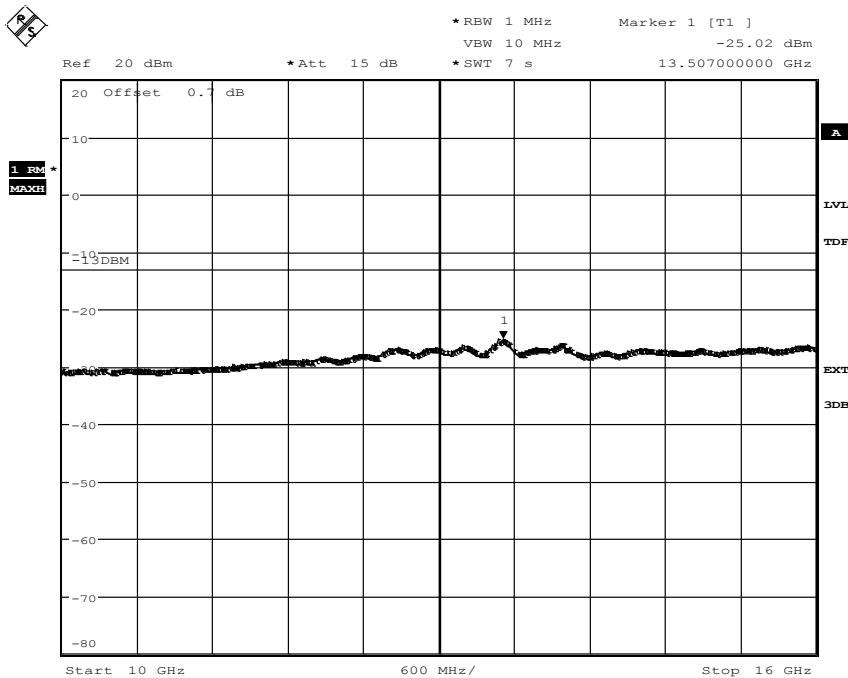
Date: 5.NOV.2013 14:15:53

Appendix 6
Diagram 3a:


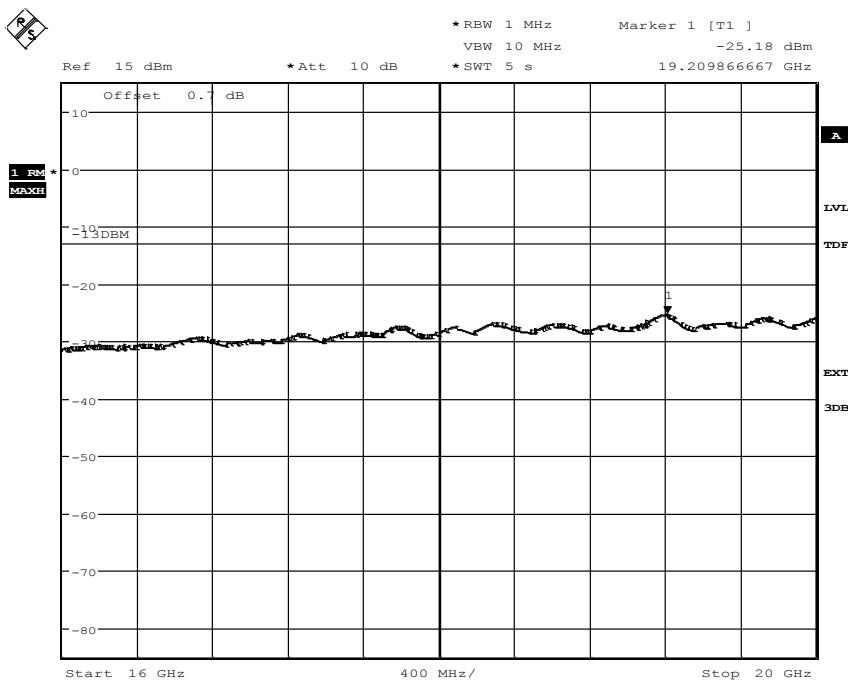
Date: 5.NOV.2013 14:59:06

Diagram 3b:


Date: 5.NOV.2013 14:55:24

Appendix 6
Diagram 3c:


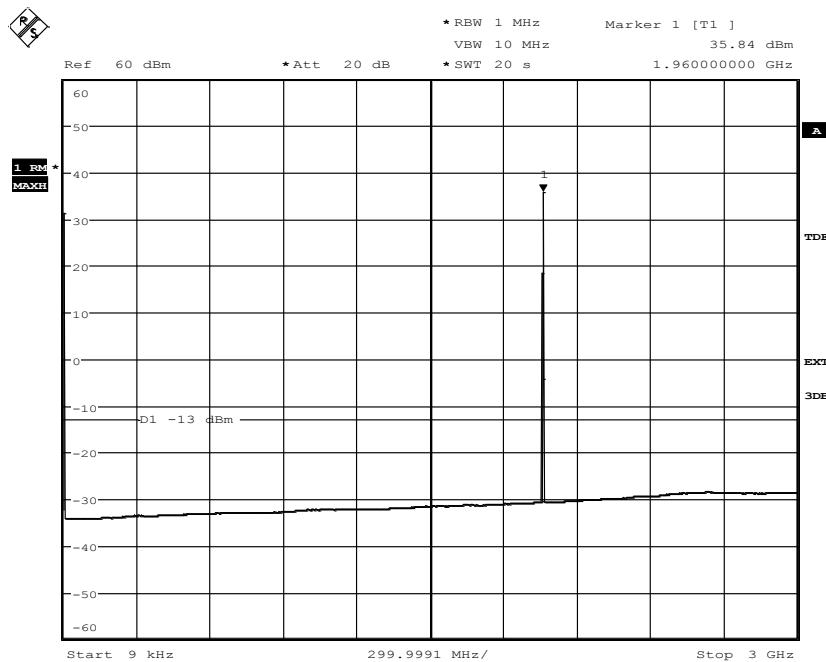
Date: 5.NOV.2013 14:53:34

Diagram 3d:


Date: 5.NOV.2013 14:51:55

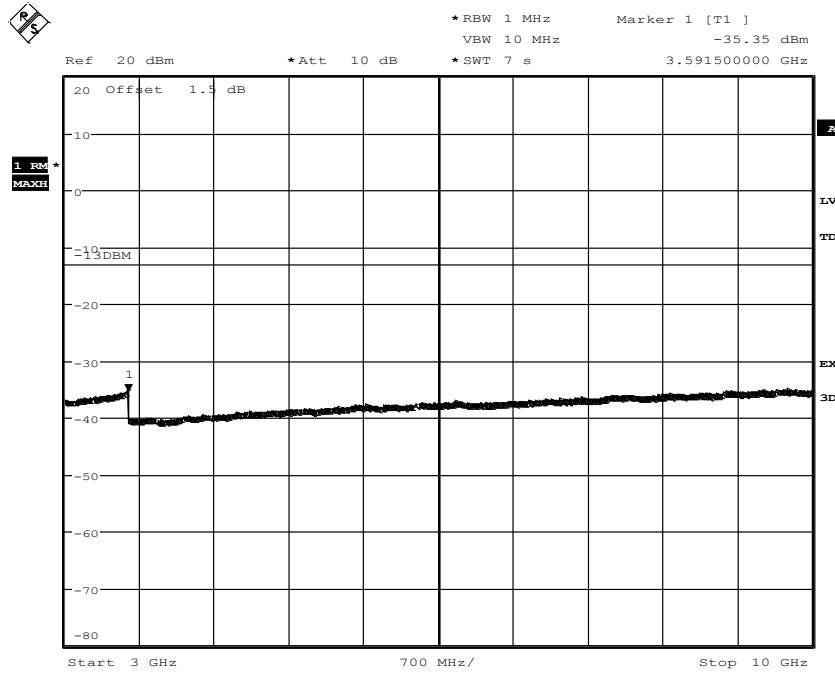
Appendix 6

Diagram 4a:



Date: 5.NOV.2013 14:40:08

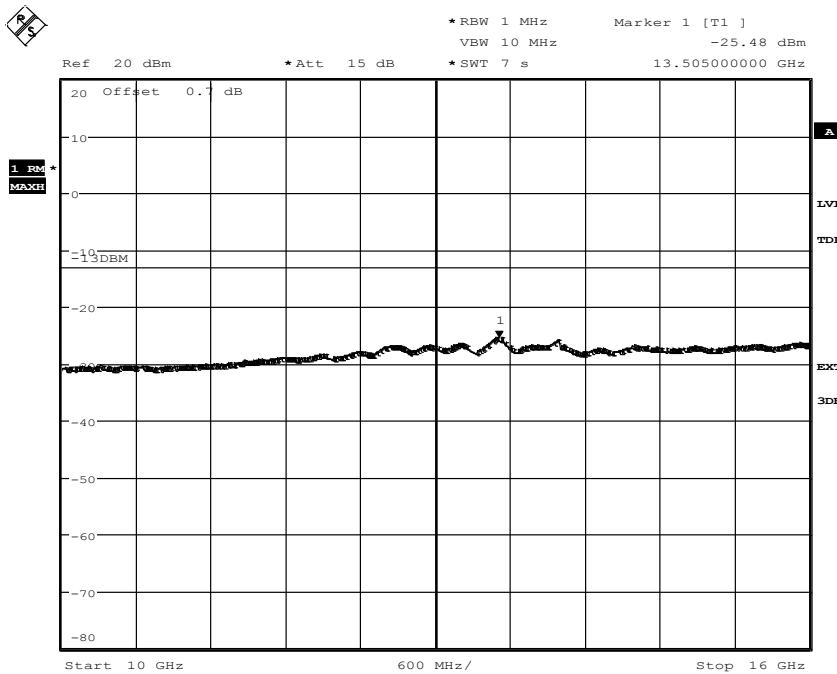
Diagram 4b:



Date: 5.NOV.2013 14:41:36

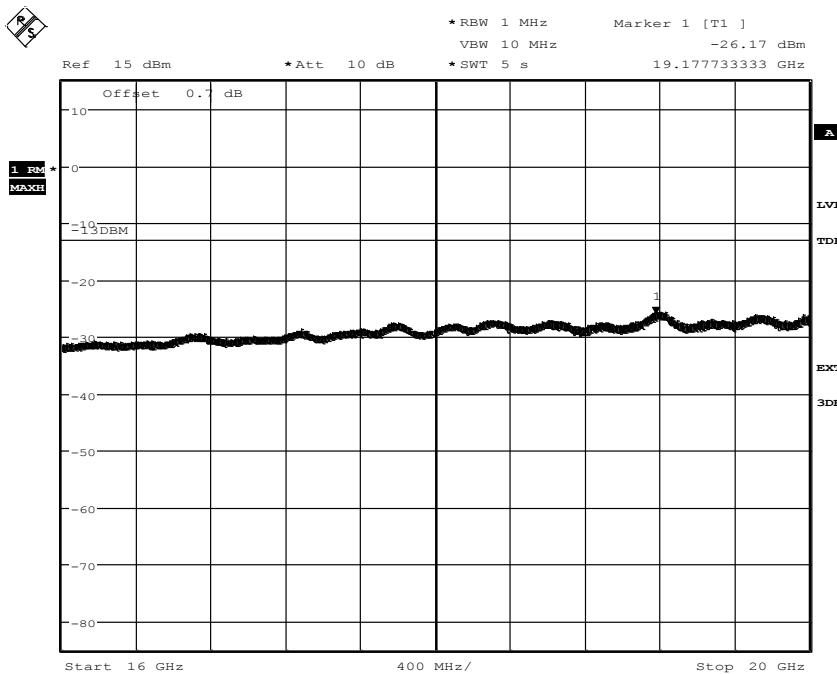
Appendix 6

Diagram 4c:



Date: 5.NOV.2013 14:43:36

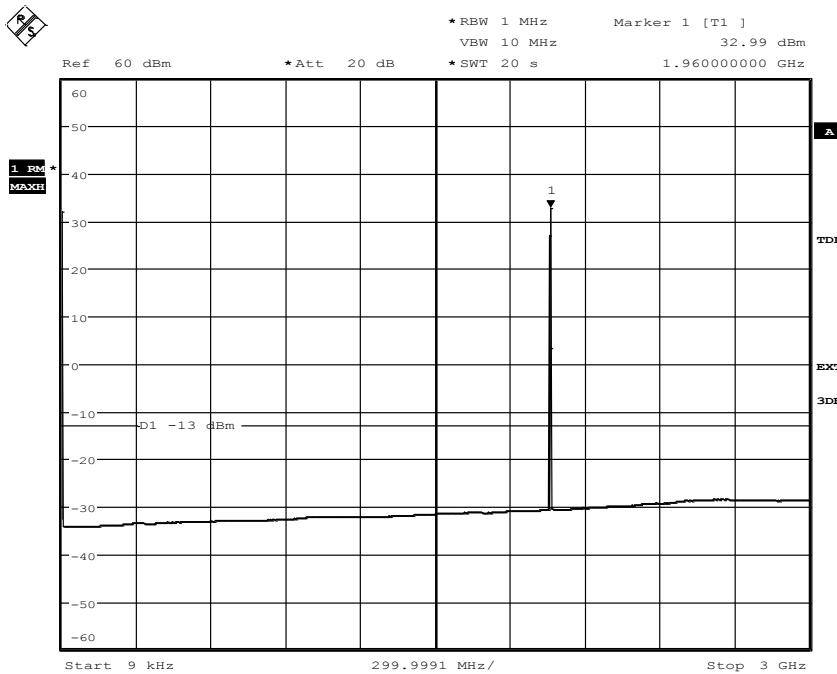
Diagram 4d:



Date: 5.NOV.2013 14:44:31

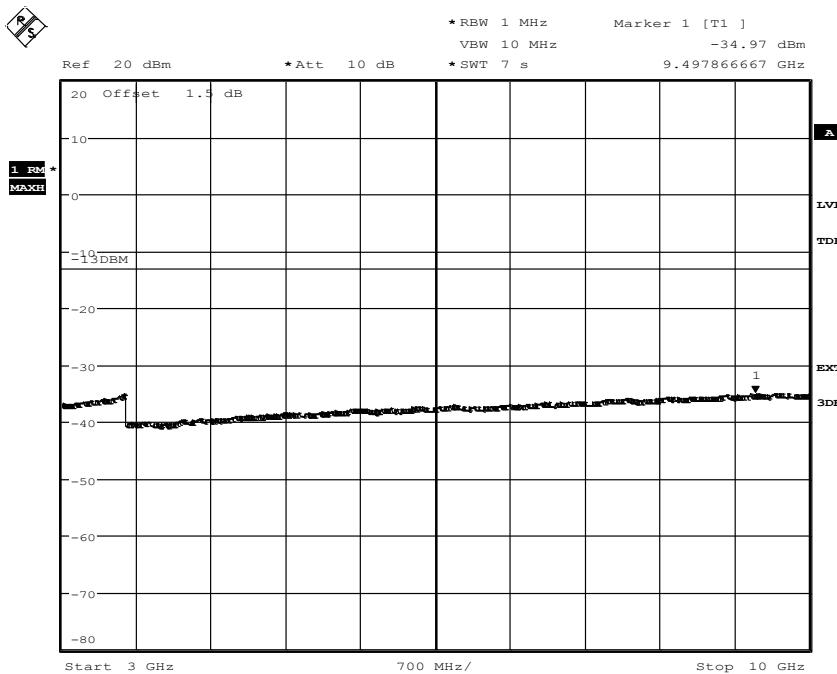
Appendix 6

Diagram 5a:

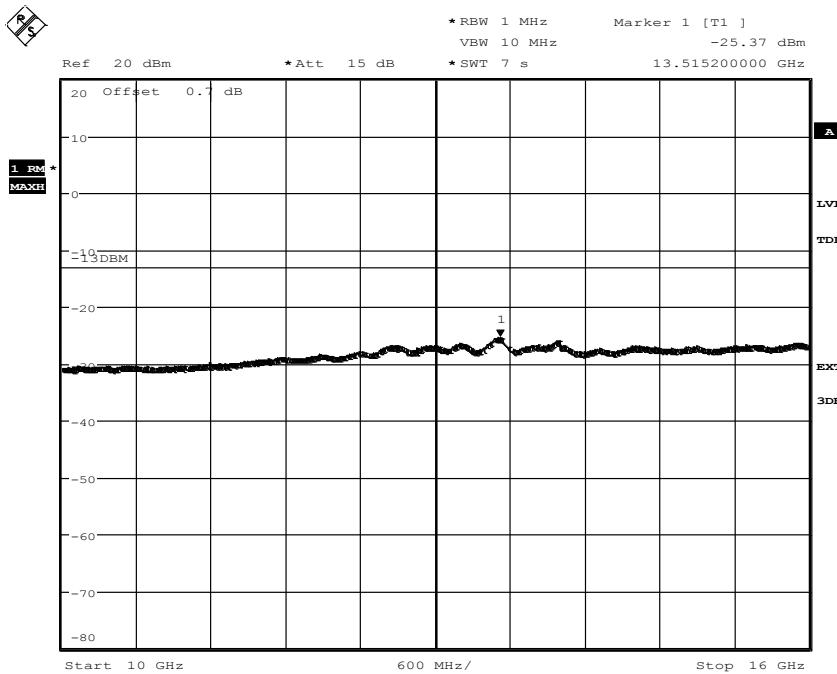


Date: 5.NOV.2013 15:14:27

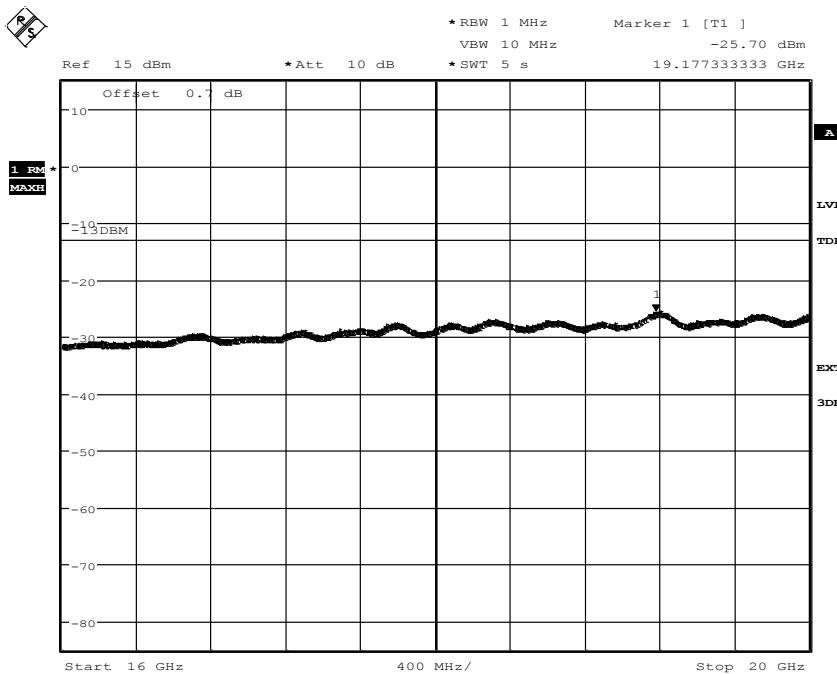
Diagram 5b:



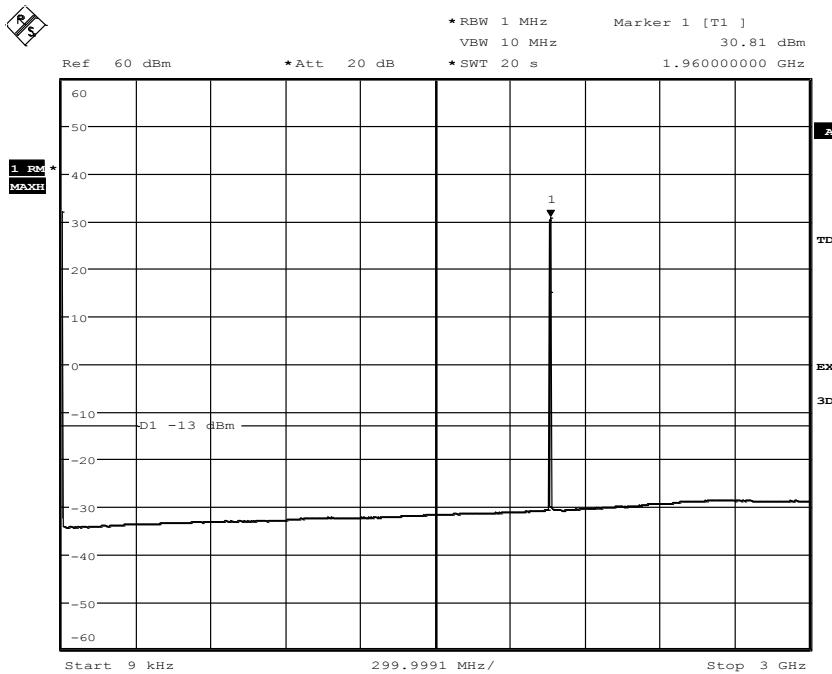
Date: 5.NOV.2013 15:16:46

Appendix 6
Diagram 5c:


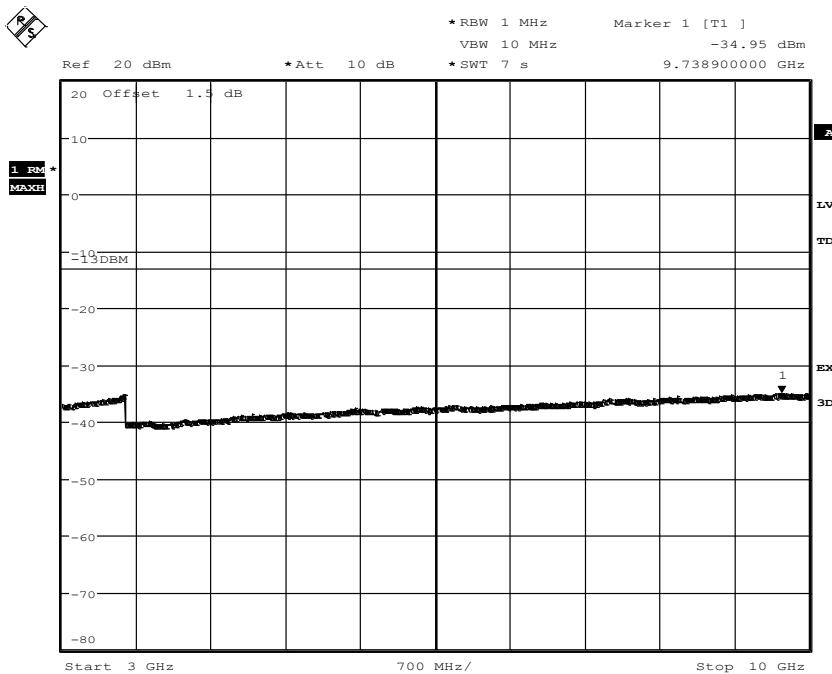
Date: 5.NOV.2013 15:17:46

Diagram 5d:


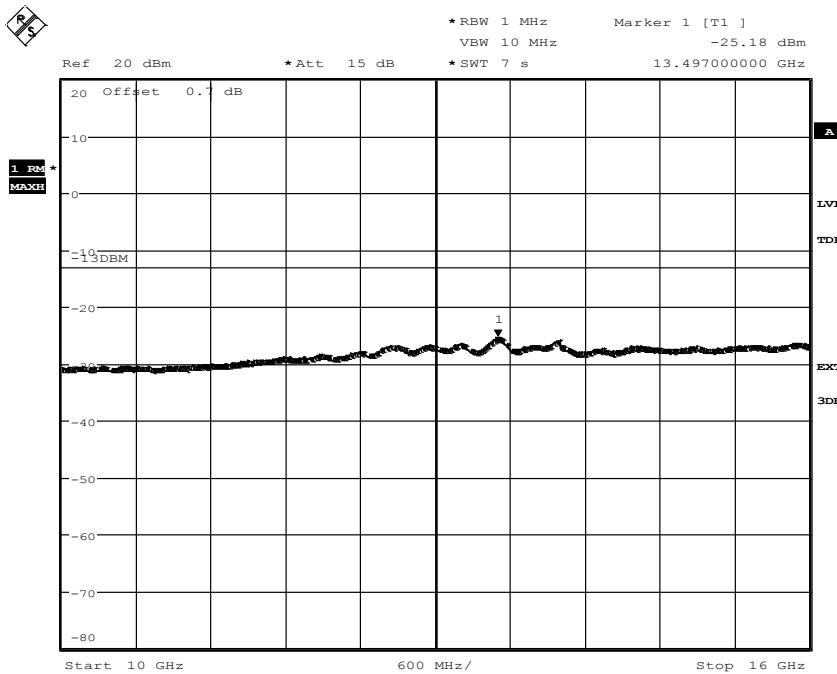
Date: 5.NOV.2013 15:18:54

Appendix 6
Diagram 6a:


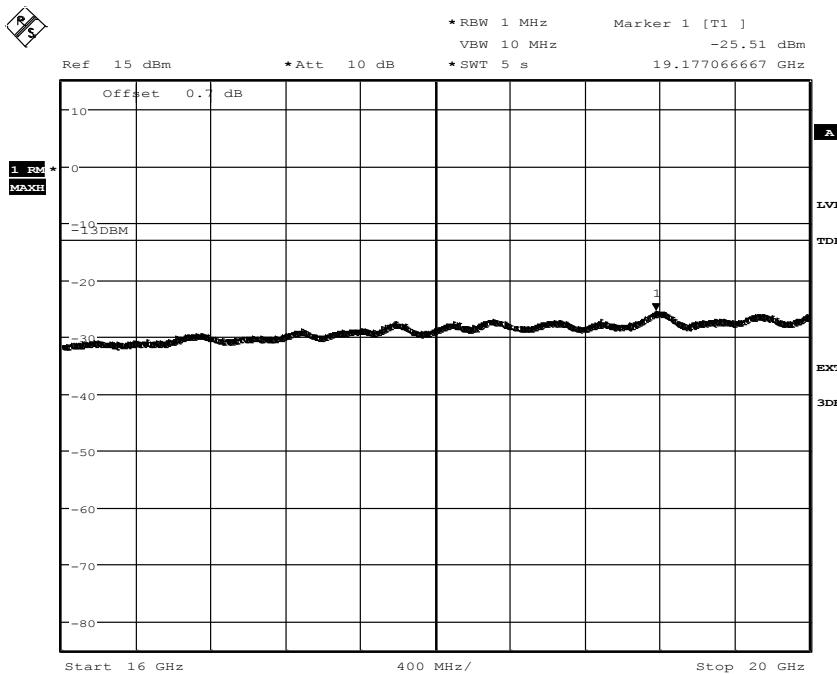
Date: 5.NOV.2013 15:33:47

Diagram 6b:


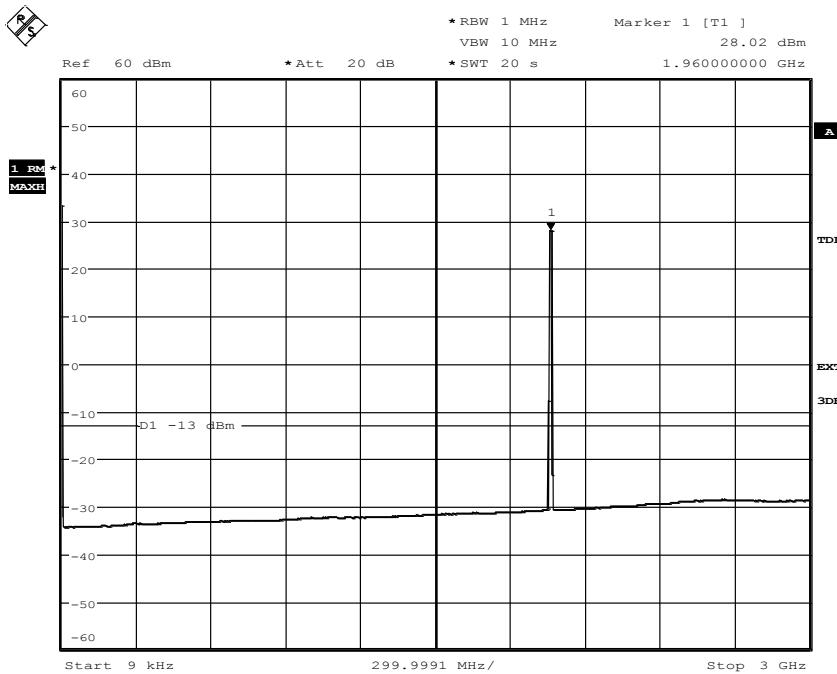
Date: 5.NOV.2013 15:35:16

Appendix 6
Diagram 6c:


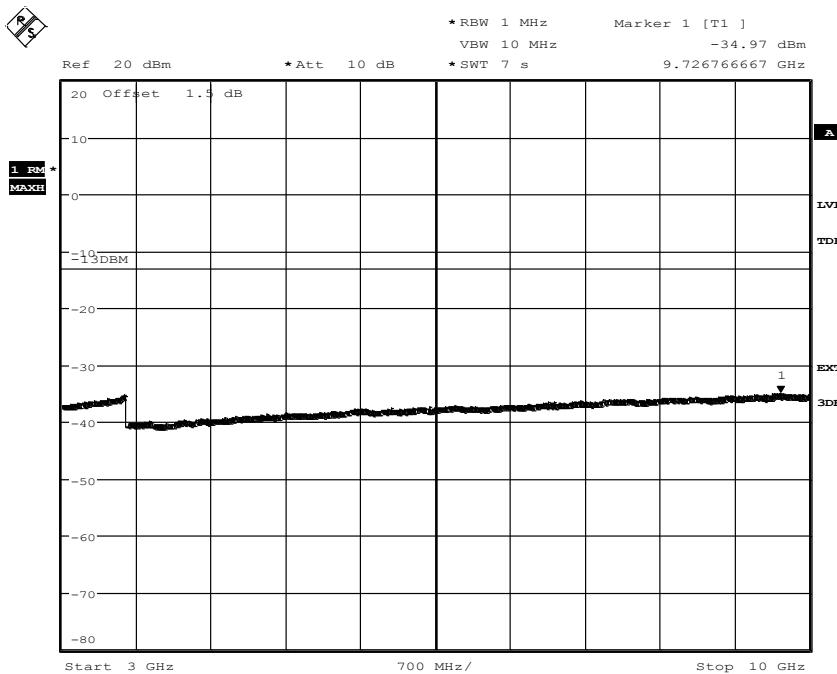
Date: 5.NOV.2013 15:36:49

Diagram 6d:


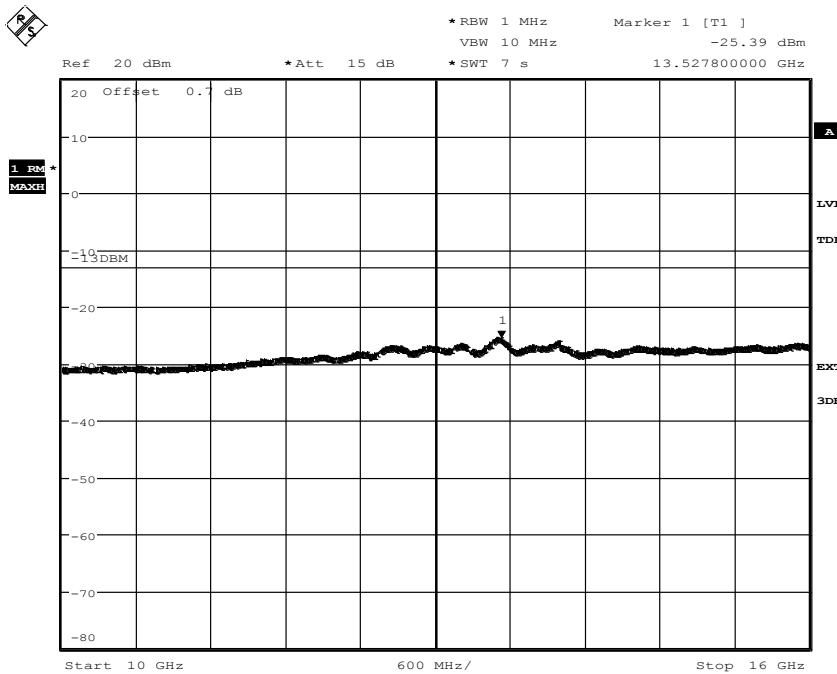
Date: 5.NOV.2013 15:37:46

Appendix 6
Diagram 7a:


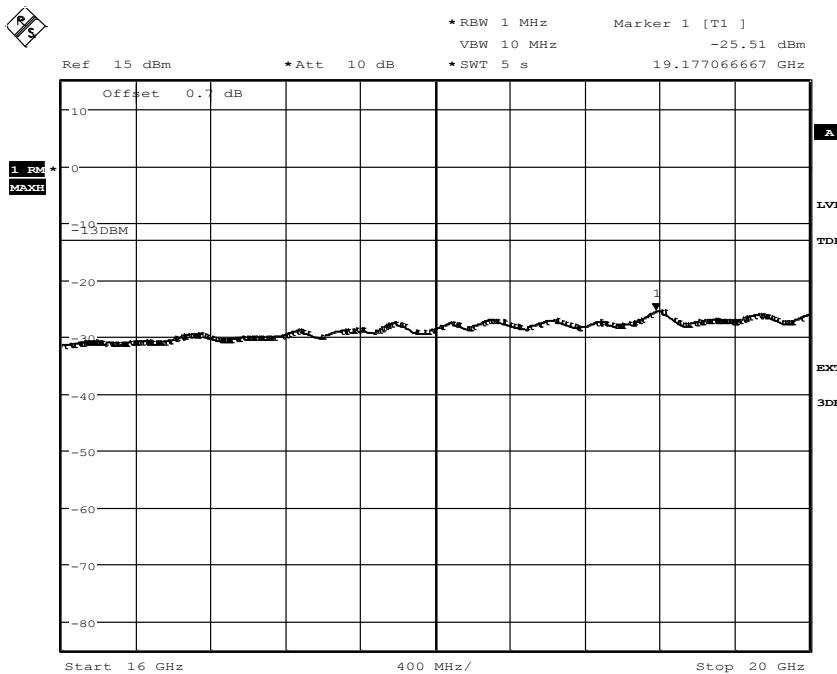
Date: 5.NOV.2013 15:46:22

Diagram 7b:


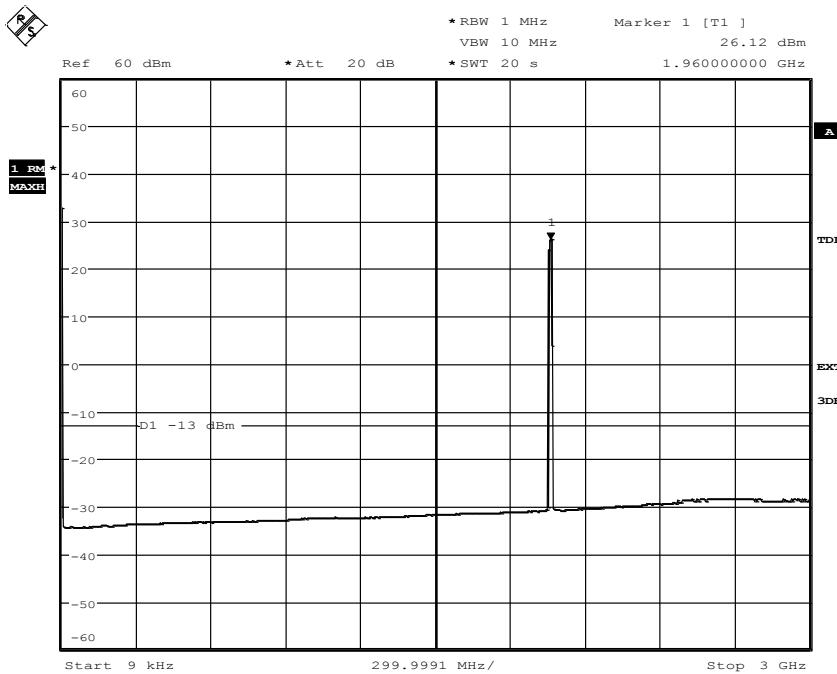
Date: 5.NOV.2013 15:44:16

Appendix 6
Diagram 7c:


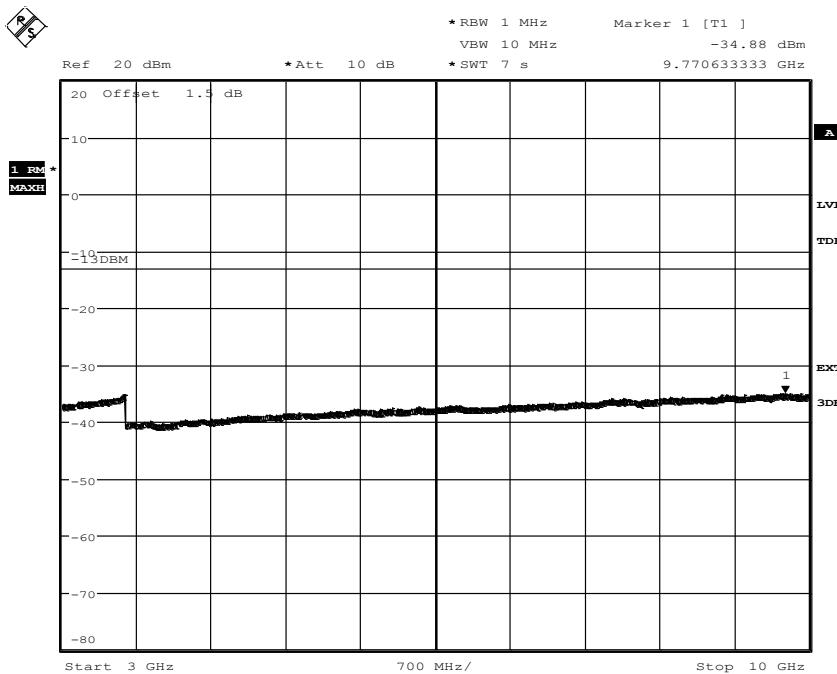
Date: 5.NOV.2013 15:43:13

Diagram 7d:


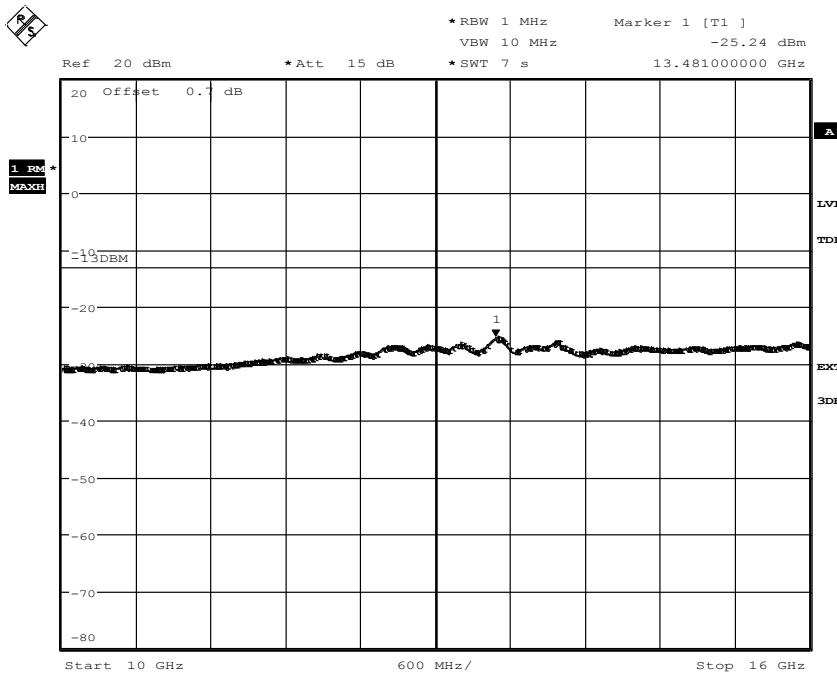
Date: 5.NOV.2013 15:41:53

Appendix 6
Diagram 8a:


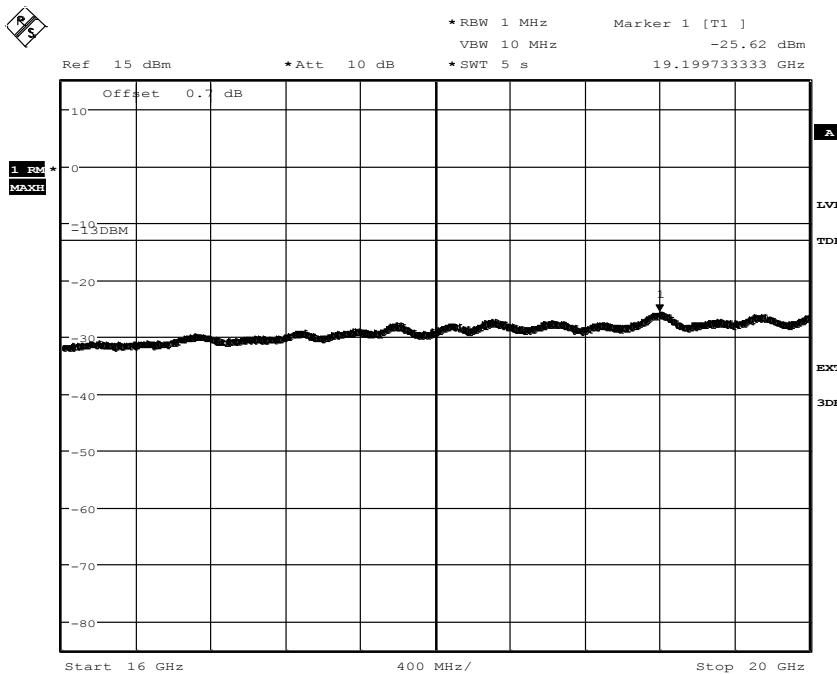
Date: 5.NOV.2013 16:00:15

Diagram 8b:


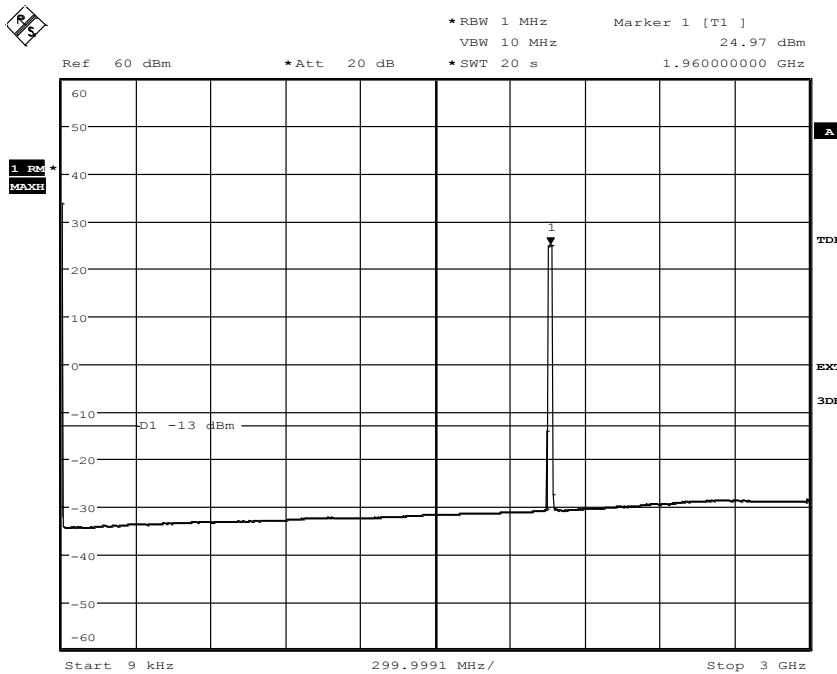
Date: 5.NOV.2013 16:01:34

Appendix 6
Diagram 8c:


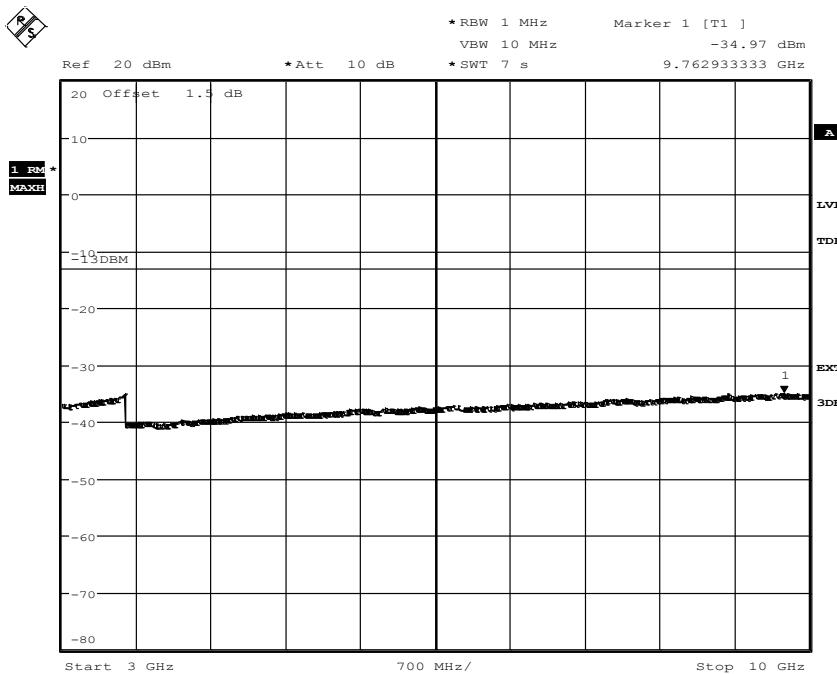
Date: 5.NOV.2013 16:02:28

Diagram 8d:


Date: 5.NOV.2013 16:03:06

Appendix 6
Diagram 9a:


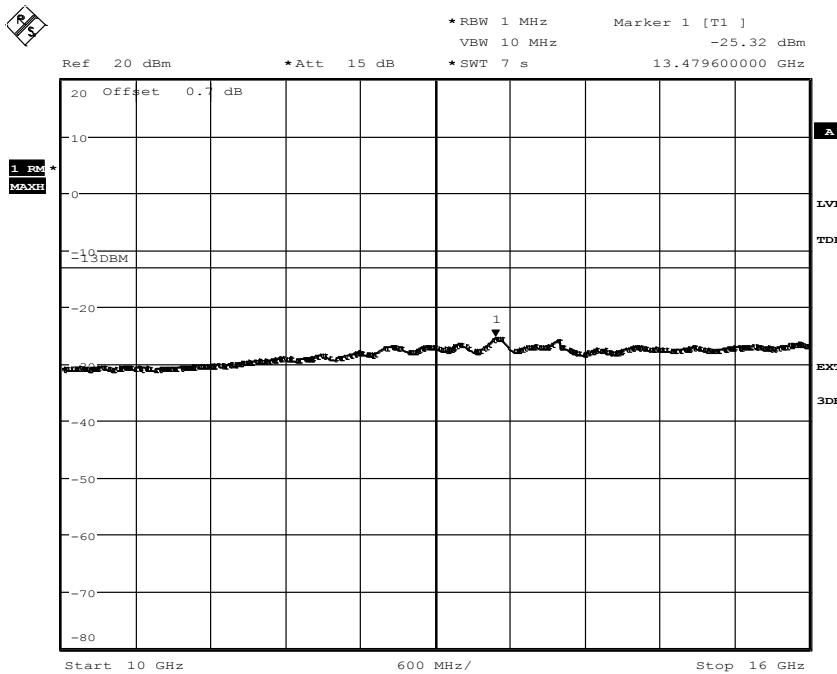
Date: 5.NOV.2013 16:10:56

Diagram 9b:


Date: 5.NOV.2013 16:08:14

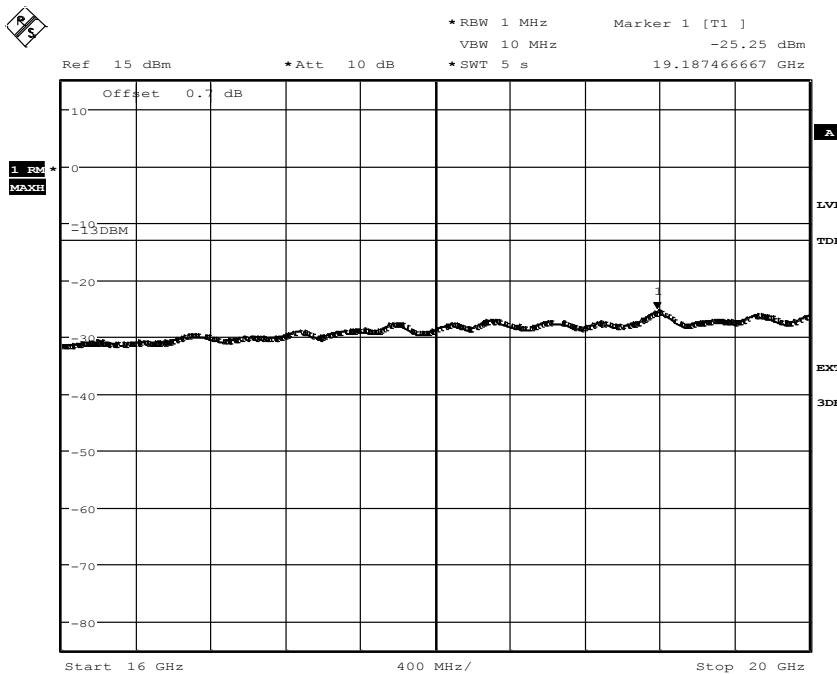
Appendix 6

Diagram 9c:



Date: 5.NOV.2013 16:06:59

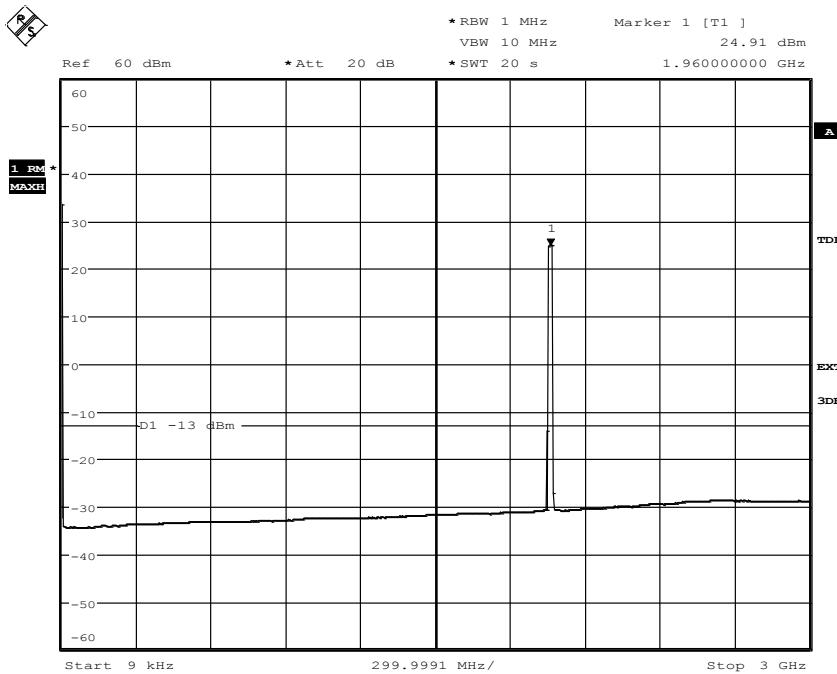
Diagram 9d:



Date: 5.NOV.2013 16:04:28

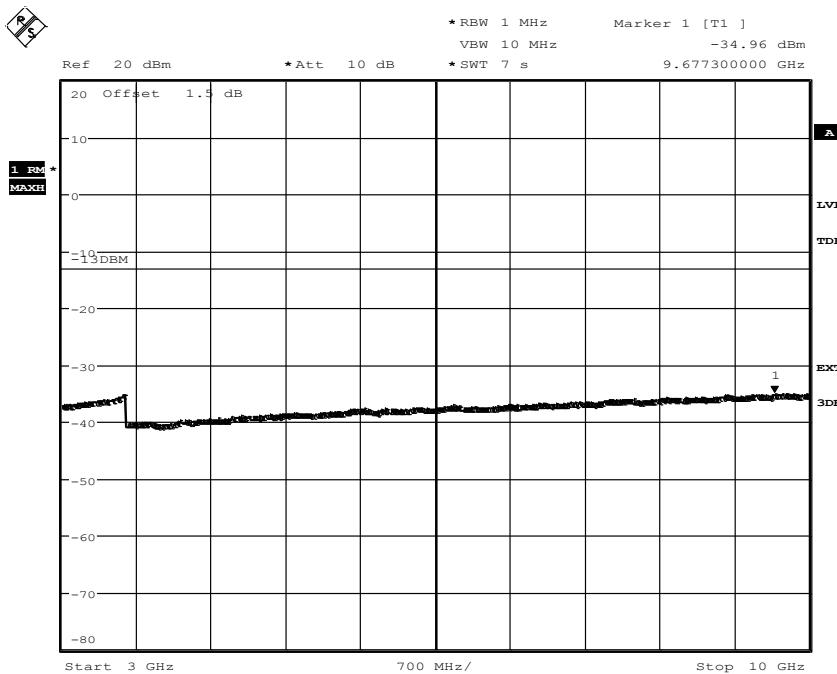
Appendix 6

Diagram 10a:



Date: 5.NOV.2013 16:21:19

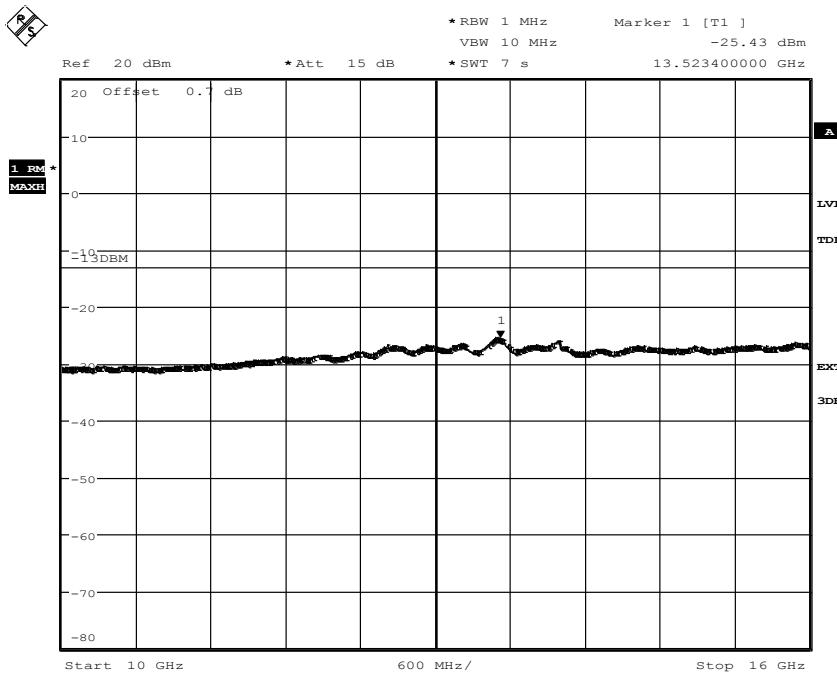
Diagram 10b:



Date: 5.NOV.2013 16:22:45

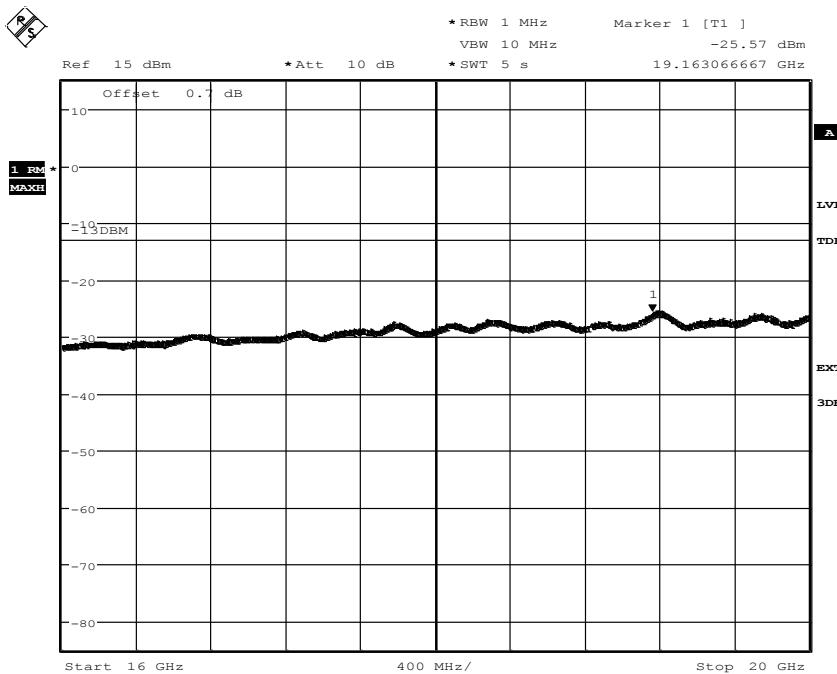
Appendix 6

Diagram 10c:

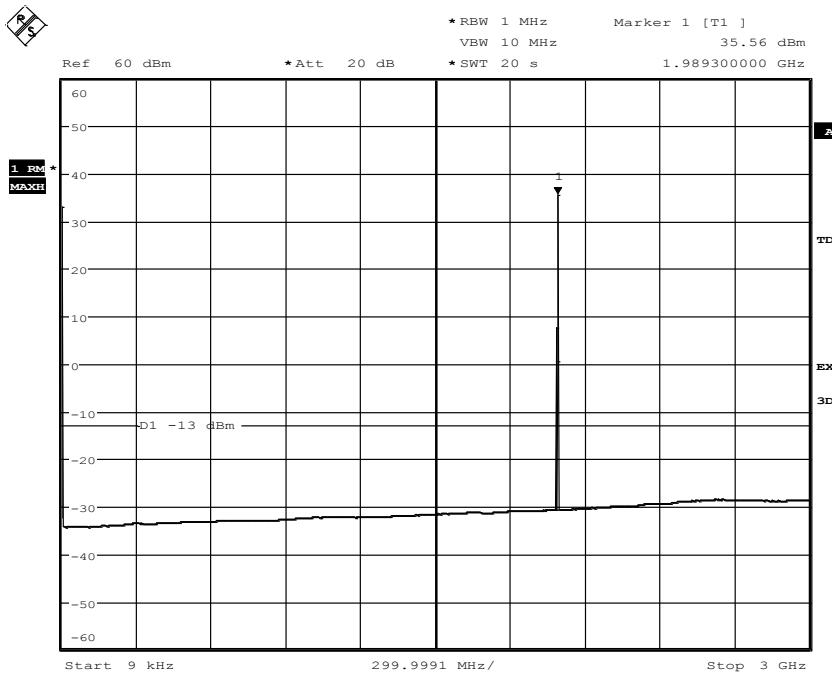


Date: 5.NOV.2013 16:23:58

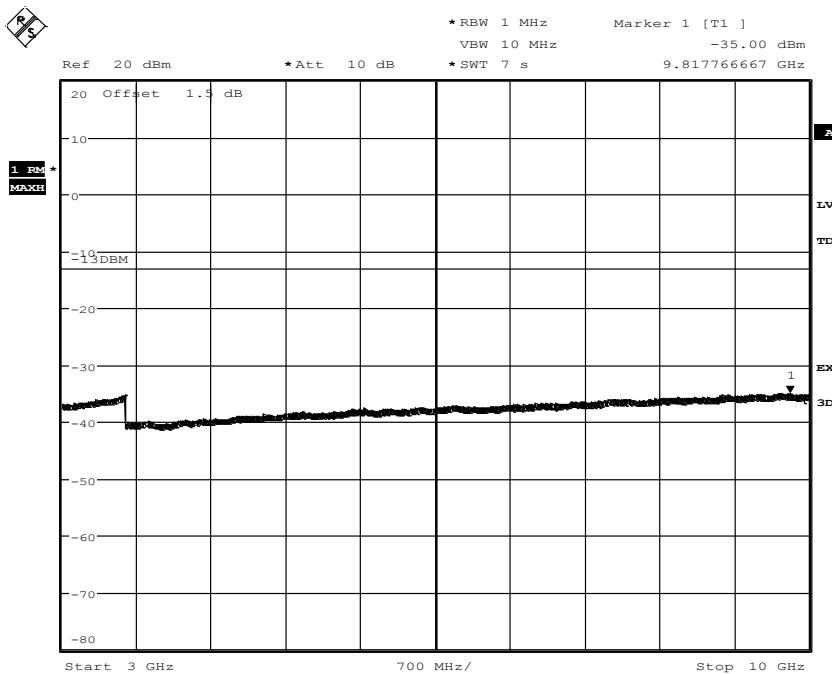
Diagram 10d:



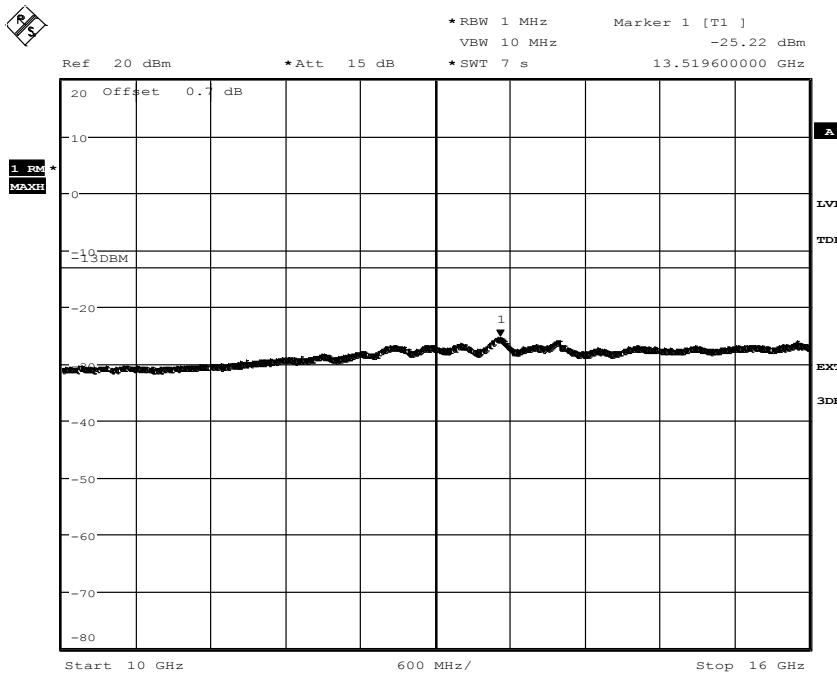
Date: 5.NOV.2013 16:24:48

Appendix 6
Diagram 11a:


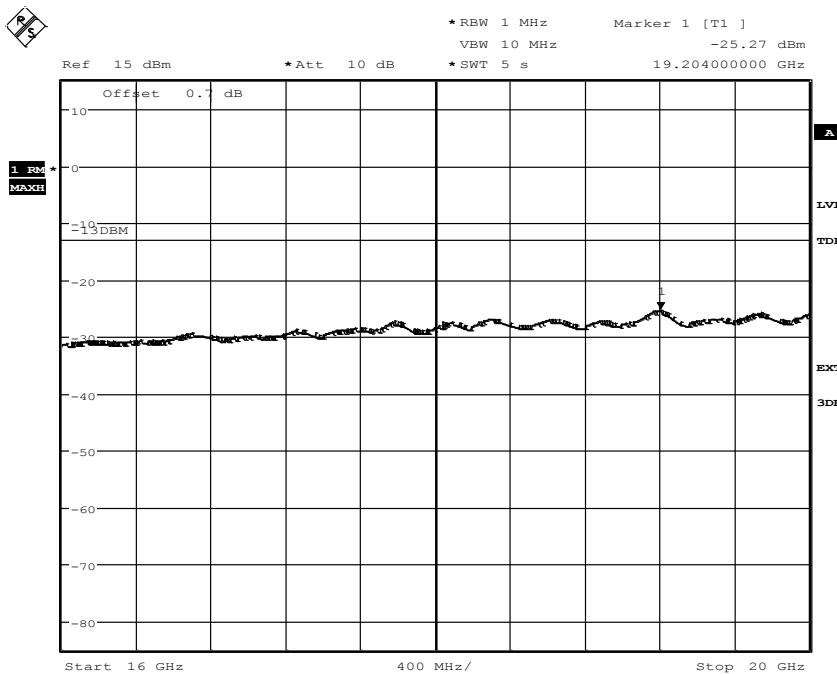
Date: 5.NOV.2013 17:23:19

Diagram 11b:


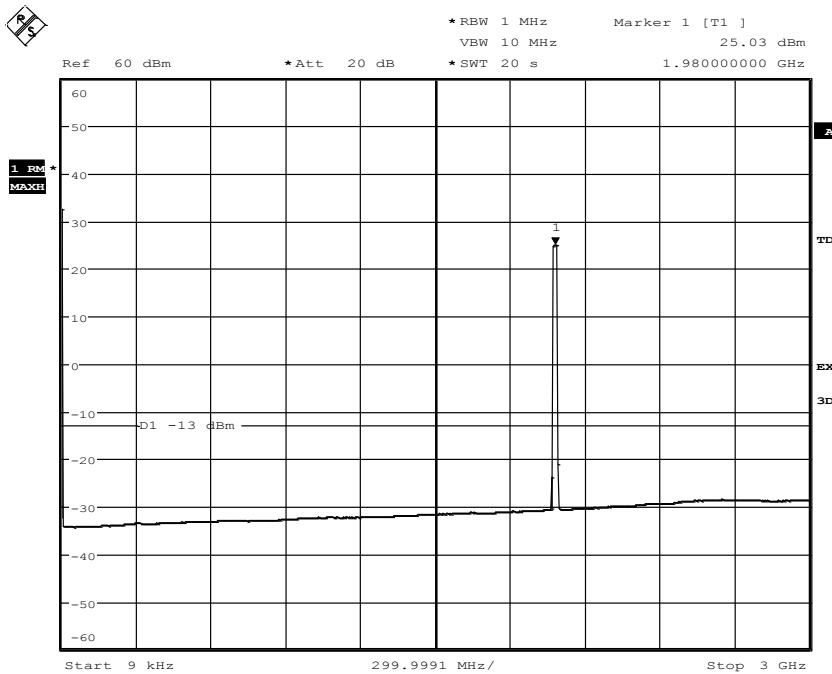
Date: 5.NOV.2013 17:21:57

Appendix 6
Diagram 11c:


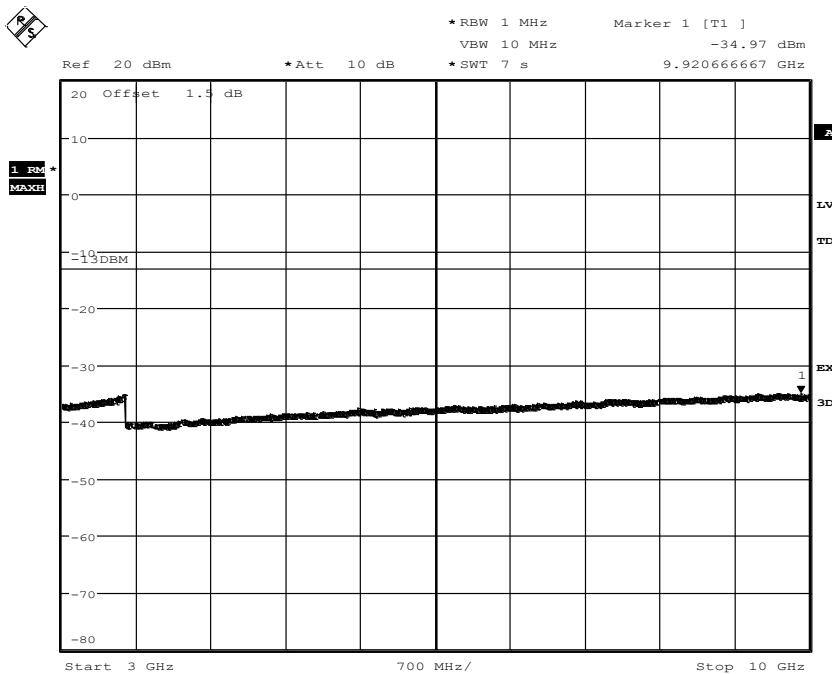
Date: 5.NOV.2013 17:20:57

Diagram 11d:


Date: 5.NOV.2013 17:19:44

Appendix 6
Diagram 12a:


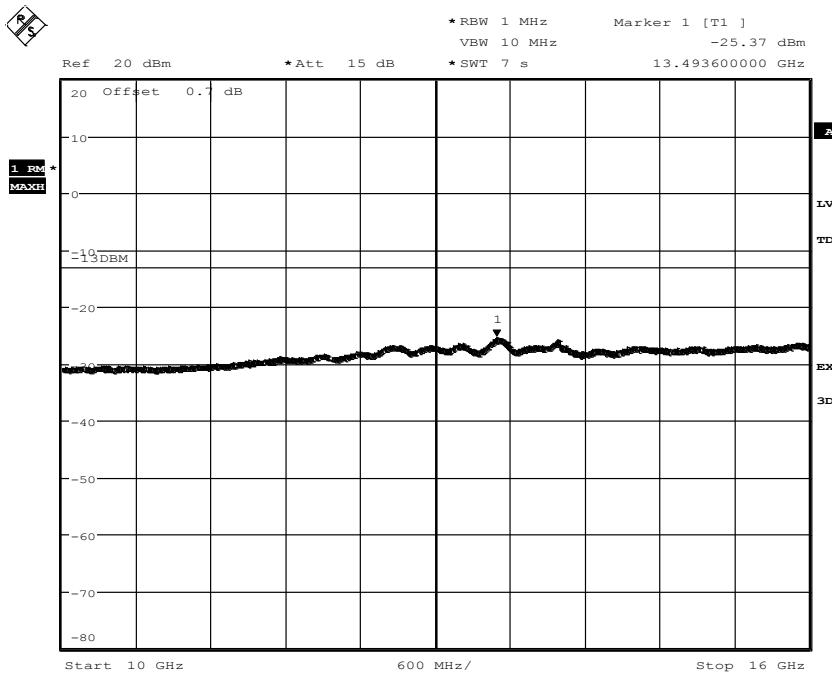
Date: 5.NOV.2013 17:10:45

Diagram 12b:


Date: 5.NOV.2013 17:12:33

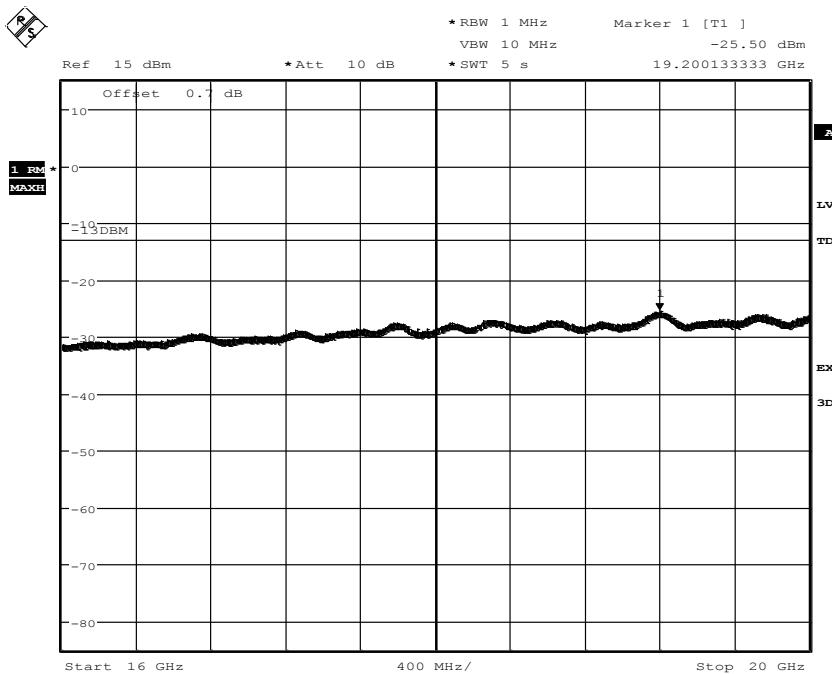
Appendix 6

Diagram 12c:

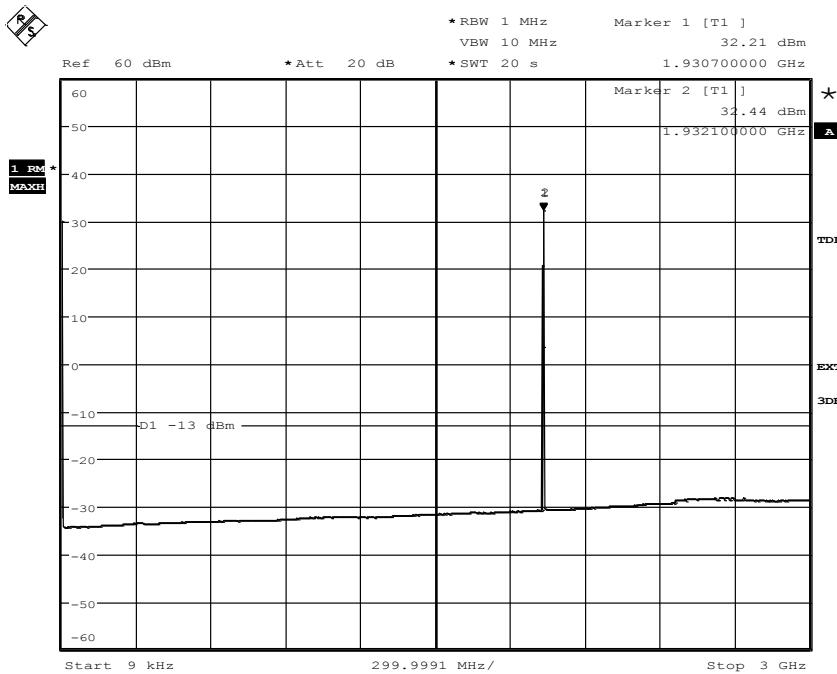


Date: 5.NOV.2013 17:13:31

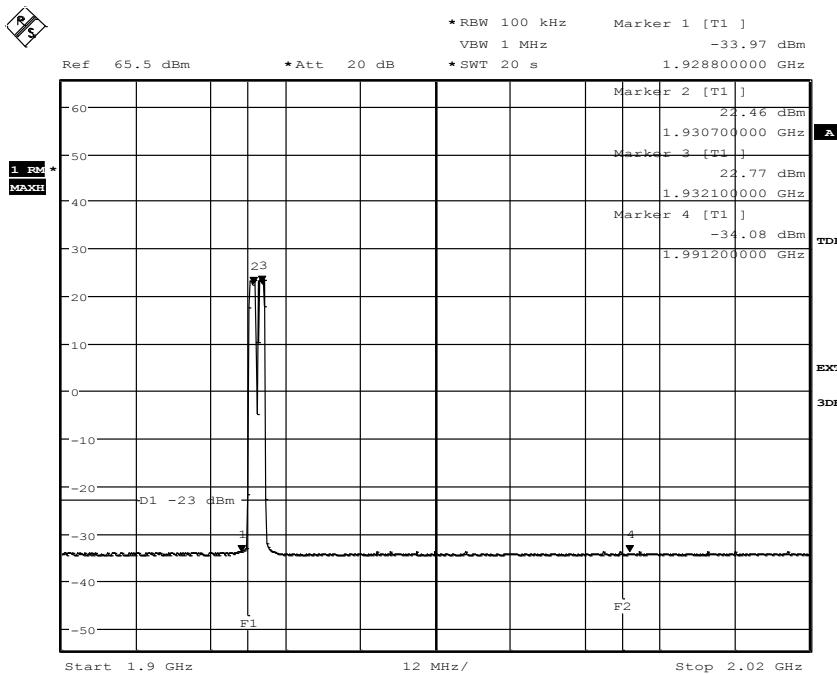
Diagram 12d:



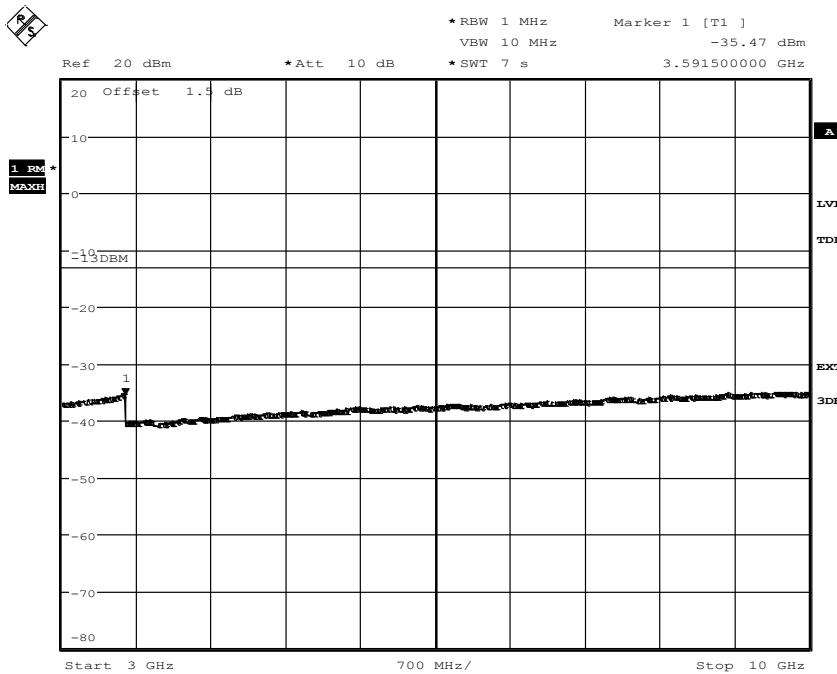
Date: 5.NOV.2013 17:14:32

Appendix 6
Diagram 13a:


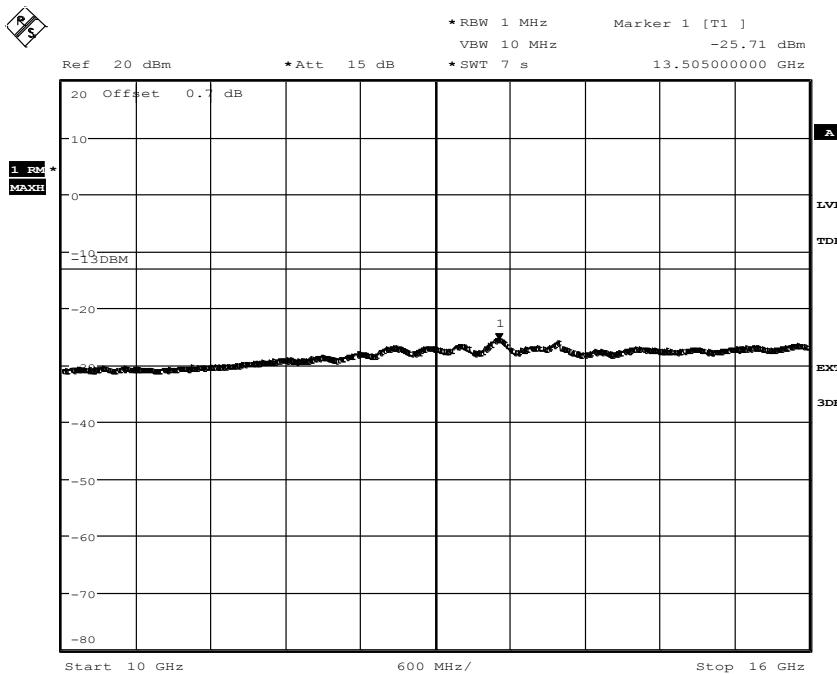
Date: 6.NOV.2013 12:58:38

Diagram 13b:


Date: 6.NOV.2013 13:12:58

Appendix 6
Diagram 13c:


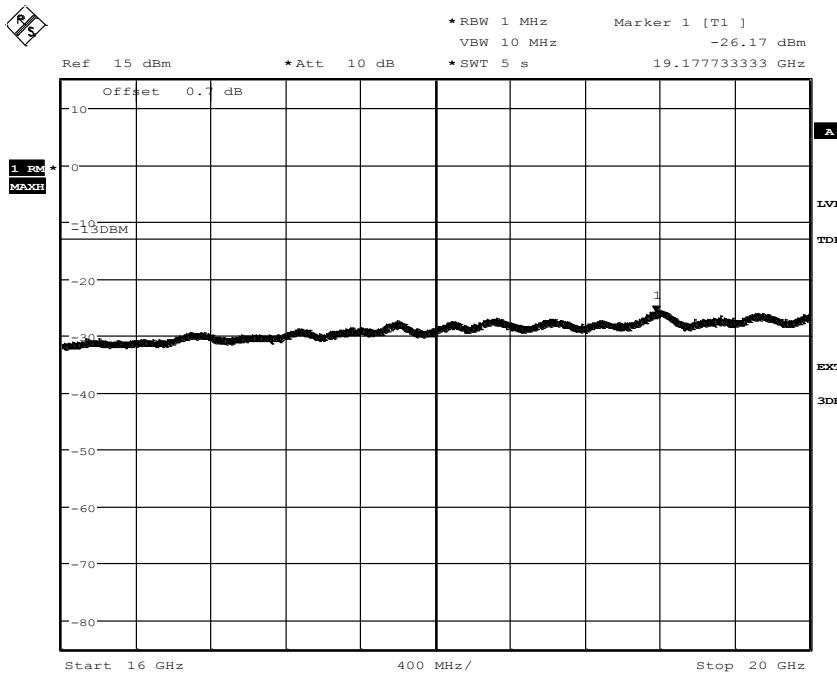
Date: 6.NOV.2013 13:05:45

Diagram 13d:


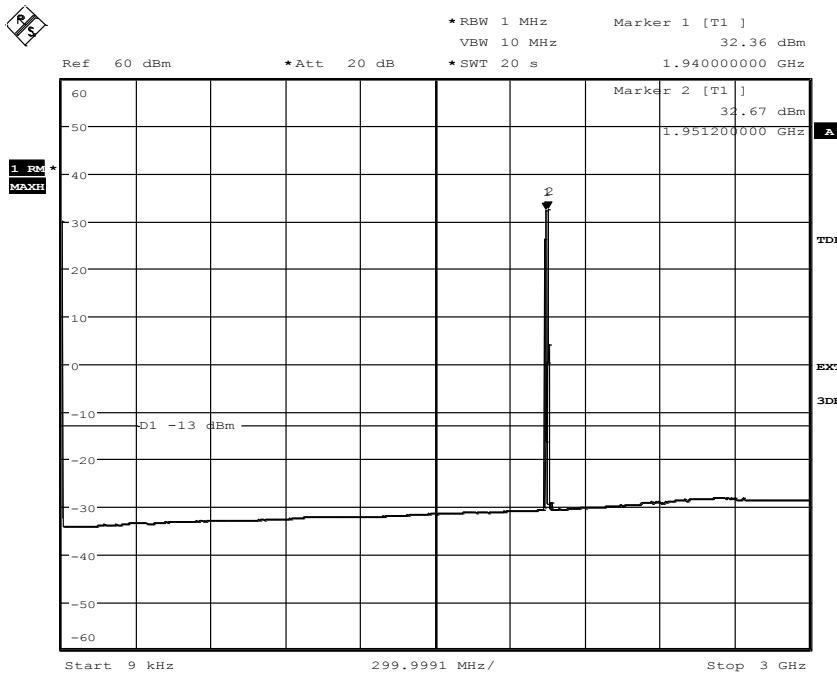
Date: 6.NOV.2013 13:09:12

Appendix 6

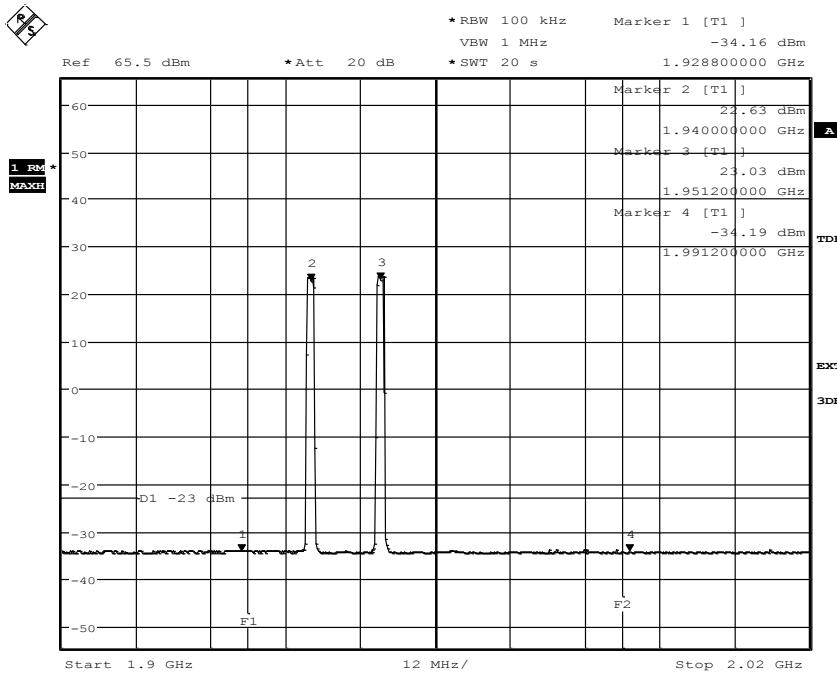
Diagram 13e:



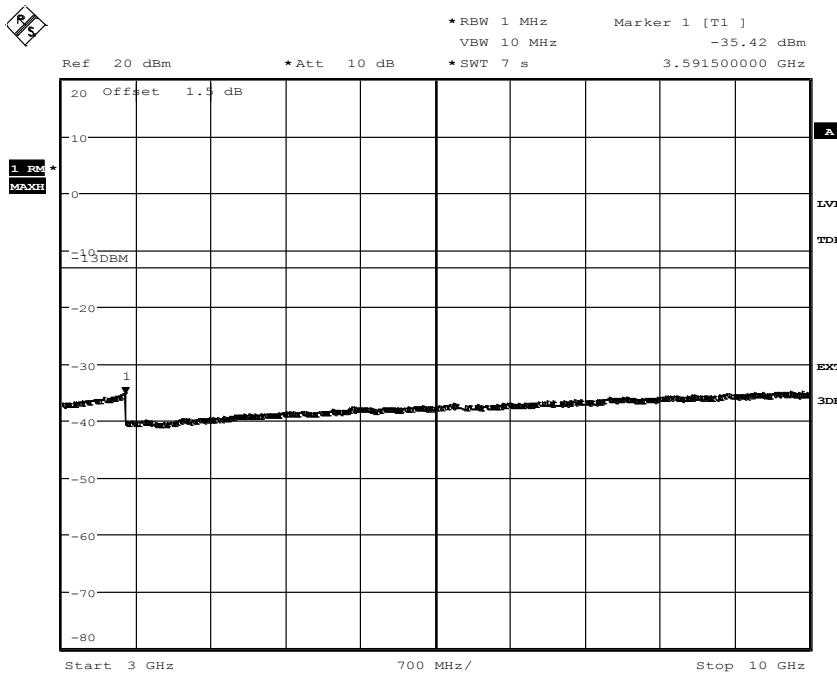
Date: 6.NOV.2013 13:10:10

Appendix 6
Diagram 14a:


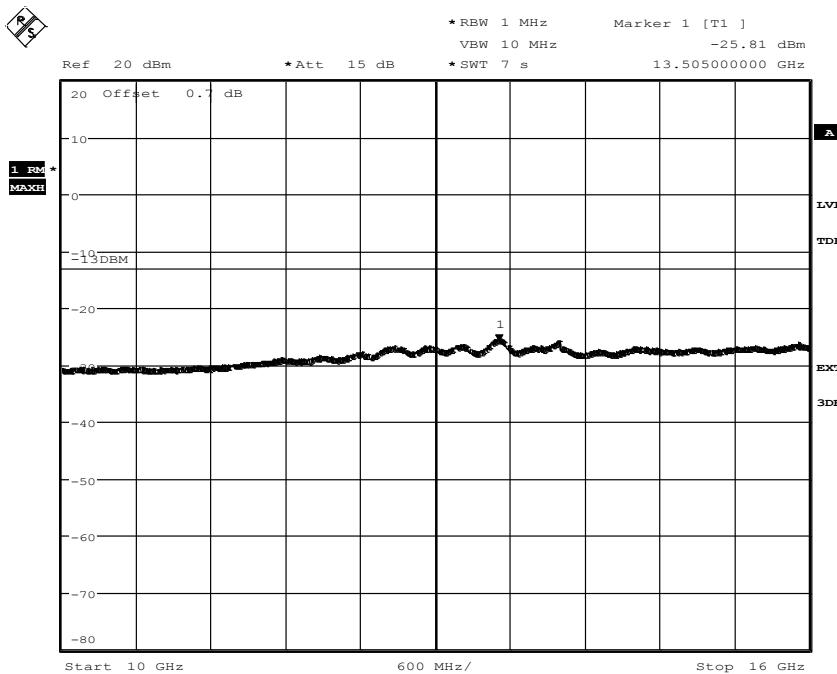
Date: 6.NOV.2013 13:27:35

Diagram 14b:


Date: 6.NOV.2013 13:29:39

Appendix 6
Diagram 14c:


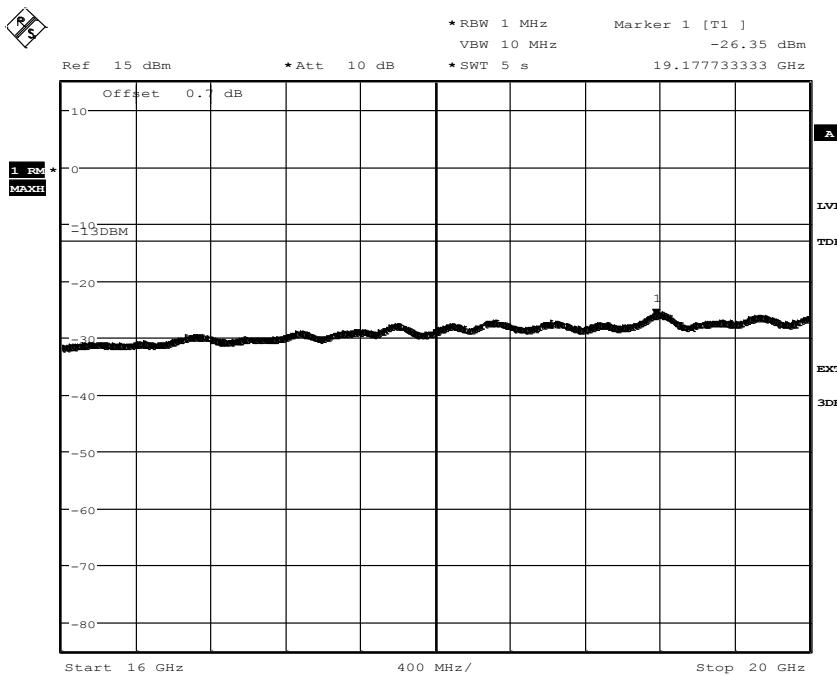
Date: 6.NOV.2013 13:31:58

Diagram 14d:


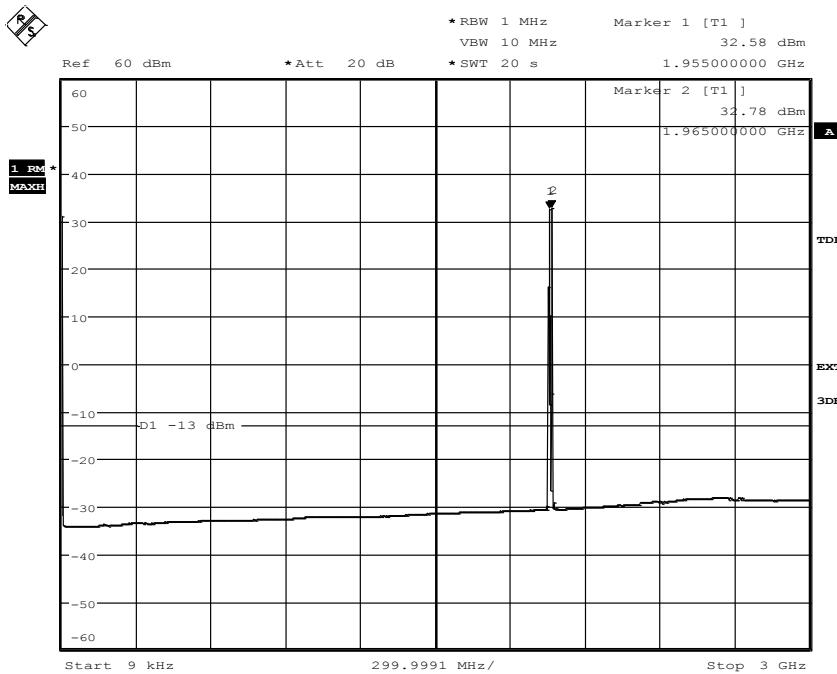
Date: 6.NOV.2013 13:33:29

Appendix 6

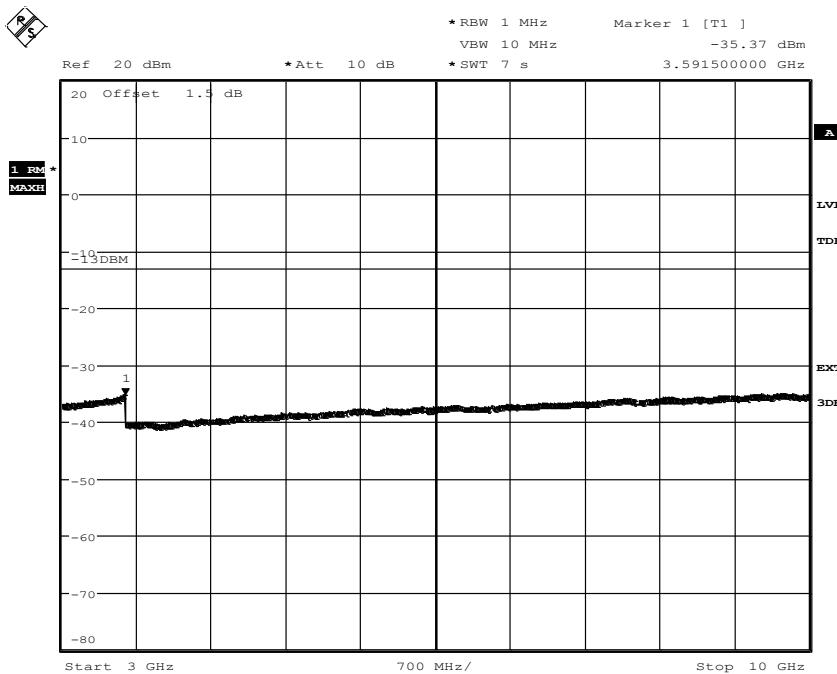
Diagram 14e:



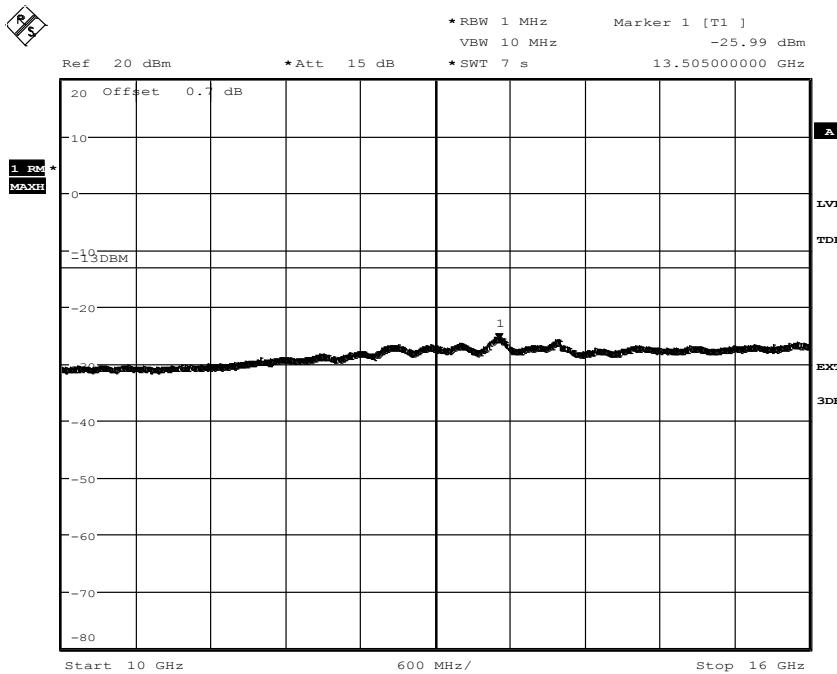
Date: 6.NOV.2013 13:34:56

Appendix 6
Diagram 15a:


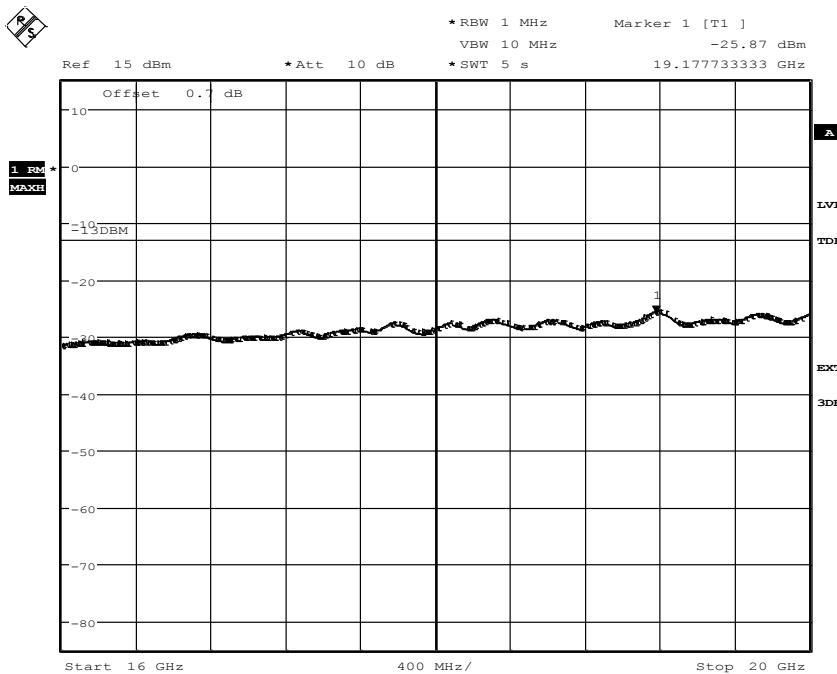
Date: 6.NOV.2013 13:59:03

Diagram 15b:


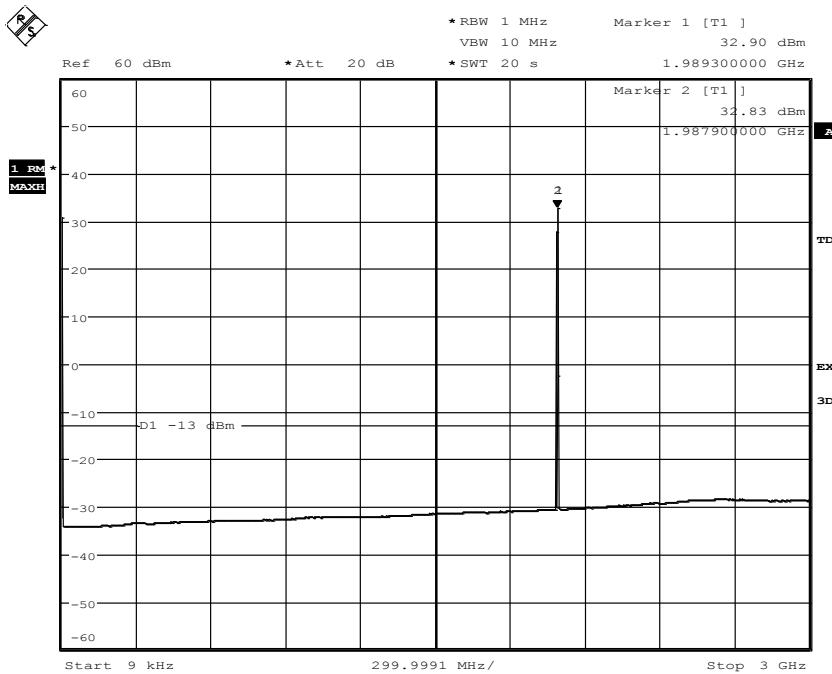
Date: 6.NOV.2013 13:56:56

Appendix 6
Diagram 15c:


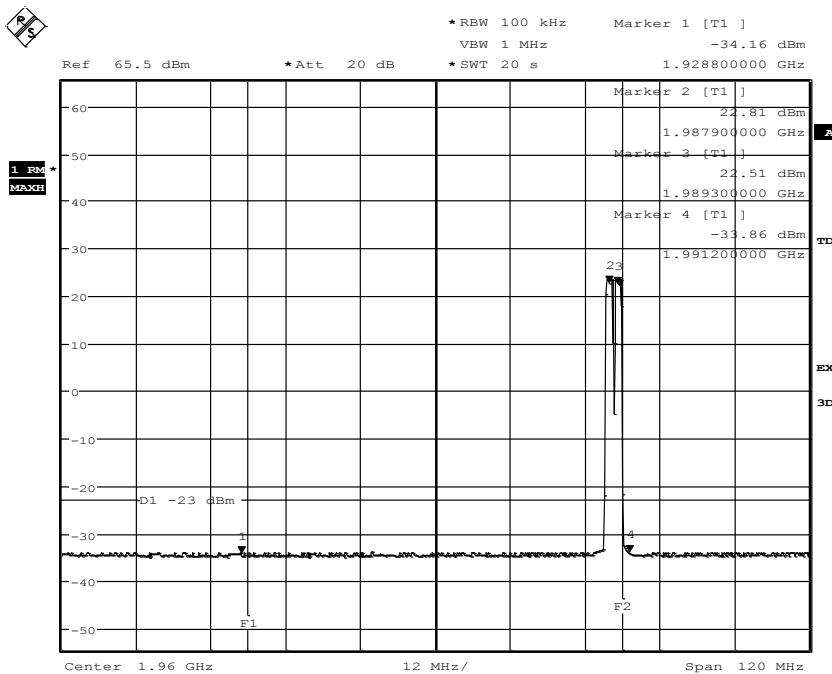
Date: 6.NOV.2013 13:55:28

Diagram 15d:


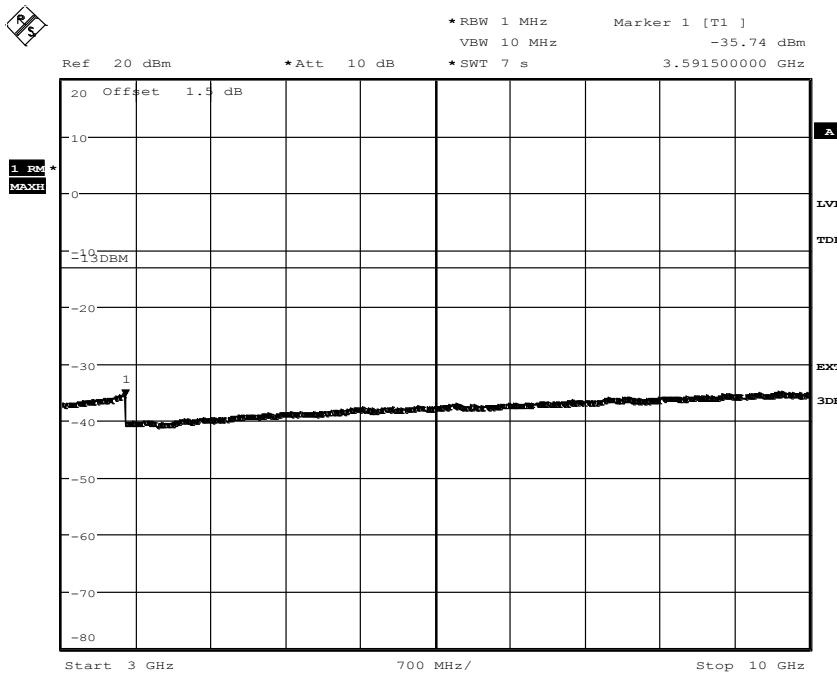
Date: 6.NOV.2013 13:54:12

Appendix 6
Diagram 16a:


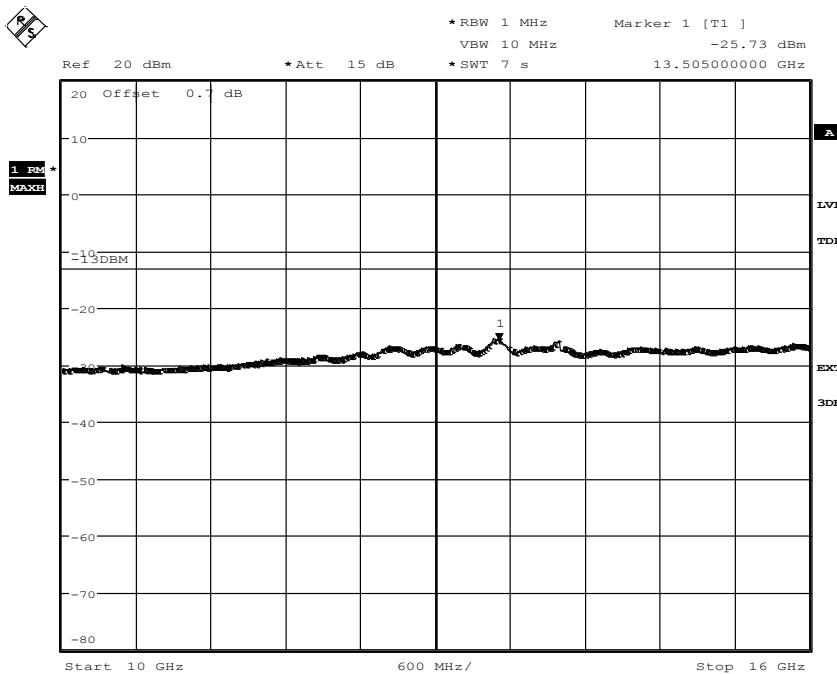
Date: 6.NOV.2013 14:07:23

Diagram 16b:


Date: 6.NOV.2013 14:51:46

Appendix 6
Diagram 16c:


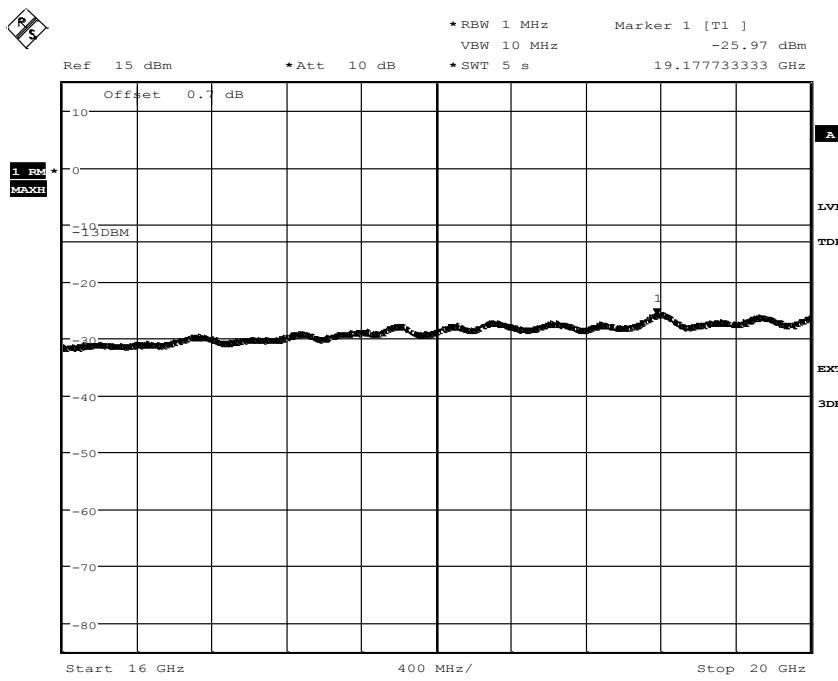
Date: 6.NOV.2013 14:20:36

Diagram 16d:


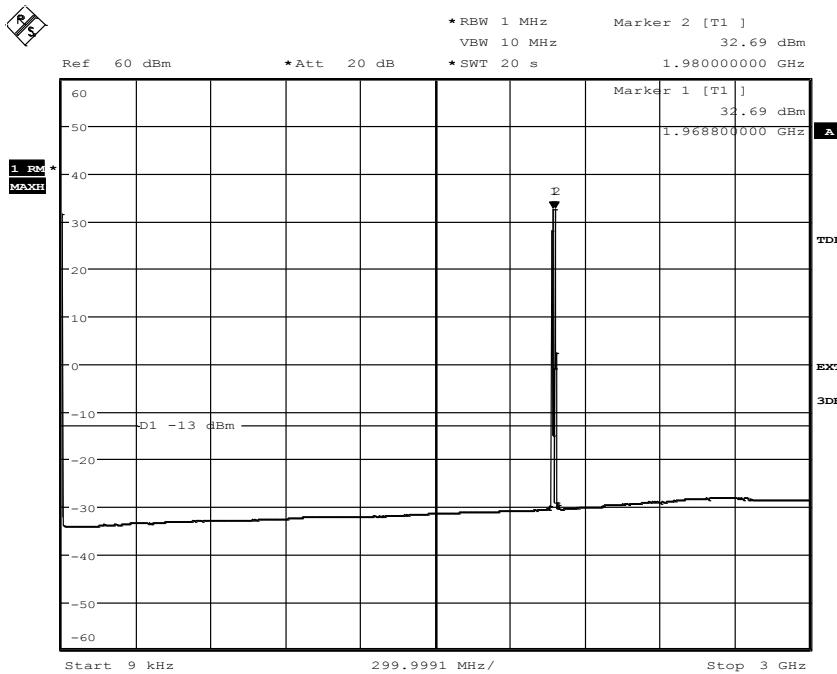
Date: 6.NOV.2013 14:22:06

Appendix 6

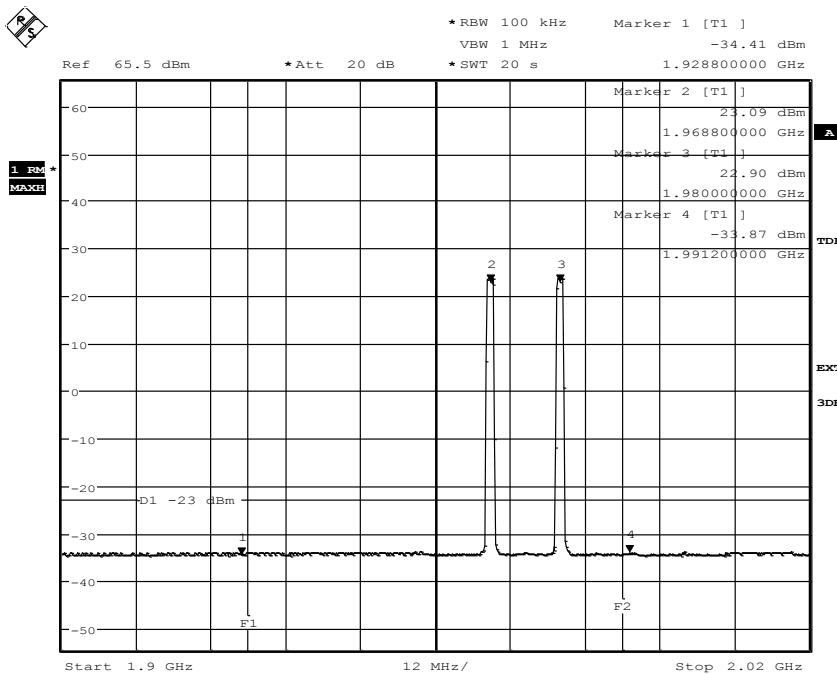
Diagram 16e:



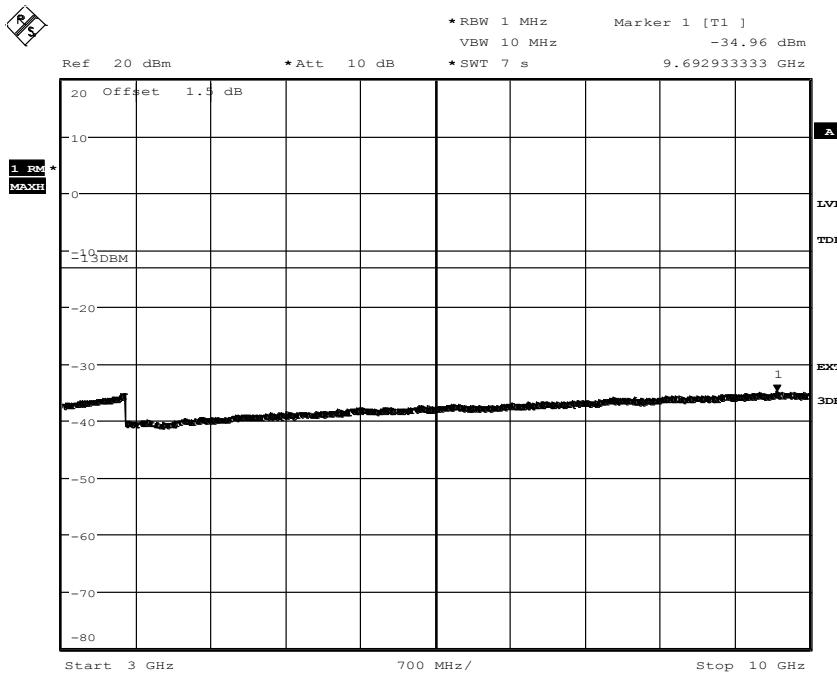
Date: 6.NOV.2013 14:23:41

Appendix 6
Diagram 17a:


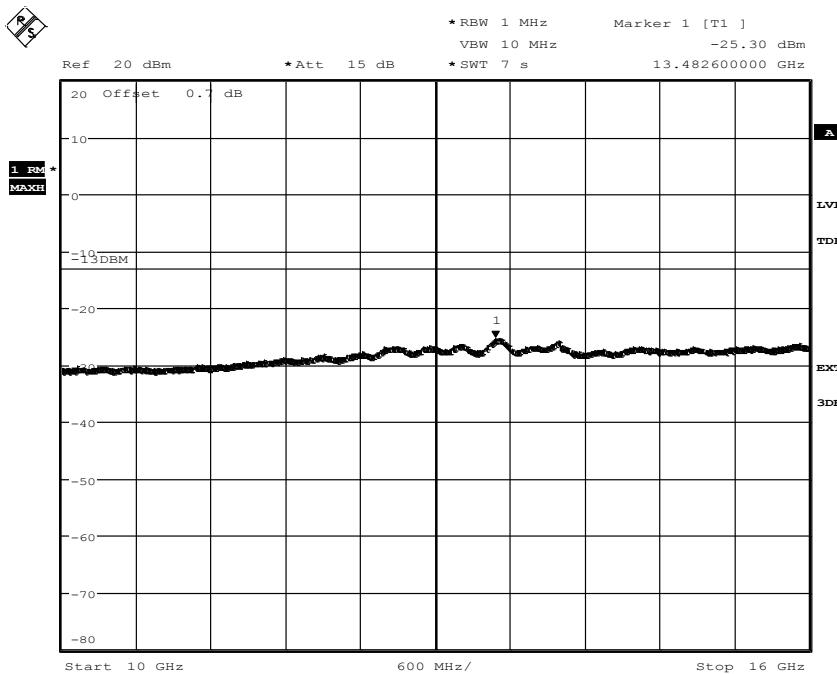
Date: 6.NOV.2013 14:40:51

Diagram 17b:


Date: 6.NOV.2013 14:42:23

Appendix 6
Diagram 17c:


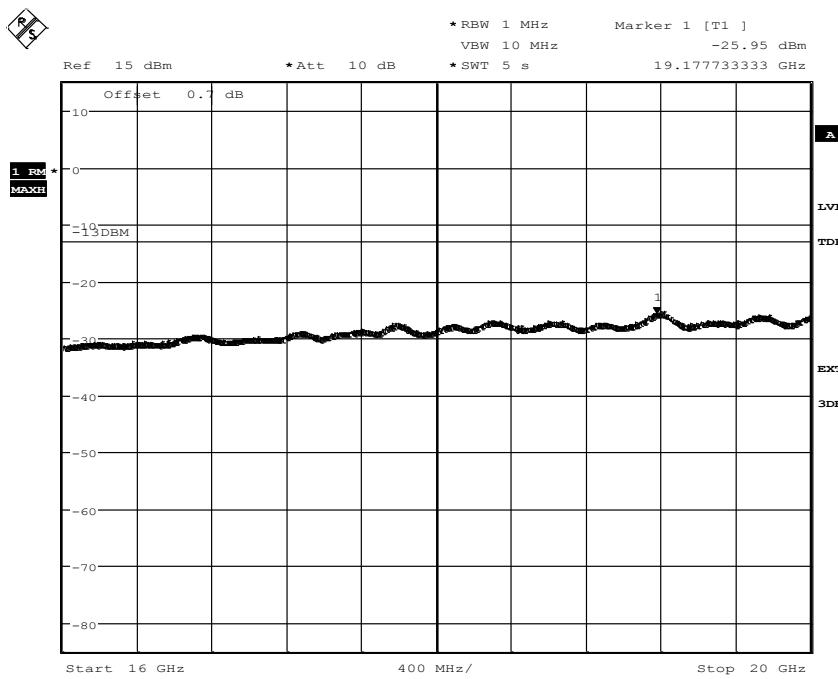
Date: 6.NOV.2013 14:38:28

Diagram 17d:


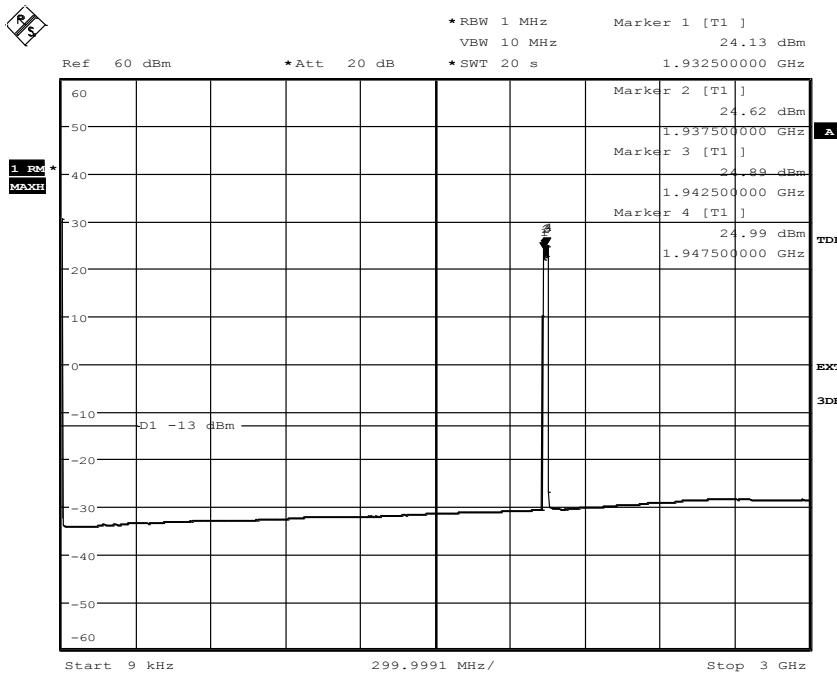
Date: 6.NOV.2013 14:36:54

Appendix 6

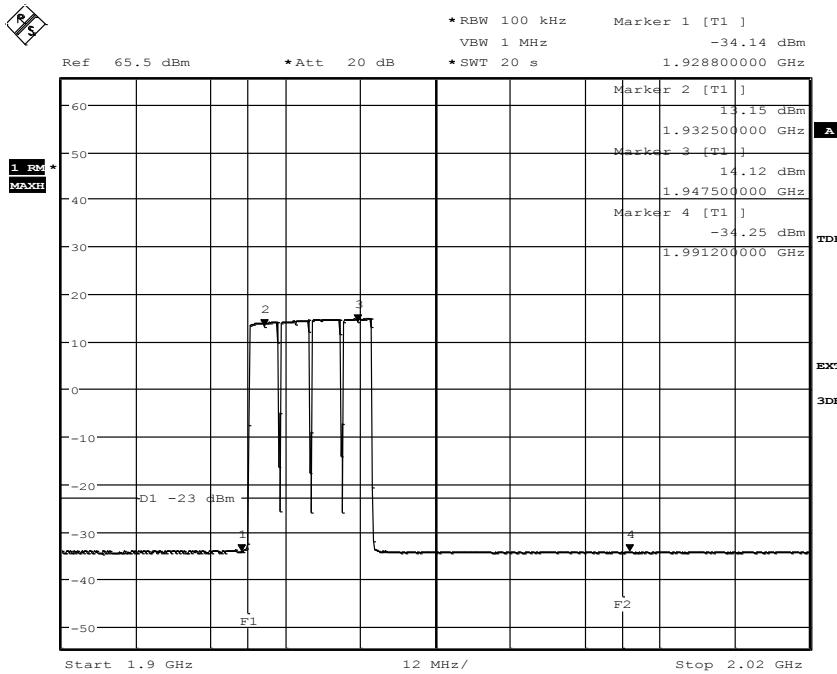
Diagram 17e:



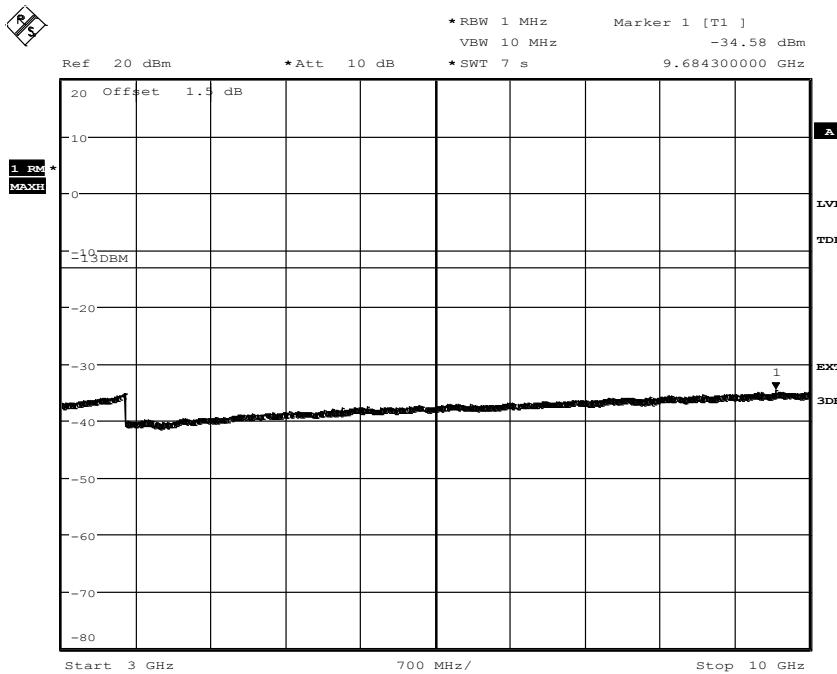
Date: 6.NOV.2013 14:36:15

Appendix 6
Diagram 18a:


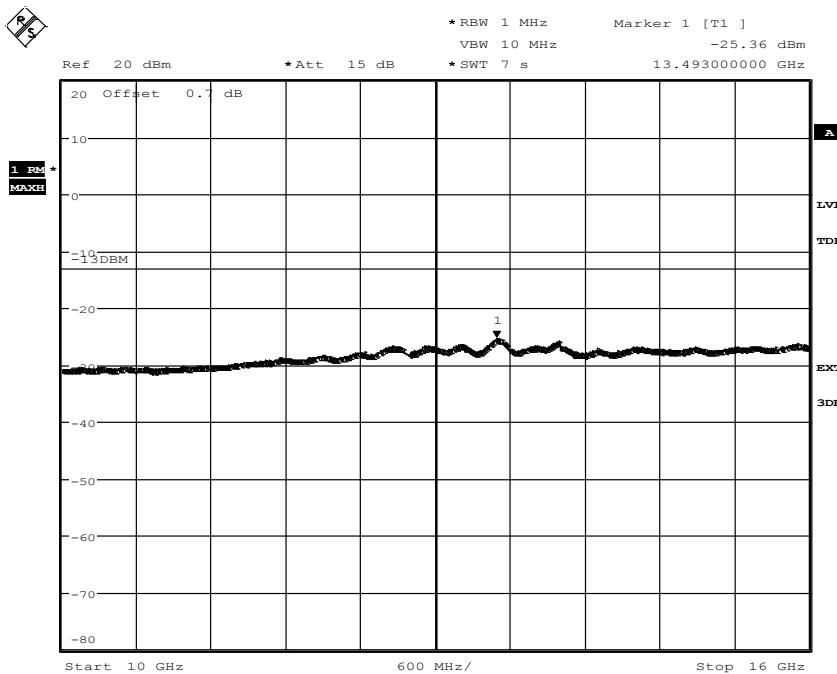
Date: 6.NOV.2013 16:58:33

Diagram 18b:


Date: 6.NOV.2013 17:00:38

Appendix 6
Diagram 18c:


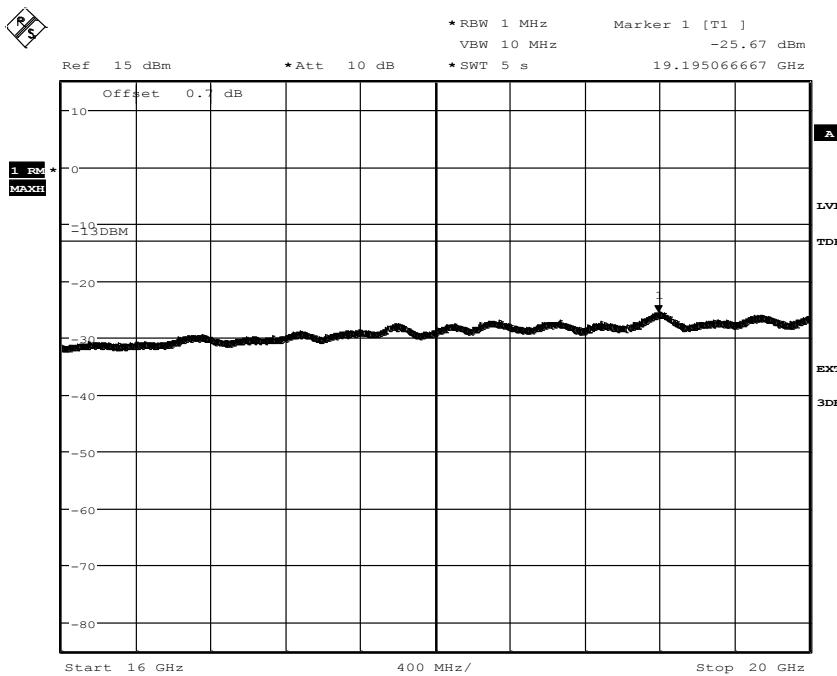
Date: 6.NOV.2013 17:02:54

Diagram 18d:


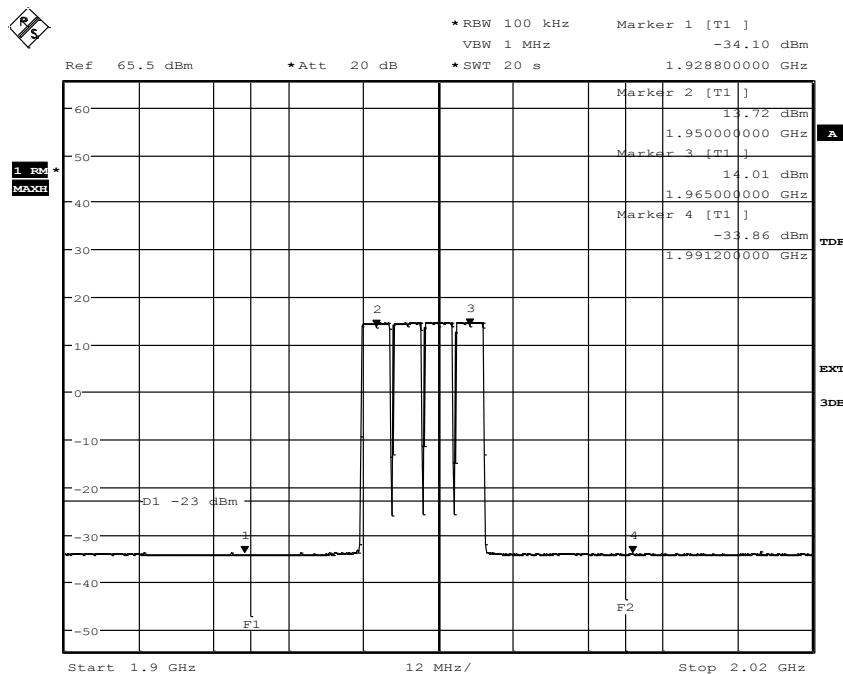
Date: 6.NOV.2013 17:03:54

Appendix 6

Diagram 18e:

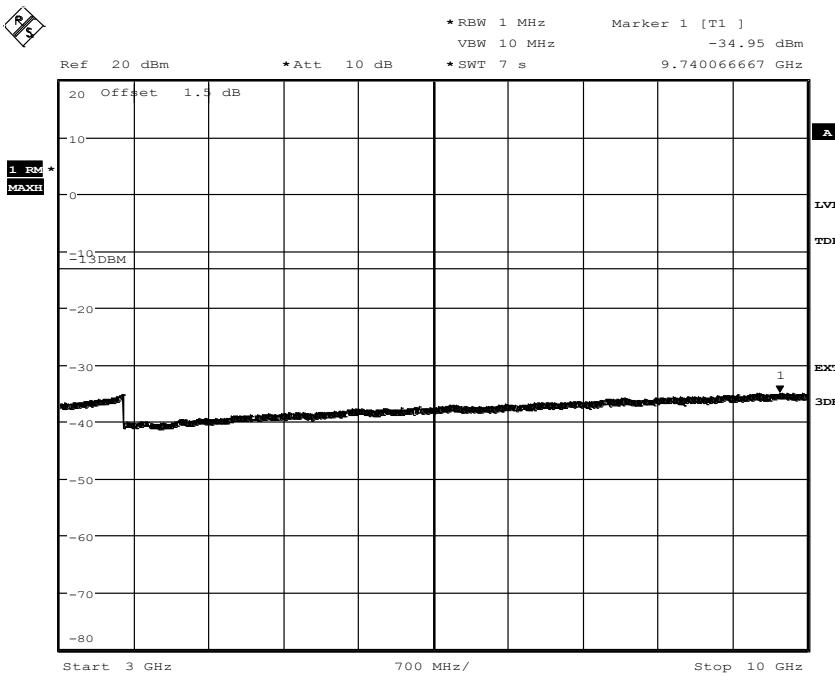


Date: 6.NOV.2013 17:04:50

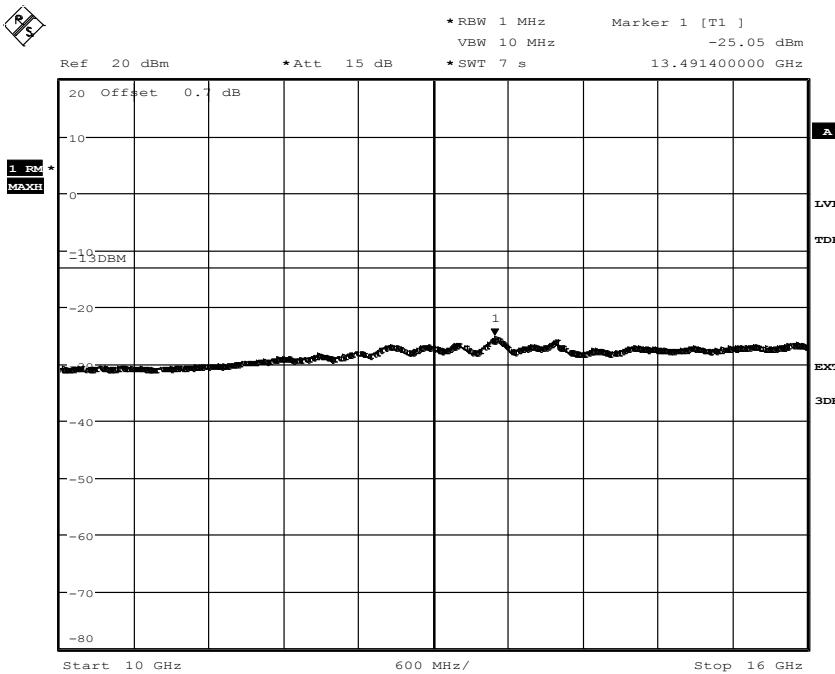
Appendix 6
Diagram 19a:
Diagram 19b:


Date: 6.NOV.2013 17:37:59

Diagram 19c:

Appendix 6


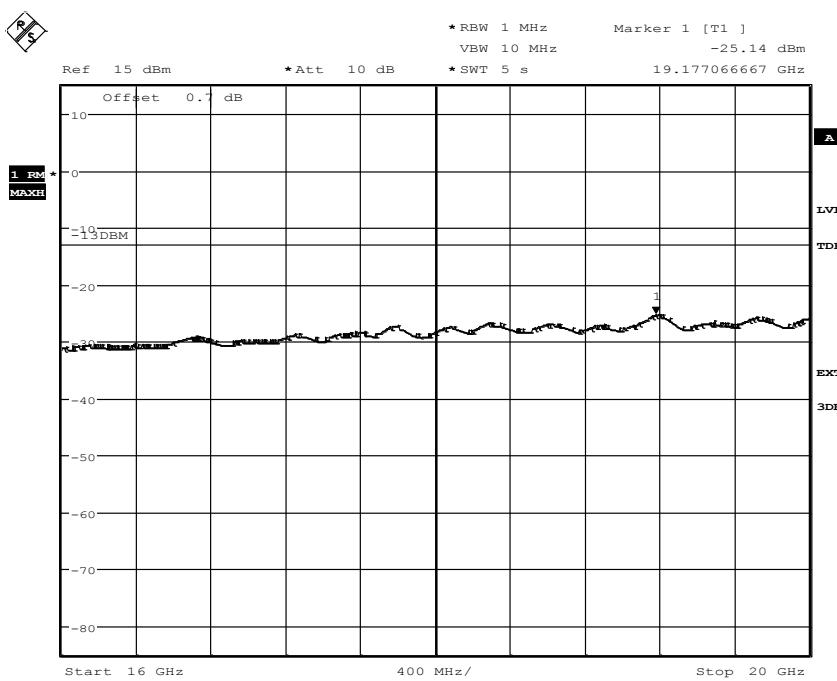
Date: 6.NOV.2013 17:31:12

Diagram 19d:


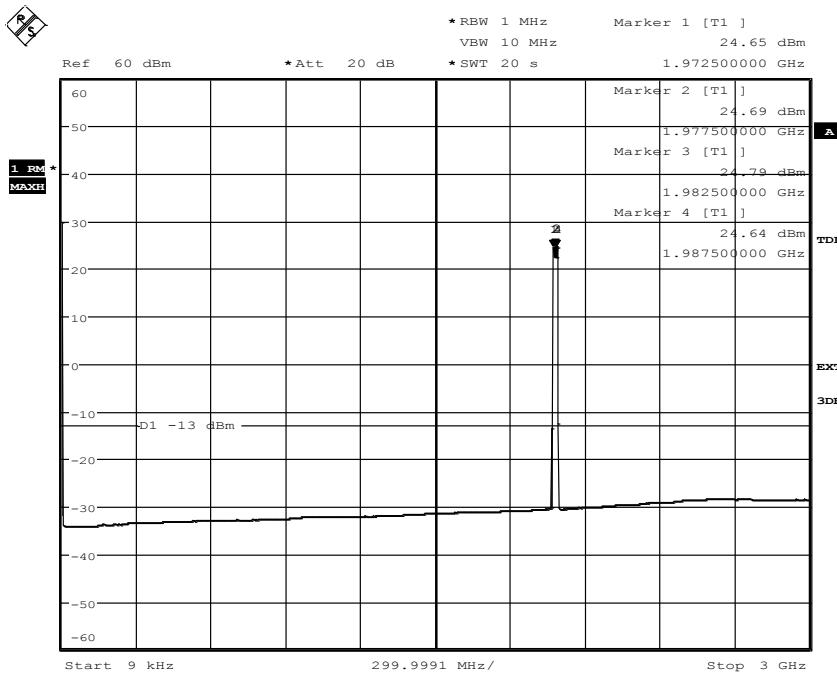
Date: 6.NOV.2013 17:27:36

Diagram 19e:

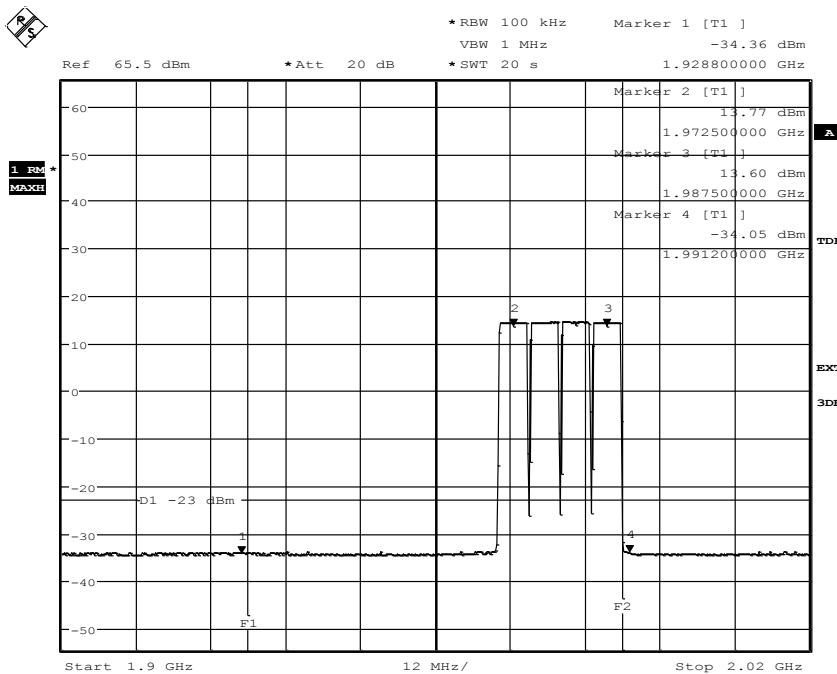
Appendix 6



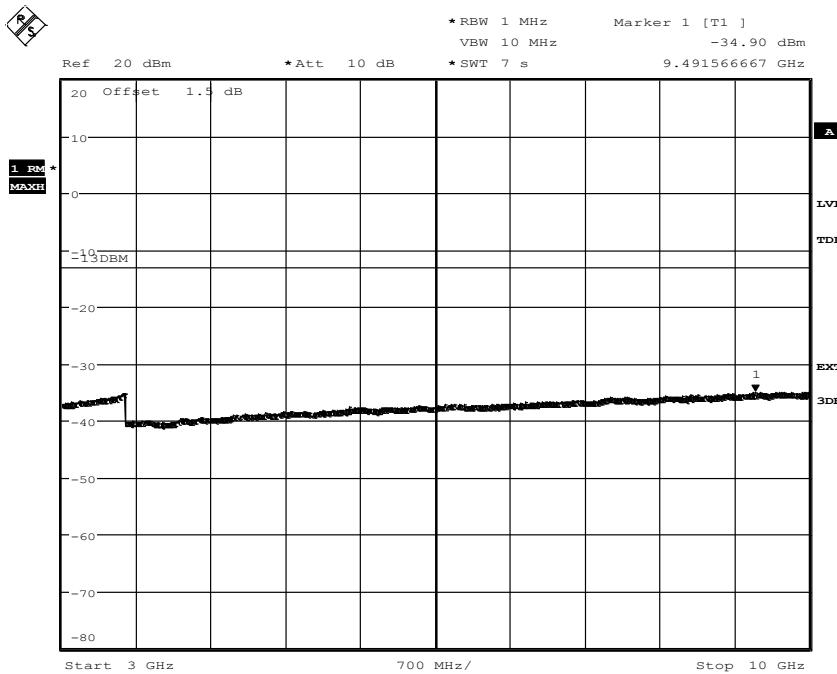
Date: 6.NOV.2013 17:24:36

Appendix 6
Diagram 20a:


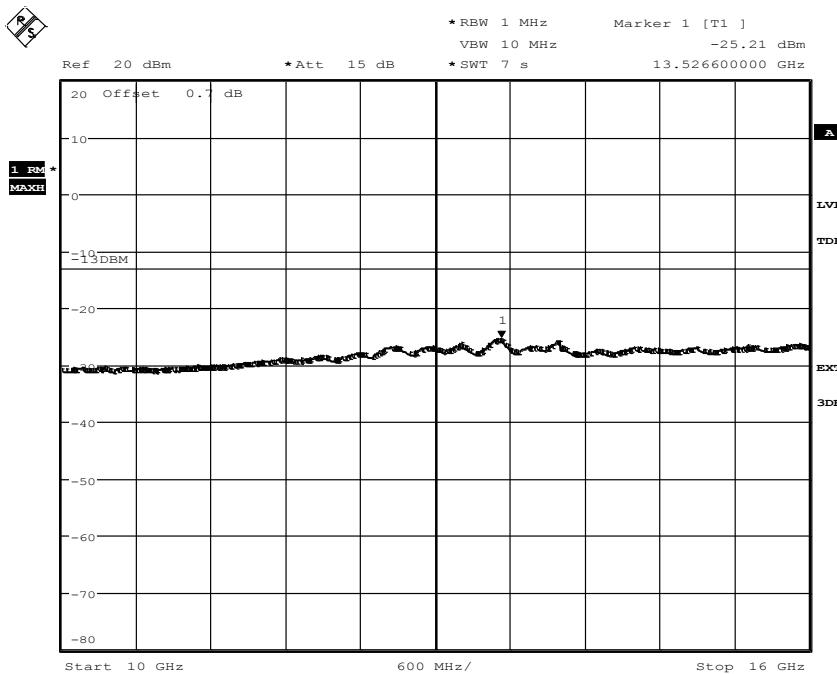
Date: 6.NOV.2013 18:03:51

Diagram 20b:


Date: 6.NOV.2013 18:05:31

Appendix 6
Diagram 20c:


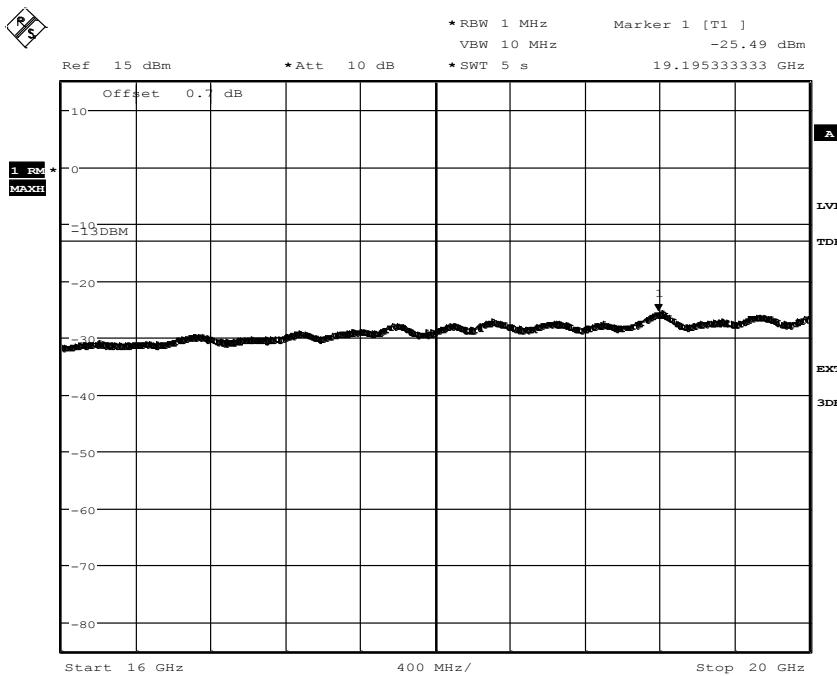
Date: 6.NOV.2013 18:07:46

Diagram 20d:


Date: 6.NOV.2013 18:09:20

Appendix 6

Diagram 20e:



Date: 6.NOV.2013 18:10:19

Appendix 7

Field strength of spurious radiation measurements according to 47 CFR 2.1053 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-10-24	23 °C ± 3°C	41 % ± 5 %
2013-11-07	23 °C ± 3°C	31 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 – 20 GHz.

In the frequency range 30 MHz – 20 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was

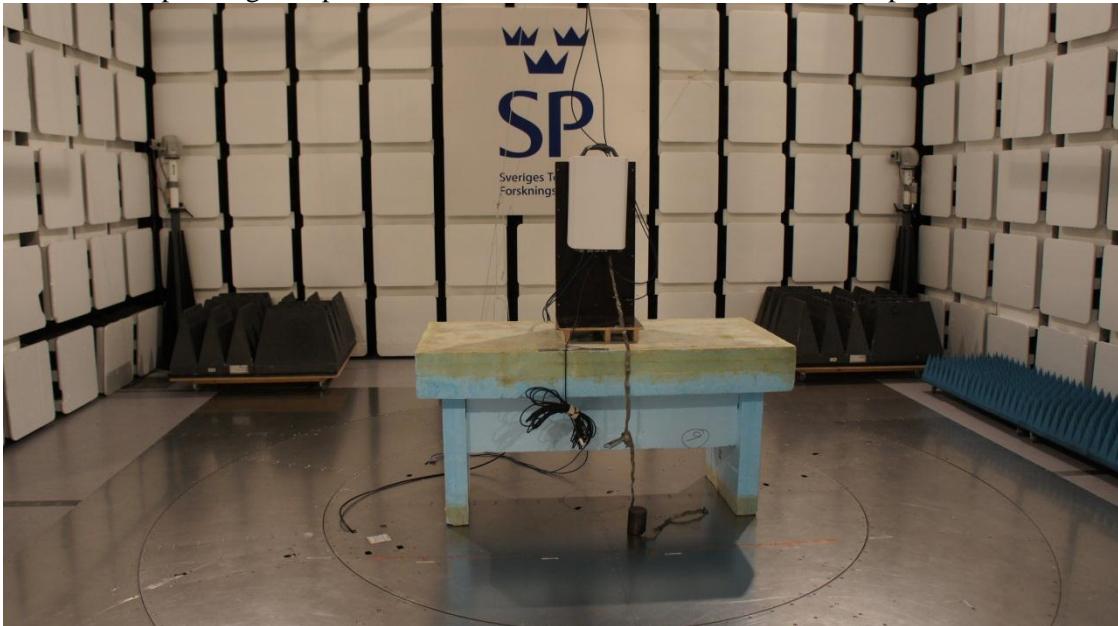
$$\gamma = 20 \log\left(\frac{4\pi D}{\lambda}\right), \quad \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

Appendix 7

The test set-up during the spurious radiation measurements is shown in the picture below:

**Measurement equipment**

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU 26	901 553
EMC 32 ver. 8.52.0	503 899
Chase Bilog Antenna CBL 6111A	503 182
EMCO Horn Antenna 3115	502 175
Flann STD Gain Horn Antenna 20240-20	503 674
Miteq, Low Noise Amplifier	503 285
μComp Nordic, Low Noise Amplifier	901 545
Testo 635 temperature and humidity meter	504 188

Appendix 7
Tested configurations

B
M
M2
M4
T

Results, representing worst case

Diagram	BW configuration[MHz]	Configuration
1 a-c	1.4 MHz	M

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-20 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

CFR 47 §24.238 and IC RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

Appendix 7

Diagram 1a:

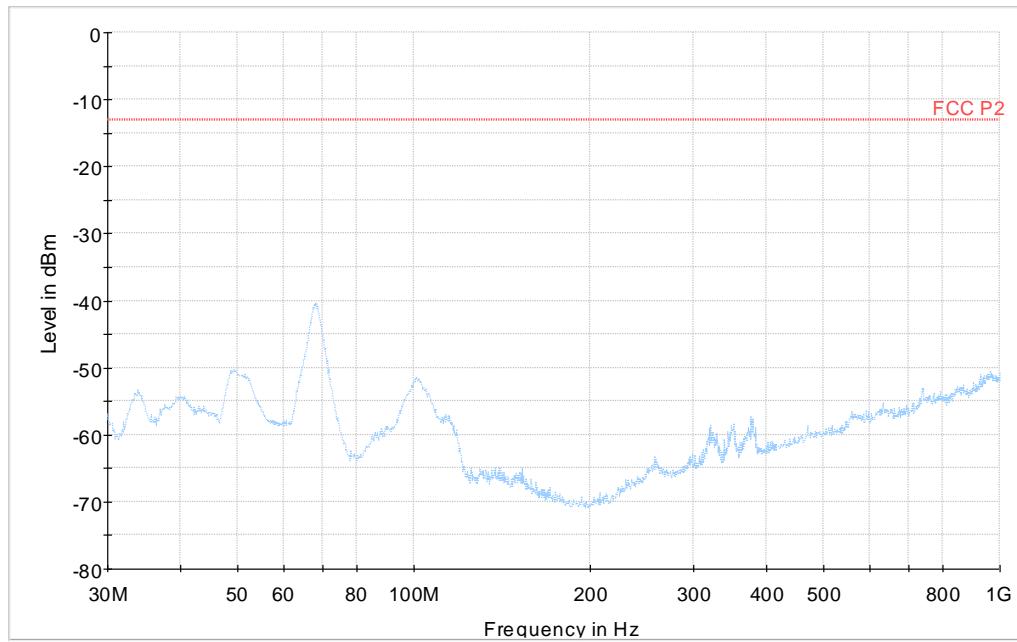
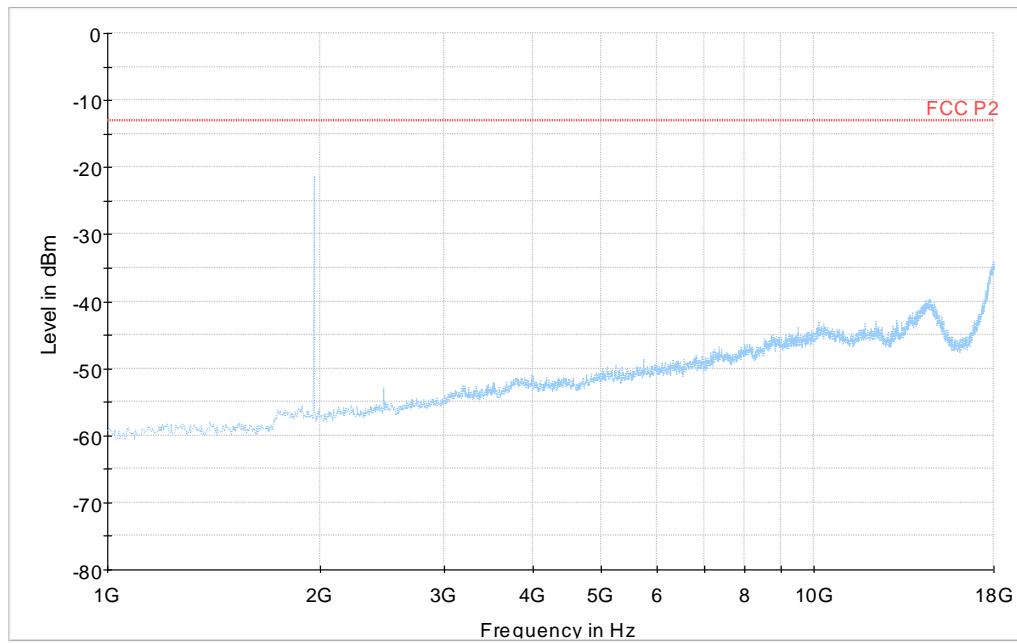


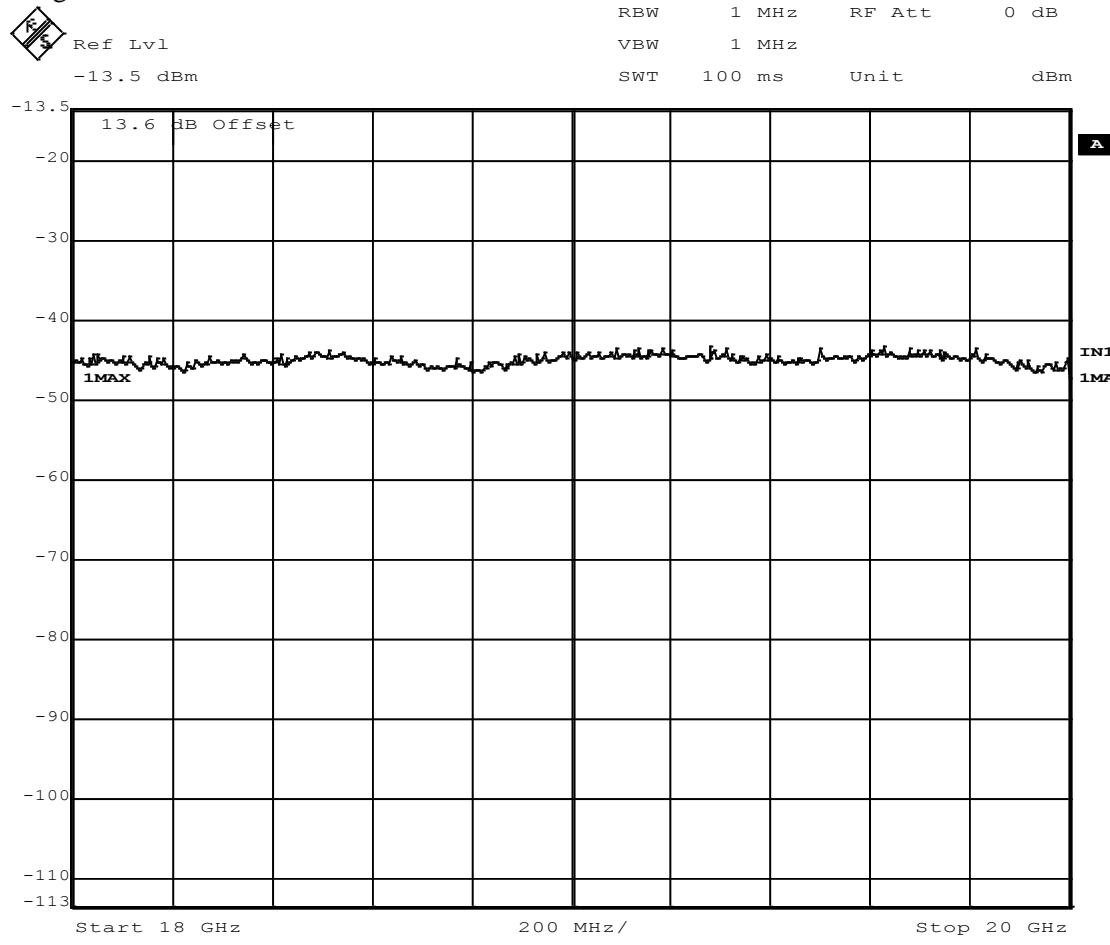
Diagram 1b:



Note: The emission at 1960 MHz is the carrier frequency and shall be ignored in the context.

Appendix 7

Diagram 1c:



Appendix 8
Frequency stability measurements according to CFR 47 §2.1055 / IC RSS 133 6.3

Date	Temperature (test equipment)	Humidity (test equipment)
2013-10-15	23 °C ± 3 °C	31% ± 5 %
2013-10-16	22 °C ± 3 °C	31% ± 5 %
2013-10-17	23 °C ± 3 °C	38% ± 5 %
2013-11-01	23 °C ± 3 °C	42% ± 5 %

Test set-up and procedure

The measurement was made per 3GPP TS 36.141. The output was connected to a spectrum analyser. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	900 233
RF Terminator	-
Temperature Chamber	503 360
Testo 635, temperature and humidity meter	504 203
Multimeter Fluke 87	502 190

Appendix 8
Results

Nominal Voltage -48 V DC

Maximum output power at mid channel (M)

Channel Bandwidth 5 MHz

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	T (°C)	Test model E-TM1.1
-48.0	+20	-3
-55.2	+20	+3
-40.8	+20	-3
-48.0	+30	-2
-48.0	+40	-5
-48.0	+50	-4
-48.0	+10	+4
-48.0	0	-4
-48.0	-10	-2
-48.0	-20	-4
-48.0	-30	-5
Maximum freq. error (Hz)		5
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Appendix 8
Results

Nominal Voltage 120 V AC, 60 Hz

Maximum output power at mid channel (M)

Channel Bandwidth 5 MHz

Test conditions		Frequency error (Hz)
Supply voltage AC (V)	T (°C)	Test model E-TM1.1
102.0	+20	-10
120.0	+20	-6
138.0	+20	+8
Maximum freq. error (Hz)		10
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Remark

Measurements were performed on test objects mRRUS 12 B2, KRC 161 328/4, revision R1A, s/n: D16A183078 and KRC 161 328/3, revision R1A, s/n: D16A076659.

It was deemed sufficient to test one combination of TX frequency, channel bandwidth configuration and test model (modulation), as all combinations share a common internal reference to derive the TX frequency from.

Limits

According to 3GPP TS 36.141, section 6.5.1.5:

The frequency Error shall be within $\pm(0.05 \text{ PPM} + 12 \text{ Hz})$ ($\pm 110 \text{ Hz}$).

§24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS-133 The carrier frequency shall not depart from the reference frequency, in excess of $\pm 1.0 \text{ ppm}$ for base stations.

Complies?	Yes
-----------	-----

Appendix 9

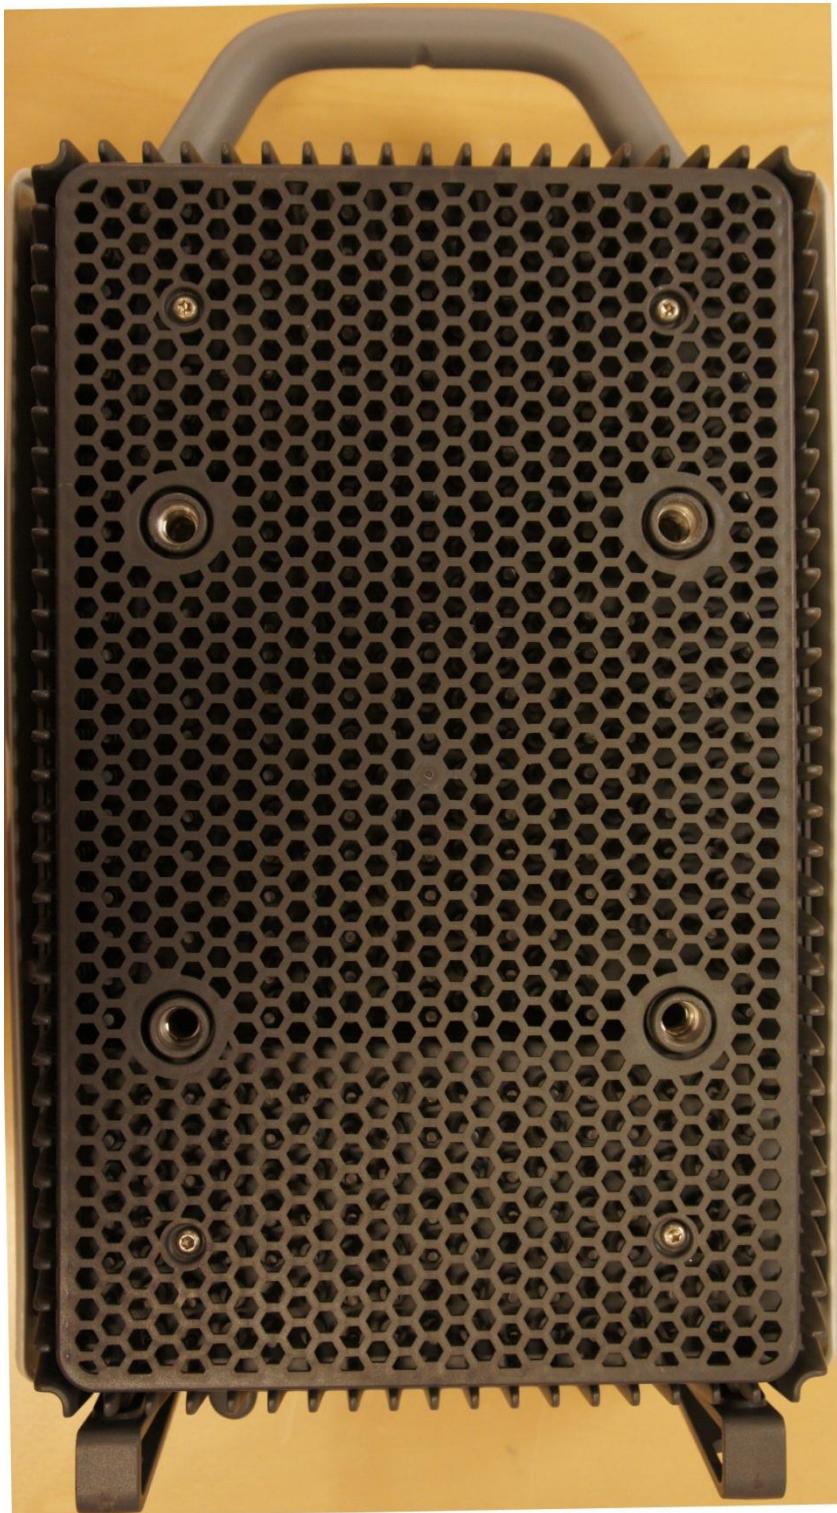
External photos

Front side



Appendix 9

Rear side



Appendix 9

Left side



Right side

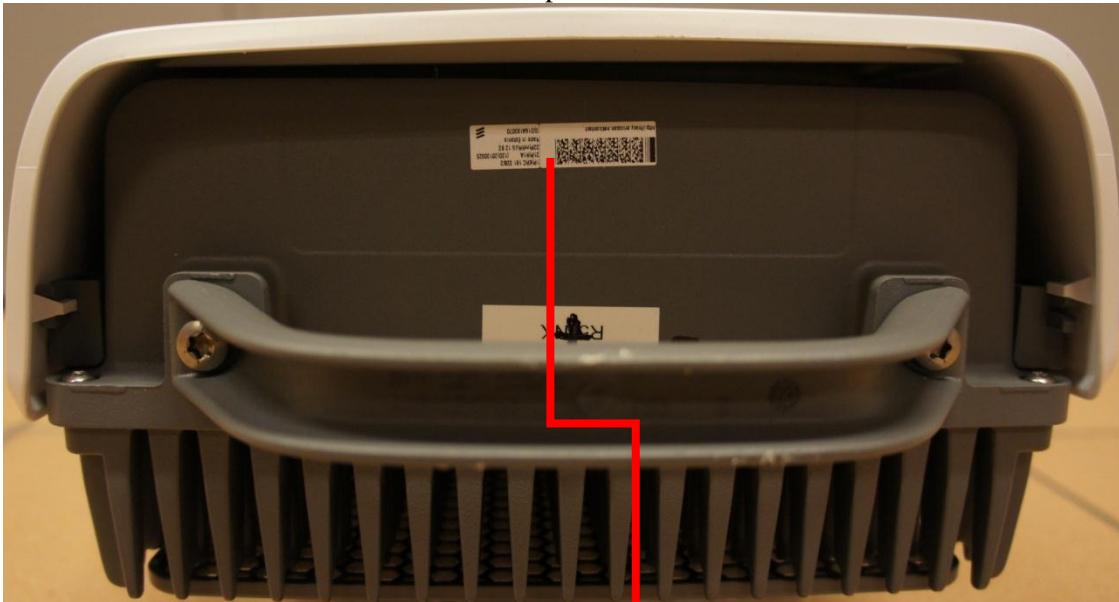


Appendix 9

Bottom side



Top side



Product label

