



Product Service

**Choose certainty.  
Add value.**



# Report On

FCC and IC Testing of the  
Ericsson KRC 161 332/1 (mRRUS12 B13) LTE (700 MHz) Base  
Station in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27,  
Industry Canada RSS-GEN and Industry Canada RSS-139

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRC161332

IC: 287AB-AS161332

PREPARED BY

Natalie Bennett  
Project Manager (RF  
and Telecoms)

APPROVED BY

Steve Scarfe  
Authorised Signatory

DATED

16 November 2018

**Document 75943170 Report 01 Issue 1**

**November 2018**



Product Service

## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT INFORMATION ..... 2</b>
1.1	Report Details ..... 3
1.2	Brief Summary of Results ..... 4
1.3	Configuration Description ..... 5
1.4	Declaration of Build Status ..... 6
1.5	Product Information ..... 7
1.6	Test Setup ..... 8
1.7	Test Conditions ..... 9
1.8	Deviation From The Standard ..... 9
1.9	Modification Record ..... 9
1.10	Test LOCATION ..... 9
<b>2</b>	<b>TEST DETAILS ..... 10</b>
2.1	Maximum Peak Output Power and Peak to Average Ratio - Conducted ..... 11
2.2	Occupied Bandwidth ..... 17
2.3	Band Edge ..... 22
2.4	Transmitter Spurious Emissions ..... 27
2.5	Radiated Emissions ..... 34
<b>3</b>	<b>TEST EQUIPMENT USED ..... 56</b>
3.1	Test Equipment Used ..... 57
3.2	Measurement Uncertainty ..... 59
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 60</b>
4.1	Accreditation, Disclaimers and Copyright ..... 61
<b>ANNEX A</b>	<b>Module Lists ..... A.2</b>



Product Service

## **SECTION 1**

### **REPORT INFORMATION**



Product Service

## 1.1 REPORT DETAILS

Manufacturer	Ericsson
Address	Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden
Product Name & Product Number	mRRUS12 B13 - KRC 161 332/1
Declared Variant(s)	KRC 161 332/2 KRC 161 332/3 KRC 161 332/4
IC Model Name	AS1613321 AS1613322 AS1613323 AS1613324
Serial Number(s)	C827540462
Software Version	NB-IoT GB CXP9013268_9 R73AM, NB-IoT SA base CXP9013268_259 R72CL01
Hardware Version	R1D
Test Specification/Issue/Date	FCC CFR 47 Part 2: 2017 FCC CFR 47 Part 27: 2017 Industry Canada RSS-GEN: Issue 5: 2018 Industry Canada RSS-139: Issue 3: 2015
Start of Test	01 October 2018
Finish of Test	23 October 2018
Name of Engineer(s)	Nicolas Salguero and Graeme Lawler
Related Document(s)	KDB 971168 D01 v02r02 KDB 662911 D01 v02r01

---

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with FCC CFR 47 Part 2, FCC CFR 47 Part 27, Industry Canada RSS-GEN and Industry Canada RSS-139. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

Nicolas Salguero

Graeme Lawler



Product Service

## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27, Industry Canada RSS-GEN and Industry Canada RSS-139 is shown below.

Section	Specification Clause				Test Description	Result
	FCC CFR 47 Part 2	FCC CFR 47 Part 27	RSS-GEN	RSS-139		
2.1	2.1046	27.50	-	6.4	Maximum Peak Output Power and Peak to Average Ratio - Conducted	Pass
2.2	2.1049	27.53	6.6	-	Occupied Bandwidth	Pass
2.3	2.1051	27.53 (h)	-	6.5	Band Edge	Pass
2.4	2.1051	27.53 (h)	-	6.5	Transmitter Spurious Emissions	Pass
2.5	2.1051	27.53 (g)	-	6.5	Radiated Emissions	Pass

### Measurement Uncertainty Decision Statement

Determination of conformity with the specification limits is based on the results of the compliance measurement and does not take into account measurement instrumentation uncertainty as defined in ANSI C63.26:2015 Clause 1.3.



Product Service

### 1.3 CONFIGURATION DESCRIPTION

Configuration	RAT	No. Of carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
				Bottom	Middle	Top
A	LTE+NB IoT GB	1	10MHz	-	751.00	-
B	NB IoT SA	1	0.18 MHz	746.20	751.40	756.80 or 755.80 for RSS-139




1.4 DECLARATION OF BUILD STATUS

<b>MAIN EUT</b>		
<b>MANUFACTURING DESCRIPTION</b>	Radio equipment	
<b>MANUFACTURER</b>	Ericsson AB	
<b>PRODUCT NAME</b>	mRRUS12 B13	
<b>PART NUMBER</b>	KRC 161 332/1* KRC 161 332/2 KRC 161 332/3 KRC 161 332/4	110-240VAC internal antenna, -48VDC internal antenna, 110-240VAC external antenna, -48VDC external antenna
<b>IC Model Names</b>	AS1613321 AS1613322 AS1613323 AS1613324	
<b>SERIAL NUMBER</b>	C827540462	
<b>HARDWARE VERSION</b>	R1D	
<b>SOFTWARE VERSION</b>	NB-IoT GB CXP9013268_9 R73AM, NB-IoT SA base CXP9013268_259 R72CL01	
<b>TRANSMITTER OPERATING RANGE</b>	746 to 756 MHz NB-IoT SA 746-756 MHz (746-757 MHz for USA)	
<b>MODULATIONS</b>	QPSK, 16QAM, 64QAM, 256QAM	
<b>INTERMEDIATE FREQUENCIES</b>	-	
<b>ITU DESIGNATION OF EMISSION</b>	5 MHz BW channel: 5M00F9W 10 MHz BW channel <sup>1</sup> : 9M40F9W NB-IoT SA 200 kHz BW channel: 230KW7D	
<b>OUTPUT POWER (RMS) (W or dBm)</b>	2 ports, 5W <sup>1</sup> per port NB-IoT SA 1x5W (per port)	
<b>FCC ID</b>	TA8AKRC161332	
<b>IC ID</b>	287AB-AS161332	
<b>TECHNICAL DESCRIPTION (a brief description of the intended use and operation)</b>	Micro base station radio	

<sup>1</sup> Including 2 NB-IoT GB carriers.

Note\*: KRC 161 332/1 to KRC 161 332/4 have the same radio design with different PSU and antenna configuration, whereas KRC 161 332/1 is the tested unit.

Signature   
Linda Grell

Date 2018-11-13


No responsibility will be accepted by TÜV SÜD Product Service as to the accuracy of the information declared in this document by the manufacturer.

## 1.5 PRODUCT INFORMATION

### 1.5.1 Technical Description

The Equipment Under Test (EUT) mRRUS12 B13 - KRC 161 332/1 is an Ericsson AB Radio Unit working in the public mobile service (Band) band which provides communication connections to (700MHz) network. The mRRUS12 B13 - KRC 161 332/1 operates from a 240V AC Supply.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

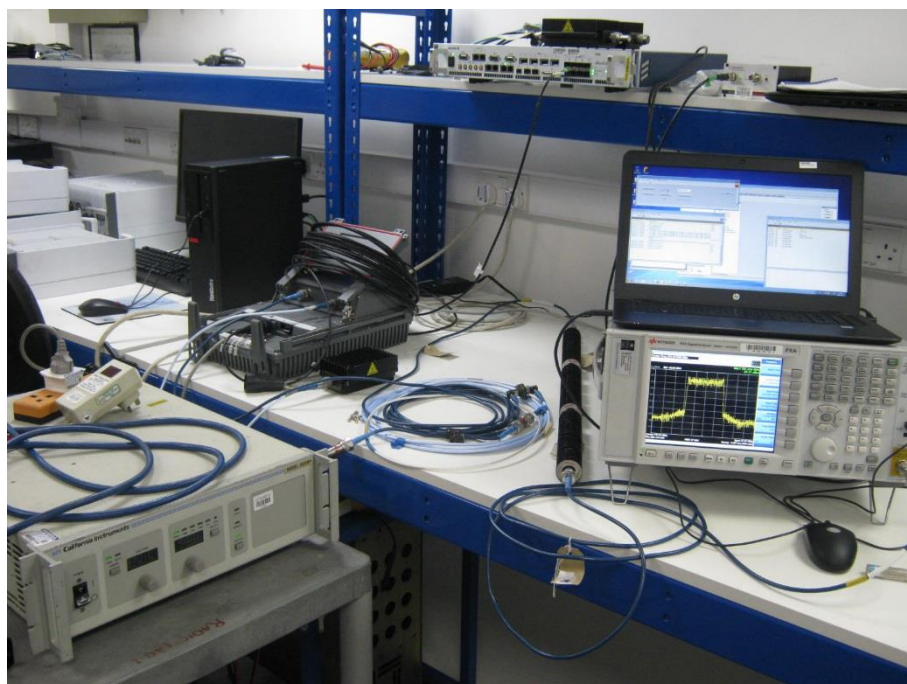


Equipment Under Test





### 1.6 TEST SETUP

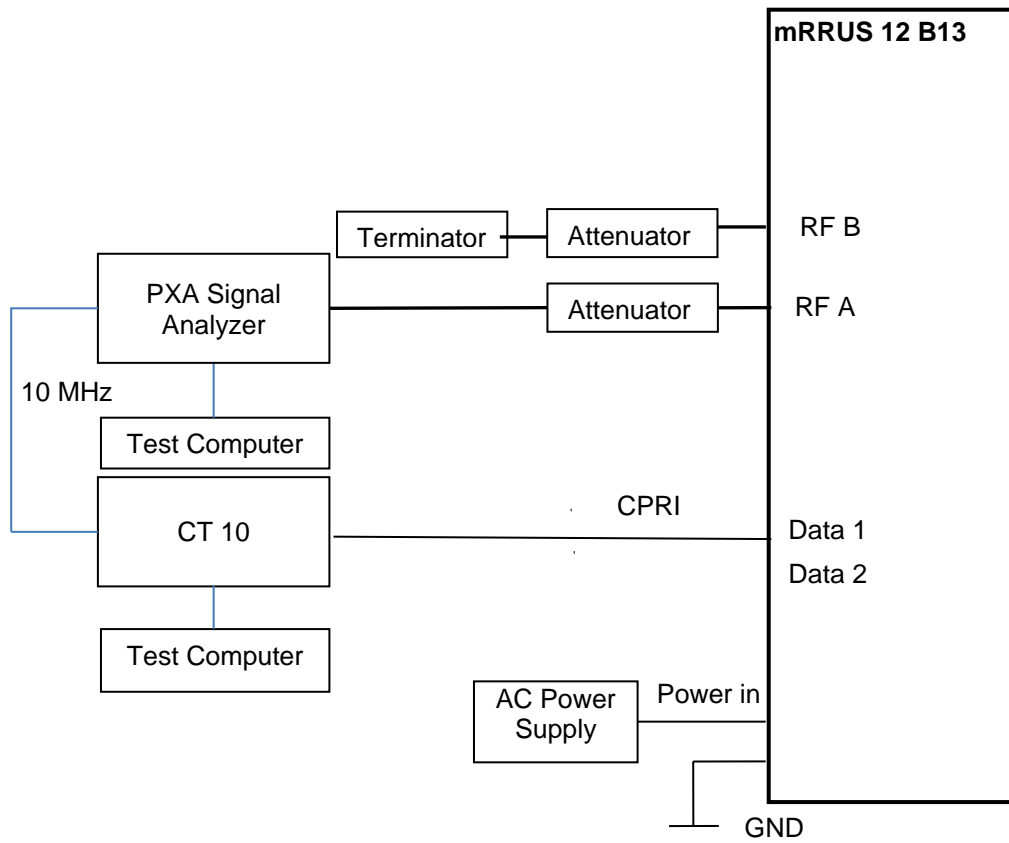



Product Service

## 1.7 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or a chamber as appropriate.

The EUT was powered from a 240V AC Supply.

FCC Measurement Facility Registration Number  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation  
IC2932B-1 Octagon House, Fareham Test Laboratory

## 1.8 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

## 1.9 MODIFICATION RECORD

No modifications were made to the EUT during testing.

## 1.10 TEST LOCATION

TÜV SÜD Product Service conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)
Maximum Peak Output Power and Peak to Average Ratio - Conducted	Nicolas Salguero
Occupied Bandwidth	Nicolas Salguero
Band Edge	Nicolas Salguero
Transmitter Spurious Emissions	Nicolas Salguero
Radiated Emissions	Graeme Lawler

Office Address:

Octagon House  
Concorde Way  
Segensworth North  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom



Product Service

## **SECTION 2**

### **TEST DETAILS**



Product Service

## **2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1046  
FCC CFR 47 Part 27, Clause 27.50  
Industry Canada RSS-139, Clause 6.4

### **2.1.2 Date of Test and Modification State**

12 October 2018 - Modification State 0

### **2.1.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.4 Environmental Conditions**

Ambient Temperature	24.8°C
Relative Humidity	52.9%

### **2.1.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01, clause 5.2.1 and summed in accordance with FCC KDB 662911 D01.



Product Service


### 2.1.6 Test Results

Configuration A

Maximum Output Power 37 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position M		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	64QAM	10.0 MHz	6.73	36.98	-

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M

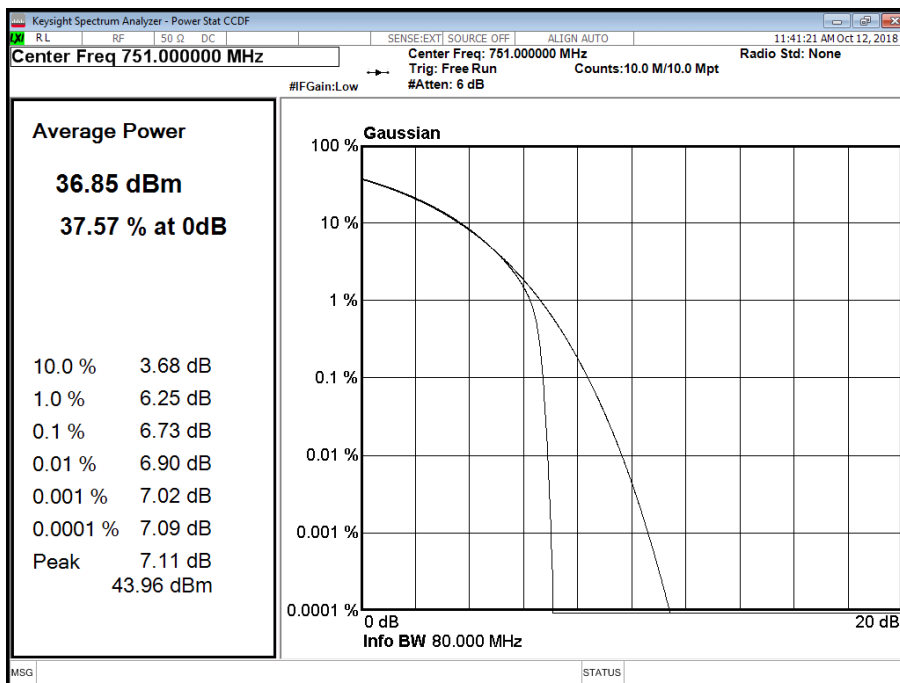




Product Service

Configuration B

Maximum Output Power 37 dBm

Antenna	NB-IoT SA Modulation	NB-IoT SA Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position B		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	N:QPSK	N:180 kHz	4.07	36.06	-

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B

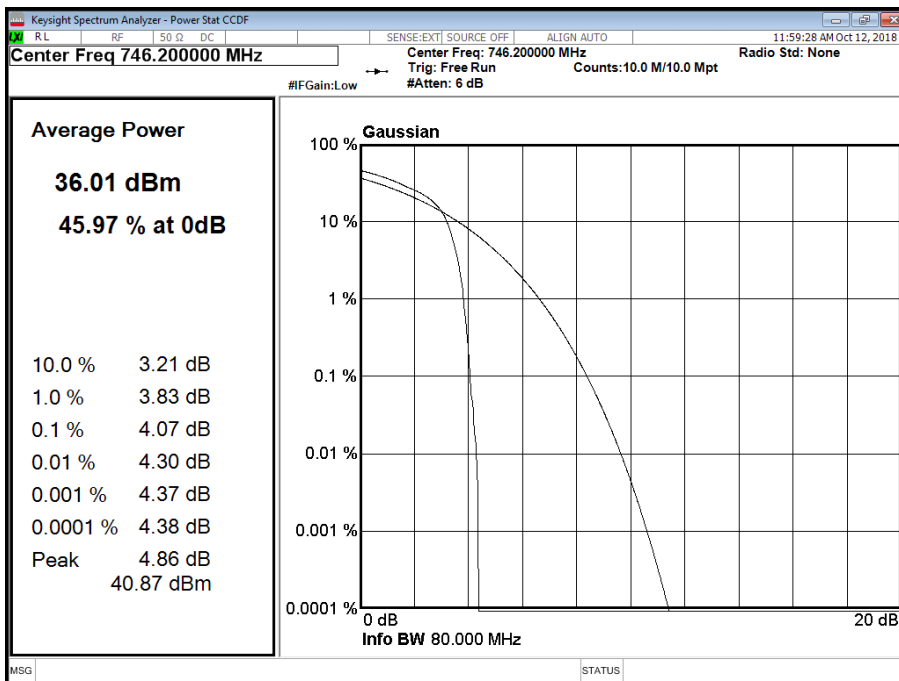




Product Service

Configuration B

Maximum Output Power 37 dBm

Antenna	NB-IoT SA Modulation	NB-IoT SA Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position M		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	N:QPSK	N:180 kHz	4.09	36.13	-

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M

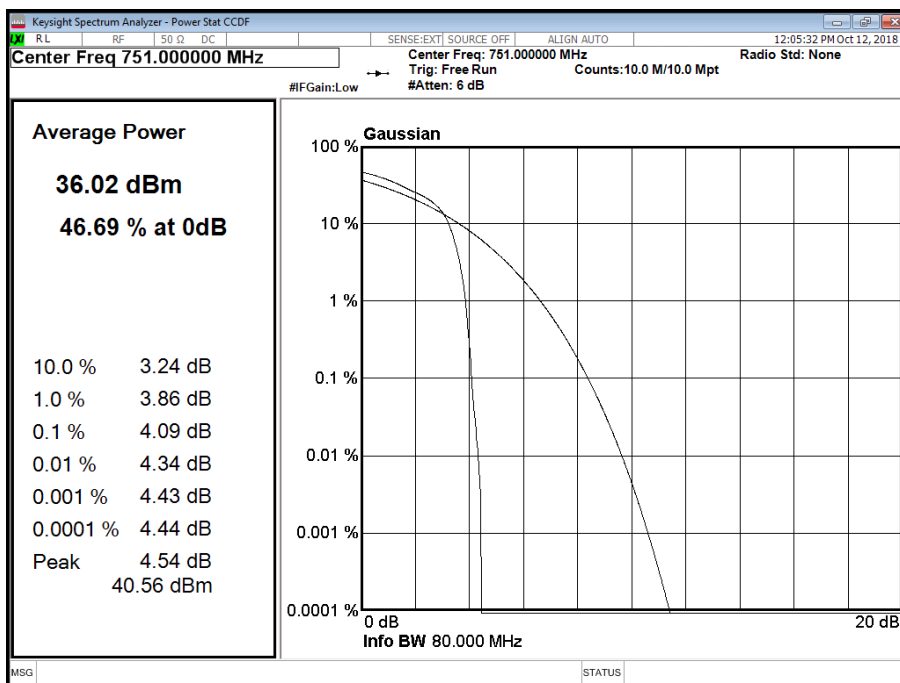




Product Service

Configuration B

Maximum Output Power 37 dBm

Antenna	NB-IoT SA Modulation	NB-IoT SA Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position T		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	N:QPSK	N:180 kHz	4.12	35.91	-

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T

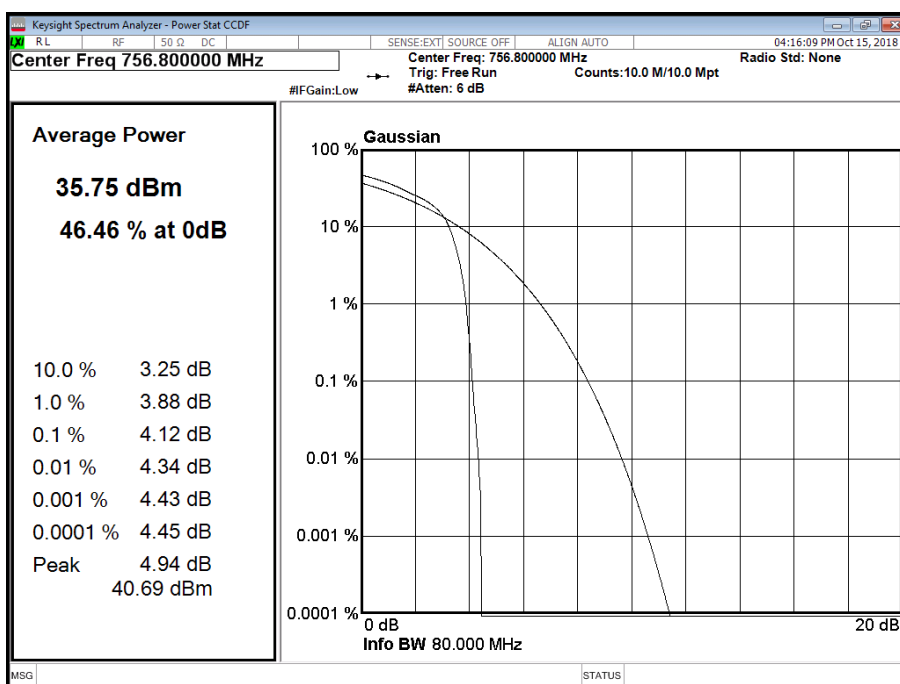






Product Service

Configuration B

Maximum Output Power 37 dBm

Antenna	NB-IoT SA Modulation	NB-IoT SA Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			Channel Position T (Canada)		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	N:QPSK	N:180 kHz	4.05	36.08	-

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T

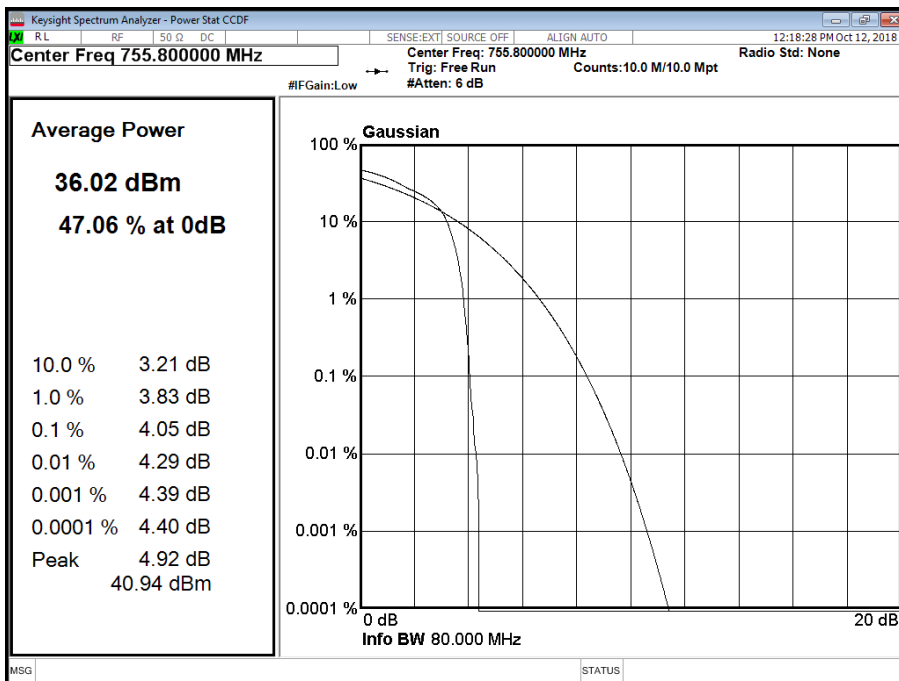

Limit	
Peak Power	≤500 W or ≤+57 dBm
Peak to Average Ratio	13 dB



Product Service

## **2.2 OCCUPIED BANDWIDTH**

### **2.2.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1049  
FCC CFR 47 Part 27, Clause 27.53  
Industry Canada RSS-GEN, Clause 6.6

### **2.2.2 Date of Test and Modification State**

12 October 2018 - Modification State 0

### **2.2.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.4 Environmental Conditions**

Ambient Temperature	24.8°C
Relative Humidity	52.9%

### **2.2.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01.



Product Service


## 2.2.6 Test Results

Configuration A

Maximum Output Power 37 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Result (KHz)					
			Channel Position B		Channel Position M		Channel Position T	
			Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth
A	64QAM	10.0 MHz	-	-	9,394.10	9,768.00	-	-

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M

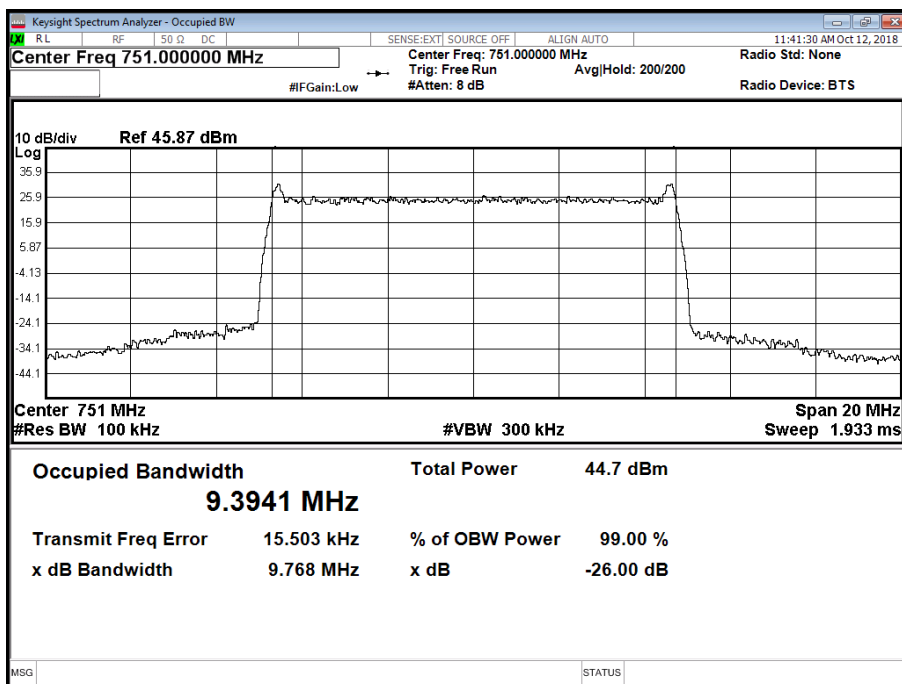




Product Service

Configuration B

Maximum Output Power 37 dBm

Antenna	NB-IoT SA Modulation	NB-IoT SA Carrier Bandwidth	Result (KHz)							
			Channel Position B		Channel Position M		Channel Position T		Channel Position T (Canada)	
			Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth
A	N:QPSK	N:180 kHz	222.09	323.90	222.78	324.80	223.47	325.88	224.30	324.10


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B

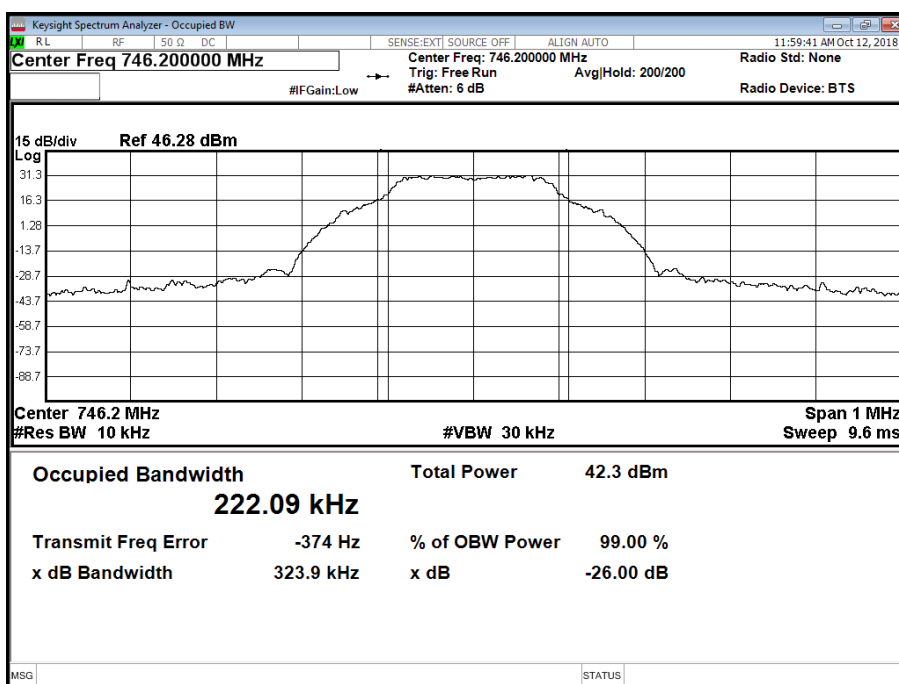




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M

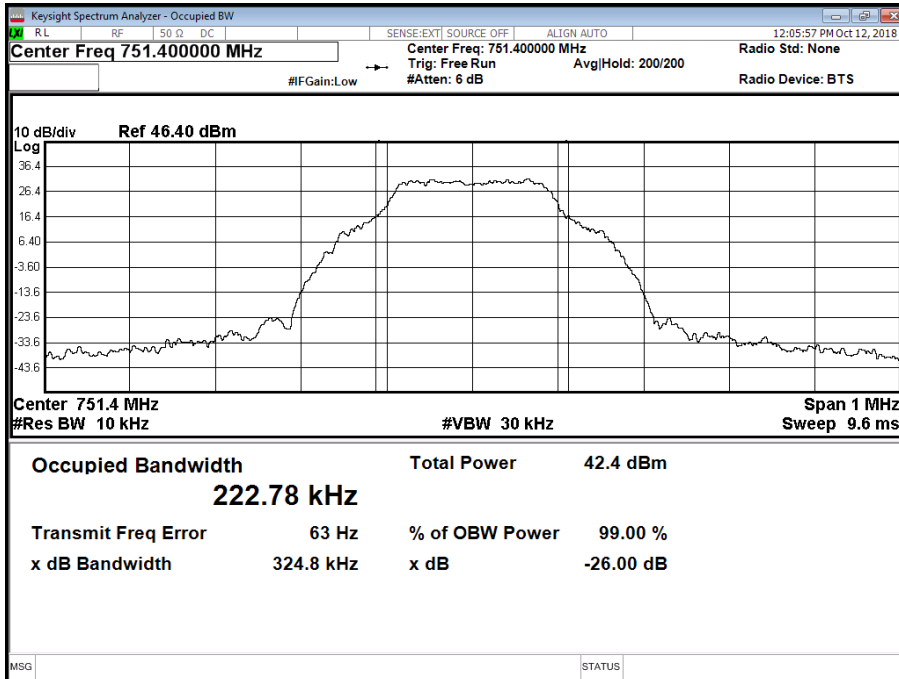


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T

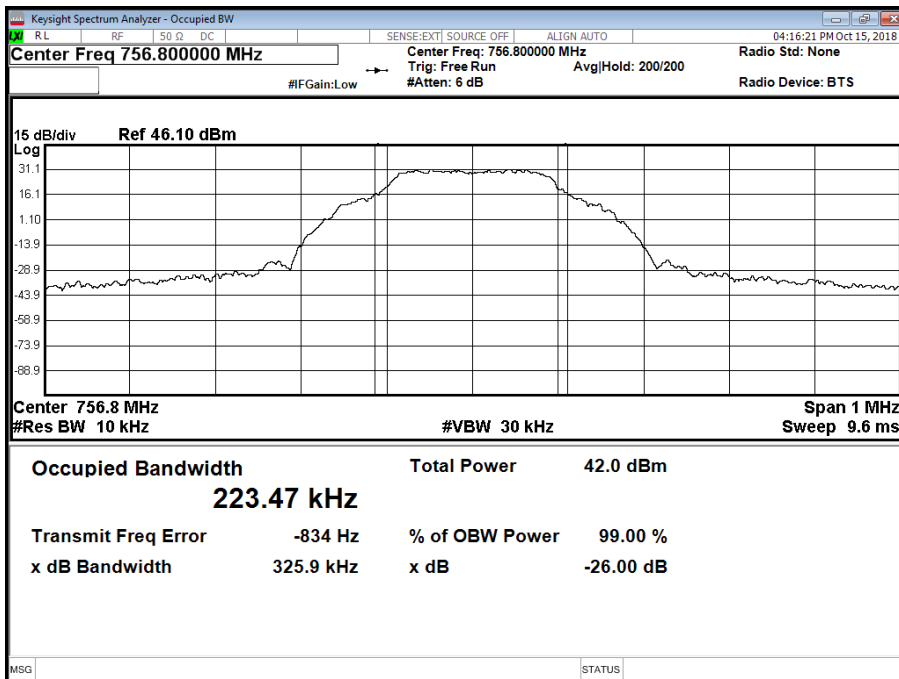



Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T (Canada)

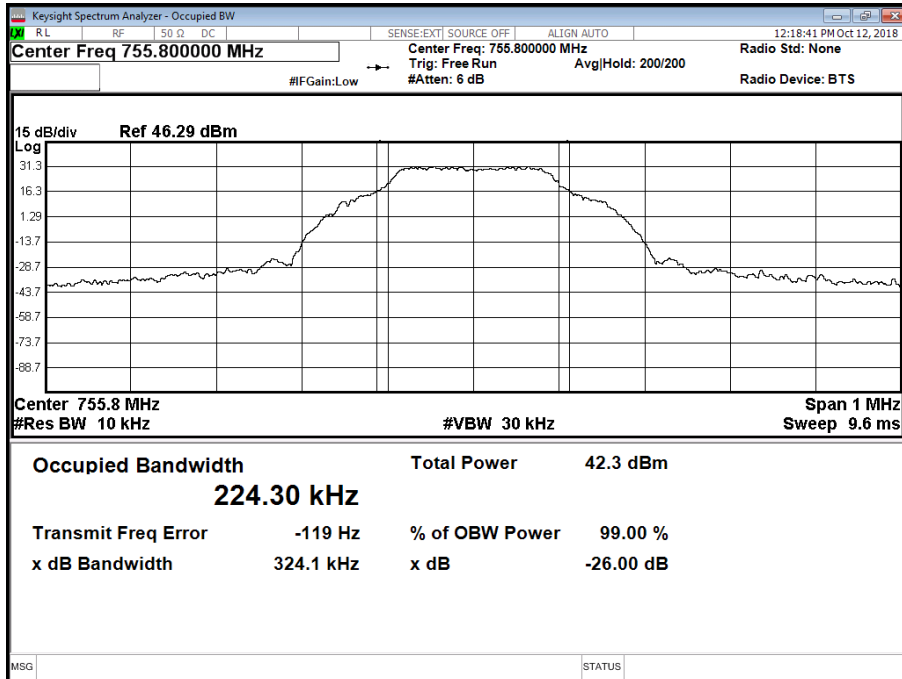



Product Service

## 2.3 BAND EDGE

### 2.3.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 27, Clause 27.53 (h)  
Industry Canada RSS-139, Clause 6.5

### 2.3.2 Date of Test and Modification State

12 October 2018 - Modification State 0

### 2.3.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.3.4 Environmental Conditions

Ambient Temperature 24.8°C  
Relative Humidity 52.9%

### 2.3.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by  $10 * \text{Log}(N)$ , where N is equal to the number of MIMO antenna ports.

For single carrier, the limit was calculated as being  $-13 \text{ dBm} - 10 * \text{Log}(4) = -19 \text{ dBm}$ .

For dual carrier, the limit was calculated as being  $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$ .

For RSS-139 the band is limited to 756MHz, a second plot shows the upper band edge for this.

### 2.3.6 Test Results

Configuration A


Maximum Output Power 37 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	64QAM	10.0 MHz	746.0	757.0 756.0 (Canada)




Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B

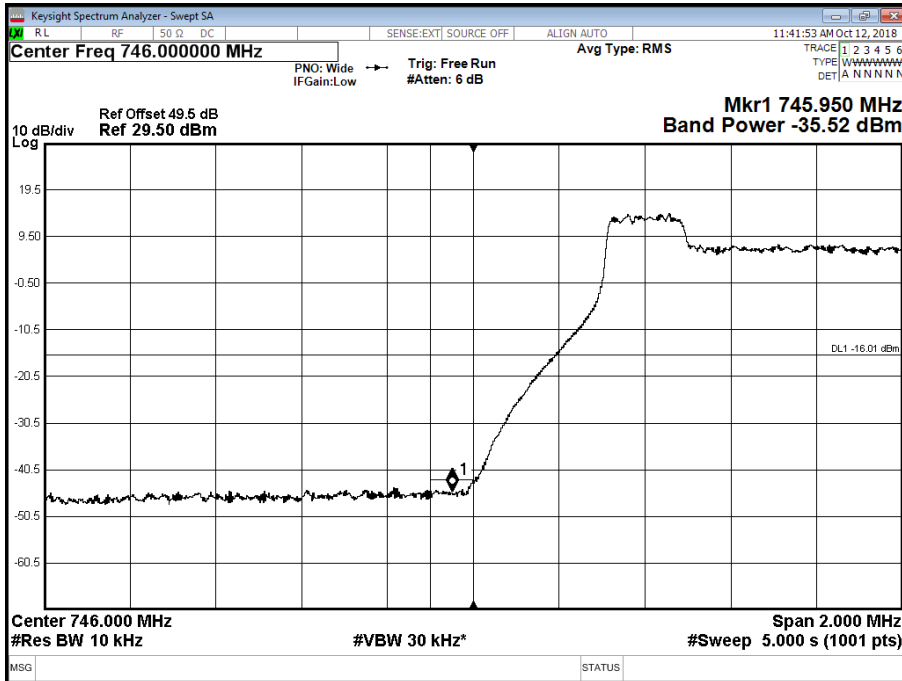

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T

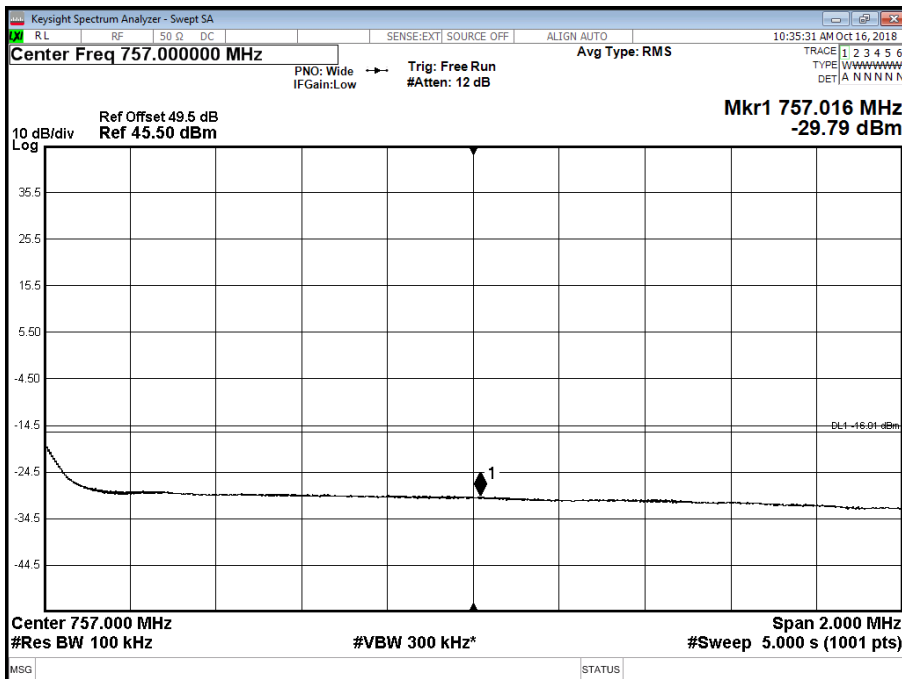






Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T  
RSS-139 (Canada)

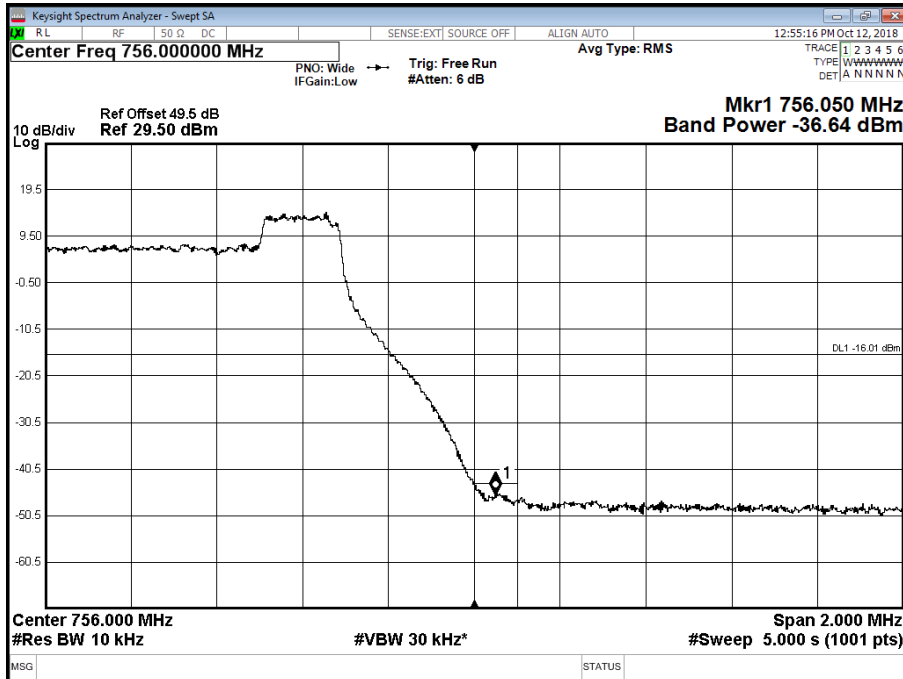




Product Service

Configuration B

Maximum Output Power 37 dBm

Antenna	NB-IoT SA Modulation	NB-IoT SA Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	N:QPSK	N:180 kHz	746.2	756.8 (756.0 for RSS-139)


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B

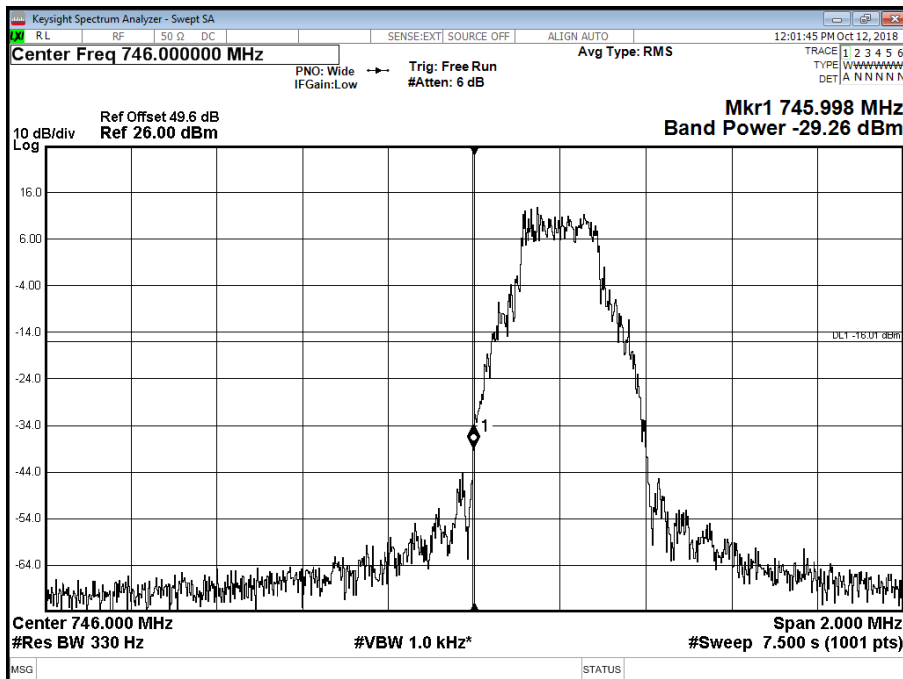




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T

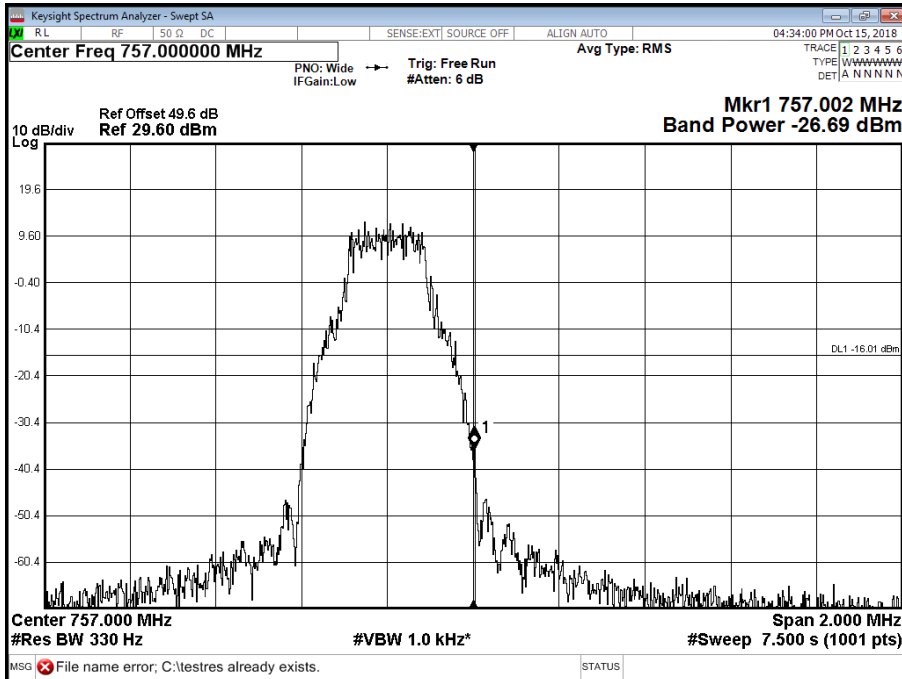

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada)

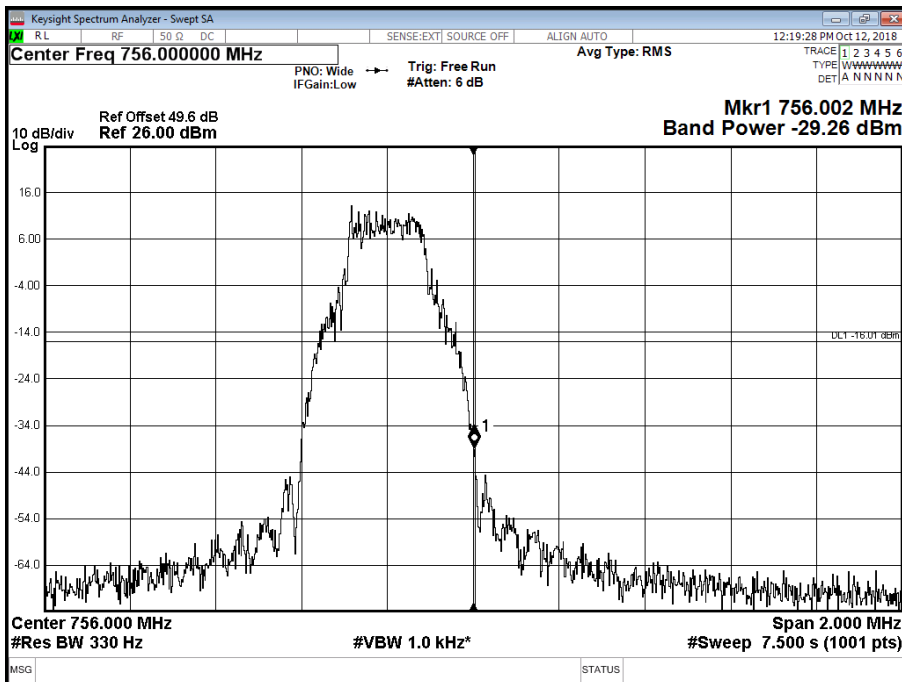

Limit	-16 dBm
-------	---------



Product Service

## **2.4 TRANSMITTER SPURIOUS EMISSIONS**

### **2.4.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 27, Clause 27.53 (h)  
Industry Canada RSS-139, Clause 6.5

### **2.4.2 Date of Test and Modification State**

12 October 2018 - Modification State 0

### **2.4.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.4 Environmental Conditions**

Ambient Temperature	24.8°C
Relative Humidity	52.9%

### **2.4.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by  $10 * \text{Log}(N)$ , where N is equal to the number of MIMO antenna ports.

For single carrier, the limit was calculated as being  $-13 \text{ dBm} - 10 * \text{Log}(4) = -19 \text{ dBm}$ .

For dual carrier, the limit was calculated as being  $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$ .




Product Service

## 2.4.6 Test Results

Configuration A

Maximum Output Power 37 dBm


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 1 - Range 0.009 to 4000 MHz

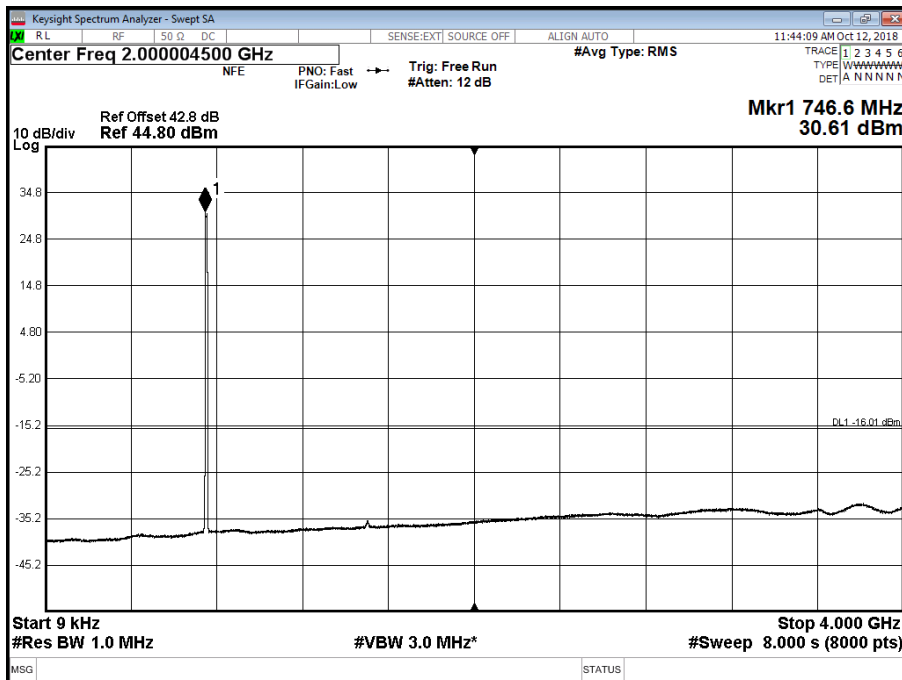



Product Service


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 2 - Range 4000 to 12000 MHz

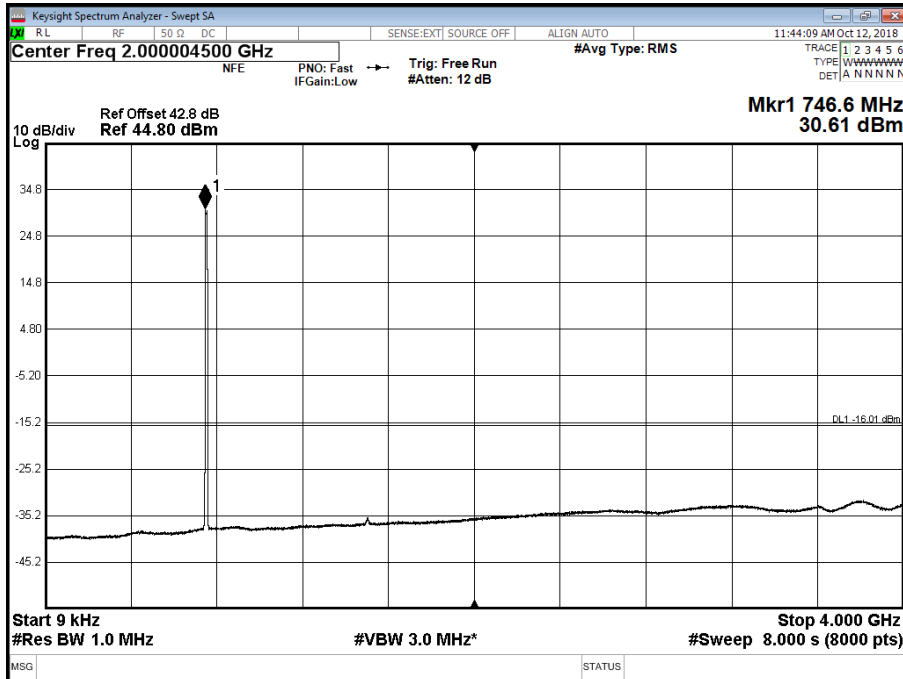

Configuration B

Maximum Output Power 37 dBm


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 1 - Range 0.009 to 4000 MHz

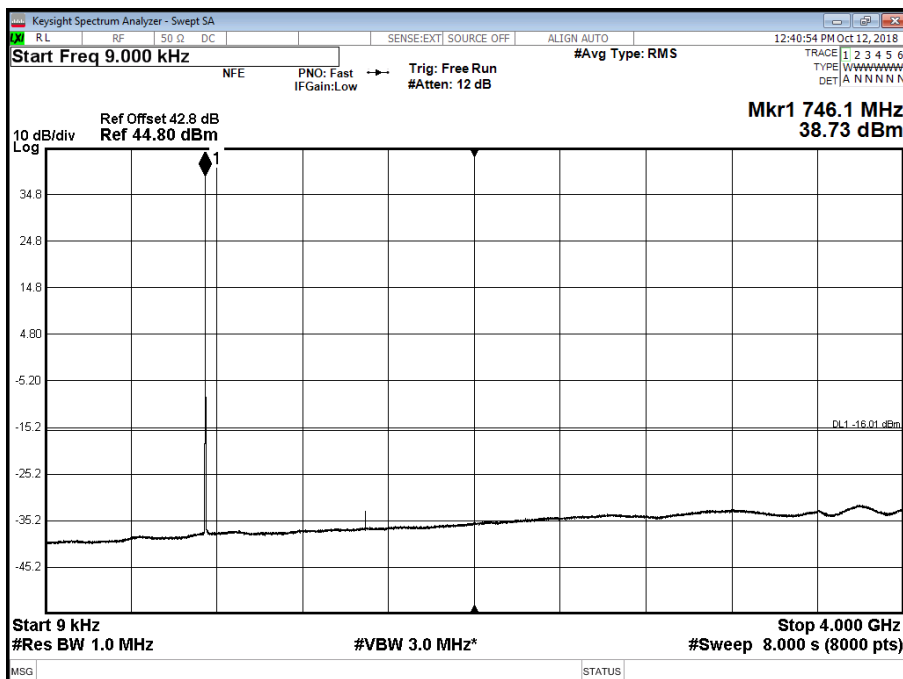




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 2 - Range 4000 to 8000 MHz

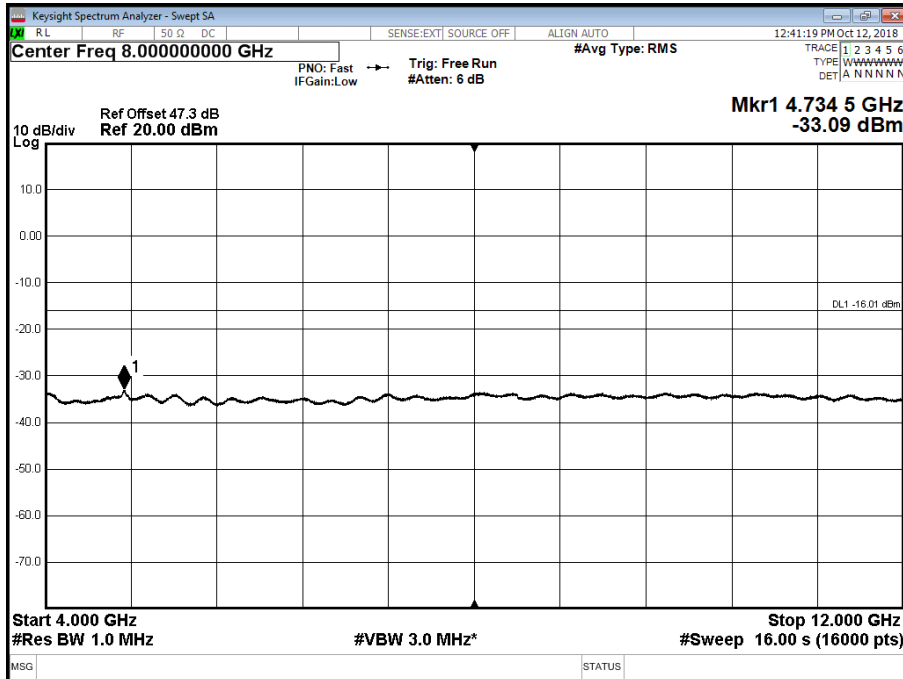


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 1 - Range 0.009 to 4000 MHz

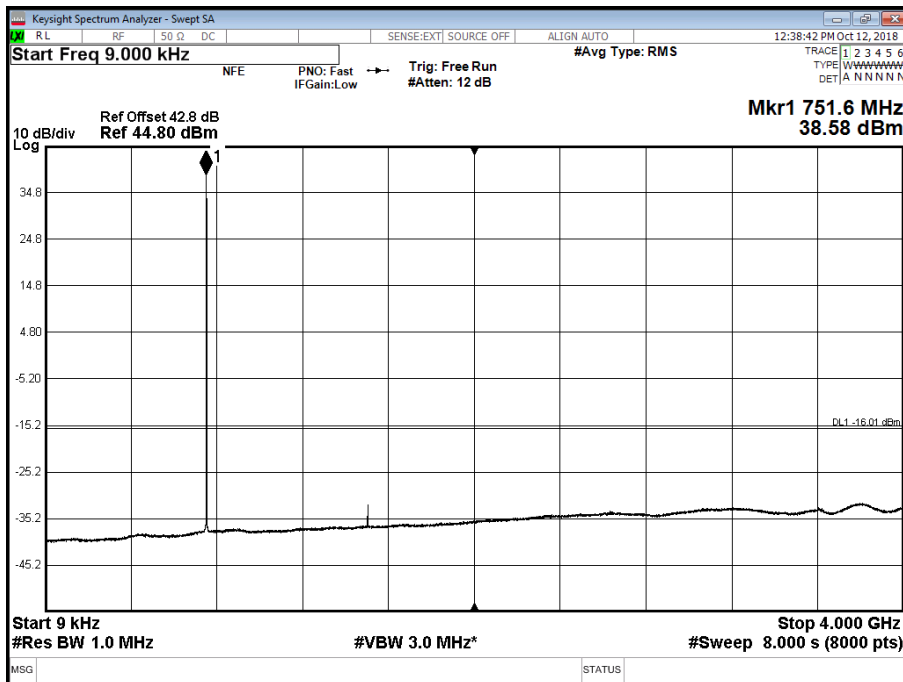




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 2 - Range 4000 to 8000 MHz

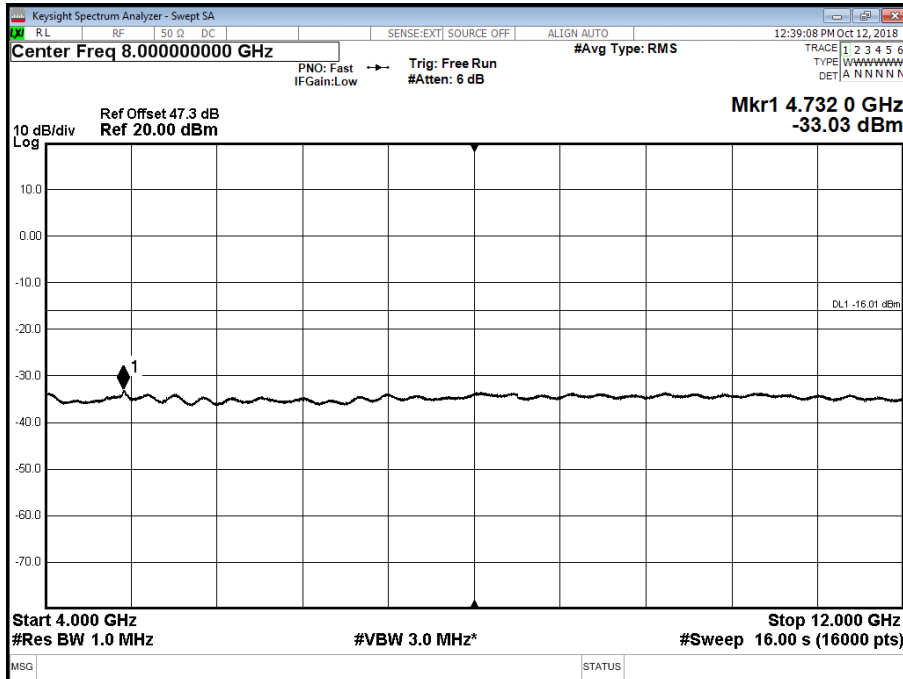

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 1 - Range 0.009 to 4000 MHz

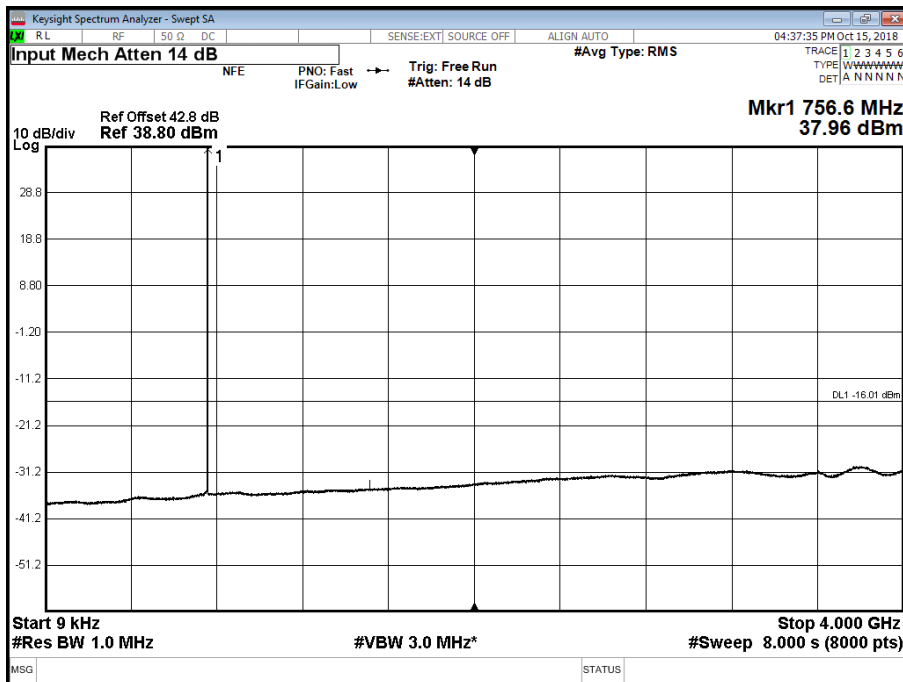







Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 2 - Range 4000 to 8000 MHz

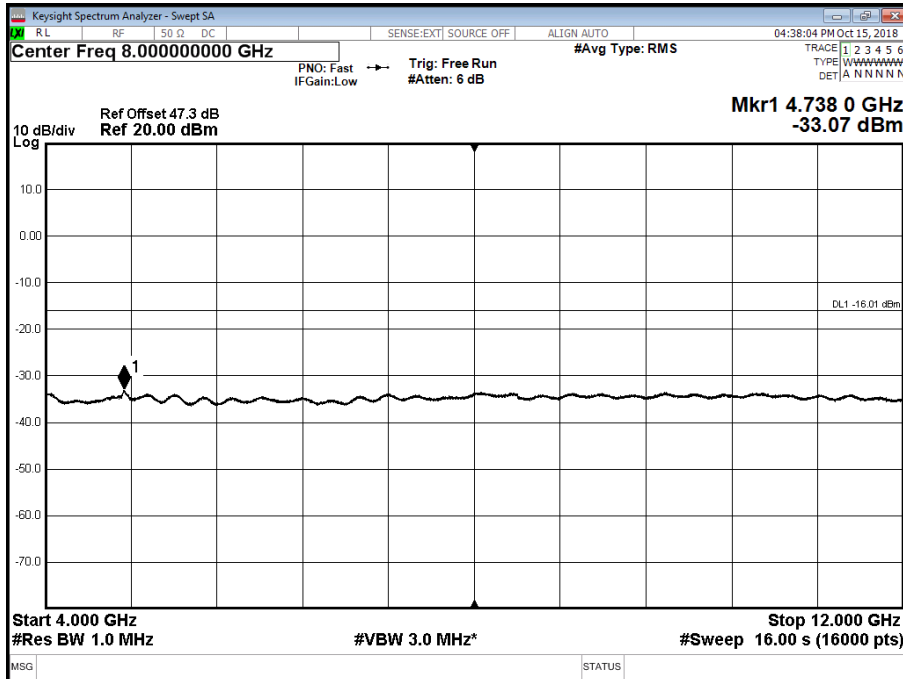


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T (Canada) - Band 1 - Range 0.009 to 4000 MHz

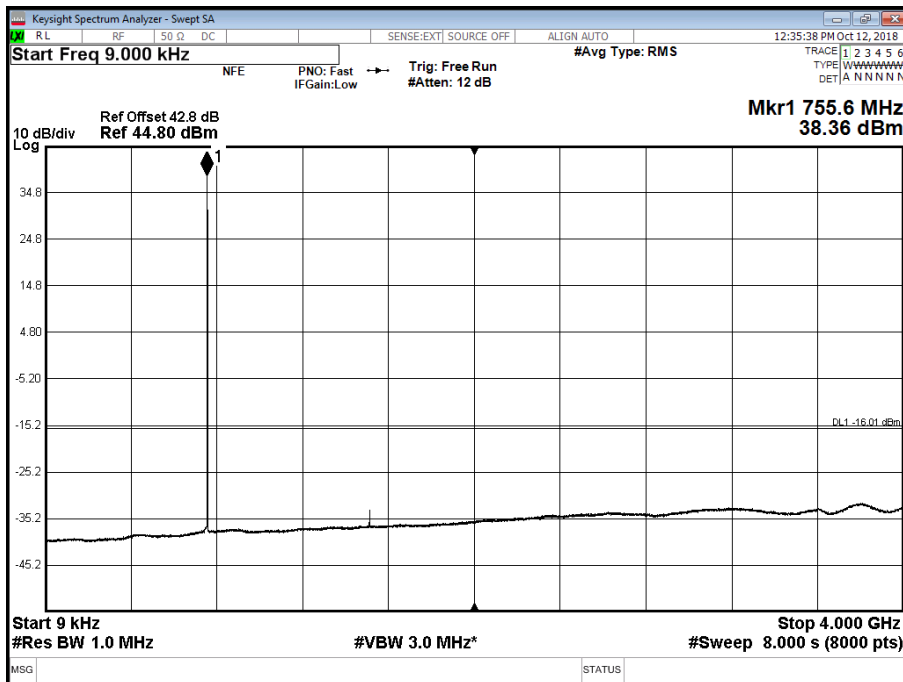



Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T (Canada) - Band 2 - Range 4000 to 8000 MHz

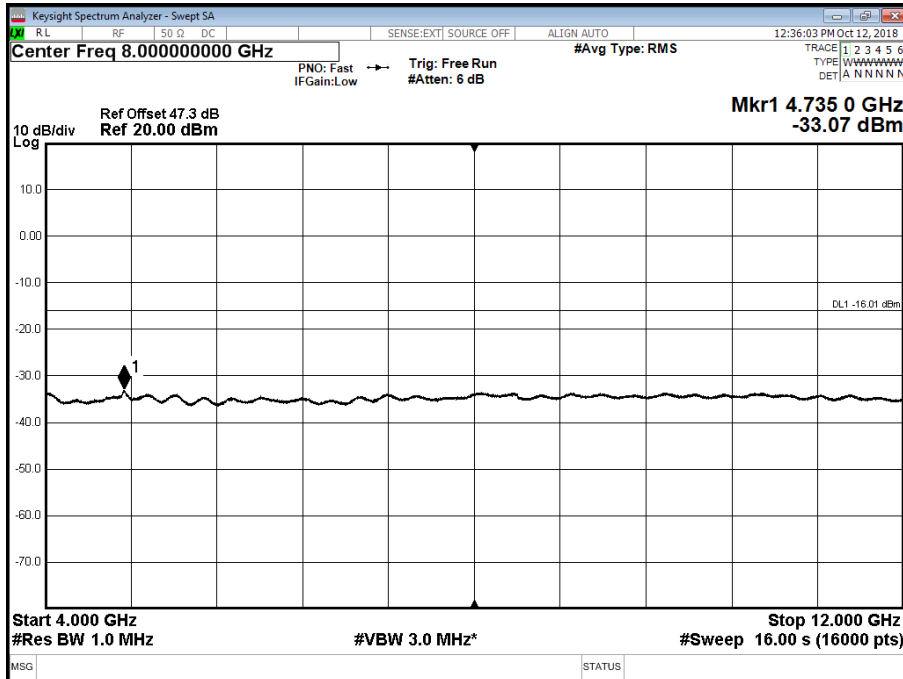

Limit	-16dBm
-------	--------



Product Service

## **2.5 RADIATED EMISSIONS**

### **2.5.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 27, Clause 27.53 (h)  
Industry Canada RSS-139, Clause 6.5

### **2.5.2 Date of Test and Modification State**

23 October 2018 - Modification State 0

### **2.5.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.4 Environmental Conditions**

Ambient Temperature	22°C
Relative Humidity	41.4%

### **2.5.5 Test Method**

The test was applied in accordance with test method requirements of ANSI/TIA-603-C-2004.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarizations.

The Applicant declared that the highest internally generated frequency would be up to 800MHz and so the upper limit for measurement was calculated at 10 times this, which is 8GHz.

Emissions identified within the range 30MHz – 8GHz were then formally measured using a Peak detector as the worst case.

In the frequency Range 30MHz – 1GHz, the measurement was performed with a resolution bandwidth of 100kHz.

In the frequency Range 1GHz – 8GHz, the measurement was performed with a resolution bandwidth of 1MHz.

The measurements were performed at a 3m distance unless otherwise stated




Product Service

### 2.5.6 Test Results

Configuration A

Maximum Output Power 37 dBm


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 30 MHz to 1 GHz\_V

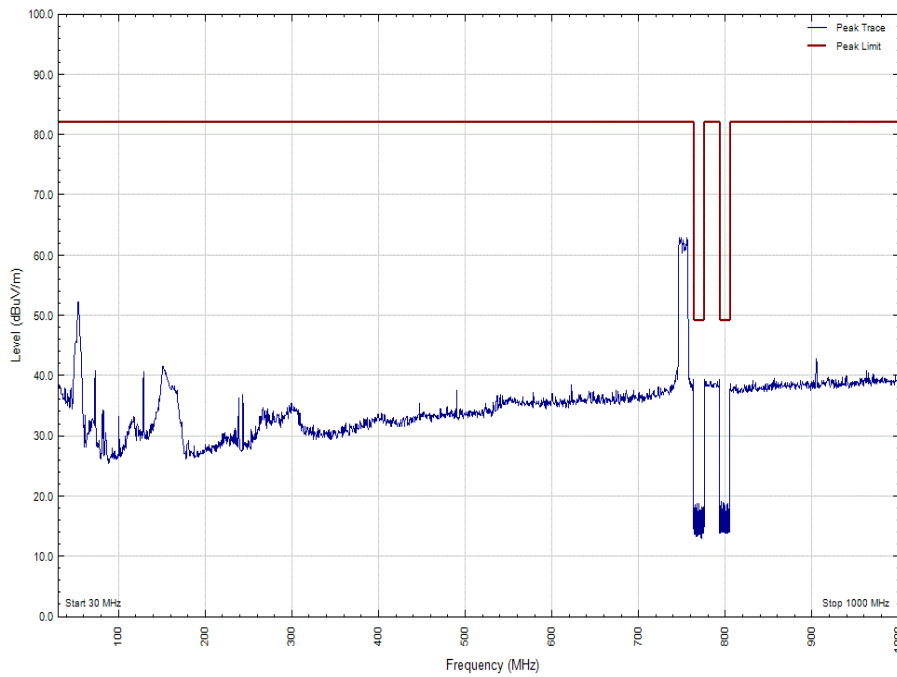




Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 30 MHz to 1 GHz\_H

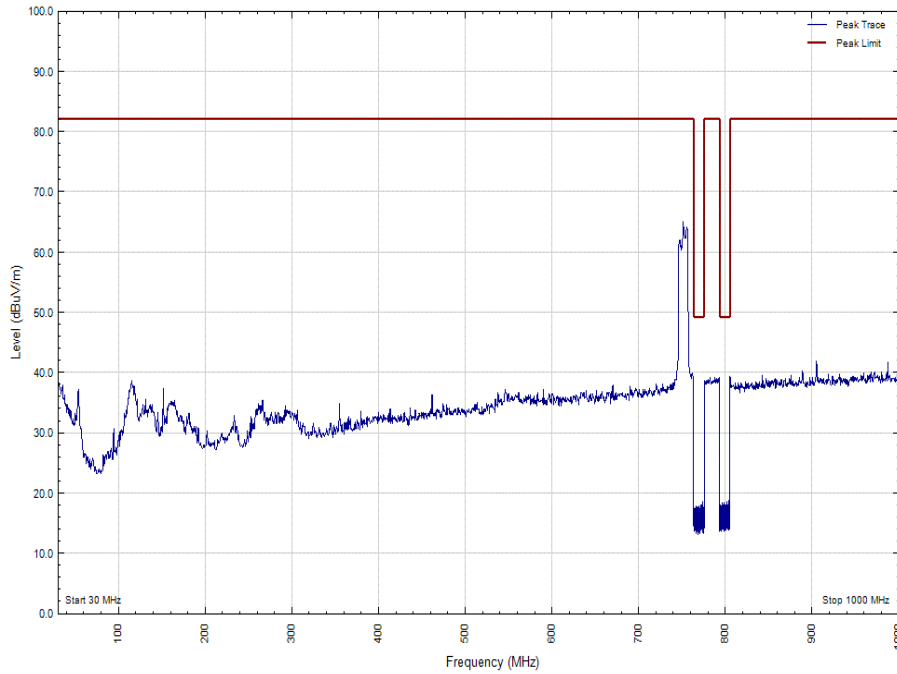


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 1 GHz to 8 GHz\_V

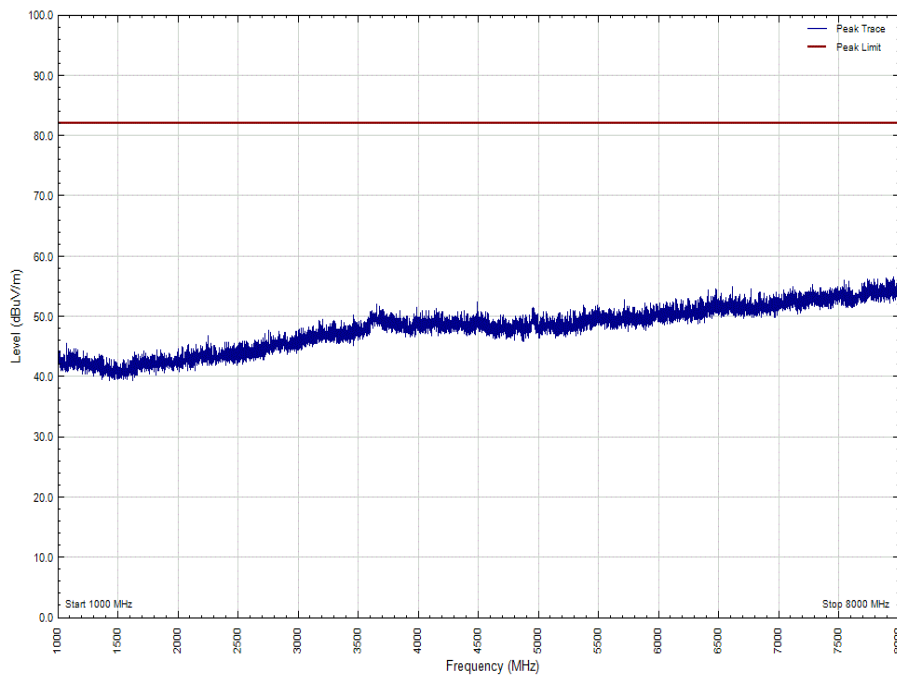




Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 1 GHz to 8 GHz\_H

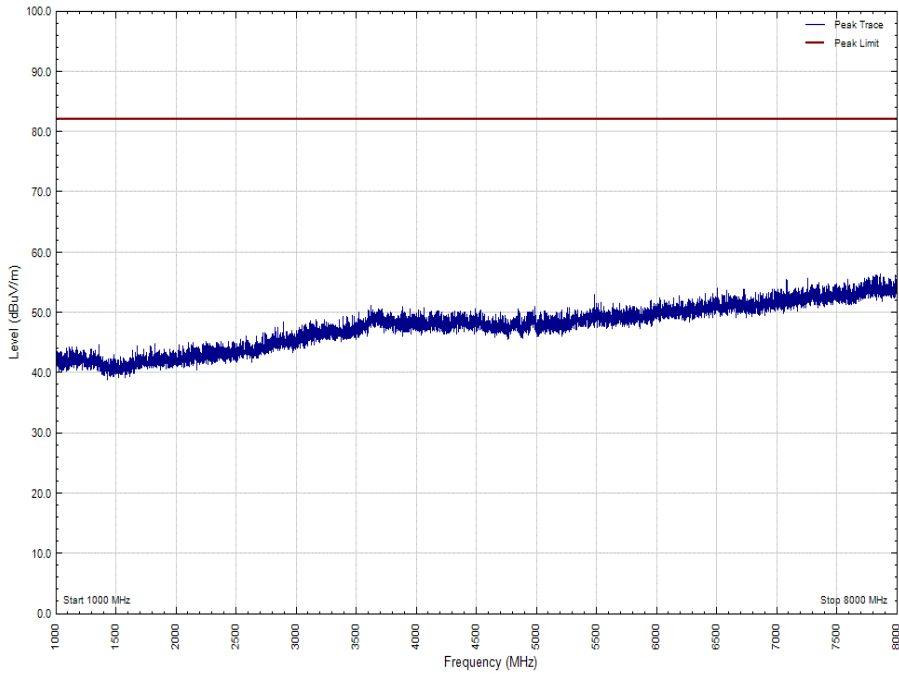


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz\_Discrete\_V

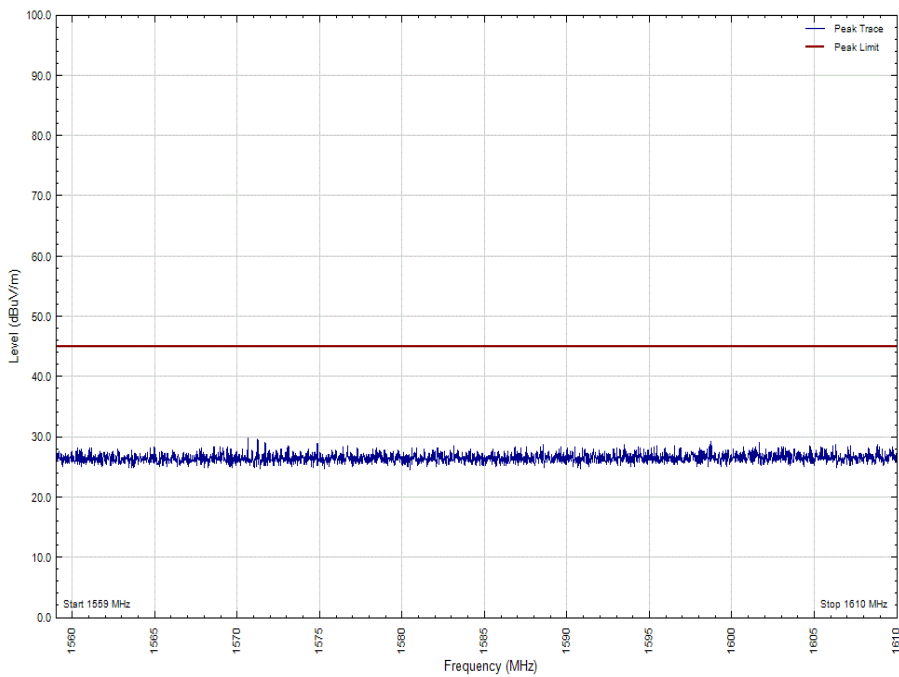




Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Discrete\_H

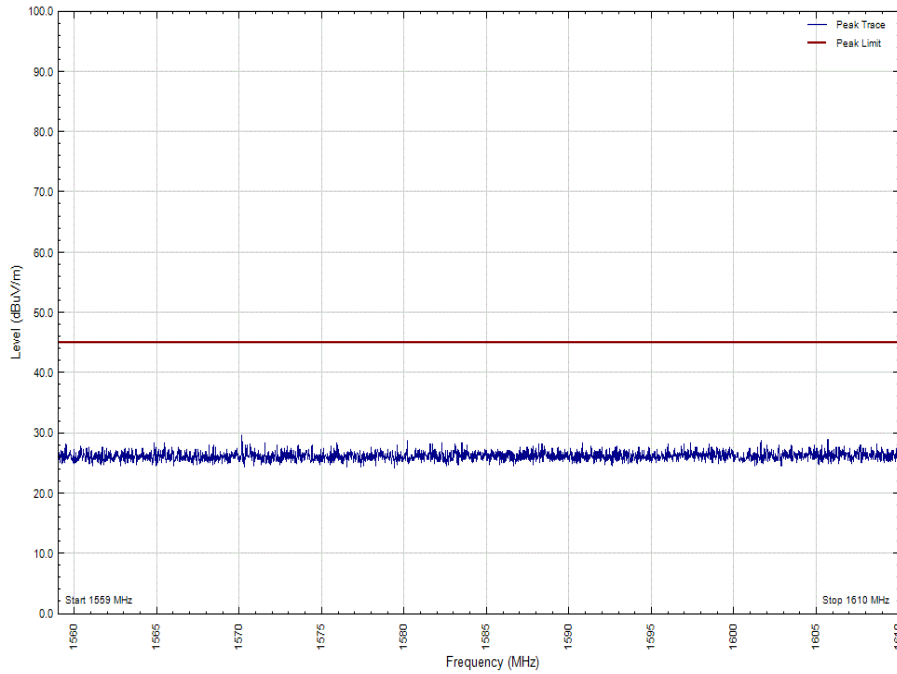


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Broadband\_V

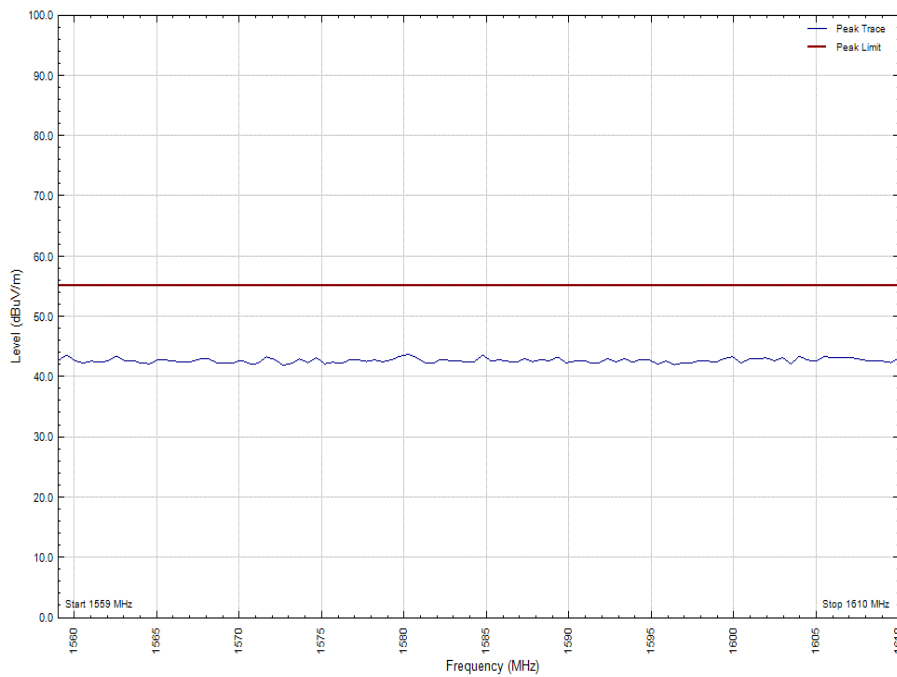



Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Broadband\_H

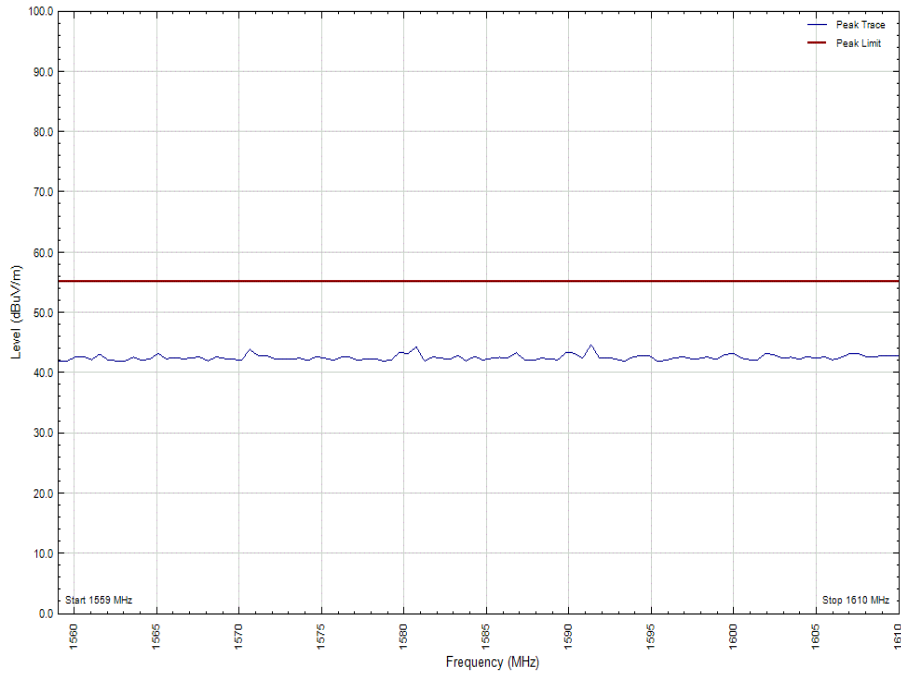






Product Service


### Configuration B

Maximum Output Power 37 dBm

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 30 MHz to 1 GHz\_V

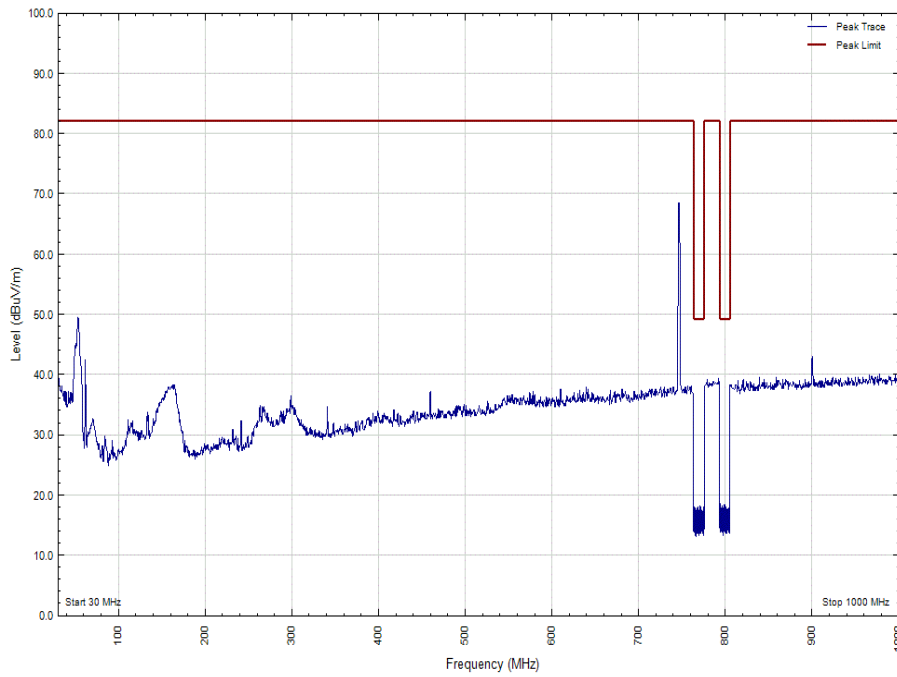


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 30 MHz to 1 GHz\_H

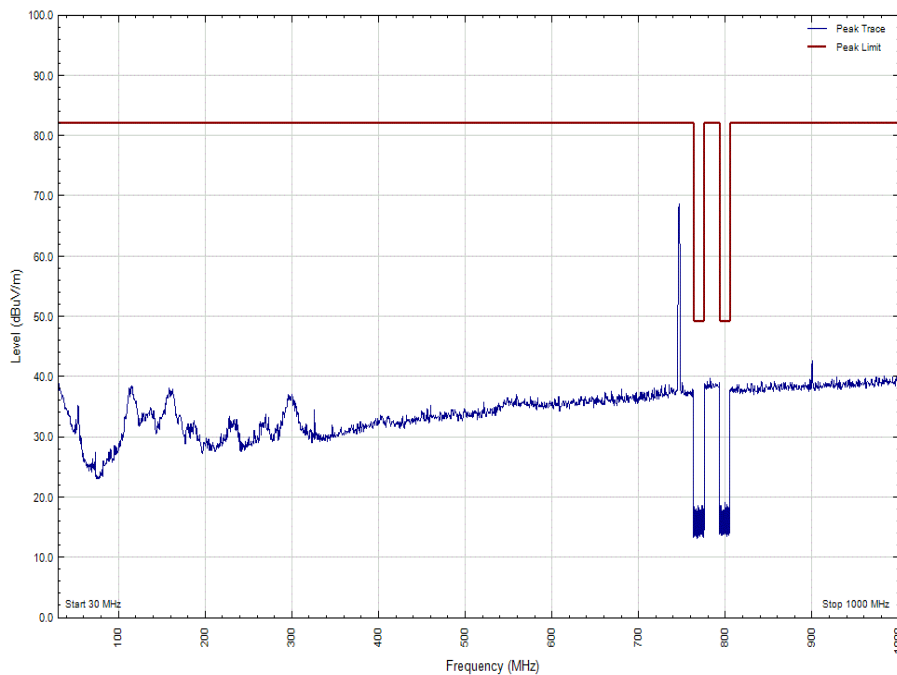




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 1 GHz to 8 GHz\_V

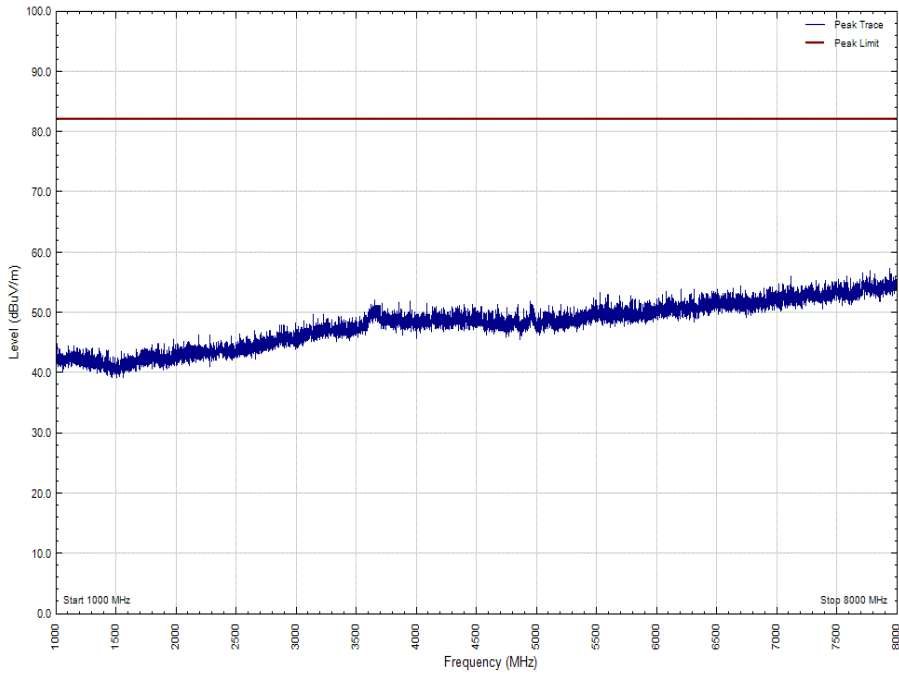


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 1 GHz to 8 GHz\_H

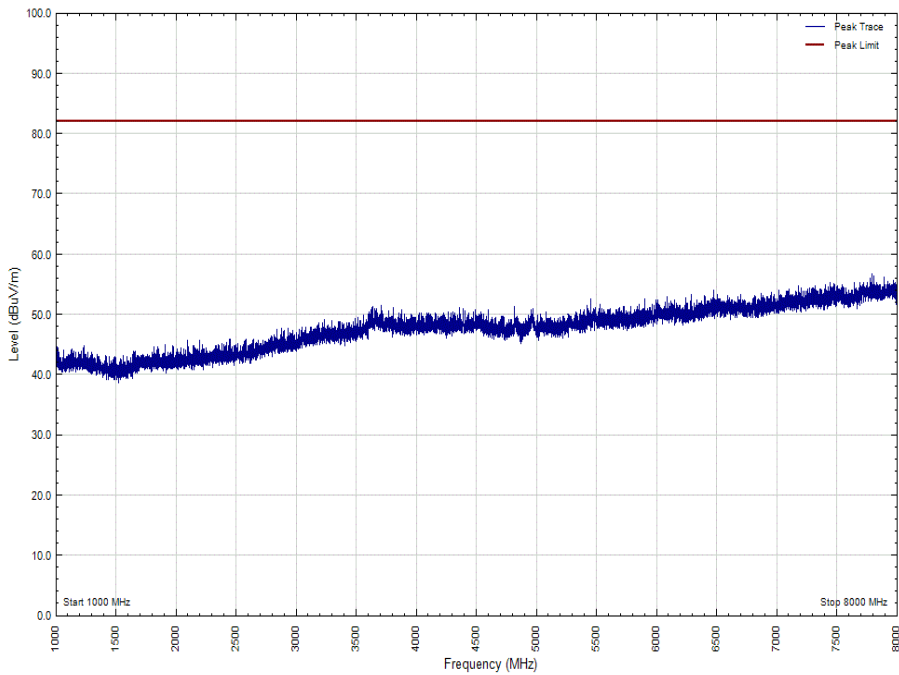




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 1559 to 1610 MHz Discrete V

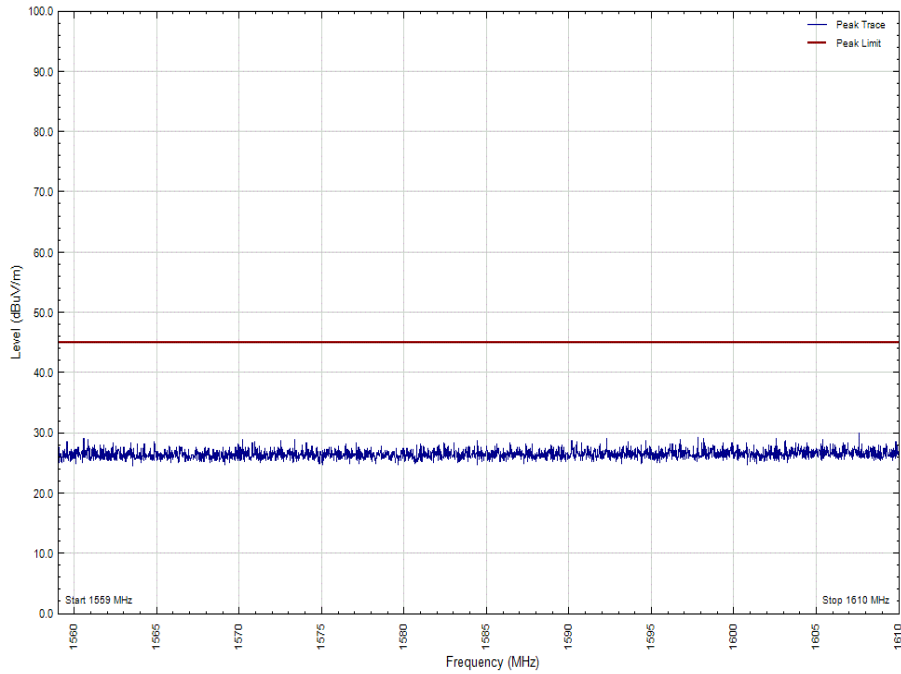


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 1559 to 1610 MHz Discrete H

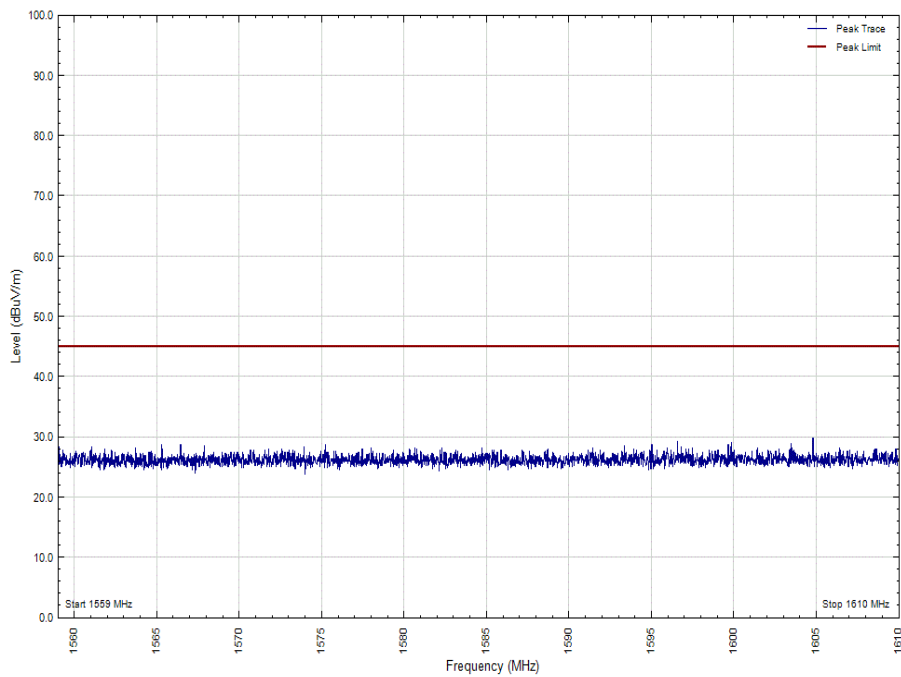




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 1559 to 1610 MHz - Broadband\_V

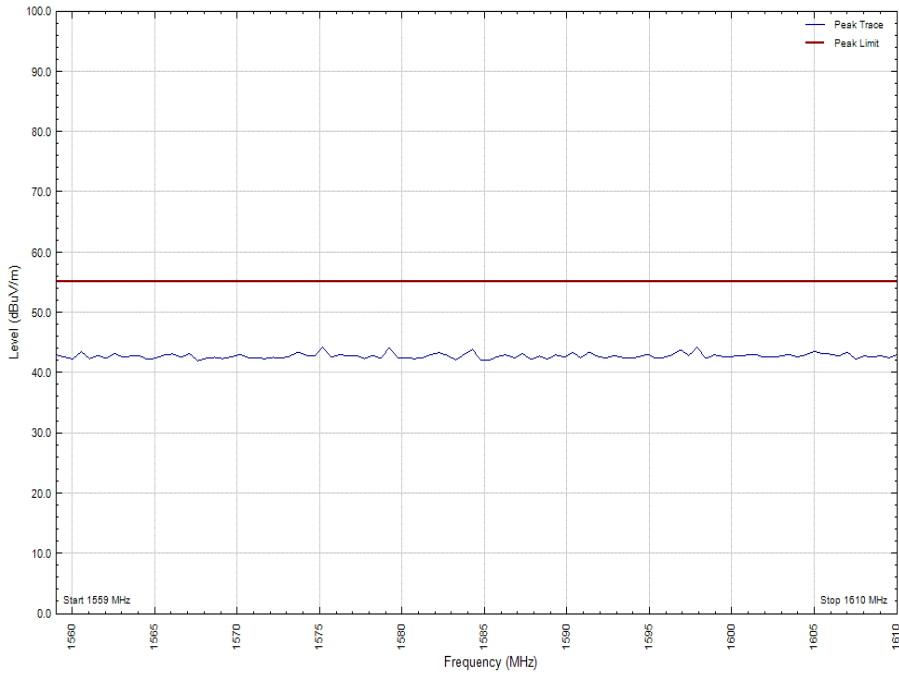


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position B - Band 13 - Range 1559 to 1610 MHz - Broadband\_H

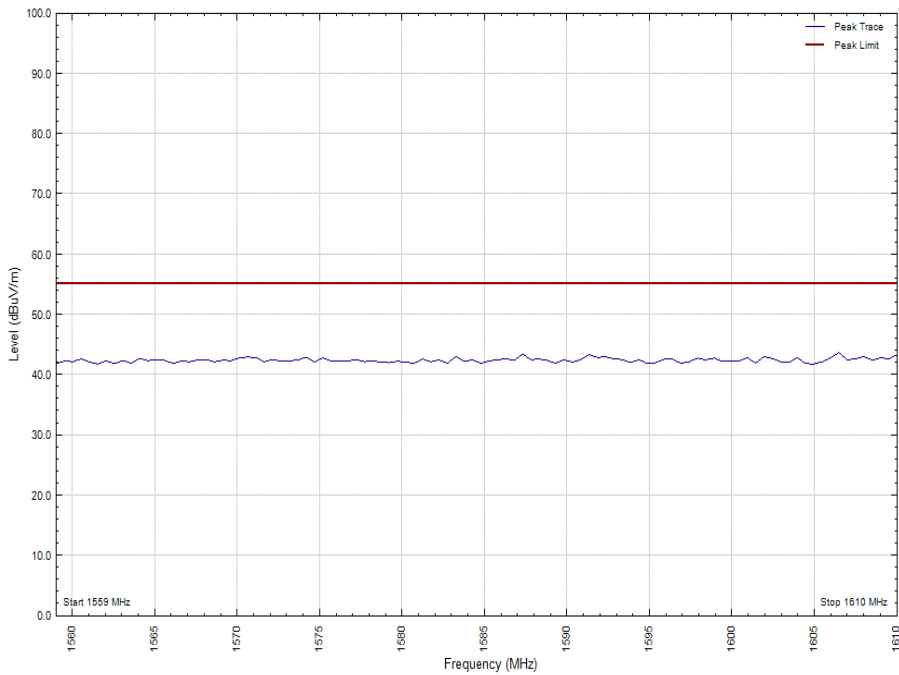




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 30 MHz to 1 GHz V

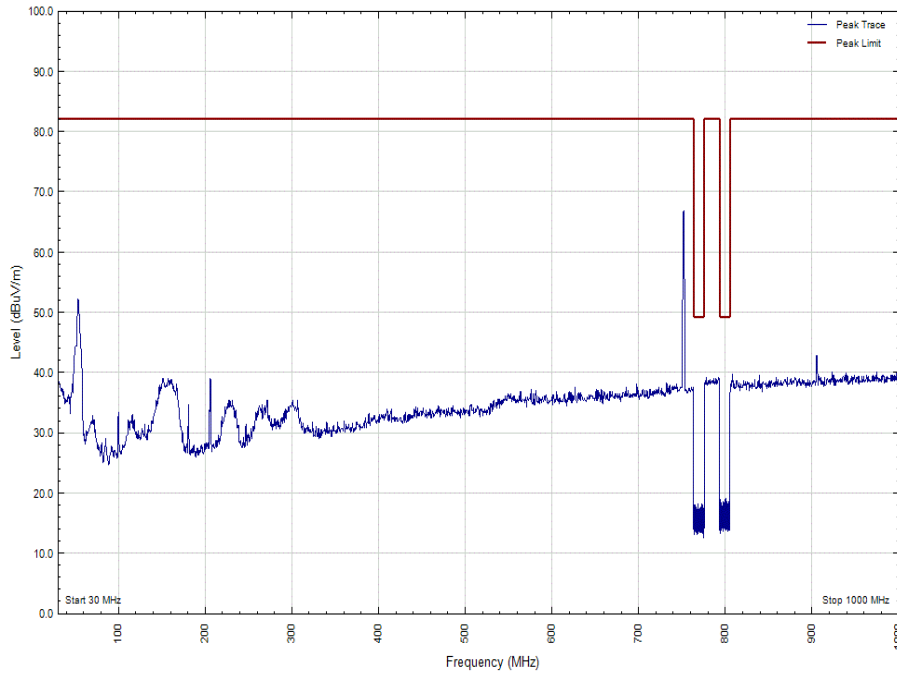


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 30 MHz to 1 GHz H

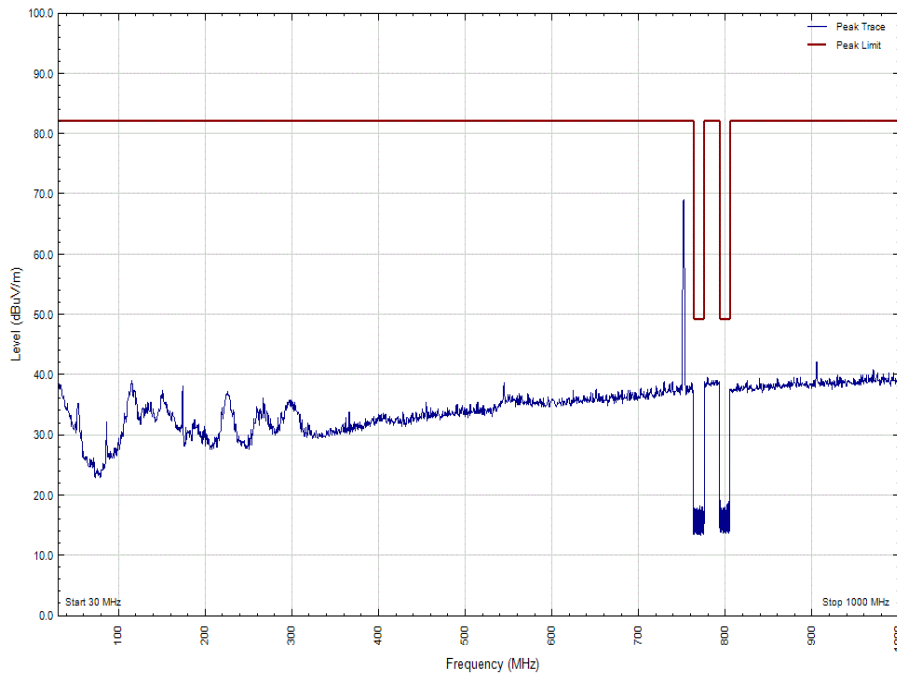




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 1 GHz to 8 GHz\_V

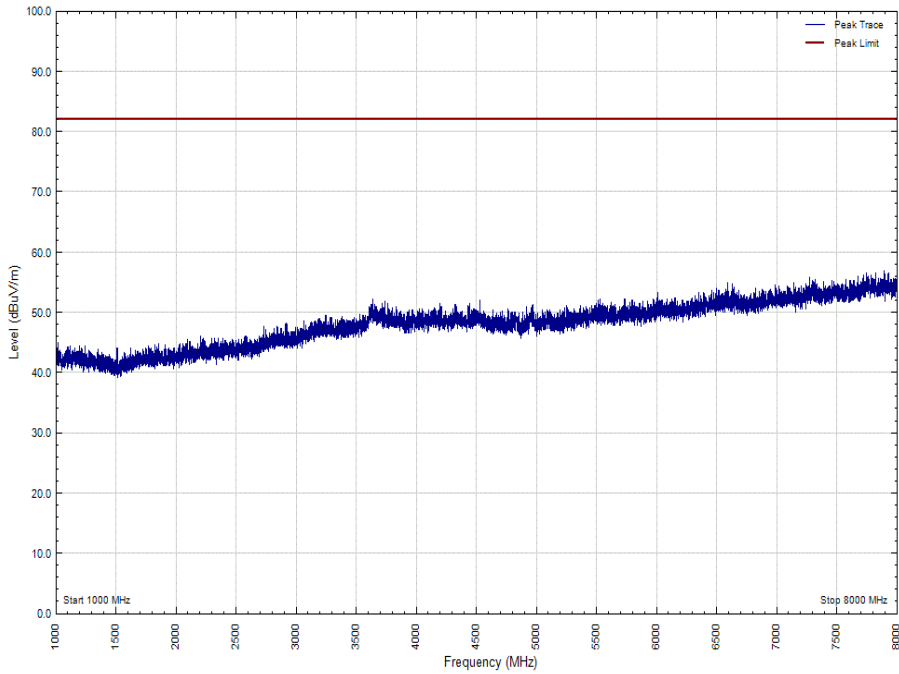


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 1 GHz to 8 GHz\_H

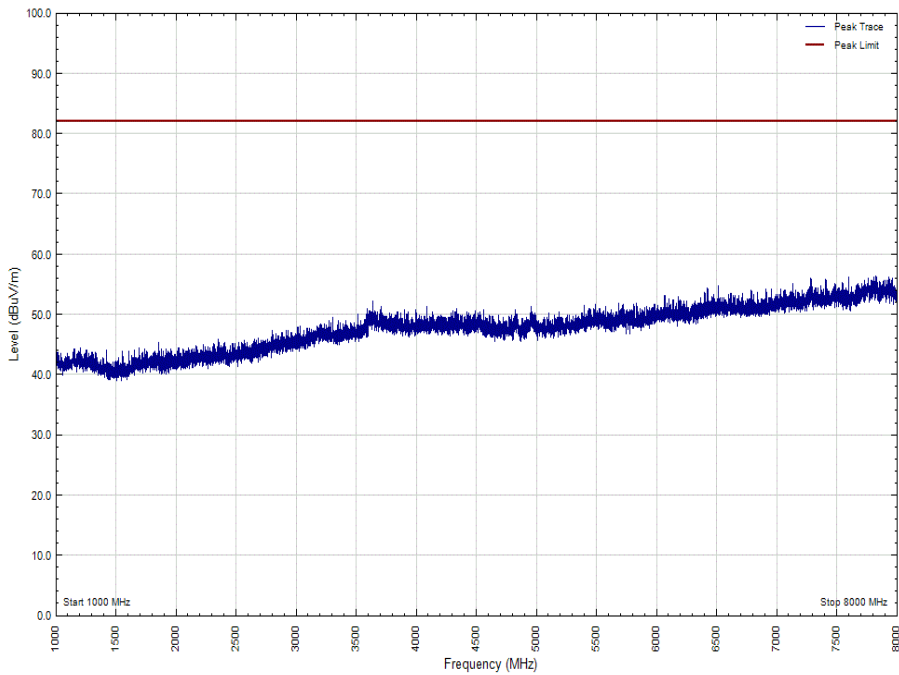




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Discrete V

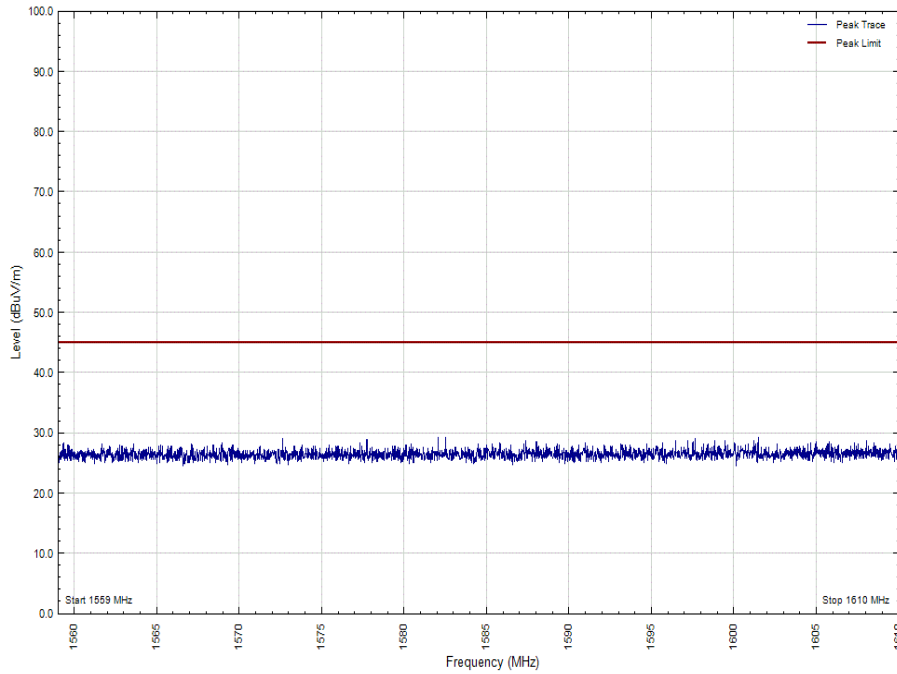


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Discrete H

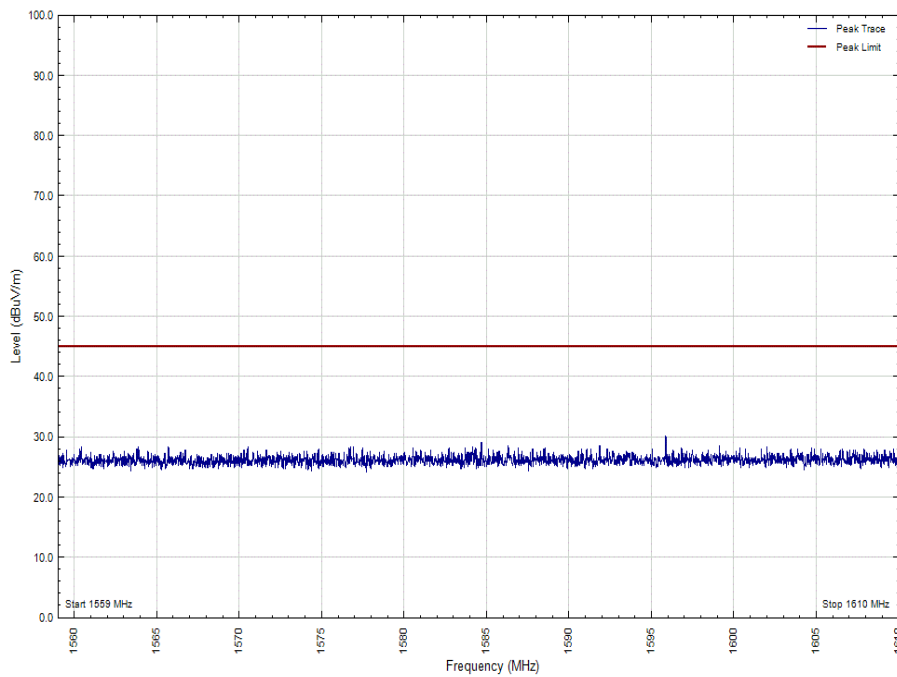




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Broadband V

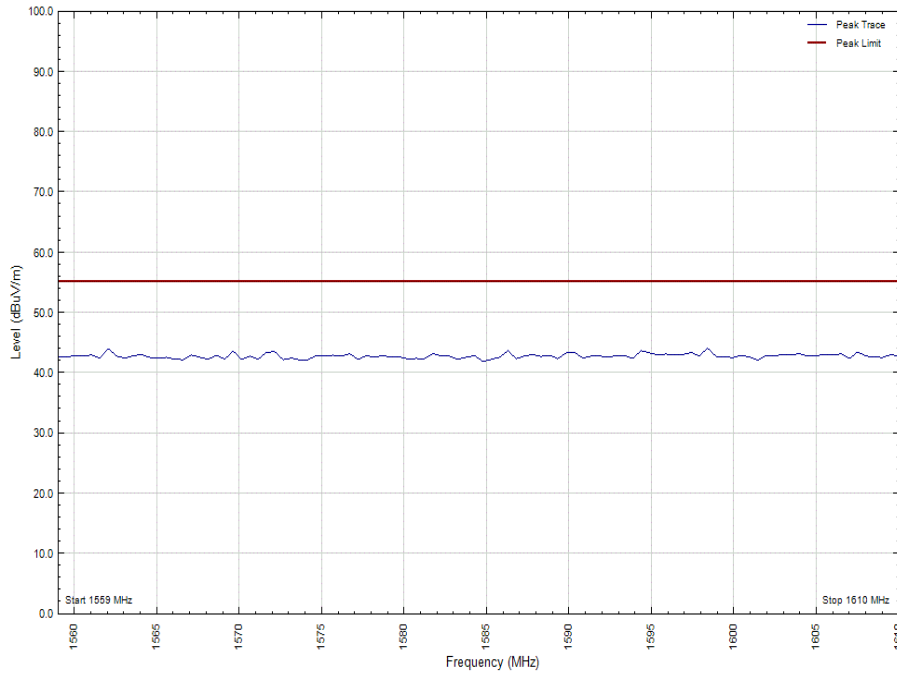

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position M - Band 13 - Range 1559 to 1610 MHz Broadband H

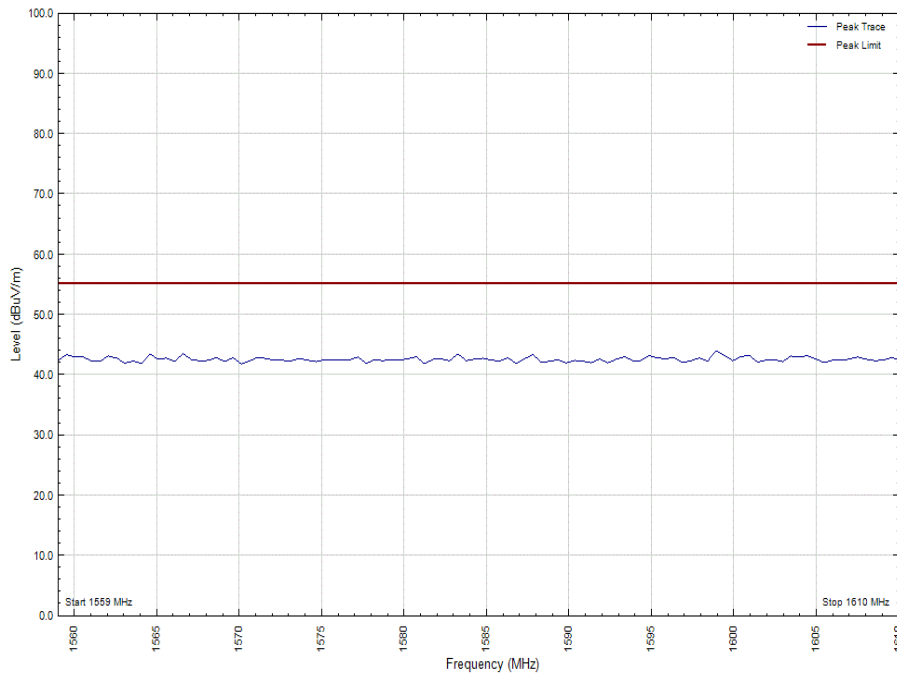







Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 30 MHz to 1 GHz \_V

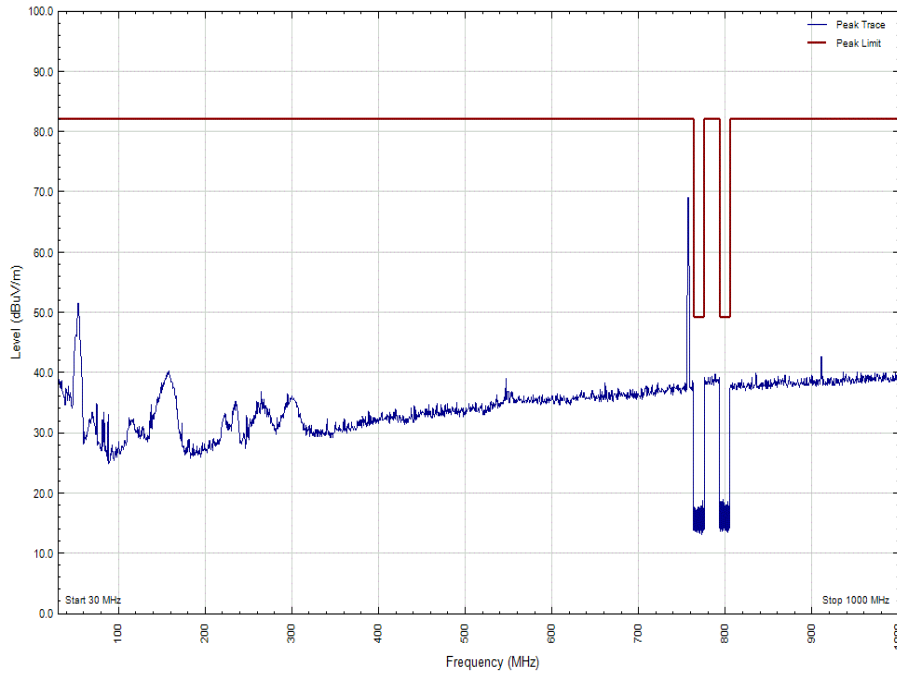


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 30 MHz to 1 GHz \_H

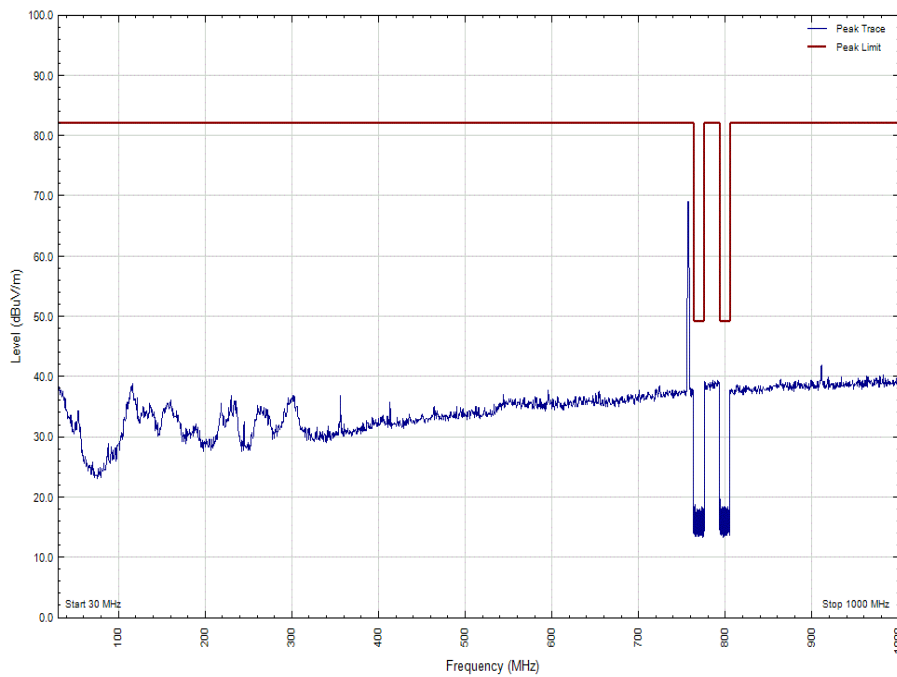




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 1 GHz to 8 GHz\_V

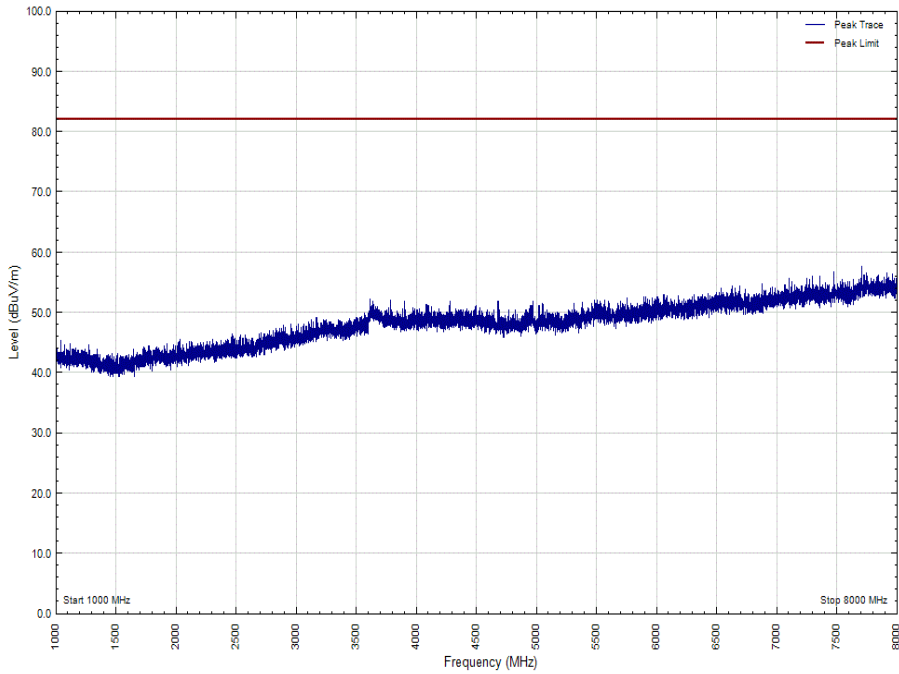


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 1 GHz to 8 GHz\_H

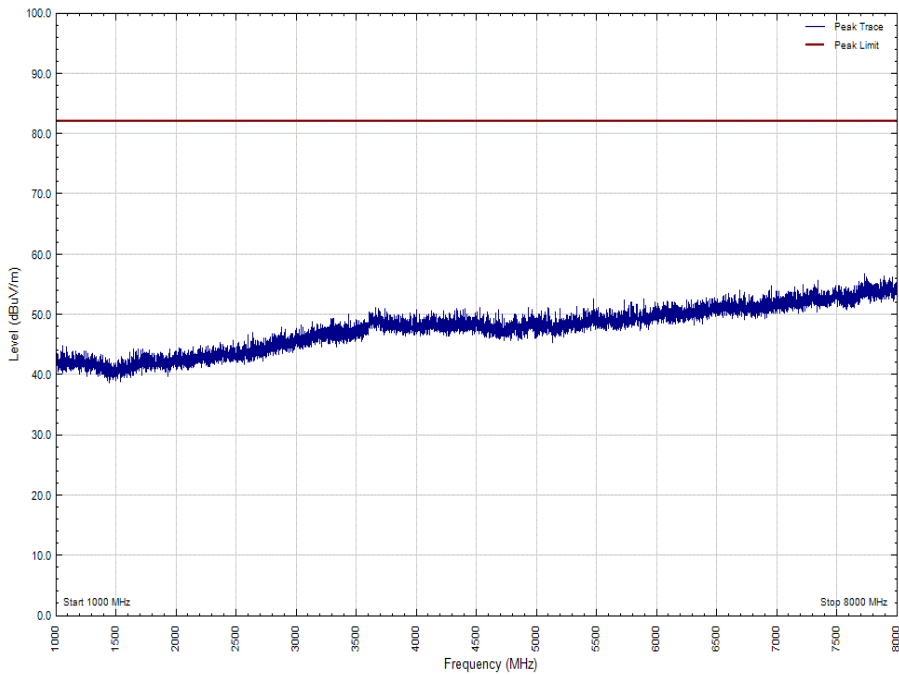




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 1559 to 1610 MHz Discrete V

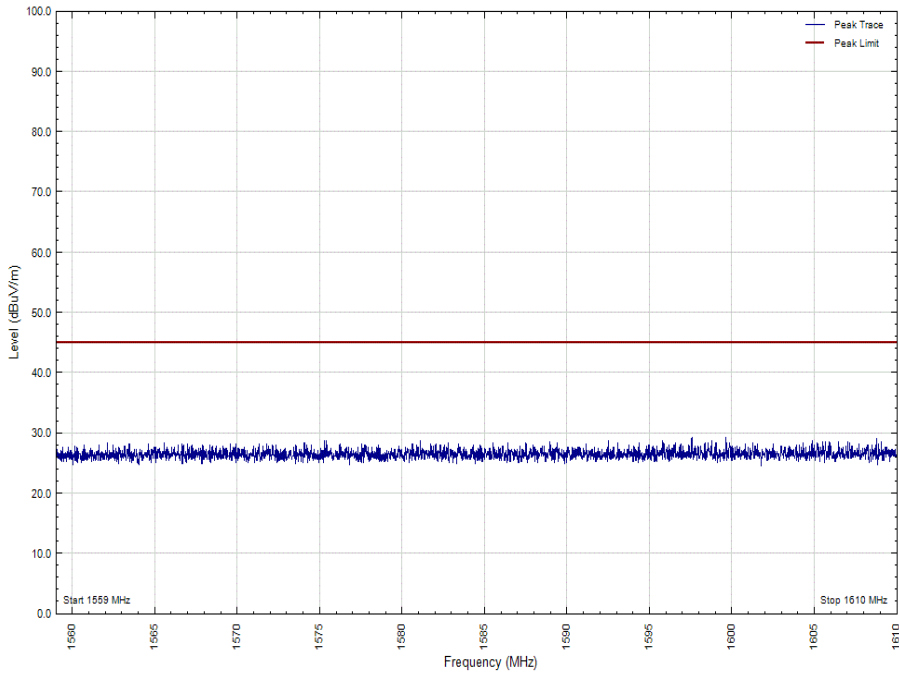


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 1559 to 1610 MHz Discrete H

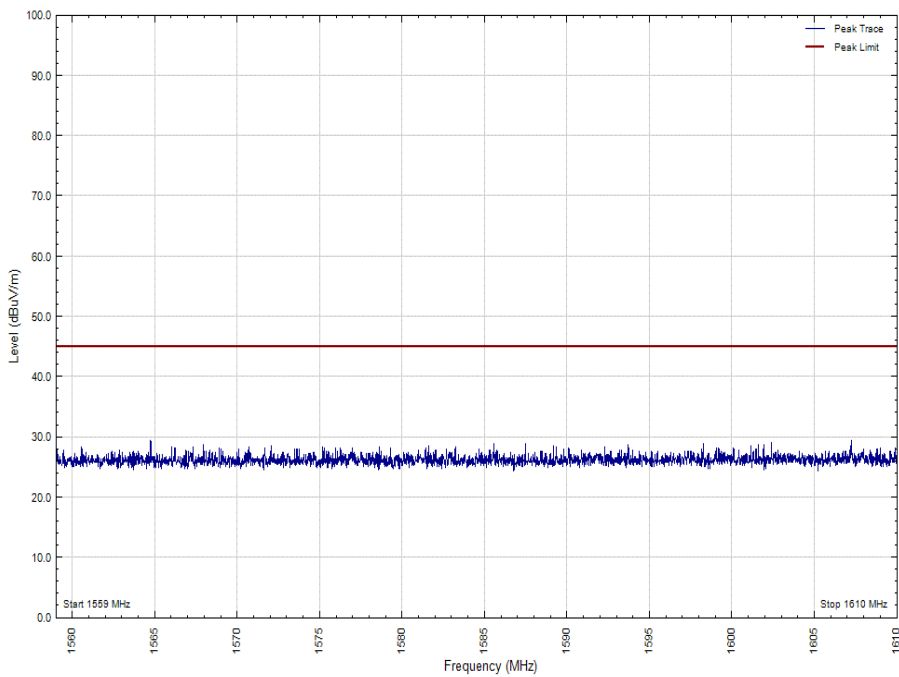




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 1559 to 1610 MHz - Broadband\_V

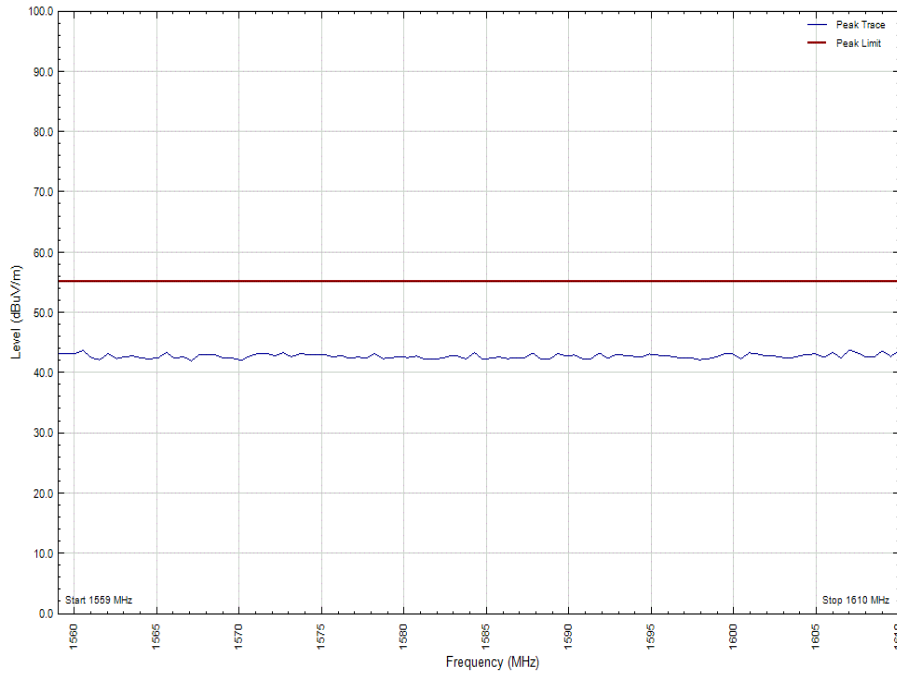


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T - Band 13 - Range 1559 to 1610 MHz - Broadband\_H

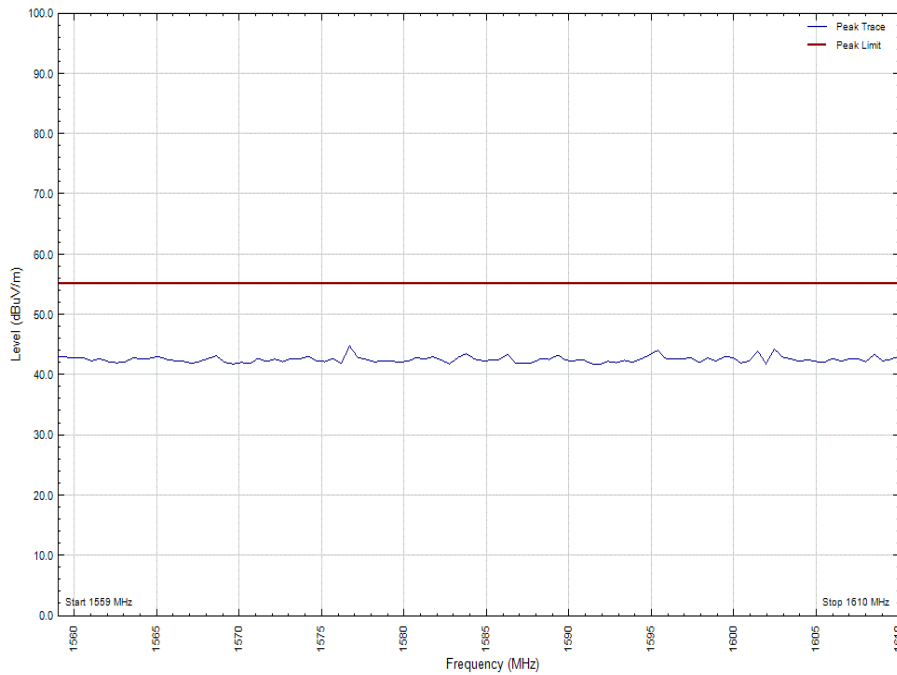




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 30 MHz to 1 GHz \_V

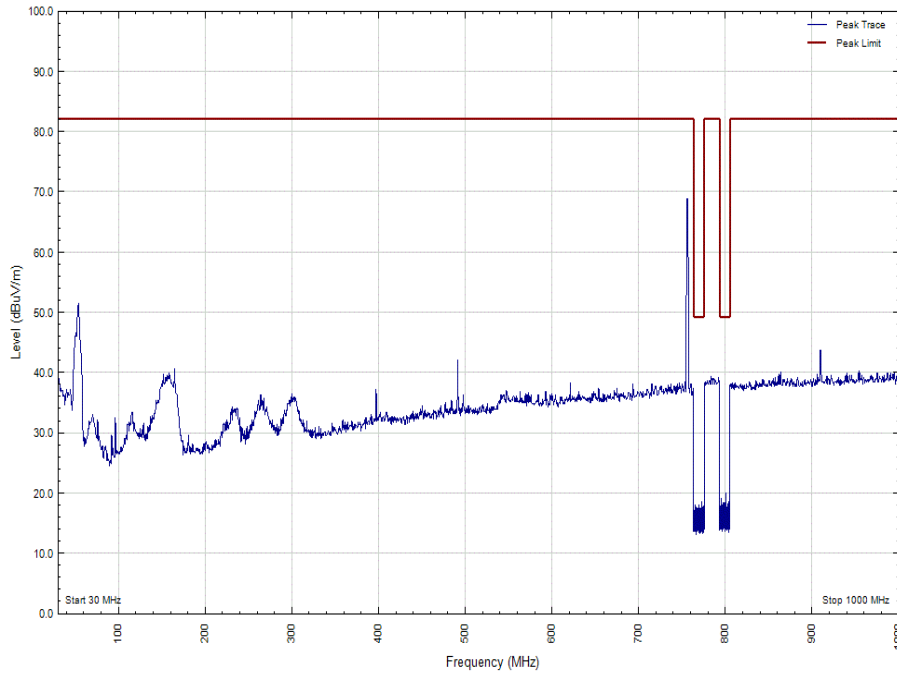


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 30 MHz to 1 GHz \_H

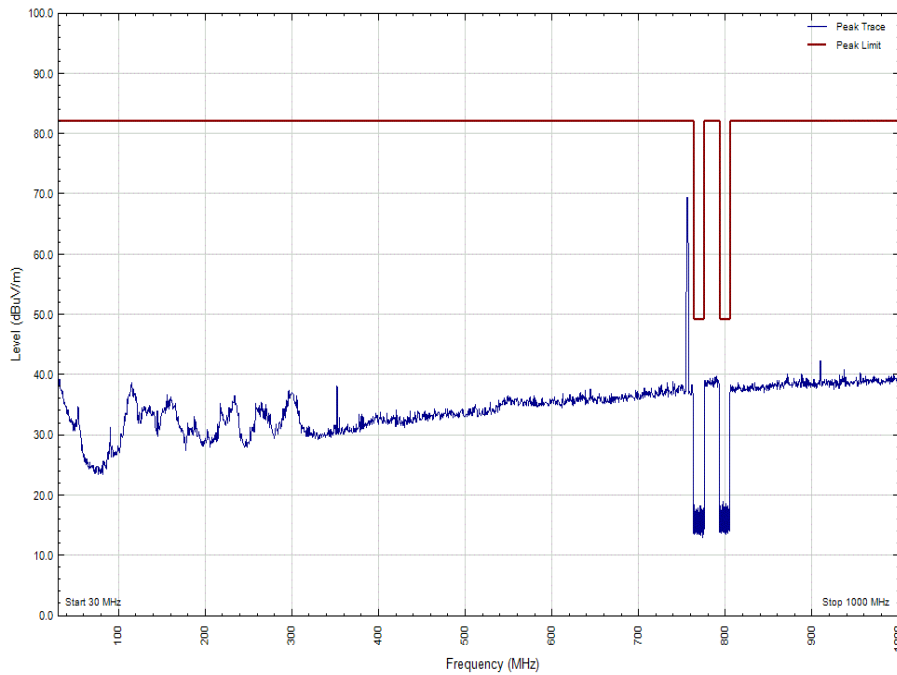




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 1 GHz to 8 GHz \_V

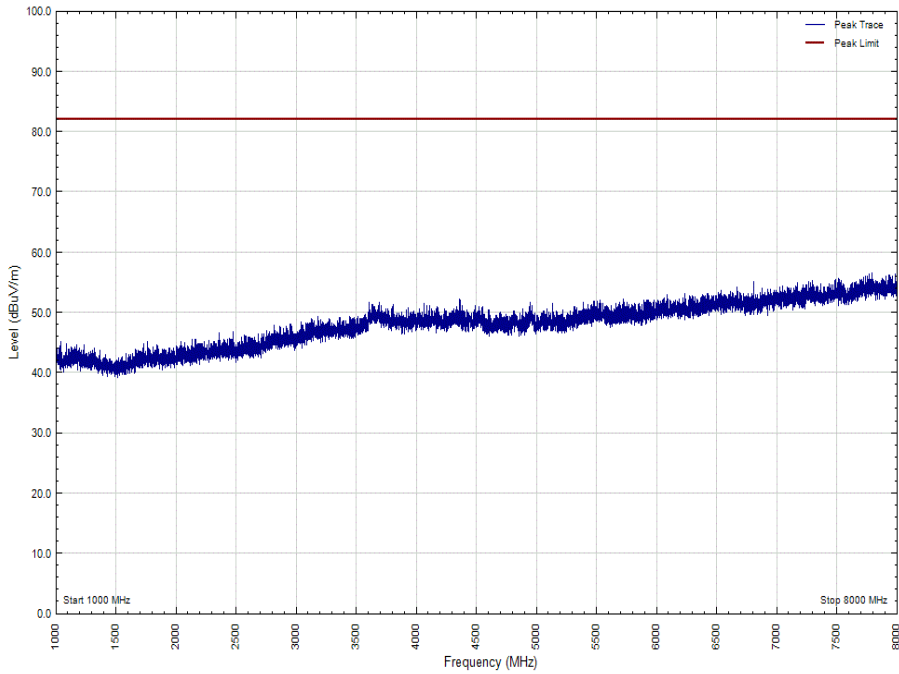


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 1 GHz to 8 GHz \_H

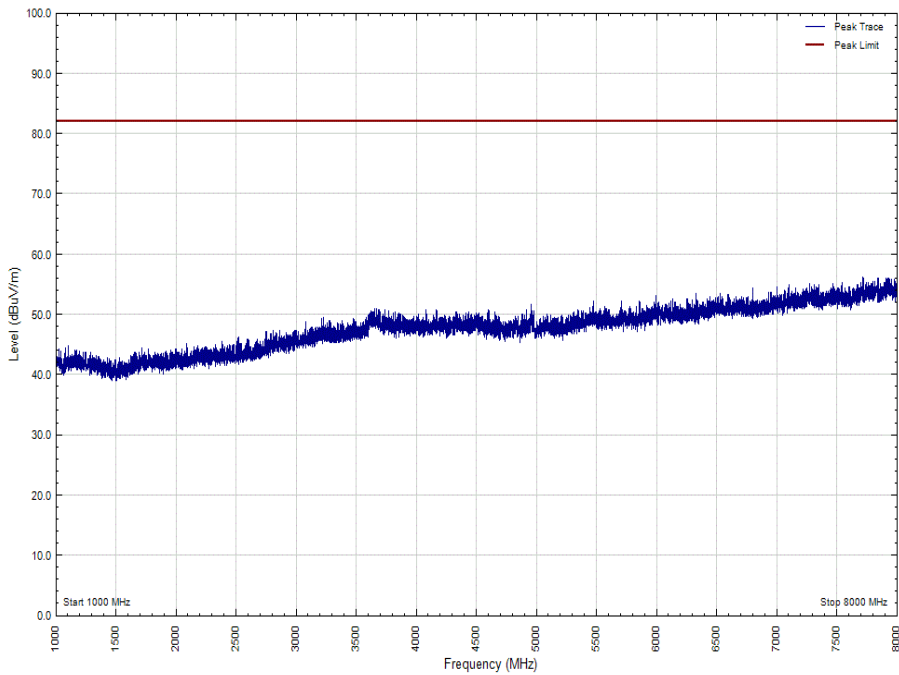




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 1559 to 1610 MHz Discrete\_V

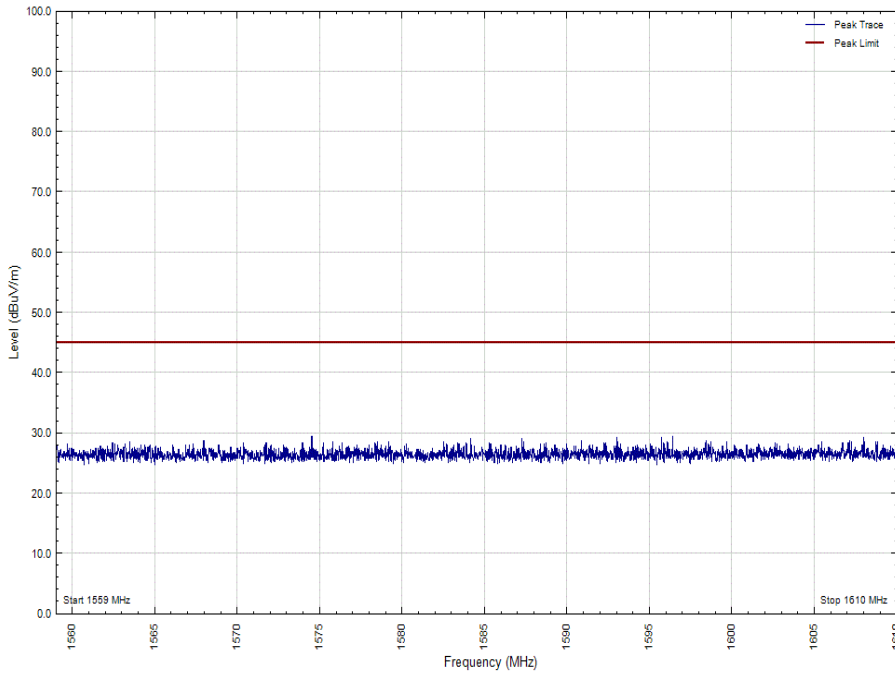


Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 1559 to 1610 MHz Discrete\_H

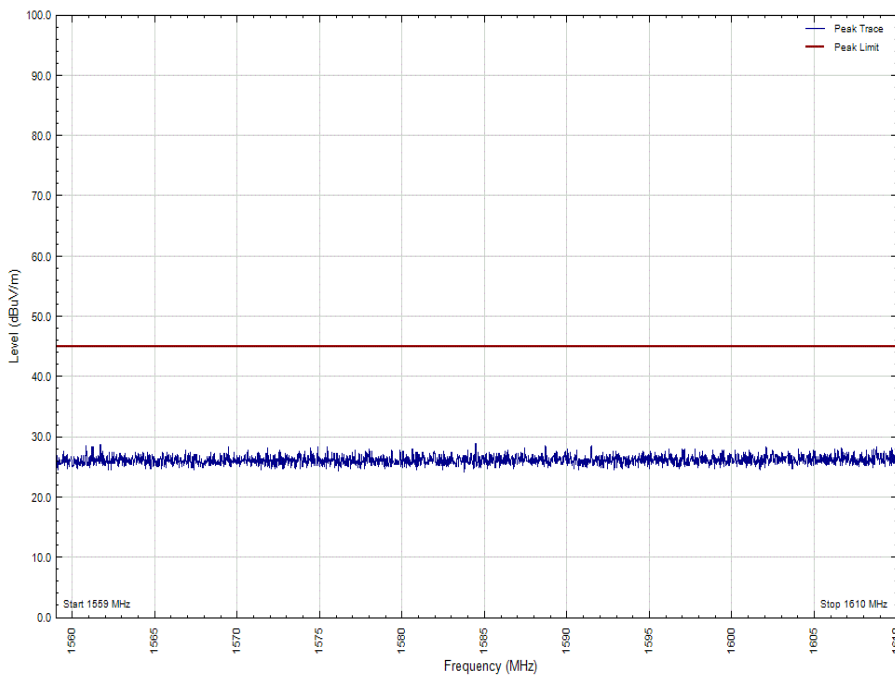




Product Service

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 1559 to 1610 MHz Broadband\_V

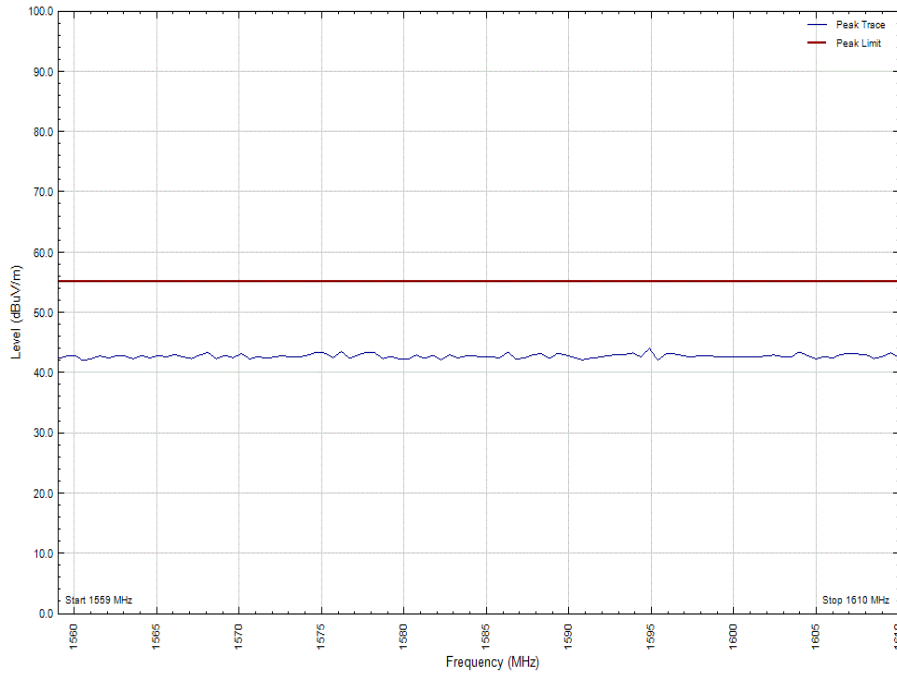

Antenna A - NB-IoT SA Modulation N:QPSK - NB-IoT SA Carrier Bandwidth N:180 kHz - Channel Position T RSS-139 (Canada) - Band 13 - Range 1559 to 1610 MHz Broadband\_H

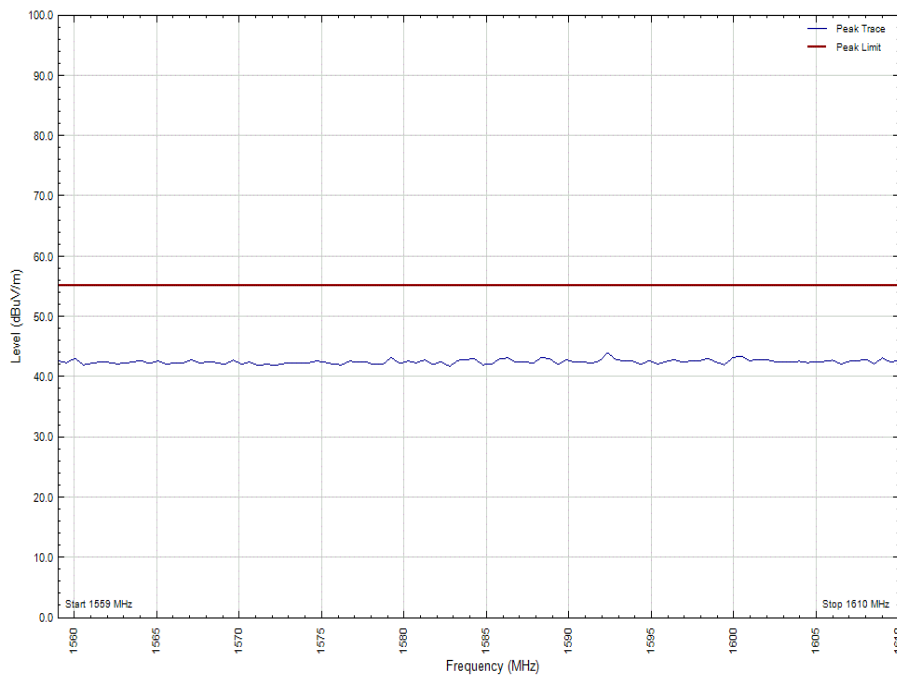

Limit	82.2dBuV/m
-------	------------





Product Service

## **SECTION 3**

### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Maximum Peak Output Power and Peak to Average Ratio - Conducted</b>					
Hygrometer	Rotronic	Hygropalm	2404	12	26-Apr-2019
Signal Analyser	N9030A	Keysight	4653	12	05-Feb-2019
PSU	Farnell	H60/25	1092	-	OP Mon
DMM	Fluke	179	4006	12	13-Dec-2018
Attenuator	Weinschel	48-10-43	4868	12	01-Nov-2018
Attenuator	Weinschel	48-30-43	4871	12	17-Jul-2019
Attenuator	Weinschel	48-10-43	3593	12	16-Jul-2019
Programmable Power Supply	California Inst	2001RP	1898	-	OP Mon
Mains Voltage Monitor	TUV SUD Product Service	MVM1	1378	12	17-Apr-2019
Network Analyser	R&S	ZVA 40	*3548	12	02-Oct-2018
Calibration unit	R&S	ZV Z54	4368	12	06-Mar-2019
<b>Occupied Bandwidth</b>					
Hygrometer	Rotronic	Hygropalm	2404	12	26-Apr-2019
Signal Analyser	N9030A	Keysight	4653	12	05-Feb-2019
PSU	Farnell	H60/25	1092	-	OP Mon
DMM	Fluke	179	4006	12	13-Dec-2018
Attenuator	Weinschel	48-10-43	4868	12	01-Nov-2018
Attenuator	Weinschel	48-30-43	4871	12	17-Jul-2019
Attenuator	Weinschel	48-10-43	3593	12	16-Jul-2019
Programmable Power Supply	California Inst	2001RP	1898	-	OP Mon
Mains Voltage Monitor	TUV SUD Product Service	MVM1	1378	12	17-Apr-2019
Network Analyser	R&S	ZVA 40	*3548	12	02-Oct-2018
Calibration unit	R&S	ZV Z54	4368	12	06-Mar-2019
<b>Band Edge</b>					
Hygrometer	Rotronic	Hygropalm	2404	12	26-Apr-2019
Signal Analyser	N9030A	Keysight	4653	12	05-Feb-2019
PSU	Farnell	H60/25	1092	-	OP Mon
DMM	Fluke	179	4006	12	13-Dec-2018
Attenuator	Weinschel	48-10-43	4868	12	01-Nov-2018
Attenuator	Weinschel	48-30-43	4871	12	17-Jul-2019
Attenuator	Weinschel	48-10-43	3593	12	16-Jul-2019
Programmable Power Supply	California Inst	2001RP	1898	-	OP Mon
Mains Voltage Monitor	TUV SUD Product Service	MVM1	1378	12	17-Apr-2019
Network Analyser	R&S	ZVA 40	*3548	12	02-Oct-2018
Calibration unit	R&S	ZV Z54	4368	12	06-Mar-2019
<b>Transmitter Spurious Emissions</b>					
Hygrometer	Rotronic	Hygropalm	2404	12	26-Apr-2019
Signal Analyser	N9030A	Keysight	4653	12	05-Feb-2019
PSU	Farnell	H60/25	1092	-	OP Mon



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
DMM	Fluke	179	4006	12	13-Dec-2018
Attenuator	Weinschel	48-10-43	4868	12	01-Nov-2018
Attenuator	Weinschel	48-30-43	4871	12	17-Jul-2019
Attenuator	Weinschel	48-10-43	3593	12	16-Jul-2019
Programmable Power Supply	California Inst	2001RP	1898	-	OP Mon
Mains Voltage Monitor	TUV SUD Product Service	MVM1	1378	12	17-Apr-2019
Network Analyser	R&S	ZVA 40	*3548	12	02-Oct-2018
Calibration unit	R&S	ZV Z54	4368	12	06-Mar-2019
Radiated Emissions					
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Multimeter	Iso-tech	IDM101	2419	12	23-Nov-2018
Antenna with permanent attenuator (Bilog)	Chase	CBL6143	2904	24	08-Aug-2019
Cable (26.5GHz)	Rosenberger	LU7-133-5000	5019	-	O/P Mon
EMI Receiver	Keysight Technologies	N9038A MXE	4628	12	04-Jul-2019
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	01-Mar-2019
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
9m N type RF cable	Rosenberger	2303-0 9.0m PNm PNm	4827	6	04-Jan-2019
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	12-Feb-2019
4dB Attenuator	Pasternack	PE7047-4	4935	12	28-Nov-2018
Hygrometer	Rotronic	HP21	4989	12	26-Apr-2019
Cable (40GHz)	Rosenberger	LU1-001-2000	5020	-	O/P Mon
EmX Software	TUV SUD Product Service	EmX V.1.3.21	5125	-	N/A - Software

N/A – Not Applicable

O/P Mon – Output Monitored with Calibrated Equipment

TU – Traceability Unscheduled

\* - This Network Analyser was only used to perform Calibrations prior to 02-Oct-2018.



Product Service

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Conducted Maximum Peak Output Power	30 MHz to 20 GHz Amplitude	± 0.1 dB
Conducted Emissions	30 MHz to 20 GHz Amplitude	± 2.3 dB
Frequency Stability	30 MHz to 2 GHz	± 5.0 Hz
Occupied Bandwidth	Up to 20 MHz Bandwidth	± 1.1 Hz
Band Edge	30 MHz to 20 GHz Amplitude	± 2.3 dB
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Worst case error for both Time and Frequency measurement 12 parts in 10 <sup>6</sup>		



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

© 2018 TÜV SÜD Product Service



Product Service

## **ANNEX A**

### **MODULE LIST**



Product Service

Configuration A and B			
Product	Product No	R-State	Serial No
Radio mRRUS12 B13	KRC 161 332/1	R1D	C827540462
Software Version:	NB-IoT GB CXP9013268_9 R73AM, NB-IoT SA base CXP9013268_259 R72CL01		