



Product Service

Choose certainty.
Add value.



Report On

FCC and IC Testing of the
Ericsson LTE and NB-IoT KRC 161 456/1 RRUS 11 B13 (700 MHz)
Base Station in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part
27, Industry Canada RSS-GEN and Industry Canada RSS-130

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRC161456-1

IC ID: 287AB-AS1614561

PREPARED BY

Maggie Whiting
Key Account Manager

APPROVED BY

Steve Scarfe
Authorised Signatory

DATED

13 April 2018

Document 75941045 Report 02 Issue 2

April 2018



CONTENTS

| Section | Page No |
|----------------|--|
| 1 | REPORT INFORMATION 2 |
| 1.1 | Report Details 3 |
| 1.2 | Brief Summary of Results 4 |
| 1.3 | Configuration Description 5 |
| 1.4 | Declaration of Build Status 6 |
| 1.5 | Product Information 7 |
| 1.6 | Test Setup 8 |
| 1.7 | Test Conditions 9 |
| 1.8 | Deviation From The Standard 9 |
| 1.9 | Modification Record 9 |
| 1.10 | Alternative Test Site 9 |
| 2 | TEST DETAILS 10 |
| 2.1 | Maximum Peak Output Power and Peak to Average Ratio - Conducted 11 |
| 2.2 | Occupied Bandwidth 17 |
| 2.3 | Band Edge 22 |
| 2.4 | Transmitter Spurious Emissions 27 |
| 2.5 | Radiated Spurious Emissions 36 |
| 3 | TEST EQUIPMENT USED 46 |
| 3.1 | Test Equipment Used 47 |
| 3.2 | Measurement Uncertainty 49 |
| 4 | ACCREDITATION, DISCLAIMERS AND COPYRIGHT 50 |
| 4.1 | Accreditation, Disclaimers and Copyright 51 |
| ANNEX A | Module Lists A.2 |



Product Service

SECTION 1

REPORT INFORMATION



Product Service

1.1 REPORT DETAILS

| | |
|-------------------------------|---|
| Manufacturer | Ericsson |
| Address | Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden |
| Product Name | RRUS 11 B13 |
| Product Number | KRC 161 456/1 |
| IC Model Name | AS1614561 |
| Serial Number(s) | CF83499443 |
| Software Version | xrus_NBIoT_GB_SA_for_FCC_test (based on CXP9013268/6 R66BM) |
| Hardware Version | R1C |
| Test Specification/Issue/Date | FCC CFR 47 Part 2: 2017 FCC CFR 47 Part 27: 2017 Industry Canada RSS-GEN: Issue 4: 2014 Industry Canada RSS-130: Issue 3: 2015 |
| Start of Test | 04 February 2018 |
| Finish of Test | 06 April 2018 |
| Name of Engineer(s) | Raj Kumar Kallem Ashok Kumar Graeme Lawler |
| Related Document(s) | KDB 971168 D01 v02r02 KDB 662911 D01 v02r01 |

This report has been up issued to Issue 2 and should be read in place of Issue 1. This report has been up issued to add in the missing Band Edge measurement for Industry Canada.



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27, Industry Canada RSS-GEN and Industry Canada RSS-130 is shown below.

| Section | Specification Clause | | | | Test Description | Result |
|---------|----------------------|--------------------|---------|---------|---|--------|
| | FCC CFR 47 Part 2 | FCC CFR 47 Part 27 | RSS-GEN | RSS-130 | | |
| 2.1 | 2.1046 | 27.50 | - | 6.4 | Maximum Peak Output Power and Peak to Average Ratio - Conducted | Pass |
| 2.2 | 2.1049 | 27.53 | 6.6 | - | Occupied Bandwidth | Pass |
| 2.3 | 2.1051 | 27.53 (h) | - | 6.5 | Band Edge | Pass |
| 2.4 | 2.1051 | 27.53 (h) | - | 6.5 | Transmitter Spurious Emissions | Pass |
| 2.5 | 2.1053 | 27.53 (c) | - | 6.5 | Transmitter Spurious Radiated Emissions | Pass |



Product Service

1.3 CONFIGURATION DESCRIPTION

| Configuration | RAT | No. Of carriers | Carrier Bandwidth | Carrier Frequency Configuration (MHz) | | |
|---------------|---------------|-----------------|-------------------|---------------------------------------|--------|----------------------------------|
| | | | | Bottom | Middle | Top |
| A | LTE+NB IoT GB | 1 | 10 MHz | - | 751.0 | - |
| B | NB IoT SA | 1 | 0.18 MHz | 746.2 | 751.4 | 756.8 or 755.8 for RSS-130 |



1.4 DECLARATION OF BUILD STATUS

| | |
|--|--|
| MAIN EUT | |
| MANUFACTURING DESCRIPTION | Radio Unit |
| MANUFACTURER | Ericsson AB |
| PRODUCT NAME | RRUS11 B13 |
| PART NUMBER | KRC 161 456/1 |
| IC Model Name | AS1614561 |
| SERIAL NUMBER | CF83499443 |
| HARDWARE VERSION | R1C |
| SOFTWARE VERSION | xrus_NB-IoT_GB_SA_for_FCC_test (based on CXP9013268/6 R66BM) |
| TRANSMITTER OPERATING RANGE | 746-756 MHz NB-IoT SA 746-756 MHz (746-757 MHz for USA) |
| MODULATIONS | QPSK, 16QAM, 64QAM, 256QAM |
| INTERMEDIATE FREQUENCIES | - |
| ITU DESIGNATION OF EMISSION | 5 MHz BW channel: 4M85F9W 10 MHz BW channel ¹ : 9M43F9W NB-IoT SA 200 kHz BW channel: 210KW7D |
| OUTPUT POWER (RMS) (W or dBm) | 2x40W ¹ NB-IoT SA 2x20W |
| FCC ID | TA8AKRC161456-1 |
| IC ID | 287AB-AS1614561 |
| TECHNICAL DESCRIPTION (a brief description of the intended use and operation) | The equipment is the remote part of LTE base station |

¹ Including 2 NB-IoT GB carriers.

Signature 
Linda Grell

Date 2018-04-04


No responsibility will be accepted by TÜV SÜD Product Service UK Limited as to the accuracy of the information declared in this document by the manufacturer.

1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) KRC 161 456/1 is an Ericsson AB Radio Unit working in the public mobile service (Band) band which provides communication connections to (Band) network. The KRC 161 456/1 operates from a -48V DC supply.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

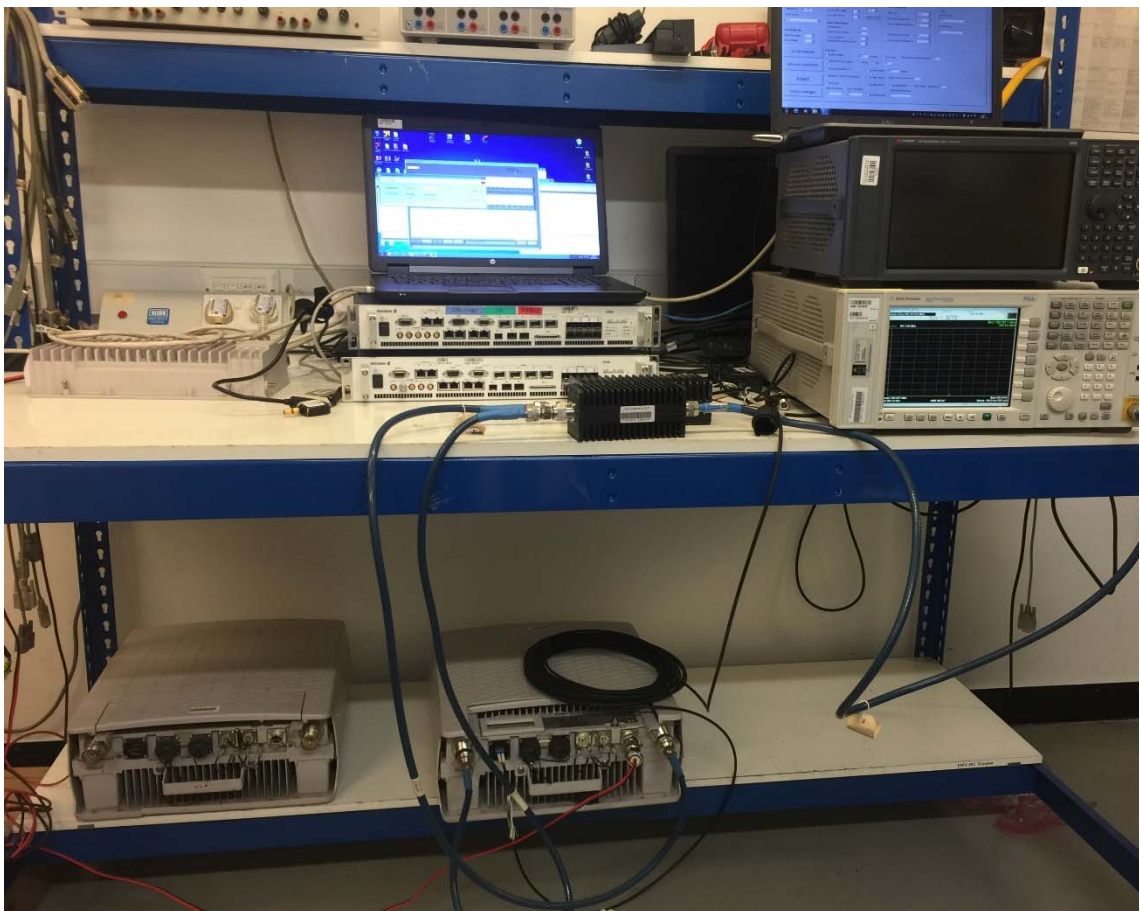

Equipment Under Test

1.6 TEST SETUP

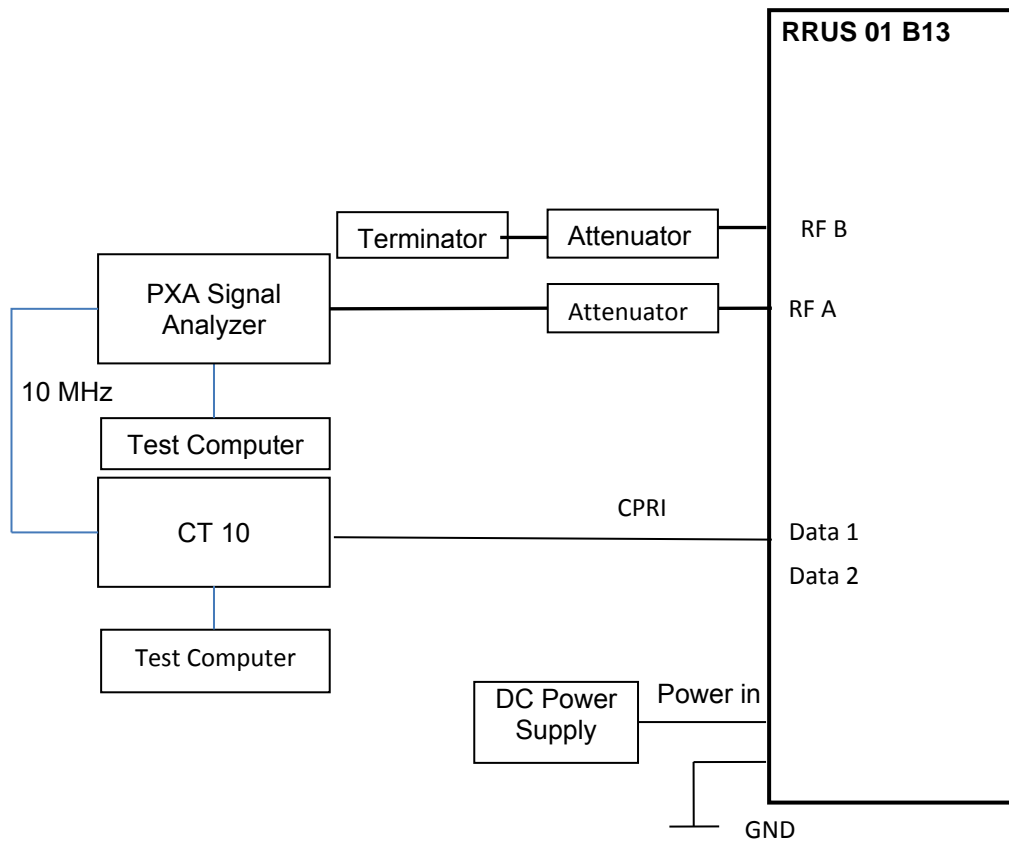


Figure 1, Block diagram of RRUS 01 B13 with cables and auxiliary equipment



Product Service

1.7 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or a chamber as appropriate.

The EUT was powered from a -48V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.8 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.9 MODIFICATION RECORD

No modifications were made to the EUT during testing.

1.10 ALTERNATIVE TEST SITE

Under our group UKAS Accreditation, TÜV SÜD Product Service conducted the following tests at Ericsson in Fareham, UK.

| Test Name | Name of Engineer(s) |
|--|---------------------------------|
| Maximum Peak Output Power and Peak to Average Ratio - Conducted | Raj Kumar Kallem Ashok Kumar |
| Occupied Bandwidth | Raj Kumar Kallem Ashok Kumar |
| Band Edge | Raj Kumar Kallem Ashok Kumar |
| Transmitter Spurious Emissions | Raj Kumar Kallem Ashok Kumar |
| Radiated Spurious Emissions | Graeme Lawler |



Product Service

SECTION 2

TEST DETAILS



Product Service

2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1046
FCC CFR 47 Part 27, Clause 27.50
Industry Canada RSS-130, Clause 6.4

2.1.2 Date of Test and Modification State

07 February to 06 April 2018 - Modification State 0

2.1.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.4 Environmental Conditions

| | |
|---------------------|-------------|
| Ambient Temperature | 19.7-21.3°C |
| Relative Humidity | 21.9-30.4% |

2.1.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, clause 5.2.1 and summed in accordance with FCC KDB 662911 D01.

2.1.6 Test Results




Product Service

Configuration A

Maximum Output Power 47.8 dBm

| Antenna | LTE Modulation | LTE Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power | | |
|---------|----------------|-----------------------|--|---------------|---|
| | | | Channel Position M | | |
| | | | PAR (dB) | Average Power | |
| dBm | dBm/MHz | | | | |
| A | 64QAM | 10.0 MHz | 6.78 | 45.94 | - |
| Total | | | - | - | - |

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M

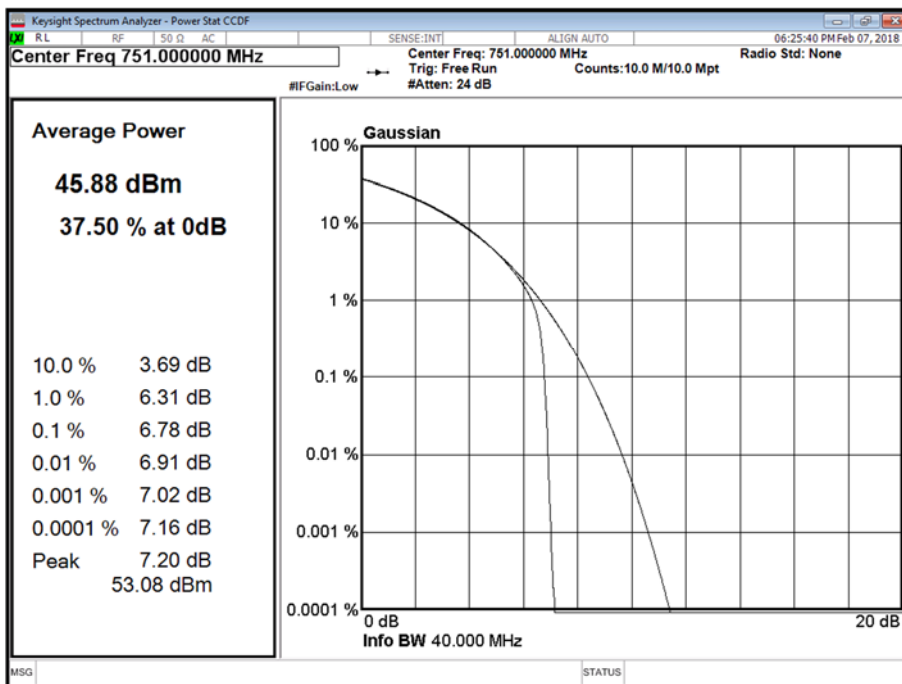




Product Service

Configuration B

Maximum Output Power 43 dBm

| Antenna | NB IoT Modulation | NB IoT Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power | | |
|---------|-------------------|--------------------------|--|---------------|---|
| | | | Channel Position B | | |
| | | | PAR (dB) | Average Power | |
| dBm | dBm/MHz | | | | |
| A | QPSK | 0.18 MHz | 4.09 | 42.38 | - |
| Total | | | - | - | - |

Antenna A - NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.18 MHz - Channel Position B

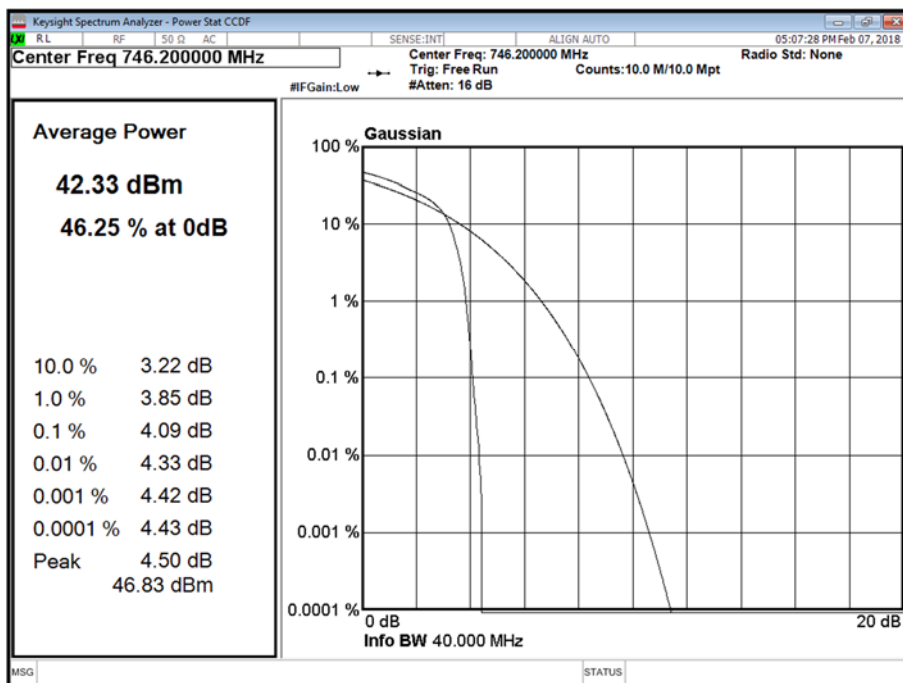




Product Service

Configuration B

Maximum Output Power 43 dBm

| Antenna | LTE Modulation | LTE Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power | | |
|---------|----------------|-----------------------|--|---------------|---|
| | | | Channel Position M | | |
| | | | PAR (dB) | Average Power | |
| dBm | dBm/MHz | | | | |
| A | QPSK | 0.18 MHz | 4.11 | 42.49 | - |
| Total | | | - | - | - |

Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.18 MHz - Channel Position M

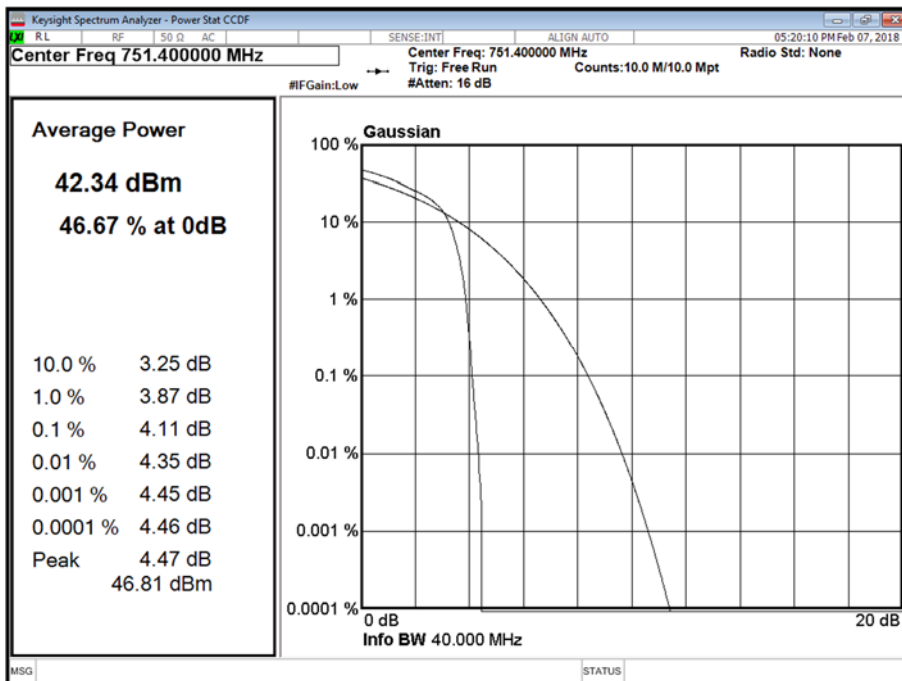




Product Service

Configuration B

Maximum Output Power 43 dBm

| Antenna | LTE Modulation | LTE Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power | | |
|---------|----------------|-----------------------|--|---------------|---|
| | | | Channel Position T | | |
| | | | PAR (dB) | Average Power | |
| dBm | dBm/MHz | | | | |
| A | QPSK | 0.18 MHz | 4.10 | 42.32 | - |
| Total | | | - | - | - |

Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.18 MHz - Channel Position T

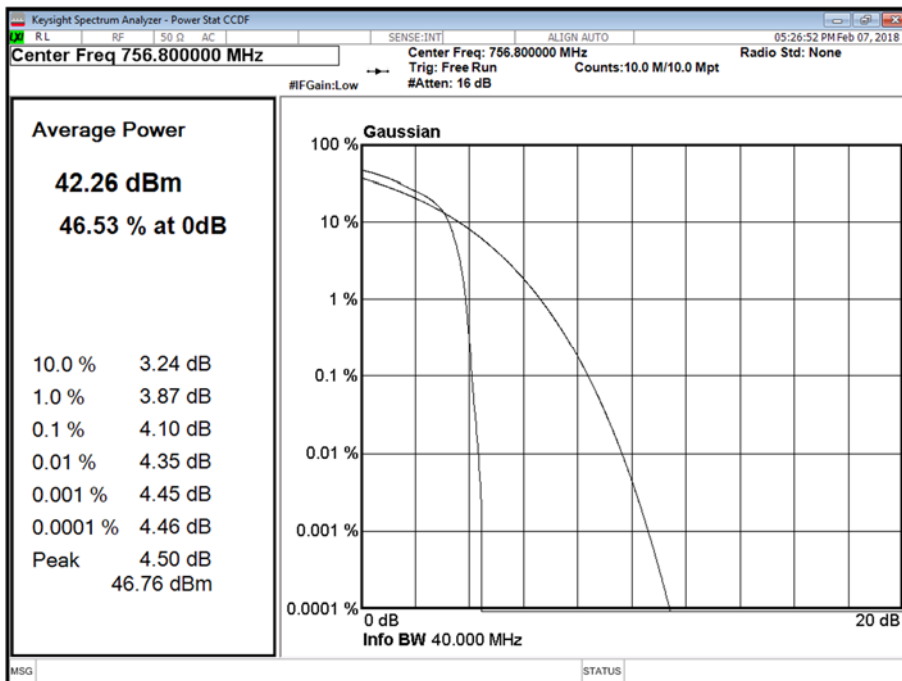




Product Service

Configuration B

Maximum Output Power 43 dBm

| Antenna | LTE Modulation | LTE Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power | | |
|---------|----------------|-----------------------|--|---------------|---|
| | | | Channel Position T – For RSS-130 | | |
| | | | PAR (dB) | Average Power | |
| dBm | dBm/MHz | | | | |
| A | QPSK | 0.18 MHz | 4.07 | 42.16 | - |
| Total | | | - | - | - |

Antenna A - LTE Modulation QPSK - LTE Carrier Bandwidth 0.18 MHz - Channel Position T – For RSS-130

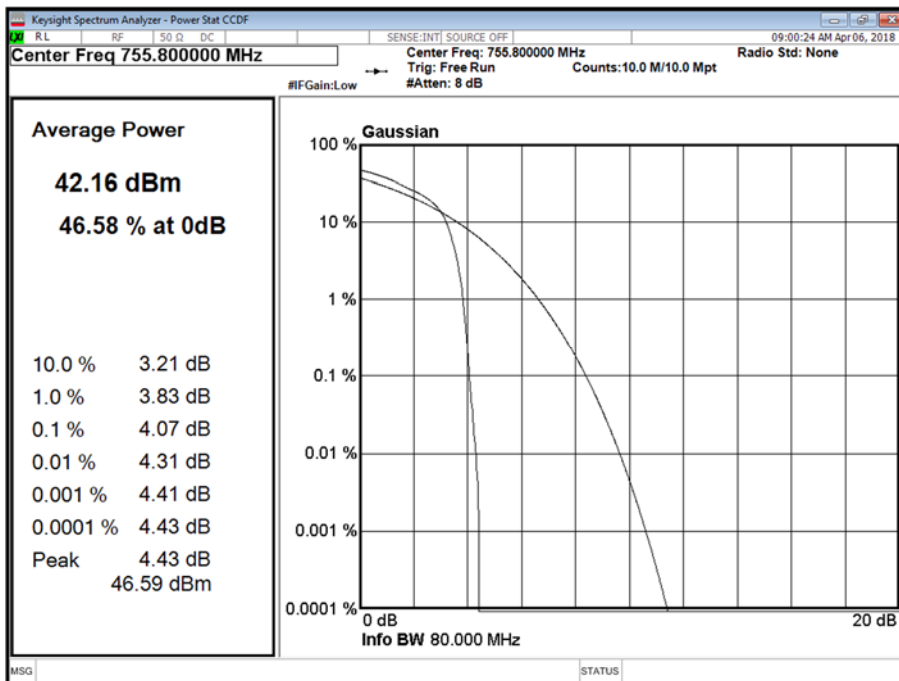

| Limit | |
|-----------------------|--------------------|
| Peak Power | ≤500 W or ≤+57 dBm |
| Peak to Average Ratio | 13 dB |



Product Service

2.2 OCCUPIED BANDWIDTH

2.2.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1049
FCC CFR 47 Part 27, Clause 27.53
Industry Canada RSS-GEN, Clause 6.6

2.2.2 Date of Test and Modification State

07 February to 06 April 2018 - Modification State 0

2.2.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.4 Environmental Conditions

Ambient Temperature 19.7-21.3°C
Relative Humidity 21.9-30.4%

2.2.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

2.2.6 Test Results

Configuration A


Maximum Output Power 47.8 dBm

| Antenna | LTE Modulation | LTE Carrier Bandwidth | Result (KHz) | | | | | |
|---------|----------------|-----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------------|
| | | | Channel Position B | | Channel Position M | | Channel Position T | |
| | | | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth |
| A | 64QAM | 10.0 MHz | - | | 9,404.69 | 9,763.54 | - | - |



Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M

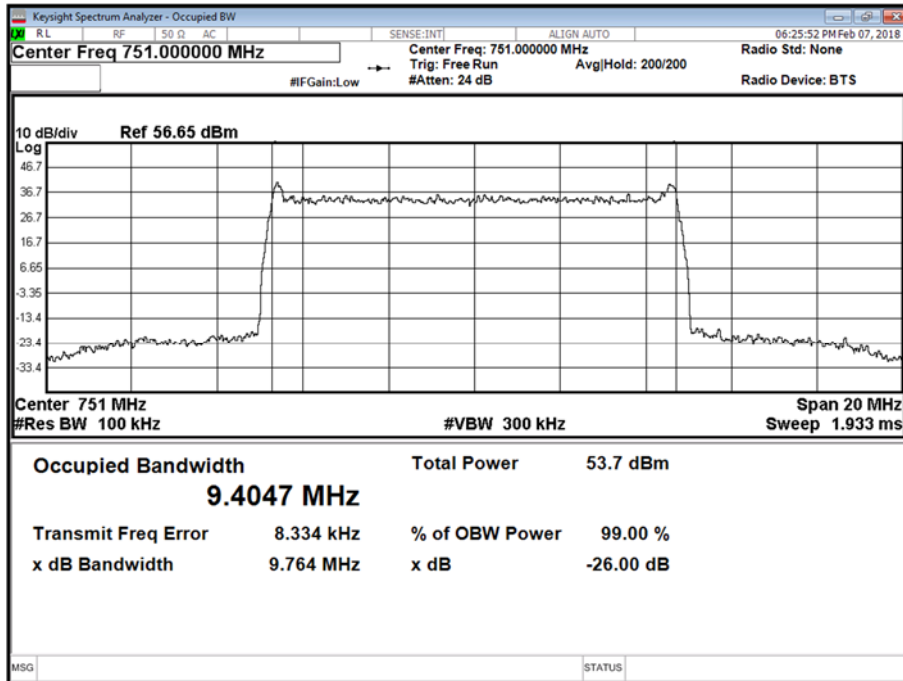




Product Service

Configuration B

Maximum Output Power 43 dBm

| Antenna | NB IoT Modulation | NB IoT Carrier Bandwidth | Result (KHz) | | | | | |
|---------|-------------------|--------------------------|--------------------|------------------|--------------------|------------------|--------------------|------------------|
| | | | Channel Position B | | Channel Position M | | Channel Position T | |
| | | | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth |
| A | QPSK | 0.2 MHz | 209.56 | 318.30 | 209.42 | 318.30 | 209.45 | 318.40 |


Antenna A – NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position B

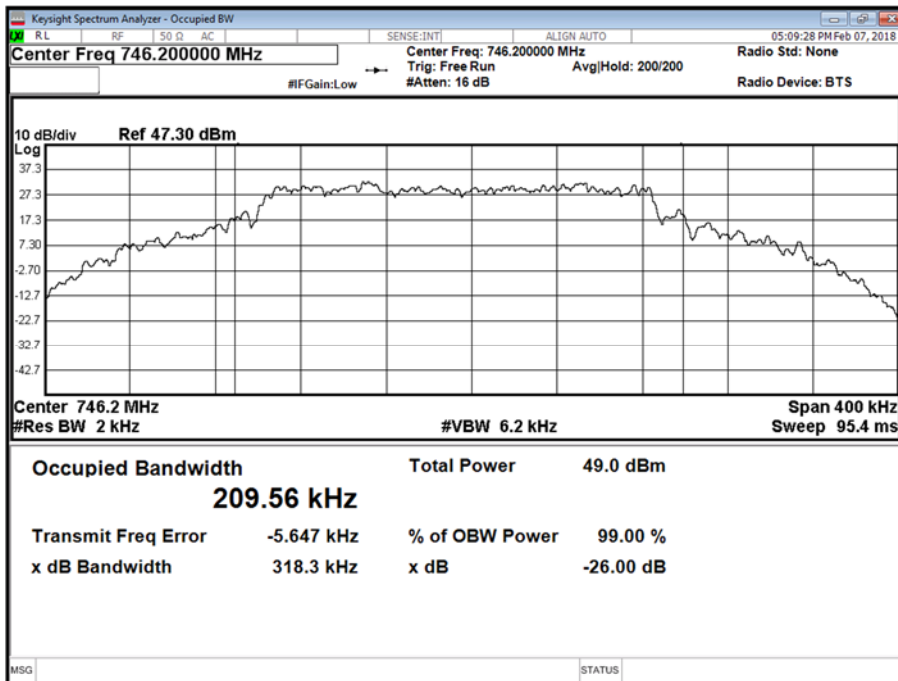




Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position M

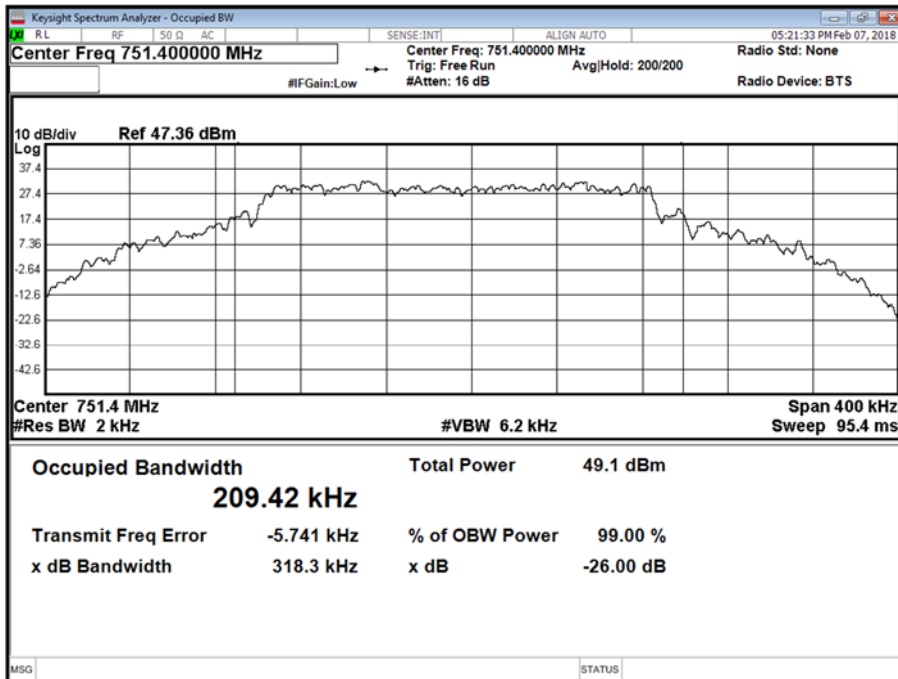

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position I

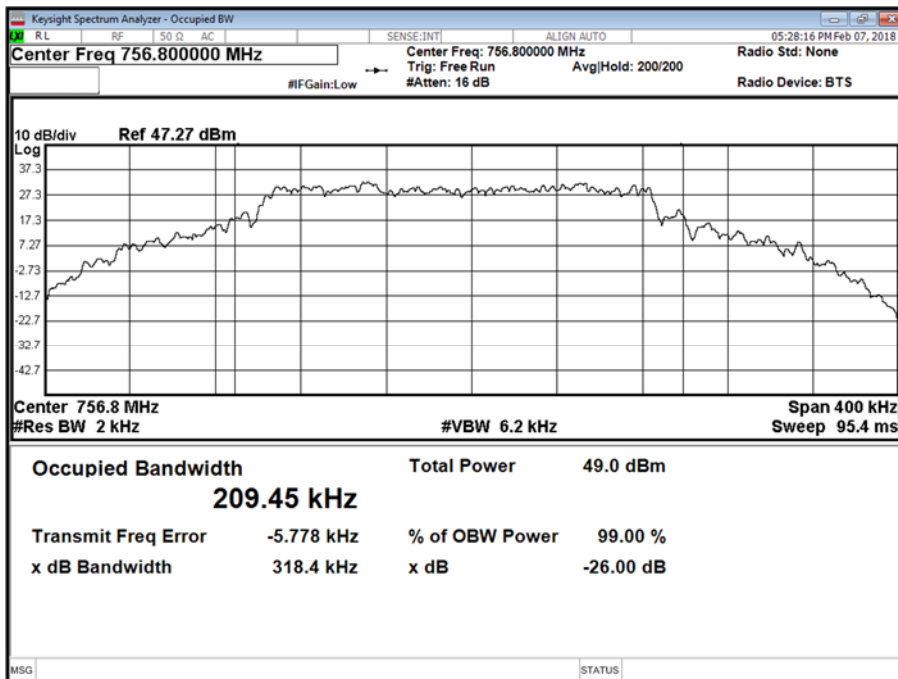




Product Service

Maximum Output Power 43 dBm

| Antenna | NB IoT Modulation | NB IoT Carrier Bandwidth | Result (KHz) | | | | | |
|---------|-------------------|--------------------------|--------------------|------------------|--------------------|------------------|----------------------------------|------------------|
| | | | Channel Position B | | Channel Position M | | Channel Position T – For RSS-130 | |
| | | | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth |
| A | QPSK | 0.2 MHz | - | - | - | - | 209.51 | 318.3 |

Antenna A – NB IoT Modulation QPSK - NB IoT Carrier Bandwidth 0.2 MHz - Channel Position T – For RSS-130

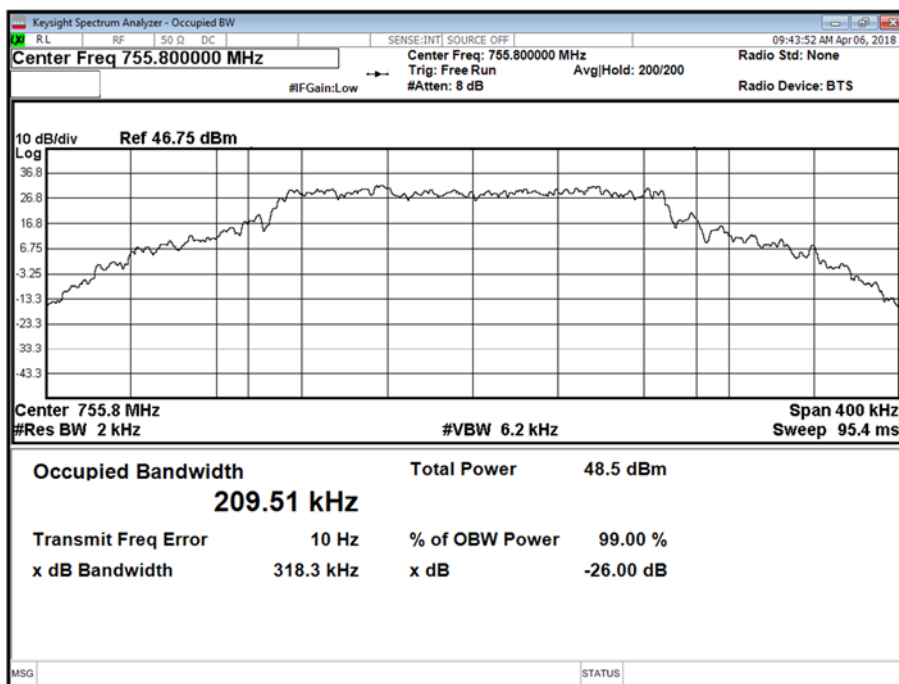



Product Service

2.3 BAND EDGE

2.3.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 27, Clause 27.53 (h)
Industry Canada RSS-130, Clause 6.5

2.3.2 Date of Test and Modification State

07 February and 06 April 2018 - Modification State 0

2.3.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.4 Environmental Conditions

Ambient Temperature 19.7-28.9°C
Relative Humidity 21.9-22.7%

2.3.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \text{Log}(N)$, where N is equal to the number of MIMO antenna ports.

For four port, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(4) = -19 \text{ dBm}$.

For dual port, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$.

For RSS-130 the band is limited to 756MHz, a second plot shows the upper band edge for this.

2.3.6 Test Results

Configuration A


Maximum Output Power 47.8 dBm

| Antenna | LTE Modulation | LTE Carrier Bandwidth | Band Edge (MHz) | |
|---------|----------------|-----------------------|--------------------|------------------------------|
| | | | Channel Position B | Channel Position T |
| A | 64QAM | 10.0 MHz | 746.0 | 757.0 (756.0 for RSS-130) |




Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B

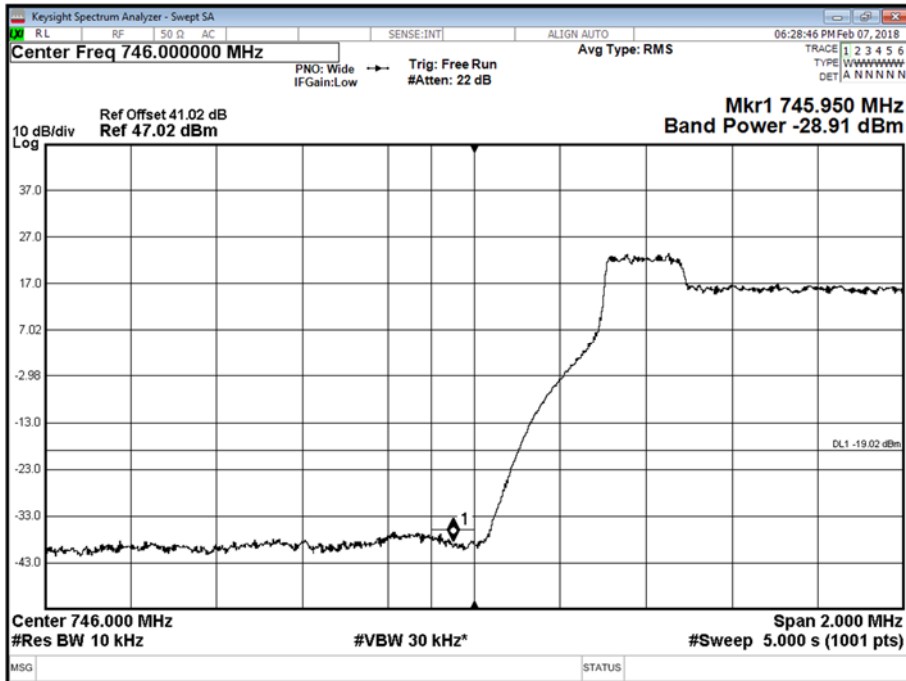


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T

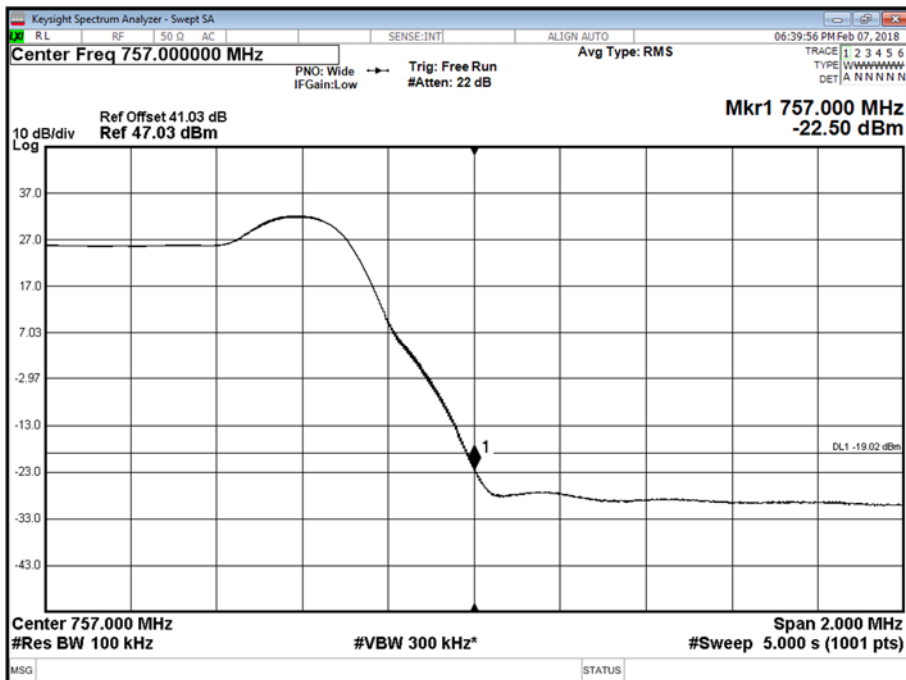



Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T – For RSS-130

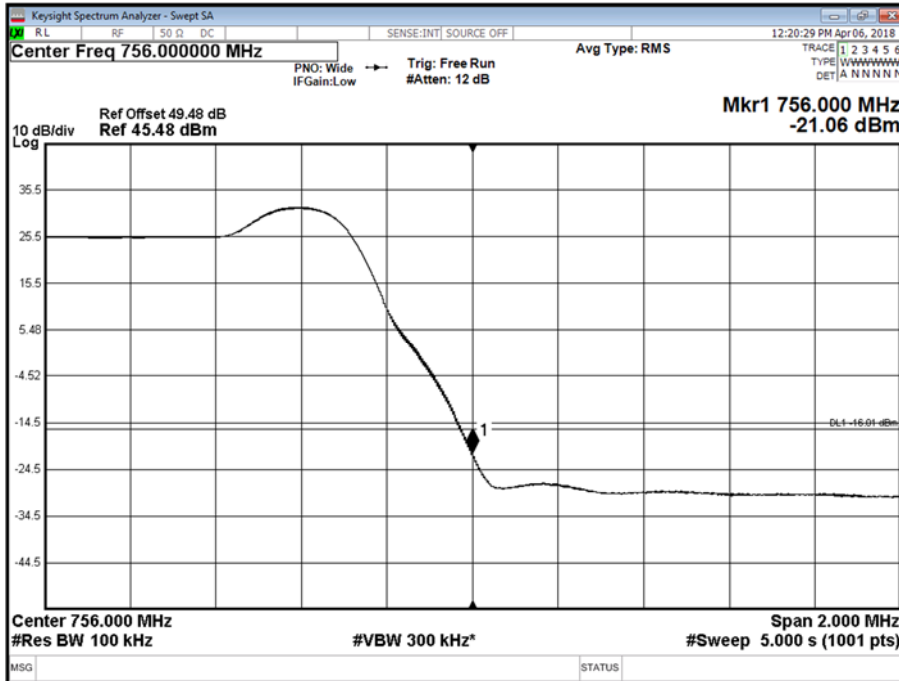




Product Service

Configuration B

Maximum Output Power 43 dBm

| Antenna | NB IOT Modulation | NB IOT Carrier Bandwidth | Band Edge (MHz) | |
|---------|-------------------|--------------------------|--------------------|------------------------------|
| | | | Channel Position B | Channel Position T |
| A | QPSK | 0.18 MHz | 746.0 | 757.0 (756.0 for RSS-130) |


Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.18 MHz - Channel Position B

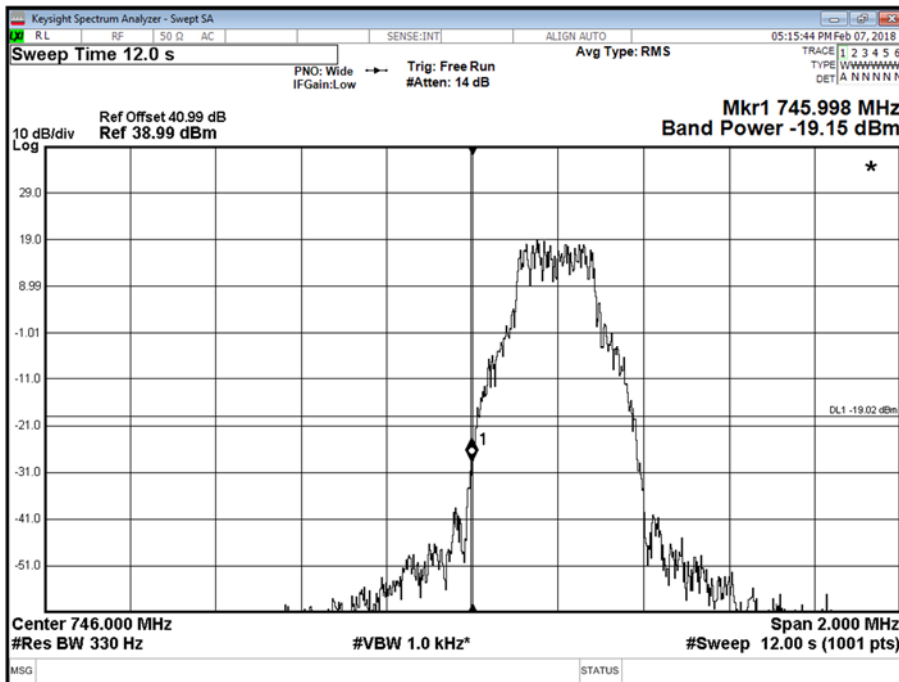




Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.18 MHz - Channel Position T

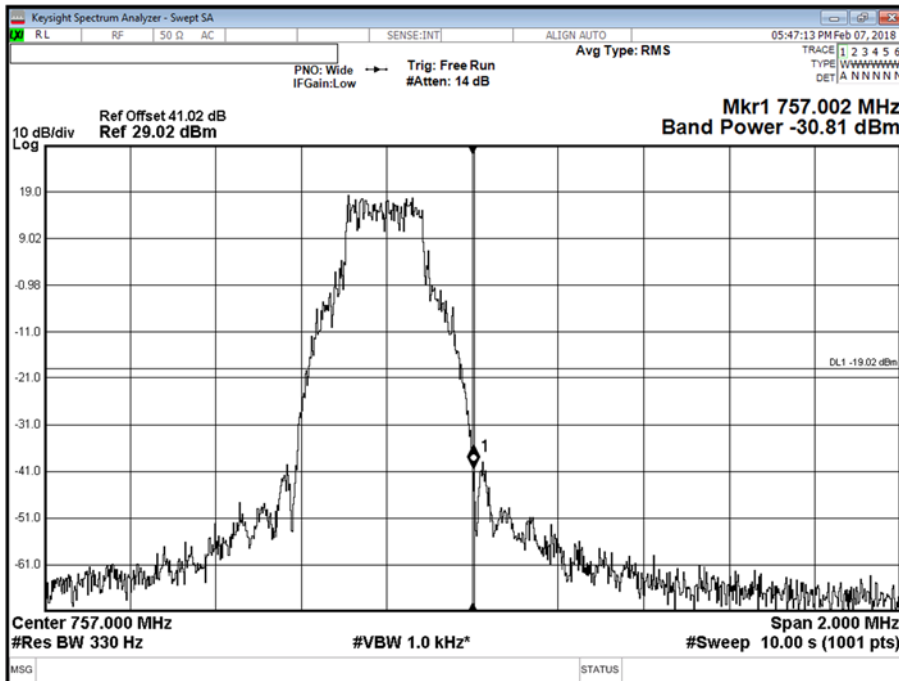

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.18 MHz - Channel Position T - For RSS-130

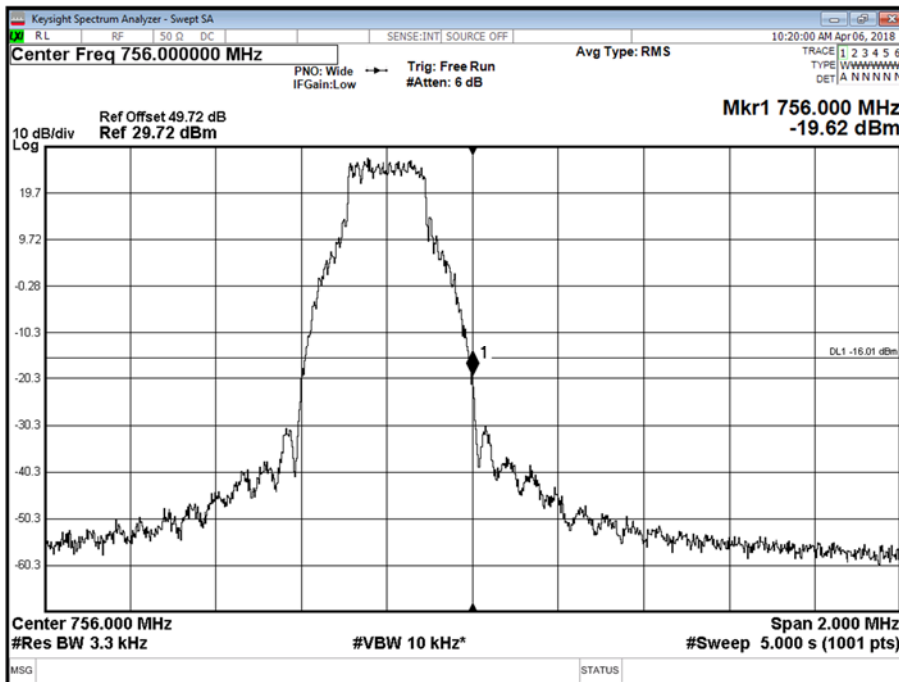

| | |
|------------|---------|
| Limit MIMO | -19 dBm |
|------------|---------|



Product Service

2.4 TRANSMITTER SPURIOUS EMISSIONS

2.4.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 27, Clause 27.53 (h)
Industry Canada RSS-130, Clause 6.5

2.4.2 Date of Test and Modification State

07 February to 06 April 2018 - Modification State 0

2.4.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.4 Environmental Conditions

| | |
|---------------------|-------------|
| Ambient Temperature | 19.7-21.3°C |
| Relative Humidity | 21.9-30.4% |

2.4.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \text{Log}(N)$, where N is equal to the number of MIMO antenna ports.

For four ports, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(4) = -19 \text{ dBm}$.

For dual port, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$.

2.4.6 Test Results


Configuration A

Maximum Output Power 47.8 dBm




Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 1 - Range 0.009 to 1000 MHz

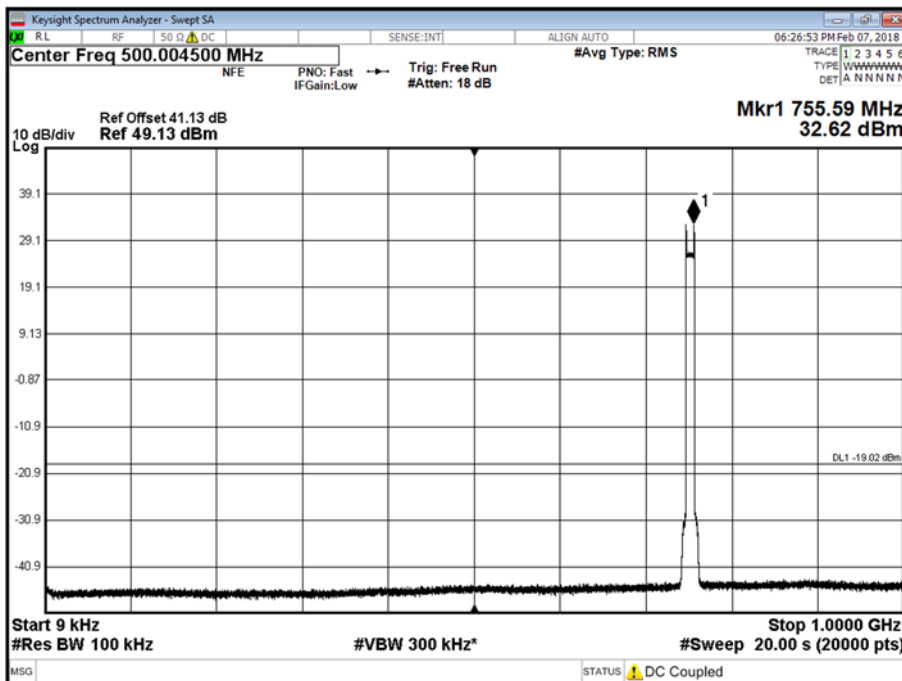


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 2 - Range 1000 to 4000 MHz

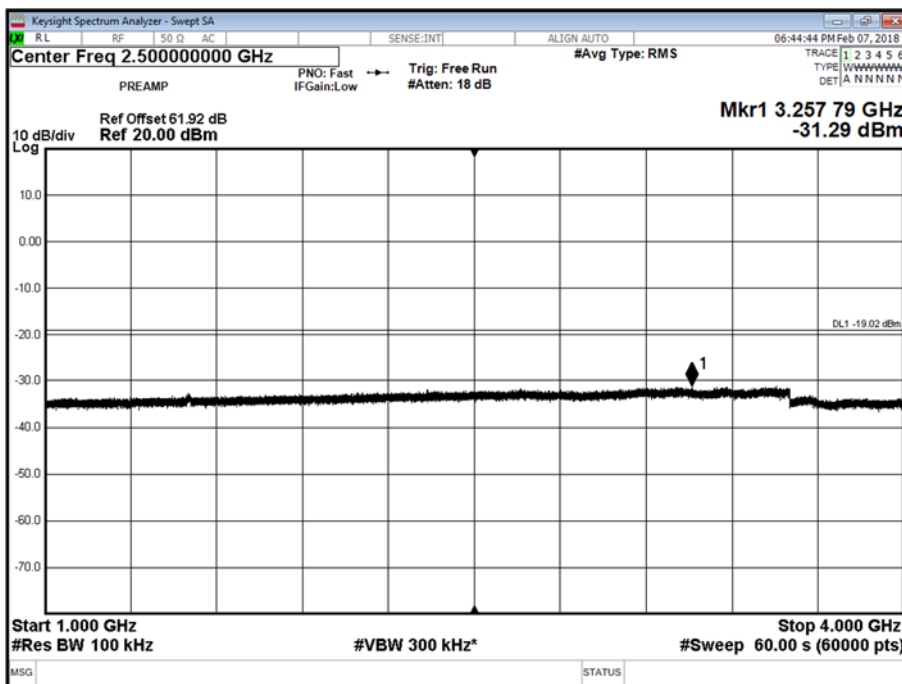



Product Service

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position M - Band 3 - Range 4000 MHz to 8000 MHz

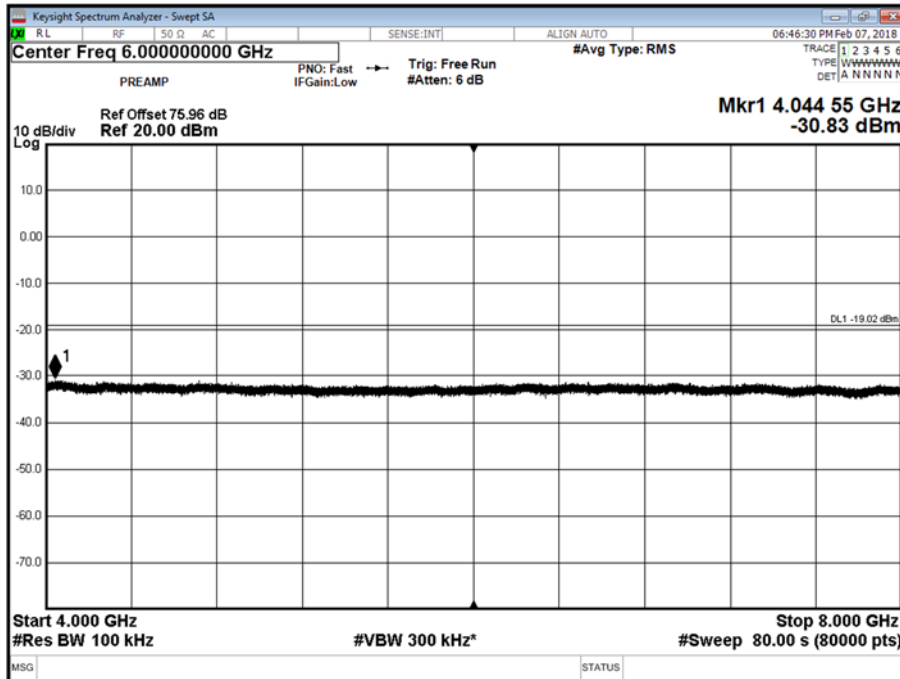




Product Service


Configuration B

Maximum Output Power 43 dBm

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position B - Band 1 - Range 0.009 to 1000 MHz

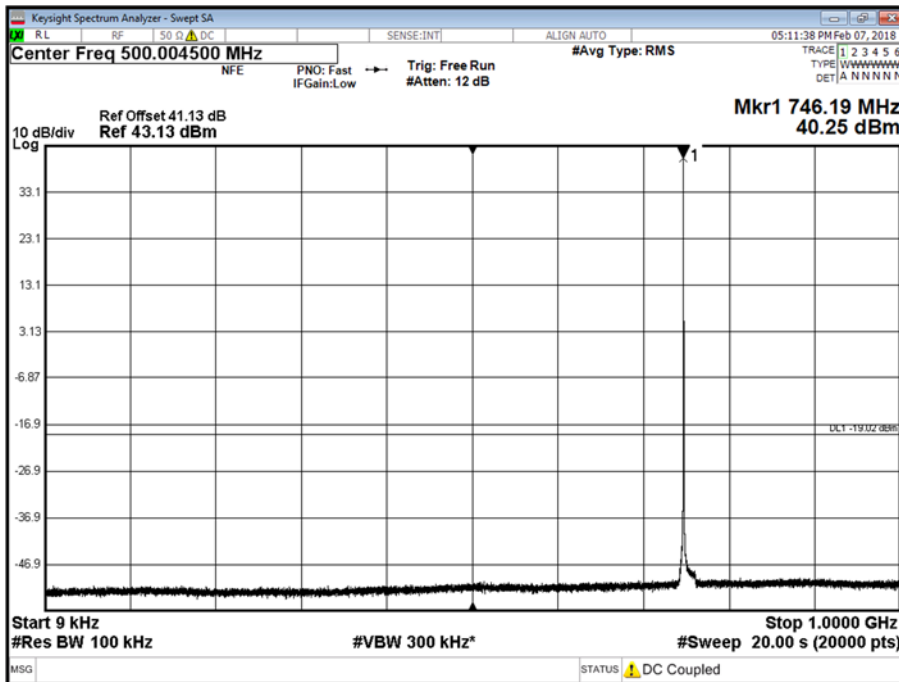


Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position B - Band 2 - Range 1000 to 4000 MHz

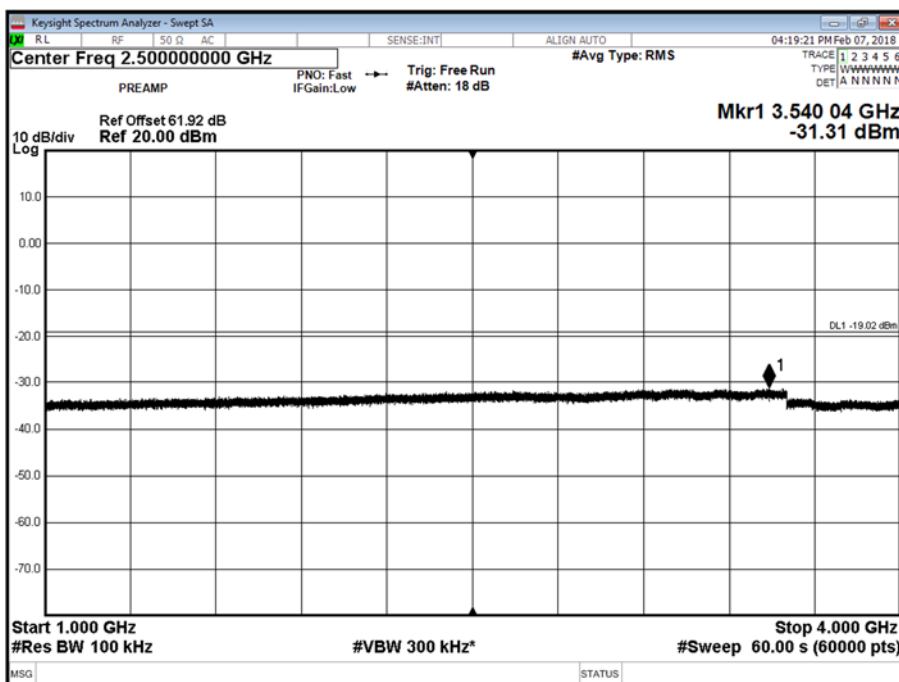




Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position B - Band 3 - Range 4000 to 8000 MHz

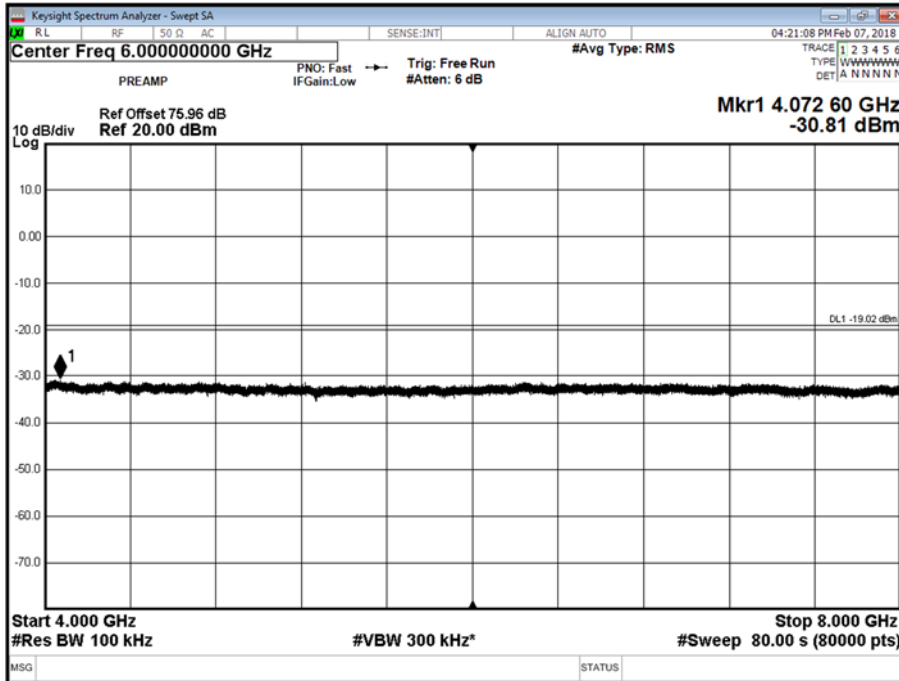


Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position M - Band 1 - Range 0.009 to 1000 MHz

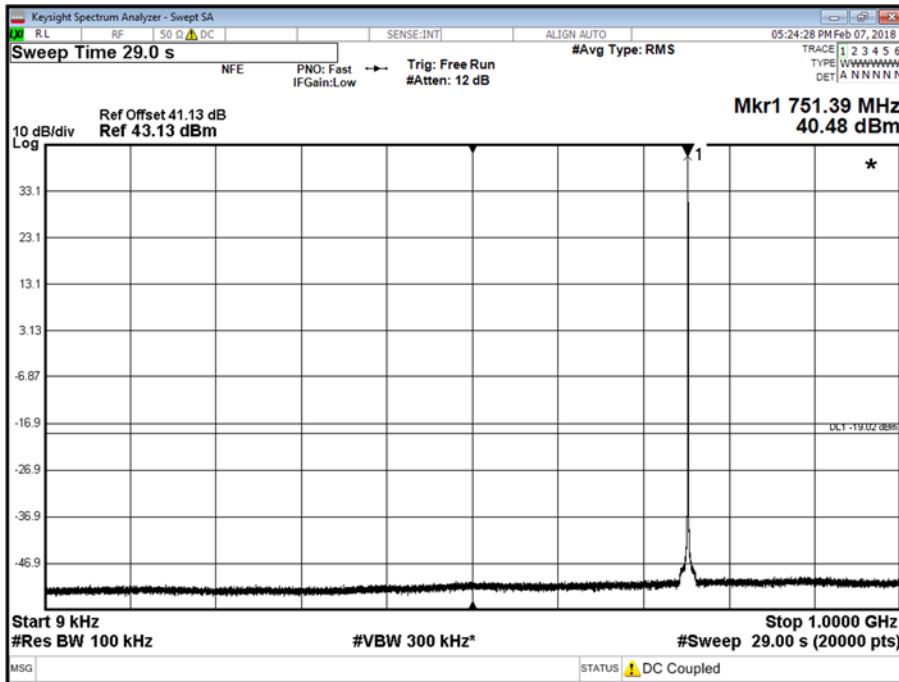




Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position M - Band 2 - Range 1000 to 4000 MHz

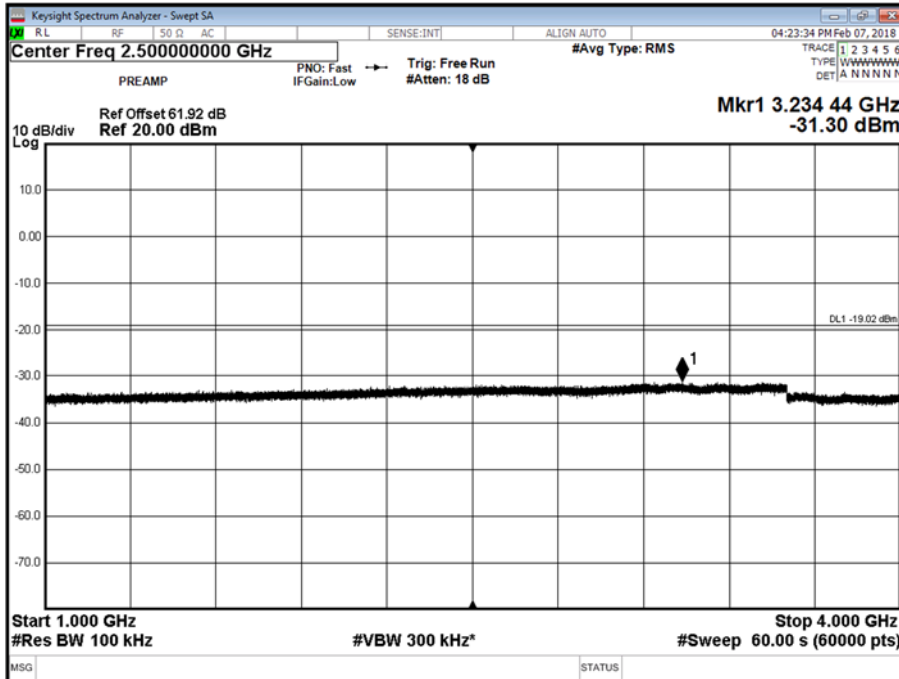


Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position M - Band 3 - Range 4000 to 8000 MHz

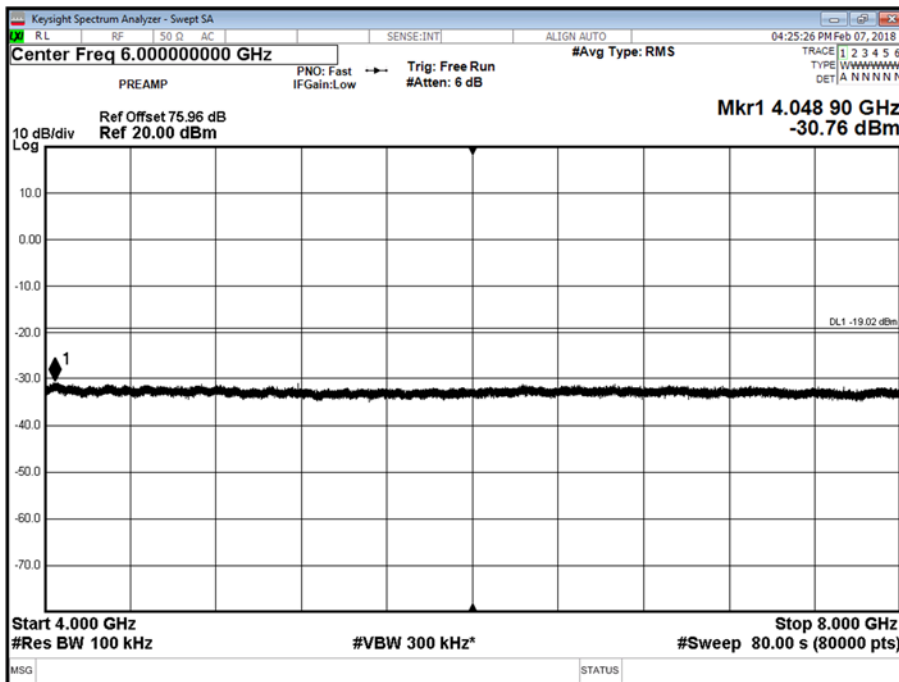




Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 1 - Range 0.009 to 1000 MHz

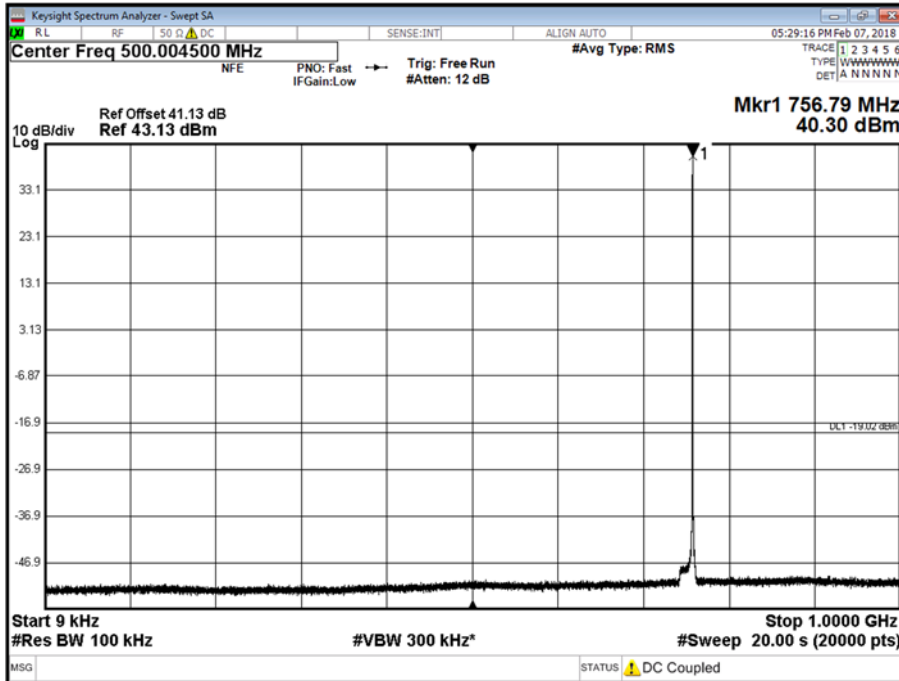


Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 2 - Range 1000 to 4000 MHz

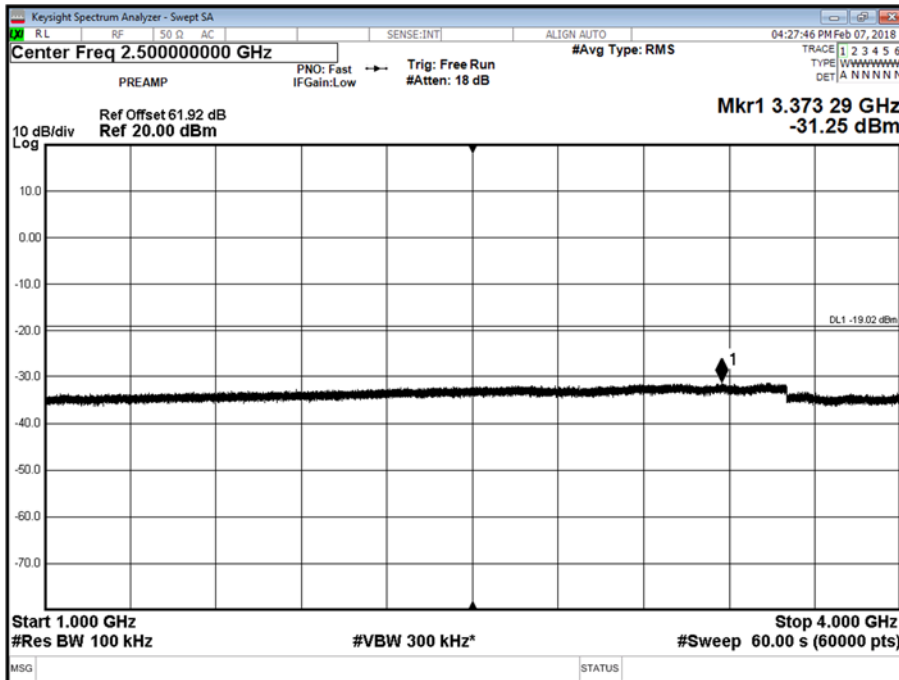




Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 3 - Range 4000 to 8000 MHz

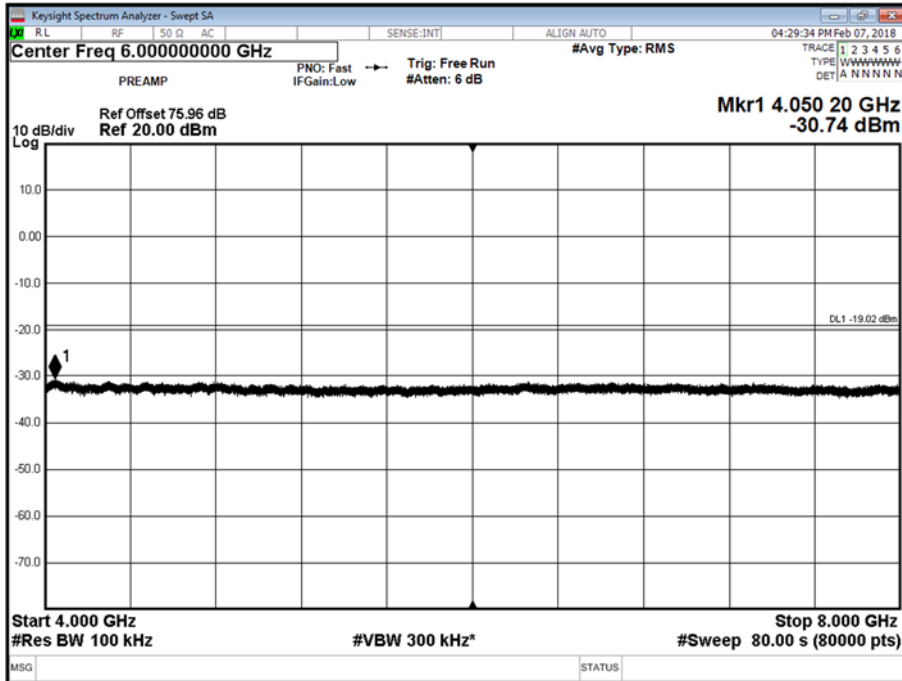


Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 1 - Range 0.009 to 1500 MHz - For RSS-130

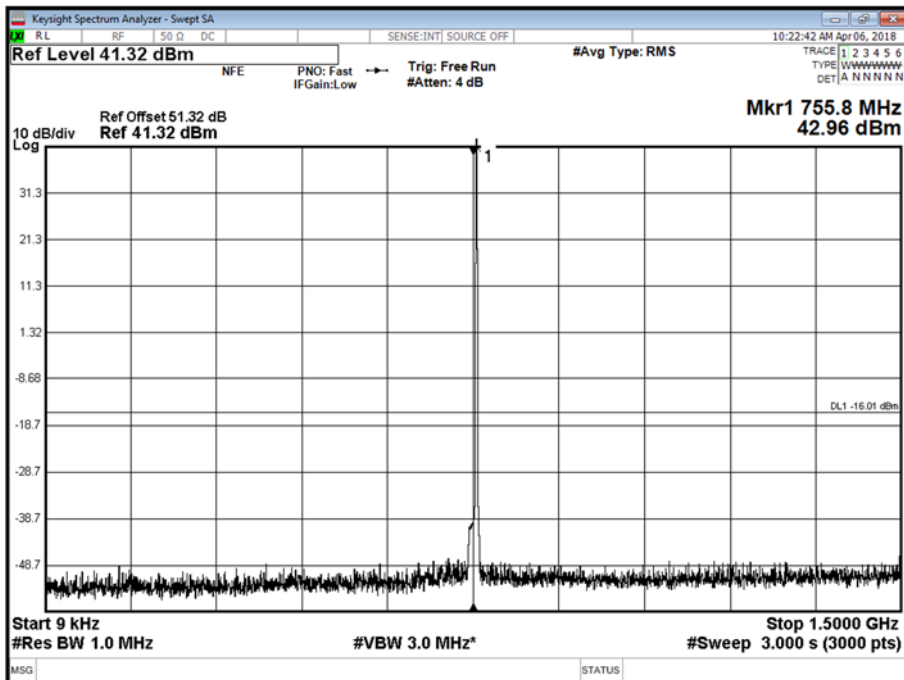



Product Service

Antenna A - NB IOT Modulation QPSK - NB IOT Carrier Bandwidth 0.2 MHz - Channel Position T - Band 2 - Range 1500 to 8000 MHz – For RSS-130

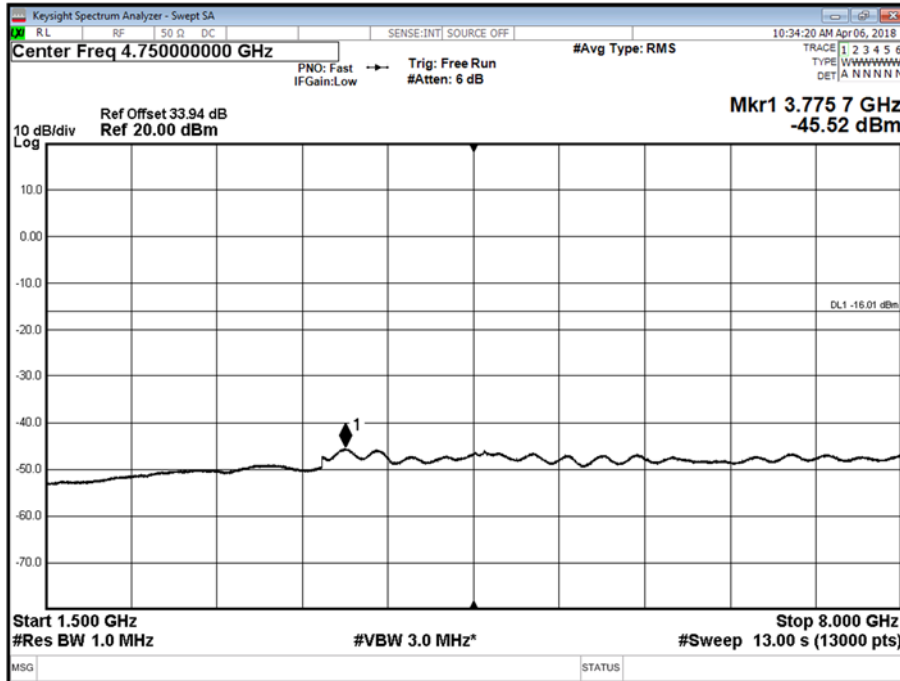

| | |
|------------|--------|
| Limit MIMO | -19dBm |
|------------|--------|



Product Service

2.5 RADIATED SPURIOUS EMISSIONS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1053
FCC CFR 47 Part 27, Clause 27.53(m)
Industry Canada RSS-130, Clause 6.5

2.5.2 Date of Test and Modification State

04 February 2018 - Modification State 0

2.5.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.4 Environmental Conditions

Ambient Temperature 18.9°C
Relative Humidity 33 %

2.5.5 Test Method

The test was applied in accordance with test method requirements of ANSI/TIA-603-C-2004.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations.

The Applicant declared that the highest internally generated frequency would be up to 800MHz and so the upper limit for measurement was calculated at 10 times this, which is 8GHz.

Emissions identified within the range 30MHz – 8GHz were then formally measured using a Peak detector as the worst case.

In the frequency Range 30MHz – 1GHz, the measurement was performed with a resolution bandwidth of 100kHz.

In the frequency Ranges between 763-775MHz and 793-805MHz, the measurement was performed with a resolution bandwidth of 10kHz.

In the frequency Range 1GHz – 8GHz, the measurement was performed with a resolution bandwidth of 1MHz.

The measurements were performed at a 3m distance unless otherwise stated.

The limits for Spurious Emissions have been calculated, as shown below using the following formula:

Field Strength of Carrier - $(43 + 10\text{Log}(P))$ dB

Where:

Field Strength is measured in $\text{dB}\mu\text{V}/\text{m}$

P is measured Transmitter Power in Watts



Product Service

Determination of Spurious Emission Limit

As the EUT does not have an integral antenna, the field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipole as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where G_i is the antenna gain of an ideal half-wave dipole,
 P_o is the power out of the transceiver in W,
 d is the measurement distance in meter.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 60)^{0.5} / 3 = 9.84V/m = 139.86dB\mu V/m$$

As per 27.53 (c)(1)) the spurious emission must be attenuated by $43 + 10\log(P_o)$ dB this gives:

$$43 + 10\log(60) = 60.78dB$$

Therefore the limit at 3m measurement distance is:

$$139.86 - 60.78 = 79.08 \text{ dB}\mu V/m$$

This limit has been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

2.5.6 Test Results


Configuration A-SC (1C)

Maximum Output Power 47.8dBm per port, LTE Bandwidth 10.0MHz




Product Service

Channel Position M – QPSK / Bandwidth 10.0MHz – 30MHz – 1GHz

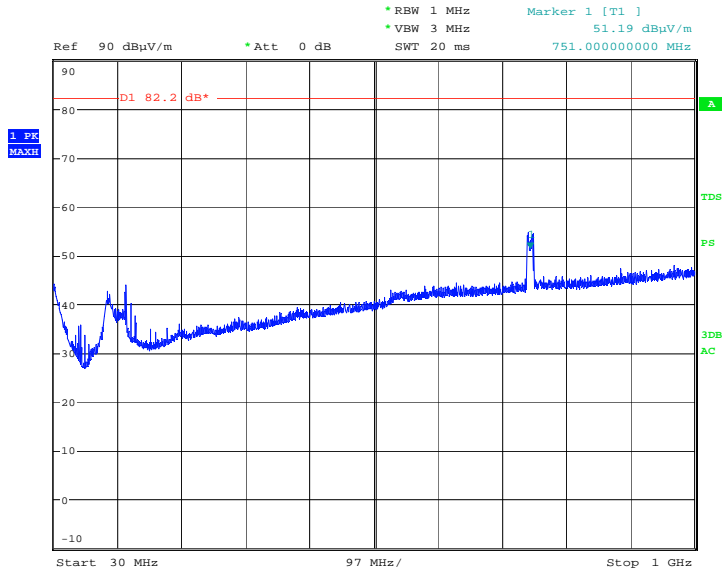

Date: 4.FEB.2018 22:06:51

Channel Position M – QPSK / Bandwidth 10.0MHz – 763MHz – 775MHz

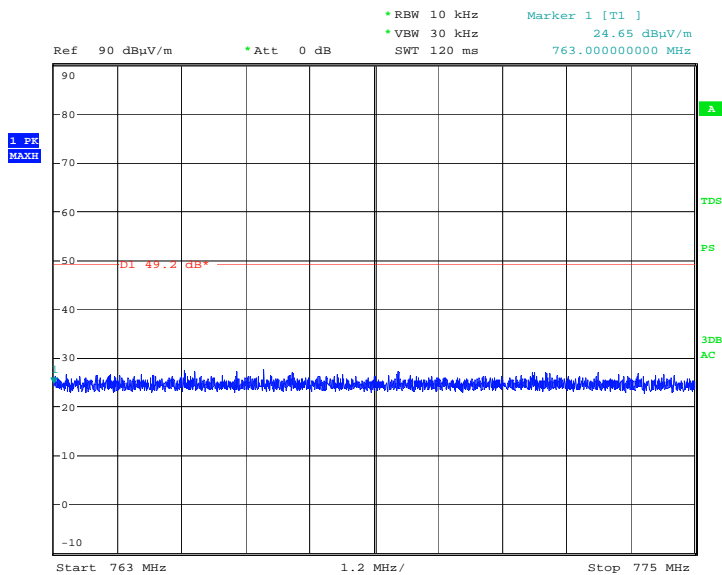


Date: 4.FEB.2018 22:09:53




Product Service

Channel Position M – QPSK / Bandwidth 10.0MHz – 793MHz – 805MHz

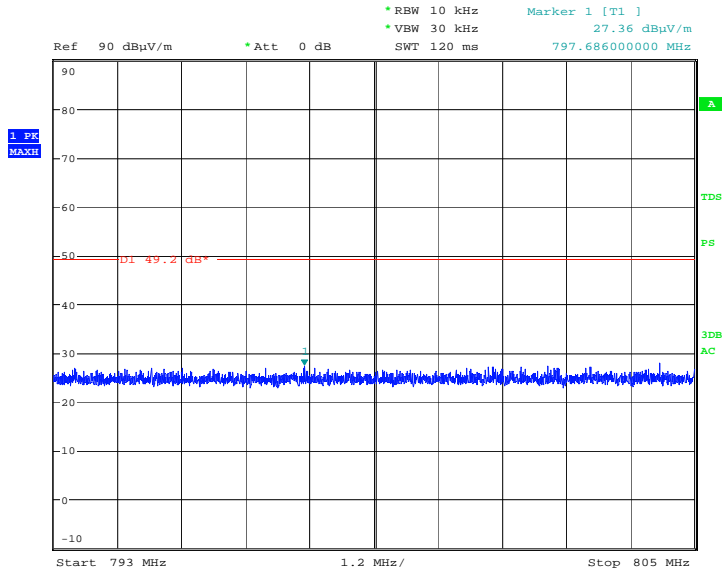

Date: 4.FEB.2018 22:13:43

Channel Position M – QPSK / Bandwidth 10.0MHz – 1GHz – 8GHz

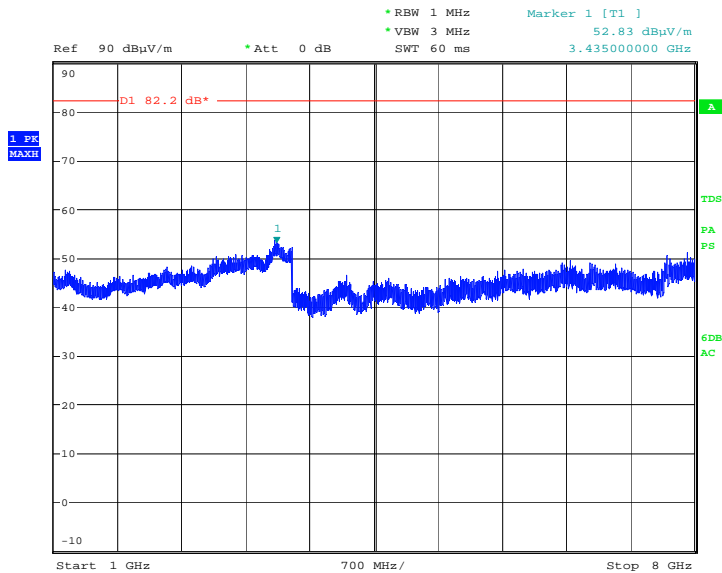

Date: 4.FEB.2018 15:02:05




Product Service

Configuration B-SC (1C)


Maximum Output Power 47.8dBm per port, NB IOT Carrier Bandwidth 0.2 MHz

Channel Position B –QPSK/Bandwidth 0.2 MHz– 30MHz – 1GHz

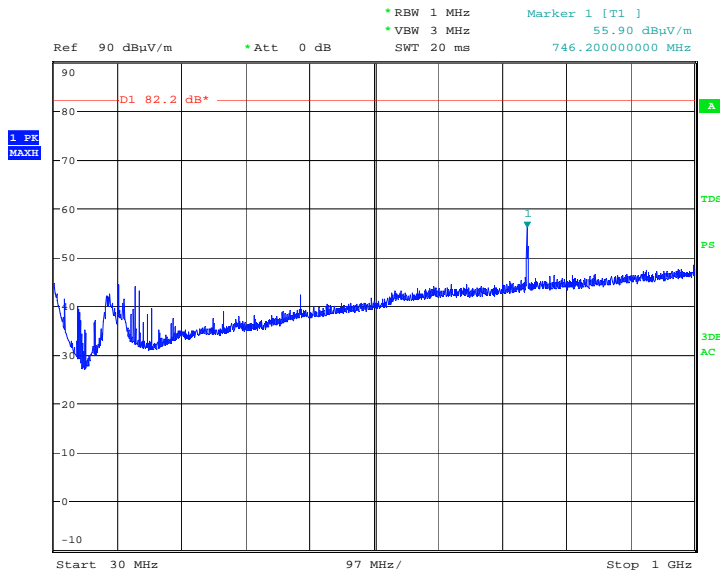

Date: 4.FEB.2018 22:26:22

Channel Position B – QPSK/Bandwidth 0.2 MHz – 763MHz – 775MHz

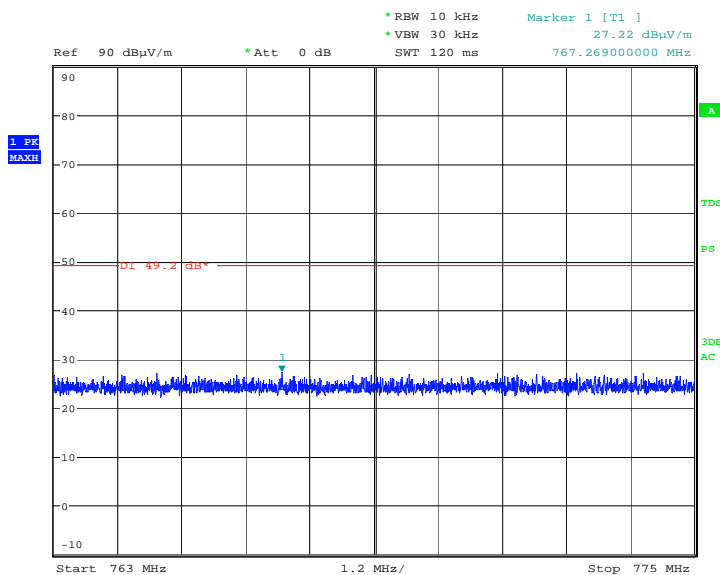


Date: 4.FEB.2018 22:20:12




Product Service

Channel Position B – QPSK/Bandwidth 0.2 MHz – 793MHz – 805MHz

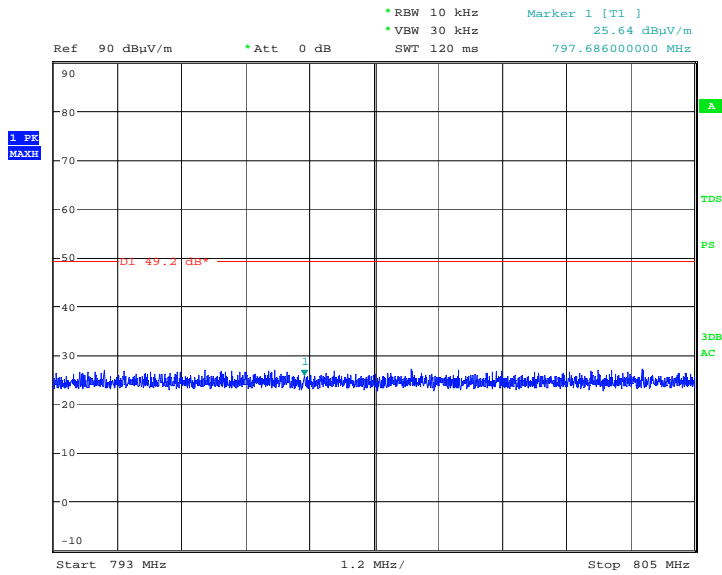

Date: 4.FEB.2018 22:18:00

Channel Position B – QPSK/Bandwidth 0.2 MHz – 1GHz – 8GHz

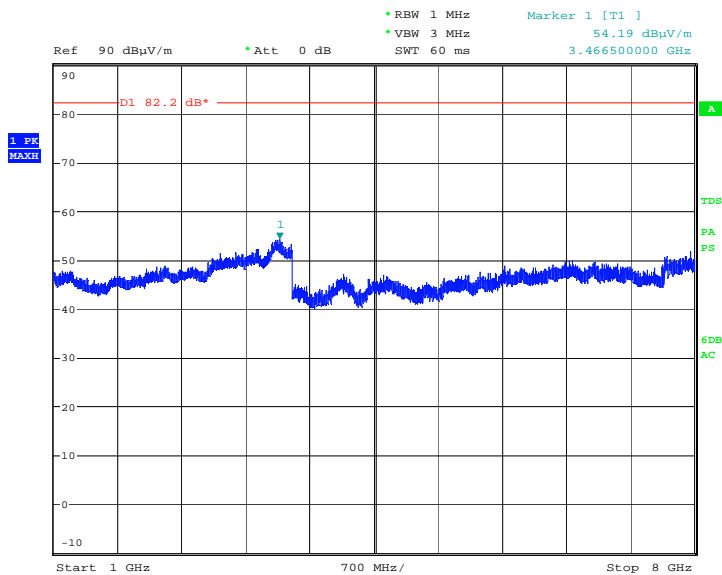


Date: 4.FEB.2018 15:21:36




Product Service

Channel Position M – QPSK/Bandwidth 0.2 MHz – 30MHz – 1GHz

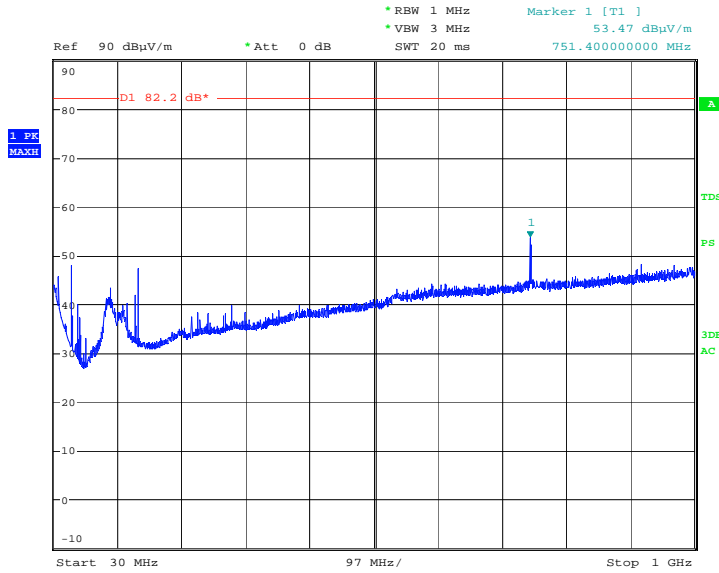

Date: 4.FEB.2018 22:30:57

Channel Position M – QPSK/Bandwidth 0.2 MHz – 763MHz – 775MHz

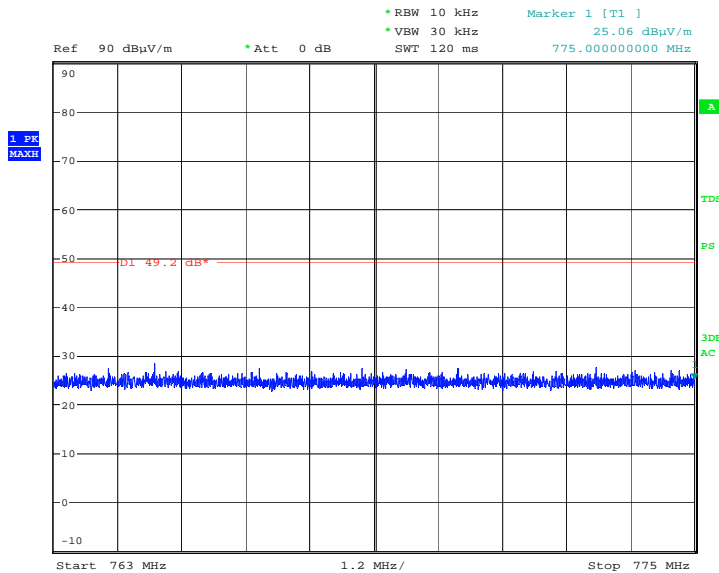


Date: 4.FEB.2018 22:34:27




Product Service

Channel Position M – QPSK / Bandwidth 0.2 MHz – 793MHz – 805MHz

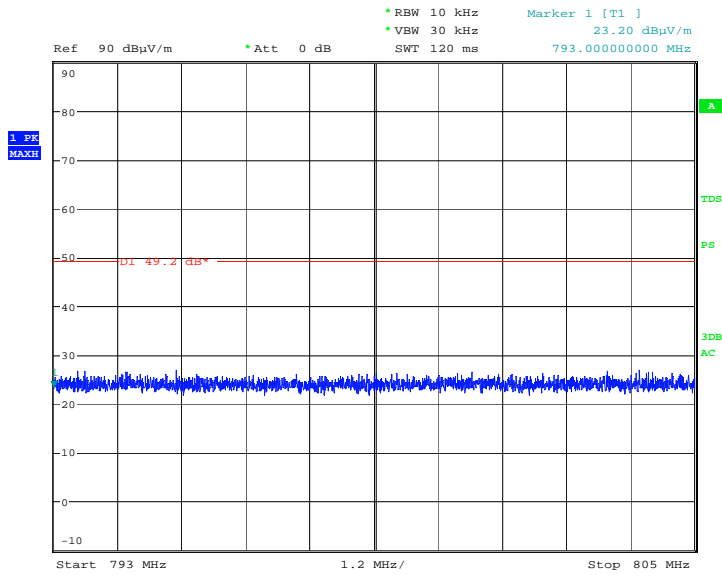

Date: 4.FEB.2018 22:35:47

Channel Position M – QPSK / Bandwidth 0.2 MHz – 1GHz – 8GHz

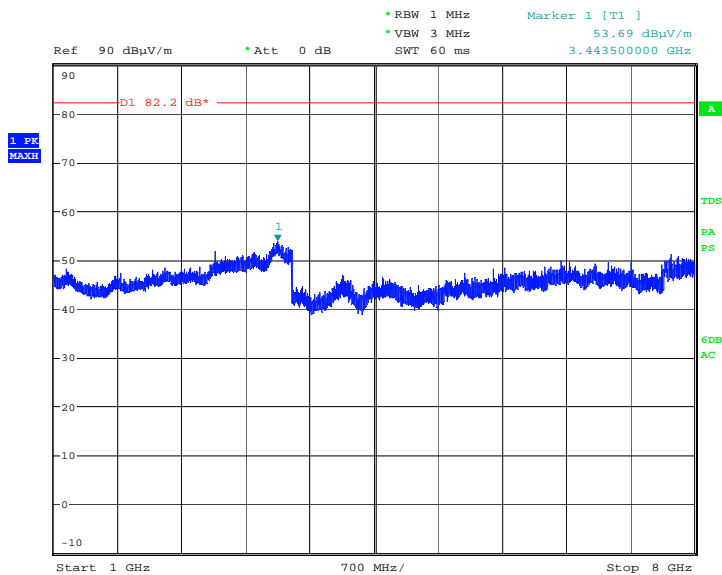


Date: 4.FEB.2018 15:33:43




Product Service

Channel Position T – QPSK / Bandwidth 0.2 MHz – 1GHz

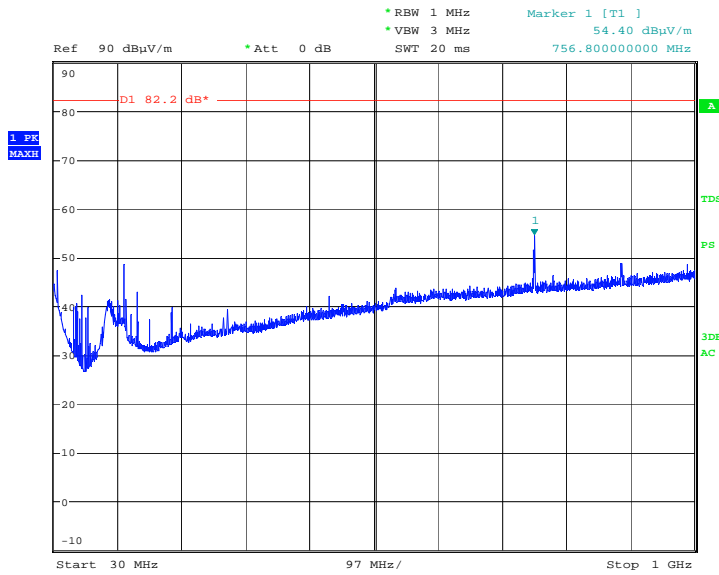

Date: 4.FEB.2018 22:44:12

Channel Position T – QPSK / Bandwidth 0.2 MHz – 763MHz – 775MHz

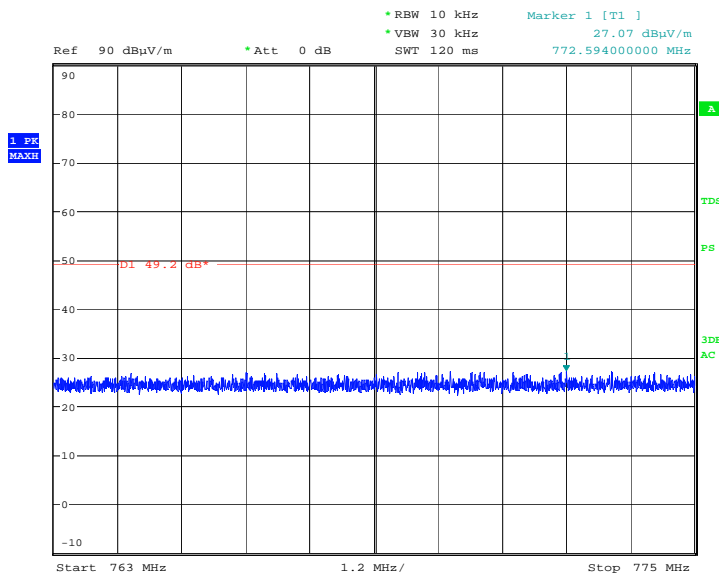


Date: 4.FEB.2018 22:41:46




Product Service

Channel Position T – QPSK / Bandwidth 0.2 MHz – 793MHz – 805MHz

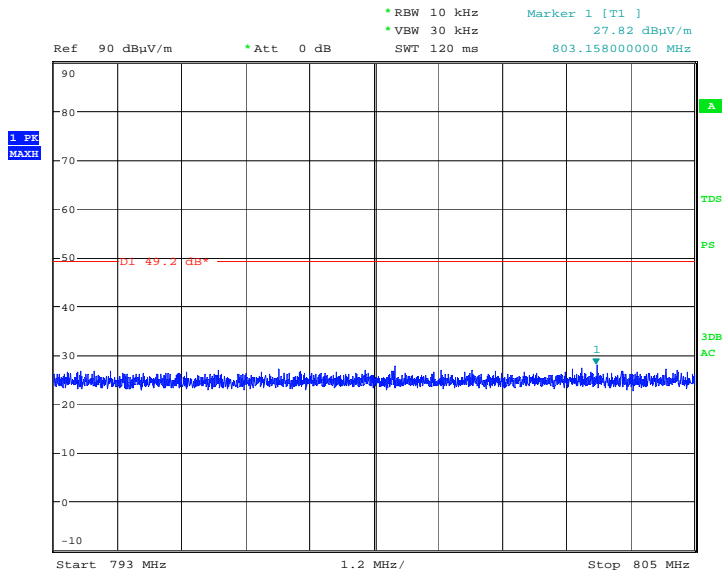

Date: 4.FEB.2018 22:39:31

Channel Position T – QPSK / Bandwidth 0.2 MHz – 1GHz – 8GHz

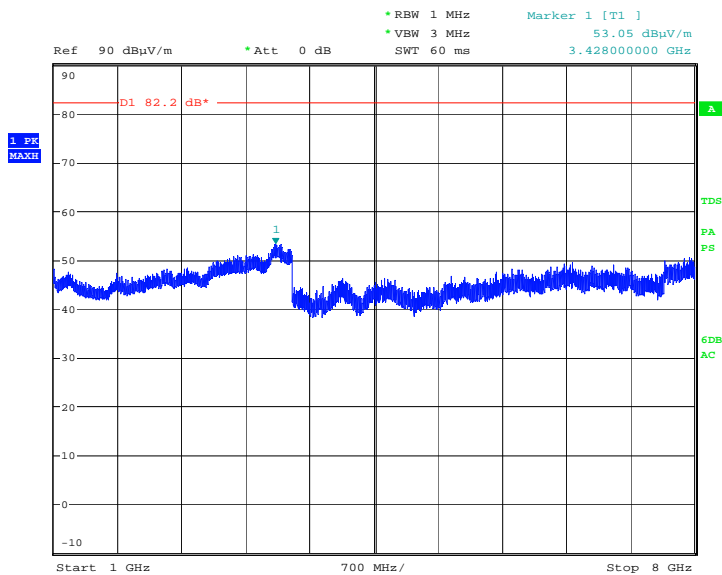

Date: 4.FEB.2018 15:40:14

Remarks

| | |
|-------|-----------------------|
| Limit | -13dBm / 79.08 dBµV/m |
|-------|-----------------------|

The EUT does not exceed -13dBm / 79.08dBµV/m at the measured frequencies.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Due |
|--|----------------|-----------|------------|-----------------------------|-----------------|
| Maximum Peak Output Power and Peak to Average Ratio - Conducted | | | | | |
| Spectrum Analyser | Keysight | PXA | MY54410231 | 12 | 30-Nov-2018 |
| Network Analyser | Rhode&Shwarz | ZVA40 | TE3548 | 12 | 02-Oct-2018 |
| Calibration unit | Rhode&Shwarz | ZV-Z54 | TE4368 | 12 | 19-Sep-2018 |
| RF Load | Ericsson china | TR10 | 09121624 | N/A | OP MON |
| Attenuator | Ericsson china | TSG150R | 1504020007 | N/A | OP MON |
| Power Supply | Ericsson China | PSU-AC 02 | N/A | N/A | OP MON |
| Hygromer | RS | TE3220 | 0427452 | 12 | 30-Aug-2018 |
| Digital Volt Meter | White gold | 79 III | TE00190 | 12 | 24-Nov-2018 |
| Band Edge | | | | | |
| Spectrum Analyser | Keysight | PXA | MY54410231 | 12 | 30-Nov-2018 |
| Network Analyser | Rhode&Shwarz | ZVA40 | TE3548 | 12 | 02-Oct-2018 |
| Calibration unit | Rhode&Shwarz | ZV-Z54 | TE4368 | 12 | 19-Sep-2018 |
| RF Load | Ericsson china | TR10 | 09121624 | N/A | OP MON |
| Attenuator | Ericsson china | TSG150R | 1504020007 | N/A | OP MON |
| Power Supply | Ericsson China | PSU-AC 02 | N/A | N/A | OP MON |
| Hygromer | RS | TE3220 | 0427452 | 12 | 30-Aug-2018 |
| Digital Volt Meter | White gold | 79 III | TE00190 | 12 | 24-Nov-2018 |
| Transmitter Spurious Emissions | | | | | |
| Spectrum Analyser | Keysight | PXA | MY54410231 | 12 | 30-Nov-2018 |
| Network Analyser | Rhode&Shwarz | ZVA40 | TE3548 | 12 | 02-Oct-2018 |
| Calibration unit | Rhode&Shwarz | ZV-Z54 | TE4368 | 12 | 19-Sep-2018 |
| Attenuator | Narda | 769-10 | TE33368 | 12 | 31-May-2018 |
| Attenuator | Narda | 769-20 | TE33367 | 12 | 31-May-2018 |
| Attenuator | Narda | 769-30 | TE33369 | 12 | 31-May-2018 |
| RF Load | Ericsson china | TR10 | 09121624 | N/A | OP MON |
| Attenuator | Ericsson china | TSG150R | 1504020007 | N/A | OP MON |
| Power Supply | Ericsson China | PSU-AC 02 | N/A | N/A | OP MON |
| Hygromer | RS | TE3220 | 0427452 | 12 | 30-Aug-2018 |
| Digital Volt Meter | White gold | 79 III | TE00190 | 12 | 24-Nov-2018 |

N/A – Not Applicable

O/P Mon – Output Monitored with Calibrated Equipment



Product Service

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Due |
|---------------------------------------|-----------------|---------------------|--------|-----------------------------|-----------------|
| Spurious Radiated Emissions | | | | | |
| Antenna (Bilog) | Schaffner | CBL6143 | 287 | 24 | 18-Apr-2018 |
| Filter (High Pass) | Lorch | SHP7-7000-SR | 566 | 12 | 5-Apr-2018 |
| Signal Generator (10MHz to 40GHz) | Rohde & Schwarz | SMR40 | 1002 | 12 | 20-Oct-2018 |
| Power Supply Unit | Farnell | H 60/50 | 1095 | - | TU |
| Antenna 18-40GHz (Double Ridge Guide) | Q-Par Angus Ltd | QSH 180K | 1511 | 24 | 7-Dec-2018 |
| Pre-Amplifier | Phase One | PS04-0086 | 1533 | 12 | 12-Jan-2019 |
| 18GHz - 40GHz Pre-Amplifier | Phase One | PSO4-0087 | 1534 | 12 | 27-Feb-2018 |
| Screened Room (5) | Rainford | Rainford | 1545 | 36 | 08-Jul-2019 |
| Turntable Controller | Inn-Co GmbH | CO 1000 | 1606 | - | TU |
| Multimeter | Iso-tech | IDM 101 | 2118 | 12 | 7-Feb-2018 |
| Digital Multimeter | Iso-tech | IDM-101 | 2895 | 12 | 20-Jul-2018 |
| Comb Generator | Schaffner | RSG1000 | 3034 | - | TU |
| Cable (N-N, 8m) | Rhophase | NPS-2302-8000-NPS | 3248 | 12 | 2-May-2018 |
| EMI Test Receiver | Rohde & Schwarz | ESU40 | 3506 | 12 | 22-Nov-2018 |
| Tilt Antenna Mast | matur GmbH | TAM 4.0-P | 3916 | - | TU |
| Mast Controller | matur GmbH | NCD | 3917 | - | TU |
| 1 Metre SMA Cable | Rhophase | 3PS-1801A-1000-3PS | 4099 | 12 | 19-Sep-2018 |
| Cable 1503 2M 2.92(P)m 2.92(P)m | Rhophase | KPS-1503A-2000-KPS | 4293 | 12 | 27-Feb-2018 |
| Digital thermo Hygrometer | Radio Spares | 1260 | 4300 | 12 | 30-Aug-2018 |
| Cable (Rx, Km-Km 2m) | Scott Cables | KPS-1501-2000-KPS | 4526 | 6 | 22-May-2018 |
| Cable (Rx, SMAM-SMAM 0.5m) | Scott Cables | SLSLL18-SMSM-00.50M | 4528 | - | OP Mon |
| Double Ridged Waveguide Horn Antenna | ETS-Lindgren | 3117 | 4722 | 12 | 17-Feb-2018 |
| Double Ridge Broadband Horn Antenna | Schwarzbeck | BBHA 9120 B | 4848 | 12 | 17-Feb-2018 |

N/A – Not Applicable

O/P Mon – Output Monitored with Calibrated Equipment



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

| Test Discipline | Frequency / Parameter | MU |
|--|----------------------------|----------|
| Conducted Maximum Peak Output Power | 30 MHz to 20 GHz Amplitude | ± 0.1 dB |
| Conducted Emissions | 30 MHz to 20 GHz Amplitude | ± 2.3 dB |
| Frequency Stability | 30 MHz to 2 GHz | ± 5.0 Hz |
| Occupied Bandwidth | Up to 20 MHz Bandwidth | ± 1.1 Hz |
| Band Edge | 30 MHz to 20 GHz Amplitude | ± 2.3 dB |
| Radiated Emissions, Bilog Antenna, AOATS | 30MHz to 1GHz Amplitude | 5.1dB* |
| Radiated Emissions, Horn Antenna, AOATS | 1GHz to 40GHz Amplitude | 6.3dB* |
| Worst case error for both Time and Frequency measurement 12 parts in 10 ⁶ | | |



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

© 2018 TÜV SÜD Product Service



Product Service

ANNEX A

MODULE LIST



Product Service

| Configurations A - B | | | |
|----------------------|---------------|-----------|--|
| Product | Product No | R-State | Serial No |
| CT10 | KDU 137 624/1 | R7B | TU8XV49142 |
| RRUS11B13 | KRC 161 456/1 | R1C | CF83499443 |
| Software Version: | CF83499443 | Revision: | xrus_NBloT_GB_SA_for_FCC_test (based on CXP9013268/6 R66BM) |