


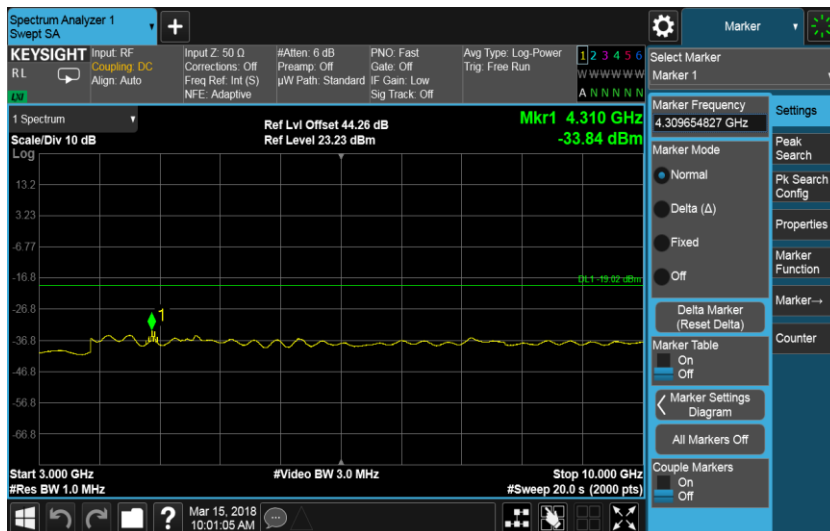
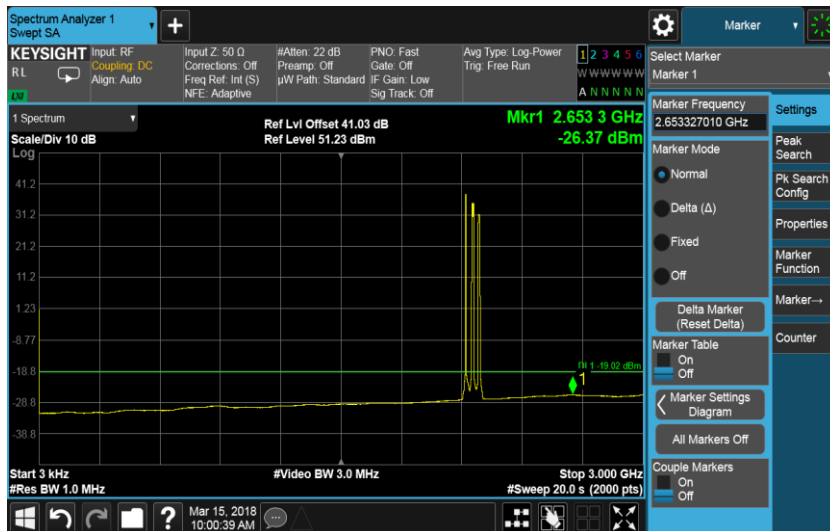



Port C, Channel Position M, LTE 10.0 MHz

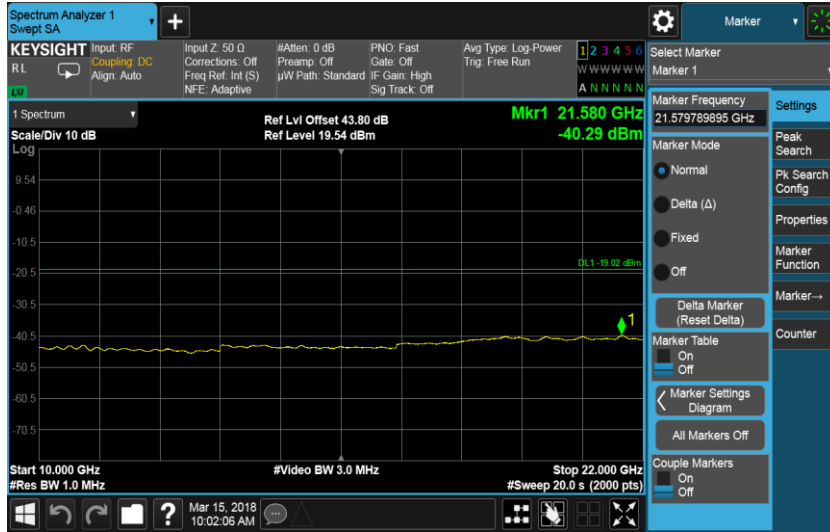

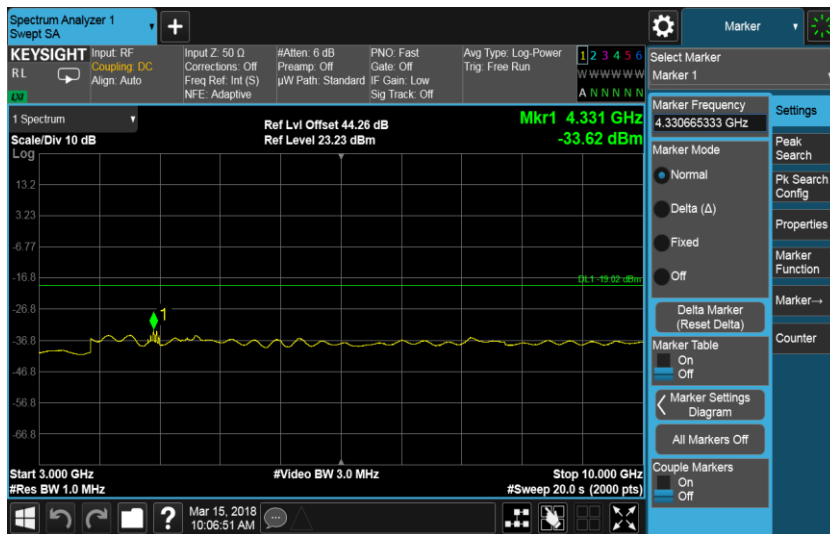



Port C, Channel Position T, LTE 10.0 MHz

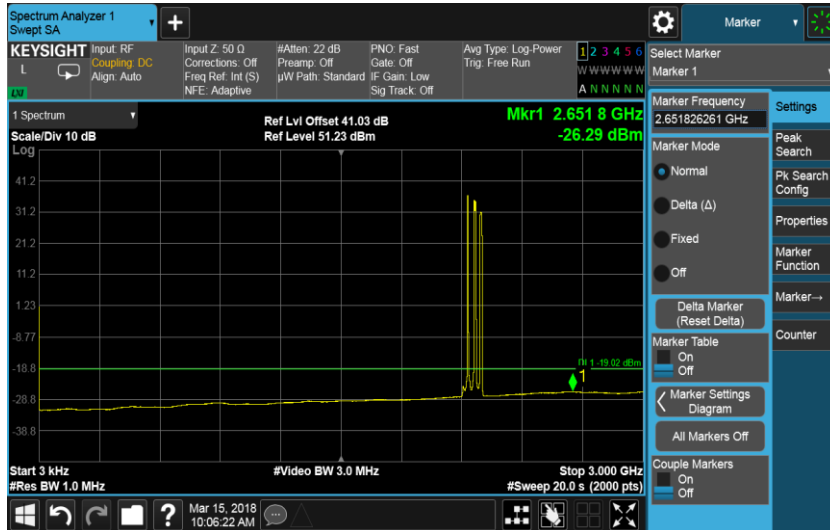


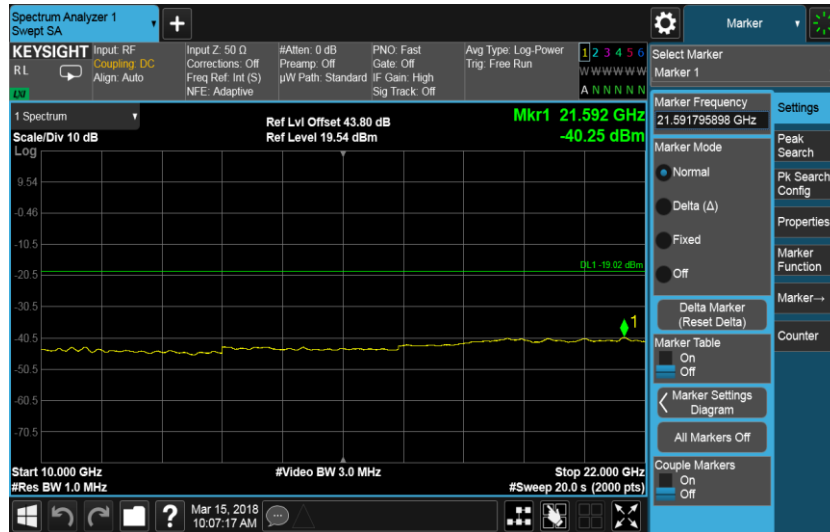


Port C, Channel Position B, LTE 15.0 MHz

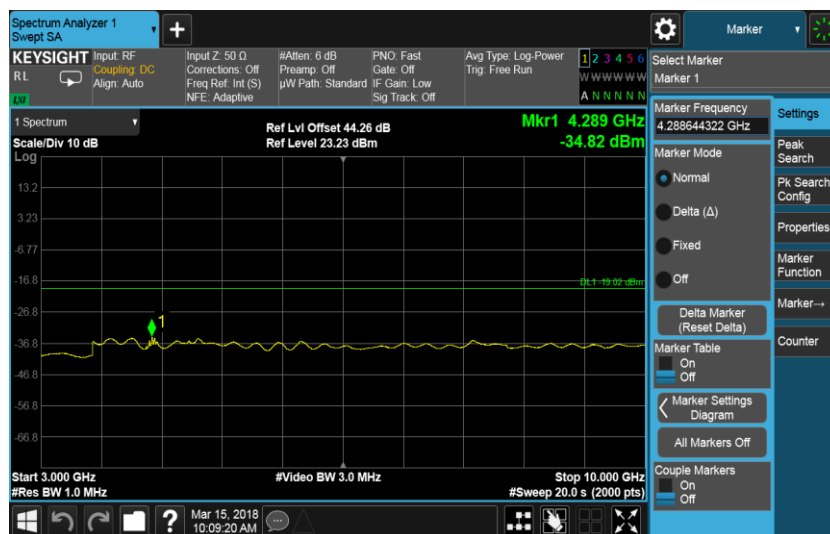


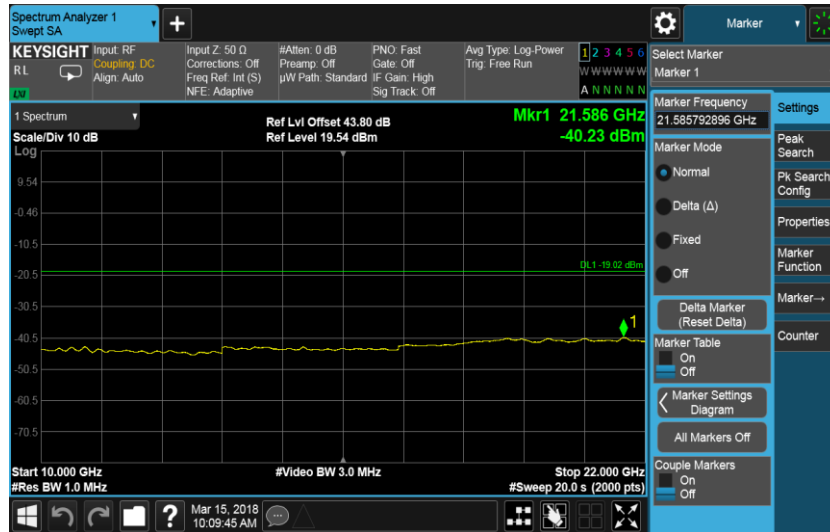



Port C, Channel Position M, LTE 15.0 MHz

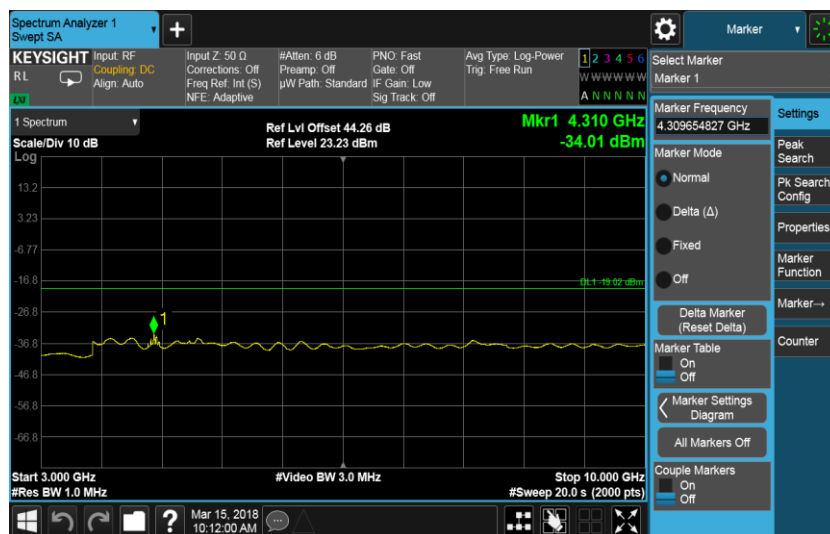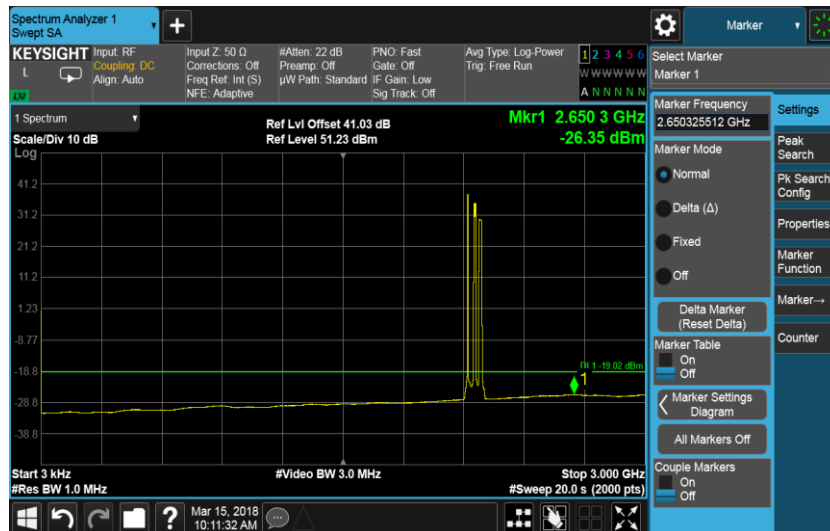






Port C, Channel Position T, LTE 15.0 MHz

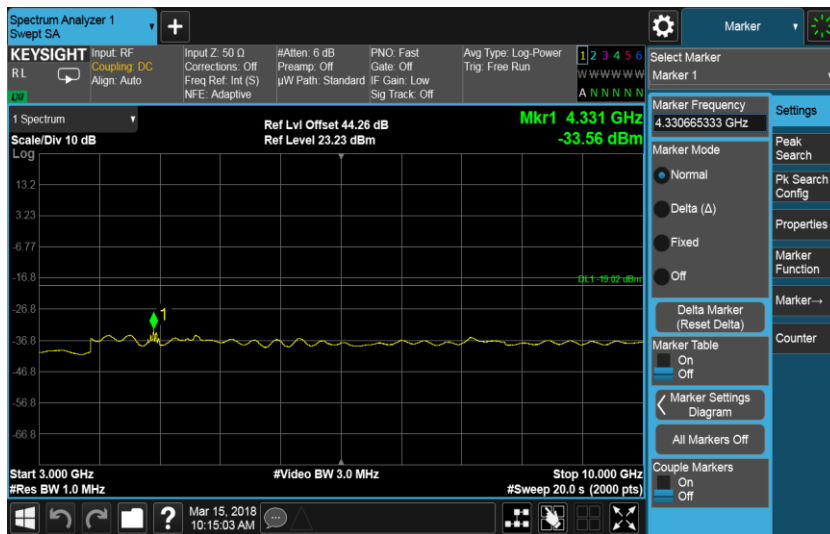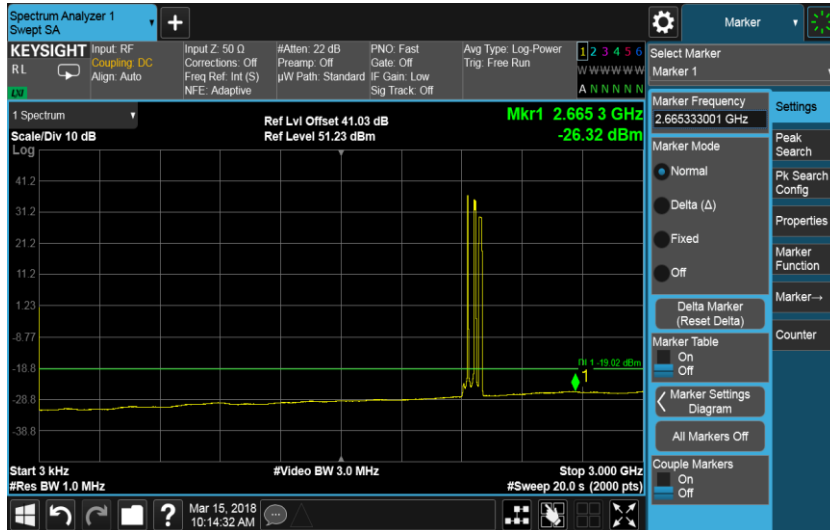

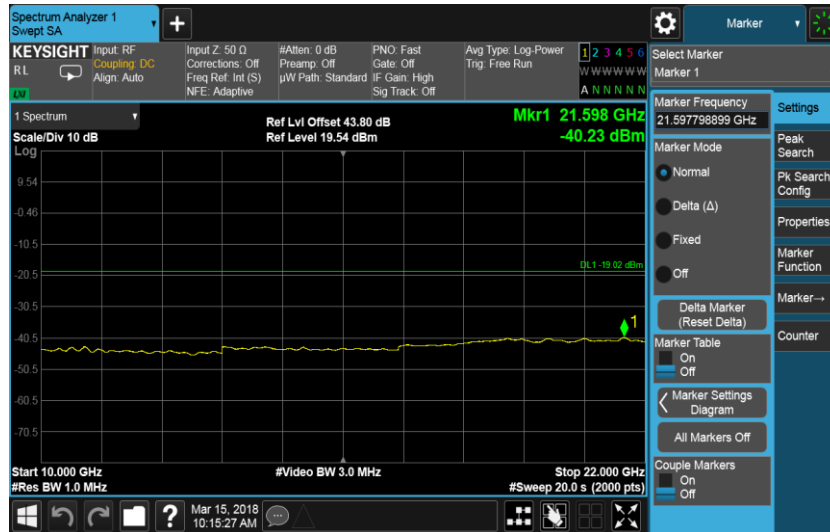



Port C, Channel Position B, LTE 20.0 MHz

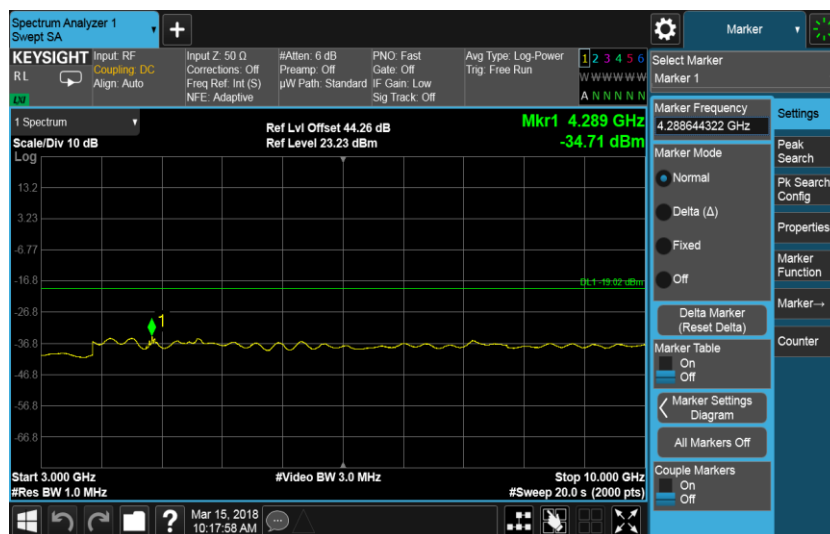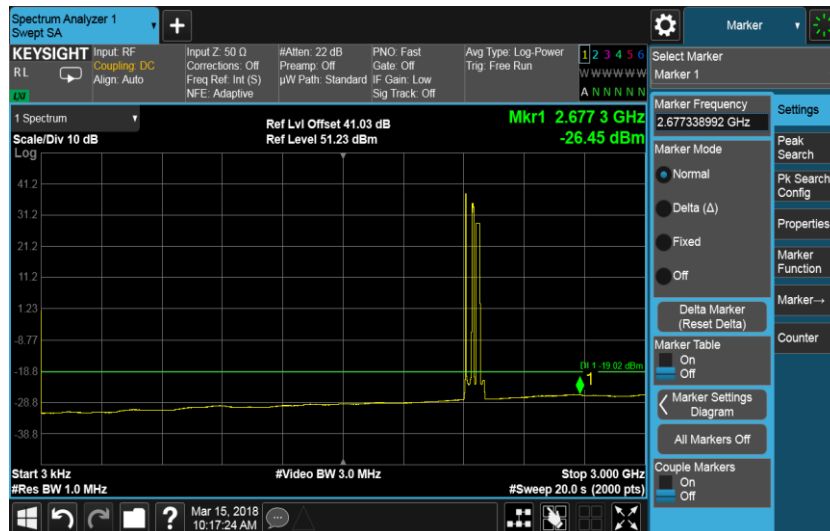

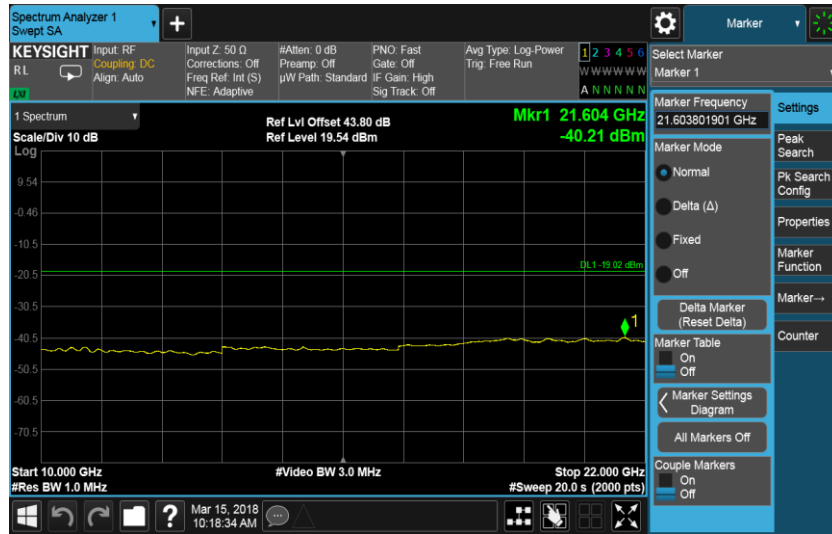



Port C, Channel Position M, LTE 20.0 MHz

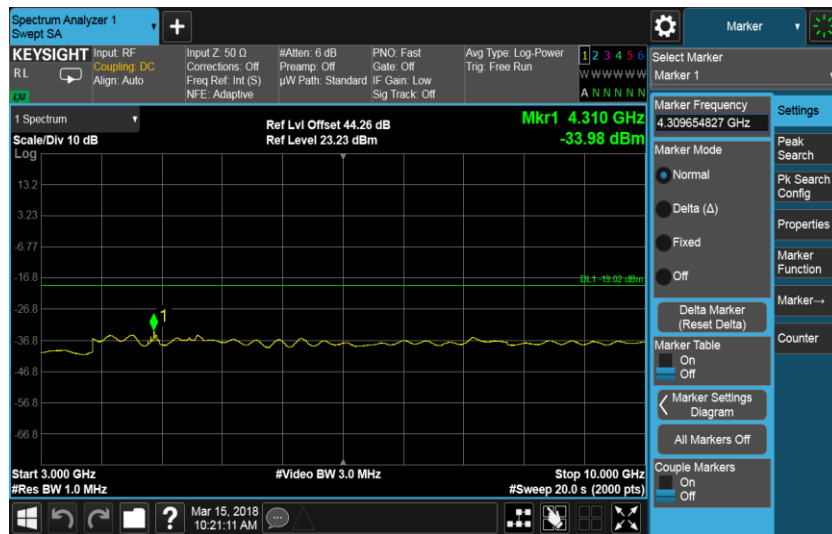

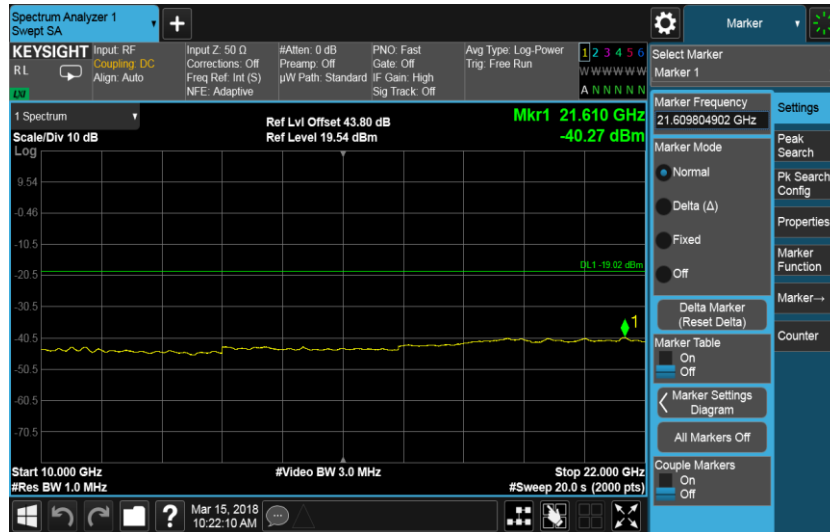

Port C, Channel Position T, LTE 20.0 MHz

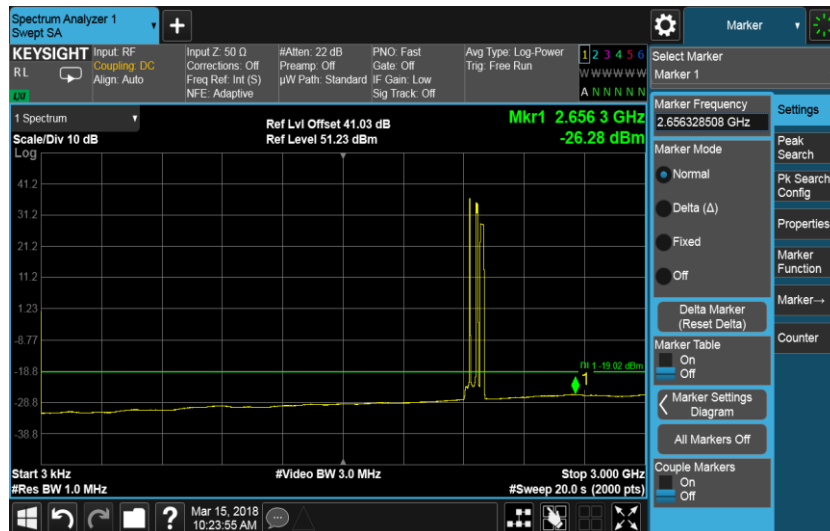

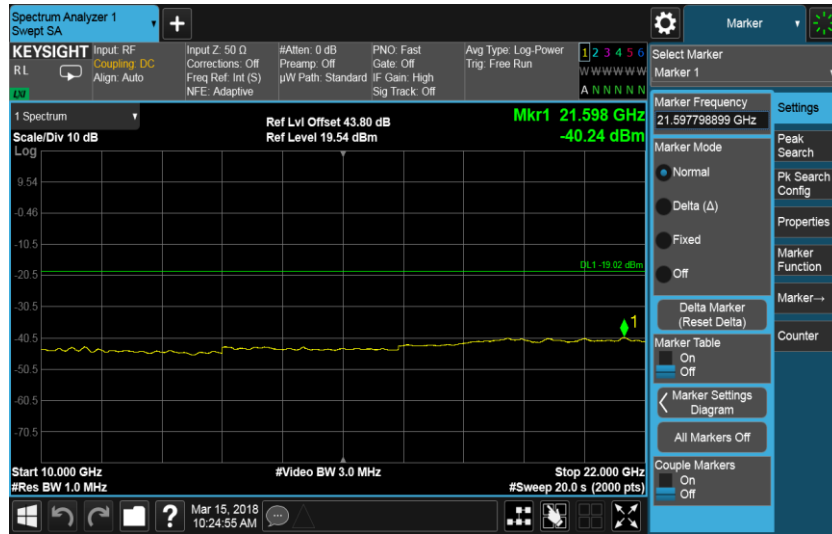

A.5 Radiated Spurious Emission

A.5.1 Reference

FCC CFR 47 Part 2, Clause 2.1046

FCC CFR 47 Part 27, Clause 27.53 (h)

A.5.2 Method of measurement

The measurements procedures in TIA-603-E: 2016 are used. This measurement is carried out in semi-anechoic chamber.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the measurement antenna in both horizontal and vertical polarisations.

Emissions identified within the range 30MHz to 20GHz were then formally measured using a peak detector as the worst case.

The limits for outside a licensee's frequency band(s) of operation the power of the spurious emissions have been calculated, as shown below using the following formula:

$$\text{Field Strength of Carrier} - (43 + 10\text{Log}(P)) \text{ dB}$$

Where:

Field Strength is measured in dB μ V/m

P is measured Transmitter Power in Watts

The EUT was measured with the antenna height varied between 1 and 4 m with the turntable rotated between 0 and 360 degrees. The emission of any outside a licensee's frequencies within 20dB of the limit were measured with the substitution method used according to the standard. The measurements were performed at a 3m distance unless otherwise stated.

A.5.3 Measurement limit

The field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipoles as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where

G_i is the antenna gain of ideal half-wave dipoles,

P_o is the power out of the transceiver in W,

d is the measurement distance in meter.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 16.56)^{0.5} / 3 = 9.51 \text{ V/m} = 139.57 \text{ dB}\mu\text{V/m}$$

As per 24.238 (a) the spurious emission must be attenuated by $43 + 10\log(P_o)$ dB this gives:

$$43 + 10\log(16.56) = 55.19 \text{ dB}$$

Therefore the limit at 3m measurement distance is:

$$139.57 - 55.19 = 84.4 \text{ dB}\mu\text{V/m}$$

These limits have been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

A.5.4 Measurement results



Configuration WCDMA-1C

Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5.0MHz

| Channel Position | Channel Frequencies |
|--------------------|---------------------|
| Channel Position B | 2112.4MHz |
| Channel Position M | 2132.4MHz |
| Channel Position T | 2152.6MHz |

Channel Position B – QPSK

No emissions were detected within 20dB of the limit.

Channel Position M – QPSK

No emissions were detected within 20dB of the limit.

Channel Position T – QPSK

No emissions were detected within 20dB of the limit.

Configuration WCDMA-2C

Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5.0MHz

| Channel Position | Channel Frequencies |
|--------------------|---------------------|
| Channel Position M | 2112.4MHz+2152.6MHz |

Channel Position M –QPSK

No emissions were detected within 20dB of the limit.

Configuration WCDMA-6C

Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5.0MHz

| Channel Position | Channel Frequencies |
|--------------------|---|
| Channel Position M | 2112.4MHz+2117.4MHz+2122.4MHz+2142.6MHz+2147.6MHz+2152.6MHz |

Channel Position M –16QAM

No emissions were detected within 20dB of the limit

Configuration LTE-MIMO-1C

Maximum Output Power 53.8dBm in total, LTE Bandwidth 5.0MHz

| Channel Position | Channel Frequencies |
|--------------------|---------------------|
| Channel Position B | 2112.5MHz |
| Channel Position M | 2155.0MHz |
| Channel Position T | 2197.5MHz |

Channel Position B– QPSK

No emissions were detected within 20dB of the limit.

Channel Position M– QPSK

No emissions were detected within 20dB of the limit.

Channel Position T – QPSK

No emissions were detected within 20dB of the limit.



Configuration LTE-MIMO-2C

Maximum Output Power 53.8dBm in total, LTE Bandwidth5.0MHz

| Channel Position | Channel Frequencies |
|------------------------------------|----------------------|
| Channel Position B _{RFBW} | 2112.5MHz+2177.5 MHz |
| Channel Position M _{RFBW} | 2122.5MHz+2187.5 MHz |
| Channel Position T _{RFBW} | 2132.5MHz+2197.5 MHz |

Channel Position B– 16QAM

No emissions were detected within 20dB of the limit.

Channel Position M–16QAM

No emissions were detected within 20dB of the limit.

Channel Position T –16QAM

No emissions were detected within 20dB of the limit.

Configuration WCDMA+LTE-MIMO-MC-1

Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5.0MHz,LTE Bandwidth 5.0MHz,

| Channel Position | Channel Frequencies |
|--------------------|-------------------------------------|
| Channel Position B | WCDMA (2112.4 MHz) +LTE (2177.5MHz) |
| Channel Position M | WCDMA (2122.4 MHz) +LTE (2187.5MHz) |
| Channel Position T | WCDMA (2132.4 MHz) +LTE (2197.5MHz) |

Channel Position B –WCDMA (16QAM) /LTE (16QAM)

No emissions were detected within 20dB of the limit.

Channel Position M –WCDMA (16QAM) /LTE (16QAM)

No emissions were detected within 20dB of the limit.

Channel Position T –WCDMA (16QAM) /LTE (16QAM)

No emissions were detected within 20dB of the limit.



Configuration WCDMA+LTE-MIMO-MC-3

Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5.0MHz, LTE Bandwidth 5.0MHz

| Channel Position | Channel Frequencies |
|--------------------|---|
| Channel Position B | WCDMA: (2112.4MHz+2117.4MHz+2122.4MHz) + LTE (2167.5MHz+2172.5MHz+2177.5MHz) |
| Channel Position M | WCDMA: (2122.4MHz+2127.4MHz+2132.4MHz) + LTE (2177.5MHz+2182.5MHz+2187.5MHz) |
| Channel Position T | WCDMA: (2132.4MHz+2137.4MHz+2142.4MHz) + LTE (2187.5MHz+2192.5MHz+2197.5MHz) |

Channel Position B –WCDMA (16QAM) /LTE (16QAM)

No emissions were detected within 20dB of the limit.

Channel Position M–WCDMA (16QAM) /LTE (16QAM)

No emissions were detected within 20dB of the limit.

Channel Position T–WCDMA (16QAM) /LTE (16QAM)

No emissions were detected within 20dB of the limit.

Configuration NB-IoT+WCDMA-MIMO-MC-1

Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5MHz, NB-IOT.,

| Channel Position | Channel Frequencies |
|--------------------|------------------------------------|
| Channel Position B | WCDMA (2112.4 MHz) +NB (2179.8MHz) |
| Channel Position M | WCDMA (2122.4 MHz) +NB (2189.8MHz) |
| Channel Position T | WCDMA (2132.4 MHz) +NB (2199.8MHz) |

Channel Position B –WCDMA (16QAM) /NB

No emissions were detected within 20dB of the limit.

Channel Position M –WCDMA (16QAM) /NB

No emissions were detected within 20dB of the limit.

Channel Position T –WCDMA (16QAM) /NB

No emissions were detected within 20dB of the limit.

Configuration NB-IoT+LTE-MIMO-MC-1

Maximum Output Power 53.8dBm in total, LTE Bandwidth 20MHz, NB-IOT.,

| Channel Position | Channel Frequencies |
|--------------------|----------------------------------|
| Channel Position B | LTE (2170.0 MHz) +NB (2110.3MHz) |
| Channel Position M | LTE (2180.0MHz) +NB (2120.2MHz) |



| | |
|-----------------------|----------------------------------|
| Channel Position T | LTE (2190.0 MHz) +NB (2130.2MHz) |
|-----------------------|----------------------------------|

Channel Position B –LTE (16QAM) /NB
No emissions were detected within 20dB of the limit.
Channel Position M –LTE (16QAM) /NB
No emissions were detected within 20dB of the limit.
Channel Position T –LTE (16QAM) /NB
No emissions were detected within 20dB of the limit.

Configuration NB-IoT+WCDMA+LTE-MIMO-MC-1


Maximum Output Power 53.8dBm in total, WCDMA Bandwidth 5MHz, WCDMA Bandwidth 5MHz, NB-IOT.

| Channel Position | Channel Frequencies |
|-----------------------|--|
| Channel Position B | WCDMA (2145.0 MHz) +LTE (2177.5 MHz) +NB (2110.3MHz) |
| Channel Position M | WCDMA (2152.6 MHz) +LTE (2187.5MHz) +NB (2120.2MHz) |
| Channel Position T | WCDMA (2162.6 MHz) +LTE (2197.5 MHz) +NB (2130.2MHz) |

Channel Position B –WCDMA (16QAM) /LTE (16QAM) /NB
No emissions were detected within 20dB of the limit.
Channel Position M –WCDMA (16QAM) /LTE (16QAM) /NB
No emissions were detected within 20dB of the limit.
Channel Position T –WCDMA (16QAM) /LTE (16QAM) /NB
No emissions were detected within 20dB of the limit.


Channel Position T -16QAM-30MHz-1GHz

RSE_Erison_30M-1G_FCC

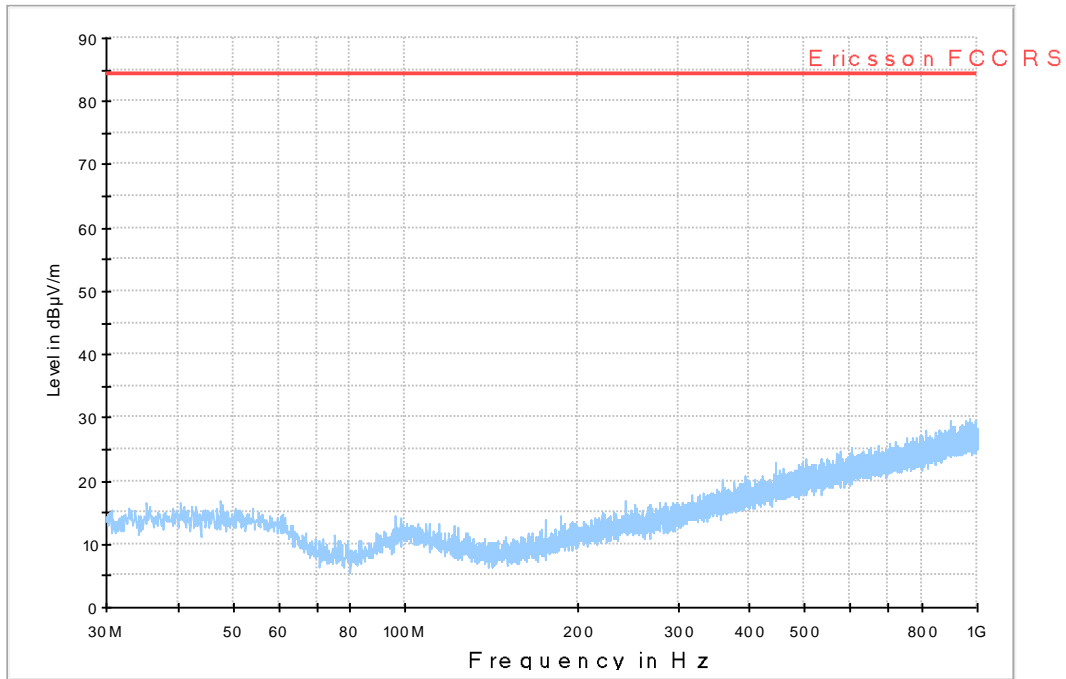


Channel Position T -16QAM-1GHz-18GHz

RSE_Erison_1-18G_FCC

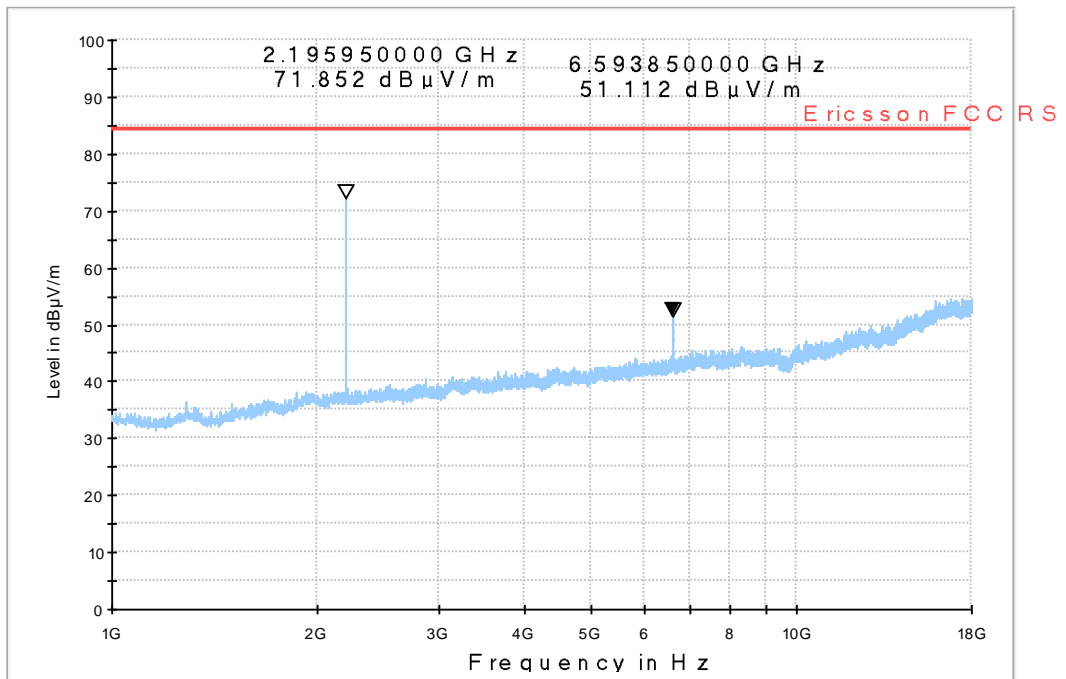

Channel Position T –16QAM-18GHz-20GHz

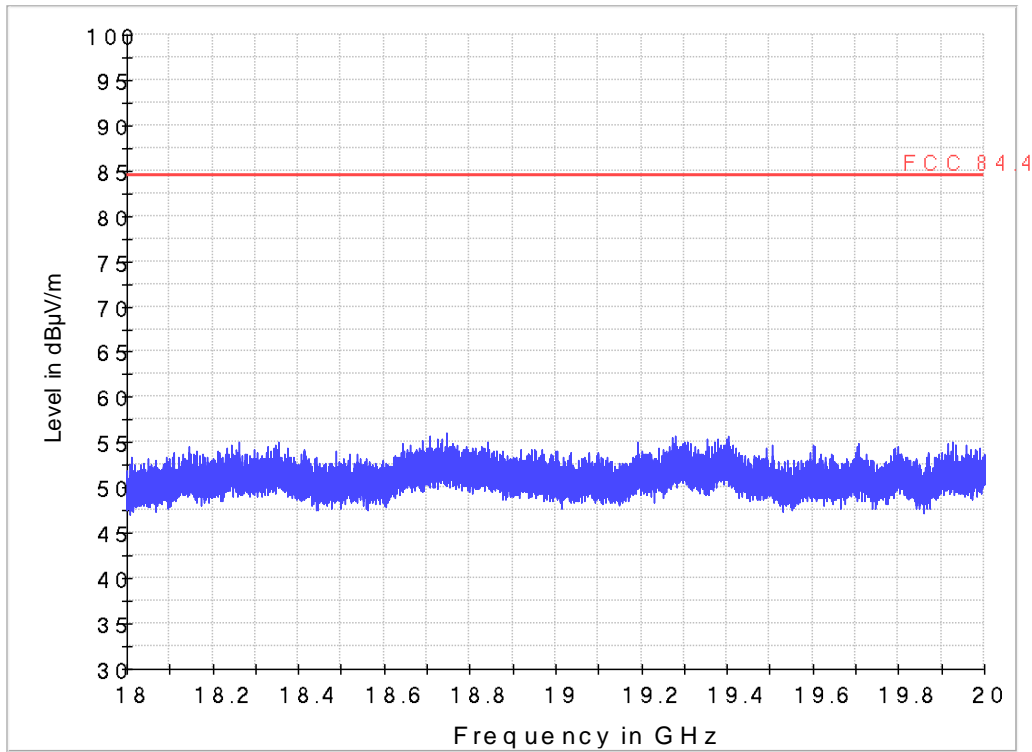

Remarks

The EUT does not exceed -13dBm / 84.4dBµV/m at the measured frequencies.



A.6 Frequency Stability

A.6.1 Reference

FCC CFR 47 Part 27, Clause 27.54

A.6.2 Method of measurement

Temperature Variation

The EUT was tested over the temperature range -30°C to +50°C in 10°C steps with -48 VDC Power Supply. At each temperature step, the Base Station was configured to transmit a [RAT]* at maximum power on the middle channel of the operating band. After achieving thermal balance, the averages of 200 transmission bursts were measured and the result recorded.

Voltage Variation

The EUT was tested at the supplied voltages varied from 85 to 115 percent of the nominal value of -48 VDC. At +20°C, the Base Station was configured to transmit a [RAT]* at maximum power on the bottom, middle and top channel of the operating band. The average of 200 transmission bursts was measured and the result recorded.

[RAT]*:

WCDMA - Test Model 1 Single Carrier with QPSK modulation

LTE (5.0 MHz OBW) - Test Model E-TM1.1 Single Carrier with QPSK modulation

NB-IoT - QPSK modulation

A.6.3 Measurement limit

FCC:

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

A.6.4 Measurement results

Frequency Error – Temperature Variation

Configuration WCDMA-1C

Maximum Output Power 47.78dBm per port, Channel Bandwidth 5MHz

| Supply Voltage DC(V) | Temperature | Frequency Stability (Hz) | | |
|-------------------------|-------------|--------------------------|-----------------------|-----------------------|
| | | Channel position B | Channel position M | Channel position T |
| -48 | -30 | -1.63 | -1.21 | 1.22 |
| | -20 | 1.54 | 1.25 | -1.96 |
| | -10 | -1.17 | -1.22 | 1.27 |
| | 0 | 1.25 | 1.04 | 1.43 |
| | 10 | -1.34 | -1.09 | 1.17 |
| | 20 | 2.09 | 1.64 | 1.27 |
| | 30 | -1.37 | 1.71 | 1.51 |
| | 40 | -1.16 | -1.04 | -1.01 |
| | 50 | -1.23 | 1.39 | 1.20 |

Configuration LTE-MIMO-1C

Maximum Output Power 47.78dBm per port, Channel Bandwidth 5MHz

| Supply Voltage DC(V) | Temperature | Frequency Stability (Hz) | | |
|-------------------------|-------------|--------------------------|-----------------------|-----------------------|
| | | Channel position B | Channel position M | Channel position T |
| -48 | -30 | -1.01 | 1.58 | 1.08 |
| | -20 | 1.16 | 0.87 | -0.89 |
| | -10 | -1.39 | 1.57 | 1.03 |
| | 0 | 1.25 | 0.95 | 1.22 |
| | 10 | -1.03 | 1.13 | 1.69 |
| | 20 | 1.56 | 1.02 | 1.07 |
| | 30 | 1.13 | 0.82 | 1.46 |
| | 40 | 0.89 | -1.07 | 1.63 |
| | 50 | -1.23 | -0.99 | -1.18 |

Configuration NB-IoT-InBand-1C

Maximum Output Power 47.78dBm per port, Channel Bandwidth 5MHz

| Supply Voltage DC(V) | Temperature | Frequency Stability (Hz) | | |
|-------------------------|-------------|--------------------------|-----------------------|-----------------------|
| | | Channel position B | Channel position M | Channel position T |
| -48 | -30 | -6.87 | -6.32 | -5.76 |
| | -20 | -6.73 | -6.36 | -6.23 |
| | -10 | -6.12 | -5.82 | -6.15 |
| | 0 | -5.87 | -6.02 | -5.74 |
| | 10 | -5.93 | -5.34 | -5.41 |
| | 20 | -6.04 | -5.67 | 5.59 |
| | 30 | -6.29 | -5.63 | -7.02 |
| | 40 | -6.27 | -5.76 | -7.08 |
| | 50 | -6.12 | -5.58 | -6.19 |

Frequency Error – Voltage Variation

Configuration WCDMA-1C

Maximum Output Power 47.78dBm per port, Channel Bandwidth 5MHz

| Supply Voltage DC(V) | Temperature(°C) | Frequency Stability (Hz) | | |
|-------------------------|-----------------|--------------------------|-----------------------|-----------------------|
| | | Channel position B | Channel position M | Channel position T |
| -40.8 | 20 | 1.43 | -1.17 | -1.42 |
| -48 | 20 | -2.37 | 2.81 | -1.89 |
| -55.2 | 20 | 1.11 | -1.61 | -1.13 |

Configuration LTE-MIMO-1C

Maximum Output Power 47.78dBm per port, Channel Bandwidth 5MHz

| Supply Voltage DC(V) | Temperature(°C) | Frequency Stability (Hz) | | |
|-------------------------|-----------------|--------------------------|-----------------------|-----------------------|
| | | Channel position B | Channel position M | Channel position T |
| -40.8 | 20 | -1.23 | -0.84 | -1.06 |
| -48 | 20 | 1.18 | 1.05 | 1.57 |
| -55.2 | 20 | 0.54 | 0.94 | 0.97 |



Configuration NB-IoT-InBand-1C

Maximum Output Power 47.78dBm per port, Channel Bandwidth 5MHz

| Supply Voltage DC(V) | Temperature(°C) | Frequency Stability (Hz) | | |
|-------------------------|-----------------|--------------------------|-----------------------|-----------------------|
| | | Channel position B | Channel position M | Channel position T |
| -40.8 | 20 | -5.15 | -4.78 | -4.63 |
| -48 | 20 | -4.85 | -4.98 | -4.53 |
| -55.2 | 20 | -5.29 | 5.11 | -5.34 |

ANNEX B: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2017-08-22 through 2018-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT