

Contact person  
**Tomas Isbring**  
Electronics  
+46 10 516 59 16  
tomas.isbring@sp.se

Date  
2015-10-27

Reference  
5P06893-F27L

Page  
1 (2)

Ericsson AB  
Niklas Warnström  
PDU HW  
Torshamnsgatan 21  
164 83 Stockholm

## Radio measurements on RRUS32 B66A 1700/2100 MHz radio equipment with FCC ID: TA8AKRC161583-1 and IC: 287AB-AS1615831

(8 appendices)

### Test object

Product name: RRUS 32 B66A  
Product number: KRC 161 583/1

### Summary

See appendix 1 for general information and appendix 8 for external photos.

Standard	Compliant	Appendix
<b>FCC CFR 47 part 2 and 27 / IC RSS-139 Issue 3</b>		
2.1046 / RSS-139 6.5 RF power output conducted	Yes	2
2.1049 / RSS-Gen 6.6 Occupied bandwidth	Yes	3
2.1051 / RSS-139 6.6 Band edge	Yes	4
2.1051 / RSS-139 6.6 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-139 6.6 Field strength of spurious radiation	Yes	6
2.1055 / RSS-139 6.4 Frequency stability	Yes	7

### SP Technical Research Institute of Sweden Electronics - EMC

Performed by

Examined by

Jörgen Wassholm

Anders Nordlöf

---

#### SP Technical Research Institute of Sweden

Postal address

SP  
Box 857  
SE-501 15 BORÅS  
Sweden

Office location

Västeråsen  
Brinellgatan 4  
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00  
+46 33 13 55 02  
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

## Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Test setups	Appendix 1
Purpose of test	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
External photos	Appendix 8

## Appendix 1

### Description of the test object

Equipment:	Product name: RRUS 32 B66A Product number: KRC 161 583/1
FCC ID:	TA8AKRC161583-1
IC ID:	287AB-AS1615831
HVIN:	AS1615831
Hardware revision state:	R1A
FVIN:	CXP 901 7316/5 rev. R62AM
Tested configuration:	LTE FDD single RAT
Frequency bands:	TX: 2110 – 2180 MHz RX: 1710 – 1780 MHz
IBW:	70 MHz, Valid for all power classes in both contiguous and non-contiguous operation.
Antenna ports:	4 TX/RX ports
RF configuration:	Single carrier, multi carrier, 4x4 MIMO / Dual sector (2x) 2x2 MIMO
RF power tolerance	+ 0.6 / - 2.0 dB
Nominal output power per antenna port:	Single carrier: 1 x 46 dBm (40W) Multi carrier: 2 x 43 dBm (40W) 3 x 41.25 dBm (40W) 4 x 40 dBm (40W)
Frequency stability tolerance:	±0.05 PPM
Antenna:	No dedicated antenna, handled during licensing
Channel bandwidths:	Single carrier: 5 MHz, 10 MHz, 15 MHz and 20 MHz Multi carrier: 5 MHz, 10 MHz, 15 MHz and 20 MHz
Emission Designators:	5M00F9W, 10M0F9W, 15M0F9W, 20M0F9W
Modulations:	QPSK, 16QAM and 64QAM
Nominal supply voltage:	-48VDC

## Appendix 1

**Operation mode during measurements**

Measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 represent QPSK modulation, test model E-TM3.2 represent 16QAM modulation and test model E-TM3.1 represent 64QAM modulation.

The settings below were deemed representative for all traffic scenarios when settings with different modulations, channel bandwidths, number of carriers and RF configurations has been tested to find the worst case setting. All measurements were performed with the test object configured for maximum transmit power. The settings below were used for all measurements if not otherwise noted.

MIMO mode, E-TM1.1

**Conducted measurements**

The test object was supplied with -48 VDC by an external power supply if not noted otherwise. Additional connections are documented in the setup drawings below. Complete measurements were made on the RF port representing worst case for each measurement.

**Radiated measurements**

The test object was supplied with -48 VDC by an external power supply. Additional connections are documented in the test setup drawings.

## Appendix 1

### **Purpose of test**

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 part 2 and 27, IC RSS-139 and IC RSS-Gen.

### **References**

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2009  
ANSI/TIA/EIA-603-C-2004  
3GPP TS 36.141, version 11.11.0  
CFR 47 part 2, October 1<sup>st</sup>, 2014  
CFR 47 part 27, October 1<sup>st</sup>, 2014  
RSS-Gen Issue 4  
RSS-139 Issue 3  
KDB 662911 Multiple transmitter output v02r01  
KDB 971168 D01 Power Meas Licens, v02r02

## Appendix 1

### **Uncertainties**

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor  $k=2$  (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

### **Reservation**

The test results in this report apply only to the particular test object as declared in the report.

### **Delivery of test object**

The test object was delivered 2015-10-07.

### **Manufacturer's representative**

Lars Wallin, Ericsson AB.

### **Test engineers**

Tomas Lennhager, Patric Augustsson, Tomas Isbring, Senad Pasalic and Jörgen Wassholm, SP.

### **Test participant**

None.

## Appendix 1

**Measurement equipment**

	Calibration Due	SP number
Test site Tesla	2017-01	503 881
R&S ESU 40	2016-07	901 385
R&S FSW 43	2016-07	902 073
R&S ESI 26	2016-07	503 292
R&S FSQ 40	2016-07	504 143
Control computer with R&S software EMC32 version 9.15.0	-	503 899
High pass filter	2016-07	504 200
RF attenuator	2016-10	902 282
Directional coupler	2016-10	901 496
Chase Bilog Antenna CBL 6111A	2017-10	503 182
EMCO Horn Antenna 3115	2016-09	502 175
µComp Nordic, Low Noise Amplifier	2016-01	901 545
Flann STD Gain Horn Antenna 20240-20	-	503 674
Flann STD Gain Horn Antenna 22240-20	-	503 674
Miteq, Low Noise Amplifier	2016-08	503 278
Schwarzbeck preamplifier BBV 9742	2015-12	504 085
Temperature and humidity meter, Testo 635	2016-04	504 203
Temperature Chamber	-	503 360
Multimeter Fluke 87	2016-08	502 190

Appendix 1

**Test frequencies used for conducted and radiated measurements**

TX test frequencies, single carrier:

EARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
66461	2112.5	B	TX bottom frequency in 5 MHz BW configuration
66486	2115.0	B	TX bottom frequency in 10 MHz BW configuration
66511	2117.5	B	TX bottom frequency in 15 MHz BW configuration
66536	2120.0	B	TX bottom frequency in 20 MHz BW configuration
66786	2145.0	M	TX band mid frequency all BW configurations
67111	2177.5	T	TX top frequency in 5 MHz BW configuration
67086	2175.0	T	TX top frequency in 10 MHz BW configuration
67061	2172.5	T	TX top frequency in 15 MHz BW configuration
67036	2170.0	T	TX top frequency in 20 MHz BW configuration

TX test frequencies, multi carrier:


66461	2112.5	B2-5	2 carrier TX band bottom constellation
66511	2117.5		5 MHz BW configuration
66761	2142.5	M2-5	2 carrier TX band mid constellation
66811	2147.5		5 MHz BW configuration
67061	2172.5	T2-5	2 carrier TX band top constellation
67111	2177.5		5 MHz BW configuration
66461	2112.5	C2-5	2 carrier TX band constellation
67111	2177.5		5 MHz BW configuration
66461	2112.5	2C	2 carrier TX band constellation
66661	2132.5		5 MHz BW configuration
66461	2112.5	IM3-5	3 carrier TX band constellation
67011	2167.5		5 MHz BW configuration
67111	2177.5		
66461	2112.5	C3-5	3 carrier TX band constellation
66786	2145.0		5 MHz BW configuration
67111	2177.5		
66536	2120.0	C3-20	3 carrier TX band constellation
66786	2145.0		20 MHz BW configuration
67036	2170.0		
66461	2112.5	C4-5	4 carrier TX band constellation
66511	2117.5		5 MHz BW configuration
67061	2172.5		
67111	2177.5		
66461	2112.5	B4-5	4 carrier TX band bottom constellation
66511	2117.5		5 MHz BW configuration
66561	2122.5		
66611	2127.5		
66486	2115.0	C4-10	4 carrier TX band constellation
66686	2135.0		10 MHz BW configuration
66886	2155.0		
67086	2175.0		

All RX frequencies were configured 400 MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.



Appendix 1

Test setup conducted measurements

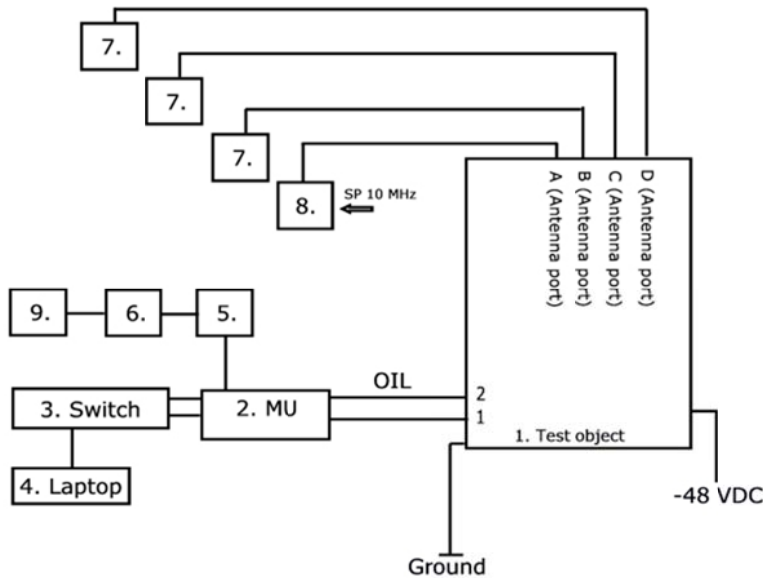

Test object:

1.	RRUS 32 B66A, KRC 161 583/1, rev. R1A, s/n: D16Q869113 With Radio Software: CXP 901 7316/5, Rev. R62AM FCC ID TA8AKRC161583-1 and IC 287AB-AS1615831
----	--

Associated equipment:


2.	RBS 6601 Main Unit: SUP 6601, 1/BFL 901 009/4, rev. R2A, s/n: BR83064952 DUS 41 01, KDU 137 624/1, rev. R5A/A, s/n: D16F285423 SW: CXP 102 051/23, Rev. R17ACS
5.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K474887
9.	GPS Active Antenna, KRE 101 2082/1

Functional test equipment:

3.	Switch Netgear GS108E
4.	Laptop HP EliteBook 8540w, BAMS – 1001052061
6.	1x4 GPS SPLITTER, KRY 101 1946/1, s/n: FG1017916
7.	Attenuator/ terminator 50 ohm
8.	SP Test Instrumentation according to measurement equipment list The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Appendix 1

**Test setup radiated measurements**

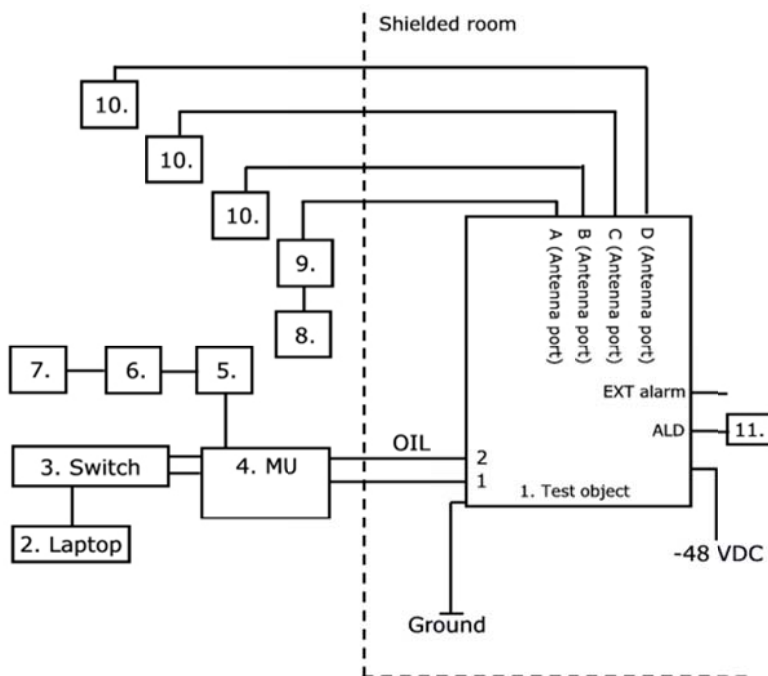

**Test object:**

1.	RRUS32 B66A, KRC 161 583/1, rev. R1A, S/N: D16Q917977 With radio software CXP 901 7316/5, rev. R62AM FCC ID TA8AKRC161583-1 and IC 287AB-AS1615831
----	--

**Associated equipment:**

4.	RBS 6601 Main Unit: SUP 6601, 1/BFL 901 009/4, rev. R2A, s/n: BR83066291 DUS 41 01, KDU 137 624/1, rev. R5A/A, s/n: A401981873 SW: CXP 102 051/23, Rev. R17ACS
5.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8KH75515
7.	GPS Active Antenna, KRE 101 2082/1
11.	Remote Control Unit, s/n: CS61547222

**Functional test equipment:**

2.	Laptop HP EliteBook 8560w, BAMS – 1001236856
3.	Switch Neatgear ProSafe FS726T
6.	1x4 GPS SPLITTER, KRY 101 1946/1
8.	R&S ESI 26 SP 503 292, for supervision only
9.	Attenuator
10.	Attenuator/ terminator 50 ohm

## Appendix 1

<b>Interfaces:</b>	<b>Type of port:</b>
Power: -48 VDC	DC Power
RF port A, 7/16 connector, combined TX/RX	Antenna
RF port B, 7/16 connector, combined TX/RX	Antenna
RF port C, 7/16 connector, combined TX/RX	Antenna
RF port D, 7/16 connector, combined TX/RX	Antenna
1, optical interface	Signal
2, optical interface	Signal
Remote Control Unit	Signal
EXT. alarm	Signal
Ground wire	Ground

Appendix 2

**RF power output measurements according to CFR 47 §27.50/ IC RSS-139 6.5**

Date	Temperature	Humidity
2015-10-08	23 °C ± 3 °C	20 % ± 5 %
2015-10-09	23 °C ± 3 °C	23 % ± 5 %

**Test set-up and procedure**

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 80 MHz was used.

Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	902 282
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

**Measurement uncertainty:** 1.1 dB

Appendix 2

**Results**

MIMO mode, single carrier

Rated output power level at each RF port 1x 46 dBm.

	Output power CCDF [RMS dBm/ PAR dB]				
BW and symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power <sup>1)</sup>
5 MHz, B	45.9/ 7.4	45.9/ 7.4	45.9/ 7.3	46.1/ 7.3	51.97
5 MHz, M	45.9/ 7.3	45.8/ 7.4	45.8/ 7.3	46.0/ 7.3	51.90
5 MHz, T	45.4/ 7.4	45.4/ 7.4	45.3/ 7.4	45.4/ 7.4	51.39
10 MHz, B	45.9/ 7.5	45.9/ 7.5	45.9/ 7.5	46.0/ 7.5	51.95
15 MHz, B	45.7/ 7.8	45.8/ 7.8	45.9/ 7.6	45.9/ 7.8	51.85
20 MHz, B	45.8/ 8.0	45.8/ 8.0	45.8/ 8.0	46.0/ 8.0	51.87

<sup>1)</sup>: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

MIMO mode, multi carrier

Rated output power level at RF connector 2x 43 dBm.

	Output power CCDF [RMS dBm/ PAR dB]				
BW and symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power <sup>1)</sup>
B2 5	45.8/ 7.6	45.9/ 7.6	45.8/ 7.7	45.9/ 7.4	51.87
M2 5	45.8/ 7.4	45.9/ 7.4	45.8/ 7.4	45.9/ 7.4	51.87
T2 5	45.6/ 7.6	45.6/ 7.6	45.7/ 7.6	45.7/ 7.6	51.67
C2-5	44.8/ 7.7	44.8/ 7.7	44.7/ 7.7	44.8/ 7.7	50.80

<sup>1)</sup>: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

Rated output power level at RF connector 3x 41.25 dBm.

	Output power CCDF [RMS dBm/ PAR dB]				
BW and symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power <sup>1)</sup>
IM3-5	44.9/ 8.3	44.8/ 8.2	44.7/ 8.2	44.9/ 8.2	50.85
C3-20	45.3/ 8.2	45.3/ 8.2	45.2/ 8.2	45.6/ 7.8	51.37

<sup>1)</sup>: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

Appendix 2

Rated output power level at RF connector 4x 40 dBm.

BW and symbolic name	Output power CCDF [RMS dBm/ PAR dB]				
	Port RF A	Port RF B	Port RF C	Port RF D	Total power <sup>1)</sup>
C4-5	44.8/ 8.0	44.9/ 7.9	44.8/ 7.9	44.9/ 7.9	50.87

<sup>1)</sup>: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Rated output power level at RF connector 1x 46 dBm.

BW and symbolic name	Output power per 1 MHz [RMS dBm]	
	Port RF D	Total power <sup>1)</sup>
5 MHz, B	38.2	44.2
10 MHz, B	35.6	41.6
15 MHz ,B	35.3	41.3
20 MHz, B	33.9	39.9

<sup>1)</sup>: Measured according to FCC KDB662911 D01 Multiple Transmitter Output v02r01. Method E), 2), c). "Measure and add 10 log(NAnt)".



Appendix 2

**Limits**

§27.50 (d)

The power of each base station transmitting in the 2110-2180 MHz band and located in any county with population density of 100 or fewer persons per square mile is limited to an EIRP of 3280 W/MHz, when transmitting with an emission bandwidth greater than 1 MHz.

The power of each base station transmitting in the 2110-2180 MHz band and situated in any geographic location other than that described above is limited to an EIRP of 1640 W/MHz, when transmitting with an emission bandwidth greater than 1 MHz.

A licensee operating a base station in the 2110-2180 MHz band utilizing a power greater than 1640 watts/MHz EIRP must coordinate such operations in advance with all parties addressed in the rules.

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

RSS-139 6.5:

There is no power limit specified for base station equipment in the RSS-139.

EIRP compliance is addressed at the time of licensing, as required by the responsible IC Bureau. Licensee's are required to take into account the antenna gain to get the maximum usable power settings to prevent the radiated output power to exceed the ERP/EIRP limits specified in SRSP-513

When the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

Complies?	Yes
-----------	-----

Appendix 3

**Occupied bandwidth measurements according to 47 CFR 2.1049 / RSS-Gen 6.6**

Date 2015-10-15	Temperature 23 °C ± 3 °C	Humidity 21 % ± 5 %
--------------------	-----------------------------	------------------------

**Test set-up and procedure**

The measurements were made per definition in FCC: KDB: 971168 D01 Power Meas Licens, v02r02 and IC: RSS-Gen section 6.6. The output was connected to a signal analyzer with the Peak detector activated in max hold.

Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	902 282
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB




Appendix 3

**Results**

Diagram	BW configuration	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1	5 MHz	B	RF A	4.495
2	5 MHz	M	RF A	4.495
3	5 MHz	M	RF B	4.495
4	5 MHz	M	RF C	4.495
5	5 MHz	M	RF D	4.480
6	5 MHz	T	RF A	4.495
7	10 MHz	M	RF A	8.961
8	15 MHz	M	RF A	13.486
9	20 MHz	M	RF A	17.862


Appendix 3

Diagram 1:

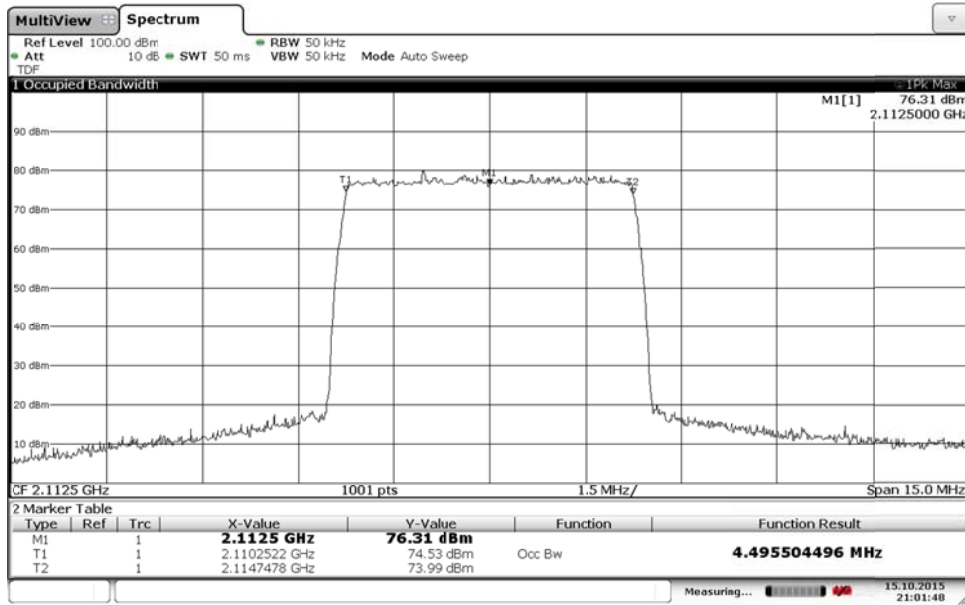

Date: 15.OCT.2015 21:01:48

Diagram 2:

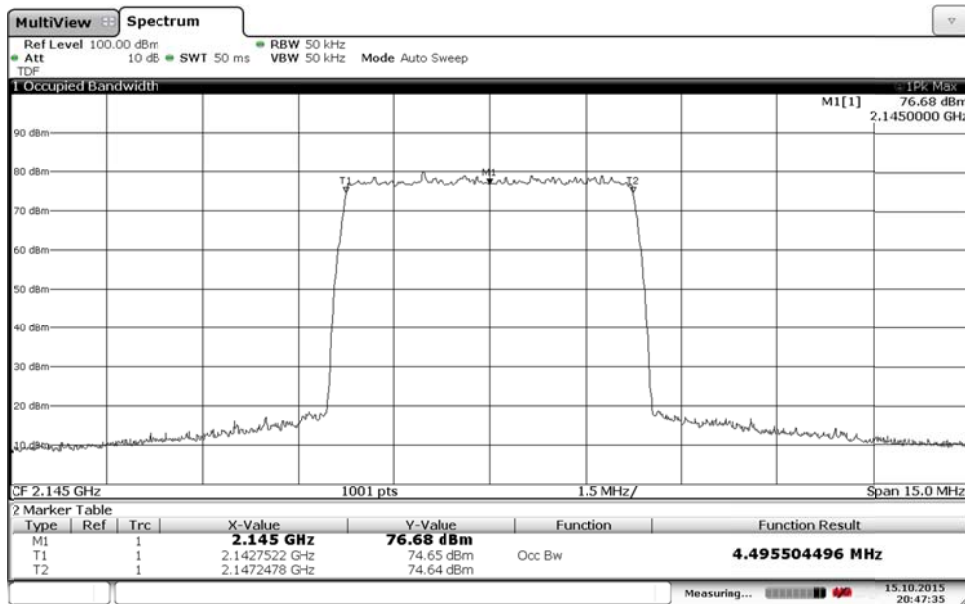

Date: 15.OCT.2015 20:47:35

Appendix 3

Diagram 3:



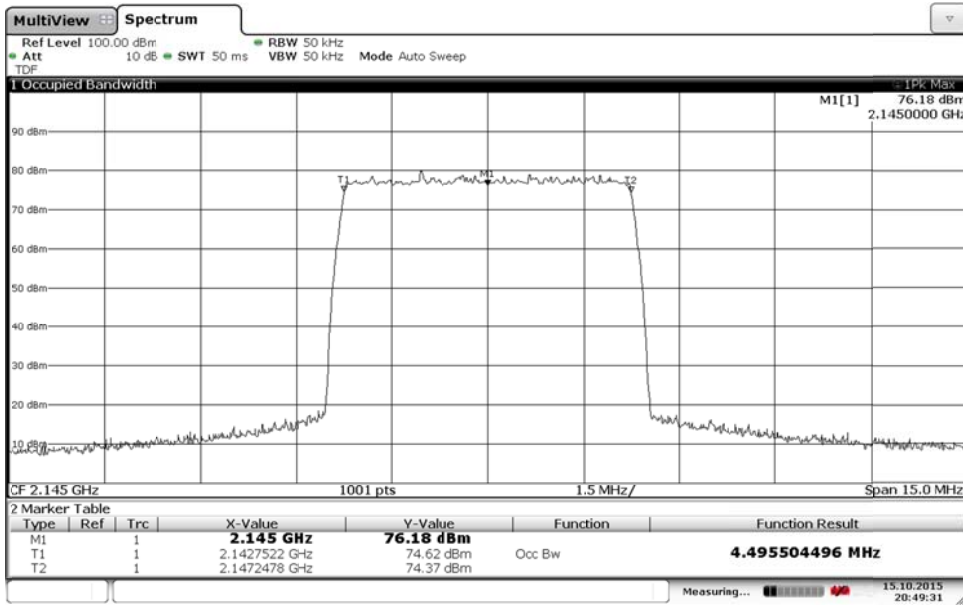


Diagram 4:

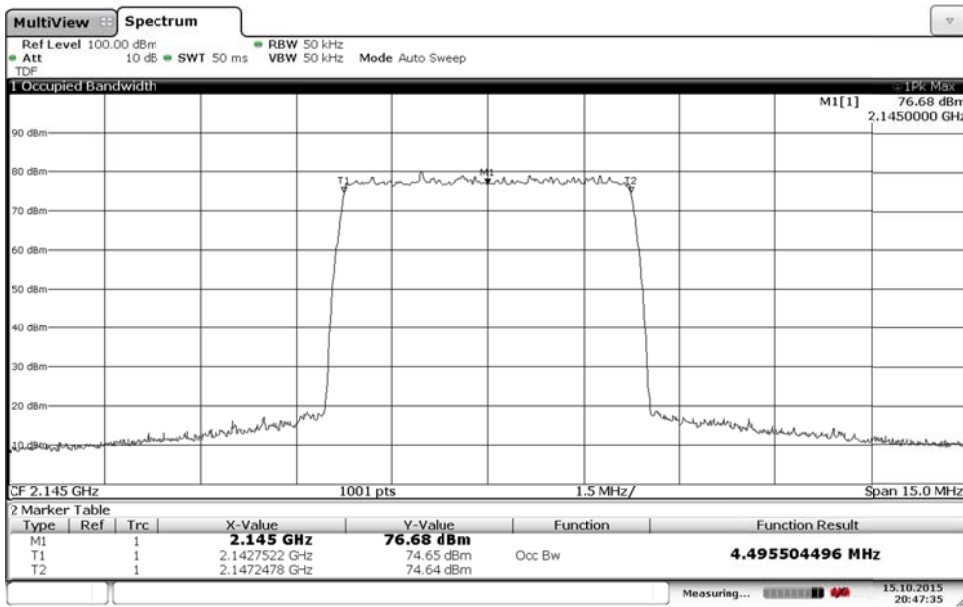


Appendix 3

Diagram 5:

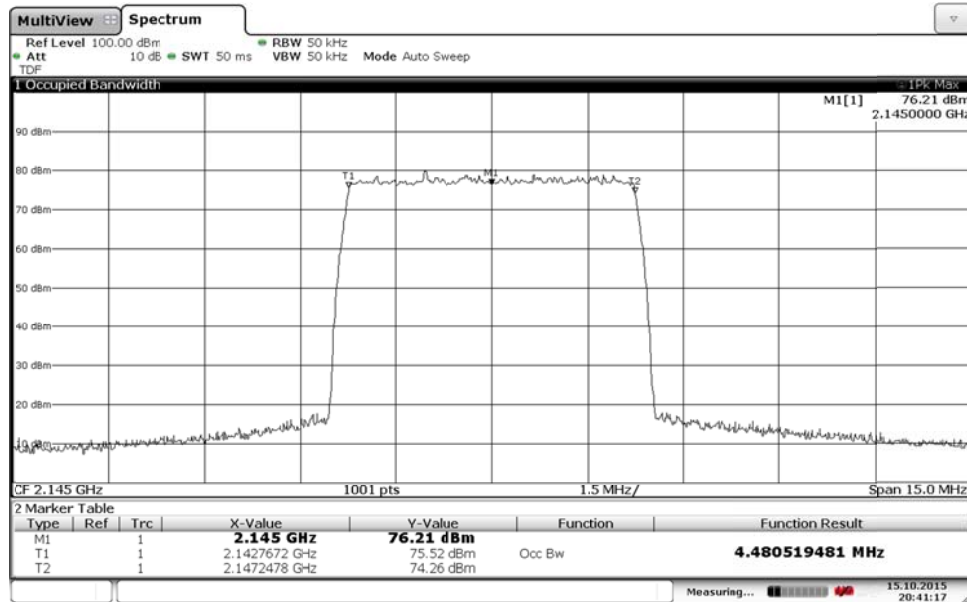

Date: 15.OCT.2015 20:41:17


Diagram 6:

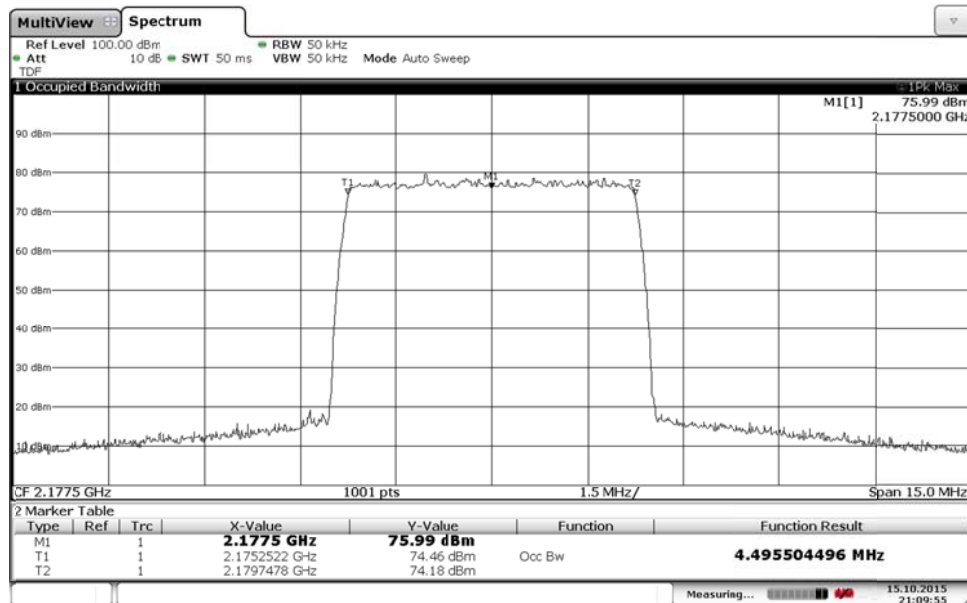

Date: 15.OCT.2015 21:09:55


Appendix 3

Diagram 7:

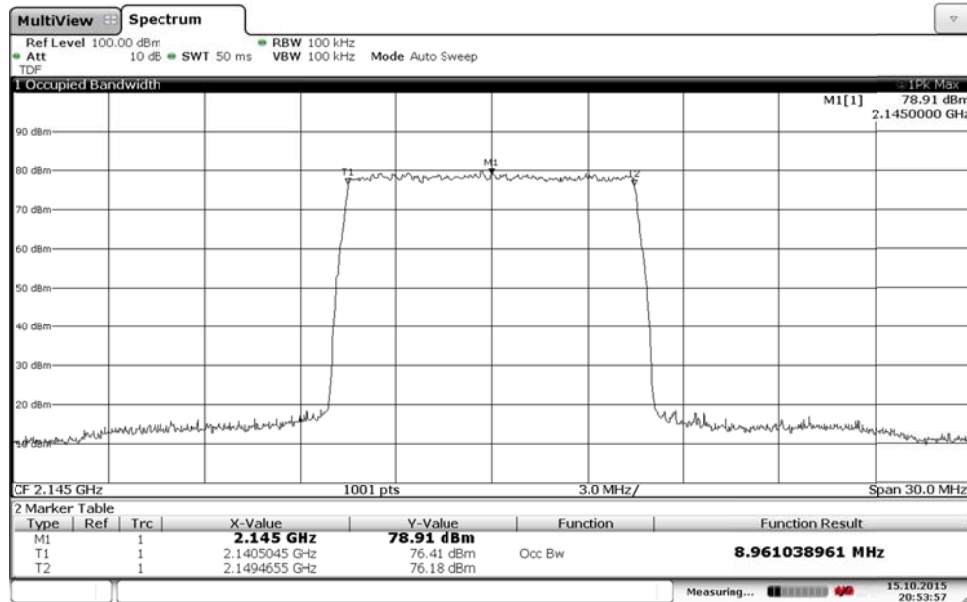

Date: 15.OCT.2015 20:53:56


Diagram 8:

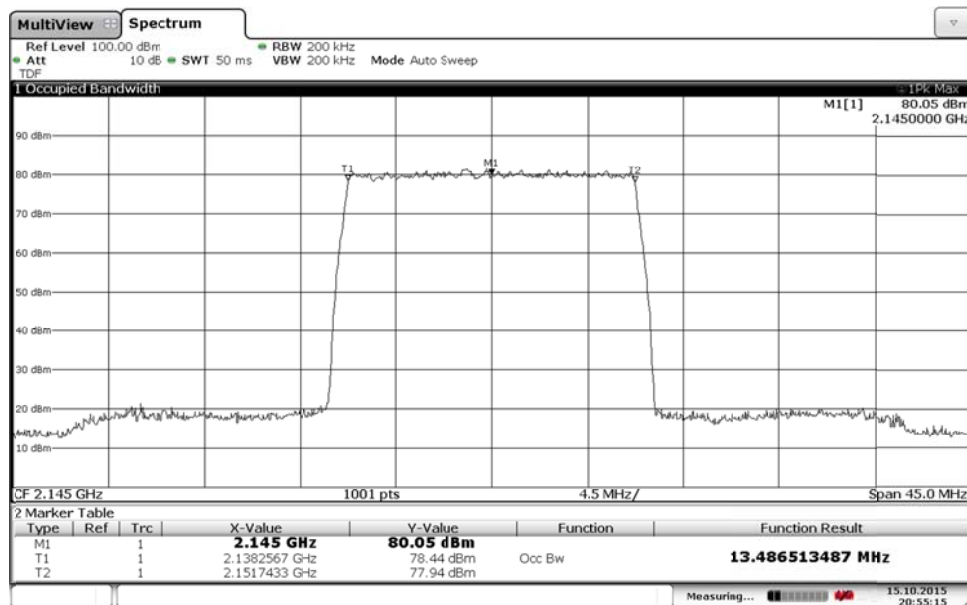

Date: 15.OCT.2015 20:55:14

Appendix 3

Diagram 9:

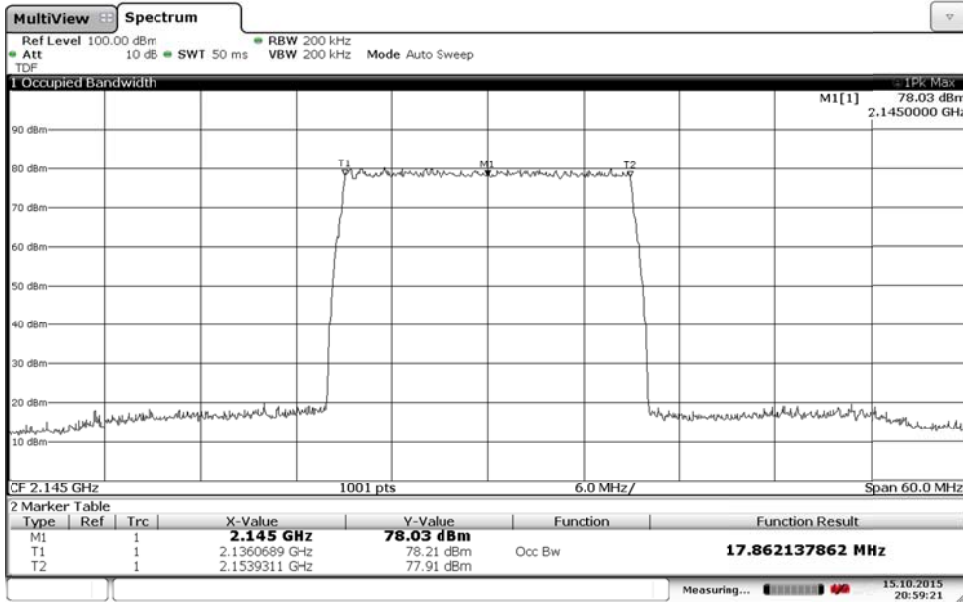

Date: 15.OCT.2015 20:59:21

## Appendix 4

### Band edge measurements according to CFR 47 §27.53(h)/ RSS-139 6.6

Date	Temperature	Humidity
2015-10-09	23 °C ± 3 °C	23 % ± 5 %
2015-10-10	23 °C ± 3 °C	23 % ± 5 %
2015-10-12	22 °C ± 3 °C	23 % ± 5 %

### Test set-up and procedure

The measurements were made per definition in §27.53(h) and IC RSS-139 6.6. The test object was connected to a spectrum analyser with the RMS detector activated.

The specified measurement bandwidth for out of band emission measurement is 1 MHz. However, In the 1 MHz band immediately outside and adjacent to the band edges, the unwanted emission power may be measured with a resolution bandwidth of at least 1% of the emission bandwidth. A narrower resolution bandwidth is allowed to be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the emission bandwidth, as applicable. Where a smaller RBW was used the limit in the plot is adjusted by  $10 \log (RBW_{used}/RBW_{specified})$  [dB].

A resolution bandwidth of 200 kHz was used 1 MHz to 6 MHz away from the band edges, to compensate for the reduced measurement bandwidth the limit was adjusted by 7 dB to -20 dBm ( $10 \log (200 \text{ kHz}/ 1 \text{ MHz})$ ).

Before comparing the results to the limit, 6 dB [ $10 \log (4)$ ] should be added according to method 2 “measure and add  $10 \log(N_{ANT})$ ” of FCC KDB662911 D01 Multiple Transmitter Output v02r01.

Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	902 282
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 4

**Results**

MIMO mode, single carrier

Diagram	BW configuration	EBW (MHz) [-26 dB point]	Symbolic name	Tested Port
1 a-c	5 MHz	-	B	RF D
2 a-c	10 MHz	-	B	RF D
3 a-c	15 MHz	-	B	RF D
4 a-c	20 MHz	-	B	RF D
5 a-c	5 MHz	-	T	RF D
6 a-c	10 MHz	-	T	RF D
7 a-c	15 MHz	-	T	RF D
8 a-c	20 MHz	-	T	RF D
-	5 MHz	4.81	M	RF D
-	10 MHz	9.65	M	RF D
-	15 MHz	14.48	M	RF D
-	20 MHz	19.30	M	RF D

MIMO mode, multi carrier

Diagram	BW configuration	Symbolic name	Tested Port
9 a-c	5 MHz	B2 5	RF D
10 a-c	5 MHz	T2 5	RF D

**Limits**

CFR 47 §27.53(h) and RSS-139 6.6

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----



Appendix 4

Diagram 1 a:



Date: 9.OCT.2015 15:26:15

Diagram 1 b:



Date: 9.OCT.2015 15:26:59

Appendix 4


Diagram 1c:



Date: 9.OCT.2015 15:27:37

Appendix 4

Diagram 2 a:

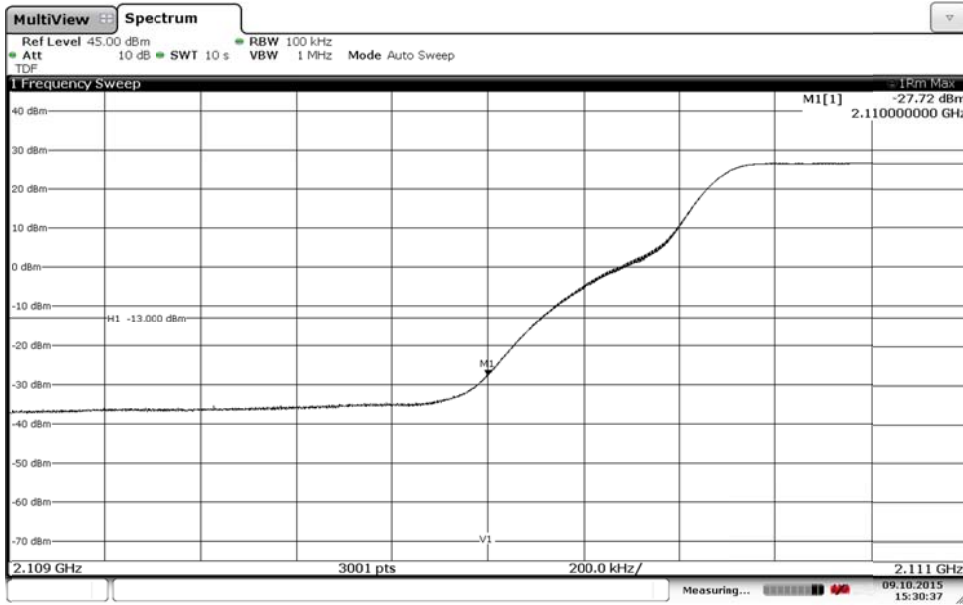

Date: 9.OCT.2015 15:30:37

Diagram 2 b:



Date: 9.OCT.2015 15:31:31

Appendix 4

Diagram 2 c:



Date: 9.OCT.2015 15:32:40

Appendix 4

Diagram 3 a:



Date: 9.OCT.2015 15:23:52

Diagram 3 b:



Date: 9.OCT.2015 15:22:40

Appendix 4


Diagram 3 c:



Date: 9.OCT.2015 15:21:35

Appendix 4

Diagram 4 a:

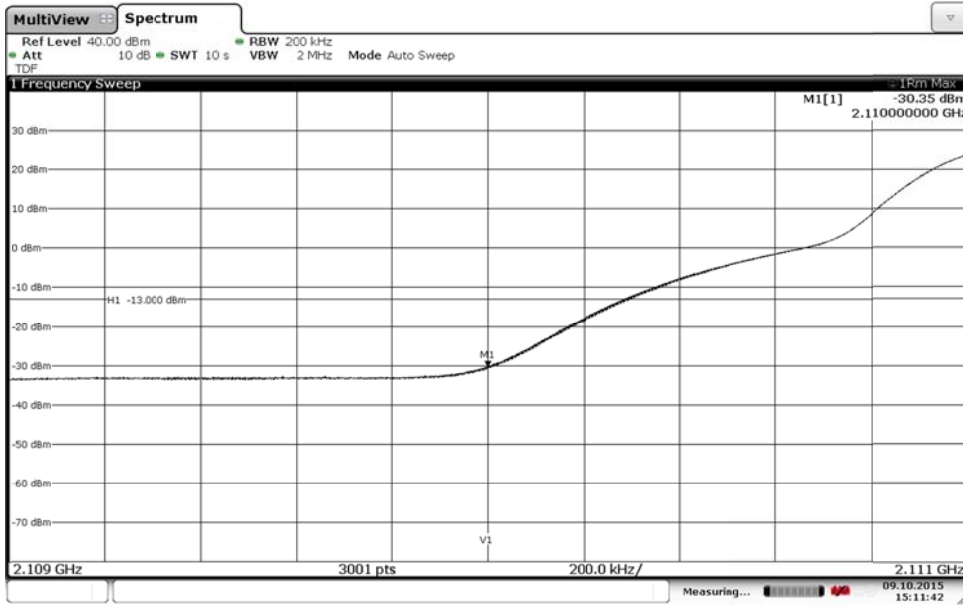

Date: 9.OCT.2015 15:11:42

Diagram 4 b:



Date: 9.OCT.2015 15:12:46

Appendix 4

Diagram 4 c:



Date: 9.OCT.2015 15:13:29



Appendix 4

Diagram 5 a:


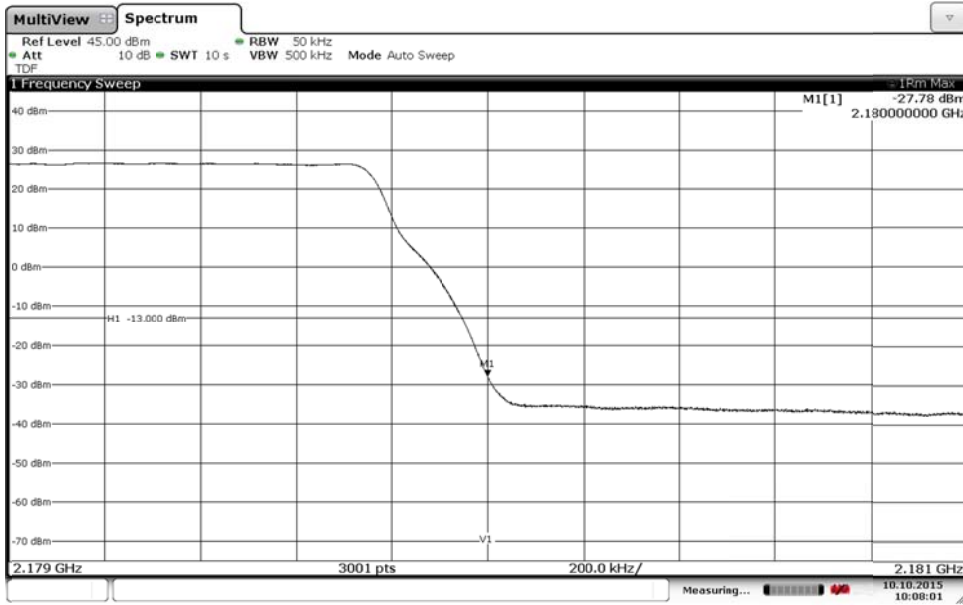


Diagram 5 b:



Appendix 4

Diagram 5 c:

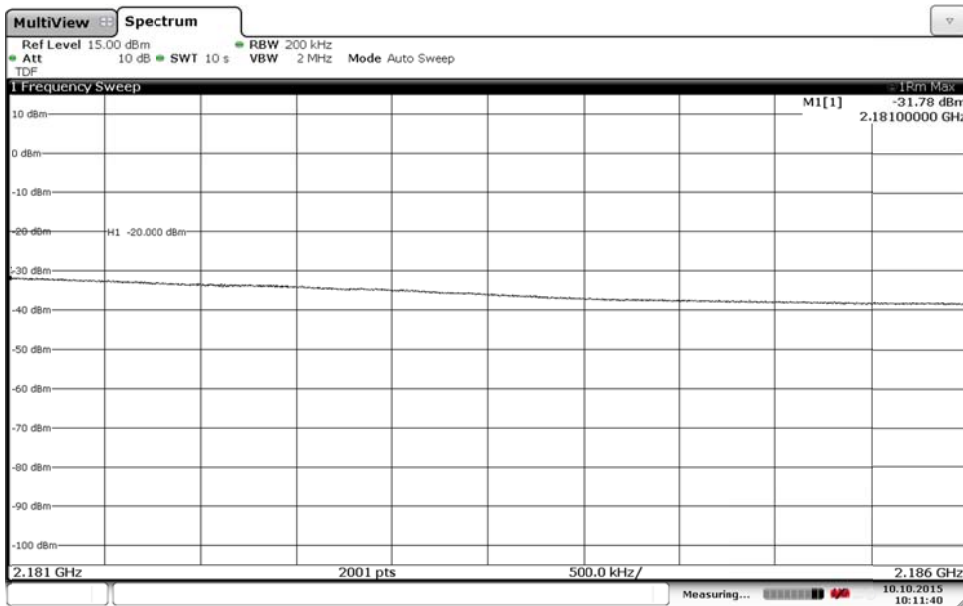

Date: 10.OCT.2015 10:24:55

Appendix 4

Diagram 6 a:


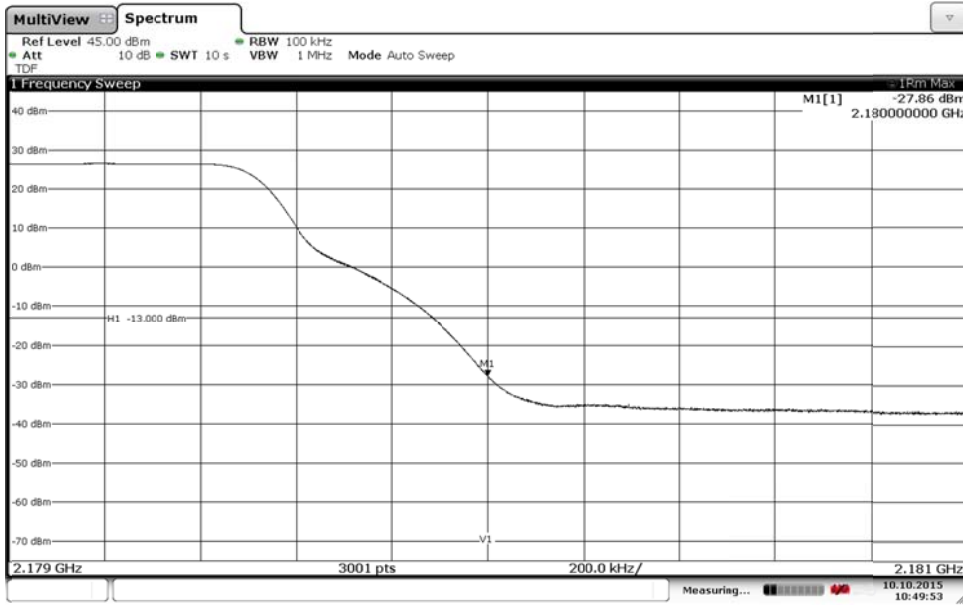


Diagram 6 b:



Appendix 4

Diagram 6 c:

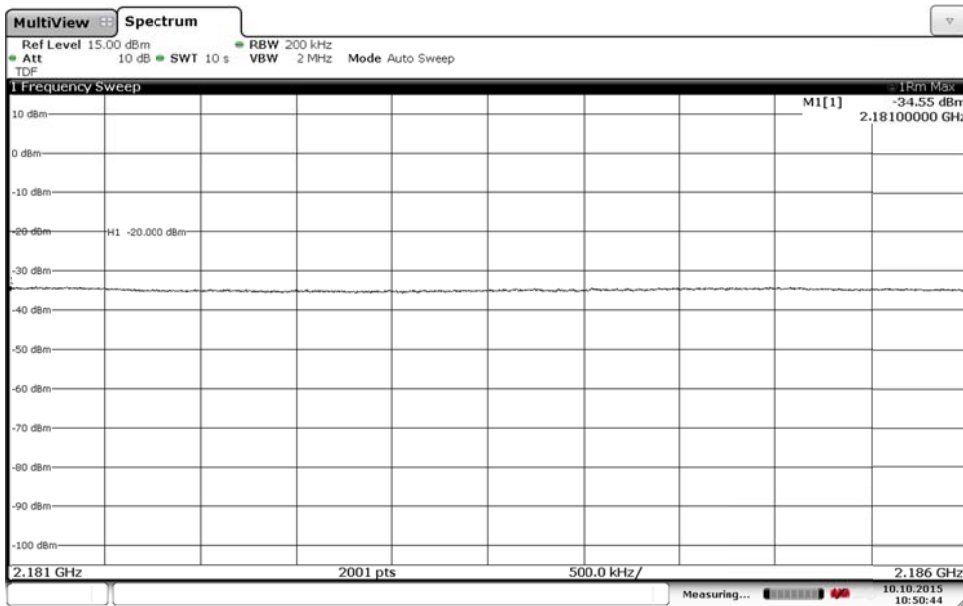


Date: 10.OCT.2015 10:53:25

Appendix 4

Diagram 7 a:




Diagram 7 b:

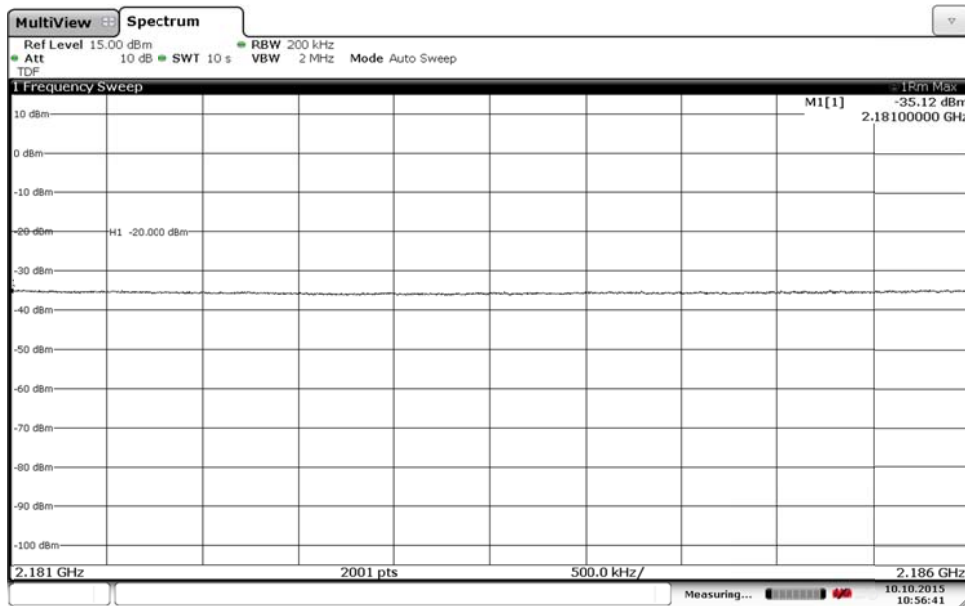

Appendix 4

Diagram 7 c:

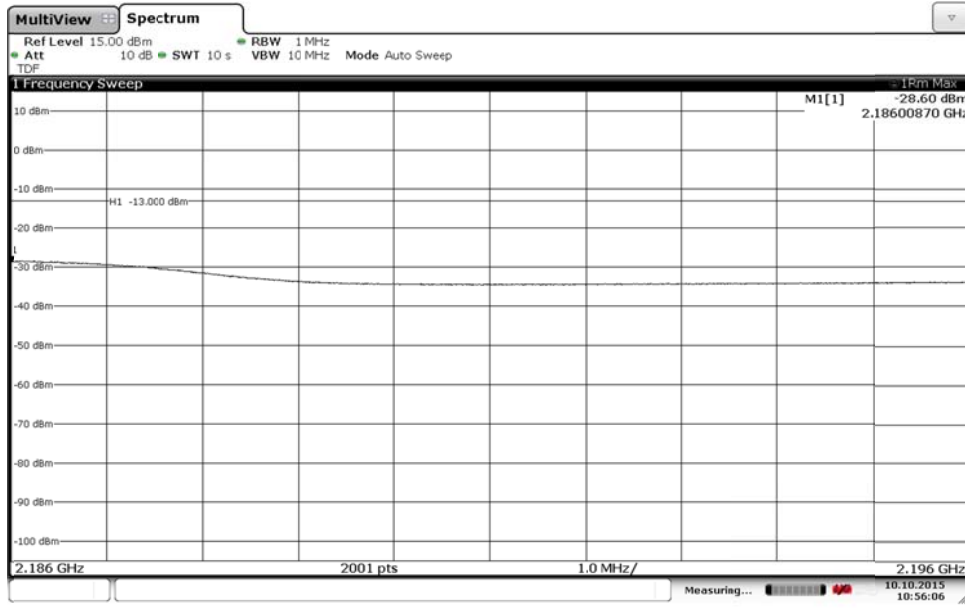


Appendix 4

Diagram 8 a:



Diagram 8 b:

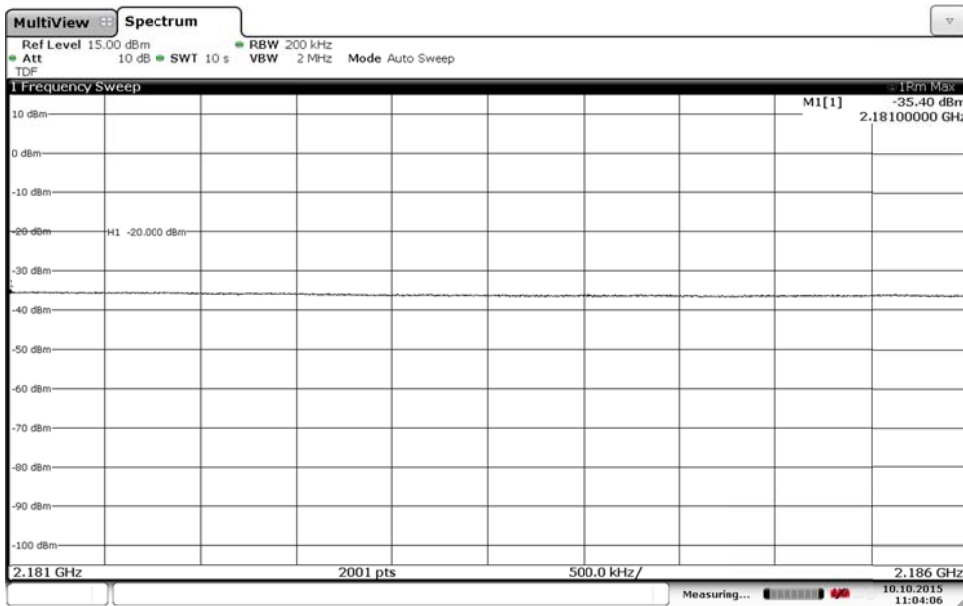

Appendix 4

Diagram 8 c:




Date: 10.OCT.2015 11:05:13



Appendix 4

Diagram 9 a:

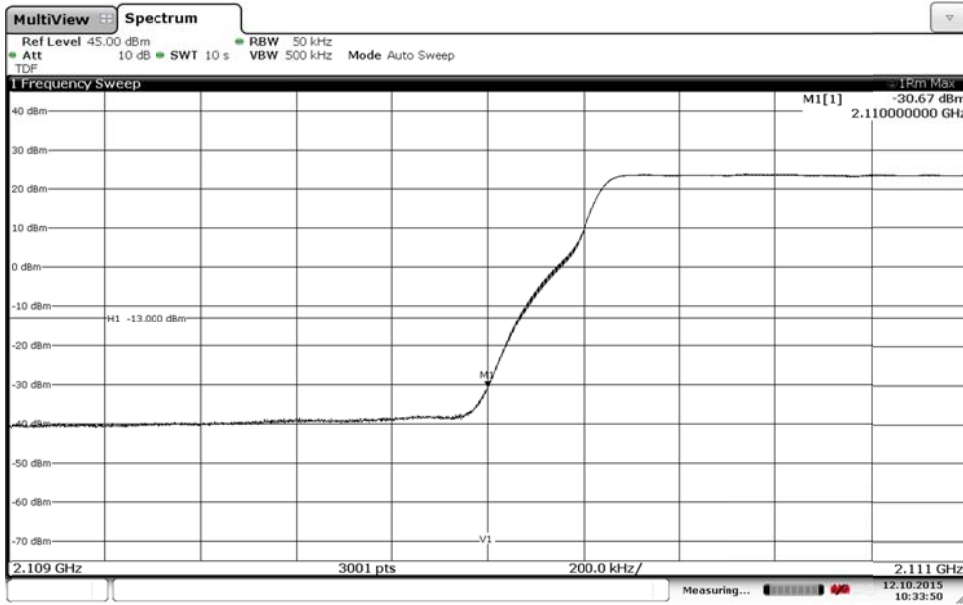

Date: 12.OCT.2015 10:33:50

Diagram 9 b:



Date: 12.OCT.2015 10:34:57

Appendix 4


Diagram 9 c:



Date: 12.OCT.2015 10:35:41


Appendix 4

Diagram 10 a:

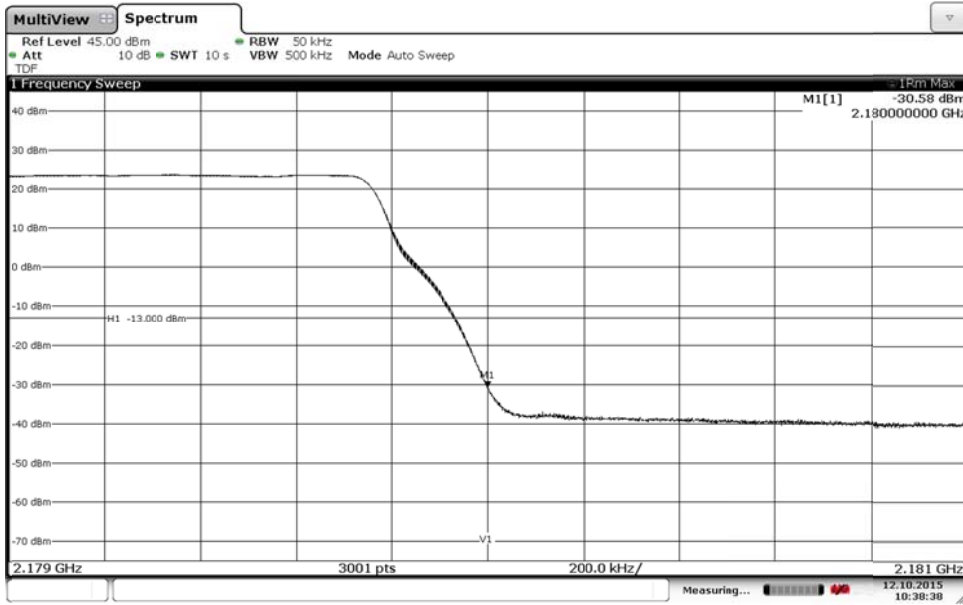

Date: 12.OCT.2015 10:38:39

Diagram 10 b:

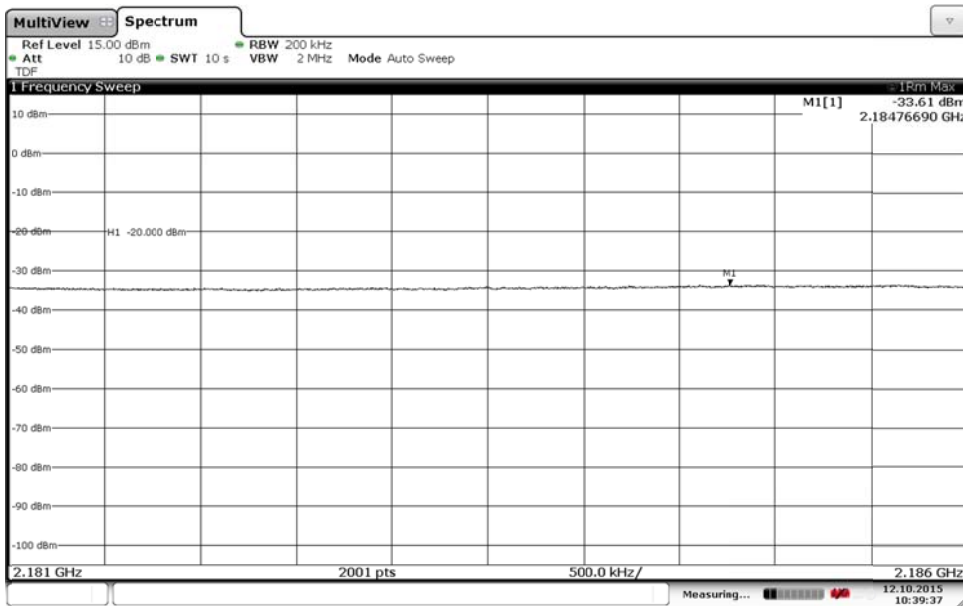

Date: 12.OCT.2015 10:39:37

Appendix 4

Diagram 10 c:



Appendix 5

**Conducted spurious emission measurements according to CFR 47 §27.53(h) / IC RSS-139 6.6**

Date	Temperature	Humidity
2015-10-10	23 °C ± 3 °C	23 % ± 5 %
2015-10-12	22 °C ± 3 °C	23 % ± 5 %
2015-10-13	23 °C ± 3 °C	22 % ± 5 %

**Test set-up and procedure**

The measurements were made per definition in §27.53(h) and RSS RSS-139 6.6. The output was connected to a spectrum analyser with a RBW setting of 1 MHz and RMS detector activated.

Before comparing the results to the limit, 6 dB [10 log (4)] should be added according to method E), 3), (iii) “measure and add 10 log(N<sub>ANT</sub>)” of FCC KDB662911 D01 Multiple Transmitter Output v02r01.

Measurement equipment	SP number
R&S FSW 43	902 073
RF attenuator	902 282
Directional coupler	901 496
HP filter	901 502
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 5

**Results**

MIMO mode, single carrier

Diagram	BW configuration [MHz]	Symbolic name	Tested Port
1 a-d	5 MHz	M	RF A
2 a-d	5 MHz	M	RF B
3 a-d	5 MHz	M	RF C
4 a-d	5 MHz	M	RF D
5 a-d	10 MHz	M	RF C
6 a-d	15 MHz	M	RF C
7 a-d	20 MHz	M	RF C
8 a-d	5 MHz	B	RF C
9 a-d	5 MHz	T	RF C

MIMO mode, multi carrier

Diagram	BW configuration [MHz]	Symbolic name	Tested Port
10 a-e	5 MHz	IM3-5	RF C
11 a-e	10 MHz	C4-10	RF C
12 a-e	5 MHz	C2-5	RF C

## Appendix 5

**Remark**

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

The highest fundamental frequency is 2.180 GHz. The measurements were made up to 22 GHz (10x2.180 GHz = 21.80 GHz).

**Limits**


§27.53(h) and RSS-139 6.6

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----


Appendix 5

Diagram 1 a:

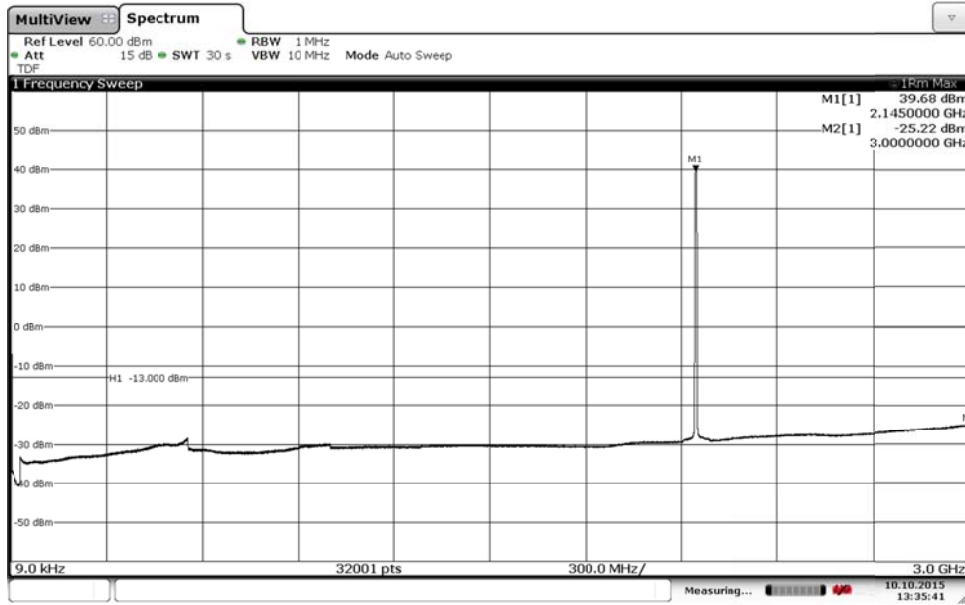

Date: 10.OCT.2015 13:35:41

Diagram 1 b:

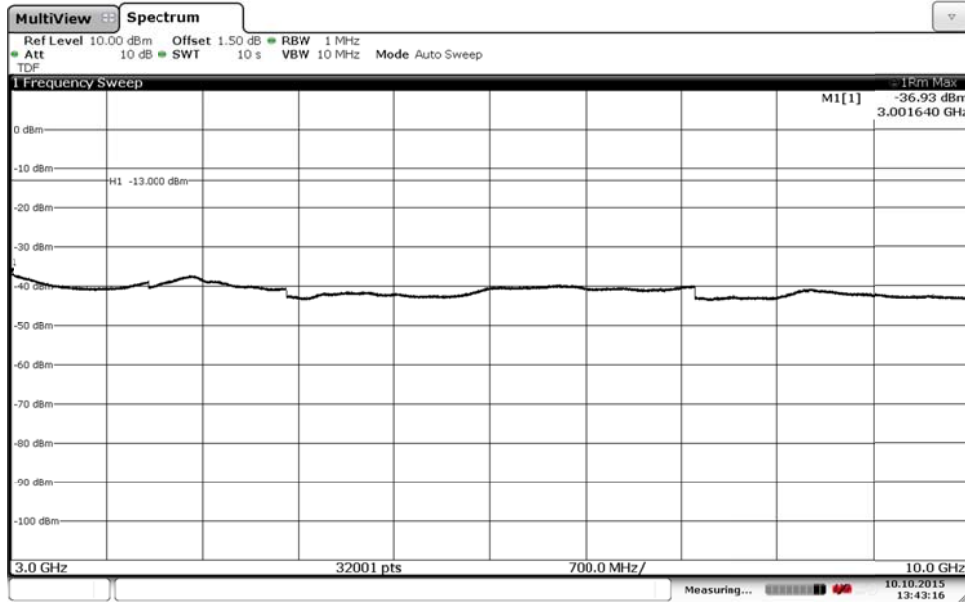

Date: 10.OCT.2015 13:43:16



Appendix 5

Diagram 1 c:



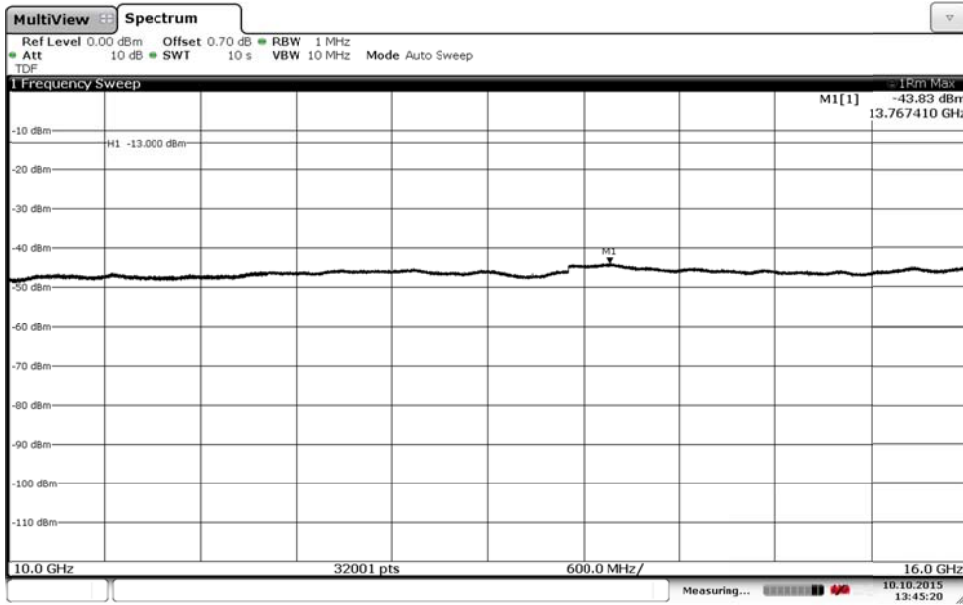


Diagram 1 d:

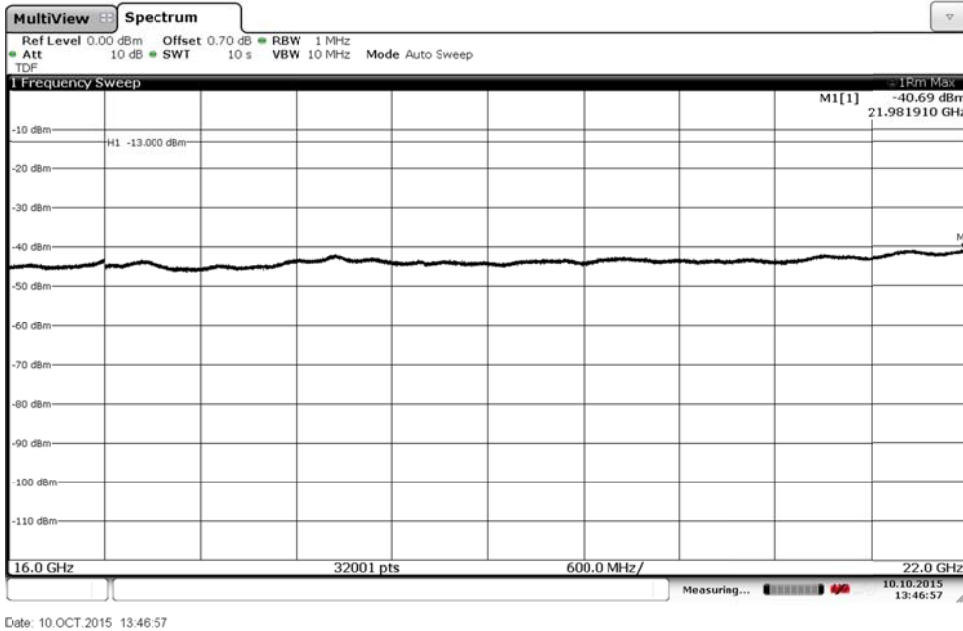


Appendix 5

Diagram 2 a:

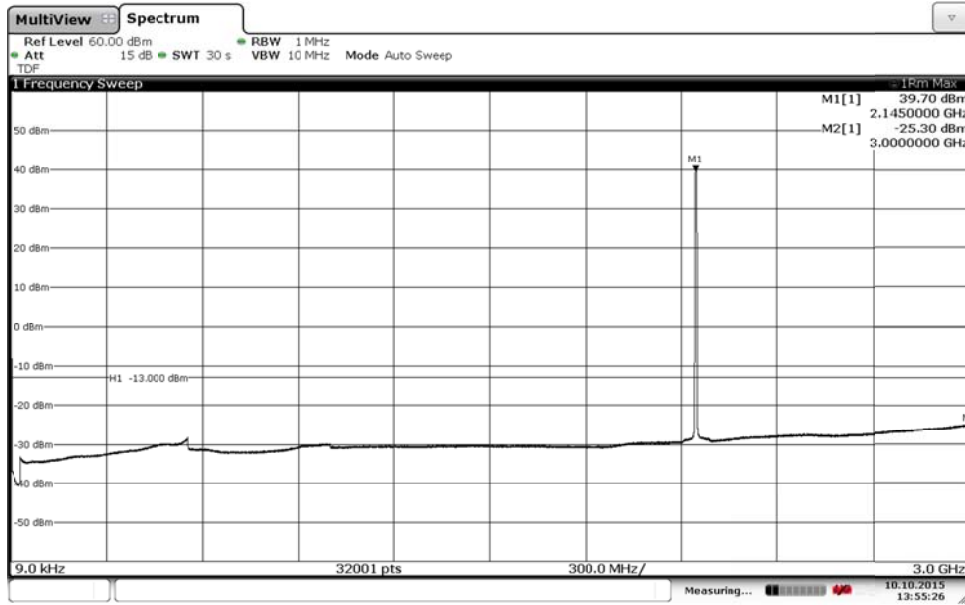

Date: 10.OCT.2015 13:55:25

Diagram 2 b:

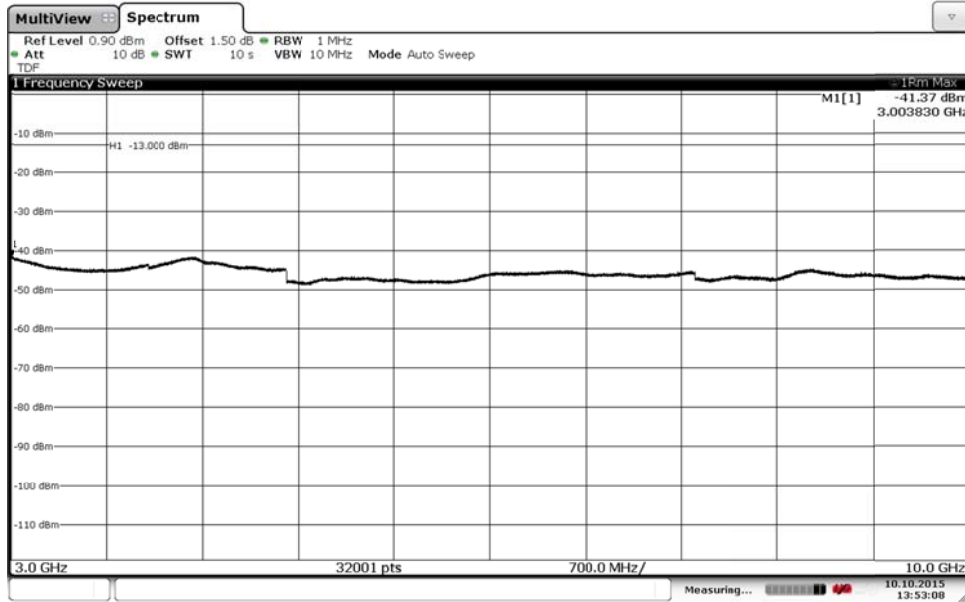

Date: 10.OCT.2015 13:53:07

Appendix 5

Diagram 2 c:


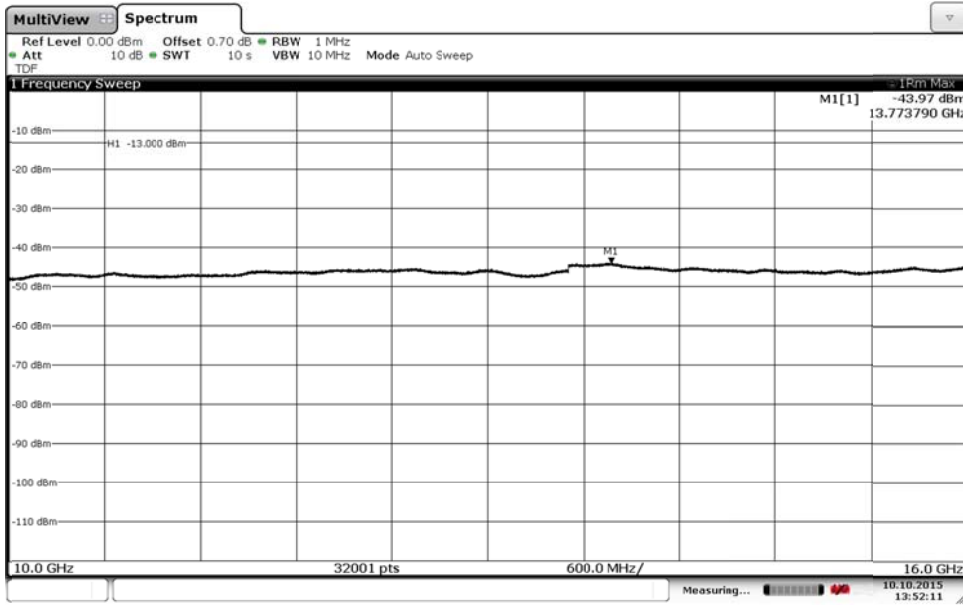


Diagram 2 d:

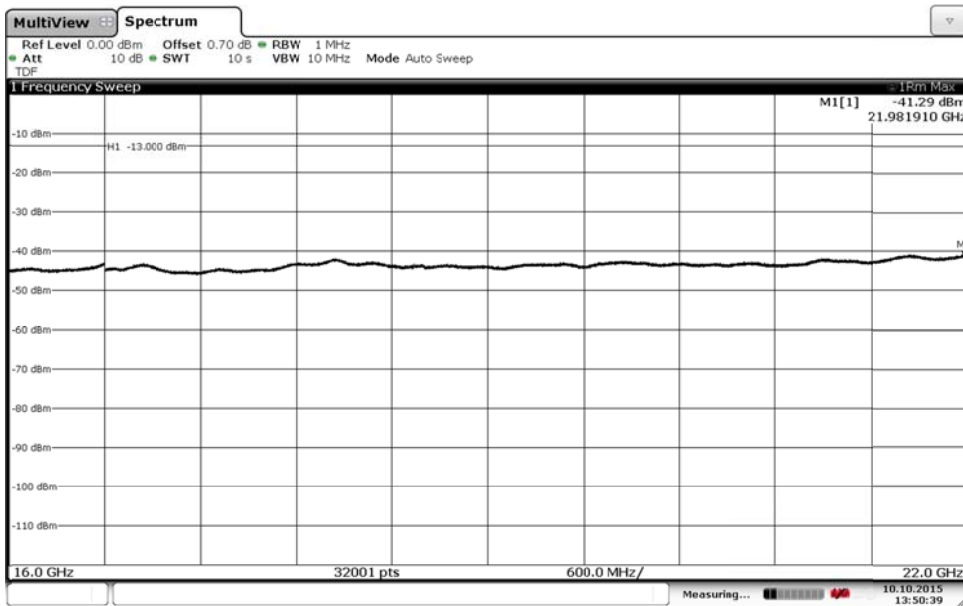

Appendix 5

Diagram 3 a:


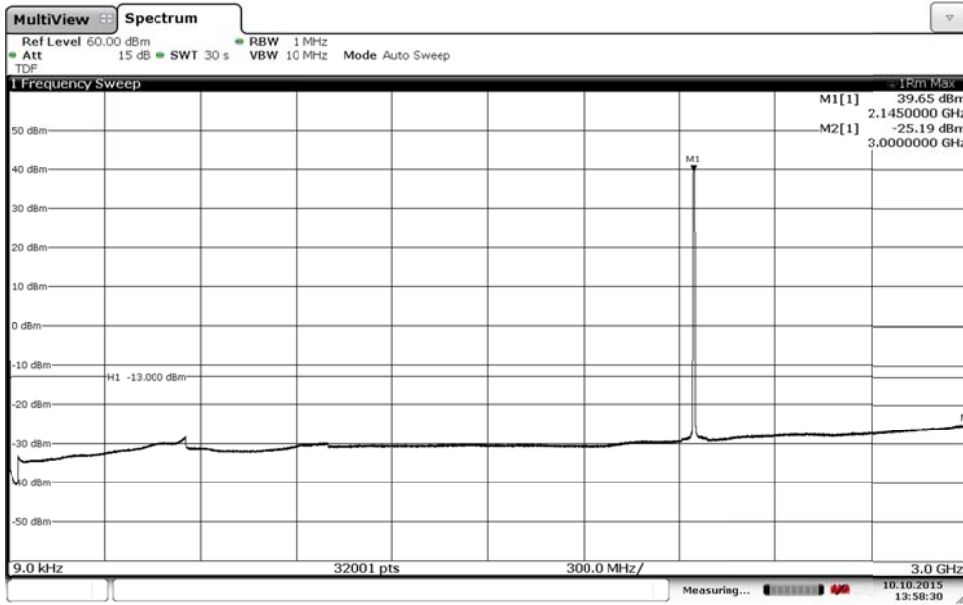


Diagram 3 b:

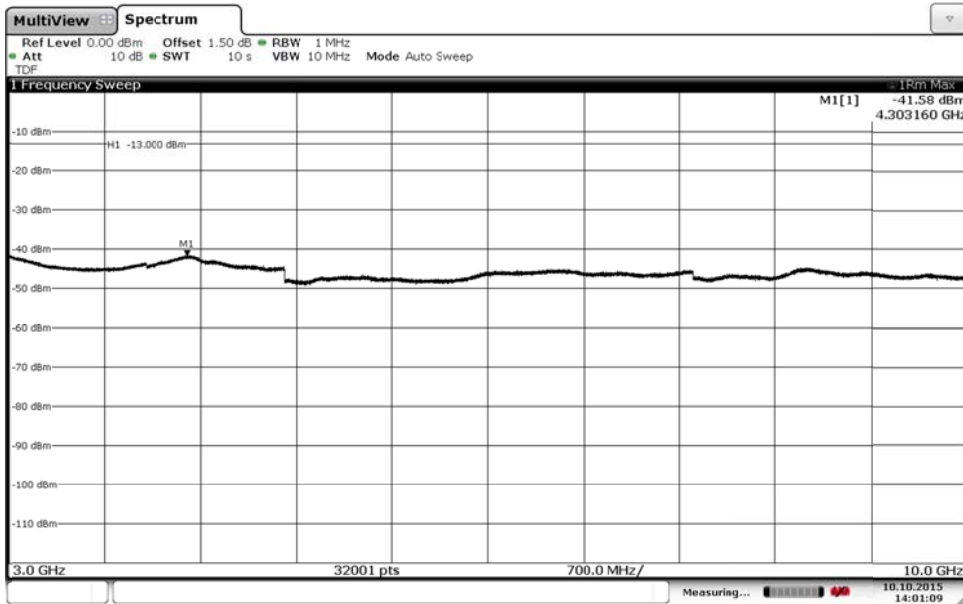

Appendix 5

Diagram 3 c:


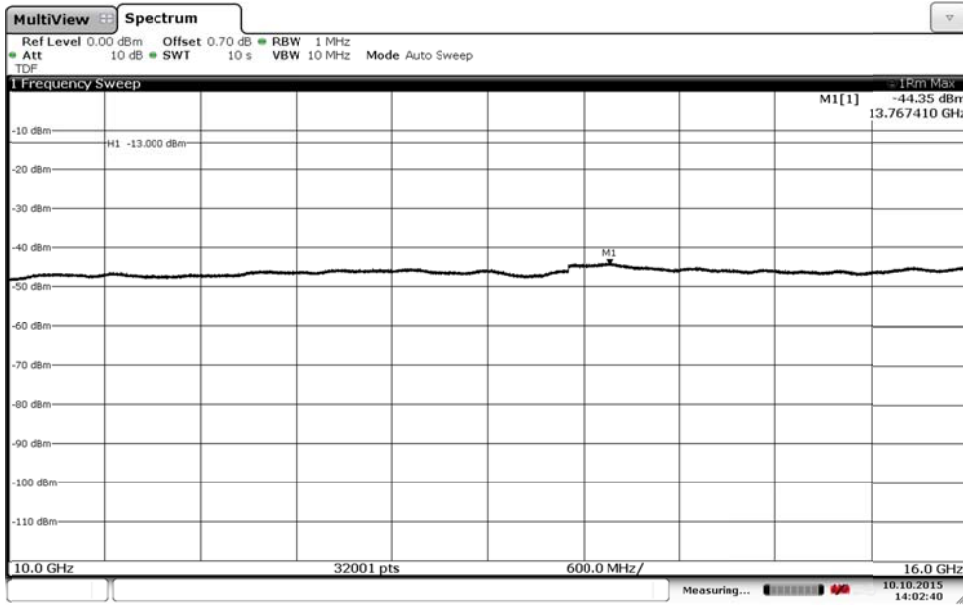


Diagram 3 d:

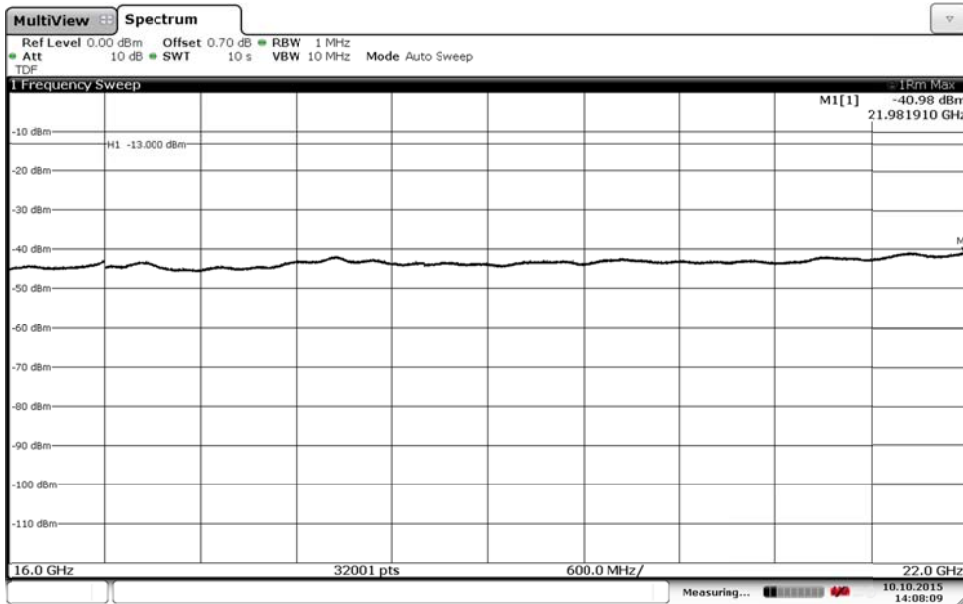

Appendix 5

Diagram 4 a:


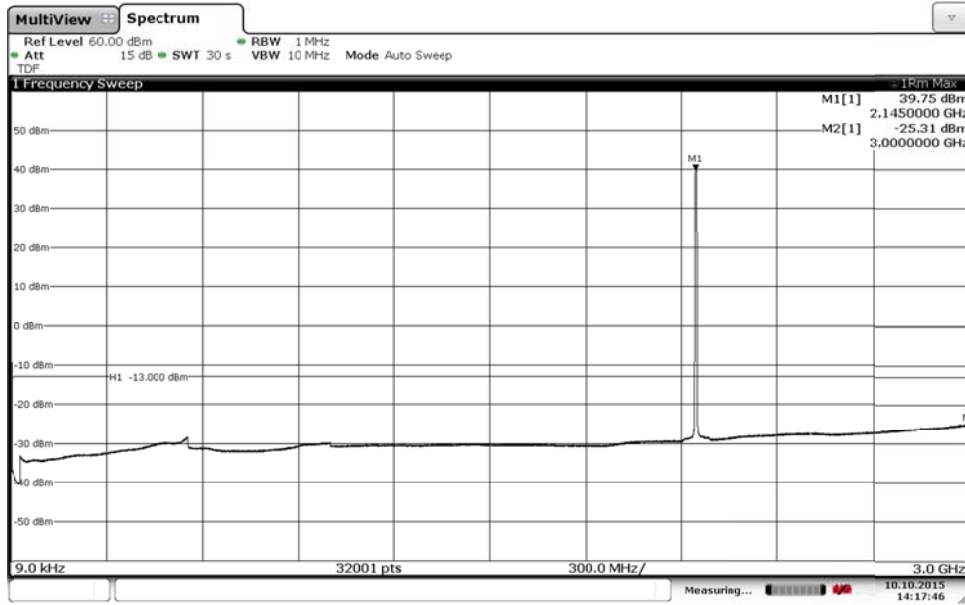


Diagram 4 b:

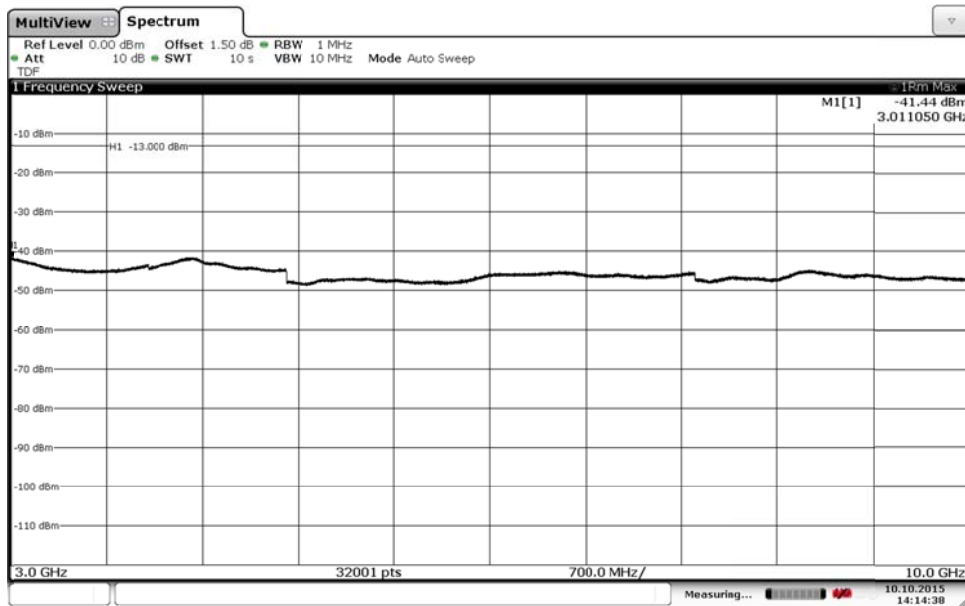

Appendix 5

Diagram 4 c:



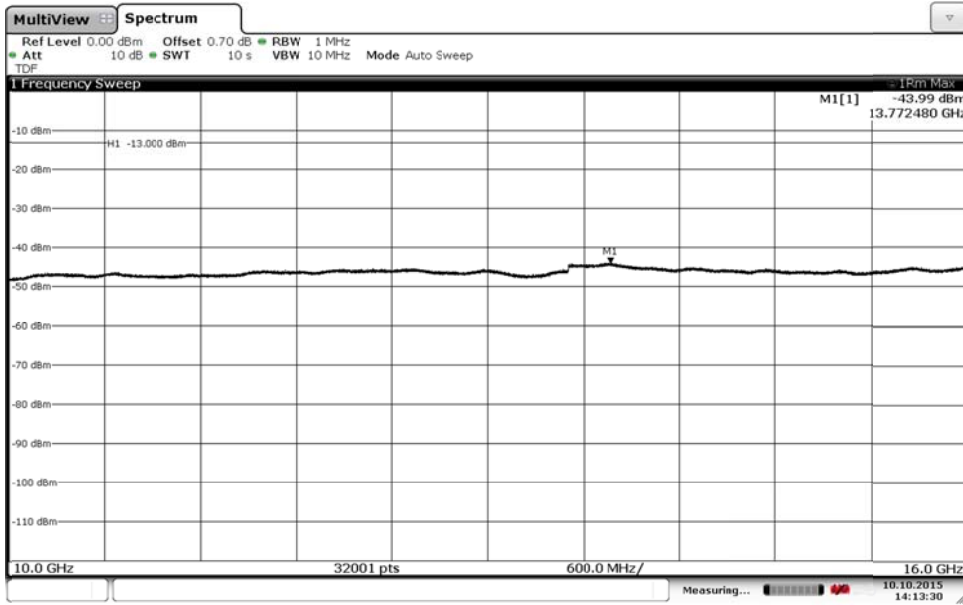


Diagram 4 d:

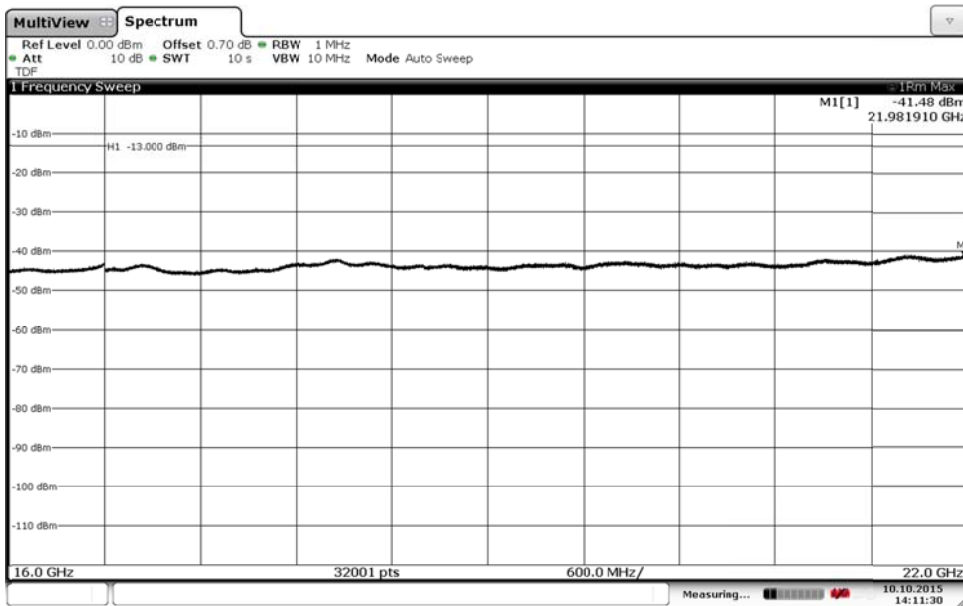


Appendix 5

Diagram 5 a:

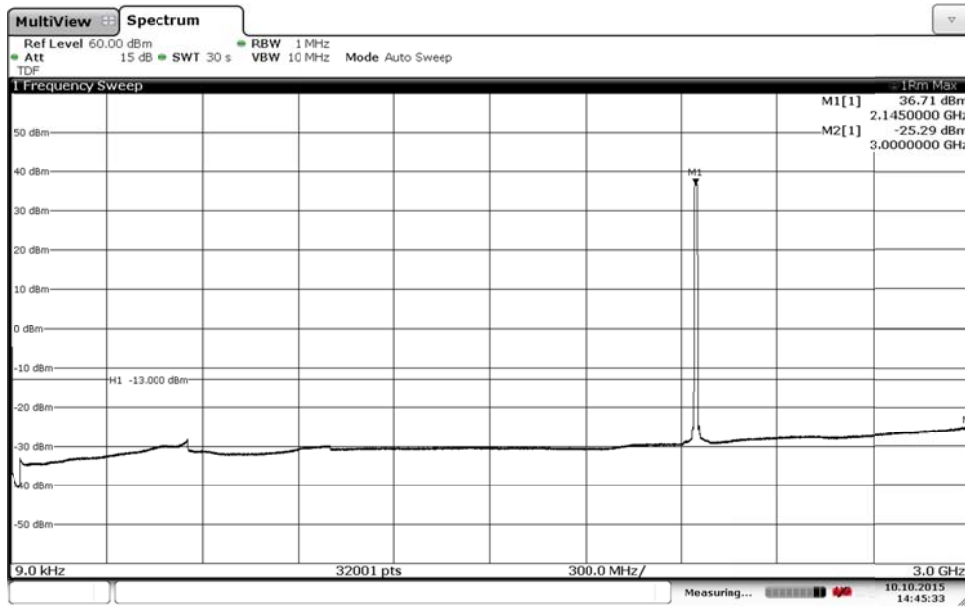

Date: 10.OCT.2015 14:45:33

Diagram 5 b:

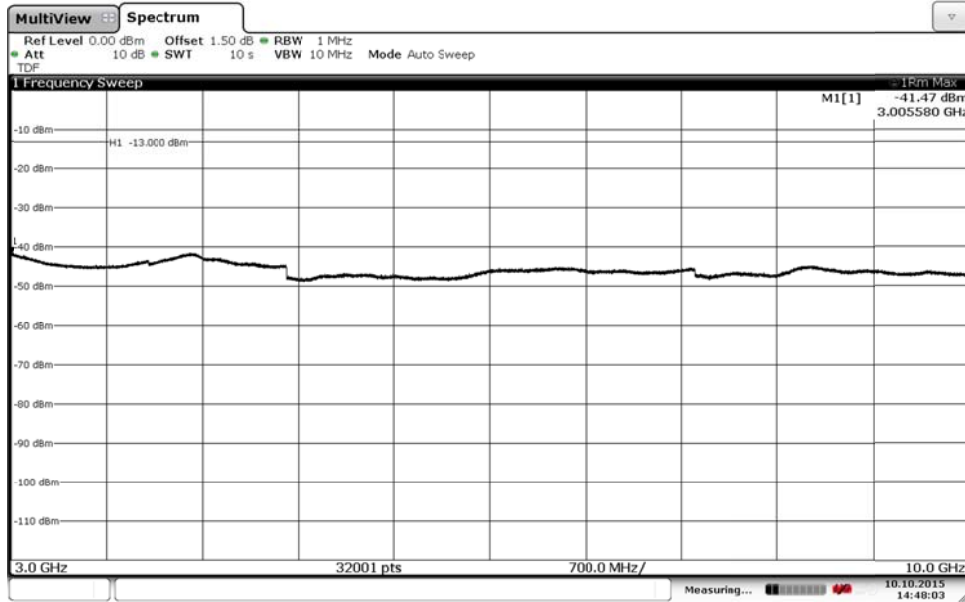


Date: 10.OCT.2015 14:48:03




Appendix 5

Diagram 5 c:

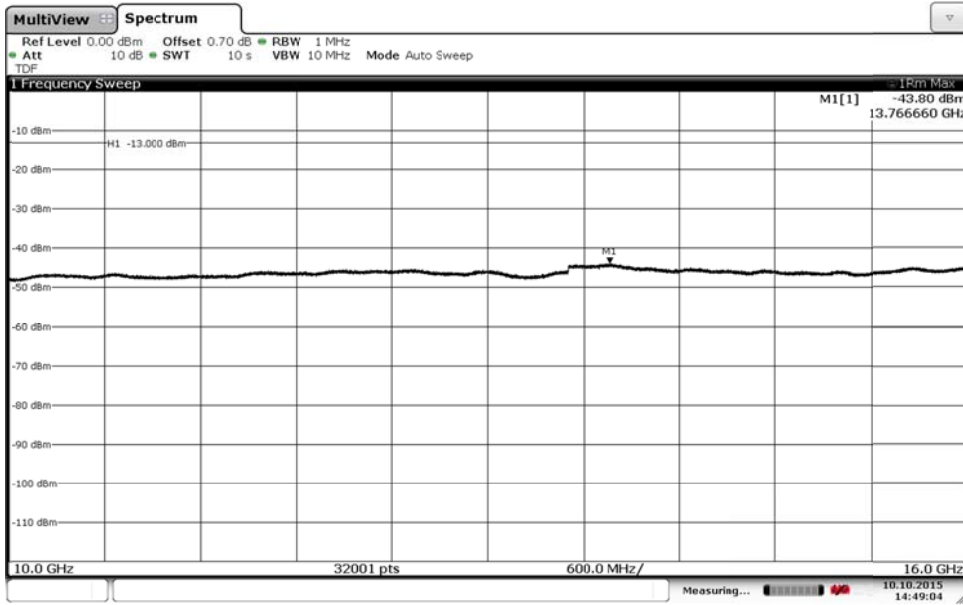

Date: 10.OCT.2015 14:49:04

Diagram 5 d:

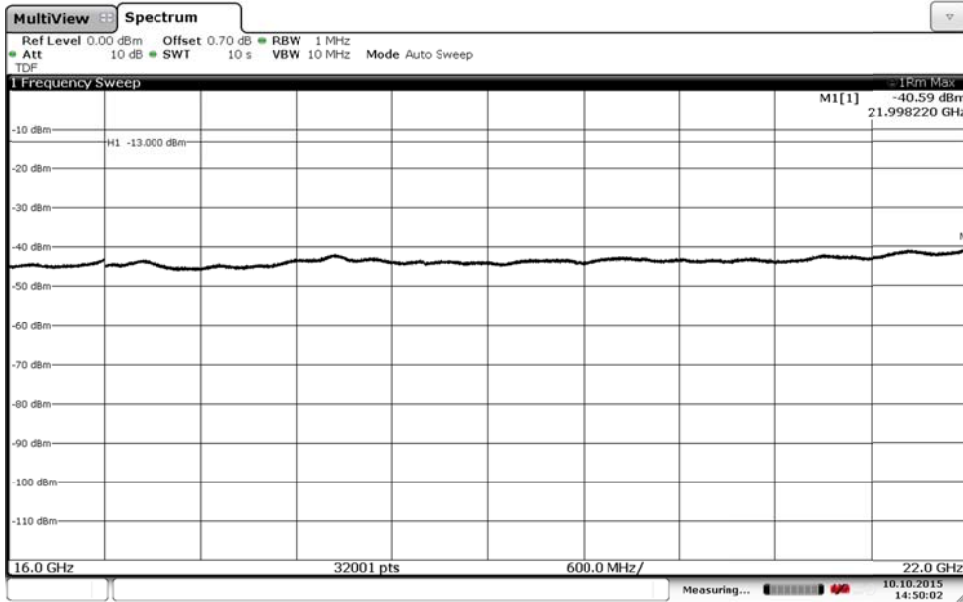

Date: 10.OCT.2015 14:50:02

Appendix 5

Diagram 6 a:



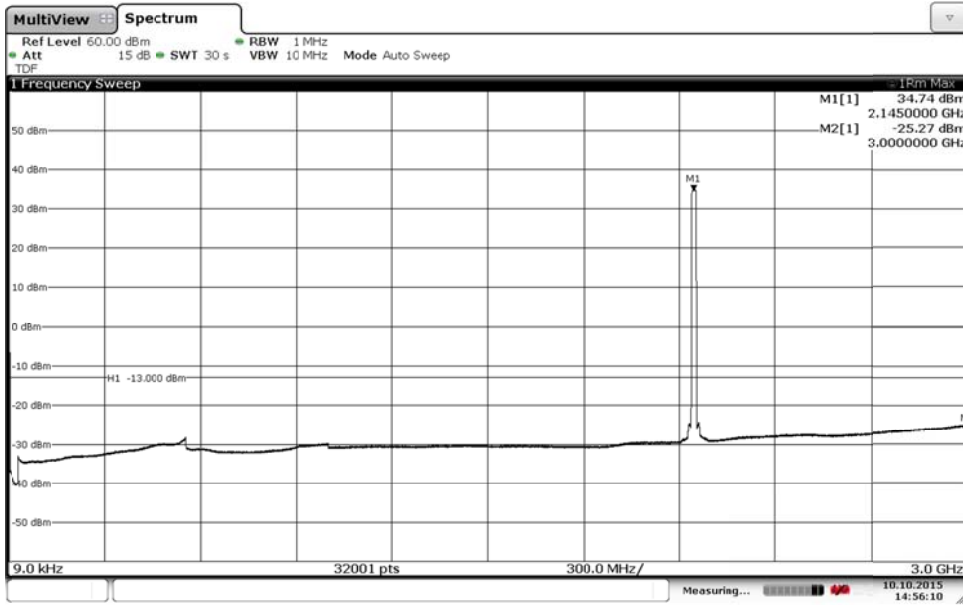


Diagram 6 b:

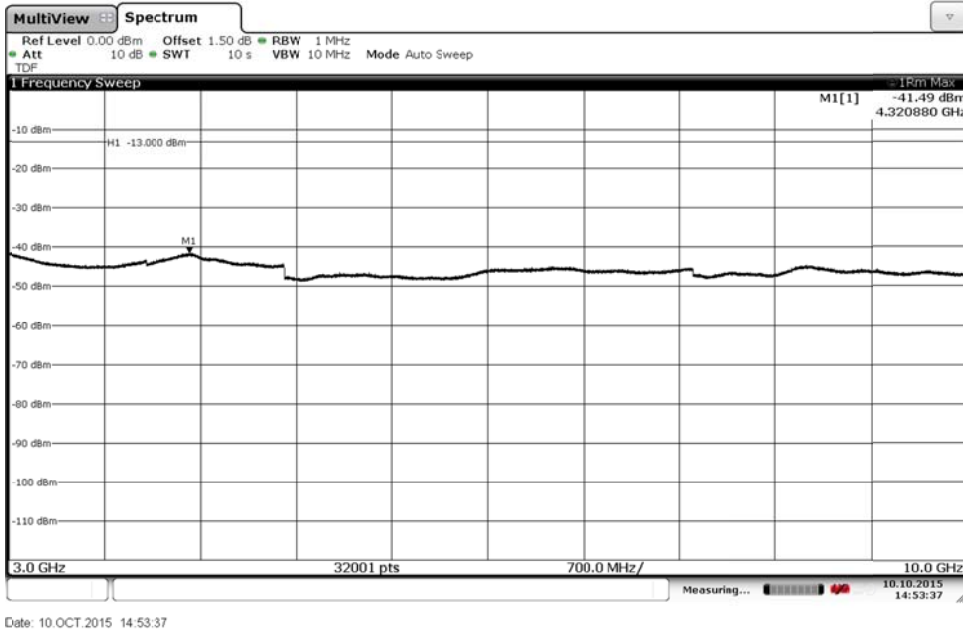


Appendix 5

Diagram 6 c:

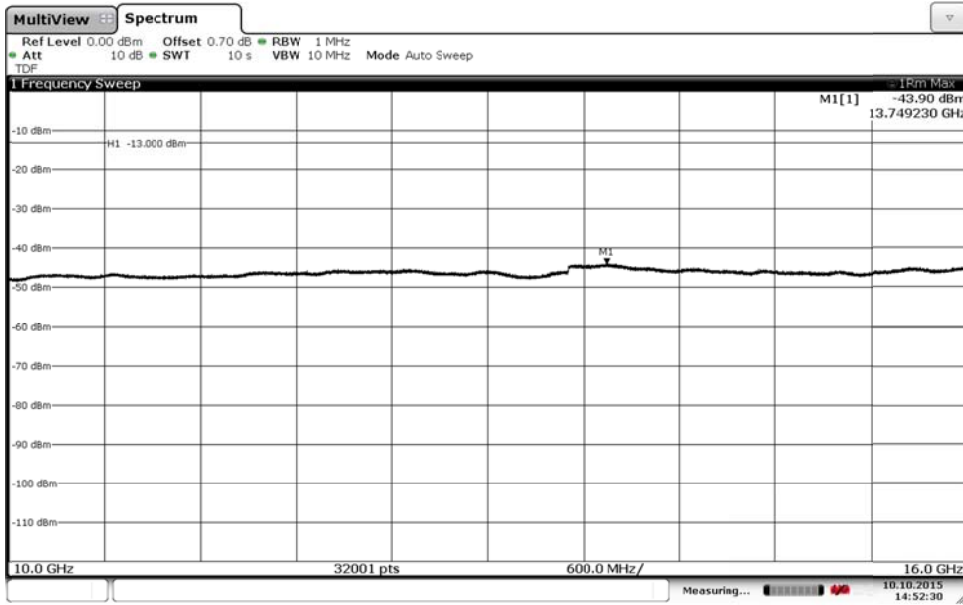

Date: 10.OCT.2015 14:52:29


Diagram 6 d:

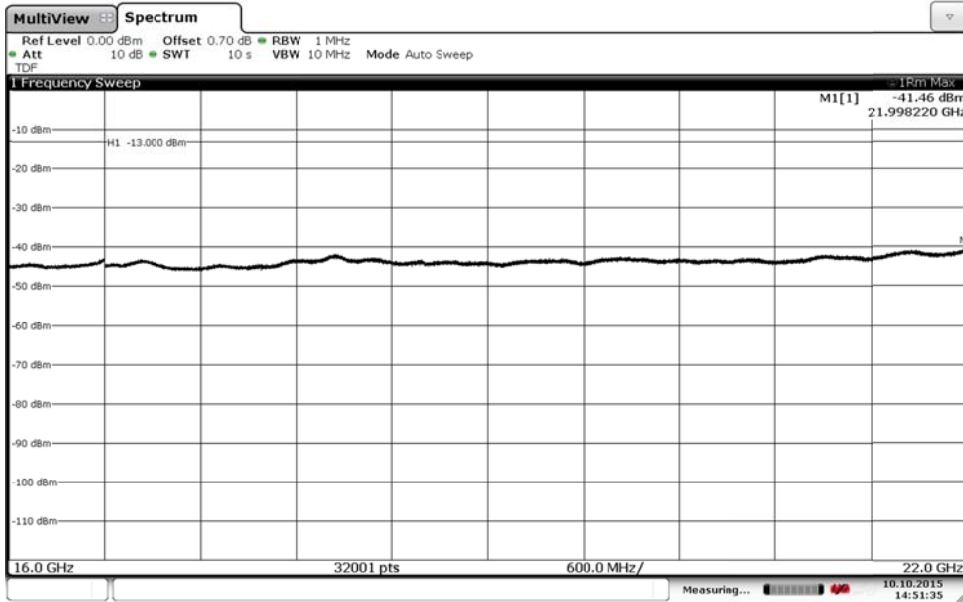

Date: 10.OCT.2015 14:51:35


Appendix 5

Diagram 7 a:

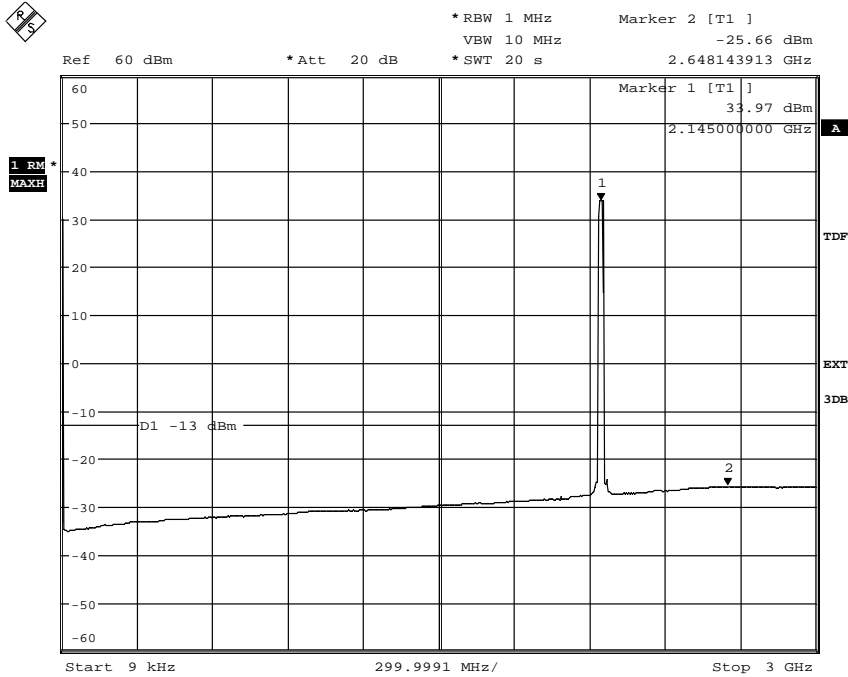

Date: 23.OCT.2015 15:04:06


Diagram 7 b:

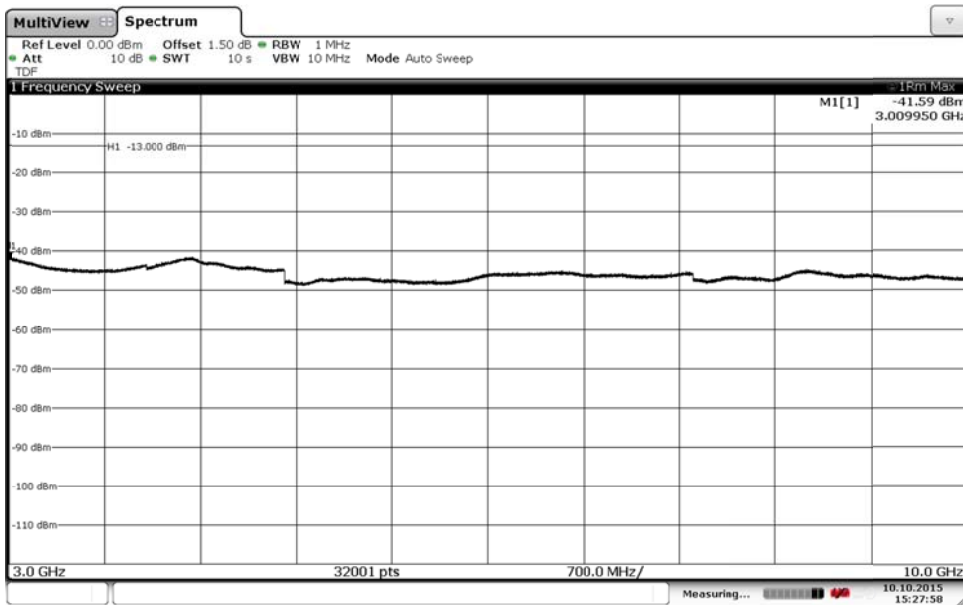

Date: 10.OCT.2015 15:27:58


Appendix 5

Diagram 7 c:

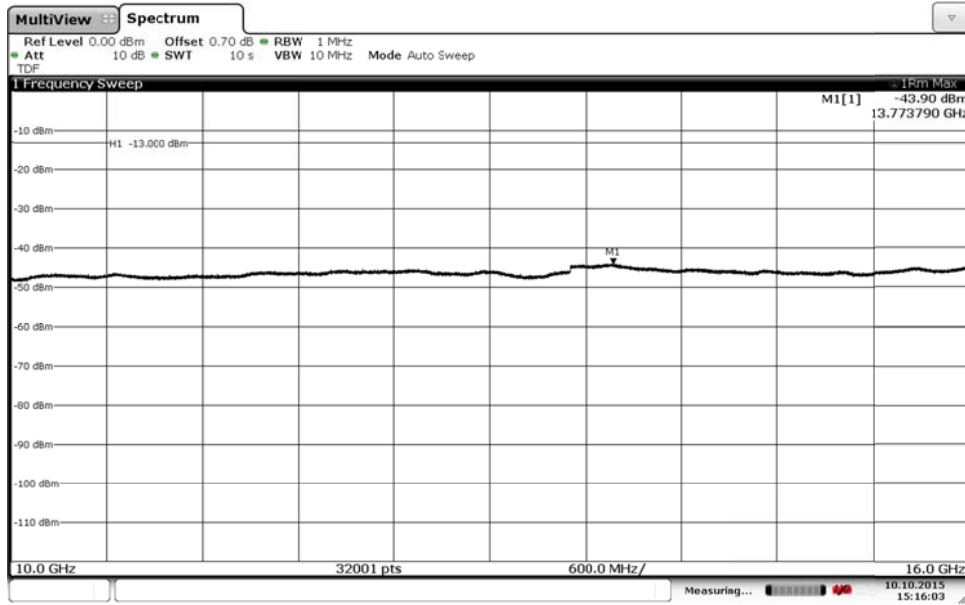

Date: 10.OCT.2015 15:16:02


Diagram 7 d:

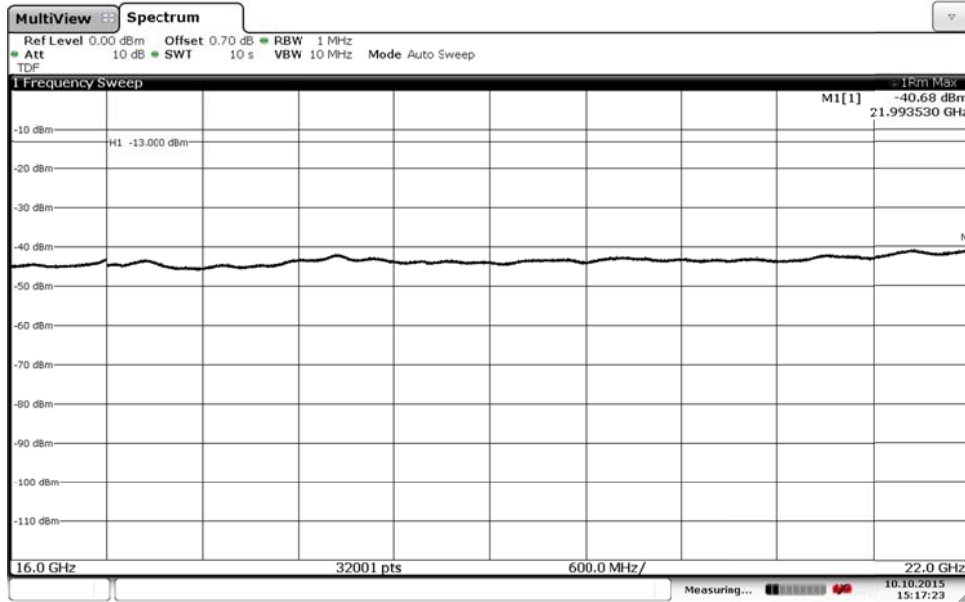

Date: 10.OCT.2015 15:17:24


Appendix 5

Diagram 8 a:

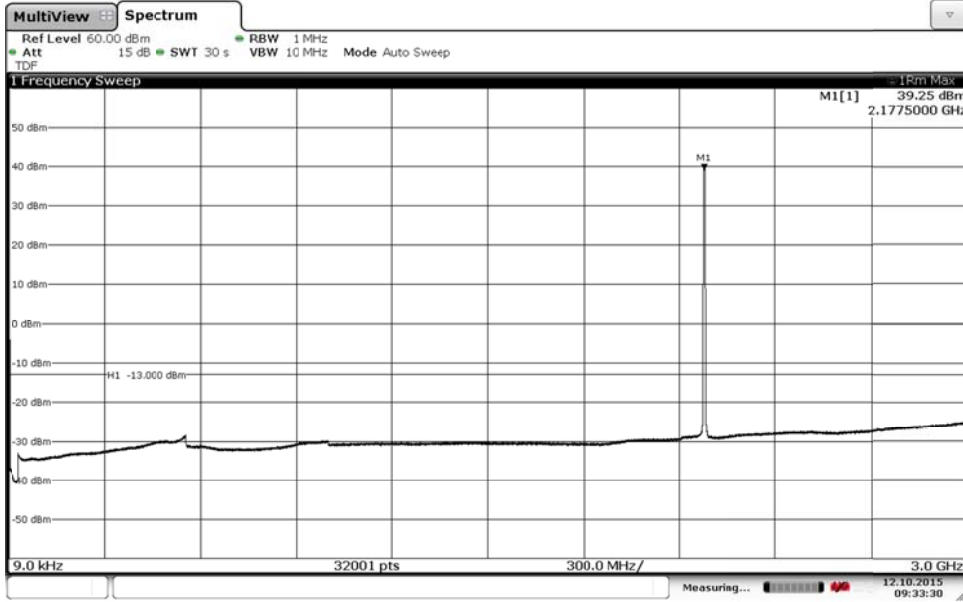

Date: 12.OCT.2015 09:33:31


Diagram 8 b:

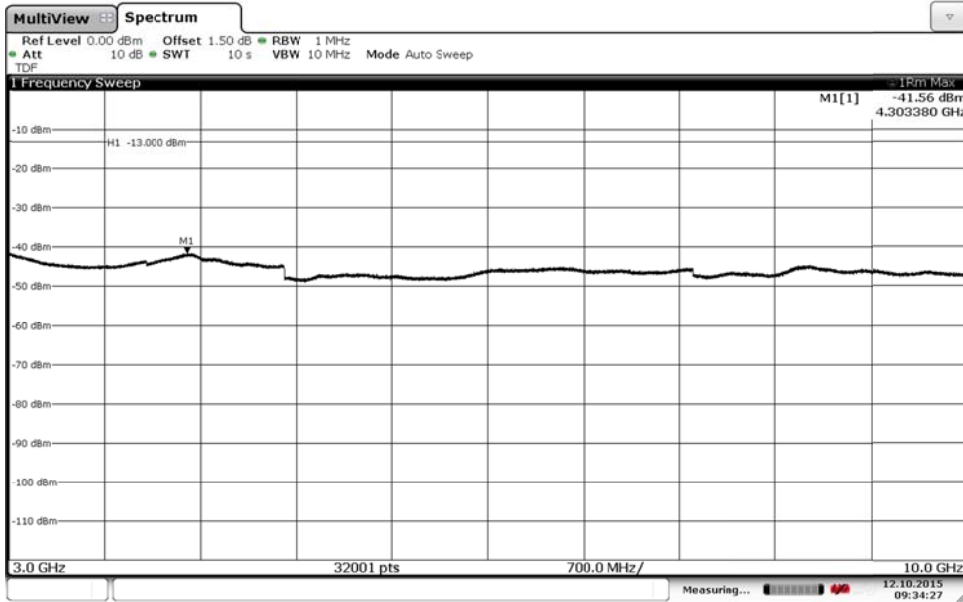

Date: 12.OCT.2015 09:34:27


Appendix 5

Diagram 8 c:

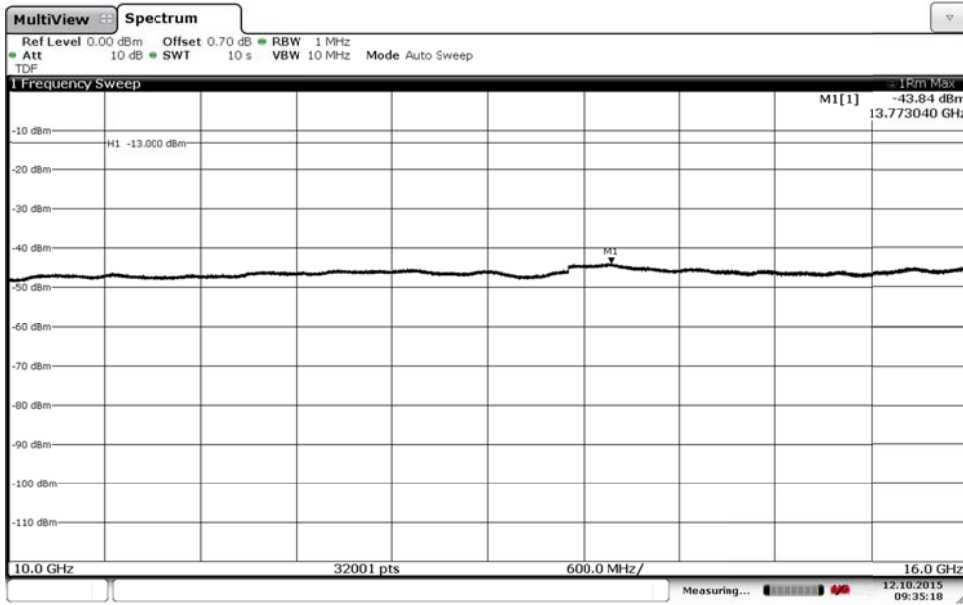

Date: 12.OCT.2015 09:35:18

Diagram 8 d:

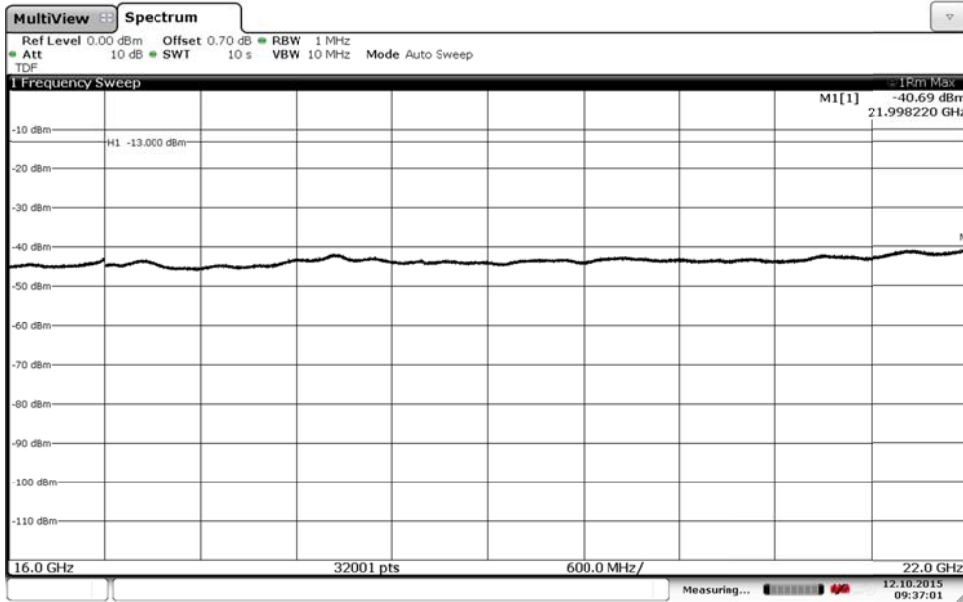

Date: 12.OCT.2015 09:37:01

Appendix 5

Diagram 9 a:


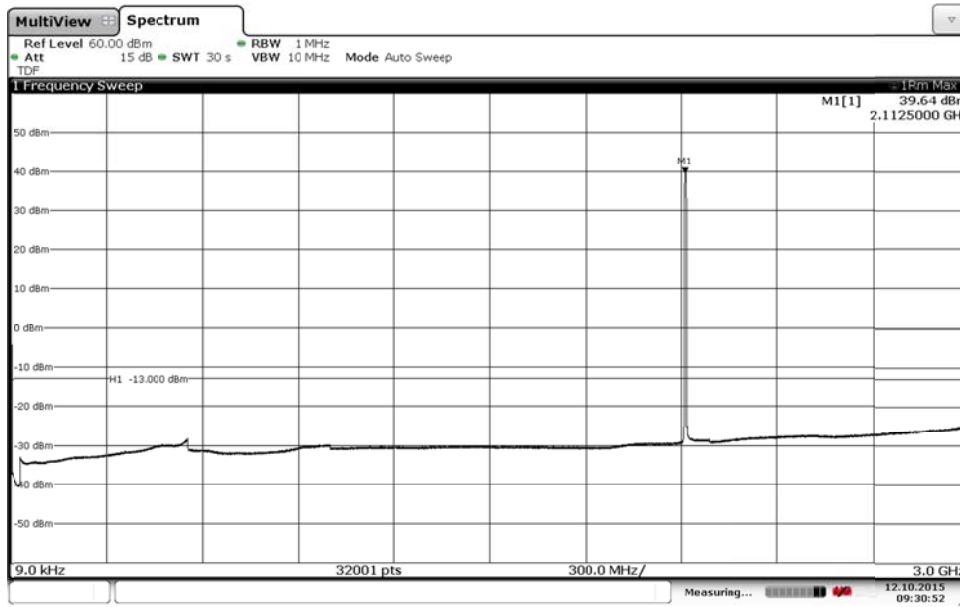


Diagram 9 b:



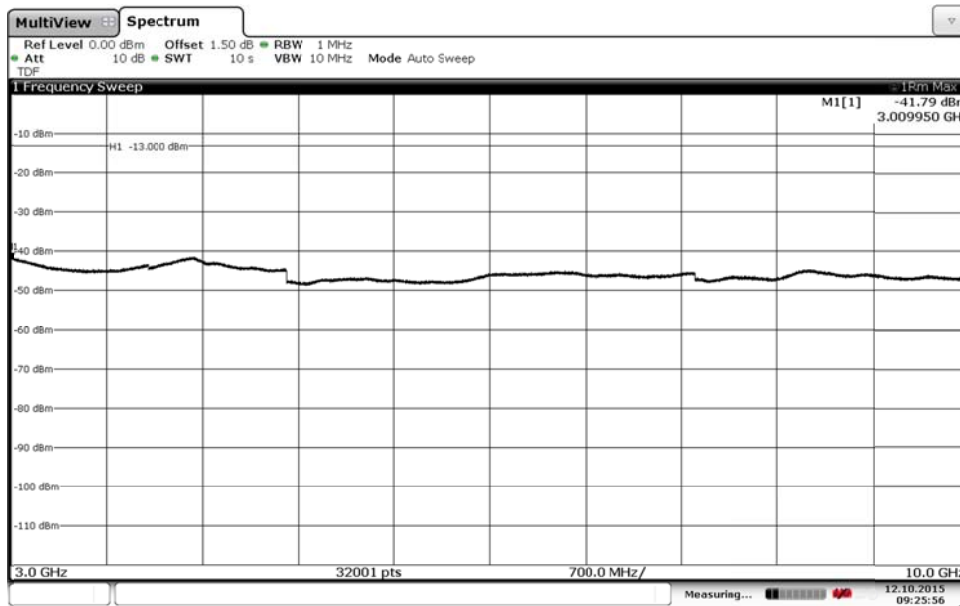

Appendix 5

Diagram 9 c:



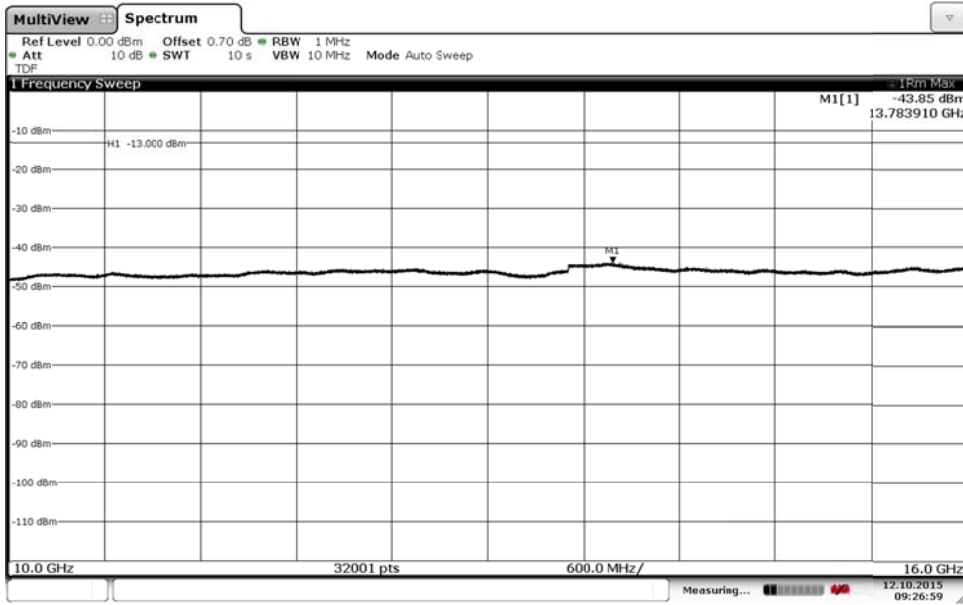


Diagram 9 d:

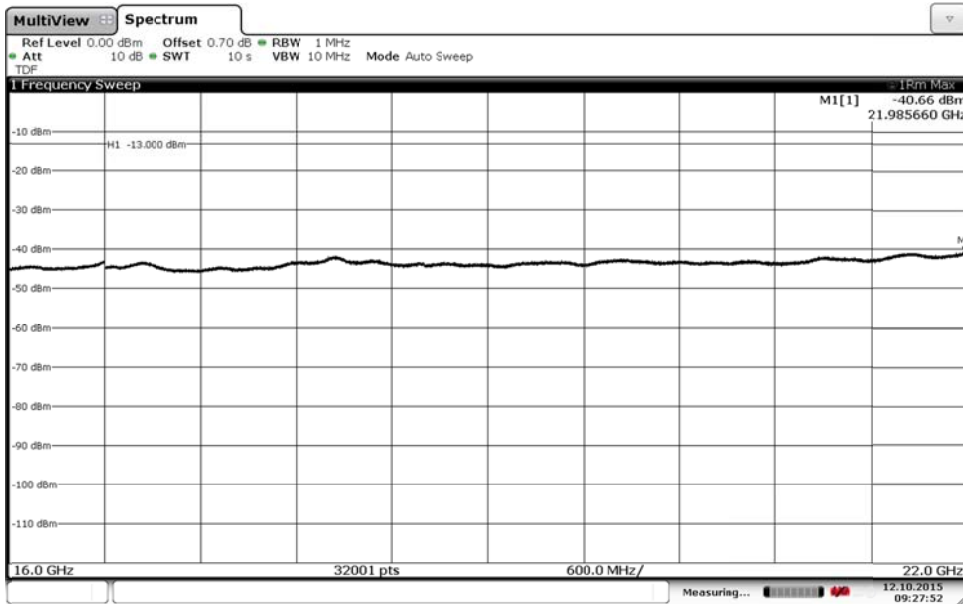


Appendix 5

Diagram 10 a:

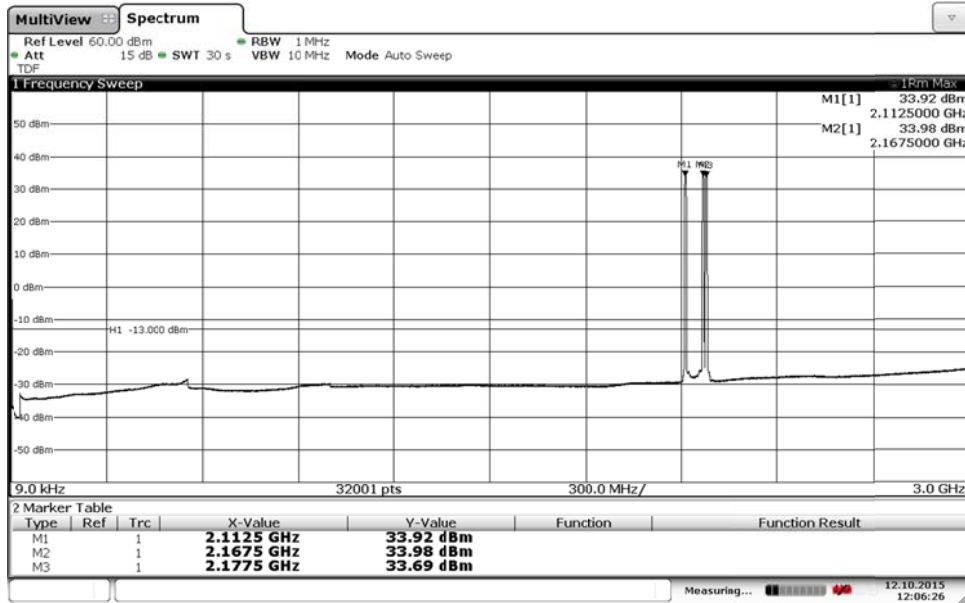

Date: 12.OCT.2015 12:06:26


Diagram 10 b:

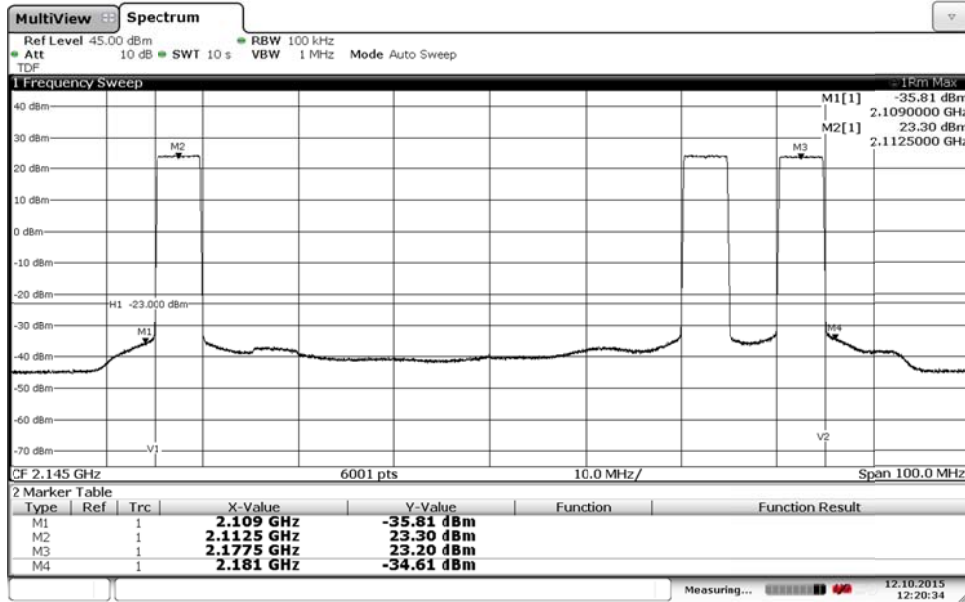

Date: 12.OCT.2015 12:20:34


Appendix 5

Diagram 10 c:

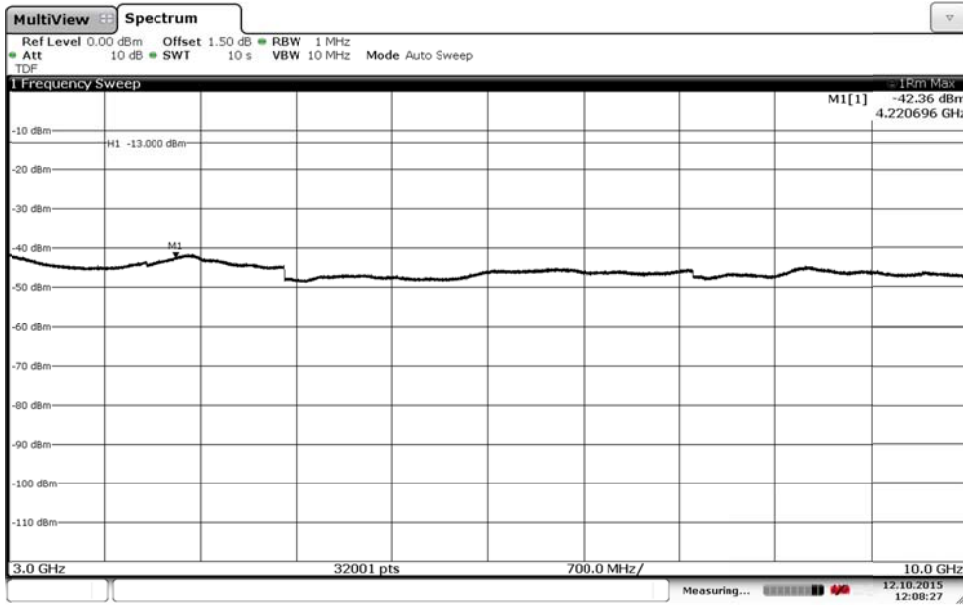

Date: 12.OCT.2015 12:08:27


Diagram 10 d:

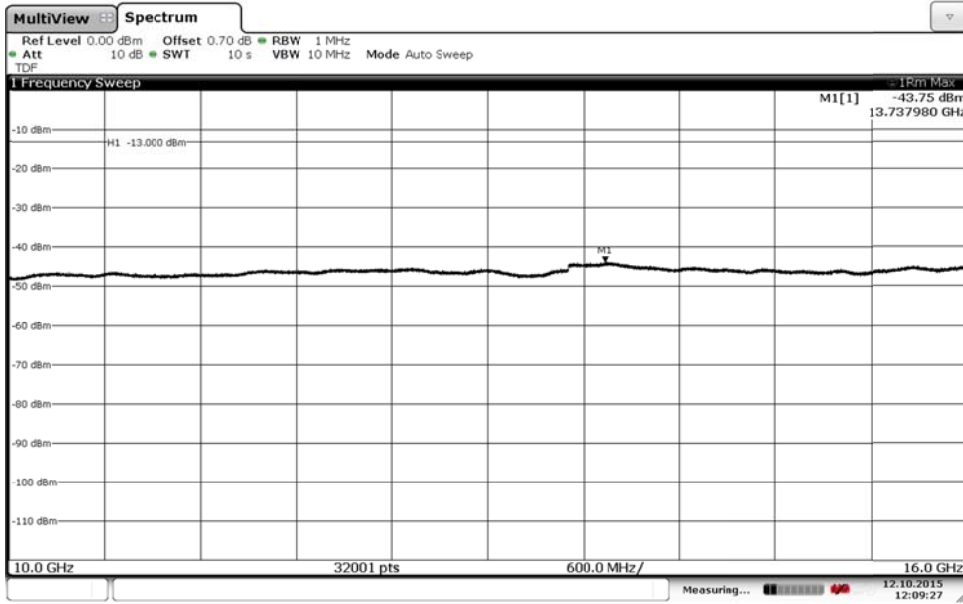

Date: 12.OCT.2015 12:09:27

Appendix 5

Diagram 10 e:

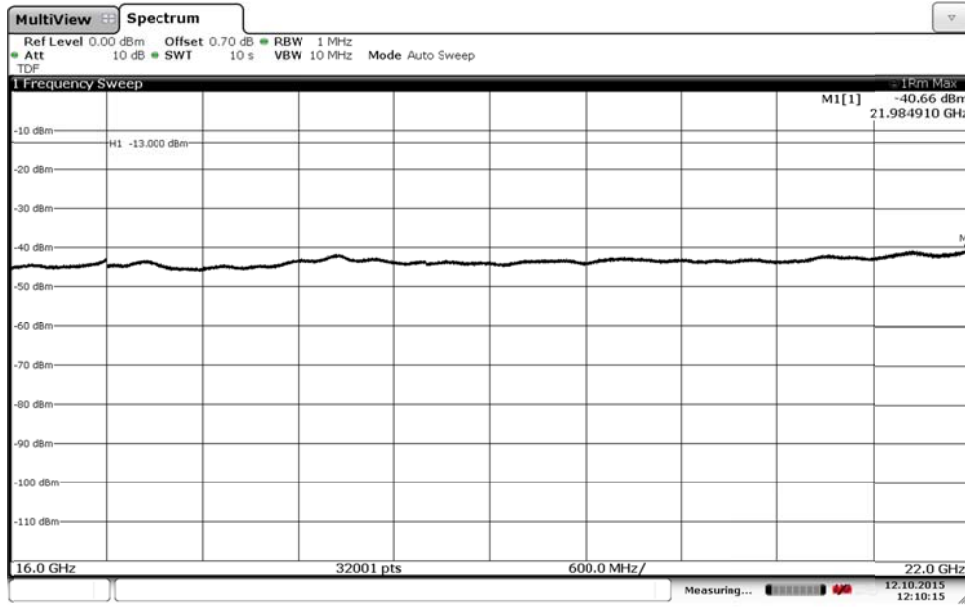

Date: 12.OCT.2015 12:10:15


Appendix 5

Diagram 11 a:



Date: 12.OCT.2015 15:45:49

Diagram 11 b:

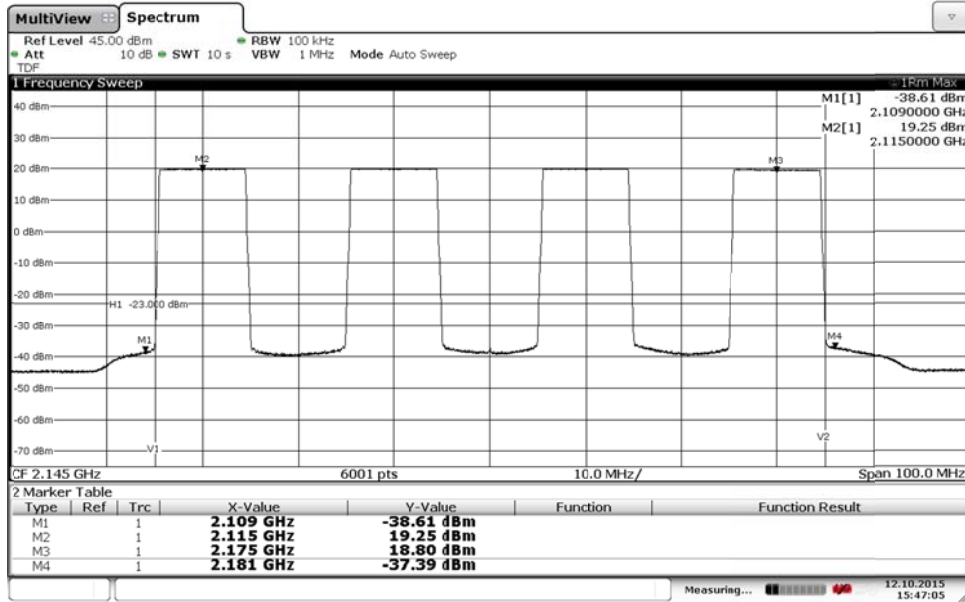

Date: 12.OCT.2015 15:47:05

Appendix 5

Diagram 11 c:



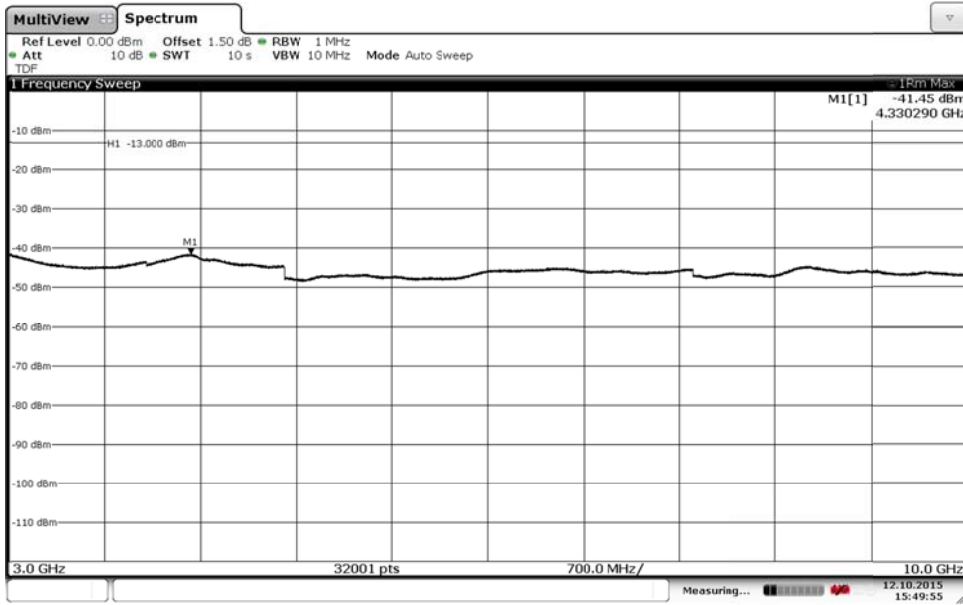


Diagram 11 d:

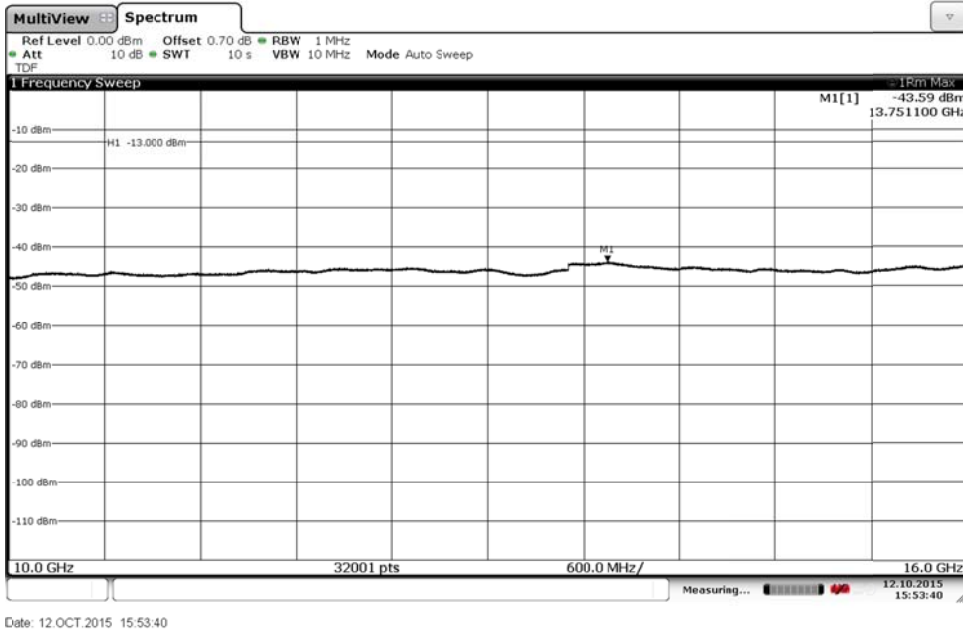

Appendix 5

Diagram 11 e:

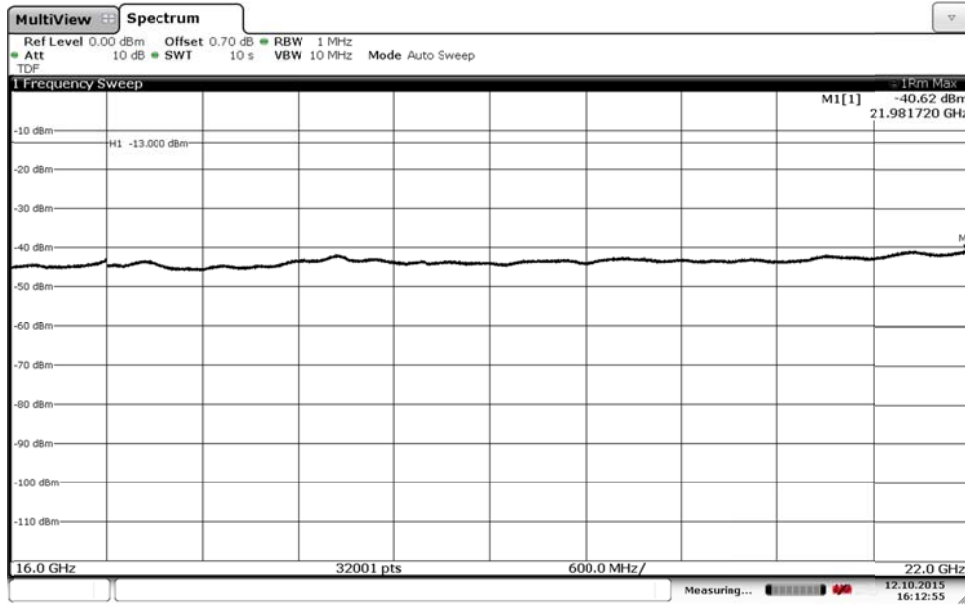

Date: 12.OCT.2015 16:12:54


Appendix 5

Diagram 12 a:



Date: 13.OCT.2015 10:13:36

Diagram 12 b:

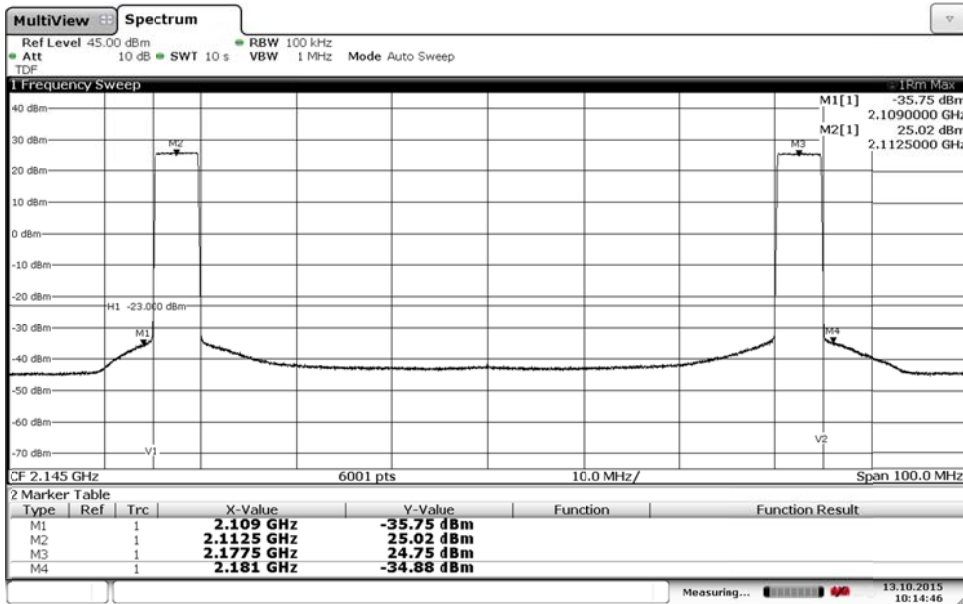

Date: 13.OCT.2015 10:14:46



Appendix 5

Diagram 12 c:



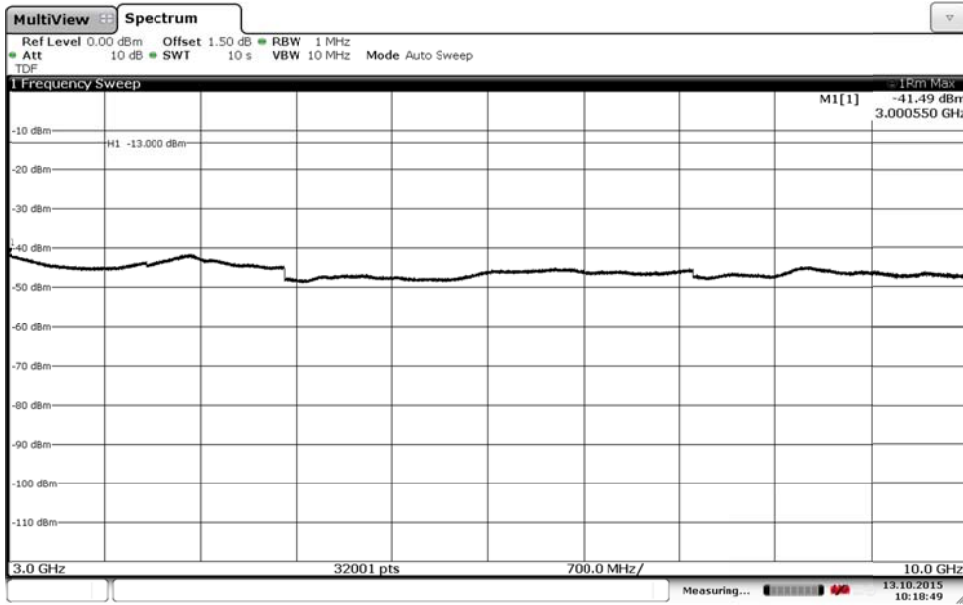


Diagram 12 d:

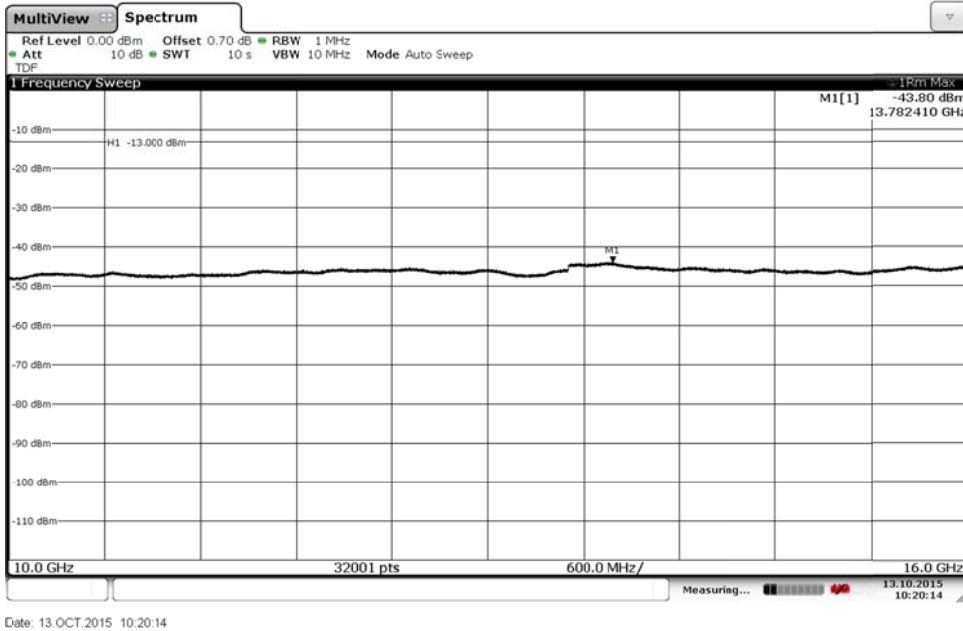

Appendix 5

Diagram 12 e:

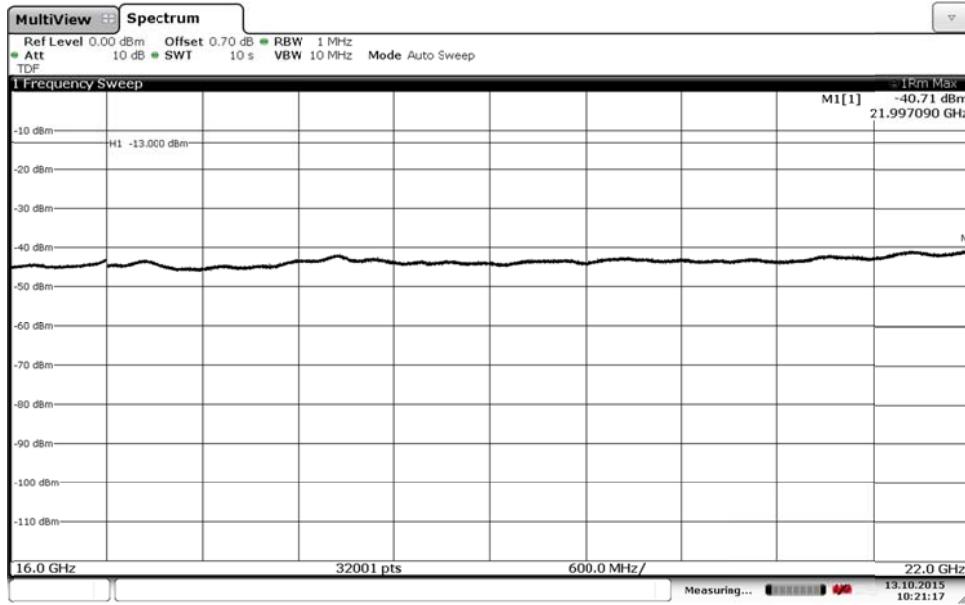

Date: 13.OCT.2015 10:21:17

Appendix 6

**Field strength of spurious radiation measurements according to 47 CFR 27.53 (h)/ IC RSS-139 6.6**

Date	Temperature	Humidity
2015-10-08	23°C ± 3°C	20 % ± 5 %
2015-10-09	23°C ± 3°C	31 % ± 5 %

**Test set-up and procedure**

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 – 22 GHz.

In the frequency range 30 MHz – 22 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was

$$\gamma = 20 \log \left( \frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

Appendix 6

The test set-up during the spurious radiation measurements is shown in the picture below:



**Measurement equipment**

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU40	901 385
EMC 32 ver. 9.15.0	503 745
Chase Bilog Antenna CBL 6111A	503 182
EMCO Horn Antenna 3115	902 212
Flann STD Gain Horn Antenna 20240-20	503 674
Flann STD Gain Horn Antenna 22240-20	503 674
High pass filter	504 200
Miteq, Low Noise Amplifier	503 278
Schwarzbeck BBV9742, Low Noise Amplifier	504 085
µComp Nordic, Low Noise Amplifier	901 545
Testo 635 temperature and humidity meter	504 203

Appendix 6

Tested configurations

Symbolic name	Bandwidth (MHz)
B	5
M	5,10,15 and 20
T	5
2C	5+5
C3-5	5+5+5
B4-5	5+5+5+5

**Results**, representing worst case

B, BW: 5 MHz Diagram 1 a-d

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-22 000	All emission > 20 dB below limit	All emission > 20 dB below limit

**Measurement uncertainty:**

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

**Limits**

§27.53(h) and RSS-139 6.6

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

## Appendix 6

Diagram 1 a:


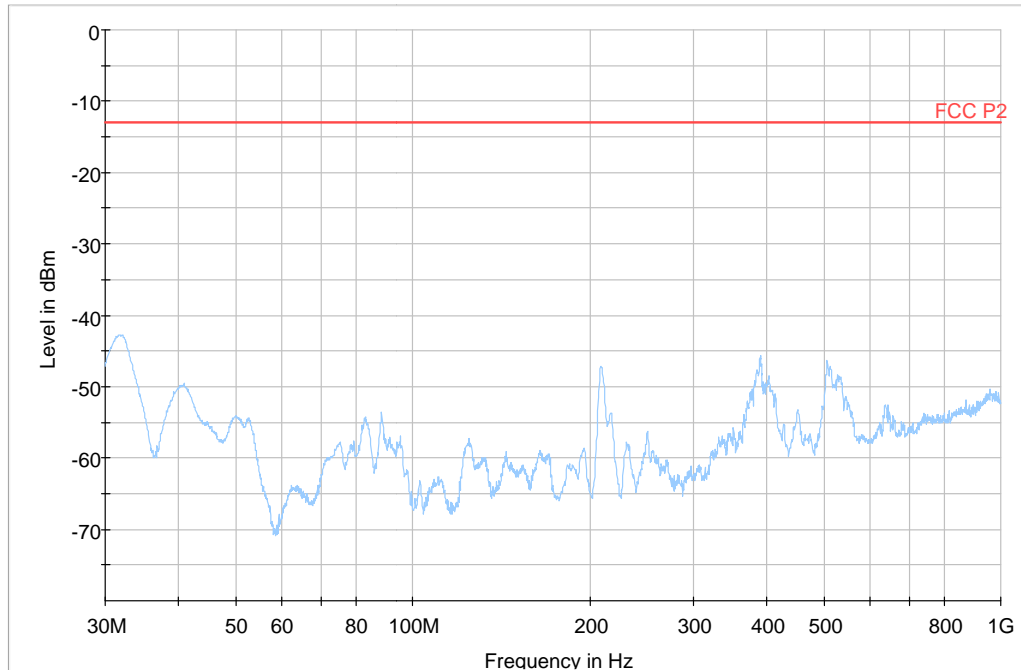



Diagram 1 b:

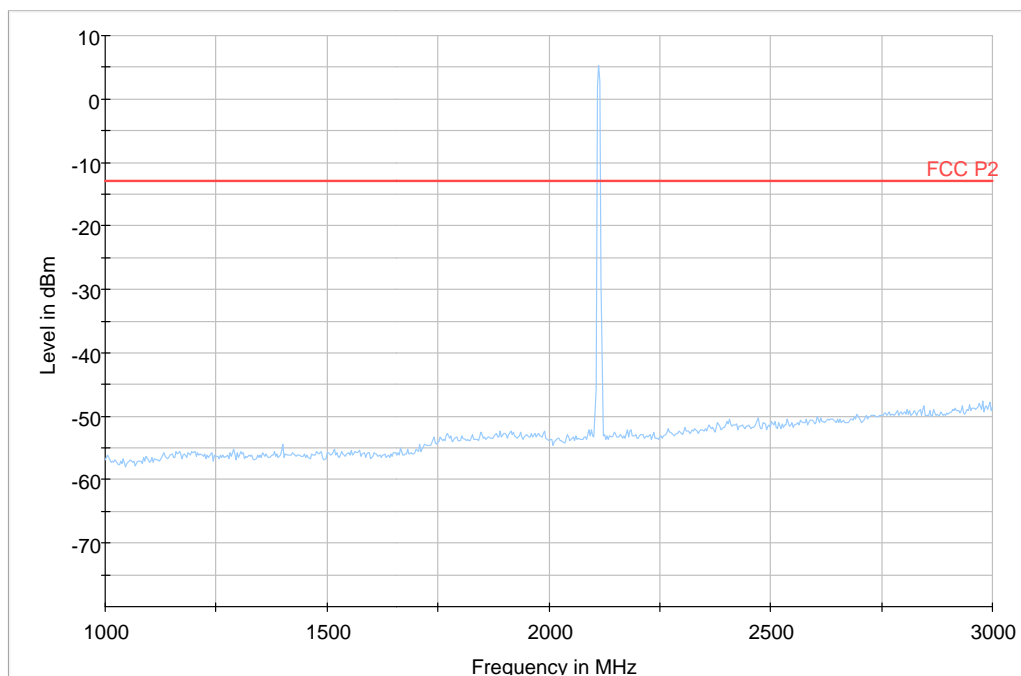

Note: The emission at 2112.5 MHz is the carrier frequency and shall be ignored in the context.

Appendix 6

Diagram 1 c:

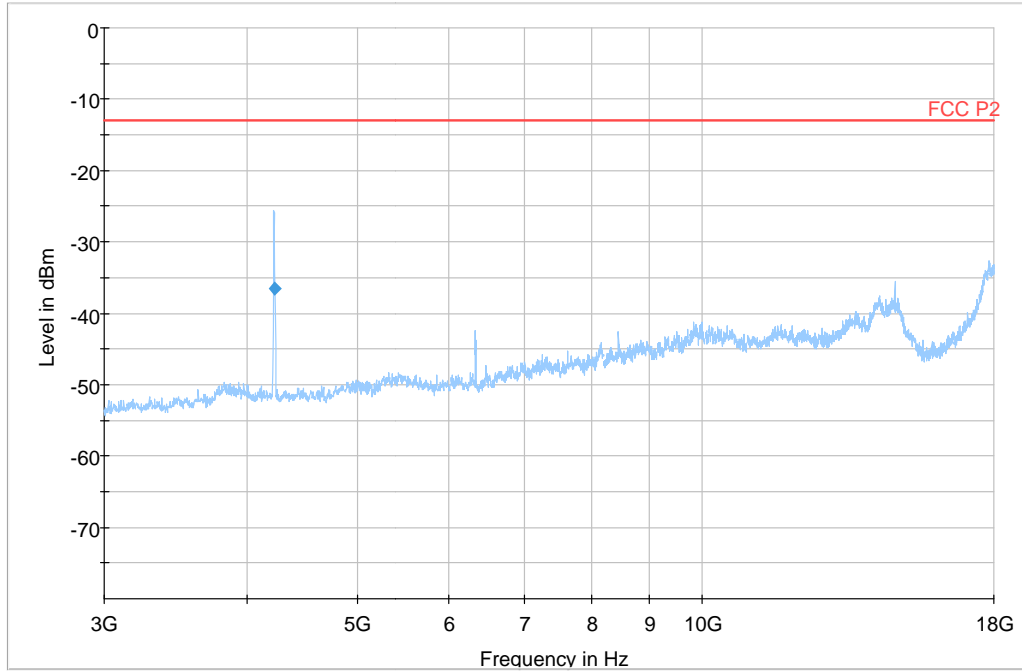


**Final RMS Result**

Frequency (MHz)	RMS (dBm)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4225.046	-36.49	---	-13.00	23.49	5000.0	1000.000	127.0	H	187.0	-103.6

## Appendix 6

Diagram 1 d:

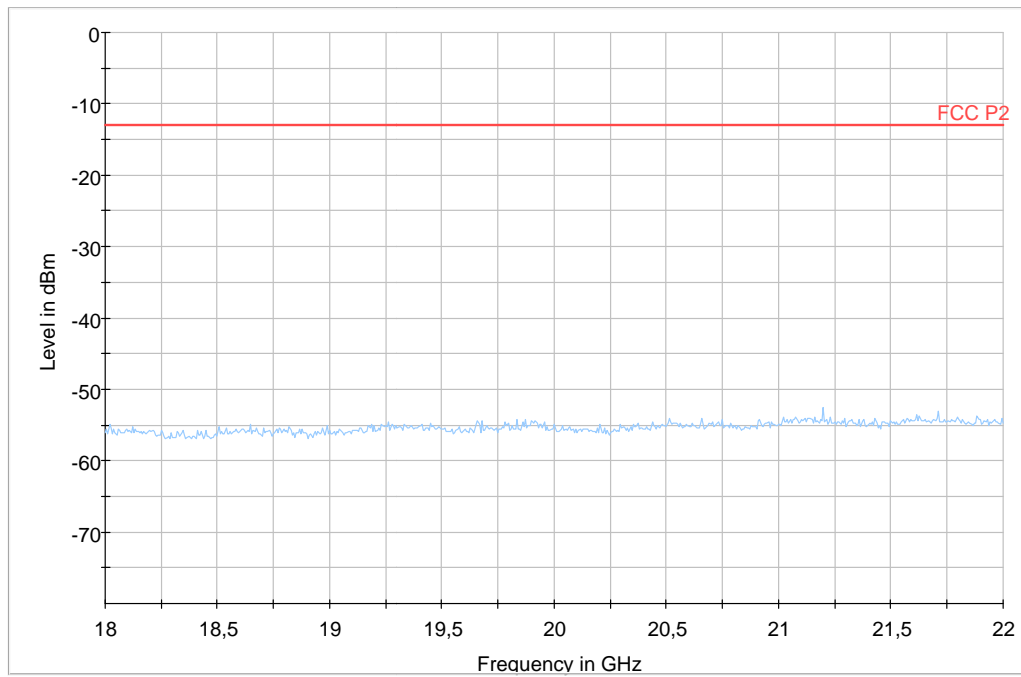



Appendix 7

**Frequency stability measurements according to CFR 47 §27.54/ IC RSS-139 6.4**

Date 2015-10-15 to 2015-10-17	Temperature (test equipment) 22-23 °C ± 3 °C	Humidity (test equipment) 23-26 % ± 5 %
----------------------------------	---	--

**Test set-up and procedure**

The measurement was made per 3GPP TS 36.141. The output was connected to a spectrum analyser.

The measurement was also made using a resolution bandwidth of 1% of the emission bandwidth, a reference point at the unwanted emission level which complies with the attenuation of  $43 + 10 \log_{10} p$  (watts) (i.e. -13dBm) (for MIMO -19dBm) at the band edge of the lowest and highest channel was selected, and the frequency at these points was recorded as fL and fH respectively.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ 40	504 143
RF attenuator	900 691
Testo 635, Temperature and humidity meter	504 203
Temperature cabinet	503 360

## Appendix 7

### Results

Nominal transmitter frequency was 2145.0 MHz (M) with a bandwidth of 5 MHz. Rated output power level at connector RF A (maximum): 46 dBm.

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	Temp. (°C)	
-48.0	+20	+9
-55.2	+20	-10
-40.8	+20	+11
-48.0	+30	+12
-48.0	+40	-9
-48.0	+50	-10
-48.0	+10	+10
-48.0	0	+10
-48.0	-10	-11
-48.0	-20	-12
-48.0	-30	-11
Maximum freq. error (Hz)		12
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Appendix 7

Test conditions			Frequency margin to band edge at -19dBm			
Supply voltage DC [V]	Temp [°C].	Carrier Bandwidth [MHz]	Test frequency Symbolic name Bottom		Test frequency Symbolic name Top	
			fL [MHz]	Offset to lower band edge (2110 MHz) [kHz]	fH [MHz]	Offset to upper band edge (2155 MHz) [kHz]
-48.0	+20	5	2110.030	30.0	2179.971	29.0
-48.0	+20	20	2110.189	189.0	2179.802	198.0

The frequency error results clearly shows that the frequency stability is good enough to ensure that the transmitted carrier stay within the operating band.

**Remark**

It was deemed sufficient to test one combination of TX frequency, channel bandwidth configuration and test model (modulation), as all combinations share a common internal reference to derive the TX frequency from.

**Limits**

§27.54:

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

RSS-139 6.4 Frequency:

The frequency stability shall be sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen

Complies?	Yes
-----------	-----

## Appendix 8

### External photos

Front side



Appendix 8

Rear side



## Appendix 8

Left side



Right side



## Appendix 8

Bottom side



Appendix 8

Top side



Product label



FCC and IC label

