

Ericsson AB

RF TEST REPORT

Report Type:

RF report

PRODUCT NAME:

Radio 8843 B2 B66A

REPORT NUMBER:

2405B1993SHA-001

ISSUE DATE:

June 5, 2024

DOCUMENT CONTROL NUMBER:

TTRFFCC Part 27_V1 © 2018 Intertek



TEST REPORT

Applicant: Ericsson AB
Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden

Manufacturer: Ericsson AB
Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden

FCC ID: TA8AKRC161707-2

SUMMARY:

The equipment is tested according to the following standard(s) or Specification:

FCC CFR 47 Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

PREPARED BY:

REVIEWED BY:

Yang Xu

Project Engineer
Yang Xu

Reviewer
Jackson Huang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	7
1.3 DESCRIPTION OF TEST FACILITY.....	8
2 TEST SPECIFICATIONS.....	9
2.1 RELATED DOCUMENTS	9
2.2 PRODUCT INFORMATION.....	9
2.3 CONFIGURATION DESCRIPTION	10
2.4 TEST SETUP	12
2.5 TEST ENVIRONMENT CONDITION:.....	13
2.6 INSTRUMENT LIST	14
2.7 MEASUREMENT UNCERTAINTY.....	15
3 MAXIMUM OUTPUT POWER AND PEAK TO AVERAGE POWER RATIO AND EIRP	16
3.1 LIMIT	16
3.2 MEASUREMENT PROCEDURE	16
3.3 MEASUREMENT RESULT	17
4 OCCUPIED BANDWIDTH	47
4.1 MEASUREMENT PROCEDURE	47
4.2 MEASUREMENT RESULT	48
5 UNWANTED EMISSIONS AT BAND EDGE	61
5.1 LIMIT	61
5.2 MEASUREMENT PROCEDURE	61
5.3 MEASUREMENT RESULT	62
6 CONDUCTED UNWANTED EMISSION	77
6.1 LIMIT	77
6.2 MEASUREMENT PROCEDURE	77
6.3 MEASUREMENT RESULT	78
7 FREQUENCY STABILITY.....	156
7.1 LIMIT	156
7.2 MEASUREMENT PROCEDURE	156
7.3 MEASUREMENT RESULT	157

Revision History

Report No.	Version	Description	Issued Date
2405B1993SHA-001	Rev. 01	Initial issue of report	June 5, 2024

Measurement result summary

TEST ITEM	FCC REFERANCE	RESULT
Max Output Power and Peak to Average Power Ratio and EIRP	27.50(d)	Pass
Occupied Bandwidth	27.53(h) 2.1049	Pass
Unwanted Emissions at Band Edge	27.53(h)	Pass
Conducted Unwanted Emission	27.53(h)	Pass
Frequency Stability	27.54	Pass

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Description:	Remote Radio Unit
Product name:	Radio 8843 B2 B66A
Product number:	KRC 161 707/2
Serial Number(s)	CF8B166746
Rating:	-48V DC
Software Version:	CXP9013268%15_R99AC
Hardware Version:	R1J
Sample received date:	May 8, 2024
Date of test:	May 8, 2024 ~ May 23, 2024

1.2 Technical Specification

Frequency Range:	B2: TX: 1930-1990 MHz, RX: 1850-1910 MHz B66A: TX: 2110-2180 MHz, RX: 1710-1780 MHz
Number of Antenna ports:	B2:4TX/4RX, 2TX/2RX B66A:4TX/4RX, 2TX/2RX
Supported RAT:	B2: LTE, NR, NB_IoT (Inband, Guardband) B66A: LTE, NR, NB_IoT (Inband, Guardband)
Max RF bandwidth (IBW):	B2: 60 MHz; B66A: 70 MHz
Supported Number of Carriers:	Maximum 3 carriers per port
Supported modulation:	LTE: QPSK, 16 QAM, 64 QAM, 256 QAM NR: QPSK, 16 QAM, 64 QAM, 256 QAM
Supported Channel Bandwidth:	LTE: 5, 10, 15, 20 MHz NR: 5, 10, 15, 20, 25, 30,35,40 MHz
Declaration output power:	B2:40W/port (Port A, B, C, D); 60W/port (Port A, D) port B and C not used in this configuration B66A:60W/port (Port E, F, G, H); 80W/port (Port E, H) Port F and G not used in this configuration
Antenna Gain(dBi):	17.8(B2), 17.8(B66A)

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address 1:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Address 2:	F9&F8&F7, Tianfu Software Park E7 Tower, No. 1366 Tianfu Avenue Middle, Hightech Zone, Chengdu City, Sichuan Province, P.R. of China
Telephone:	+86 21 61278200
Telefax:	+86 21 54262353
The test facility is recognized, certified, or accredited by these organizations:	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Related documents

FCC Part 27 (2023)

FCC Part 2 (2023)

ANSI C63.26:2015

KDB 971168 D01 v03r01

KDB 662911 D01 v02r01

2.2 Product Information

The Equipment Under Test (EUT) is an Ericsson Radio Unit working in the wireless communications services 2110-2180MHz which provides communication connections to network in LTE/NR modes and MSR modes. The Radio 8843 B2 B66A operates from a -48V DC.

The EUT includes 4 TX/RX or 2TX/RX mode and it can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration. The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

A full technical description can be found in the Manufacturer's documentation.

TEST REPORT

2.3 Configuration Description

Testing in this Report covers only B66A (2110-2180MHz). For additional configurations and test cases not contained within this test report, refer to the following reports: 2405B1992SHA-001.

The following settings were used to represent all traffic scenarios. The output power was measured on the bottom, middle and top channel of all applicable antenna ports. By measuring the output power of QPSK, 16QAM, 64QAM, 256QAM on one of the antenna ports, it was determined that 256QAM for 4TX/RX & QPSK for 2TX/RX NR was the worst-case modulation schemes as data listed following and were used for all testing.

4TX/RX mode	Port	QPSK	16QAM	64QAM	256QAM
NR-1C 40M Middle	Port H	47.45dBm	47.46dBm	47.47dBm	47.49dBm

2TX/RX mode	Port	QPSK	16QAM	64QAM	256QAM
NR-1C 40M Middle	Port H	48.56dBm	48.53dBm	48.53dBm	48.52dBm

Complete testing was carried out on the worst-case antenna port which was determined by the highest output power from the 4/2 measured ports on worst-case modulation scheme and the worst antenna port was port H for 4TX/RX & 2TX/RX NR as data listed following.

4TX/RX mode	modulation	Port E	Port F	Port G	Port H
NR-1C 40M Middle	256QAM	47.24dBm	47.40dBm	47.24dBm	47.49dBm

2TX/RX mode	modulation	Port E	Port H
NR-1C 40M Middle	QPSK	48.39dBm	48.56dBm

The settings below were used for all measurements unless otherwise noted:


NR

Configuration	No. of Carriers	NR Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-1C	1NR	25	2122.5	2145	2167.5
		30	2125	2145	2165
		35	2127.5	2145	2162.5
		40	2130	2145	2160
NR-2C	2NR	25	-	2122.5+2167.5	-
		30	-	2125+2165	-
		35	-	2127.5+2162.5	-

Configuration	No. of Carriers	NR Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-1C-UE	1NR	25	2122.5	-	2167.5
		30	2125	-	2165
		35	2127.5	-	2162.5
		40	2130	-	2160
NR-2C-UE	2NR	25	-	2122.5+2167.5	-
		30	-	2125+2165	-
		35	-	2127.5+2162.5	-

2.4 Test Setup

Conducted Measurement:

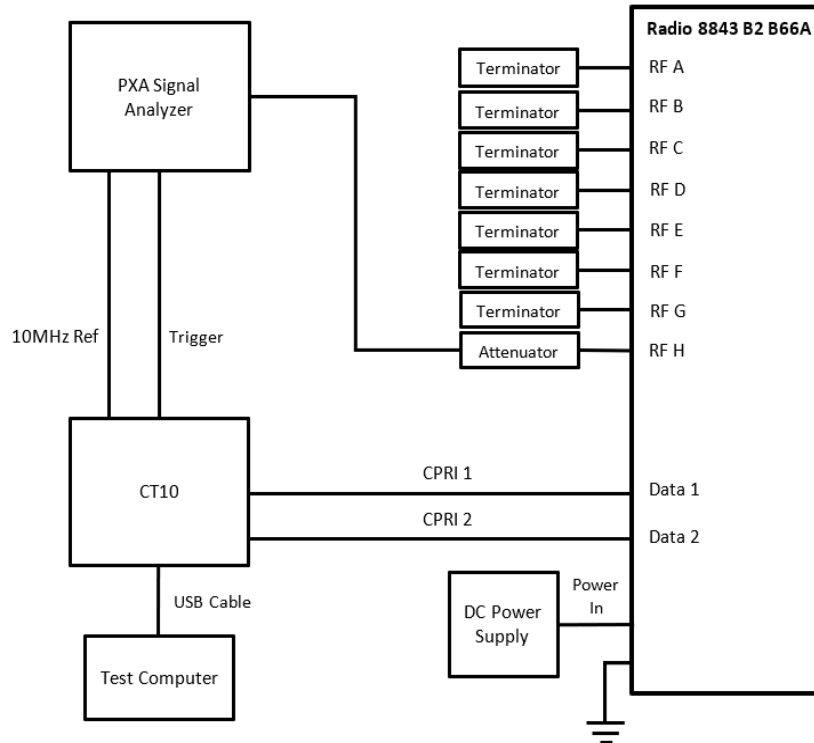

No.	Auxiliary Equipment	Product Number / Model Type	Version
1	Test computer	DELL OptiPlex 3050	-
2	CT10	LPC 102487/1	R1C
3	DC Power Supply	US21E7359S	-
4	GNSS Rubidium clock	HJ5418A-V1	-
5	10db Attenuator	2.92TS100-10-26.5-A	-
6	10db Attenuator	DTS50GH-A-10-18-NMF	-
7	40db Attenuator	WDTS300-40Db-6G-NFF	
8	Terminator	WTF250-6-C	
9	Terminator	WTF300-6-NF	
10	Terminator	TF200-LIM-0360-DF	
11	Coupler	C40-560-4F	
12	Filter	W-FLTF-026-18000-26500	

Proper Attenuator/Filter will be chosen to use in relative test case. And the cable loss of specified Attenuator/Filter with connect cable will be calibrated before test for relative frequency range and the worst reading will be used as offset in the relative test case.

TEST REPORT

2.5 Test environment condition:

Test items	Temperature	Humidity
Max Output Power and Peak to Average Power Ratio and EIRP	23°C	54% RH
Occupied Bandwidth		
Unwanted Emissions at Band Edge		
Conducted Unwanted Emission		
Frequency Stability	Please refer to clause 7	

2.6 Instrument list

RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Signal Analyzer	R&S	FSVA3044	101087	2024-07-09
<input checked="" type="checkbox"/>	Signal Analyzer	Keysight	N9030B	MY57140894	2024-07-09
<input checked="" type="checkbox"/>	Climatic Chamber	Chongqing Yinhe	SDJ61F	201700266	2024-06-30
<input checked="" type="checkbox"/>	Hygrometer	TESTO	608-H1	1745127471	2024-12-09
<input checked="" type="checkbox"/>	Hygrometer	TESTO	608-H1	1745127476	2024-12-09

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum output power	0.73dB
Occupied Bandwidth	0.88%
Unwanted Emissions at Band Edge	3.03dB
Conducted Unwanted Emission	3.03dB
Frequency stability	0.77×10^{-7}

TEST REPORT

3 Maximum Output Power and Peak to Average Power Ratio and EIRP

Test result: Pass

3.1 Limit

Output Power:

(EIRP) 1640 W(62.15dBm) or 3280W(65.16dBm) for emission bandwidth \leq 1MHz
1640 W/MHz(62.15dBm/MHz) or 3280W/MHz(65.16dBm/MHz) for emission bandwidth $>$ 1MHz

Peak to Average Ratio: \leq 13 dB

3.2 Measurement Procedure

The EUT was configured to transmit on maximum power and proper modulation. The transmitter power shall be measured in terms of a root-mean-square (RMS) average value. In case of the EUT was configured to MIMO mode, since the EUT transmits on all antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at all antennas were tested, and the total output power were then summed mathematically in linear power units according to FCC KDB 662911 D01.

A peak to average ratio measurement is performed at the conducted ports of the EUT for single carrier for single RAT mode. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) was used and 0.1% probability value recorded.

TEST REPORT

3.3 Measurement result

4TX/RX mode:

NR-1C


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	25	47.53	34.15	7.12	47.52	34.07	7.03	47.41	33.94	7.19
F	256QAM	25	47.46	34.12	7.07	47.58	34.22	7.03	47.36	33.91	7.19
G	256QAM	25	47.50	34.17	7.10	47.46	34.00	7.03	47.37	33.95	7.20
H	256QAM	25	47.46	34.02	7.09	47.68	34.12	7.03	47.45	34.00	7.19
Total conducted power			53.51	40.14	-	53.58	40.12	-	53.42	39.97	-
antenna gain			17.8								
EIRP			71.31	57.94	-	71.38	57.92	-	71.22	57.77	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	4.21	-	-	4.23	-	-	4.38	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	30	47.47	33.31	7.14	47.49	33.15	7.03	47.43	33.23	7.24
F	256QAM	30	47.49	33.34	7.11	47.54	33.25	7.04	47.40	33.08	7.24
G	256QAM	30	47.51	33.13	7.13	47.46	33.18	7.04	47.32	33.04	7.25
H	256QAM	30	47.55	33.37	7.13	47.62	33.39	7.04	47.41	32.99	7.24
Total conducted power			53.53	39.31	-	53.55	39.26	-	53.41	39.11	-
antenna gain			17.8								
EIRP			71.33	57.11	-	71.35	57.06	-	71.21	56.91	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	5.04	-	-	5.09	-	-	5.24	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	35	47.19	32.53	7.14	47.31	32.57	7.03	47.22	32.57	7.30
F	256QAM	35	47.34	32.45	7.10	47.34	32.47	7.03	47.22	32.30	7.29
G	256QAM	35	47.34	32.46	7.11	47.27	32.27	7.03	47.14	32.22	7.33
H	256QAM	35	47.39	32.56	7.11	47.45	32.70	7.03	47.27	32.27	7.28
Total conducted power			53.34	38.52	-	53.36	38.53	-	53.23	38.36	-
antenna gain			17.8								
EIRP			71.14	56.32	-	71.16	56.33	-	71.03	56.16	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	5.83	-	-	5.82	-	-	5.99	-


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	40	47.17	31.68	7.15	47.49	32.03	7.05	47.16	31.65	7.31
F	256QAM	40	47.33	31.77	7.13	47.40	31.90	7.04	47.26	31.81	7.31
G	256QAM	40	47.26	31.76	7.13	47.24	31.72	7.06	47.15	31.84	7.35
H	256QAM	40	47.53	32.00	7.14	47.24	31.64	7.04	47.34	31.75	7.30
Total conducted power			53.35	37.82	-	53.36	37.85	-	53.25	37.78	-
antenna gain			17.8								
EIRP			71.15	55.62	-	71.16	55.65	-	71.05	55.58	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	6.53	-	-	6.50	-	-	6.57	-

NR 25MHz, Channel B, Power

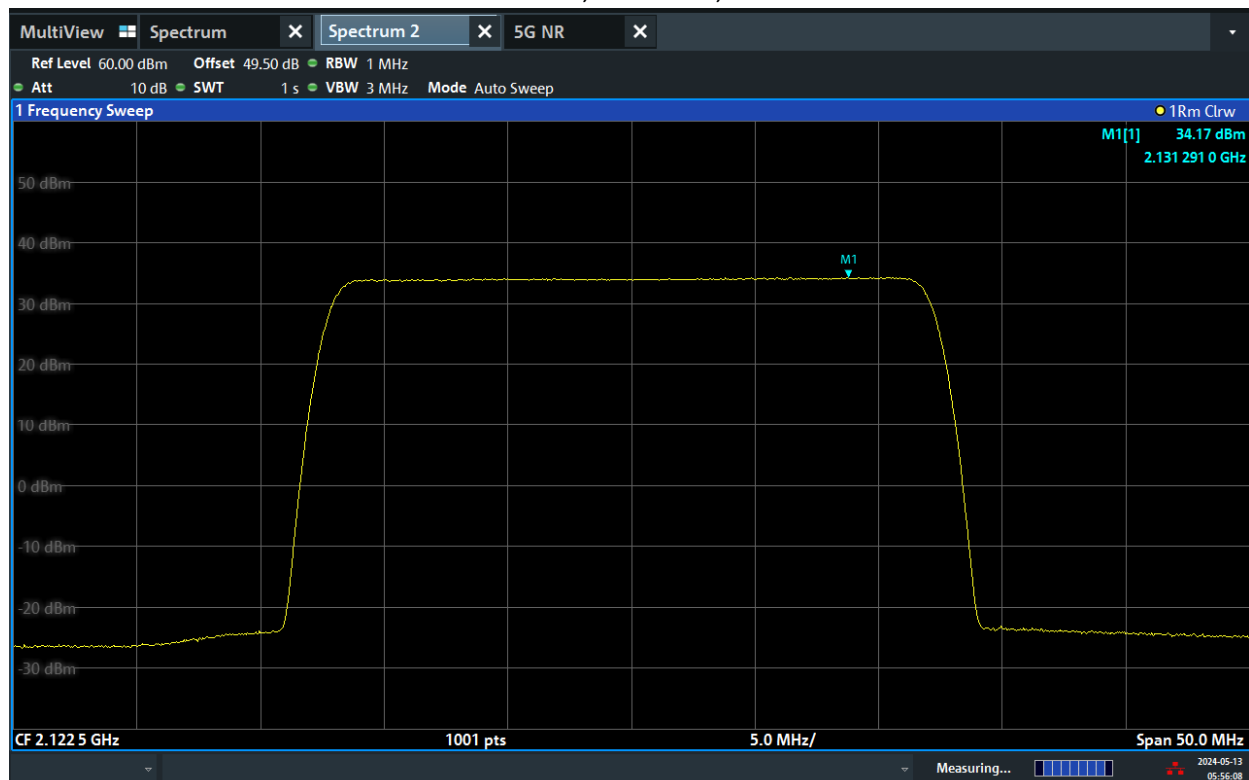


05:56:09 AM 05/13/2024

NR 25MHz, Channel B, PAR

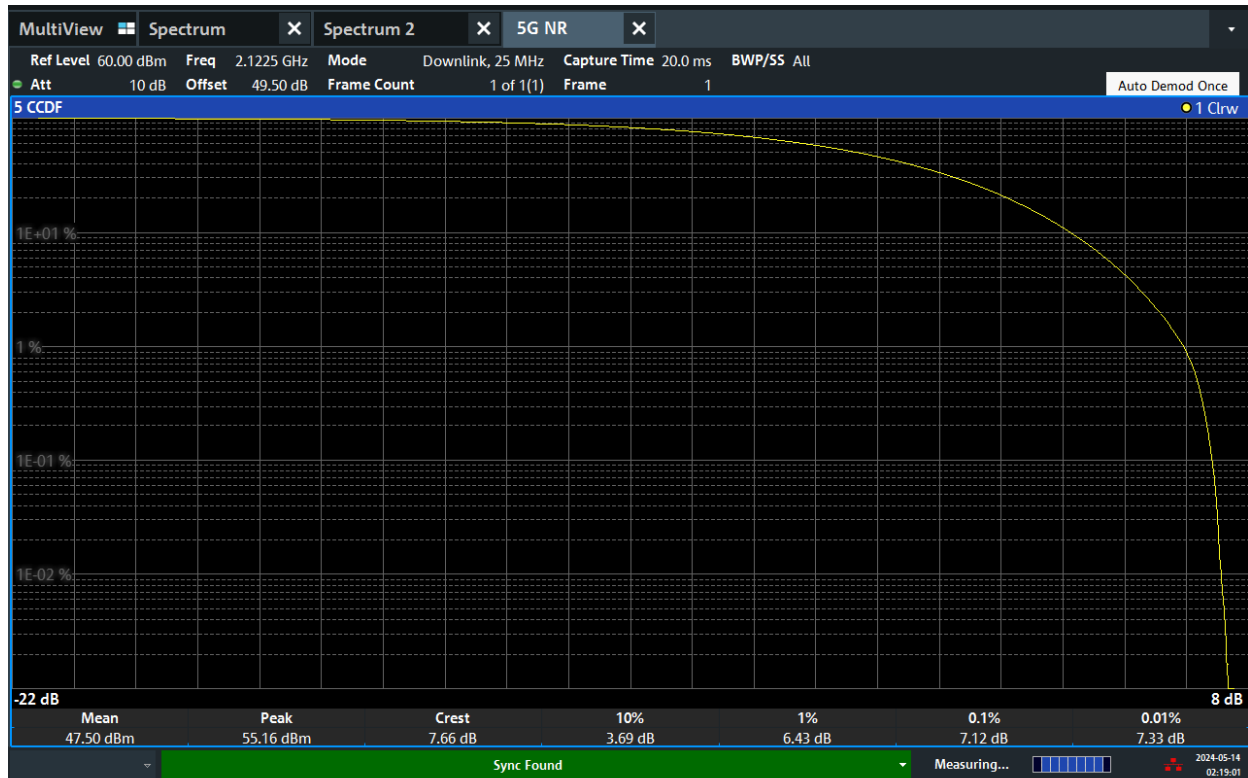


02:19:01 AM 05/14/2024

NR 25MHz, Channel M, Power

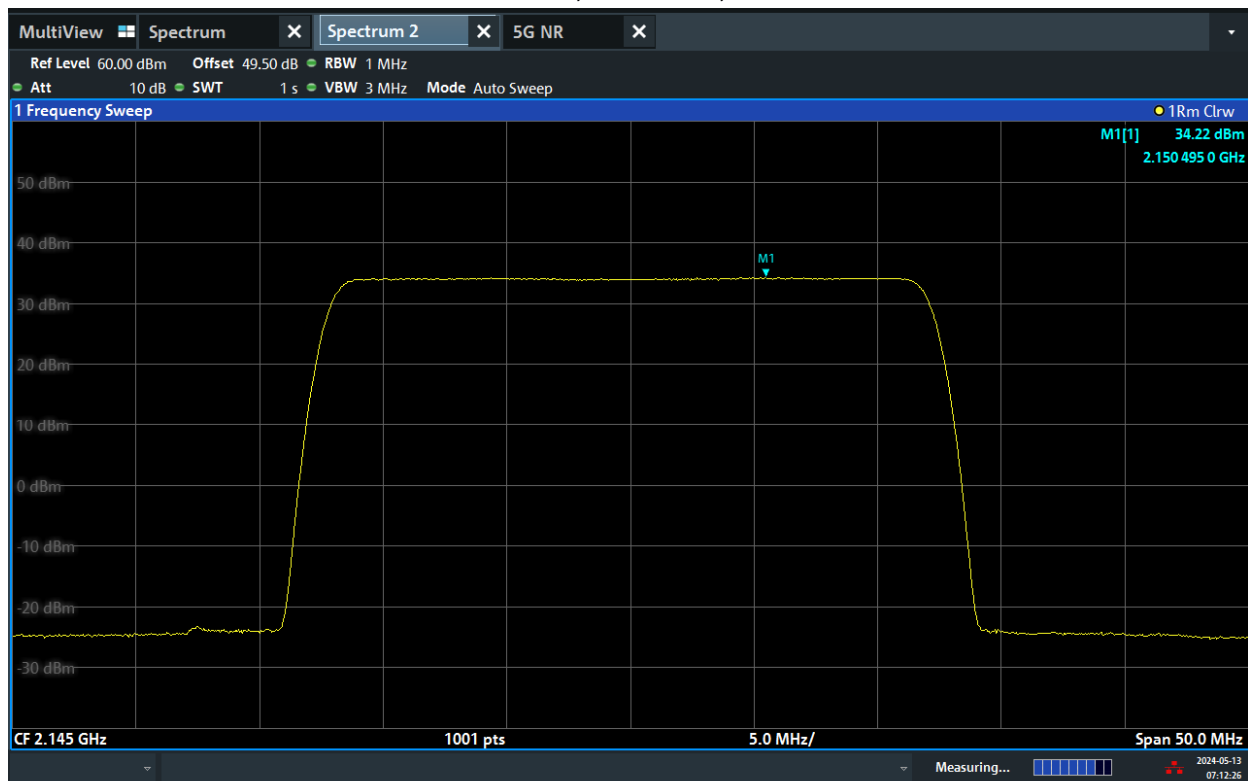


07:12:26 AM 05/13/2024

NR 25MHz, Channel M, PAR

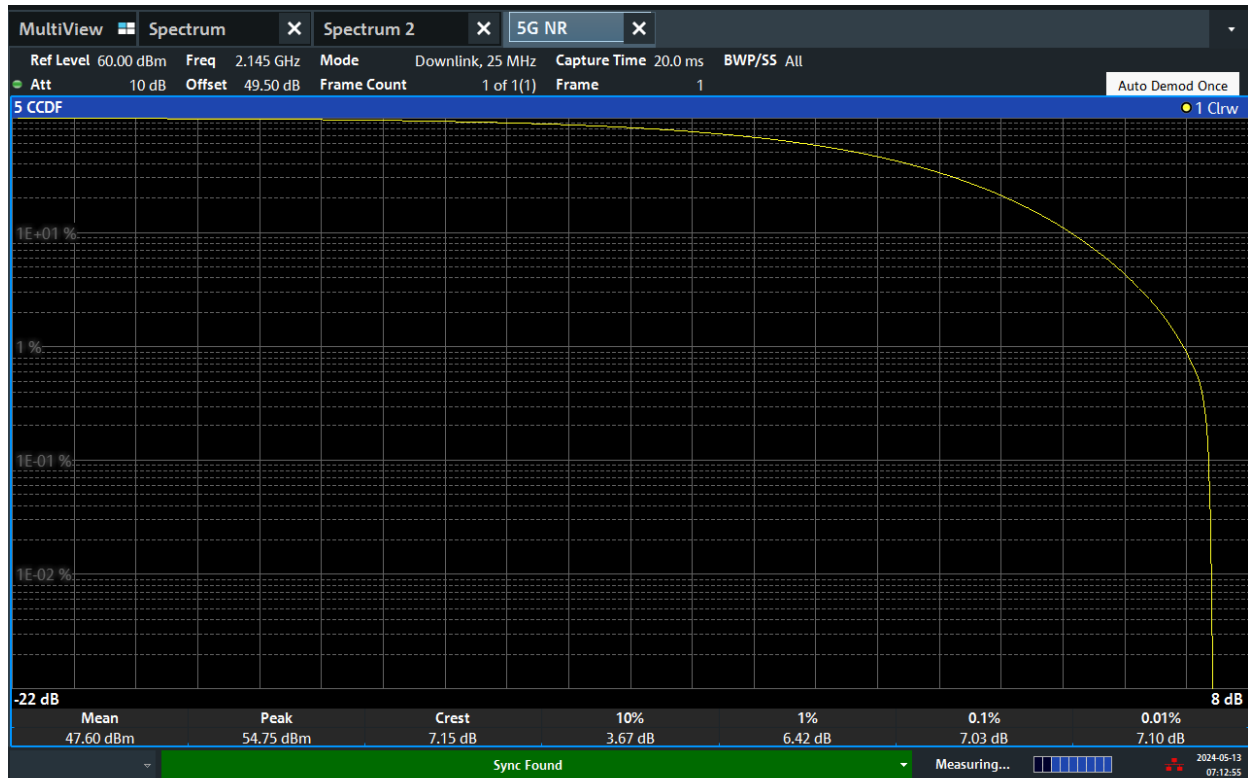


07:12:55 AM 05/13/2024

NR 25MHz, Channel T, Power

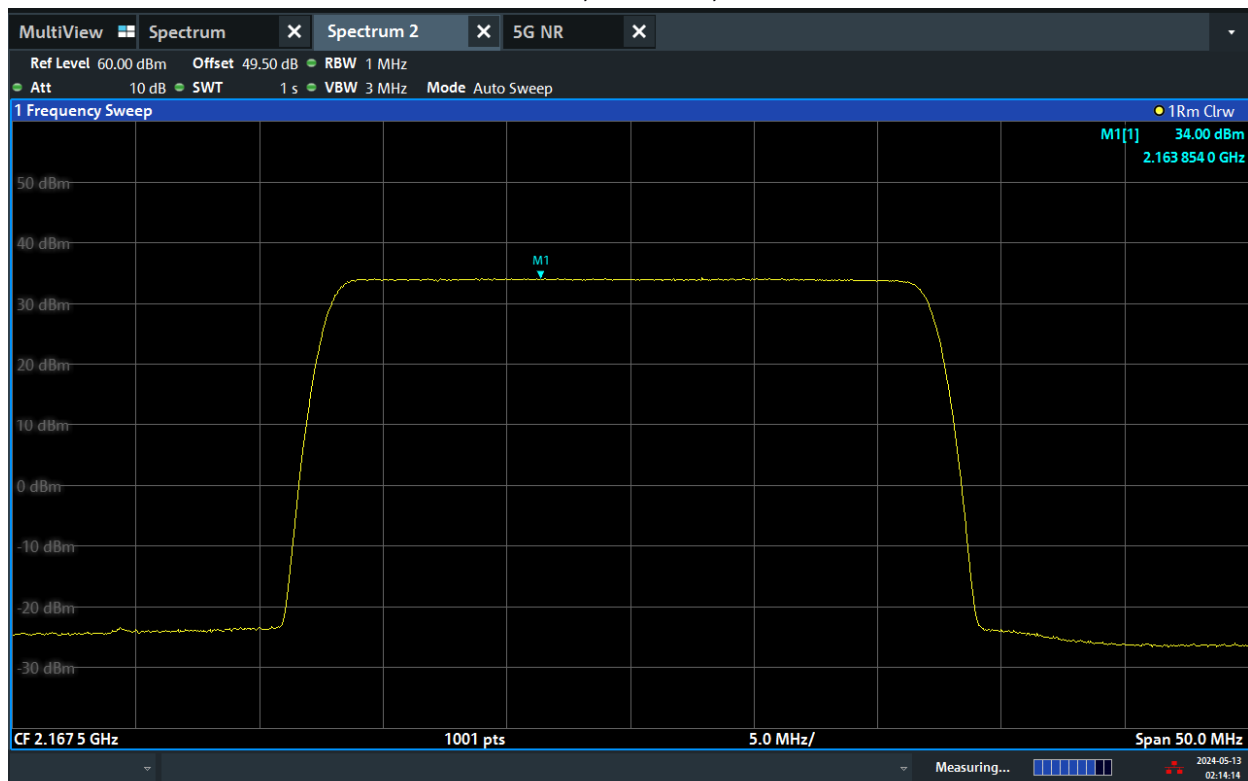


02:14:15 AM 05/13/2024

NR 25MHz, Channel T, PAR

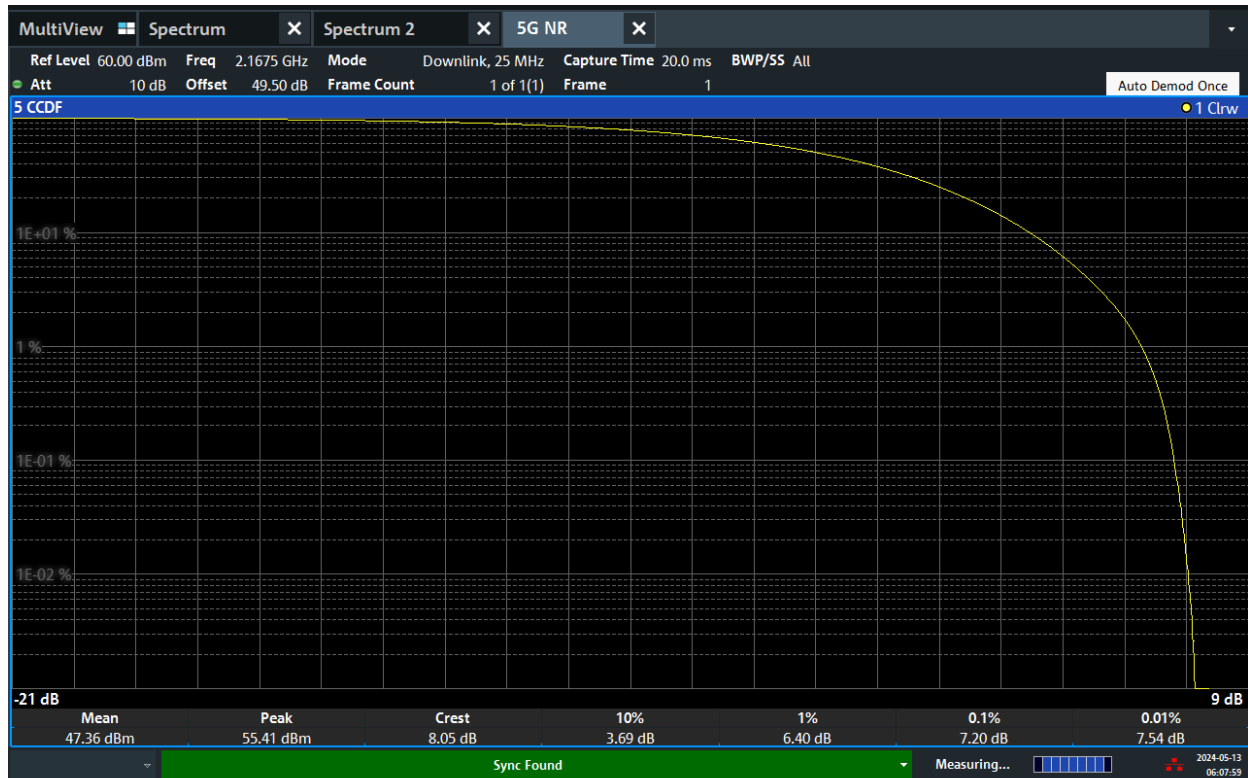


06:08:00 AM 05/13/2024

NR 30MHz, Channel B, Power

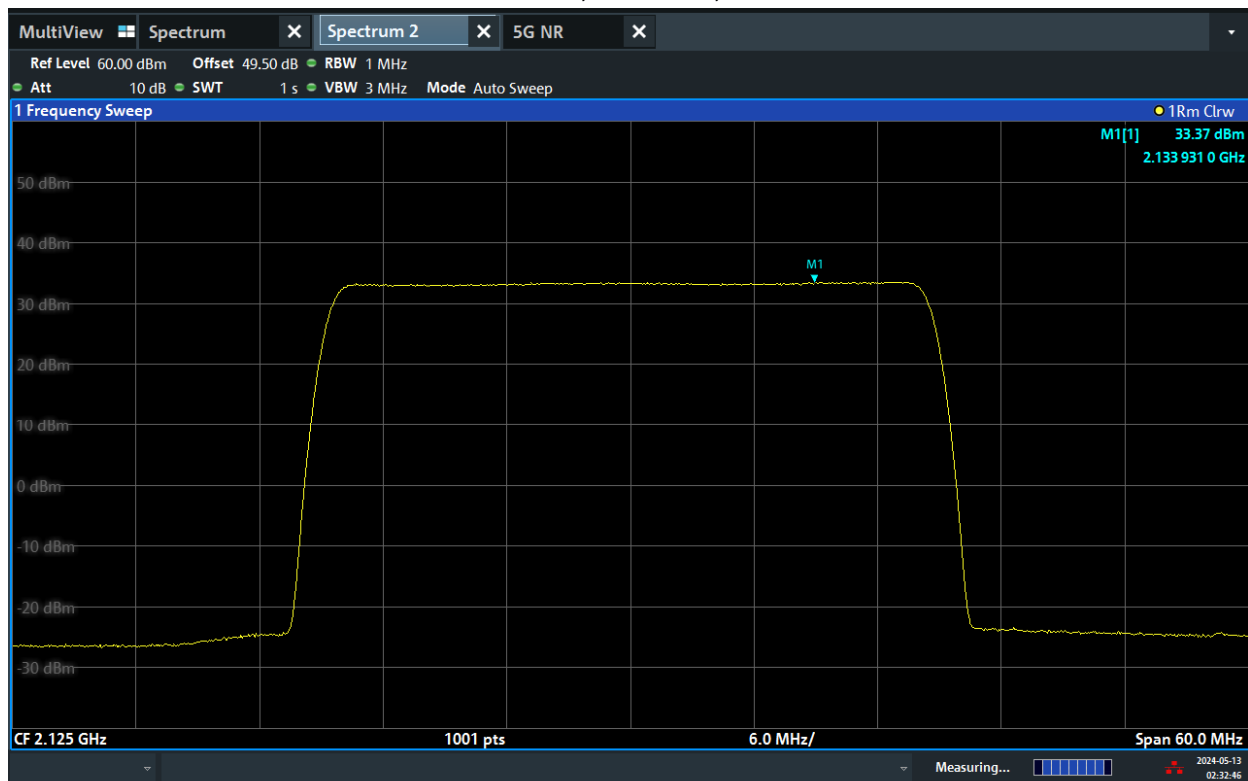


02:32:47 AM 05/13/2024

NR 30MHz, Channel B, PAR

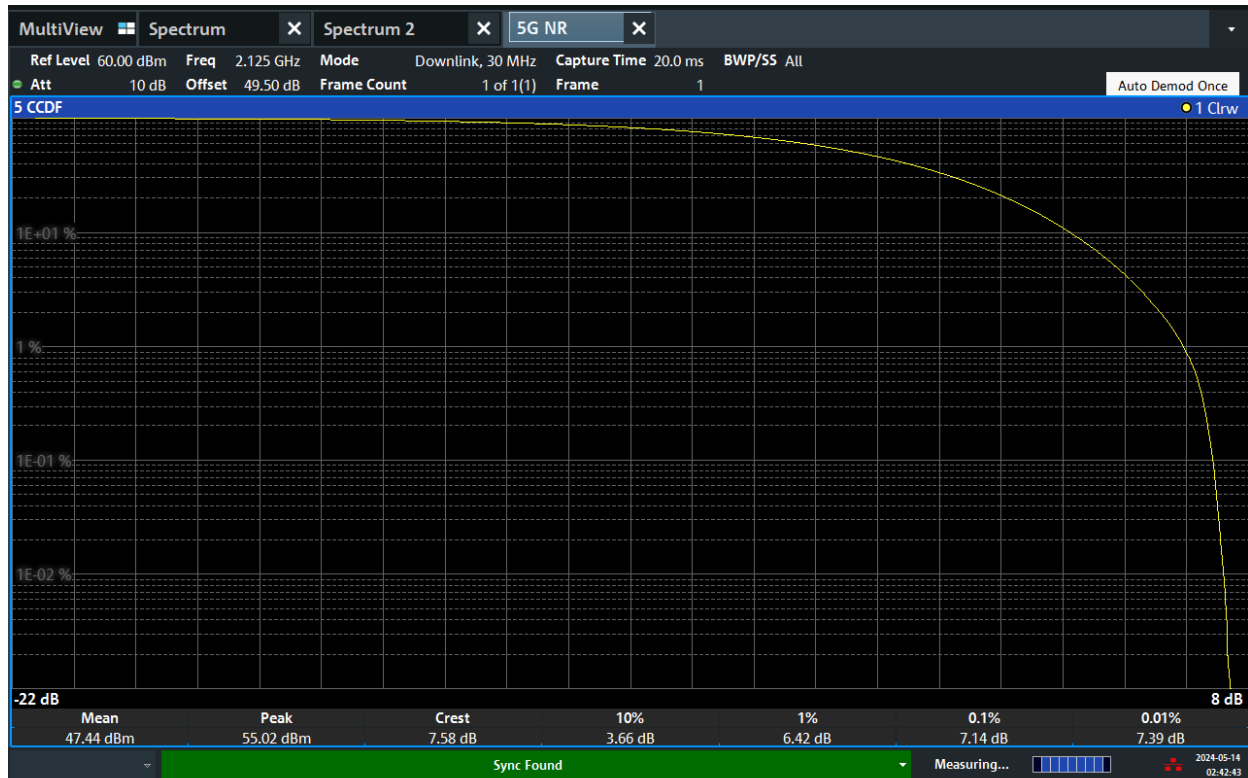


02:42:43 AM 05/14/2024

NR 30MHz, Channel M, Power

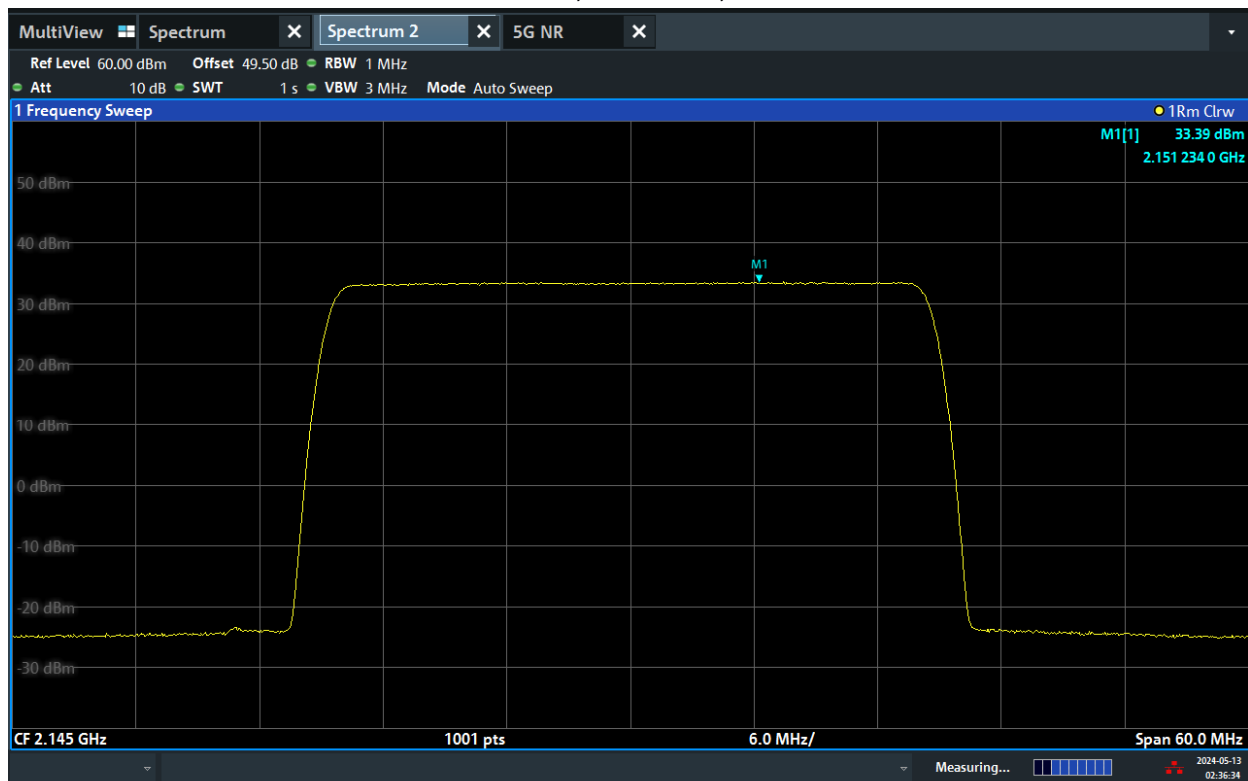


02:36:35 AM 05/13/2024

NR 30MHz, Channel M, PAR

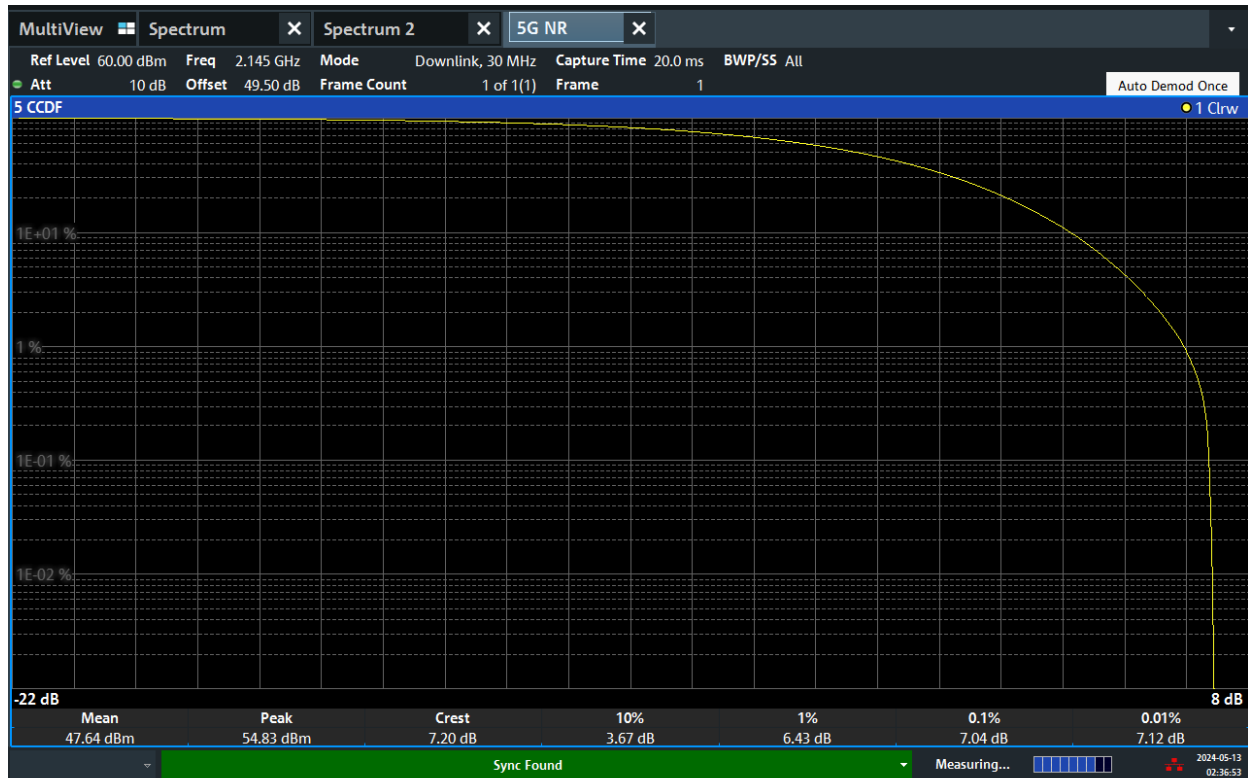


02:36:54 AM 05/13/2024

NR 30MHz, Channel T, Power

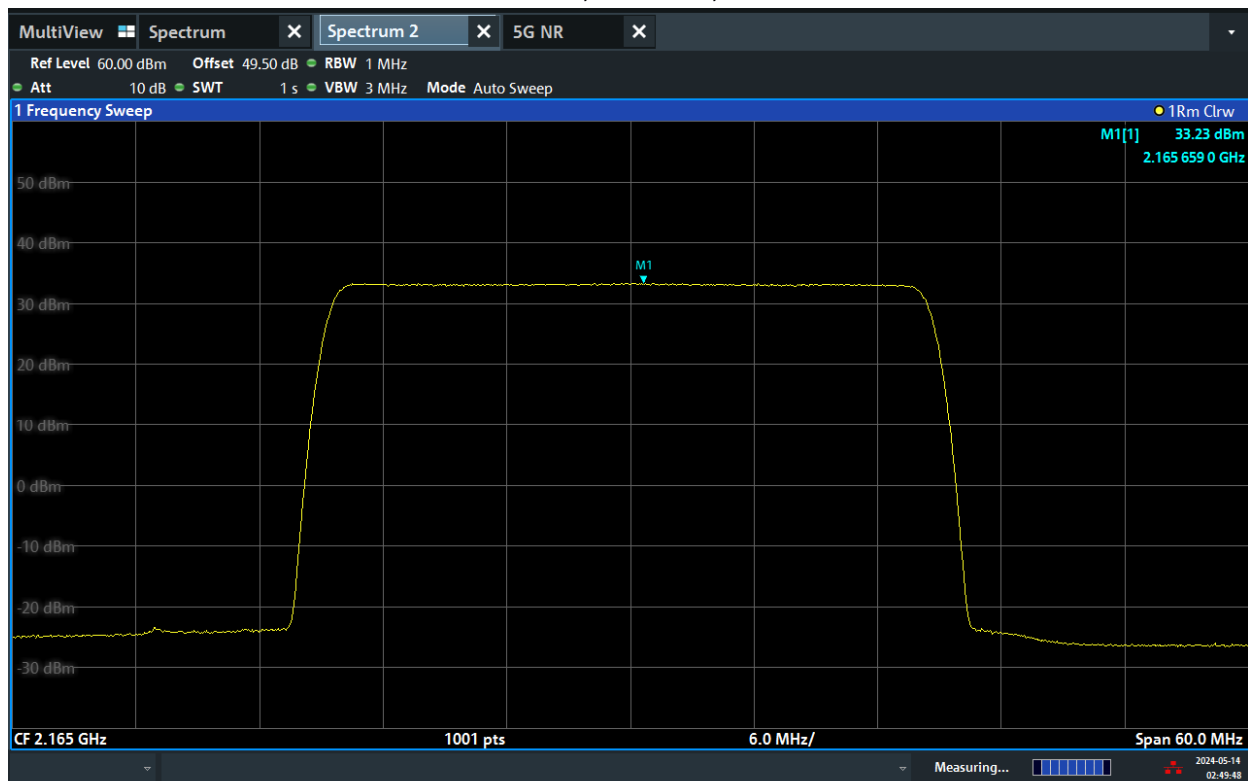


02:49:49 AM 05/14/2024

NR 30MHz, Channel T, PAR

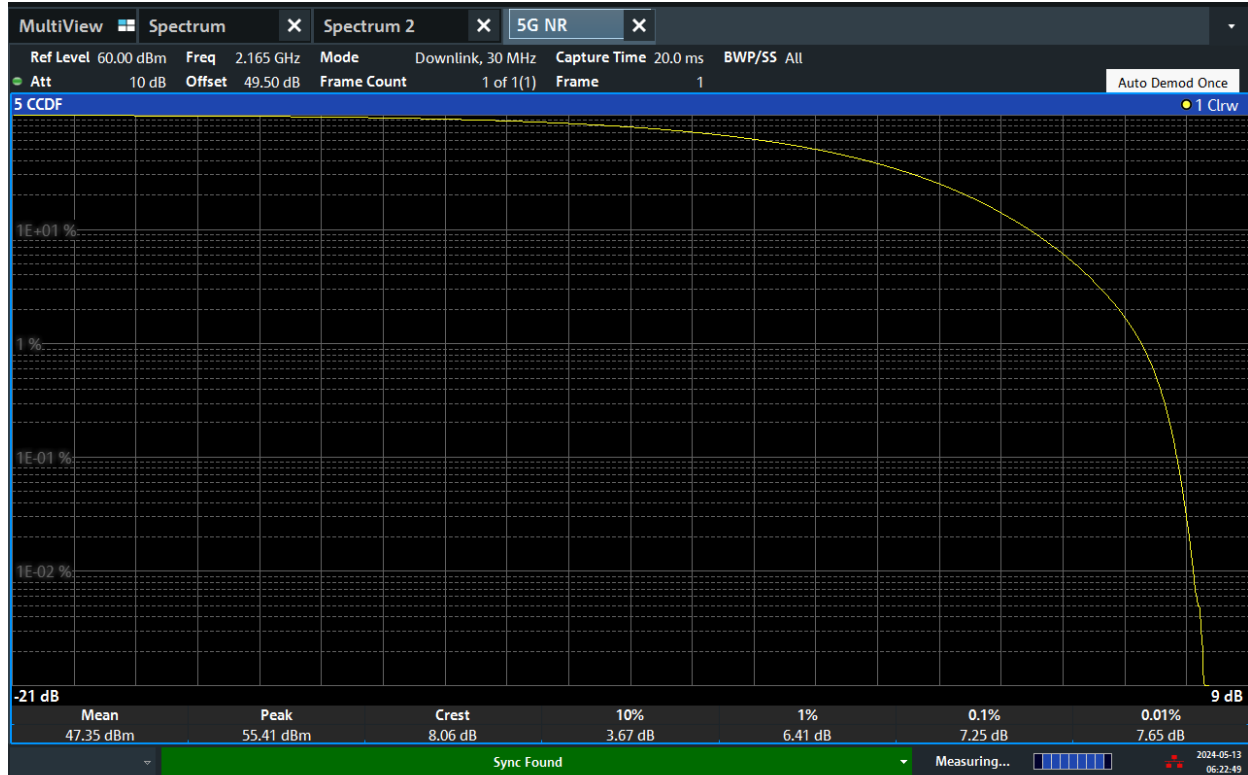


06:22:50 AM 05/13/2024

NR 35MHz, Channel B, Power

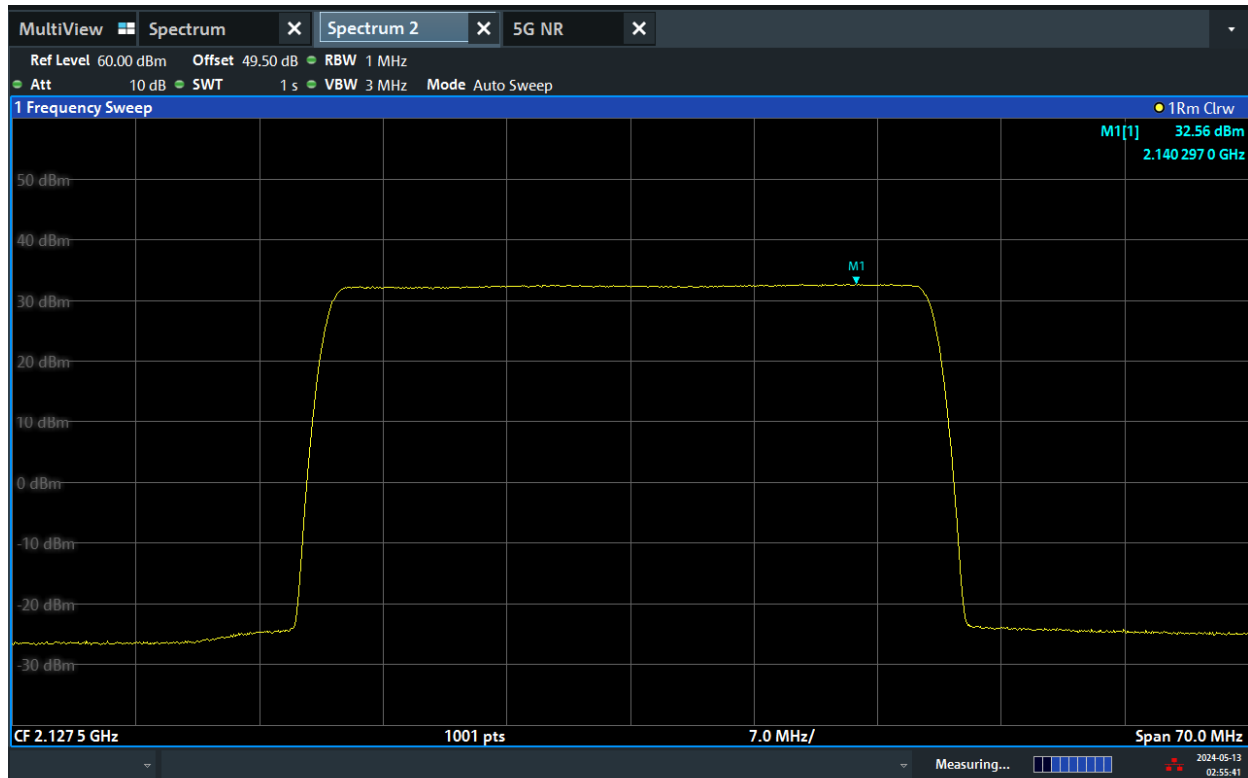


02:55:42 AM 05/13/2024

NR 35MHz, Channel B, PAR

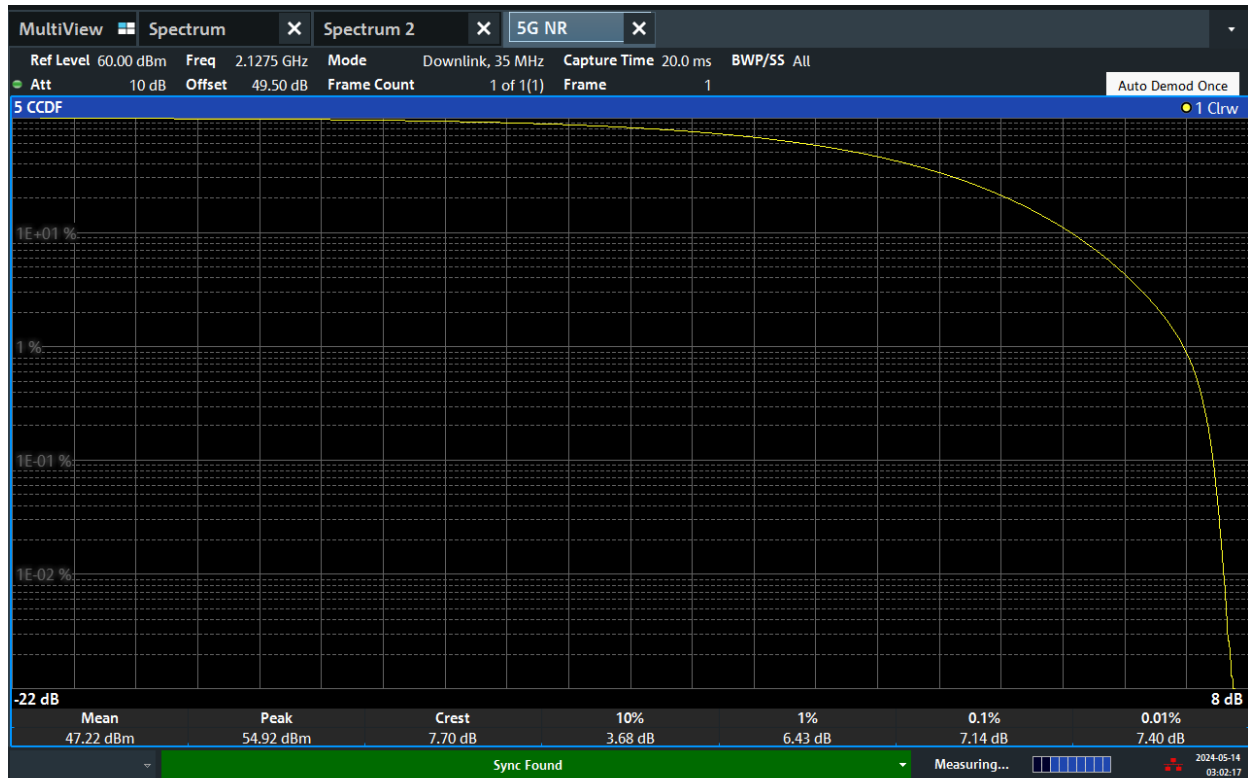


03:02:17 AM 05/14/2024

NR 35MHz, Channel M, Power

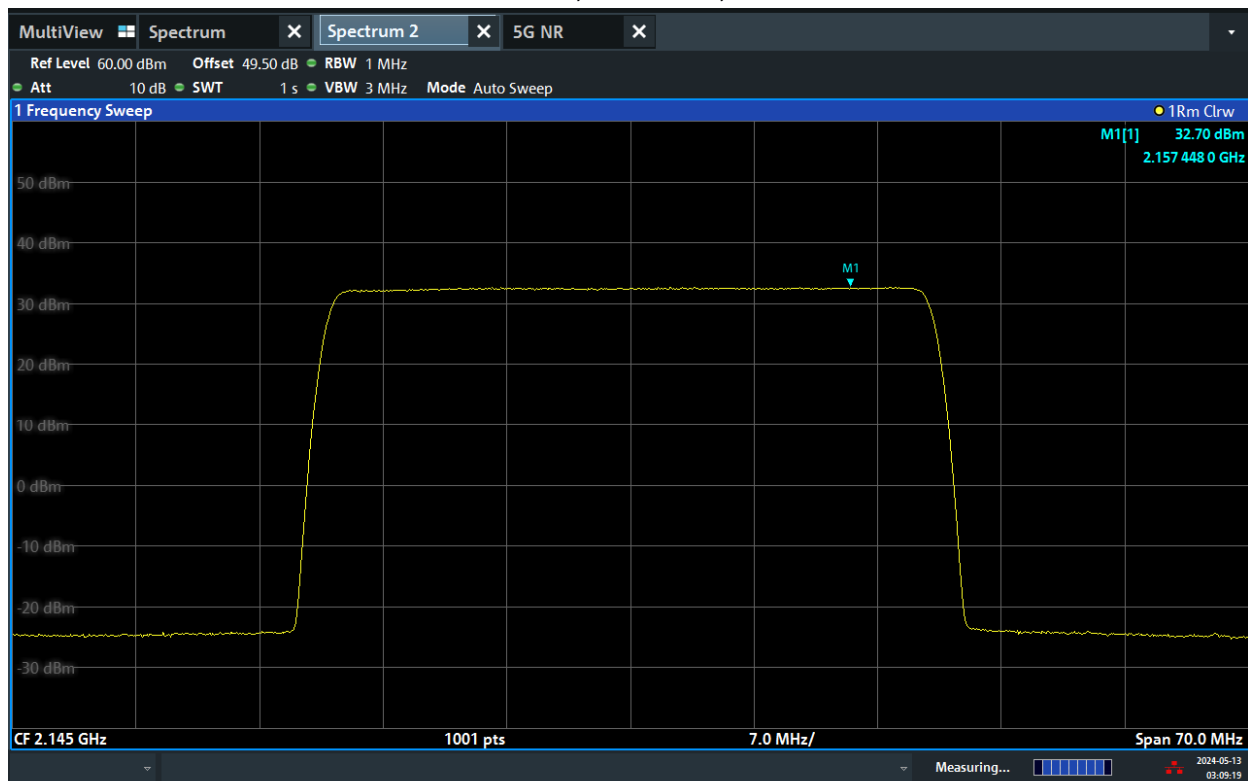


03:09:19 AM 05/13/2024

NR 35MHz, Channel M, PAR

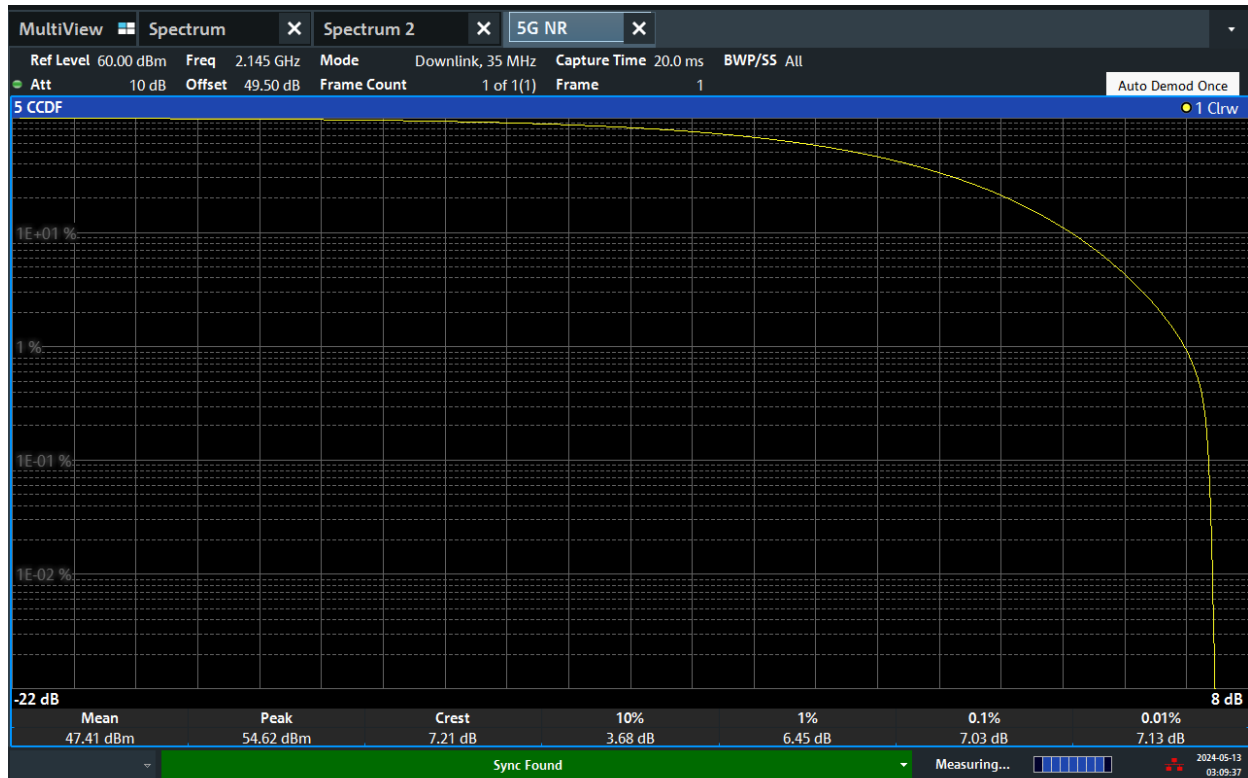


03:09:37 AM 05/13/2024

NR 35MHz, Channel T, Power

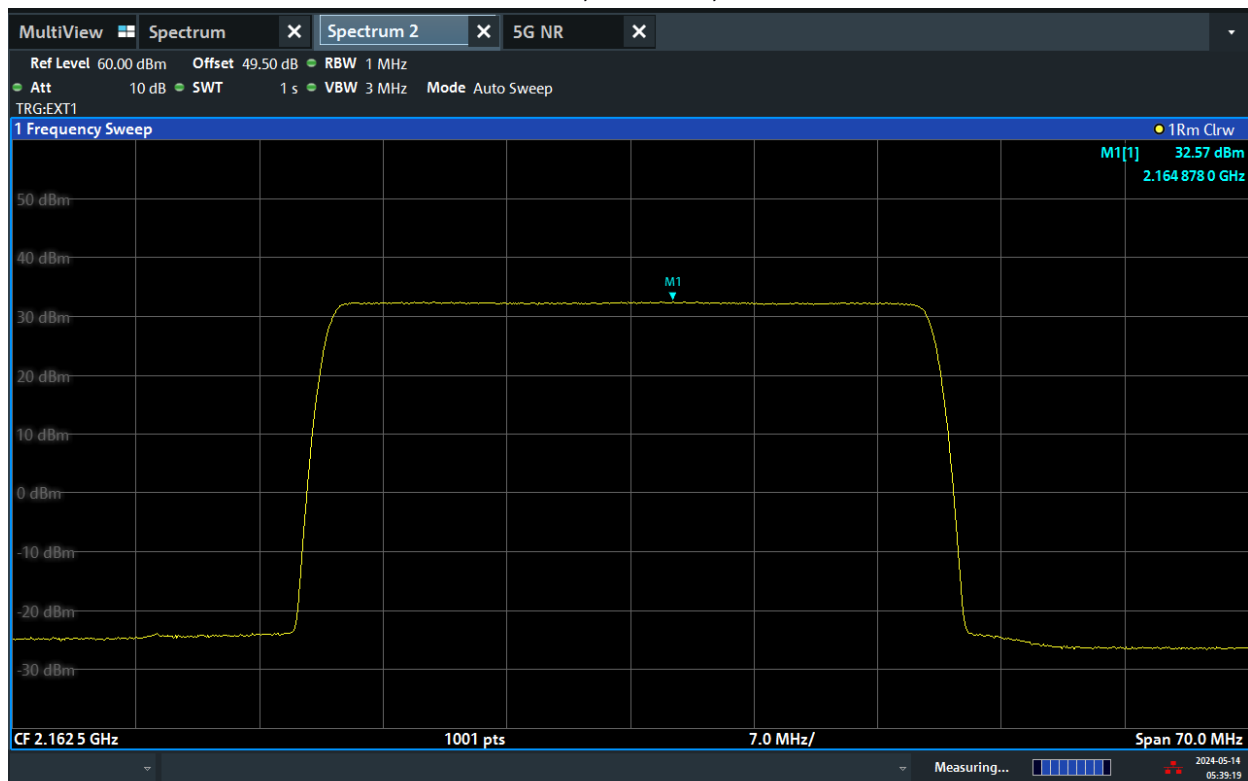


05:39:19 AM 05/14/2024

NR 35MHz, Channel T, PAR

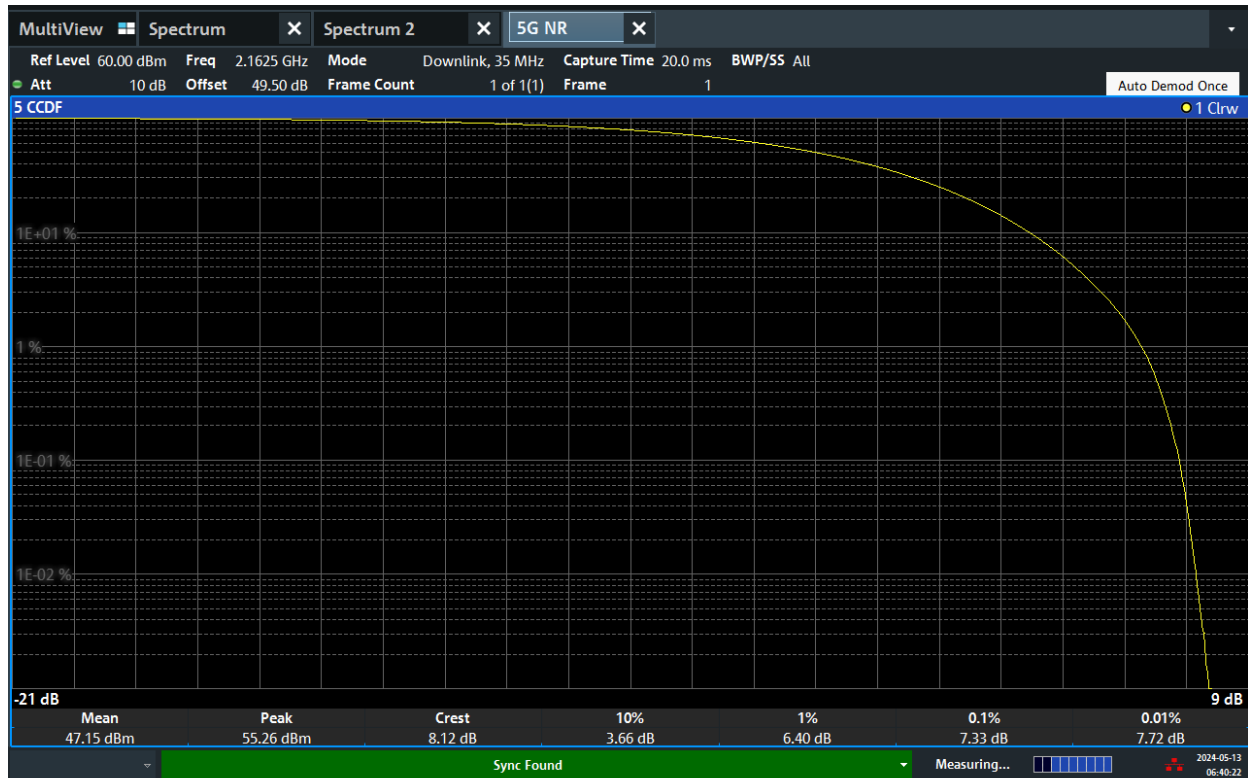


06:40:22 AM 05/13/2024

NR 40MHz, Channel B, Power

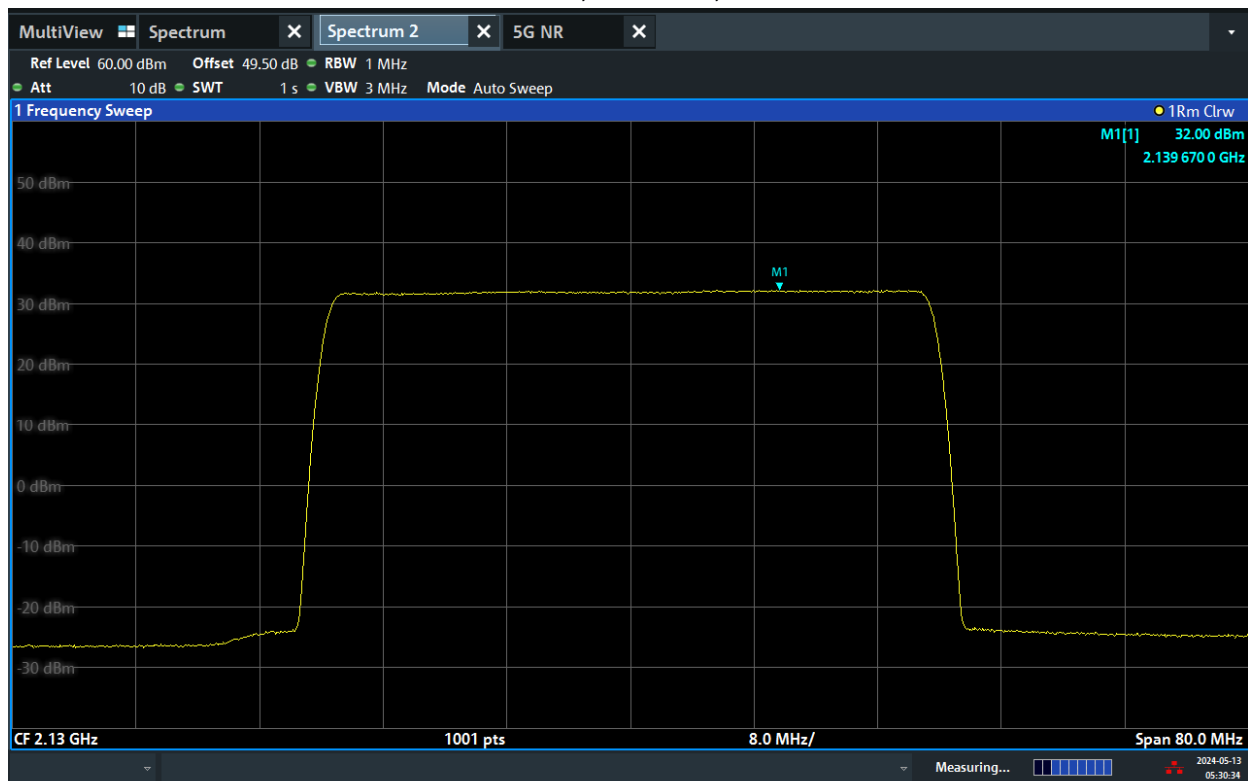


05:30:35 AM 05/13/2024

NR 40MHz, Channel B, PAR

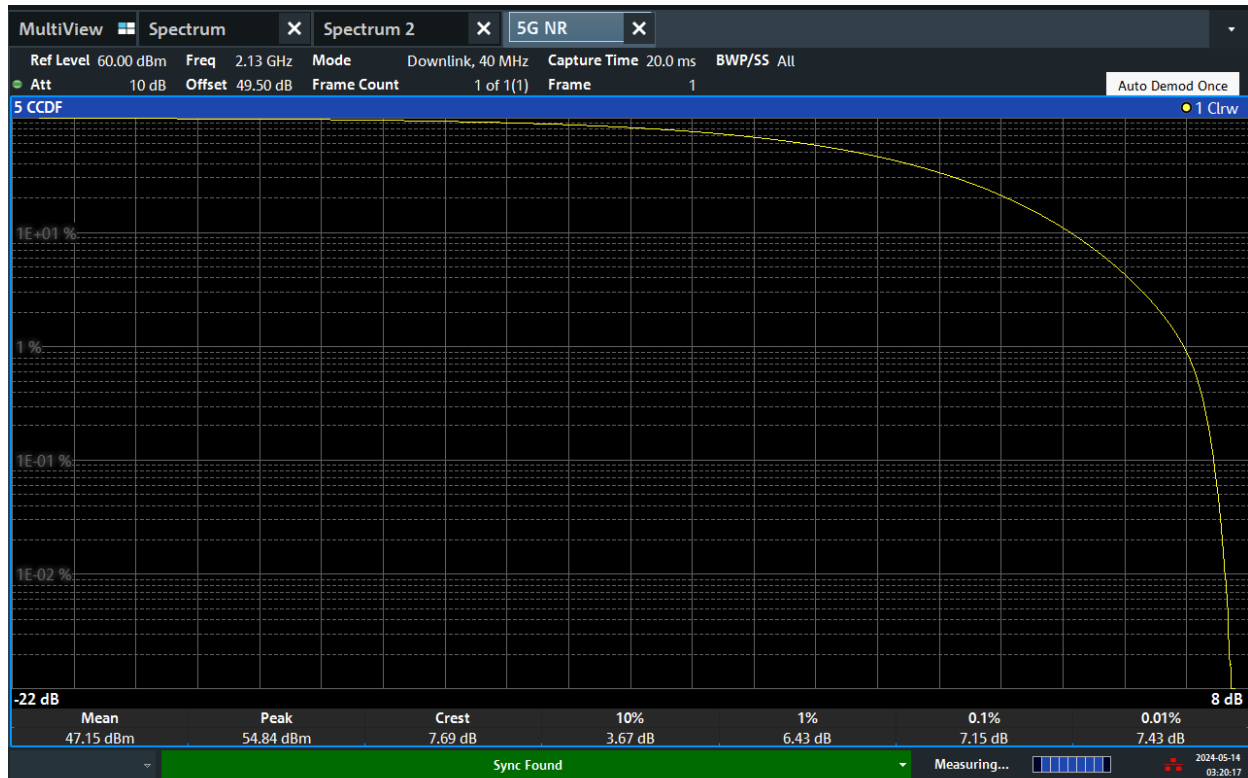


03:20:18 AM 05/14/2024

NR 40MHz, Channel M, Power

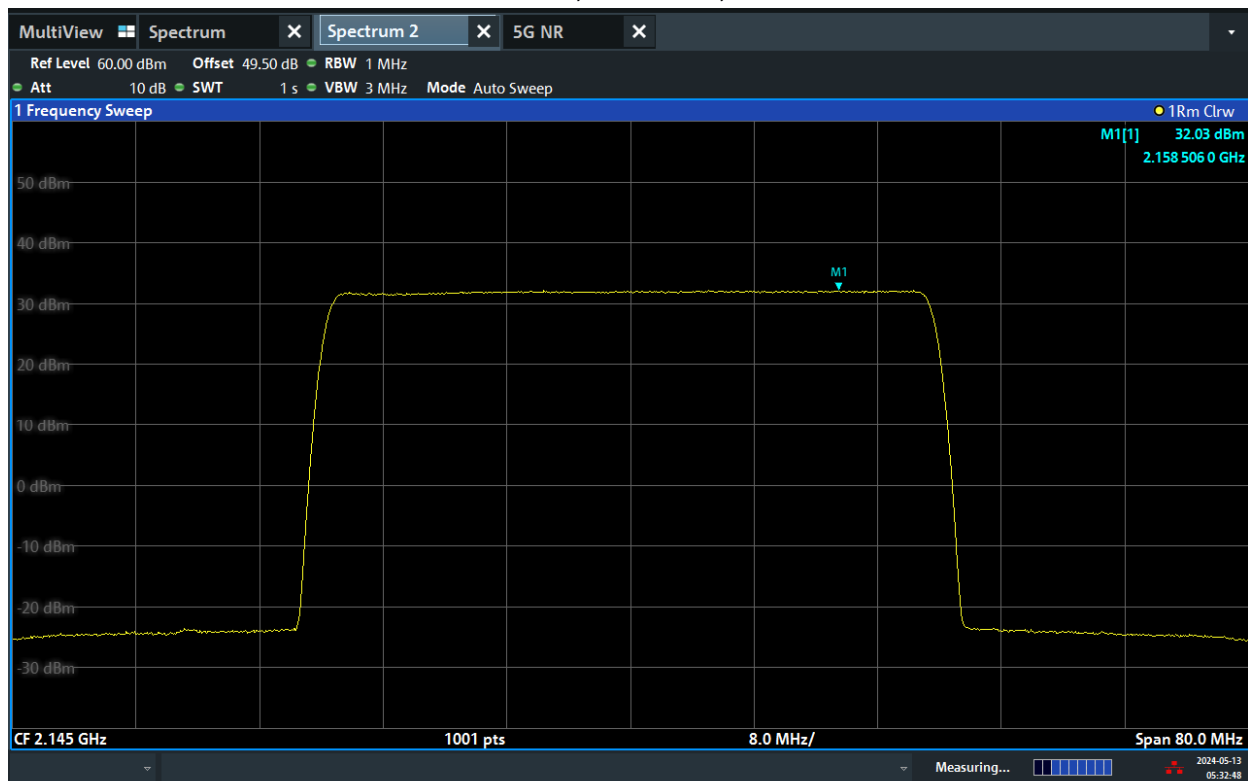


05:32:49 AM 05/13/2024

NR 40MHz, Channel M, PAR

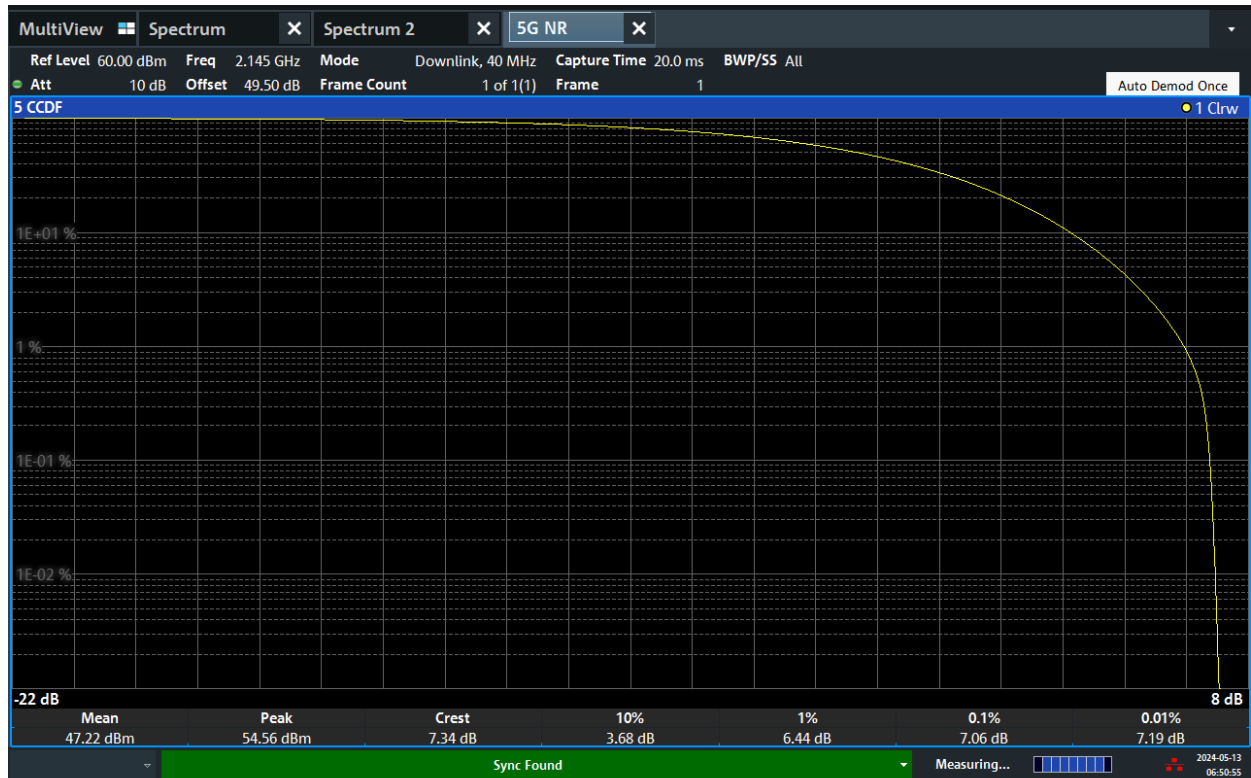


06:50:56 AM 05/13/2024

NR 40MHz, Channel T, Power

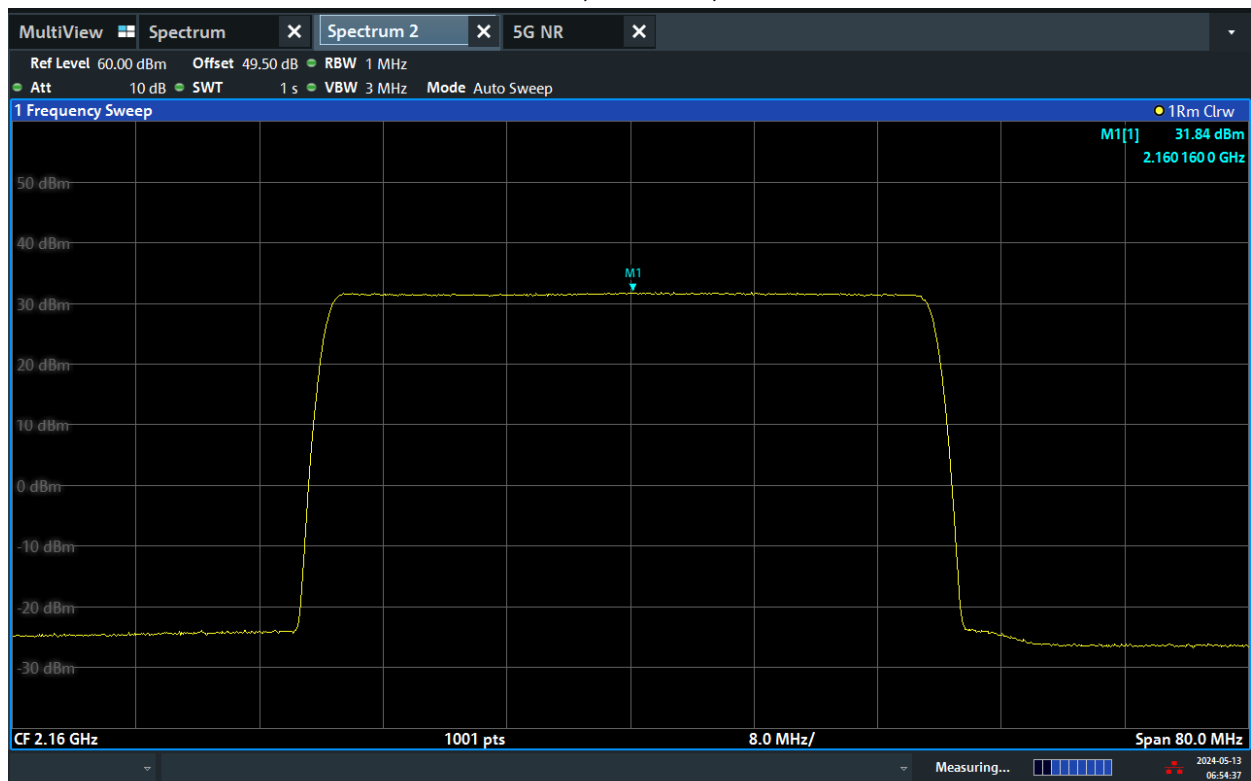

06:54:38 AM 05/13/2024

NR 40MHz, Channel T, PAR

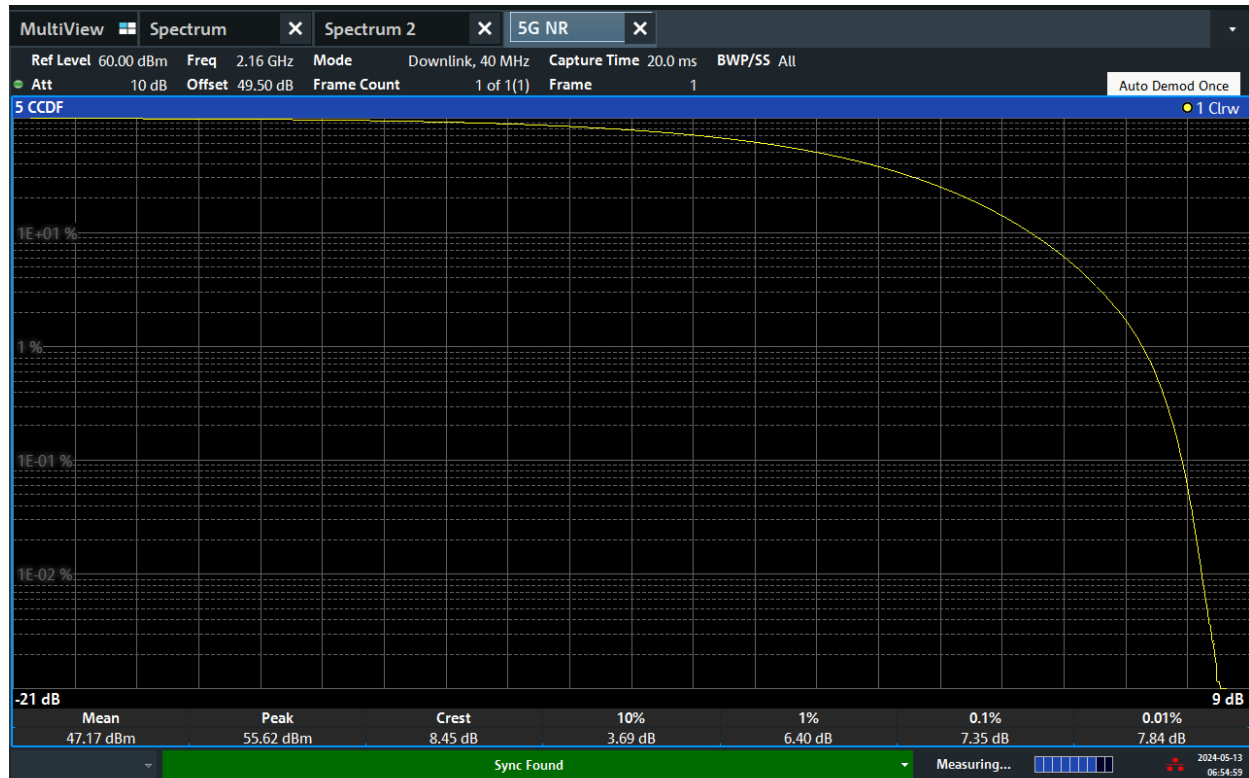

06:54:59 AM 05/13/2024


NR-2C

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	25	-	-	-	46.97	30.73	-	-	-	-
F	256QAM	25	-	-	-	46.91	30.81	-	-	-	-
G	256QAM	25	-	-	-	46.89	30.66	-	-	-	-
H	256QAM	25	-	-	-	47.02	30.86	-	-	-	-
Total conducted power			-	-	-	52.97	36.79	-	-	-	-
antenna gain			17.8								
EIRP			-	-	-	70.77	54.59	-	-	-	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	-	-	-	7.56	-	-	-	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	30	-	-	-	46.99	30.02	-	-	-	-
F	256QAM	30	-	-	-	46.95	30.09	-	-	-	-
G	256QAM	30	-	-	-	46.91	29.93	-	-	-	-
H	256QAM	30	-	-	-	47.08	30.13	-	-	-	-
Total conducted power			-	-	-	53.00	36.06	-	-	-	-
antenna gain			17.8								
EIRP			-	-	-	70.80	53.86	-	-	-	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	-	-	-	8.29	-	-	-	-


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	256QAM	35	-	-	-	47.01	29.28	-	-	-	-
F	256QAM	35	-	-	-	46.98	29.34	-	-	-	-
G	256QAM	35	-	-	-	46.90	29.25	-	-	-	-
H	256QAM	35	-	-	-	47.08	29.51	-	-	-	-
Total conducted power			-	-	-	53.01	35.37	-	-	-	-
antenna gain			17.8								
EIRP			-	-	-	70.81	53.17	-	-	-	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	-	-	-	8.98	-	-	-	-

NR 25MHz, Channel M, Power

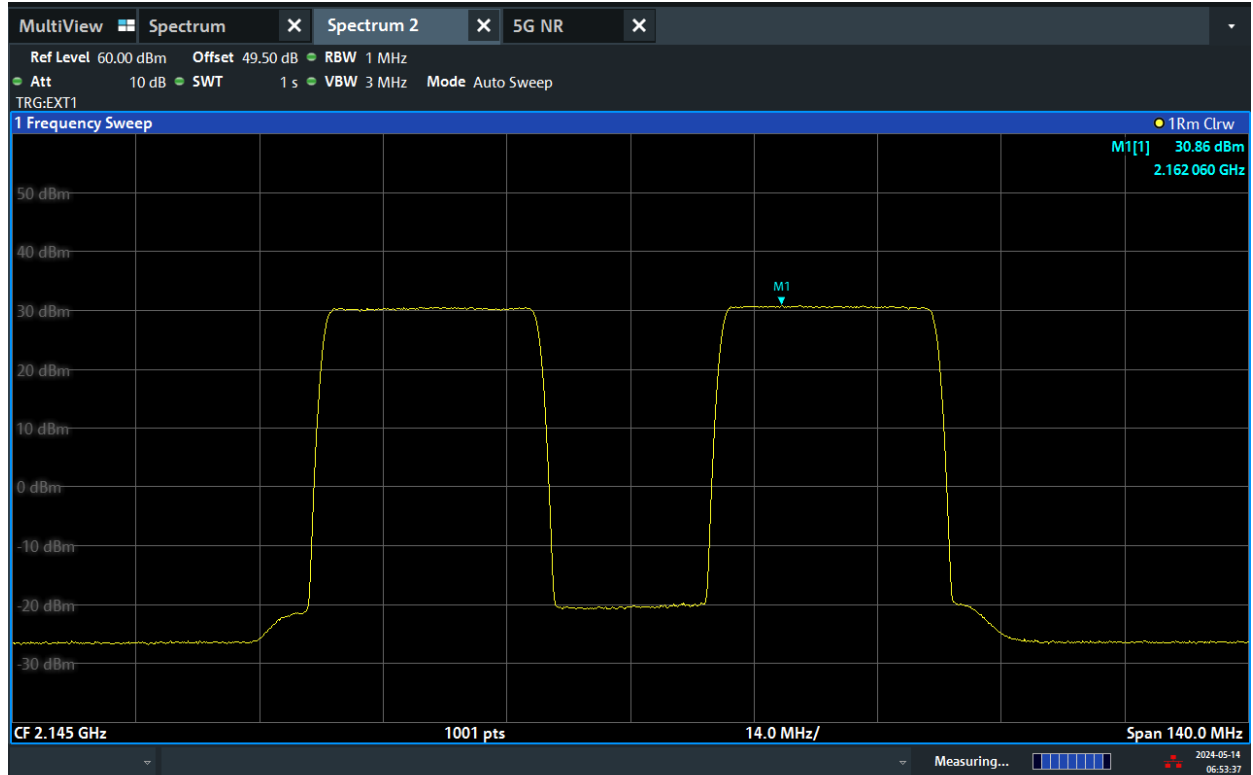


06:53:37 AM 05/14/2024

NR 30MHz, Channel M, Power

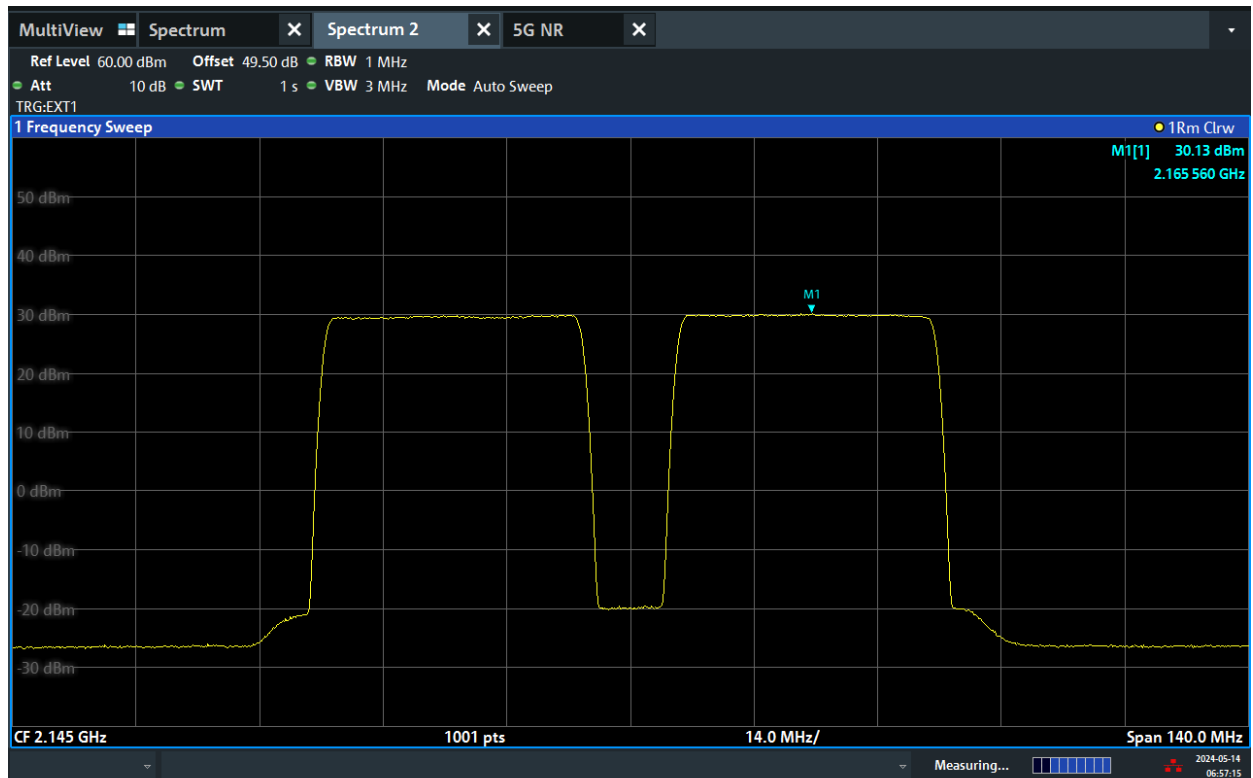

06:57:15 AM 05/14/2024

NR 40MHz, Channel M, Power

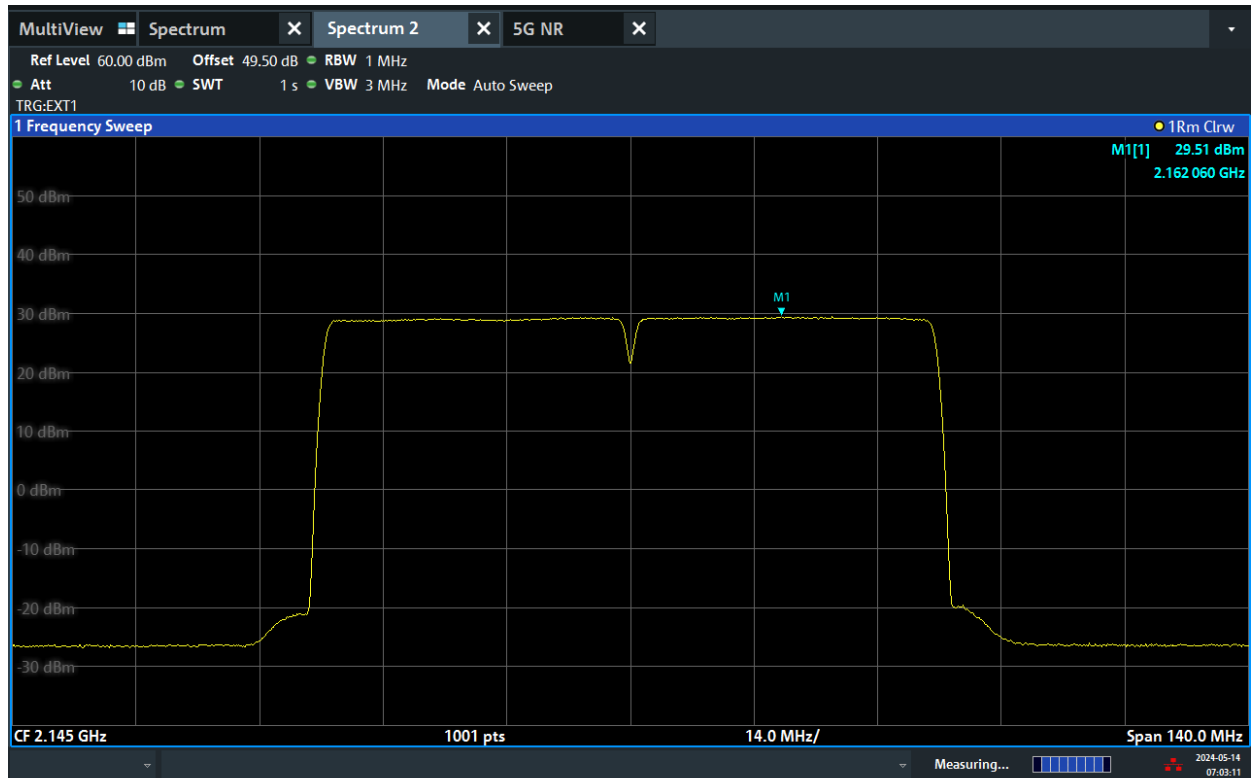

07:03:12 AM 05/14/2024

2TX/RX mode:

NR-1C


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	QPSK	25	48.70	35.37	7.10	48.66	35.12	7.03	48.49	35.00	7.20
H	QPSK	25	48.71	35.36	7.11	48.77	35.33	7.02	48.54	35.04	7.18
Total conducted power			51.72	38.38	-	51.73	38.24	-	51.53	38.03	-
antenna gain			17.8								
EIRP			69.52	56.18	-	69.53	56.04	-	69.33	55.83	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	5.97	-	-	6.11	-	-	6.32	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	QPSK	30	48.67	34.49	7.15	48.67	34.36	7.03	48.52	34.34	7.25
H	QPSK	30	48.65	34.61	7.14	48.75	34.51	7.03	48.56	34.28	7.24
Total conducted power			51.67	37.56	-	51.72	37.45	-	51.55	37.32	-
antenna gain			17.8								
EIRP			69.47	55.36	-	69.52	55.25	-	69.35	55.12	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	6.79	-	-	6.90	-	-	7.03	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	QPSK	35	48.32	33.42	7.14	48.38	33.41	7.03	48.35	33.35	7.29
H	QPSK	35	48.60	33.69	7.13	48.56	33.63	7.03	48.36	33.37	7.28
Total conducted power			51.47	36.57	-	51.48	36.53	-	51.37	36.37	-
antenna gain			17.8								
EIRP			69.27	54.37	-	69.28	54.33	-	69.17	54.17	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	7.78	-	-	7.82	-	-	7.98	-


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
E	QPSK	40	48.34	32.95	7.16	48.39	32.89	7.04	48.25	32.79	7.33
H	QPSK	40	48.65	33.21	7.14	48.56	33.07	7.05	48.43	32.90	7.31
Total conducted power			51.51	36.09	-	51.49	35.99	-	51.35	35.86	-
antenna gain			17.8								
EIRP			69.31	53.89	-	69.29	53.79	-	69.15	53.66	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
margin			-	8.26	-	-	8.36	-	-	8.49	-

NR 25MHz, Channel B, Power

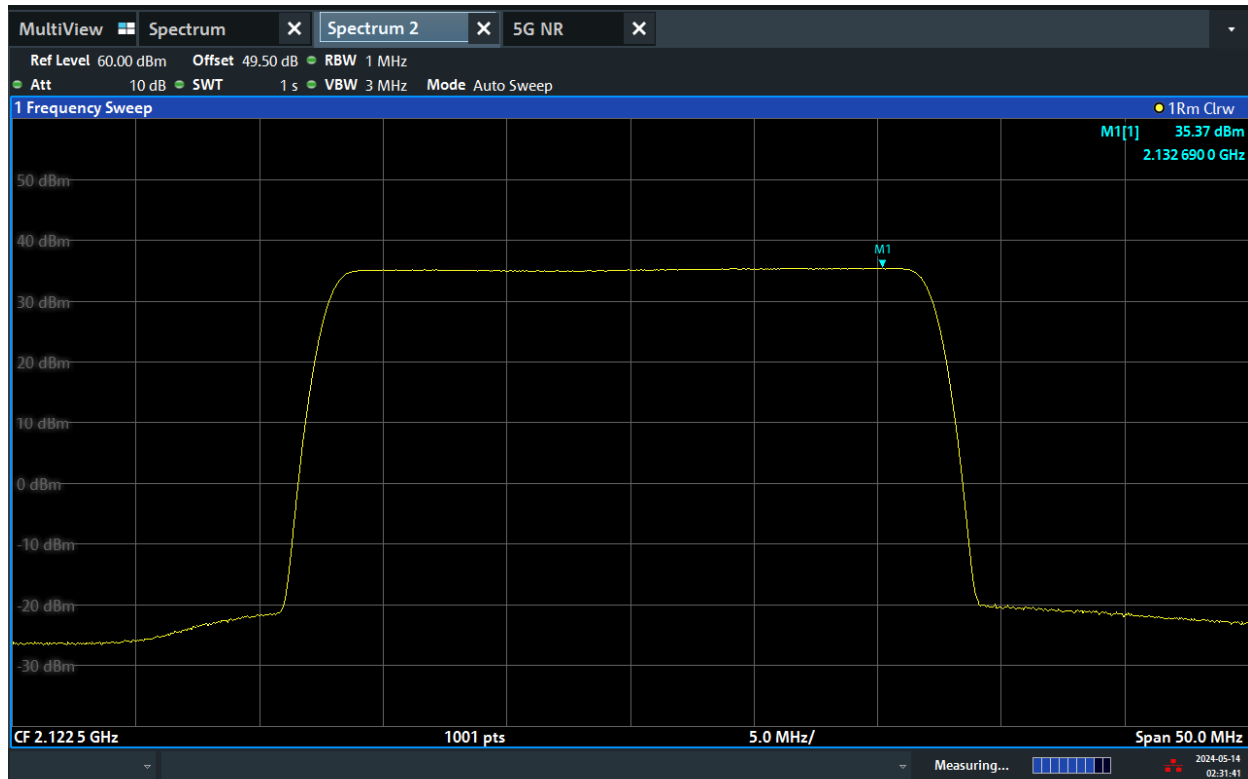


02:31:41 AM 05/14/2024

NR 25MHz, Channel B, PAR

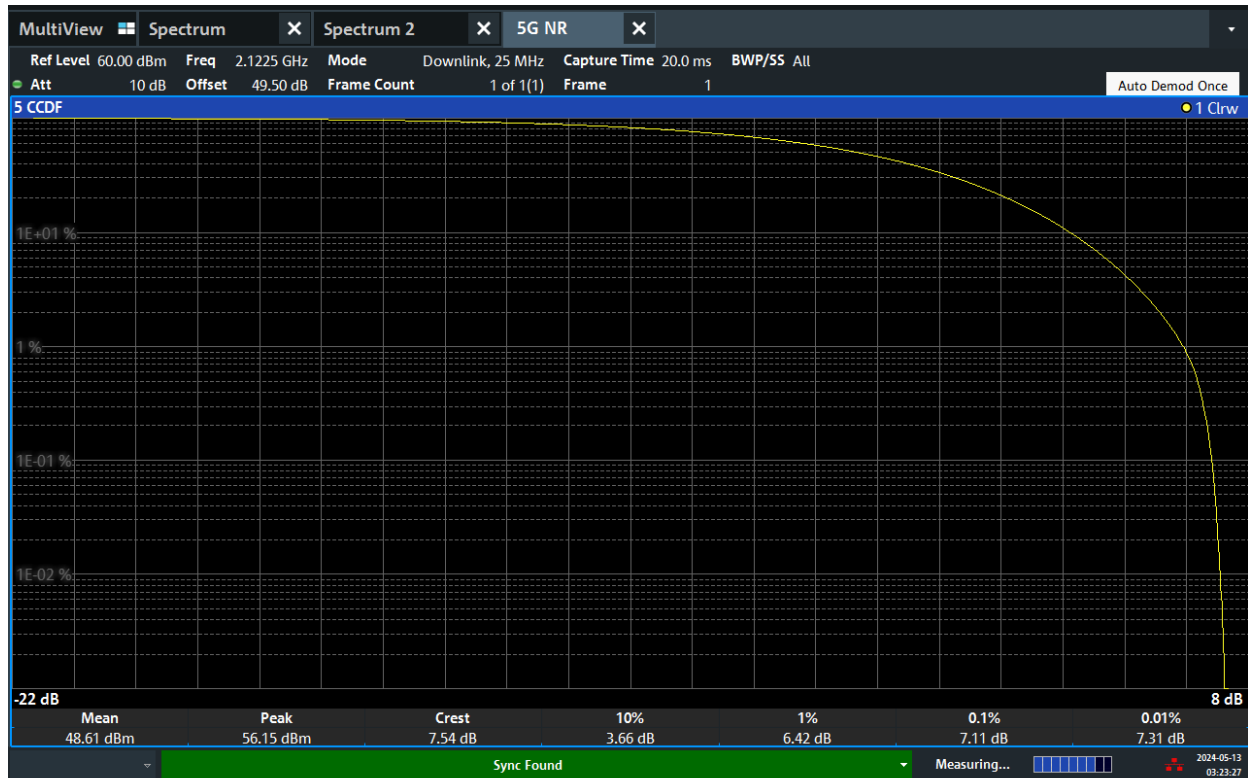


03:23:28 AM 05/13/2024

NR 25MHz, Channel M, Power

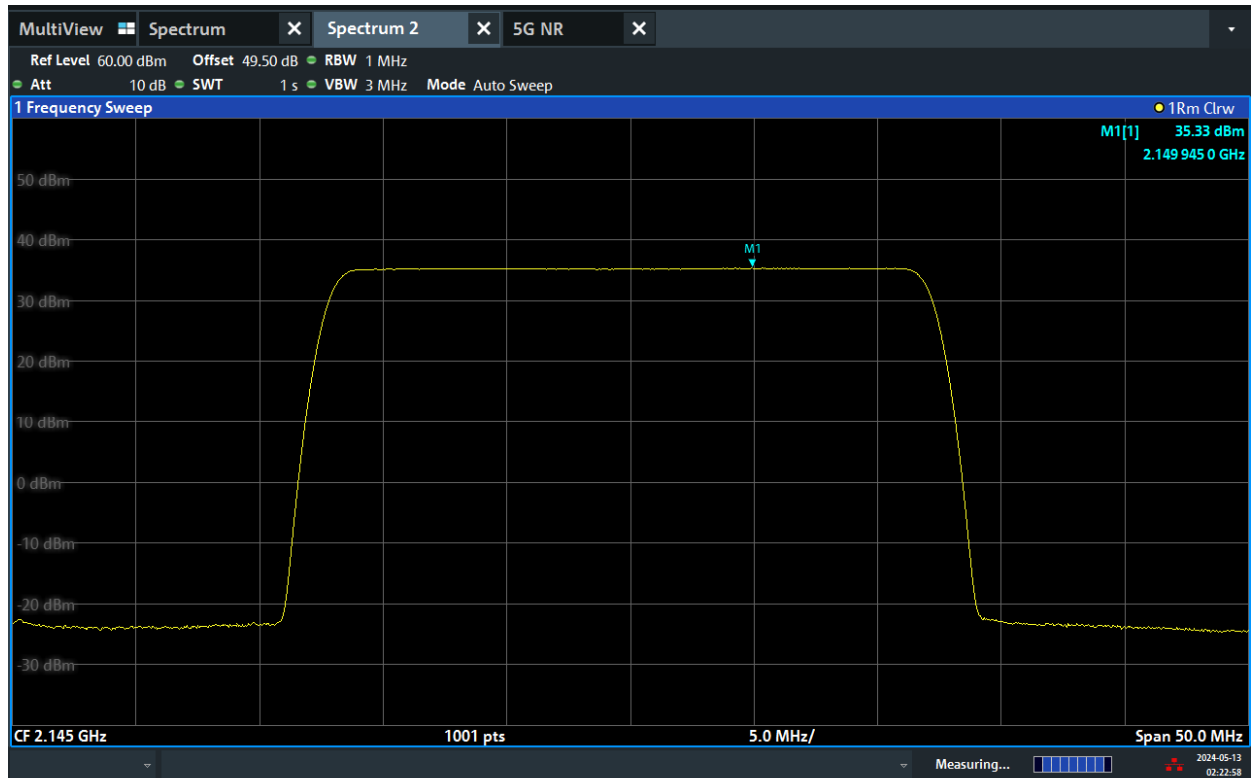


02:22:59 AM 05/13/2024

NR 25MHz, Channel M, PAR

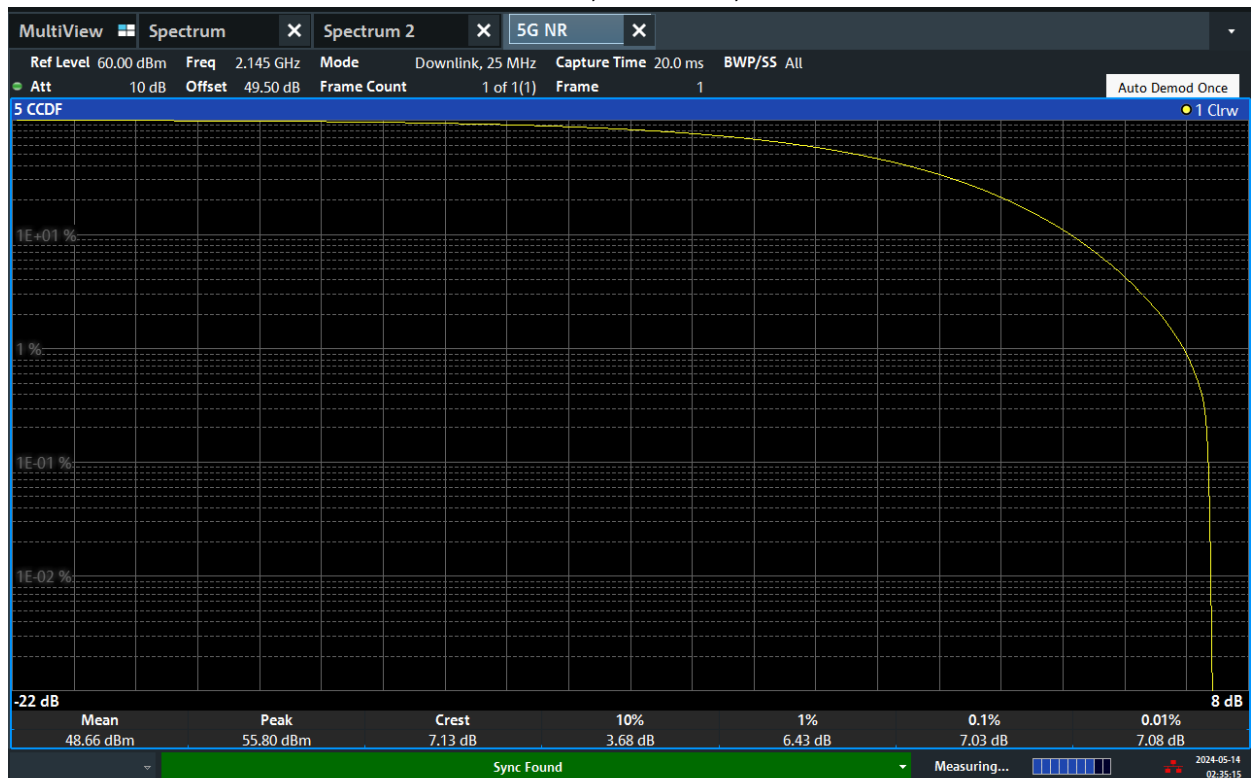


02:35:15 AM 05/14/2024

NR 25MHz, Channel T, Power

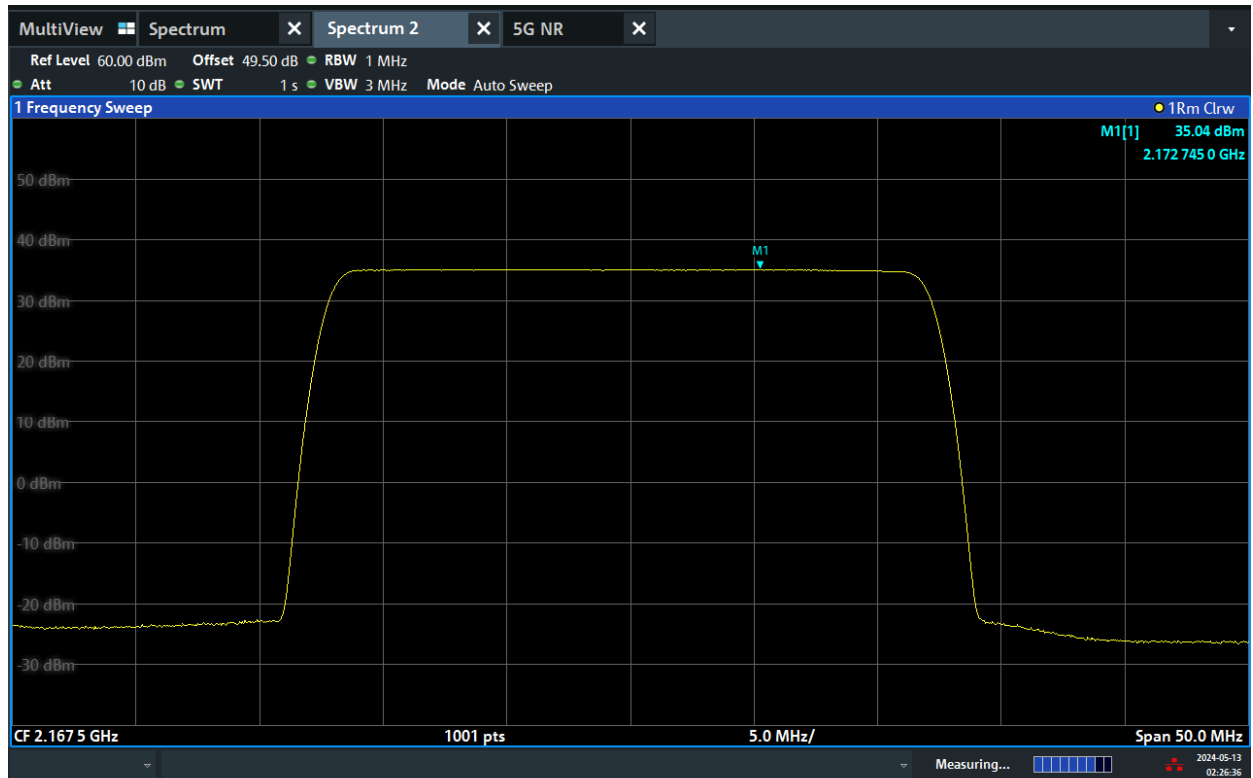


02:26:37 AM 05/13/2024

NR 25MHz, Channel T, PAR

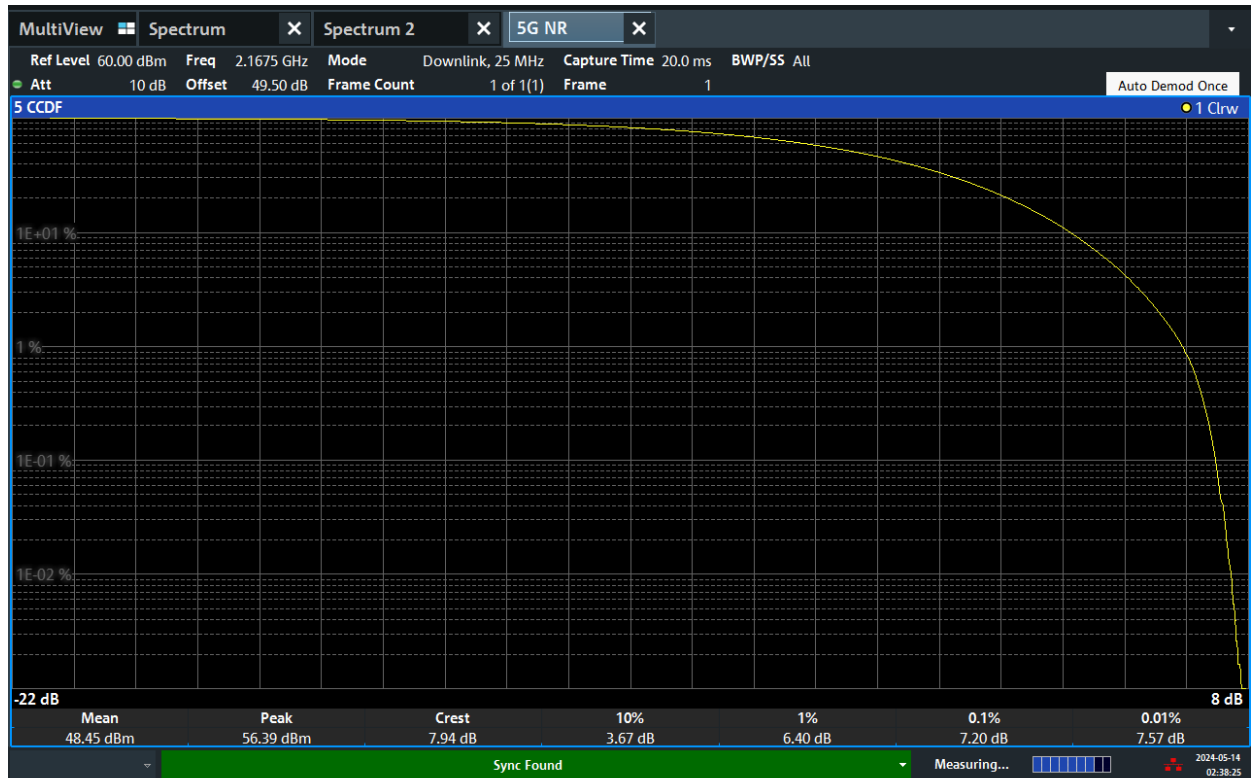


02:38:26 AM 05/14/2024

NR 30MHz, Channel B, Power

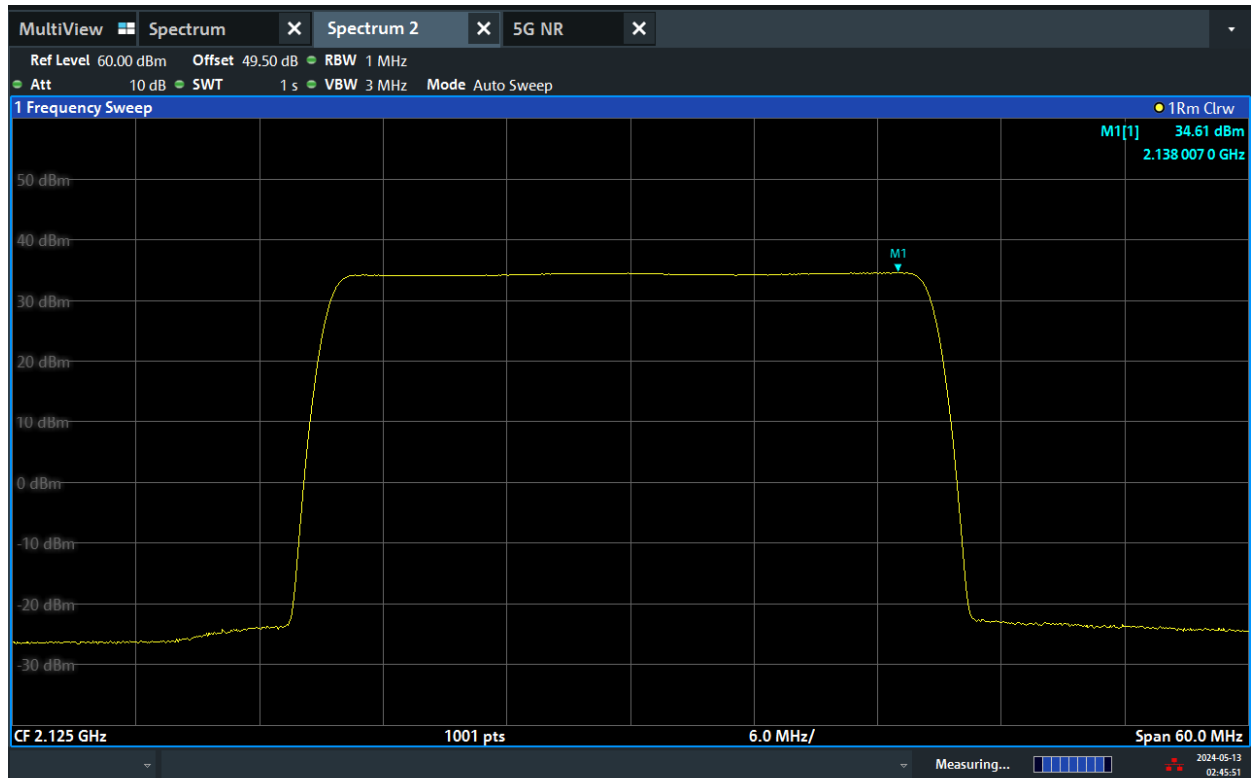


02:45:52 AM 05/13/2024

NR 30MHz, Channel B, PAR

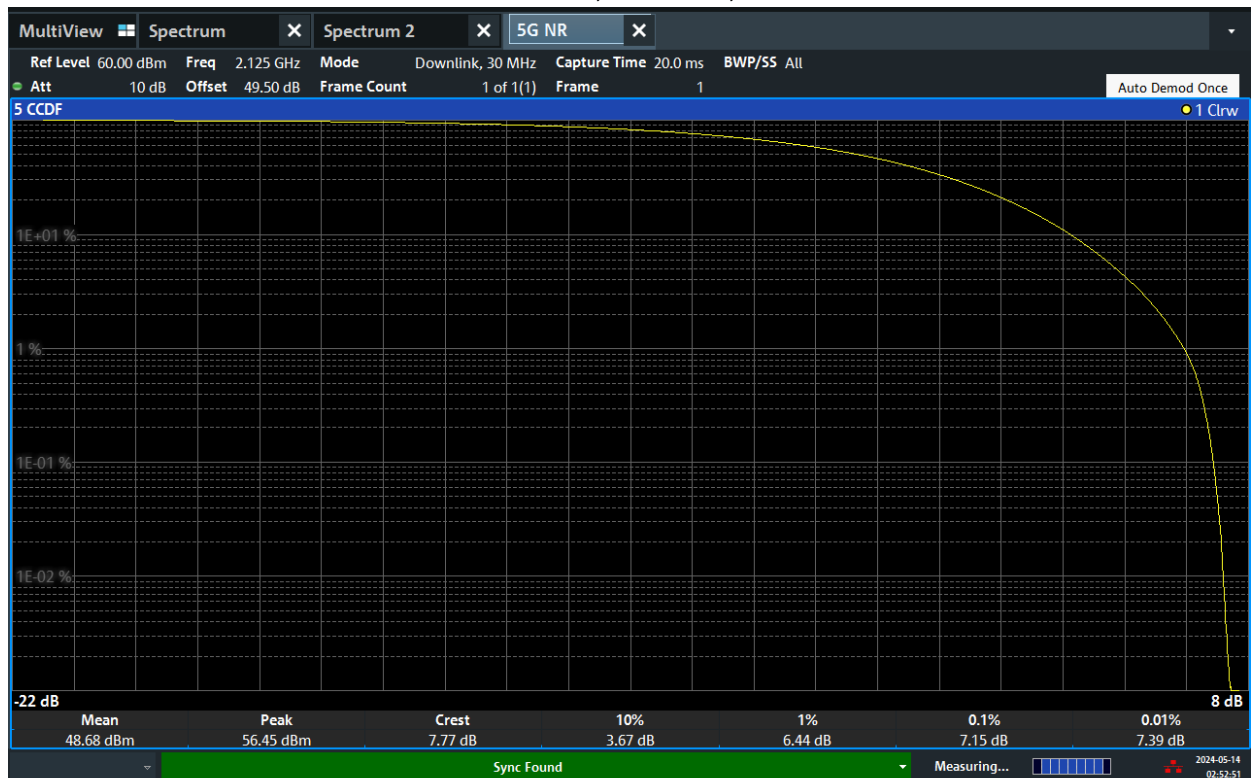


02:52:51 AM 05/14/2024

NR 30MHz, Channel M, Power

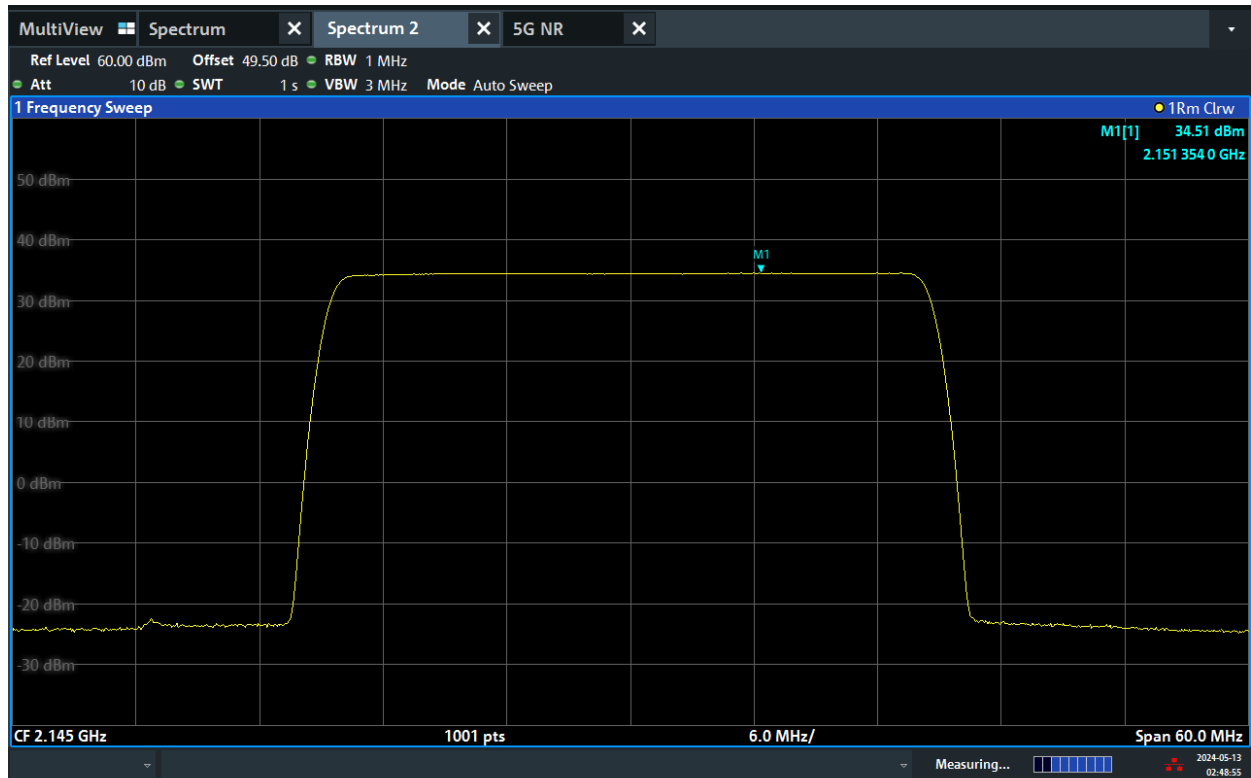


02:48:56 AM 05/13/2024

NR 30MHz, Channel M, PAR

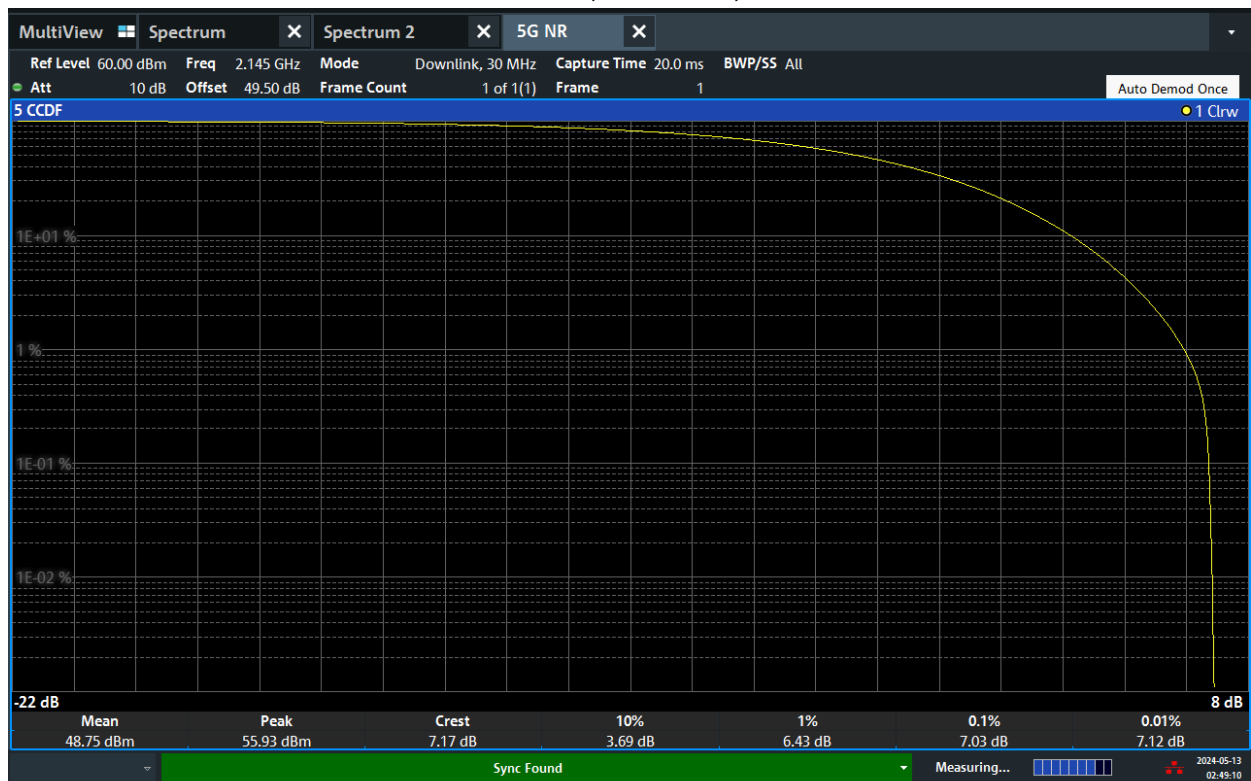


02:49:10 AM 05/13/2024

NR 30MHz, Channel T, Power

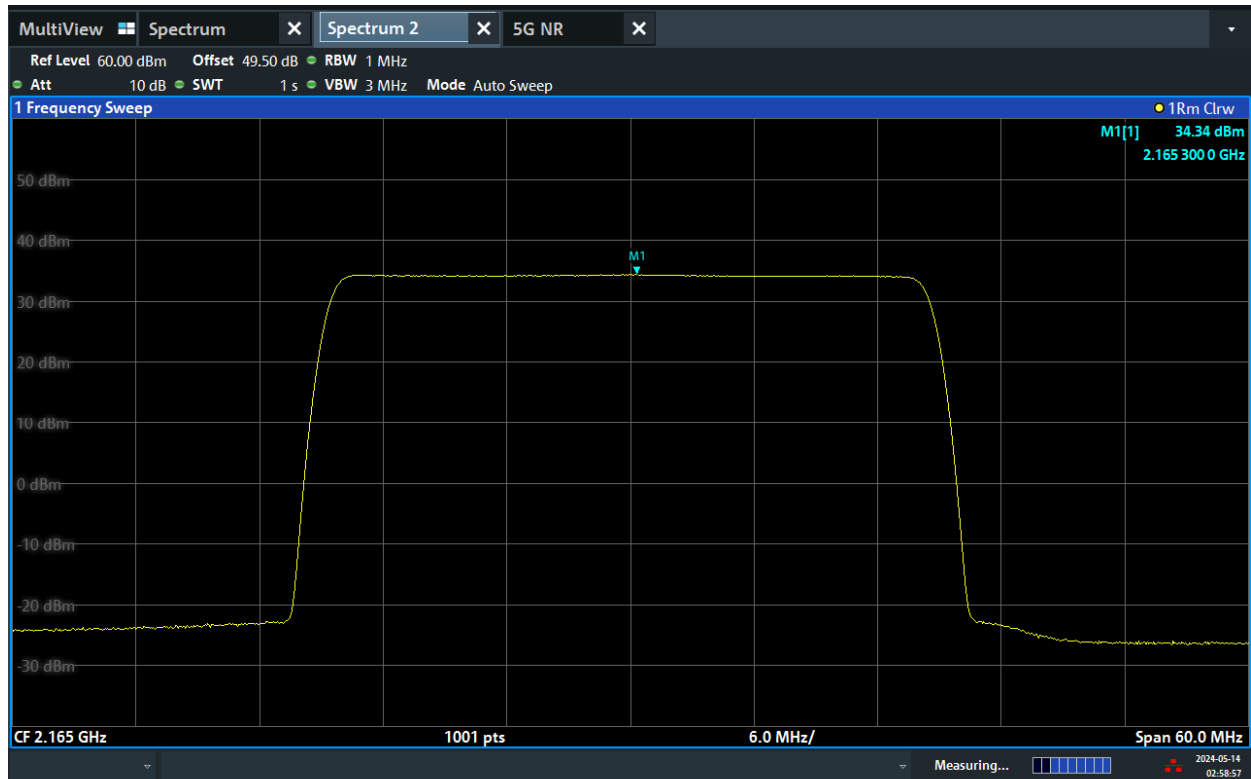


02:58:58 AM 05/14/2024

NR 30MHz, Channel T, PAR

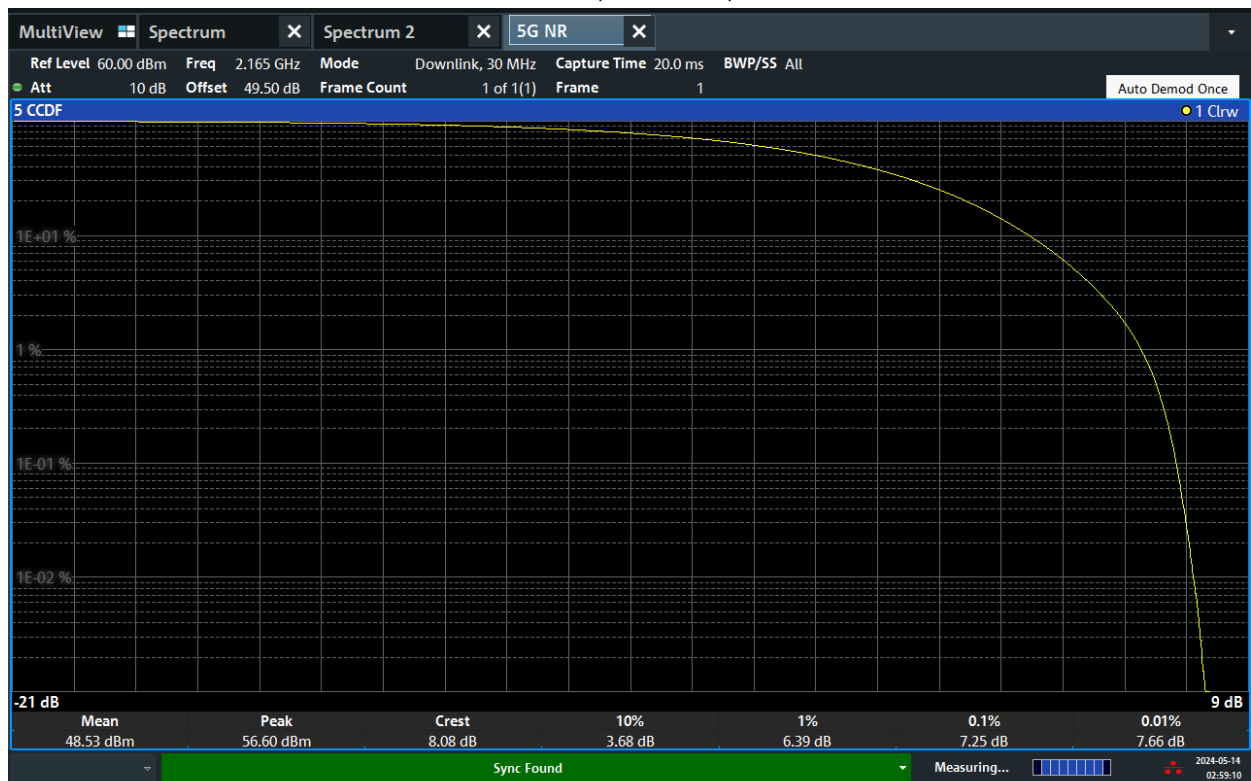


02:59:11 AM 05/14/2024

NR 35MHz, Channel B, Power

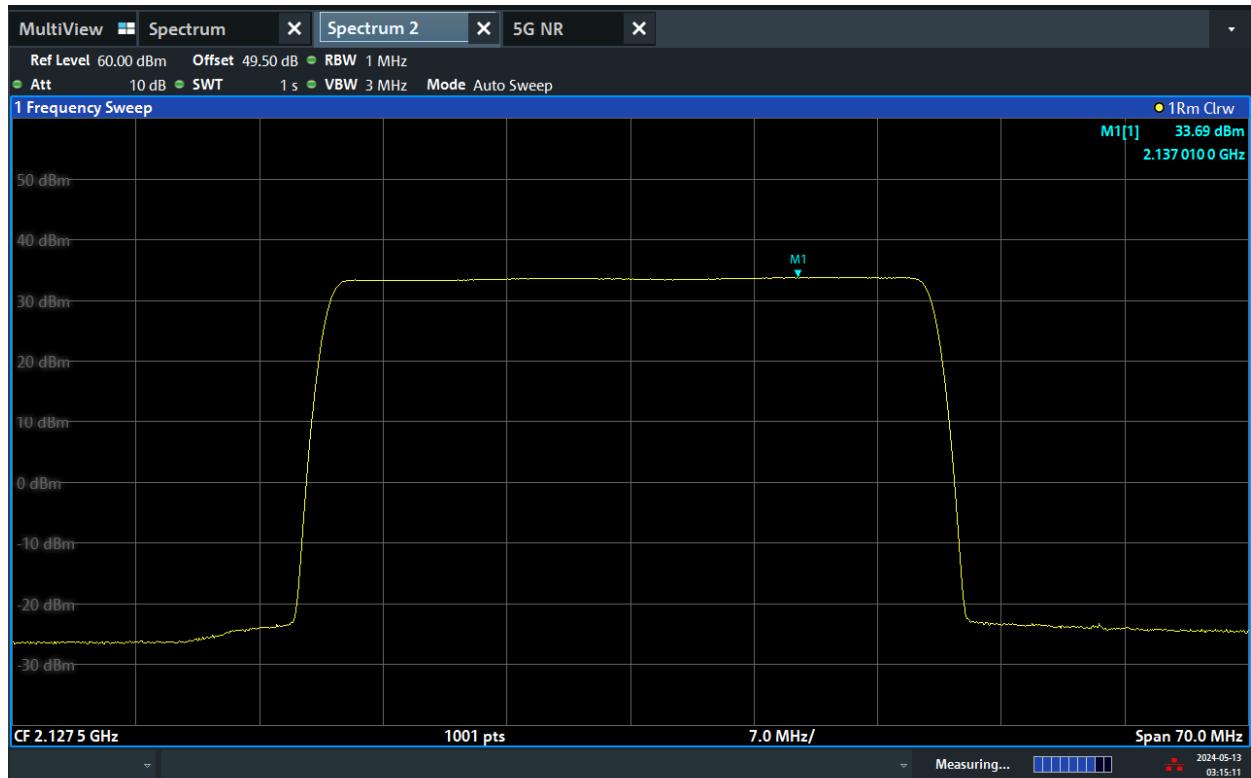


03:15:12 AM 05/13/2024

NR 35MHz, Channel B, PAR

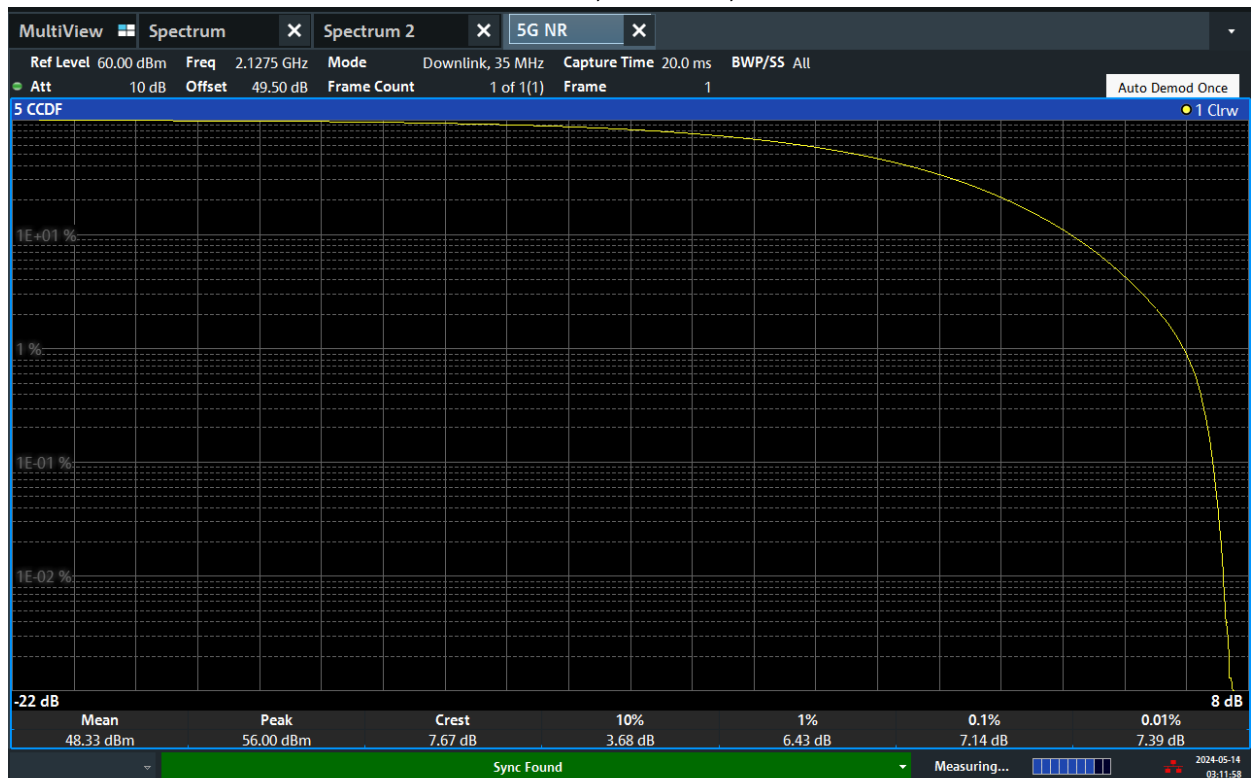


03:11:58 AM 05/14/2024

NR 35MHz, Channel M, Power

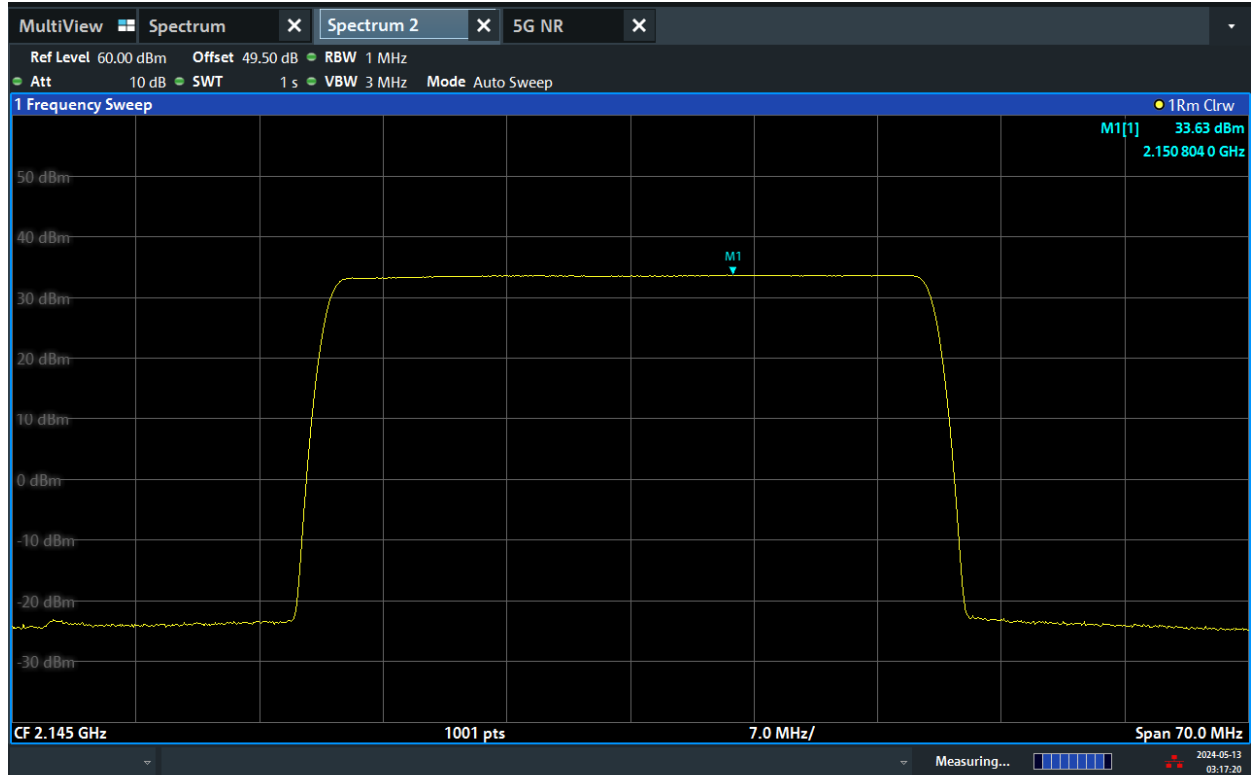


03:17:21 AM 05/13/2024

NR 35MHz, Channel M, PAR

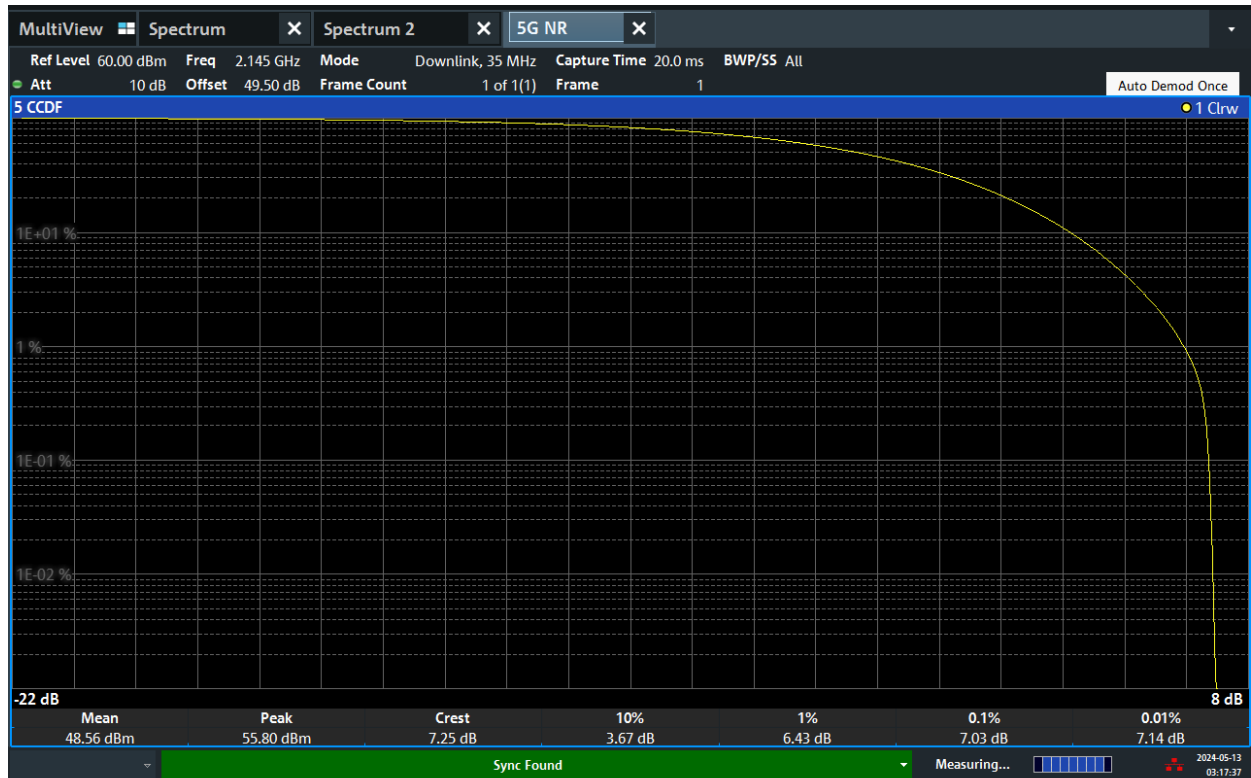


03:17:38 AM 05/13/2024

NR 35MHz, Channel T, Power

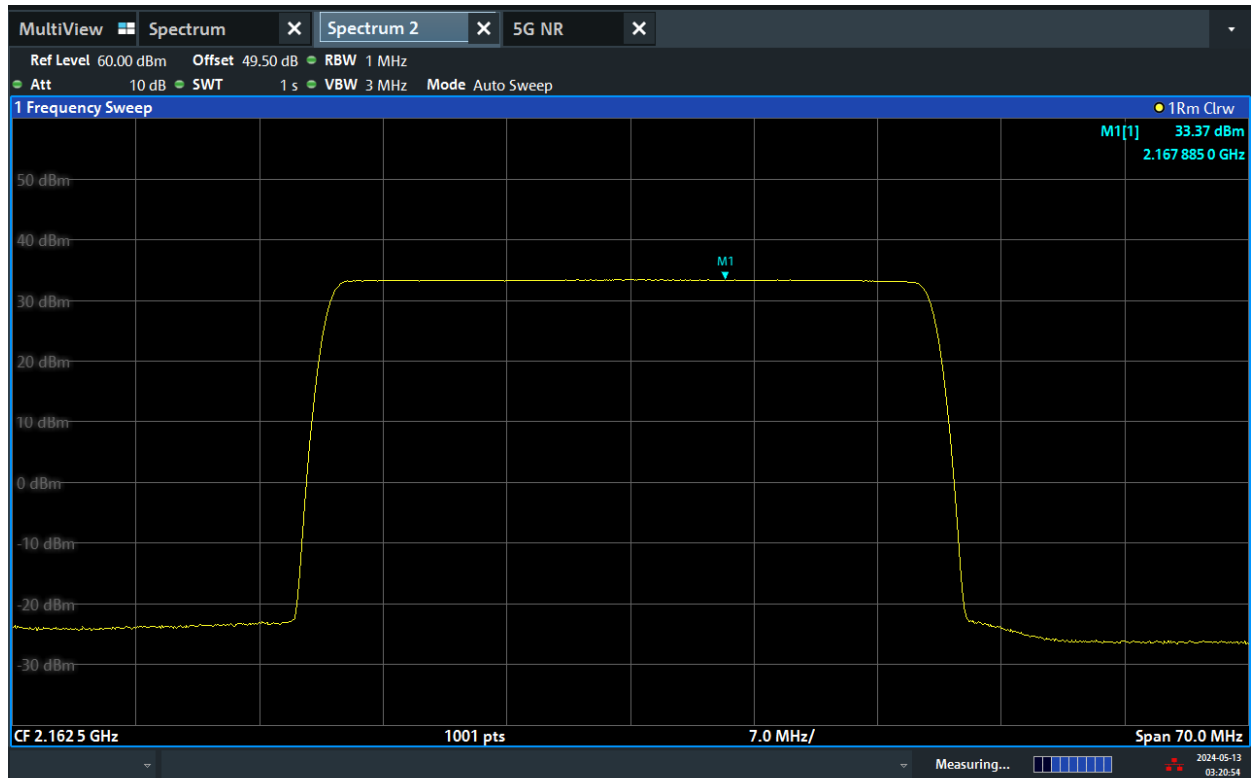


03:20:55 AM 05/13/2024

NR 35MHz, Channel T, PAR

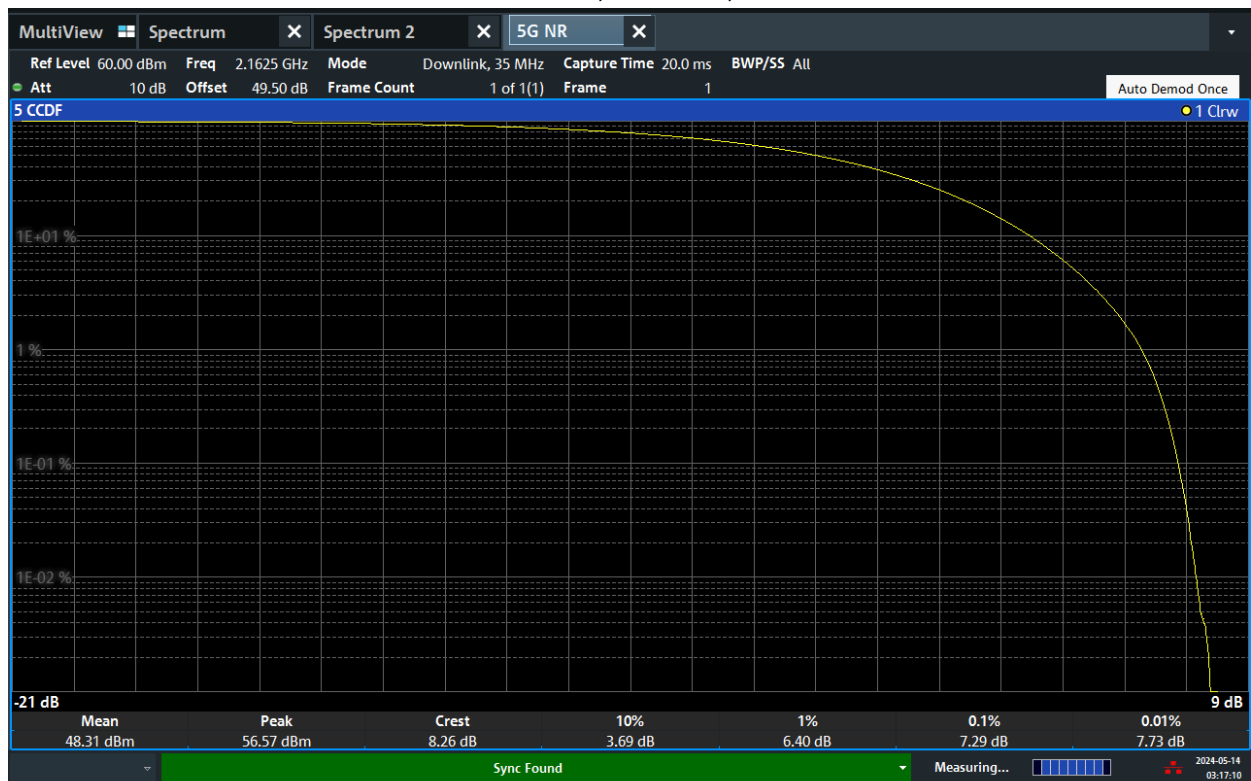


03:17:10 AM 05/14/2024

NR 40MHz, Channel B, Power

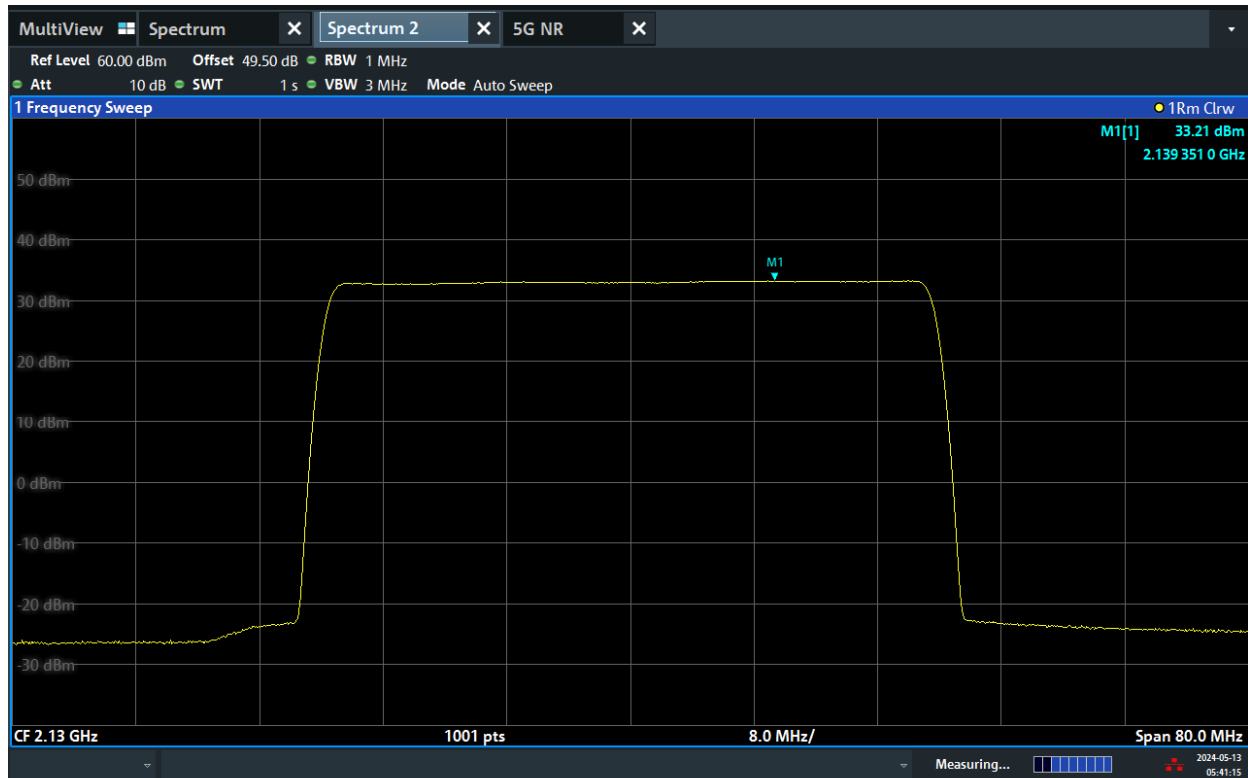


05:41:15 AM 05/13/2024

NR 40MHz, Channel B, PAR

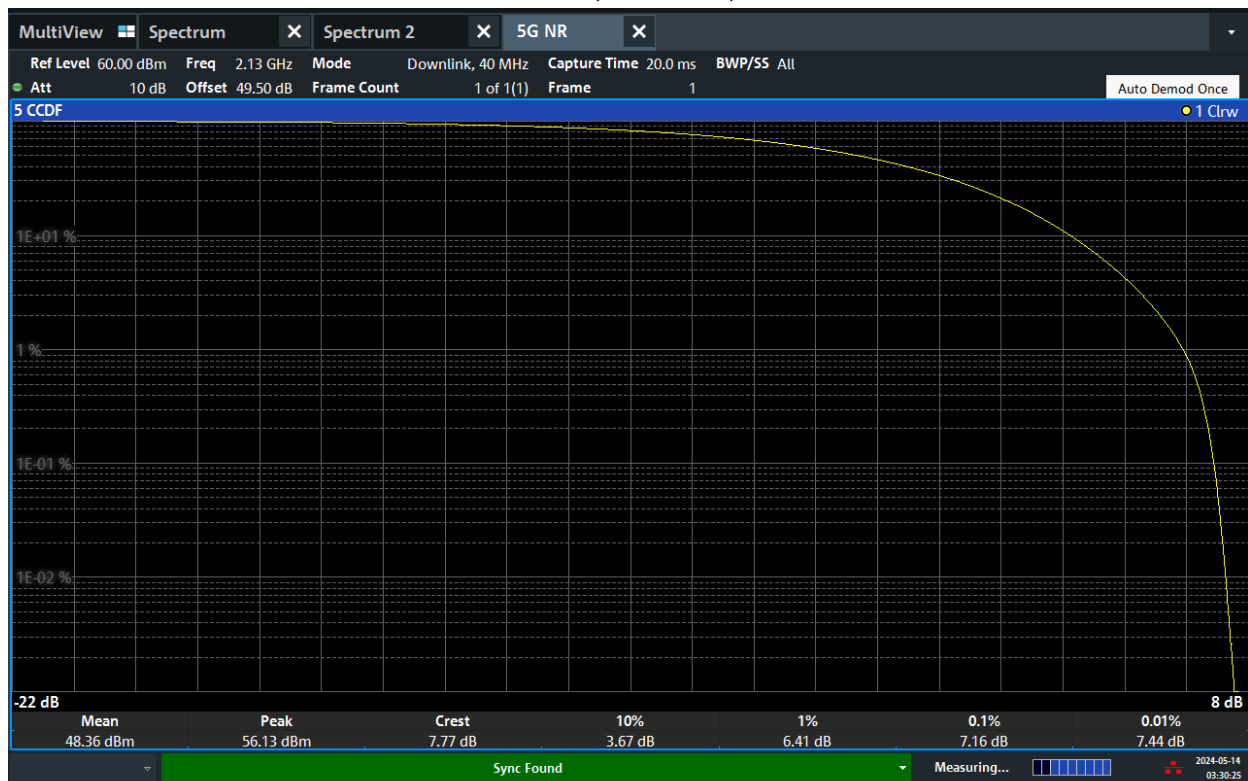


03:30:25 AM 05/14/2024

NR 40MHz, Channel M, Power

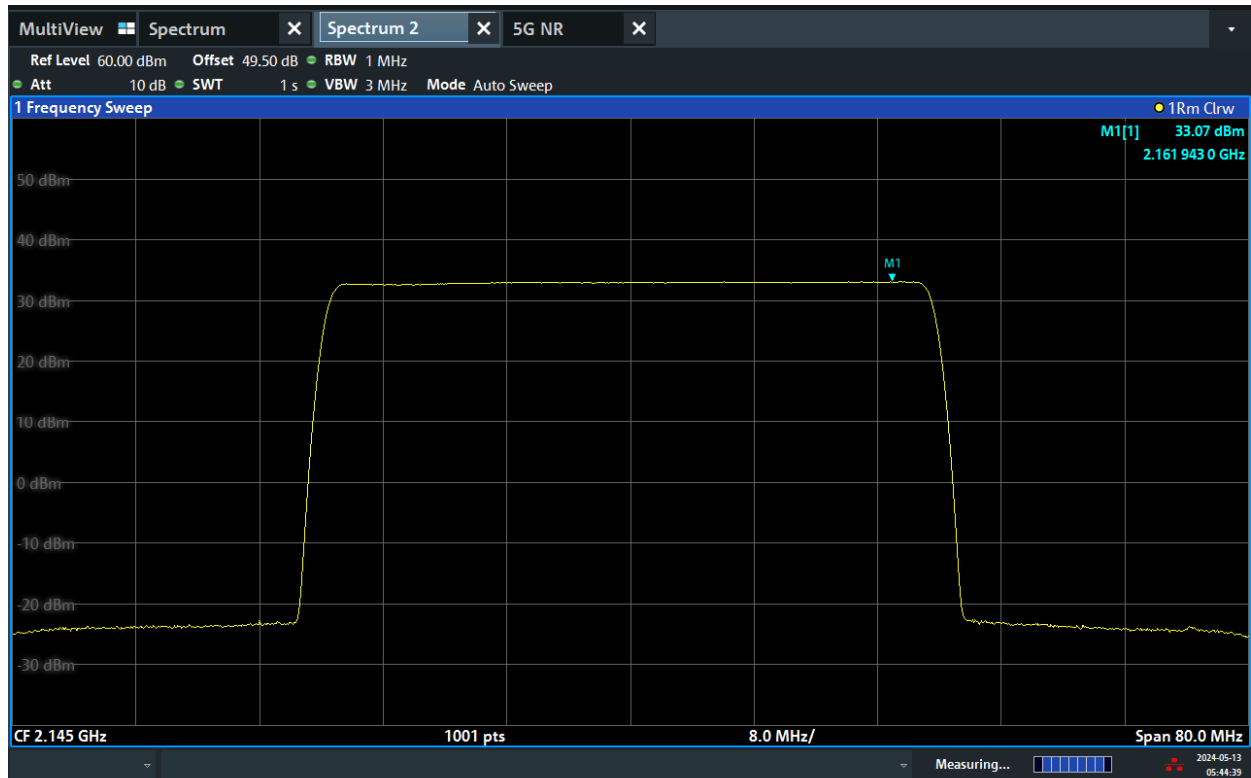


05:44:39 AM 05/13/2024

NR 40MHz, Channel M, PAR

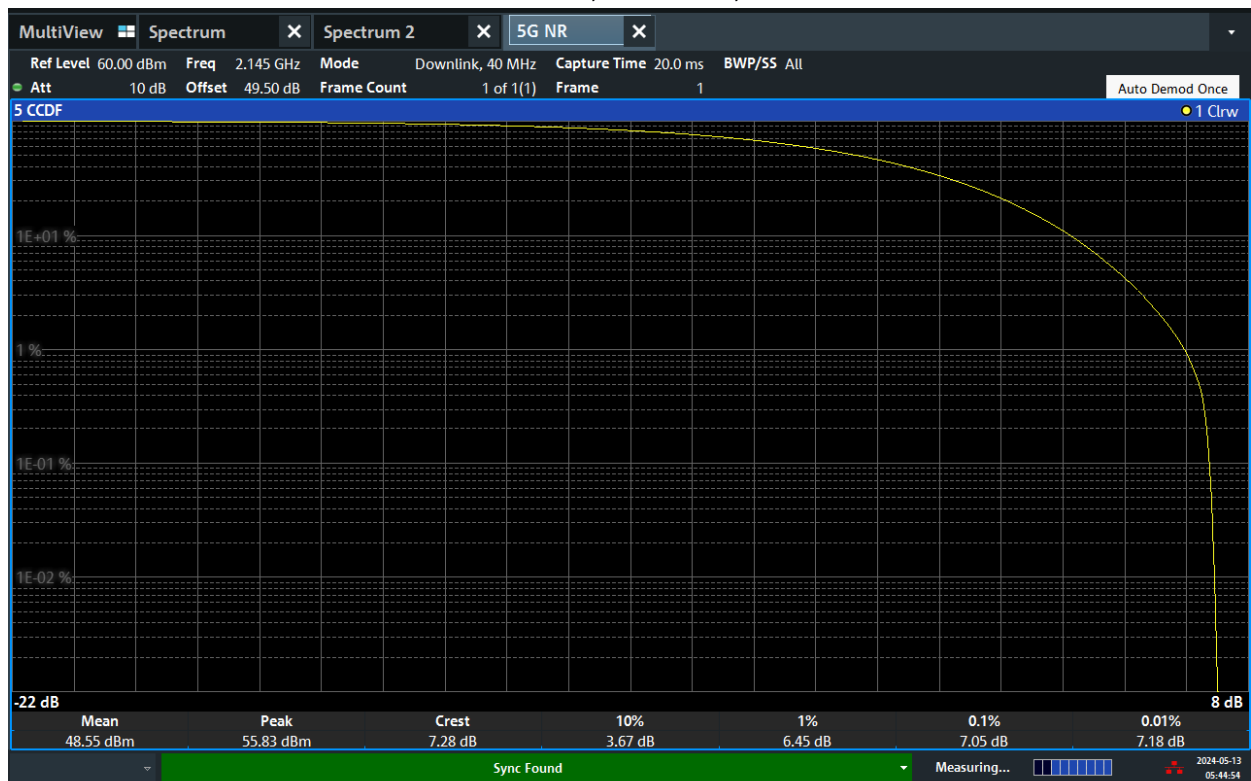


05:44:54 AM 05/13/2024

NR 40MHz, Channel T, Power

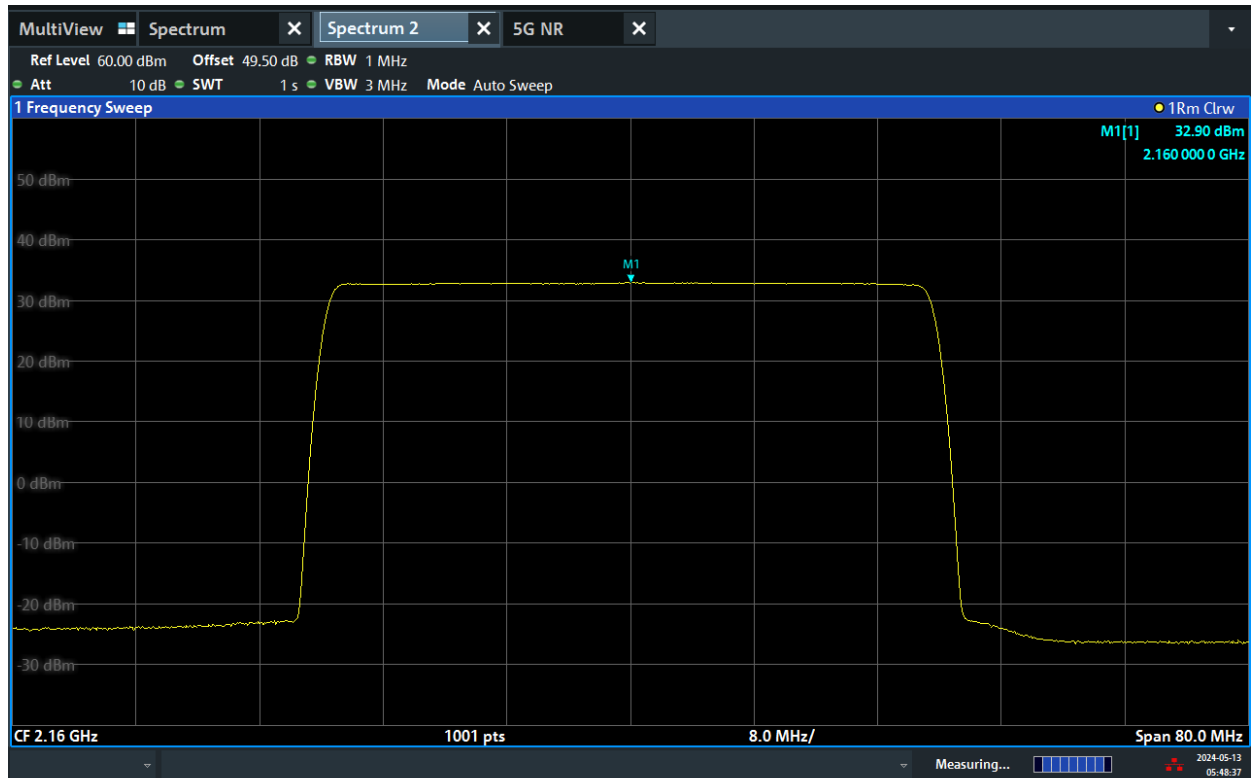

05:48:37 AM 05/13/2024

NR 40MHz, Channel T, PAR

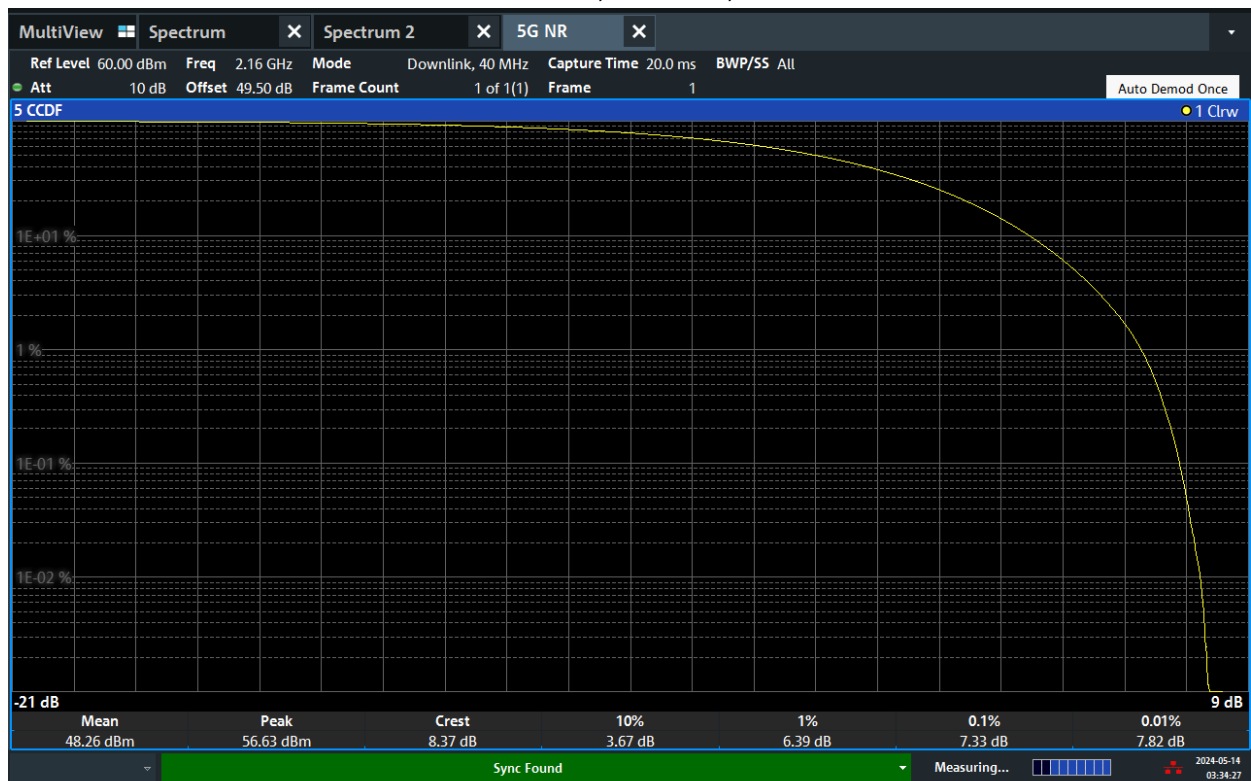

03:34:28 AM 05/14/2024

TEST REPORT

4 Occupied Bandwidth

Test result: Pass

4.1 Measurement Procedure

The EUT was set to transmit at maximum power and testing was carried out on bottom, middle and top channels. Using the Occupied Bandwidth measurement function in the spectrum analyzer, the 26dB bandwidth was measured in accordance with FCC KDB 971168 D01 Clause 4.2.

The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEST REPORT

4.2 Measurement result

4TX/RX mode:

NR-1C


99% Occupied Bandwidth

Antenna Port	Modulation	Bandwidth	Occupied Bandwidth (MHz)		
			Channel Position B	Channel Position M	Channel Position T
H	256QAM	25MHz	23.729	23.722	23.715
H	256QAM	30MHz	28.539	28.526	28.525
H	256QAM	35MHz	33.540	33.535	33.527
H	256QAM	40MHz	38.536	38.534	38.516


-26dBc Occupied Bandwidth

Antenna Port	Modulation	Bandwidth	Occupied Bandwidth (MHz)		
			Channel Position B	Channel Position M	Channel Position T
H	256QAM	25MHz	24.59	24.59	24.59
H	256QAM	30MHz	29.51	29.51	29.51
H	256QAM	35MHz	34.69	34.69	34.69
H	256QAM	40MHz	39.90	39.90	39.89


256QAM, 25MHz, Channel position B

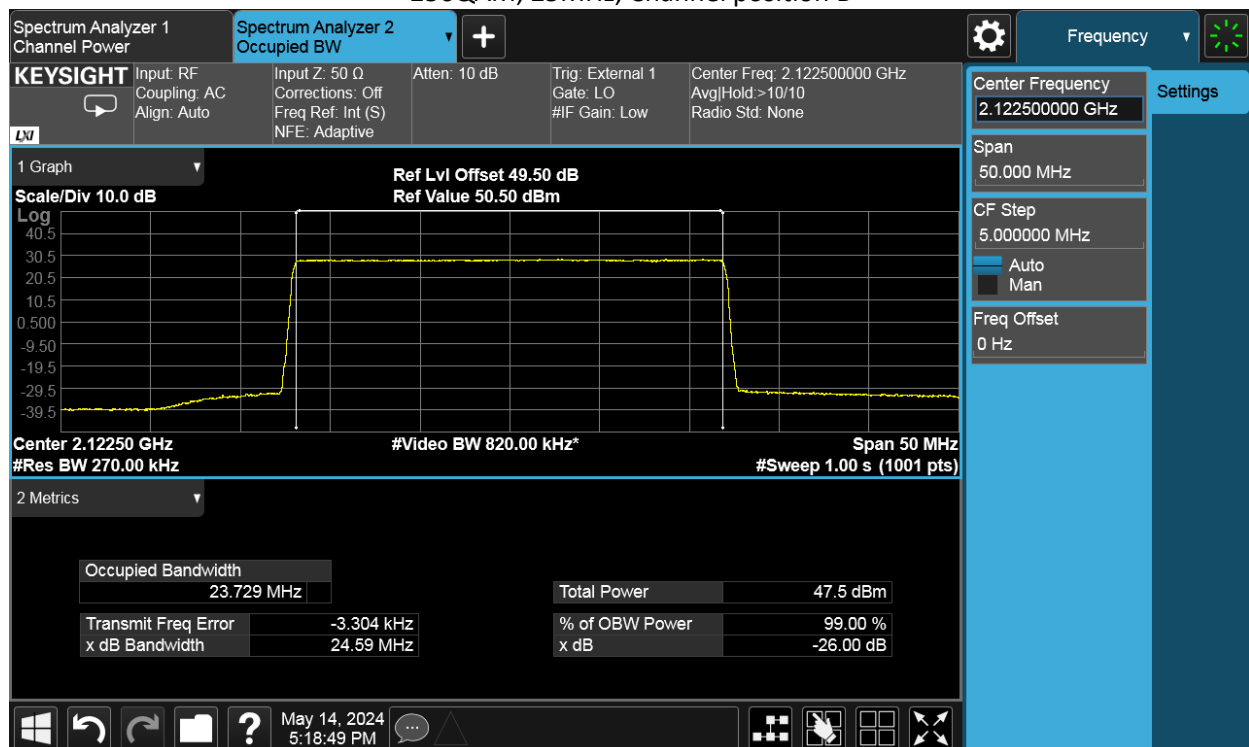


256QAM, 25MHz, Channel position M

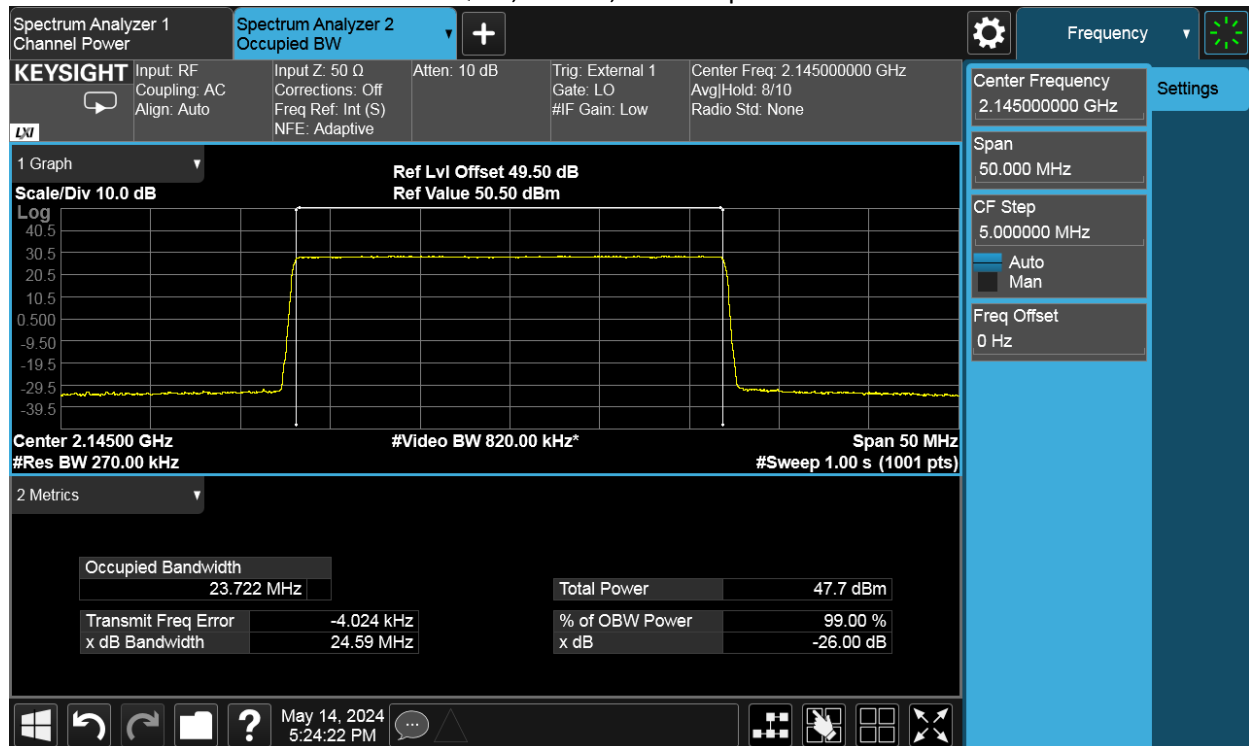


256QAM, 25MHz, Channel position T

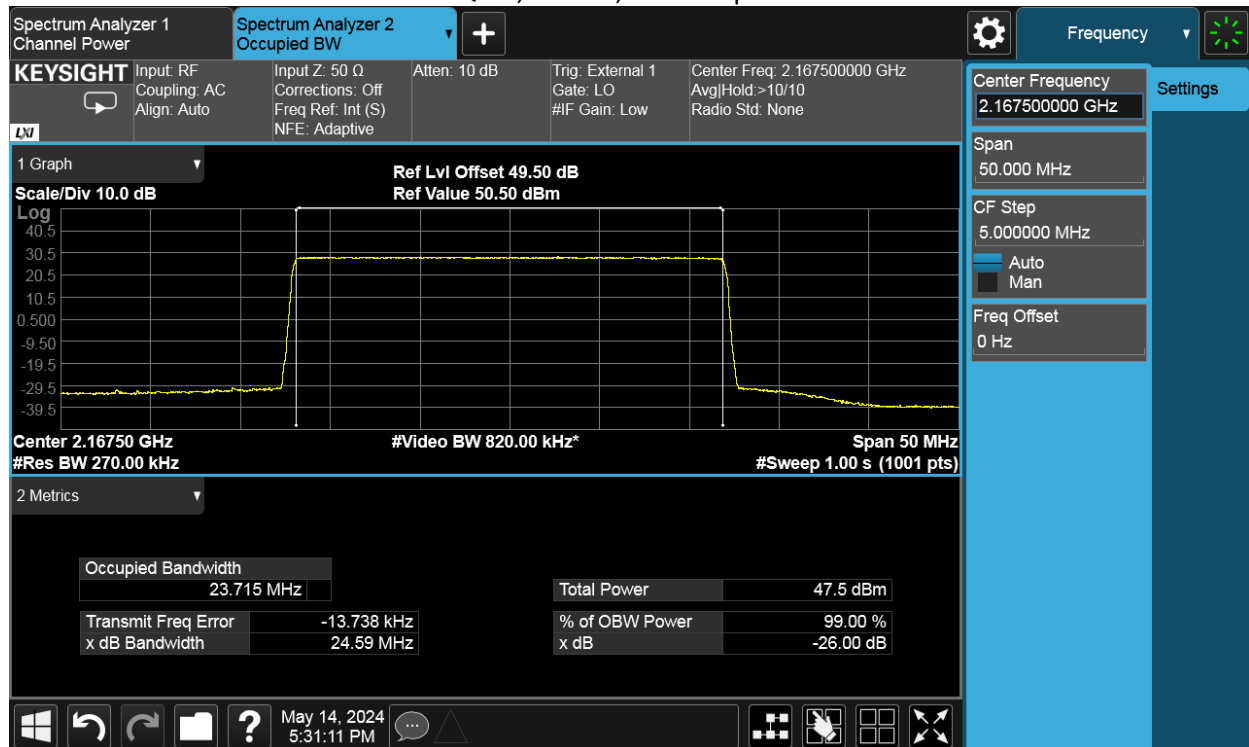


256QAM, 30MHz, Channel position B

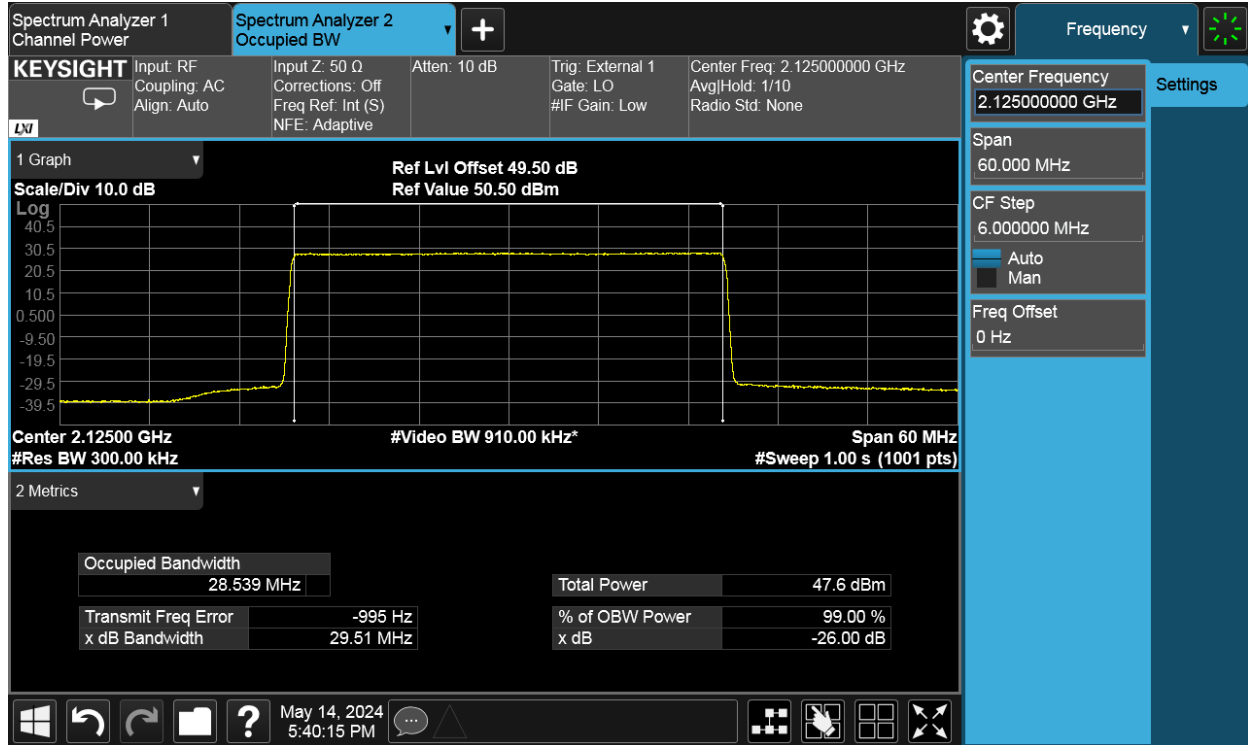


256QAM, 30MHz, Channel position M

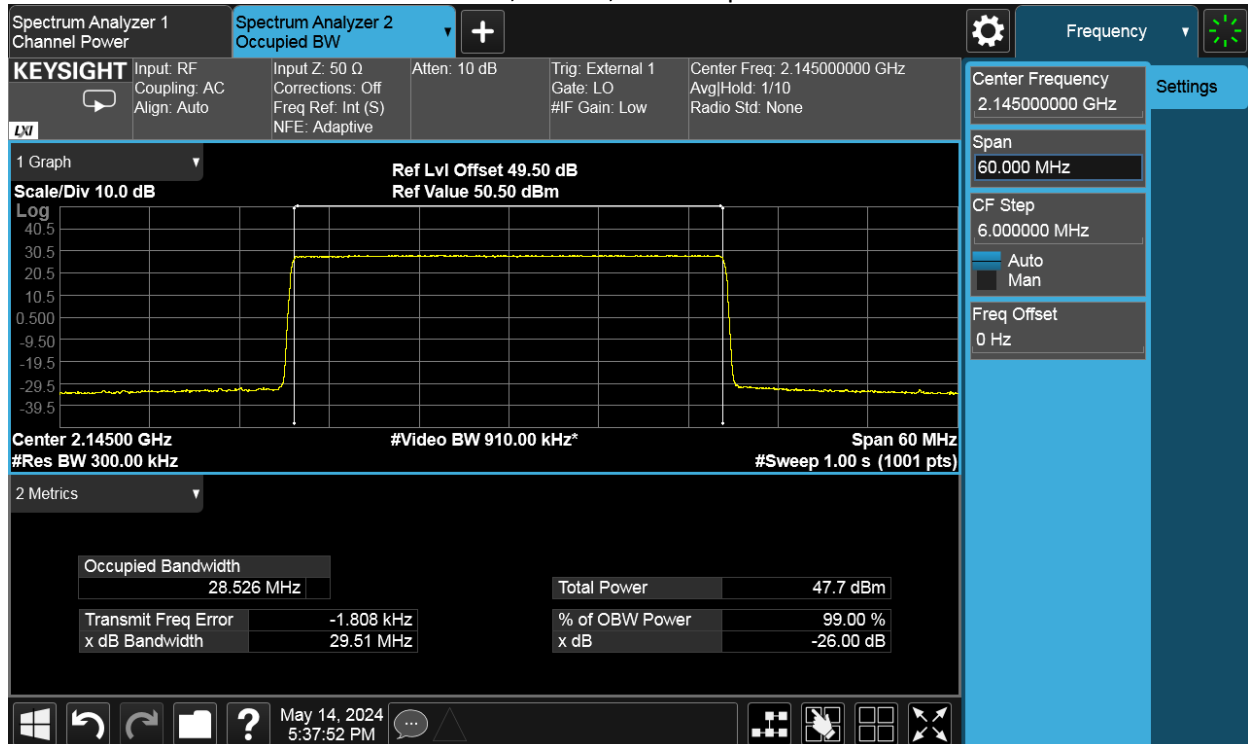


256QAM, 30MHz, Channel position T

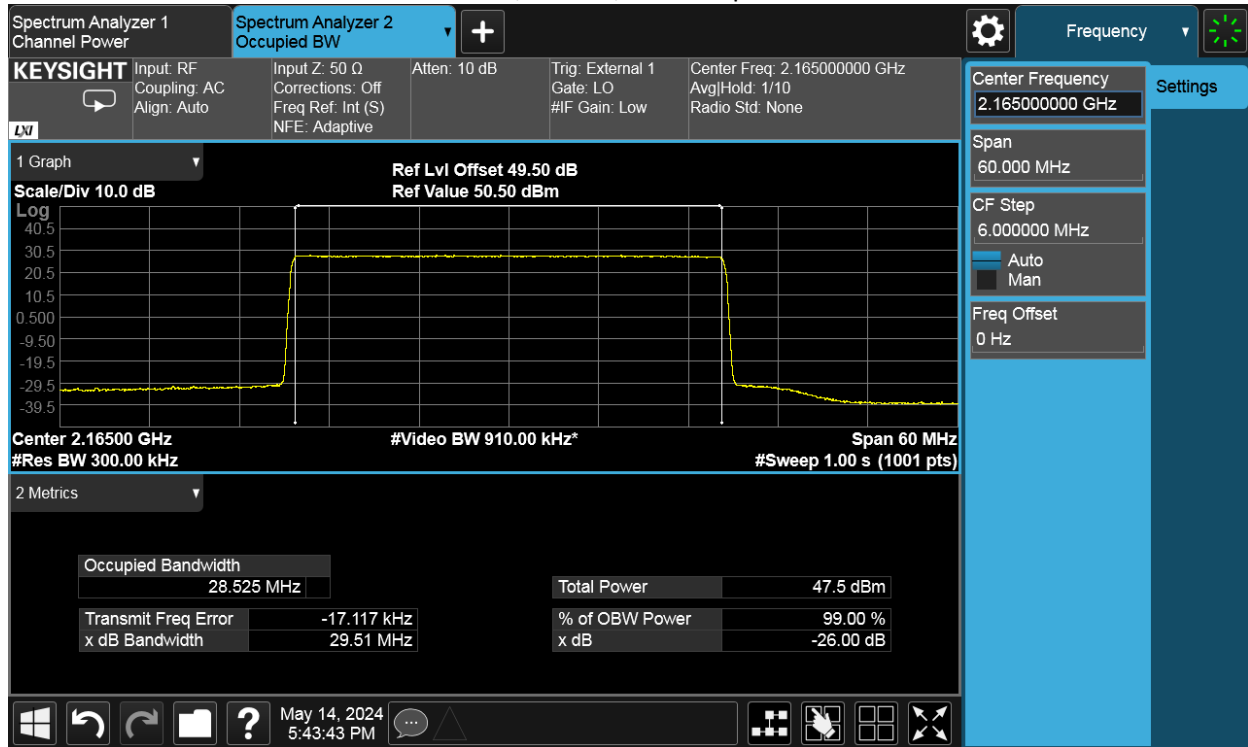


256QAM, 35MHz, Channel position B

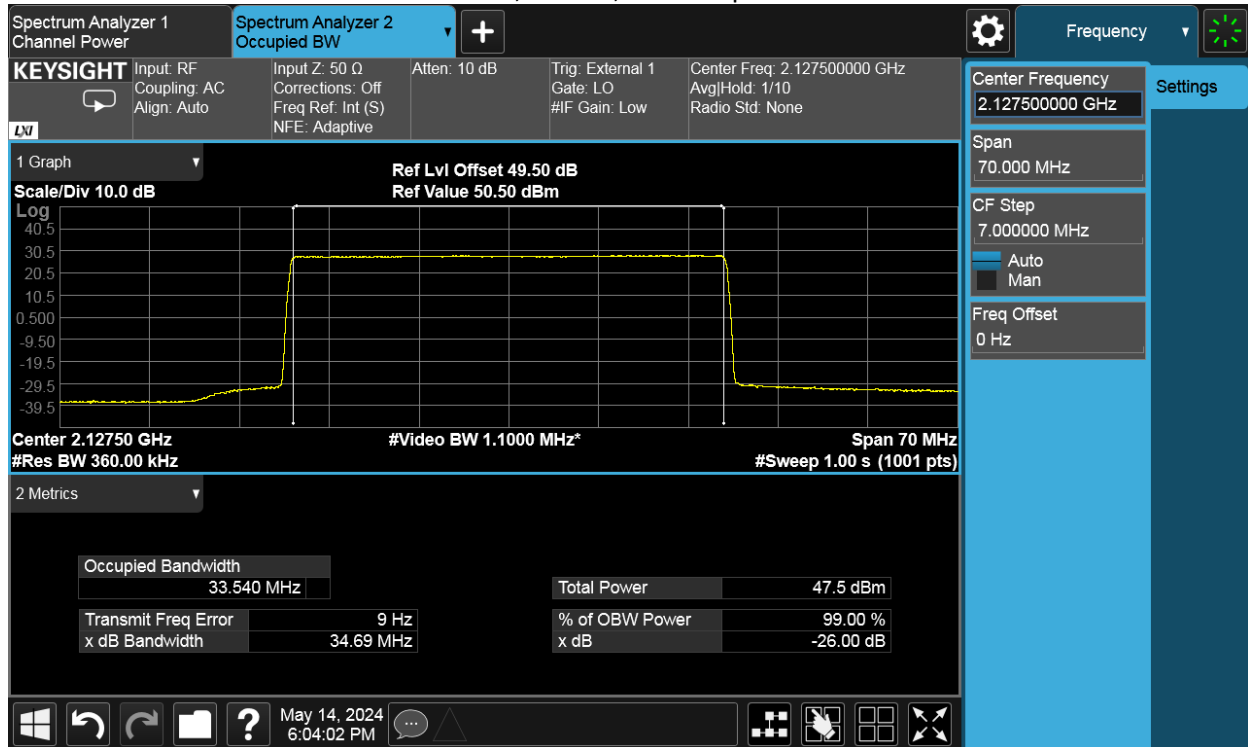


256QAM, 35MHz, Channel position M

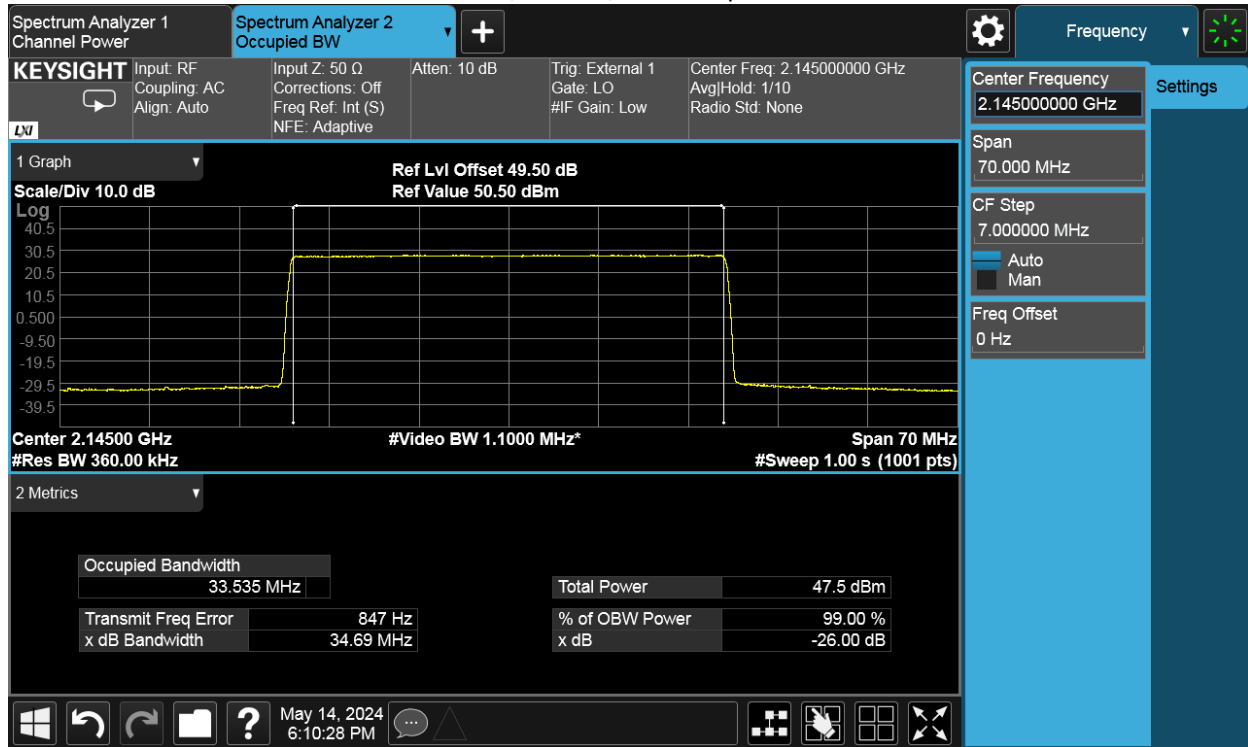


256QAM, 35MHz, Channel position T

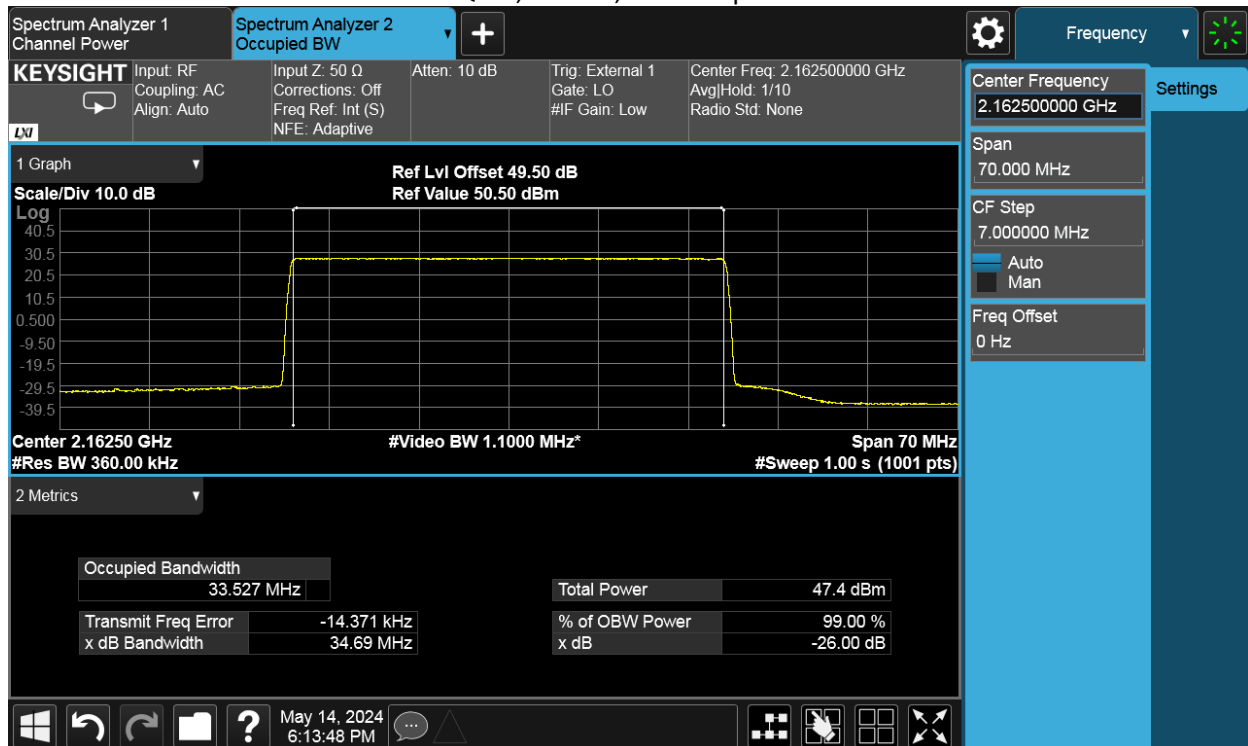


256QAM, 40MHz, Channel position B

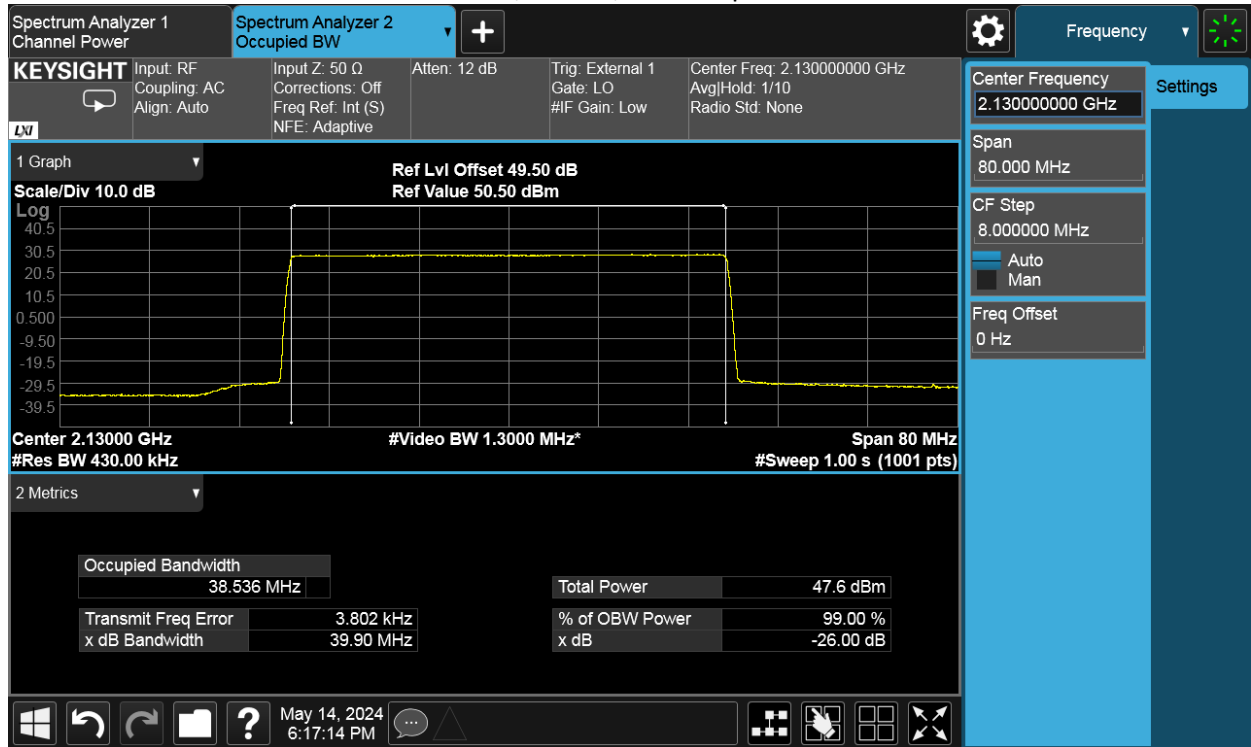

256QAM, 40MHz, Channel position M

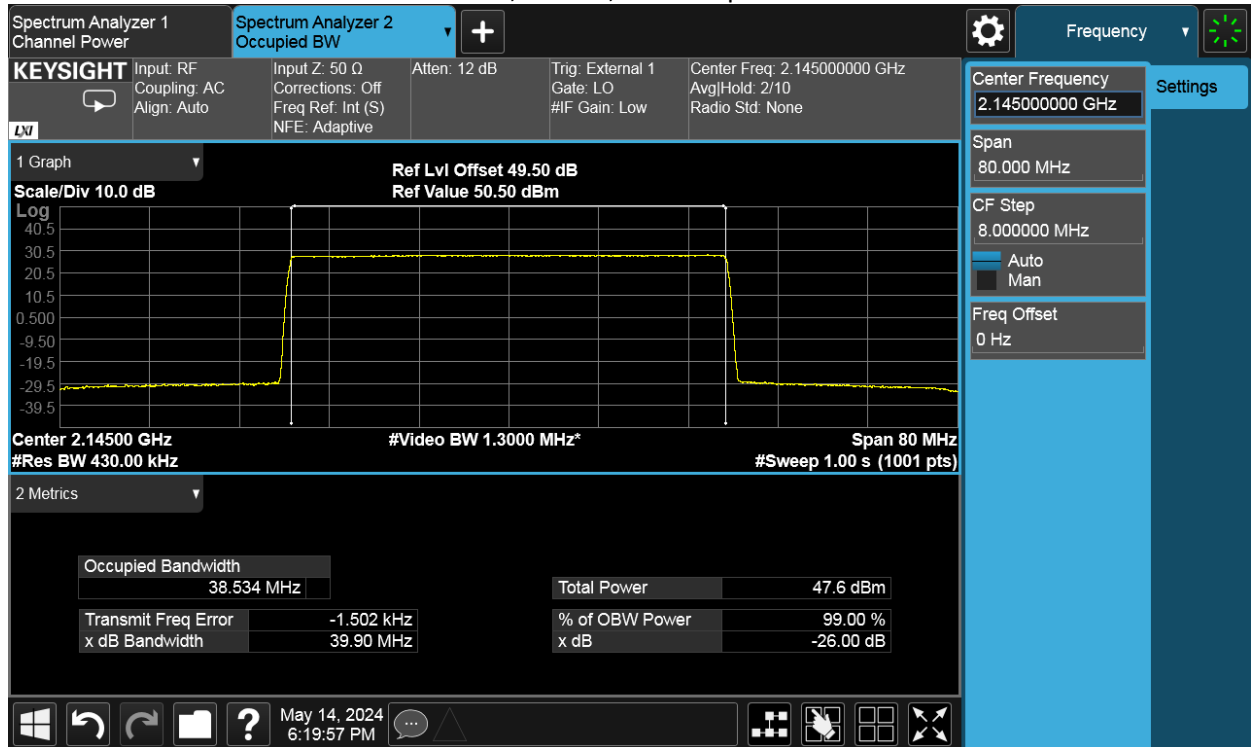

256QAM, 40MHz, Channel position T

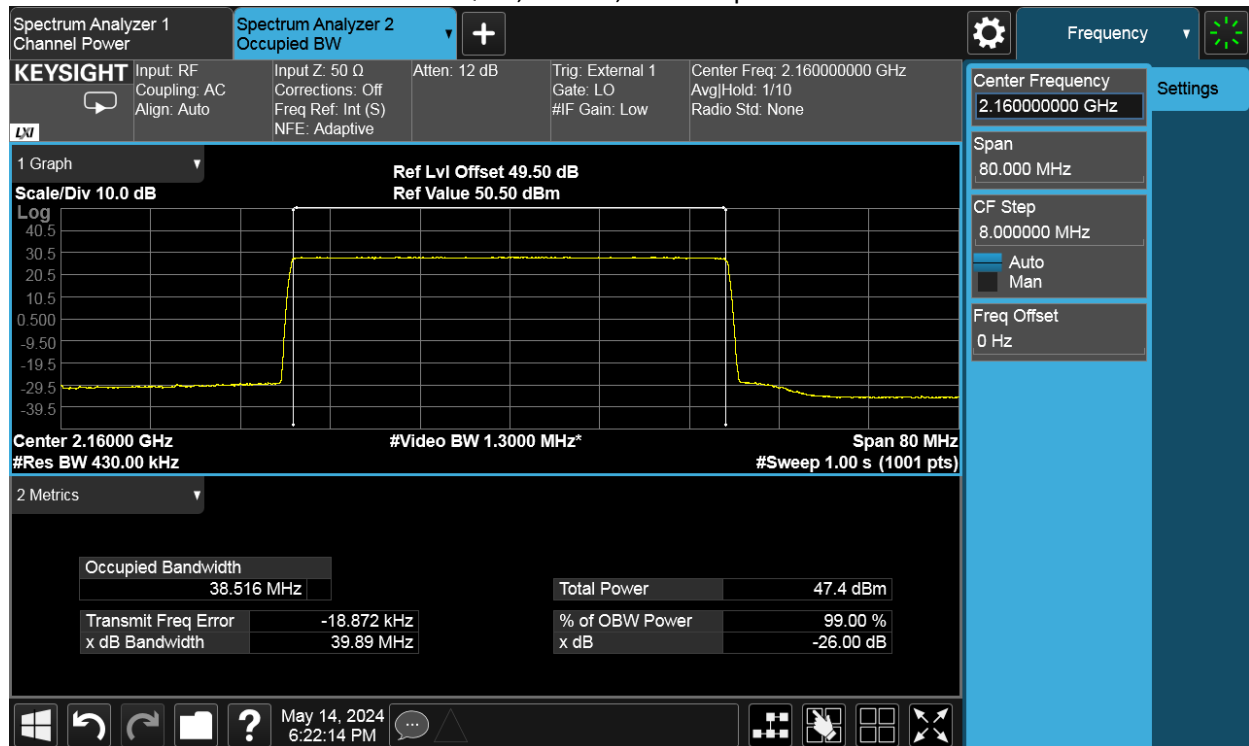

2TX/RX mode:

NR-1C


99% Occupied Bandwidth

Antenna Port	Modulation	Bandwidth	Occupied Bandwidth (MHz)		
			Channel Position B	Channel Position M	Channel Position T
H	QPSK	25MHz	23.732	23.724	23.718
H	QPSK	30MHz	28.541	28.526	28.525
H	QPSK	35MHz	33.532	33.525	33.516
H	QPSK	40MHz	38.534	38.534	38.515


-26dBc Occupied Bandwidth

Antenna Port	Modulation	Bandwidth	Occupied Bandwidth (MHz)		
			Channel Position B	Channel Position M	Channel Position T
H	QPSK	25MHz	24.59	24.59	24.59
H	QPSK	30MHz	29.51	29.51	29.51
H	QPSK	35MHz	34.69	34.69	34.69
H	QPSK	40MHz	39.91	39.90	39.90


QPSK, 25MHz, Channel position B

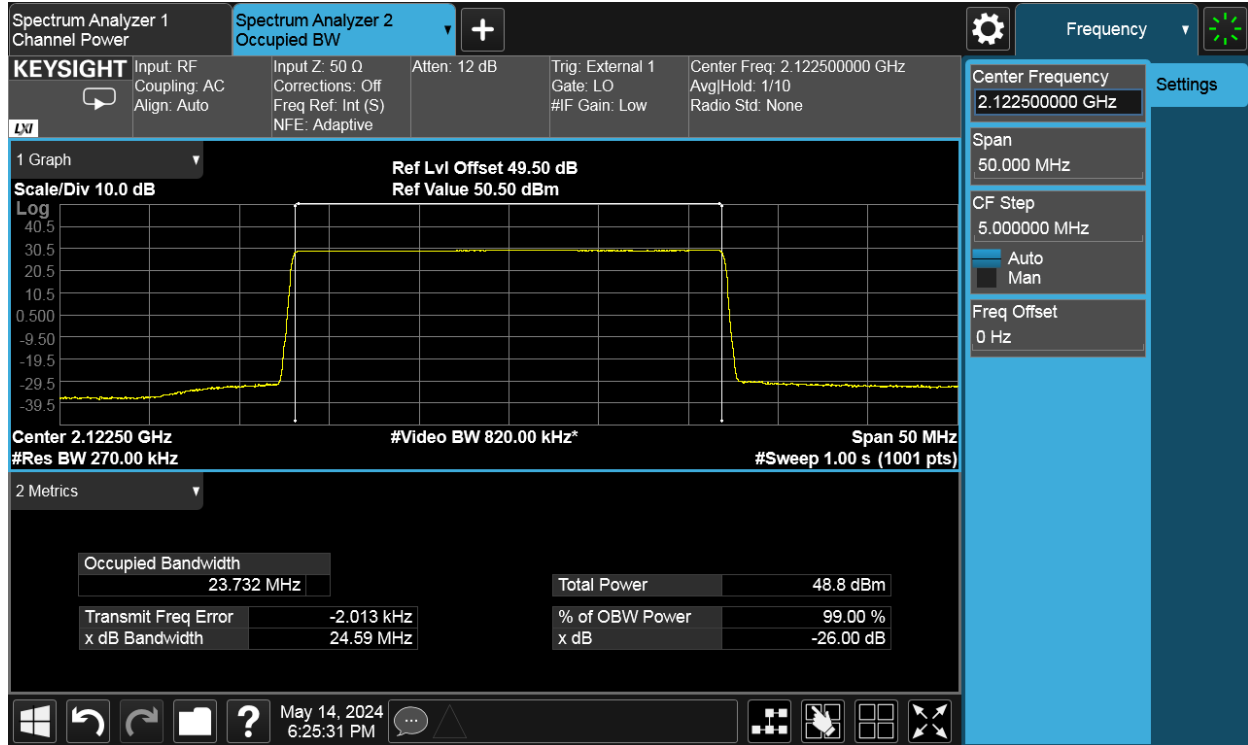


QPSK, 25MHz, Channel position M

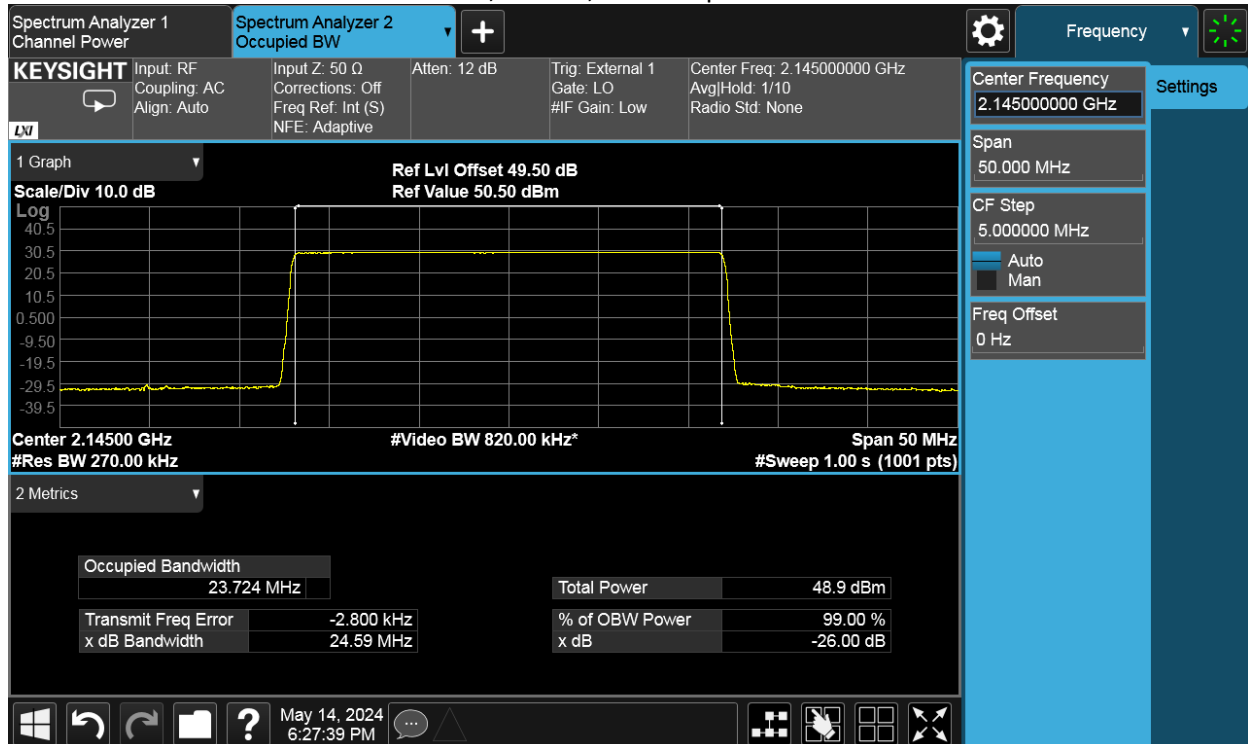


QPSK, 25MHz, Channel position T

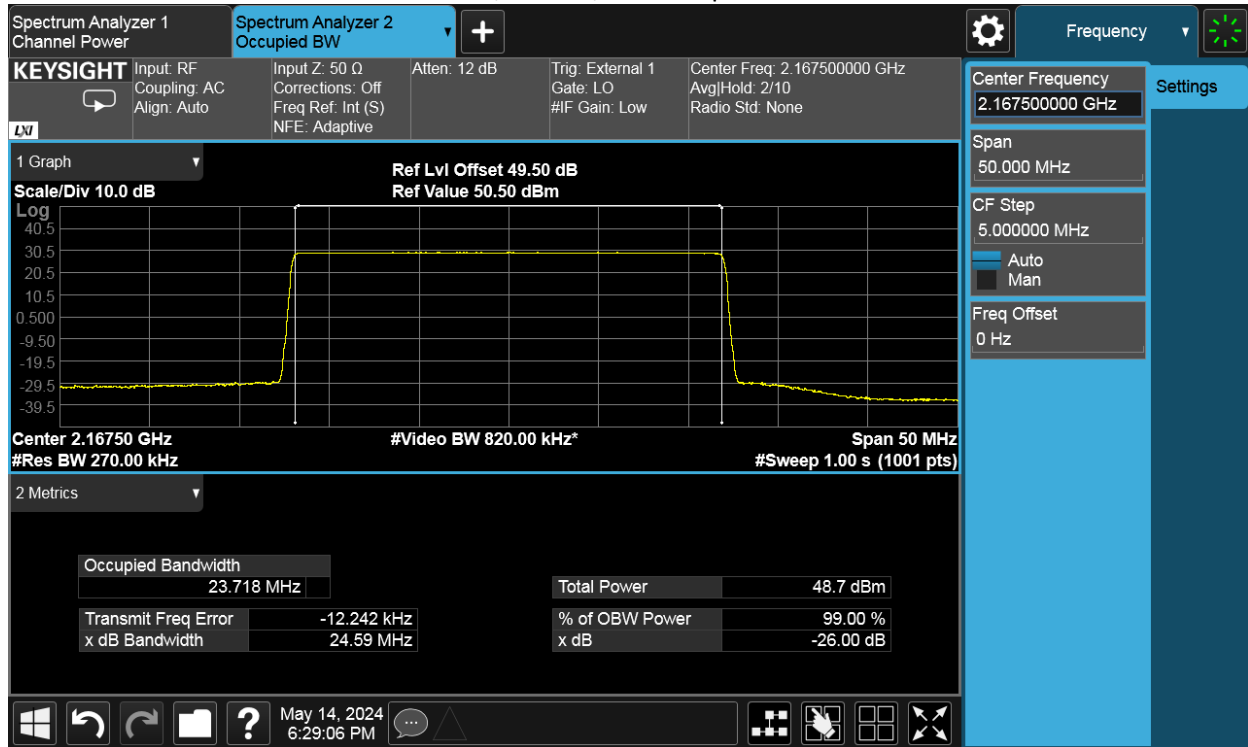


QPSK, 30MHz, Channel position B

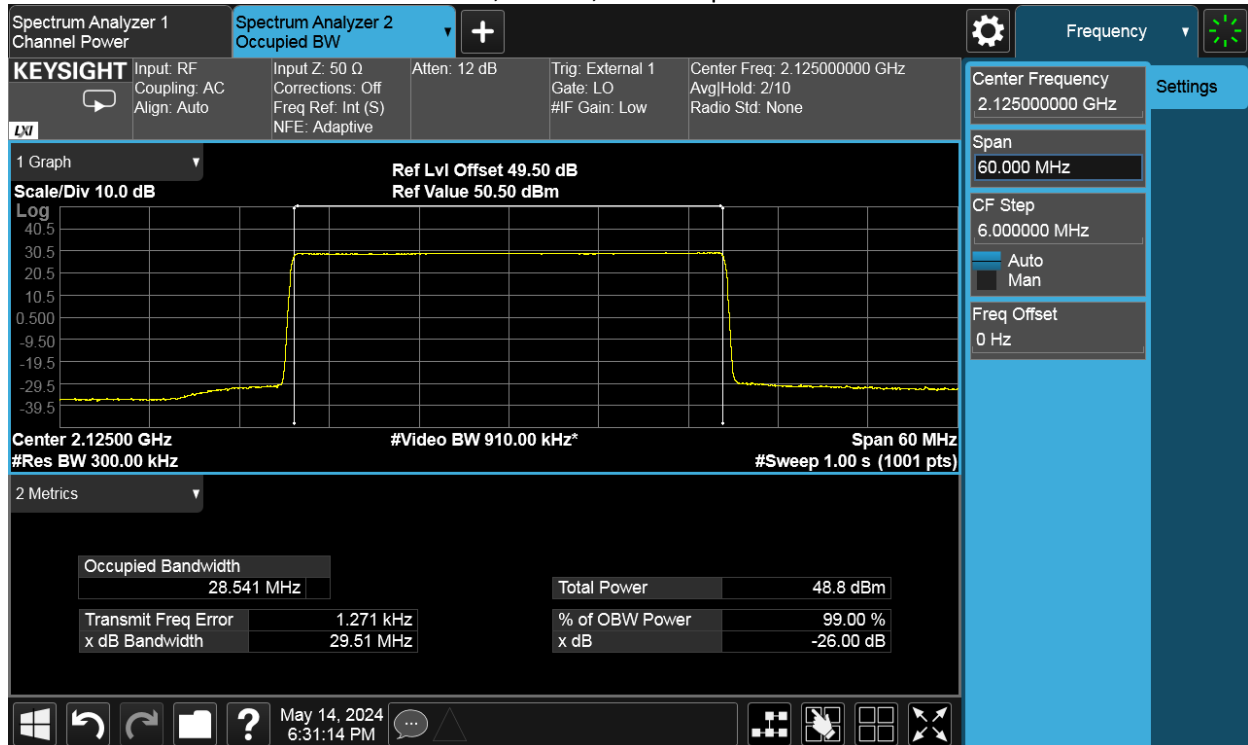


QPSK, 30MHz, Channel position M

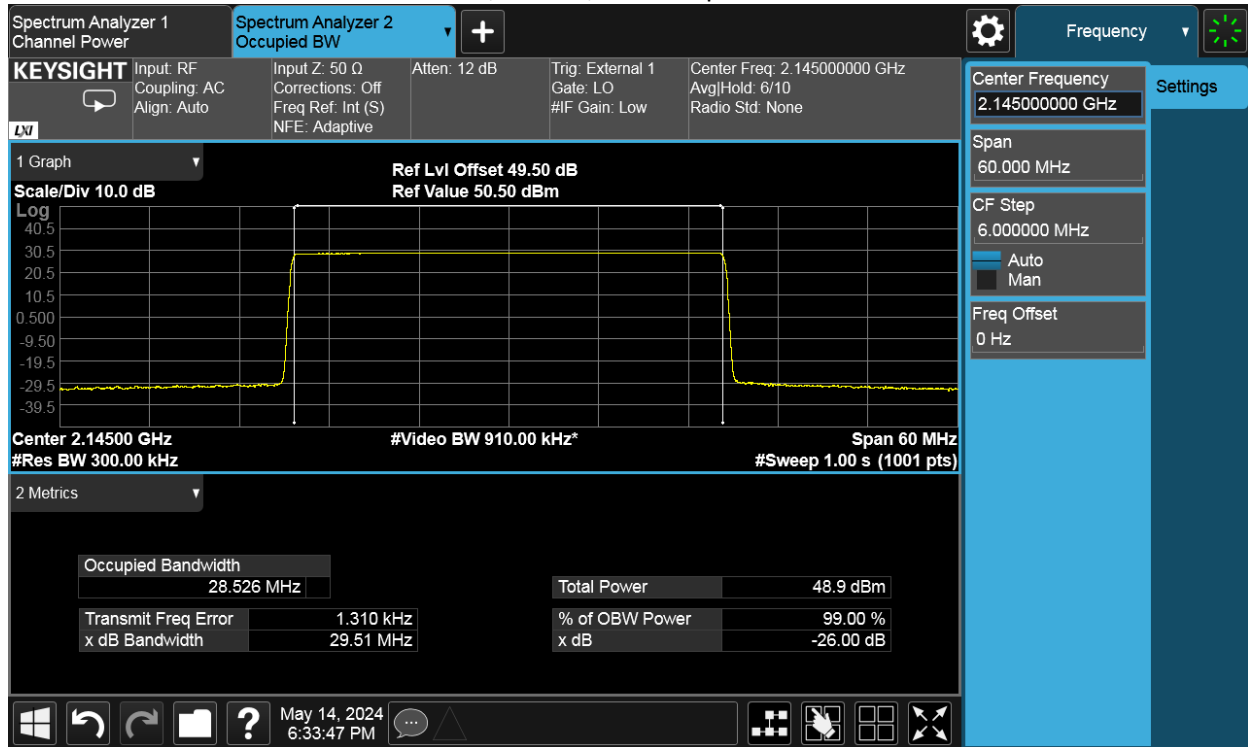


QPSK, 30MHz, Channel position T

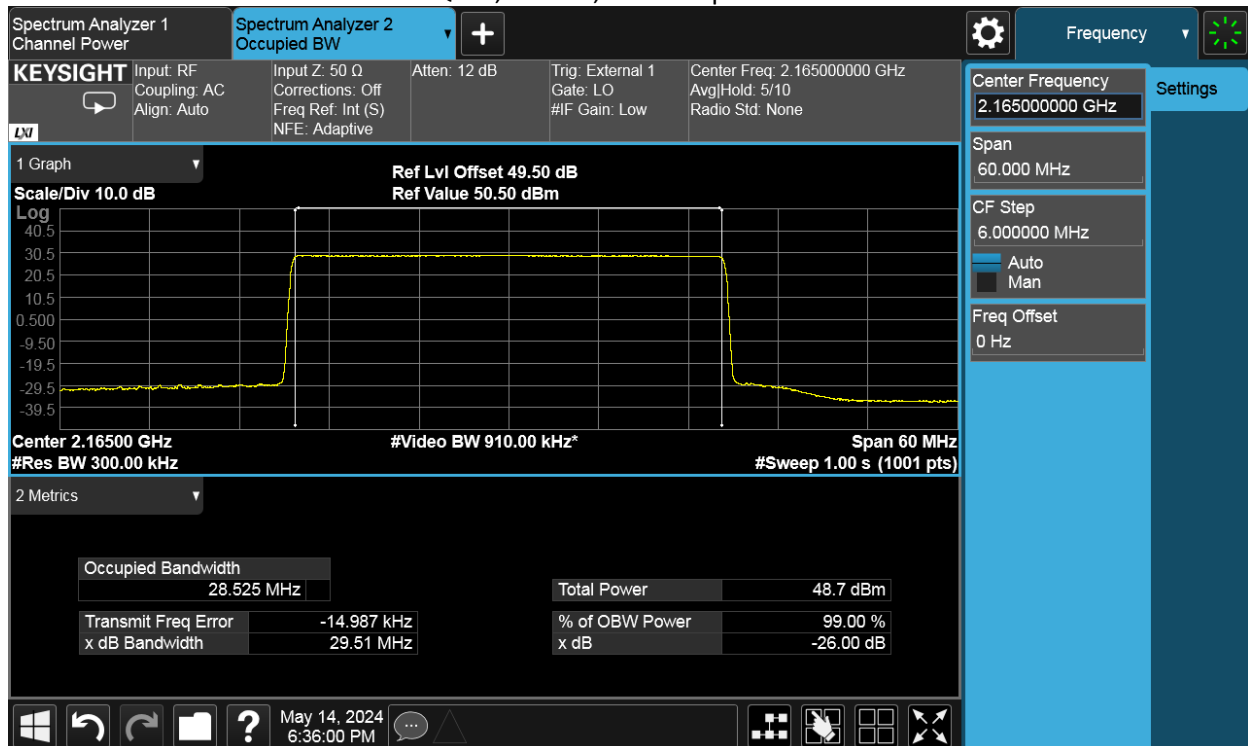


QPSK, 35MHz, Channel position B

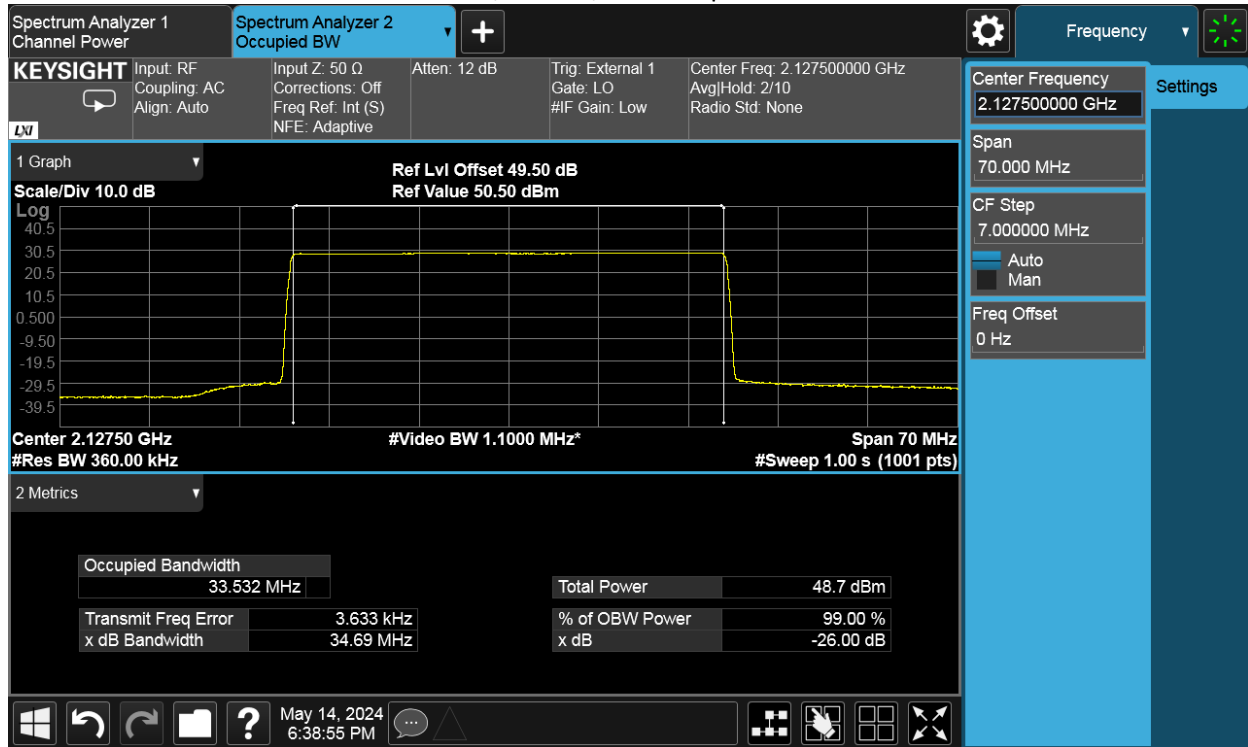


QPSK, 35MHz, Channel position M

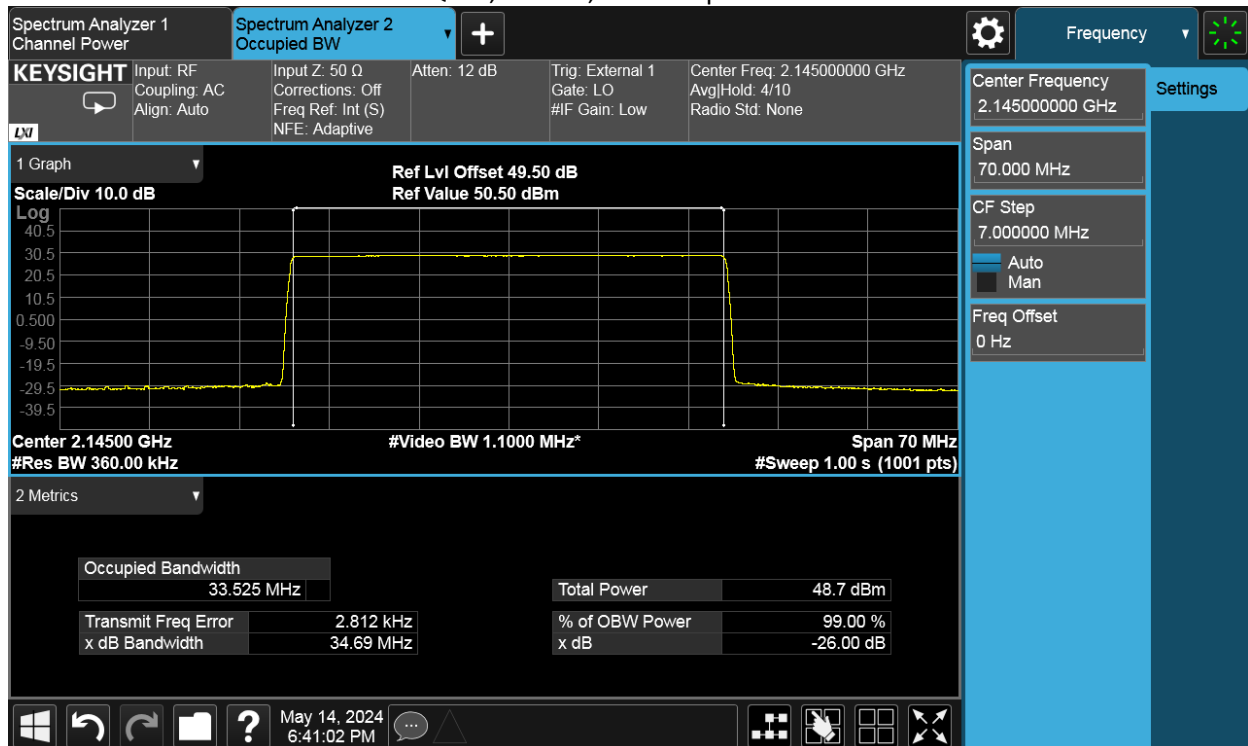


QPSK, 35MHz, Channel position T

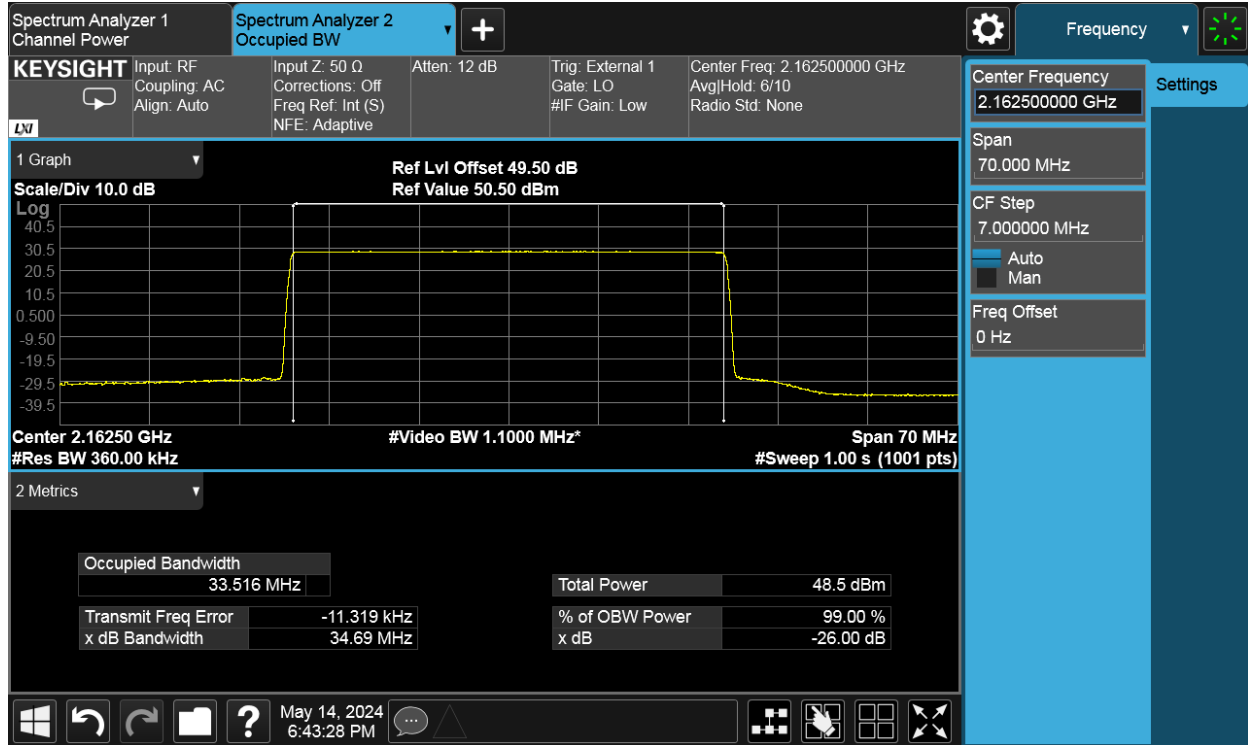


QPSK, 40MHz, Channel position B

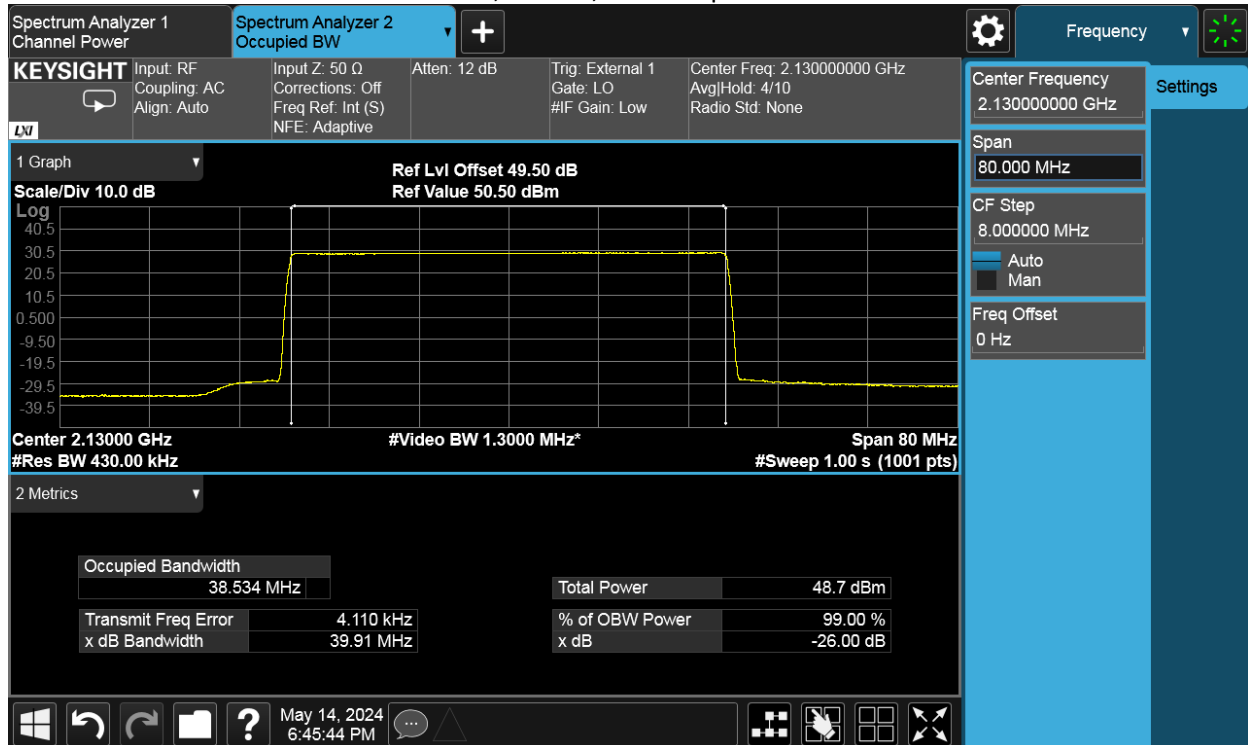

QPSK, 40MHz, Channel position M

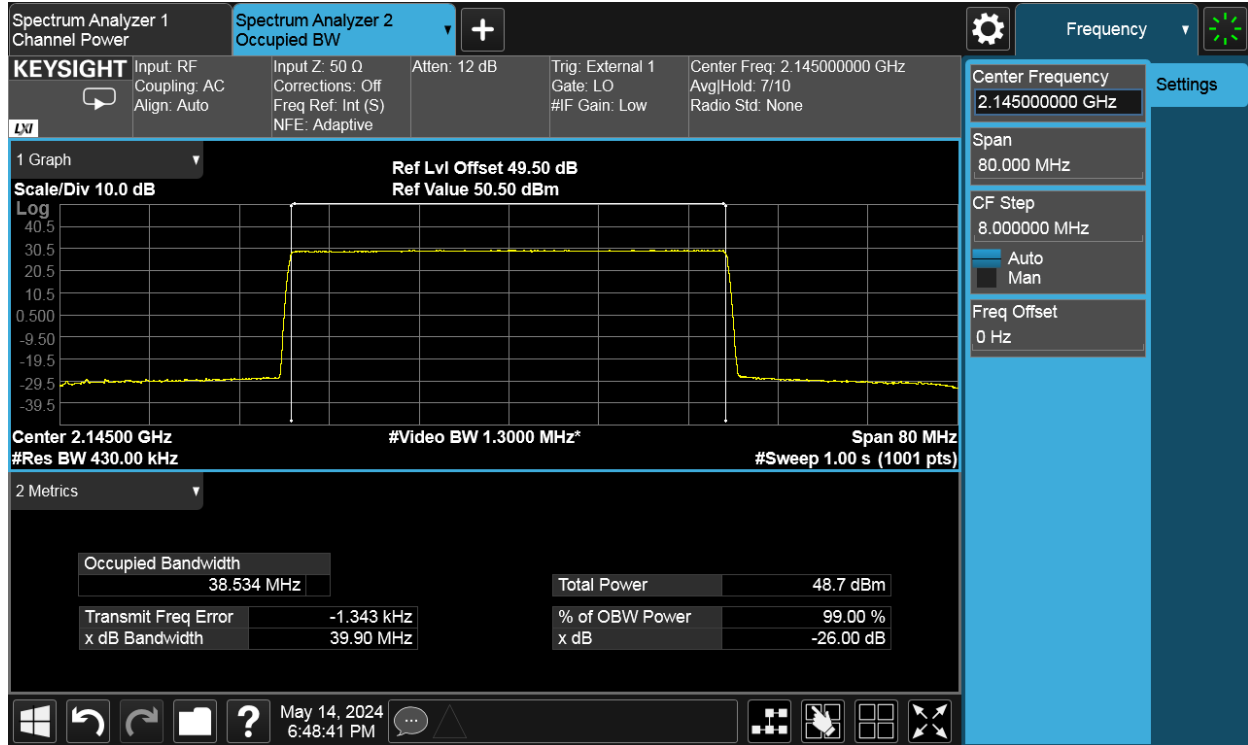

QPSK, 40MHz, Channel position T

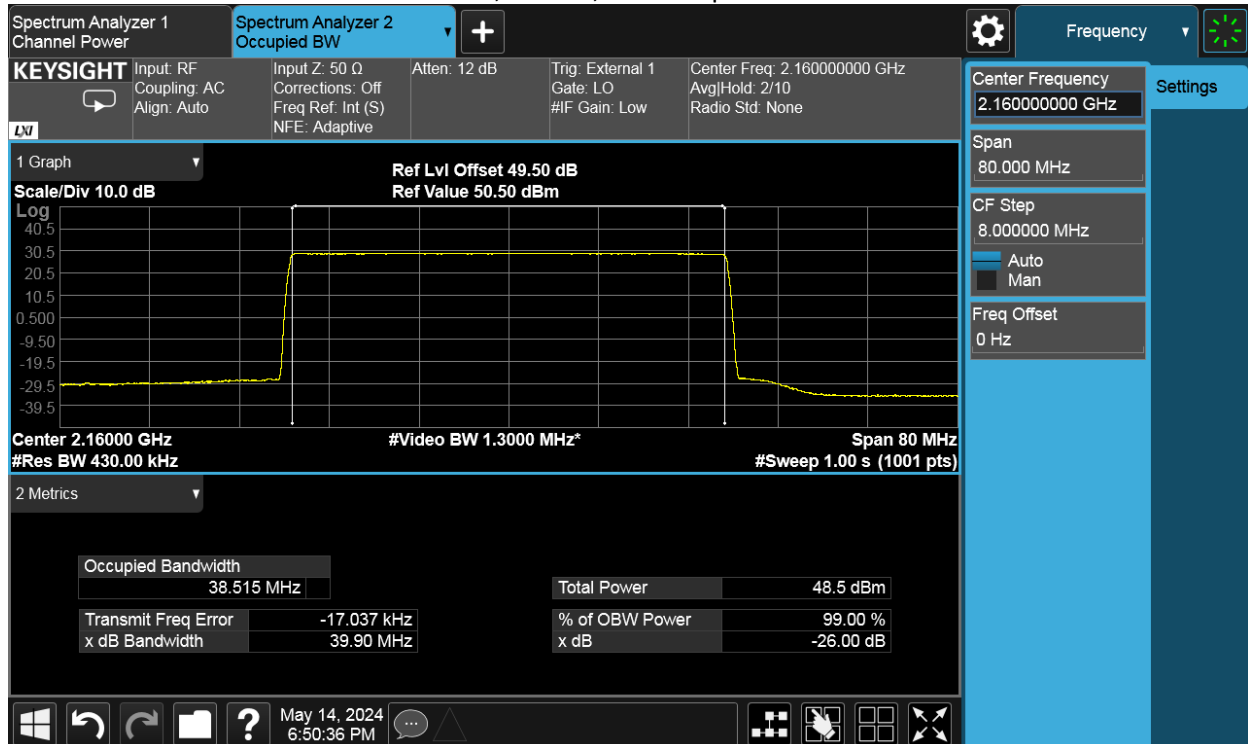

TEST REPORT

5 Unwanted Emissions at Band Edge

Test result: Pass

5.1 Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

5.2 Measurement Procedure

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

For MIMO 4TX/RX or 2TX/RX mode configurations, the limit was adjusted with a correction of -6.02dB [$10\log(1/4)$] or -3.01dB [$10\log(1/2)$] by using the Measure and Add $10\log(N)$ dB technique according to KDB 662911 D01 Multiple Transmitter Output accounting for simultaneous transmission from antenna ports . Then the limit was adjusted to -19.02 or -16.01dBm.

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed and a RBW of 1MHz for measurements of emissions > 1MHz away from the band edges.

Spectrum analyzer detector was set as RMS.

TEST REPORT


5.3 Measurement result

4TX/RX mode:


NR-1C-UE

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
H	B	256QAM	25	270	-19.02
H	T	256QAM	25	270	-19.02

Channel Position B

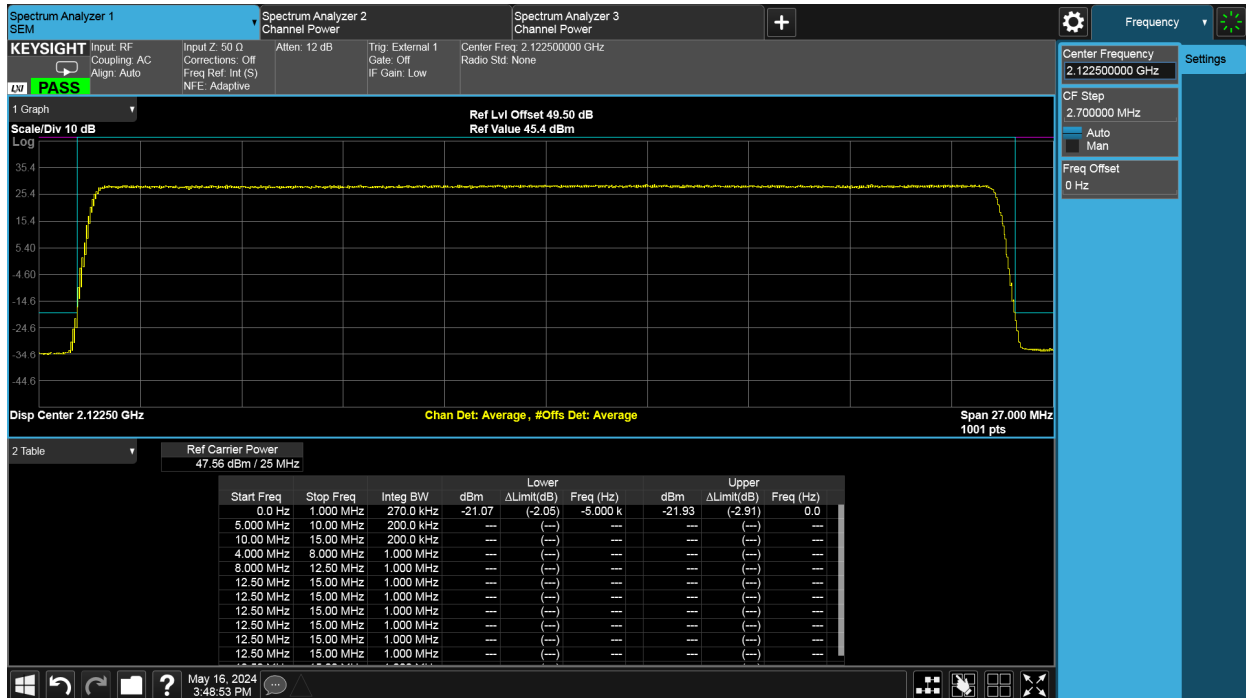


Channel Position T

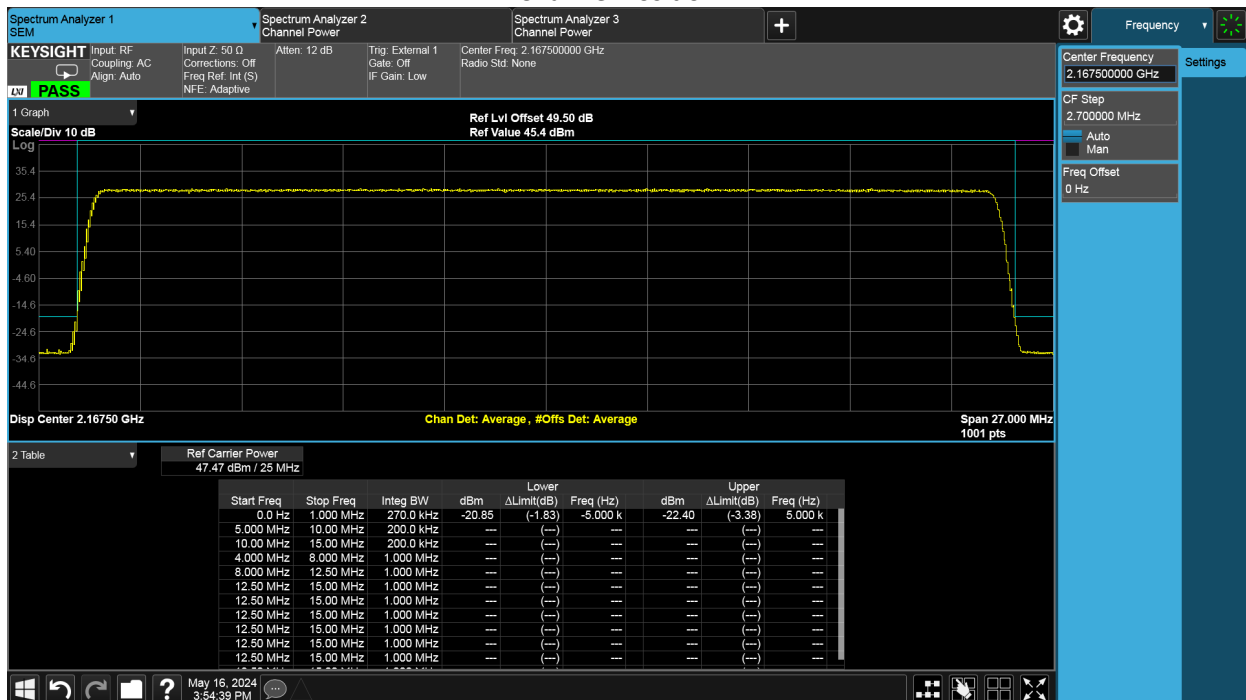


Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
H	B	256QAM	30	300	-19.02
H	T	256QAM	30	300	-19.02

Channel Position B

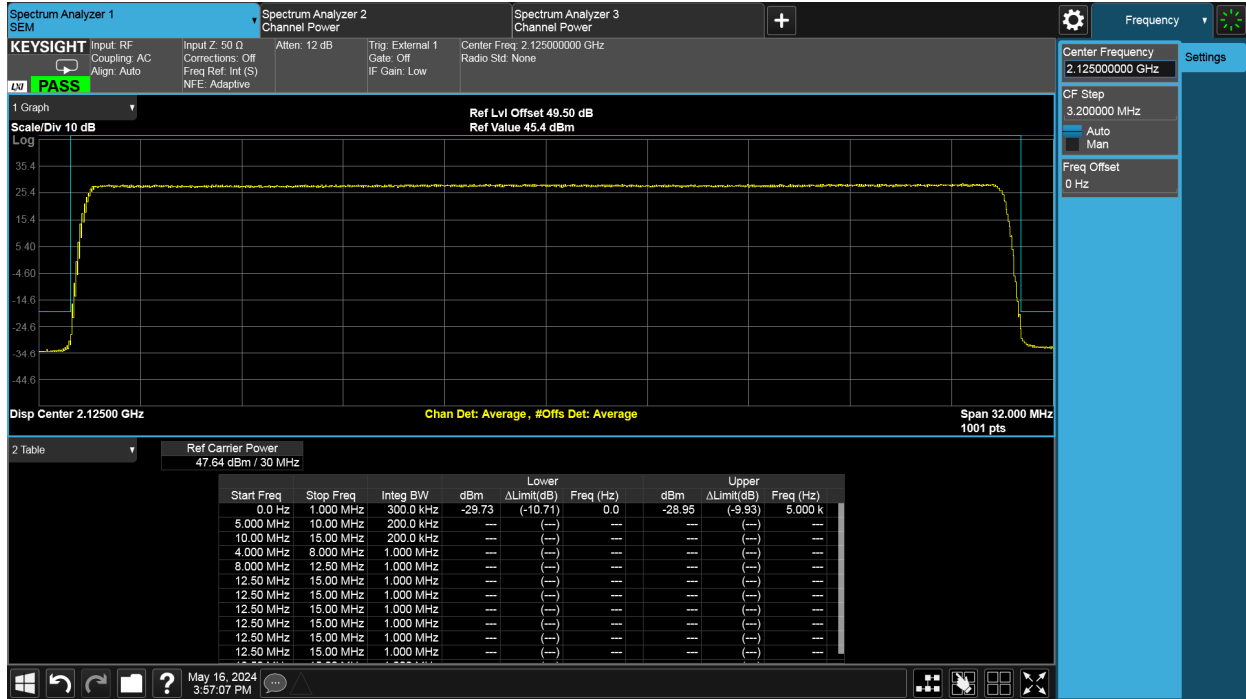


Channel Position T

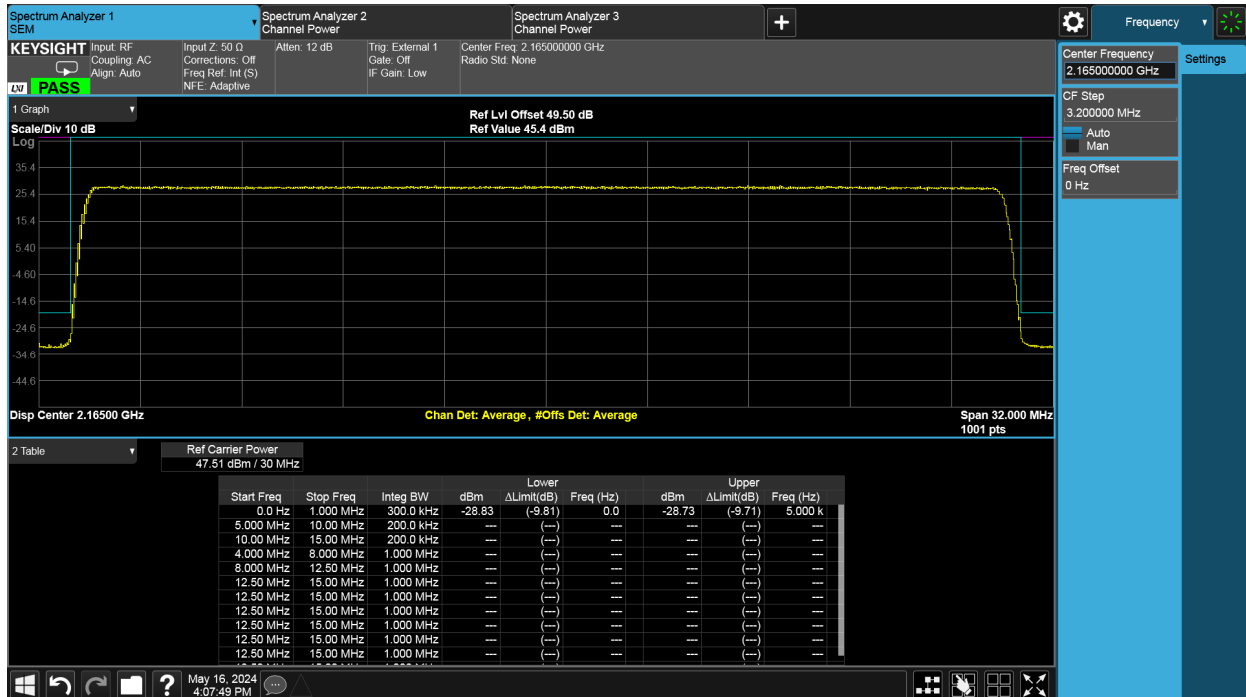


Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
H	B	256QAM	35	360	-19.02
H	T	256QAM	35	360	-19.02

Channel Position B

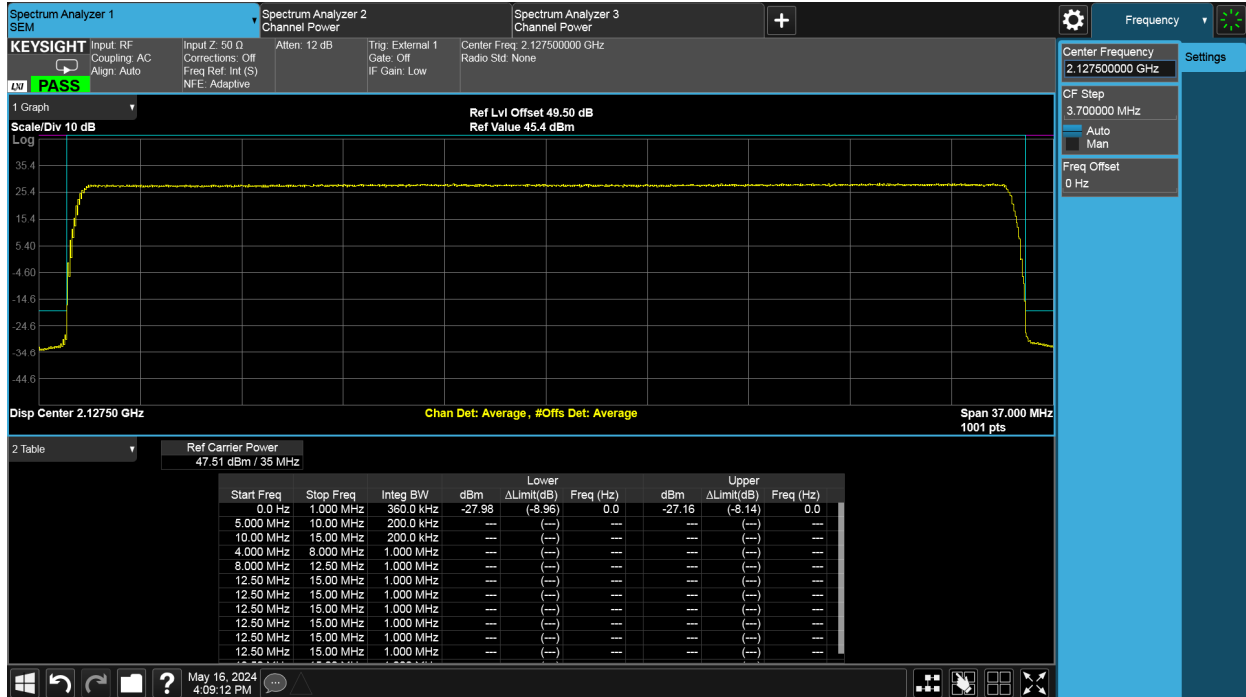



Channel Position T

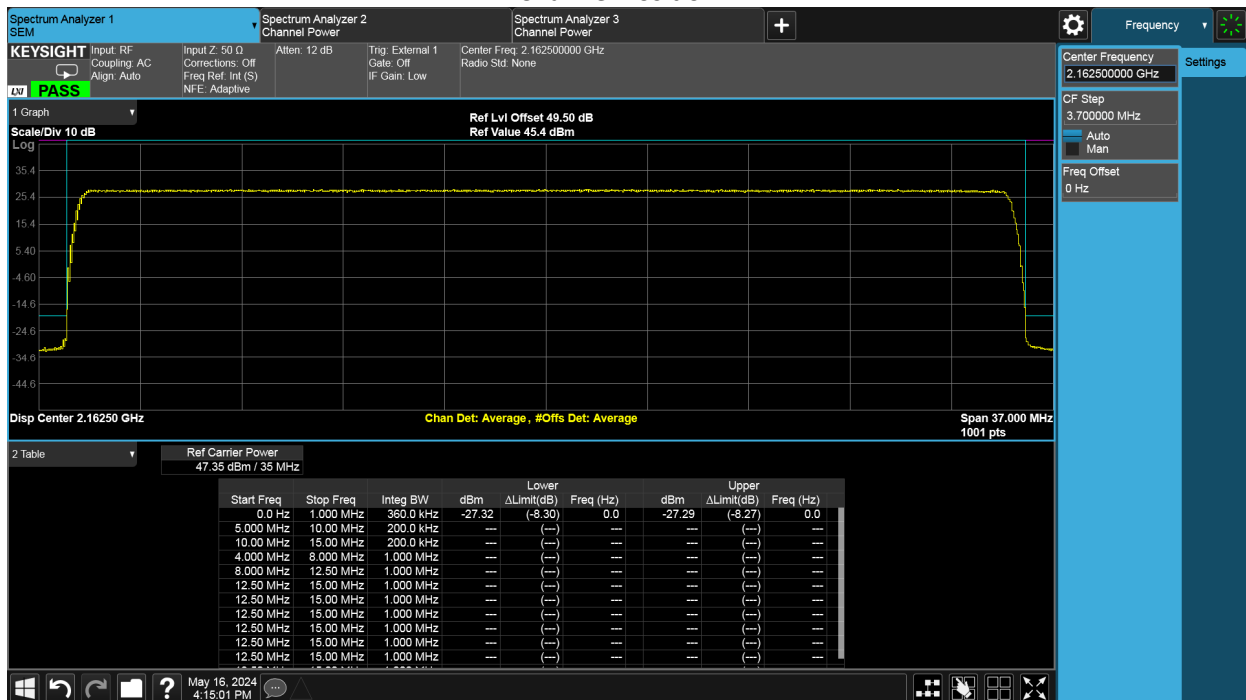


TEST REPORT


Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
H	B	256QAM	40	430	-19.02
H	T	256QAM	40	430	-19.02

Channel Position B

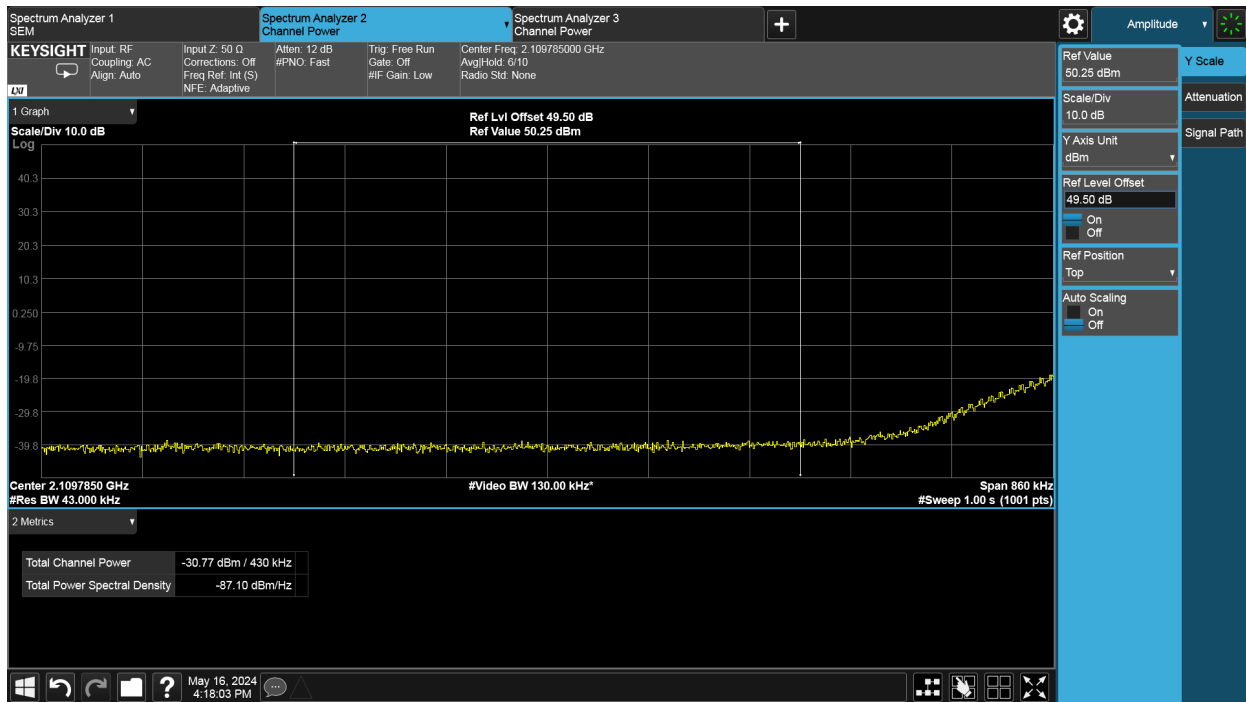
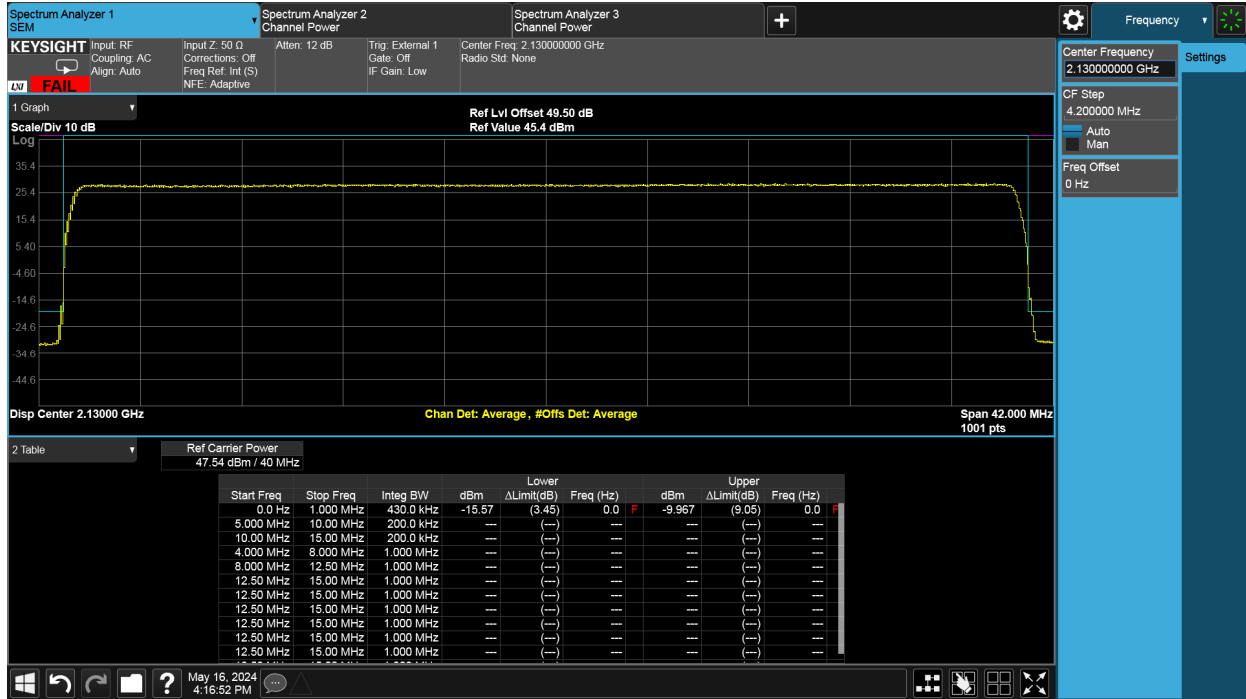


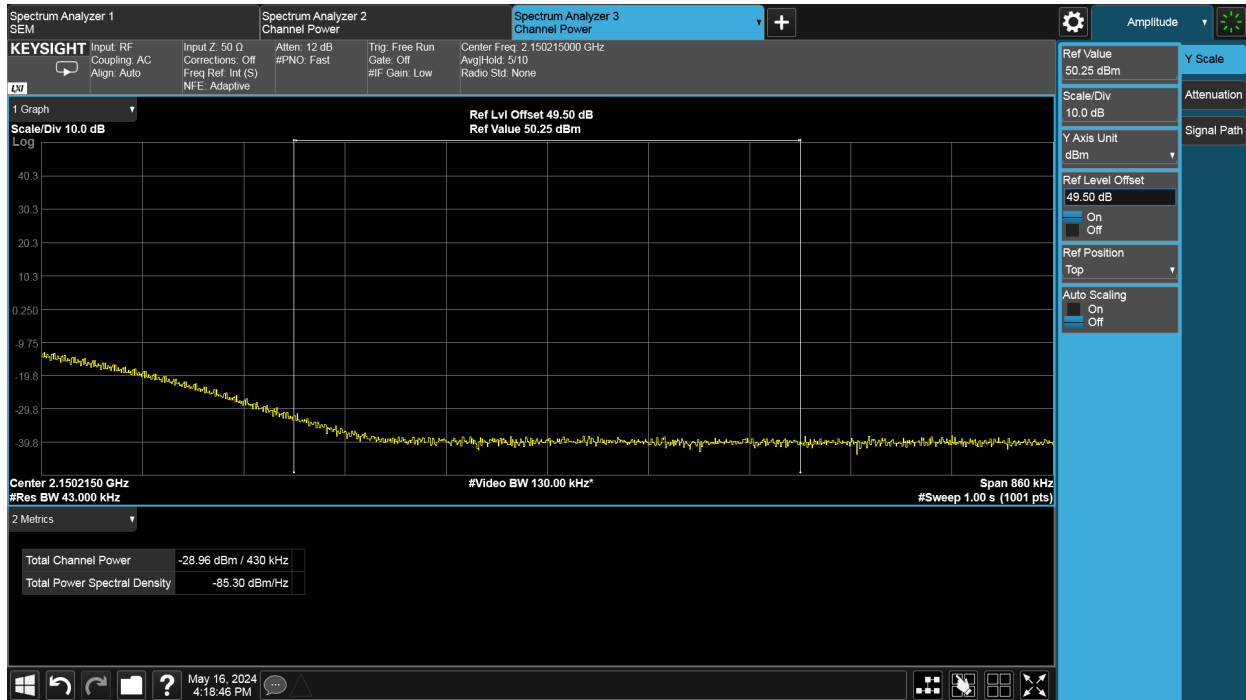

Channel Position T

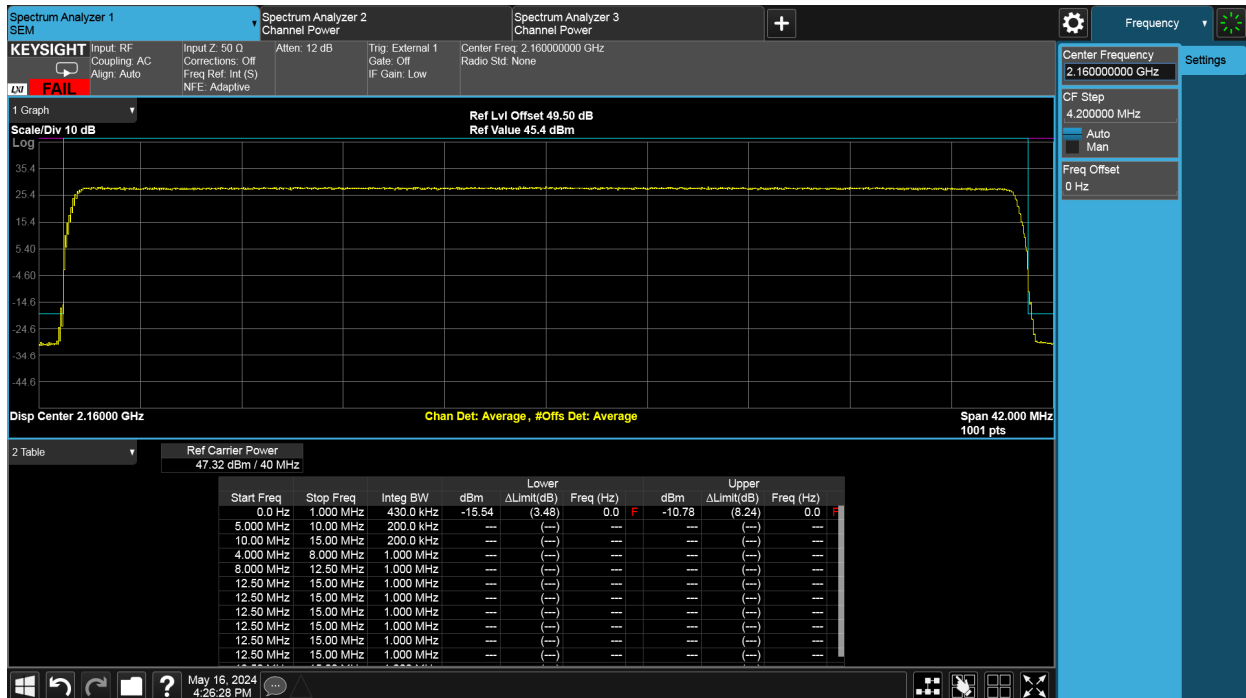


TEST REPORT

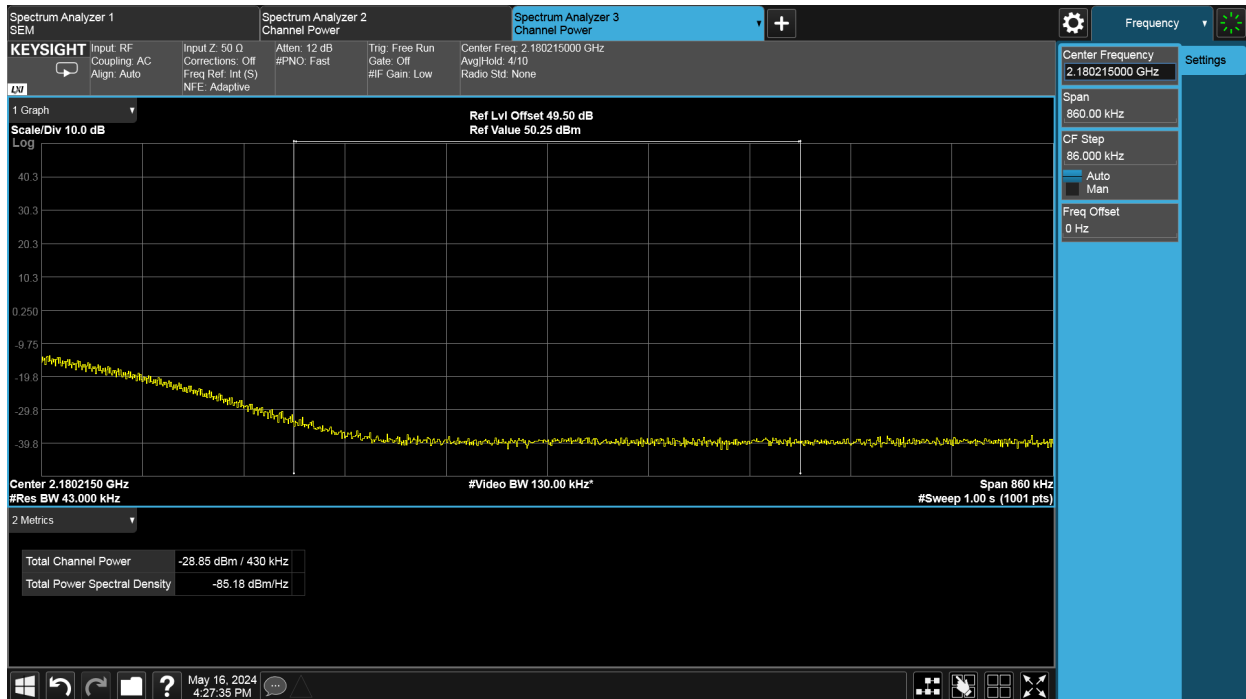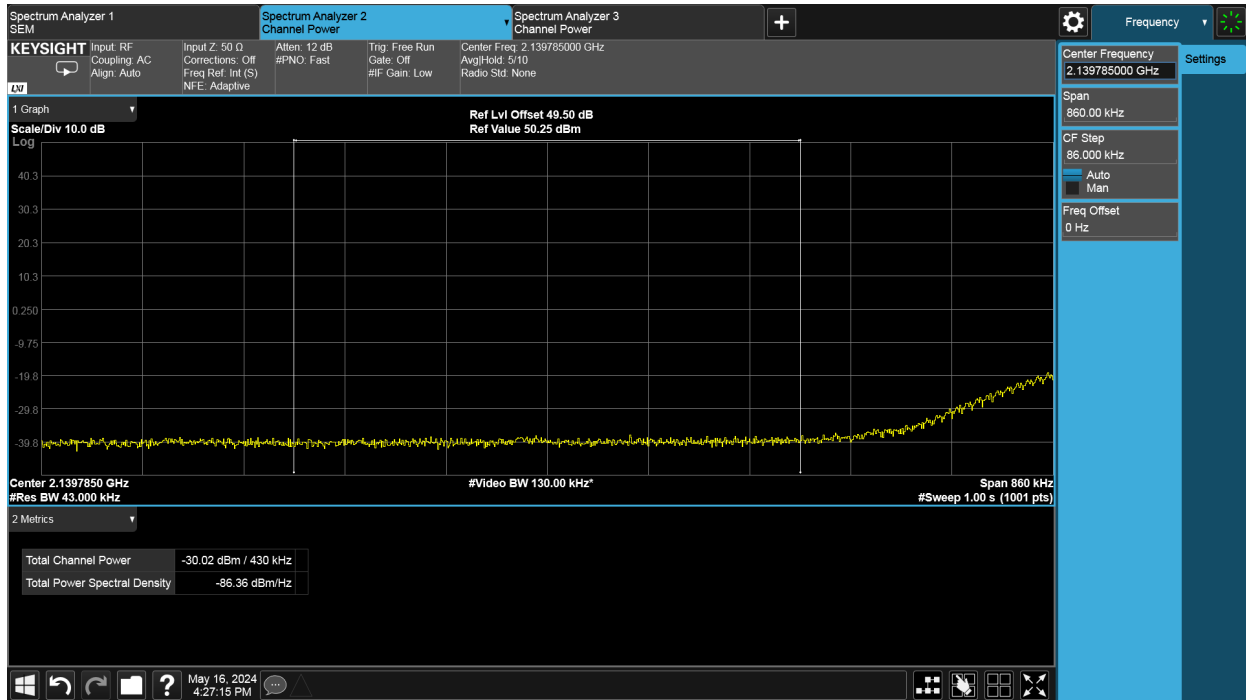

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
H	B	256QAM	25	270	-19.02
H	T	256QAM	25	270	-19.02

Channel Position B

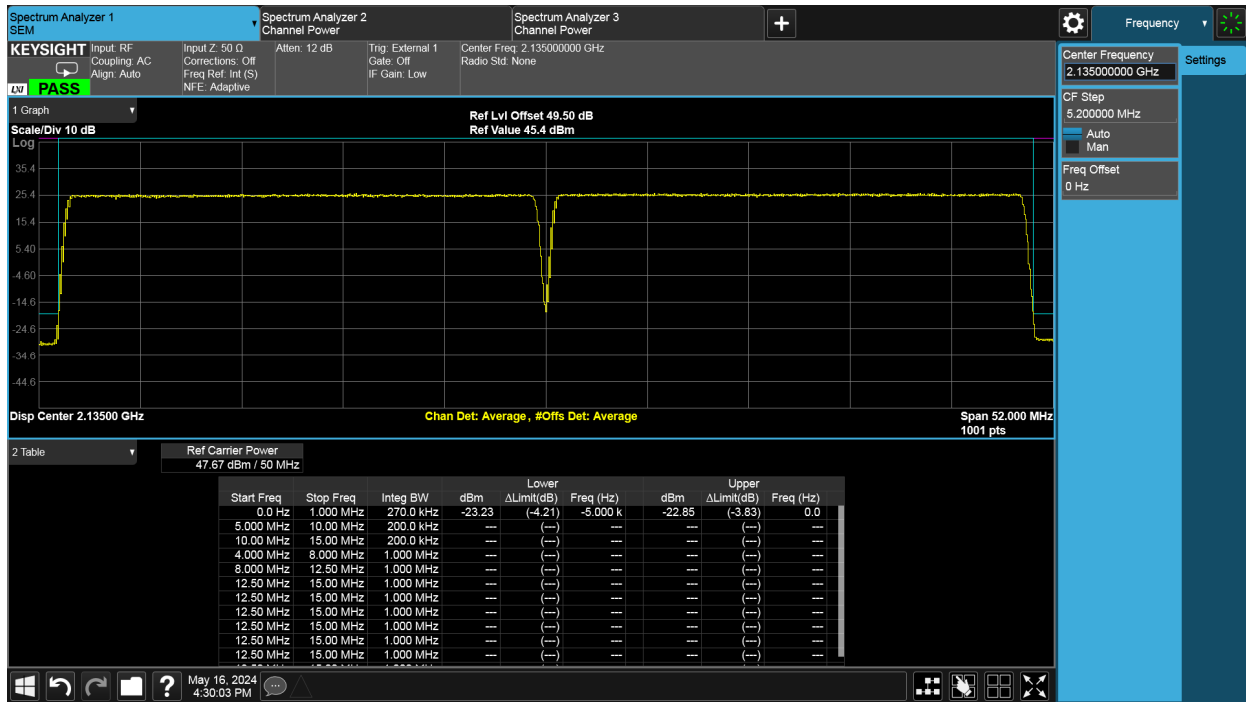

Channel Position T

