



EMC Test Report for LPRU 4410 B5B13 (With LTE and NR signals)

Tested to: FCC Part 15 Subpart B
FCC Part 22 (Section 22.917(a))
FCC Part 27 (Section - 27.53(C))
ICES-003

Test Result summary

| FCC/ ICES Section | Description | Specification/Method | Pass or Fail | Results in section |
|-------------------|---------------------------------------|-------------------------------------|--------------|--------------------|
| 15.109 / 6.2 | Radiated Emissions (RE) | FCC Part 15 / ICES 003 / ANSI C63.4 | Pass | 3.2 |
| 15.107 / 6.1 | Conducted Emissions (CE) for AC Power | FCC Part 15 / ICES 003 / ANSI C63.4 | Pass | 3.3 |
| 27.53(C) | Transmitter Spurious Emissions (RE) | FCC Part 27 / ANSI C63.26 | Pass | 3.2 |
| 22.917(a) | Out of band Emissions (RE) | FCC Part 22 / ANSI C63.26 | Pass | 3.2 |

Document number: 7169007217-TR-EMC-01-01-F15

Release date: 17 April 2020

Prepared for: Ericsson Canada



About this document

This document is written and distributed by TÜV SÜD Canada Inc. Whenever TÜV SÜD is mentioned in this document it shall be taken as referring to TÜV SÜD Canada Inc.

This test report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc. Opinions or interpretations expressed in this report, if any, are outside the scope of the accreditations of TÜV SÜD Canada Inc. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc, unless otherwise stated.

Throughout this document:

- text in **blue** font is a clickable link
- text in italics is provided as-is from the customer

The release control record, document approvals, and laboratory Accreditations are as follows.

Release control record

This document is based on document template KG000347-TR-EMC-08-03.


| Issue | Reason for change | Date released |
|-------|-------------------|---------------|
| 01 | initial release | 17 April 2020 |

Approvals

| Function | Name | Job title | Signature |
|--------------------|-----------------|-------------------------|-----------|
| Technical Reviewer | Scott Drysdale | Canada Wireless Manager | |
| Author | Kasi Sivaratnam | EMC Test Engineer | |

Accreditations

The test facilities of TÜV SÜD Canada Inc are accredited by the American Association for Laboratory Accreditation (A2LA) to ISO/IEC 17025:2005 in accordance with the scope of accreditation outlined at the website portal.a2la.org/scopepdf/2955-19.pdf.

| | |
|---|--|
|  <p>A2LA Cert. No. 2955.19</p> | <p>DISCLAIMER AND COPYRIGHT</p> <p>This non-binding report has been prepared by TÜV SÜD Canada with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Canada. No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada.</p> <p>© TÜV SÜD.</p> <p>ACCREDITATION</p> <p>Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.</p> |
|---|--|

The Canadian lab registration number associated with the TÜV SÜD test facilities is 24015.

Test lab information

| | |
|-----------------------------|---|
| Lab name | TÜV SÜD Canada Inc |
| Company name | TÜV SÜD Canada Inc |
| Mailing or shipping address | 1280 Teron Road, Ottawa, Ontario, K2K 2C1, Canada |
| Primary technical contact | Stephen Tippet |
| Title | Lab Manager |
| Phone | 613-668-5149 |

Customer information

| | |
|-----------------|--|
| Company name | Ericsson Canada |
| Mailing address | 349 Terry Fox Drive, Ottawa, On, K2K 2V6, Canada |
| Primary contact | Denis Lalonde |
| Title | Team Leader RA Verification |
| Phone | 613-790-2901 |
| E-mail | Denis.lalonde@ericsson.com |



Table of contents

| | |
|---|-----------|
| About this document | 2 |
| 1. Executive summary | 9 |
| 1.1 Compliance summary | 10 |
| 2. Details of the equipment under test | 11 |
| 2.1 Assessed hardware | 11 |
| 2.2 Product overview | 11 |
| 2.3 Product port definition and EUT cable information | 13 |
| 2.4 Configurations of the EUT..... | 14 |
| 2.4.1 Radiated Emissions Single Carrier Configuration - LTE | 15 |
| 2.4.2 Radiated Emissions MultiCarrier Configuration - LTE..... | 16 |
| 2.4.3 Radiated Emissions Single Carrier Configuration – NR | 17 |
| 2.4.4 Radiated Emissions MultiCarrier/Single RAT Configuration – NR | 18 |
| 2.4.5 Radiated Emissions MultiCarrier/Multi RAT Configuration – NR+LTE | 18 |
| 2.4.6 Conducted Emissions Carrier Configuration – LTE..... | 19 |
| 2.5 Modifications of the EUT during testing..... | 19 |
| 2.6 Inventory of the EUT and support equipments..... | 20 |
| 3. Detailed test results of Emissions | 21 |
| 3.1 Measurement instrumentation..... | 21 |
| 3.2 Radiated Emissions, E-field..... | 22 |
| 3.2.1 Test specification and limits | 22 |
| 3.2.2 Test procedure..... | 22 |
| 3.2.3 Calculation of the compliance margin | 24 |
| 3.2.4 Measurement uncertainties | 24 |
| 3.2.5 Test results of Radiated Emissions – (Single carrier-2 LTE - Bottom channel) | 24 |
| 3.2.6 Test results of Radiated Emissions – (Single carrier-2, LTE – Middle channel) | 29 |
| 3.2.7 Test results of Radiated Emissions – (Single carrier-2, LTE – Top channel) | 34 |
| 3.2.8 Test results of Radiated Emissions – (Multi carrier- 5, LTE – Middle channel)..... | 39 |
| 3.2.9 Test results of Radiated Emissions (SC1 - NR 5MHz/LTE 10MHz – Bot ch) | 45 |
| 3.2.10 Test results of Radiated Emissions (SC1- NR 5MHz/LTE 10MHz – Mid ch) | 48 |
| 3.2.11 Test results of Radiated Emissions (SC1- NR 5MHz/LTE 10MHz – Top ch)..... | 51 |
| 3.2.12 Test results of Radiated Emissions (MC1 - 2 * NR 5MHz / LTE 10 MHz– Mid ch) | 54 |
| 3.2.13 Test results of Radiated Emissions (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)..... | 57 |
| 3.2.14 Radiated Emissions test setup pictures | 60 |
| 3.2.15 Test equipment..... | 65 |
| 3.2.16 Test conclusion | 65 |
| 3.3 Conducted Emissions on AC power leads | 66 |
| 3.3.1 Test specification and limits | 66 |
| 3.3.2 Test procedure..... | 66 |



| | | |
|-----------|--|-----------|
| 3.3.3 | Calculation of the compliance margin | 67 |
| 3.3.4 | Measurement uncertainties | 68 |
| 3.3.5 | Test results of CE on AC power ports | 68 |
| 3.3.6 | Test equipment..... | 71 |
| 3.3.7 | Test conclusion | 71 |
| 4. | References | 72 |
| 4.1 | Appendix A: Abbreviations | 73 |

List of figures

| | | |
|------------|--|----|
| Figure 1: | The EUT, LPRU 4410 B5B13 | 11 |
| Figure 2: | Test configuration for Emission tests..... | 14 |
| Figure 3: | Tested carrier detail - Single carrier (LTE)..... | 15 |
| Figure 4: | Tested carrier detail – Multicarrier (LTE)..... | 16 |
| Figure 4: | Tested carrier detail – Single carrier (NR) | 17 |
| Figure 4: | Tested carrier detail – MultiCarrier/Single RAT Configuration (NR)..... | 18 |
| Figure 4: | Tested carrier detail – MultiCarrier / Multi RAT Configuration (NR)..... | 18 |
| Figure 5: | CE tested carrier detail | 19 |
| Figure 6: | Setup of Radiated Emissions..... | 23 |
| Figure 7: | Plot of RE at 3 m – 30 to 1000 MHz (LTE – Bottom channel) | 25 |
| Figure 8: | Plot of RE at 3m from 1 to 10 GHz (LTE – Bottom channel) | 26 |
| Figure 9: | Plot of RE at 3m from 10 to 18 GHz (LTE – Bottom channel) | 27 |
| Figure 10: | Plot of RE at 1m from 18 to 26.5 GHz (LTE – Bottom channel) | 28 |
| Figure 11: | Plot of RE at 1m from 26.5 to 40 GHz (LTE – Bottom channel) | 28 |
| Figure 12: | Plot of RE at 3 m – 30 to 1000 MHz (LTE – Middle channel)..... | 30 |
| Figure 13: | Plot of RE at 3m from 1 to 10 GHz (LTE – Middle channel)..... | 31 |
| Figure 14: | Plot of RE at 3m from 10 to 18 GHz (LTE – Middle channel)..... | 32 |
| Figure 15: | Plot of RE at 1m from 18 to 26.5 GHz (LTE – Middle channel)..... | 33 |
| Figure 16: | Plot of RE at 1m from 26.5 to 40 GHz (LTE – Middle channel)..... | 33 |
| Figure 17: | Plot of RE at 3 m – 30 to 1000 MHz (LTE – Top channel)..... | 35 |
| Figure 18: | Plot of RE at 3m from 1 to 10 GHz (LTE – Top channel)..... | 36 |
| Figure 19: | Plot of RE at 3m from 10 to 18 GHz (LTE – Top channel)..... | 37 |
| Figure 20: | Plot of RE at 1m from 18 to 26.5 GHz (LTE – Top channel)..... | 38 |
| Figure 21: | Plot of RE at 1m from 26.5 to 40 GHz (LTE – Top channel)..... | 38 |
| Figure 22: | Plot of RE at 3 m – 30 to 1000 MHz (MC 5, LTE – Middle channel) – AC powered | 40 |
| Figure 23: | Plot of RE at 3m from 1 to 10 GHz (MC 5, LTE – Middle channel) - AC powered..... | 41 |
| Figure 24: | Plot of RE at 3m from 10 to 18 GHz (MC 5, LTE – Middle channel) – AC powered | 42 |
| Figure 25: | Plot of RE at 1m from 18 to 26.5 GHz (MC 5, LTE – Middle channel) – AC powered | 43 |



Figure 26: Plot of RE at 1m from 26.5 to 40 GHz (MC 5, LTE – Middle channel) – AC powered 43
Figure 27: Plot of RE at 3 m – 30 to1000 MHz (MC 5, LTE – Middle channel) – DC powered 44
Figure 28: Plot of RE at 3 m – 30 to1000 MHz (SC1- NR 5 / LTE 10 – Bot channel)..... 46
Figure 29: Plot of RE at 3m from 1 to 10 GHz (SC1- NR 5 / LTE 10 – Bot channel)..... 47
Figure 30: Plot of RE at 3 m – 30 to1000 MHz (SC1- NR 5 / LTE 10 – Mid channel)..... 49
Figure 31: Plot of RE at 3m from 1 to 10 GHz (SC1- NR 5 / LTE 10 – Mid channel)..... 50
Figure 32: Plot of RE at 3 m – 30 to1000 MHz (SC1- NR 5 / LTE 10 – Top ch)..... 52
Figure 33: Plot of RE at 3m from 1 to 10 GHz (SC1- NR 5 / LTE 10 – Top ch)..... 53
Figure 34: Plot of RE at 3 m – 30 to1000 MHz (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)..... 55
Figure 35: Plot of RE at 3m from 1 to 10 GHz (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)..... 56
Figure 36: Plot of RE at 3 m – 30 to1000 MHz (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)..... 58
Figure 37: Plot of RE at 3m from 1 to 10 GHz (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)..... 59
Figure 38: Setup for RE tests at 30 MHz to 1 GHz with LTE (Single & Multi Carrier)- AC Powered... 60
Figure 39: Setup for RE tests at 30 MHz to 1 GHz with LTE (Single & Multi Carrier)- DC Powered... 61
Figure 40: Setup for RE tests for above 1 GHz with LTE (Single & Multi Carrier)..... 62
Figure 41: Setup for RE tests at 30 MHz to 1 GHz with NR (Single & Multi Carrier) 63
Figure 42: Setup for RE tests for above 1 GHz with NR (Single & Multi Carrier) 64
Figure 43: CE test method on AC leads for regulatory test cases 67
Figure 44: Plot of CE on AC port, line L1 for FCC Part 15 class B..... 69
Figure 45: Plot of CE on AC port, line L2 for FCC Part 15 class B..... 70
Figure 46: Setup for CE tests on AC power cables 71

List of tables

Table 1: Summary of test results for the USA; FCC Part 15 subpart B 10
Table 2: Summary of test results for the USA; FCC Part 22..... 10
Table 3: Summary of test results for the USA; FCC Part 27 subpart C 10
Table 4: Summary of test results for Canada; ICES-003..... 10
Table 5: Assessed hardware..... 11
Table 6: System port definition..... 13
Table 7: EUT Modifications 19
Table 8: Inventory of the EUT & Support with LTE (RE & CE tests) 20
Table 9: Inventory of the EUT & Support with NR signal (RE tests)..... 20
Table 10: RE test requirements..... 22
Table 11: RE limits at 10 m for Class B of FCC 22
Table 12: Emission limits for FCC Part 27 & Part 22 22
Table 13: RE test results from 30 to 1000 MHz for FCC Part 15 (LTE – Bottom channel) 25



| | |
|--|----|
| Table 14: RE test results from 30 to 1000 MHz for FCC Part 22/27 (LTE – bottom channel)..... | 25 |
| Table 15: RE test results from 1 to 10 GHz for FCC Part 15 (LTE – Bottom channel)..... | 26 |
| Table 16: RE test results from 1 to 10 GHz for FCC Part 22/27 (LTE – Bottom channel)..... | 26 |
| Table 17: RE test results from 10 to 18 GHz for FCC Part 15 (LTE – Bottom channel)..... | 27 |
| Table 18: RE test results from 10 to 18 GHz FCC Part 22/27 (LTE – Bottom channel) | 27 |
| Table 19: RE test results from 30 to 1000 MHz for FCC Part 15 (LTE – Middle channel) | 30 |
| Table 20: RE test results from 30 to 1000 MHz for FCC Part 22/27 (LTE – Middle channel) | 30 |
| Table 21: RE test results from 1 to 10 GHz for Part 15 (LTE – Middle channel)..... | 31 |
| Table 22: RE test results from 1 to 10 GHz for Part 22/27 (LTE – Middle channel)..... | 31 |
| Table 23: RE test results from 10 to 18 GHz for FCC Part 15 (LTE – Middle channel) | 32 |
| Table 24: RE test results from 10 to 18 GHz for FCC Part 22/27 (LTE – Middle channel) | 32 |
| Table 25: RE test results from 30 to 1000 MHz for FCC part 15 (LTE – Top channel)..... | 35 |
| Table 26: RE test results from 30 to 1000 MHz for Part 22/27 (LTE – Top channel)..... | 35 |
| Table 27: RE test results from 1 to 10 GHz for FCC Part 15 (LTE – Top channel) | 36 |
| Table 28: RE test results from 1 to 10 GHz for FCC Part 22/27 (LTE – Top channel) | 36 |
| Table 29: RE test results from 10 to 18 GHz for FCC Part 15 (LTE – Top channel) | 37 |
| Table 30: RE test results from 10 to 18 GHz for FCC Part 27 (LTE – Top channel) | 37 |
| Table 31: RE test results from 30 to 1000 MHz for FCC Part 15 (MC 5, LTE – Middle channel) | 40 |
| Table 32: RE test results from 30 to 1000 MHz for FCC Part 27 (MC 5, LTE – Middle channel) | 40 |
| Table 33: RE test results from 1 to 10 GHz for FCC Part 15 (MC 5, LTE – Middle channel)..... | 41 |
| Table 34: RE test results from 1 to 10 GHz for FCC Part 27 (MC 5, LTE – Middle channel)..... | 41 |
| Table 35: RE test results from 10 to 18 GHz for FCC Part 15 (MC 5, LTE – Middle channel)..... | 42 |
| Table 36: RE test results from 10 to 18 GHz for FCC Part 22/27 (MC 5, LTE – Middle channel)..... | 42 |
| Table 37: RE test results from 30 to 1000 MHz for FCC Part 15 (MC 5, LTE – Middle channel) | 44 |
| Table 38: RE test results from 30 to 1000 MHz for FCC Part 27 (MC 5, LTE – Middle channel) | 44 |
| Table 39: RE test results from 30 to 1000 MHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Bot channel) 46 | |
| Table 40: RE test results from 30 to 1000 MHz - FCC Part 22/27 (SC1- NR 5 / LTE 10 – Bot channel)46 | |
| Table 41: RE test results from 1 to 10 GHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Bot channel)..... | 47 |
| Table 42: RE test results from 1 to 10 GHz for FCC Part 22/27 (SC1- NR 5 / LTE 10 – Bot channel).. | 47 |
| Table 43: RE test results from 30 to 1000 MHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Mid channel) 49 | |
| Table 44: RE test results from 30 to 1000 MHz - FCC Part 22/27 (SC1- NR 5 / LTE 10 – Mid channel) | 49 |
| Table 45: RE test results from 1 to 10 GHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Mid channel) | 50 |
| Table 46: RE test results from 1 to 10 GHz for FCC Part 22/27 (SC1- NR 5 / LTE 10 – Mid channel). 50 | |
| Table 47: RE test results from 30 to 1000 MHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Top ch) | 52 |
| Table 48: RE test results from 30 to 1000 MHz - FCC Part 22/27 (SC1- NR 5 / LTE 10 – Top ch)..... | 52 |
| Table 49: RE test results from 1 to 10 GHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Top ch)..... | 53 |



| | |
|--|----|
| Table 50: RE test results from 1 to 10 GHz for FCC Part 22/27 (SC1- NR 5 / LTE 10 – Top ch)..... | 53 |
| Table 51: RE test results from 30 to 1000 MHz for FCC Part 15 (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)..... | 55 |
| Table 52: RE test results from 30 to 1000 MHz - FCC Part 22/27 (MC1- 2 * NR 5MHz / LTE 10MHz– Mid ch)..... | 55 |
| Table 53: RE test results from 1 to 10 GHz for FCC Part 15 (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch) | 56 |
| Table 54: RE test results from 1 to 10 GHz for FCC Part 22/27 (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)..... | 56 |
| Table 55: RE test results from 30 to 1000 MHz for FCC Part 15 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)..... | 58 |
| Table 56: RE test results from 30 to 1000 MHz - FCC Part 22/27 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)..... | 58 |
| Table 57: RE test results from 1 to 10 GHz for FCC Part 15 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch) | 59 |
| Table 58: RE test results from 1 to 10 GHz for FCC Part 22/27 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)..... | 59 |
| Table 59: Test equipment used for RE | 65 |
| Table 60: CE test requirements on AC power leads | 66 |
| Table 61: CE test limits on AC power leads for Class B..... | 66 |
| Table 62: CE test results on AC port, line L1 for FCC Part 15 class B..... | 69 |
| Table 63: CE test results on AC port, line L2 for FCC Part 15 class B..... | 70 |
| Table 64: Test equipment used for CE on AC power leads..... | 71 |

1. Executive summary

This document reports the Electromagnetic Compatibility (EMC) testing performed on the product called LPRU 4410 B5B13 for Ericsson Canada per project number 7169007217. The objective of the test activities is to evaluate compliance of the product to following EMC regulatory standards.

The LPRU 4410 B5B13 is verified to comply with the Class B Emissions requirements of these standards:

- FCC Part 15 Subpart B [5] (Class B)
- ICES 003 [9] (Class B)
- FCC Part 22[7] (Emissions Limitations for cellular equipment, Section 22.917(a))
- FCC Part 27 [8] (Digital Base Stations, Section - 27.53(C))

Information about the test result summary and, the equipment under test (EUT) is in the sections:

- [Compliance summary](#)
- [Details of the equipment under test](#)
- [Detailed test results of Emissions](#)



1.1 Compliance summary

The test results in this report apply only to the tested components that are identified in the section [Assessed hardware](#).

The following table summarizes the EMC test results for the test cases performed on the LPRU 4410 B5B13

Table 1: Summary of test results for the USA; FCC Part 15 subpart B

| FCC Section | Description | Specification/Method | Pass or Fail | Results in section |
|-------------|---------------------------------------|------------------------|--------------|---------------------|
| 15.109 | Radiated Emissions (RE) | FCC Part 15/ANSI C63.4 | Pass | 3.2 |
| 15.107 | Conducted Emissions (CE) for AC Power | FCC Part 15/ANSI C63.4 | Pass | 3.3 |

Table 2: Summary of test results for the USA; FCC Part 22

| FCC Section | Description | Specification/Method | Pass or Fail | Results in section |
|-------------|--|--------------------------|--------------|---------------------|
| 22.917 (a) | Emissions Limitations for cellular equipment – Out of band emissions | FCC Part 22/ ANSI C63.26 | Pass | 3.2 |

Table 3: Summary of test results for the USA; FCC Part 27 subpart C

| FCC Section | Description | Specification/Method | Pass or Fail | Results in section |
|-------------|---|--------------------------|--------------|---------------------|
| 27.53(C) | Transmitter Spurious Emissions (RE) – Digital Base Stations | FCC Part 27/ ANSI C63.26 | Pass | 3.2 |

Table 4: Summary of test results for Canada; ICES-003

| ICES Section | Description | Specification/Method | Pass or Fail | Results in section |
|--------------|---------------------------------------|----------------------|--------------|---------------------|
| 6.2 | Radiated Emissions (RE) | ICES 003/ANSI C63.4 | Pass | 3.2 |
| 6.1 | Conducted Emissions (CE) for AC Power | ICES 003/ANSI C63.4 | Pass | 3.3 |

2. Details of the equipment under test

This section describes the equipment under test (EUT).

2.1 Assessed hardware

The following table indicates the hardware components that were assessed during this test program.


Table 5: Assessed hardware

| Hardware component | Part number | Release |
|--|---------------|---------|
| Low Power Radio Unit 4410 B5B13 (LPRU 4410, B5B13) | KRC 161 887/1 | R1A |

2.2 Product overview

The product trade name is LPRU 4410 B5B13. The LPRU 4410 product is an indoor wireless telecommunication product. It is a radio unit that provides cellular service. It can operate from AC power (100-250VAC) and DC power (-48VDC).

Figure 1: The EUT, LPRU 4410 B5B13

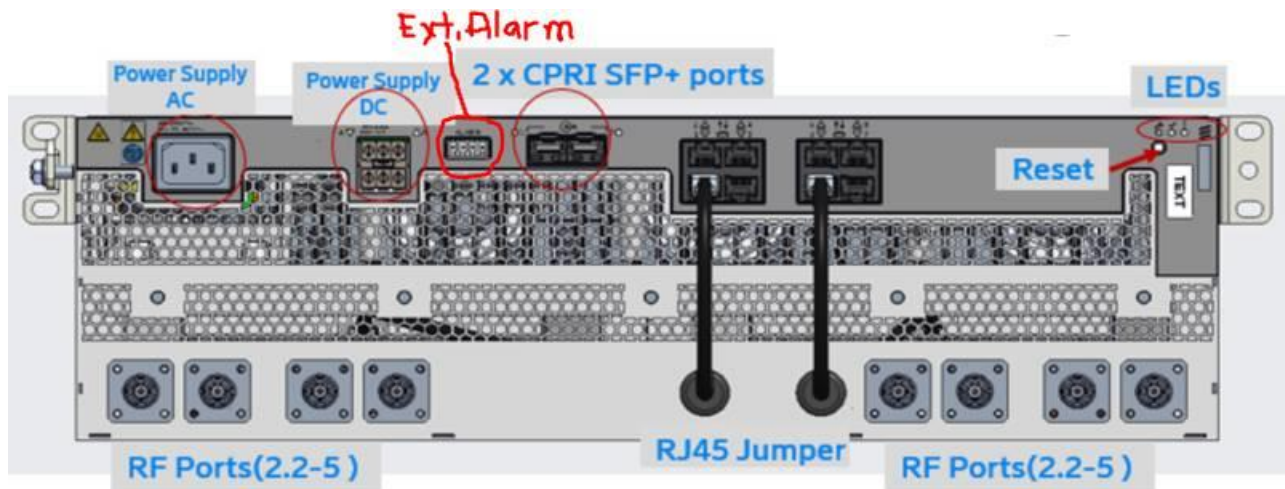



| Product data: | |
|------------------------------------|------------------------------------|
| Product Name | LPRU 4410 B5B13 |
| Revision: | R1A |
| P/N: | KRC 161 887/1 |
| Nominal Voltage: | 110VAC or -48VDC |
| Operating Temperature: | -5°C to +55°C |
| Dimensions: (H x W x D) | 442 x 132 x 370mm (WxHxD) |
| Weight; | 11.4 kg |
| Band5: (BC2) | |
| | DL: 869 - 894MHz; UL: 824 - 849MHz |
| Capability sets (SC): | CS2 |
| Markets: | FCC |
| No of RF ports: | 4 (1A,1B,1C,1D) |
| Output power per port: | 50mW |
| Limitation outp power: | |
| IBW: | 25MHz |
| IBW limitation: | Contiguous operations only |
| RAT supported | NR + LTE + NBloT IB/GB SC, MC |
| supported LTE BW: | 5, 10MHz |
| supported NR BW: | 5, 10, 15, 20MHz |
| Max No of carriers per port in MR: | |
| Max no of NR per port | 2 |
| Max no of LTE per port | 5 |
| Max no of GSM per port | |
| Modulations, LTE | QPSK, 16QAM, 64QAM, 256QAM |
| Modulations, GSM | |
| NB loT IB per LTE host | 1 |
| NB loT GB per LTE host (min 10MHz) | 1 |
| NB loT SA per port | |
| NR FDD FR1 | |
| CIPR | |
| Band13: (BC1) | |
| | DL: 746 - 756MHz; UL: 777 – 787MHz |
| Capability sets (SC): | CS2 |
| Markets: | FCC |
| No of RF ports: | 4 (2A,2B,2C,2D) |
| Output power per port: | 50mW |
| Limitation outp power: | |
| IBW: | 10MHz |
| IBW limitation: | Contiguous operations only |

| Product data: | |
|------------------------------------|----------------------------|
| RAT supported | LTE + NB IoT IB/GB SC, MC |
| supported LTE BW: | 5, 10MHz |
| Max No of carriers per port in MR: | |
| Max no of LTE per port | 5 |
| Max no of GSM per port | |
| Modulations, LTE | QPSK, 16QAM, 64QAM, 256QAM |
| Modulations, GSM | |
| NB IoT IB per LTE host | 1 |
| NB IoT GB per LTE host (min 10MHz) | 1 |
| NB IoT SA per port | |
| CIPR | |

The Configuration of the LPRU 4410 B5B13 that was tested is shown in the section [Configurations of the EUT](#). The EUT was tested in a tabletop setting.

2.3 Product port definition and EUT cable information

[Table 6](#) identifies all the cables and ports on the EUT. The Environment of the cables is indoor.


Table 6: System port definition

| Port Name | Port Description | Port Type | Interface Detail | Plug-Cable Type | Port Test setup |
|-------------------|-------------------------------------|-----------|----------------------------------|--|--|
| AC-IN | 100-250VAC, 50/60 Hz | AC Power | AC, single phase | C14, AC cable | 6' cable, C14, |
| DC-IN-A/B | -48VDC, 3 Wire, A and B feed inputs | DC Power | 3-wire or 2-wire | 3-wire, AWG-10, 6mm ² | 1 branch is enough, test both 2w & 3w, |
| Alarm | External Alarm Input 1 and 2 | Signal | 2x2pin, single ended | AWG, unshielded, | 1 branch |
| Data-1/2 | CPRI -1 and -2 | Telecom | CPRI, 2.5/5/9.8/10.1 Gbs | Optical SFP+ fiber (1km), No support for eCPRI | none |
| dRDI 1-8 | IRU/DOT Interface, partly Internal | Internal | 5G/10GBase-T, Ethernet | RJ-45, Cat6A, fixed internal termination | none |
| 1A / 1B / 1C / 1D | RF I/O ports - Band 5 | Antenna | to active DAS ports (Dot side 1) | 2.2-5 connector, | SMA adaptor used on all ports, |
| 2A / 2B / 2C / 2D | RF I/O ports - Band 13 | Antenna | to active DAS ports (Dot side 2) | 2.2-5 connector, | SMA adaptor used on all ports, |
| MMI | LPRU Status LEDs | n/a | n/a | n/a | none |
| Ground | Ground Lug (EUT front) | Ground | AWG-6, wire | Dual Hole Flag Lug, AWG-6 (RPM777567) | 6' Gnd cable attached |

2.4 Configurations of the EUT

Figure 2 shows the configuration of the EUT for Emissions test.

Figure 2: Test configuration for Emission tests

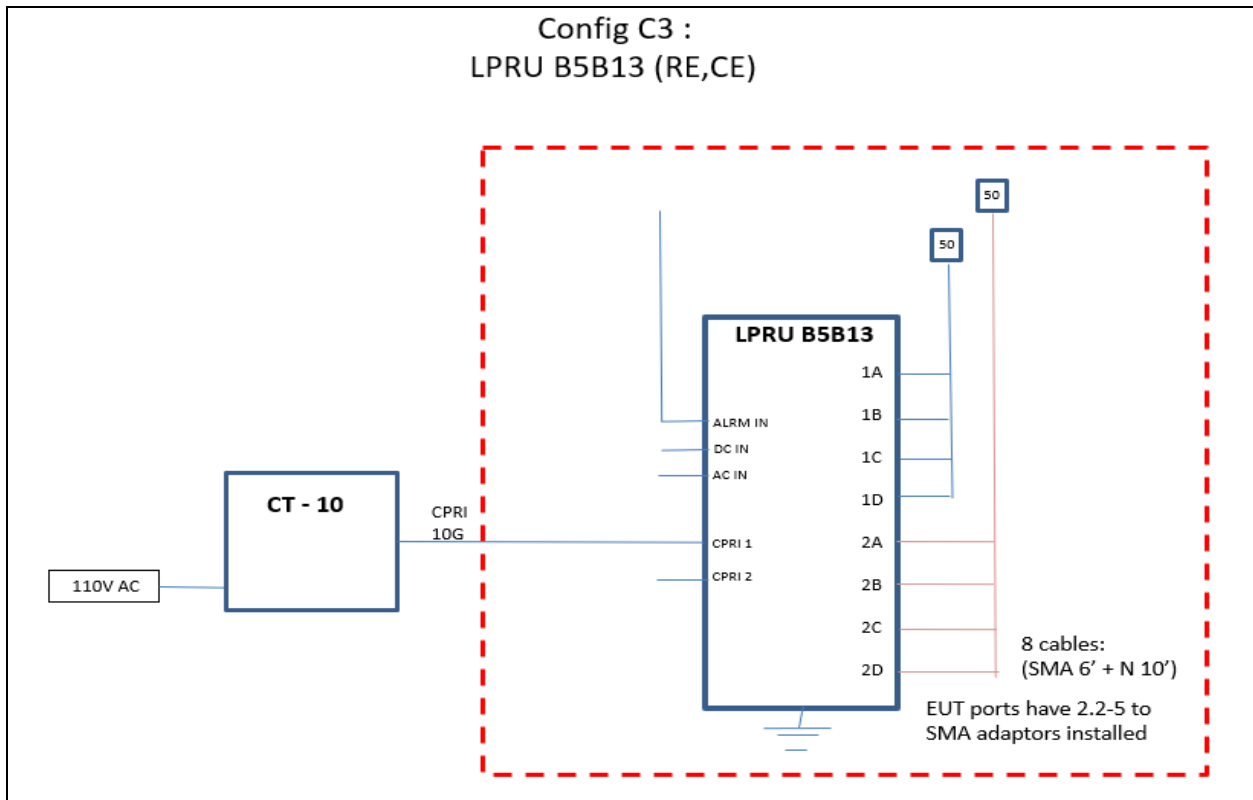

2.4.1 Radiated Emissions Single Carrier Configuration - LTE

Figure 3: Tested carrier detail - Single carrier (LTE)

| Config C3, Carrier Config SC1 | | | |
|--|-------------------------------------|-------------------------|-------------------------------------|
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: L, 5MHz, 881.5MHz | 1 | B13: L, 5MHz, 751MHz |
| Config C3, Carrier Config SC2 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NBlot GB 876.5MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 881.5MHz | | |
| 3 | B5: NBlot GB 886.5MHz (PRB50) | | |
| Config C3, Carrier Config SC3 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: L, 10MHz, 881.5MHz | 1 | B13: NBlot GB 746 MHz (PRB1) |
| | | 2 | B13: L, 10MHz, 751MHz |
| | | 3 | B13: NBlot GB 756 MHz (PRB50) |
| Config C3, Carrier Config SC2 - Bottom | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | BOTTOM (Radiated Emissions): | Carrier: | BOTTOM (Radiated Emissions): |
| 1 | B5: NBlot GB 869MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 874MHz | | |
| 3 | B5: NBlot GB 879MHz (PRB50) | | |
| Config C3, Carrier Config SC2-Middle | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NBlot GB 776.5MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 881.5MHz | | |
| 3 | B5: NBlot GB 786.5MHz (PRB50) | | |
| Config C3, Carrier Config SC2-Top | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | TOP (Radiated Emissions): | Carrier: | TOP (Radiated Emissions): |
| 1 | B5: NBlot GB 884MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 889MHz | | |
| 3 | B5: NBlot GB 894MHz (PRB50) | | |

Note: Radiated Emissions measurements were compared between SC1, SC2, and SC3. SC2 was found to have higher emissions than SC1 and SC3. All plots with single carrier in this report are therefore measured using SC2 carrier configuration.

2.4.2 Radiated Emissions MultiCarrier Configuration - LTE

Figure 4: Tested carrier detail – Multicarrier (LTE)

| Config C3, Carrier Config MC4 | | | |
|-------------------------------|-------------------------------------|-------------------------|-------------------------------------|
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NBlot GB 871.5MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 876.5MHz | | |
| 3 | B5: NBlot GB 881.5MHz (PRB50) | | |
| 4 | B5: L, 10MHz, 886.5MHz | | |
| Config C3, Carrier Config MC5 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NBlot GB 869MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 874MHz | | |
| 3 | B5: NBlot GB 879MHz (PRB50) | | |
| 4 | B5: L, 10MHz, 884MHz | | |
| 5 | B5: L, 5MHz, 891.5MHz | | |
| Config C3, Carrier Config MC6 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: L, 10MHz, 876.5MHz | 1 | B13: NBlot GB 746MHz (PRB1) |
| 2 | B5: L, 10MHz, 886.5MHz | 2 | B13: L, 10MHz, 751MHz |
| | | 3 | B13: NBlot GB 756MHz (PRB50) |
| Config C3, Carrier Config MC7 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: L, 10MHz, 874MHz | 1 | B13: NBlot GB 746MHz (PRB1) |
| 2 | B5: L, 10MHz, 884MHz | 2 | B13: L, 10MHz, 751MHz |
| 3 | B5: L, 5MHz, 891.5MHz | 3 | B13: NBlot GB 756MHz (PRB50) |

Note: Radiated Emissions measurements were compared between MC4, MC5, MC6 and MC7. MC5 was found to have higher emissions. All plots with multicarrier in this report are therefore measured using MC5 carrier configuration.



2.4.3 Radiated Emissions Single Carrier Configuration – NR

Figure 5: Tested carrier detail – Single carrier (NR)

| SINGLE RAT = NR, Config SC1 | | | |
|--------------------------------------|-------------------------------------|-------------------------|-------------------------------------|
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NR, 5MHz, 881.5MHz | 1 | B13: L, 10MHz, 751MHz |
| SINGLE RAT = NR, Config SC2 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NR, 10MHz, 881.5MHz | 1 | B13: L, 10MHz, 751MHz |
| SINGLE RAT = NR, Config SC3 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NR, 15MHz, 881.5MHz | 1 | B13: L, 10MHz, 751MHz |
| SINGLE RAT = NR, Config SC4 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NR, 20MHz, 881.5MHz | 1 | B13: L, 10MHz, 751MHz |
| SINGLE RAT = NR, Config SC1- Bottom | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | Bottom (Radiated Emissions): | Carrier: | Bottom (Radiated Emissions): |
| 1 | B5: NR, 5M, 871.5MHz | 1 | B13: L, 10MHz, 751MHz |
| SINGLE RAT = NR, Config SC1 - Middle | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | Middle (Radiated Emissions): | Carrier: | Middle (Radiated Emissions): |
| 1 | B5: NR, 5M, 881.5MHz | 1 | B13: L, 10MHz, 751MHz |
| SINGLE RAT = NR, Config SC1 - Top | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | Top (Radiated Emissions): | Carrier: | Top (Radiated Emissions): |
| 1 | B5: NR, 5M, 891.5MHz | 1 | B13: L, 10MHz, 751MHz |

Note: Radiated Emissions measurements were compared between SC1, SC2, SC3 and SC4. SC1 was found to have higher emissions than SC2, SC3 and SC4. All plots with single carrier in this report are therefore measured using SC1 carrier configuration.

2.4.4 Radiated Emissions MultiCarrier/Single RAT Configuration – NR

Figure 6: Tested carrier detail – MultiCarrier/Single RAT Configuration (NR)

| MultiCarrier/Single RAT = NR, Config MC1 | | | |
|--|------------------------------|-------------------------|------------------------------|
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NR, 5M, 881.5MHz | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: NR, 5M, 886.5MHz | | |

2.4.5 Radiated Emissions MultiCarrier/Multi RAT Configuration – NR+LTE

Figure 7: Tested carrier detail – MultiCarrier / Multi RAT Configuration (NR)

| MultiCarrier / MultiRAT = NR+LTE, Config MR1 | | | |
|--|------------------------------|-------------------------|------------------------------|
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NBloT GB 869MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 874MHz | | |
| 3 | B5: NBloT GB 879MHz (PRB50) | | |
| 4 | B5: NR, 5MHz, 881.5MHz | | |
| MultiCarrier / MultiRAT = NR+LTE, Config MR1 | | | |
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Radiated Emissions): | Carrier: | MIDDLE (Radiated Emissions): |
| 1 | B5: NBloT GB 869MHz (PRB1) | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: L, 10MHz, 874MHz | | |
| 3 | B5: NBloT GB 879MHz (PRB50) | | |
| 4 | B5: NR, 5MHz, 881.5MHz | | |

Note: Radiated Emissions measurements were compared between MR1 and MR2. MR1 was found to have higher emissions than MR2. All plots with single carrier in this report are therefore measured using MR1 carrier configuration.

2.4.6 Conducted Emissions Carrier Configuration – LTE

Figure 8: CE tested carrier detail

| Config C3 Carrier Config for CE | | | |
|---------------------------------|--------------------------------------|-------------------------|--------------------------------------|
| B5 PORT 1A,1B, 1C,1D | | B13 Port 2A, 2B, 2C, 2D | |
| Carrier: | MIDDLE (Conducted Emissions): | Carrier: | MIDDLE (Conducted Emissions): |
| 1 | B5: L, 10MHz, 869MHz | 1 | B13: L, 10MHz, 751MHz |
| 2 | B5: NBIoT GB 874MHz (PRB50) | | |

2.5 Modifications of the EUT during testing

Following modifications were made to the EUT prior to EMC testing.

Table 7: EUT Modifications

| Band 5 BOM Changes: | | | | |
|----------------------|-------------------|----------------------------------|-------------------|-------------------------------------|
| Ref Des | Old EPN | Description | New EPN | Description |
| L13A7 | REG 724 5181/91PH | INDUCTOR/9.1nH 3% 0201 | REG 724 5181/75PH | 7.5nH 3% 0201 |
| L14A7 | REG 724 5181/91PH | INDUCTOR/9.1nH 3% 0201 | REG 724 5181/75PH | 7.5nH 3% 0201 |
| Band 13 BOM Changes: | | | | |
| Ref Des | Old EPN | Description | New EPN | Description |
| R102A8 | DNI | NA | RJC 545 1111/18C | 1.8pF +/-0.25pF 0201 100V HQ C0G |
| R103A8 | DNI | NA | RJC 545 1111/18C | 1.8pF +/-0.25pF 0201 100V HQ C0G |
| R119A10 | REP 621 105/51 | RESISTOR/51Kohm 1% 0201 0.05W | REP 621 104/1 | 1kohm 1% 0201 0.05W |

2.6 Inventory of the EUT and support equipments

The following tables identifies the inventory of the EUT.

Table 8: Inventory of the EUT & Support with LTE (RE & CE tests)

| Equipment Role | Product Name | Product Number | Release | Product Serial# |
|-------------------------------|-----------------------------------|----------------------|---------|-----------------|
| EUT | LPRU 4410 B5B13 | KRC 161 887/1 | R1A | TD3F056933 |
| AC power cable | generic, 14AWG, C14 plug, 2m | na | na | na |
| DC power cable | 2W DC Cable | RPM 777 825/02500 | na | na |
| DC extension cable | TUV DC power cable, 13mm 2, 4m | na | na | na |
| Optical Fiber | LC, SM, 20m | na | na | na |
| RF Adaptor | 2.2-5 to SMA Adaptor | na | na | na |
| RF Cable | N-type, 10m | na | na | na |
| RF Cable | SMA, 2m | na | na | na |
| Ext Alarm Cable | Custom, 4w, 16-AWG, 5m | na | na | na |
| TEST SET | CT-10, DU-SIM | LPC 102 487/1 | R1C | T01F311639 |
| Software info | | | | |
| IRU load: CXP9013268%17_R80DD | | | | |

Table 9: Inventory of the EUT & Support with NR signal (RE tests)

| Equipment Role | Product Name | Product Number | Release | Product Serial# |
|-------------------------------|------------------------------|----------------|---------|-----------------|
| EUT | LPRU 4410 B5B13 | KRC 161 887/1 | R1A | TD3F057135 |
| AC power cable | generic, 14AWG, C14 plug, 2m | na | na | na |
| Optical Fiber | LC, SM, 20m | na | na | na |
| RF Adaptor | 2.2-5 to SMA Adaptor | na | na | na |
| RF Cable | N-type, 10m | na | na | na |
| RF Cable | SMA, 2m | na | na | na |
| Ext Alarm Cable | Custom, 4w, 16-AWG, 5m | na | na | na |
| TEST SET | CT-10, DU-SIM | LPC 102 487/1 | R1C | T01F311639 |
| Software info | | | | |
| IRU load: CXP9013268%17_R82DD | | | | |

3. Detailed test results of Emissions

Emissions from systems manifest themselves in two forms: conducted emissions on cables and radiated emissions from the entire system (i.e. electronic modules, hardware, and cables). Regulatory standards restrict these different forms of emissions generated by the system.

The temperature and humidity in the test facilities are controlled. The temperature is maintained between 20 °C and 25 °C, with a relative humidity between 30 % and 60 %. Levels are recorded and any exceptions are included in the detailed test results sections of this report.

3.1 Measurement instrumentation

The measurement instrumentation conforms to the relevant standards in this report: ANSI C63.2, CISPR 16, CISPR 22, and CISPR 32. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

3.2 Radiated Emissions, E-field

This test verifies that the EUT does not produce excess amounts of E-field Radiated Emissions (RE) that could interfere with licensed radiators.

3.2.1 Test specification and limits

The testing requirements are as follows.

Table 10: RE test requirements

| Requirement | Method | Country of application |
|------------------------|------------|------------------------|
| FCC Part 15, Subpart B | ANSI C63.4 | USA |
| FCC Part 27, | ANSI C63.4 | USA |
| ICES 003 | ANSI C63.4 | Canada |

The limits of the RE tests are as follows.

Table 11: RE limits at 10 m for Class B of FCC

| Frequency range (MHz) | FCC Part 15 & ICES 003 (dB μ V/m) | Detector |
|-----------------------|---------------------------------------|------------|
| 30 to 88 | 29.5 | Quasi-Peak |
| 88 to 216 | 33.0 | Quasi-Peak |
| 216 to 960 | 35.5 | Quasi-Peak |
| 960 to 1000 | 43.5 | Quasi-Peak |
| 1000 to 40000 | 43.5 ¹ | Average |

Table 12: Emission limits for FCC Part 27 & Part 22

| Frequency range (MHz) | EIRP Limit (dBm) | Calculated EIRP Limit in dB μ V/m |
|-----------------------|------------------|---------------------------------------|
| 30 - 40000 | -13 | 82.2 |

3.2.2 Test procedure

Verifications of the test equipment and AFC were performed before the installation of the EUT in accordance with the quality assurance procedures documented in the EMC test procedures document.


The test was performed according to the relevant procedures listed in [Table 10](#).

- The EUT was placed on the turntable inside the AFC (configured for normal operation). The system and its cables were separated from the ground plane by an insulating support 10 mm in height.
- For tests between 30 MHz and 1 GHz the receive antenna (BiLog®) was placed 3 m away from the EUT. An initial scan was performed to find emissions/frequencies requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions

(frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, as well as both polarizations of the receiving antenna.

- For tests above 1 GHz the receive antenna (horn) was placed 3 m away from the EUT. Absorbing cones were placed on the floor between the antenna and the EUT. An initial scan was performed to find emissions/frequencies requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, as well as both polarizations of the receiving antenna.
- For tests between 18 and 40 GHz the receive horn antenna was placed at a 1 m distance from the EUT with the absorbing cones placed on the floor. An initial scan was performed to find emissions/frequencies requiring detail measurement. The pre-scan was performed on all sides of the EUT, using both polarization of the receive antenna to find any system emissions.
- For all above frequency ranges, the pre-scan peak data was compared to the limits. Peaks with less than 6 dB of margin were maximized using the proper detector: the EUT was rotated in azimuth over 360 degrees to identify the direction of maximum emission, antenna height was then varied from 1 to 4 m to obtain maximum emission level.

Figure 9: Setup of Radiated Emissions

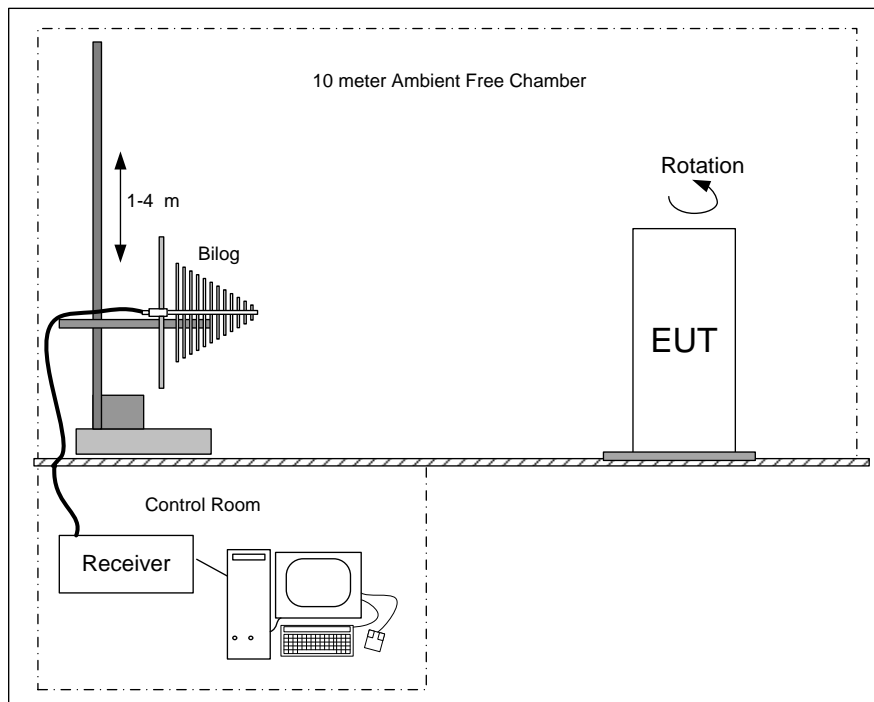

3.2.3 Calculation of the compliance margin

The following example shows the way in which the compliance margin is calculated in the “RE Test Results” tables.

The rows in these tables are defined as follows.

Meter Reading (dB μ V) = Voltage measured using the spectrum analyzer with the proper detector

Correction (dB) = Cumulative gain or loss of pre-amplifier and cables used in the measurement path (dB) + Antenna Factor (dB)

Level (dB μ V/m) = Corrected value or field strength, that is, the parameter of interest that is compared to the limit

Margin (dB) = Level with respect to the appropriate limit (a negative Margin indicates that the Level is below the limit and that the measurement is a Pass)

The values in the Level row are calculated as follows: Level = Meter Reading + Correction (dB)

The values in the Margin row are calculated as follows: Margin = Level - Limit

3.2.4 Measurement uncertainties

The expanded measurement instrumentation uncertainty with a 95 % level of confidence, calculated according to the method described in CISPR 16 is:

- ± 3.8 dB between 30 MHz and 1 GHz
- ± 4.7 dB between 1 GHz and 10 GHz
- ± 4.8 dB between 10 GHz and 18 GHz
- ± 4.6 dB between 18 GHz and 26.5 GHz
- ± 4.8 dB between 26.5 GHz and 40 GHz

3.2.5 Test results of Radiated Emissions – (Single carrier-2 LTE - Bottom channel)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 6 -10 February 2020

Tested by: Turker Dagdelen

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 10: Plot of RE at 3 m – 30 to 1000 MHz (LTE – Bottom channel)

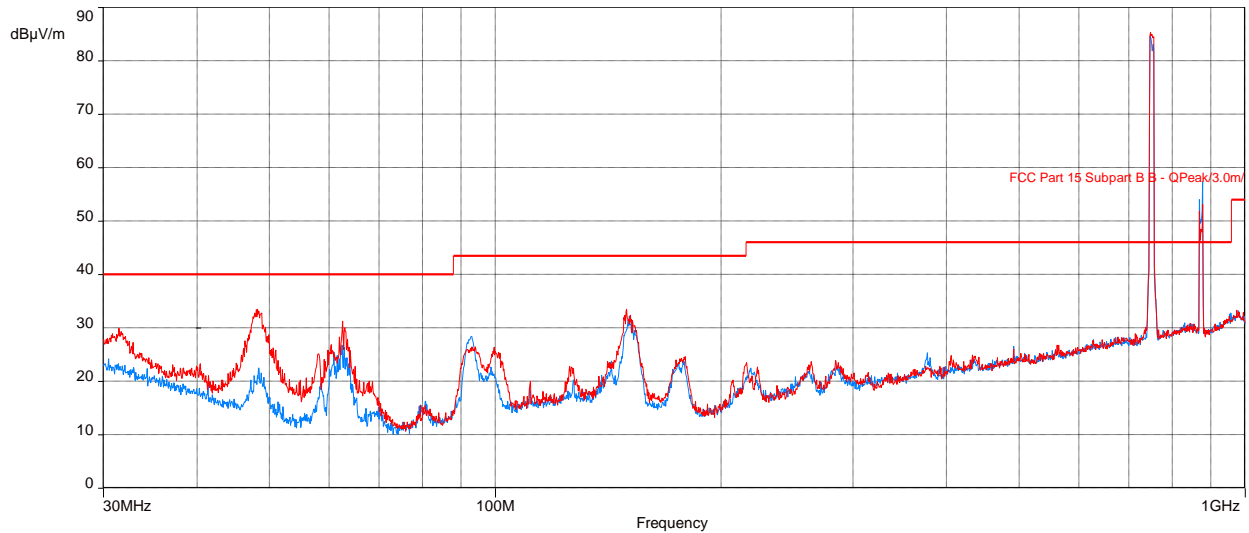

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 13: RE test results from 30 to 1000 MHz for FCC Part 15 (LTE – Bottom channel)

| Frequency (MHz) | Level Quasi Peak (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|---------------------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 48.12666026 | 29.35 | 40.00 | -10.65 | 1.00 | 19.00 | Vertical | -11.40 |
| 62.62741667 | 24.10 | 40.00 | -15.90 | 2.01 | 26.25 | Vertical | -14.94 |
| 149.6947949 | 28.18 | 43.52 | -15.34 | 1.12 | 240.25 | Vertical | -8.56 |
| 150.8803877 | 25.22 | 43.52 | -18.30 | 2.76 | 112.50 | Horizontal | -8.61 |

Table 14: RE test results from 30 to 1000 MHz for FCC Part 22/27 (LTE – bottom channel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 48.12666026 | 29.35 | 82.2 | -52.85 | 1.00 | 19.00 | Vertical | -11.40 |
| 62.62741667 | 24.10 | 82.2 | -58.10 | 2.01 | 26.25 | Vertical | -14.94 |
| 149.6947949 | 28.18 | 82.2 | -54.02 | 1.12 | 240.25 | Vertical | -8.56 |
| 150.8803877 | 25.22 | 82.2 | -56.98 | 2.76 | 112.50 | Horizontal | -8.61 |

Note: In the table/Plot above, no emissions exceed the Part 22/Part 27 radiated spurious emissions limit when converted to dBµV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/Part 27, see antenna port conducted emissions in applicable test report.

Figure 11: Plot of RE at 3m from 1 to 10 GHz (LTE – Bottom channel)

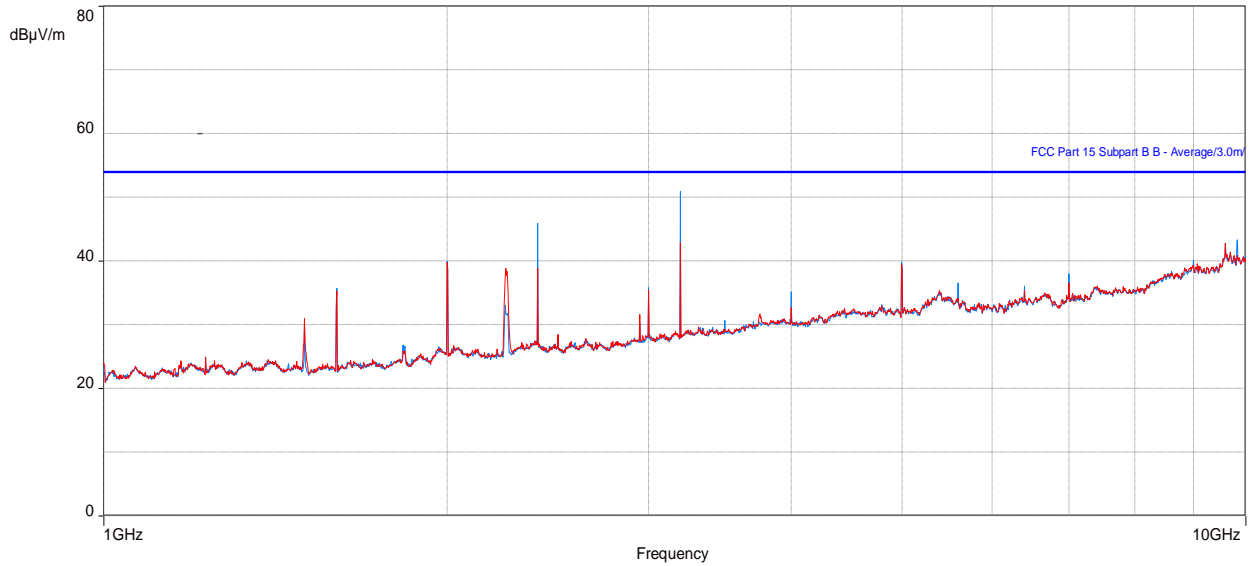


Table 15: RE test results from 1 to 10 GHz for FCC Part 15 (LTE – Bottom channel)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|-------------------|--------------|-----------------|
| 2399.984295 | 46.23 | 53.96 | -7.73 | 3.47 | 177.50 | Horizontal | -7.74 |
| 3199.978526 | 51.65 | 53.96 | -2.31 | 2.57 | 177.75 | Horizontal | -6.37 |
| 3199.978526 | 43.83 | 53.96 | -10.13 | 2.63 | 105.50 | Vertical | -6.37 |

Table 16: RE test results from 1 to 10 GHz for FCC Part 22/27 (LTE – Bottom channel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|-------------------|--------------|-----------------|
| 2399.984295 | 46.23 | 82.2 | -35.97 | 3.47 | 177.50 | Horizontal | -7.74 |
| 3199.978526 | 51.65 | 82.2 | -30.55 | 2.57 | 177.75 | Horizontal | -6.37 |
| 3199.978526 | 43.83 | 82.2 | -38.37 | 2.63 | 105.50 | Vertical | -6.37 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBµV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 12: Plot of RE at 3m from 10 to 18 GHz (LTE – Bottom channel)

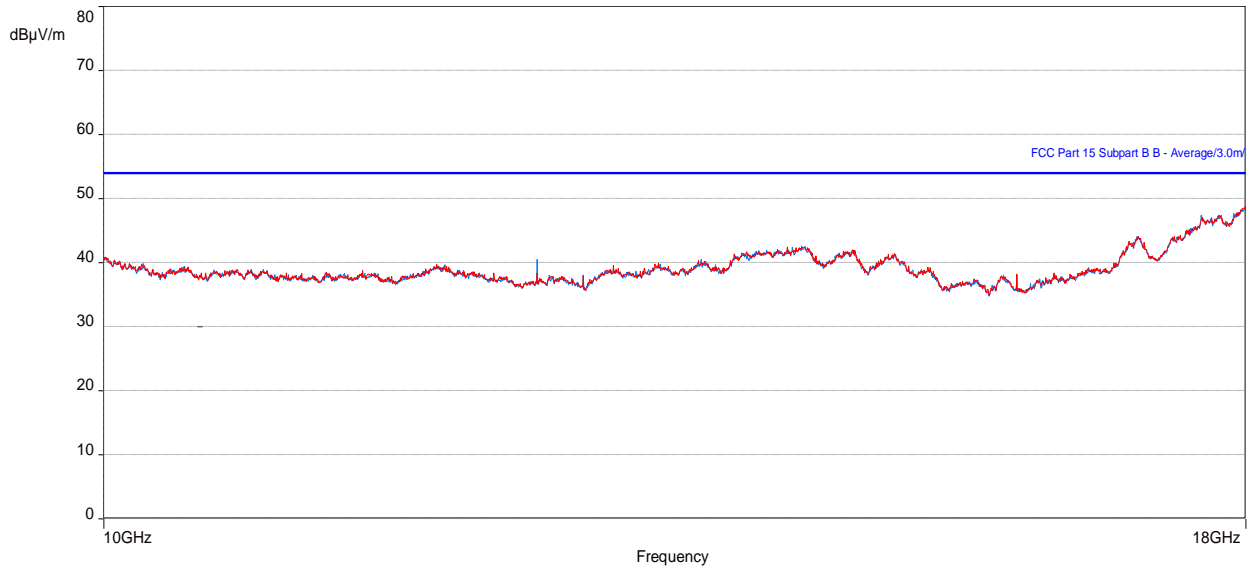


Table 17: RE test results from 10 to 18 GHz for FCC Part 15 (LTE – Bottom channel)


| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|-------------------|--------------|-----------------|
| 17033.3314 | 40.39 | 53.96 | -13.57 | 1.00 | 16.50 | Vertical | 14.04 |
| 17759.31378 | 43.70 | 53.96 | -10.26 | 1.00 | 360.00 | Vertical | 16.97 |

Table 18: RE test results from 10 to 18 GHz FCC Part 22/27 (LTE – Bottom channel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|-------------------|--------------|-----------------|
| 17033.3314 | 40.39 | 82.2 | -41.81 | 1.00 | 16.50 | Vertical | 14.04 |
| 17759.31378 | 43.70 | 82.2 | -38.50 | 1.00 | 360.00 | Vertical | 16.97 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBµV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.


Figure 13: Plot of RE at 1m from 18 to 26.5 GHz (LTE – Bottom channel)

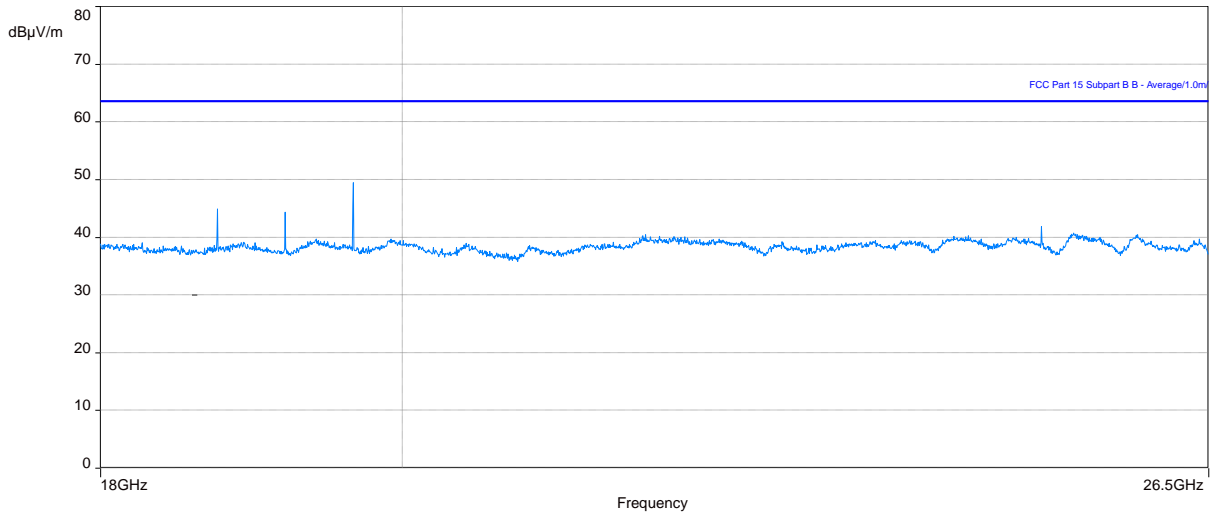

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 14: Plot of RE at 1m from 26.5 to 40 GHz (LTE – Bottom channel)

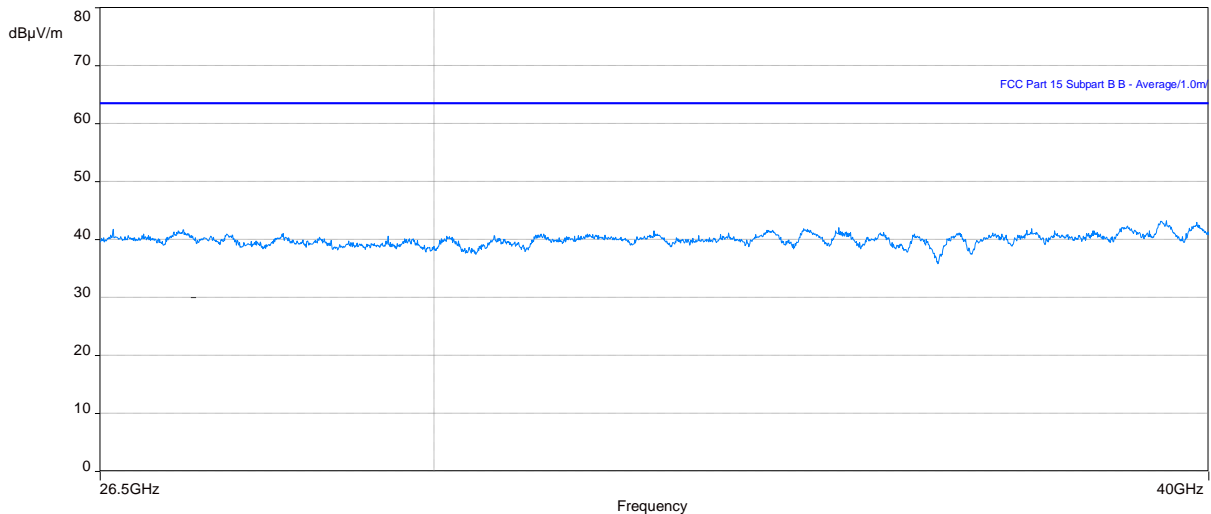

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.6 Test results of Radiated Emissions – (Single carrier-2, LTE – Middle channel)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 6 -10 February 2020

Tested by: Turker Dagdelen

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 15: Plot of RE at 3 m – 30 to 1000 MHz (LTE – Middle channel)

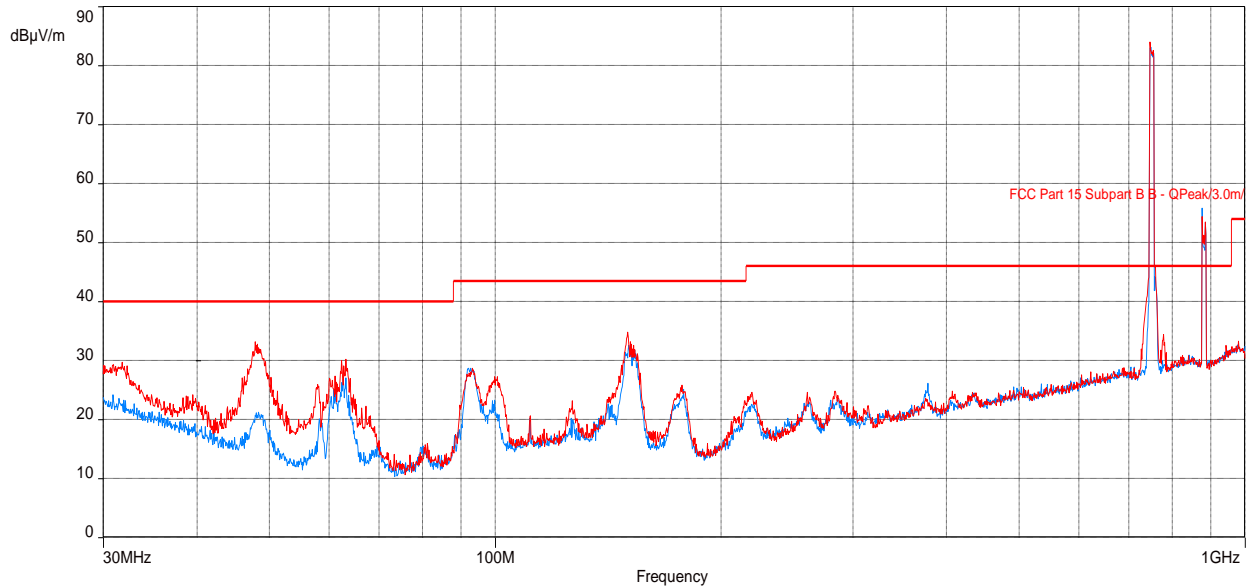

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 19: RE test results from 30 to 1000 MHz for FCC Part 15 (LTE – Middle channel)

| Frequency (MHz) | Level Quasi Peak (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|---------------------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 47.85008333 | 29.39 | 40.00 | -10.61 | 1.37 | 18.75 | Vertical | -11.27 |
| 63.22908941 | 25.21 | 40.00 | -14.79 | 1.34 | 141.50 | Vertical | -14.89 |
| 150.3166569 | 28.50 | 43.52 | -15.02 | 1.12 | 240.00 | Vertical | -8.58 |

Table 20: RE test results from 30 to 1000 MHz for FCC Part 22/27 (LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|----------------|------------|---------------|--------------|-----------------|
| 47.85008333 | 29.39 | 82.2 | -52.81 | 1.37 | 18.75 | Vertical | -11.27 |
| 63.22908941 | 25.21 | 82.2 | -56.99 | 1.34 | 141.50 | Vertical | -14.89 |
| 150.3166569 | 28.50 | 82.2 | -53.70 | 1.12 | 240.00 | Vertical | -8.58 |

Note: In the table/Plot above, no emissions exceed the Part 22/Part 27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/Part 27, see antenna port conducted emissions in applicable test report.

Figure 16: Plot of RE at 3m from 1 to 10 GHz (LTE – Middle channel)

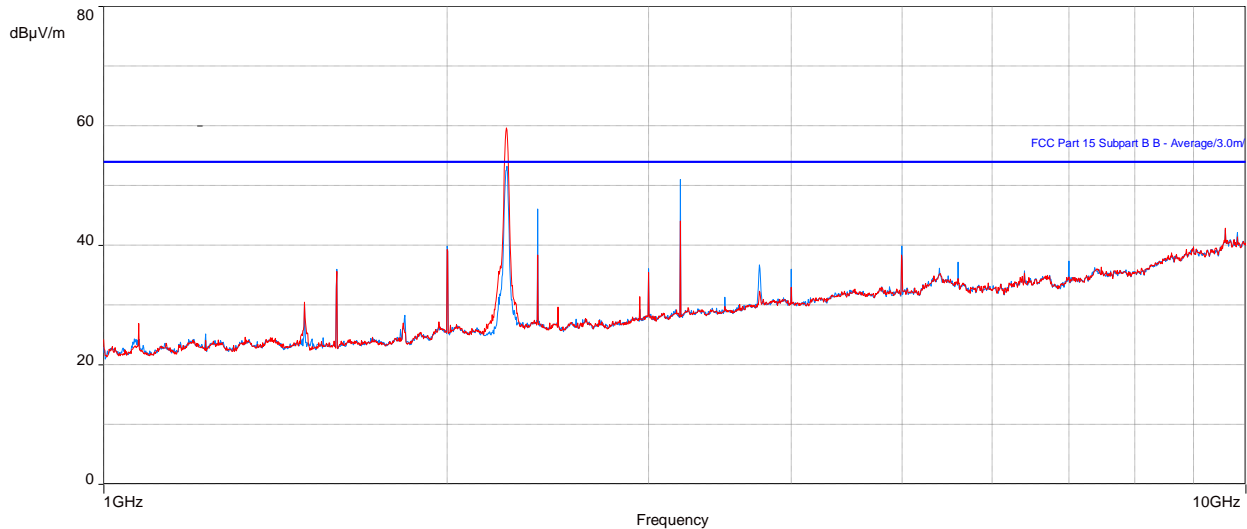


Table 21: RE test results from 1 to 10 GHz for Part 15 (LTE – Middle channel)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|-------------------|--------------|-----------------|
| 2252.751603 | 39.73 | 53.96 | -14.23 | 2.01 | 313.00 | Vertical | -9.36 |
| 2254.571154 | 32.24 | 53.96 | -21.72 | 3.26 | 285.75 | Horizontal | -9.34 |
| 2399.984295 | 45.61 | 53.96 | -8.35 | 1.00 | 178.00 | Horizontal | -7.74 |
| 3199.976923 | 51.32 | 53.96 | -2.64 | 2.57 | 175.50 | Horizontal | -6.37 |
| 3199.978526 | 44.11 | 53.96 | -9.85 | 2.63 | 112.75 | Vertical | -6.37 |

Table 22: RE test results from 1 to 10 GHz for Part 22/27 (LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|-------------------|--------------|-----------------|
| 2252.751603 | 39.73 | 82.2 | -42.47 | 2.01 | 313.00 | Vertical | -9.36 |
| 2254.571154 | 32.24 | 82.2 | -49.96 | 3.26 | 285.75 | Horizontal | -9.34 |
| 2399.984295 | 45.61 | 82.2 | -36.59 | 1.00 | 178.00 | Horizontal | -7.74 |
| 3199.976923 | 51.32 | 82.2 | -30.88 | 2.57 | 175.50 | Horizontal | -6.37 |
| 3199.978526 | 44.11 | 82.2 | -38.09 | 2.63 | 112.75 | Vertical | -6.37 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 17: Plot of RE at 3m from 10 to 18 GHz (LTE – Middle channel)

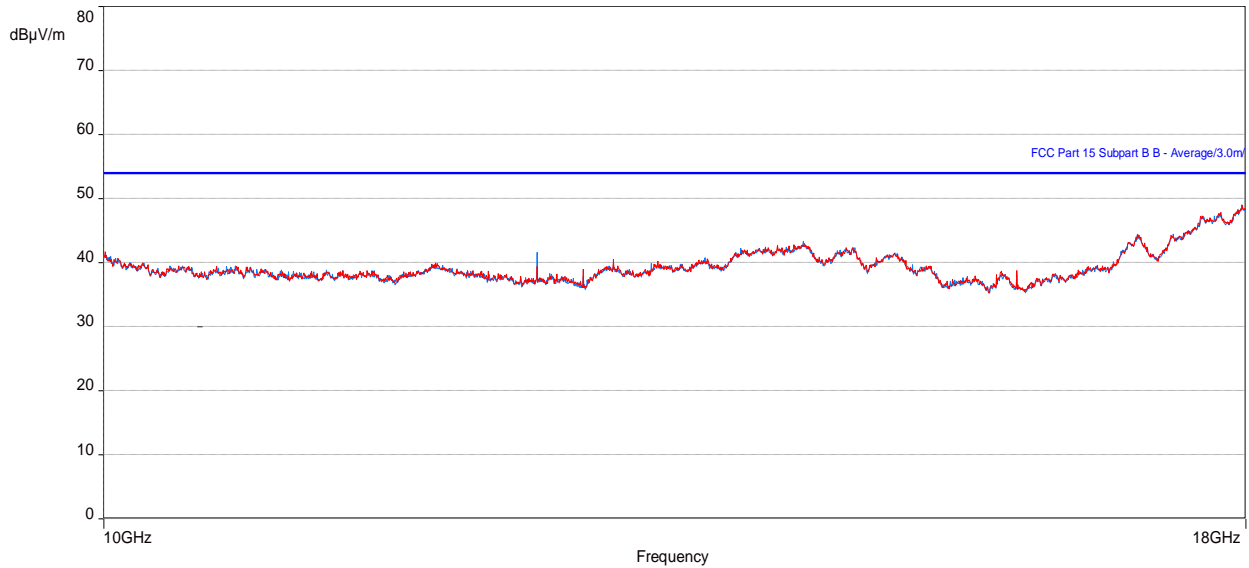


Table 23: RE test results from 10 to 18 GHz for FCC Part 15 (LTE – Middle channel)


| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|-------------------|--------------|-----------------|
| 17764.48172 | 43.92 | 53.96 | -10.04 | 1.00 | 299.75 | Horizontal | 16.91 |
| 17771.94391 | 43.96 | 53.96 | -10.00 | 1.00 | 16.75 | Vertical | 16.82 |
| 17964.09936 | 44.91 | 53.96 | -9.05 | 1.00 | 53.00 | Horizontal | 21.17 |
| 17967.66249 | 45.04 | 53.96 | -8.92 | 1.00 | 38.75 | Vertical | 21.25 |

Table 24: RE test results from 10 to 18 GHz for FCC Part 22/27 (LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|-------------------|--------------|-----------------|
| 17764.48172 | 43.92 | 82.2 | -38.28 | 1.00 | 299.75 | Horizontal | 16.91 |
| 17771.94391 | 43.96 | 82.2 | -38.24 | 1.00 | 16.75 | Vertical | 16.82 |
| 17964.09936 | 44.91 | 82.2 | -37.29 | 1.00 | 53.00 | Horizontal | 21.17 |
| 17967.66249 | 45.04 | 82.2 | -37.16 | 1.00 | 38.75 | Vertical | 21.25 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBµV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.


Figure 18: Plot of RE at 1m from 18 to 26.5 GHz (LTE – Middle channel)

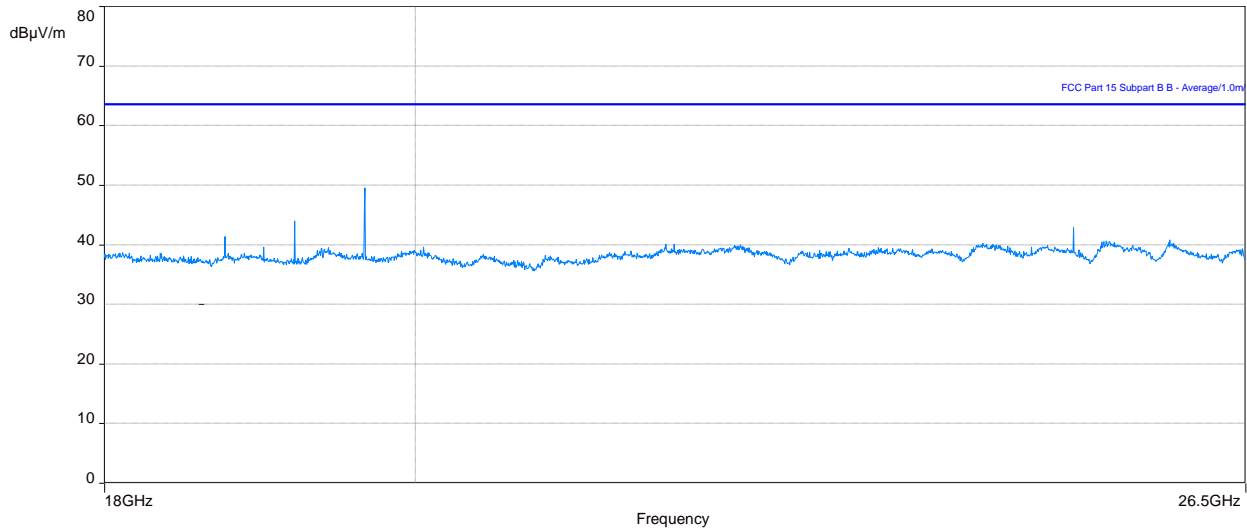

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 19: Plot of RE at 1m from 26.5 to 40 GHz (LTE – Middle channel)

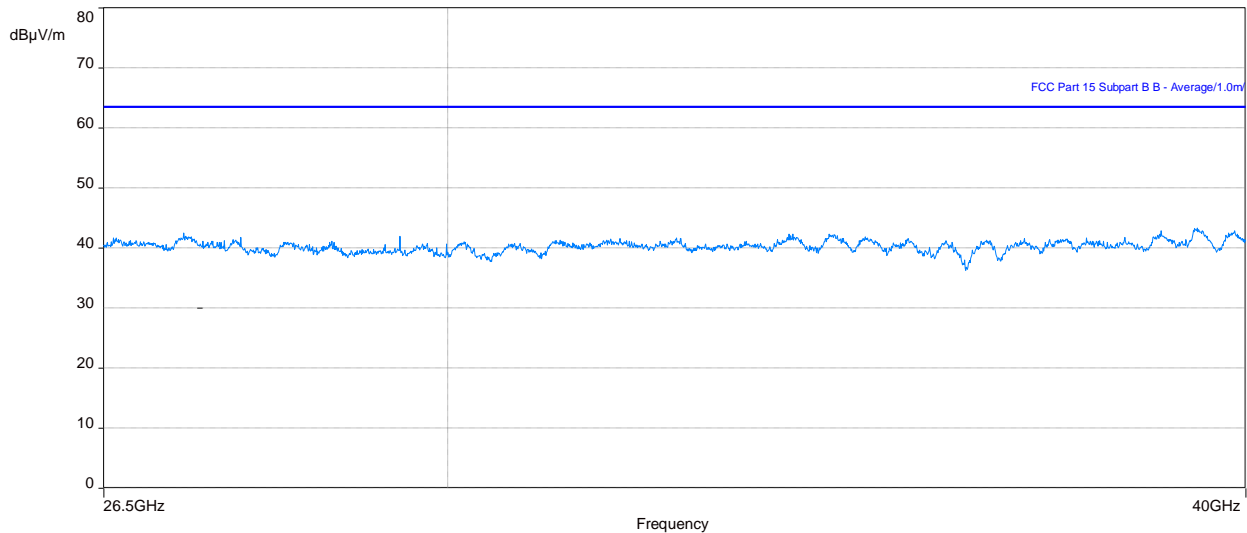

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.7 Test results of Radiated Emissions – (Single carrier-2, LTE – Top channel)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 6 -10 February 2020

Tested by: Turker Dagdelen

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 20: Plot of RE at 3 m – 30 to 1000 MHz (LTE – Top chanel)

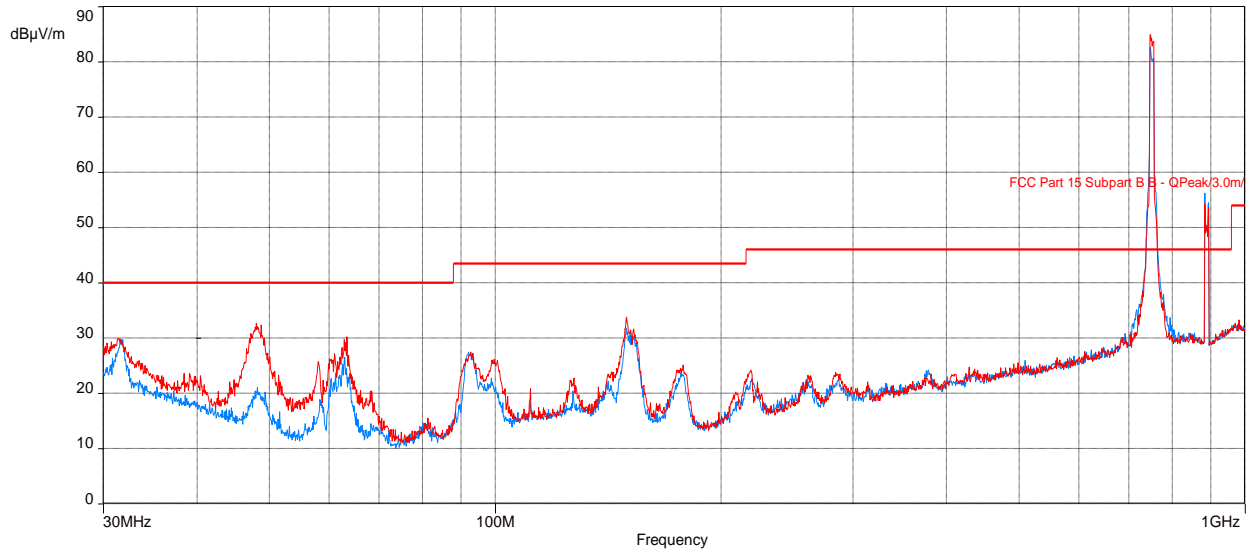

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 25: RE test results from 30 to 1000 MHz for FCC part 15 (LTE – Top chanel)

| Frequency (MHz) | Level Quasi peak (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|---------------------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 31.63774326 | 18.34 | 40.00 | -21.66 | 2.39 | 282.50 | Horizontal | -3.33 |
| 48.02837821 | 29.26 | 40.00 | -10.74 | 1.00 | 19.00 | Vertical | -11.35 |
| 63.44484649 | 23.87 | 40.00 | -16.13 | 1.27 | 141.50 | Vertical | -14.88 |
| 149.7833013 | 28.13 | 43.52 | -15.39 | 1.00 | 246.00 | Vertical | -8.56 |

Table 26: RE test results from 30 to 1000 MHz for Part 22/27 (LTE – Top chanel)

| Frequency (MHz) | Level (dBµV/m) | EIRP Limit (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 31.63774326 | 18.34 | 82.2 | -63.86 | 2.39 | 282.50 | Horizontal | -3.33 |
| 48.02837821 | 29.26 | 82.2 | -52.94 | 1.00 | 19.00 | Vertical | -11.35 |
| 63.44484649 | 23.87 | 82.2 | -58.33 | 1.27 | 141.50 | Vertical | -14.88 |
| 149.7833013 | 28.13 | 82.2 | -54.07 | 1.00 | 246.00 | Vertical | -8.56 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 21: Plot of RE at 3m from 1 to 10 GHz (LTE – Top channel)

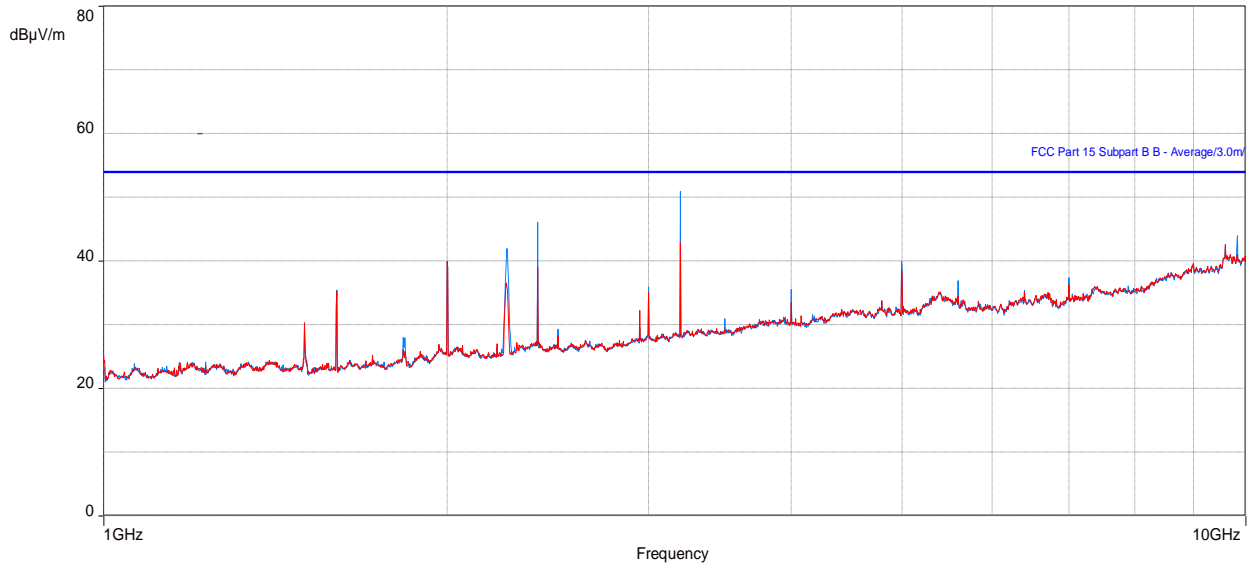


Table 27: RE test results from 1 to 10 GHz for FCC Part 15 (LTE – Top channel)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 46.24 | 53.96 | -7.72 | 3.47 | 177.75 | Horizontal | -7.74 |
| 3199.978526 | 51.47 | 53.96 | -2.49 | 2.92 | 177.50 | Horizontal | -6.37 |
| 3199.978526 | 43.67 | 53.96 | -10.29 | 2.64 | 105.50 | Vertical | -6.37 |

Table 28: RE test results from 1 to 10 GHz for FCC Part 22/27 (LTE – Top channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 27 (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|----------------------------|------------|-------------------|--------------|-----------------|
| 2399.984295 | 46.24 | 82.2 | -35.96 | 3.47 | 177.75 | Horizontal | -7.74 |
| 3199.978526 | 51.47 | 82.2 | -30.73 | 2.92 | 177.50 | Horizontal | -6.37 |
| 3199.978526 | 43.67 | 82.2 | -38.53 | 2.64 | 105.50 | Vertical | -6.37 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 22: Plot of RE at 3m from 10 to 18 GHz (LTE – Top channel)

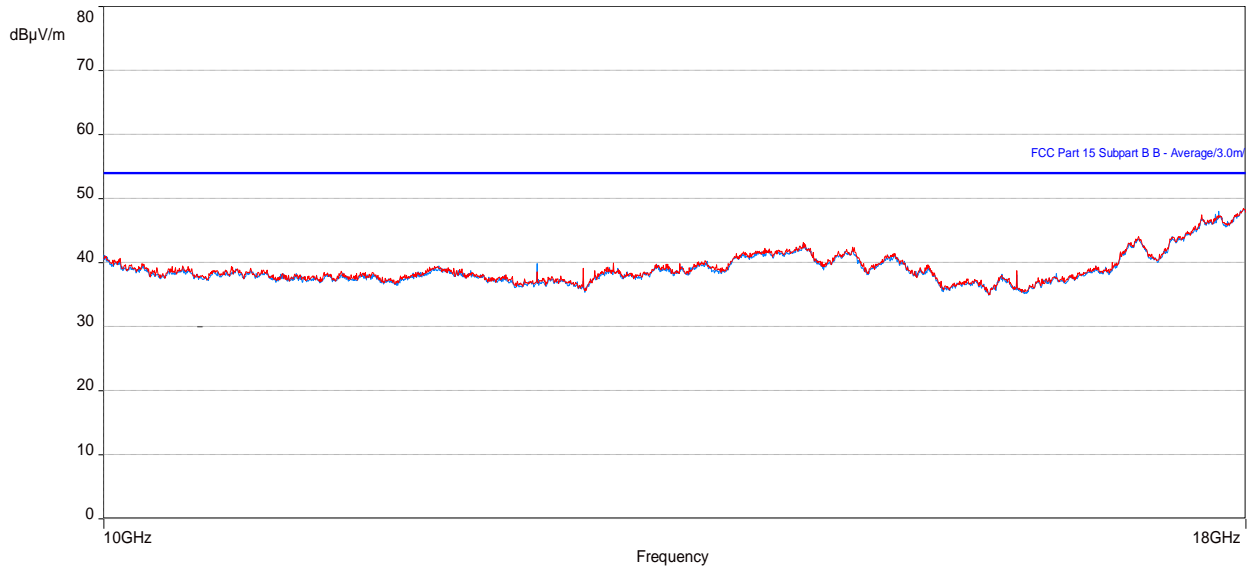


Table 29: RE test results from 10 to 18 GHz for FCC Part 15 (LTE – Top channel)


| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|-------------------|--------------|-----------------|
| 17599.02755 | 43.25 | 53.96 | -10.71 | 4.00 | 343.25 | Vertical | 19.62 |
| 17600.48332 | 43.40 | 53.96 | -10.56 | 4.00 | 307.25 | Horizontal | 19.61 |
| 17978.79518 | 45.15 | 53.96 | -8.81 | 4.00 | 2.50 | Vertical | 21.51 |
| 17981.26409 | 45.40 | 53.96 | -8.56 | 4.00 | 88.75 | Horizontal | 21.57 |

Table 30: RE test results from 10 to 18 GHz for FCC Part 27 (LTE – Top channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 17599.02755 | 43.25 | 82.2 | -38.95 | 4.00 | 343.25 | Vertical | 19.62 |
| 17600.48332 | 43.40 | 82.2 | -38.80 | 4.00 | 307.25 | Horizontal | 19.61 |
| 17978.79518 | 45.15 | 82.2 | -37.05 | 4.00 | 2.50 | Vertical | 21.51 |
| 17981.26409 | 45.40 | 82.2 | -36.80 | 4.00 | 88.75 | Horizontal | 21.57 |

Note: In the table/Plot above, no emissions exceed the Part 27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 27, see antenna port conducted emissions in applicable test report.


Figure 23: Plot of RE at 1m from 18 to 26.5 GHz (LTE – Top channel)

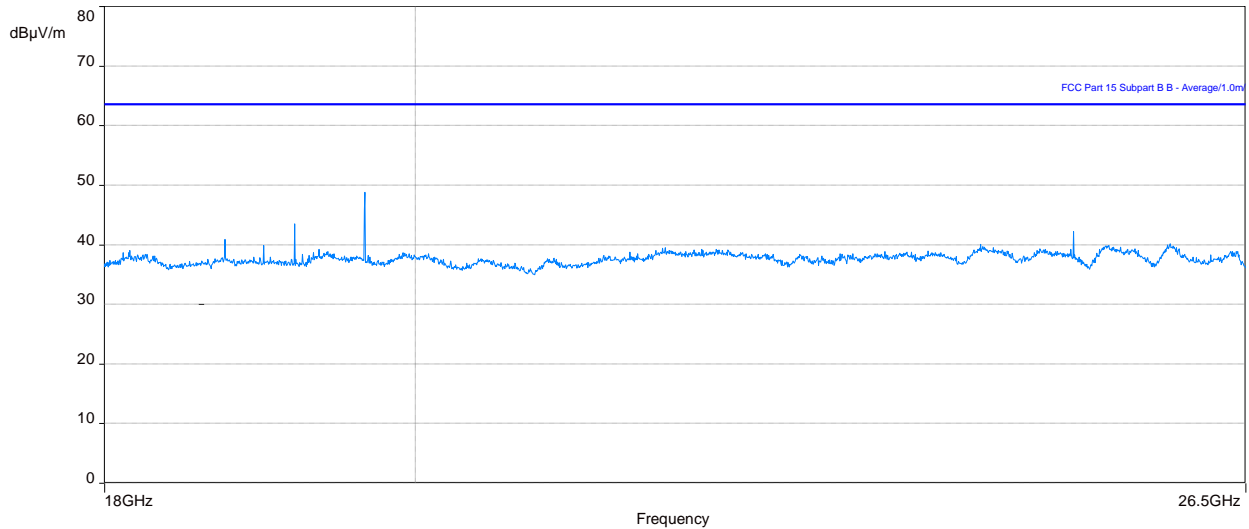

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 24: Plot of RE at 1m from 26.5 to 40 GHz (LTE – Top channel)

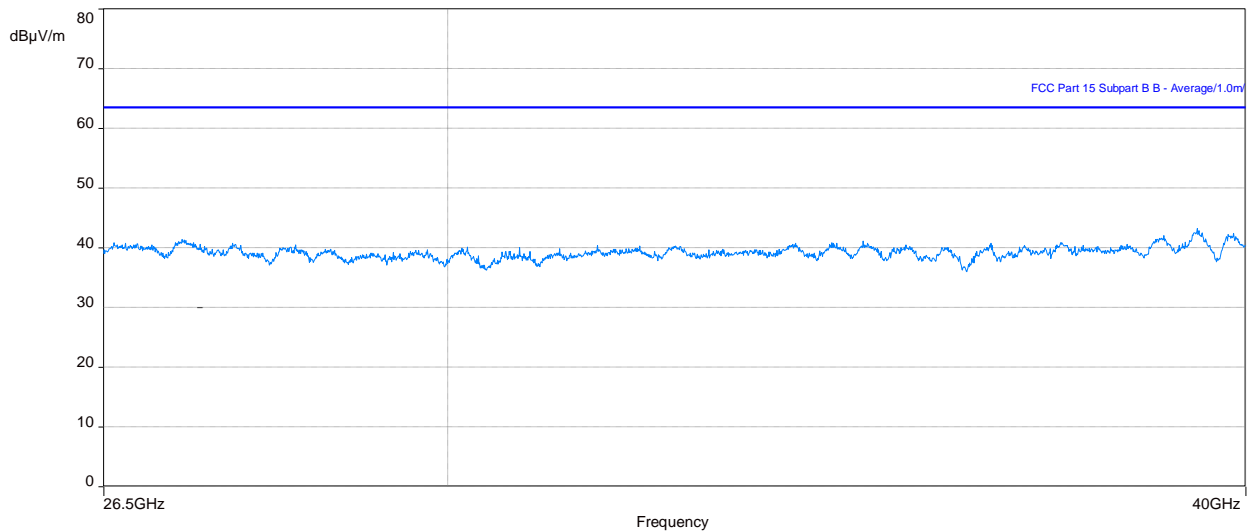

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.8 Test results of Radiated Emissions – (Multi carrier- 5, LTE – Middle channel)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 6 - 10 February 2020

Tested by: Turker Dagdelen

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 25: Plot of RE at 3 m – 30 to 1000 MHz (MC 5, LTE – Middle channel) – AC powered

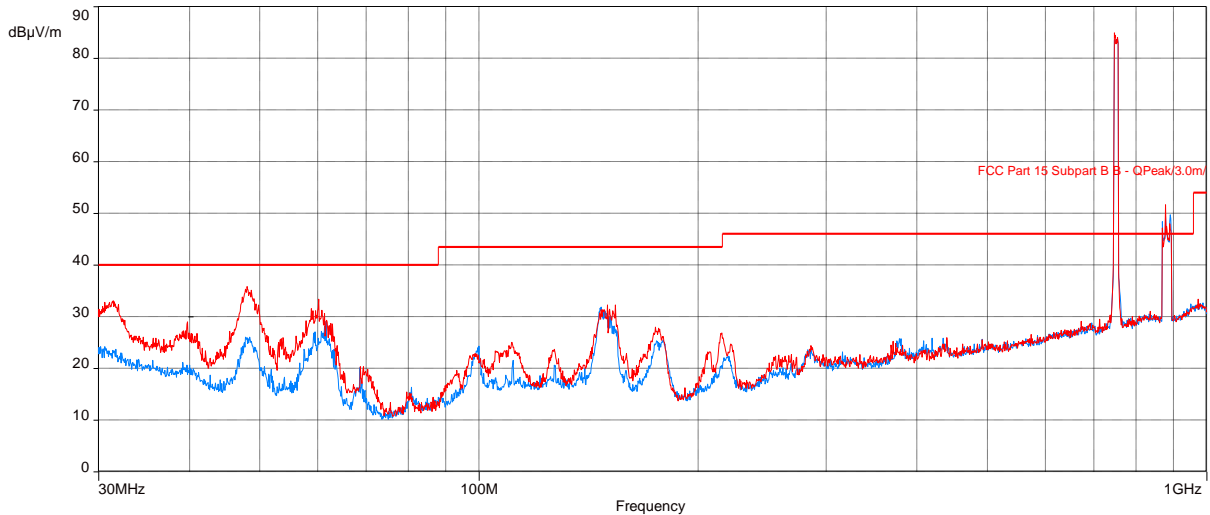

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 31: RE test results from 30 to 1000 MHz for FCC Part 15 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level Quasi Peak (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|---------------------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 31.4451029 | 32.40 | 40.00 | -7.60 | 1.05 | 343.25 | Vertical | -3.24 |
| 48.01515351 | 33.65 | 40.00 | -6.35 | 1.00 | 31.25 | Vertical | -11.35 |
| 58.83367949 | 27.68 | 40.00 | -12.32 | 1.86 | 40.75 | Vertical | -14.88 |
| 60.21567915 | 24.55 | 40.00 | -15.45 | 2.14 | 26.25 | Vertical | -14.96 |

Table 32: RE test results from 30 to 1000 MHz for FCC Part 27 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 31.4451029 | 32.40 | 82.2 | -49.8 | 1.05 | 343.25 | Vertical | -3.24 |
| 48.01515351 | 33.65 | 82.2 | -48.55 | 1.00 | 31.25 | Vertical | -11.35 |
| 58.83367949 | 27.68 | 82.2 | -54.52 | 1.86 | 40.75 | Vertical | -14.88 |
| 60.21567915 | 24.55 | 82.2 | -57.65 | 2.14 | 26.25 | Vertical | -14.96 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 26: Plot of RE at 3m from 1 to 10 GHz (MC 5, LTE – Middle channel) - AC powered

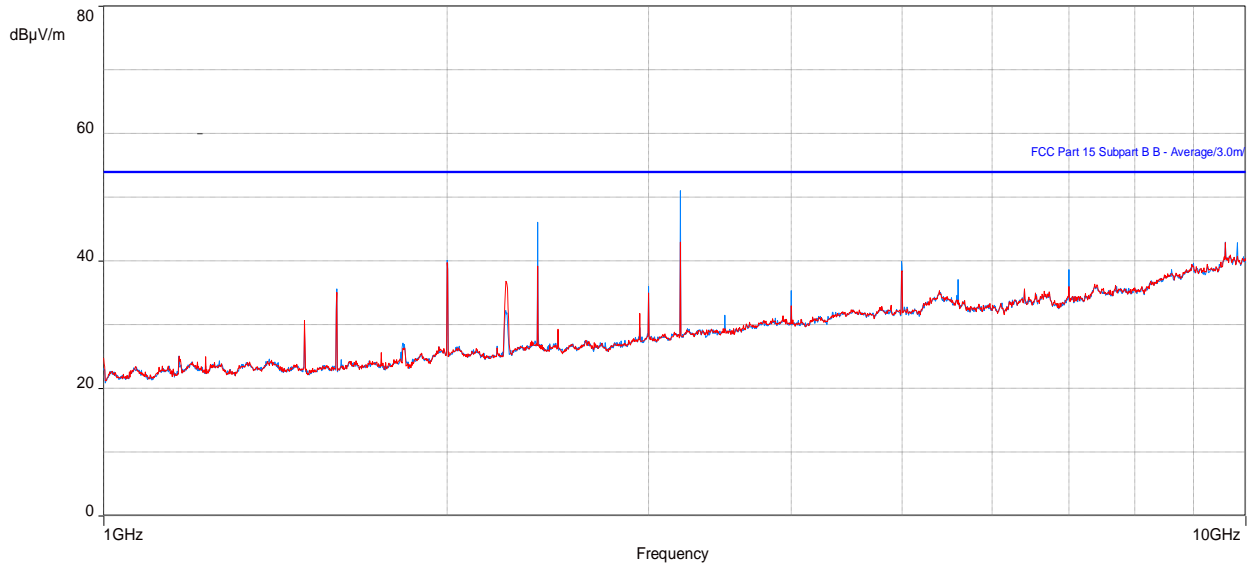


Table 33: RE test results from 1 to 10 GHz for FCC Part 15 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 46.14 | 53.96 | -7.82 | 3.47 | 175.00 | Horizontal | -7.74 |
| 3199.978526 | 51.73 | 53.96 | -2.23 | 2.56 | 177.50 | Horizontal | -6.37 |
| 3199.978526 | 43.09 | 53.96 | -10.87 | 2.63 | 111.50 | Vertical | -6.37 |

Table 34: RE test results from 1 to 10 GHz for FCC Part 27 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 46.14 | 82.2 | -36.06 | 3.47 | 175.00 | Horizontal | -7.74 |
| 3199.978526 | 51.73 | 82.2 | -30.47 | 2.56 | 177.50 | Horizontal | -6.37 |
| 3199.978526 | 43.09 | 82.2 | -39.11 | 2.63 | 111.50 | Vertical | -6.37 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 27: Plot of RE at 3m from 10 to 18 GHz (MC 5, LTE – Middle channel) – AC powered

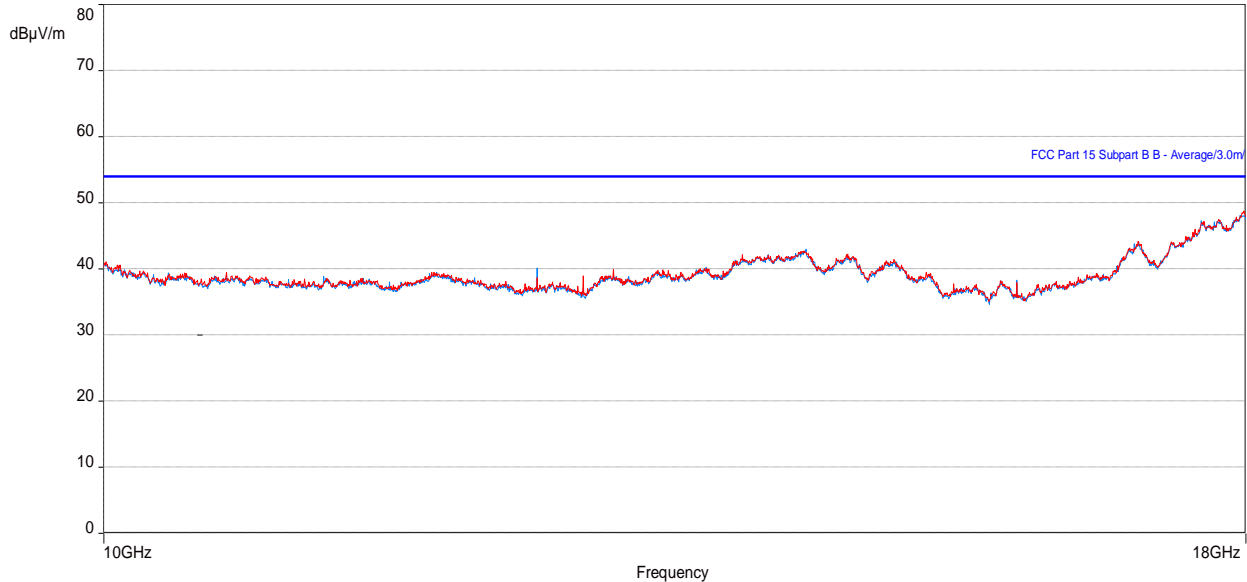


Table 35: RE test results from 10 to 18 GHz for FCC Part 15 (MC 5, LTE – Middle channel)


| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (degrees) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|-------------------|--------------|-----------------|
| 17032.82885 | 40.47 | 53.96 | -13.49 | 4.00 | 2.50 | Vertical | 14.05 |
| 17033.2705 | 40.33 | 53.96 | -13.63 | 3.99 | 314.25 | Horizontal | 14.04 |
| 17592.01826 | 43.34 | 53.96 | -10.62 | 1.00 | 360.25 | Vertical | 19.59 |
| 17999.06762 | 45.26 | 53.96 | -8.70 | 1.00 | 38.75 | Horizontal | 22.02 |

Table 36: RE test results from 10 to 18 GHz for FCC Part 22/27 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 17032.82885 | 40.47 | 82.2 | -41.73 | 4.00 | 2.50 | Vertical | 14.05 |
| 17033.2705 | 40.33 | 82.2 | -41.87 | 3.99 | 314.25 | Horizontal | 14.04 |
| 17592.01826 | 43.34 | 82.2 | -38.86 | 1.00 | 360.25 | Vertical | 19.59 |
| 17999.06762 | 45.26 | 82.2 | -36.94 | 1.00 | 38.75 | Horizontal | 22.02 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.


Figure 28: Plot of RE at 1m from 18 to 26.5 GHz (MC 5, LTE – Middle channel) – AC powered

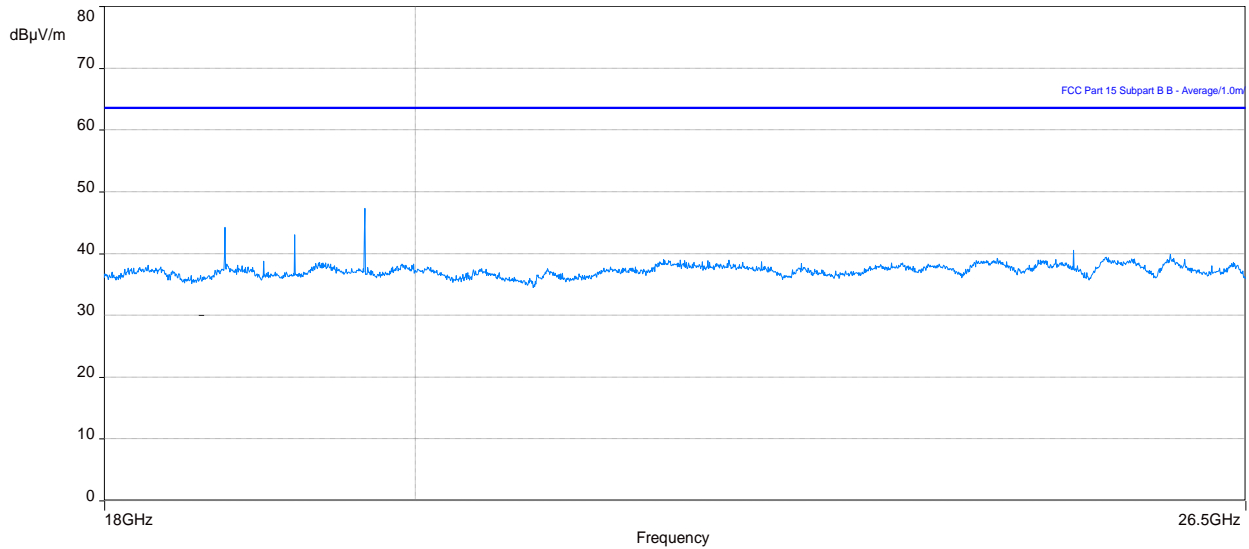

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.


Figure 29: Plot of RE at 1m from 26.5 to 40 GHz (MC 5, LTE – Middle channel) – AC powered

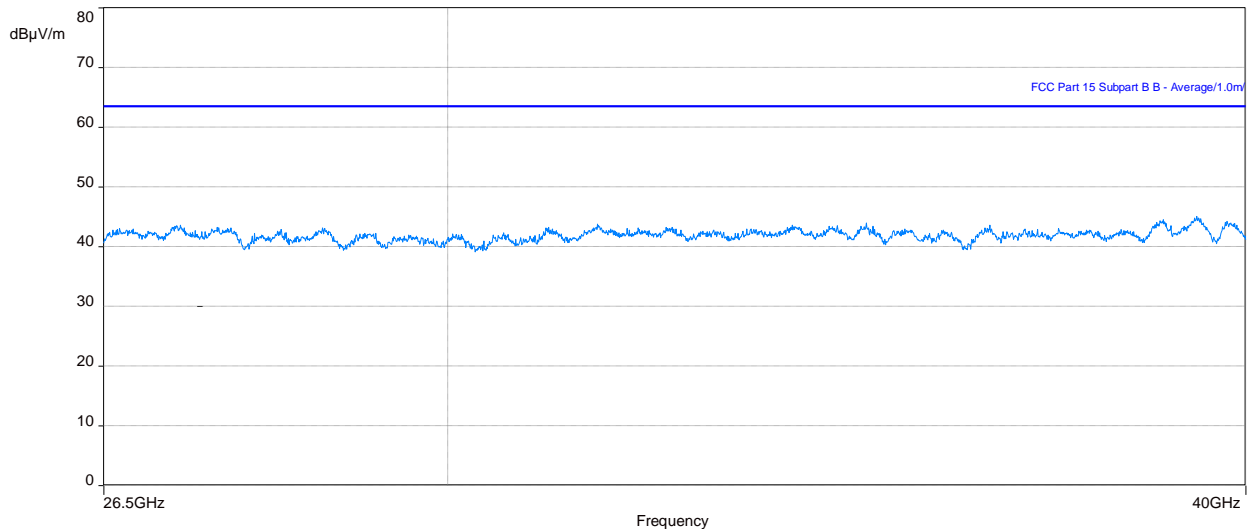

Note 1: In the plot above No Emissions exceeds the FCC Part 15 limit.

Note 2: In the plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 30: Plot of RE at 3 m – 30 to 1000 MHz (MC 5, LTE – Middle channel) – DC powered

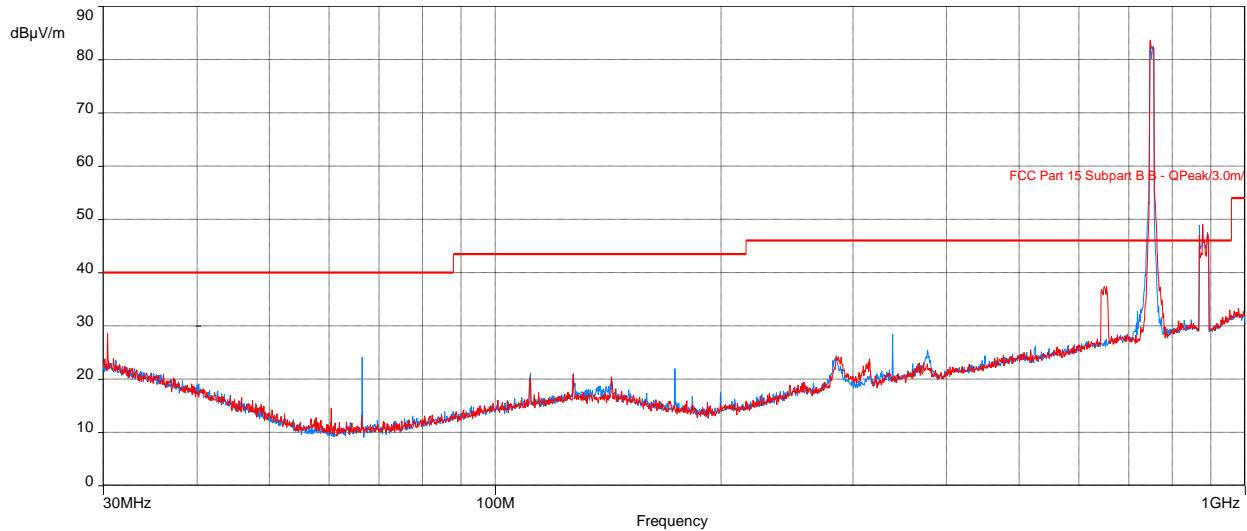

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 37: RE test results from 30 to 1000 MHz for FCC Part 15 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level Quasi Peak (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|---------------------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 649.7519103 | 21.49 | 46.02 | -24.53 | 2.13 | 319.25 | Vertical | 2.02 |

Table 38: RE test results from 30 to 1000 MHz for FCC Part 27 (MC 5, LTE – Middle channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 649.7519103 | 21.49 | 82.2 | -60.71 | 2.13 | 319.25 | Vertical | 2.02 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBµV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.9 Test results of Radiated Emissions (SC1 - NR 5MHz/LTE 10MHz – Bot ch)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 19 -23 March 2020

Tested by: Kurupal Patel

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 31: Plot of RE at 3 m – 30 to 1000 MHz (SC1- NR 5 / LTE 10 – Bot channel)

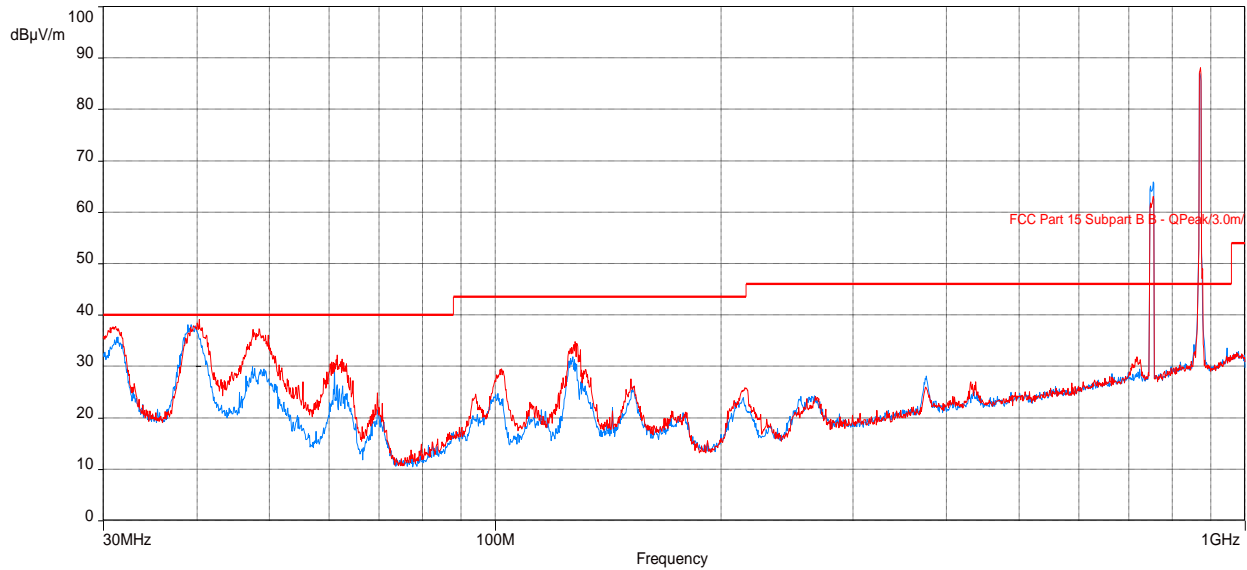

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 39: RE test results from 30 to 1000 MHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Bot channel)

| Frequency (MHz) | Level (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC Part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 31.36392949 | 33.70 | 40.00 | -6.30 | 2.57 | 26.25 | Horizontal | -3.20 |
| 40.31401249 | 36.24 | 40.00 | -3.76 | 1.00 | 33.75 | Vertical | -7.59 |
| 48.39862854 | 33.92 | 40.00 | -6.08 | 1.57 | 40.50 | Vertical | -11.53 |
| 127.7719936 | 28.81 | 43.52 | -14.71 | 1.00 | 170.25 | Vertical | -8.27 |

Table 40: RE test results from 30 to 1000 MHz - FCC Part 22/27 (SC1- NR 5 / LTE 10 – Bot channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC Part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 31.36392949 | 33.70 | 82.2 | -48.5 | 2.57 | 26.25 | Horizontal | -3.20 |
| 40.31401249 | 36.24 | 82.2 | -45.96 | 1.00 | 33.75 | Vertical | -7.59 |
| 48.39862854 | 33.92 | 82.2 | -48.28 | 1.57 | 40.50 | Vertical | -11.53 |
| 127.7719936 | 28.81 | 82.2 | -53.39 | 1.00 | 170.25 | Vertical | -8.27 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 32: Plot of RE at 3m from 1 to 10 GHz (SC1- NR 5 / LTE 10 – Bot channel)

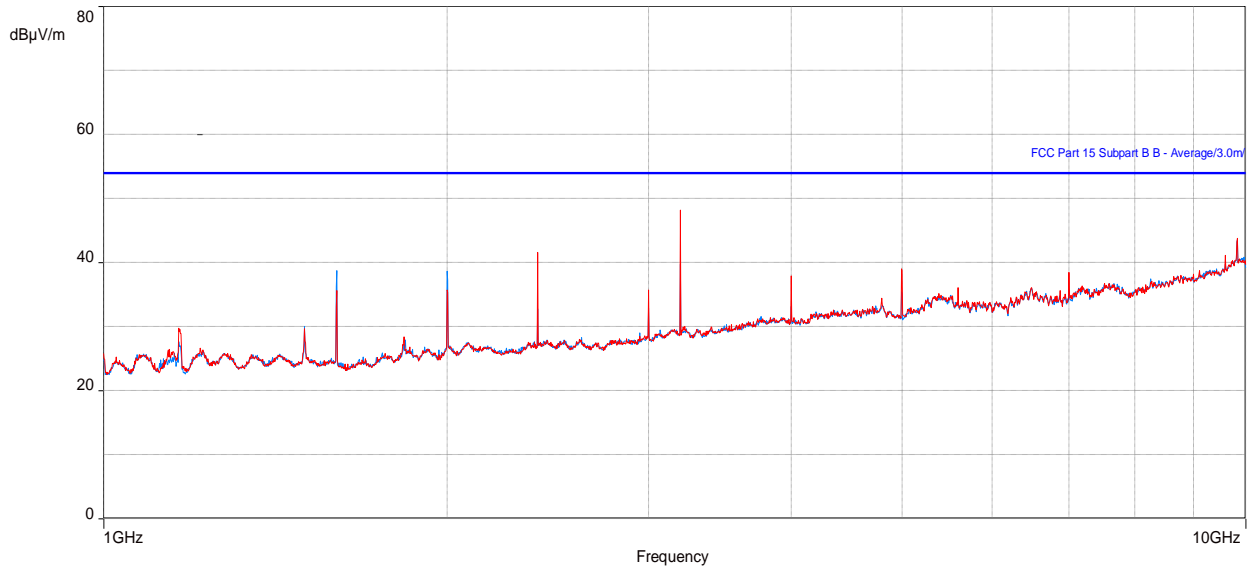


Table 41: RE test results from 1 to 10 GHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Bot channel)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 41.40 | 53.96 | -12.56 | 1.05 | 182.75 | Vertical | -8.61 |
| 3199.978526 | 48.62 | 53.96 | -5.34 | 2.23 | 189.75 | Vertical | -6.76 |
| 9830.333333 | 42.35 | 53.96 | -11.61 | 1.87 | 189.75 | Vertical | 9.05 |
| 9830.333333 | 43.81 | 53.96 | -10.15 | 1.00 | 40.50 | Horizontal | 9.05 |

Table 42: RE test results from 1 to 10 GHz for FCC Part 22/27 (SC1- NR 5 / LTE 10 – Bot channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 41.40 | 82.2 | -40.80 | 1.05 | 182.75 | Vertical | -8.61 |
| 3199.978526 | 48.62 | 82.2 | -33.58 | 2.23 | 189.75 | Vertical | -6.76 |
| 9830.333333 | 42.35 | 82.2 | -39.85 | 1.87 | 189.75 | Vertical | 9.05 |
| 9830.333333 | 43.81 | 82.2 | -38.39 | 1.00 | 40.50 | Horizontal | 9.05 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.10 Test results of Radiated Emissions (SC1- NR 5MHz/LTE 10MHz – Mid ch)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 19 -23 March 2020

Tested by: Kurupal Patel

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 33: Plot of RE at 3 m – 30 to 1000 MHz (SC1- NR 5 / LTE 10 – Mid channel)

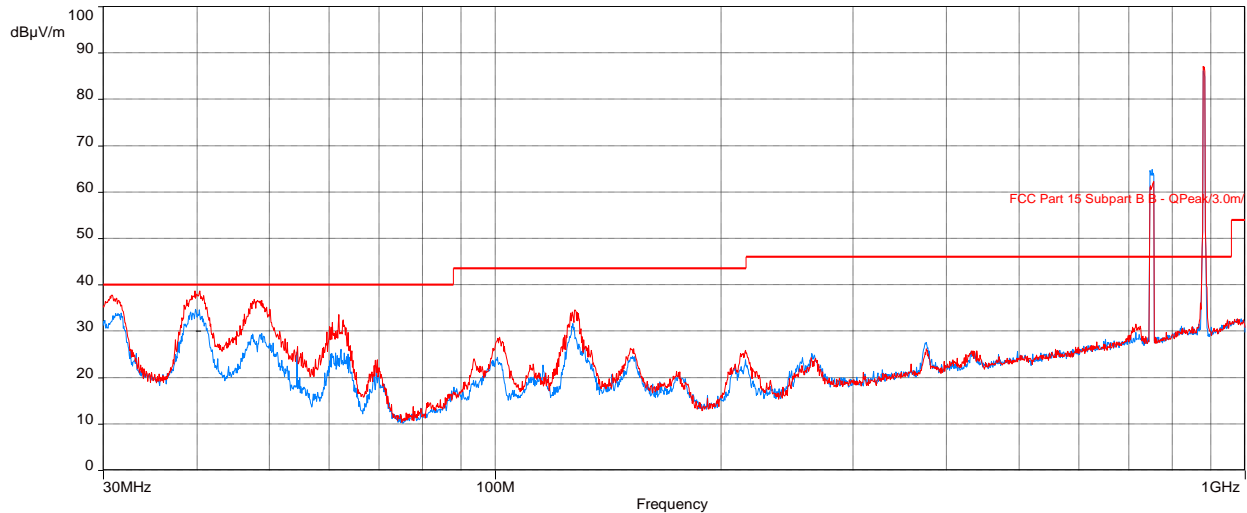

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 43: RE test results from 30 to 1000 MHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Mid channel)

| Frequency (MHz) | Level (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC Part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 30.75007726 | 36.56 | 40.00 | -3.44 | 2.80 | 350.25 | Vertical | -2.90 |
| 31.69848044 | 32.83 | 40.00 | -7.17 | 2.57 | 26.25 | Horizontal | -3.36 |
| 39.83862787 | 36.34 | 40.00 | -3.66 | 2.81 | 24.25 | Horizontal | -7.32 |
| 40.36217308 | 36.00 | 40.00 | -4.00 | 1.00 | 33.50 | Vertical | -7.61 |
| 47.68120479 | 33.49 | 40.00 | -6.51 | 1.00 | 40.50 | Vertical | -11.18 |

Table 44: RE test results from 30 to 1000 MHz - FCC Part 22/27 (SC1- NR 5 / LTE 10 – Mid channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC Part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 30.75007726 | 36.56 | 82.2 | -45.64 | 2.80 | 350.25 | Vertical | -2.90 |
| 31.69848044 | 32.83 | 82.2 | -49.37 | 2.57 | 26.25 | Horizontal | -3.36 |
| 39.83862787 | 36.34 | 82.2 | -45.86 | 2.81 | 24.25 | Horizontal | -7.32 |
| 40.36217308 | 36.00 | 82.2 | -46.2 | 1.00 | 33.50 | Vertical | -7.61 |
| 47.68120479 | 33.49 | 82.2 | -48.71 | 1.00 | 40.50 | Vertical | -11.18 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 34: Plot of RE at 3m from 1 to 10 GHz (SC1- NR 5 / LTE 10 – Mid channel)

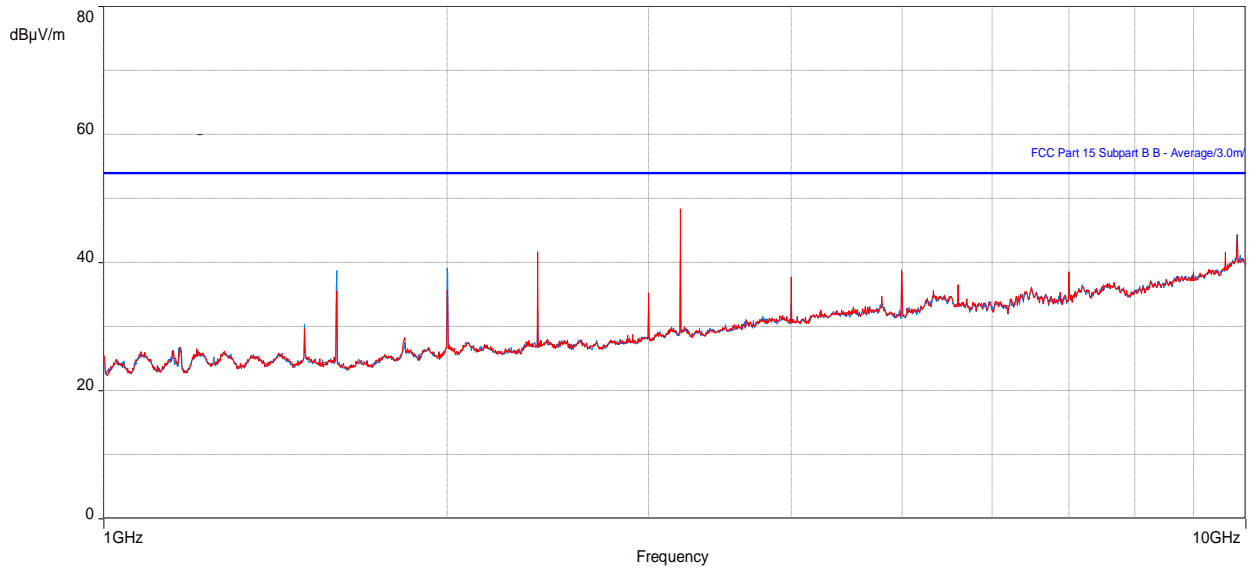


Table 45: RE test results from 1 to 10 GHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Mid channel)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 41.43 | 53.96 | -12.53 | 1.05 | 182.50 | Vertical | -8.61 |
| 3199.978526 | 39.16 | 53.96 | -14.80 | 1.00 | 127.00 | Horizontal | -6.76 |
| 3199.978526 | 48.65 | 53.96 | -5.31 | 2.23 | 189.75 | Vertical | -6.76 |
| 9830.333013 | 43.85 | 53.96 | -10.11 | 2.37 | 40.50 | Horizontal | 9.05 |

Table 46: RE test results from 1 to 10 GHz for FCC Part 22/27 (SC1- NR 5 / LTE 10 – Mid channel)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 41.43 | 82.2 | -40.77 | 1.05 | 182.50 | Vertical | -8.61 |
| 3199.978526 | 39.16 | 82.2 | -43.04 | 1.00 | 127.00 | Horizontal | -6.76 |
| 3199.978526 | 48.65 | 82.2 | -33.55 | 2.23 | 189.75 | Vertical | -6.76 |
| 9830.333013 | 43.85 | 82.2 | -38.35 | 2.37 | 40.50 | Horizontal | 9.05 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.11 Test results of Radiated Emissions (SC1- NR 5MHz/LTE 10MHz – Top ch)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 19 -23 March 2020

Tested by: Kurupal Patel

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 35: Plot of RE at 3 m – 30 to 1000 MHz (SC1- NR 5 / LTE 10 – Top ch)

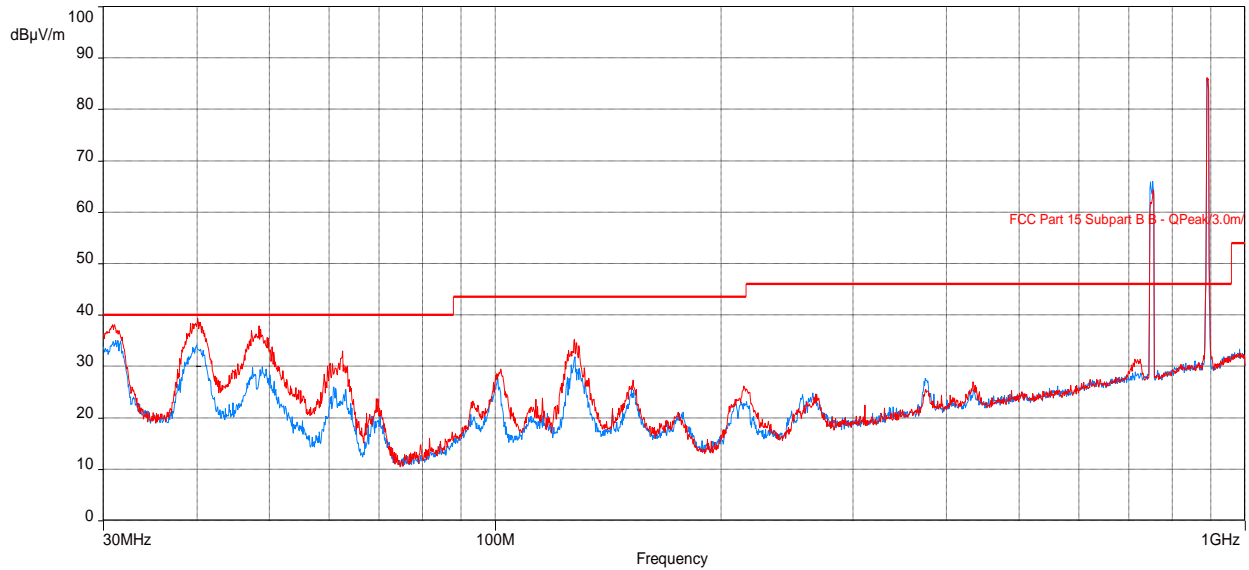

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 47: RE test results from 30 to 1000 MHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Top ch)

| Frequency (MHz) | Level (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC Part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 31.09087821 | 36.46 | 40.00 | -3.54 | 1.00 | 343.00 | Vertical | -3.07 |
| 40.11857018 | 36.32 | 40.00 | -3.68 | 1.00 | 26.25 | Vertical | -7.48 |
| 48.39077597 | 33.86 | 40.00 | -6.14 | 1.00 | 33.25 | Vertical | -11.53 |
| 62.61199326 | 27.84 | 40.00 | -12.16 | 1.96 | 55.25 | Vertical | -14.94 |

Table 48: RE test results from 30 to 1000 MHz - FCC Part 22/27 (SC1- NR 5 / LTE 10 – Top ch)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC Part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 31.09087821 | 36.46 | 82.2 | -45.74 | 1.00 | 343.00 | Vertical | -3.07 |
| 40.11857018 | 36.32 | 82.2 | -45.88 | 1.00 | 26.25 | Vertical | -7.48 |
| 48.39077597 | 33.86 | 82.2 | -48.34 | 1.00 | 33.25 | Vertical | -11.53 |
| 62.61199326 | 27.84 | 82.2 | -54.36 | 1.96 | 55.25 | Vertical | -14.94 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 36: Plot of RE at 3m from 1 to 10 GHz (SC1- NR 5 / LTE 10 – Top ch)

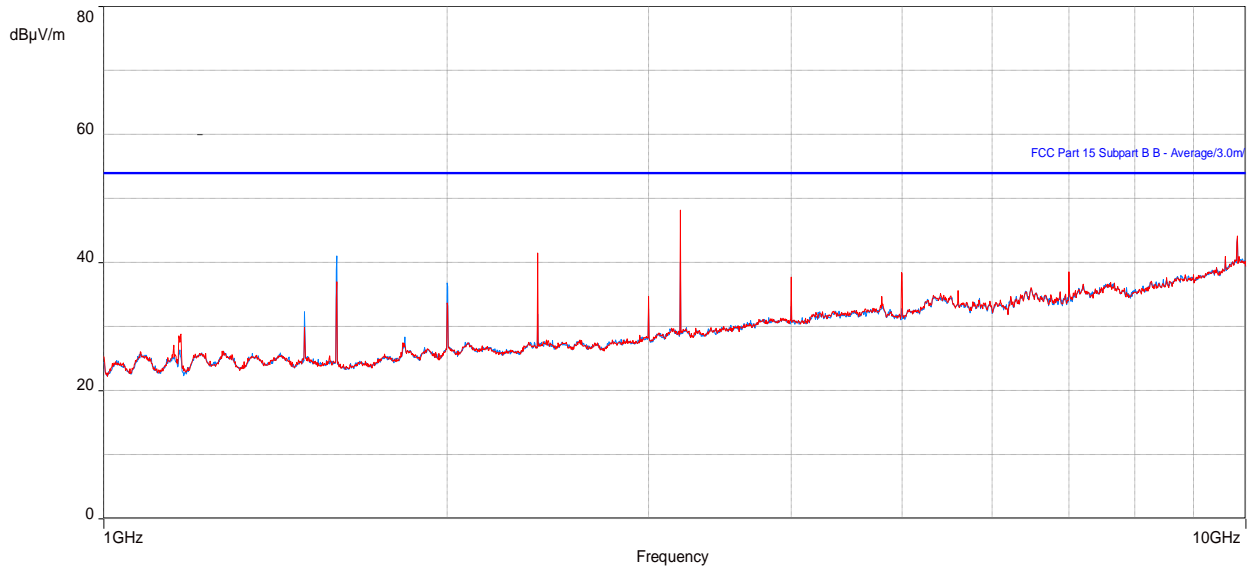


Table 49: RE test results from 1 to 10 GHz for FCC Part 15 (SC1- NR 5 / LTE 10 – Top ch)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 41.44 | 53.96 | -12.52 | 1.05 | 184.75 | Vertical | -8.61 |
| 3199.978526 | 48.60 | 53.96 | -5.36 | 2.64 | 189.50 | Vertical | -6.76 |
| 1599.988782 | 40.43 | 53.96 | -13.53 | 3.61 | 290.75 | Horizontal | -11.97 |
| 9830.333333 | 43.82 | 53.96 | -10.14 | 1.00 | 40.75 | Horizontal | 9.05 |

Table 50: RE test results from 1 to 10 GHz for FCC Part 22/27 (SC1- NR 5 / LTE 10 – Top ch)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 2399.984295 | 41.44 | 82.2 | -40.76 | 1.05 | 184.75 | Vertical | -8.61 |
| 3199.978526 | 48.60 | 82.2 | -33.6 | 2.64 | 189.50 | Vertical | -6.76 |
| 1599.988782 | 40.43 | 82.2 | -41.77 | 3.61 | 290.75 | Horizontal | -11.97 |
| 9830.333333 | 43.82 | 82.2 | -38.38 | 1.00 | 40.75 | Horizontal | 9.05 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.12 Test results of Radiated Emissions (MC1 - 2 * NR 5MHz / LTE 10 MHz– Mid ch)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 19 -23 March 2020

Tested by: Kurupal Patel

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 37: Plot of RE at 3 m – 30 to 1000 MHz (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)

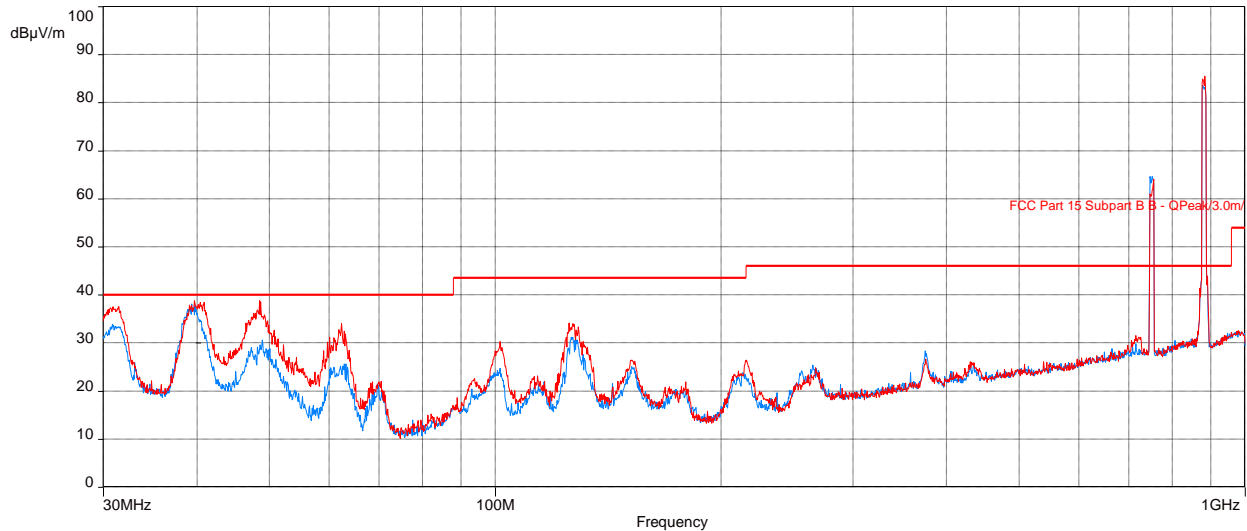

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 51: RE test results from 30 to 1000 MHz for FCC Part 15 (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)

| Frequency (MHz) | Level (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC Part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 30.85204521 | 29.79 | 40.00 | -10.21 | 2.66 | 206.00 | Horizontal | -2.95 |
| 39.66554487 | 36.52 | 40.00 | -3.48 | 1.00 | 40.75 | Vertical | -7.22 |
| 48.52976315 | 33.87 | 40.00 | -6.13 | 1.23 | 40.50 | Vertical | -11.59 |
| 62.38537854 | 22.16 | 40.00 | -17.84 | 2.86 | 119.75 | Vertical | -14.96 |
| 125.551891 | 24.46 | 43.52 | -19.06 | 2.17 | 213.25 | Vertical | -8.33 |

Table 52: RE test results from 30 to 1000 MHz - FCC Part 22/27 (MC1- 2 * NR 5MHz / LTE 10MHz– Mid ch)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC Part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 30.85204521 | 29.79 | 82.2 | -52.41 | 2.66 | 206.00 | Horizontal | -2.95 |
| 39.66554487 | 36.52 | 82.2 | -45.68 | 1.00 | 40.75 | Vertical | -7.22 |
| 48.52976315 | 33.87 | 82.2 | -48.33 | 1.23 | 40.50 | Vertical | -11.59 |
| 125.551891 | 24.46 | 82.2 | -57.74 | 2.17 | 213.25 | Vertical | -8.33 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 38: Plot of RE at 3m from 1 to 10 GHz (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)

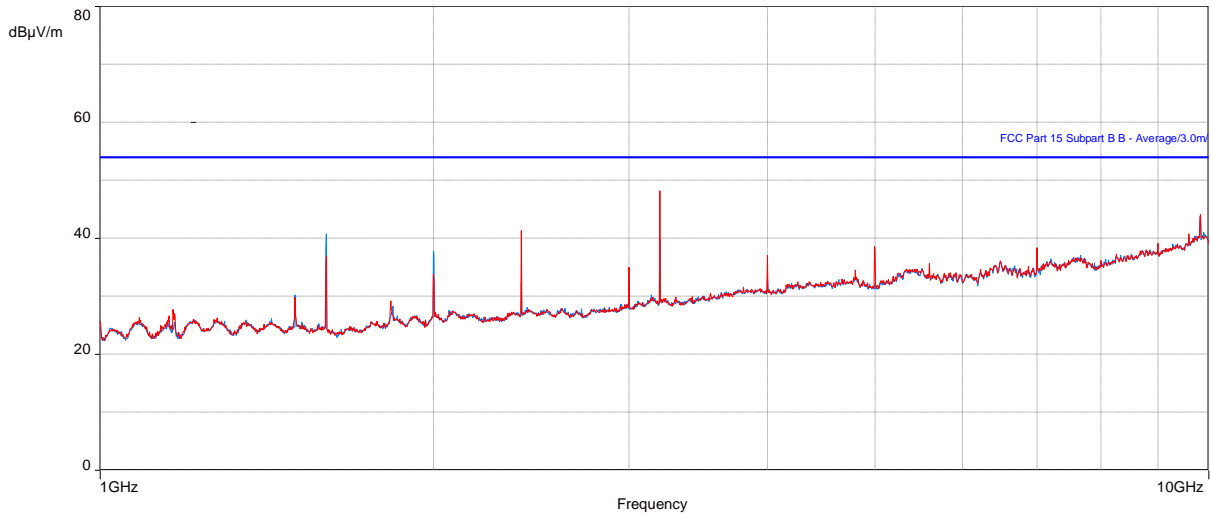


Table 53: RE test results from 1 to 10 GHz for FCC Part 15 (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 1599.990064 | 44.44 | 53.96 | -9.52 | 3.67 | 297.75 | Horizontal | -11.97 |
| 2399.984295 | 35.07 | 53.96 | -18.89 | 1.05 | 160.75 | Vertical | -8.61 |
| 3199.977244 | 49.11 | 53.96 | -4.85 | 2.23 | 190.50 | Vertical | -6.76 |
| 9830.333333 | 44.18 | 53.96 | -9.78 | 2.08 | 40.50 | Horizontal | 9.05 |

Table 54: RE test results from 1 to 10 GHz for FCC Part 22/27 (MC1- 2 * NR 5MHz / LTE 10 MHz– Mid ch)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 1599.990064 | 44.44 | 82.2 | -37.76 | 3.67 | 297.75 | Horizontal | -11.97 |
| 2399.984295 | 35.07 | 82.2 | -47.13 | 1.05 | 160.75 | Vertical | -8.61 |
| 3199.977244 | 49.11 | 82.2 | -33.09 | 2.23 | 190.50 | Vertical | -6.76 |
| 9830.333333 | 44.18 | 82.2 | -38.02 | 2.08 | 40.50 | Horizontal | 9.05 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.



3.2.13 Test results of Radiated Emissions (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 19 -23 March 2020

Tested by: Kurupal Patel

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 39: Plot of RE at 3 m – 30 to 1000 MHz (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

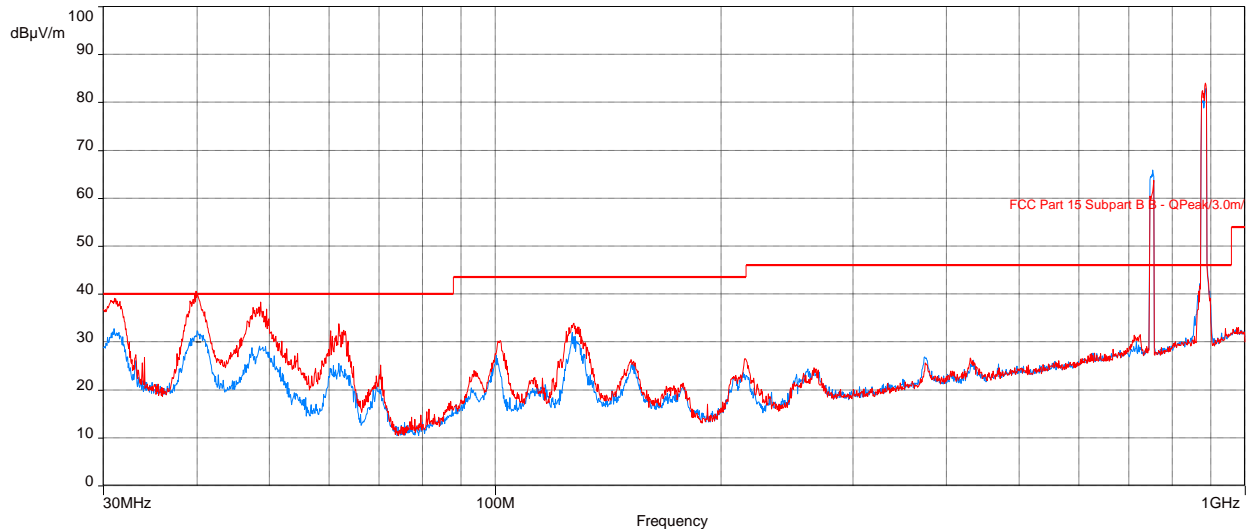

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 55: RE test results from 30 to 1000 MHz for FCC Part 15 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

| Frequency (MHz) | Level (dBµV/m) | Limit Quasi-peak (dBµV/m) | Margin to FCC Part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 31.15983333 | 36.24 | 40.00 | -3.76 | 1.87 | 343.25 | Vertical | -3.10 |
| 39.77232051 | 36.40 | 40.00 | -3.60 | 1.00 | 26.25 | Vertical | -7.28 |
| 48.63377564 | 33.61 | 40.00 | -6.39 | 1.56 | 55.00 | Vertical | -11.65 |
| 127.3893238 | 29.09 | 43.52 | -14.43 | 1.00 | 168.00 | Vertical | -8.28 |

Table 56: RE test results from 30 to 1000 MHz - FCC Part 22/27 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC Part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 31.15983333 | 36.24 | 82.2 | -45.96 | 1.87 | 343.25 | Vertical | -3.10 |
| 39.77232051 | 36.40 | 82.2 | -45.8 | 1.00 | 26.25 | Vertical | -7.28 |
| 48.63377564 | 33.61 | 82.2 | -48.59 | 1.56 | 55.00 | Vertical | -11.65 |
| 127.3893238 | 29.09 | 82.2 | -53.11 | 1.00 | 168.00 | Vertical | -8.28 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamentals. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

Figure 40: Plot of RE at 3m from 1 to 10 GHz (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

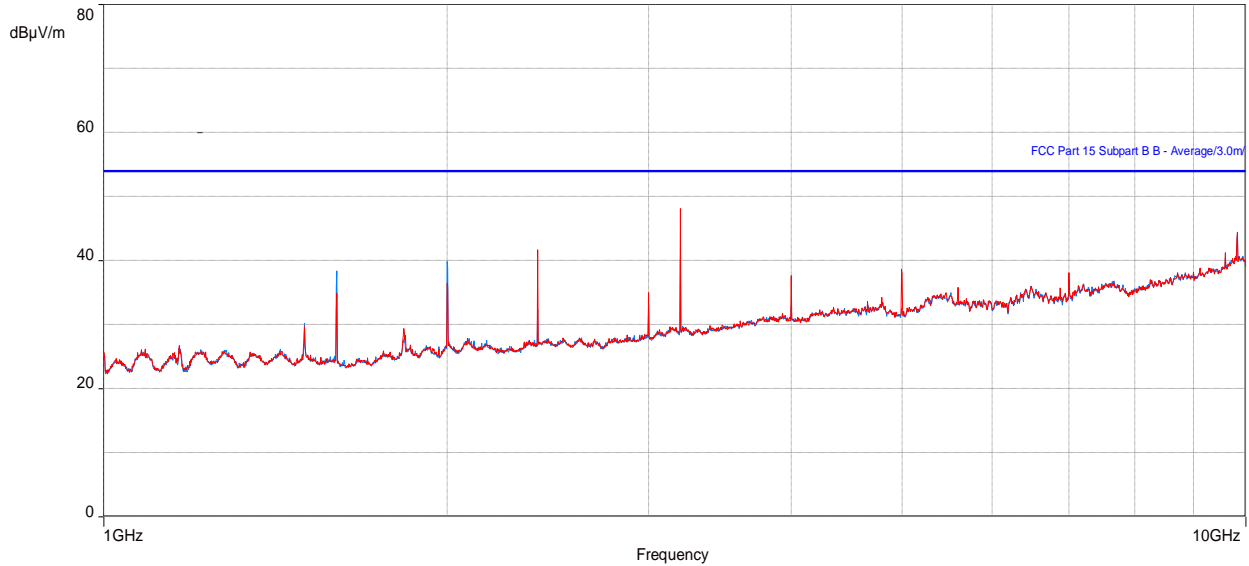


Table 57: RE test results from 1 to 10 GHz for FCC Part 15 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

| Frequency (MHz) | Level Average (dBµV/m) | Limit Average (dBµV/m) | Margin to FCC part 15 Class B (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|------------------------|------------------------|------------------------------------|------------|---------------|--------------|-----------------|
| 1999.986538 | 41.40 | 53.96 | -12.56 | 3.88 | 290.75 | Horizontal | -9.56 |
| 3199.978526 | 47.73 | 53.96 | -6.23 | 2.64 | 196.75 | Vertical | -6.76 |
| 9830.333333 | 43.19 | 53.96 | -10.77 | 1.00 | 336.00 | Vertical | 9.05 |

Table 58: RE test results from 1 to 10 GHz for FCC Part 22/27 (MR1- L10GB+NR5 / LTE 10MHz – Mid ch)

| Frequency (MHz) | Level (dBµV/m) | Limit EIRP (dBµV/m) | Margin to FCC part 22/27 (dB) | Height (m) | Azimuth (deg) | Polarization | Correction (dB) |
|-----------------|----------------|---------------------|-------------------------------|------------|---------------|--------------|-----------------|
| 1999.986538 | 41.40 | 82.2 | -40.8 | 3.88 | 290.75 | Horizontal | -9.56 |
| 3199.978526 | 47.73 | 82.2 | -34.47 | 2.64 | 196.75 | Vertical | -6.76 |
| 9830.333333 | 43.19 | 82.2 | -39.01 | 1.00 | 336.00 | Vertical | 9.05 |

Note: In the table/Plot above, no emissions exceed the Part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC Part 22/27, see antenna port conducted emissions in applicable test report.

3.2.14 Radiated Emissions test setup pictures

Figure 41: Setup for RE tests at 30 MHz to 1 GHz with LTE (Single & Multi Carrier)- AC Powered

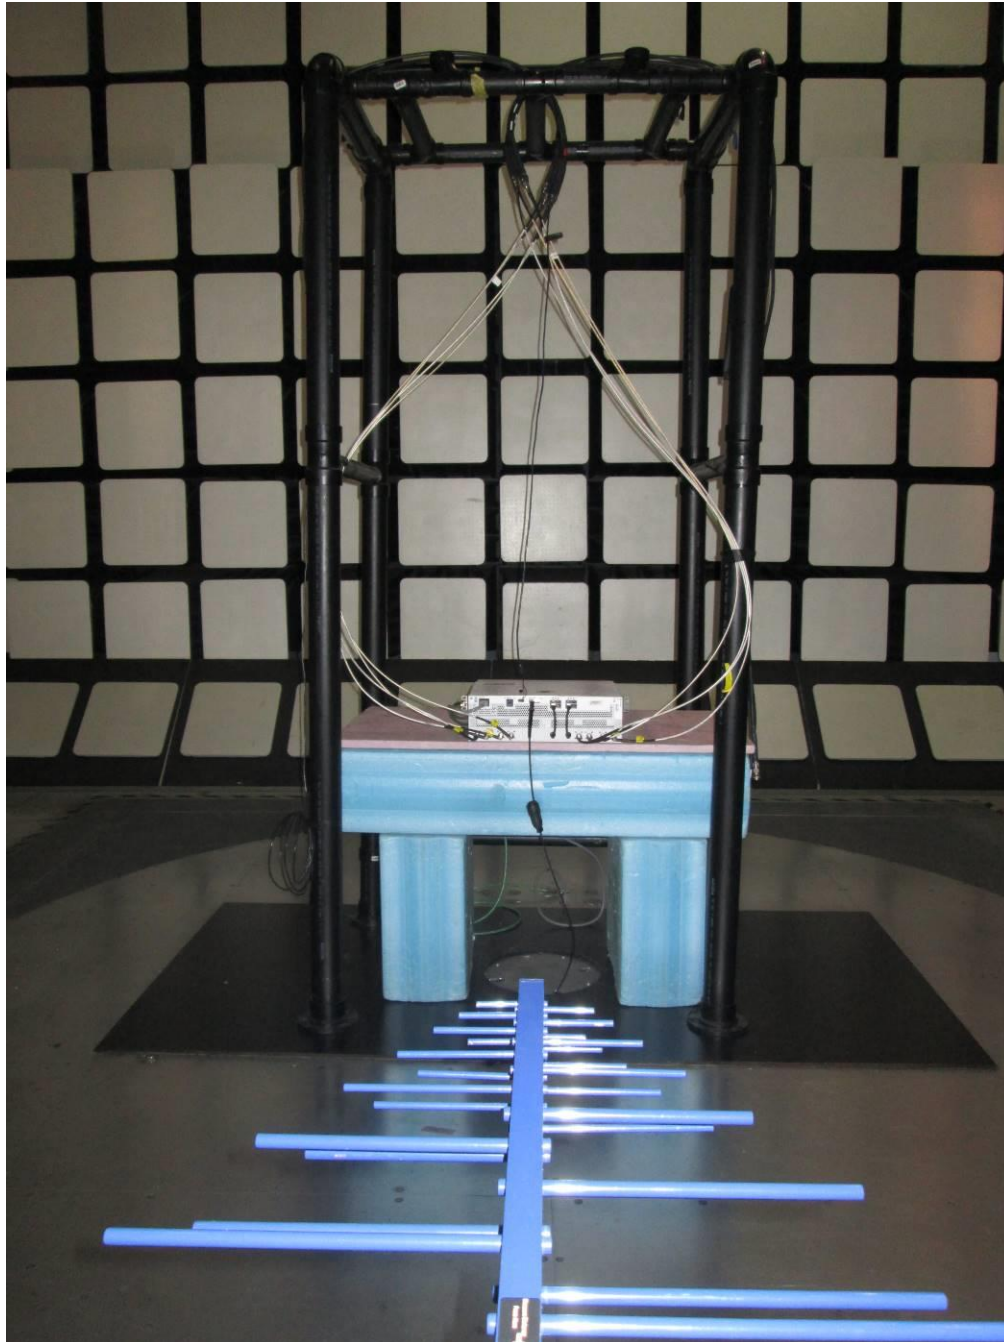


Figure 42: Setup for RE tests at 30 MHz to 1 GHz with LTE (Single & Multi Carrier)- DC Powered

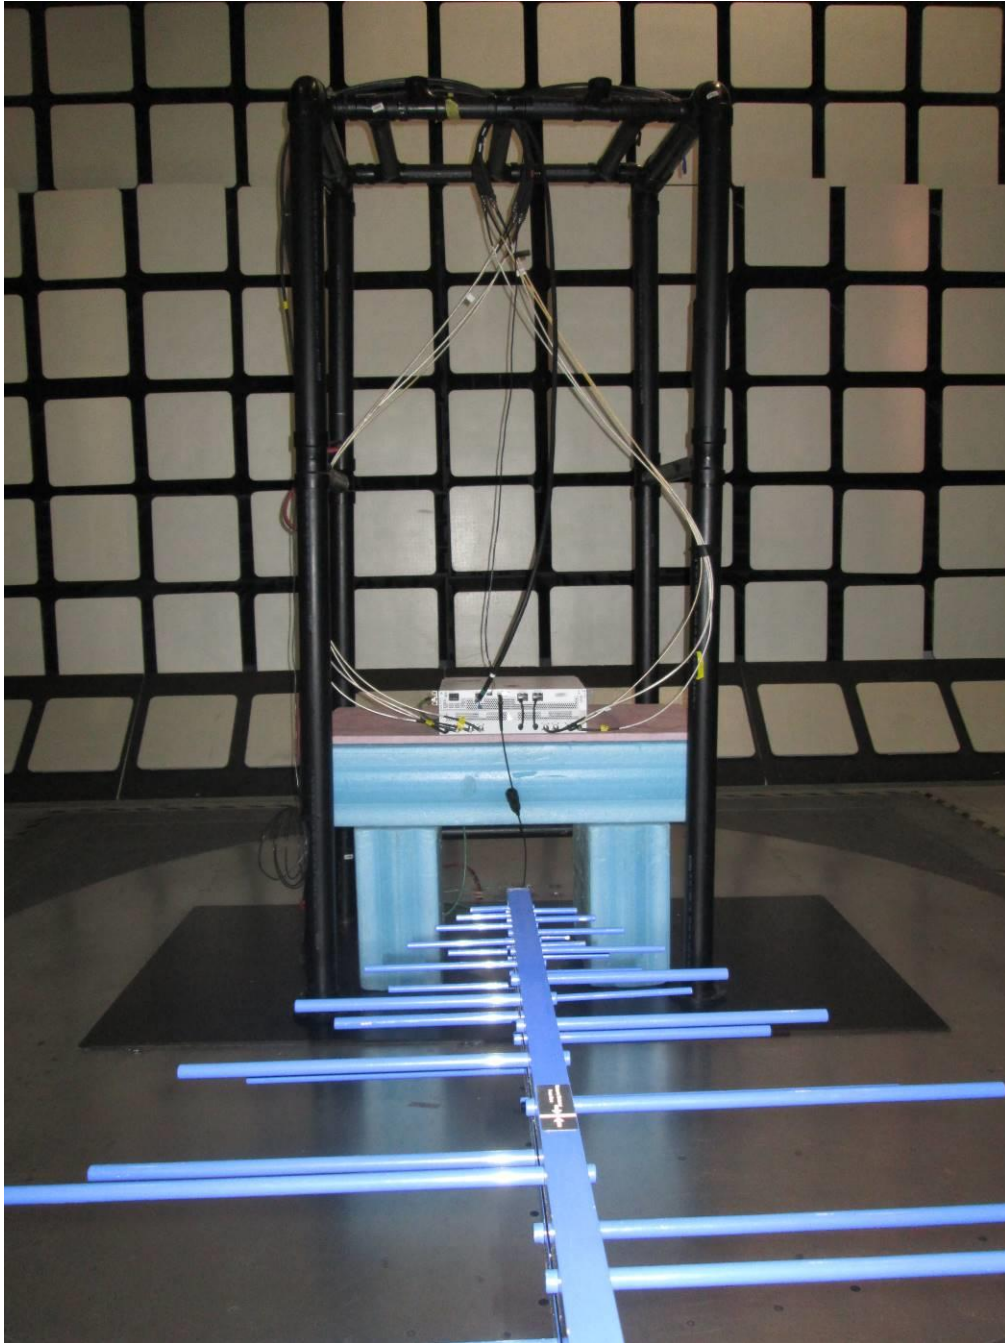


Figure 43: Setup for RE tests for above 1 GHz with LTE (Single & Multi Carrier)


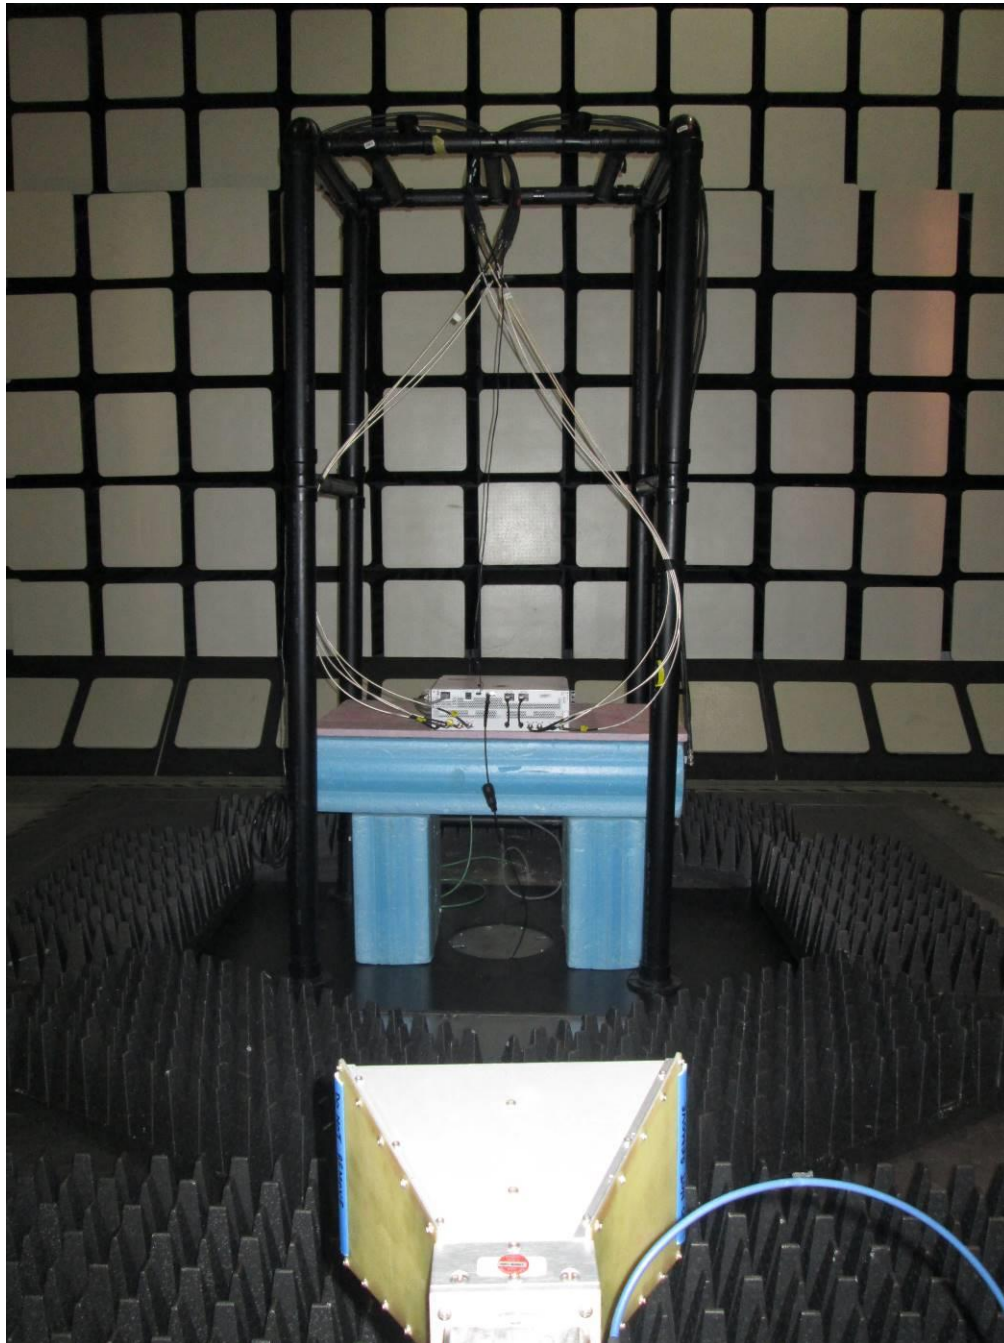


Figure 44: Setup for RE tests at 30 MHz to 1 GHz with NR (Single & Multi Carrier)



Figure 45: Setup for RE tests for above 1 GHz with NR (Single & Multi Carrier)

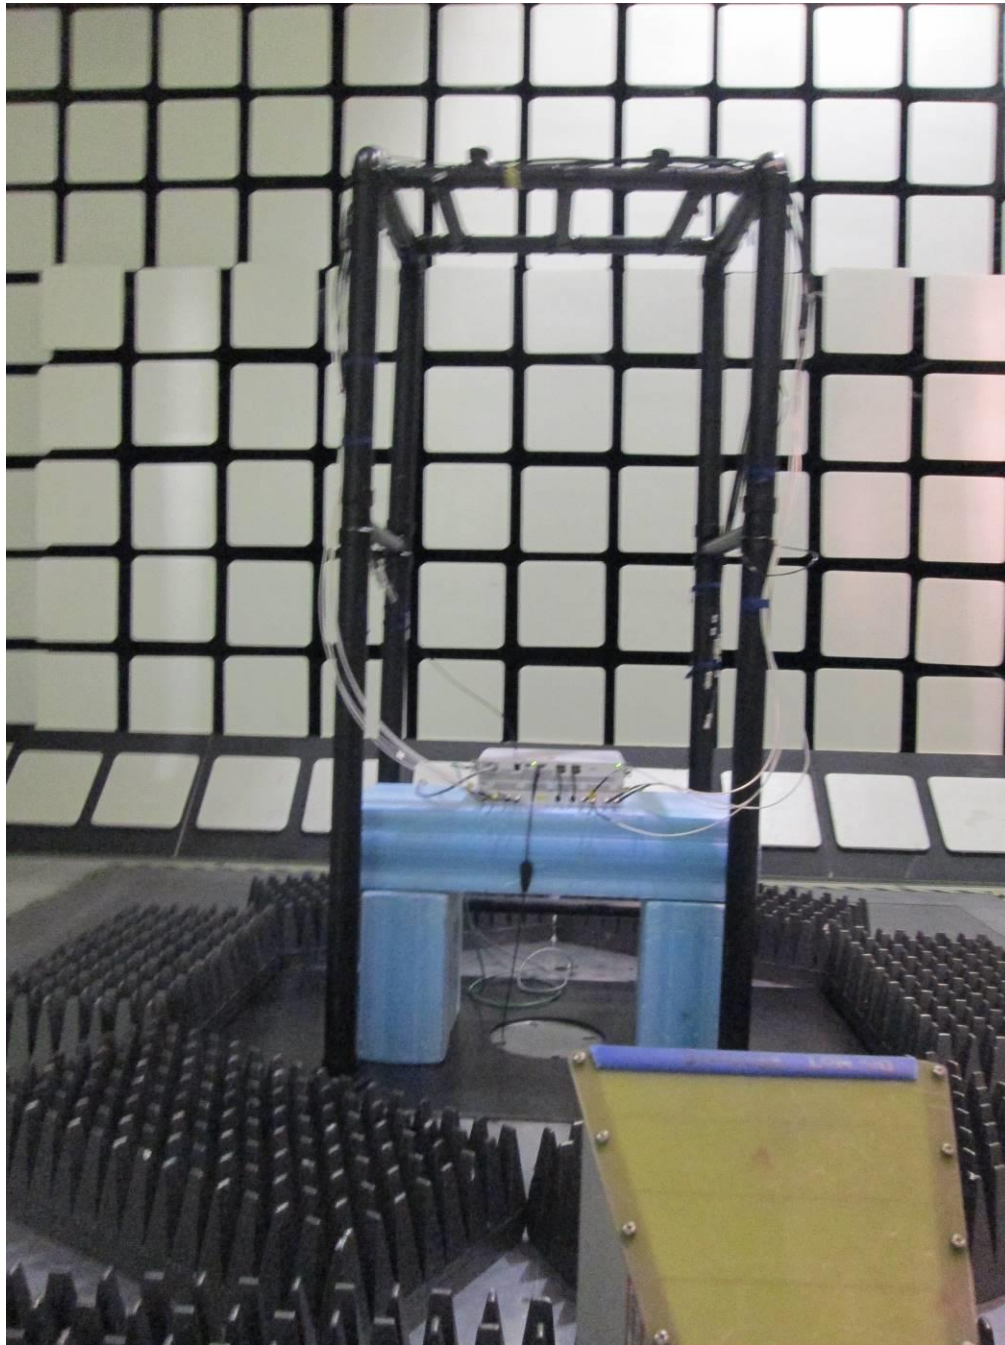

3.2.15 Test equipment

The equipment used for E-field RE testing was as follows.

Table 59: Test equipment used for RE

| Description | Make | Model number | Asset ID | Calibr. date | Calibr. due |
|------------------------------|------------------------|------------------------|-----------|--------------|-------------|
| EMC Automation Software | Nexio V3.18 | BAT-EMC | F0163649 | Not required | |
| Double Ridged Horn Antenna | Emco | 3115 | SSG012298 | 2019-05-01 | 2020-05-01 |
| Bilog Antenna | Chase | CBL6111 | SSG012564 | 2019-05-15 | 2020-05-15 |
| RF Amplifier | Hewlett Packard | 8447D | SSG013045 | 2020-01-08 | 2021-01-08 |
| Pre-Amplifier | BNR | LNA | SSG012594 | 2019-05-22 | 2020-05-22 |
| Horn Antenna (18 - 26.5 GHz) | Emco | 3160-09 | SSG012292 | 2019-08-26 | 2021-08-26 |
| Horn Antenna (26.5 - 40 GHz) | Emco | 3160-10 | SSG012294 | 2019-08-26 | 2021-08-26 |
| EMI Receiver | Rohde & Schwarz | ESU40 | SSG013672 | 2019-10-08 | 2020-10-08 |
| Coaxial Cable | Huber & Suhner | 104PEA | SSG012041 | 2020-01-06 | 2021-01-06 |
| Coaxial Cable | Huber & Suhner | 106A | SSG012455 | 2020-01-06 | 2021-01-06 |
| Coaxial Cable | Huber & Suhner | 106A | SSG012711 | 2020-01-06 | 2021-01-06 |
| Coaxial Cable | Micro-Coax | UFA 210B-1-1500-504504 | SSG012376 | 2020-01-02 | 2021-01-02 |
| Coaxial Cable | Huber & Suhner | ST18/Nm/Nm/36 | SSG012786 | 2020-01-02 | 2021-01-02 |
| Coaxial Cable | Huber & Suhner | 101 PEA, Sucoflex | SSG012290 | 2018-11-13 | 2020-11-13 |
| RF Filter: High Pass | Microwave Circuits Inc | H1G013G1 | SSG013705 | 2020-01-06 | 2021-01-06 |

3.2.16 Test conclusion

The LPRU 4410 B5B13 has passed the E-field Radiated Emission (RE) tests with respect to the standards/sections listed in section [Executive summary](#).

3.3 Conducted Emissions on AC power leads

This test verifies the EUT does not produce excessive Conducted Emissions (CE) on the AC main power leads.

3.3.1 Test specification and limits

The test requirements are as follows.

Table 60: CE test requirements on AC power leads

| Requirement | Method | Country of application |
|------------------------|------------|------------------------|
| FCC Part 15, Subpart B | ANSI C63.4 | USA |
| ICES 003 | ANSI C63.4 | Canada |

The limits of the CE tests on AC power leads are as follows.

Table 61: CE test limits on AC power leads for Class B


| Frequency range (MHz) | FCC Part 15 Average (dB μ V) | FCC Part 15 Quasi-peak (dB μ V) |
|-----------------------|----------------------------------|-------------------------------------|
| 0.15 to 0.5 | 56 to 46 | 66 to 56 |
| 0.5 to 5 | 46 | 56 |
| 5 to 30 | 50 | 60 |

3.3.2 Test procedure

Verifications of the test equipment were performed before the installation of the EUT in accordance with the quality assurance procedures documented in the EMC test procedures document. The test was performed by the relevant procedures listed in [Table 60](#).

[Figure 46](#) shows the test method for regulatory CE measurements on AC Leads.

Figure 46: CE test method on AC leads for regulatory test cases

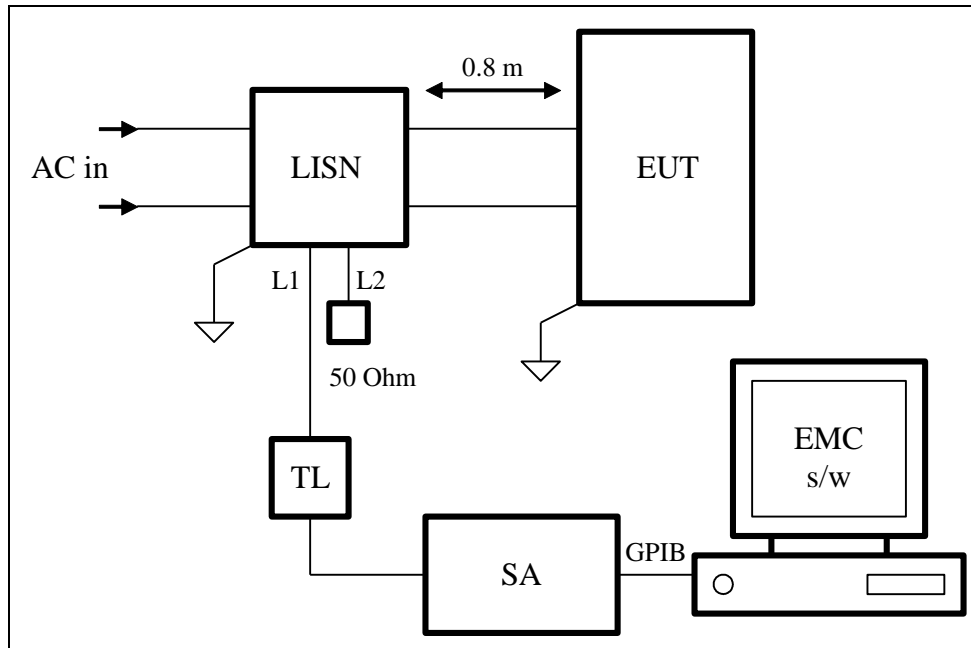

- The EUT was arranged and connected according to its normal mode of operation on a metallic ground plane. The EUT and all cables were insulated from the ground plane which extended by at least 0.5 m beyond the boundaries of the EUT.
- The LISNs were bonded to the ground plane; the distance between the boundary of the EUT and the closest surface of the LISN was 0.8 m. The mains cable between the EUT and the LISNs was 1 m long, or if more than 1 m, the excess cable was folded to form a non-inductive bundle, not exceeding 0.4 m in length. The safety ground connection of the EUT, if present, was connected to the reference ground plane.
- Conducted Emissions were measured by connecting the spectrum analyzer input, through the transient limiter, to the LISN outputs, L1 and L2 (the unused LISN output was terminated with a coaxial 50-Ohm termination).
- For each lead, a pre-scan was taken over the frequency range of the requirement, using peak detection on the spectrum analyzer. The pre-scan data was then compared to the specification limits. Frequencies close to the limit lines were measured using a QP and/or an AVG detector as required.

3.3.3 Calculation of the compliance margin

The compliance margin is computed in a similar way as for RE (see section [Calculation of the compliance margin](#)).

3.3.4 Measurement uncertainties

The expanded measurement instrumentation uncertainty, with a 95 % level of confidence, calculated according to the method described in CISPR 16 is: ± 2.8 dB on CISPR 22 AC power leads conducted emissions.

3.3.5 Test results of CE on AC power ports

Test location: Ground Plane
Date tested: 27 March 2020
Tested by: Kasi Sivaratnam

Test configurations are identified in the section [Configurations of the EUT](#).

For the following test results that have supporting data tables, negative margin values indicate a pass.

Figure 47: Plot of CE on AC port, line L1 for FCC Part 15 class B

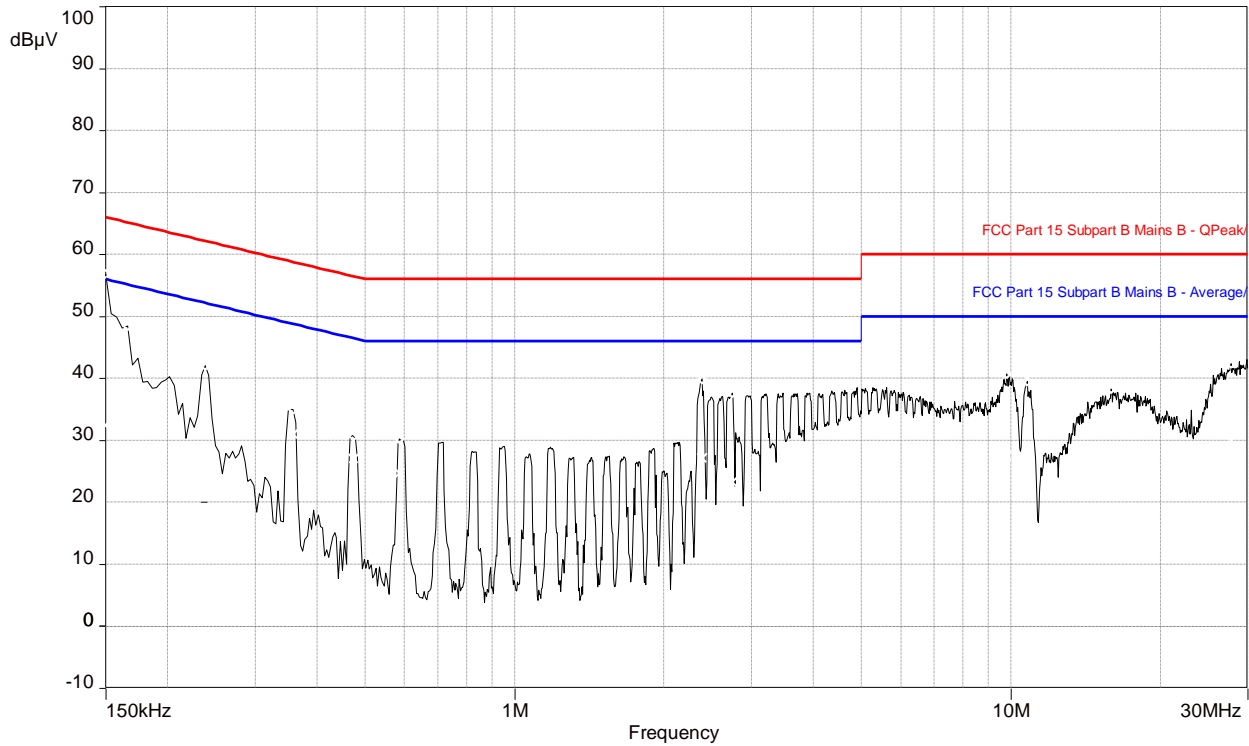


Table 62: CE test results on AC port, line L1 for FCC Part 15 class B

| Frequency (MHz) | Level Average (dBµV) | Level Quasi-peak (dBµV) | Margin to Average Class B (dB) | Margin to Quasi-peak Class B (dB) | Limit Average (dBµV) | Limit Quasi-peak (dBµV) | Correction (dB) |
|-----------------|----------------------|-------------------------|--------------------------------|-----------------------------------|----------------------|-------------------------|-----------------|
| 0.148146 | 32.47 | 38.72 | -23.53 | -27.28 | 56.00 | 66.00 | 9.83 |
| 0.162634 | 33.14 | 43.21 | -22.22 | -22.15 | 55.36 | 65.36 | 9.82 |
| 0.237514 | 30.96 | 38.25 | -21.21 | -23.92 | 52.17 | 62.17 | 9.78 |
| 0.357694 | 30.98 | 34.17 | -17.80 | -24.61 | 48.77 | 58.77 | 9.77 |
| 0.472218 | 27.04 | 29.37 | -19.40 | -27.07 | 46.44 | 56.44 | 9.76 |
| 0.587134 | 24.73 | 29.00 | -21.27 | -27.00 | 46.00 | 56.00 | 9.76 |
| 2.384848 | 27.13 | 38.43 | -18.87 | -17.57 | 46.00 | 56.00 | 9.76 |
| 2.745438 | 23.20 | 35.72 | -22.80 | -20.28 | 46.00 | 56.00 | 9.76 |
| 9.813874 | 27.47 | 34.75 | -22.53 | -25.25 | 50.00 | 60.00 | 9.79 |
| 10.77858 | 26.89 | 34.57 | -23.11 | -25.43 | 50.00 | 60.00 | 9.81 |
| 15.909644 | 24.13 | 31.56 | -25.87 | -28.44 | 50.00 | 60.00 | 9.97 |
| 27.799044 | 30.01 | 35.82 | -19.99 | -24.18 | 50.00 | 60.00 | 10.08 |

Figure 48: Plot of CE on AC port, line L2 for FCC Part 15 class B


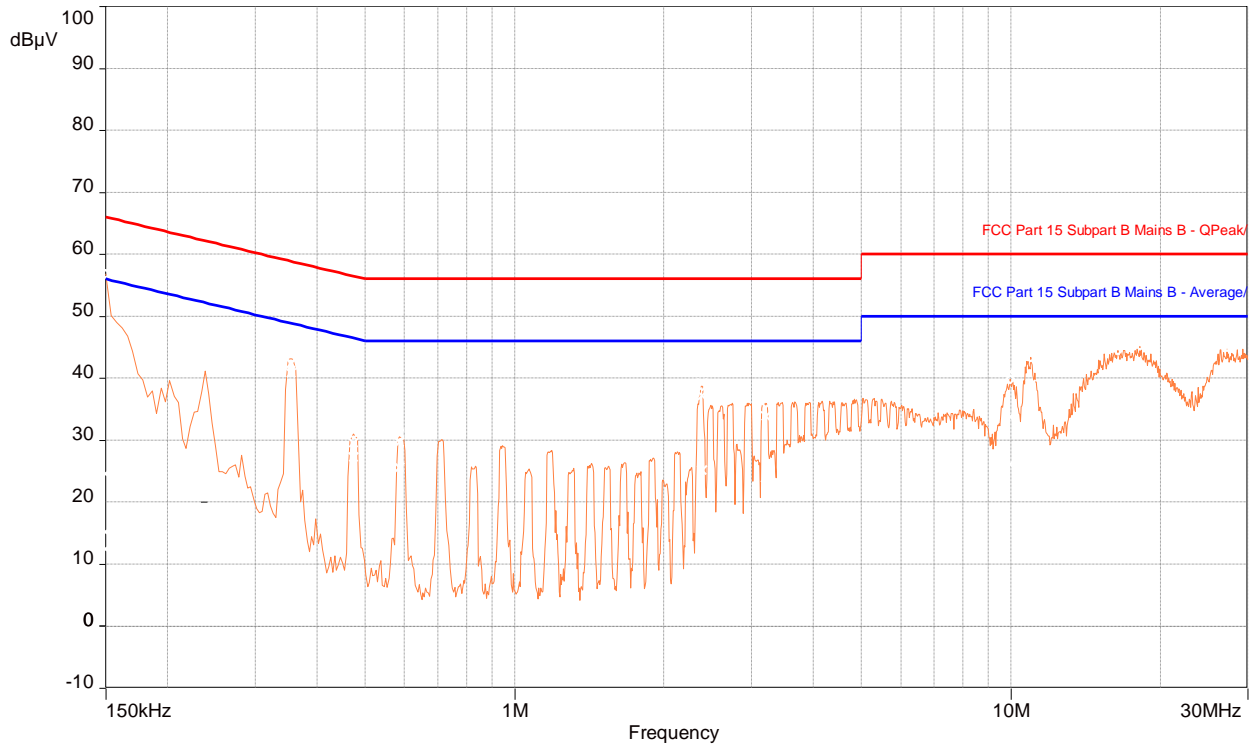


Table 63: CE test results on AC port, line L2 for FCC Part 15 class B

| Frequency (MHz) | Level Average (dBµV) | Level Quasi-peak (dBµV) | Margin to Average Class B (dB) | Margin to Quasi-peak Class B (dB) | Limit Average (dBµV) | Limit Quasi-peak (dBµV) | Correction (dB) |
|-----------------|----------------------|-------------------------|--------------------------------|-----------------------------------|----------------------|-------------------------|-----------------|
| 0.145788 | 12.45 | 15.24 | -43.55 | -50.76 | 56.00 | 66.00 | 9.81 |
| 0.355656 | 40.85 | 42.32 | -8.02 | -16.55 | 48.87 | 58.87 | 9.76 |
| 0.472182 | 27.22 | 29.56 | -19.22 | -26.88 | 46.44 | 56.44 | 9.76 |
| 0.587584 | 25.56 | 29.71 | -20.44 | -26.29 | 46.00 | 56.00 | 9.75 |
| 2.387048 | 25.09 | 37.20 | -20.91 | -18.80 | 46.00 | 56.00 | 9.75 |
| 3.210288 | 22.67 | 33.84 | -23.33 | -22.16 | 46.00 | 56.00 | 9.75 |
| 9.972448 | 26.12 | 33.76 | -23.88 | -26.24 | 50.00 | 60.00 | 9.78 |
| 10.968038 | 32.77 | 38.92 | -17.23 | -21.08 | 50.00 | 60.00 | 9.81 |
| 16.453568 | 31.65 | 38.67 | -18.35 | -21.33 | 50.00 | 60.00 | 9.96 |
| 18.220542 | 31.47 | 37.73 | -18.53 | -22.27 | 50.00 | 60.00 | 9.97 |
| 27.2602 | 32.14 | 37.87 | -17.86 | -22.13 | 50.00 | 60.00 | 10.15 |

Figure 49: Setup for CE tests on AC power cables

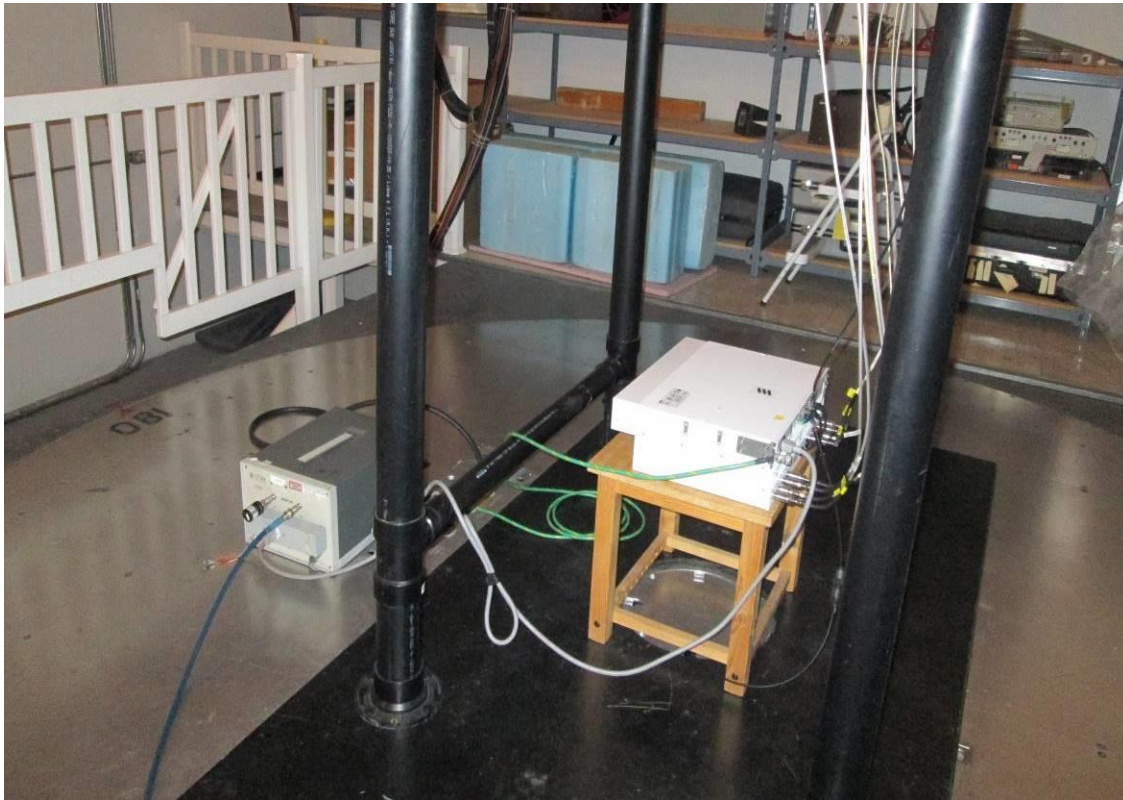

3.3.6 Test equipment

The equipment used for CE testing was as follows.

Table 64: Test equipment used for CE on AC power leads

| Description | Make | Model number | Asset ID | Calibr. date | Calibr. due |
|--------------------------------------|-----------------|--------------|-----------|--------------|--------------|
| EMC Automation Software | Nexio V3.18 | BAT-EMC | F0163649 | Not required | Not required |
| Coaxial Cable | Huber & Suhner | 104PEA | SSG013080 | 2020-01-06 | 2021-01-06 |
| Transient Limiter | Hewlett Packard | 11947A | SSG012403 | 2020-01-08 | 2021-01-08 |
| Line Impedance Stabilization Network | Emco | 3825/2 | SSG011780 | 2019-09-16 | 2020-09-16 |
| EMI Receiver | Rohde & Schwarz | ESCI | SSG013727 | 2019-09-12 | 2020-09-12 |
| Termination | Narda | 374BNM | SSG012451 | 2019-10-02 | 2020-10-02 |

3.3.7 Test conclusion

The LPRU 4410 B5B13 has passed the Conducted Emissions (CE) test on AC power leads with respect to class B limit of FCC Part 15 Subpart B, and ICES-003.

4. References

The documents, regulations, and standards that are referenced throughout this test report are listed alphabetically as follows.

1. ANSI C63.2-2009, American National Standards Institute for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications.
2. ANSI C63.4-2014, American National Standards Institute for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
3. CISPR 16 Publications (all parts and sections), Specification for Radio Disturbance and Immunity Measuring Apparatus and Methods - Part 1: Radio Disturbance and Immunity Measuring Apparatus.
4. CISPR 22 (2008, +IS 1, + IS 2, + IS 3: 2012), Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.
5. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 2, U.S. Federal Communications Commission.
6. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 15 Radio Frequency Devices, U.S. Federal Communications Commission.
7. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 22 – Public Mobile Services, U.S. Federal Communications Commission.
8. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 27 Miscellaneous Wireless Communications Services, U.S. Federal Communications Commission.
9. ICES-003 Issue 6 (2016), Spectrum Management and Telecommunications, Interference-Causing Equipment Standard: Information Technology Equipment (ITE) – Limits and methods of measurement.

4.1 Appendix A: Abbreviations

The abbreviations of terms used in this document are as follows.

| Term | Definition |
|--------|--|
| A | 6 dB Coaxial Attenuator (Conducted Immunity) |
| AAN | Asymmetric Artificial Network (ISN) |
| AE | Auxiliary equipment |
| AFC | Ambient Free Chamber |
| ANSI | American National Standards Institute |
| AVG | Average detector |
| BiLog | Biconical Log-Periodic Hybrid antenna (a registered trademark of Schaffner-Chase EMC Limited, 1993) |
| CDN | Coupling-decoupling Network |
| CE | Conducted Emissions |
| CISPR | Comité International Spécial Perturbation Radioélectrique (International Special Committee on Radio Interference) |
| CSA | Canadian Standards Association |
| DN/P | Decoupling / Protection Network |
| EMC | Electromagnetic Compatibility |
| EMI | Electromagnetic Interference |
| ETSI | European Telecommunications Standards Institute |
| EUT | equipment under test |
| GND | Ground |
| HCP | Horizontal Coupling Plane |
| HME | Harmonics Measurement Equipment |
| HV | High Voltage |
| HVP | High Voltage Probe |
| h/w | hardware |
| IC | Industry Canada |
| ICES | Canadian Specification: ICES-003, Issue 3, "Spectrum Management: Interference-causing equipment standard (Digital Apparatus) |
| IEC | International Electro Technical Association |
| ISN | Impedance Stabilization Network |
| LISN | Line Impedance Stabilization Network |
| ms | millisecond, unless otherwise specified |
| NA, na | not applicable |



| Term | Definition |
|-------------|---|
| PA | Broadband Power Amplifier |
| PK | Peak Detector |
| PS | Power Supply |
| QP | Quasi-peak Detector |
| QPA | Quasi-peak Adapter (for the Spectrum Analyzer) |
| R | 100-ohm Injection Resistor (Conducted Immunity) |
| RBW | Resolution Bandwidth |
| RE | Radiated Emissions |
| RF | Radio-Frequency |
| RI | Radiated Immunity |
| RMS | Root-mean-square |
| s/w | software |
| SA | Spectrum Analyzer, the CISPR 16, ANSI C63.2 Compliant EMI meter |
| STP | Shielded Twisted Pair |
| T | 50-ohm Coaxial Termination (Conducted Emissions / Immunity) |
| TL | Transient Limiter |
| UFA | Uniform field Area |
| VBW | Video Bandwidth |



TÜV SÜD Canada Inc

EMC Test Report

End of Document