



Product Service

Choose certainty.  
Add value.



# Report On

FCC and IC Testing of the  
Ericsson AB (1900 MHz) RBS 6501 B25 KRD 901 125/x\* Radio Base  
Station In accordance with FCC CFR 47 Part 24 and Industry Canada  
RSS-133: Issue 6

See Note\* in page 3

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRD901125

IC ID: 287AB-AS901125

PREPARED BY

Guangdi Dong  
Project Engineer

APPROVED BY

Simon Bennett  
Authorised Signatory

DATED

16 April 2014

Document 75926232 Report 01 Issue 1

April 2014

## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT INFORMATION ..... 2</b>
1.1	Report Details ..... 3
1.2	Brief Summary of Results ..... 4
1.3	Configuration Description ..... 5
1.4	Declaration of Build Status ..... 6
1.5	Product Information ..... 7
1.6	Test Setup ..... 8
1.7	Test Conditions ..... 10
1.8	Deviation From The Standard ..... 10
1.9	Modification Record ..... 10
1.10	Alternative Test Site ..... 10
<b>2</b>	<b>TEST DETAILS ..... 11</b>
2.1	Maximum Peak Output Power and Peak to Average Ratio - Conducted ..... 12
2.2	Maximum PEak Output Power - Radiated ..... 19
2.3	Occupied Bandwidth ..... 22
2.4	Spurious Emission at Band Edge ..... 55
2.5	Radiated Spurious Emissions ..... 78
2.6	Conducted Spurious Emissions ..... 84
2.7	Frequency Stability ..... 111
<b>3</b>	<b>TEST EQUIPMENT USED ..... 113</b>
3.1	Test Equipment Used ..... 114
3.2	Measurement Uncertainty ..... 116
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 117</b>
4.1	Accreditation, Disclaimers and Copyright ..... 118



Product Service

## SECTION 1

### REPORT INFORMATION

## 1.1 REPORT DETAILS

Manufacturer	Ericsson AB
Address	Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden
Product Name	RBS 6501 B25
Product Number	KRD 901 125/x*
IC Model Number	AS901125x*
Serial Number(s)	CB4T018461 CB4S878468
Software Version	CXP 102 051/19 Rev R37AL
Hardware Version	R1A
Test Specification/Issue/Date	FCC CFR 47 Part 24: 2013 Industry Canada RSS-133 Issue 6: 2013
Start of Test	17 March 2014
Finish of Test	10 April 2014
Name of Engineer(s)	Guangdi Dong
Related Document(s)	ANSI C63.4: 2009 ANSI/TIA/EIA-603-C: 2004 FCC CFR 47 Part 2: 2013 Industry Canada RSS-GEN Issue 3: 2010

Note\*: X can be 1 to 4.

RBS 6501 B25 is available in the following four variants with the listed product numbers and IC Model Numbers. The differences between them are as follows:

Product Number	IC Model Number	Description
KRD 901 125/1	AS9011251	100 - 250 VAC power feed with integrated antenna
KRD 901 125/2	AS9011252	-48 VDC power feed with integrated antenna
KRD 901 125/3	AS9011253	100 - 250 VAC power feed without integrated antenna
KRD 901 125/4	AS9011254	-48 VDC power feed without integrated antenna

## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, Part 24 and Industry Canada RSS-133 is shown below.

Section	Spec Clause			Test Description	Result
	Part 2	Part 24	RSS 133		
2.1	2.1046	24.232(b) 24.232(d)	6.4	Maximum Peak Output Power and Peak to Average Ratio – Conducted	Pass
2.2	-	24.232(b) 24.232(d)	6.4	Maximum Peak Output Power – Radiated	Pass
2.3	2.1049(h)	24.238(b)	RSS-Gen 4.6.1	Occupied Bandwidth	Pass
2.4	2.1051	24.238(b)	6.5.1	Spurious Emissions at Band Edge	Pass
2.5	2.1053	24.238(a)	6.5.1	Radiated Spurious Emissions	Pass
2.6	2.1051	24.238(a)	6.5.1	Conducted Spurious Emissions	Pass
2.7	2.1055	24.235	6.3	Frequency Stability	Pass
-	-	-	6.6	Receiver Spurious Emissions	N/A

N/A – Not Applicable


### 1.3 CONFIGURATION DESCRIPTION

Configuration Code	Carrier(s)	Configuration Description
L-MIMO-SC	1C	LTE MIMO, Single Carrier
L-MIMO-MC 1	2C	LTE MIMO, Multi Carrier x2

1.4 DECLARATION OF BUILD STATUS

<b>MAIN EUT</b>	
<b>MANUFACTURING DESCRIPTION</b>	Radio Base Station
<b>MANUFACTURER</b>	Ericsson AB
<b>PRODUCT NAME</b>	RBS 6501 B25
<b>PRODUCT NUMBER</b>	KRD 901 125/1 KRD 901 125/2 KRD 901 125/3 KRD 901 125/4
<b>IC MODLE NUMBER</b>	AS9011251 AS9011252 AS9011253 AS9011254
<b>TRANSMITTER OPERATING RANGE</b>	TX: 1930MHz - 1995MHz RX: 1850MHz - 1915MHz
<b>MODULATIONS</b>	QPSK, 16QAM, 64QAM
<b>INTERMEDIATE FREQUENCIES</b>	-
<b>ITU DESIGNATION OF EMISSION</b>	1M40F9W, 3M00F9W, 5M00F9W, 10M0F9W, 15M0F9W, 20M0F9W
<b>SUPPORTED CHANNEL BANDWIDTH CONFIGURATION</b>	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz
<b>OUTPUT POWER (RMS) (W or dBm)</b>	Single Antenna: 37dBm (5W) MIMO: 2 x 37dBm (2 x 5W)
<b>ANTENNA GAIN</b>	Internal antenna KRE 101 2141/1: >5dBi Semi-integrated Omni antenna KRE 101 2233/1: 2dBi
<b>NUMBER OF CARRIERS</b>	Maximum 2 carriers
<b>INSTANTANEOUS BANDWIDTH</b>	25MHz
<b>FCC ID</b>	TA8AKRD901125
<b>IC ID</b>	287AB-AS901125
<b>AC POWER SOURCE</b>	100-250 V AC
<b>DC POWER SOURCE</b>	-48V DC
<b>TECHNICAL DESCRIPTION (a brief description of the intended use and operation)</b>	The equipment is a LTE Radio Base Station

Signature



Date

10 April 2014

D of B S Serial No

75926232/01

No responsibility will be accepted by TÜV SÜD Product Service as to the accuracy of the information declared in this document by the manufacturer.

## 1.5 PRODUCT INFORMATION

### 1.5.1 Technical Description

The Equipment Under Test (EUT) RBS 6501 B25 KRD 901 125/x is an Ericsson Radio Base Station working in the public mobile service 1800MHz/1900MHz band which provides communication connections to 1800MHz/1900MHz network in LTE Modes. The RBS 6501 B25 Radio Base Station supports 100 - 250 VAC and -48 VDC power supply.

The RBS 6501 B25 KRD 901 125/x Radio Base Station is likely to use integrated wide Sector antenna or Semi-integrated Omni antenna.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.




Equipment Under Test



1.6 TEST SETUP

Test Setup, Conducted Measurement:

Configuration setup:

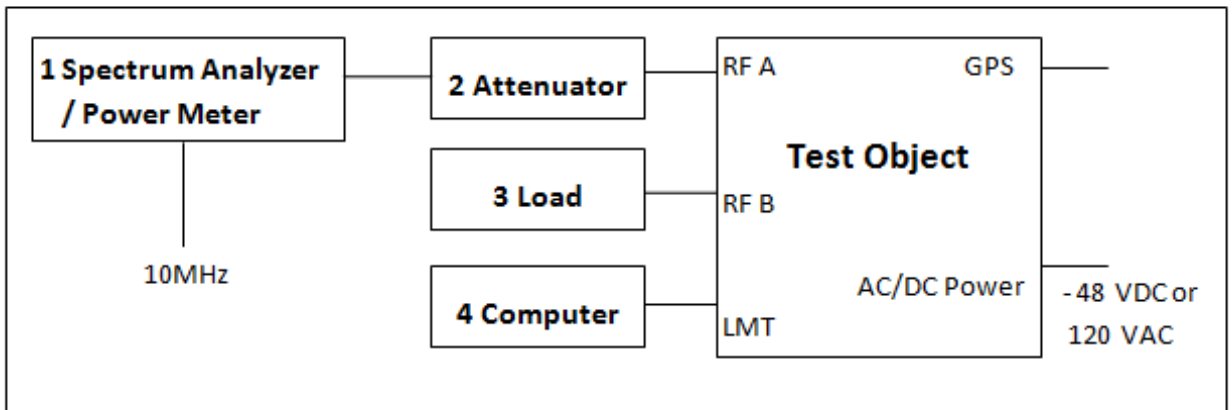


Product Name	Product Number	Version	Serial Number
RBS 6501 B25	KRD 901 125/2	R1A	CB4T018461
RBS 6501 B25	KRD 901 125/3	R1A	CB4S878468

No.	Auxiliary Equipment	Part Number / Model Type	Version	Serial Number
1	Spectrum Analyzer	FSQ26	--	100253
	Power Meter	NRP	--	101593
	Power Sensor	NRP-Z51	--	102309
2	Attenuator	48-40-43-LIM	--	BR5020
3	Load	TFE100	--	09121647
4	Computer	Advantech-610H	--	ETD/L913

**Test Setup, Radiated Measurement:**

**Configuration setup:**

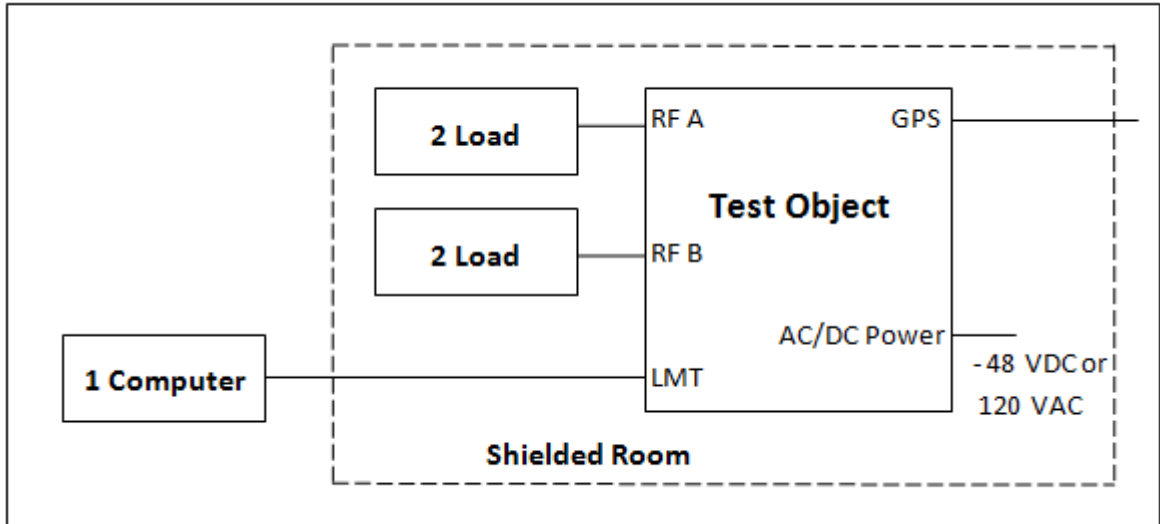

Product Name	Product Number	Version	Serial Number
RBS 6501 B25	KRD 901 125/2	R1A	CB4T018461

No.	Auxiliary Equipment	Part Number / Model Type	Version	Serial Number
1	Computer	Advantech-610H	--	ETD/L913
2	Load	TFE100	--	09121647
	Load	TFZ10-3R	--	20100908079

## 1.7 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or a chamber as appropriate.

All test cases were tested with the EUT supplied with -48V DC by an external power supply. Frequency stability measurements were tested using both -48V DC and 120V AC.

## 1.8 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

## 1.9 MODIFICATION RECORD

Modification State 0 - No modifications were made to the EUT during testing.

## 1.10 ALTERNATIVE TEST SITE

Under our group UKAS Accreditation, TÜV SÜD Product Service conducted the following tests at Ericsson in Beijing, China:

- Maximum Peak Output Power and Peak to Average Ratio – Conducted
- Occupied Bandwidth
- Band Edge
- Conducted Spurious Emissions
- Frequency Stability

Radiated Spurious Emissions and Maximum Peak Output Power-Radiated testing have been performed under the following site registrations:

FCC Accreditation 910917:

The State Radio Monitoring Centre, No.80 Beilishi Road, Xicheng District, Beijing, China.

Industry Canada Accreditation 7308A-1:

The State Radio Monitoring Centre, No.80 Beilishi Road, Xicheng District, Beijing, China.



Product Service

## **SECTION 2**

### **TEST DETAILS**

## **2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1046  
FCC CFR 47 Part 24, Clause 24.232 (b)(d)  
Industry Canada RSS-133, Clause 6.4

### **2.1.2 Equipment Under Test**

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461

### **2.1.3 Date of Test and Modification State**

17 and 18 March 2014 - Modification State 0

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Environmental Conditions**

Ambient Temperature	22.5 - 23.5°C
Relative Humidity	25.0 - 26.5%

### **2.1.6 Test Method**

The path loss between the EUT and the power sensor was measured and recorded for the test band. The path loss was entered as an offset into the Power Meter and Spectrum Analyzer. The EUT was configured to transmit on Maximum Power on the configurations defined in the tables below. Using a power meter and attenuator(s), the output power of the EUT was measured at the antenna terminal. A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF), measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in given bandwidth. A resolution bandwidth of 50MHz was used. The Average Power and Peak to Average Ratio was measured and recorded with the results being compared with the limits. In the case of MIMO devices, the power was measured from each antenna port and the results summed in accordance with FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 2.1.7 Test Results

Configuration L-MIMO-SC

Maximum Output Power 37.0dBm per carrier

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1930.7MHz		Channel Position M 1962.5MHz		Channel Position T 1994.3MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 1.4 MHz	36.67	6.99	37.04	7.00	36.97	6.99
B		36.64	7.07	37.00	6.84	37.07	7.06
Total		39.67	-	40.03	-	40.03	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1931.5MHz		Channel Position M 1962.5MHz		Channel Position T 1993.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 3.0 MHz	36.87	6.90	37.13	6.84	37.17	6.82
B		36.82	6.89	37.07	6.81	37.19	6.90
Total		39.86	-	40.11	-	40.19	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1932.5MHz		Channel Position M 1962.5MHz		Channel Position T 1992.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 5.0 MHz	37.03	7.02	37.15	6.83	37.18	6.92
B		36.94	7.08	37.08	6.87	37.25	7.00
Total		40.00	-	40.13	-	40.23	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1935.0MHz		Channel Position M 1962.5MHz		Channel Position T 1990.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 10.0 MHz	37.11	7.33	37.14	6.84	37.14	7.12
B		37.05	7.30	37.08	6.86	37.23	7.10
Total		40.09	-	40.12	-	40.19	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1937.5MHz		Channel Position M 1962.5MHz		Channel Position T 1987.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 15.0 MHz	37.11	7.59	37.12	6.92	37.08	7.28
B		37.09	7.61	37.07	6.91	37.11	7.32
Total		40.11	-	40.10	-	40.10	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1940.0MHz		Channel Position M 1962.5MHz		Channel Position T 1985.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 20.0 MHz	37.10	7.68	37.09	6.92	36.99	7.41
B		37.08	7.69	37.05	6.95	36.96	7.43
Total		40.10	-	40.08	-	39.98	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1930.7MHz		Channel Position M 1962.5MHz		Channel Position T 1994.3MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 1.4 MHz	36.66	6.82	37.01	7.08	36.95	6.95
B		36.65	7.11	36.99	7.05	37.05	6.97
Total		39.66	-	40.01	-	40.01	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1931.5MHz		Channel Position M 1962.5MHz		Channel Position T 1993.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 3.0 MHz	36.85	6.84	37.10	6.90	37.13	6.80
B		36.81	6.96	37.05	6.84	37.17	6.85
Total		39.84	-	40.08	-	40.16	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1932.5MHz		Channel Position M 1962.5MHz		Channel Position T 1992.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 5.0 MHz	36.97	6.87	37.09	6.76	37.11	6.94
B		36.89	7.00	37.03	6.98	37.18	7.03
Total		39.94	-	40.07	-	40.15	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1935.0MHz		Channel Position M 1962.5MHz		Channel Position T 1990.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 10.0 MHz	37.07	7.28	37.10	6.86	37.09	7.23
B		37.02	7.28	37.04	6.80	37.19	7.12
Total		40.05	-	40.08	-	40.15	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1937.5MHz		Channel Position M 1962.5MHz		Channel Position T 1987.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 15.0 MHz	37.09	7.67	37.10	6.92	37.07	7.22
B		37.04	7.66	37.03	6.97	37.08	7.32
Total		40.07	-	40.07	-	40.08	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1940.0MHz		Channel Position M 1962.5MHz		Channel Position T 1985.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 20.0 MHz	37.07	7.77	37.08	6.92	36.96	7.60
B		37.06	7.67	37.03	6.96	36.94	7.51
Total		40.07	-	40.06	-	39.96	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1930.7MHz		Channel Position M 1962.5MHz		Channel Position T 1994.3MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 1.4 MHz	36.62	6.92	36.99	6.85	36.92	7.07
B		36.64	6.90	36.98	7.19	37.05	6.98
Total		39.64	-	39.99	-	39.99	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1931.5MHz		Channel Position M 1962.5MHz		Channel Position T 1993.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 3.0 MHz	36.86	6.87	37.12	6.86	37.15	6.87
B		36.83	6.88	37.08	6.80	37.21	6.86
Total		39.85	-	40.11	-	40.19	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1932.5MHz		Channel Position M 1962.5MHz		Channel Position T 1992.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 5.0 MHz	37.00	7.01	37.13	6.82	37.17	6.83
B		36.97	6.99	37.12	6.73	37.27	6.89
Total		39.99	-	40.13	-	40.23	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1935.0MHz		Channel Position M 1962.5MHz		Channel Position T 1990.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 10.0 MHz	37.09	7.25	37.13	6.90	37.15	7.04
B		37.04	7.29	37.08	6.84	37.23	7.10
Total		40.07	-	40.11	-	40.20	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1937.5MHz		Channel Position M 1962.5MHz		Channel Position T 1987.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 15.0 MHz	37.10	7.66	37.11	6.96	37.05	7.34
B		37.08	7.55	37.07	6.92	37.10	7.23
Total		40.10	-	40.10	-	40.08	-



Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1940.0MHz		Channel Position M 1962.5MHz		Channel Position T 1985.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 20.0 MHz	37.09	7.82	37.10	6.99	36.99	7.49
B		37.09	7.89	37.05	6.95	36.97	7.41
Total		40.10	-	40.08	-	39.99	-

Configuration L-MIMO-MC 1 (2C)

Maximum Output Power 34.0dBm per carrier

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1930.7MHz +1954.3MHz		Channel Position M 1950.7MHz+1974.3MHz		Channel Position T 1970.7MHz+1994.3MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 1.4 MHz	36.71	-	37.00	-	36.76	-
B		36.71	-	36.91	-	36.63	-
Total		39.72	-	39.96	-	39.70	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1931.5MHz +1953.5MHz		Channel Position M 1951.5MHz+1973.5MHz		Channel Position T 1971.5MHz+1993.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 3.0 MHz	36.86	-	37.08	-	36.90	-
B		36.84	-	37.00	-	36.76	-
Total		39.86	-	40.05	-	39.84	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1932.5MHz +1952.5MHz		Channel Position M 1952.5MHz+1972.5MHz		Channel Position T 1972.5MHz+1992.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 5.0 MHz	36.95	-	37.11	-	36.95	-
B		36.91	-	37.01	-	36.82	-
Total		39.94	-	40.07	-	39.89	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1935.0MHz +1950.0MHz		Channel Position M 1955.0MHz+1970.0MHz		Channel Position T 1975.0MHz+1990.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	QPSK / 10.0 MHz	37.04	-	37.13	-	37.01	-
B		37.00	-	37.04	-	36.96	-
Total		40.03	-	40.09	-	39.99	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1930.7MHz +1954.3MHz		Channel Position M 1950.7MHz+1974.3MHz		Channel Position T 1970.7MHz+1994.3MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 1.4 MHz	36.69	-	36.99	-	36.76	-
B		36.72	-	36.94	-	36.64	-
Total		39.71	-	39.97	-	39.71	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1931.5MHz +1953.5MHz		Channel Position M 1951.5MHz+1973.5MHz		Channel Position T 1971.5MHz+1993.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 3.0 MHz	36.84	-	37.05	-	36.87	-
B		36.82	-	36.98	-	36.73	-
Total		39.84	-	40.02	-	39.81	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1932.5MHz +1952.5MHz		Channel Position M 1952.5MHz+1972.5MHz		Channel Position T 1972.5MHz+1992.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 5.0 MHz	36.87	-	37.04	-	36.88	-
B		36.85	-	36.96	-	36.77	-
Total		39.87	-	40.01	-	39.83	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1935.0MHz +1950.0MHz		Channel Position M 1955.0MHz+1970.0MHz		Channel Position T 1975.0MHz+1990.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	16QAM / 10.0 MHz	37.00	-	37.09	-	36.96	-
B		36.96	-	37.00	-	36.91	-
Total		39.99	-	40.05	-	39.94	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1930.7MHz +1954.3MHz		Channel Position M 1950.7MHz+1974.3MHz		Channel Position T 1970.7MHz+1994.3MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 1.4 MHz	36.67	-	36.96	-	36.72	-
B		36.68	-	36.90	-	36.60	-
Total		39.68	-	39.94	-	39.67	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1931.5MHz +1953.5MHz		Channel Position M 1951.5MHz+1973.5MHz		Channel Position T 1971.5MHz+1993.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 3.0 MHz	36.85	-	37.06	-	36.90	-
B		36.84	-	36.99	-	36.76	-
Total		39.85	-	40.03	-	39.84	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1932.5MHz +1952.5MHz		Channel Position M 1952.5MHz+1972.5MHz		Channel Position T 1972.5MHz+1992.5MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 5.0 MHz	36.92	-	37.08	-	36.93	-
B		36.91	-	37.03	-	36.84	-
Total		39.92	-	40.06	-	39.89	-

Antenna	Modulation / Carrier Bandwidth (MHz)	Average Output Power / Peak to Average Ratio (PAR)					
		Channel Position B 1935.0MHz +1950.0MHz		Channel Position M 1955.0MHz+1970.0MHz		Channel Position T 1975.0MHz+1990.0MHz	
		Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)	Power (dBm)	PAR (dB)
A	64QAM / 10.0 MHz	37.03	-	37.12	-	36.99	-
B		37.00	-	37.05	-	36.95	-
Total		40.02	-	40.09	-	39.98	-
Limit							
Peak Power				FCC/IC: $\leq 1640$ W (e.i.r.p)/ MHz or 32.15 dBm IC: $\leq 100$ W or $\leq 50$ dBm			
Peak to Average Ratio				13 dB			

## **2.2 MAXIMUM PEAK OUTPUT POWER - RADIATED**

### **2.2.1 Specification Reference**

FCC CFR 47 Part 24, Clause 24.232 (b)(d)  
Industry Canada RSS-133, Clause 6.4

### **2.2.2 Equipment Under Test**

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461

### **2.2.3 Date of Test and Modification State**

01 and 02 April 2014 - Modification State 0

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Environmental Conditions**

Ambient Temperature	22.0 - 22.5°C
Relative Humidity	31.0 - 31.5%

### **2.2.6 Test Method**

The measurements were performed according to ANSI/TIA/EIA-603-C-2004.

The EUT was set to transmit at maximum power and testing was carried out on Bottom, Middle and Top Channels. The test of radiated emission was performed in a semi anechoic chamber. The measurements were performed with both horizontal and vertical polarizations of the antennas. The antenna distance was 3.0 m.

The fundamental was scanned with Peak detector with the antenna height was varied between 1-4 m and the turntable was rotated between 0-360 degrees for maximum response. The carrier power was measured with RMS detector activated with a RBW of 1MHz. The output power was verified with the substitution method. The antenna distance during the measurements was 3.0 m.

### 2.2.7 Test Results

Configuration L-MIMO-SC

Maximum Output Power 37.0dBm per carrier

Internal antenna KRE 101 2141/1, upright mounted

Bandwidth Configuration (MHz)	Channel Position B	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1930.7MHz	38.50/39.12	7.08/8.16

Bandwidth Configuration (MHz)	Channel Position M	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1962.5MHz	39.11/40.01	8.15/10.02

Bandwidth Configuration (MHz)	Channel Position T	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1994.3MHz	40.33/40.51	10.79/11.25
3	1993.5MHz	38.12/38.99	6.49/7.93
5	1992.5MHz	36.05/35.18	4.03/3.30
10	1990.0MHz	32.72/33.80	1.87/2.40
15	1987.5MHz	31.15/31.95	1.30/1.57
20	1985.0MHz	29.09/30.69	0.81/1.17

Internal antenna KRE 101 2141/1, side mounted

Bandwidth Configuration (MHz)	Channel Position B	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1930.7MHz	38.96/39.45	7.87/8.81

Bandwidth Configuration (MHz)	Channel Position M	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1962.5MHz	39.64/40.71	9.20/11.78

Bandwidth Configuration (MHz)	Channel Position T	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1994.3MHz	40.66/40.53	11.64/11.30

Semi-integrated Omni antenna KRE 101 2233/1, upright mounted

Bandwidth Configuration (MHz)	Channel Position B	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1930.7MHz	36.10/28.71	4.07/0.74

Bandwidth Configuration (MHz)	Channel Position B	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1962.5MHz	34.49/28.41	2.81/0.69

Bandwidth Configuration (MHz)	Channel Position M	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1994.3MHz	36.95/26.81	4.95/0.48
3	1993.5MHz	34.16/25.42	2.61/0.35
5	1992.5MHz	31.57/22.81	1.44/0.19
10	1990.0MHz	28.76/20.67	0.75/0.12
15	1987.5MHz	26.27/17.32	0.42/0.05
20	1985.0MHz	25.01/17.52	0.32/0.06

Semi-integrated Omni antenna KRE 101 2233/1, side mounted

Bandwidth Configuration (MHz)	Channel Position B	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1930.7MHz	36.67/24.01	4.65/0.25

Bandwidth Configuration (MHz)	Channel Position M	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1962.5MHz	36.11/27.13	4.08/0.52

Bandwidth Configuration (MHz)	Channel Position T	Vertical/Horizontal RMS power	
		dBm/MHz	W/MHz
1.4	1994.3MHz	38.01/24.89	6.32/0.31

Limit	
e.i.r.p.	FCC / IC: ≤ 1640 W / MHz

## **2.3 OCCUPIED BANDWIDTH**

### **2.3.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1049 (h)  
FCC CFR 47 Part 24, Clause 24.238(b)  
Industry Canada RSS-GEN, Clause 4.6.1

### **2.3.2 Equipment Under Test**

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461

### **2.3.3 Date of Test and Modification State**

18 March 2014 - Modification State 0

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Environmental Conditions**

Ambient Temperature	23.5°C
Relative Humidity	27.5%

### **2.3.6 Test Method**

The EUT was set to transmit at maximum power and testing was carried out on Bottom, Middle and Top Channels. Using the Occupied Bandwidth measurement function in the Spectrum Analyser, the Occupied Bandwidth is defined as the width of the signal between two points, one below the carrier centre frequency and one above the carrier centre frequency. For IC requirement, the 99% Occupied Bandwidth was measured. For FCC requirement, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26. The -26dBc Occupied Bandwidth was measured from each antenna port in accordance with FCC KDB 971168 D01 v02r01.

The results are shown in the plots below.

### 2.3.7 Test Results

Configuration L-MIMO-SC

Maximum Output Power 37.0dBm per carrier

99% Occupied Bandwidth for IC requirement

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1930.7MHz	Channel Position M 1962.5MHz	Channel Position T 1994.3MHz
QPSK / 1.4 MHz	1.09	1.09	1.09
16QAM / 1.4 MHz	1.09	1.09	1.09
64QAM / 1.4 MHz	1.09	1.09	1.09

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1931.5MHz	Channel Position M 1962.5MHz	Channel Position T 1993.5MHz
QPSK / 3.0 MHz	2.68	2.68	2.69

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1932.5MHz	Channel Position M 1962.5MHz	Channel Position T 1992.5MHz
QPSK / 5.0 MHz	4.47	4.47	4.47


Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1935.0MHz	Channel Position M 1962.5MHz	Channel Position T 1990.0MHz
QPSK / 10.0 MHz	8.94	8.94	8.94

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1937.5MHz	Channel Position M 1962.5MHz	Channel Position T 1987.5MHz
QPSK / 15.0 MHz	13.41	13.41	13.41

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1940.0MHz	Channel Position M 1962.5MHz	Channel Position T 1985.0MHz
QPSK / 20.0 MHz	17.88	17.88	17.88
16QAM / 20.0 MHz	17.88	17.88	17.88
64QAM / 20.0 MHz	17.88	17.88	17.88




Channel Position B - QPSK / Bandwidth 1.4 MHz

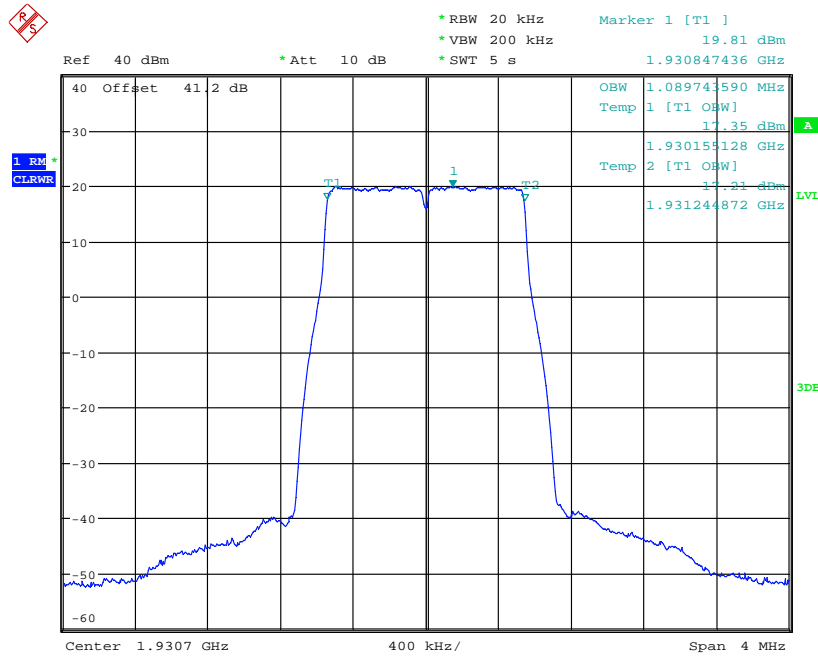


Date: 18.MAR.2014 08:30:08

Channel Position B - 16QAM / Bandwidth 1.4 MHz

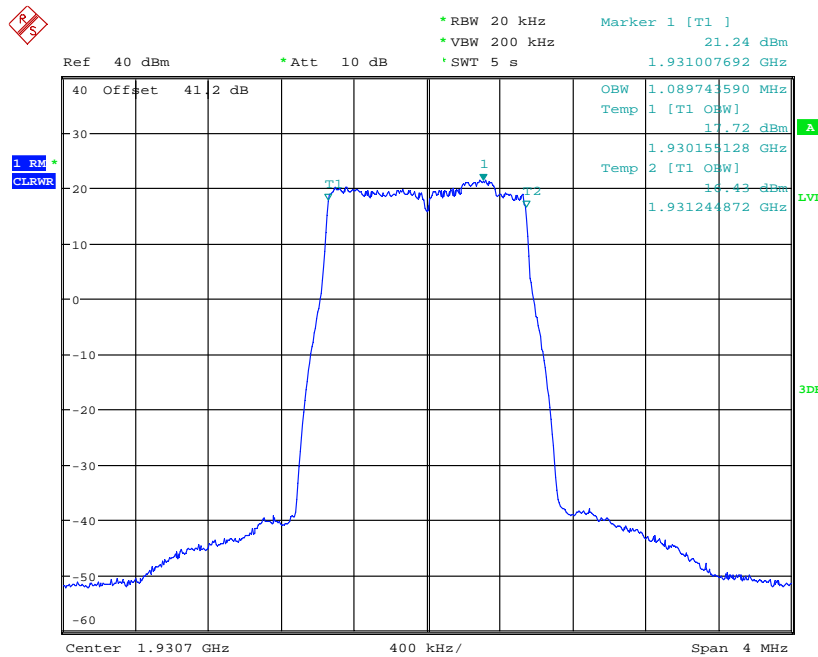


Date: 18.MAR.2014 08:33:50

**Channel Position B - 64QAM / Bandwidth 1.4 MHz**

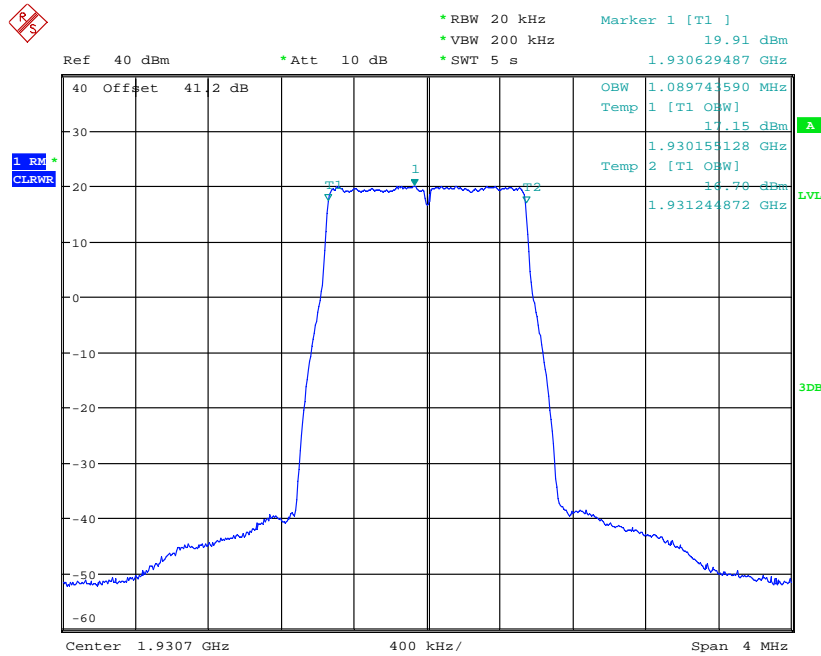


Date: 18.MAR.2014 08:37:02

**Channel Position B - QPSK / Bandwidth 3.0 MHz**

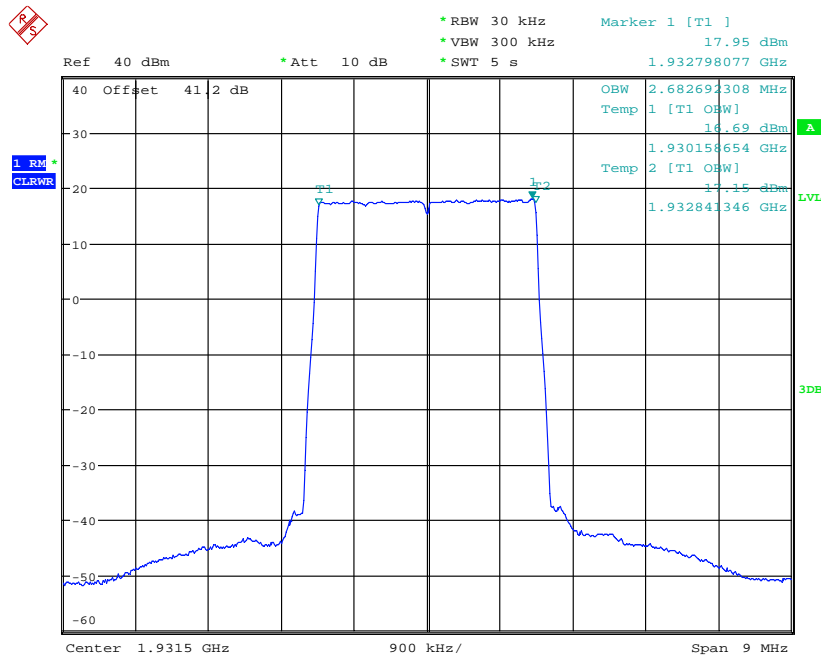


Date: 18.MAR.2014 09:45:54

Channel Position B - QPSK / Bandwidth 5.0 MHz

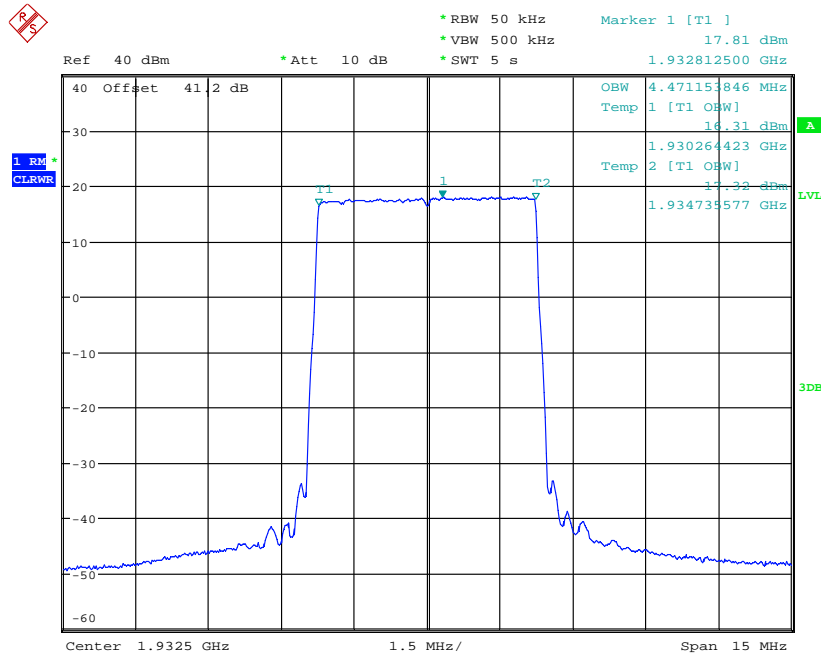


Date: 18.MAR.2014 13:05:52

Channel Position B - QPSK / Bandwidth 10.0 MHz

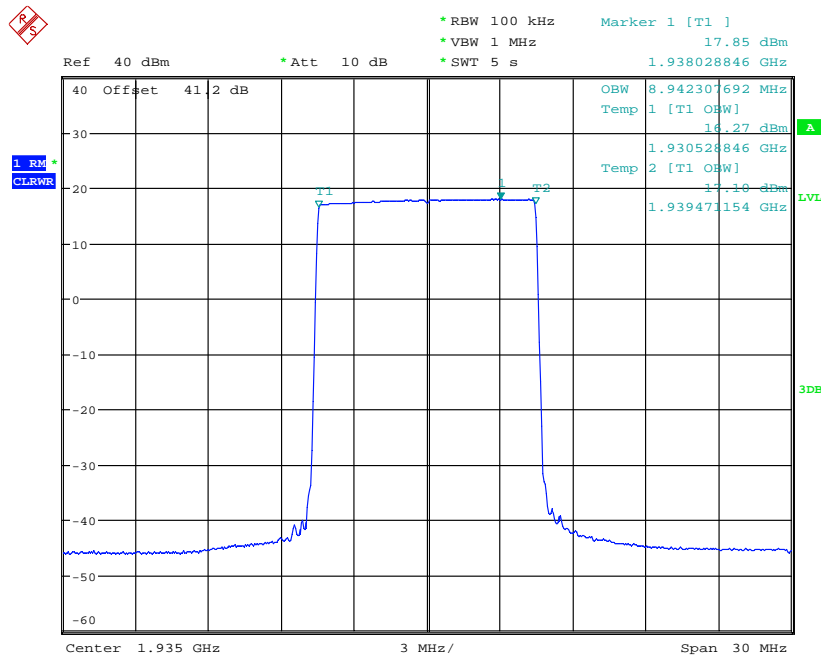


Date: 18.MAR.2014 13:40:34

### Channel Position B - QPSK / Bandwidth 15.0 MHz

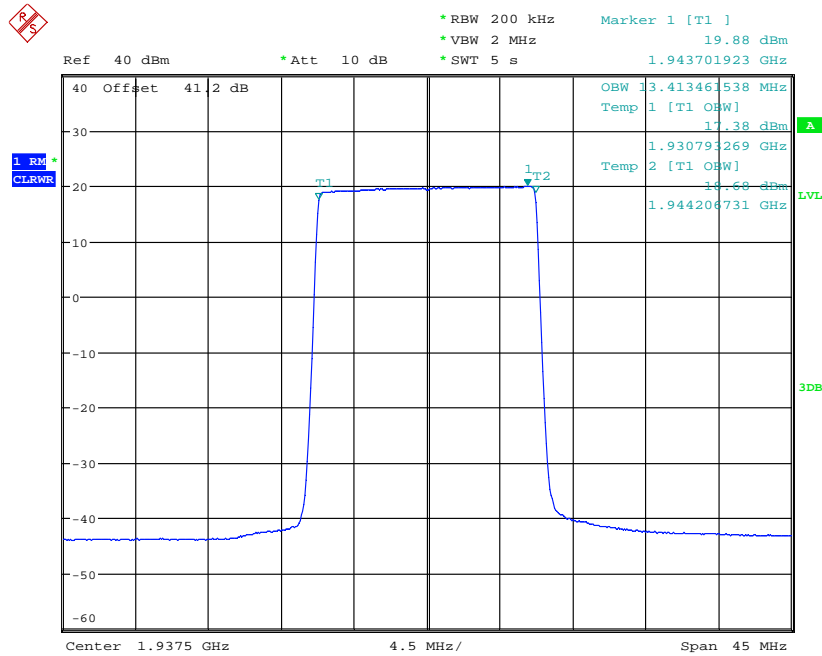


Date: 18.MAR.2014 14:15:46

### Channel Position B - QPSK / Bandwidth 20.0 MHz

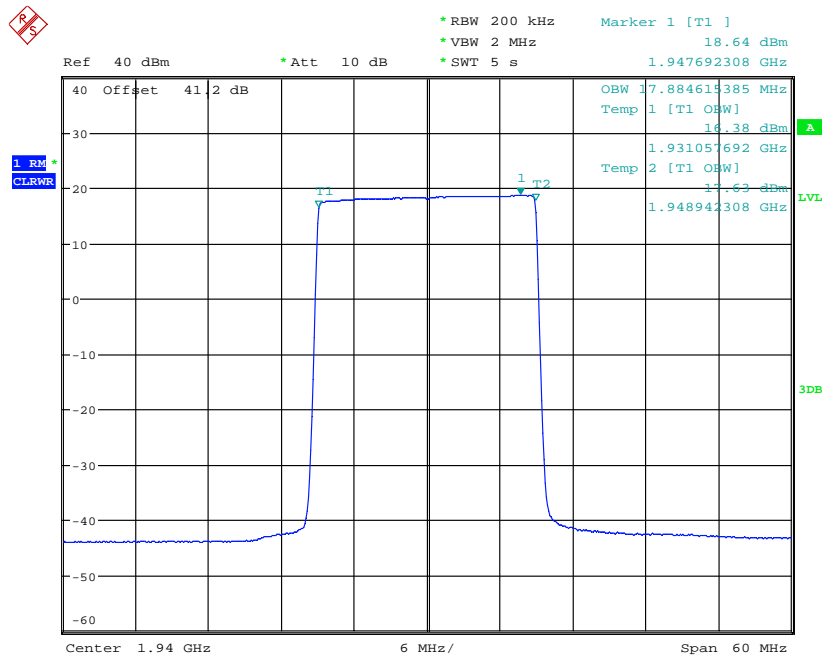


Date: 18.MAR.2014 14:57:12

**Channel Position B – 16QAM / Bandwidth 20.0 MHz**

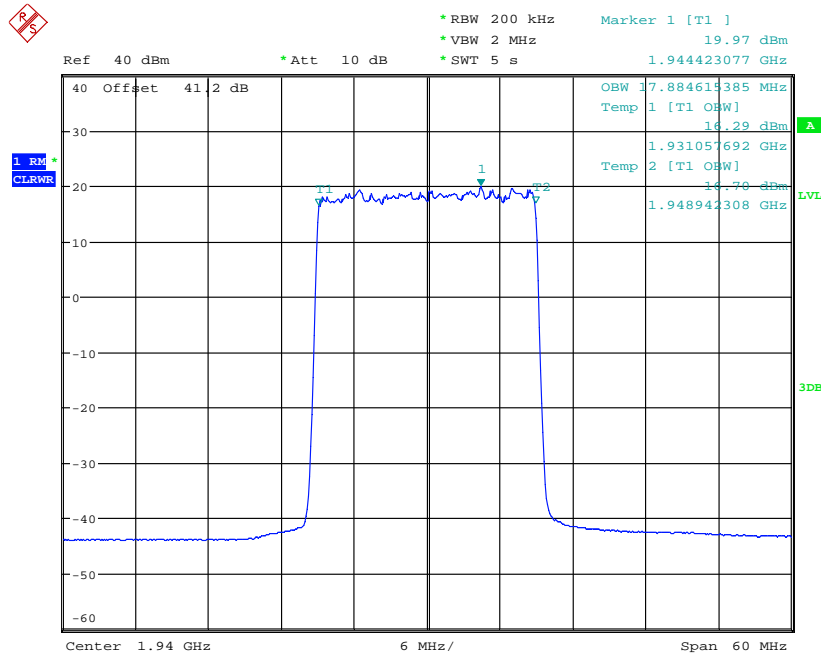


Date: 18.MAR.2014 15:00:03

**Channel Position B – 64QAM / Bandwidth 20.0 MHz**

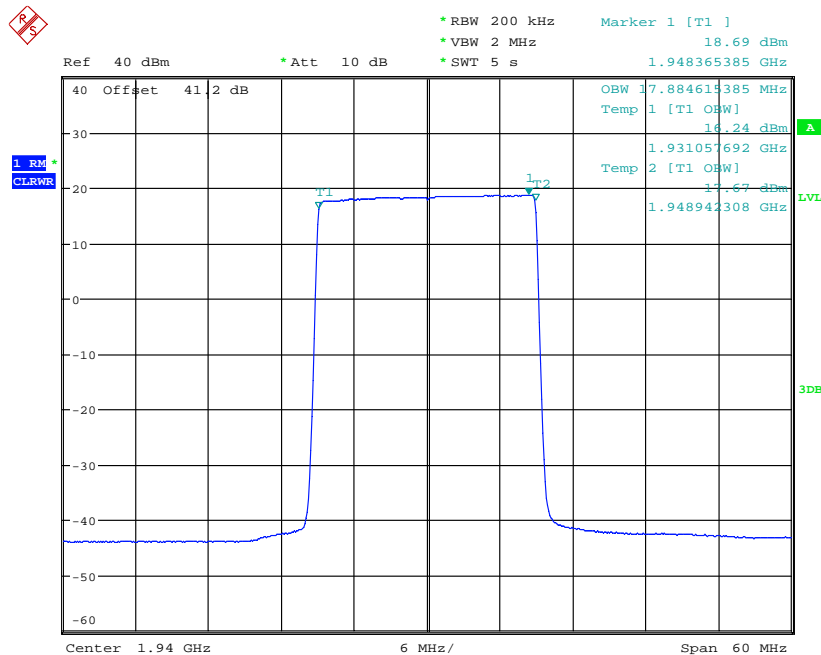


Date: 18.MAR.2014 15:03:20

Channel Position M - QPSK / Bandwidth 1.4 MHz

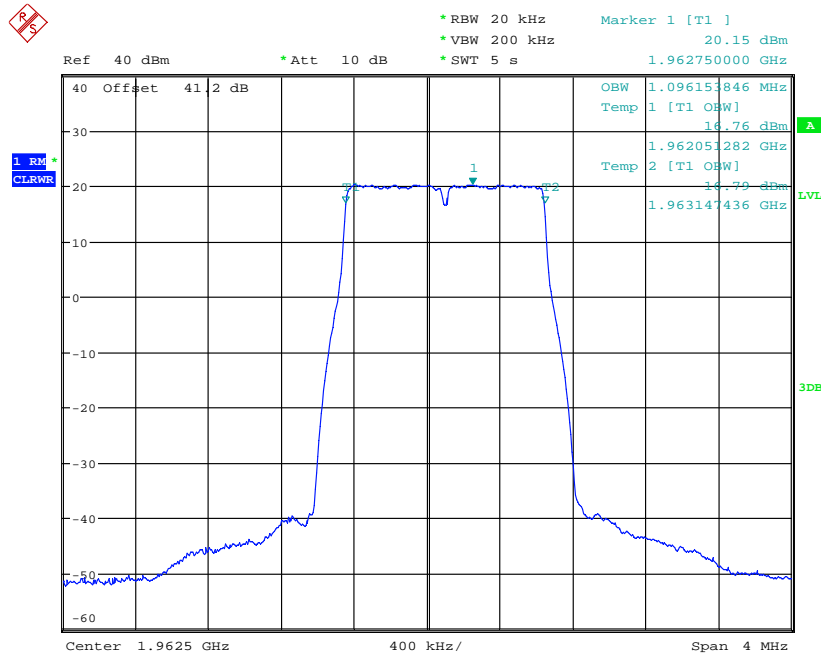


Date: 18.MAR.2014 08:44:27

Channel Position M - 16QAM / Bandwidth 1.4 MHz

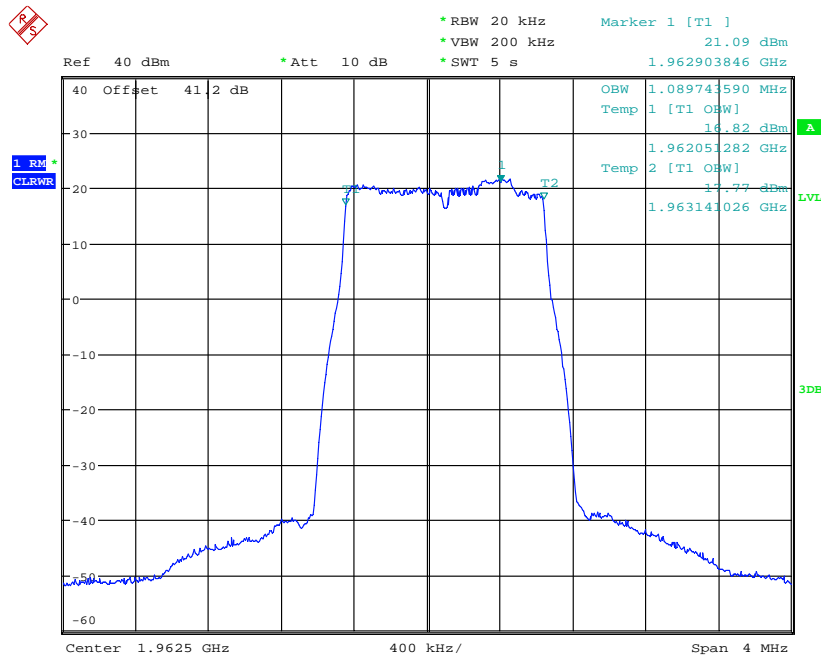


Date: 18.MAR.2014 08:48:52

Channel Position M - 64QAM / Bandwidth 1.4 MHz

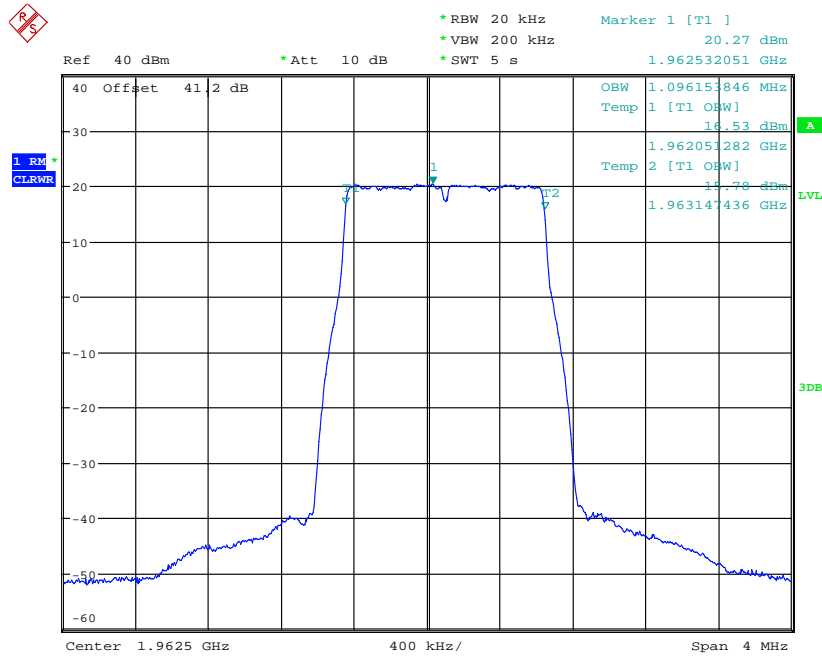


Date: 18.MAR.2014 08:49:55

Channel Position M - QPSK / Bandwidth 3.0 MHz

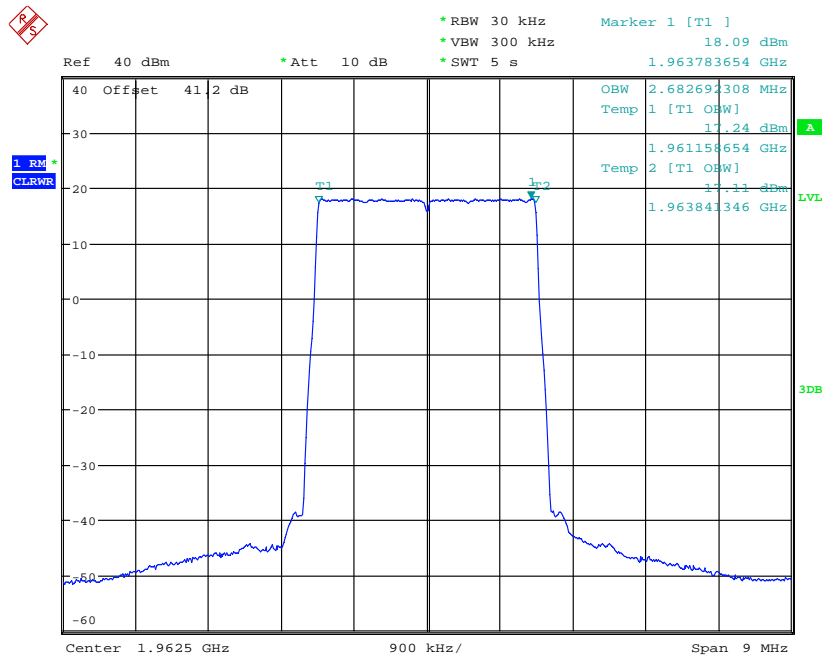


Date: 18.MAR.2014 12:12:02

Channel Position M - QPSK / Bandwidth 5.0 MHz

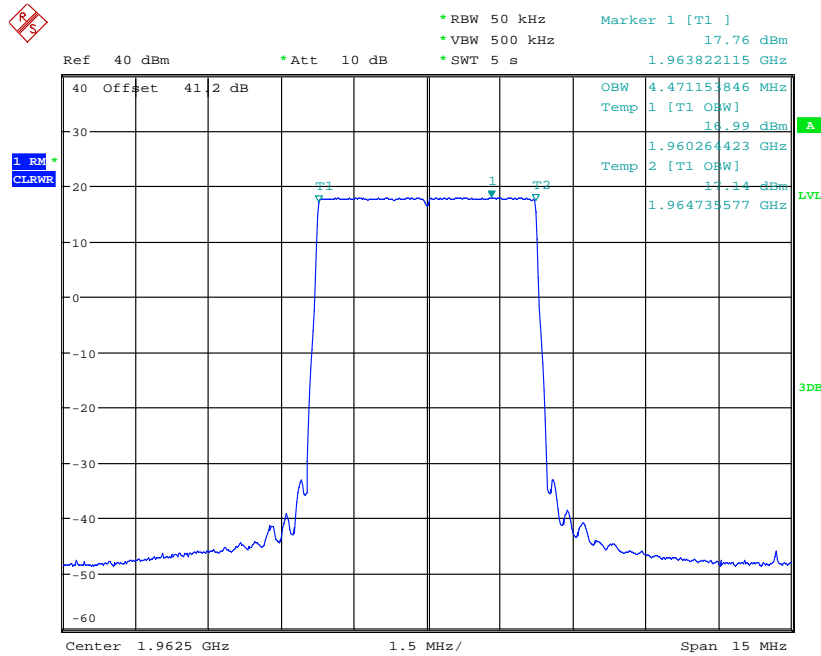

Date: 18.MAR.2014 13:07:56


Channel Position M - QPSK / Bandwidth 10.0 MHz

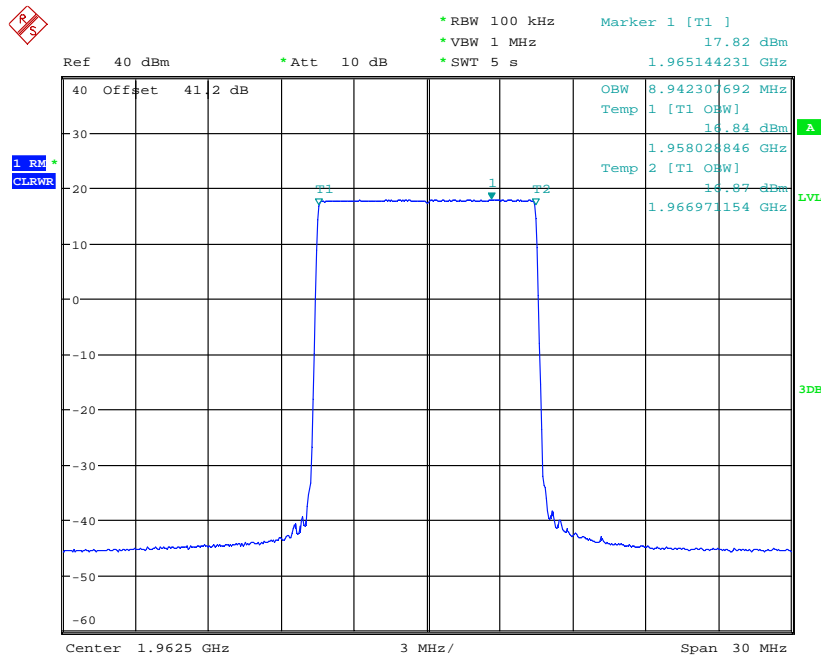

Date: 18.MAR.2014 13:49:29




Channel Position M - QPSK / Bandwidth 15.0 MHz

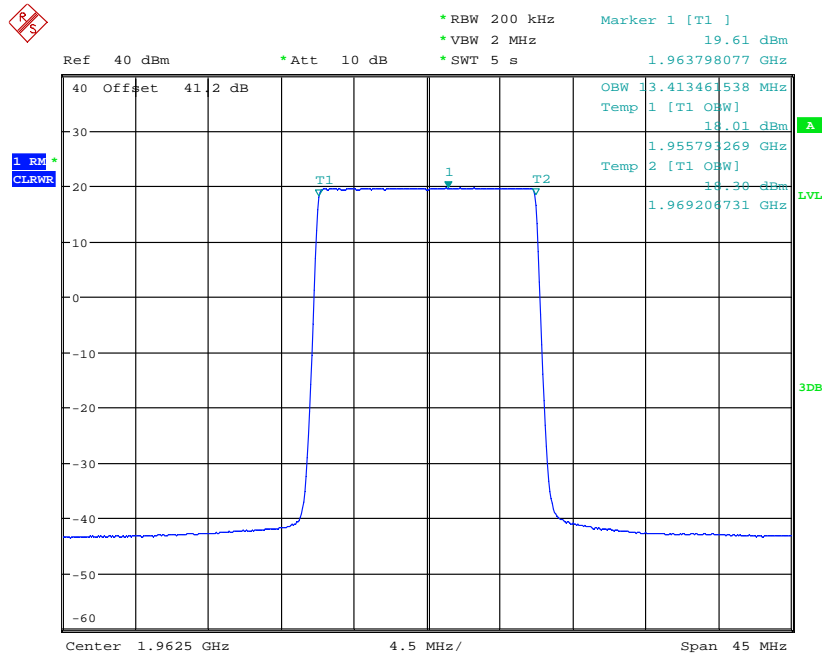


Date: 18.MAR.2014 14:37:35

Channel Position M - QPSK / Bandwidth 20.0 MHz

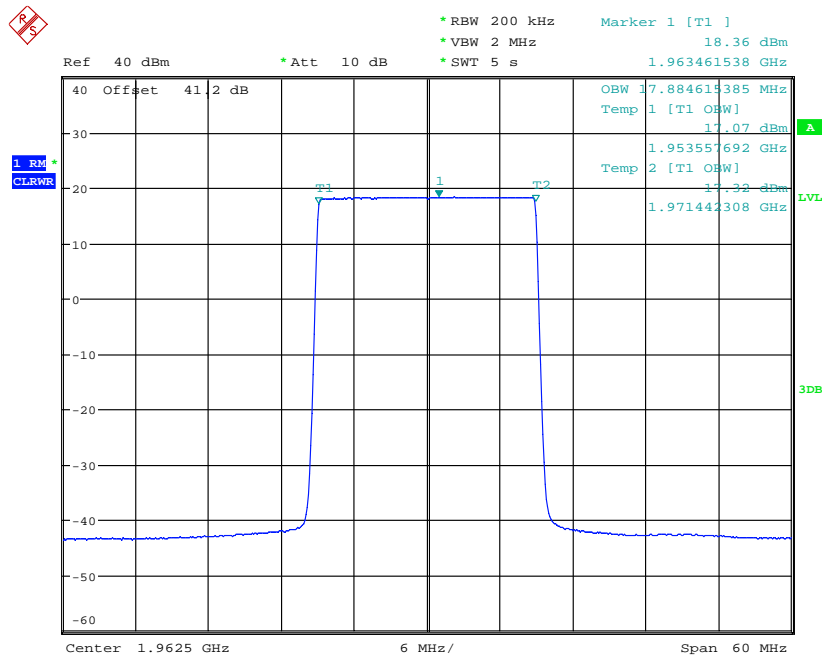


Date: 18.MAR.2014 15:08:50

**Channel Position M – 16QAM / Bandwidth 20.0 MHz**

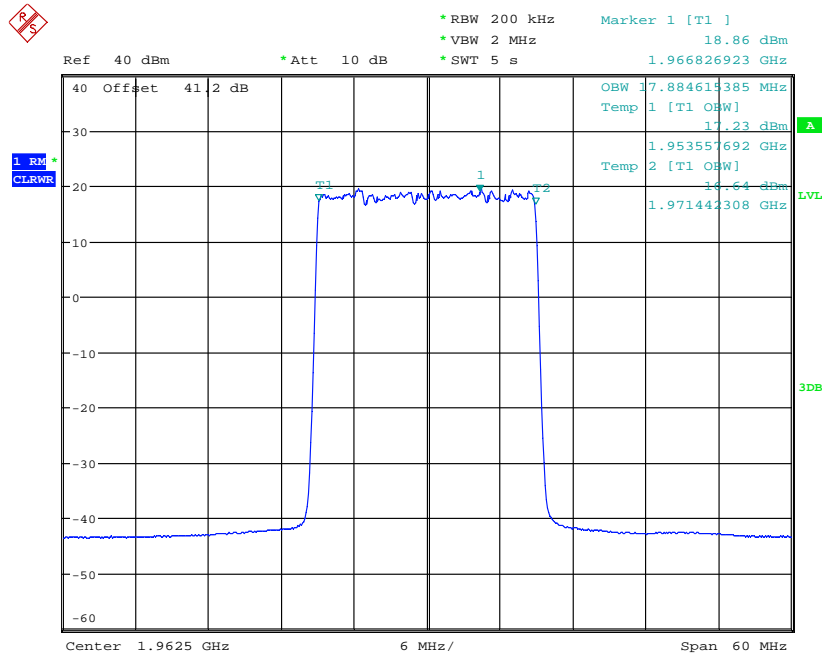


Date: 18.MAR.2014 15:12:20

**Channel Position M – 64QAM / Bandwidth 20.0 MHz**

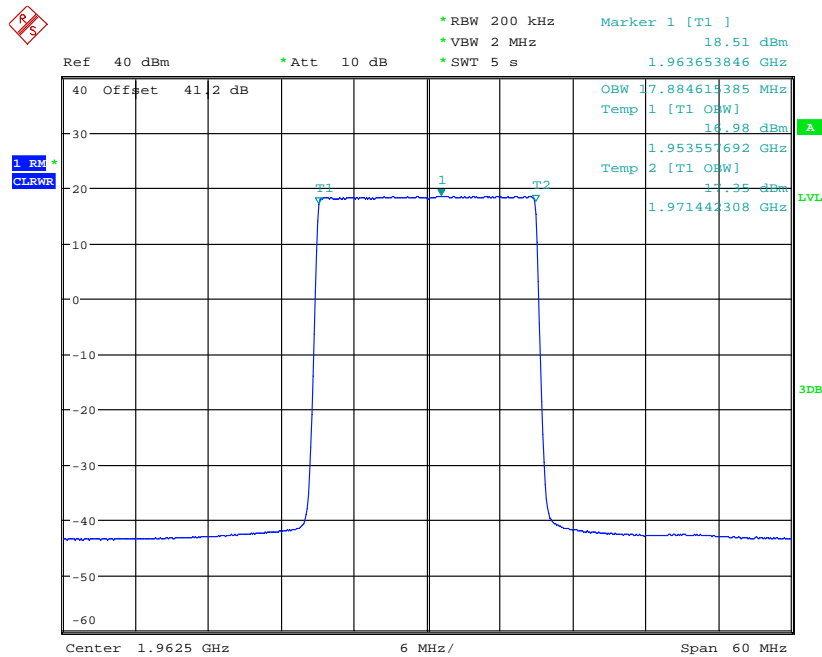


Date: 18.MAR.2014 15:14:09

**Channel Position T - QPSK / Bandwidth 1.4 MHz**

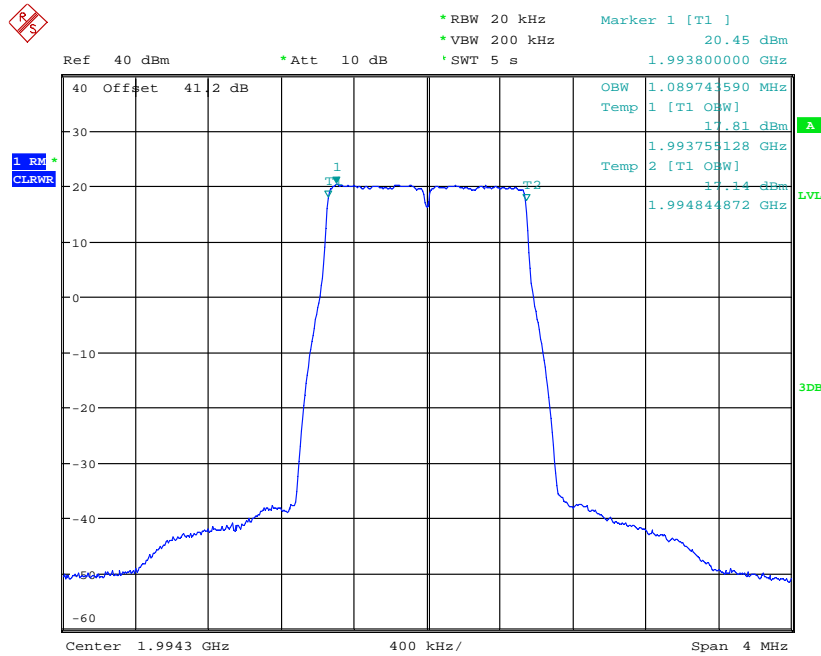


Date: 18.MAR.2014 09:25:00

**Channel Position T - 16QAM / Bandwidth 1.4 MHz**

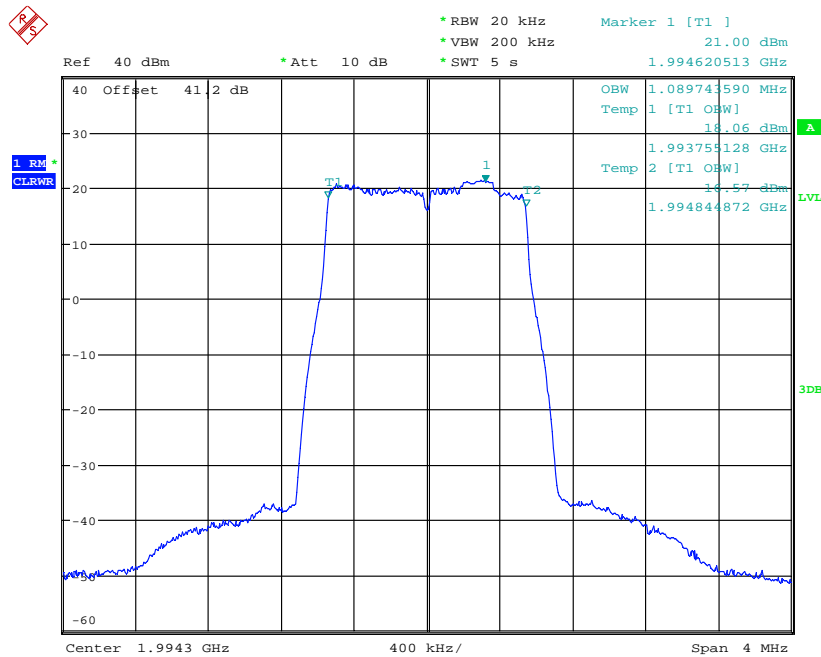


Date: 18.MAR.2014 09:38:32

**Channel Position T - 64QAM / Bandwidth 1.4 MHz**

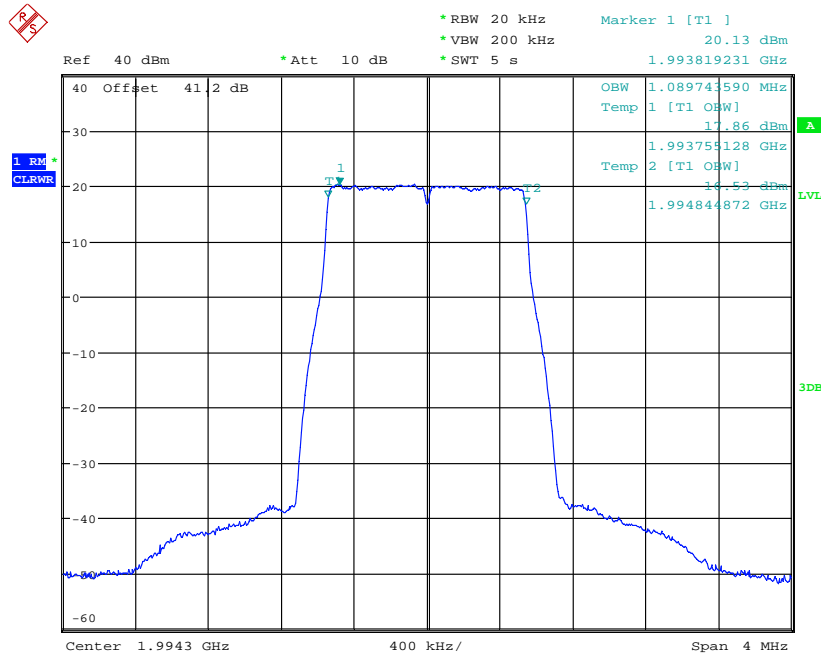


Date: 18.MAR.2014 09:40:29

**Channel Position T - QPSK / Bandwidth 3.0 MHz**

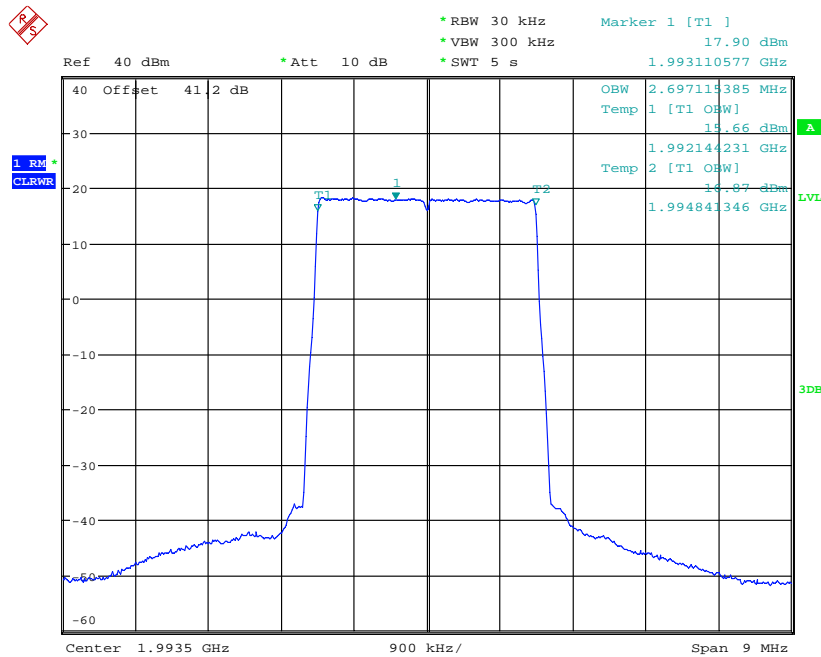


Date: 18.MAR.2014 12:46:44

Channel Position T - QPSK / Bandwidth 5.0 MHz

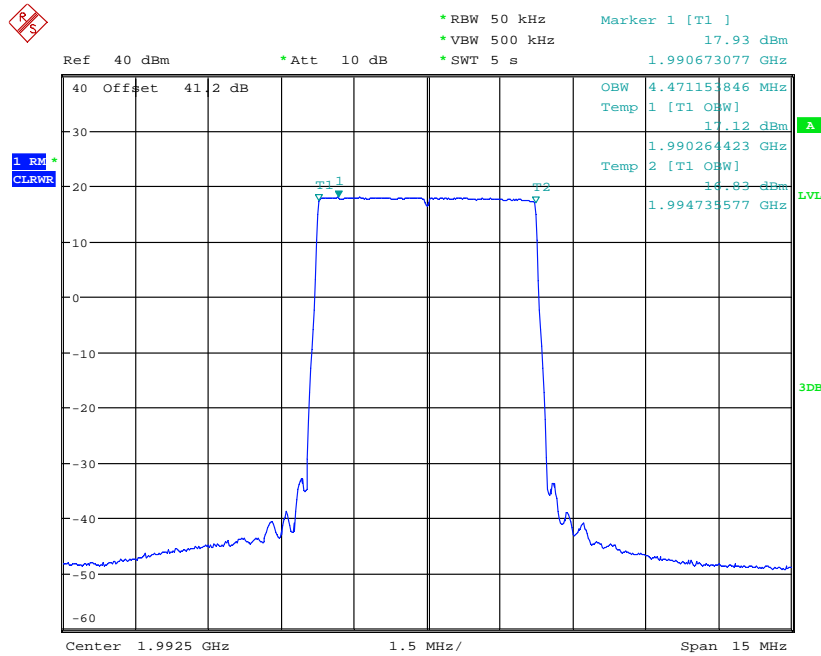


Date: 18.MAR.2014 13:28:18

Channel Position T - QPSK / Bandwidth 10.0 MHz

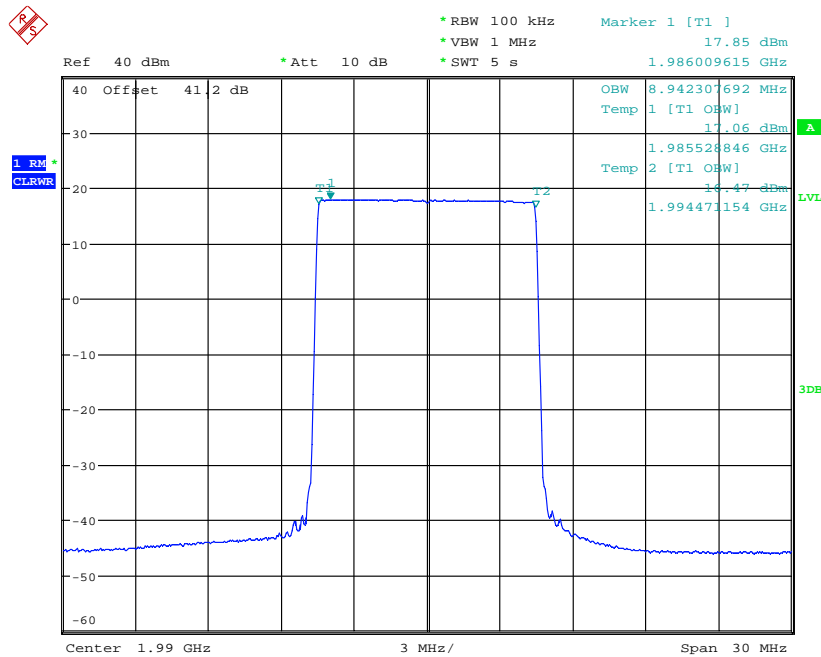


Date: 18.MAR.2014 14:06:37

Channel Position T - QPSK / Bandwidth 15.0 MHz

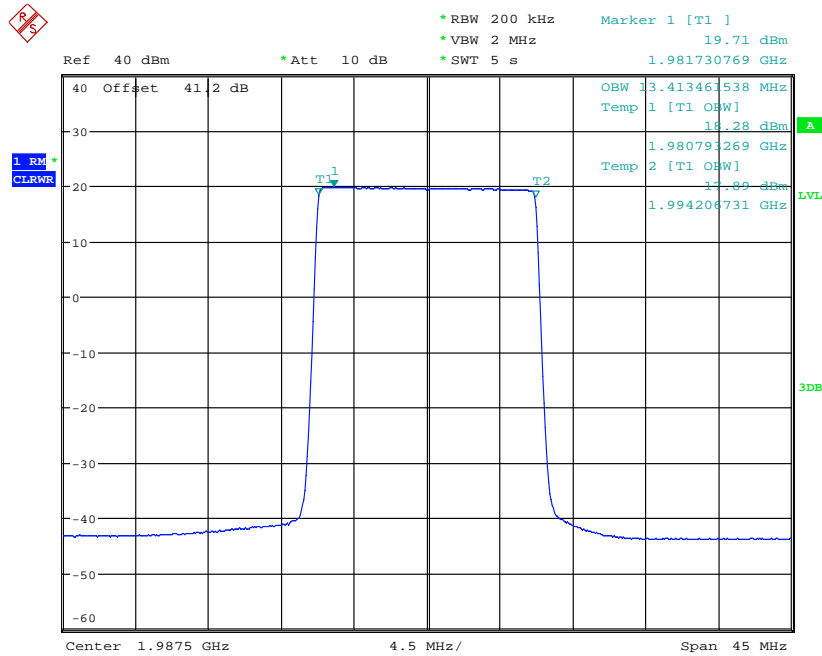


Date: 18.MAR.2014 15:36:08

Channel Position T - QPSK / Bandwidth 20.0 MHz

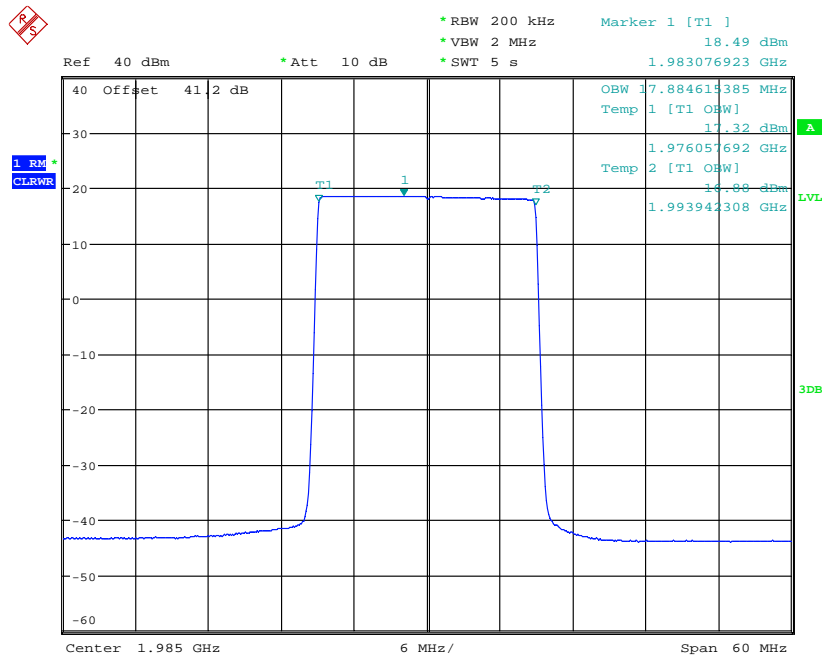


Date: 18.MAR.2014 15:25:57

Channel Position T – 16QAM / Bandwidth 20.0 MHz

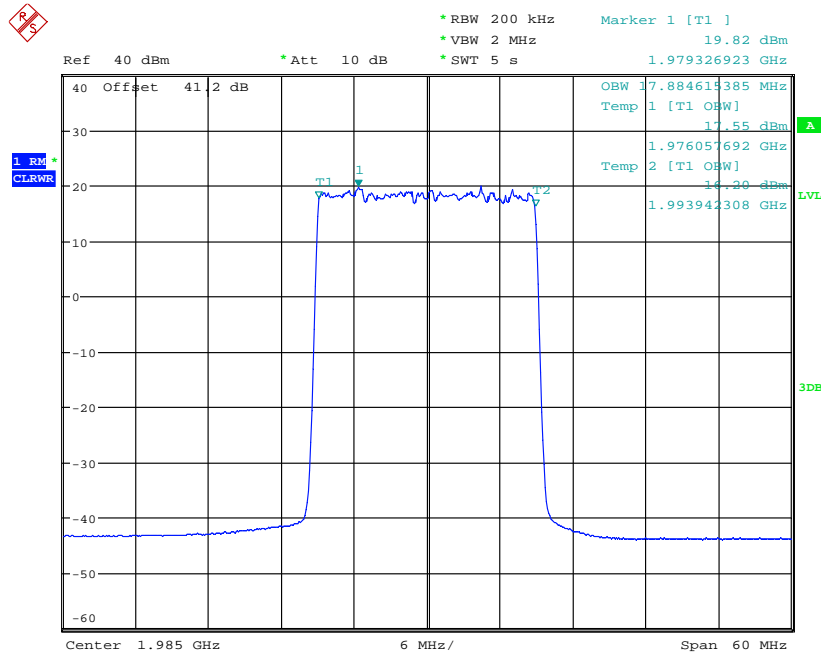

Date: 18.MAR.2014 15:27:17

Channel Position T – 64QAM / Bandwidth 20.0 MHz

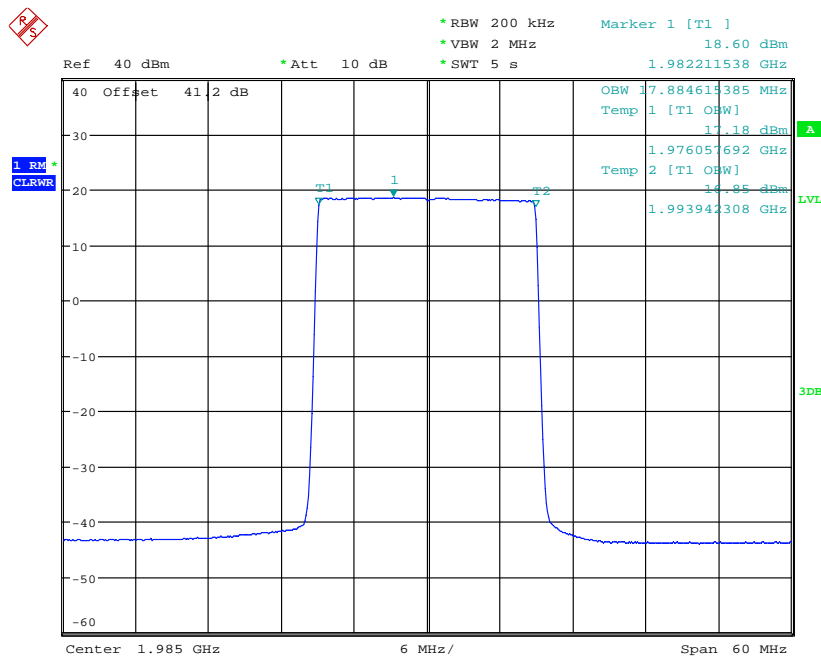

Date: 18.MAR.2014 15:31:30

-26dBc Occupied Bandwidth for FCC requirement

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1930.7MHz	Channel Position M 1962.5MHz	Channel Position T 1994.3MHz
QPSK / 1.4 MHz	1.27	1.27	1.27
16QAM / 1.4 MHz	1.27	1.27	1.27
64QAM / 1.4 MHz	1.26	1.27	1.27

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1931.5MHz	Channel Position M 1962.5MHz	Channel Position T 1993.5MHz
QPSK / 3.0 MHz	2.91	2.91	2.91

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1932.5MHz	Channel Position M 1962.5MHz	Channel Position T 1992.5MHz
QPSK / 5.0 MHz	4.81	4.81	4.81


Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1935.0MHz	Channel Position M 1962.5MHz	Channel Position T 1990.0MHz
QPSK / 10.0 MHz	9.42	9.42	9.42

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1937.5MHz	Channel Position M 1962.5MHz	Channel Position T 1987.5MHz
QPSK / 15.0 MHz	14.21	14.28	14.28

Modulation / Bandwidth	Occupied Bandwidth (MHz)		
	Channel Position B 1940.0MHz	Channel Position M 1962.5MHz	Channel Position T 1985.0MHz
QPSK / 20.0 MHz	18.75	18.75	18.75
16QAM / 20.0 MHz	18.75	18.65	18.75
64QAM / 20.0 MHz	18.75	18.75	18.65




**Channel Position B - QPSK / Bandwidth 1.4 MHz**

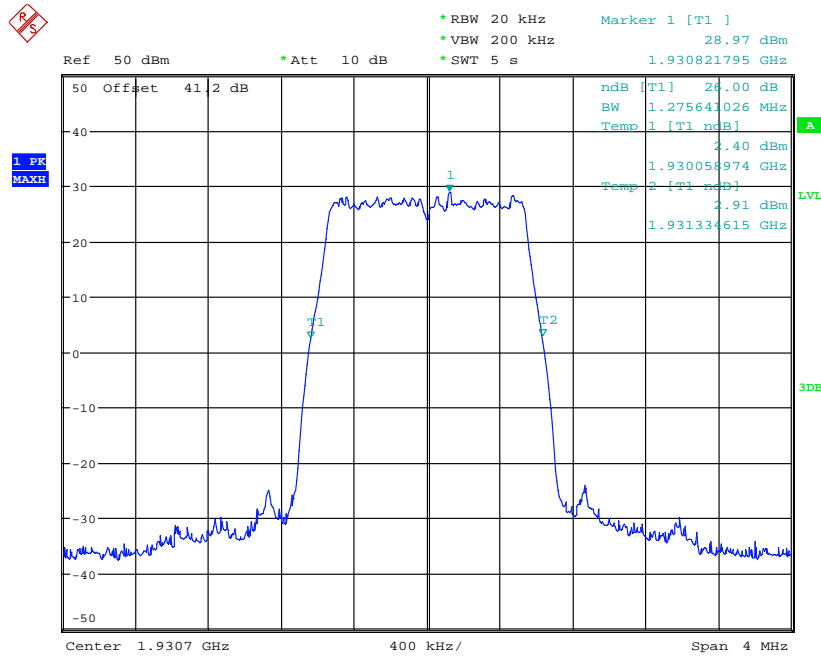


Date: 18.MAR.2014 08:29:25

**Channel Position B - 16QAM / Bandwidth 1.4 MHz**

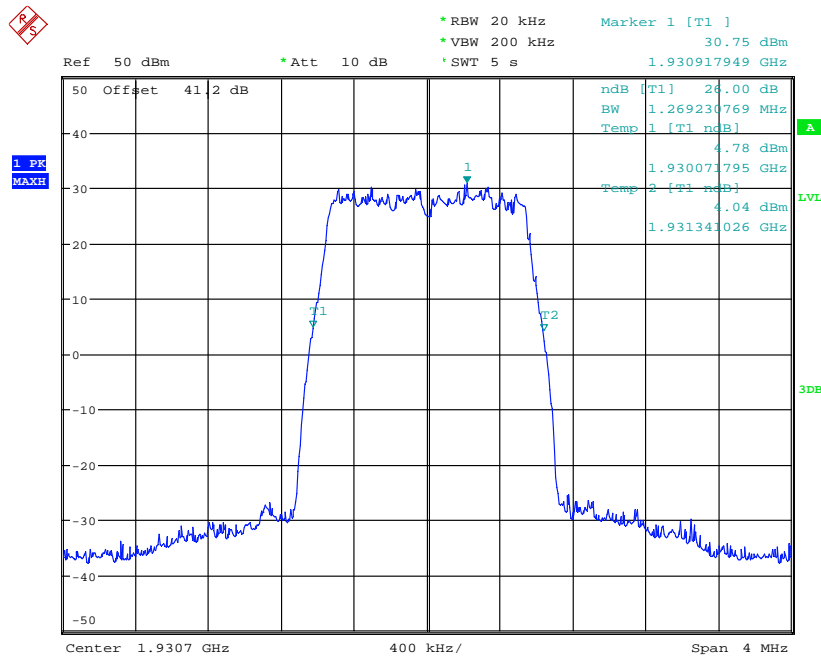


Date: 18.MAR.2014 08:35:13

**Channel Position B - 64QAM / Bandwidth 1.4 MHz**

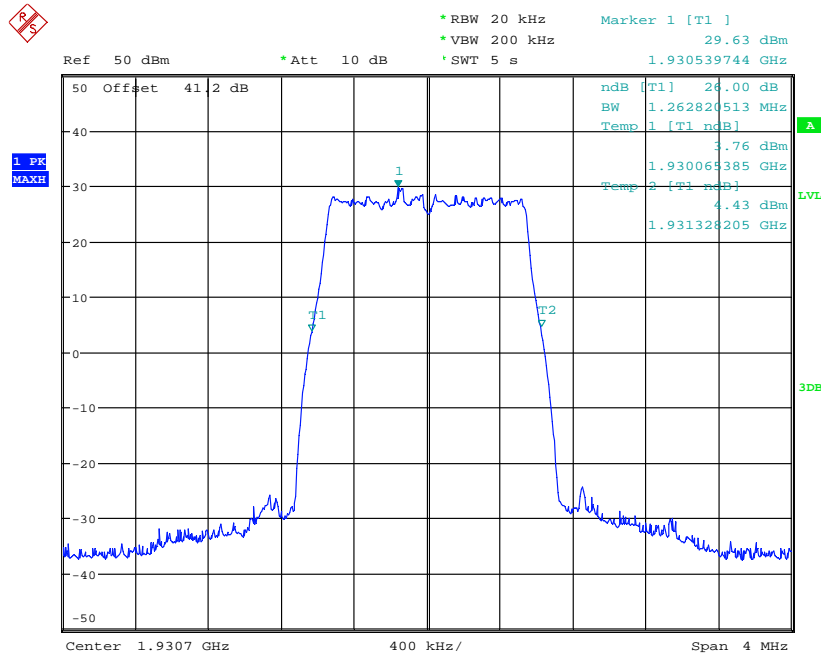


Date: 18.MAR.2014 08:36:23

**Channel Position B - QPSK / Bandwidth 3.0 MHz**

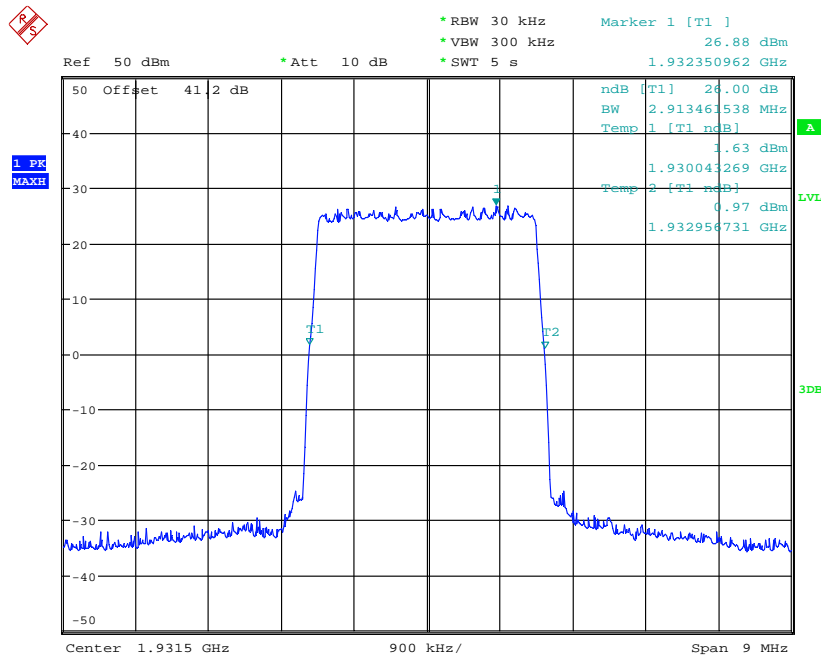


Date: 18.MAR.2014 09:45:02

## Channel Position B - QPSK / Bandwidth 5.0 MHz

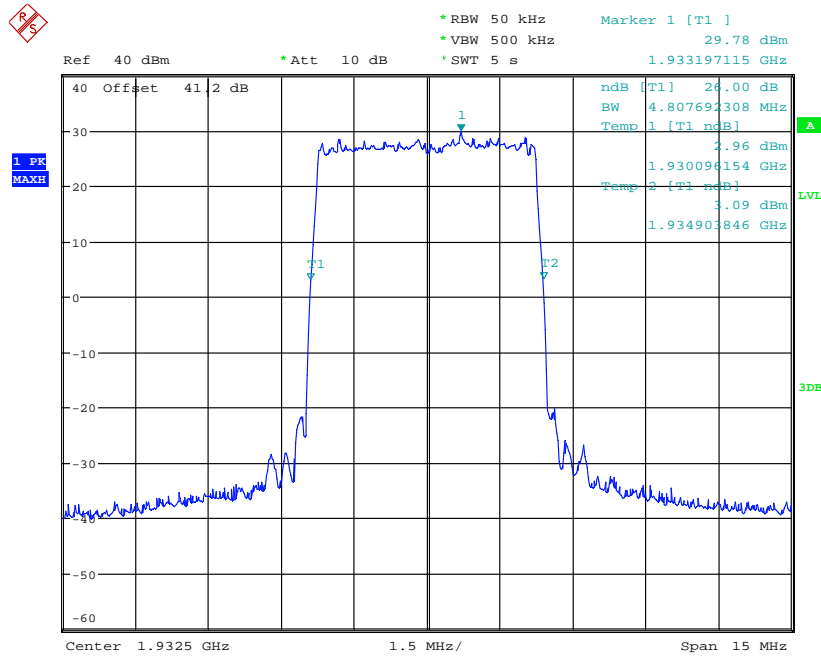


Date: 18.MAR.2014 13:00:56

## Channel Position B - QPSK / Bandwidth 10.0 MHz

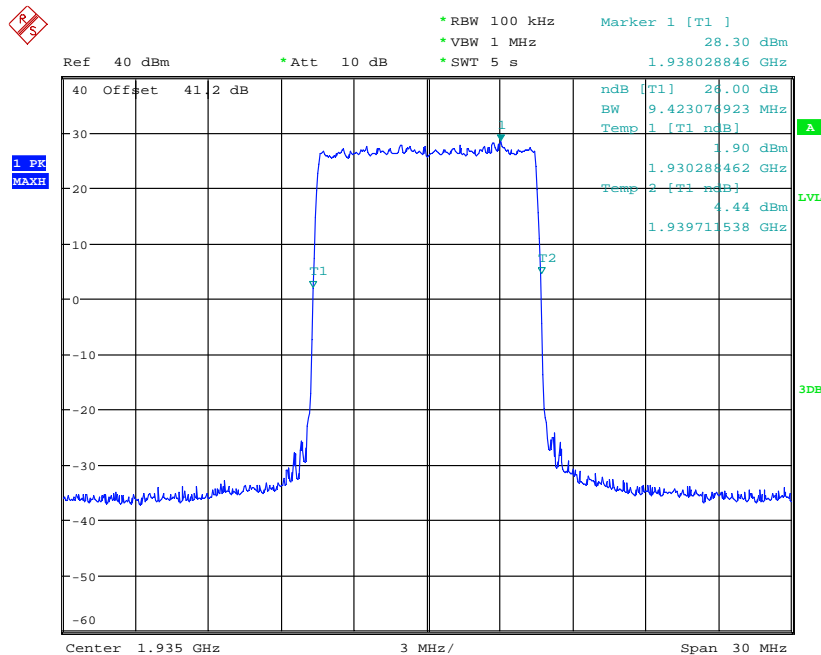


Date: 18.MAR.2014 13:39:51

**Channel Position B - QPSK / Bandwidth 15.0 MHz**

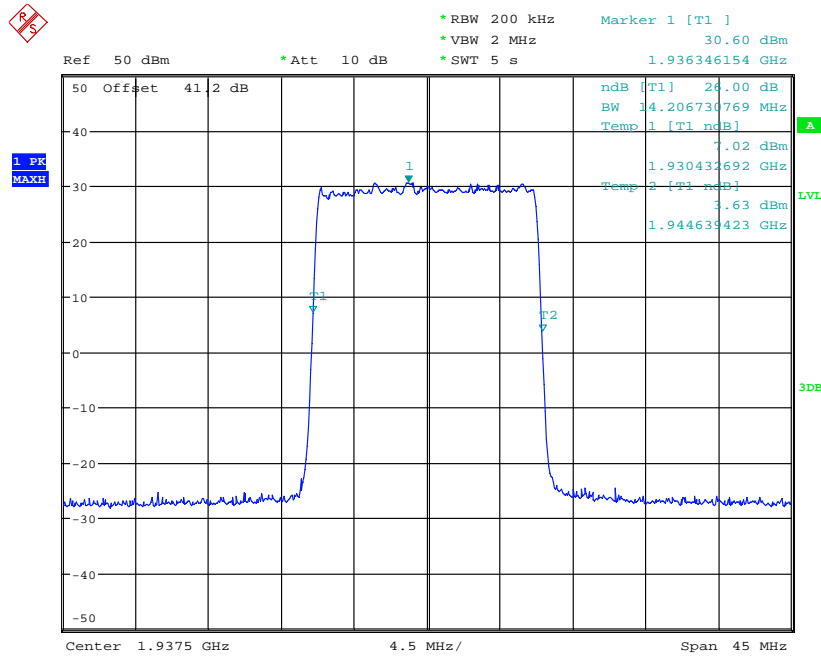


Date: 18.MAR.2014 14:15:01

**Channel Position B - QPSK / Bandwidth 20.0 MHz**

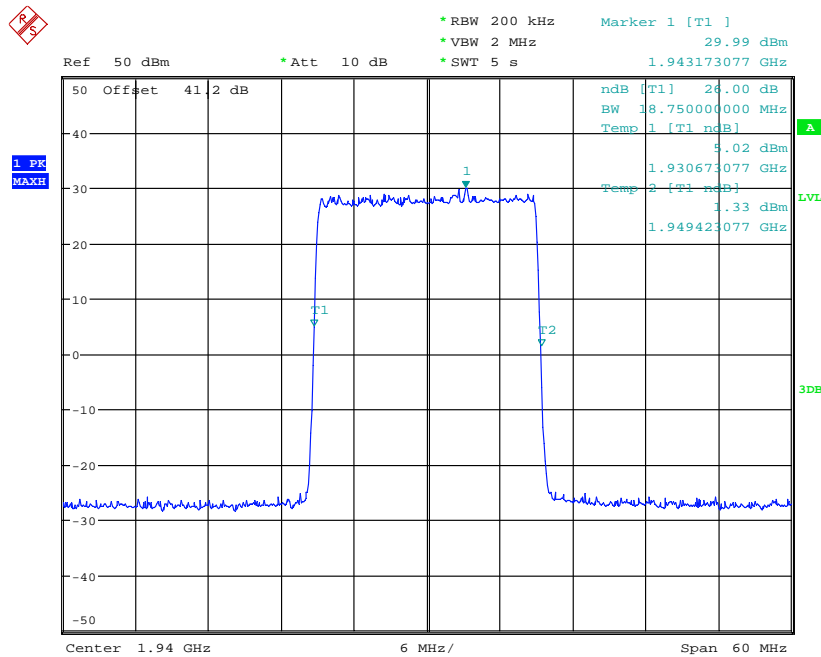


Date: 18.MAR.2014 14:56:08

**Channel Position B – 16QAM / Bandwidth 20.0 MHz**

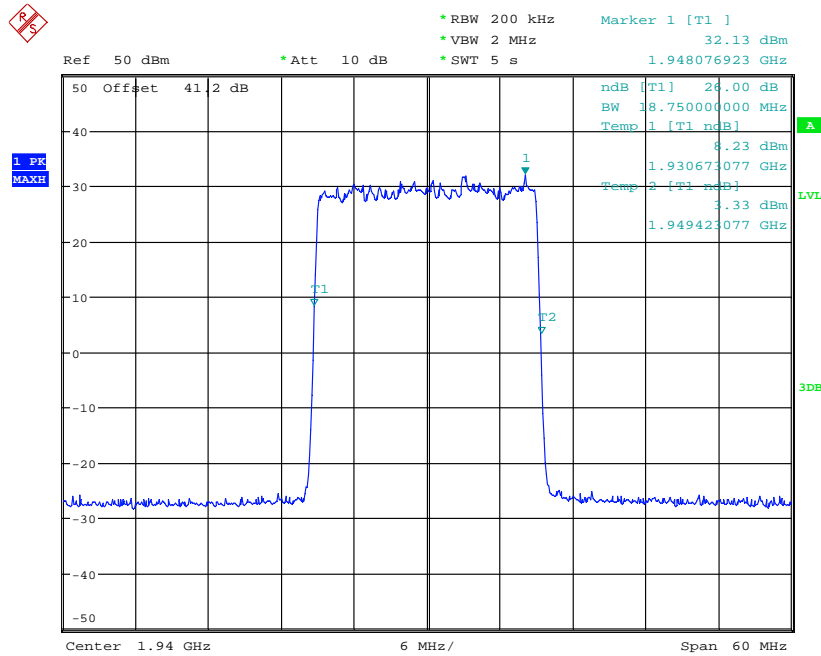


Date: 18.MAR.2014 15:01:21

**Channel Position B – 64QAM / Bandwidth 20.0 MHz**

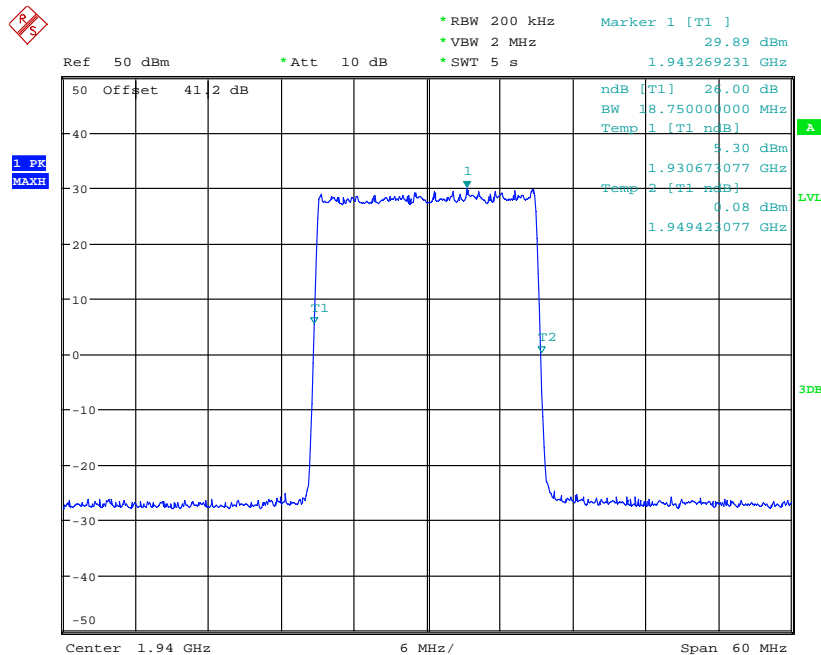


Date: 18.MAR.2014 15:02:16

**Channel Position M - QPSK / Bandwidth 1.4 MHz**

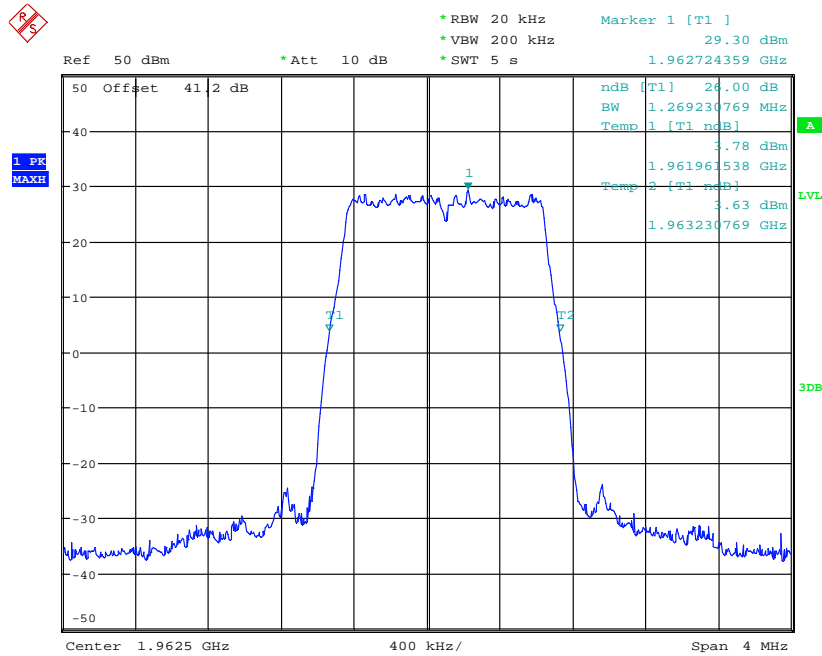


Date: 18.MAR.2014 08:45:15

**Channel Position M - 16QAM / Bandwidth 1.4 MHz**

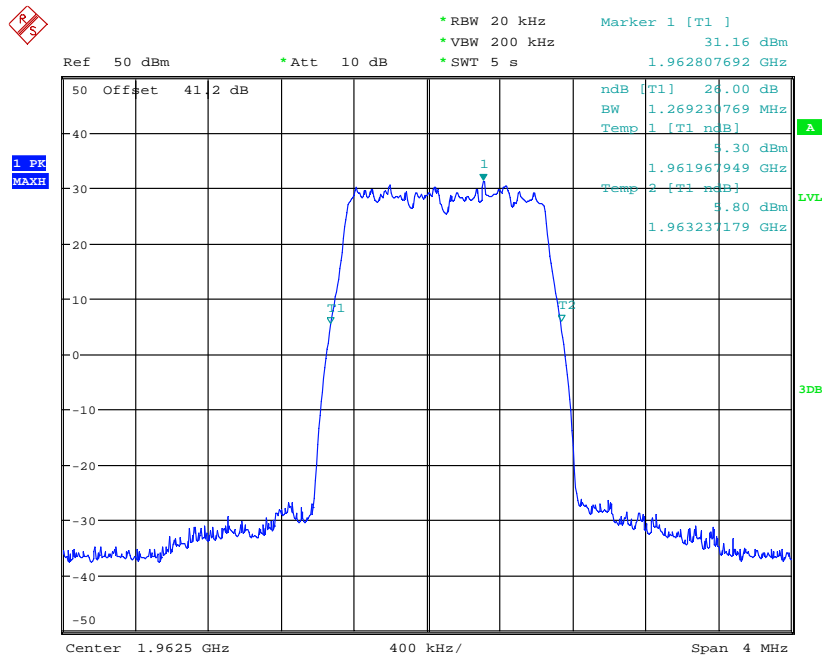


Date: 18.MAR.2014 08:47:56

**Channel Position M - 64QAM / Bandwidth 1.4 MHz**

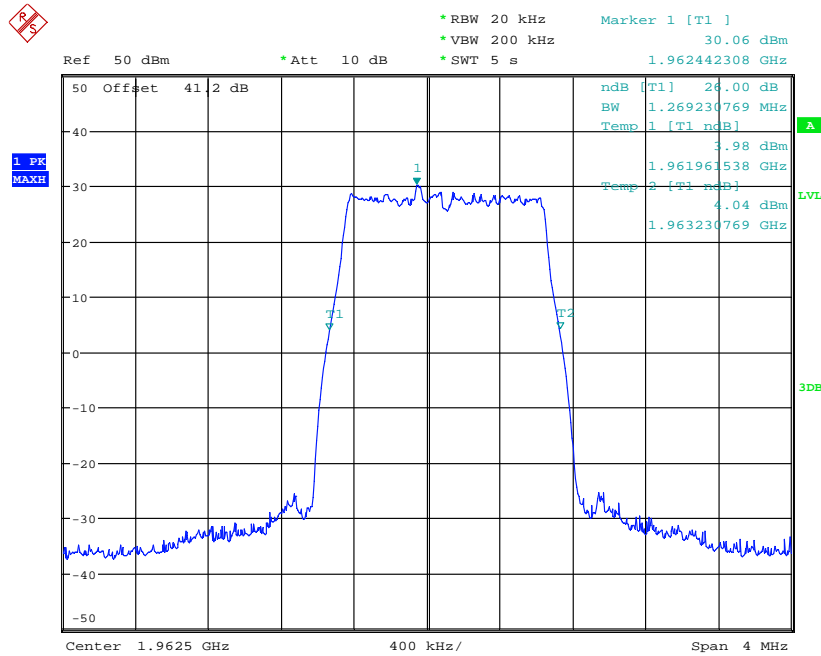


Date: 18.MAR.2014 08:50:45

**Channel Position M - QPSK / Bandwidth 3.0 MHz**

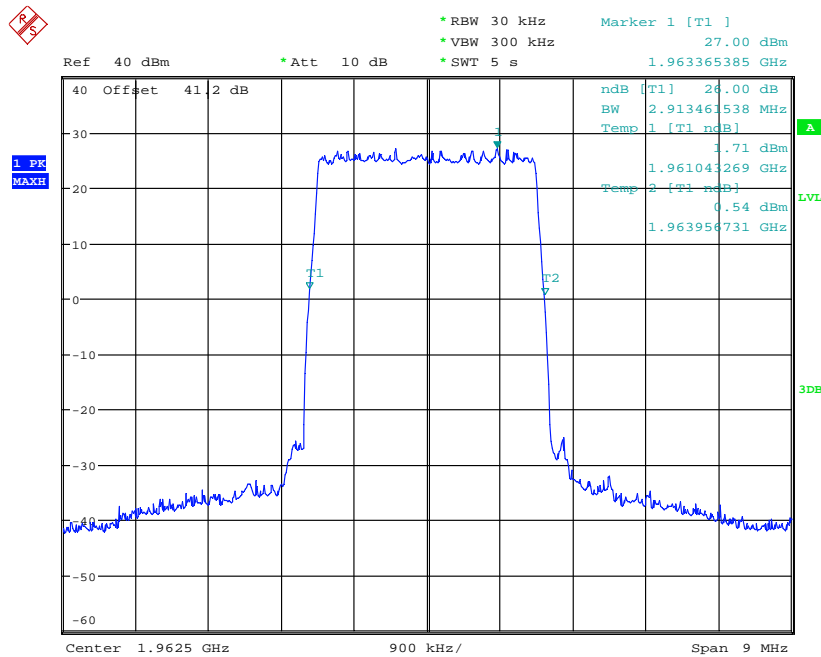


Date: 18.MAR.2014 12:12:53

**Channel Position M - QPSK / Bandwidth 5.0 MHz**

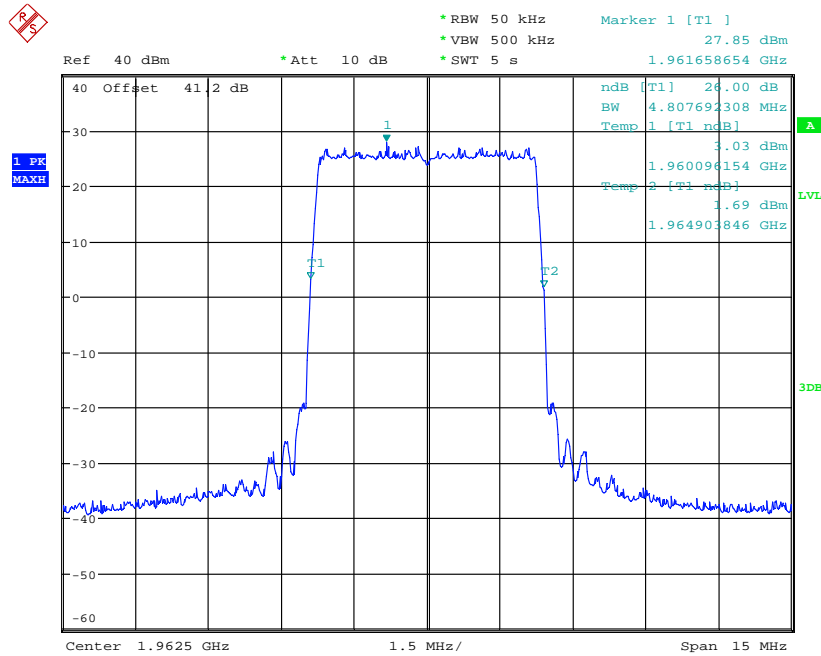

Date: 18.MAR.2014 13:09:06


**Channel Position M - QPSK / Bandwidth 10.0 MHz**

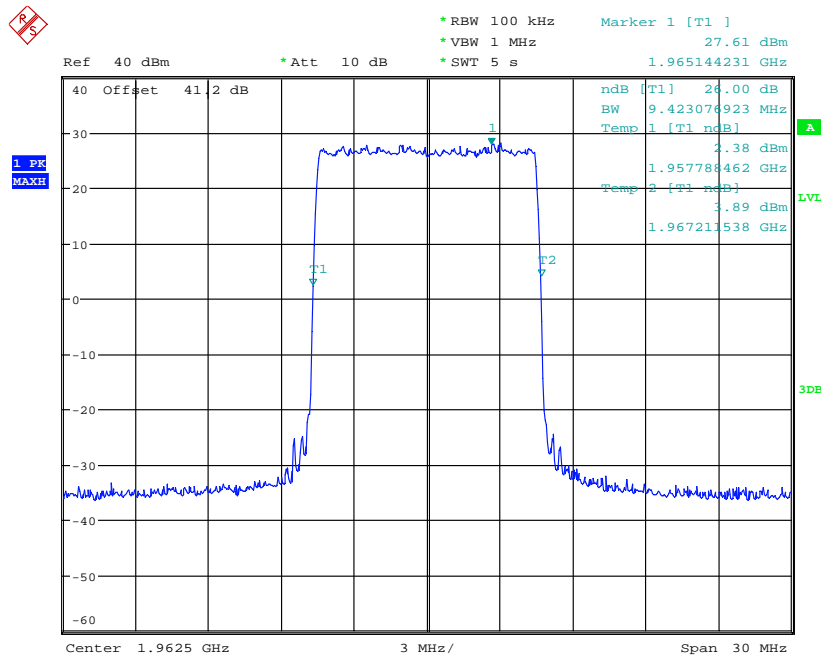

Date: 18.MAR.2014 13:50:35




Channel Position M - QPSK / Bandwidth 15.0 MHz

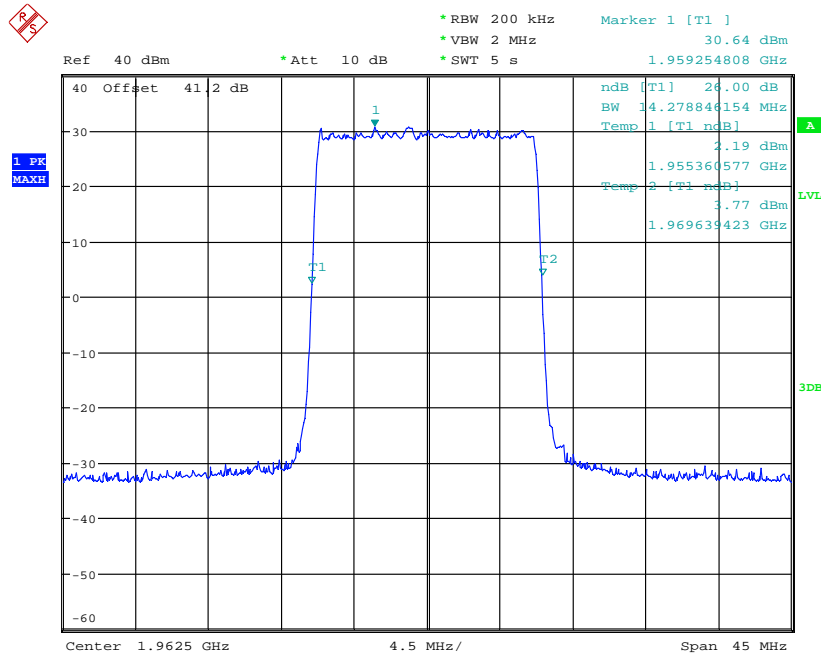


Date: 18.MAR.2014 14:38:19

Channel Position M - QPSK / Bandwidth 20.0 MHz

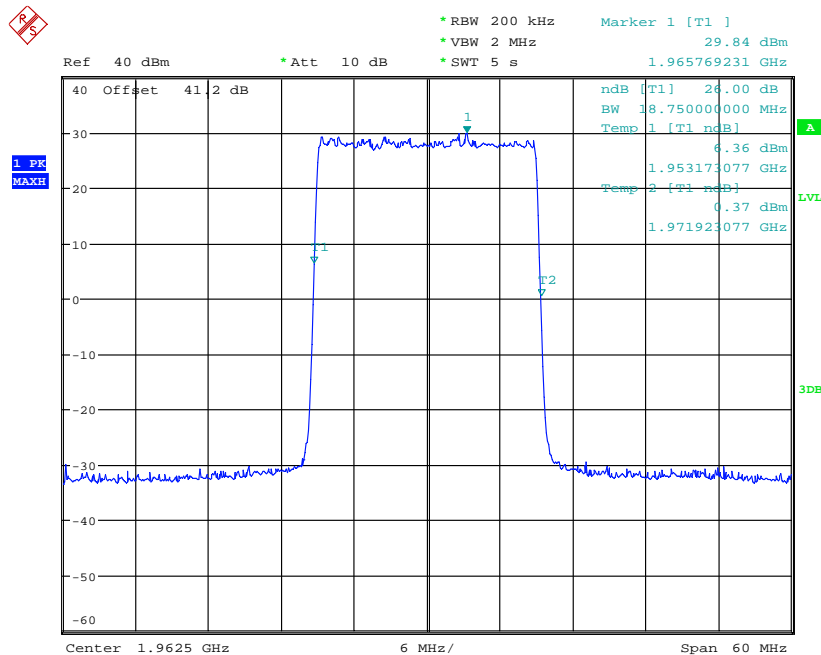


Date: 18.MAR.2014 15:09:41

**Channel Position M – 16QAM / Bandwidth 20.0 MHz**

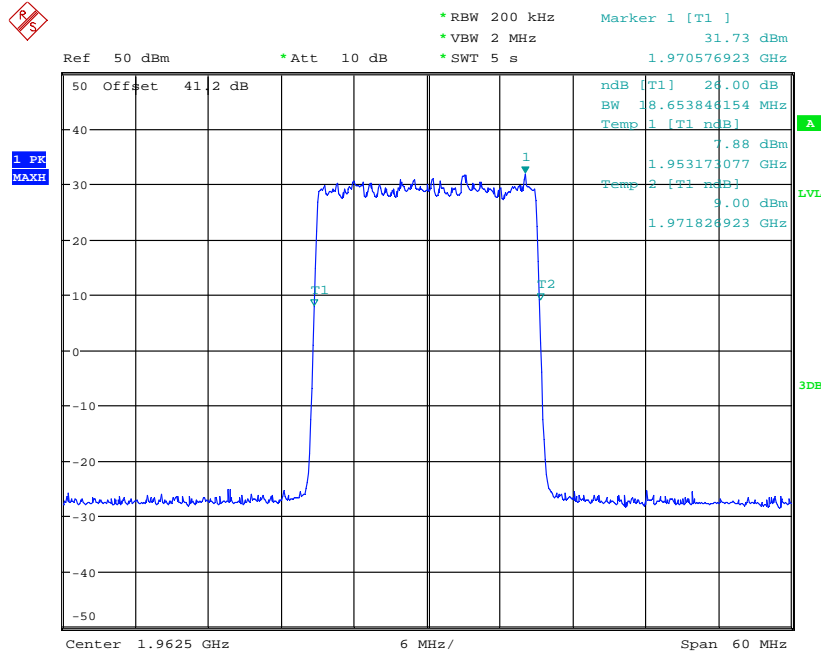


Date: 18.MAR.2014 15:11:52

**Channel Position M – 64QAM / Bandwidth 20.0 MHz**

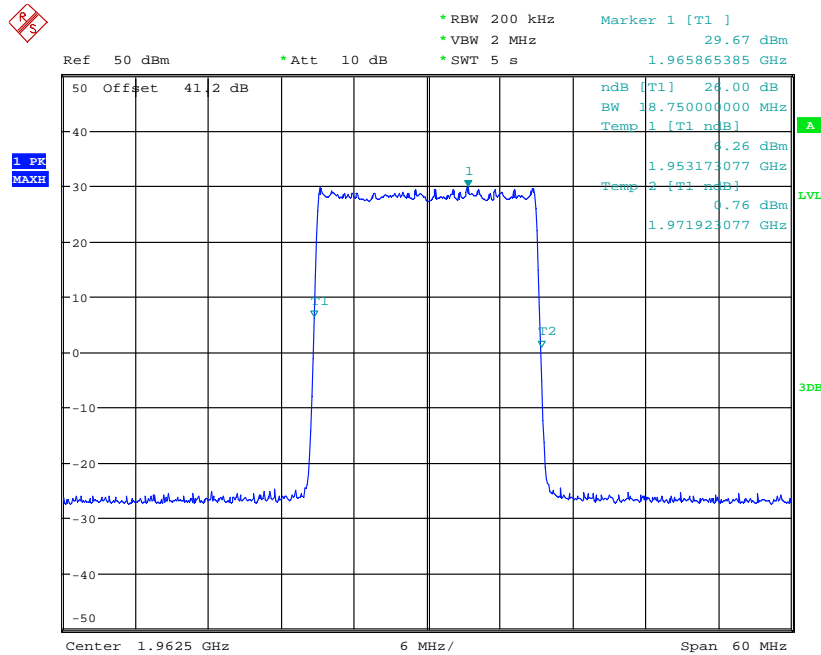


Date: 18.MAR.2014 15:16:08

### Channel Position T - QPSK / Bandwidth 1.4 MHz

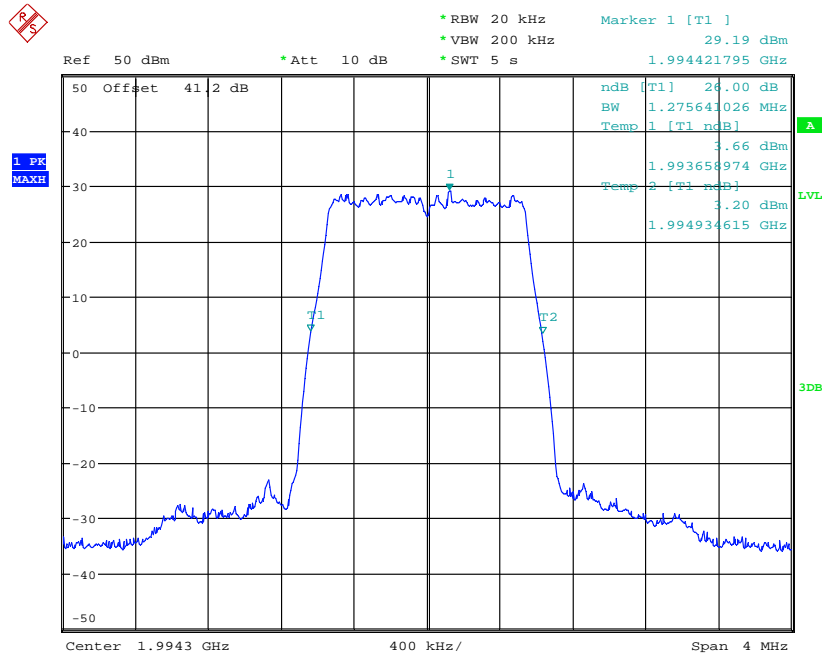


Date: 18.MAR.2014 09:28:56

### Channel Position T - 16QAM / Bandwidth 1.4 MHz

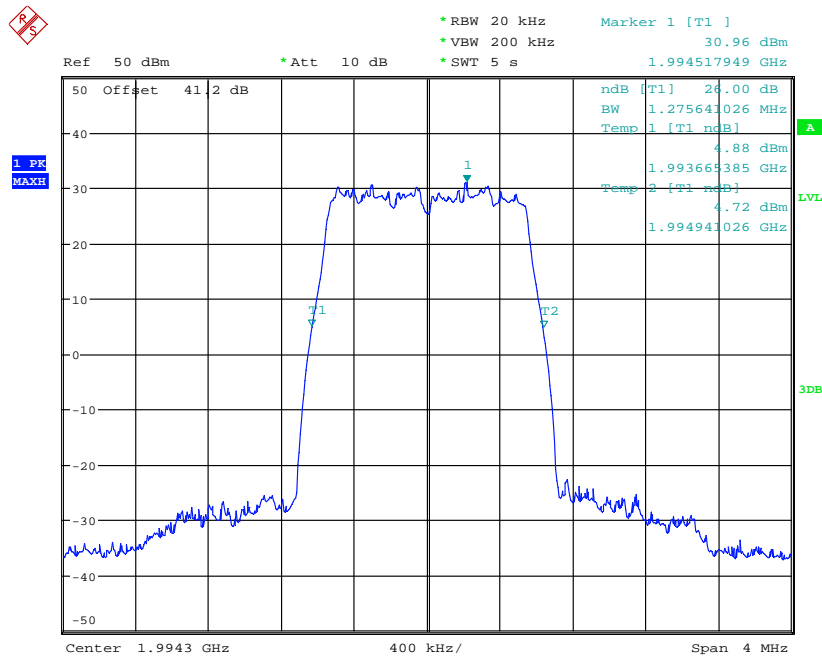


Date: 18.MAR.2014 09:37:37

**Channel Position T - 64QAM / Bandwidth 1.4 MHz**

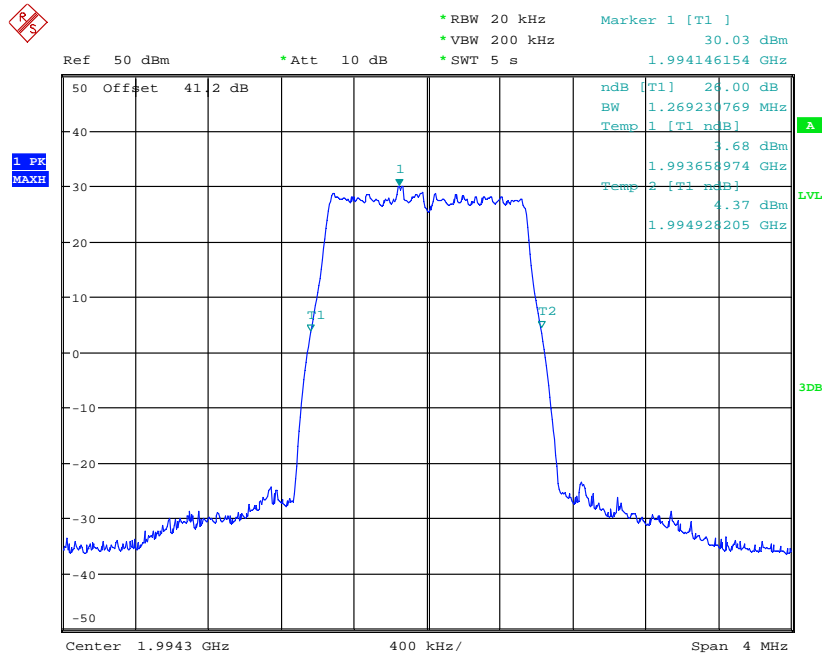


Date: 18.MAR.2014 09:42:38

**Channel Position T - QPSK / Bandwidth 3.0 MHz**

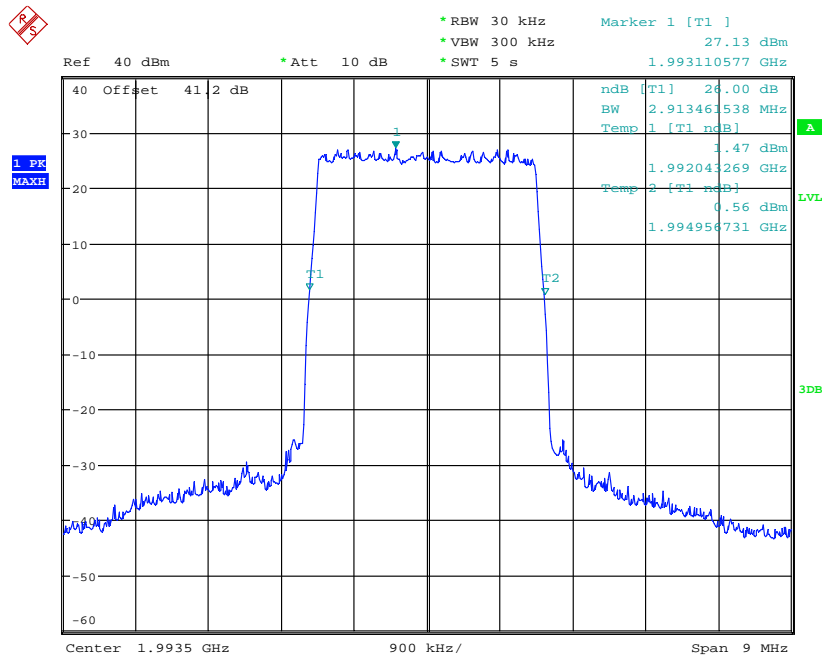


Date: 18.MAR.2014 12:46:08

**Channel Position T - QPSK / Bandwidth 5.0 MHz**

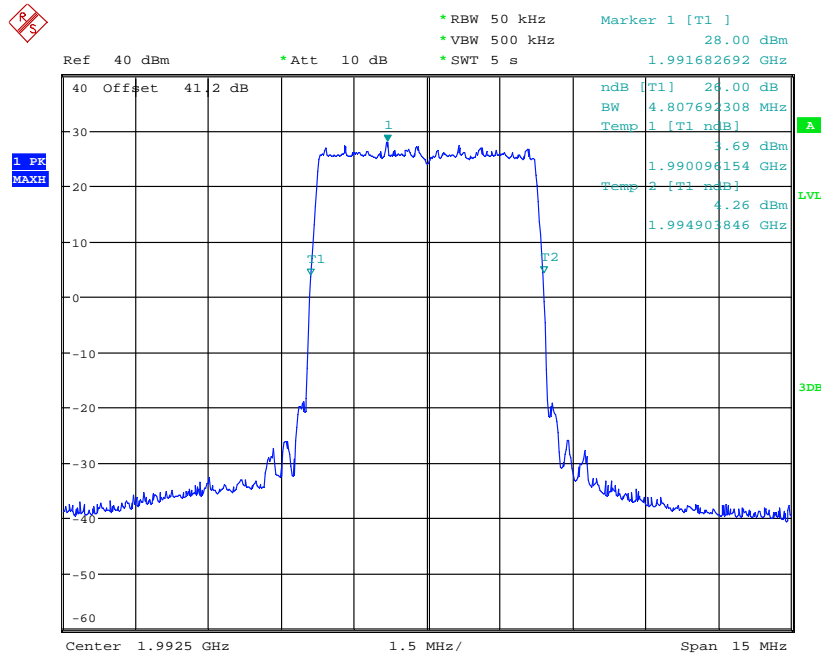


Date: 18.MAR.2014 13:29:48

**Channel Position T - QPSK / Bandwidth 10.0 MHz**

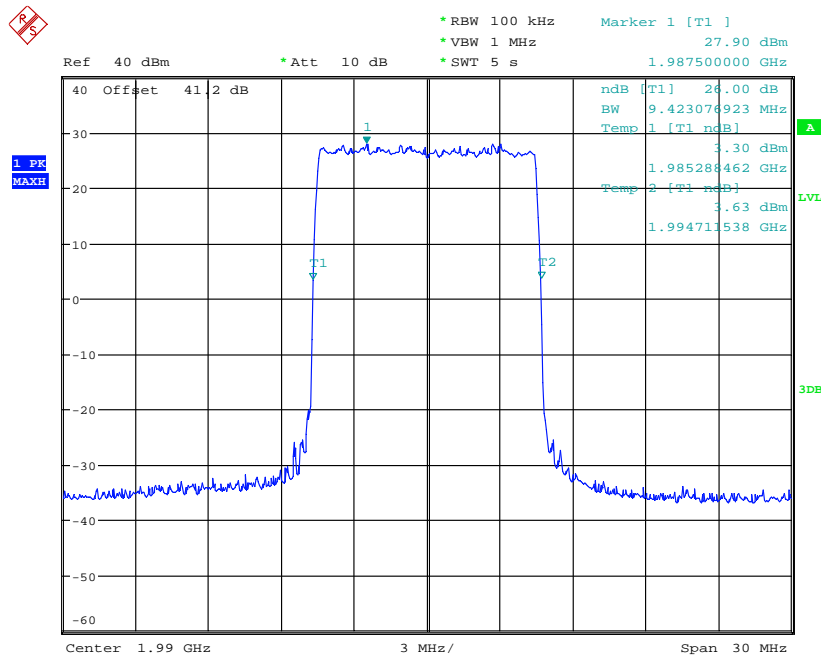


Date: 18.MAR.2014 14:06:02

Channel Position T - QPSK / Bandwidth 15.0 MHz

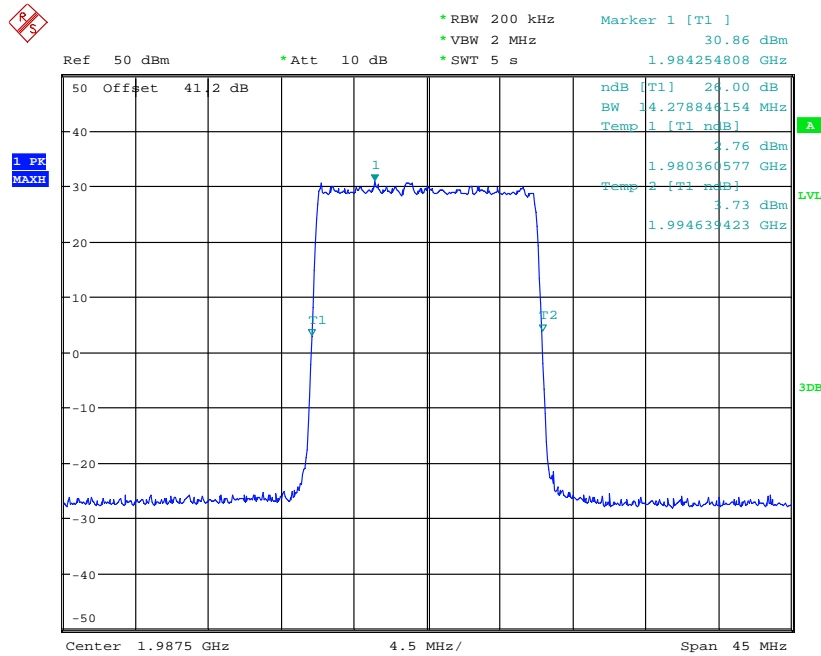


Date: 18.MAR.2014 15:34:54

Channel Position T - QPSK / Bandwidth 20.0 MHz

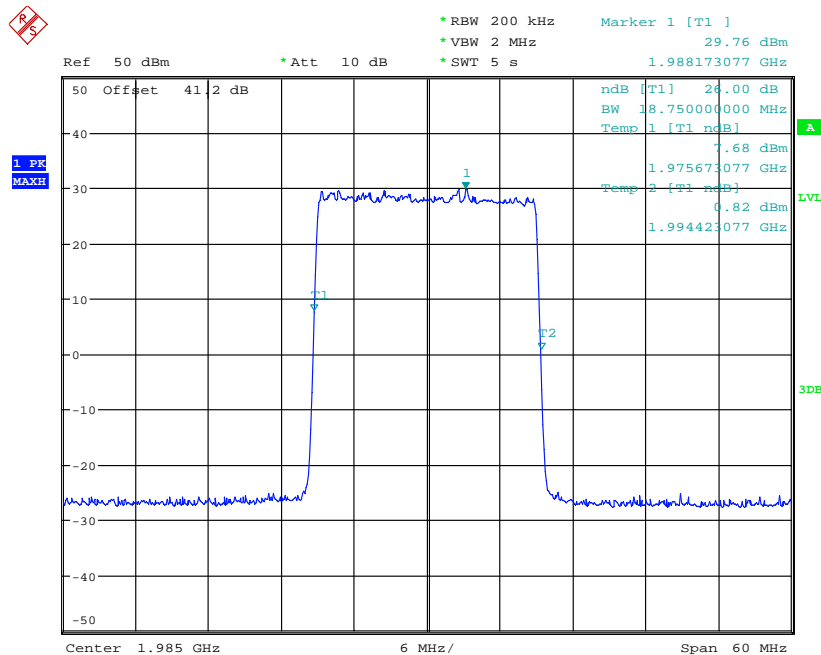


Date: 18.MAR.2014 15:25:37

**Channel Position T – 16QAM / Bandwidth 20.0 MHz**

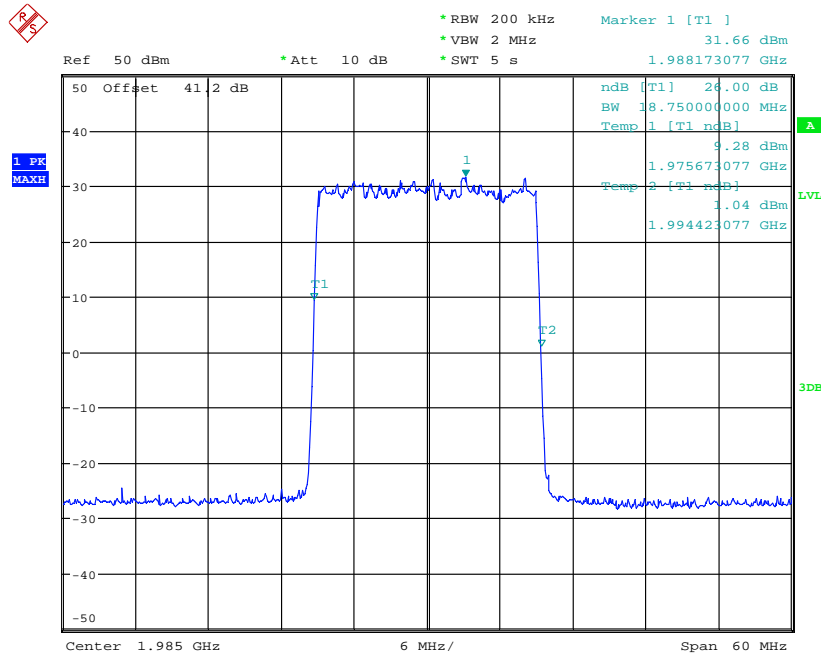

Date: 18.MAR.2014 15:28:04

**Channel Position T – 64QAM / Bandwidth 20.0 MHz**

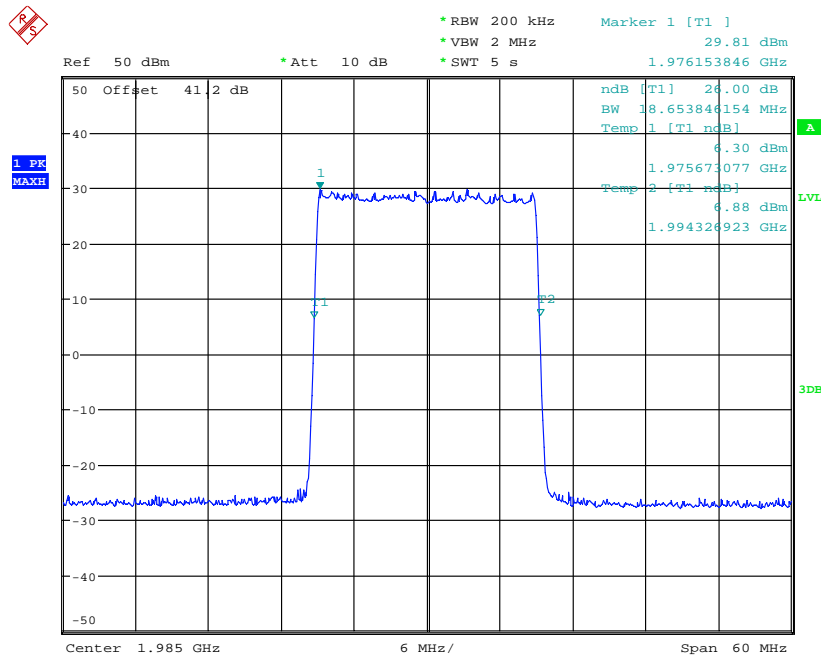

Date: 18.MAR.2014 15:30:57

## 2.4 SPURIOUS EMISSION AT BAND EDGE

### 2.4.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 24, Clause 24.238(b)  
Industry Canada RSS-133, Clause 6.5

### 2.4.2 Equipment Under Test

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461

### 2.4.3 Date of Test and Modification State

19 and 20 March 2014 - Modification State 0

### 2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.4.5 Environmental Conditions

Ambient Temperature	23.0 - 23.8°C
Relative Humidity	25.6 - 26.5%

### 2.4.6 Test Method

In accordance with FCC CFR 47 Part 24, Clause 24.238(b) and Industry Canada RSS-133, Clause 6.5, any emissions outside of the block edges shall be attenuated by at least  $43 + 10 \log(P)$ . In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1% of the emission bandwidth should be used.

For measurements of emissions  $> 1\text{MHz}$  away from the band edges, a RBW is 1MHz or greater should be used. A resolution bandwidth of 50kHz was used between 1MHz to 6MHz from the band edge. to compensate for the reduced measurement bandwidth, the limit was adjusted with -13dB to -26dBm.

For MIMO mode configurations, the limit was adjusted with a correction of -3dB  $[10\log(2)]$  by using the Measure and Add  $10\log(N)$  dB technique according to FCC KDB662911 D01 accounting for simultaneous transmission from antennas port RF A and RF B.

The path loss measured and entered as a reference level offset. The EUT was set to transmit at its maximum rated output power in the configurations described in the tables below. Measurements were made at the Top and Bottom of the band.

The results are shown in the plots below.



**2.4.7 Test Results**


Configuration L-MIMO-SC

Maximum Output Power 37.0dBm per carrier


Band Edge Frequency	Channel Bandwidth	Edge Test with modulation QPSK Channel Frequencies
Channel Position B 1930.0 MHz	1.4 MHz	1930.7MHz
	3.0 MHz	1931.5MHz
	5.0 MHz	1932.5MHz
	10.0 MHz	1935.0MHz
	15.0 MHz	1937.5MHz
	20.0 MHz	1940.0MHz
Channel Position T 1995.0 MHz	1.4 MHz	1994.3MHz
	3.0 MHz	1993.5MHz
	5.0 MHz	1992.5MHz
	10.0 MHz	1990.0MHz
	15.0 MHz	1987.5MHz
	20.0 MHz	1985.0MHz

Note: The channels shown in the table above are the minimum and maximum channels that can be used in the authorised frequency ranges to maintain compliance. Channels outside of the ranges shown in the above tables shall not be made available to the end user.

Channel Position B - QPSK / Bandwidth 1.4 MHz

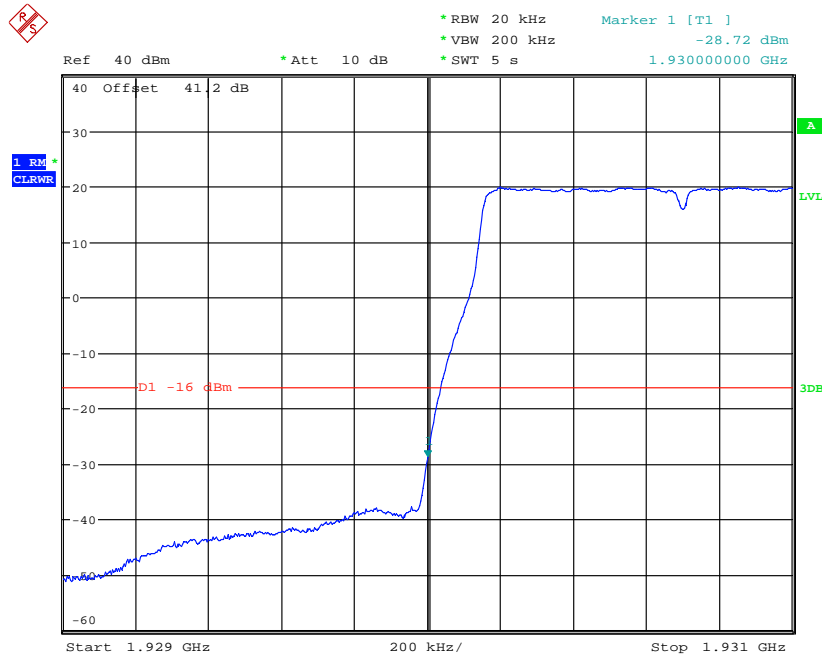


Date: 19.MAR.2014 09:11:54

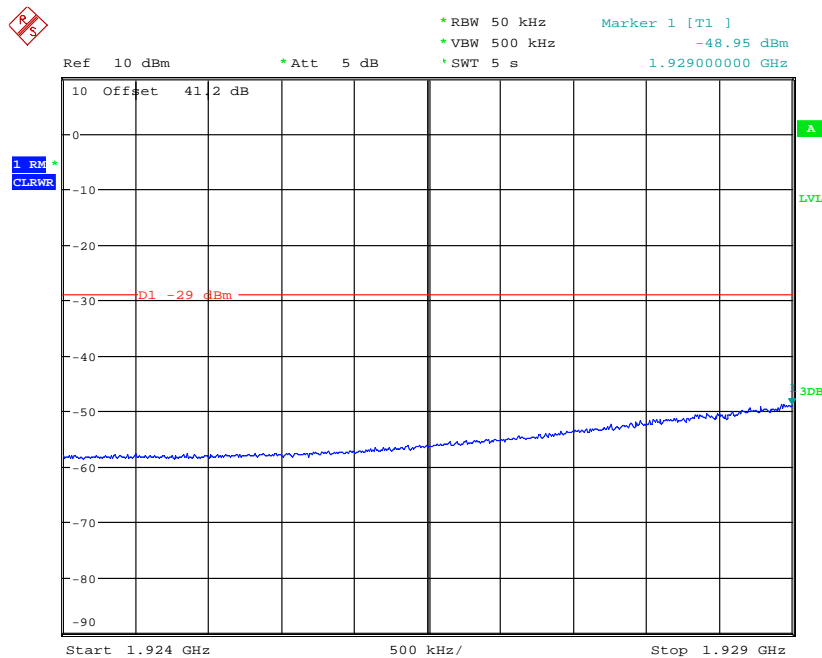


Date: 19.MAR.2014 09:13:40

## Channel Position B - QPSK / Bandwidth 3.0 MHz

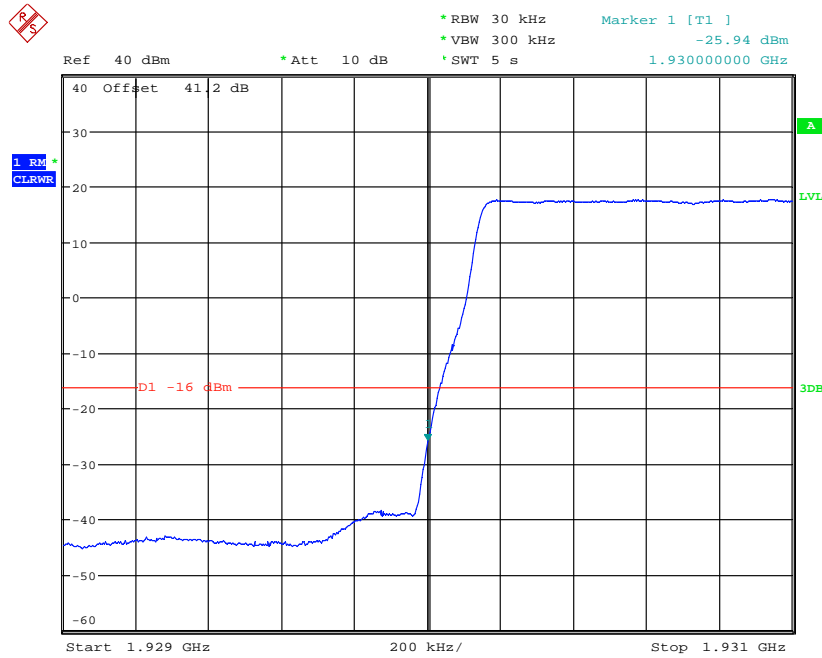


Date: 19.MAR.2014 12:04:38

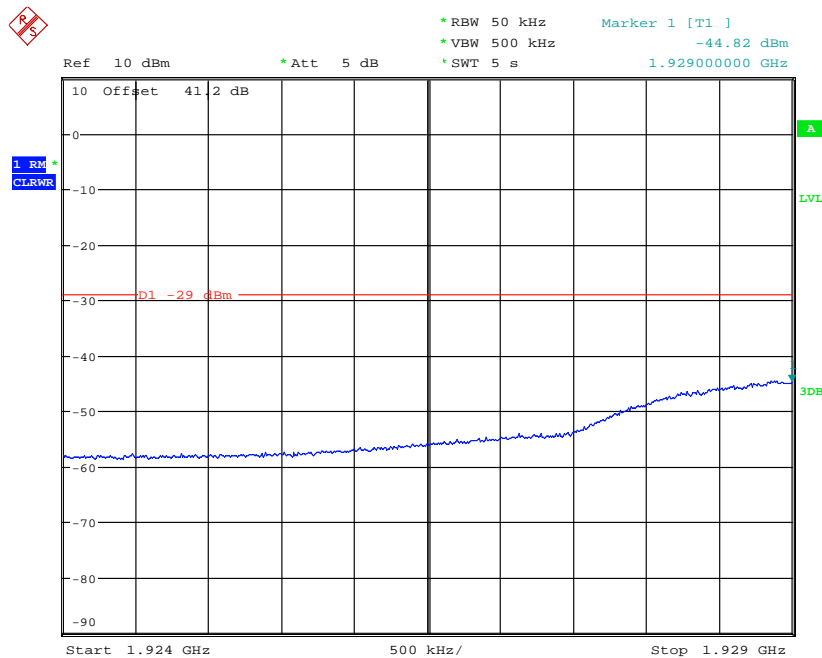


Date: 19.MAR.2014 12:06:22

**Channel Position B - QPSK / Bandwidth 5.0 MHz**

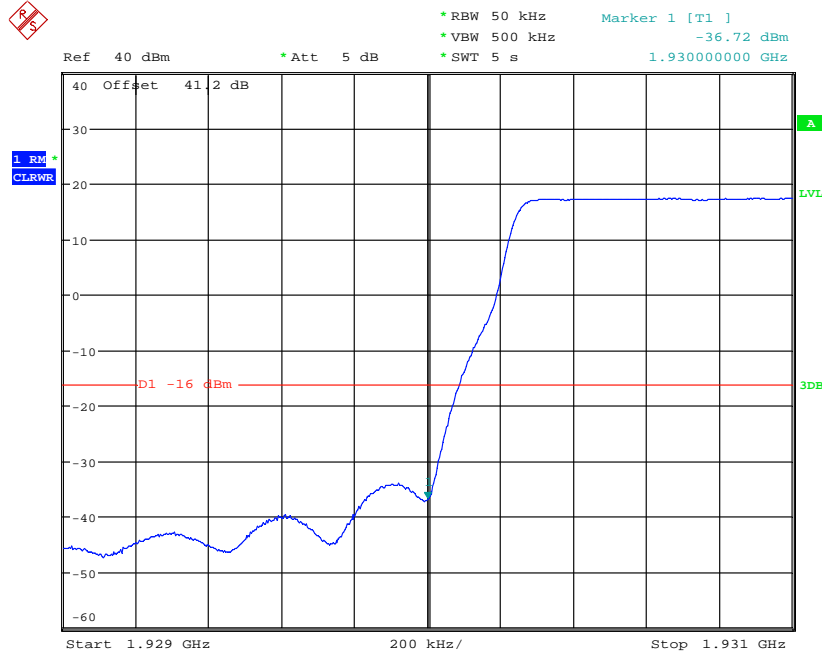


Date: 19.MAR.2014 12:12:03

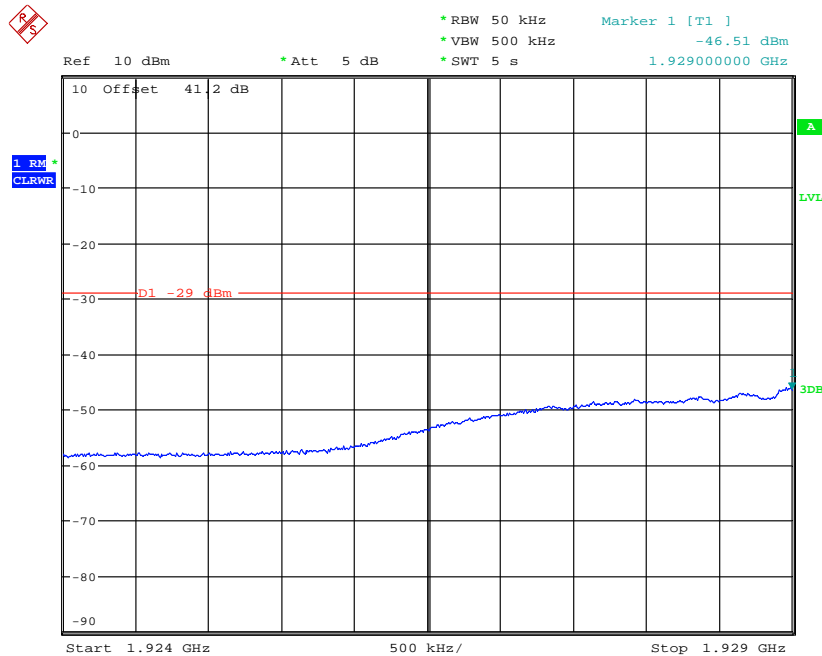


Date: 19.MAR.2014 12:13:03

## Channel Position B - QPSK / Bandwidth 10.0 MHz

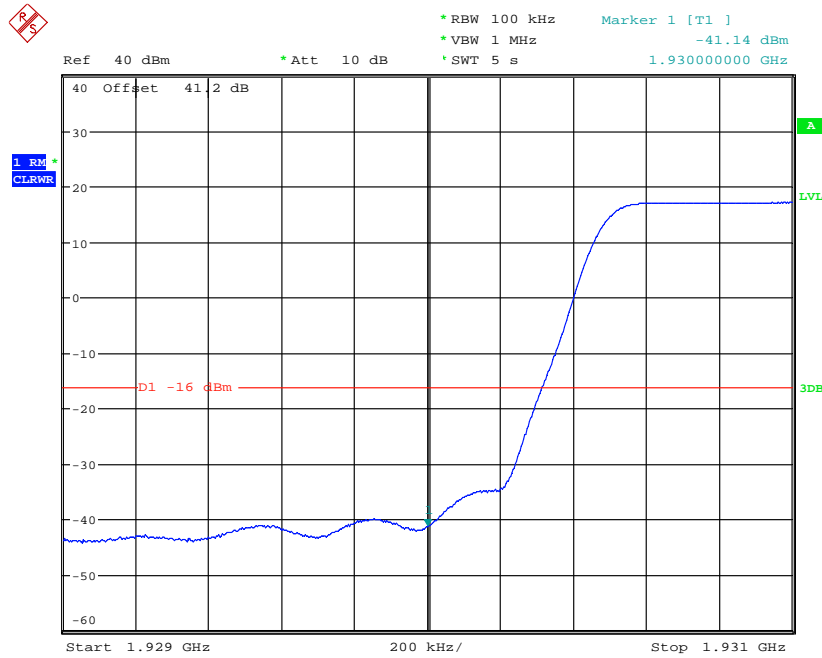


Date: 19.MAR.2014 12:32:29

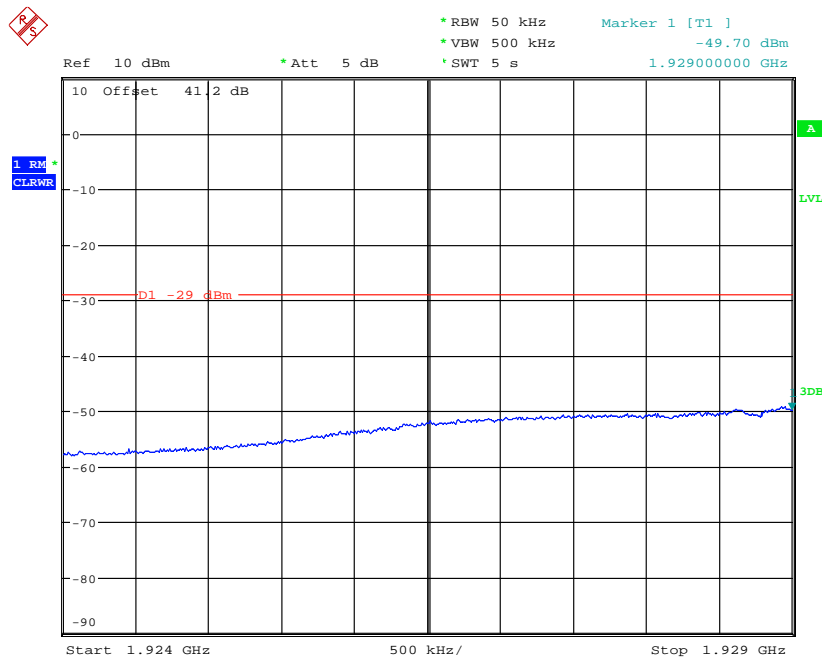


Date: 19.MAR.2014 12:33:49

Channel Position B - QPSK / Bandwidth 15.0 MHz

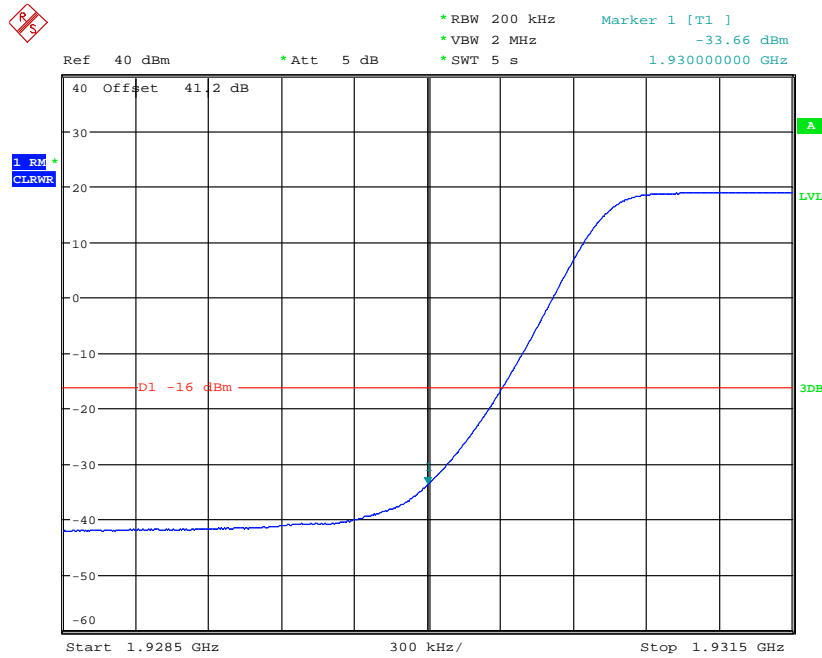


Date: 19.MAR.2014 12:44:03

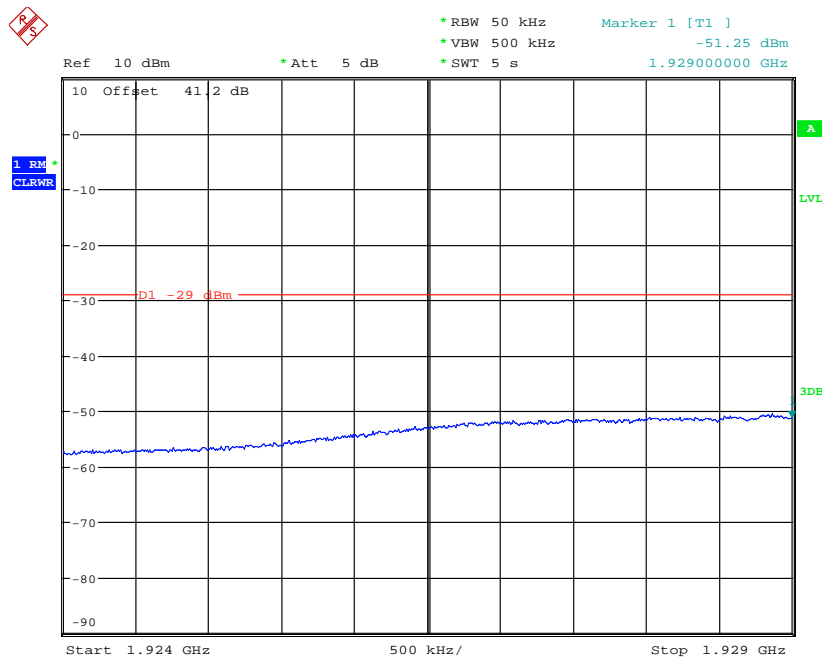


Date: 19.MAR.2014 12:44:55

Channel Position B - QPSK / Bandwidth 20.0 MHz

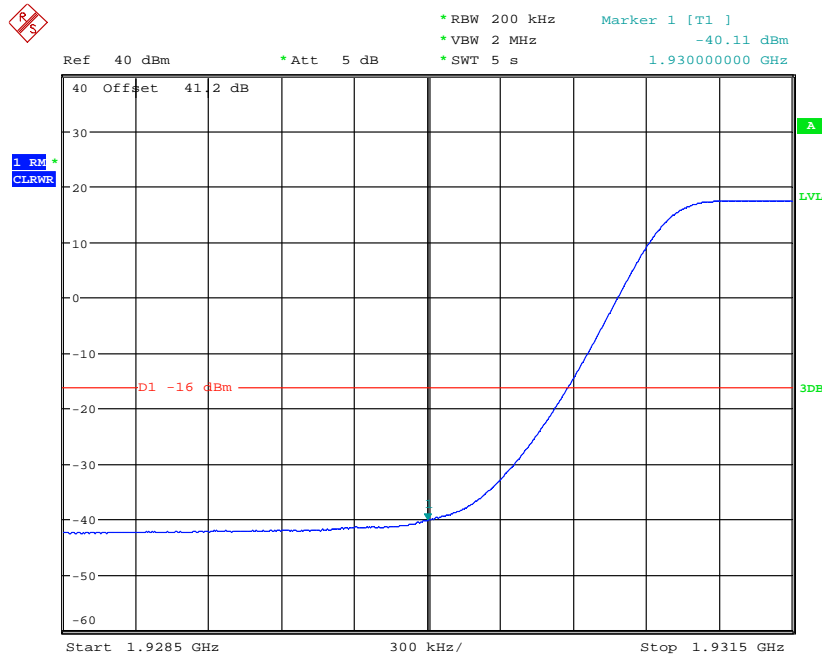


Date: 19.MAR.2014 12:53:40

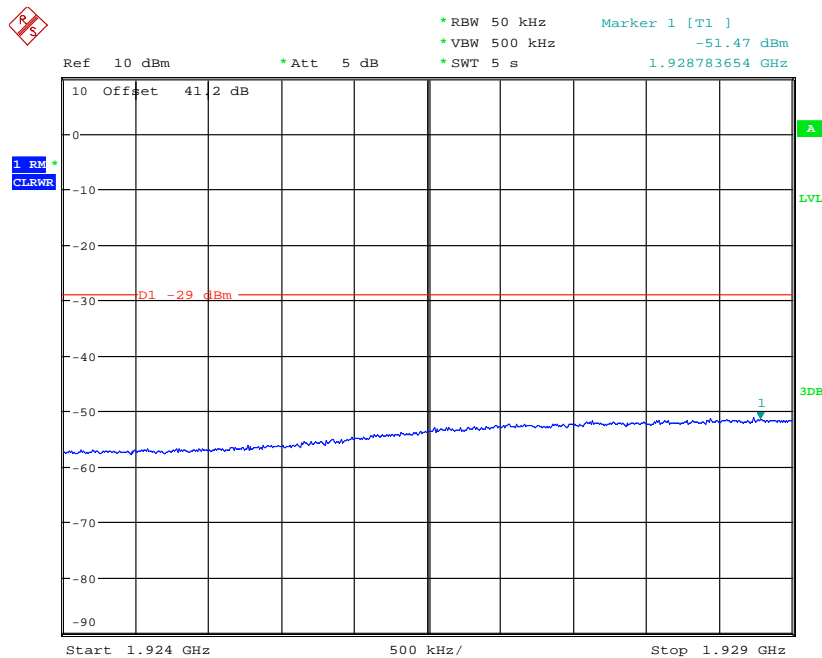


Date: 19.MAR.2014 12:54:38

Channel Position T - QPSK / Bandwidth 1.4 MHz

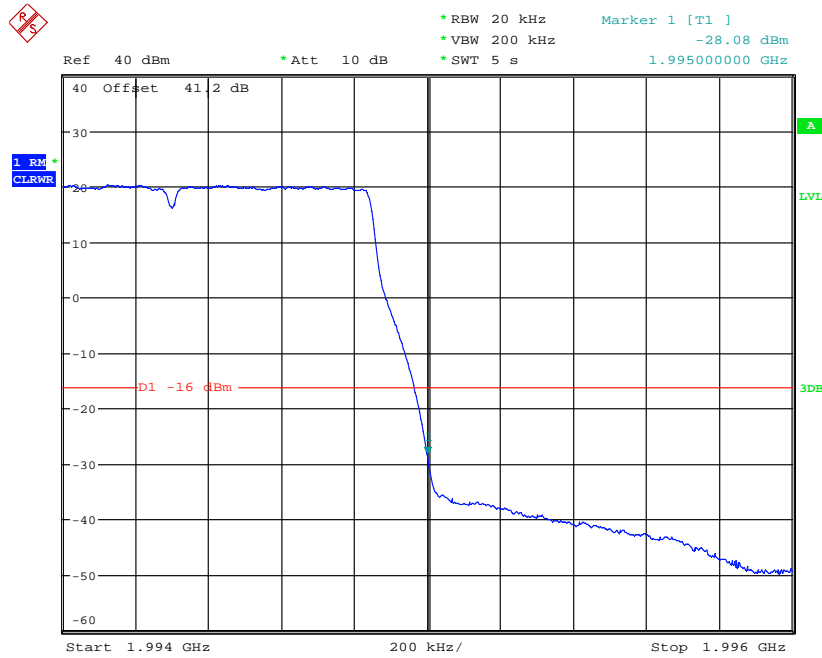


Date: 19.MAR.2014 09:45:07

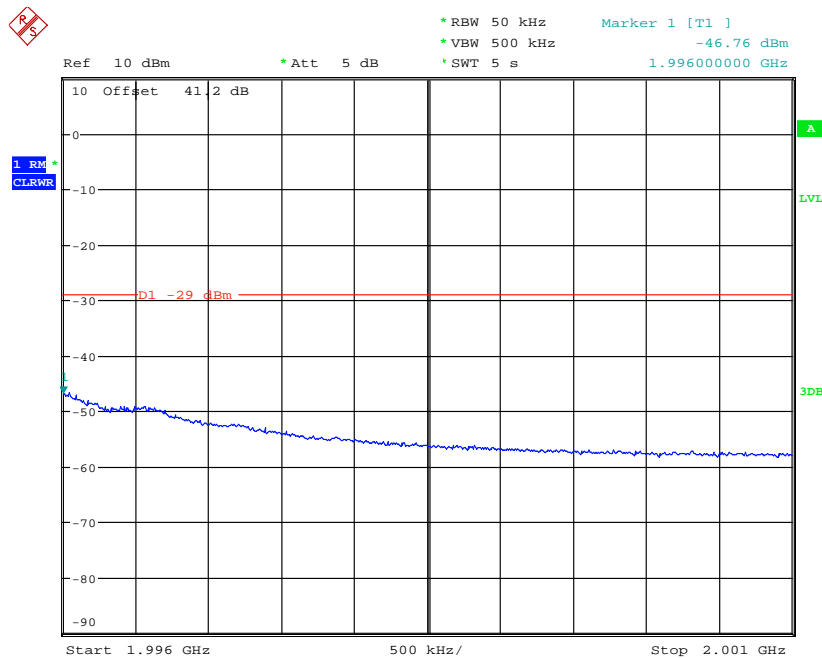


Date: 19.MAR.2014 09:47:34



Channel Position T - QPSK / Bandwidth 3.0 MHz

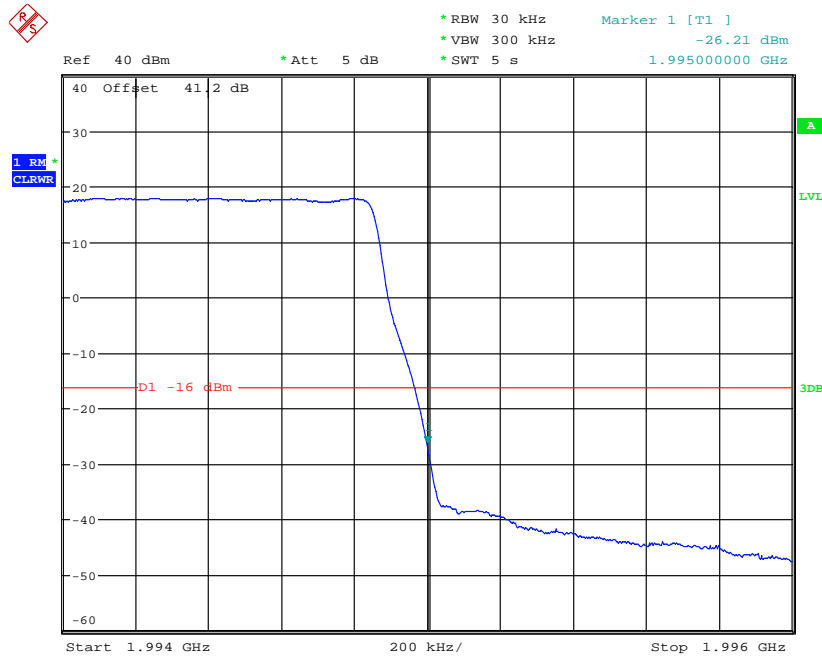


Date: 19.MAR.2014 12:09:13

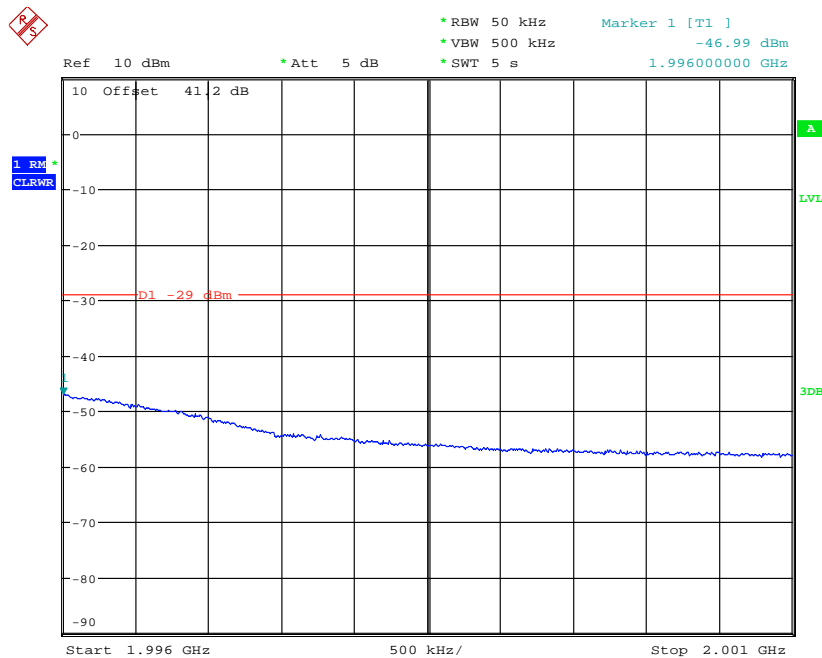


Date: 19.MAR.2014 12:08:11

Channel Position T - QPSK / Bandwidth 5.0 MHz

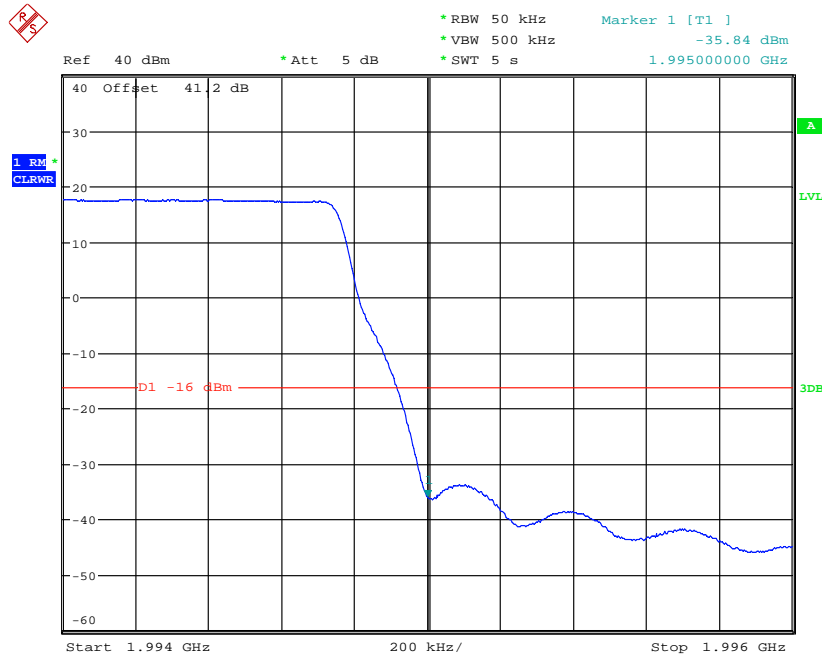


Date: 19.MAR.2014 12:23:35

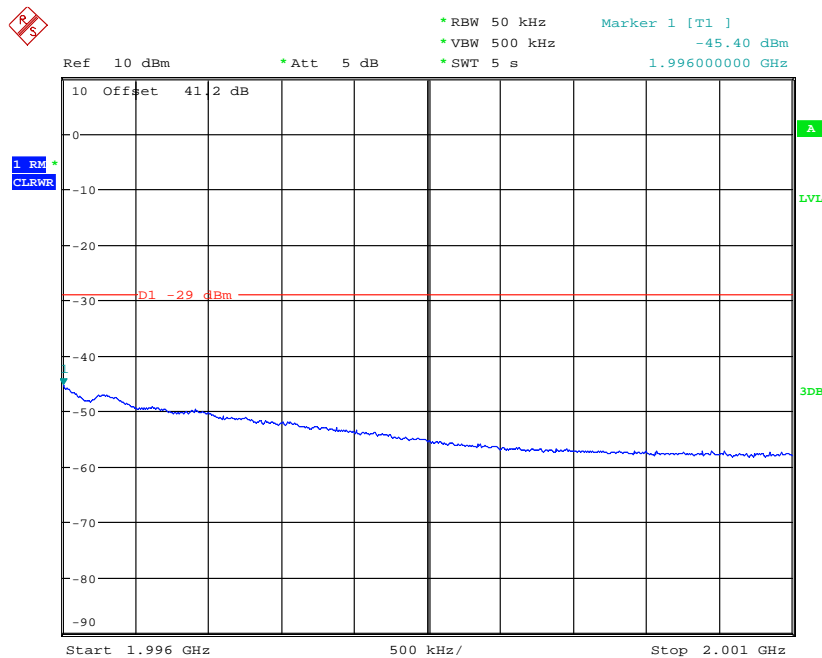


Date: 19.MAR.2014 12:22:15

Channel Position T - QPSK / Bandwidth 10.0 MHz

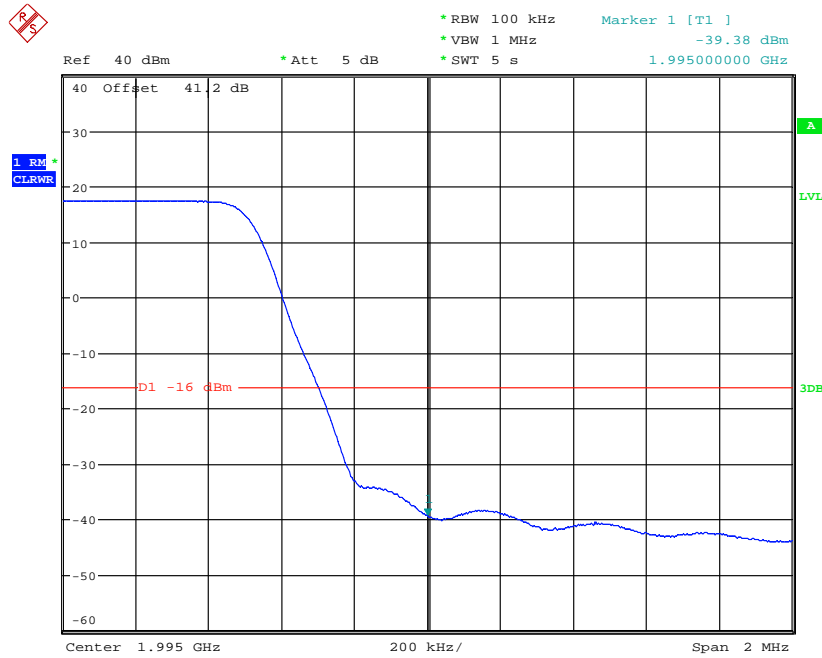


Date: 19.MAR.2014 12:35:46

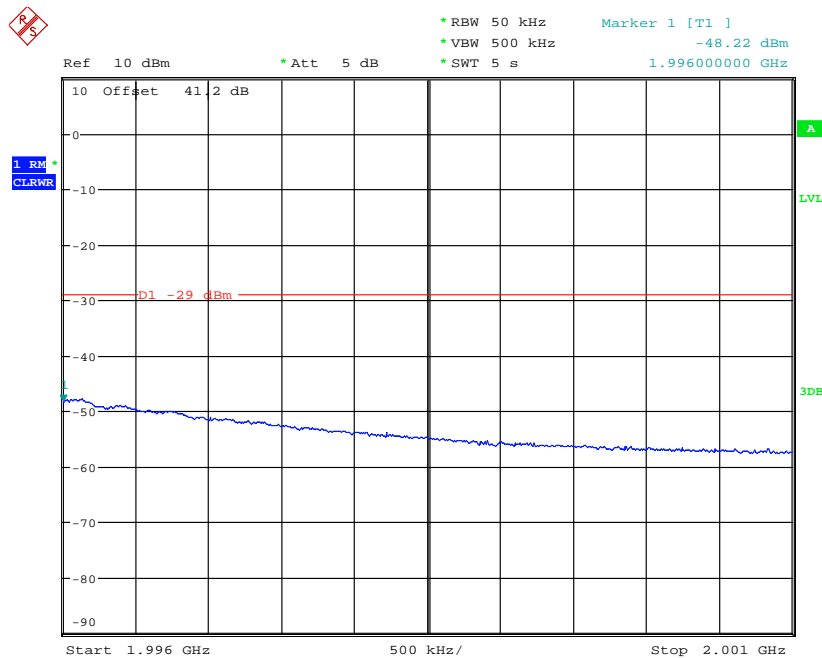


Date: 19.MAR.2014 12:36:51

Channel Position T - QPSK / Bandwidth 15.0 MHz

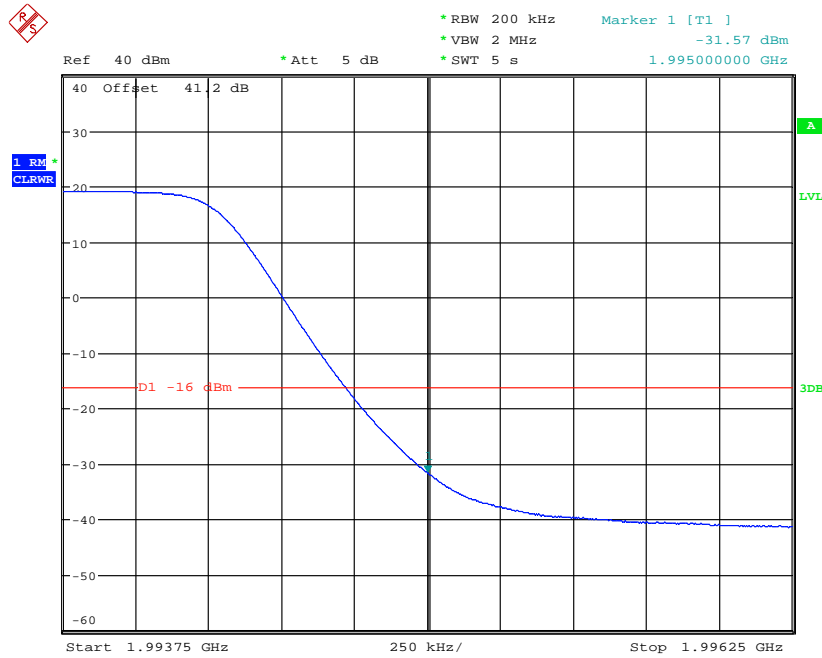


Date: 19.MAR.2014 12:50:07

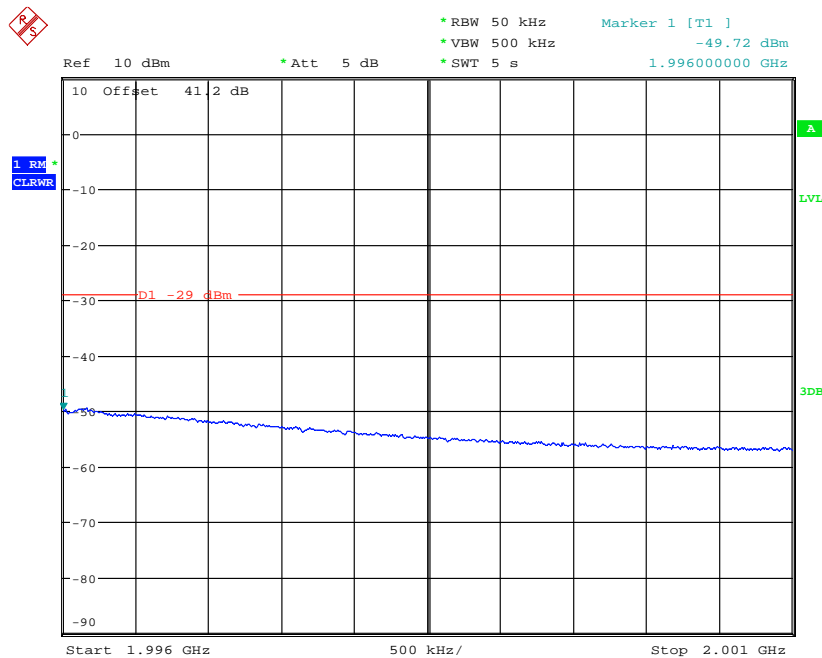


Date: 19.MAR.2014 12:46:54

Channel Position T - QPSK / Bandwidth 20.0 MHz

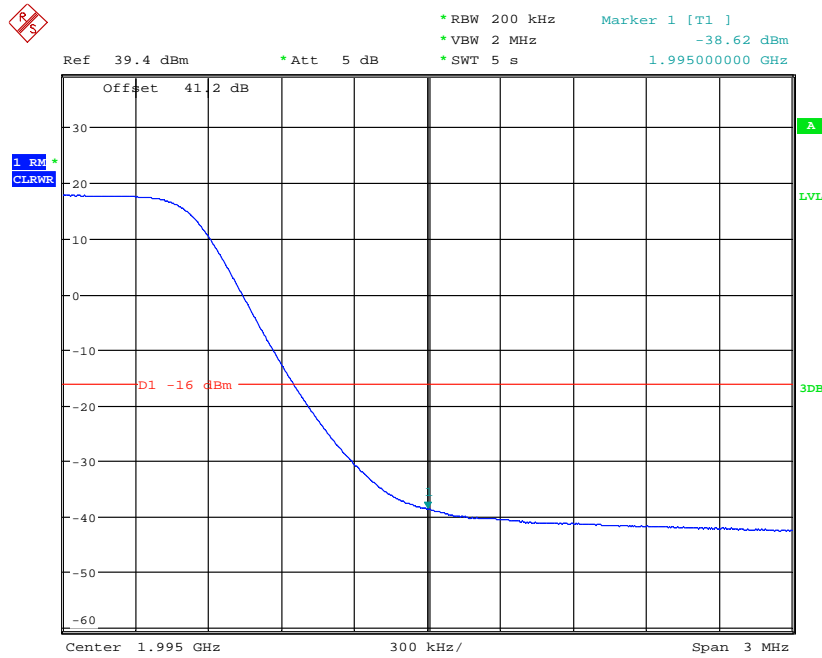

Date: 19.MAR.2014 13:18:39

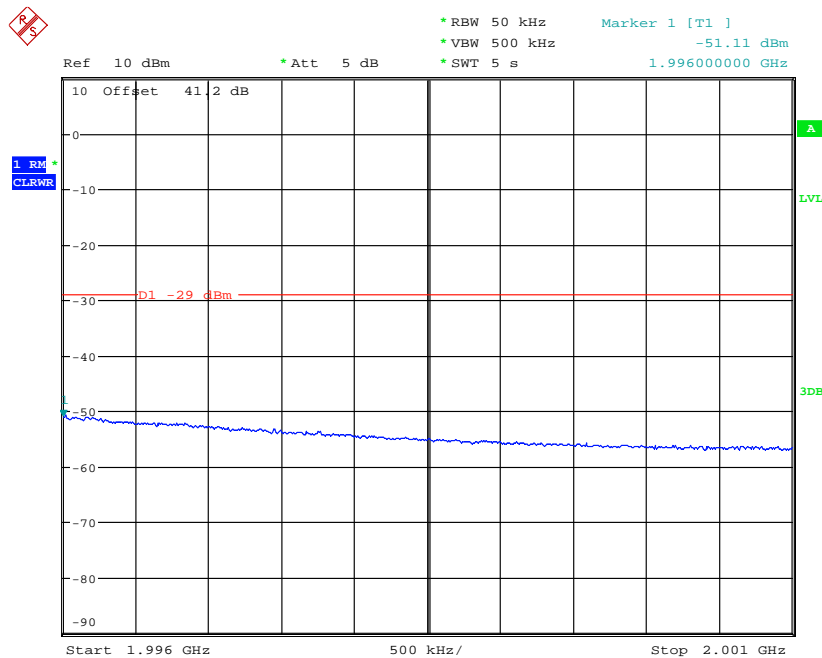

Date: 19.MAR.2014 13:19:40


Configuration L-MIMO-MC 1 (2C)

Maximum Output Power 34.0dBm per carrier


Band Edge Frequency	Channel Bandwidth	Edge Test with modulation QPSK Channel Frequencies
Channel Position B <sub>RFBW</sub> 1930.0 MHz	1.4 MHz	1930.7MHz + 1932.1MHz
	3.0 MHz	1931.5MHz + 1934.5MHz
	5.0 MHz	1932.5MHz + 1937.5MHz
	10.0 MHz	1935.0MHz + 1945.0MHz
	15.0 MHz	-
	20.0 MHz	-
Channel Position T <sub>RFBW</sub> 1995.0 MHz	1.4 MHz	1992.9MHz + 1994.3MHz
	3.0 MHz	1990.5MHz + 1993.5MHz
	5.0 MHz	1987.5MHz + 1992.5MHz
	10.0 MHz	1980.0MHz + 1990.0MHz
	15.0 MHz	-
	20.0 MHz	-

Note: The channels shown in the table above are the minimum and maximum channels that can be used in the authorised frequency ranges to maintain compliance. Channels outside of the ranges shown in the above tables shall not be made available to the end user.

Channel Position  $B_{RFBW}$  - QPSK / Bandwidth 1.4 MHz

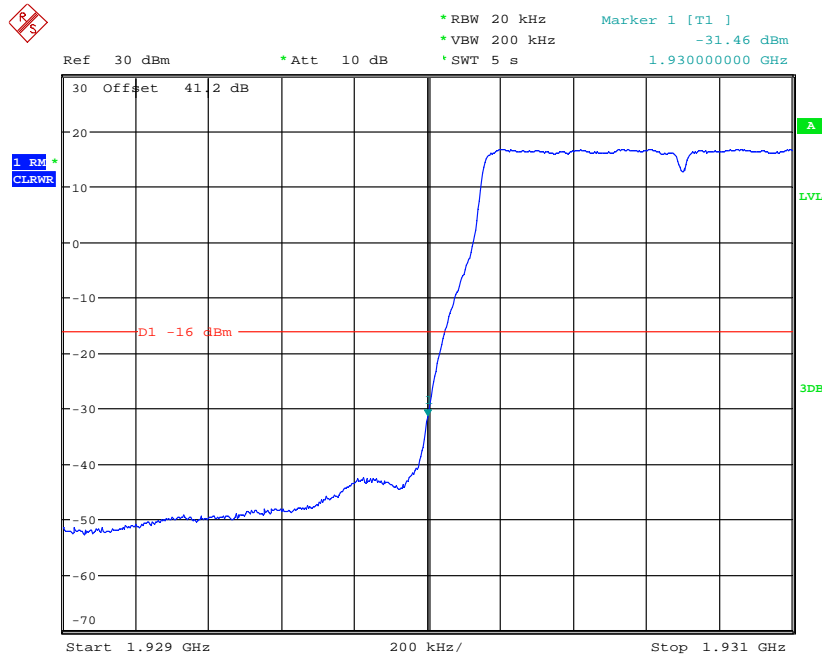


Date: 20.MAR.2014 13:09:56

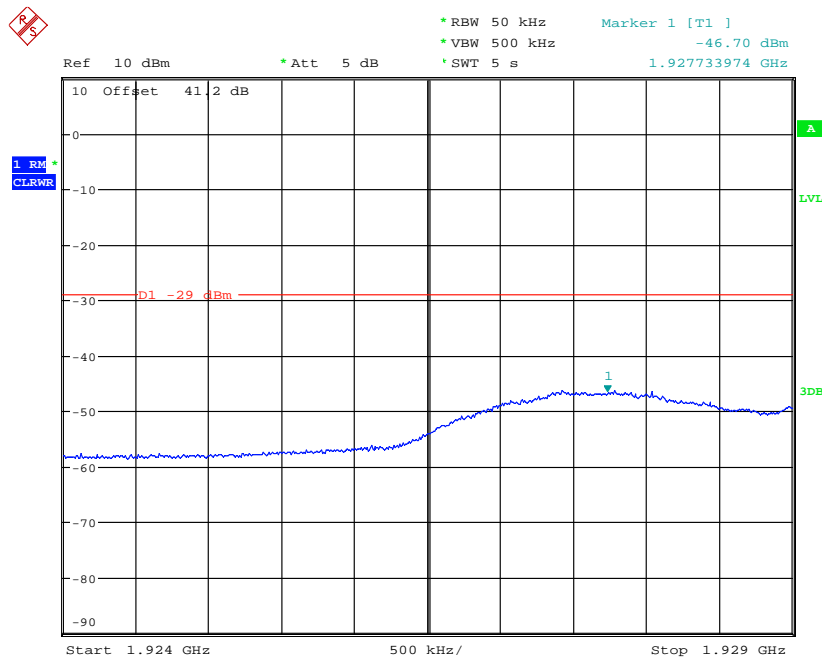


Date: 20.MAR.2014 13:08:48

Channel Position  $B_{RFBW}$  - QPSK / Bandwidth 3.0 MHz

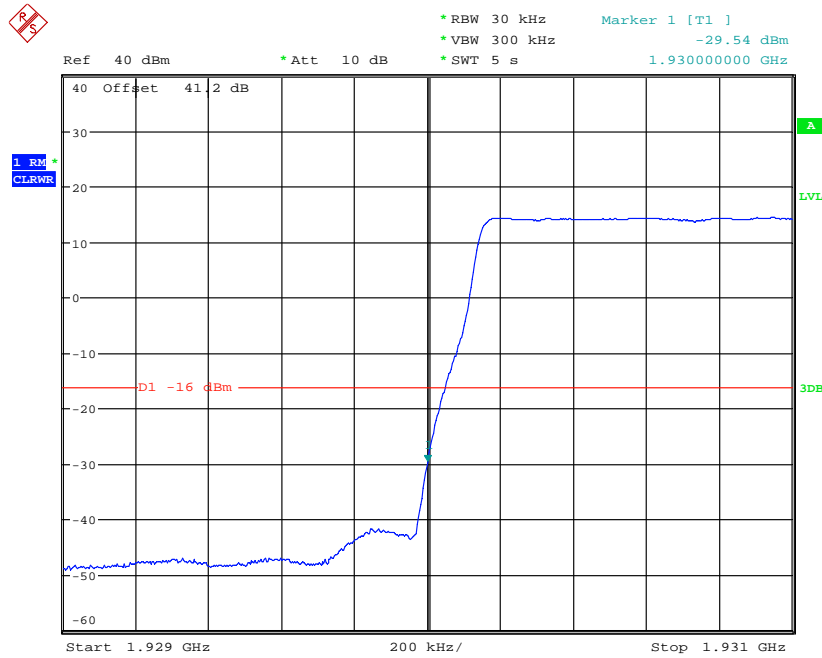


Date: 20.MAR.2014 13:24:03

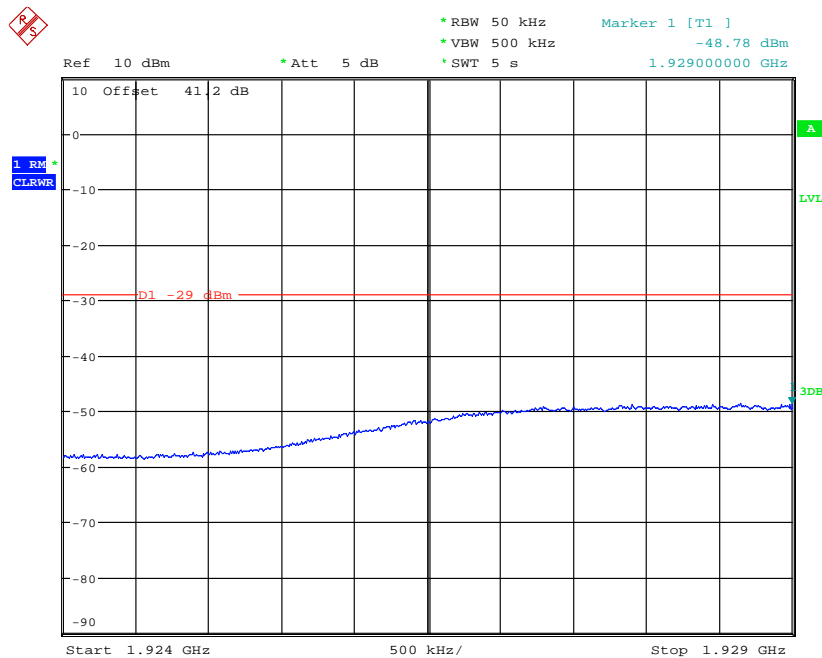


Date: 20.MAR.2014 13:25:21



Channel Position  $B_{RFBW}$  - QPSK / Bandwidth 5.0 MHz

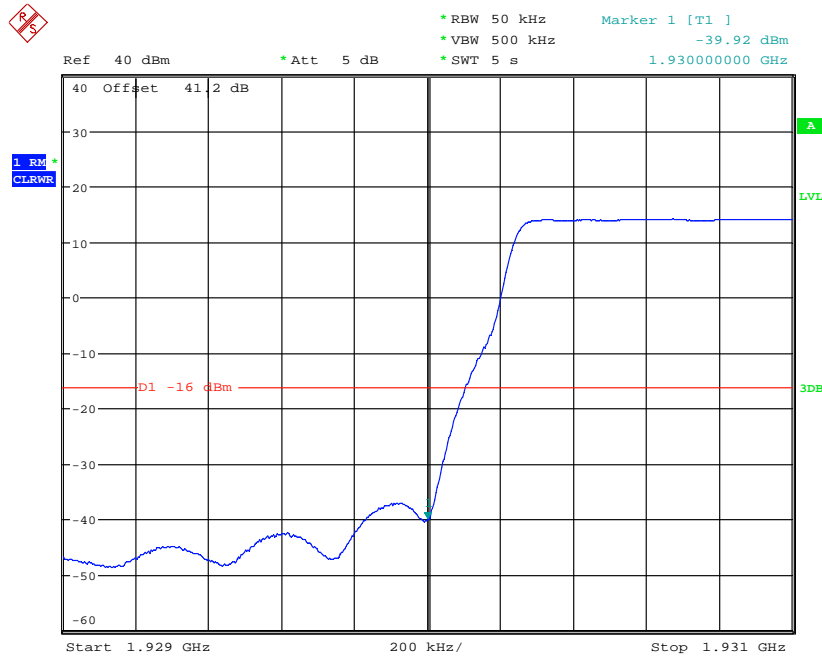


Date: 20.MAR.2014 14:13:06

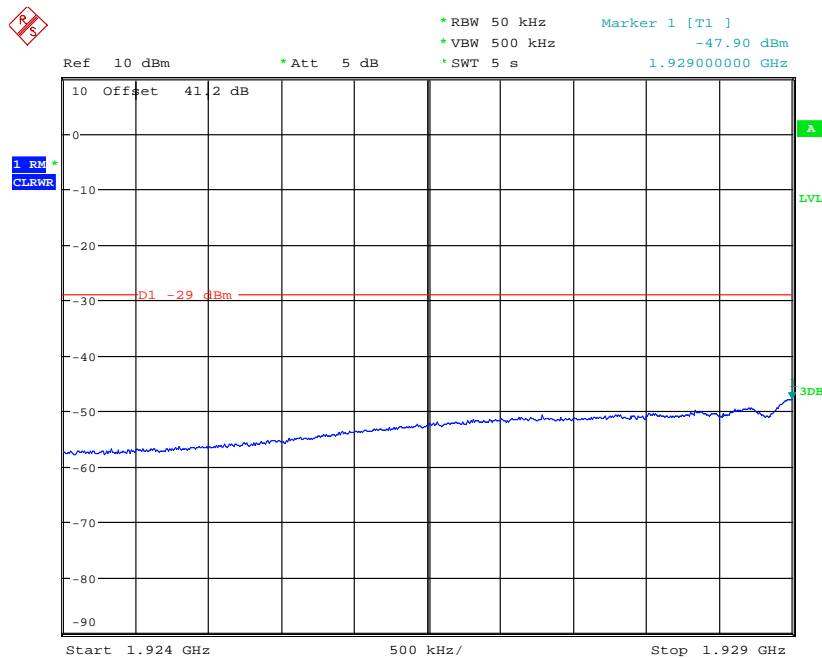


Date: 20.MAR.2014 14:14:15

Channel Position  $B_{RFBW}$  - QPSK / Bandwidth 10.0 MHz

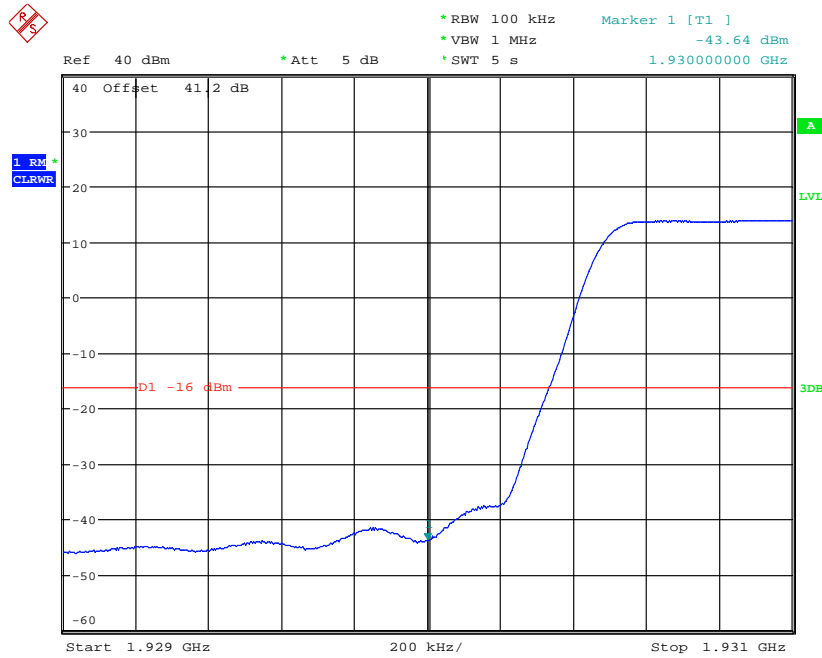


Date: 20.MAR.2014 14:20:07

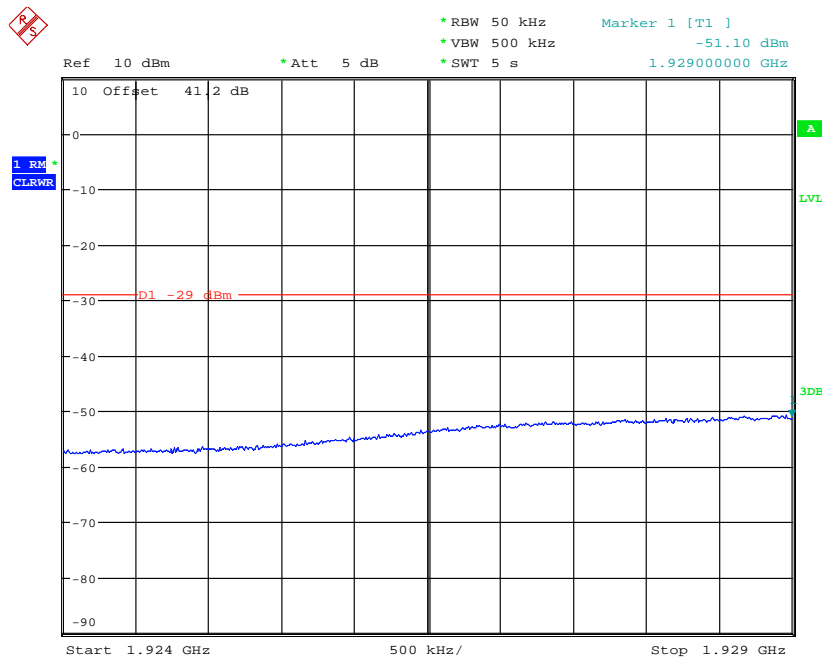


Date: 20.MAR.2014 14:21:06

Channel Position T<sub>RFBW</sub> - QPSK / Bandwidth 1.4 MHz

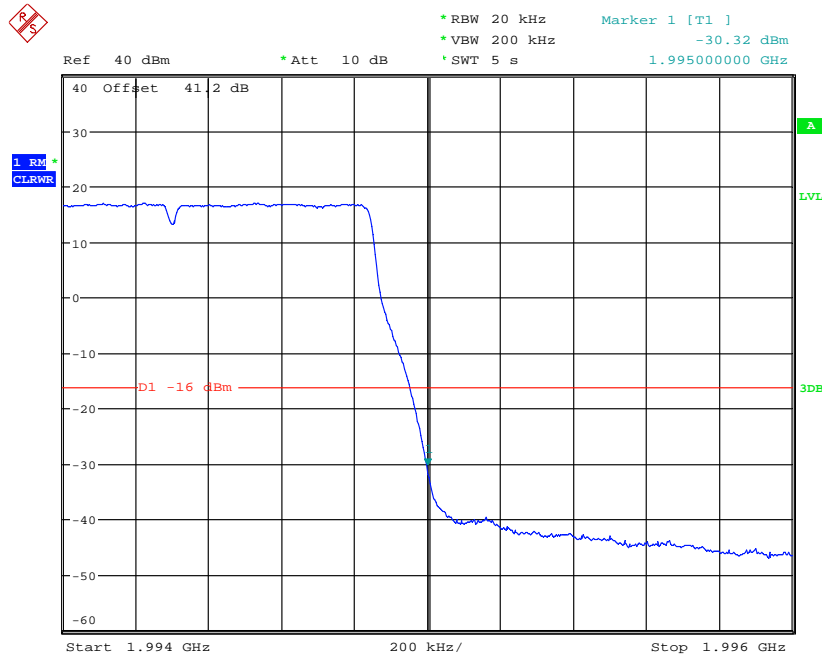


Date: 20.MAR.2014 13:19:09

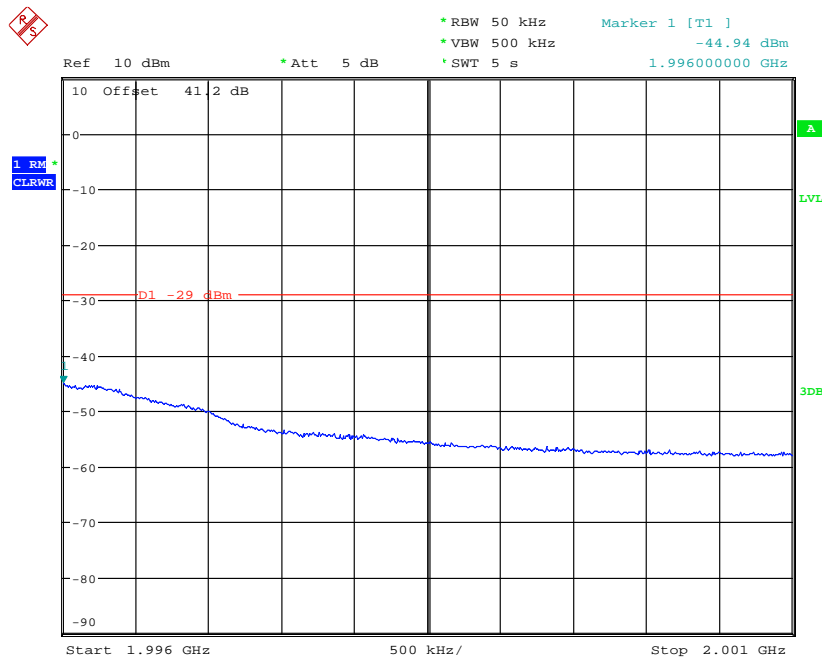


Date: 20.MAR.2014 13:17:27

Channel Position T<sub>RFBW</sub> - QPSK / Bandwidth 3.0 MHz

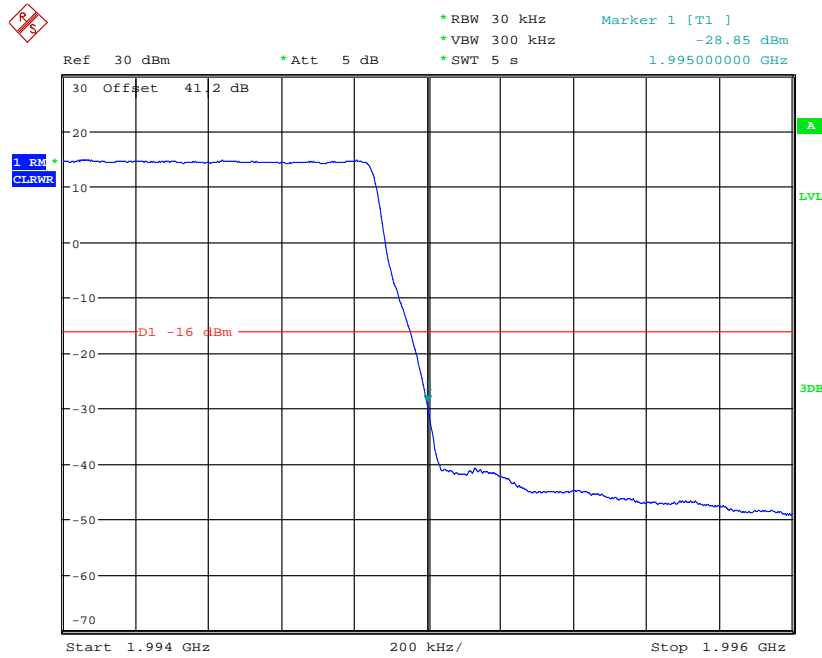


Date: 20.MAR.2014 14:09:34

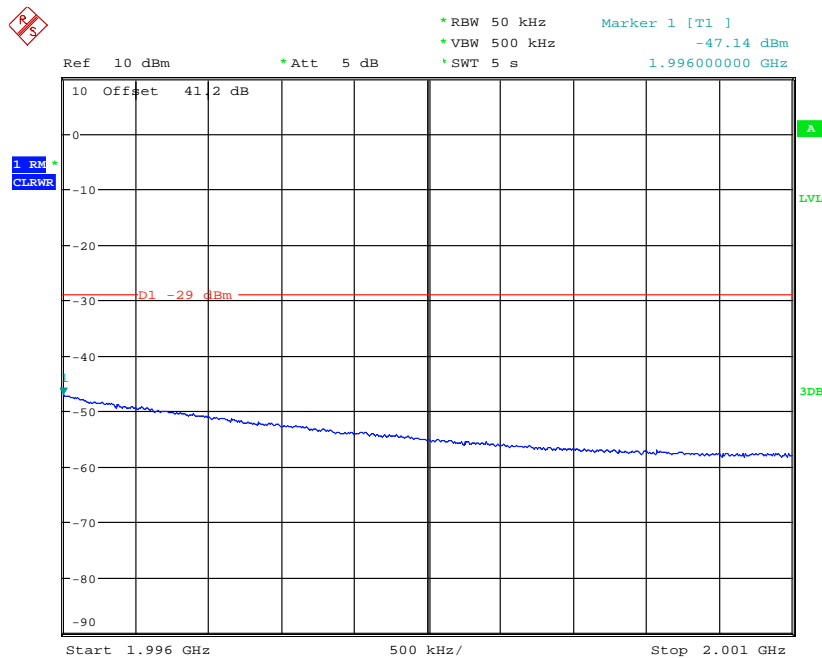


Date: 20.MAR.2014 14:07:14

Channel Position T<sub>RFBW</sub> - QPSK / Bandwidth 5.0 MHz

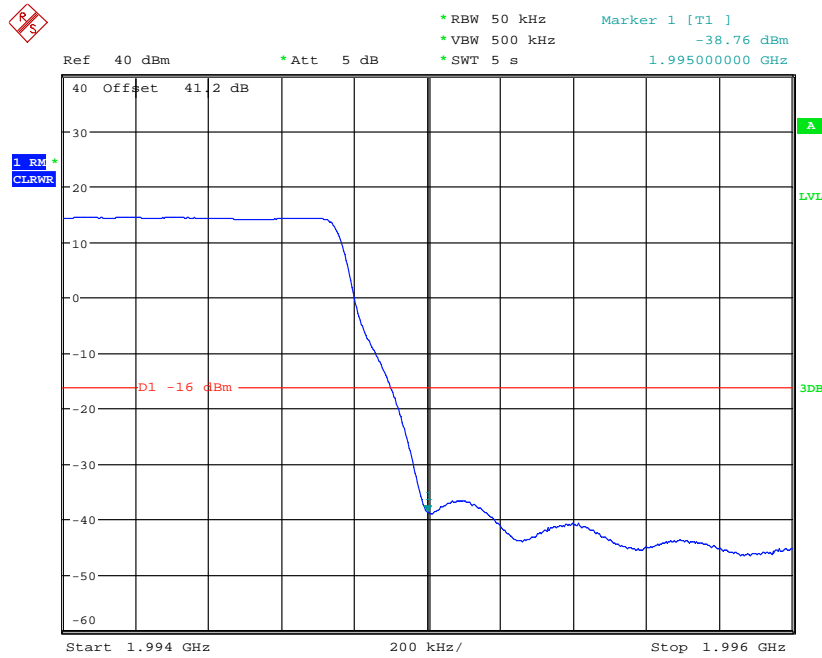


Date: 20.MAR.2014 14:17:01

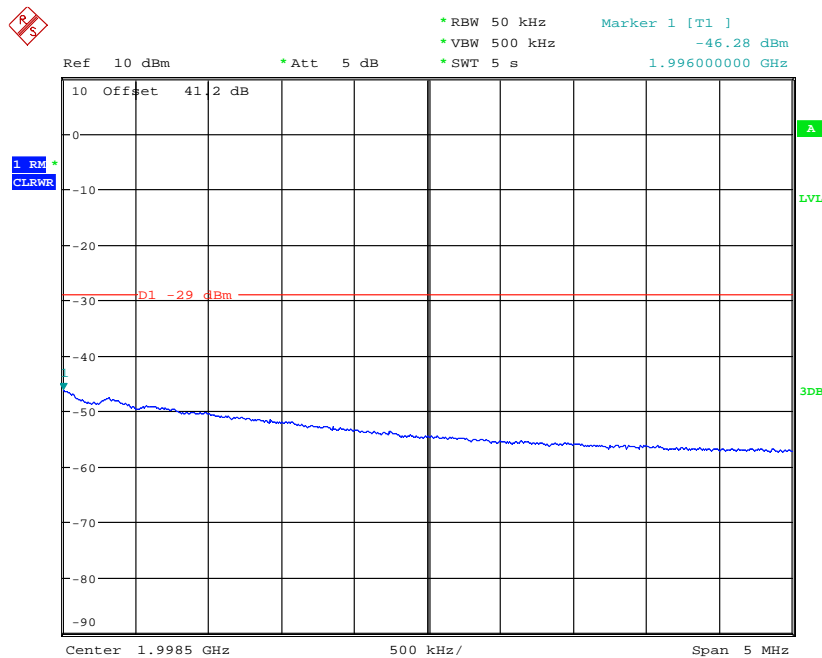


Date: 20.MAR.2014 14:16:23

Channel Position T<sub>RFBW</sub> - QPSK / Bandwidth 10.0 MHz

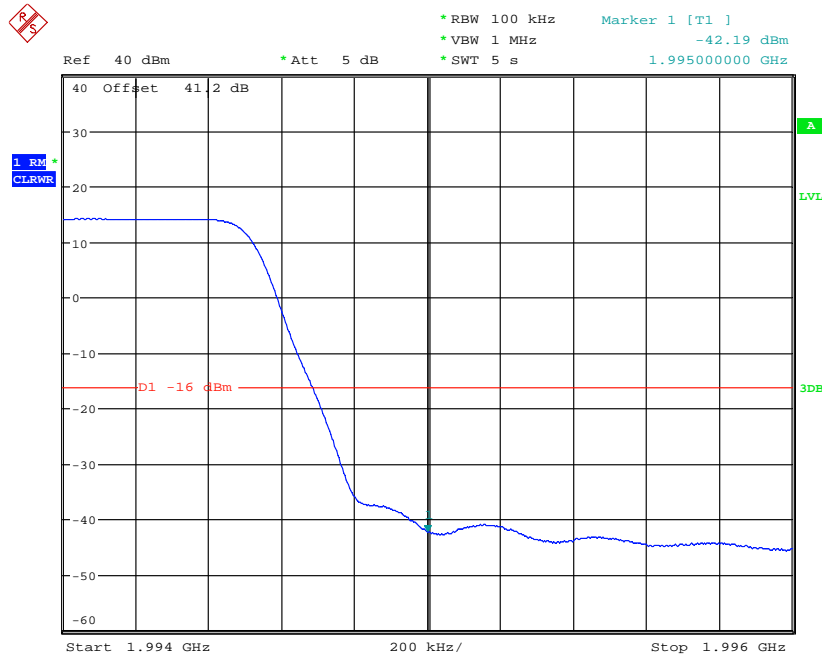

Date: 20.MAR.2014 14:24:02

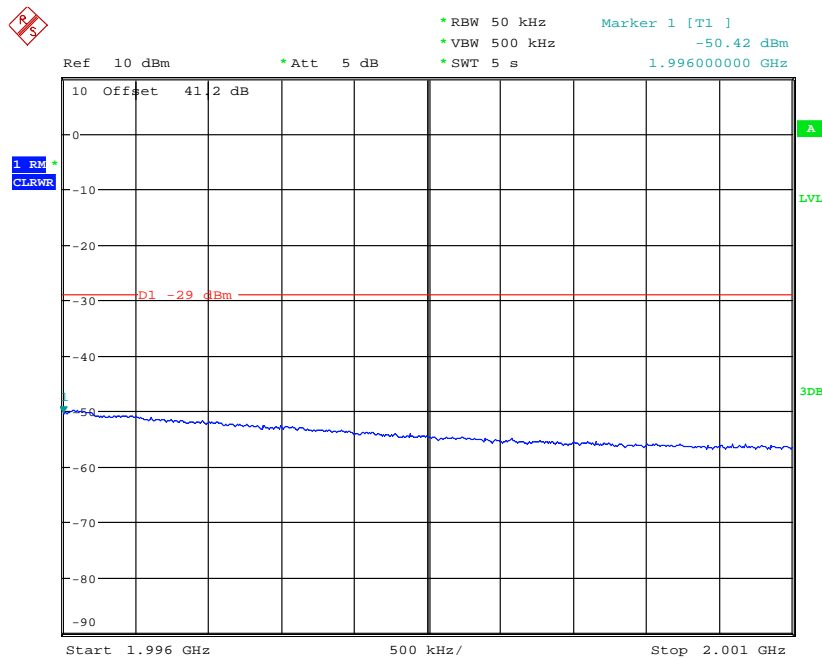

Date: 20.MAR.2014 14:22:36

Limit	-13 dBm
-------	---------

## 2.5 RADIATED SPURIOUS EMISSIONS

### 2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1053  
FCC CFR 47 Part 24, Clause 24.238(a)  
Industry Canada RSS-133, Clause 6.5

### 2.5.2 Equipment Under Test

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461

### 2.5.3 Date of Test and Modification State

04 April 2014 - Modification State 0

### 2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.5.5 Environmental Conditions

Ambient Temperature	23.0 °C
Relative Humidity	32.0%

### 2.5.6 Test Method

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisation.

Emissions identified within the range 30MHz – 20GHz were then formally measured using a Peak detector as the worst case.

In the frequency Range 30MHz – 20GHz, the measurement was performed with a resolution bandwidth of 1MHz.

The measurements were performed at a 3m distance unless otherwise stated.

The limits for Spurious Emissions have been calculated, as shown below using the following formula:

Field Strength of Carrier -  $(43 + 10\text{Log}(P))$  dB

Where:

Field Strength is measured in dB $\mu$ V/m

P is measured Transmitter Power in Watts

### Determination of Spurious Emission Limit

As the EUT have an integral antenna, the field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipoles as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where  $G_i$  is the antenna gain of ideal half-wave dipoles,

$P_o$  is the power out of the transceiver in W,

$d$  is the measurement distance in meter.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 9.20)^{0.5} / 3 = 7.09V/m = 137.01dB\mu V/m$$

As per 24.238(a) the spurious emission must be attenuated by  $43 + 10\log(P_o)$  dB this gives:

$$43 + 10\log(9.20) = 52.64dB$$

Therefore the limit at 3m measurement distance is:

$$134.39 - 52.64 = 84.4 \text{ dB}\mu V/m$$

This limit has been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

The results are shown in the plots below.



### 2.5.7 Test Results

Note: Only the worst case results plots have been included as all of the emissions are greater than 20dB below the limit. A set of plots have been included to show the measurement system noise floor.

Configuration L-MIMO-SC (1C)

Maximum Output Power 37.0dBm per carrier, LTE Bandwidth 1.4MHz

Channel Position	Channel Frequencies
Channel Position B	1930.7MHz
Channel Position M	1962.5MHz
Channel Position T	1994.3MHz

#### Channel Position B - QPSK

No emissions were detected within 20dB of the limit.

#### Channel Position M - QPSK

No emissions were detected within 20dB of the limit.


#### Channel Position T - QPSK

No emissions were detected within 20dB of the limit.


#### Channel Position T – 16QAM

No emissions were detected within 20dB of the limit.

Channel Position T – 64QAM / Bandwidth 1.4MHz - 30MHz – 1GHz

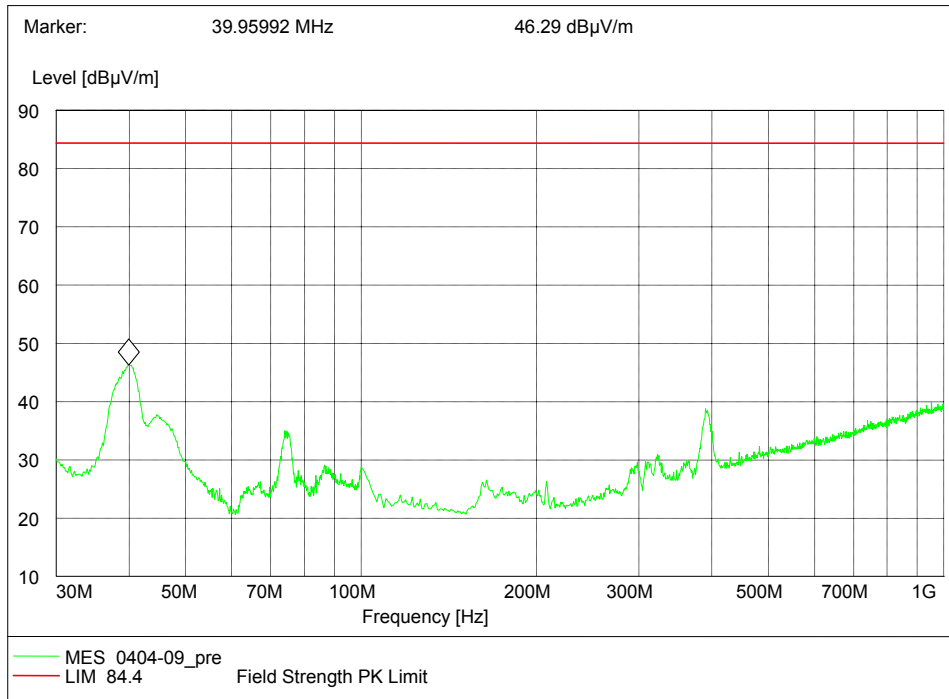


Channel Position T – 64QAM / Bandwidth 1.4MHz - 1GHz – 18GHz

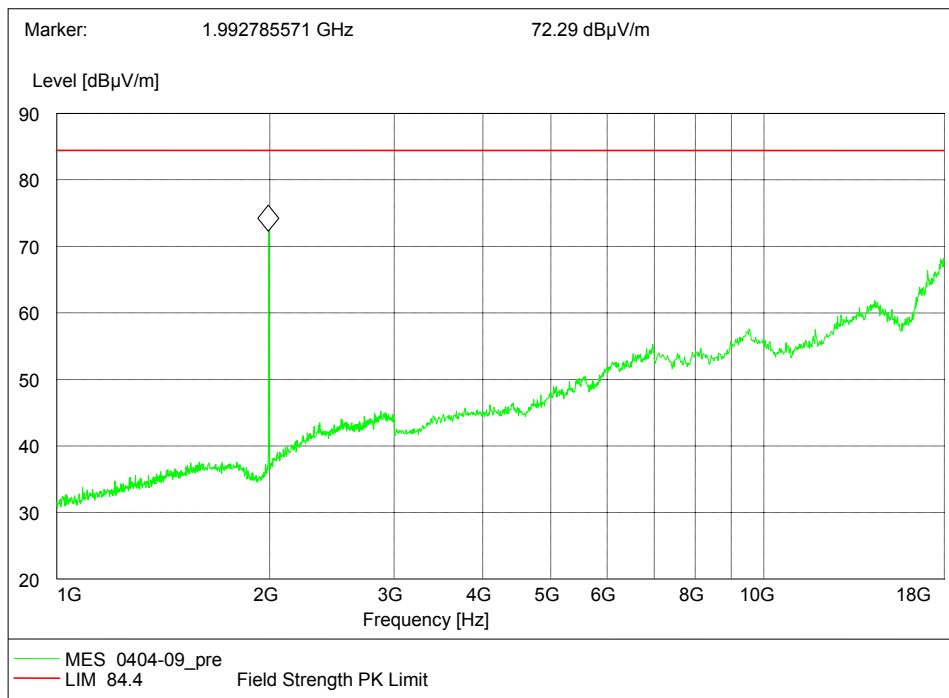

Note: The frequency marked is the carrier.

Channel Position T – 64QAM / Bandwidth 1.4MHz - 18GHz – 20GHz

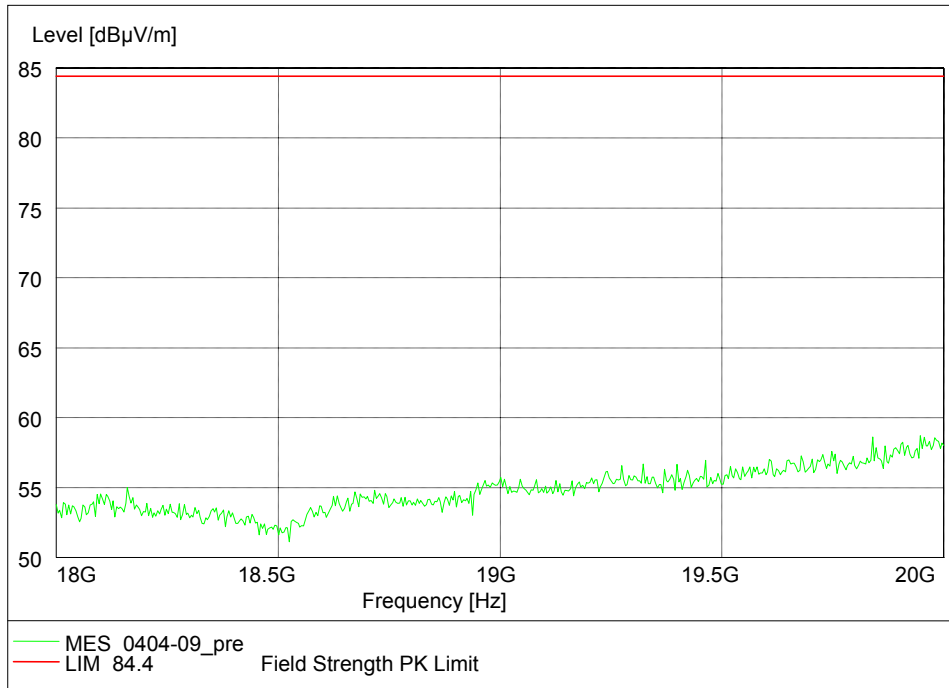

Maximum Output Power 37.0dBm per carrier, LTE Bandwidth 3.0MHz

Channel Position	Channel Frequencies
Channel Position T	1993.5MHz

Channel Position T – 64QAM

No emissions were detected within 20dB of the limit.

Maximum Output Power 37.0dBm per carrier, LTE Bandwidth 5.0MHz

Channel Position	Channel Frequencies
Channel Position T	1992.5MHz

Channel Position T – 64QAM

No emissions were detected within 20dB of the limit.

Maximum Output Power 37.0dBm per carrier, LTE Bandwidth 10.0MHz

Channel Position	Channel Frequencies
Channel Position T	1990.0MHz

Channel Position T – 64QAM

No emissions were detected within 20dB of the limit.

Maximum Output Power 37.0dBm per carrier, LTE Bandwidth 15.0MHz

Channel Position	Channel Frequencies
Channel Position T	1987.5MHz

Channel Position T – 64QAM

No emissions were detected within 20dB of the limit.

Maximum Output Power 37.0dBm per carrier, LTE Bandwidth 20.0MHz

Channel Position	Channel Frequencies
Channel Position T	1985.0MHz

Channel Position T – 64QAM

No emissions were detected within 20dB of the limit.

Configuration L-MIMO-MC 1(2C)

Maximum Output Power 34.0dBm per carrier, LTE Bandwidth 1.4MHz

Channel Position	Channel Frequencies
Channel Position T <sub>RFBW</sub>	1970.7MHz + 1994.3MHz

Channel Position B<sub>RFBW</sub> – 64QAM

No emissions were detected within 20dB of the limit.

Limit	
	-13dBm / 84.4dB $\mu$ V/m

Remarks

The EUT does not exceed -13dBm / 84.4dB $\mu$ V/m at the measured frequencies.

## 2.6 CONDUCTED SPURIOUS EMISSIONS

### 2.6.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 24, Clause 24.238(a)  
Industry Canada RSS-133, Clause 6.5

### 2.6.2 Equipment Under Test

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461

### 2.6.3 Date of Test and Modification State

19 and 20 April 2014 - Modification State 0

### 2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.6.5 Environmental Conditions

Ambient Temperature	23.0 - 23.8 °C
Relative Humidity	25.5 - 26.5 %

### 2.6.6 Test Method

In accordance with FCC CFR 47 Part 2, Clause 2.1051, the spurious emissions from the antenna terminal were measured. In accordance with FCC CFR 47 Part 24, Clause 24.238(a) and Industry Canada RSS-133, Clause 6.5, any emissions outside of the block edges shall be attenuated by at least  $43 + 10 \log (P)$ .

The EUT was set to transmit at its maximum rated output power. The path loss between the Spectrum Analyser and the EUT was measured with the worst case level being entered as a Reference Level Offset. In accordance with 24.238(a), the RBW was set to 1MHz and a Peak detector with the trace set to Max Hold was used. The frequency spectrum was then investigated between 9kHz and 20GHz. Testing was carried out on the Bottom, Middle and Top channels.

For MIMO mode configurations, the limit was adjusted with a correction of -3dB  $[10\log 2]$  by using the Measure and Add  $10\log(N)$  dB technique according to FCC KDB662911 D01 accounting for simultaneous transmission from antenna ports RF A and RF B.

The measurements were performed on the output connector RF A. Limited complementary measurement were done at output conector RF B to verify identical performance for both transmitter chains in MIMO mode

The results are shown in the plots below.


### 2.6.7 Test Results

Configuration L-MIMO-SC

Maximum Output Power 37.0dBm per carrier

Channel Position	Bandwidth	Channel Frequency
Channel Position B	1.4MHz	1930.7MHz
	20.0MHz	1940.0MHz
Channel Position M	1.4MHz	1962.5MHz
	20.0MHz	1962.5MHz
Channel Position T	1.4MHz	1994.3MHz
	20.0MHz	1985.0MHz


Channel Position B - QPSK / Bandwidth 1.4MHz - 9kHz – 3GHz

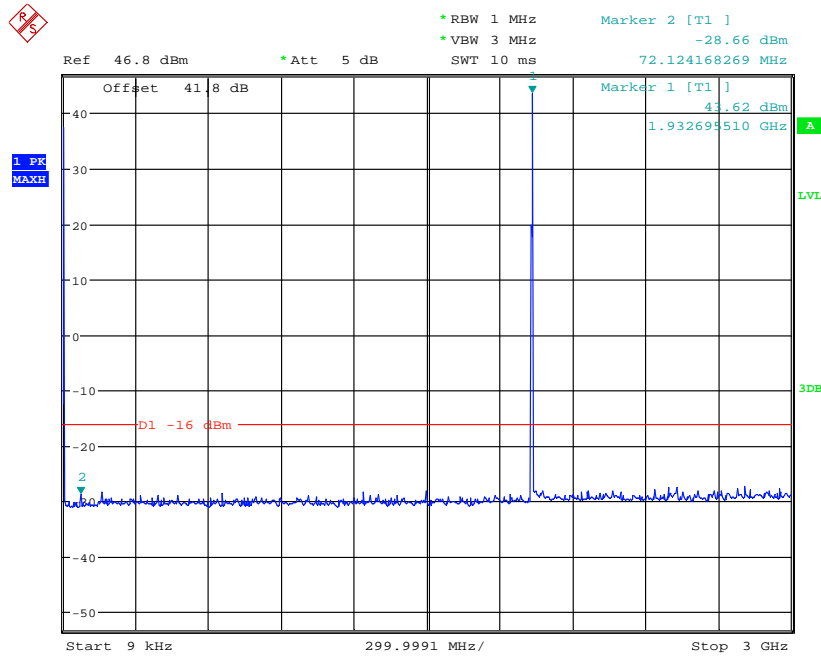

Date: 19.MAR.2014 09:18:51


Note: The emission beyond the limit is within the operating band.

Channel Position B - QPSK / Bandwidth 1.4MHz - 3GHz – 4GHz

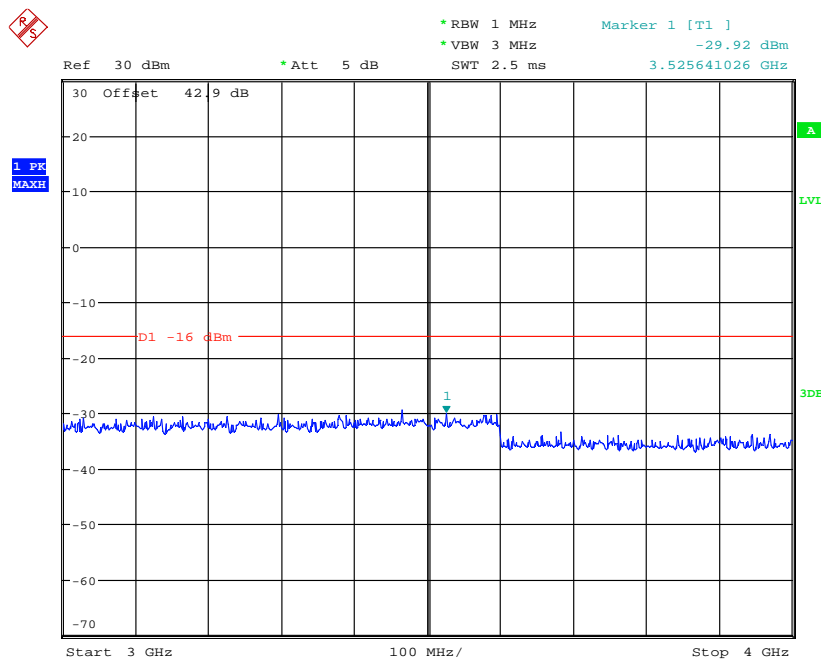


Date: 19.MAR.2014 14:00:22

Channel Position B - QPSK / Bandwidth 1.4MHz - 4GHz – 10GHz

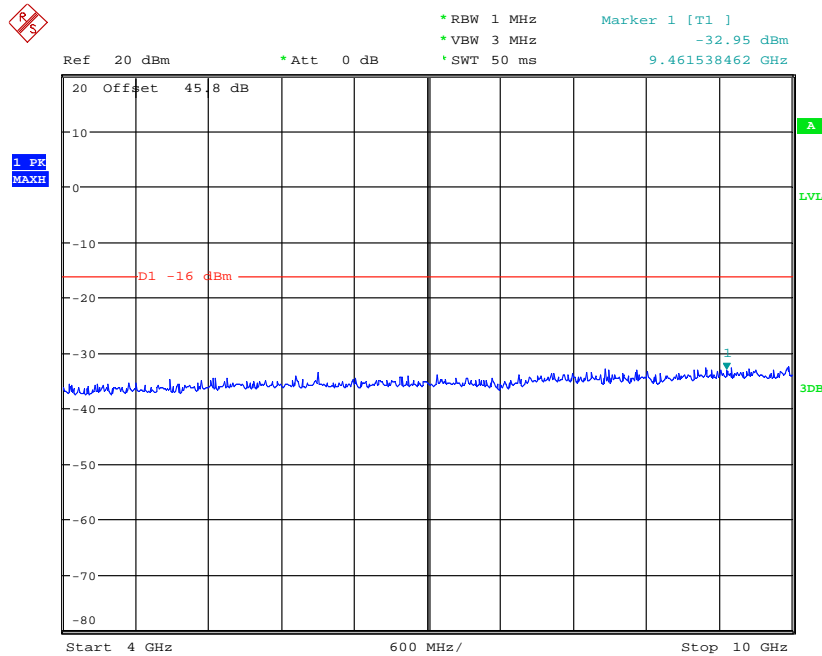

Date: 19.MAR.2014 15:30:07


Channel Position B - QPSK / Bandwidth 1.4MHz - 10GHz – 20GHz

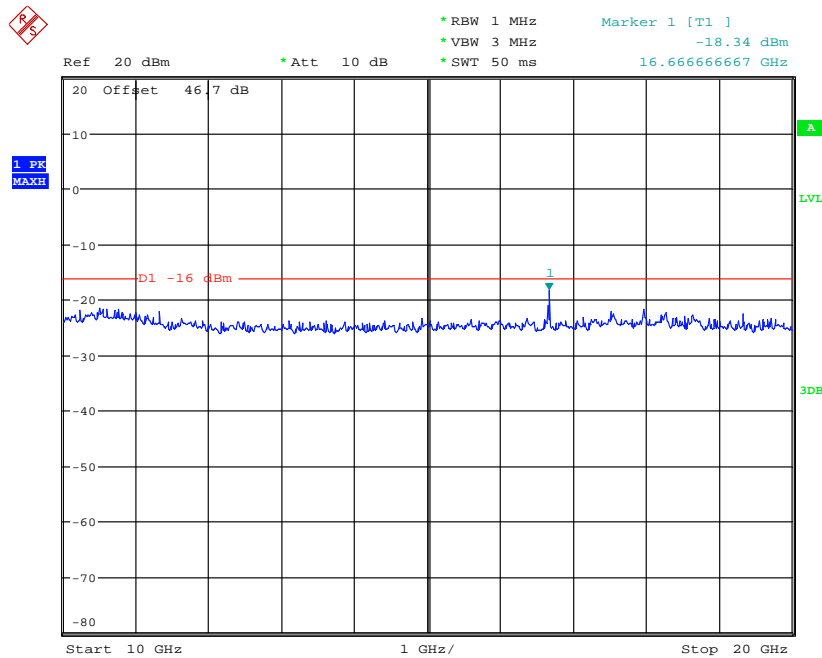

Date: 19.MAR.2014 14:59:51




Channel Position B - QPSK / Bandwidth 20.0MHz - 9kHz – 3GHz

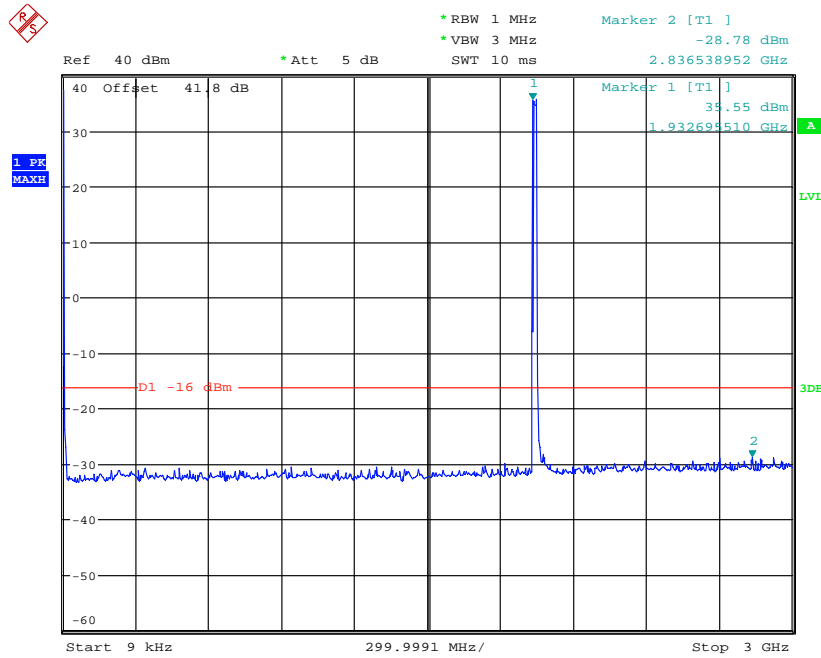

Date: 19.MAR.2014 12:57:07


Note: The emission beyond the limit is within the operating band.

Channel Position B - QPSK / Bandwidth 20.0MHz - 3GHz – 4GHz

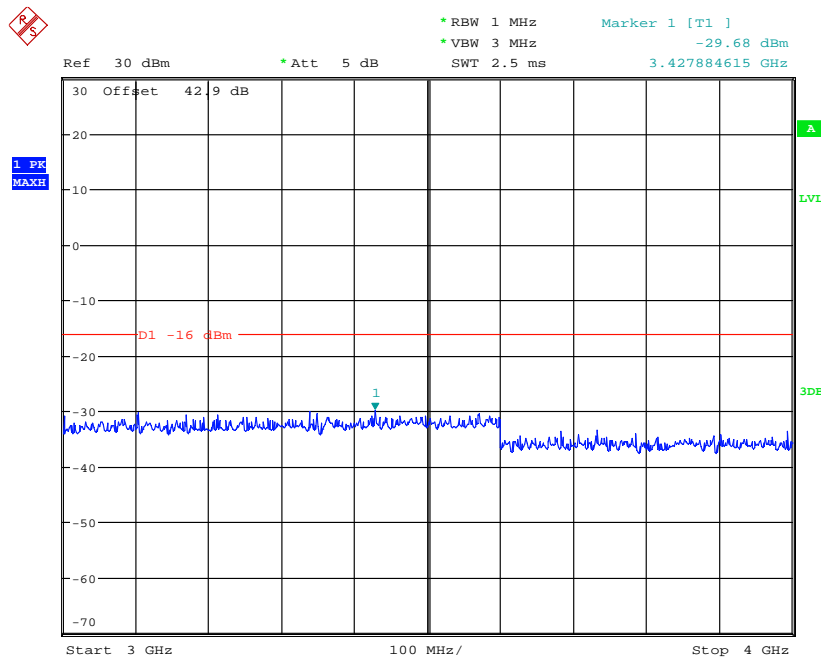


Date: 19.MAR.2014 14:01:48

Channel Position B - QPSK / Bandwidth 20.0MHz - 4GHz – 10GHz

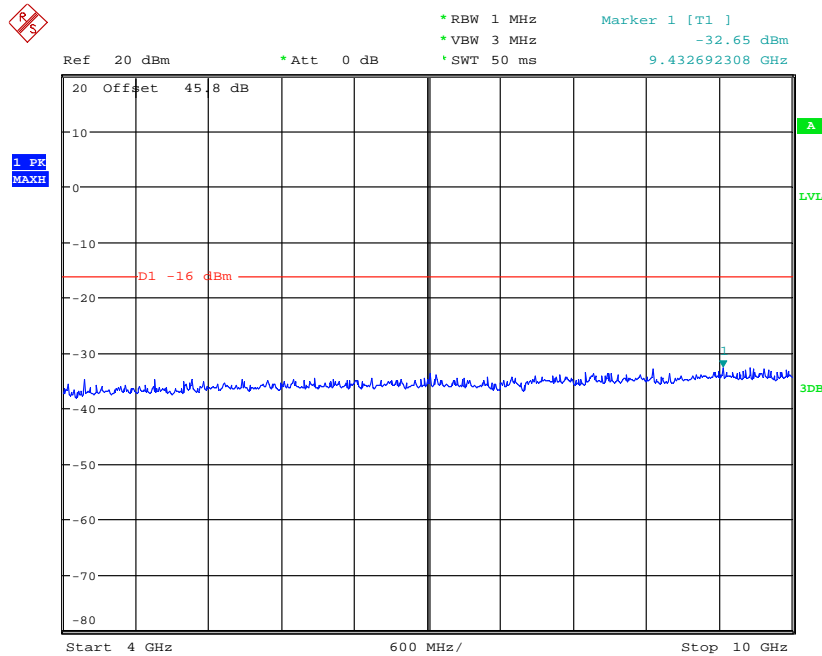


Date: 19.MAR.2014 15:20:42

Channel Position B - QPSK / Bandwidth 20.0MHz - 10GHz – 20GHz

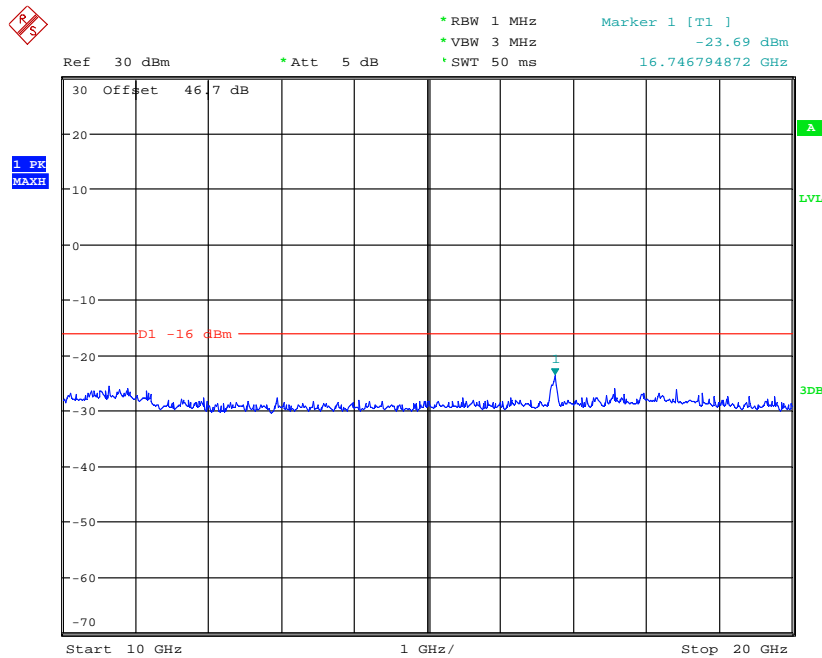

Date: 19.MAR.2014 15:13:08


Channel Position M - QPSK / Bandwidth 1.4MHz - 9kHz – 3GHz

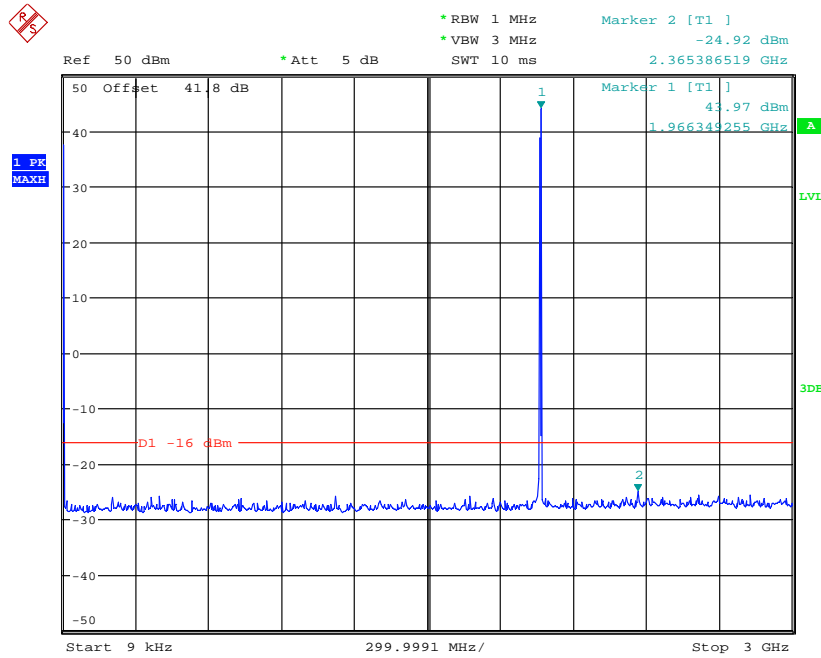

Date: 19.MAR.2014 13:31:45


Note: The emission beyond the limit is within the operating band.

Channel Position M - QPSK / Bandwidth 1.4MHz - 3GHz – 4GHz

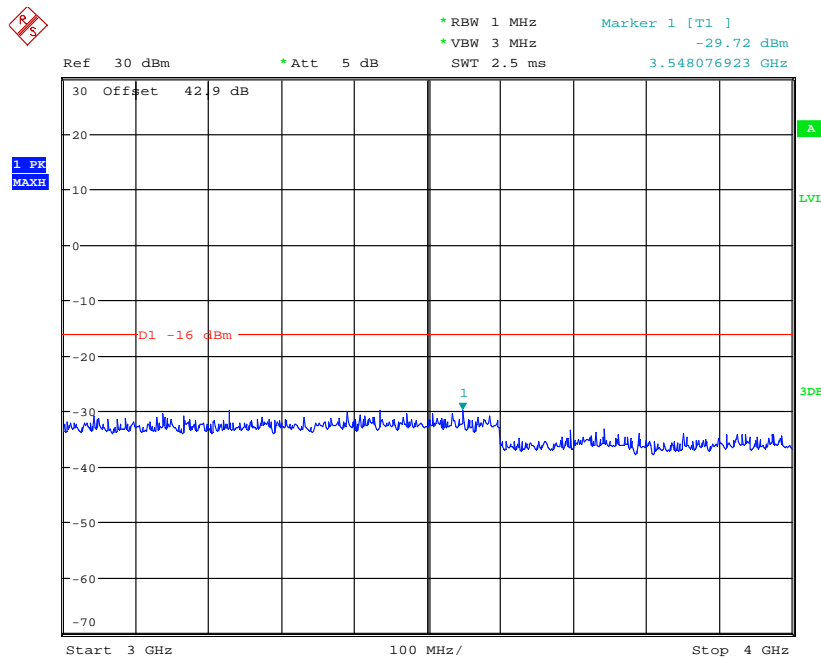


Date: 19.MAR.2014 13:54:33

Channel Position M - QPSK / Bandwidth 1.4MHz - 4GHz – 10GHz

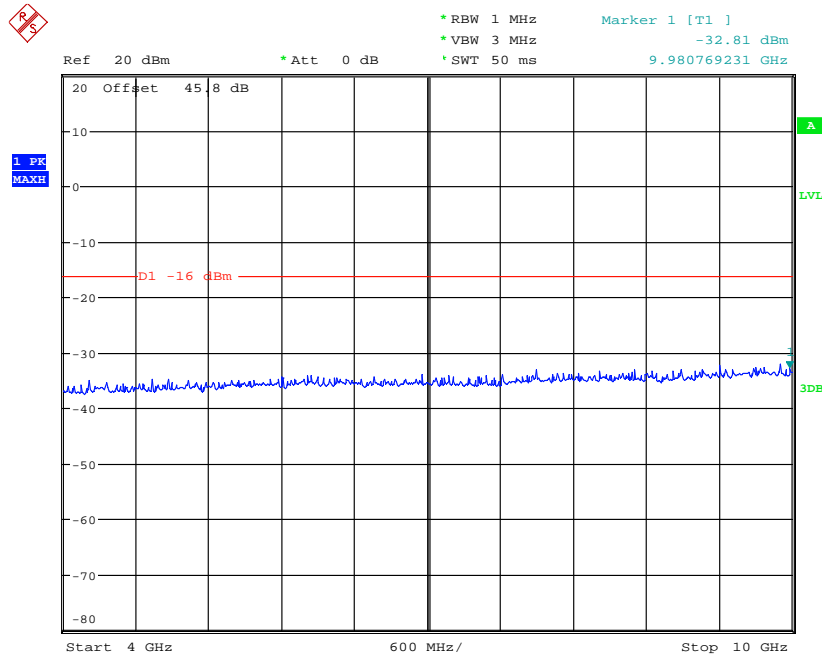


Date: 19.MAR.2014 15:28:10

Channel Position M - QPSK / Bandwidth 1.4MHz - 10GHz – 20GHz

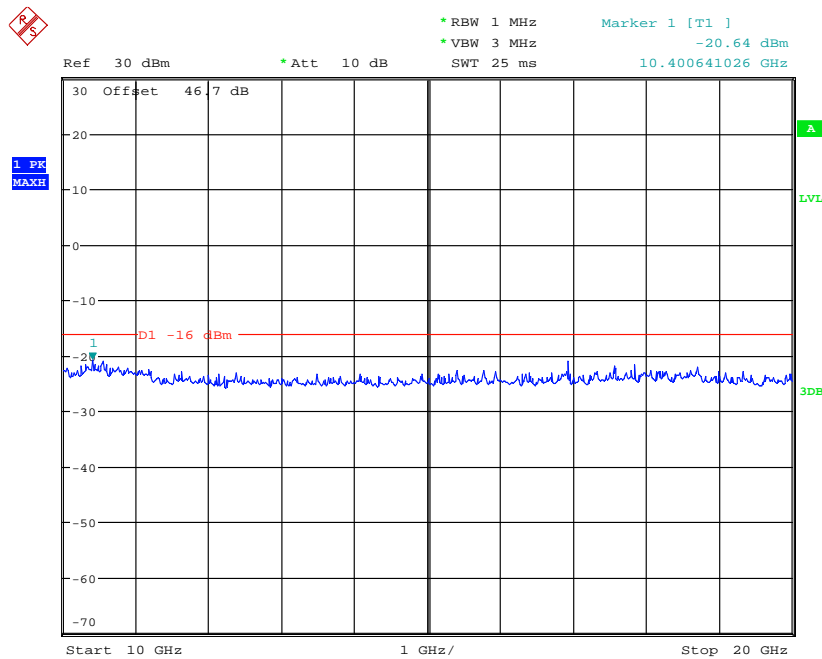

Date: 19.MAR.2014 14:51:00


Channel Position M - QPSK / Bandwidth 20.0MHz - 9kHz – 3GHz

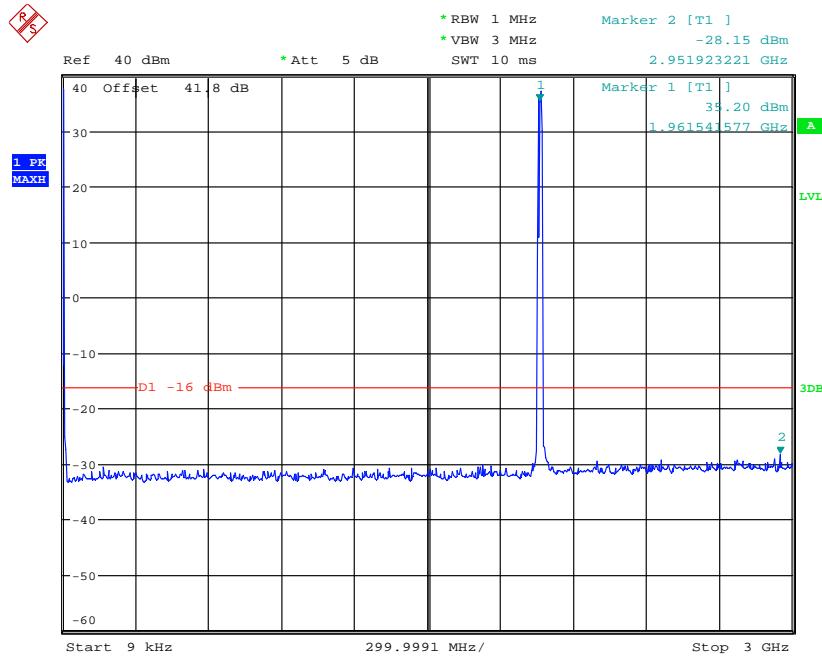

Date: 19.MAR.2014 13:22:15


Note: The emission beyond the limit is within the operating band.

Channel Position M - QPSK / Bandwidth 20.0MHz - 3GHz – 4GHz

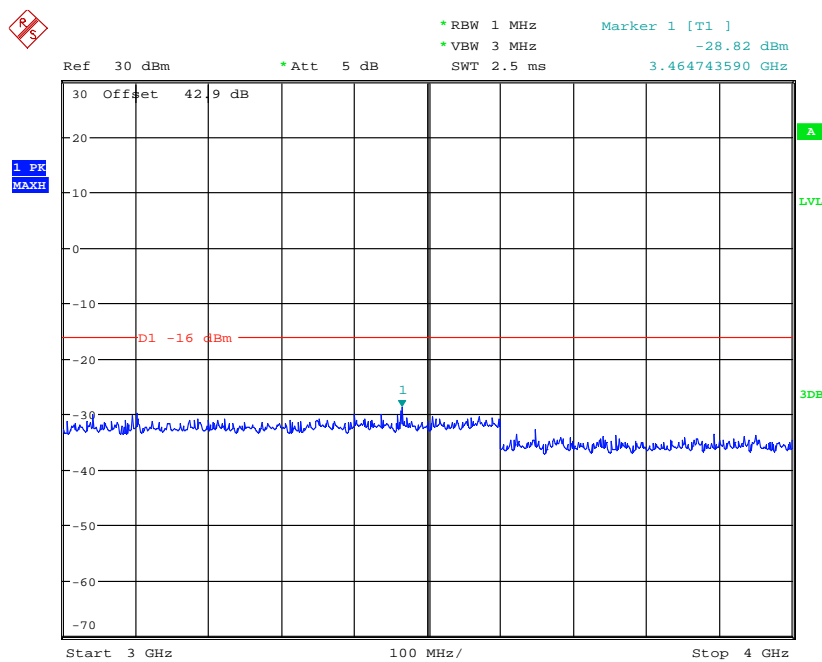


Date: 19.MAR.2014 13:58:42

Channel Position M - QPSK / Bandwidth 20.0MHz - 4GHz – 10GHz

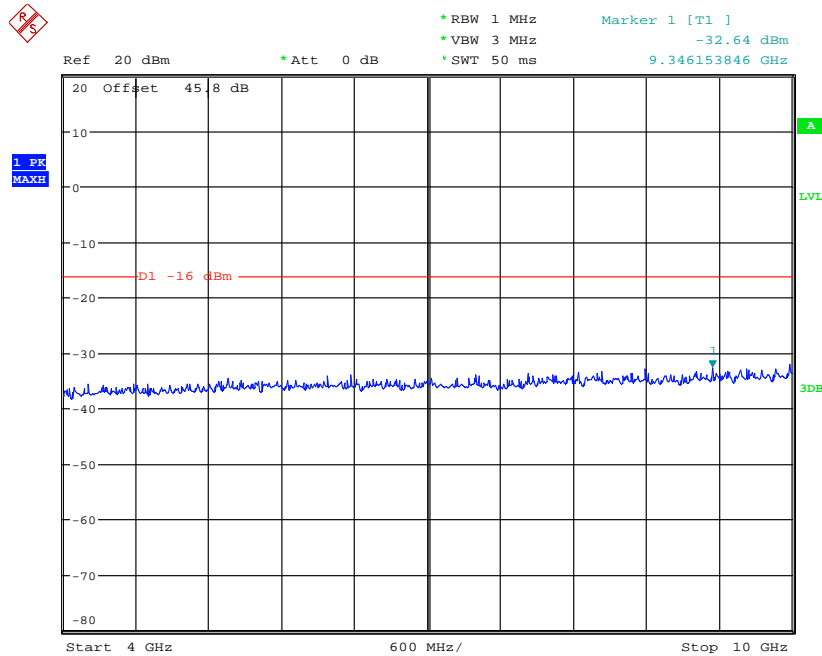


Date: 19.MAR.2014 15:21:51

Channel Position M - QPSK / Bandwidth 20.0MHz - 10GHz – 20GHz

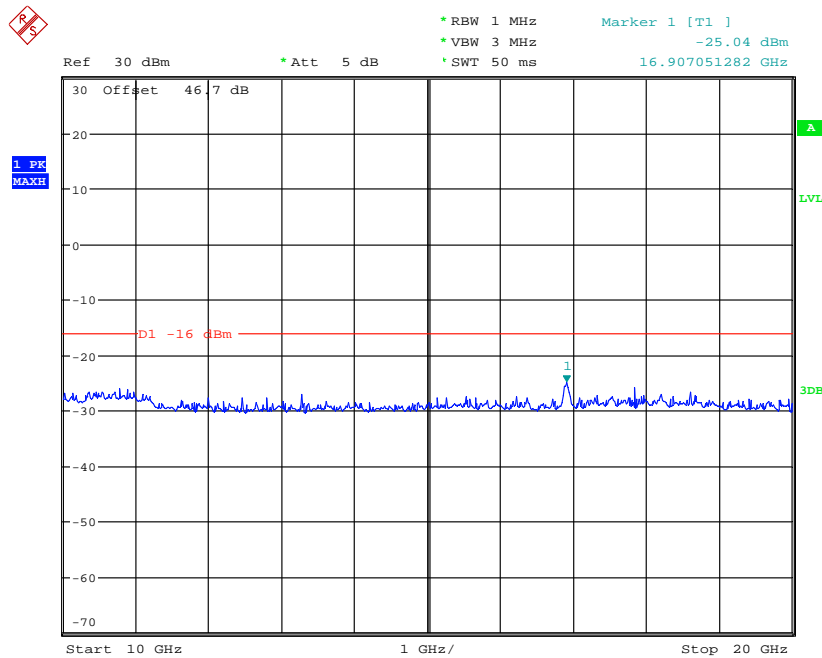

Date: 19.MAR.2014 15:11:40


Channel Position T - QPSK / Bandwidth 1.4MHz - 9kHz – 3GHz

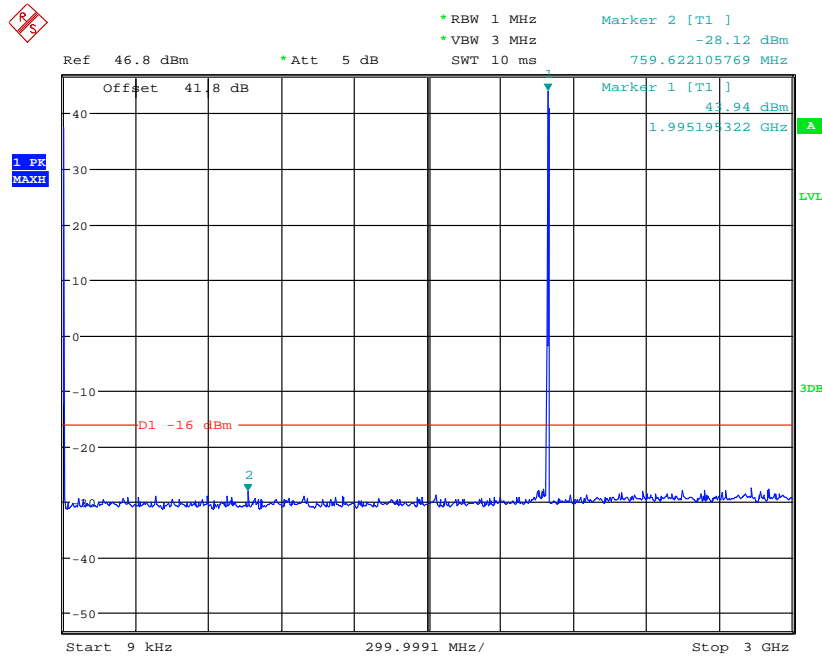

Date: 19.MAR.2014 11:58:03


Note: The emission beyond the limit is within the operating band.

Channel Position T - QPSK / Bandwidth 1.4MHz - 3GHz – 4GHz

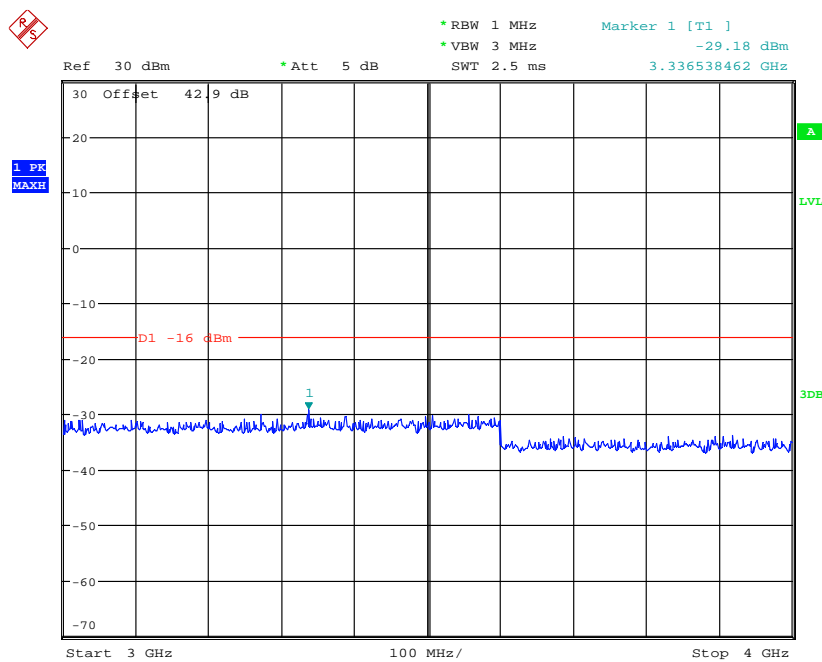


Date: 19.MAR.2014 14:01:15

**Channel Position T - QPSK / Bandwidth 1.4MHz - 4GHz – 10GHz**

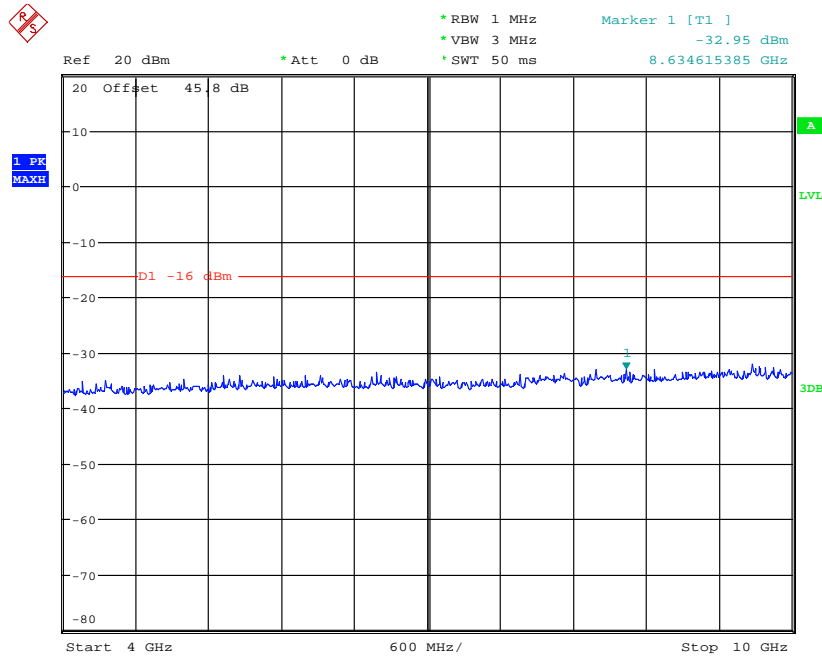

Date: 19.MAR.2014 15:33:38


**Channel Position T - QPSK / Bandwidth 1.4MHz - 10GHz – 20GHz**

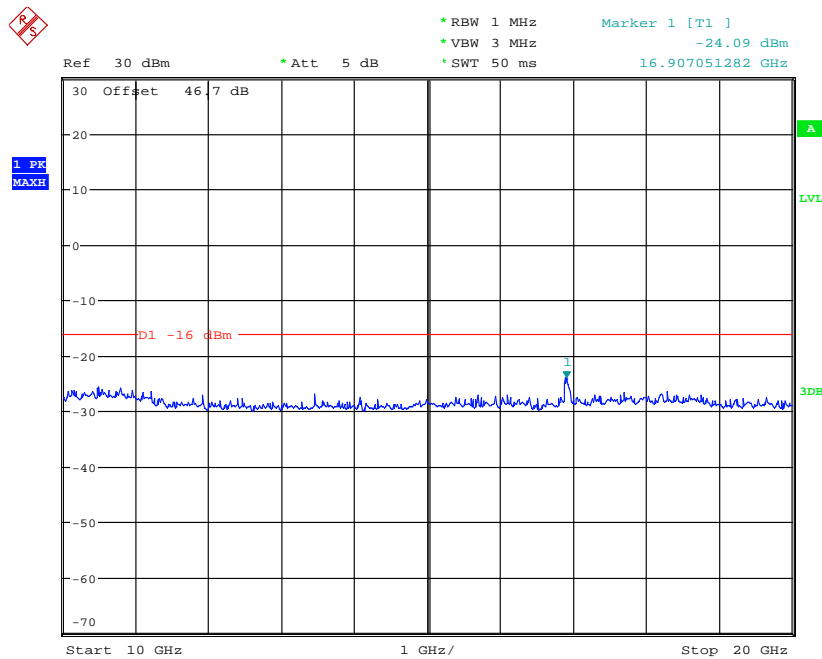

Date: 19.MAR.2014 15:09:03




Channel Position T - QPSK / Bandwidth 20.0MHz - 9kHz – 3GHz

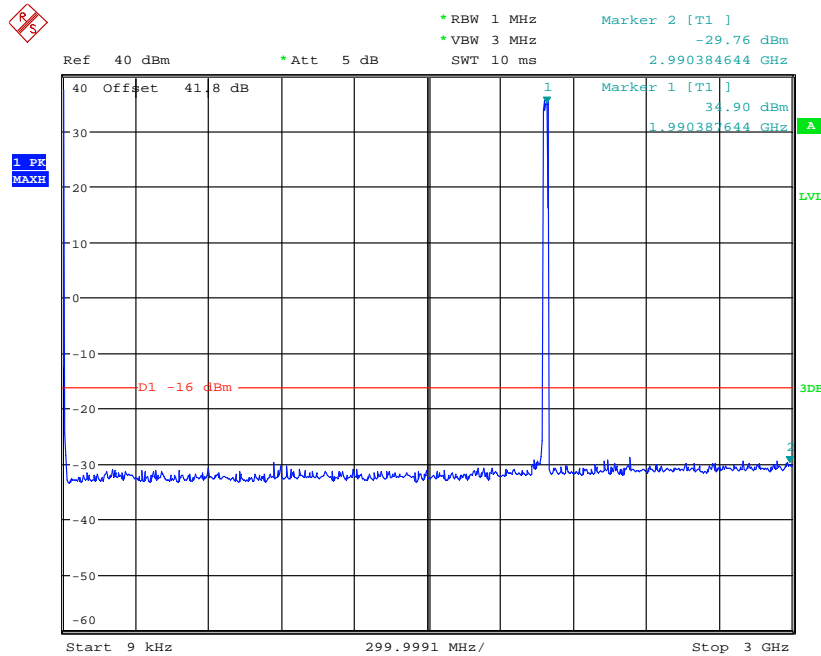

Date: 19.MAR.2014 12:58:54


Note: The emission beyond the limit is within the operating band.

Channel Position T - QPSK / Bandwidth 20.0MHz - 3GHz – 4GHz

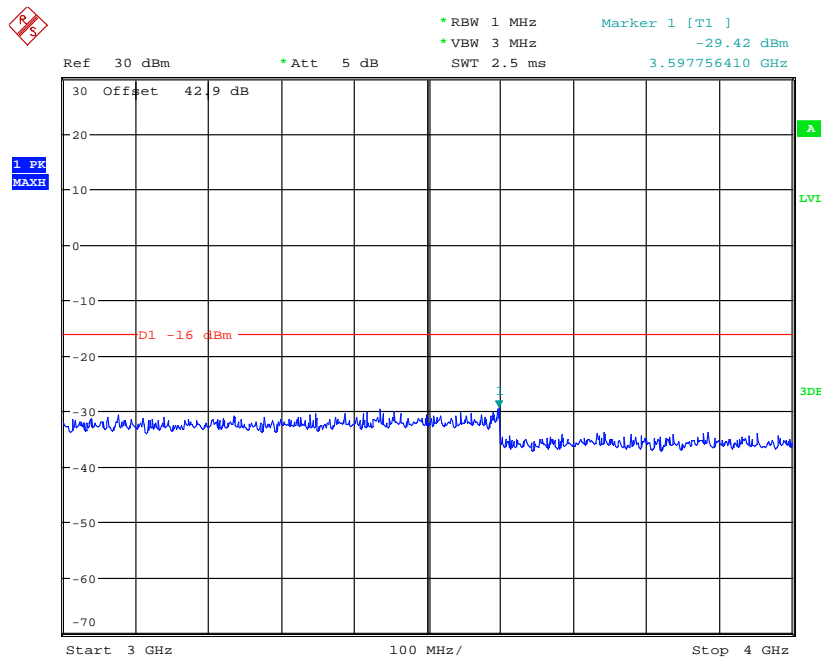


Date: 19.MAR.2014 14:02:17

Channel Position T - QPSK / Bandwidth 20.0MHz - 4GHz – 10GHz

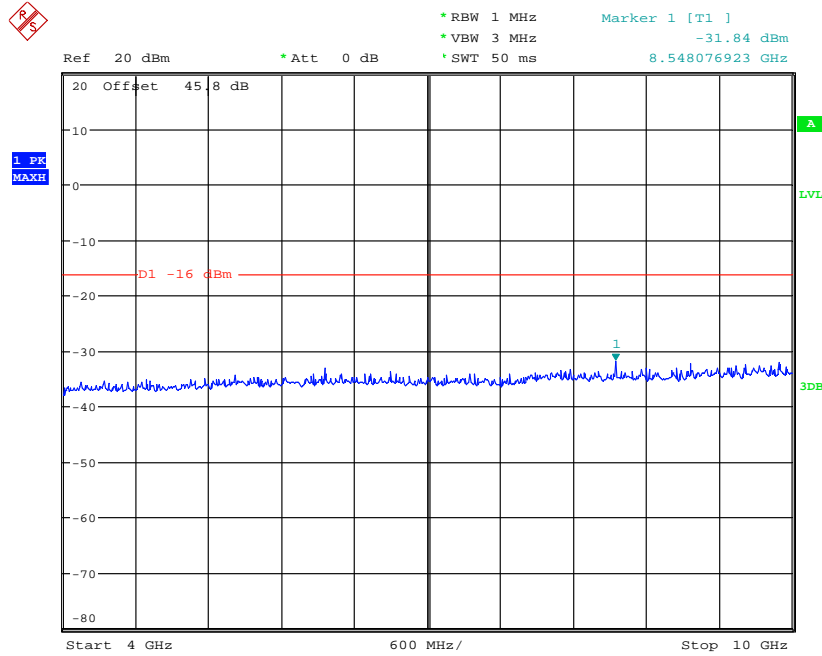

Date: 19.MAR.2014 15:18:45

Channel Position T - QPSK / Bandwidth 20.0MHz - 10GHz – 20GHz

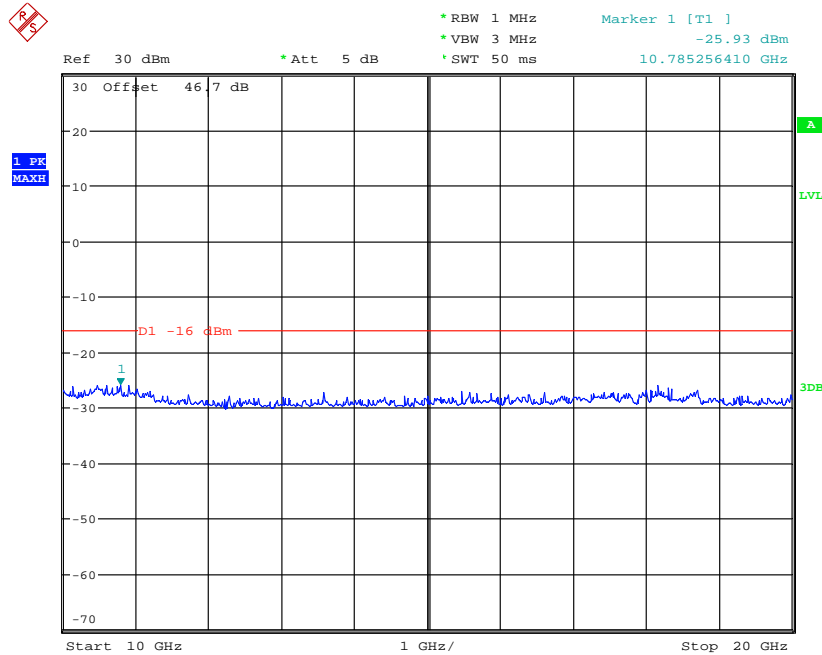


Date: 19.MAR.2014 15:14:36

Configuration L-MIMO-MC 1 (2C)

Maximum Output Power 34.0dBm per carrier

Channel Position	Bandwidth	Channel Frequency
Channel Position $B_{RFBW}$	1.4MHz	1930.7MHz + 1954.3MHz
	10.0MHz	1935.0MHz + 1950.0MHz
Channel Position $M_{RFBW}$	1.4MHz	1950.7MHz + 1974.3MHz
	10.0MHz	1955.0MHz + 1970.0MHz
Channel Position $T_{RFBW}$	1.4MHz	1970.7MHz + 1994.3MHz
	10.0MHz	1975.0MHz + 1990.0MHz


Channel Position B<sub>RFBW</sub> - QPSK / Bandwidth 1.4MHz - 9kHz – 3GHz

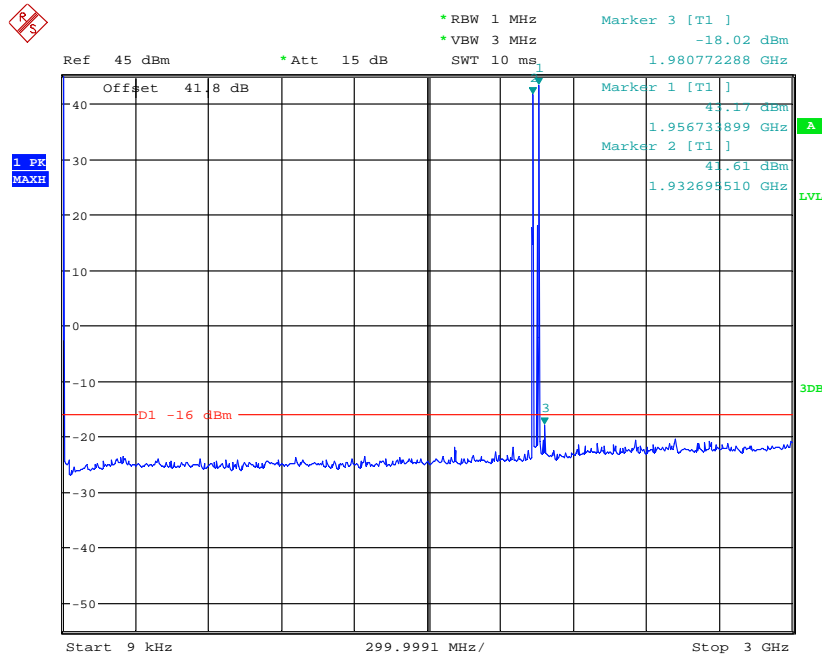

Date: 20.MAR.2014 08:26:46


Note: The emission beyond the limit is within the operating band.

Channel Position B<sub>RFBW</sub> - QPSK / Bandwidth 1.4MHz - 3GHz – 4GHz

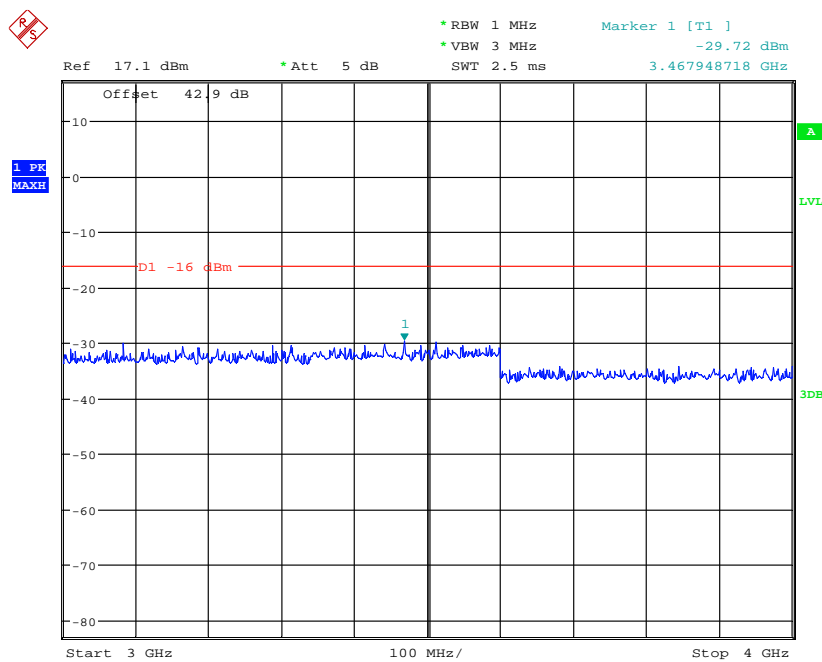


Date: 20.MAR.2014 12:36:21

Channel Position  $B_{RFBW}$  - QPSK / Bandwidth 1.4MHz - 4GHz – 10GHz

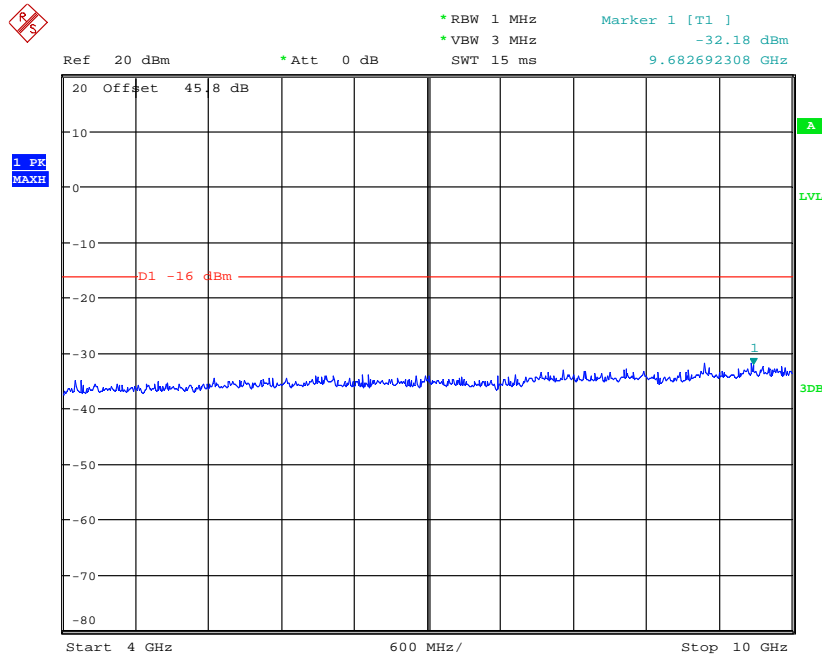


Date: 20.MAR.2014 12:15:32

Channel Position  $B_{RFBW}$  - QPSK / Bandwidth 1.4MHz - 10GHz – 20GHz

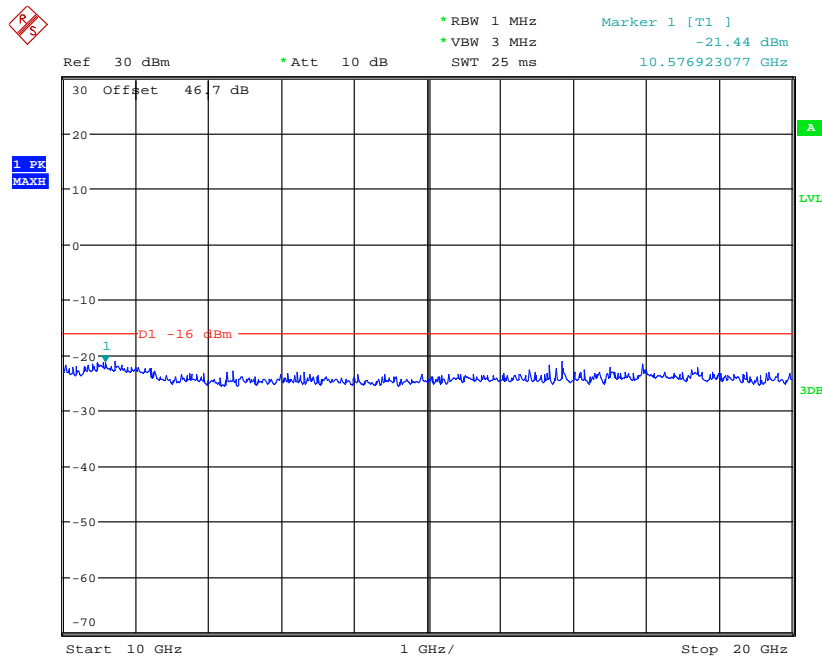

Date: 20.MAR.2014 09:33:49


Channel Position B<sub>RFBW</sub> - QPSK / Bandwidth 10.0MHz - 9kHz – 3GHz

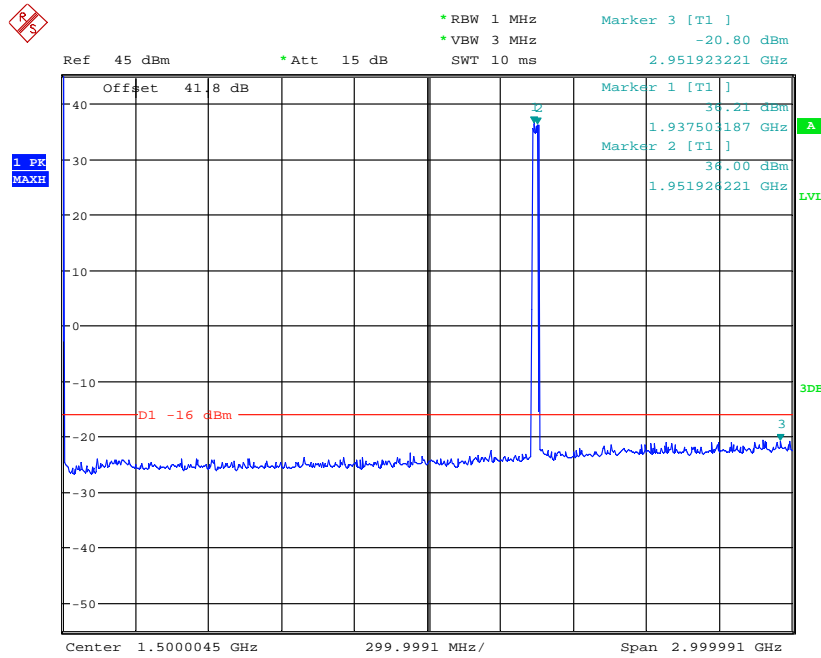

Date: 20.MAR.2014 09:15:40


Note: The emission beyond the limit is within the operating band.

Channel Position B<sub>RFBW</sub> - QPSK / Bandwidth 10.0MHz - 3GHz – 4GHz

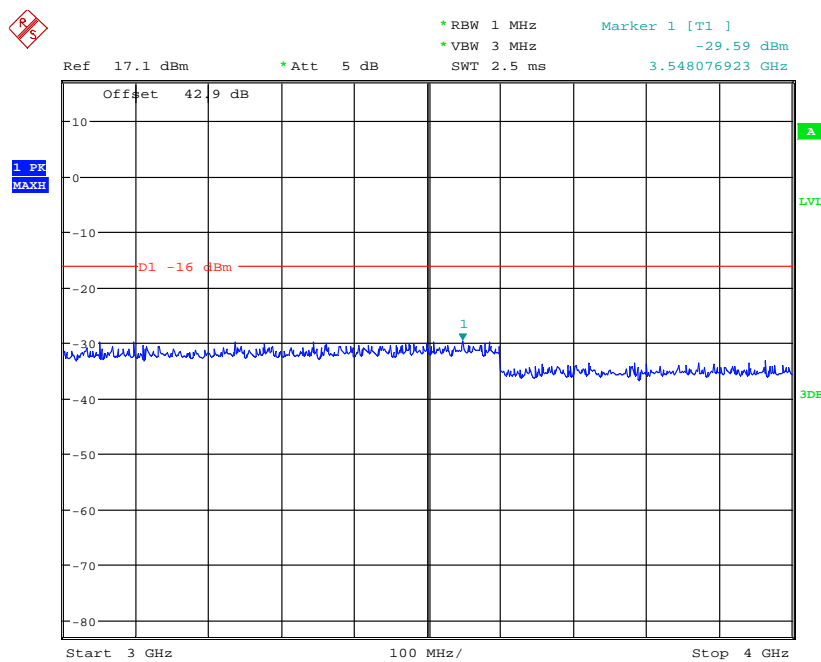


Date: 20.MAR.2014 12:28:27

Channel Position B<sub>RFBW</sub> - QPSK / Bandwidth 10.0MHz - 4GHz – 10GHz

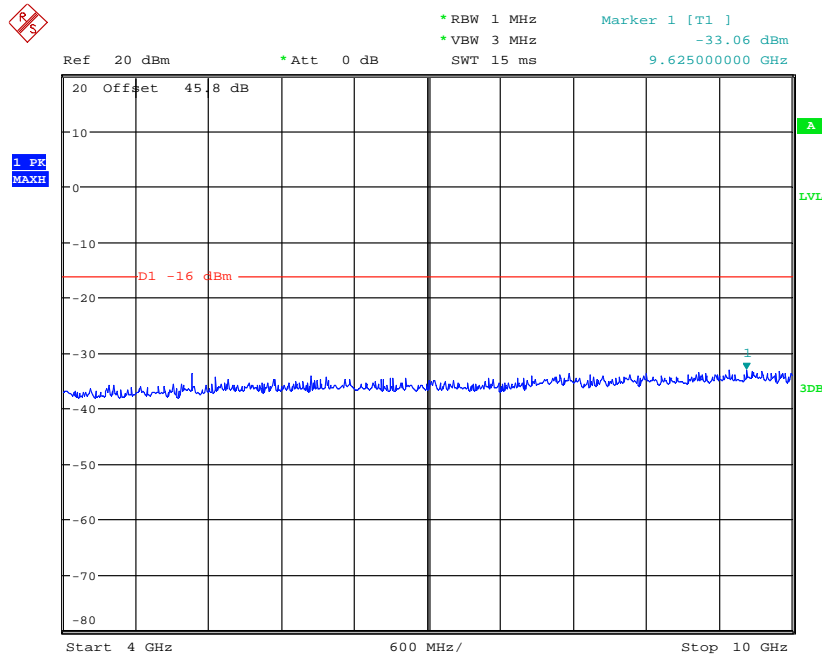


Date: 20.MAR.2014 12:20:11

Channel Position B<sub>RFBW</sub> - QPSK / Bandwidth 10.0MHz - 10GHz – 20GHz

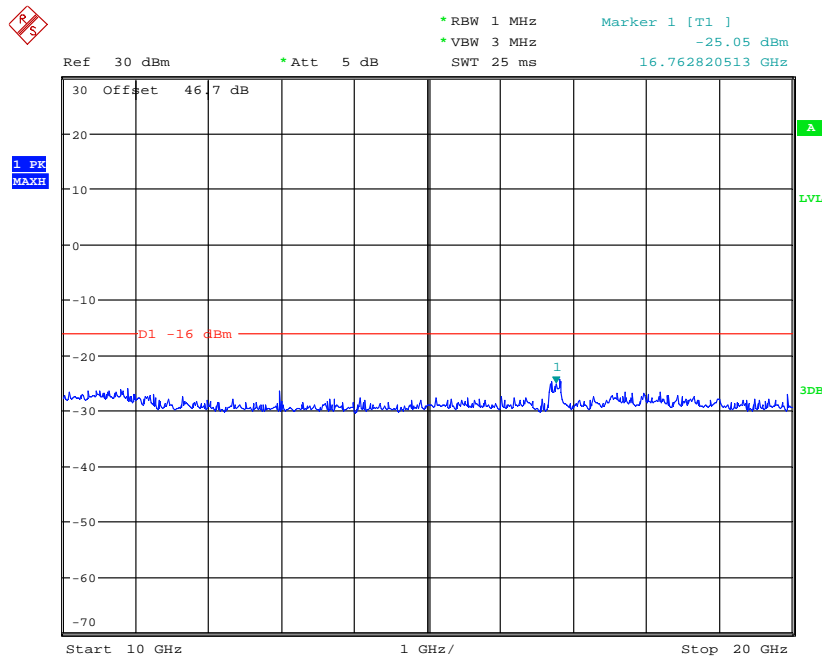

Date: 20.MAR.2014 09:27:41


Channel Position M<sub>RFBW</sub> - QPSK / Bandwidth 1.4MHz - 9kHz – 3GHz

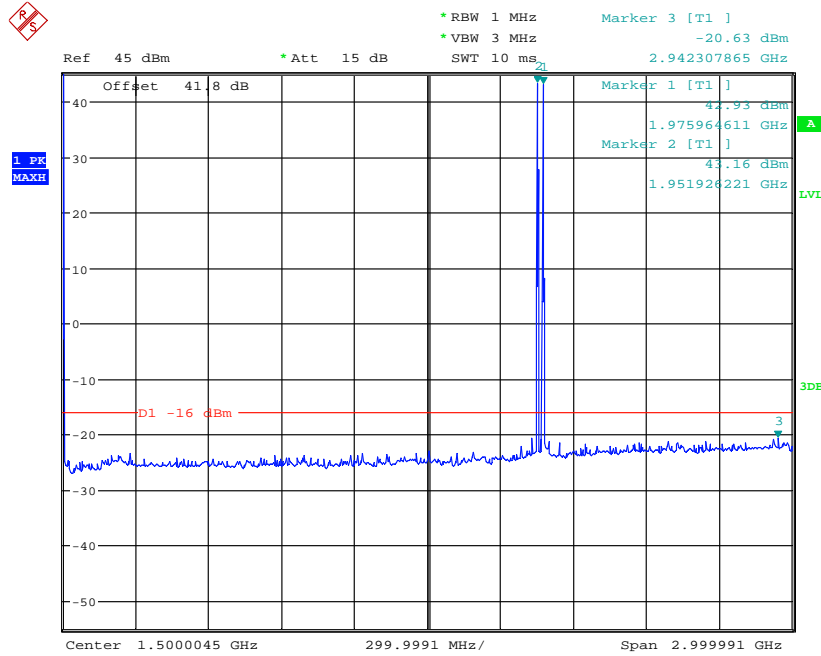

Date: 20.MAR.2014 08:37:24

Note: The emission beyond the limit is within the operating band.


Channel Position M<sub>RFBW</sub> - QPSK / Bandwidth 1.4MHz - 3GHz – 4GHz

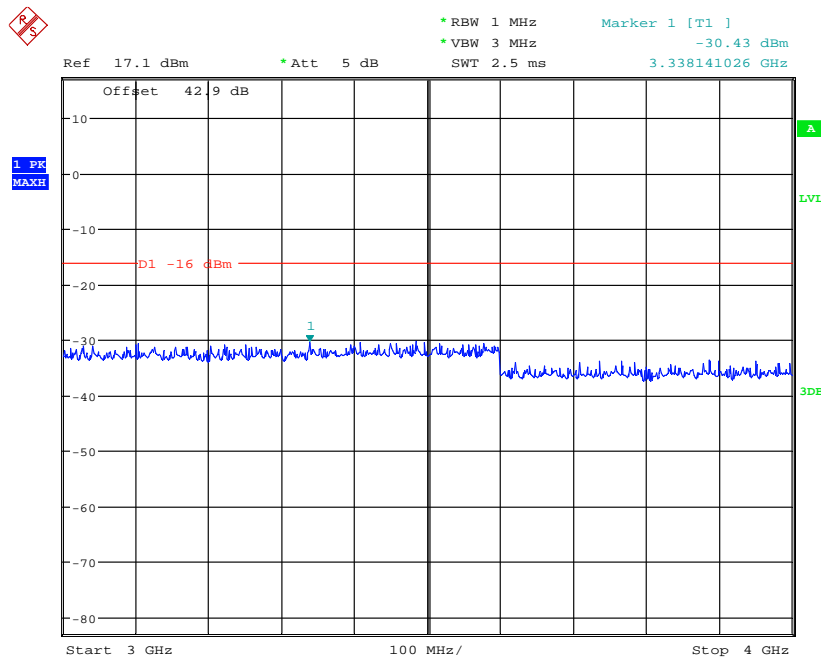

Date: 20.MAR.2014 12:36:57




Channel Position  $M_{RFBW}$  - QPSK / Bandwidth 1.4MHz - 4GHz – 10GHz

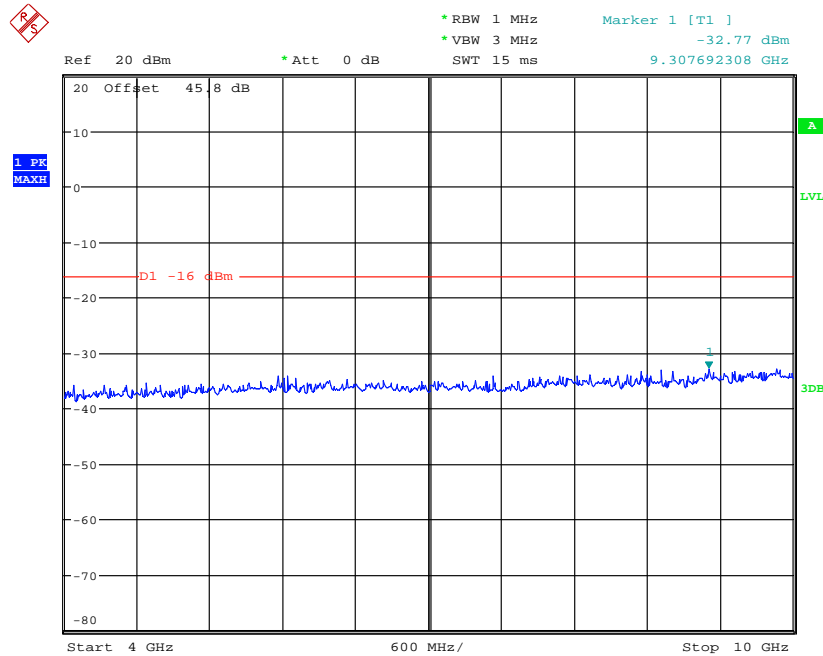


Date: 20.MAR.2014 12:16:58

Channel Position  $M_{RFBW}$  - QPSK / Bandwidth 1.4MHz - 10GHz – 20GHz

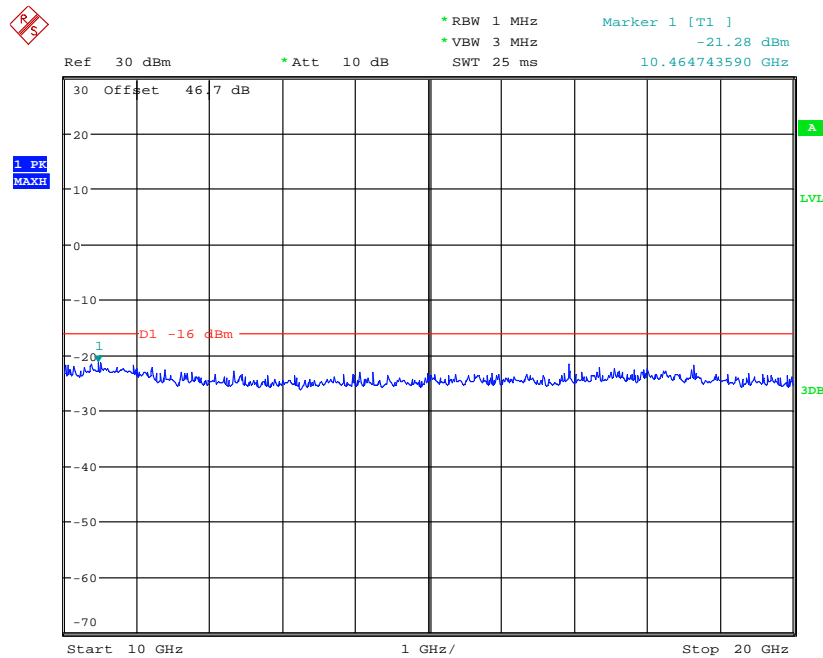

Date: 20.MAR.2014 09:35:10


Channel Position  $M_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 9kHz – 3GHz

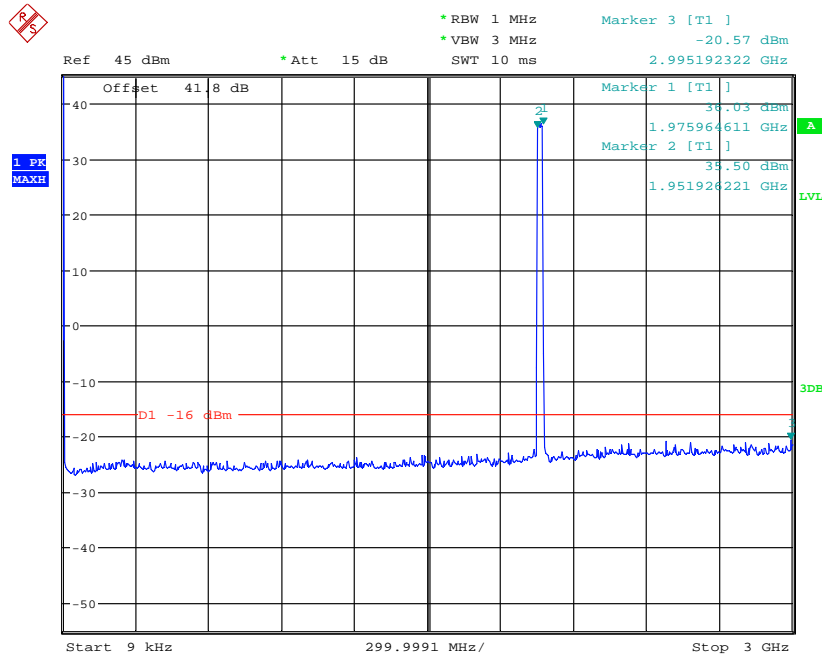

Date: 20.MAR.2014 09:19:01


Note: The emission beyond the limit is within the operating band.

Channel Position  $M_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 3GHz – 4GHz

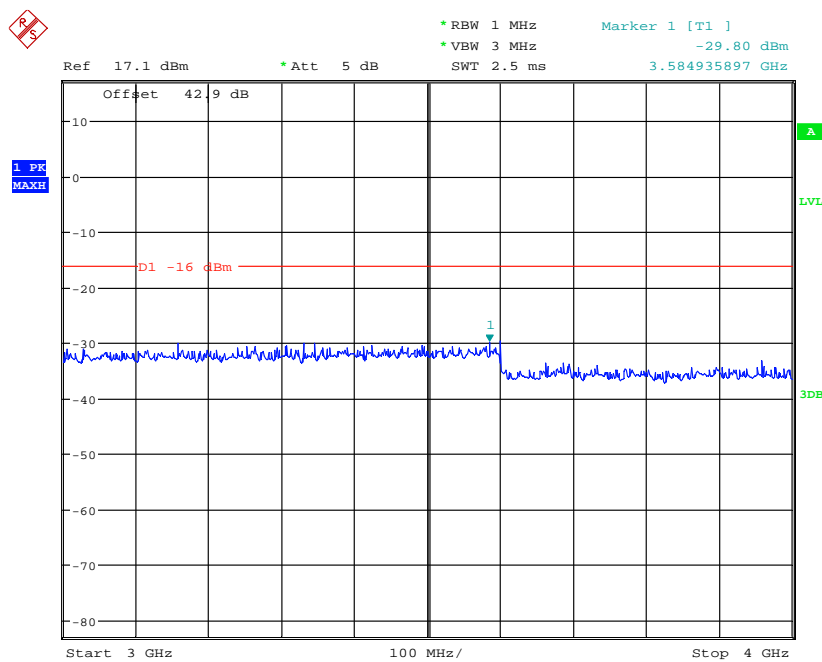


Date: 20.MAR.2014 12:30:02

Channel Position  $M_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 4GHz – 10GHz

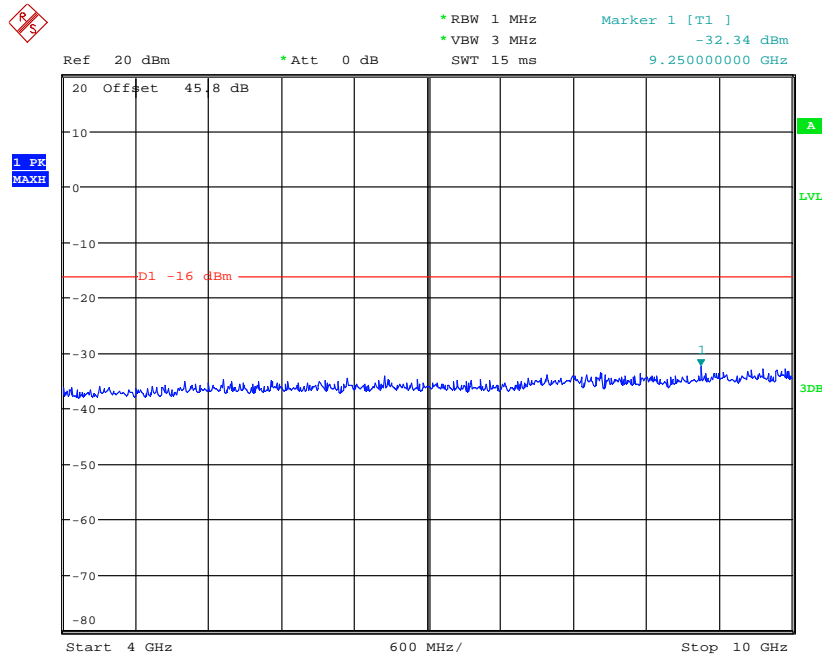


Date: 20.MAR.2014 12:21:09

Channel Position  $M_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 10GHz – 20GHz

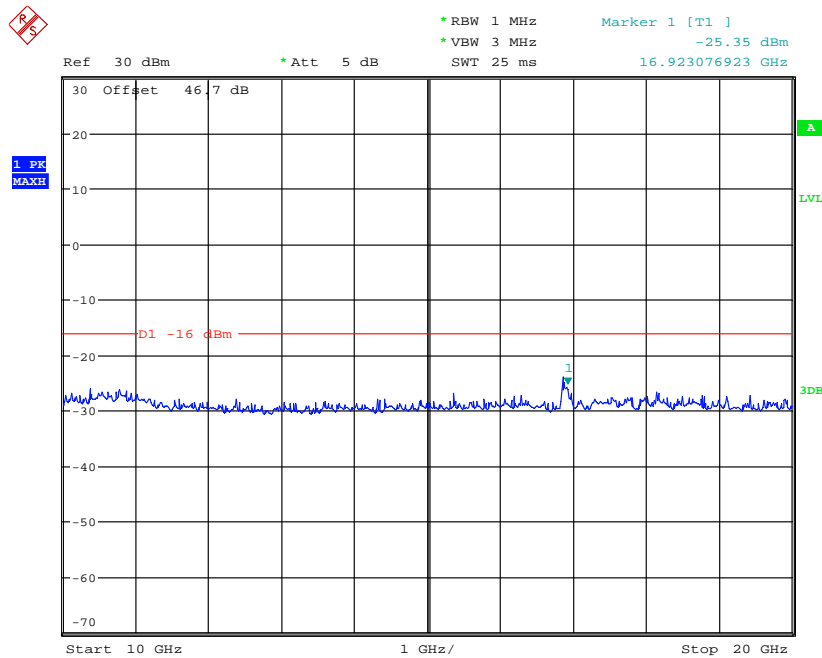

Date: 20.MAR.2014 09:29:20


Channel Position T<sub>RFBW</sub> - QPSK / Bandwidth 1.4MHz - 9kHz – 3GHz

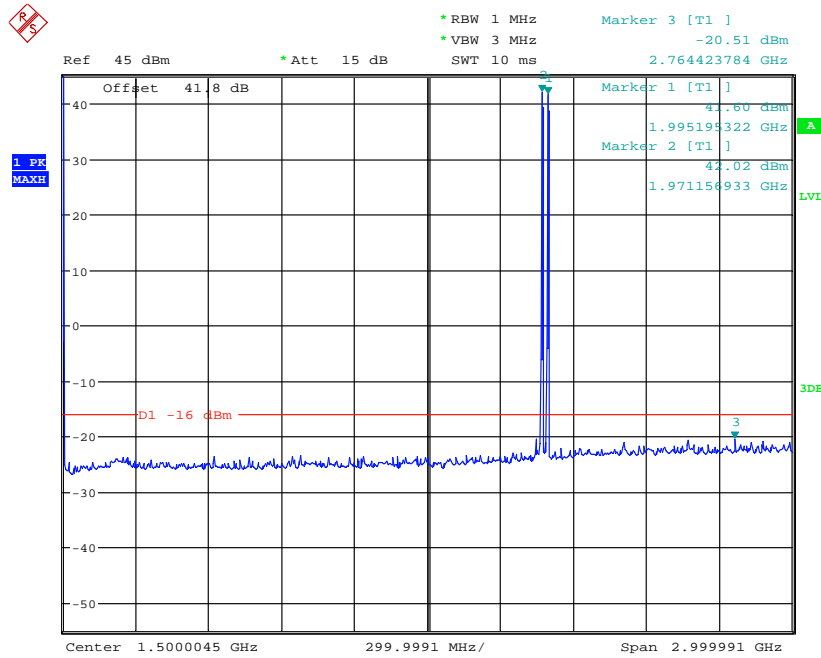

Date: 20.MAR.2014 08:33:45


Note: The emission beyond the limit is within the operating band.

Channel Position T<sub>RFBW</sub> - QPSK / Bandwidth 1.4MHz - 3GHz – 4GHz

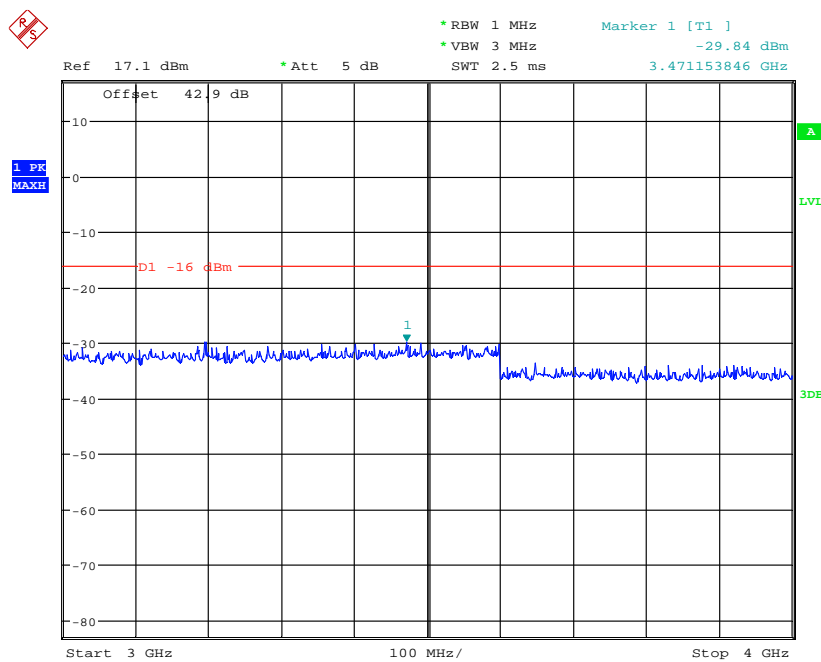


Date: 20.MAR.2014 12:37:32

Channel Position  $T_{RFBW}$  - QPSK / Bandwidth 1.4MHz - 4GHz – 10GHz

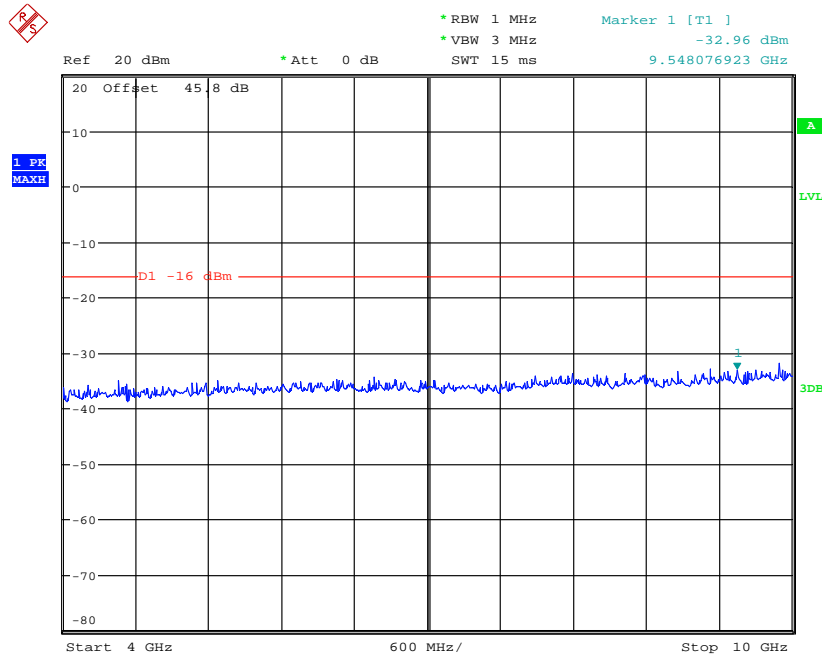


Date: 20.MAR.2014 12:17:26

Channel Position  $T_{RFBW}$  - QPSK / Bandwidth 1.4MHz - 10GHz – 20GHz

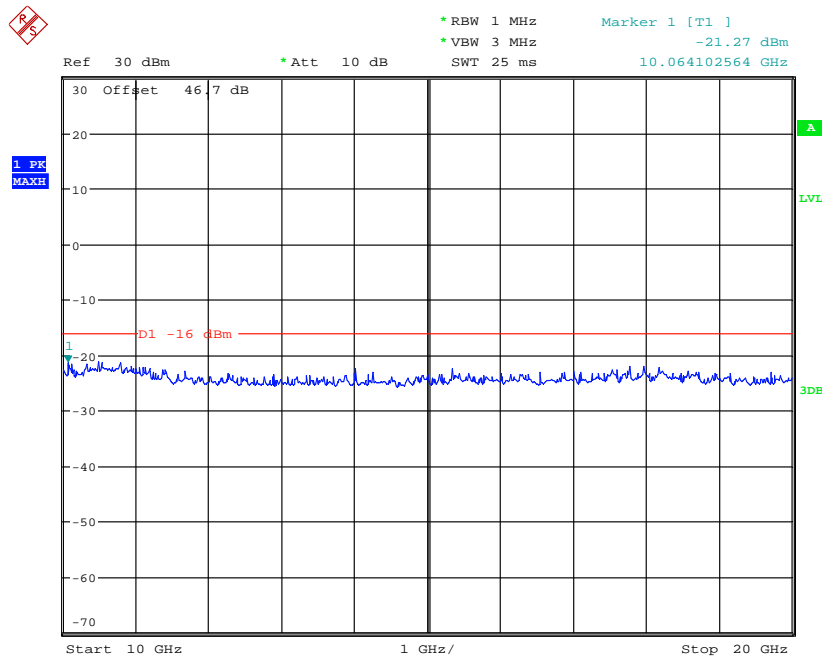

Date: 20.MAR.2014 09:44:02


Channel Position  $T_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 9kHz – 3GHz

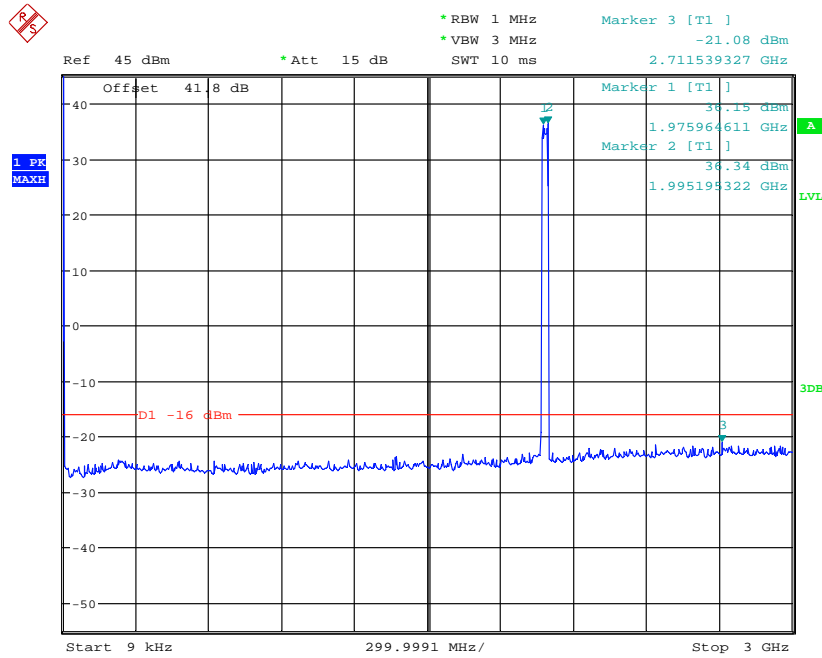

Date: 20.MAR.2014 09:21:17


Note: The emission beyond the limit is within the operating band.

Channel Position  $T_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 3GHz – 4GHz

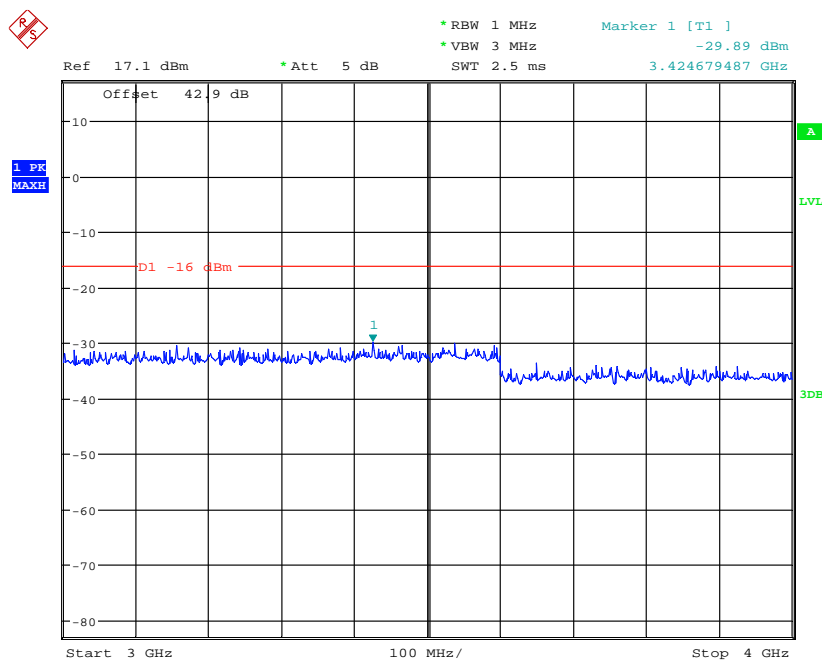


Date: 20.MAR.2014 12:31:40

Channel Position  $T_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 4GHz – 10GHz

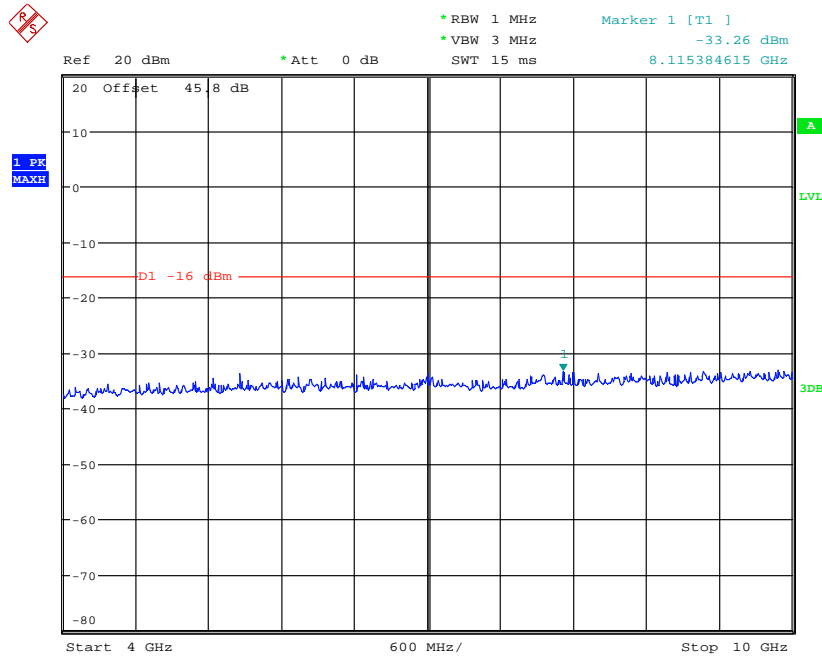

Date: 20.MAR.2014 12:21:36

Channel Position  $T_{RFBW}$  - QPSK / Bandwidth 10.0MHz - 10GHz – 20GHz

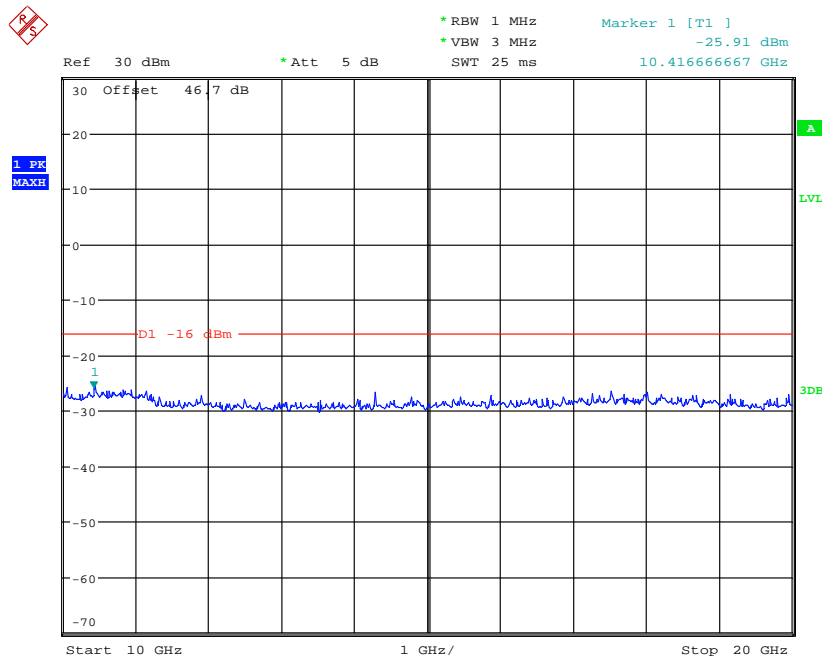

Date: 20.MAR.2014 09:25:23

Limit	-13 dBm
-------	---------

## 2.7 FREQUENCY STABILITY

### 2.7.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1055  
FCC CFR 47 Part 24, Clause 24.235  
Industry Canada RSS-133, Clause 6.3

### 2.7.2 Equipment Under Test

RBS 6501 B25, KRD 901 125/2, S/N: CB4T018461  
RBS 6501 B25, KRD 901 125/3, S/N: CB4S878468

### 2.7.3 Date of Test and Modification State

21 and 24 April 2014 - Modification State 0

### 2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.7.5 Environmental Conditions

Ambient Temperature	22.8 - 23.3°C
Relative Humidity	25.5 - 26.5%

### 2.7.6 Test Method

#### Frequency Error – Temperature Variation

The EUT was tested over the temperature range -30°C to +50°C in 10°C steps with -48 VDC Power Supply. At each temperature step, the Base Station was configured to transmit an [RAT]\* at maximum power on the middle channel of the operating band. After achieving thermal balance, the averages of 200 transmission bursts were measured and the result recorded.

#### Frequency Error – Voltage Variation

The EUT was tested at the supplied voltages varied from 85 to 115 percent of the nominal values of both -48 VDC and 120 VAC power supplies. At +20°C and each voltage extreme, the Base Station was configured to transmit an [RAT]\* at maximum power on the middle channel of the operating band. The average of 200 transmission bursts was measured and the result recorded.

[RAT]\* LTE (5.0 MHz OBW) – Single Carrier with QPSK modulation



**Test Results**

Configuration LTE-MIMO-SC

Maximum Output Power 37.0dBm per carrier, Channel Bandwidth 5MHz

Supply Voltage DC (V)	Temperature	Frequency Stability (Hz)
		Channel Position M (1962.5MHz)
-48.0	-30°C	+4.41
	-20°C	-4.76
	-10°C	+4.35
	0°C	+3.53
	+10°C	-4.61
	+20°C	+4.25
	+30°C	-4.44
	+40°C	+3.51
	+50°C	+3.85

Configuration LTE-MIMO-SC

Maximum Output Power 37.0dBm per carrier, Channel Bandwidth 5MHz

Supply Voltage DC (V)	Temperature	Frequency Stability (Hz)
		Channel Position M (1962.5MHz)
-40.8 V	+20°C	-3.67
-48.0 V		+4.23
-55.2 V		+3.87

Supply Voltage AC (V)	Temperature	Frequency Stability (Hz)
		Channel Position M (1962.5MHz)
-102.0 V	+20°C	-4.84
-120.0 V		-4.08
-138.0 V		+3.73

Limit	± (0.05ppm or +12 Hz) or ±110Hz <sup>1</sup> IC: ± 1.0ppm or ±1.96kHz
-------	--

Remarks

<sup>1</sup> Limit according to 3GPP TS 36.141 V10.10.0.

The frequency stability of the EUT is sufficient to keep it within the authorised frequency ranges at any temperature and voltage interval across the measured range.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**

### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Maximum Average Output Power and Peak to Average Ratio - Conducted</b>					
Network Analyzer	Agilent	8720D	US36140166	12	17-Nov-2014
Power Meter	Rohde & Schwarz	NRP	101593	12	04-Aug-2014
Power Sensor	Rohde & Schwarz	NRP-Z51	102309	12	04-Aug-2014
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	04-Aug-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Load	Shanghai Huaxiang	TFE100	09121647	-	O/P MON
DC Power Supply	Dahua	DH1716A-10	1000303181	-	O/P MON
<b>Maximum Average Output Power - Radiated</b>					
EMI Receiver	Rohde & Schwarz	ESI 40	100015	12	19-Aug-2014
Ultra log test antenna	Rohde & Schwarz	HL562	100167	12	19-Aug-2014
Double-Ridged Wave-guide Horn Antenna	Rohde & Schwarz	HF 906	100029	12	19-Aug-2014
Antenna master	Frankonia	MA 260	-	-	19-Aug-2014
Semi Anechoic Chamber	Frankonia	23.18m×16.88m×9.60m	-	12	19-Aug-2014
Single Generator	Rohde & Schwarz	SMR40	100152	12	19-Aug-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
DC Power Supply	Dahua	DH1716-5D	2007060047	-	O/P MON
Digital Multimeter	FLUKE	179	91820401	12	24-Dec-2014
Thermo-hygrometer	AZ Instruments	8705	9151655	12	12-Dec-2014
<b>Occupied Bandwidth</b>					
Network Analyzer	Agilent	8720D	US36140166	12	17-Nov-2014
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	04-Aug-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Load	Shanghai Huaxiang	TFE100	09121647	-	O/P MON
DC Power Supply	Dahua	DH1716A-10	1000303181	-	O/P MON
<b>Band Edge</b>					
Network Analyzer	Agilent	8720D	US36140166	12	17-Nov-2014
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	04-Aug-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Load	Shanghai Huaxiang	TFE100	09121647	-	O/P MON
DC Power Supply	Dahua	DH1716A-10	1000303181	-	O/P MON
<b>Conducted Spurious Emission</b>					
Network Analyzer	Agilent	8720D	US36140166	12	17-Nov-2014
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	04-Aug-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Pass Filter	K & L	ULK 904 240/n	35	-	O/P MON
Pass Filter	Ericsson	ULK 904 193	-	-	O/P MON
Load	Shanghai Huaxiang	TFE100	09121647	-	O/P MON
DC Power Supply	Dahua	DH1716A-10	1000303181	-	O/P MON

<b>Radiated Spurious Emissions</b>					
Load	Shanghai Huaxiang	TF150-3	06081410	-	O/P MON
Load	Shanghai Huaxiang	TF100	09121614	-	O/P MON
EMI Receiver	Rohde & Schwarz	ESI 40	100015	12	19-Aug-2014
Ultra log test antenna	Rohde & Schwarz	HL562	100167	12	19-Aug-2014
Double-Ridged Wave-guide Horn Antenna	Rohde & Schwarz	HF 906	100029	12	19-Aug-2014
Pyramidal Horn Antenna	EMCO	3160-09	760840	12	19-Aug-2014
Pyramidal Horn Antenna	EMCO	3160-10	808234	12	19-Aug-2014
Antenna master	Frankonia	MA 260	-	-	19-Aug-2014
Relay Switch Unit	Rohde & Schwarz	331.1601.31	338965002	-	TU
Semi Anechoic Chamber	Frankonia	23.18m×16.88m×9.60m	-	12	19-Aug-2014
DC Power Supply	Dahua	DH1716-5D	2007060047	-	O/P MON
Digital Multimeter	FLUKE	179	91820401	12	24-Dec-2014
Thermo-hygrometer	AZ Instruments	8705	9151655	12	12-Dec-2014
<b>Frequency Stability</b>					
Network Analyzer	Agilent	8720D	US36140166	12	17-Nov-2014
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	04-Aug-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Climate Chamber	Shang Hai Zenda	ZTH100U	10080065	-	O/P MON
Load	Shanghai Huaxiang	TFE100	09121647	-	O/P MON
DC Power Supply	Dahua	DH1716A-10	1000303181	-	O/P MON
AC Power Supply	Chroma	6530	ETD/L710	12	O/P MON
Digital Multimeter	FLUKE	179	91820401	12	24-Dec-2014
Thermo-hygrometer	AZ Instruments	8705	9151655	12	12-Dec-2014

N/A – Not Applicable

OP MON – Output Monitored with Calibrated Equipment

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Conducted Maximum Peak Output Power	30MHz to 10GHz Amplitude	0.5dB*
ERP	30MHz to 18GHz Amplitude	2.6dB
Conducted Emissions	30MHz to 40GHz Amplitude	3.0dB*
Frequency stability	30MHz to 2GHz	$<\pm 1 \times 10^{-7}$
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Worst case error for both Time and Frequency measurement 12 parts in $10^6$		

\* In accordance with CISPR 16-4



Product Service

## **SECTION 5**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

© 2014 TÜV SÜD Product Service