

EMC/Radio Test report – Radiated Emissions

339635-1TRFEMC-R1

Date of issue: October 24, 2017

Applicant:

Ericsson Canada

Product:

Radio DOT Transceiver

Model:

RD 4442 B25B66A

RD 2243 B25

RD 2243 B66A

Part number:

KRY 901 386/1

KRY 901 402/1

KRY 901 404/1

FCC ID:

TA8AKRY901386-1

TA8AKRY901402-1

TA8AKRY901404-1



Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

Custom.docx: June 6, 2016

Requirements/Summary:

| Standard | Clause | Compliance |
|--|--|------------|
| FCC CFR 47 Part 15, Subpart B | §15.109 Radiated emission limits. | Yes |
| FCC 47 CFR Part 24 – Personal Communications Services | §24.238 Emission limitations for Broadband PCS equipment. (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. | Yes |
| FCC 47 CFR Part 27 – Miscellaneous Wireless Communications Services | §27.53 Emission limits. (h) AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB. | Yes |
| ICES-003 Issue 6 January 2016 | 6.2 Radiated Emissions Limits | Yes |
| RSS-133 Issue 6, January 2013 — 2 GHz Personal Communications Services | 6.5 Transmitter Unwanted Emissions 6.5.1 Out-of-Block Emissions ii. After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10}(P)$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required. | Yes |
| RSS-139 Issue 3, July 2015 – Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz | 6.5 Transmitter Unwanted Emissions ii. After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10}(P)$ (watts) dB. | Yes |



Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

www.nemko.com

Lab and test locations

| | | | |
|--------------------|-------------------|---------------------|--------------------------|
| Company name | Nemko Canada Inc. | | |
| Designation number | CA2040 | | |
| Facility Name | Ottawa | Montreal | Almonte |
| Address | 303 River Road | 292 Labrosse Avenue | 1500 Peter Robinson Road |
| City | Ottawa | Pointe-Claire | West Carleton |
| Province | ON | QC | ON |
| Postal code | K1V 1H2 | H9R 5L8 | K0A 1L0 |
| Country | Canada | Canada | Canada |
| Telephone | +1 613 737 9680 | +1 514 694 2684 | +1 613 256-9117 |
| Facsimile | +1 613 737 9691 | +1 514 694 3528 | +1 613 256-8848 |
| Toll free | +1 800 563 6336 | | |
| Website | www.nemko.com | | |

| | |
|--------------------|---|
| Tested by | Predrag Golic, EMC Specialist, |
| Reviewed by | Kevin Rose, Wireless/EMC Specialist |
| Review date | October 12, 2017 |
| Reviewer signature |  |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of Contents

| | |
|---|-----------|
| Table of Contents | 4 |
| Section 1 Report summary | 5 |
| 1.1 Test specifications | 5 |
| 1.2 Exclusions | 5 |
| 1.3 Statement of compliance | 5 |
| 1.4 Test report revision history | 5 |
| Section 2 Summary of test results | 6 |
| 2.1 Results | 6 |
| Section 3 Equipment under test (EUT) details | 7 |
| 3.1 Applicant/Manufacturer | 7 |
| 3.2 Sample information | 7 |
| 3.3 EUT information | 7 |
| 3.4 Test Frequencies | 10 |
| 3.5 EMC Test Bed Test Parameters | 11 |
| 3.6 EUT setup details | 12 |
| Section 4 Engineering considerations | 13 |
| 4.1 Modifications incorporated in the EUT | 13 |
| 4.2 Technical judgment | 13 |
| 4.3 Deviations from laboratory tests procedures | 13 |
| Section 5 Test conditions | 14 |
| 5.1 Atmospheric conditions | 14 |
| 5.2 Power supply range | 14 |
| Section 6 Measurement uncertainty | 15 |
| 6.1 Uncertainty of measurement | 15 |
| Section 7 Testing data | 16 |
| 7.1 Radiated emissions | 16 |

Section 1 Report summary

1.1 Test specifications

| | |
|-------------------------------|--|
| FCC CFR 47 Part 15, Subpart B | Title 47: Telecommunication; Part 15—Radio Frequency Devices |
| FCC 47 CFR Part 24 | Personal Communications Services |
| FCC 47 CFR Part 27 | Miscellaneous Wireless Communications Services |
| ICES-003 | Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement |
| RSS-133 Issue 6, January 2013 | 2 GHz Personal Communications Services |
| RSS-139 Issue 3, July 2015 | Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz |

1.2 Exclusions

As per Nemko quote Q102126421R only Emissions Testing is performed. Client requested a scan from 30 to 22000 MHz

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.2 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.4 Test report revision history

Table 1.4-1: Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRF | Original report issued |

Section 2 Summary of test results

2.1 Results

Table 2.1-1: Emissions Testing results

| Part/RSS | Section | Test description | Verdict |
|----------|------------|---|---------|
| §15.109 | (a) | Radiated emission limits. | Pass |
| §24.238 | (a) | Emission limitations for Broadband PCS equipment. | Pass |
| §27.53 | (h) | Emission limits. | Pass |
| ICES-003 | 6.2 | Radiated Emissions Limits | Pass |
| 133 | 6.5.1 (ii) | Out-of-Block Emissions | Pass |
| 139 | 6.5 (ii) | Transmitter Unwanted Emissions | Pass |

Notes: None

Section 3 Equipment under test (EUT) details

3.1 Applicant/Manufacturer

| | |
|--------------|--|
| Company name | Ericsson Canada Inc. |
| Address | 349 Terry Fox Drive, Ottawa, ON, Canada, K2K 2V6 |

3.2 Sample information

| | |
|------------------------|--------------------|
| Receipt date | September 29, 2017 |
| Nemko sample ID number | 1 |

3.3 EUT information

| | |
|---|--|
| Product name | Radio DOT Transceiver |
| Model | Tested: RD 4442 B25B66A (De-populated variants: RD 2243 B25 & RD 2243 B66A) |
| Part number | Tested: KRY 901 386/1 (De-populated variants: KRY 901 402/1 & KRY 901 404/1) |
| Revision | R1B |
| Serial number | TD3T308275 |
| Nominal Voltage: | -48 V _{DC} @ 0.5 A |
| Total Power based on IBW: | 4 x 50 mW |
| Operating Temperature: | 5° C to +40° C |
| IF Interface: | DL: 110 – 150 MHz UL: 40 – 80 MHz |
| Regulatory Requirements | Radio: FCC CFR 47 Part 2, 24, 27; RSS-133, RSS-139 EMC: FCC CFR 47 Part 15; ICES-003 |
| Antenna ports | 4 TX/RX Ports |
| Side 1 FDD Band | Band 25 |
| Antenna ports | 2 TX/RX Ports |
| BW | 65 MHz |
| IBW | 40 MHz |
| Frequency: | TX (DL): 1930 - 1995 MHz RX (UL): 1850 – 1915 MHz |
| Total number of supported E-UTRA carriers | 2 (Contiguous Operations Only) |
| Total number of supported UTRA carriers | 4 (Contiguous Operations Only) |
| Nominal O/P per Antenna Port: | Single Carrier: 1 x 50 mW (17 dBm) Multi-Carrier: 2 x 25 mW (14 dBm) Multi-Carrier: 3 x 16.7 mW (12.2 dBm) Multi-Carrier: 4 x 12.5 mW (11 dBm) Multi-Carrier: 5 x 10 mW (10 dBm) Multi-Carrier: 6 x 8.3mW (9.2 dBm) |
| Accuracy (Nominal): | +/- 0.1 PPM |
| RAT: | LTE, WCDMA |
| Modulation: | LTE: QPSK, 16QAM, 64QAM, 256QAM (DL only) WCDMA: QPSK, 16QAM, 64QAM, 256QAM (DL only) |

3.3 EUT information, continued

| | |
|---|--|
| Channel Bandwidth: | LTE: 5, 10, 15, 20 MHz |
| | WCDMA: 5 MHz |
| Maximum Combined OBW per Port: | 40 MHz |
| Channel Raster: | LTE: 100 kHz, WCDMA: 200 kHz |
| Multi-carrier: | Single Antenna, Tx Diversity, MIMO |
| Supported Carrier Configurations: | LTE BW = 5, 10, 15, 20 MHz (1-2), WCDMA BW = 5 MHz (1-4) |
| Side 2 FDD Band | Band 66A |
| Antenna ports | 2 TX/RX Ports |
| BW | 70 MHz |
| IBW | 40 MHz |
| Frequency: | TX (DL): 2110 - 2180 MHz |
| | RX (UL): 1710 – 1780 MHz |
| Total number of supported E-UTRA carriers | 2 (Contiguous Operations Only) |
| Total number of supported UTRA carriers | 4 (Contiguous Operations Only) |
| Nominal O/P per Antenna Port: | Single Carrier: 1 x 50 mW (17 dBm) |
| | Multi-Carrier: 2 x 25 mW (14 dBm) |
| | Multi-Carrier: 3 x 16.7 mW (12.2 dBm) |
| | Multi-Carrier: 4 x 12.5 mW (11 dBm) |
| | Multi-Carrier: 5 x 10 mW (10 dBm) |
| | Multi-Carrier: 6 x 8.3mW (9.2 dBm) |
| Accuracy (Nominal): | +/- 0.1 PPM |
| RAT: | LTE, WCDMA |
| Modulation: | LTE: QPSK, 16QAM, 64QAM, 256QAM (DL only) |
| | WCDMA: QPSK, 16QAM, 64QAM, 256QAM (DL only) |
| Channel Bandwidth: | LTE: 5, 10, 15, 20 MHz |
| | WCDMA: 5 MHz |
| Maximum Combined OBW per Port: | 40 MHz |
| Channel Raster: | LTE: 100 kHz, WCDMA: 200 kHz |
| Multi-carrier: | Single Antenna, Tx Diversity, MIMO |
| Supported Carrier Configurations: | LTE BW = 5, 10, 15, 20 MHz (1-2), WCDMA BW = 5 MHz (1-4) |

3.3 EUT information, continued

| <p>Description/theory of operation</p> | <p>The test object is an RD 4442 B25B66A (Dual Band Radio DOT) designed for use in LTE Radio Base Station (RBS) equipment. RD 4442 supports two separate bands in one radio dot connected with one CAT cable to two IRU 2242 using a passive splitter (Y-Adaptor) on the IRU end. The RD 4442 product provides radio access for mobile and fixed devices and is intended for the indoor environment. The RD 4442 is a Radio Unit (RU) forming part of the Ericsson RBS equipment and RDS (Radio DOT System) RBS consisting of a Digital Unit (DU), an IRU 2242 (Indoor Radio Unit) and Radio DOT (RD 4442).</p> <p>The IRU and RD are connected over a CAT 6 Interface (Radio DOT Interface (RDI)) with a capacity of 8 DOTs per IRU. The IRU provides DC, control and the baseband to IF conversion while the RD 4442 provides the IF to RF conversion and wireless transceiver functions. The RD supports four TX/RX RF-branches.</p> <p>The RD 4442 B25B66A operates in LTE/WCDMA FDD mode at a maximum RF output of 4 x 17dBm and supports single carrier (SC) and multi-carrier (MC) configured for a maximum of 6 carriers per port.</p> <p>The RD 2243 B25 product is a de-populated variant of the RD 4442 B2B66A where the B66A components have been removed.</p> <p>The RD 2243 B66A product is a de-populated variant of the RD 4442 B2B66A where the B25 components have been removed.</p> <p>The RDS IRU 2242 (KRC 161 444/2) can support either TDD or FDD operation, but not simultaneously.</p> | | | | | | | | | | | | |
|--|---|----------------------|---|---------------|----------------------|----------------|------------|-----------------|-----------------------|-----------|-----|---------|-----------|
| <p>Operational frequencies</p> | <table border="1"> <thead> <tr> <th colspan="2">Clocks / Oscillators</th> </tr> </thead> <tbody> <tr> <td>10 MHz</td> <td>SYNC</td> </tr> <tr> <td>40 MHz</td> <td>MCU</td> </tr> <tr> <td>12.5 MHz</td> <td>AGC</td> </tr> <tr> <td>16.67 MHz</td> <td>AGC</td> </tr> <tr> <td>230 MHz</td> <td>FSK Modem</td> </tr> </tbody> </table> | Clocks / Oscillators | | 10 MHz | SYNC | 40 MHz | MCU | 12.5 MHz | AGC | 16.67 MHz | AGC | 230 MHz | FSK Modem |
| Clocks / Oscillators | | | | | | | | | | | | | |
| 10 MHz | SYNC | | | | | | | | | | | | |
| 40 MHz | MCU | | | | | | | | | | | | |
| 12.5 MHz | AGC | | | | | | | | | | | | |
| 16.67 MHz | AGC | | | | | | | | | | | | |
| 230 MHz | FSK Modem | | | | | | | | | | | | |
| <p>Port description</p> | <table border="1"> <thead> <tr> <th>Port</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>RDI</td> <td>Shielded RJ45 (CAT6)</td> </tr> <tr> <td>Antenna A/B</td> <td>RF Probe</td> </tr> </tbody> </table> | Port | Description | RDI | Shielded RJ45 (CAT6) | Antenna A/B | RF Probe | | | | | | |
| Port | Description | | | | | | | | | | | | |
| RDI | Shielded RJ45 (CAT6) | | | | | | | | | | | | |
| Antenna A/B | RF Probe | | | | | | | | | | | | |
| <p>Physical</p> | <table border="1"> <tbody> <tr> <td>Dimensions</td> <td>95 x 140 x 140 mm [H x W x D] (Including mounting HW)</td> </tr> <tr> <td>Weight</td> <td>439 g</td> </tr> <tr> <td>Cooling</td> <td>Convection</td> </tr> <tr> <td>Mounting</td> <td>Ceiling or Wall Mount</td> </tr> </tbody> </table> | Dimensions | 95 x 140 x 140 mm [H x W x D] (Including mounting HW) | Weight | 439 g | Cooling | Convection | Mounting | Ceiling or Wall Mount | | | | |
| Dimensions | 95 x 140 x 140 mm [H x W x D] (Including mounting HW) | | | | | | | | | | | | |
| Weight | 439 g | | | | | | | | | | | | |
| Cooling | Convection | | | | | | | | | | | | |
| Mounting | Ceiling or Wall Mount | | | | | | | | | | | | |
| <p>Software details</p> | <p>CXP 901 3268/14 R65FH08</p> | | | | | | | | | | | | |
| <p>Label product ID</p> | <p>(1P)KRY 901 386/1 (21P)R1B RD 4442 B25B66A (S)TD3T308275 Made in China 20170901</p> | | | | | | | | | | | | |

3.4 Test Frequencies

The following tables display the test parameters displayed and verified by the EMC test bed system for each RAT used for radiated emissions.

Test Parameter and Set-up Details:

| Band 25 | | | | | | Band 66A | | | | | |
|--------------------------|--|--|--|--|--|--------------------------|--|--|--|--|--|
| TX (DL): 1930 – 1995 MHz | | | | | | TX (DL): 2110 - 2180 MHz | | | | | |
| RX (UL): 1850 – 1915 MHz | | | | | | RX (UL): 1710 – 1780 MHz | | | | | |
| Duplex Spacing: 80 MHz | | | | | | Duplex Spacing: 400 MHz | | | | | |

Test Frequencies:

| B25 LTE Single Carrier | | | | | | | | | | | | |
|------------------------|---------------------|--------|--------|--------|--------|--------|--------------------|--------|--------|--------|--------|--------|
| BW | Transmit / DL (MHz) | | | | | | Receive / UL (MHz) | | | | | |
| MHz | B | EARFCN | M | EARFCN | T | EARFCN | B | EARFCN | M | EARFCN | T | EARFCN |
| 5 | 1932.5 | 8065 | 1962.5 | 8365 | 1992.5 | 8665 | 1852.5 | 26065 | 1882.5 | 26365 | 1912.5 | 26665 |
| 10 | 1935.0 | 8090 | 1962.5 | 8365 | 1990.0 | 8640 | 1855.0 | 26090 | 1882.5 | 26365 | 1910.0 | 26640 |
| 15 | 1937.5 | 8115 | 1962.5 | 8365 | 1987.5 | 8615 | 1857.5 | 26115 | 1882.5 | 26365 | 1907.5 | 26615 |
| 20 | 1940.0 | 8140 | 1962.5 | 8365 | 1985.0 | 8590 | 1860.0 | 26140 | 1882.5 | 26365 | 1905.0 | 26590 |

| B25 LTE Multiple-Carriers (2x) | | | | | | | | | | | | |
|--------------------------------|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| BW | Transmit / DL (MHz) | | | | | | | | | | | |
| MHz | B1 | EARFCN | B2 | EARFCN | M1 | EARFCN | M2 | EARFCN | T1 | EARFCN | T2 | EARFCN |
| 5 | 1932.5 | 8065 | 1937.5 | 8115 | 1960.0 | 8340 | 1965.0 | 8390 | 1987.5 | 8615 | 1992.5 | 8665 |

| B25 WCDMA Single Carrier | | | | | | |
|--------------------------|---------------------|--------|--------|--------------------|--------|--------|
| BW | Transmit / DL (MHz) | | | Receive / UL (MHz) | | |
| MHz | B | M | T | B | M | T |
| 5 | 1932.4 | 1962.4 | 1992.6 | 1852.4 | 1882.4 | 1912.6 |
| ARFCN | 5112 | 5262 | 5413 | 4887 | 5037 | 5188 |

| B25 1W+1L Multiple-Carriers (LTE 5MHz BW) | | | | | | |
|---|---------------------|--------|--|--|--|--|
| BW | Transmit / DL (MHz) | | | | | |
| MHz | WM1 | LM2 | | | | |
| 5 | 1960.0 | 1965.0 | | | | |

| B25 2W+1L Multiple-Carriers (LTE 5MHz BW) | | | | | | |
|---|---------------------|--------|--------|--|--|--|
| BW | Transmit / DL (MHz) | | | | | |
| MHz | WM1 | WM2 | LM3 | | | |
| 5 | 1957.4 | 1962.4 | 1967.4 | | | |

| B25 4W+2L Multiple-Carriers (LTE 5MHz BW) | | | | | | |
|---|---------------------|--------|--------|--------|--------|--------|
| BW | Transmit / DL (MHz) | | | | | |
| MHz | WM1 | WM2 | WM3 | WM4 | LM5 | LM6 |
| 5 | 1950.0 | 1955.0 | 1960.0 | 1965.0 | 1970.0 | 1975.0 |

| B66A LTE Single Carrier | | | | | | | | | | | | |
|-------------------------|---------------------|--------|------|--------|--------|--------|--------------------|--------|--------|--------|--------|--------|
| BW | Transmit / DL (MHz) | | | | | | Receive / UL (MHz) | | | | | |
| MHz | B | EARFCN | M | EARFCN | T | EARFCN | B | EARFCN | M | EARFCN | T | EARFCN |
| 5 | 2112.5 | 66461 | 2145 | 66786 | 2177.5 | 67111 | 1712.5 | 131997 | 1745.0 | 132322 | 1777.5 | 132647 |
| 10 | 2115.0 | 66486 | 2145 | 66786 | 2175.0 | 67086 | 1715.0 | 132022 | 1745.0 | 132322 | 1775.0 | 132622 |
| 15 | 2117.5 | 66511 | 2145 | 66786 | 2172.5 | 67061 | 1717.5 | 132047 | 1745.0 | 132322 | 1772.5 | 132597 |
| 20 | 2120.0 | 66536 | 2145 | 66786 | 2170.0 | 67036 | 1720.0 | 132072 | 1745.0 | 132322 | 1770.0 | 132572 |

3.4 Test Frequencies, continued

| B66A LTE Multiple-Carriers (2x) | | | | | | | | | | | | |
|---------------------------------|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| BW | Transmit / DL (MHz) | | | | | | | | | | | |
| MHz | B1 | EARFCN | B2 | EARFCN | M1 | EARFCN | M2 | EARFCN | T1 | EARFCN | T2 | EARFCN |
| 5 | 2112.5 | 66461 | 2117.5 | 66511 | 2142.5 | 66761 | 2147.5 | 66811 | 2172.5 | 67061 | 2177.5 | 67111 |

| B66A WCDMA Single Carrier | | | | | | |
|---------------------------|---------------------|------|--------|--------------------|--------|--------|
| BW | Transmit / DL (MHz) | | | Receive / UL (MHz) | | |
| MHz | B | M | T | B | M | T |
| 5 | 2112.4 | 2145 | 2177.6 | 1712.4 | 1745.0 | 1777.6 |
| ARFCN | 1537 | 1700 | 1863 | 1312 | 1475 | 1638 |

| B66A 1W+1L Multiple-Carriers (LTE 5MHz BW) | | | | | | |
|--|---------------------|---------|--|--|--|--|
| BW | Transmit / DL (MHz) | | | | | |
| MHz | WM1 | LM2 | | | | |
| 5 | 2142.4 | 2147.40 | | | | |

| B66A 2W+1L Multiple-Carriers (LTE 5MHz BW) | | | | | | |
|--|---------------------|--------|--------|--|--|--|
| BW | Transmit / DL (MHz) | | | | | |
| MHz | WM1 | WM2 | LM3 | | | |
| 5 | 2140.0 | 2145.0 | 2150.0 | | | |

| B66A 4W+2L Multiple-Carriers (LTE 5MHz BW) | | | | | | |
|--|---------------------|--------|--------|---------|---------|--------|
| BW | Transmit / DL (MHz) | | | | | |
| MHz | WM1 | WM2 | WM3 | WM4 | LM5 | LM6 |
| 5 | 2132.4 | 2137.4 | 2142.4 | 2147.40 | 2152.40 | 2157.4 |

3.5 EMC Test Bed Test Parameters

| RAT | Modulation | Test Model / Configuration |
|-------|------------|----------------------------|
| LTE | QPSK | E-TM1.1 |
| WCDMA | 16QAM | TM5 |

3.6 EUT setup details

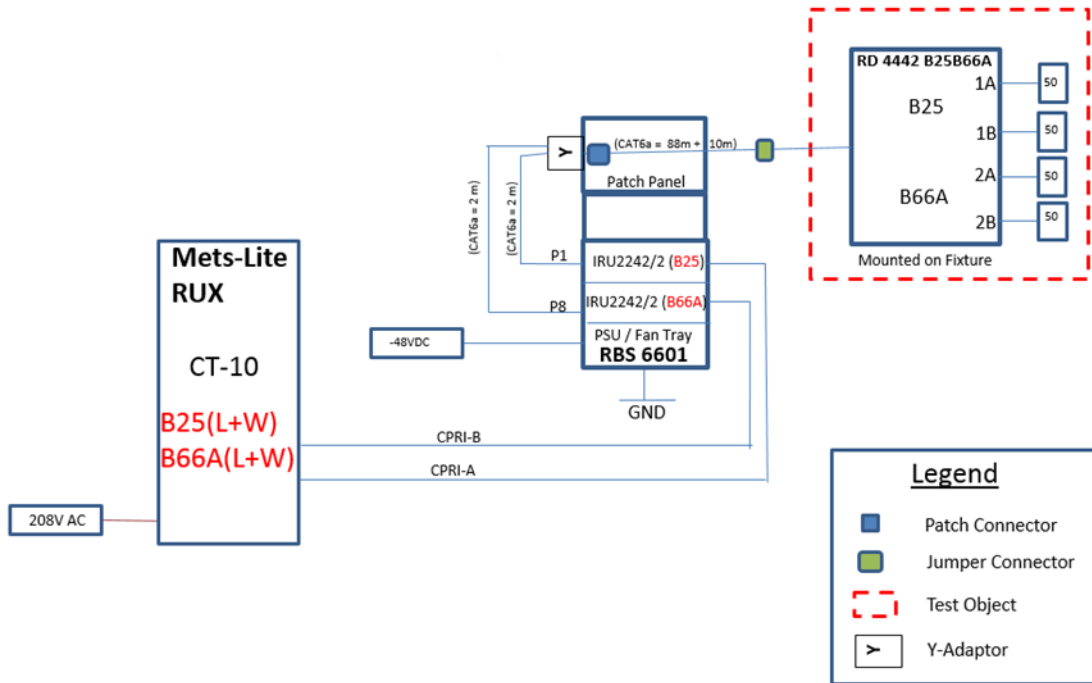


Figure 3.6-1: Setup diagram

| Product Name | Model Number | R-State | Serial Number |
|-----------------|---------------|---------|---------------|
| RD 4442 B25B66A | KRY 901 386/1 | R1B | TD3T308275 |

| Product Name | Model Number | R-State | Serial Number |
|--------------|---------------|---------|---------------|
| RBS-6601 | BFL 901 009/4 | R2A | BR83523705 |
| IRU 2242 | KRC 161 444/2 | R2B | D822456537 |
| IRU 2242 | KRC 161 444/2 | R2B | D822439694 |
| METS-Lite | n/a | n/a | n/a |

Section 4 Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

There are 3 models being certified. RD 4442 B25B66A is formally tested being a more complex product than the two depopulated versions RD 2243 B25 and RD 2243 B66A which will only support single Band of operation.

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5 Test conditions

5.1 Atmospheric conditions

| | |
|-------------------|------------|
| Temperature | 15–30 °C |
| Relative humidity | 20–75 % |
| Air pressure | 86–106 kPa |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6 Measurement uncertainty

6.1 Uncertainty of measurement

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC measurements; as well as described in UKAS LAB34: The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of K=2 with 95% certainty.

| Test name | Measurement uncertainty, dB |
|---------------------------------|-----------------------------|
| Radiated electromagnetic fields | 3.78 |

Section 7 Testing data

7.1 Radiated emissions

7.1.1 Definitions and limits

FCC §15.109 and ICES-003 Section 6.2:

- (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Table 7.1-1: Requirements as per FCC Part 15 Subpart B Class B

| Frequency range [MHz] | Distance [m] | Measurement | | limits [dBµV/m] |
|-----------------------|--------------|-------------|------------------------------------|--------------------|
| | | | Detector type/ bandwidth | |
| 30–88 | 3 | | Quasi Peak/120 kHz | 40.0 |
| 88–216 | | | | 43.5 |
| 216–960 | | | | 46.0 |
| 960–1000 | | | | 54.0 |
| >1000 | 3 | | Linear average/1 MHz Peak/1 MHz | 54.0 74.0 |

Notes: Where there is a step in the relevant limit, the lower value was applied at the transition frequency.

FCC §24.238:

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC §27.53:

(h) AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

RSS-133 Section 6.5.1:

(ii). After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10}(P)$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS-139 Section 6.5:

(ii). After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10}(P)$ (watts) dB.

7.1.2 Test summary

| | | | |
|---------------|------------------------------------|-------------------|-----------|
| Verdict | Pass | | |
| Test date | October 2, 2017 to October 4, 2017 | Temperature | 24 °C |
| Test engineer | Predrag Golic | Air pressure | 1020 mbar |
| Test location | Ottawa | Relative humidity | 35 % |

7.1.3 Observations/special notes

EUT can operate in single carrier, multicarrier and multiRAT mode as well as it can transmit two types of signal [LTE and WCDMA].

- In LTE single mode, the 5, 10, 15, and 20 MHz BW configurations were pre-scanned and 5 MHz mode was formally tested as the worst-case representative;
- In a single mode both LTE and WCDMA transmission modes are formally tested while EUT was transmitting on middle channel. LTE transmission was deemed worst case and it is formally tested while EUT was transmitting on top and bottom channel as well.
- In LTE dual carrier mode, middle channel is tested as a representative.
- In a multiRAT mode EUT was set up as 1W+1L, 2W+1L and 4W+2L on middle channel and pre-scanned. 1W+1L is deemed worst case and it is formally tested.

7.1.4 Setup details

| | |
|------------------------------|---|
| Test facility | 3 m Semi anechoic chamber |
| Measuring distance (m) | 3 |
| Antenna height variation (m) | 1–4 |
| Turn table position (°) | 0–360 |
| Spectrum analyzer settings | 30 MHz to 1 GHz: Spectrum analyzer bandwidth (3 dB) Settings: 100 kHz RBW and 300 kHz VBW, positive peak detector. 1 GHz to 22 GHz: Spectrum analyzer bandwidth (3 dB) Settings: 1 MHz RBW and 3 MHz VBW, positive peak detector |

Table 7.1-2: Modes assessed

| |
|--|
| LTE Single Carrier – 5 MHz middle channel, pre-scan |
| LTE Single Carrier – 10 MHz middle channel, pre-scan |
| LTE Single Carrier – 15 MHz middle channel, pre-scan |
| LTE Single Carrier – 20 MHz middle channel, pre-scan |
| LTE Single Carrier – 5 MHz middle channel, full scan |
| WCDMA Single Carrier – middle channel, full scan |
| LTE Single Carrier – 5 MHz bottom channel, full scan |
| LTE Single Carrier – 5 MHz top channel, full scan |
| LTE dual Carrier – 5 MHz middle channel, full scan |
| Multi-RAT 1W+1L(5MHz) -- middle channel, pre-scan |
| Multi-RAT 2W+1L(5MHz) -- middle channel, pre-scan |
| Multi-RAT 4W+2L(5MHz) -- middle channel, pre-scan |
| Multi-RAT 1W+1L(5MHz) -- middle channel, full scan |

7.1.5 Test equipment list

Table 7.1-3: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|-----------------------------|-----------------|--------------|-----------|-----------|------------|
| 3 m EMI test chamber | TDK | SAC-3 | FA002047 | 1 year | Dec. 01/17 |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESU 26 | FA002043 | 1 year | Jan. 31/18 |
| Spectrum analyzer | Rohde & Schwarz | FSU | FA001877 | 1 year | Jul. 18/18 |
| Bilog antenna (20–3000 MHz) | Sunol | JB3 | FA002108 | 1 year | June 27/18 |
| Horn with Preamp | ETS-Lindgren | 3117-PA | FA002840 | 1 year | Nov. 11/17 |
| Horn antenna (18–40 GHz) | EMCO | 3116 | FA001847 | 1 year | June 27/18 |
| Pre-amplifier (18–26 GHz) | Narda | BBS-1826N612 | FA001550 | — | VOU |
| 50 Ω coax cable | C.C.A. | None | FA002555 | 1 year | May 2/18 |
| 50 Ω coax cable | Huber + Suhner | None | FA002074 | 1 year | May 12/18 |

Notes: VOU - verify on use

7.1.6 Test data

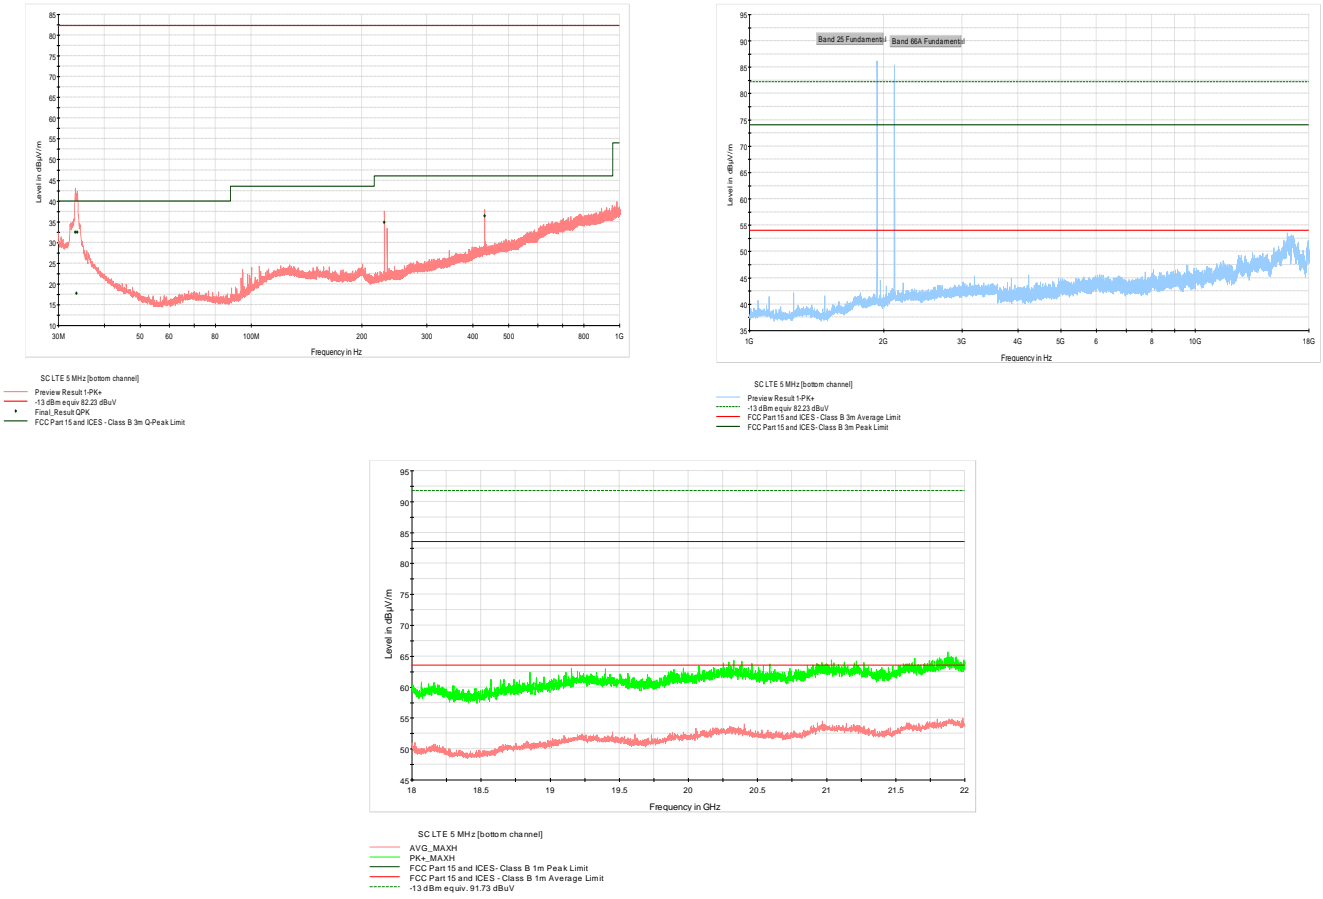


Figure 7.1-1: Radiated emissions spectral plot (30 to 22000 MHz) – Single carrier 5 MHz channel [bottom][LTE]

Table 7.1-4: Radiated emissions results

| Frequency (MHz) | Detector | Field strength ¹ (dBμV/m) | 3 m limit (dBμV/m) | Margin (dB) | Bandwidth (MHz) | Correction factor ² (dB) |
|-----------------|-----------|--------------------------------------|--------------------|-------------|-----------------|-------------------------------------|
| 33.36 | QuasiPeak | 32.5 | 40.0 | 7.6 | 0.120 | 20.2 |
| 33.60 | QuasiPeak | 17.7 | 40.0 | 22.3 | 0.120 | 20.0 |
| 33.78 | QuasiPeak | 32.5 | 40.0 | 7.5 | 0.120 | 19.8 |
| 229.95 | QuasiPeak | 34.8 | 46.0 | 11.2 | 0.120 | 13.6 |
| 430.08 | QuasiPeak | 36.4 | 46.0 | 9.6 | 0.120 | 19.1 |

Notes: ¹ Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 32.5 dBμV/m (field strength) = 12.3 dBμV (receiver reading) + 20.2 dB (Correction factor)

7.1.6 Test data, continued

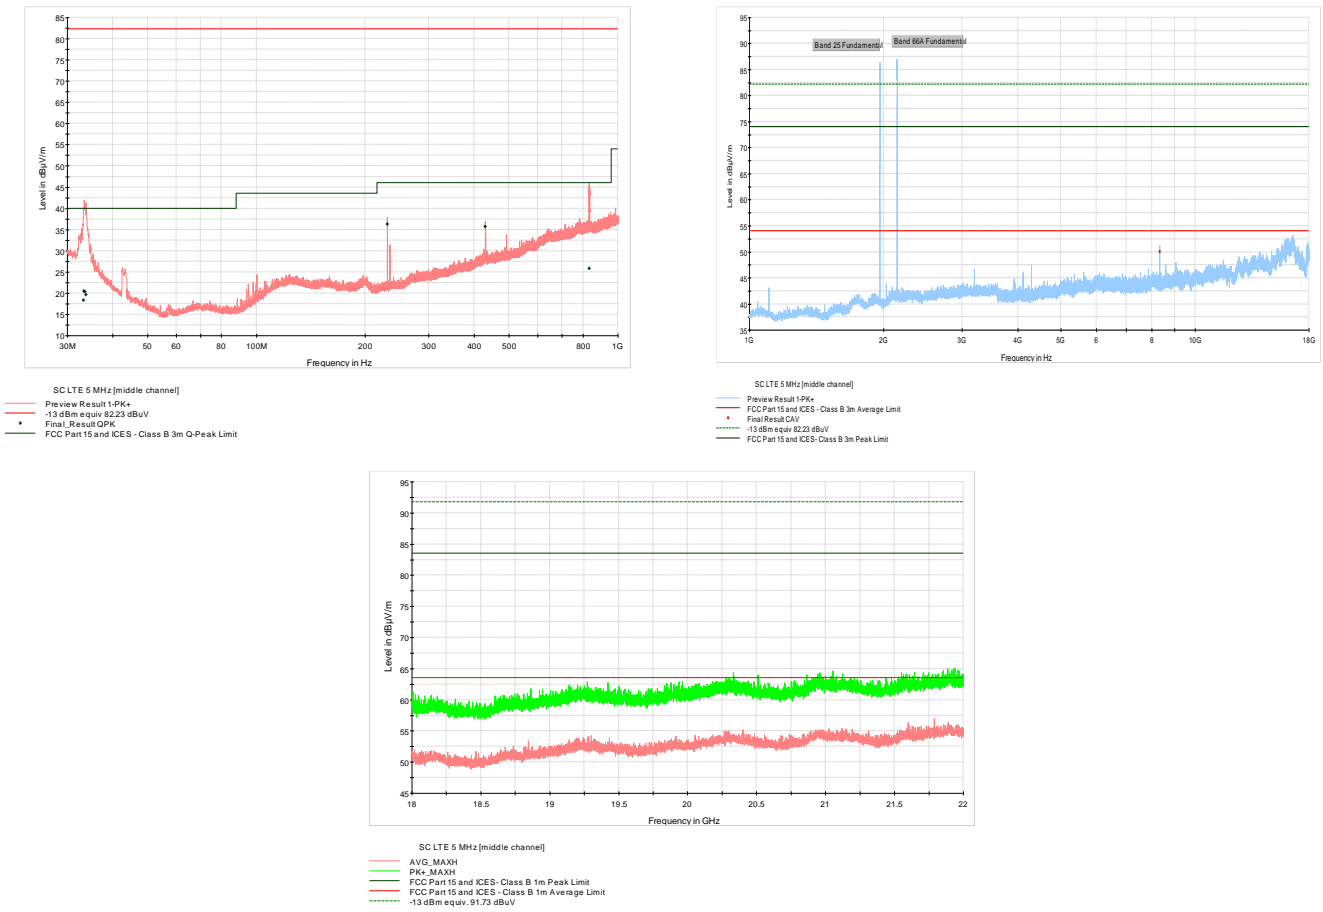


Figure 7.1-2: Radiated emissions spectral plot (30 to 22000 MHz) – Single carrier 5 MHz channel [middle][LTE]

Table 7.1-5: Radiated emissions results

| Frequency (MHz) | Detector | Field strength ¹ (dBμV/m) | 3 m limit (dBμV/m) | Margin (dB) | Bandwidth (MHz) | Correction factor ² (dB) |
|-----------------|-----------|--------------------------------------|--------------------|-------------|-----------------|-------------------------------------|
| 33.24 | QuasiPeak | 18.3 | 40.0 | 21.7 | 0.12 | 20.3 |
| 33.39 | QuasiPeak | 20.4 | 40.0 | 19.6 | 0.12 | 20.2 |
| 33.60 | QuasiPeak | 20.3 | 40.0 | 19.7 | 0.12 | 20.0 |
| 33.78 | QuasiPeak | 19.6 | 40.0 | 20.4 | 0.12 | 19.8 |
| 229.95 | QuasiPeak | 36.3 | 46.0 | 9.7 | 0.12 | 13.6 |
| 430.08 | QuasiPeak | 35.7 | 46.0 | 10.3 | 0.12 | 19.1 |
| 832.92 | QuasiPeak | 25.8 | 46.0 | 20.2 | 0.12 | 25.2 |
| 8319.93 | CAverage | 50.1 | 54.0 | 3.9 | 1.00 | -2.4 |

Notes: ¹ Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 18.3 dBμV/m (field strength) = (-2.0) dBμV (receiver reading) + 20.3 dB (Correction factor)

7.1.6 Test data, continued

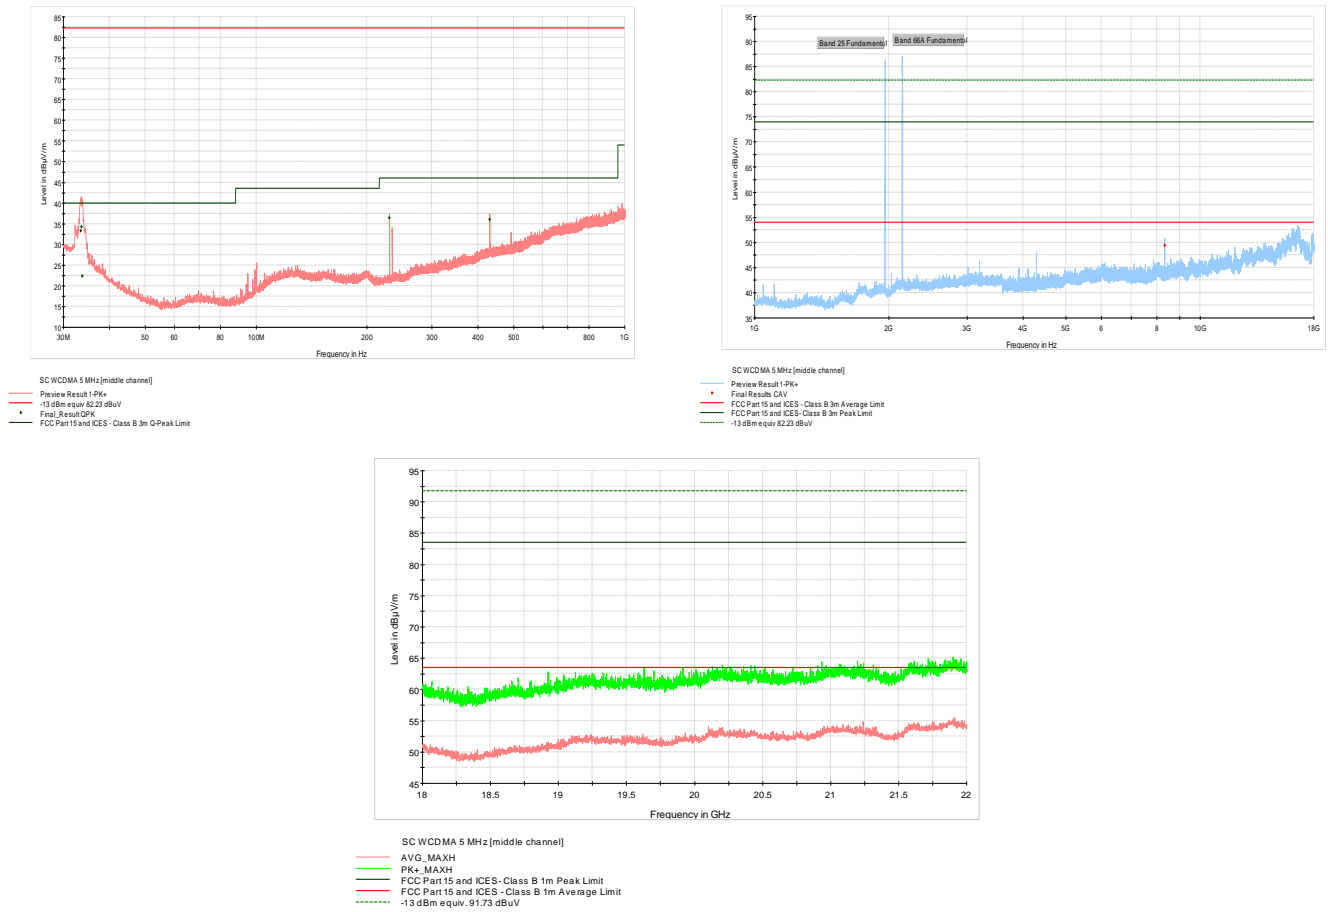


Figure 7.1-3: Radiated emissions spectral plot (30 to 22000 MHz) – Single carrier 5 MHz channel [middle][WCDMA]

Table 7.1-6: Radiated emissions results

| Frequency (MHz) | Detector | Field strength ¹ (dBμV/m) | 3 m limit (dBμV/m) | Margin (dB) | Bandwidth (MHz) | Correction factor ² (dB) |
|-----------------|-----------|--------------------------------------|--------------------|-------------|-----------------|-------------------------------------|
| 33.39 | QuasiPeak | 33.3 | 40.0 | 6.7 | 0.12 | 20.2 |
| 33.60 | QuasiPeak | 34.2 | 40.0 | 5.8 | 0.12 | 20.0 |
| 33.78 | QuasiPeak | 22.3 | 40.0 | 17.7 | 0.12 | 19.8 |
| 229.95 | QuasiPeak | 36.4 | 46.0 | 9.6 | 0.12 | 13.6 |
| 430.08 | QuasiPeak | 36.1 | 46.0 | 9.9 | 0.12 | 19.1 |
| 8319.93 | CAverage | 49.4 | 54.0 | 4.6 | 1.00 | -2.4 |

Notes: ¹ Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 33.3 dBμV/m (field strength) = 13.1 dBμV (receiver reading) + 20.2 dB (Correction factor)

7.1.6 Test data, continued

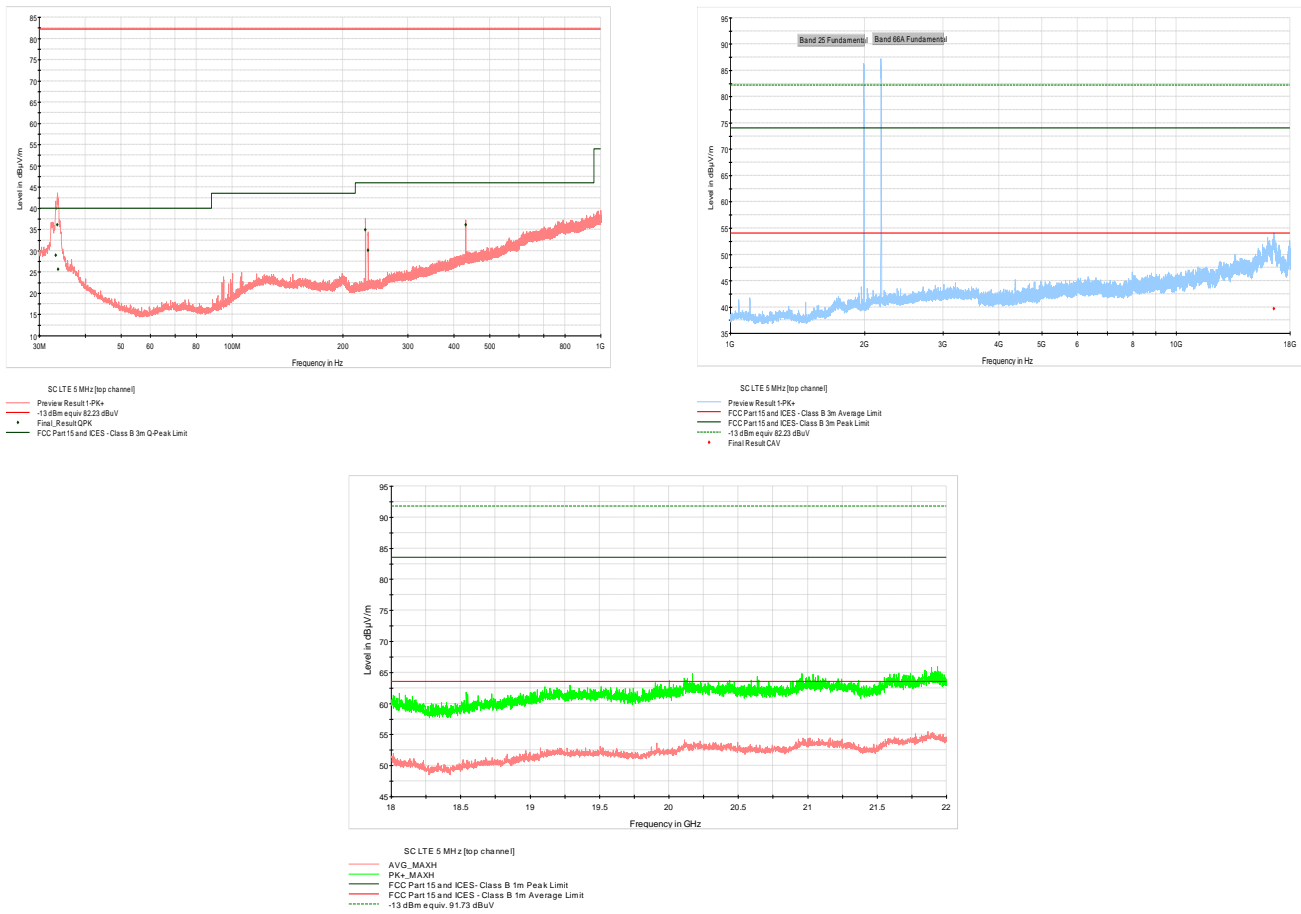


Figure 7.1-4: Radiated emissions spectral plot (30 to 22000 MHz) – Single carrier 5 MHz channel [top][LTE]

Table 7.1-7: Radiated emissions results

| Frequency (MHz) | Detector | Field strength ¹ (dBµV/m) | 3 m limit (dBµV/m) | Margin (dB) | Bandwidth (MHz) | Correction factor ² (dB) |
|-----------------|-----------|--------------------------------------|--------------------|-------------|-----------------|-------------------------------------|
| 33.24 | QuasiPeak | 29.0 | 40.0 | 11.1 | 0.12 | 20.3 |
| 33.60 | QuasiPeak | 36.1 | 40.0 | 3.9 | 0.12 | 20.0 |
| 33.78 | QuasiPeak | 25.7 | 40.0 | 14.3 | 0.12 | 19.8 |
| 229.95 | QuasiPeak | 35.0 | 46.0 | 11.0 | 0.12 | 13.6 |
| 234.03 | QuasiPeak | 30.1 | 46.0 | 15.9 | 0.12 | 13.8 |
| 430.08 | QuasiPeak | 36.1 | 46.0 | 9.9 | 0.12 | 19.1 |
| 16544.54 | CAverage | 39.7 | 54.0 | 14.3 | 1.00 | 12.4 |

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 29.0 dBµV/m (field strength) = 8.7 dBµV (receiver reading) + 20.3 dB (Correction factor)

7.1.6 Test data, continued



Figure 7.1-5: Radiated emissions spectral plot (30 to 22000 MHz) – Dual carrier 5 MHz channel [middle][LTE]

Table 7.1-8: Radiated emissions results

| Frequency (MHz) | Detector | Field strength ¹ (dBµV/m) | 3 m limit (dBµV/m) | Margin (dB) | Bandwidth (MHz) | Correction factor ² (dB) |
|-----------------|-----------|--------------------------------------|--------------------|-------------|-----------------|-------------------------------------|
| 33.21 | QuasiPeak | 31.9 | 40.0 | 8.1 | 0.12 | 20.3 |
| 33.36 | QuasiPeak | 34.1 | 40.0 | 5.9 | 0.12 | 20.2 |
| 33.60 | QuasiPeak | 36.2 | 40.0 | 3.8 | 0.12 | 20.0 |
| 33.78 | QuasiPeak | 31.8 | 40.0 | 8.3 | 0.12 | 19.8 |
| 229.95 | QuasiPeak | 36.5 | 46.0 | 9.5 | 0.12 | 13.6 |
| 430.08 | QuasiPeak | 36.0 | 46.0 | 10.0 | 0.12 | 19.1 |
| 8319.95 | CAverage | 48.0 | 54.0 | 6.0 | 1.00 | -2.4 |
| 16572.03 | CAverage | 39.9 | 54.0 | 14.1 | 1.00 | 12.4 |

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 31.9 dBµV/m (field strength) = 11.6 dBµV (receiver reading) + 20.3 dB (Correction factor)

7.1.6 Test data, continued

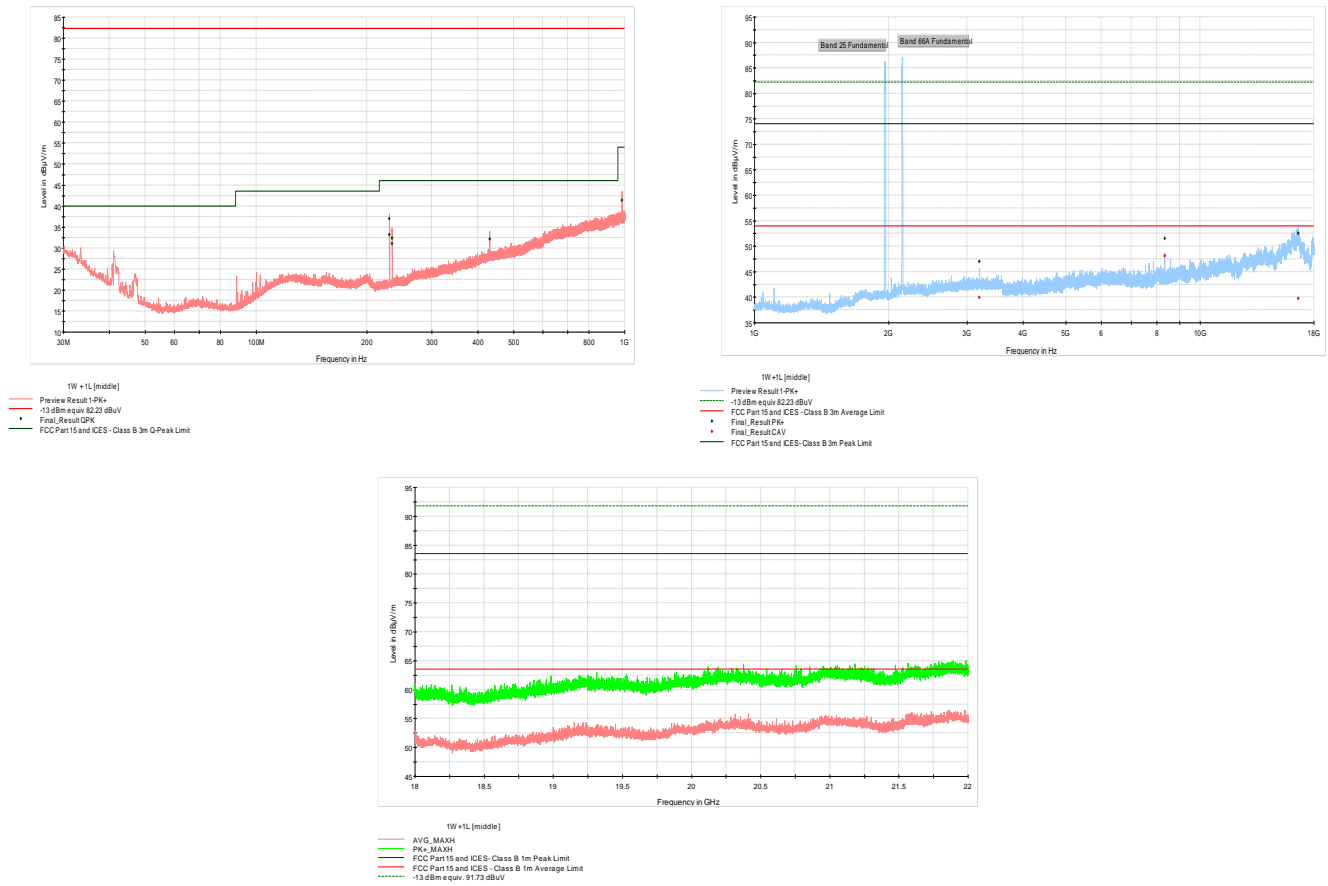


Figure 7.1-6: Radiated emissions spectral plot (30 to 22000 MHz) – MultiRAT 1W+1L [middle]

Table 7.1-9: Radiated emissions results

| Frequency (MHz) | Detector | Field strength ¹ (dBµV/m) | 3 m limit (dBµV/m) | Margin (dB) | Bandwidth (MHz) | Correction factor ² (dB) |
|-----------------|-----------|--------------------------------------|--------------------|-------------|-----------------|-------------------------------------|
| 229.95 | QuasiPeak | 36.9 | 46.0 | 9.1 | 0.12 | 13.6 |
| 230.04 | QuasiPeak | 33.2 | 46.0 | 12.8 | 0.12 | 13.6 |
| 233.94 | QuasiPeak | 32.3 | 46.0 | 13.7 | 0.12 | 13.8 |
| 234.03 | QuasiPeak | 31.0 | 46.0 | 15.0 | 0.12 | 13.8 |
| 430.08 | QuasiPeak | 32.1 | 46.0 | 13.9 | 0.12 | 19.1 |
| 983.04 | QuasiPeak | 41.4 | 54.0 | 12.6 | 0.12 | 26.8 |
| 3194.88 | CAverage | 40.0 | 54.0 | 14.0 | 1.00 | -10.3 |
| 8319.93 | CAverage | 48.1 | 54.0 | 5.9 | 1.00 | -2.4 |
| 16582.12 | CAverage | 39.8 | 54.0 | 14.2 | 1.00 | 12.3 |
| 16582.12 | MaxPeak | 52.5 | 74.0 | 21.5 | 1.00 | 12.3 |

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 36.9 dBµV/m (field strength) = 23.3 dBµV (receiver reading) + 13.6 dB (Correction factor)

7.1.7 Setup photos



Figure 7.1-7: Radiated emissions setup photo – below 1 GHz

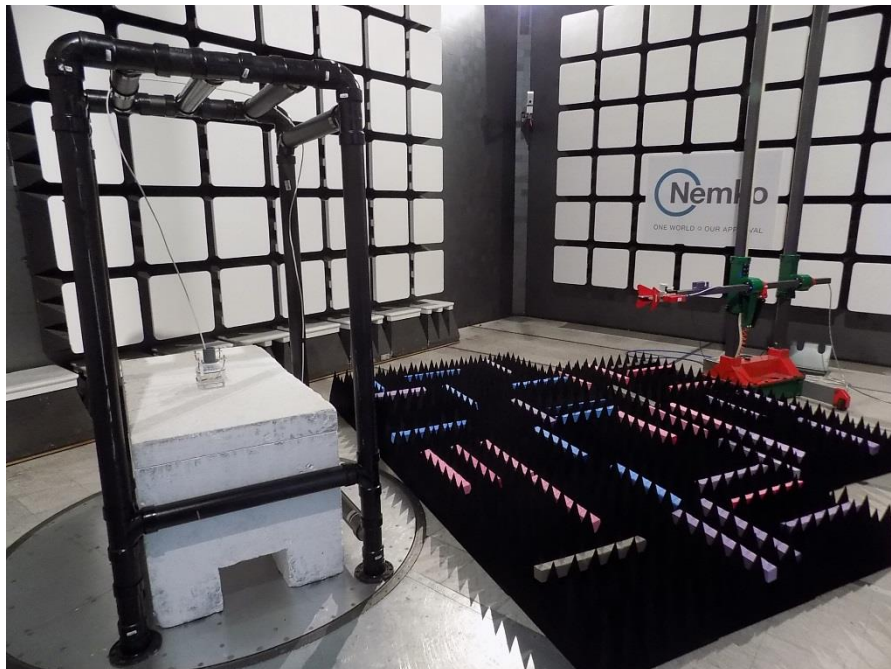


Figure 7.1-8: Radiated emissions setup photo – above 1 GHz

7.1.6 Setup photos, continued



Figure 7.1-9: Radiated emissions setup photo – above 1 GHz