



Add value.  
Inspire trust.

## Report On

FCC and ISED Testing of the Ericsson KRY 901 428/2 (Dot 2282 B5 B12A) & KRY 901 466/2 (Dot 2282 B5 B13)

LTE (with NB-IoT GB), NR, LTE + NR (850 MHz) Base Station in accordance with FCC CFR 47 Part 2: 2019, FCC CFR 47 Part 22: 2019, ISED RSS-GEN: Issue 5: March 2019 Amendment 1, ISED RSS-132: Issue 3: 2013

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRY901428-1, TA8AKRY901428-2, TA8AKRY901466-1, & TA8AKRY901466-2

IC ID: 287AB-AS9014281, 287AB-AS9014282, 287AB-AS9014661 & 287AB-AS9014662

Document 7169009740 Report 01 Issue 1

June 2021


PREPARED BY



---

Glen Westwell

APPROVED BY



---

Scott Drysdale  
Authorised Signatory

DATED

10 June 2021

---



---

**Add value.  
Inspire trust.**





## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT INFORMATION ..... 2</b>
1.1	Report Details ..... 3
1.2	Brief Summary of Results ..... 4
1.3	Configuration Description ..... 5
1.4	Declaration of Build Status ..... 6
1.5	Product Information ..... 8
1.6	Test Setup ..... 9
1.7	Test Conditions ..... 10
1.8	Deviation From The Standard ..... 10
1.9	Modification Record ..... 10
1.10	Additional Information ..... 10
<b>2</b>	<b>TEST DETAILS ..... 11</b>
2.1	Maximum Peak Output Power and Peak to Average Ratio - Conducted ..... 12
2.2	Occupied bandwidth ..... 29
2.3	Band Edge ..... 33
2.4	Tranceiver Spurious Emissions ..... 44
2.5	Frequency Stability ..... 54
<b>3</b>	<b>TEST EQUIPMENT USED ..... 56</b>
3.1	Test Equipment Used ..... 57
3.2	Measurement Uncertainty ..... 58
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 59</b>
4.1	Accreditation, Disclaimers and Copyright ..... 60
<b>ANNEX A</b>	<b>Module Lists ..... A.2</b>



## **SECTION 1**

### **REPORT INFORMATION**



## 1.1 REPORT DETAILS

Manufacturer	Ericsson
Address	Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden
Product Name & Product Number	Dot 2282 B5B12A & KRY 901 428/2
IC Model Name	AS9014281, AS9014282, AS9014661, & AS9014662
Serial Number(s)	TD3WD72731
Software Version	CXP9013268%17 Revision R82GS
Hardware Version	R1C
Non-Tested Variant (See Section 1.10 Additional Information)	Dot 2272 B5B12A, KRY 901 428/1 Dot 2272 B5B13, KRY 901 466/1 Dot 2282 B5B13, KRY 901 466/2
Test Specification/Issue/Date	FCC CFR 47 Part 2: 2019 FCC CFR 47 Part 22: 2019 ISED RSS-GEN: Issue 5: March 2019 Amendment 1 ISED RSS-132: Issue 3: 2013
Test Plan	Dot 2282 B5B12A_RA_testplan_NR_LTE_NBIoT
Start of Test	25 March 2021
Finish of Test	28 March 2021
Name of Engineer(s)	Glen Westwell
Related Document(s)	KDB 971168 D01 v02r02 KDB 662911 D01 v02r01 ANSI C63.26-2015 ICES-003:Issue 7 (2020-10)

---

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with FCC CFR 47 Part 2: 2019, FCC CFR 47 Part 22: 2019, ISED RSS-GEN: Issue 5: March 2019 Amendment 1, ISED RSS-132: Issue 3: 2013. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

Glen Westwell



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 22, ISED RSS-GEN and ISED RSS-132 is shown below.

Section	Specification Clause				Test Description	Result
	FCC CFR 47 Part 2	FCC CFR 47 Part 22	RSS-GEN	ISED RSS-132		
2.1	2.1046	22.913 (a)	-	5.4	Maximum Peak Output Power and Peak to Average Ratio - Conducted	Pass
2.2	2.1049	22.917 (b)	-	5.5	Occupied Bandwidth	Pass
2.3	2.1051	22.917 (b)	-	5.5	Band edge	Pass
2.4	2.1051	22.917(b)	6.13	5.5	Transmitter Spurious Emissions	Pass
2.5	2.1055	22.355	6.11	5.3	Frequency Stability	Pass

This test report only covers testing for B5, test results for B12A can be found in TUV SUD Document 7169009740 Report 02.



### 1.3 CONFIGURATION DESCRIPTION

Note: LTE with 10MHz bandwidth included an NBloT Guardband signal.

Configuration A					
RAT	NO. Of Carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE	1	5 MHz	871.5	881.5	891.5
		10 MHz	874.0	881.5	889.0
NR	1	5 MHz	871.5	881.5	891.5
		10 MHz	874.0	881.5	889.0
		15 MHz	876.5	881.5	886.5
		20 MHz	879.0	881.5	884.0

Configuration B					
RAT	No. of Carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE +NR+NR	3	5+5+5 MHz	871.5 + 876.5 + 881.5	876.5 + 881.5 + 886.5	881.5 + 886.5 + 891.5
		10+5+5 MHz	874.0 + 881.5 + 886.5	876.5 + 884.0 + 889.0	879.0 + 886.5 + 891.5

Configuration C					
RAT	NO. of Carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE	5	5 MHz	--	871.5 + 876.5 + 881.5 +	--
NR			--	886.5 + 891.5	--

**1.4 DECLARATION OF BUILD STATUS**

<b>MAIN EUT</b>	
<b>MANUFACTURING DESCRIPTION</b>	Dot 2272 B5B12A and Dot 2282 B5B12A
<b>MANUFACTURER</b>	Ericsson
<b>TYPE</b>	Remote Radio Base Station
<b>TESTED UNIT PART NUMBER</b>	KRY 901 428/2
<b>SERIAL NUMBER</b>	TD3WD72731
<b>HARDWARE VERSION</b>	R1C
<b>SOFTWARE VERSION</b>	CXP9013268%17_R82GS
<b>NON-TESTED VARIANT PART NUMBER</b>	KRY 901 428/1
<b>TRANSMITTER OPERATING RANGE</b>	B5: 869-894 MHz, B12A: 729-745MHz
<b>RECEIVER OPERATING RANGE</b>	B5: 824-849 MHz, B12A: 699-715MHz
<b>COUNTRY OF ORIGIN</b>	China
<b>INTERMEDIATE FREQUENCIES</b>	None
<b>EMISSION DESIGNATOR(S): (i.e. G1D, GXW)</b>	B5 and B12A LTE: 5M00W7D, 10M0W7D B5 and B12A NBloT Guardband: 10M0W7D B5 NR: 5M00F9W, 10M0F9W, 15M0F9W, 20M0F9W B12A NR: 5M00F9W, 10M0F9W, 15M0F9W
<b>MODULATION TYPES: (i.e. GMSK, QPSK)</b>	LTE: QPSK, 16QAM, 64QAM, 256QAM NR: QPSK, 16QAM, 64QAM, 256QAM
<b>HIGHEST INTERNALLY GENERATED FREQUENCY</b>	0.894 GHz
<b>OUTPUT POWER (W or dBm)</b>	B5: 2 x 0.05W (17dBm) B12A: 2 x 0.05W (17dBm)
<b>ANTENNA GAIN (dBi)</b>	B5 Peak gain: 1.4dBi B12A Peak gain: 1.8dBi
<b>FCC ID</b>	TA8AKRY901428-2 and TA8AKRY901428-1
<b>INDUSTRY CANADA ID</b>	287AB-AS9014282 and 287AB-AS9014281
<b>TECHNICAL DESCRIPTION (a brief description of the intended use and operation)</b>	Dot 2282 B5B12A (KRY 901 428/2) is a dual band Remote Radio Unit forming part of the Ericsson Radio Base Station (RBS) equipment. The RD provides radio access for mobile and fixed devices and is intended for the indoor environment. The radio operates over 4 Transmit ports in MRO; Single, Multi-Carrier, and MIMO transmission with a maximum rated RF Output of 0.05W per port over an operational temperature of 5°C to +40°C. The unit is designed to be ceiling or wall mounted.  Dot 2272 B5B12A (KRY 901 428/1) is identical to Dot 2282 B5B12A (KRY 901 428/2) except that it is built with internal antennas instead of external antenna RF ports.

Signature:

.....  
Denis Lalonde

Date: 1 June 2021

Declaration of Build Status Serial Number: TD3WD72731






## 1.5 PRODUCT INFORMATION

### 1.5.1 Technical Description


The Equipment Under Test (EUT) Dot 2282 B5 B12A is an Ericsson AB Radio Unit working in the public mobile service 869-894 MHz band which provides communication connections to 869-894 MHz network. The Dot 2282 B5 B12A operates from a -48V DC supply.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

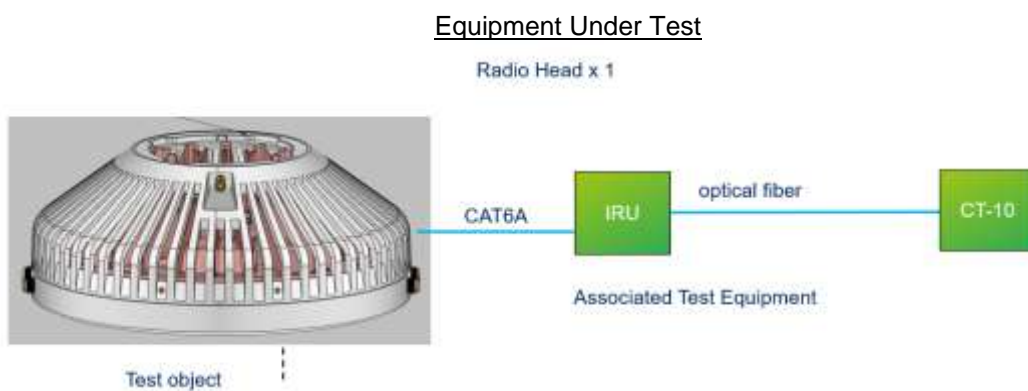



1.6 TEST SETUP

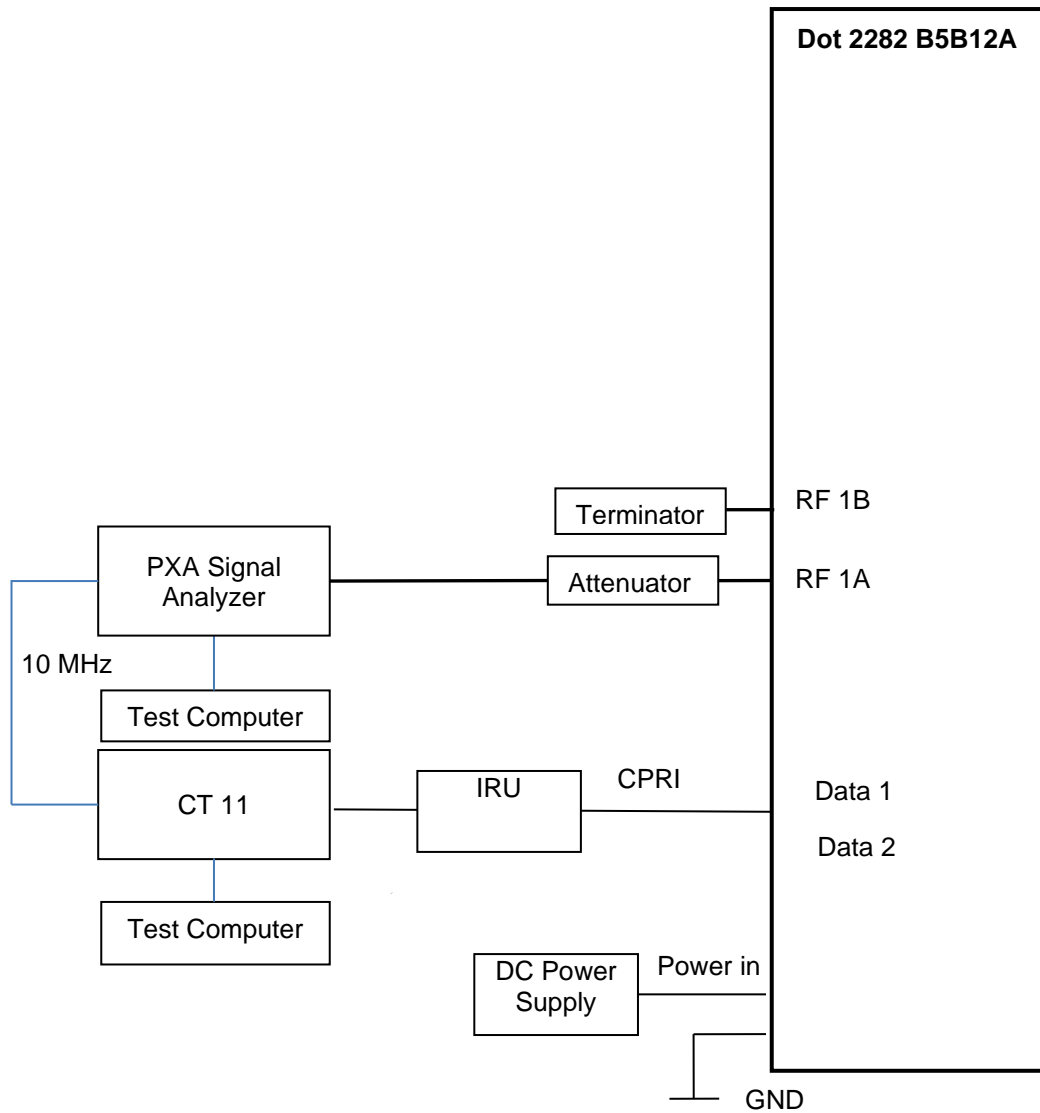



## 1.7 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated as described in the Test Method for each Test.

The EUT was powered from a -48V DC supply.

FCC Measurement Facility Registration Number  
CA4810 TUV SUD Ottawa, Canada

ISED Accreditation  
IC#24015 TUV SUD Ottawa, Canada

Under our A2LA Accreditation, TÜV SÜD Canada conducted the following tests Ericsson, Ottawa Laboratory.

Test Name	Name of Engineer(s)
Maximum Peak Output Power and Peak to Average Ratio - Conducted	Glen Westwell
Occupied Bandwidth	Glen Westwell
Band Edge	Glen Westwell
Transceiver Spurious Emissions	Glen Westwell

## 1.8 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

## 1.9 MODIFICATION RECORD

No modifications were made to the EUT during testing.

## 1.10 ADDITIONAL INFORMATION

1. This filing is for a Radio Certification for use in the USA and Canada under the following ID's:

FCC ID: TA8AKRY901428-2 and TA8AKRY901428-1  
ISED ID: 287AB-AS9014282 and 287AB-AS9014281

2. Transmitter performance was measured for top, mid & bottom channels, where applicable, across all antenna ports as presented in the average power measurement tables. Typical performance is presented.

3. Dot 2272 B5B12A (KRY 901 428/1) is identical to Dot 2282 B5B12A (KRY 901 428/2) except that it is built with internal antennas instead of external antenna RF ports.

4. The B5 circuits of Dot 2272 B5B13 and Dot 2282 B5B13 are identical to the the B5 circuits in the B5B12A variants. For this reason, the B5 test results tested on Dot 2282 B5B12A are used to demonstrate FCC/ISED compliance for Dot 2272 B5B13 and Dot 2282 B5B13 products.



## **SECTION 2**

### **TEST DETAILS**



## **2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 22, Clause 22.913 (a)  
ISED RSS-132, Clause 5.4  
FCC CFR 47 Part 2, Clause 2.1046

### **2.1.2 Date of Test and Modification State**

25 and 26 March 2021 - Modification State 0

### **2.1.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.4 Environmental Conditions**

Ambient Temperature	24.9 - 25.2°C
Relative Humidity	29.4 - 29.8%

### **2.1.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01, clause 5.2.1 and summed in accordance with FCC KDB 662911 D01.



## 2.1.6 Test Results

### Configuration A

Maximum Output Power 17.00 dBm / Port

Antenna Gain (dBd)	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power				
			Channel Position B				
Antenna Port			PAR (dB)	Average Power			ERP dBm/MHz
	dBm	ERP (dBm)		dBm/MHz			
-0.75							
A	LTE: QPSK	5.0 MHz	9.04	17.09	16.34	11.92	11.17
B	LTE: QPSK	5.0 MHz	-	17.25	16.50	11.92	11.17
Total			-	20.18	19.43	14.93	14.18
A	LTE: QPSK	10.0 MHz	9.44	17.37	16.62	8.59	7.84
B	LTE: QPSK	10.0 MHz	-	17.43	16.68	8.59	7.84
Total			-	20.41	19.66	11.60	10.85
A	NR: QPSK	5.0 MHz	9.01	16.96	16.21	11.81	11.06
B	NR: QPSK	5.0 MHz	-	16.64	15.89	11.81	11.06
Total			-	19.81	19.06	14.82	14.07
A	NR: QPSK	10.0 MHz	9.11	17.09	16.34	8.76	8.01
B	NR: QPSK	10.0 MHz	-	16.84	16.09	8.76	8.01
Total			-	19.98	19.23	11.77	11.02
A	NR: QPSK	15.0 MHz	9.51	17.00	16.25	7.30	6.55
B	NR: QPSK	15.0 MHz	-	17.03	16.28	7.30	6.55
Total			-	20.03	19.28	10.31	9.56
A	NR: QPSK	20.0 MHz	10.11	16.57	15.82	5.11	4.36
B	NR: QPSK	20.0 MHz	-	16.59	15.84	5.11	4.36
Total			-	19.59	18.84	8.12	7.37

Antenna Gain (dBd)	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power				
			Channel Position M				
Antenna Port			PAR (dB)	Average Power			ERP dBm/MHz
	dBm	ERP (dBm)		dBm/MHz			
-0.75							
A	LTE: QPSK	5.0 MHz	9.03	16.91	16.16	12.43	11.68
B	LTE: QPSK	5.0 MHz	-	17.27	16.52	12.43	11.68
Total			-	20.10	19.35	15.44	14.69
A	LTE: QPSK	10.0 MHz	9.31	17.33	16.58	8.75	8.00
B	LTE: QPSK	10.0 MHz	-	17.52	16.77	8.75	8.00
Total			-	20.44	19.69	11.76	11.01
A	NR: QPSK	5.0 MHz	9.03	17.08	16.33	12.43	11.68
B	NR: QPSK	5.0 MHz	-	17.11	16.36	12.43	11.68
Total			-	20.11	19.36	15.44	14.69
A	NR: QPSK	10.0 MHz	9.10	16.98	16.23	8.73	7.98
B	NR: QPSK	10.0 MHz	-	16.86	16.11	8.73	7.98
Total			-	19.93	19.18	11.74	10.99
A	NR: QPSK	15.0 MHz	9.26	17.03	16.28	7.37	6.62
B	NR: QPSK	15.0 MHz	-	17.27	16.52	7.37	6.62
Total			-	20.16	19.41	10.38	9.63
A	NR: QPSK	20.0 MHz	10.07	16.54	15.79	5.19	4.44
B	NR: QPSK	20.0 MHz	-	15.99	15.24	5.19	4.44
Total			-	19.28	18.53	8.20	7.45



Antenna Gain (dBd)	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power				
			Channel Position T				Average Power
Antenna Port			PAR (dB)	dBm	ERP (dBm)	dBm/MHz	ERP dBm/MHz
-0.75							
A	LTE: QPSK	5.0 MHz	9.06	17.01	16.26	11.99	11.24
B	LTE: QPSK	5.0 MHz	-	17.08	16.33	11.99	11.24
Total			-	20.06	19.31	15.00	14.25
A	LTE: QPSK	10.0 MHz	9.38	16.74	15.99	8.91	8.16
B	LTE: QPSK	10.0 MHz	-	17.41	16.66	8.91	8.16
Total			-	20.10	19.35	11.92	11.17
A	NR: QPSK	5.0 MHz	9.06	16.91	16.16	11.99	11.24
B	NR: QPSK	5.0 MHz	-	16.70	15.95	11.99	11.24
Total			-	19.82	19.07	15.00	14.25
A	NR: QPSK	10.0 MHz	9.15	16.97	16.22	9.00	8.25
B	NR: QPSK	10.0 MHz	-	17.56	16.81	9.00	8.25
Total			-	20.29	19.54	12.01	11.26
A	NR: QPSK	15.0 MHz	9.29	18.04	17.29	7.45	6.70
B	NR: QPSK	15.0 MHz	-	18.14	17.39	7.45	6.70
Total			-	21.10	20.35	10.46	9.71
A	NR: QPSK	20.0 MHz	10.07	16.40	15.65	5.37	4.62
B	NR: QPSK	20.0 MHz	-	16.76	16.01	5.37	4.62
Total			-	19.59	18.84	8.38	7.63

Remarks

1. Transmitter performance has been presented for top, mid, bottom channels across all antenna ports as represented in the tables above.
2. Typical performance and measurement plot data has been presented for reference.
3. All plot data is on file and available upon request.






Configuration A

Antenna Port A Carrier Power - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B



Antenna Port A Pk-Av Ratio - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

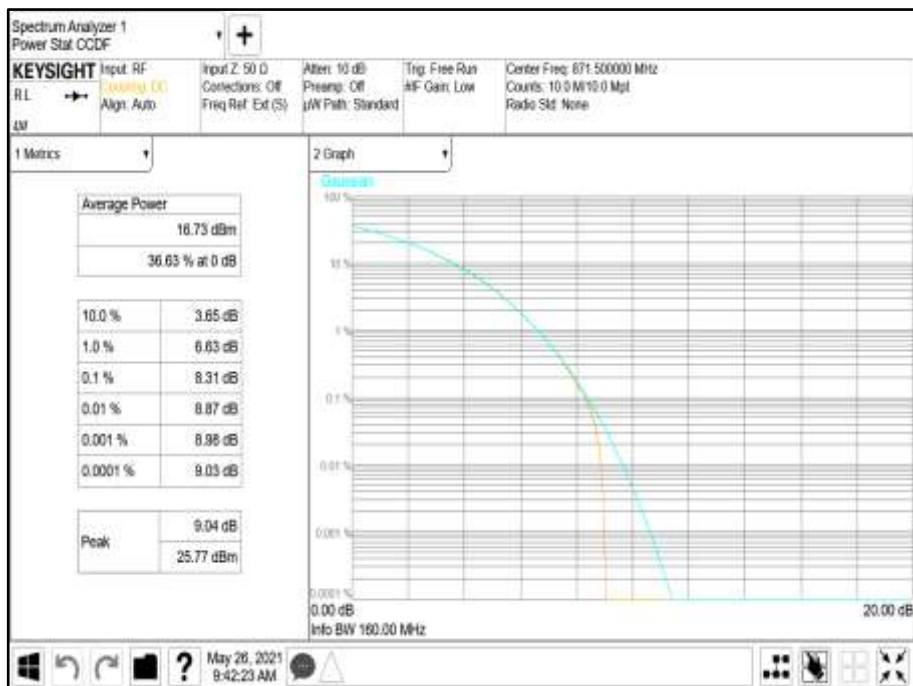




Antenna Port A PSD - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B



Antenna Port A Carrier Power - Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

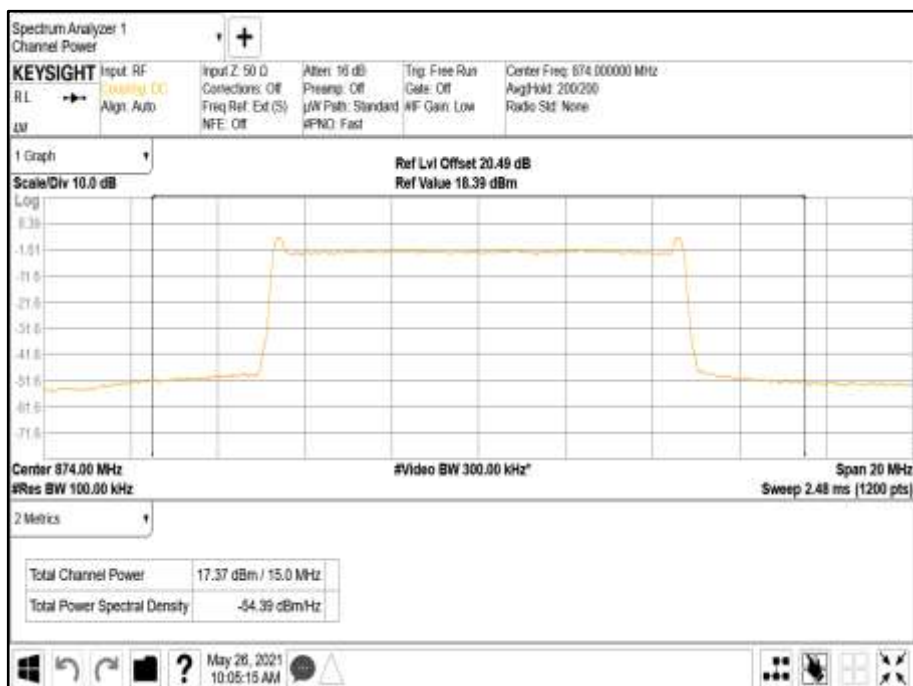



Antenna Port A Pk-Av Ratio - Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B



Antenna Port A PSD - Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B






Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B




Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

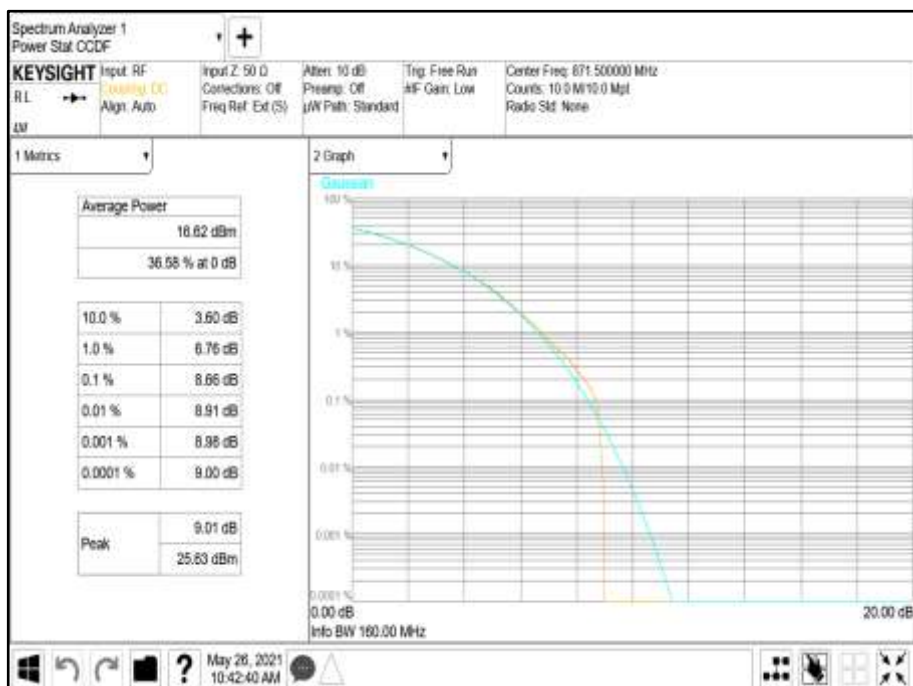



Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

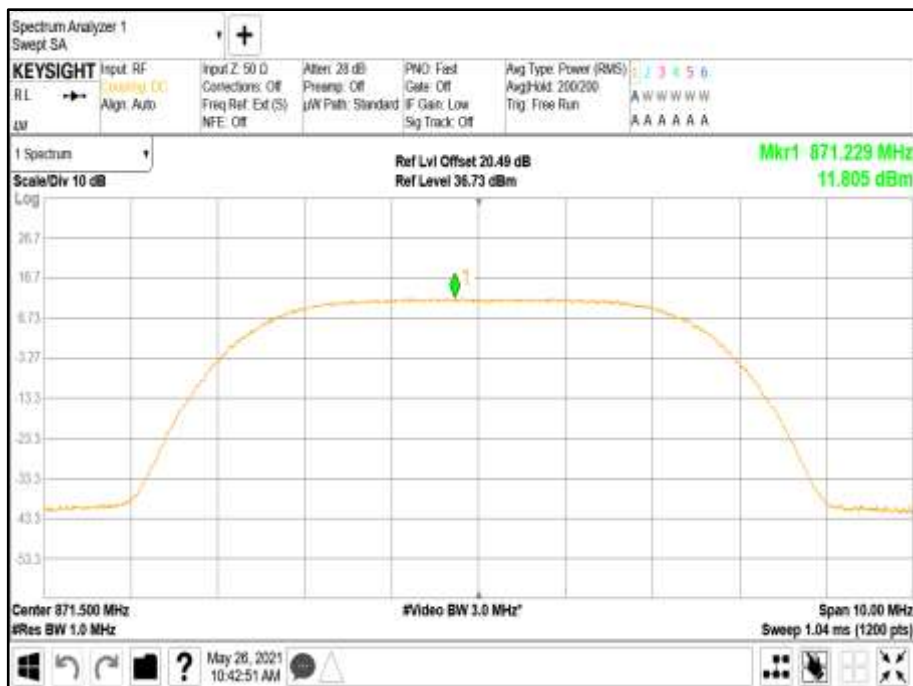


Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B





Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

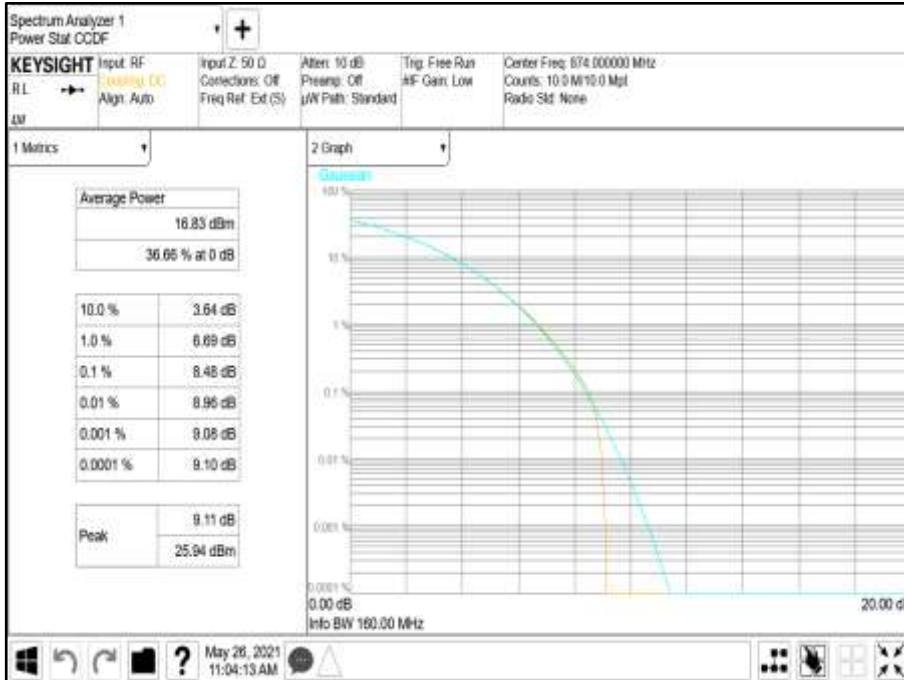

Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B





Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B



Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B





Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B




Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B







Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B

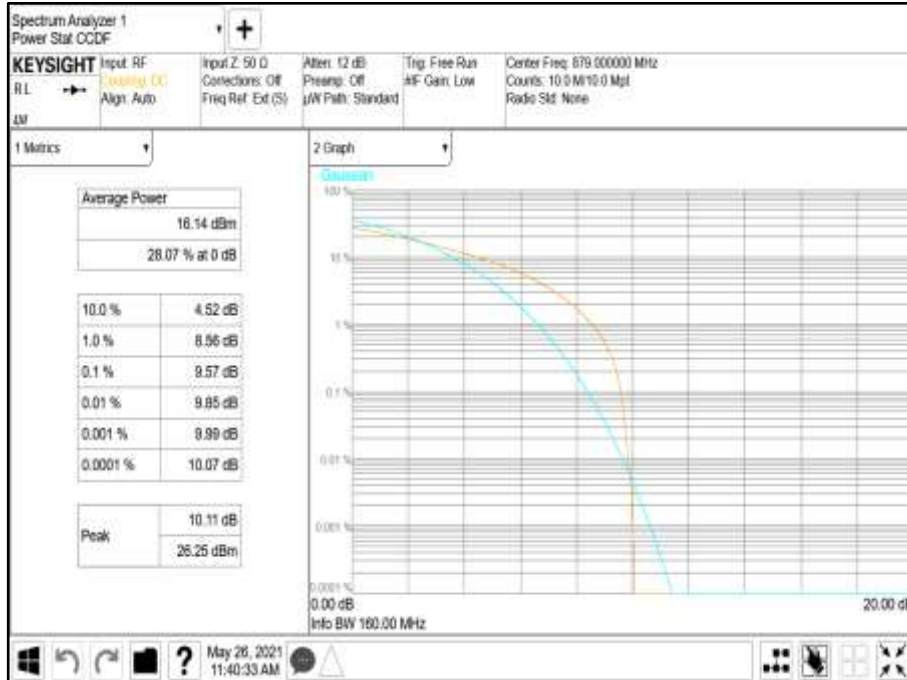

Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B





Configuration B


Maximum Output Power 17.00 dBm / Port

Antenna	Modulation	Carrier Bandwidth	Output Power		
			Channel Position B		
			PAR (dB)	Average Power	
dBm	dBm/MHz				
A	LTE + NR + NR: QPSK	5.0+5.0+5.0 MHz	-	16.78	-
B	LTE + NR + NR: QPSK	5.0+5.0+5.0 MHz	-	17.70	-
Total			-	20.27	-
A	LTE + NR + NR: QPSK	10.0+5.0+5.0 MHz	-	17.04	-
B	LTE + NR + NR: QPSK	10.0+5.0+5.0 MHz	-	16.60	-
Total			-	19.84	-

Remarks

1. The table results are measured at all antenna ports, worst-case.
2. The plot results represent typical radio performance across all channels.
3. Plot data performance for all transmitter ports and channels are available on request.

Antenna A - Modulation LTE + NR + NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0 MHz - Channel Position B

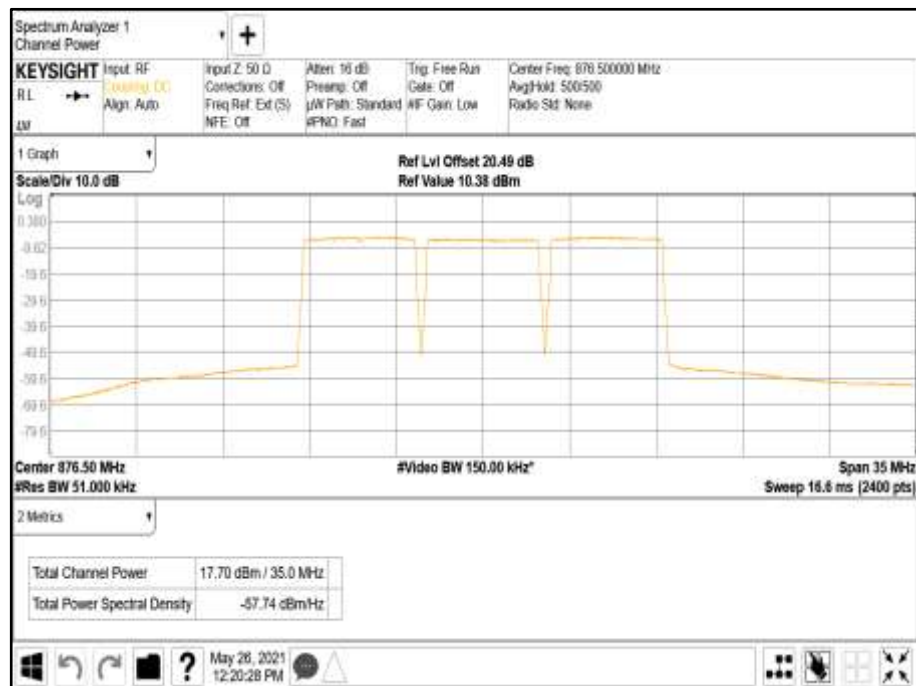



Antenna A - Modulation LTE + NR + NR: QPSK - Carrier Bandwidth 10.0+5.0+5.0 MHz - Channel Position B





Configuration C

Maximum Output Power 17.00 dBm / Port


Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power		
			PAR (dB)	Channel Position M	
				Average Power	
			dBm	dBm/MHz	
A	LTE: QPSK	5.0+5.0+5.0+5.0+5.0 MHz	-	16.62	-
B	LTE: QPSK	5.0+5.0+5.0+5.0+5.0 MHz	-	16.78	-
Total			-	19.71	-
A	NR: QPSK	5.0+5.0+5.0+5.0+5.0 MHz	-	17.17	-
B	NR: QPSK	5.0+5.0+5.0+5.0+5.0 MHz	-	16.94	-
Total			-	20.07	-

Remarks


1. The plot results represent typical radio performance across the transmit pass band.
2. The highest power transmitter configuration is presented for compliance.



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position M

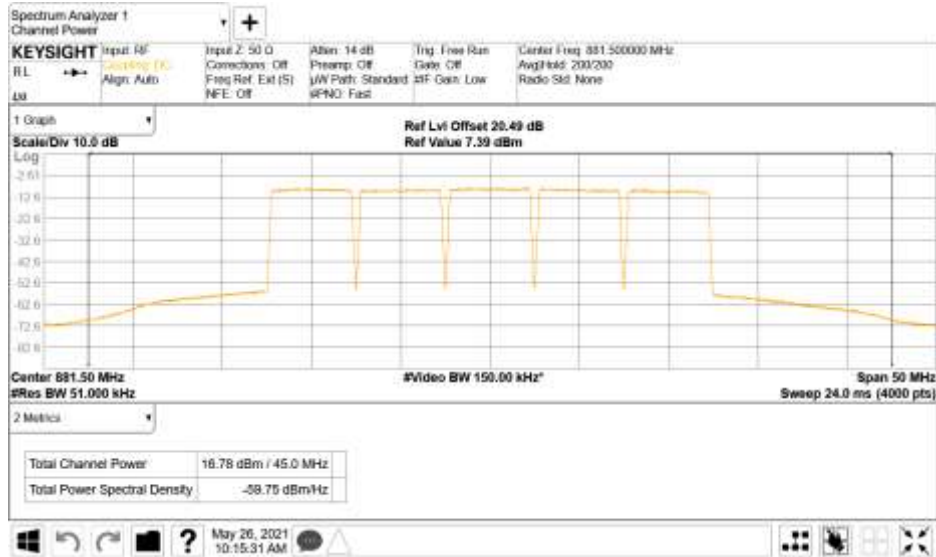

Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position M

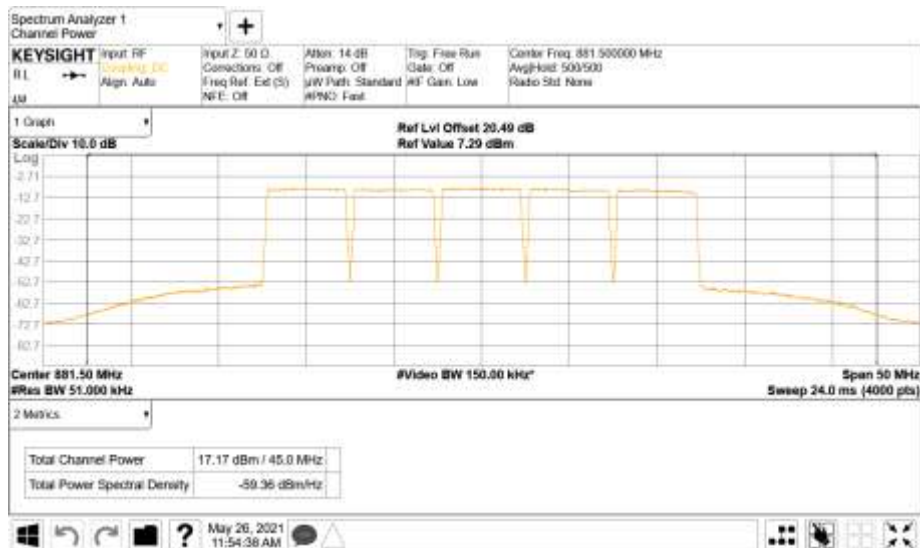



FCC Part 22.913(a) Clauses (i) & (i)

Limit	
Maximum ERP (Non-Urban)	$\leq 2000 \text{ W}$ or $\leq 800\text{W/MHz}$ (>72km from International Border)
	$\leq 1000 \text{ W}$ or $\leq 800\text{W/MHz}$
Maximum ERP (Urban)	$\leq 500 \text{ W}$ or $\leq 400\text{W/MHz}$
Peak to Average Ratio	13 dB

RSS-132 Clause 5.4

Limit	
Peak to Average Ratio	13 dB

SRSP-503 Power and Antenna Height Limitations Clause 5.1.1 & 5.1.2

Limit	
Maximum EIRP (Non-Urban)	$\leq 1640 \text{ W/MHz}$ or $\leq +62.15 \text{ dBm}$
Maximum EIRP (Urban)	$\leq 820 \text{ W/MHz}$ or $\leq +59.15 \text{ dBm}$



**2.2 OCCUPIED BANDWIDTH**

**2.2.1 Specification Reference**

FCC CFR 47 Part 22, Clause 22.917 (b)  
 ISED RSS-132, Clause 5.5  
 FCC CFR 47 Part 2, Clause 2.1049

**2.2.2 Date of Test and Modification State**

25 and 26 March 2021 - Modification State 0

**2.2.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.2.4 Environmental Conditions**

Ambient Temperature 24.9 - 25.2°C  
 Relative Humidity 29.4 - 29.8%

**2.2.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01.

**2.2.6 Test Results**

Configuration A

Maximum Output Power 17.00 dBm/Port


Modulation	Carrier Bandwidth	Result (MHz)	
		Channel Bandwidth	
		Occupied Bandwidth	-26 dB Bandwidth
NR: QPSK	LTE: 5.0 MHz	4.46	4.71
NR: QPSK	LTE: 10.0 MHz	9.39	9.63
NR: QPSK	NR: 5.0 MHz	4.45	4.72
NR: QPSK	NR: 10.0 MHz	9.27	9.64
NR: QPSK	NR: 15.0 MHz	14.08	14.61
NR: QPSK	NR: 20.0 MHz	19.26	20.14

**Remarks**


Representative occupied bandwidth performance results presented. Plot data performance for all transmitter ports and channel positions are on file and available on request



Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

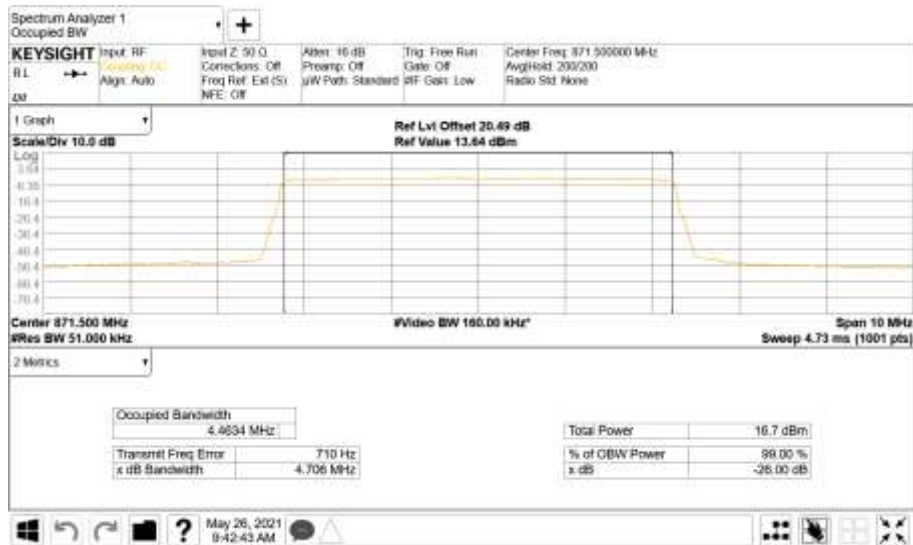


Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

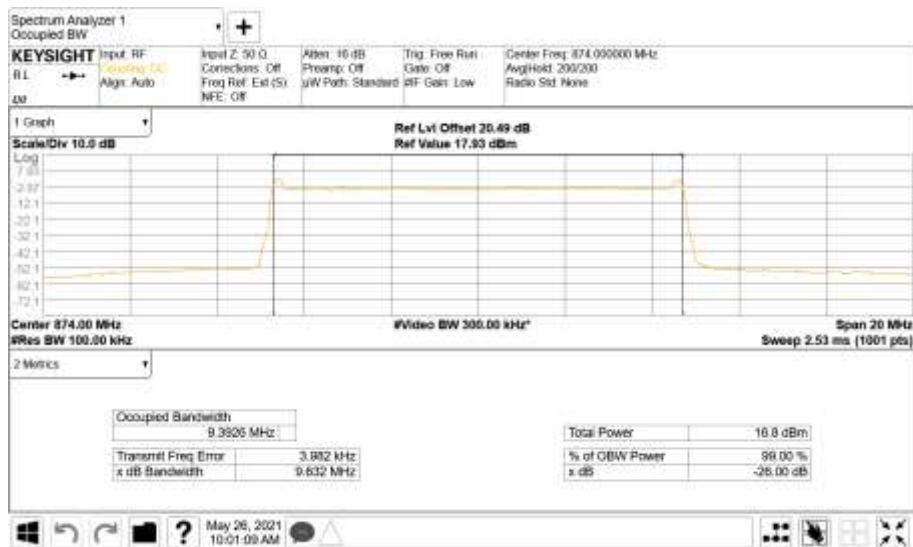






Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

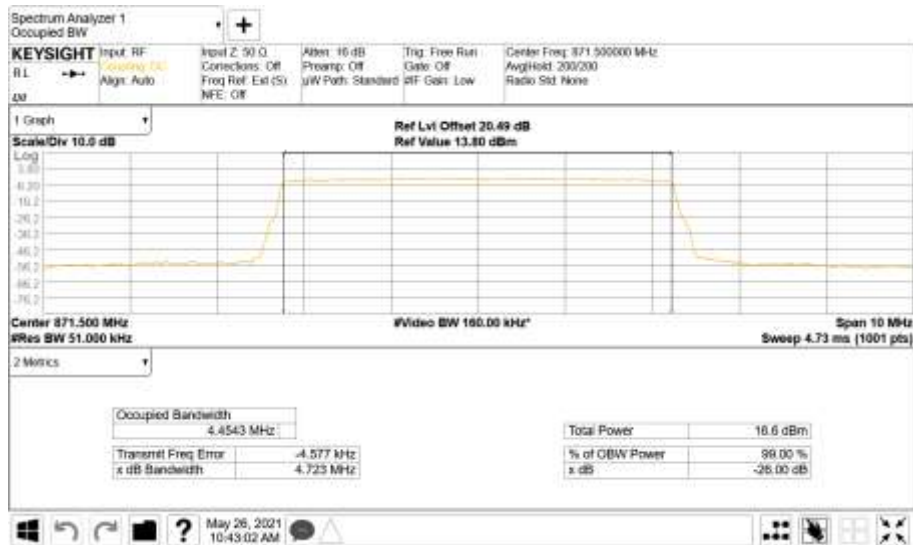


Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

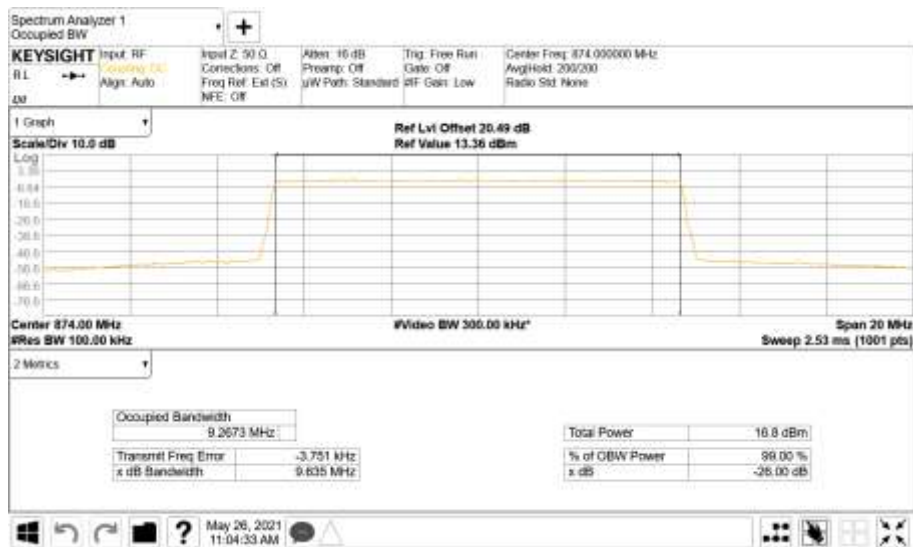




Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B

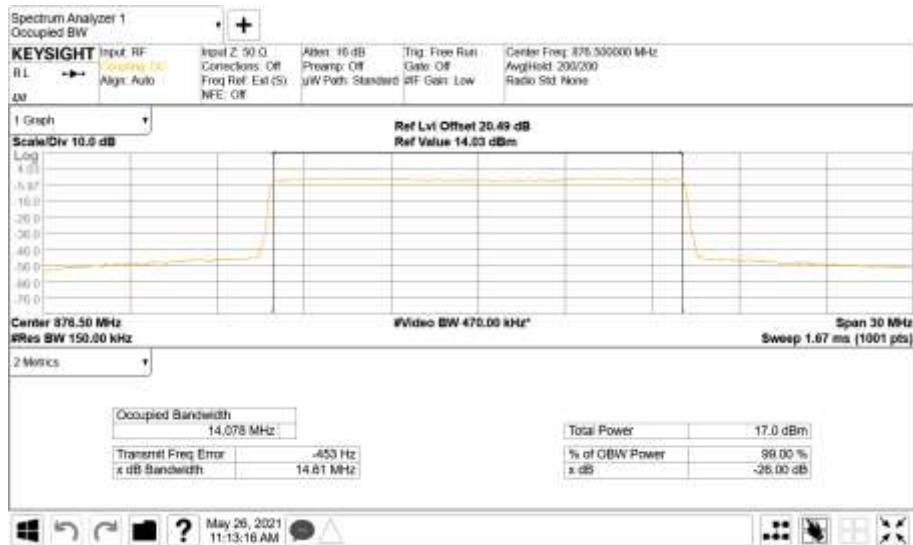

Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B

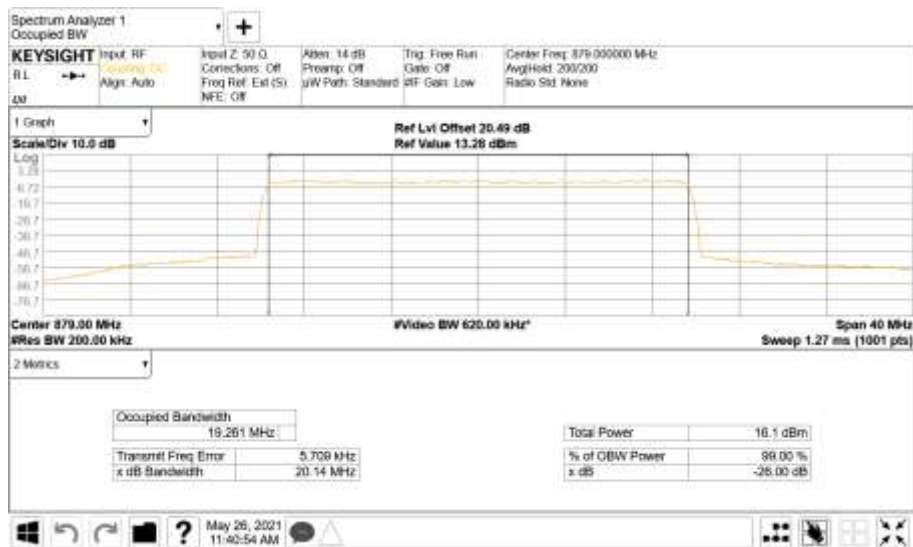



**2.3 BAND EDGE**

**2.3.1 Specification Reference**

FCC CFR 47 Part 22, Clause 22.917 (b)  
 ISED RSS-132, Clause 5.5  
 FCC CFR 47 Part 2, Clause 2.1051

**2.3.2 Date of Test and Modification State**

25 and 26 March 2021 - Modification State 0

**2.3.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.3.4 Environmental Conditions**

Ambient Temperature 24.9 - 25.2°C  
 Relative Humidity 29.4 - 29.8%

**2.3.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.0.

Band Edge measurements were used an Integration Bandwidth of at least 1% of the measured 26dB Bandwidth.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by  $10 * \text{Log}(N)$ , where N is equal to the number of MIMO antenna ports.

For dual port, the limit was calculated as being  $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$ .

**2.3.6 Test Results**


Configuration A

Maximum Output Power 17.00 dBm /Port


Modulation	Carrier Bandwidth	Band Edge (MHz)	
		Channel Position B	Channel Position T
NR: QPSK	LTE: 5.0 MHz	871.5	891.5
NR: QPSK	LTE: 10.0 MHz	874.0	889.0
NR: QPSK	NR: 5.0 MHz	871.5	891.5
NR: QPSK	NR: 10.0 MHz	874.0	889.0
NR: QPSK	NR: 15.0 MHz	876.5	886.5
NR: QPSK	NR: 20.0 MHz	879.0	884.0



Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

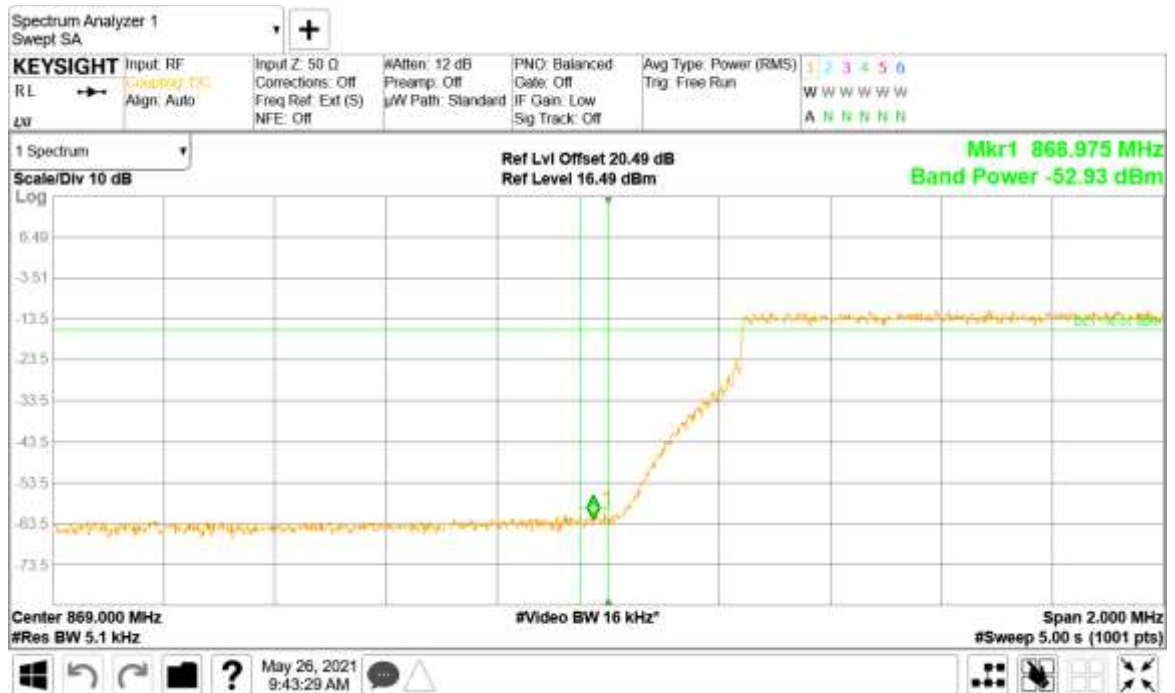


Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position T

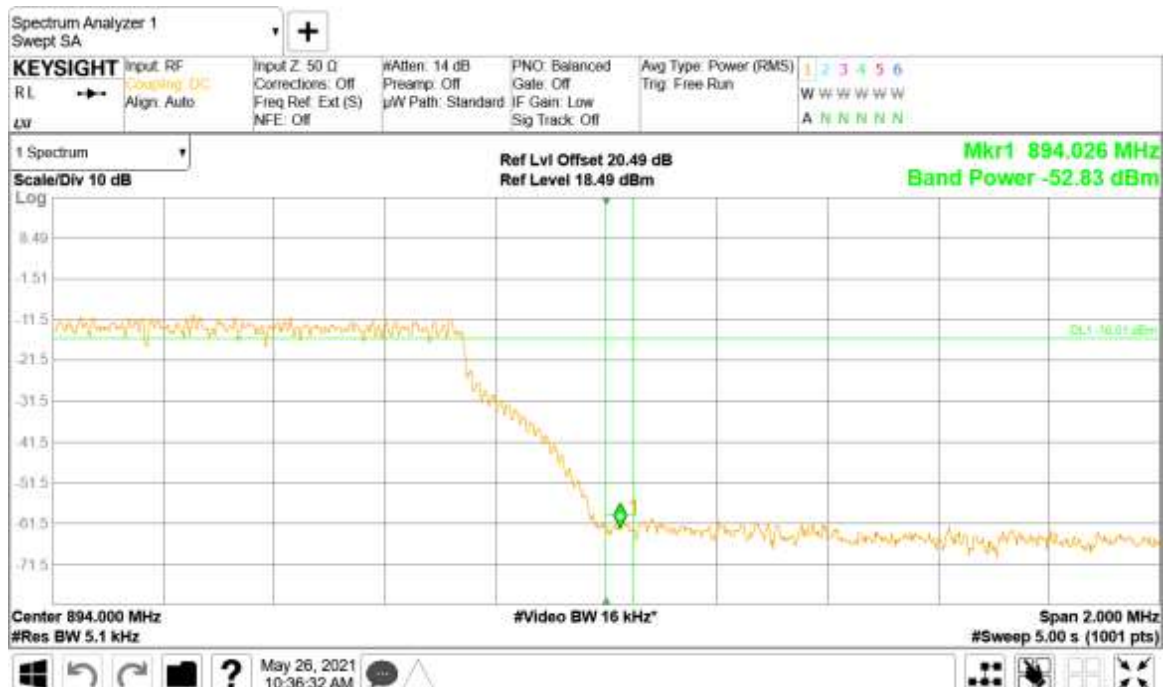




Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

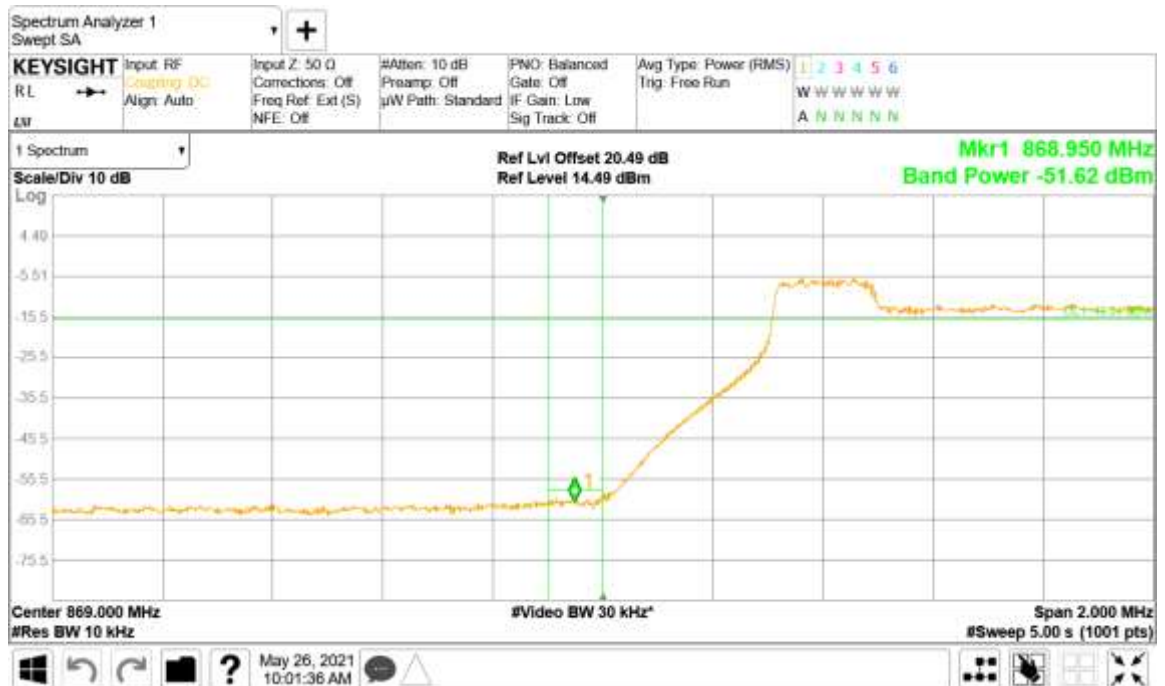


Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position T

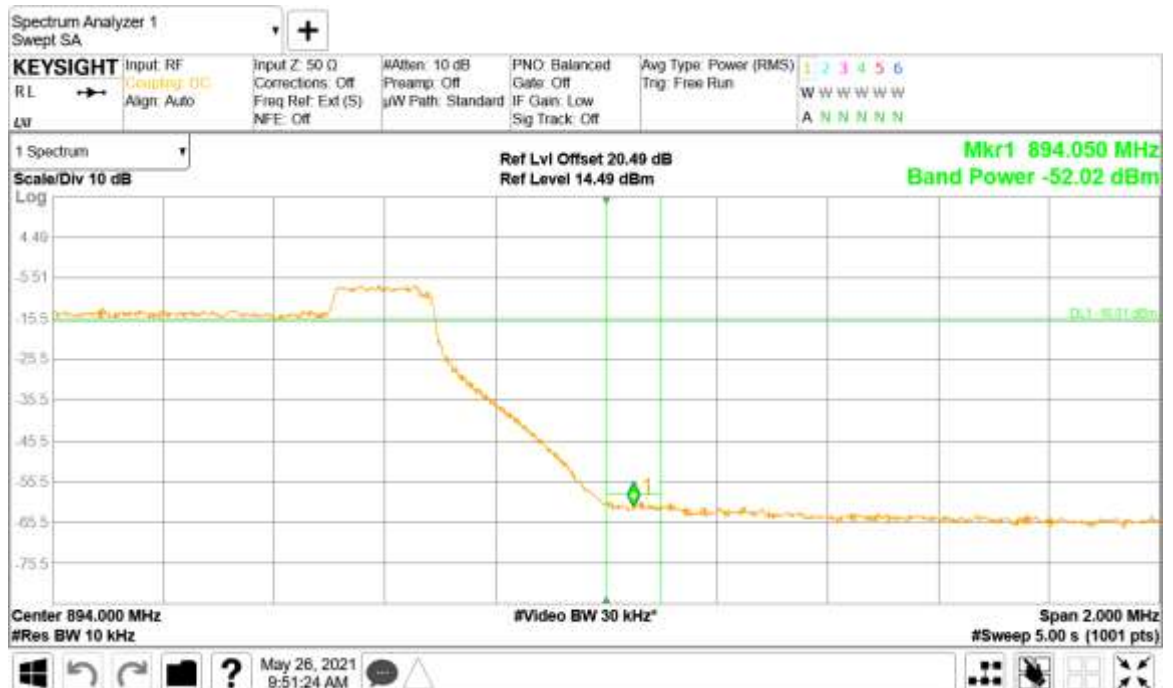




Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

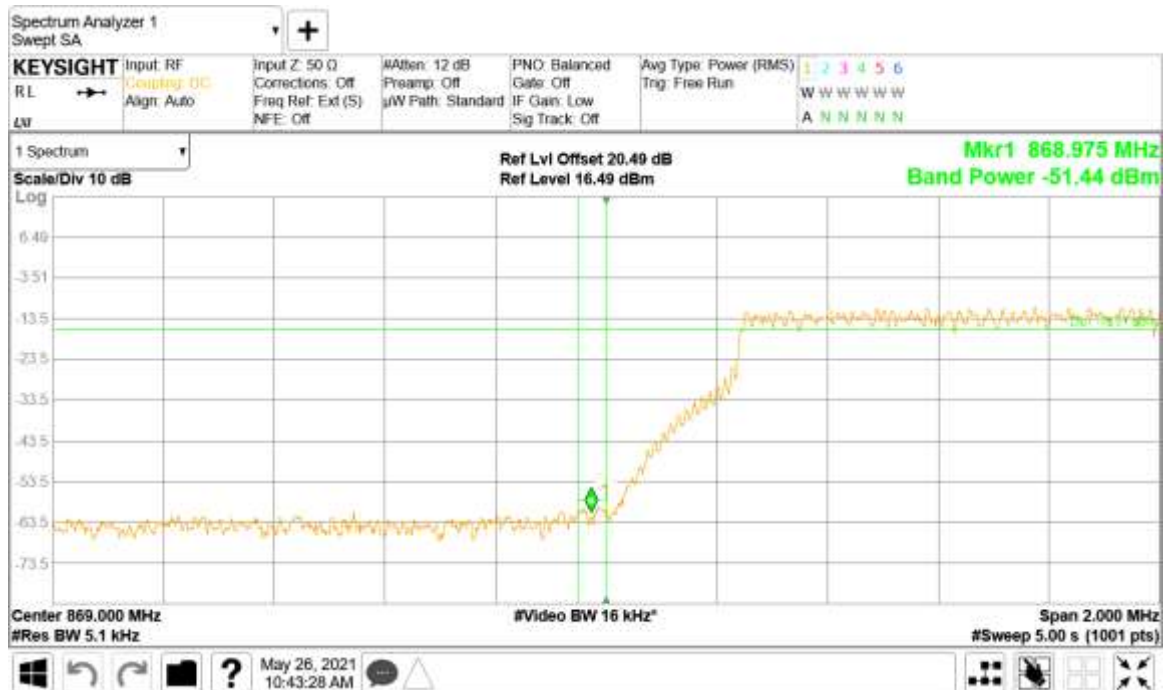


Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position T

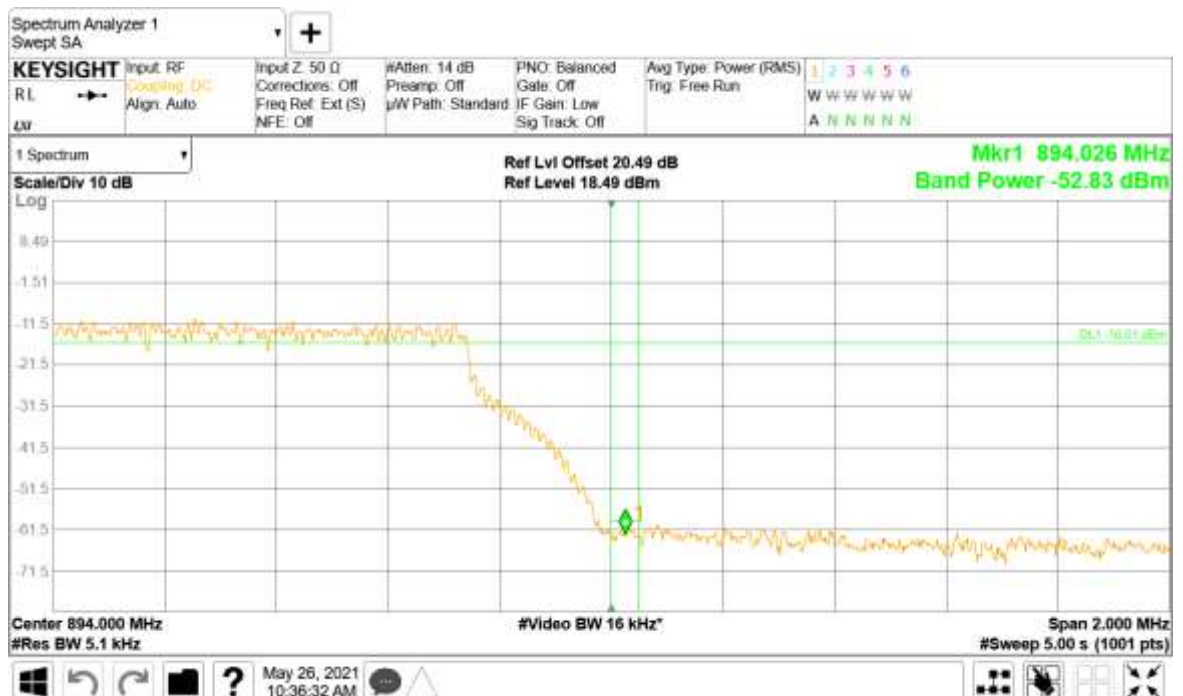




Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

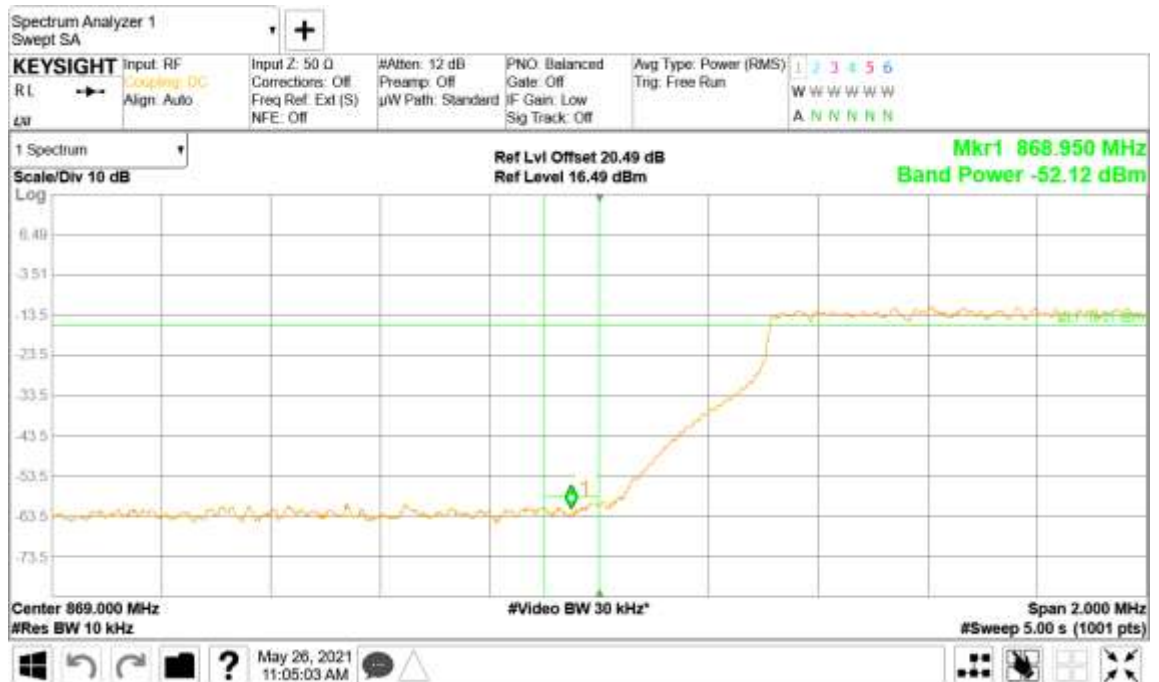


Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position T

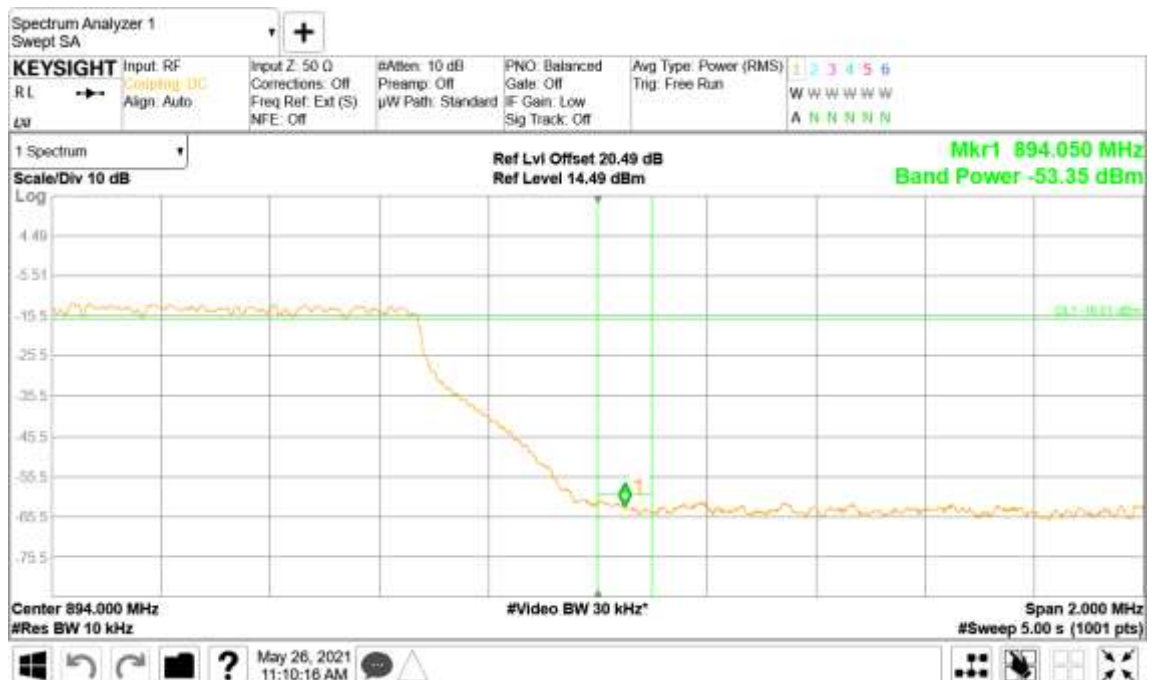




Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B

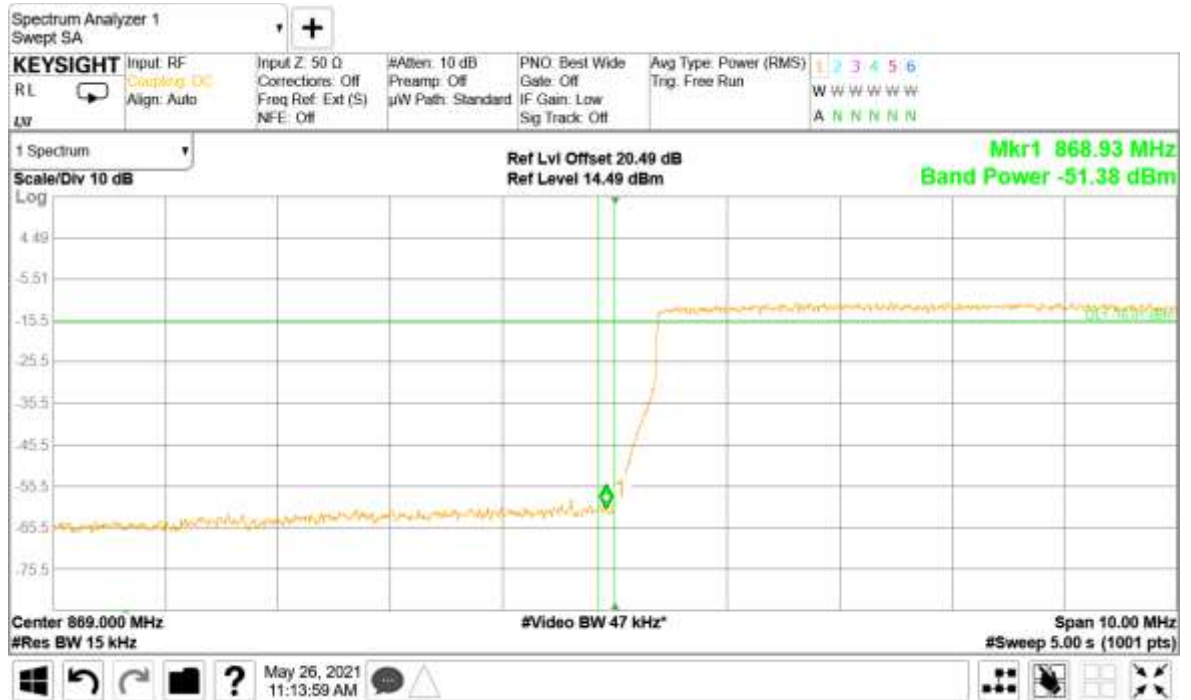


Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position T

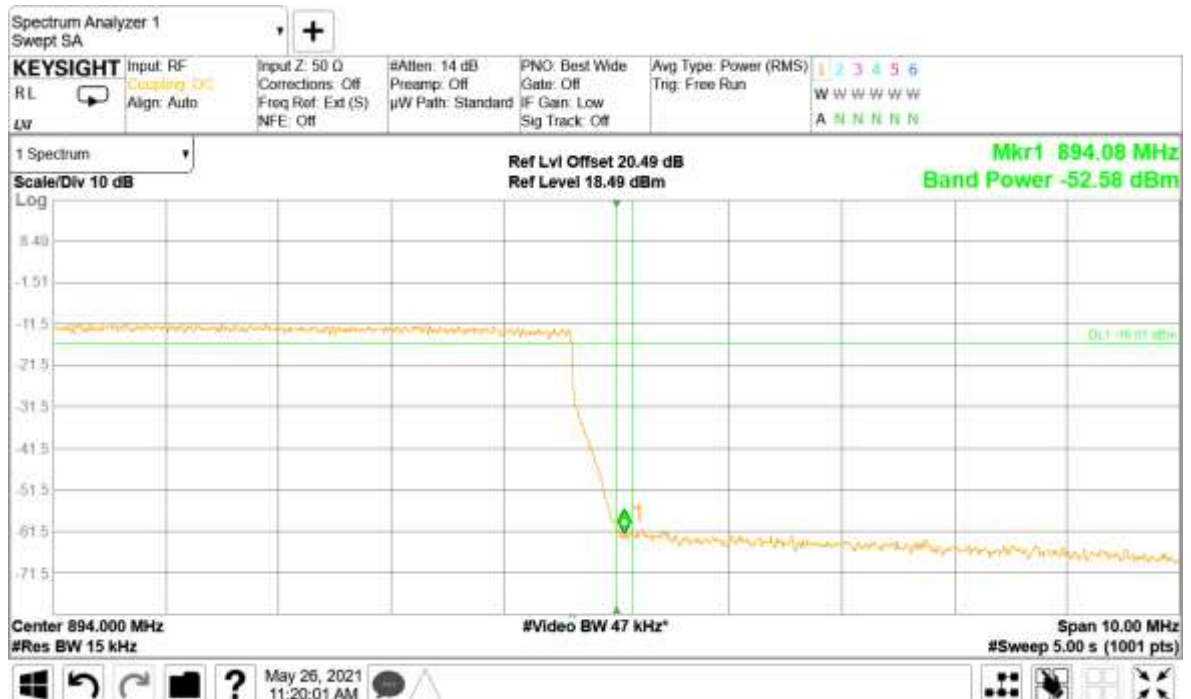






Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B

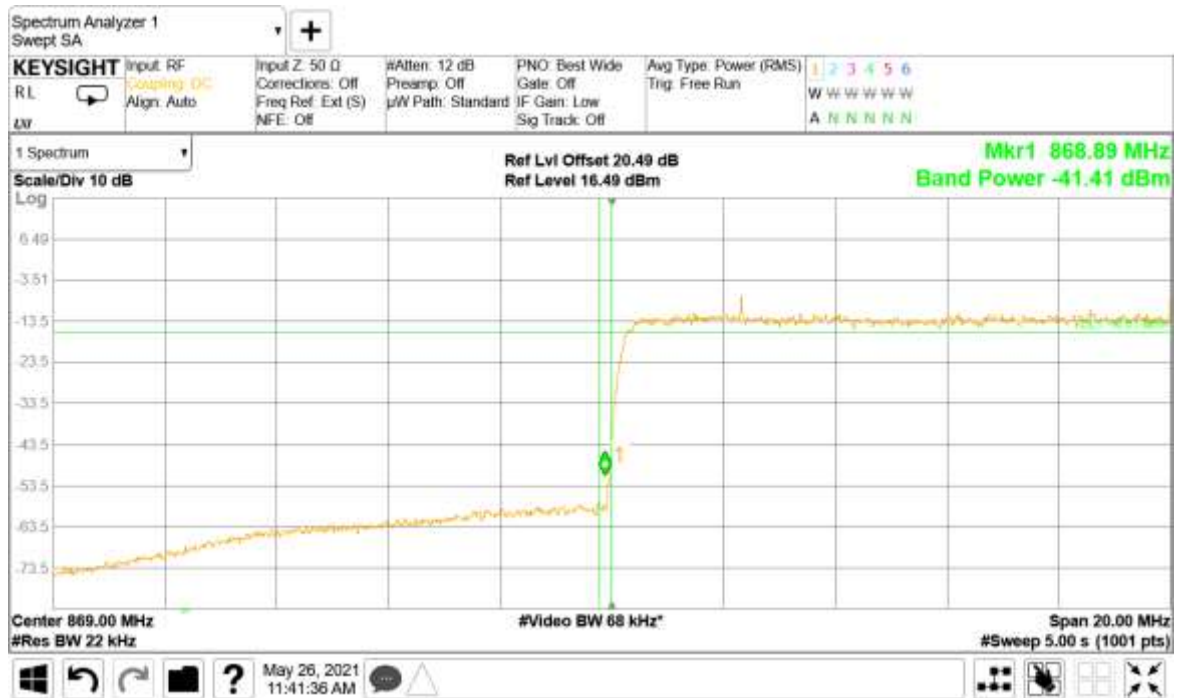

Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position T

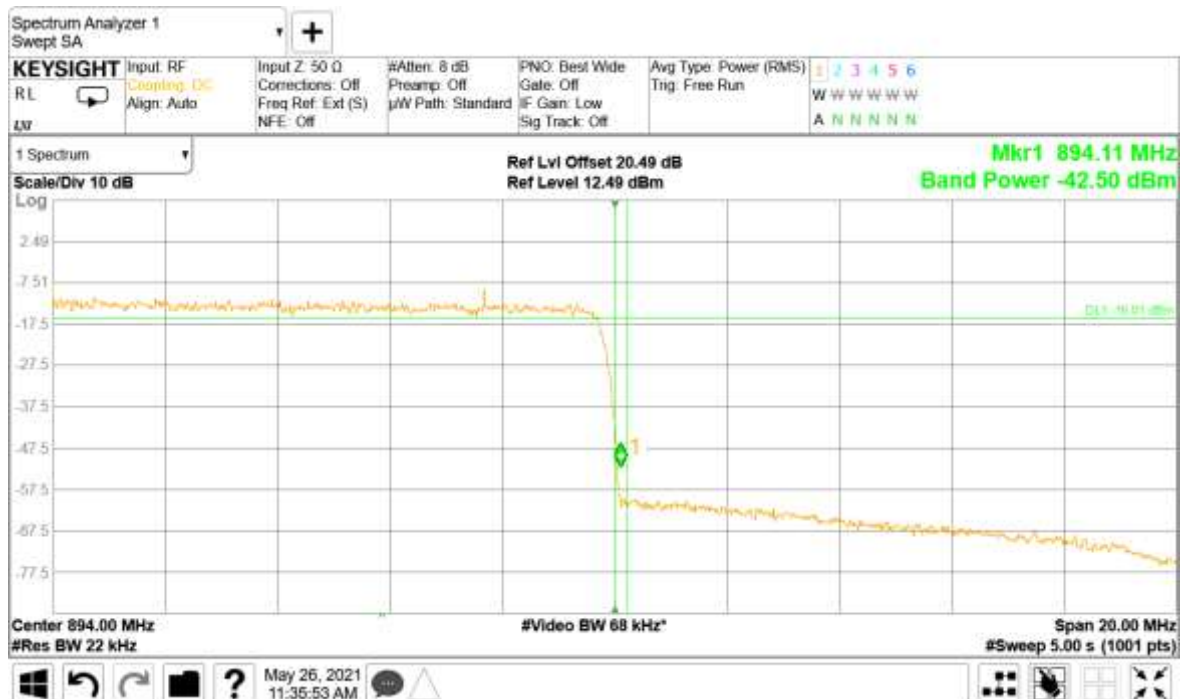



Configuration B

Maximum Output Power 17.00 dBm / Port

Modulation	Carrier Bandwidth	Band Edge (MHz)	
		Channel Position B	Channel Position T
LTE + NR + NR: QPSK	5.0+5.0+5.0 MHz	871.5 + 876.5 + 881.5	881.5 + 886.5 + 891.5
LTE + NR + NR: QPSK	10.0+5.0+5.0 MHz	874.0 + 881.5 + 886.5	879.0 + 886.5 + 891.5

Modulation LTE+NR+NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0 MHz - Channel Position B



Modulation LTE+NR+NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0 MHz - Channel Position T





Modulation LTE+NR+NR: QPSK - Carrier Bandwidth 10.0+5.0+5.0 MHz - Channel Position B



Modulation LTE+NR+NR: QPSK - Carrier Bandwidth 10.0+5.0+5.0 MHz - Channel Position T





Configuration C

Maximum Output Power 17.00 dBm / Port

Antenna	Modulation	Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	LTE: QPSK	5.0+5.0+5.0+5.0+5.0 MHz	871.5 + 876.5 + 881.5 + 886.5 + 891.5	871.5 + 876.5 + 881.5 + 886.5 + 891.5
A	NR: QPSK	5.0+5.0+5.0+5.0+5.0 MHz	871.5 + 876.5 + 881.5 + 886.5 + 891.5	871.5 + 876.5 + 881.5 + 886.5 + 891.5

Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B



Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position T





Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B



Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position T



Limit	-16 dBm
-------	---------



## **2.4 TRANCEIVER SPURIOUS EMISSIONS**

### **2.4.1 Specification Reference**

FCC CFR 47 Part 22, Clause 22.917(b)  
ISED RSS-GEN, Clause 6.13  
ISED RSS-132, Clause 5.5  
FCC CFR 47 Part 2, Clause 2.1051

### **2.4.2 Date of Test and Modification State**

26 March 2021 - Modification State 0

### **2.4.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.4 Environmental Conditions**

Ambient Temperature	25.2°C
Relative Humidity	29.4%

### **2.4.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.1.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by  $10 * \text{Log}(N)$ , where N is equal to the number of MIMO antenna ports.

For dual port, the limit was calculated as being  $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$ .

### **2.4.6 Test Results**

Configuration A


Maximum Output Power 17.00 dBm / Port

#### Remarks


1. Transceiver spurious emissions have been searched for all channel bandwidths and antenna ports.
2. Representative spurious emissions performance has been presented for all modulations.
3. Plot data performance for all transmitter ports, channel bandwidths, and channel positions are on file and available on request.



Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1.00 - Range 0.009 to 1500 MHz

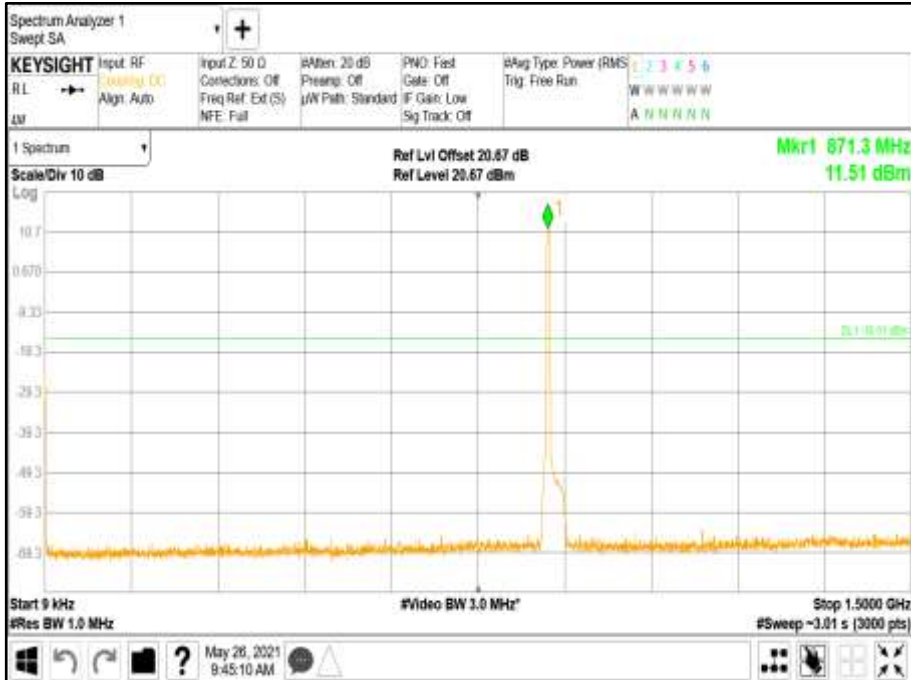


Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2 - Range 1500 to 9000 MHz

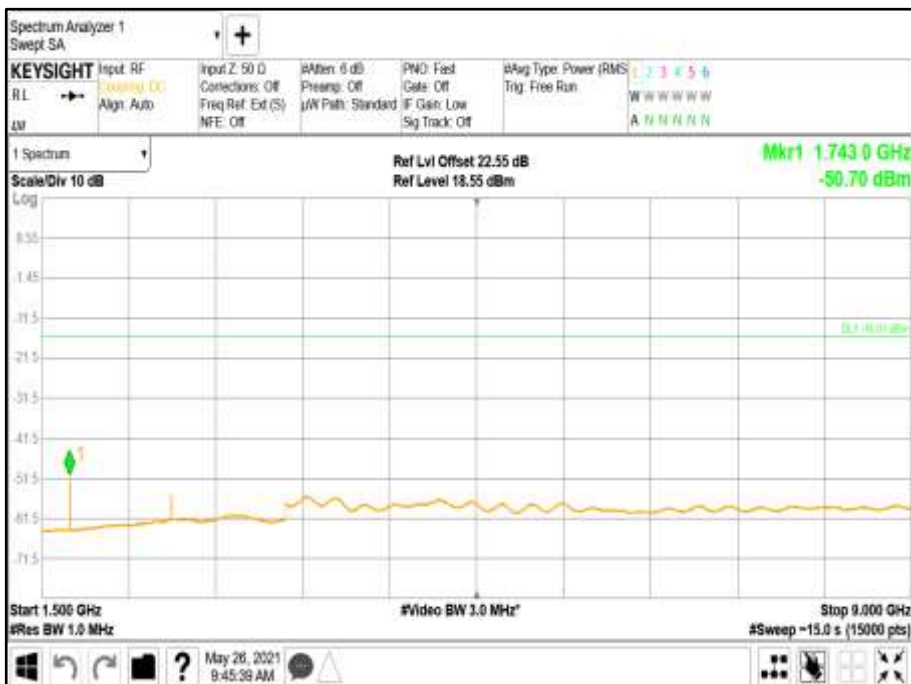




Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1 - Range 0.009 to 1500 MHz

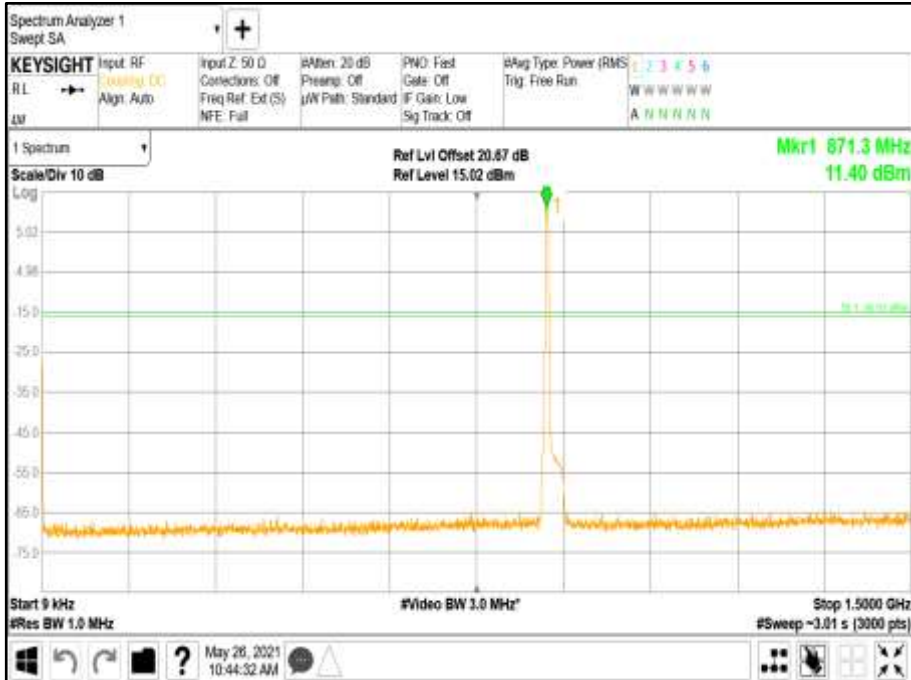

Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2 - Range 1500 to 9000 MHz

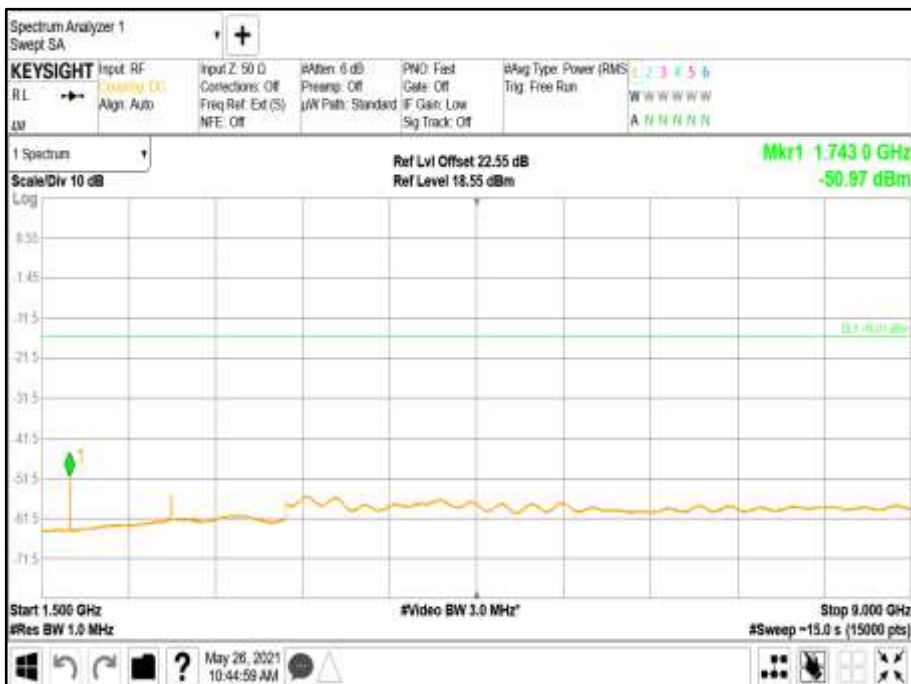






Modulation RX Spur - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1 - Range 30.0 to 1000 MHz



Modulation RX Spur - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2 - Range 1000 to 10000 MHz

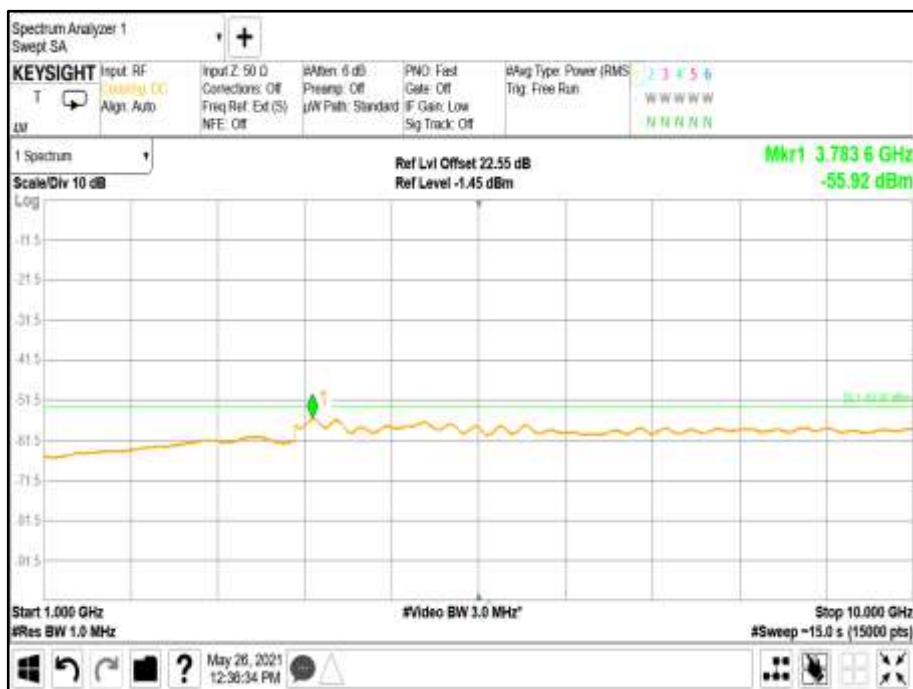




## Configuration B

Maximum Output Power 17.00 dBm / Port

## Remarks


1. Representative spurious emissions performance has been presented for all modulations.
2. Typical worst-case performance presented.

Modulation LTE + NR + NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0 MHz - Channel Position B - Band 1.00 - Range 0.009 to 1500 MHz

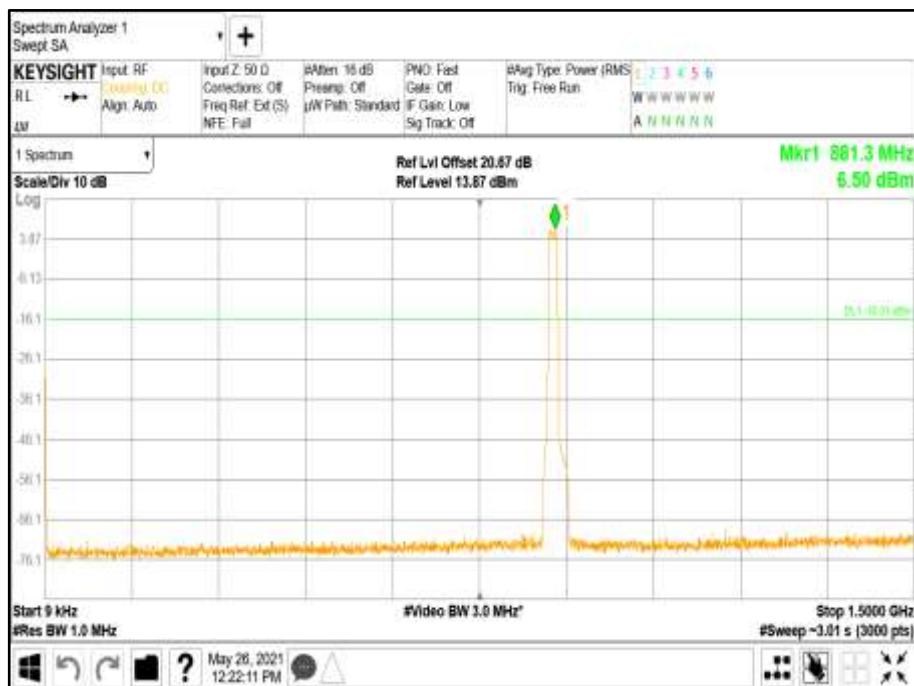




Modulation LTE + NR + NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0 MHz - Channel Position B - Band 2 - Range 1500 to 9000 MHz

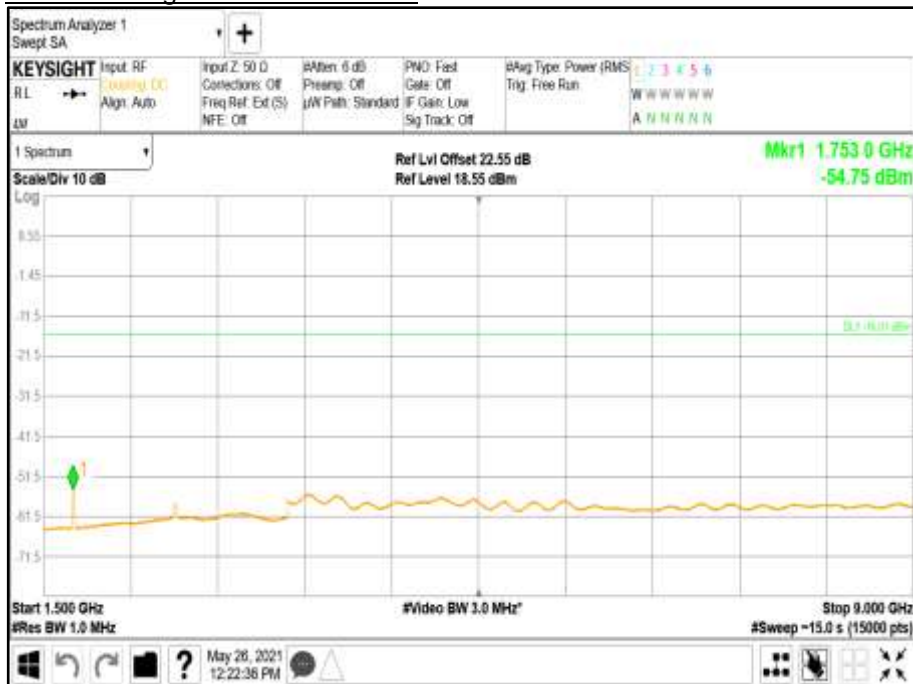


Modulation LTE + NR + NR: QPSK - Carrier Bandwidth 10.0+5.0+5.0 MHz - Channel Position B - Band 1.00 - Range 0.009 to 1500 MHz

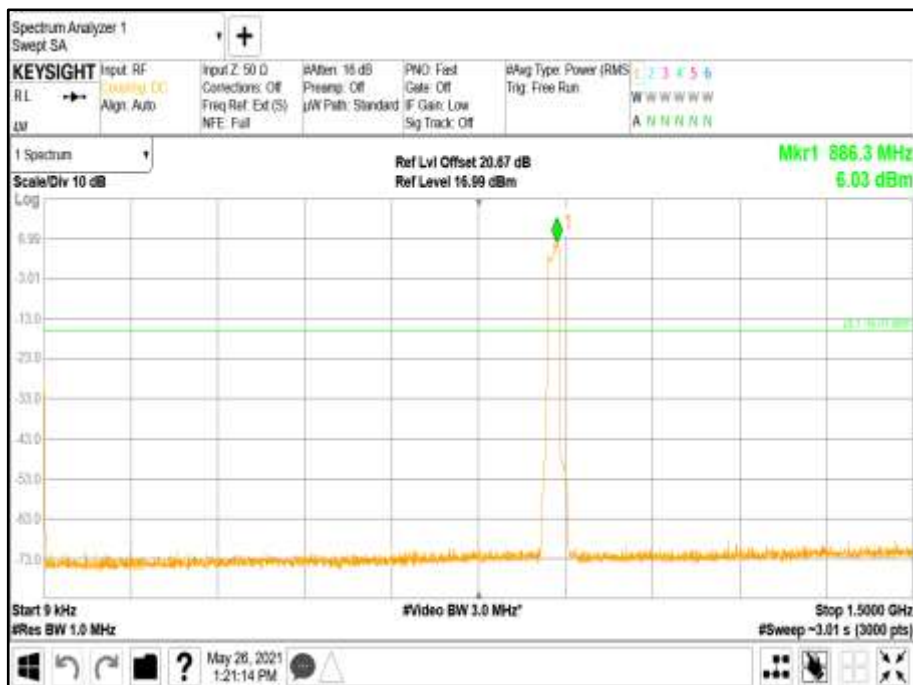



Modulation LTE + NR + NR: QPSK - Carrier Bandwidth 10.0+5.0+5.0 MHz - Channel Position B - Band 2 - Range 1500 to 9000 MHz

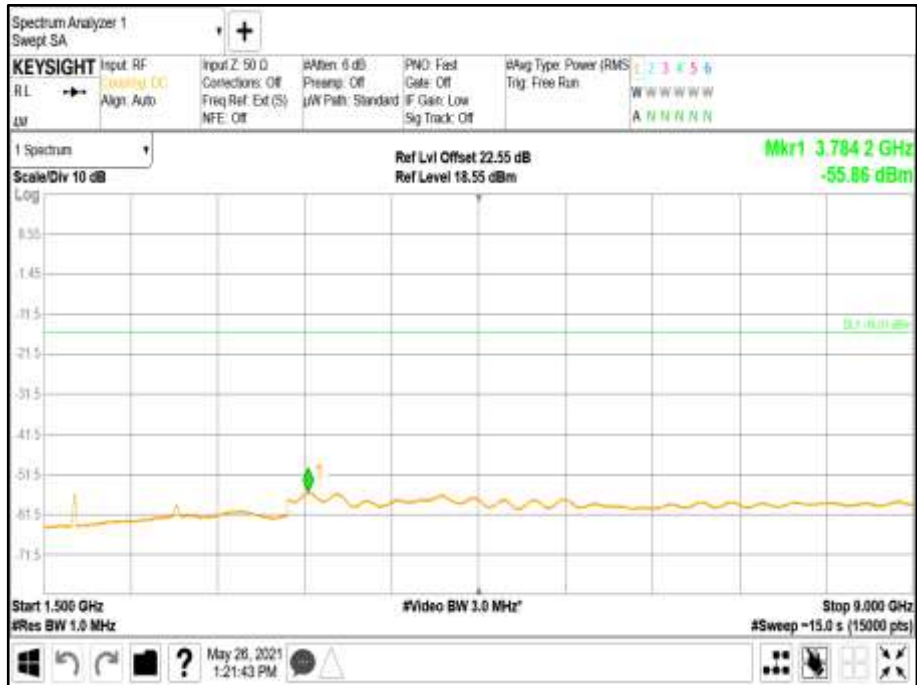




### Configuration C

Maximum Output Power 17.00 dBm / Port

### Remarks


1. Transceiver spurious emissions have been searched for all channel bandwidths and antenna ports.
2. Representative spurious emissions performance has been presented for all modulations.
3. Plot data performance for all transmitter ports, channel bandwidths, and channel positions are on file and available on request.

Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position M - Band 1.00 - Range 0.009 to 1500 MHz

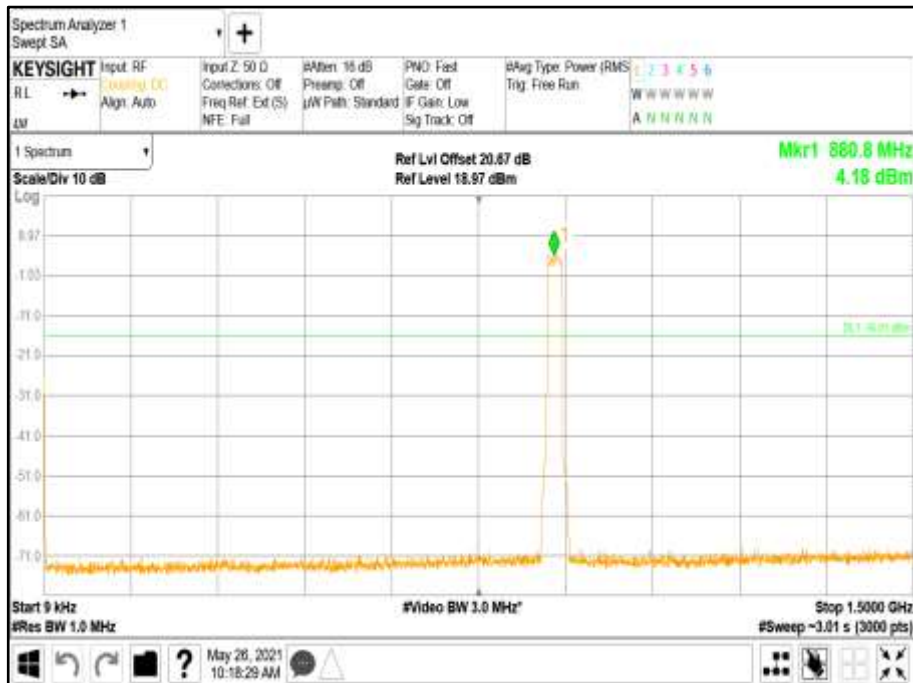




Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position M - Band 2.00 - Range 1500 to 9000 MHz

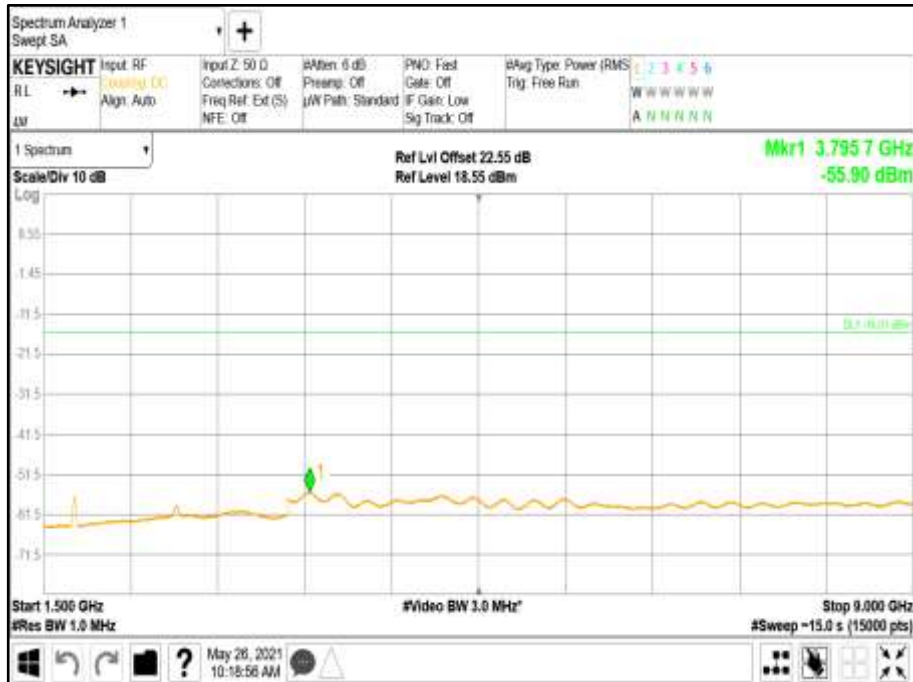


Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position M - Band 1 - Range 0.009 to 1500 MHz

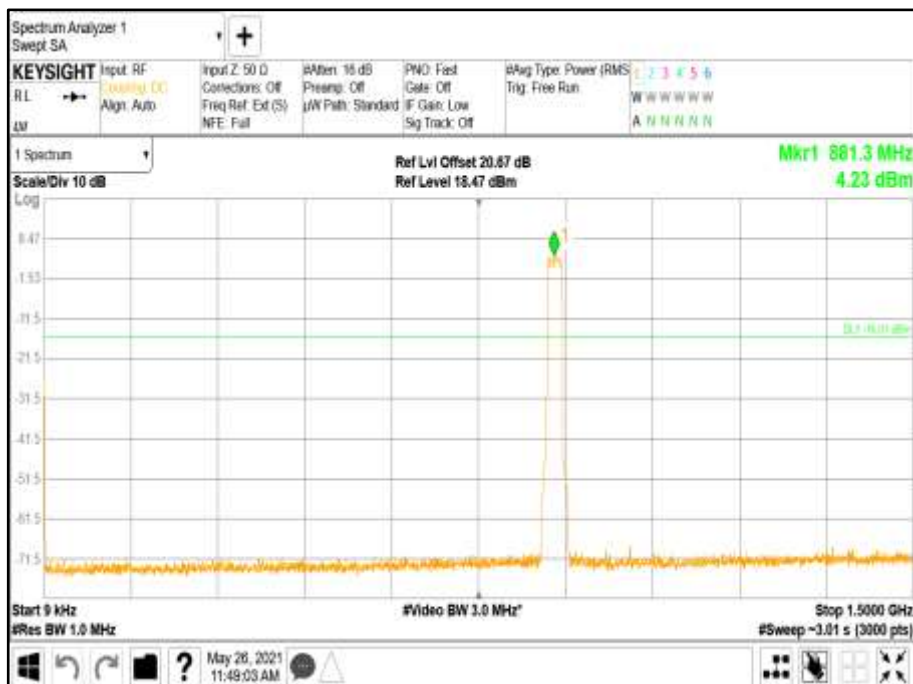



Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position M - Band 2 - Range 1500 to 9000 MHz

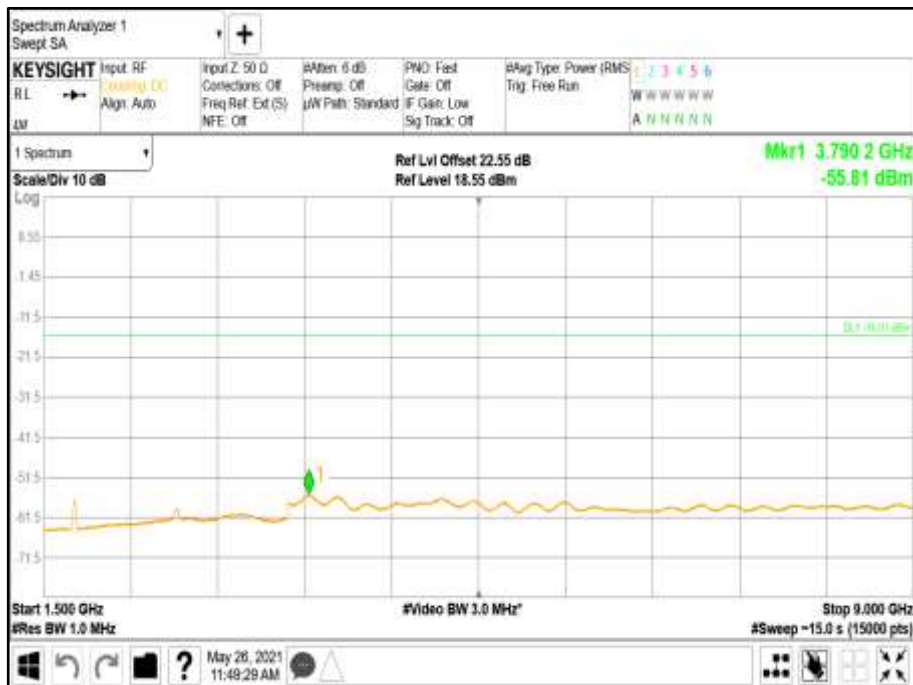

Limit	-16 dBm
-------	---------



**2.5 FREQUENCY STABILITY**

**2.5.1 Specification Reference**

FCC CFR 47 Part 22.355  
 ISED RSS-GEN, Clause 6.11  
 ISED RSS-132, Clause 5.3  
 FCC CFR 47 Part 2, Clause 2.1055

**2.5.2 Date of Test and Modification State**

28 March 2021 - Modification State 0

**2.5.3 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.5.4 Environmental Conditions**

Ambient Temperature 25.3°C  
 Relative Humidity 30.1%

**2.5.5 Test Method**

All measurements were made in accordance with FCC KDB 971168 D01, Clause 9 and ANSI C63.26 Clause 5.6

**2.5.6 Test Results**

Configuration A

Maximum Output Power 17.00 dBm / Port

Temperature	Voltage	Frequency Error (Hz)
		Channel Position B: 871.5 MHz
-30°C	-48.0 V DC	Transmitter is shut down
-20°C	-48.0 V DC	Transmitter is shut down
-10°C	-48.0 V DC	1.2105
0°C	-48.0 V DC	-1.5005
+10°C	-48.0 V DC	-1.1016
+20°C	-40.5 V DC	1.0312
+20°C	-48.0 V DC	0.8721
+20°C	-57.5 V DC	0.6470
+30°C	-48.0 V DC	-1.0786
+40°C	-48.0 V DC	1.2415
+50°C	-48.0 V DC	1.1181

Remarks

Worst case = 0.00172 ppm





RSS-132 Limit 5.3

Limit	$\pm 1.5$ ppm or $\pm 1.322$ kHz
-------	----------------------------------

Frequency Tolerance FCC Part 22.355

Frequency range (MHz)	Limit (ppm)
25 to 50	20.0
50 to 450	5.0
450 to 512	2.5
821 to 896	1.5
928 to 929	5.0
929 to 960	1.5
2110 to 2220	10.0



### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Keysight	PXA N9030B	MY57144347	24	24/04/2022
Thermometer	VWR	61161-364	192595396.00	24	25-10-2021
PSU	Xantrex	XKW60-50	E00109862	-	O/P Mon
Attenuator (20dB)	Mini-Circuits	BW-K10-2W44+	-	-	O/P Mon
Climate Chamber	Burnsco	RTC-37P-3-3	-07-07	-	O/P Mon

N/A – Not Applicable

O/P Mon – Output Monitored with Calibrated Equipment



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU	
Conducted Maximum Peak Output Power	30 MHz to 20 GHz Amplitude	± 0.7 dB	
Conducted Emissions	30 MHz to 20 GHz Amplitude	± 2.1 dB	
Frequency Stability	30 MHz to 2 GHz	± 5.0 Hz	
Occupied Bandwidth	Up to 20 MHz Bandwidth	5 MHz Bandwidth	± 11547 Hz
		10 MHz Bandwidth	± 23094 Hz
		15 MHz Bandwidth	± 34641 Hz
		20 MHz Bandwidth	± 46188 Hz
Band Edge	30 MHz to 20 GHz Amplitude	±0.8 dB	
Radiated Spurious Emissions	30 MHz to 1 GHz	± 5.2 dB	
	1 GHz to 40GHz	± 6.3 dB	

#### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.



## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Testing Laboratory  
Certificate #2955.19

This report relates only to the actual item/items tested.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.

This report relates only to the actual item/items tested

© 2021 TÜV SÜD

**ANNEX A**

**MODULE LIST**

Configurations A-C			
Product	Product No	R-State	Serial No
CT11	LPC 102 494/1	R2A	T01G495060
IRU 8844	KRC 161 754/3	R1D	D828666185
DOT 2282 B5 B12A (EUT)	KRY 901 428/2	R1C	TD3WD72731
Software Version:	CXP9013268%17	Revision:	R82GS