



Radiated Emissions Test Report for

Dot 2272 B5B13 (KRY 901 466/1) and Dot 2282 B5B13 (KRY 901 466/2)

Tested to: FCC Part 15 Subpart B / ICES 003 (Class B)
FCC Part 22 (Section 22.359(a))
FCC Part 27 (Section - 27.53(C))
RSS-Gen (Section 7.3)
RSS-130 (Section 4.7)
RSS-132 (Section 5.5 & 5.6)

Test Result summary

FCC/ ICES/ RSS Section	Description	Specification/Method	Pass or Fail	Results in section
15.109 / 6.2	Radiated Emissions (RE)	FCC Part 15 / ICES 003 / ANSI C63.4	Pass	3.2
15.107 / 6.1	Conducted Emissions (CE) for AC Power	FCC Part 15 / ICES 003 / ANSI C63.4	Not Applicable	
22.359 (a)	Out of band Emissions (RE)	FCC Part 22 / ANSI C63.26	Pass	3.2
27.53 (C)	Emissions Limits (RE)	FCC Part 27 / ANSI C63.26	Pass	3.2
7.3	Receiver Emissions Limits	RSS-Gen / ANSI C63.4	Pass	3.2
RSS-130 / 4.7	Transmitter unwanted Emissions	RSS-130 / ANSI C63.26	Pass	3.2
RSS-132 / 5.5	Transmitter unwanted Emissions	RSS-132 / ANSI C63.26	Pass	3.2
RSS-132 / 5.6	Receiver Spurious Emissions	RSS-Gen / ANSI C63.4	Pass	3.2

Document number: 7169009760-TR-EMC-01-01-F15

Release date: 15 June 2021

Prepared for: Ericsson Canada



About this document

This document is written and distributed by TÜV SÜD Canada Inc. Whenever TÜV SÜD is mentioned in this document it shall be taken as referring to TÜV SÜD Canada Inc.

This test report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc. Opinions or interpretations expressed in this report, if any, are outside the scope of the accreditations of TÜV SÜD Canada Inc. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc, unless otherwise stated.

Throughout this document:

- text in **blue** font is a clickable link
- text in *italics* is provided as-is from the customer

The release control record, document approvals, and laboratory Accreditations are as follows.

Release control record

This document is based on document template KG000347-TR-EMC-08-03.


Issue	Reason for change	Date released
01	initial release	15 June 2021

Approvals

Function	Name	Job title	Signature
Technical Reviewer	Scott Drysdale	Canada Wireless Manager	
Author	Kasi Sivaratnam	EMC Test Engineer	

Accreditations

The test facilities of TÜV SÜD Canada Inc are accredited by the American Association for Laboratory Accreditation (A2LA) to ISO/IEC 17025:2017 in accordance with the scope of accreditation outlined at the website portal.a2la.org/scopepdf/2955-19.pdf.

 A2LA Cert. No. 2955.19	DISCLAIMER AND COPYRIGHT This non-binding report has been prepared by TÜV SÜD Canada with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Canada. No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.
	ACCREDITATION Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

The Canadian lab registration number associated with the TÜV SÜD test facilities is 24015.

Test lab information

Lab name	TÜV SÜD Canada Inc
Company name	TÜV SÜD Canada Inc
Mailing or shipping address	1280 Teron Road, Ottawa, Ontario, K2K 2C1, Canada
Primary technical contact	Stephen Tippet
Title	Lab Manager
Phone	613-668-5149

Customer information

Company name	Ericsson Canada
Mailing address	349 Terry Fox Drive, Ottawa, On, K2K 2V6, Canada
Primary contact	Denis Lalonde
Title	Team Leader RA Verification
Phone	613-790-2901
E-mail	Denis.lalonde@ericsson.com



Table of contents

About this document	2
1. Executive summary	8
1.1 Compliance summary	9
2. Details of the equipment under test	11
2.1 Assessed hardware	11
2.2 Product overview	11
2.3 Product port definition and EUT cable information	14
2.4 Configurations of the EUT.....	14
2.4.1 Radiated Emissions Single RAT / Single Carrier (LTE & NBIoT).....	15
2.4.2 Radiated Emissions Single RAT / Single Carrier (NR).....	17
2.4.3 Radiated Emissions Single RAT / Multi Carrier Configurations (LTE)	19
2.4.4 Radiated Emissions Multi RAT / Multi Carrier (LTE + NR).....	20
2.4.5 Radiated Emissions Receiver mode only test	22
2.5 Modifications of the EUT during testing	22
2.6 Inventory of the EUT and support equipments.....	22
2.7 Software and operations of the EUT.....	23
3. Detailed test results of Emissions	24
3.1 Measurement instrumentation.....	24
3.2 Radiated Emissions, E-field.....	25
3.2.1 Test specification and limits	25
3.2.2 Test procedure.....	25
3.2.3 Calculation of the compliance margin	27
3.2.4 Measurement uncertainties	27
3.2.5 Test results of RE (Single RAT / Single Carrier) - LTE.....	27
3.2.5.1 Single RAT/Single Carrier (SC, LTE – Bottom channel).....	28
3.2.5.2 Single RAT/Single Carrier (SC, LTE – Middle channel)	30
3.2.5.3 Single RAT/Single Carrier (SC, LTE – Top channel).....	32
3.2.6 Test results of RE (Single RAT / Single Carrier) - NR	34
3.2.7 Test results of RE (Single RAT/Multi Carrier) - LTE.....	37
3.2.8 Test results of RE (Multi RAT/Multi Carrier) - LTE + NR	40
3.2.9 Test results of RE (Receiver mode only).....	43
3.2.10 Radiated Emissions test setup pictures	46
3.2.11 Test equipment.....	50
3.2.12 Test conclusion	50
4. References	51
4.1 Appendix A: Abbreviations	52



List of figures

Figure 1: The EUT with internal antenna (DOT 2272)	11
Figure 2: The EUT with External antenna (DOT 2282).....	12
Figure 3: Product detail, DOT 2282 B5B13	13
Figure 4: Test configuration for Emission tests – TX mode, Dot 2282.....	14
Figure 5: Test configuration for Emission tests – Rx mode, Dot 2272	15
Figure 6: Carrier detail – Config (SC1) - Middle	15
Figure 7: Carrier detail – Config (SC2) - Middle	15
Figure 8: Carrier detail – Config (SC3) – Middle.....	16
Figure 9: Carrier detail – Config (SC4) – Middle.....	16
Figure 10: Tested carrier detail – Single RAT/carrier config (SC- LTE & NBIoT)	16
Figure 11: Carrier detail – Config (SC5) – Middle.....	17
Figure 12: Carrier detail – Config (SC6) – Middle.....	17
Figure 13: Carrier detail – Config (SC7) – Middle.....	17
Figure 14: Carrier detail – Config (SC8) – Middle.....	17
Figure 15: Tested carrier detail – Single RAT/carrier config (SC) - NR.....	18
Figure 16: Carrier detail – Config (MC1) – Middle	19
Figure 17: Carrier detail – Config (MC2) – Middle	19
Figure 18: Carrier detail – Config (MC3) – Middle	19
Figure 19: Tested carrier detail – Single RAT / Multi carrier config (MC) – LTE.....	20
Figure 20: Carrier detail – NR+LTE Config (MR1) – Middle	20
Figure 21: Carrier detail – NR+LTE Config (MR2) – Middle	20
Figure 22: Carrier detail – NR+LTE Config (MR3) – Middle	21
Figure 23: Tested carrier detail – Multi RAT / Multi Carrier (MR) - LTE + NR	21
Figure 24: Tested carrier detail – MR - Rx.....	22
Figure 25: Setup of Radiated Emissions.....	26
Figure 26: Plot of RE at 3 m – 30 to1000 MHz (SC- LTE- Bottom channel).....	28
Figure 27: Plot of RE at 3m from 1 to 10 GHz (SC- LTE- Bottom channel).....	29
Figure 28: Plot of RE at 3 m – 30 to1000 MHz (SC- LTE- Middle channel)	30
Figure 29: Plot of RE at 3m from 1 to 10 GHz (SC- LTE- Middle channel)	31
Figure 30: Plot of RE at 3 m – 30 to1000 MHz (SC- LTE- Top channel)	32
Figure 31: Plot of RE at 3m from 1 to 10 GHz (SC- LTE- Top channel)	33
Figure 32: Plot of RE at 3 m – 30 to1000 MHz (SC, NR- Middle channel)	35
Figure 33: Plot of RE at 3m from 1 to 10 GHz (SC, NR- Middle channel)	36
Figure 34: Plot of RE at 3 m – 30 to1000 MHz (MC, LTE – Mid channel)	38
Figure 35: Plot of RE at 3m from 1 to 10 GHz (MC, LTE- Mid channel).....	39
Figure 36: Plot of RE at 3 m – 30 to1000 MHz (MR, NR+LTE – Mid channel).....	41



Figure 37: Plot of RE at 3m from 1 to 10 GHz (MR, NR+LTE – Mid channel)..... 42
Figure 38: Plot of RE at 3 m – 30 to1000 MHz (Receiver mode only)..... 44
Figure 39: Plot of RE at 3m from 1 to 10 GHz (Receiver mode only)..... 45
Figure 40: Setup for RE tests at 30 MHz to 1 GHz (Tx mode – Dot 2282) 46
Figure 41: Setup for RE tests for above 1 GHz (Tx mode – Dot 2282) 47
Figure 42: Setup for RE tests at 30 MHz to 1 GHz (Rx mode – Dot 2272)..... 48
Figure 43: Setup for RE tests for above 1 GHz (Rx mode – Dot 2272)..... 49

List of tables

Table 1: Summary of test results for the USA; FCC Part 15 subpart B 9
Table 2: Summary of test results for the USA; FCC Part 22..... 9
Table 3: Summary of test results for the USA; FCC Part 27 subpart C 9
Table 4: Summary of test results for Canada; ICES-003..... 9
Table 5: Summary of test results for RSS-Gen..... 10
Table 6: Summary of test results for the RSS-130 10
Table 7: Summary of test results for Canada, RSS-132 10
Table 8: Assessed hardware..... 11
Table 9: System port definition..... 14
Table 10: Inventory of the EUT 22
Table 11: RE test requirements..... 25
Table 12: RE limits at 3m for Class B of FCC Part 15/ICES-003/RSS-Gen (Sec 7.3)..... 25
Table 13: EIRP limits for FCC Part 22/Part 27 & RSS 130/132..... 25
Table 14: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Bottom channel) 28
Table 15: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Bottom channel) 28
Table 16: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Bottom channel) 29
Table 17: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Bottom channel)..... 29
Table 18: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Middle channel)..... 30
Table 19: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Middle channel) 30
Table 20: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Middle channel)..... 31
Table 21: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Middle channel)..... 31
Table 22: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Top channel) 32
Table 23: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Top channel) 32
Table 24: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Top channel)..... 33
Table 25: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Top channel) 33
Table 26: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Middle channel)..... 35
Table 27: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Middle channel) 35



Table 28: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Middle channel).....	36
Table 29: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Middle channel)	36
Table 30: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Mid channel).....	38
Table 31: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Mid channel)	38
Table 32: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Mid channel)	39
Table 33: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Mid channel).....	39
Table 34: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Mid channel).....	41
Table 35: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Mid channel)	41
Table 36: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Mid channel)	42
Table 37: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Mid channel).....	42
Table 38: RE test results from 30 to 1000 MHz for RSS-Gen (Rx mode only).....	44
Table 39: RE test results from 1 to 10 GHz for RSS-Gen (Rx mode only).....	45
Table 40: Test equipment used for RE	50

1. Executive summary

This document reports the Electromagnetic Compatibility (EMC) testing performed on the product called Dot 2272 B5B13 (KRY 901 466/1) and Dot 2282 B5B13 (KRY 901 466/2) for Ericsson Canada per project number 7169009760. The objective of the test activities is to evaluate compliance of the product to following EMC regulatory standards.

The Dot 2272 B5B13 (KRY 901 466/1) and Dot 2282 B5B13 (KRY 901 466/2) is verified to comply with the Radiated Emissions requirements of these standards:

- FCC Part 15 Subpart B [6] (**Class B**)
- FCC Part 22 [7] (Emissions Limitations for public mobile services, Section 22.359(a))
- FCC Part 27 [8] (Digital Base Stations, Section - 27.53(C))
- ICES 003[9] (**Class B**)
- RSS-Gen [10] (Receiver emissions Limits, Section 7.3)
- RSS-130[11] (Transmitter unwanted Emissions, Section 4.7)
- RSS-132 [12] (Transmitter unwanted Emissions, Section 5.5)
- RSS-132[12] (Receiver Spurious Emissions, Section 5.6)

Information about the test result summary and, the equipment under test (EUT) is in the sections:

- [Compliance summary](#)
- [Details of the equipment under test](#)
- [Detailed test results of Emissions](#)



1.1 Compliance summary

The test results in this report apply only to the tested components that are identified in the section [Assessed hardware](#).

The following table summarizes the EMC test results for the test cases performed on the Dot 2272 B5B13 (KRY 901 466/1) and Dot 2282 B5B13 (KRY 901 466/2).

Table 1: Summary of test results for the USA; FCC Part 15 subpart B

FCC Section	Description	Specification/Method	Pass or Fail	Results in section
15.109	Radiated Emissions (RE)	FCC Part 15/ANSI C63.4	Pass	3.2
15.107	Conducted Emissions (CE) for AC Power	FCC Part 15/ANSI C63.4	Not Applicable; EUT operates from POE (56 VDC).	

Table 2: Summary of test results for the USA; FCC Part 22

FCC Section	Description	Specification/Method	Pass or Fail	Results in section
22.359(a)	Emissions Limitations for public mobile services	FCC Part 22/ ANSI C63.26	Pass	3.2

Table 3: Summary of test results for the USA; FCC Part 27 subpart C

FCC Section	Description	Specification/Method	Pass or Fail	Results in section
27.53(C)	Transmitter Spurious Emissions (RE) – Digital Base Stations	FCC Part 27/ ANSI C63.26	Pass	3.2

Table 4: Summary of test results for Canada; ICES-003

ICES Section	Description	Specification/Method	Pass or Fail	Results in section
6.2	Radiated Emissions (RE)	ICES 003/ANSI C63.4	Pass	3.2
6.1	Conducted Emissions (CE) for AC Power	ICES 003/ANSI C63.4	Not Applicable; EUT operates from POE (56 VDC).	



Table 5: Summary of test results for RSS-Gen

RSS-Gen Section	Description	Specification/Method	Pass or Fail	Results in section
7.3	Receiver Radiated Emissions	RSS-Gen / ANSI C63.4	Pass	3.2
7.2	Conducted Emissions (CE) for AC Power	RSS-Gen / ANSI C63.4	Not Applicable; EUT operates from POE (56 VDC).	
7.4	Receiver Conducted Emissions	See antenna port conducted emissions in applicable test report		

Table 6: Summary of test results for the RSS-130

RSS-130 Section	Description	Specification/Method	Pass or Fail	Results in section
4.7	Transmitter unwanted Emissions	RSS-130 / ANSI C63.26	Pass	3.2

Table 7: Summary of test results for Canada, RSS-132

RSS-132 Section	Description	Specification/Method	Pass or Fail	Results in section
5.5	Transmitter unwanted Emissions	RSS-132 / ANSI C63.26	Pass	3.2
5.6	Receiver Spurious Emissions	RSS-132 / ANSI C63.26	Pass	3.2

2. Details of the equipment under test

This section describes the equipment under test (EUT).

2.1 Assessed hardware

The following table indicates the hardware components that were assessed during this test program.

Table 8: Assessed hardware

Hardware component ¹	Part number
DOT 2272 B5B13, with internal Antenna	KRY 901 466/1
DOT 2282 B5B13, with External Antenna	KRY 901 466/2
Table Notes	
1. The 2 units above use the same pcb and hardware. The only difference between the units is the presence of the internal/external antennas. Therefore all EMC tests were done only on the external Antenna port variant except except the Rx band testing (RSS-GEN section 7.3 & RSS 132 Section 5.6).	

2.2 Product overview

The products trade names are DOT 2272 B5B13 & DOT 2282 B5B13. The DOT 2272 & DOT 2282 products are indoor wireless telecommunication products. They transmit and receives the cellular signals for 5G wireless systems; and operates from POE (56 VDC). This DOTs come in 2 variants as mention above in [Table 8: Assessed hardware](#).

Figure 1: The EUT with internal antenna (DOT 2272)

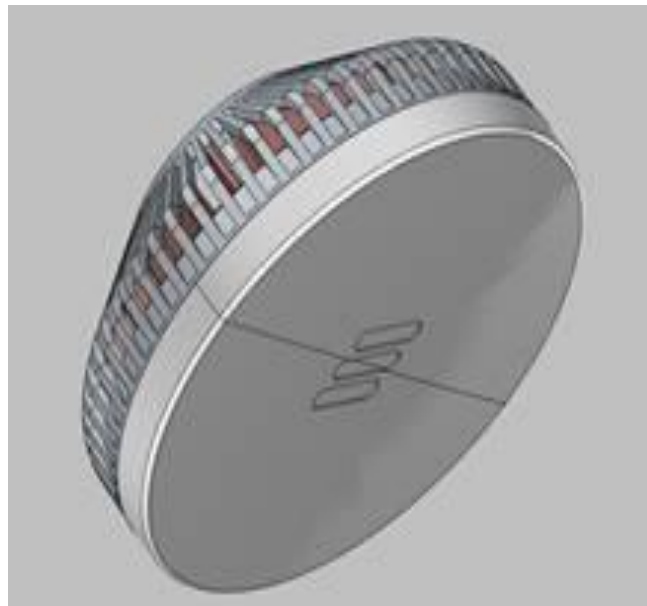


Figure 2: The EUT with External antenna (DOT 2282)



The 2 units above use the same pcb and hardware. The only difference between the units is the presence of the internal/external antennas. Therefore all EMC tests were done only on the external Antenna port variant except the Rx band testing; the configurations of the tested DOT 2272 / 2282 B5B13 are shown in the section [Configurations of the EUT](#). The EUT was tested in a tabletop setting.



Figure 3: Product detail, DOT 2282 B5B13

Product data:	DOT 2282 B5B13
Product	Ph4 Mid Tier Dot, 4T4R
Revision:	R1A
P/N:	KRY 901 466/2
Nominal Voltage:	POE, 56Vdc
Operating Temperature:	+5°C to +40°C
Bands	(B5 and B13)
Antennas	4T4R
Output Power per band	4x50mW (FDD)
RAT support	B5: LTE-FDD, NBLoT IB/GB, NR
	B13: LTE-FDD, NBLoT IB/GB, NR
Mixed Mode supported	B5: LTE(NBLoT) + NR
	B13: LTE(NBLoT) + NR
IBW	B5: 25MHz, B13: 10MHz
Nominal O/P per FDD Antenna Port:	Single Carrier: 1 x 50mW (17dBm)
	Multi-Carrier: 2 x 25mW (14 dBm)
	Multi-Carrier: 3 x 16.7mW (12.2 dBm)
	Multi-Carrier: 4 x 12.5mW (11 dBm)
	Multi-Carrier: 5 x 10mW (10 dBm)
Max number LTE carriers per Port	B5: 5 carriers
	B13: 2 carriers
Max number of NR carriers	2
Max number of UTRA carriers	na
Modulation:	LTE: QPSK, 16QAM, 64QAM, 256 QAM (DL only)
Channel Bandwidth B5:	LTE: 5, 10MHz
	WCDMA: na
	NBLoT GB/IB: 10MHz (host LTE BW)
	NR: 5, 10, 15, 20MHz
Channel Bandwidth B13:	LTE: 5, 10MHz
	WCDMA: na
	NBLoT GB/IB: 10MHz (host LTE BW)
	NR: 5, 10MHz
IF Interface:	Digital
Channel Raster:	LTE: 100kHz,
Mounting	ceiling or wall
Dimensions: (H x W)	140 x 140 x 60mm
Weight;	0.546 kg

Configuration of the Dot 2272 B5B13 (KRY 901 466/1) and Dot 2282 B5B13 (KRY 901 466/2) that was tested is shown in the section [Configurations of the EUT](#). The EUT was tested in a tabletop setting.

2.3 Product port definition and EUT cable information

[Table 9](#) identifies all the cables and ports on the EUT. The Environment of the cables is indoor.

Table 9: System port definition

Port Name	Port Description	Port Type	Interface Detail	Plug-Cable Type
dRDI	Digital RDI	Telecom	ethernet	RJ-45, CAT6A
1A, 1B	RF to antenna B5, branch A & B	Antenna	RF	SMA, Coax >3m
2A, 2B	RF to antenna B13, branch A & B	Antenna	RF	SMA, Coax >3m

2.4 Configurations of the EUT

[Figure 4](#) and [Figure 5](#) show the configurations of the EUT for Emissions test. Test Configurations were defined by customer.

Figure 4: Test configuration for Emission tests – TX mode, Dot 2282


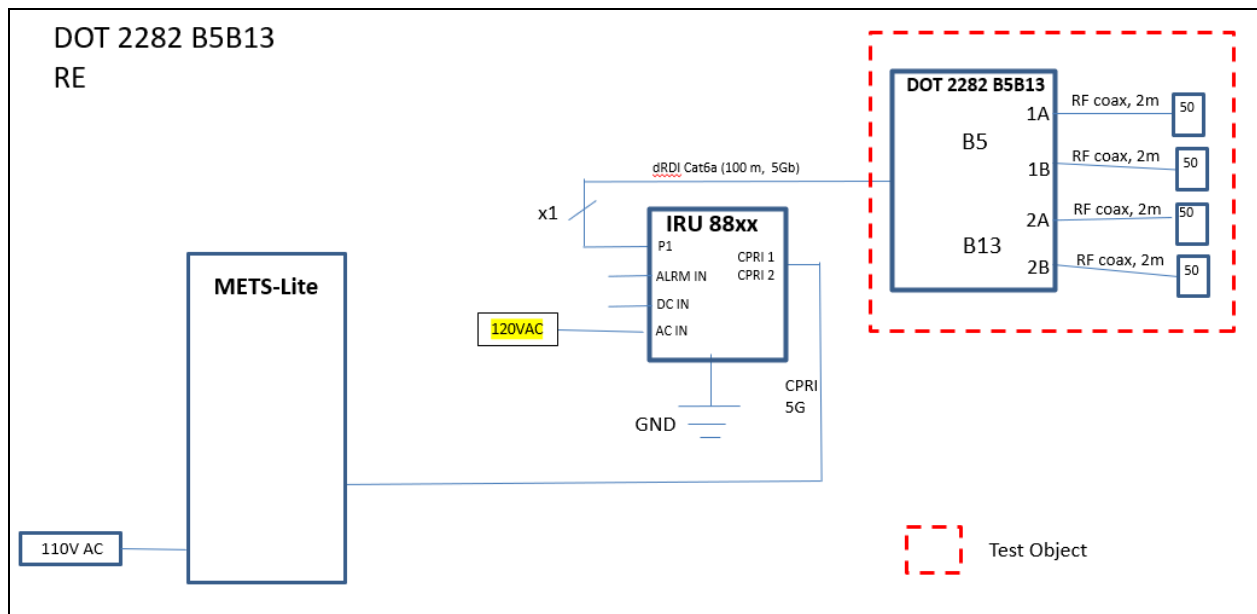


Figure 5: Test configuration for Emission tests – Rx mode, Dot 2272

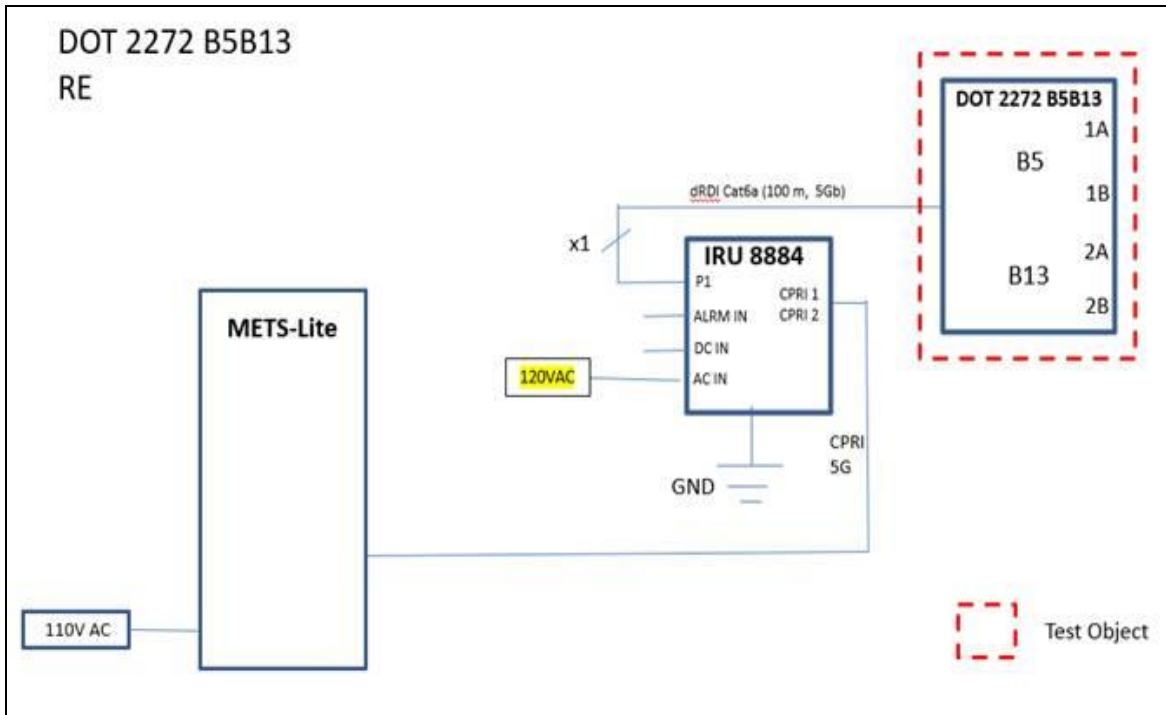

2.4.1 Radiated Emissions Single RAT / Single Carrier (LTE & NBloT)

Figure 6: Carrier detail – Config (SC1) - Middle

SR LTE Config SC1 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 881.5MHz	1	B13: LTE, 5MHz, 751MHz

Figure 7: Carrier detail – Config (SC2) - Middle

SR LTE Config SC2 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 881.5MHz	1	B13: LTE, 10MHz, 751MHz
		2	B13: NBloT GB, 200KHz,

Figure 8: Carrier detail – Config (SC3) – Middle

SR LTE Config SC3 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 10MHz, 881.5MHz	1	B13: LTE, 5MHz, 751MHz
2	B5: NBloT GB, 200KHz,		

Figure 9: Carrier detail – Config (SC4) – Middle

SR LTE Config SC4 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 10MHz, 881.5MHz	1	B13: LTE, 10MHz, 751MHz
2	B5: NBloT GB, 200KHz,	2	B13: NBloT GB, 200KHz,

Note: Radiated Emissions measurements were compared between SC1, SC2, SC3 and SC4 middle channel. SC1 was found to have higher emissions than SC2, SC3 and SC4; therefore EUT with SC1 carrier configuration was tested fully at all three channels and reported. See Figure 10 for tested carrier detail.

Figure 10: Tested carrier detail – Single RAT/carrier config (SC- LTE & NBloT)

SR LTE Config SC BW 5M Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Bottom	Carrier:	Bottom
1	B5: LTE, 5MHz, 871.5MHz	1	B13: LTE, 5MHz, 748.5MHz
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 881.5MHz	1	B13: LTE, 5MHz, 751MHz
Carrier:	Top	Carrier:	Top
1	B5: LTE, 5MHz, 891.5MHz	1	B13: LTE, 5MHz, 753.5MHz

2.4.2 Radiated Emissions Single RAT / Single Carrier (NR)

Figure 11: Carrier detail – Config (SC5) – Middle

SR NR Config SC5 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: NR, 5MHz, 881.5MHz	1	B13: NR, 5MHz, 751MHz

Figure 12: Carrier detail – Config (SC6) – Middle

SR NR Config SC6 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: NR, 10MHz, 881.5MHz	1	B13: NR, 10MHz, 751MHz

Figure 13: Carrier detail – Config (SC7) – Middle

SR NR Config SC7 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: NR, 15MHz, 881.5MHz	1	B13: NR, 10MHz, 751MHz

Figure 14: Carrier detail – Config (SC8) – Middle

SR NR Config SC8 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: NR, 20MHz, 881.5MHz	1	B13: NR, 5MHz, 751MHz

Note: Radiated Emissions measurements were compared between SC5, SC6, SC7 and SC8 middle channel. SC6 was found to have higher emissions than SC5, SC7 and SC8; therefore EUT with SC6 carrier configuration was tested at middle channels and reported. See Figure 15 for tested carrier detail.



Figure 15: Tested carrier detail – Single RAT/carrier config (SC) - NR

SR NR Config SC BW 5M Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: NR, 10MHz, 881.5MHz	1	B13: NR, 10MHz, 751MHz

2.4.3 Radiated Emissions Single RAT / Multi Carrier Configurations (LTE)

Figure 16: Carrier detail – Config (MC1) – Middle

SR LTE Config MC1 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 10MHz, 876.5MHz	1	B13: LTE, 10MHz, 751MHz
2	B5: NBloT GB, 200KHz,	2	B13: NBloT GB, 200KHz,
3	B5: LTE, 5MHz, 884MHz		

Figure 17: Carrier detail – Config (MC2) – Middle

SR LTE Config MC2 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 10MHz, 874MHz	1	B13: LTE, 5MHz, 748.5MHz
2	B5: NBloT GB, 200KHz,	2	B13: LTE, 5MHz, 753.5MHz
3	B5: LTE, 10MHz, 884MHz		
4	B5: NBloT GB, 200KHz,		
5	B5: LTE, 5MHz, 891.5MHz		

Figure 18: Carrier detail – Config (MC3) – Middle

SR LTE Config MC3 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 871.5MHz	1	B13: LTE, 5MHz, 748.5MHz
2	B5: LTE, 5MHz, 876.5MHz	2	B13: LTE, 5MHz, 753.5MHz
3	B5: LTE, 5MHz, 881.5MHz		
4	B5: LTE, 5MHz, 886.5MHz		
5	B5: LTE, 5MHz, 891.5MHz		

Note: Radiated Emissions measurements were compared between MC1, MC2, and MC3 middle channel. MC1 was found to have higher emissions than MC2, and MC3; therefore EUT with MC1 carrier configuration was tested at middle channel and reported. See Figure 19 for tested carrier detail.



Figure 19: Tested carrier detail – Single RAT / Multi carrier config (MC) – LTE

SR LTE Config MC1 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 10MHz, 876.5MHz	1	B13: LTE, 10MHz, 751MHz
2	B5: NBloT GB, 200KHz,	2	B13: NBloT GB, 200KHz,
3	B5: LTE, 5MHz, 884MHz		

2.4.4 Radiated Emissions Multi RAT / Multi Carrier (LTE + NR)

Figure 20: Carrier detail – NR+LTE Config (MR1) – Middle

LTE + NR Config MR1 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 874MHz	1	B13: LTE, 5MHz,
2	B5: LTE, 5MHz, 879MHz	2	B13: NR, 5MHz,
3	B5: NR, 10MHz, 886.5MHz		

Figure 21: Carrier detail – NR+LTE Config (MR2) – Middle

LTE + NR Config MR2 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 871.5MHz	1	B13: LTE, 5MHz, 748.5MHz
2	B5: LTE, 5MHz, 876.5MHz	2	B13: NR, 5MHz, 753.5MHz
3	B5: LTE, 5MHz, 881.5MHz		
4	B5: NR, 10MHz, 889MHz		



Figure 22: Carrier detail – NR+LTE Config (MR3) – Middle

LTE + NR Config MR3 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 871.5MHz	1	B13: LTE, 5MHz, 748.5MHz
2	B5: LTE, 5MHz, 876.5MHz	2	B13: NR, 5MHz, 753.5MHz
3	B5: LTE, 5MHz, 881.5MHz		
4	B5: LTE, 5MHz, 886.5MHz		
5	B5: NR, 5MHz, 891.5MHz		

Note: Radiated Emissions measurements were compared between MR1, MR2, and MR3 middle channel. MR3 was found to have higher emissions than MR1 and MR2; therefore EUT with MR3 - middle carrier configuration was tested and reported.

Figure 23: Tested carrier detail – Multi RAT / Multi Carrier (MR) - LTE + NR

LTE + NR Config MR3 Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 871.5MHz	1	B13: LTE, 5MHz, 748.5MHz
2	B5: LTE, 5MHz, 876.5MHz	2	B13: NR, 5MHz, 753.5MHz
3	B5: LTE, 5MHz, 881.5MHz		
4	B5: LTE, 5MHz, 886.5MHz		
5	B5: NR, 5MHz, 891.5MHz		

2.4.5 Radiated Emissions Receiver mode test

Figure 24: Tested carrier detail – MR - Rx mode

LTE + NR Config MR-Rx Carrier setups for Emissions			
B5 PORT 1A,1B		B13 Port 2A, 2B	
BS type 1-C, CS16 (NR, E-UTRA), TC21		BS type 1-C, CS16 (NR, E-UTRA), TC21	
Carrier:	Middle	Carrier:	Middle
1	B5: LTE, 5MHz, 871.5MHz	1	B13: LTE, 5MHz, 748.5MHz
2	B5: LTE, 5MHz, 876.5MHz	2	B13: NR, 5MHz, 753.5MHz
3	B5: LTE, 5MHz, 881.5MHz		
4	B5: LTE, 5MHz, 886.5MHz		
5	B5: NR, 5MHz, 891.5MHz		

2.5 Modifications of the EUT during testing

The EUT was not modified prior to or during testing.

2.6 Inventory of the EUT and support equipments

The following table identifies the inventory of the EUT.

Table 10: Inventory of the EUT

Equipment Role	Product Name	Product Number	Product Release	Product Serial#	Comments
EUT #1	DOT 2282 B5B13	KRY 901 466/2	R1A	TD3W072758	
EUT #2	DOT 2272 B5B13	KRY 901 466/1	R1A	TD3W068094	Used for Rx mode test (RSS-GEN7.3) only
SUPPORT	IRU 8884	KRC 161 754/1	R1C	D828486322	
CABLE	CPRI, Fiber, LC/LC, 20m	na	na	na	
CABLE	RDI, CAT6A, M-M, 100m	na	na	na	
CABLE	RF COAX, SMA, 2m	na	na	na	
TEST SET	CT-10, DU-SIM, METS-Lite	LPC 102 487/1	R1C	TO1F311639	



2.7 Software and operations of the EUT

The software used to operate the system was representative of the latest production version.

IRU load: R9A99
RUX rev: R9F
RUX testDef: _RRUS_DOT_Ph4_B5B13_LTE_Finaluse_V1



3. Detailed test results of Emissions

Emissions from systems manifest themselves in two forms: conducted emissions on cables and radiated emissions from the entire system (i.e. electronic modules, hardware, and cables). Regulatory standards restrict these different forms of emissions generated by the system.

The temperature and humidity in the test facilities are controlled. The temperature is maintained between 20 °C and 25 °C, with a relative humidity between 30 % and 60 %. Levels are recorded and any exceptions are included in the detailed test results sections of this report.

3.1 Measurement instrumentation

The measurement instrumentation conforms to the relevant standards in this report: ANSI C63.2, CISPR 16, CISPR 22, and CISPR 32. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

3.2 Radiated Emissions, E-field

This test verifies that the EUT does not produce excess amounts of E-field Radiated Emissions (RE) that could interfere with licensed radiators.

3.2.1 Test specification and limits

The testing requirements are as follows.

Table 11: RE test requirements

Requirement	Method	Country of application
FCC Part 15, Subpart B	ANSI C63.4	USA
FCC Part 22	ANSI C63.26	USA
FCC Part 27	ANSI C63.26	USA
ICES 003	ANSI C63.4	Canada
RSS-Gen (Section 7.3)	ANSI C63.4 / ICES 0003	Canada
RSS-130	ANSI C63.26 / ICES 0003	Canada
RSS-132	ANSI C63.26 / ICES 0003	Canada

The limits of the RE tests are as follows.

Table 12: RE limits at 3m for Class B of FCC Part 15/ICES-003/RSS-Gen (Sec 7.3)

Frequency range (MHz)	ICES 003 (dB μ V/m)	Detector
30 to 88	40.0	Quasi-Peak
88 to 216	43.5	Quasi-Peak
216 to 960	46.0	Quasi-Peak
960 to 1000	54.0	Quasi-Peak
1000 to 40000	54.0	Average

Table 13: EIRP limits for FCC Part 22/Part 27 & RSS 130/132


Frequency range (MHz)	EIRP Limit (dBm)	Calculated EIRP Limit in dB μ V/m
30 - 40000	-13	82.2

3.2.2 Test procedure

Verifications of the test equipment and AFC were performed before the installation of the EUT in accordance with the quality assurance procedures documented in the EMC test procedures document. The test was performed according to the relevant procedures listed in [Table 11](#).

- The EUT was placed on the turntable inside the AFC (configured for normal operation). The system and its cables were separated from the ground plane by an insulating support 10 mm in height.
- For tests between 30 MHz and 1 GHz the receive antenna (BiLog®) was placed 3 m away from the EUT. An initial scan was performed to find emissions/frequencies requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, as well as both polarizations of the receiving antenna.
- For tests above 1 GHz the receive antenna (horn) was placed 3 m away from the EUT. Absorbing cones were placed on the floor between the antenna and the EUT. An initial scan was performed to find emissions/frequencies requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, as well as both polarizations of the receiving antenna.
- For tests between 18 and 40 GHz the receive horn antenna was placed at a 1 m distance from the EUT with the absorbing cones placed on the floor. An initial scan was performed to find emissions/frequencies requiring detail measurement. The pre-scan was performed on all sides of the EUT, using both polarization of the receive antenna to find any system emissions.
- For all above frequency ranges, the pre-scan peak data was compared to the limits. Peaks with less than 6 dB of margin were maximized using the proper detector: the EUT was rotated in azimuth over 360 degrees to identify the direction of maximum emission, antenna height was then varied from 1 to 4 m to obtain maximum emission level.

Figure 25: Setup of Radiated Emissions

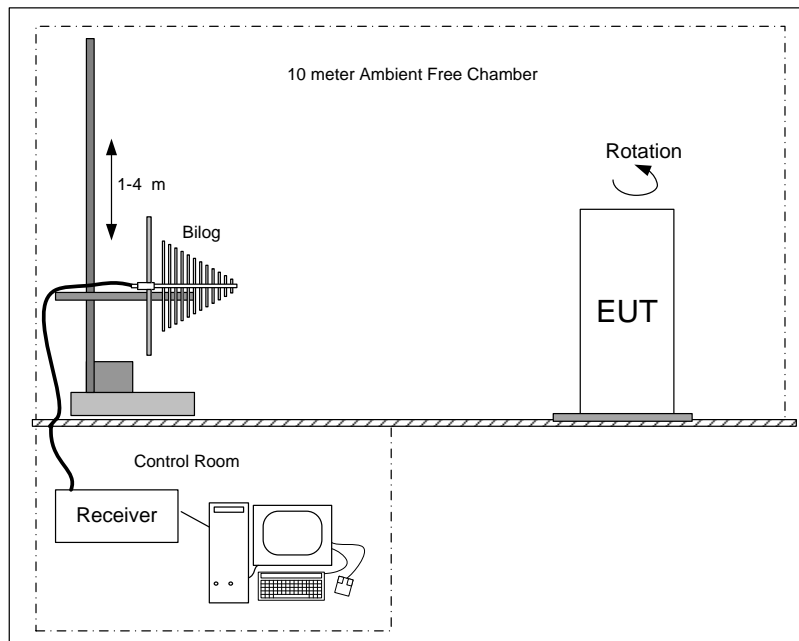

3.2.3 Calculation of the compliance margin

The following example shows the way in which the compliance margin is calculated in the “RE Test Results” tables.

The rows in these tables are defined as follows.

Meter Reading (dB μ V) = Voltage measured using the spectrum analyzer with the proper detector

Correction (dB) = Cumulative gain or loss of pre-amplifier and cables used in the measurement path (dB) + Antenna Factor (dB)

Level (dB μ V/m) = Corrected value or field strength, that is, the parameter of interest that is compared to the limit

Margin (dB) = Level with respect to the appropriate limit (a negative Margin indicates that the Level is below the limit and that the measurement is a Pass)

The values in the Level row are calculated as follows: Level = Meter Reading + Correction (dB)

The values in the Margin row are calculated as follows: Margin = Level - Limit

3.2.4 Measurement uncertainties

The expanded measurement instrumentation uncertainty with a 95 % level of confidence, calculated according to the method described in CISPR 16 is:

- ± 3.8 dB between 30 MHz and 1 GHz
- ± 4.7 dB between 1 GHz and 10 GHz
- ± 4.8 dB between 10 GHz and 18 GHz
- ± 4.6 dB between 18 GHz and 26.5 GHz
- ± 4.8 dB between 26.5 GHz and 40 GHz

3.2.5 Test results of RE (Single RAT / Single Carrier) - LTE

Test location: 10-meter Ambient Free Chamber (AFC)

Date tested: 25 - 31, May 2021


Tested by: Krupal Patel & Christopher Richer

Test configuration is listed as SC - LTE & NB-IoT in [Figure 10](#) as identified in the section [Configurations of the EUT](#). For the following test results that have supporting data tables with worst case emissions, negative margin values indicate a pass.

Red trace – Vertical antenna polarity, Blue trace – Horizontal antenna polarity

3.2.5.1 Single RAT/Single Carrier (SC, LTE – Bottom channel)

Figure 26: Plot of RE at 3 m – 30 to 1000 MHz (SC- LTE- Bottom channel)

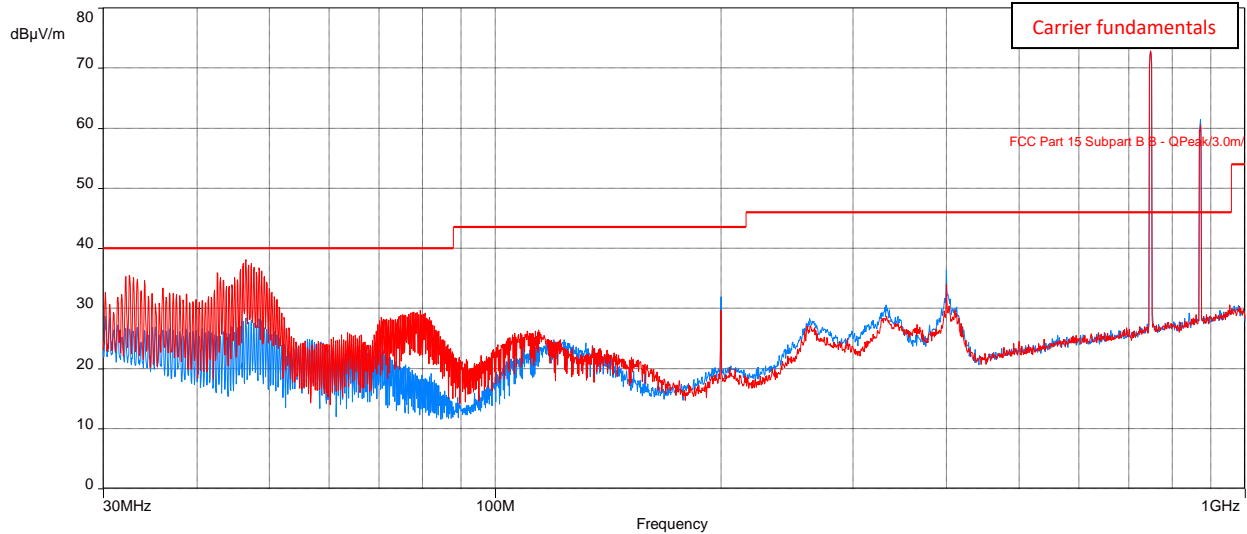

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 14: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Bottom channel)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
32.55741667	35.34	40.00	-4.66	1.00	362.00	Vertical	-3.13
46.50634615	37.80	40.00	-2.20	1.00	349.75	Vertical	-10.84
48.44233974	35.76	40.00	-4.24	1.00	341.00	Vertical	-11.87
399.997221	36.86	46.02	-9.16	2.72	283.50	Horizontal	-3.32

Table 15: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Bottom channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
32.55741667	35.34	82.2	-46.86	1.00	362.00	Vertical	-3.13
46.50634615	37.80	82.2	-44.40	1.00	349.75	Vertical	-10.84
48.44233974	35.76	82.2	-46.44	1.00	341.00	Vertical	-11.87
399.997221	36.86	82.2	-45.34	2.72	283.50	Horizontal	-3.32

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

Figure 27: Plot of RE at 3m from 1 to 10 GHz (SC- LTE- Bottom channel)

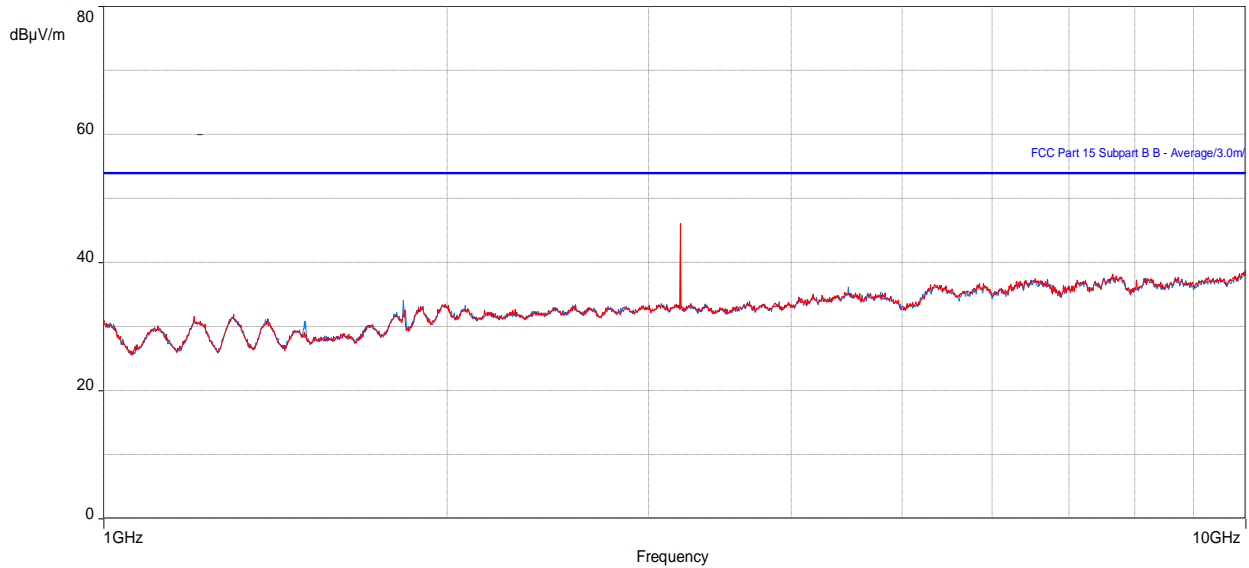


Table 16: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Bottom channel)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	46.20	53.96	-7.76	1.52	4.50	Vertical	-4.43
3199.978526	41.25	53.96	-12.71	4.00	232.75	Horizontal	-4.43


Table 17: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Bottom channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	46.20	82.2	-36.0	1.52	4.50	Vertical	-4.43
3199.978526	41.25	82.2	-40.95	4.00	232.75	Horizontal	-4.43

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

3.2.5.2 Single RAT/Single Carrier (SC, LTE – Middle channel)

Figure 28: Plot of RE at 3 m – 30 to 1000 MHz (SC- LTE- Middle channel)

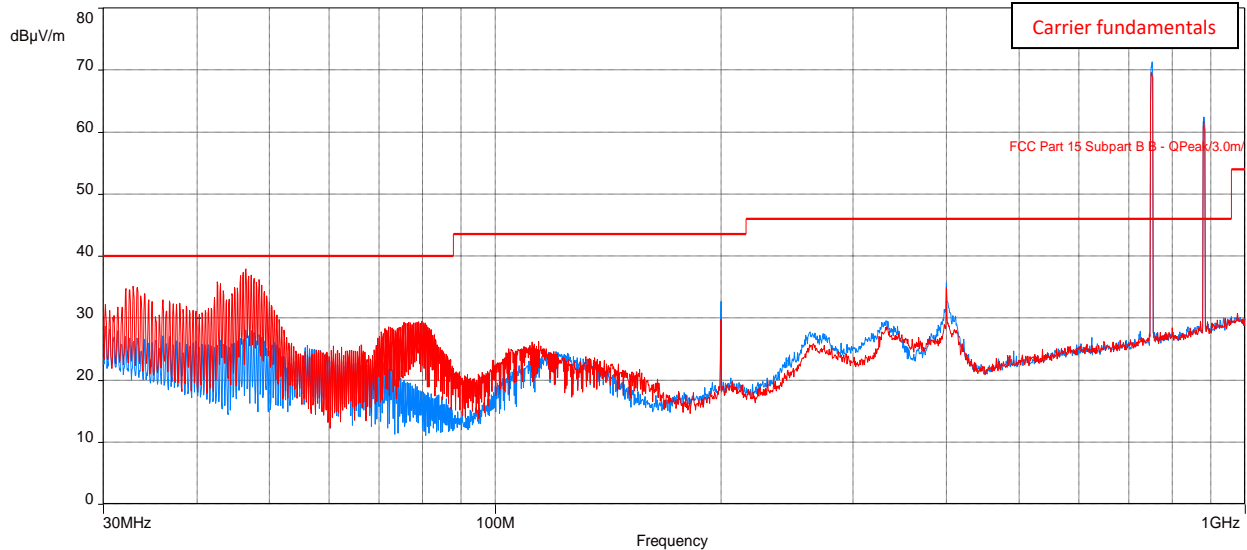

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 18: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Middle channel)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
30.22424967	29.95	40.00	-10.05	2.67	328.75	Horizontal	-1.90
42.62746795	35.56	40.00	-4.44	1.00	10.75	Vertical	-8.67
46.50394231	37.60	40.00	-2.40	1.00	340.75	Vertical	-10.84
399.997221	35.87	46.02	-10.15	2.53	283.25	Horizontal	-3.32

Table 19: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Middle channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
30.22424967	29.95	82.2	-52.25	2.67	328.75	Horizontal	-1.90
42.62746795	35.56	82.2	-46.64	1.00	10.75	Vertical	-8.67
46.50394231	37.60	82.2	-44.60	1.00	340.75	Vertical	-10.84
399.997221	35.87	82.2	-46.33	2.53	283.25	Horizontal	-3.32

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

Figure 29: Plot of RE at 3m from 1 to 10 GHz (SC- LTE- Middle channel)

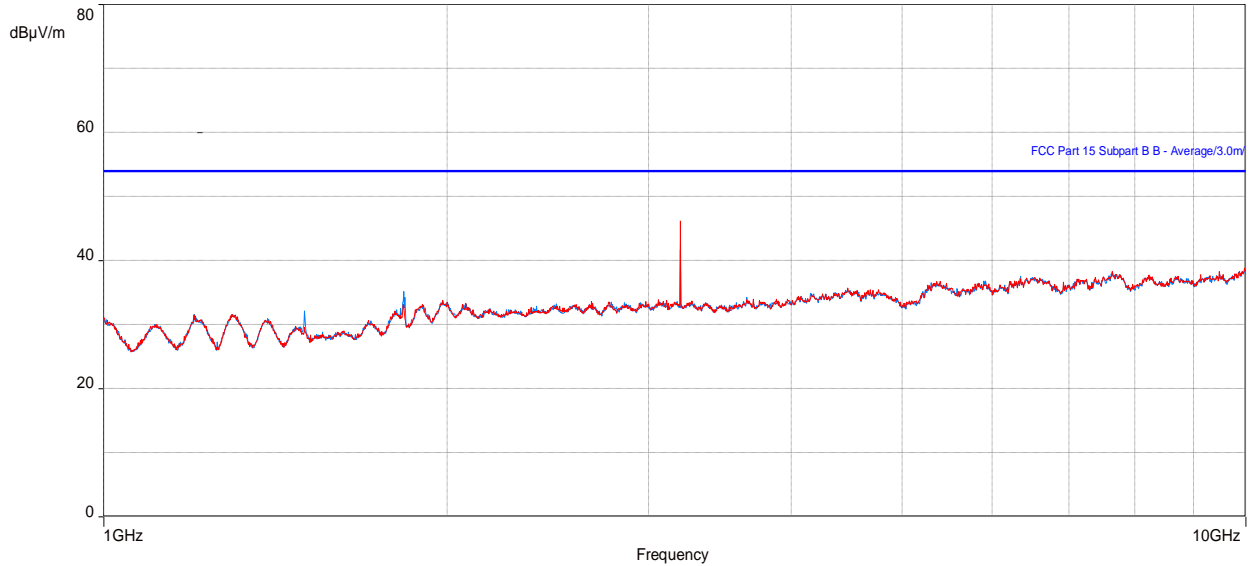


Table 20: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Middle channel)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	45.80	53.96	-8.16	2.35	0.00	Vertical	-4.43
3199.978526	40.04	53.96	-13.92	4.00	234.75	Horizontal	-4.43


Table 21: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Middle channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	45.80	82.2	-36.40	2.35	0.00	Vertical	-4.43
3199.978526	40.04	82.2	-42.16	4.00	234.75	Horizontal	-4.43

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

3.2.5.3 Single RAT/Single Carrier (SC, LTE – Top channel)

Figure 30: Plot of RE at 3 m – 30 to 1000 MHz (SC- LTE- Top channel)

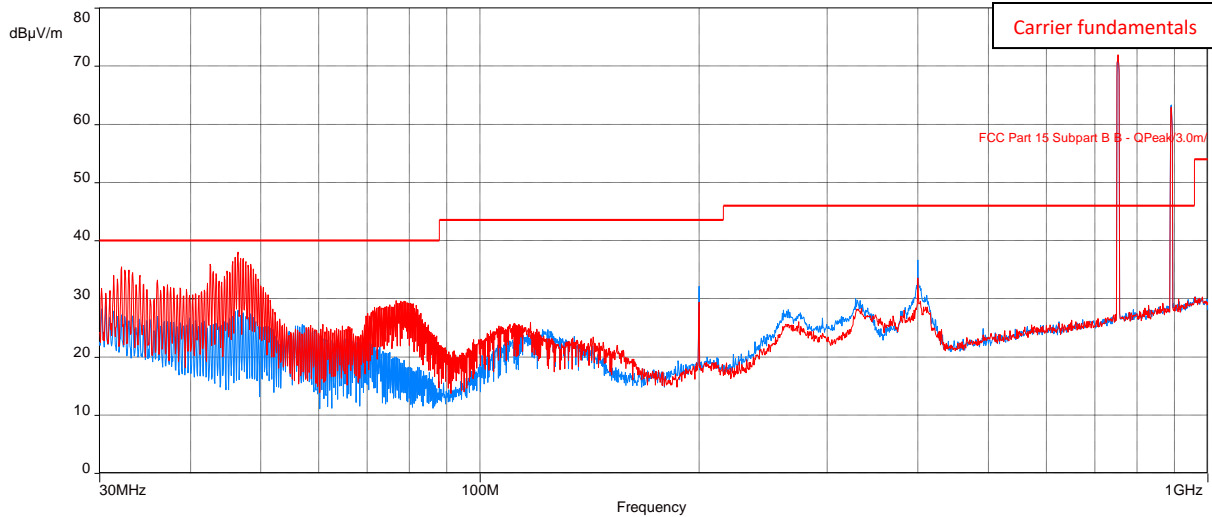

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 22: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Top channel)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
32.16521121	35.03	40.00	-4.97	1.00	357.75	Vertical	-2.95
42.62650641	35.54	40.00	-4.46	1.00	18.75	Vertical	-8.67
46.50073718	37.63	40.00	-2.37	1.00	341.25	Vertical	-10.84
399.9973813	36.38	46.02	-9.64	2.76	283.25	Horizontal	-3.32

Table 23: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Top channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
32.16521121	35.03	82.2	-47.17	1.00	357.75	Vertical	-2.95
42.62650641	35.54	82.2	-46.66	1.00	18.75	Vertical	-8.67
46.50073718	37.63	82.2	-44.57	1.00	341.25	Vertical	-10.84
399.9973813	36.38	82.2	-45.82	2.76	283.25	Horizontal	-3.32

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

Figure 31: Plot of RE at 3m from 1 to 10 GHz (SC- LTE- Top channel)

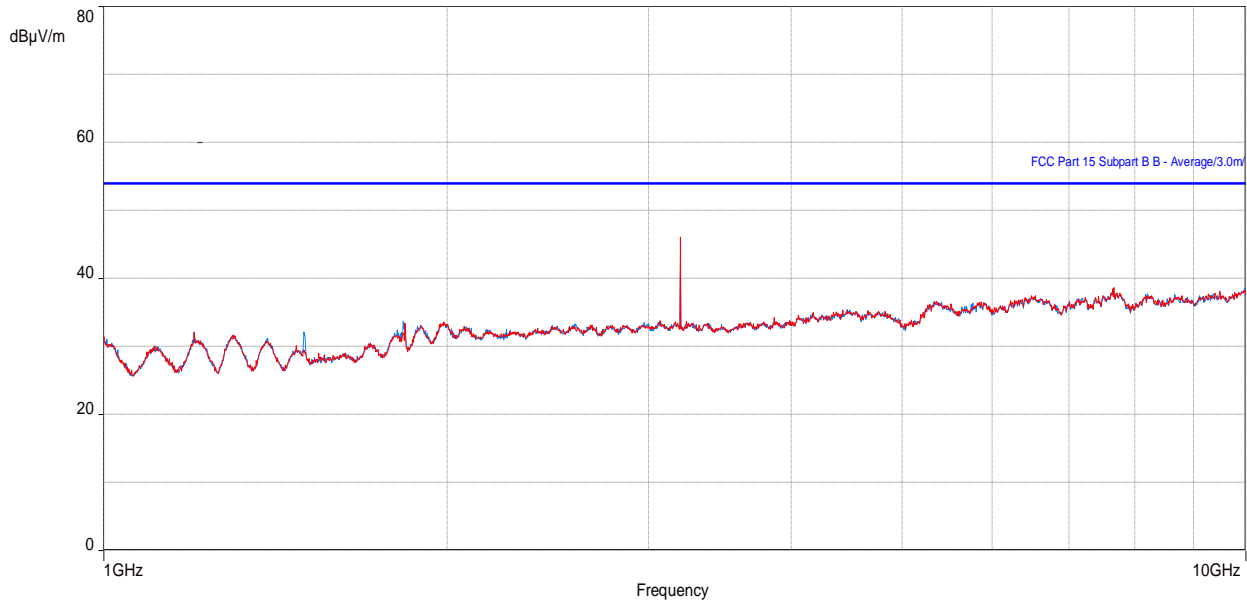


Table 24: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Top channel)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	45.97	53.96	-7.99	2.69	0.00	Vertical	-4.43
3199.978526	40.74	53.96	-13.22	4.00	234.75	Horizontal	-4.43

Table 25: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Top channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	45.97	82.2	-36.23	2.69	0.00	Vertical	-4.43
3199.978526	40.74	82.2	-41.46	4.00	234.75	Horizontal	-4.43

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.



3.2.6 Test results of RE (Single RAT / Single Carrier) - NR

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 25 - 31, May 2021

Tested by: Krupal Patel & Christopher Richer

Test configuration is listed as SC - NR in [Figure 15](#) as identified in the section [Configurations of the EUT](#). For the following test results that have supporting data tables with worst case emissions, negative margin values indicate a pass.

Red trace – Vertical antenna polarity, Blue trace – Horizontal antenna polarity

Figure 32: Plot of RE at 3 m – 30 to 1000 MHz (SC, NR- Middle channel)

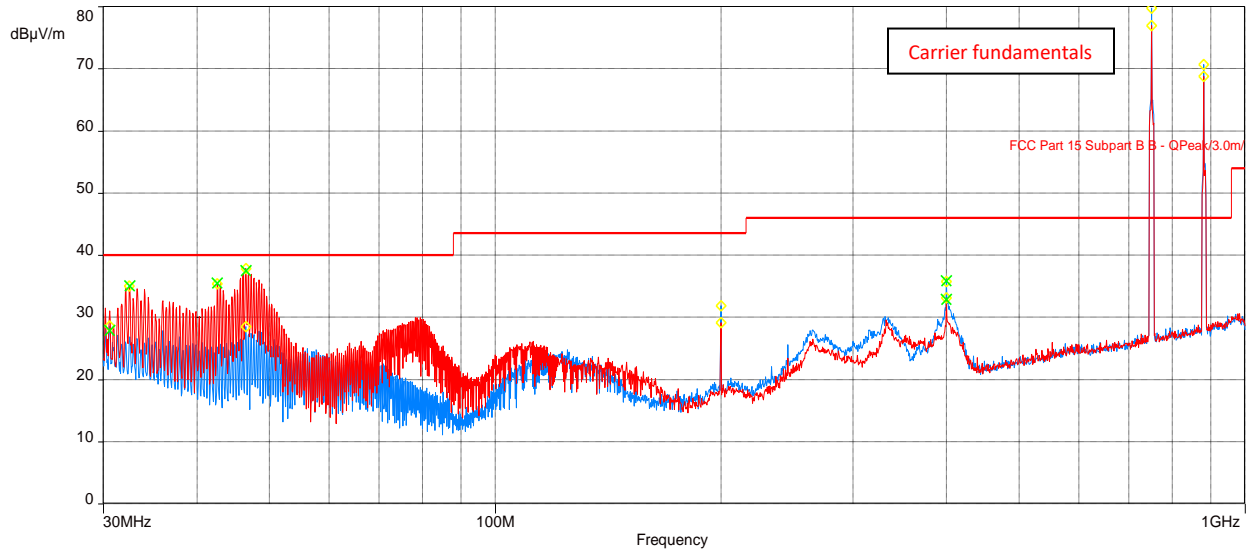

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 26: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Middle channel)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
32.54924359	35.01	40.00	-4.99	1.00	360.00	Vertical	-3.13
42.62426282	35.50	40.00	-4.50	1.00	11.75	Vertical	-8.67
46.49208333	37.43	40.00	-2.57	1.00	340.75	Vertical	-10.83
399.9973813	35.82	46.02	-10.20	2.67	283.25	Horizontal	-3.32

Table 27: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Middle channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
32.54924359	35.01	82.2	-47.19	1.00	360.00	Vertical	-3.13
42.62426282	35.50	82.2	-46.70	1.00	11.75	Vertical	-8.67
46.49208333	37.43	82.2	-44.77	1.00	340.75	Vertical	-10.83
399.9973813	35.82	82.2	-46.38	2.67	283.25	Horizontal	-3.32

Note: In the table/Plot above, no emissions exceeded the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

Figure 33: Plot of RE at 3m from 1 to 10 GHz (SC, NR- Middle channel)

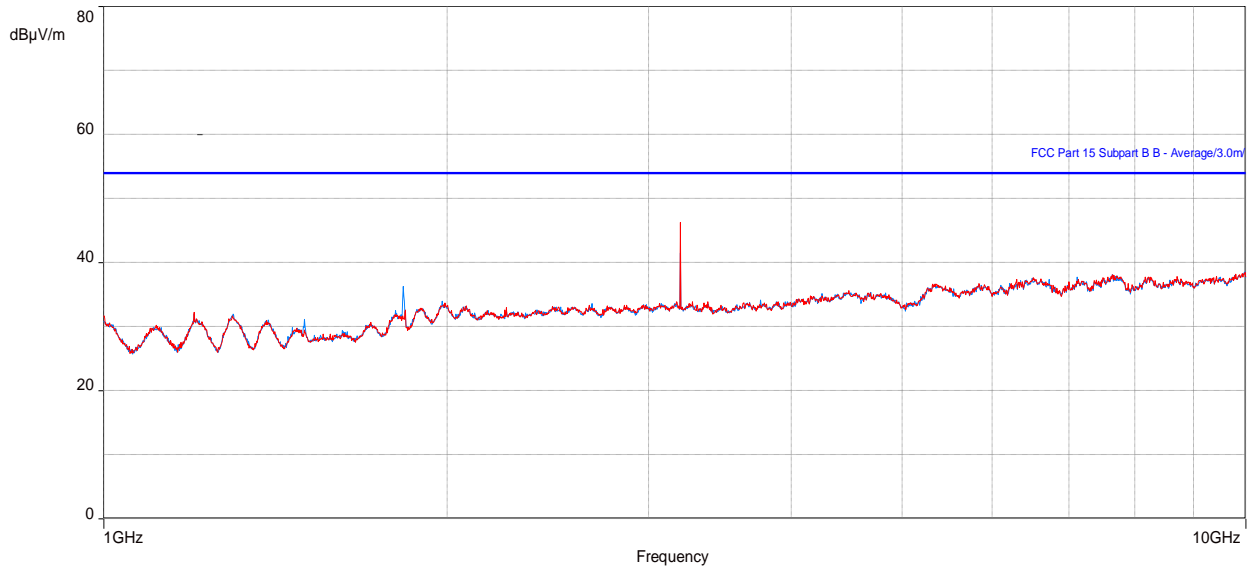


Table 28: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Middle channel)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	41.95	53.96	-12.01	3.41	82.00	Horizontal	-4.43
3199.978526	46.13	53.96	-7.83	1.94	355.00	Vertical	-4.43

Table 29: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Middle channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	41.95	82.2	-40.25	3.41	82.00	Horizontal	-4.43
3199.978526	46.13	82.2	-36.07	1.94	355.00	Vertical	-4.43

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.




3.2.7 Test results of RE (Single RAT/Multi Carrier) - LTE

Test location: 10-meter Ambient Free Chamber (AFC)
Date tested: 25 - 31, May 2021
Tested by: Krupal Patel & Christopher Richer

Test configuration is listed as MC - LTE in [Figure 19](#) as identified in the section [Configurations of the EUT](#). For the following test results that have supporting data tables with worst case emissions, negative margin values indicate a pass.

Red trace – Vertical antenna polarity, Blue trace – Horizontal antenna polarity

Figure 34: Plot of RE at 3 m – 30 to 1000 MHz (MC, LTE – Mid channel)

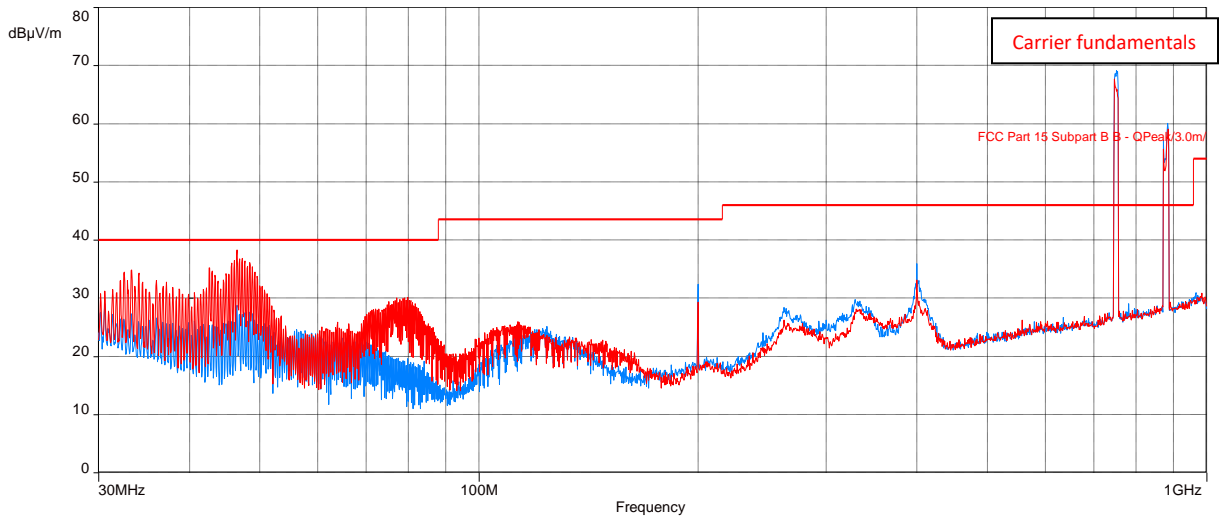

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 30: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Mid channel)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
33.32424326	34.39	40.00	-5.61	1.00	32.50	Vertical	-3.53
42.62089744	34.97	40.00	-5.03	1.00	25.25	Vertical	-8.67
46.49560897	37.77	40.00	-2.23	1.00	341.00	Vertical	-10.83
399.997221	35.79	46.02	-10.23	2.77	283.50	Horizontal	-3.32

Table 31: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Mid channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
33.32424326	34.39	82.2	-47.81	1.00	32.50	Vertical	-3.53
42.62089744	34.97	82.2	-47.23	1.00	25.25	Vertical	-8.67
46.49560897	37.77	82.2	-44.43	1.00	341.00	Vertical	-10.83
399.997221	35.79	82.2	-46.41	2.77	283.50	Horizontal	-3.32

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

Figure 35: Plot of RE at 3m from 1 to 10 GHz (MC, LTE- Mid channel)

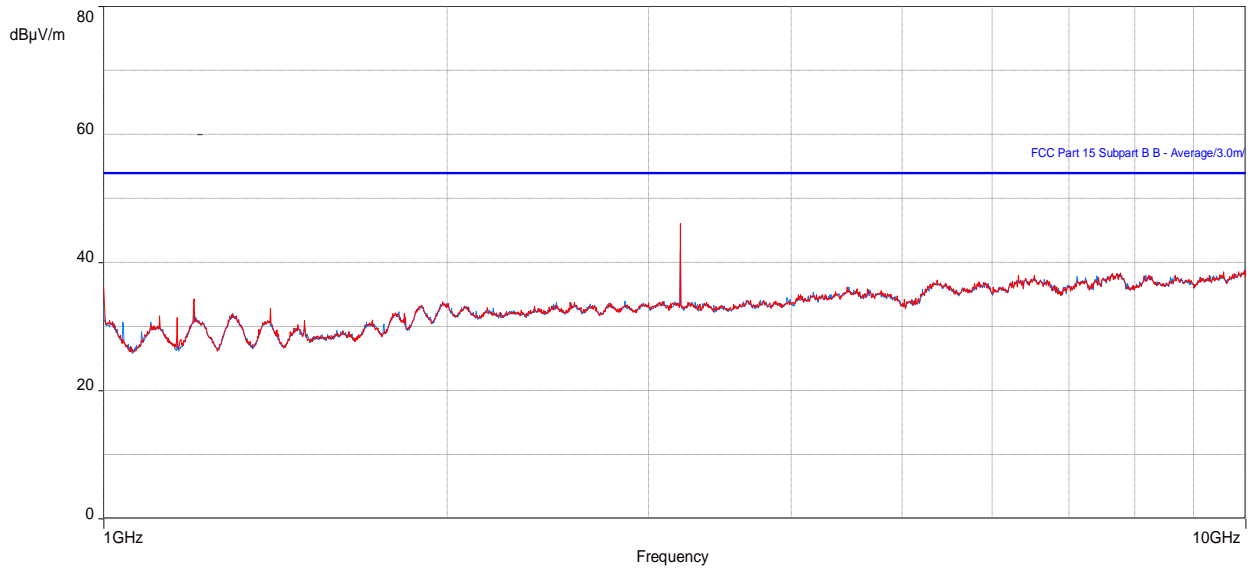


Table 32: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Mid channel)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
999.974359	32.09	53.96	-21.87	1.18	11.75	Vertical	-11.17
1199.992308	29.19	53.96	-24.77	1.46	96.25	Vertical	-10.73
3199.978526	41.86	53.96	-12.10	3.00	276.00	Horizontal	-4.43
3199.978526	46.38	53.96	-7.58	1.94	348.00	Vertical	-4.43

Table 33: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Mid channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
999.974359	32.09	82.2	-50.11	1.18	11.75	Vertical	-11.17
1199.992308	29.19	82.2	-53.01	1.46	96.25	Vertical	-10.73
3199.978526	41.86	82.2	-40.34	3.00	276.00	Horizontal	-4.43
3199.978526	46.38	82.2	-35.82	1.94	348.00	Vertical	-4.43

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.



3.2.8 Test results of RE (Multi RAT/Multi Carrier) - LTE + NR

Test location: 10-meter Ambient Free Chamber (AFC)


Date tested: 25 - 31, May 2021

Tested by: Krupal Patel & Christopher Richer

Test configuration is listed as MR – LTE + NR in [Figure 23](#) as identified in the section [Configurations of the EUT](#). For the following test results that have supporting data tables with worst case emissions, negative margin values indicate a pass.

Red trace – Vertical antenna polarity, Blue trace – Horizontal antenna polarity

Figure 36: Plot of RE at 3 m – 30 to 1000 MHz (MR, NR+LTE – Mid channel)

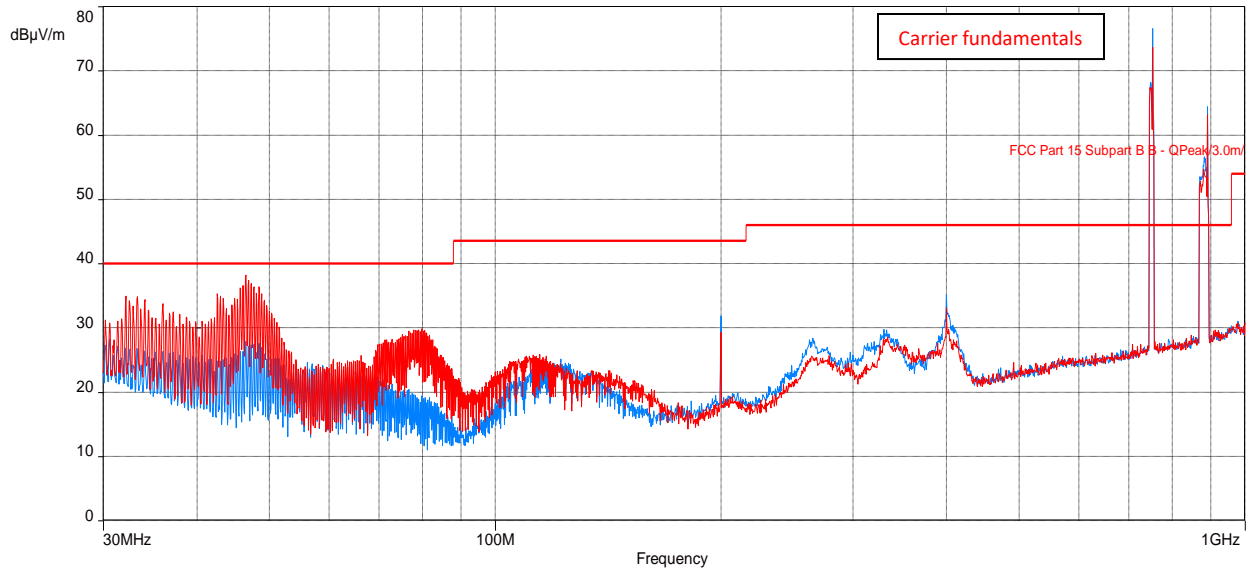

Note: Peaks above the limit are leakage of the EUT’s fundamentals from the 50-ohm terminations.

Table 34: RE test results from 30 to 1000 MHz for FCC part 15 & ICES-003 (Mid channel)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
33.31943556	34.28	40.00	-5.72	1.00	19.00	Vertical	-3.53
42.62009615	34.94	40.00	-5.06	1.00	18.75	Vertical	-8.66
46.49512821	37.79	40.00	-2.21	1.00	340.75	Vertical	-10.83
399.997221	35.75	46.02	-10.27	2.70	283.50	Horizontal	-3.32

Table 35: RE test results from 30 to 1000 MHz for FCC Part 22/27 & RSS 130/132 (Mid channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
33.31943556	34.28	82.2	-47.92	1.00	19.00	Vertical	-3.53
42.62009615	34.94	82.2	-47.26	1.00	18.75	Vertical	-8.66
46.49512821	37.79	82.2	-44.41	1.00	340.75	Vertical	-10.83
399.997221	35.75	82.2	-46.45	2.70	283.50	Horizontal	-3.32

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.

Figure 37: Plot of RE at 3m from 1 to 10 GHz (MR, NR+LTE – Mid channel)

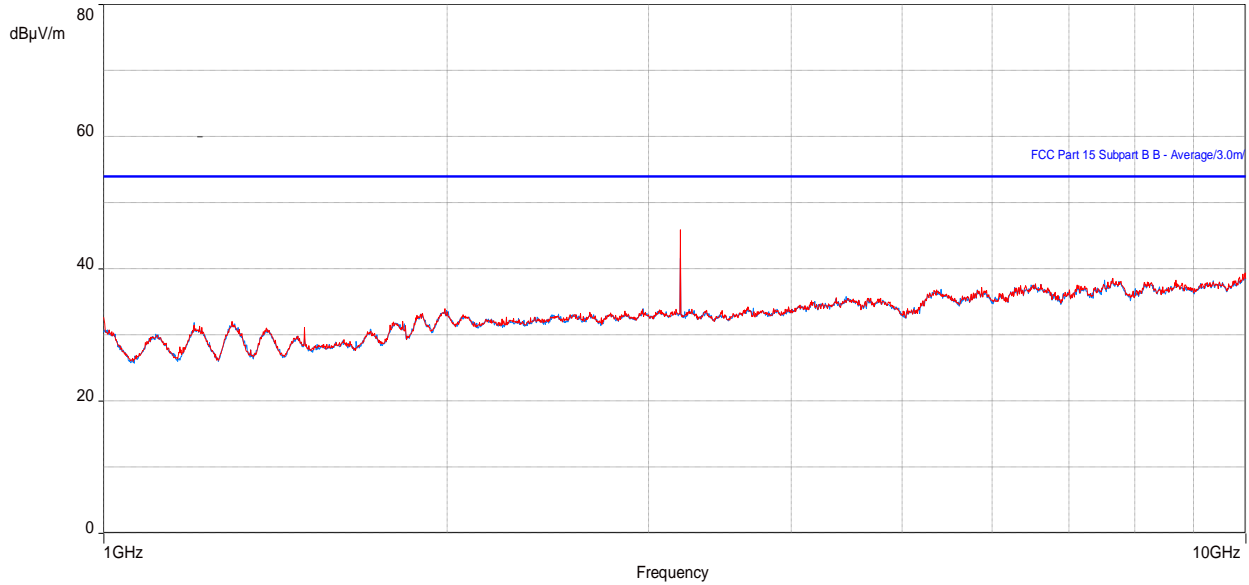


Table 36: RE test results from 1 to 10 GHz for FCC part 15 & ICES-003 (Mid channel)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to Class B Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	40.25	53.96	-13.71	4.00	68.25	Horizontal	-4.43
3199.978526	46.62	53.96	-7.34	1.59	356.25	Vertical	-4.43

Table 37: RE test results from 1 to 10 GHz for FCC Part 22/27 & RSS 130/132 (Mid channel)

Frequency (MHz)	Level (dBµV)	Limit EIRP (dBµV)	Margin to EIRP Limit (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	40.25	82.2	-41.95	4.00	68.25	Horizontal	-4.43
3199.978526	46.62	82.2	-35.58	1.59	356.25	Vertical	-4.43

Note: In the table/Plot above, no emissions exceed the FCC part 22/27 radiated spurious emissions limit when converted to dBuV/m, except for the fundamental. For final spurious emissions measurements to FCC part 22/27, see antenna port conducted emissions in applicable test report.



3.2.9 Test results of RE (Receiver mode only)

Test location: 10-meter Ambient Free Chamber (AFC)
Date tested: 25 - 31, May 2021
Tested by: Krupal Patel & Christopher Richer

Test configuration is listed as MR/Rx in [Figure 24](#) as identified in the section [Configurations of the EUT](#). For the following test results that have supporting data tables with worst case emissions, negative margin values indicate a pass.

Red trace – Vertical antenna polarity, Blue trace – Horizontal antenna polarity

Figure 38: Plot of RE at 3 m – 30 to 1000 MHz (Receiver mode only)

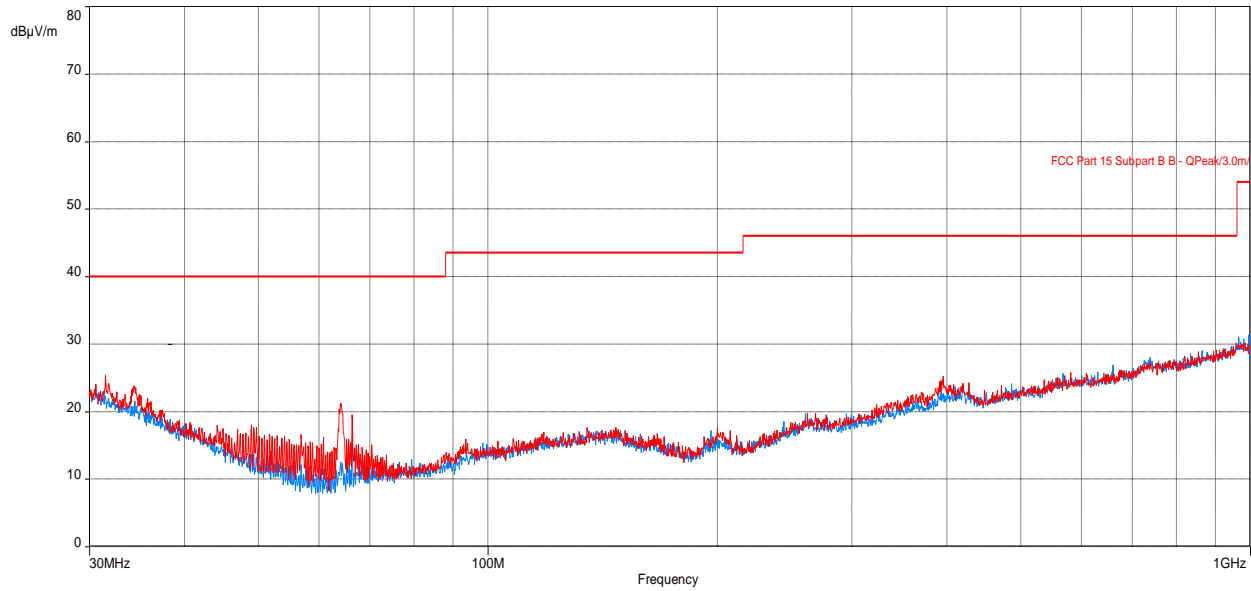


Table 38: RE test results from 30 to 1000 MHz for RSS-Gen (Rx mode only)

Frequency (MHz)	Level (dBµV)	Limit Quasi-peak (dBµV)	Margin to RSS-Gen Class B (dB)	Height (m)	Azimuth (deg)	Polarization	Correction (dB)
31.47050608	19.35	40.00	-20.65	1.00	117.75	Vertical	-2.55
944.7376826	23.58	46.02	-22.44	2.22	182.50	Horizontal	5.85
949.4183303	24.02	46.02	-22.00	1.93	45.75	Vertical	6.05

Figure 39: Plot of RE at 3m from 1 to 10 GHz (Receiver mode only)

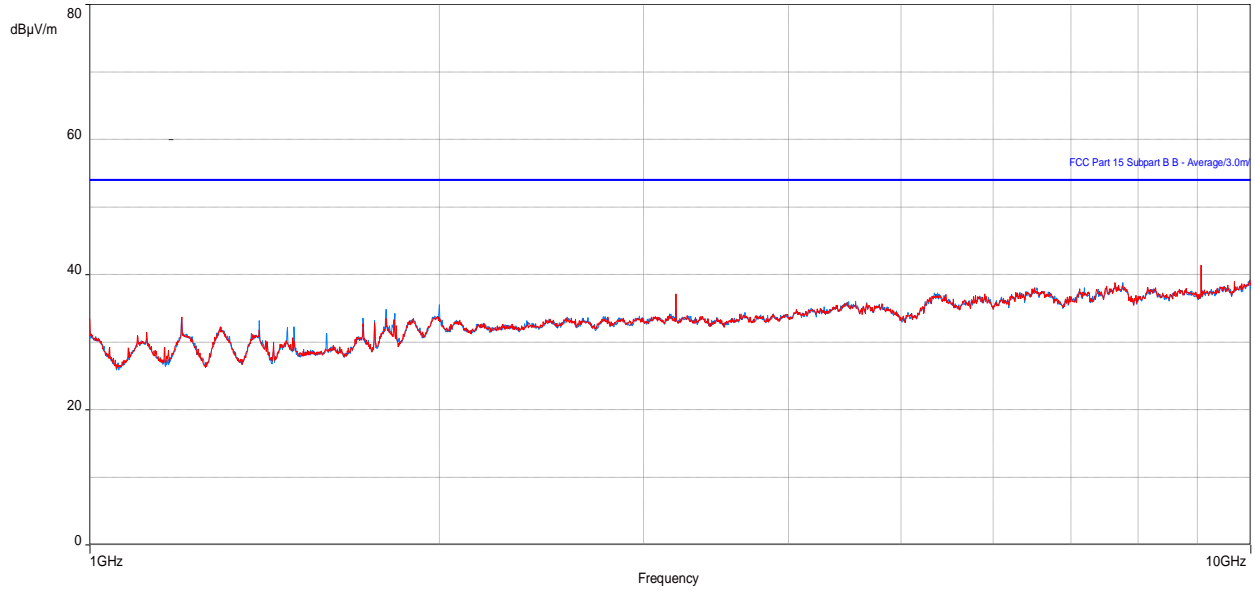


Table 39: RE test results from 1 to 10 GHz for RSS-Gen (Rx mode only)

Frequency (MHz)	Level Average (dBµV)	Limit Average (dBµV)	Margin to RSS-Gen Class B (dB)	Height (m)	Azimuth (degrees)	Polarization	Correction (dB)
3199.978526	33.09	53.96	-20.87	3.00	269.75	Horizontal	-4.43
3199.978526	34.77	53.96	-19.19	1.25	183.50	Vertical	-4.43
7757.849679	34.73	53.96	-19.23	4.00	25.00	Horizontal	4.03
9062.439103	38.51	53.96	-15.45	2.62	82.75	Vertical	2.60

3.2.10 Radiated Emissions test setup pictures

Figure 40: Setup for RE tests at 30 MHz to 1 GHz (Tx mode – Dot 2282)

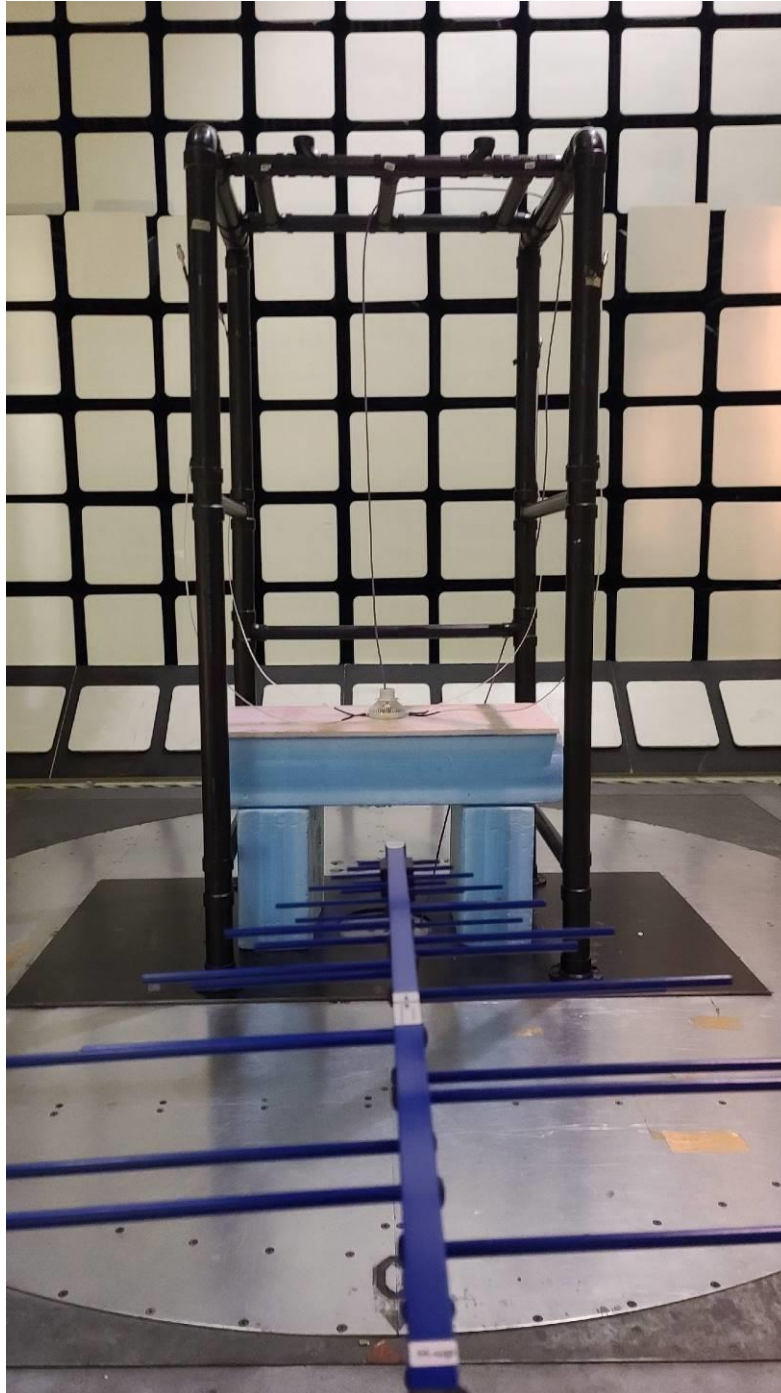


Figure 41: Setup for RE tests for above 1 GHz (Tx mode – Dot 2282)


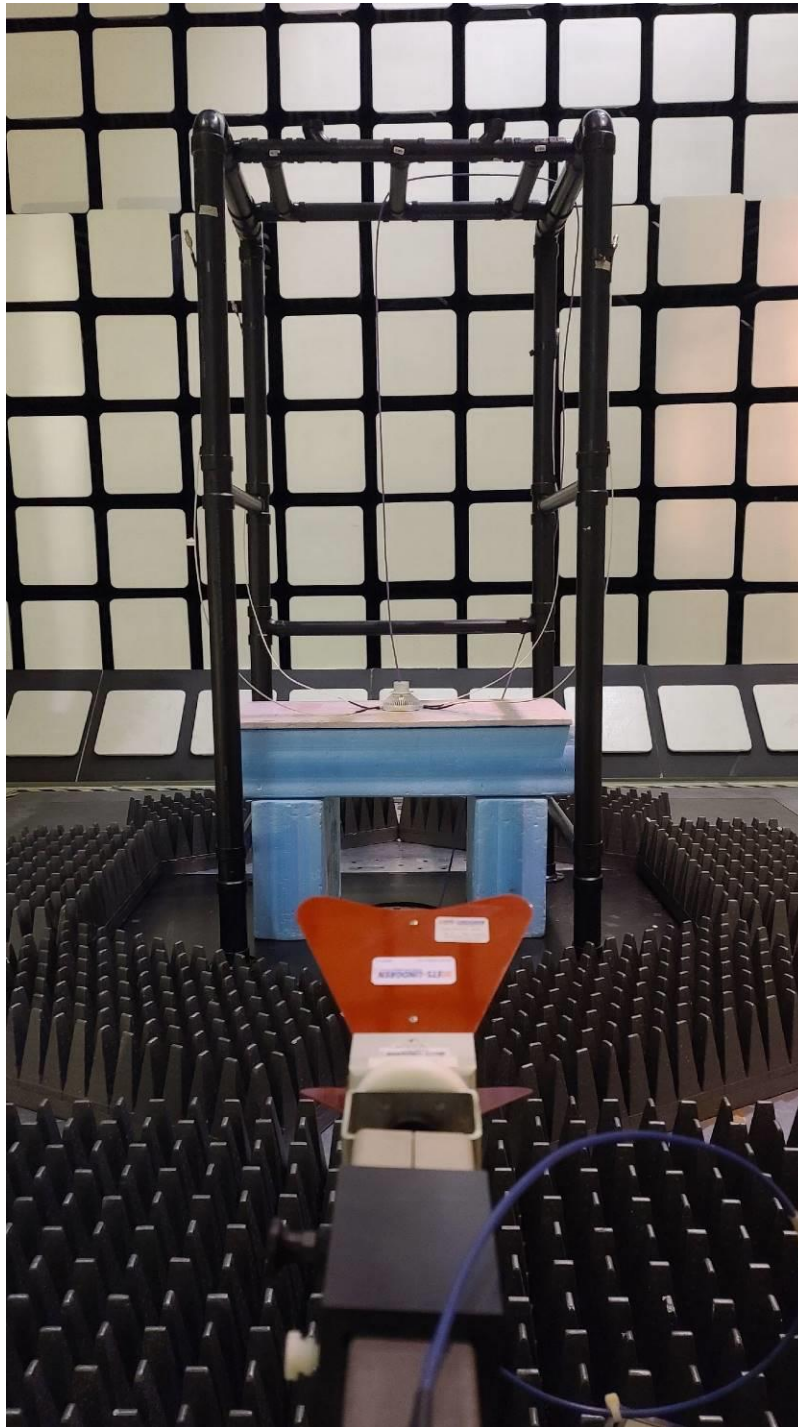


Figure 42: Setup for RE tests at 30 MHz to 1 GHz (Rx mode – Dot 2272)



Figure 43: Setup for RE tests for above 1 GHz (Rx mode – Dot 2272)



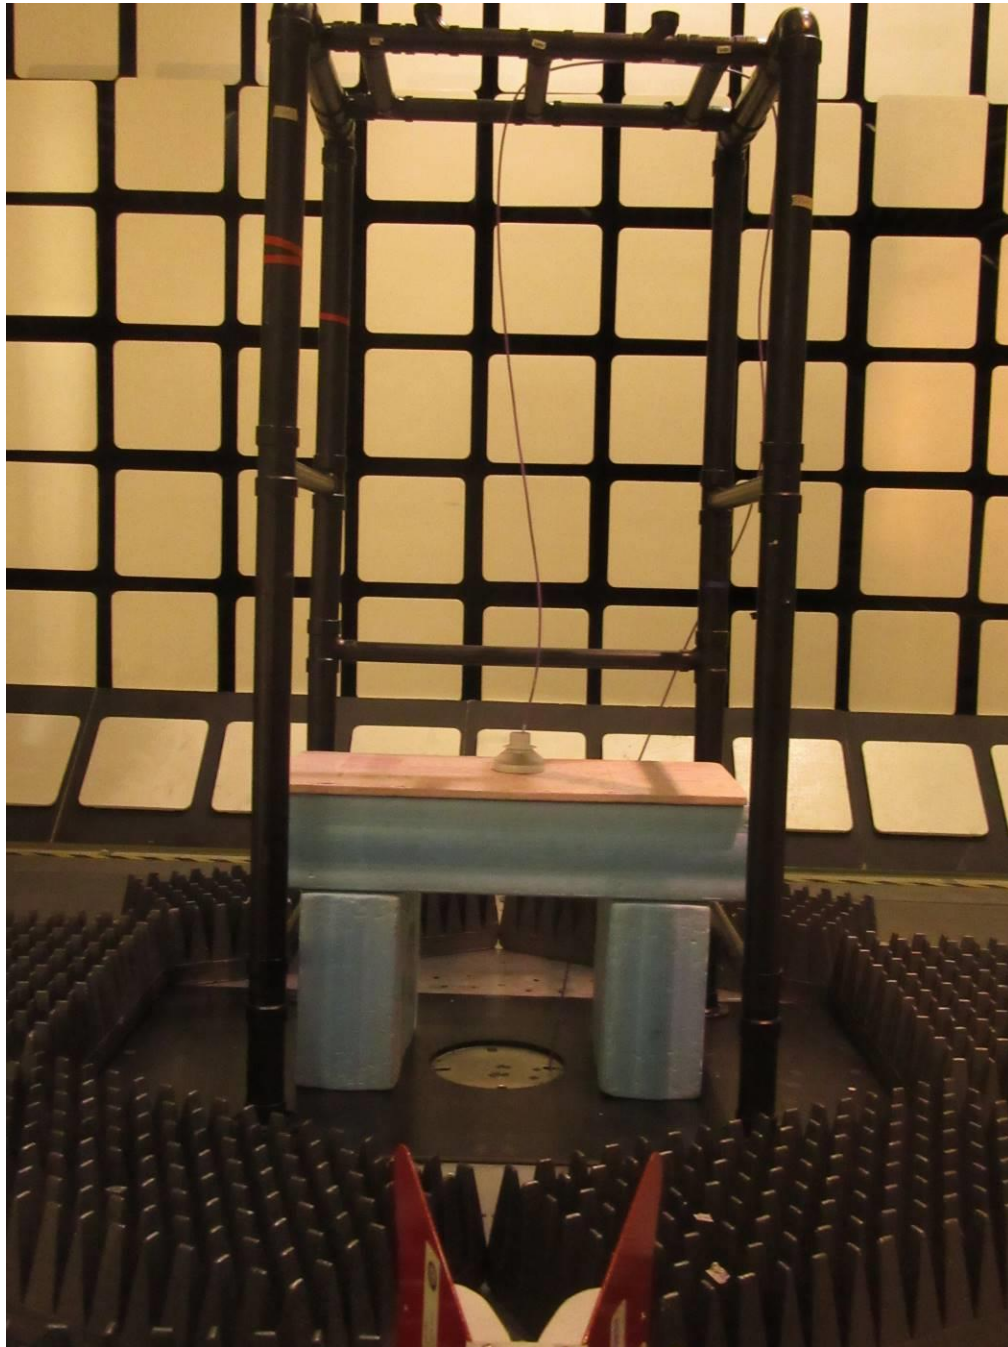

3.2.11 Test equipment

The equipment used for E-field RE testing was as follows.

Table 40: Test equipment used for RE

Description	Make	Model number	Asset ID	Calibr. date	Calibr. due
EMC Automation Software	Nexio V3.18	BAT-EMC	F0163649	not required	not required
Bilog Antenna	TESEQ	CBL 6111D	SSG013965	2021-05-04	2022-05-04
Horn Antenna 3MCH 00003	ETS	3117	LAVE04211	2021-03-30	2022-03-30
EMI Receiver	Rohde & Schwarz	ESU26	SSG013729	2021-03-31	2022-03-31
EMI Receiver	Rohde & Schwarz	ESU40	SSG013672	2020-10-29	2021-10-29
Coaxial Cable	Huber & Suhner	106A	SSG013841	2021-01-05	2022-01-05
Coaxial Cable	Huber & Suhner	106A	SSG012711	2021-01-05	2022-01-05
Coaxial Cable	Huber & Suhner	104PEA	SSG012041	2021-01-05	2022-01-05
Coaxial Cable	Huber & Suhner	ST18/Nm/Nm/36	SSG012785	2021-01-06	2022-01-06
Coaxial Cable	Micro-Coax	UFA 210B-1-1500-504504	SSG012376	2021-01-06	2022-01-06
Pre-Amplifier	Hp	8447D	LAVE04346	2020-09-10	2021-09-10
Pre-Amplifier	BNR	LNA	SSG012360	2020-11-16	2021-11-16
Power Supply	Hewlett Packard	6216A	SSG013063	not required	not required

3.2.12 Test conclusion

The Dot 2272 B5B13 (KRY 901 466/1) and Dot 2282 B5B13 (KRY 901 466/2) have passed the E-field Radiated Emission (RE) tests with respect to the Class B limits of FCC Part 15, ICES003, and RSS - Gen (Section 7.3) and EIRP limits of FCC Part 22 (Section 22.359(a)), FCC Part 27 (Section 27.53(C)), RSS-130 (Section 4.7), and RSS-132 (Section 5.5 & 5.6).

4. References

The documents, regulations, and standards that are referenced throughout this test report are listed alphabetically as follows.

1. ANSI C63.2-2009, American National Standards Institute for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications.
2. ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed radio Services.
3. ANSI C63.4-2014, American National Standards Institute for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
4. CISPR 16 Publications (all parts and sections), Specification for Radio Disturbance and Immunity Measuring Apparatus and Methods - Part 1: Radio Disturbance and Immunity Measuring Apparatus.
5. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 2, U.S. Federal Communications Commission.
6. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 15 Radio Frequency Devices, U.S. Federal Communications Commission.
7. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 22 – Public Mobile Services, U.S. Federal Communications Commission.
8. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, Part 27 Miscellaneous Wireless Communications Services, U.S. Federal Communications Commission.
9. ICES-003 Issue 6 (2016), Spectrum Management and Telecommunications, Interference-Causing Equipment Standard: Information Technology Equipment (ITE) – Limits and methods of measurement.
10. RSS-Gen – General Requirements for Compliance of Radio Apparatus, Issue 5 (March 2019); Ministry of Industry, Government of Canada.
11. RSS-130 Issue 2 (2019), Spectrum Management and Telecommunications, Radio Standards Specification, Equipment Operating in the Frequency Bands 617- 652 MHz, 663 – 698 MHz, 698 - 756 MHz and 777-787 MHz.
12. Radio Standards Specification RSS-132, issue 3 (January 2013), Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz, Ministry of Industry, Government of Canada.

4.1 Appendix A: Abbreviations

The abbreviations of terms used in this document are as follows.

Term	Definition
A	6 dB Coaxial Attenuator (Conducted Immunity)
AAN	Asymmetric Artificial Network (ISN)
AE	Auxiliary equipment
AFC	Ambient Free Chamber
ANSI	American National Standards Institute
AVG	Average detector
BiLog	Biconical Log-Periodic Hybrid antenna (a registered trademark of Schaffner-Chase EMC Limited, 1993)
CISPR	Comité International Spécial Perturbation Radioélectrique (International Special Committee on Radio Interference)
CSA	Canadian Standards Association
EMC	Electromagnetic Compatibility
ETSI	European Telecommunications Standards Institute
EUT	equipment under test
GND	Ground
h/w	hardware
IC	Industry Canada
ICES	Canadian Specification: ICES-003, Issue 3, "Spectrum Management: Interference-causing equipment standard (Digital Apparatus)
IEC	International Electro Technical Association
ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network
ms	millisecond, unless otherwise specified
NA, na	not applicable
PK	Peak Detector
PS	Power Supply
QP	Quasi-peak Detector
QPA	Quasi-peak Adapter (for the Spectrum Analyzer)
RBW	Resolution Bandwidth
RE	Radiated Emissions
s/w	software
SA	Spectrum Analyzer, the CISPR 16, ANSI C63.2 Compliant EMI meter



Term	Definition
STP	Shielded Twisted Pair
T	50-ohm Coaxial Termination (Conducted Emissions / Immunity)
TL	Transient Limiter
VBW	Video Bandwidth



TÜV SÜD Canada Inc

Radiated Emissions Test Report

End of Document