





Test report issued by an Accredited Testing Laboratory

Accred. no. 1761
Testing
ISO/IEC 17025

EMF Test Report: Ericsson Dot 44Kr/41Kr B77D (FCC)

| | | | |
|---|---|---|--|
| Document number: | GFTL-22:000819 Uen, Rev A | Date of report: | 2022-06-03 |
| Testing laboratory: | Ericsson EMF Research Laboratory Ericsson AB SE-164 80 Stockholm Sweden | Company/Client: | Denis Lalonde Ericsson Canada 349 Terry Fox Drive Ottawa ON K2K 2V6 Canada |
| Tests performed by: | Paramananda Joshi | Dates of tests: | 2022-06-01 (Rev A) |
| Manufacturer and market name(s) of device: | Ericsson Dot 44Kr/41Kr B77D | | |
| Testing has been performed in accordance with: | FCC OET Bulletin 65, KDB447498 D04 v01 | | |
| Test results: | Minimum separation distance for which the RF EMF exposure complies with the limits in FCC 47 CFR 1.1310 to be included in the Customer Product Information (CPI) for Ericsson Dot 44Kr/41Kr B77D. | | |
| Additional information: | Testing was conducted for mobile exposure conditions according to KDB447498 D04. | | |
| Signature: | Test Engineer  <hr/> Paramananda Joshi Senior Researcher paramananda.joshi@ericsson.com Tel: +46725074006 | Quality Manager  <hr/> Christer Törnevik Senior Expert – EMF and Health christer.tornevik@ericsson.com Tel: +46705863148 | |

1 Summary of EMF Test Report¹

Equipment under test (EUT)

| | | | |
|--|--|-----------|--------|
| Product name | Ericsson Dot 44Kr B77D (internal antennas) Ericsson Dot 41Kr B77D (external antennas) | | |
| Product number | KRY 901 515/3 KRY 901 515/4 | | |
| Supported bands, Tx frequency range (MHz), and standards | B77D | 3700–3980 | NR TDD |
| Exposure environment | General public/uncontrolled, Occupational/controlled | | |

Results

RF exposure compliance distances, required for the equipment under test (EUT) to comply with the mobile device exposure conditions and relevant limits applicable in the USA [1]-[3] are listed below for the general public (GP) and occupational (O) exposure limits.

RF exposure compliance assessment results for general public (GP) and occupational (O) exposure for Dot 44Kr/41Kr B77D, together with an assumed output power tolerance of 1 dB, using procedures applicable for the US market [3].

| Band | Standard | Maximum nominal output power from the radio | TDD DL duty cycle | Compliance distance | |
|------|----------|---|-------------------|---------------------|---|
| | | | | GP | O |
| B77D | NR | 4 x 0.4 W | 75% | 20 cm | |

¹ This page contains a summary of the test results. The full report provides a complete description of all test details and results.

2 General information

The purpose of the tests was to verify that the EUT is in compliance with the appropriate RF exposure standards, recommendations and limits applicable in the USA [1]–[3]. Compliance is demonstrated by showing that the EUT meets the test exemption criteria specified in [3] at a minimum test separation distance of 20 cm. The details of the analysis are presented in Section 4.

It should be noted that the test results presented in this test report are valid for the frequency range and for the antenna properties specified in Table 1, in addition to the power level, the power tolerance and TDD downlink duty cycle specified in Table 2. These data, together with information on the physical separation of the antennas were supplied by the client and may affect the validity of the results.

The test results were determined for Dot 44Kr B77D (equipped with internal antennas) and are also applicable for Dot 41Kr B77D connected to external antennas provided that the antenna gain for each branch is equal to or smaller than 5.4 dBi and that the minimum distance between antennas remains equal or larger than 75 mm.

Proposed EMF health and safety information for inclusion in the Customer Product Information (CPI) is provided in Appendices A and B.

3 Equipment under test

Table 1 summarizes the technical data for the EUT. Photographs and drawing of the EUT are presented in Appendix C.

Table 1 Technical data for the EUT.

| | | | | |
|--|--|--|---------------|-------------------------------|
| Product name | Ericsson Dot 44Kr B77D | | | |
| Product tested | KRY 901 515/3 | | | |
| Supported bands, Tx frequency range (MHz), and standards | B77D | 3700–3980 | NR TDD | |
| Dimensions of Radio head, H x D (mm) | 76 x 220 | | | |
| Configuration(s) covered by this report | B77D | | | |
| Antenna(s) | Four internal antenna branches | Maximum antenna gain for each branch (dBi) | | |
| | | Branch A: 4.9 | Branch B: 5.4 | Branch C: 5.3 Branch D: 5.1 |
| Exposure environment | General public/uncontrolled, Occupational/controlled | | | |

Output power levels of the EUT are given in Table 2.

Table 2 Output power levels of the EUT.

| Band | Standard | Maximum nominal output power [W / dBm] | Power tolerance [dB] | TDD DL duty cycle | Maximum time-averaged output power ² [W / dBm] |
|------|----------|--|----------------------|-------------------|---|
| B77D | NR (TDD) | 4 x 0.4 / 32 | 1 | 75% | 1.5 / 31.79 |

The EUT related data in Table 1 and Table 2 were supplied by the client.

4 Test exemption justification

FCC procedures [3] specify exemptions criteria and exposure assessment methods to verify compliance with EMF exposure limits [1] of mobile devices. The minimum test separation distance for which the equipment is

² Conservative measure of the total maximum possible output power level delivered to the antennas including losses, tolerances, and maximum TDD DL duty cycle.

shown to comply with the exposure limits must be clearly provided in the operating and installation instructions. A minimum test separation distance of at least 20 cm is required between the device and nearby persons to apply mobile device exposure limits.

4.1 Single antenna

The effective radiated power (ERP) for each of the four antenna branches (including output power tolerance and TDD DL duty cycle) is calculated in Table 3 based on the EUT data provided by the client and reported in Table 1 and Table 2. Table 3 also specifies the ERP threshold derived by means of the SAR-based exemption threshold specified in [3]³ for a minimum test separation distance of 20 cm and applicable in the frequency range of B77D.

Table 3 ERP per antenna branch and corresponding ERP test exemption threshold as specified by [3].

| EUT branch | ERP per branch | Minimum test separation distance | ERP exemption threshold |
|------------|----------------|----------------------------------|-------------------------|
| A | 715 mW | 20 cm | 3060 mW |
| B | 805 mW | | |
| C | 779 mW | | |
| D | 755 mW | | |

All antenna branches meet the ERP exemption threshold.

4.2 Simultaneous transmission

The results in this section show that the EUT meets the test exemption requirement for simultaneous transmission based on the SAR to peak location separation ratio (SPLSR) procedure described in [3]. This ratio is defined as:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

where SAR_1 and SAR_2 are the estimated SAR values for the two antenna branches in the pair i , and R_i is their distance in millimeters. The estimated SAR for each antenna is determined as [3]:

$$SAR_{est} = 1.6 \cdot ERP / ERP_{th}$$

where ERP and ERP_{th} corresponds to the antenna ERP and the ERP exemption threshold in Table 3, respectively. The value of R_i as supplied by the client (see Annex C) and the corresponding $SPLSR$ rounded to two decimal digits are shown in Table 4.

Table 4 Distance between antenna branches and SPLSR values.

| Branches in the pair | R_i (mm) | SPLSR |
|----------------------|------------|-------|
| A and B | 204 | <0.01 |
| A and C | 190 | <0.01 |
| A and D | 75 | 0.01 |
| B and C | 75 | 0.01 |

³ See Section 2.1.3. SAR-based exemption is applicable to the frequency range between 300 MHz and 6 GHz, with test separation distances between 0.5 cm and 40 cm, and for all RF sources in fixed, mobile, and portable device exposure conditions.

| | | |
|---------|-----|-------|
| B and D | 190 | <0.01 |
| C and D | 204 | <0.01 |

The SPLSR for all antenna pairs is below 0.04 and hence the EUT qualifies for simultaneous test exemption as specified in [3].

5 Results

Based on the applicability of FCC RF exposure test exemptions, the EUT RF exposure compliance distance is given in Table 5.

Table 5 RF exposure compliance assessment results for general public (GP) and occupational (O) exposure for Dot 44Kr/41Kr B77D together with an assumed output power tolerance of 1 dB using procedures applicable for the US market [3].

| Band | Standard | Maximum nominal output power from the radio | TDD DL duty cycle | Compliance distance | |
|------|----------|---|-------------------|---------------------|---|
| | | | | GP | O |
| B77D | NR | 4 x 0.4 W | 75% | 20 cm | |

6 Conclusion

The results in Section 4 show that the Ericsson Dot 44Kr B77D meets FCC SAR-based test exemption criteria [3] and it's therefore compliant with the EMF exposure limits for a minimum separation distance of 20 cm.

As Dot 41Kr B77D is equipped with the same hardware as Dot 44Kr B77D except the antennas, the test results are also applicable for Dot 41Kr connected to external antennas with similar radiation characteristics as the Dot 44Kr antennas.

7 References

- [1] FCC, Code of Federal Regulations CFR title 47, part 1.1310 “Radiofrequency radiation exposure limits”, Federal Communications Commission (FCC), 2020.
- [2] FCC, OET Bulletin 65, “Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields”, 1997.
- [3] FCC KDB 447498 D04 Interim General RF Exposure Guidance v01, “RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices”, 2021.

8 Revision History

| Rev. | Date | Description |
|------|------------|----------------|
| A | 2022-06-03 | First revision |

Appendix A. Information to be included in the CPI

Table A.1 lists the minimum separation distance for which the RF EMF exposure from Dot 44Kr B77D and Dot 41Kr B77D is below the limits specified by the FCC as applicable in:

- USA (47 CFR 1.1310)

Table A.1: Minimum separation distance for general public/uncontrolled exposure applicable in USA.

| Product | Standard | Maximum nominal output power from the radio | TDD DL duty cycle | Compliance distance |
|---------------|----------|---|-------------------|---------------------|
| Dot 44Kr B77D | NR | 4 x 0.4 W | 75% | 20 cm |

Note to the table: The test results were determined for Dot 44Kr (equipped with internal antennas) and are also applicable for Dot 41Kr connected to external antennas provided that the antenna gain is equal or smaller than 5.4 dBi and that the minimum distance between antennas remains equal or larger than 75 mm.

Appendix B. Guidelines on how to install the product

The Ericsson Dot 44Kr B77D and Dot 41Kr B77D (KRY 901 515/3 and KRY 901 515/4) shall be installed to make sure that the general public does not have access to the applicable RF EMF compliance distance.

Appendix C. Photographs and drawings of the EUT



Figure C.1: View of the EUT.

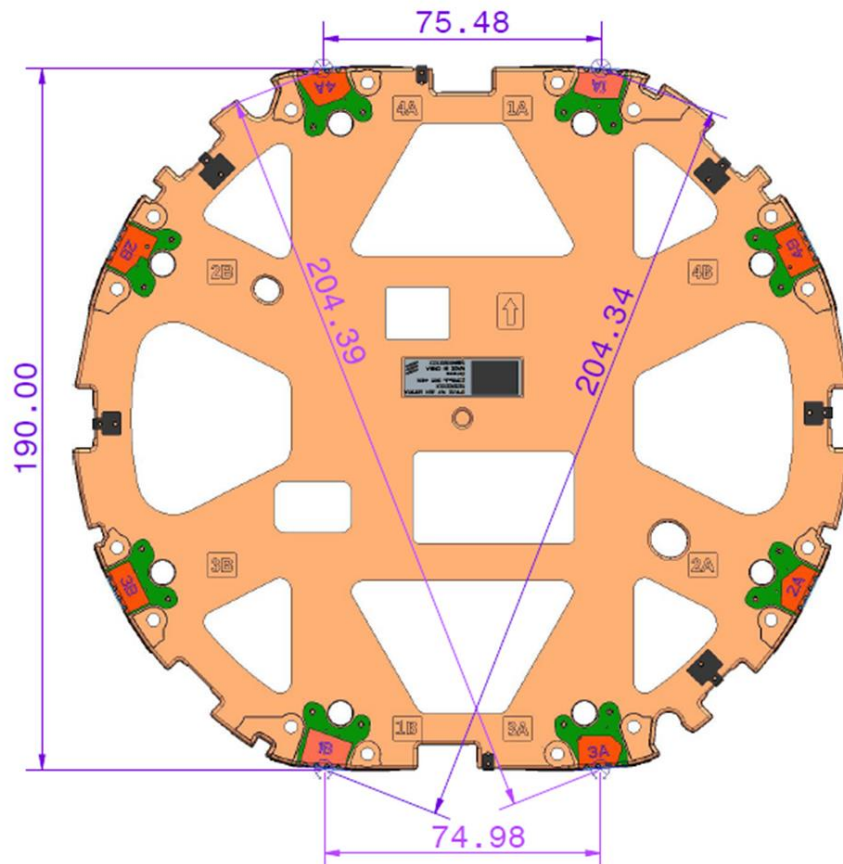


Figure C.2: Drawing showing the physical separation of active antennas measured from the feed points. For convenience the four active antennas are listed in the document as 'A', 'B', 'C', 'D' corresponding to '1A', '1B', '3A' and '4A' in the figure.