



Add value.
Inspire trust.

Report On

FCC Testing of the
Ericsson Remote Radio Unit Dot 2256/2266 B48B41B25B66 KRY 901
537/1, KRY 901 537/2, NR + LTE (2100 MHz) Base Station in
accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27

COMMERCIAL-IN-CONFIDENCE

FCC: TA8AKRY901537-1 & TA8AKRY901537-2

PREPARED BY

Handwritten signature of Glen Westwell.

Glen Westwell
Senior Test Engineer
(Technical)

APPROVED BY

Handwritten signature of Scott Drysdale.

Scott Drysdale
Authorised Signatory

DATED

29 November 2022

Document 75957009 Report 03 Issue 2

17-January-2023



CONTENTS

Section	Page No
1	REPORT INFORMATION 2
1.1	Report Details 3
1.2	Brief Summary of Results 4
1.3	Test Rationale..... 5
1.4	Configuration Description 6
1.5	Declaration of Build Status 8
1.6	Product Information 10
1.7	Test Setup 11
1.8	Deviation From The Standard 13
1.9	Modification Record 13
1.10	Additional Information 13
2	TEST DETAILS 15
2.1	Maximum Peak Output Power and Peak to Average Ratio - Conducted..... 16
2.2	Occupied Bandwidth..... 47
2.3	Band Edge 54
2.4	Transmitter Spurious Emissions 80
2.5	Frequency Stability 94
3	TEST EQUIPMENT USED 95
3.1	Test Equipment Used 96
3.2	Measurement Uncertainty 97
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 98
4.1	Accreditation, Disclaimers and Copyright..... 99
ANNEX A	Module Lists.....A.2



SECTION 1

REPORT INFORMATION



1.1 REPORT DETAILS

Manufacturer	Ericsson
Address	Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden
Product Name & Product Number	Dot 4465 B77DB25B66 - KRY 901 523/2
Serial Number(s)	TD3W340089
Software Version	R1A modified as a R1B
Hardware Version	Dot 4465 B77DB25B66 - KRY 901 523/2
Non-Tested Variant (See Section 1.10 Additional Information)	Dot 4455 B77DB25B66 - KRY 901 523/1 Dot 2256 B48B41B25B66 - KRY 901 537/1 Dot 2266 B48B41B25B66 - KRY 901 537/2
Test Specification/Issue/Date	FCC CFR 47 Part 2: 2021 FCC CFR 47 Part 27: 2021
Test Plan	TP_RA-FCC_Dot_4465_B77DB25B66
Start of Test	12-October-2022
Finish of Test	16-October-2022
Name of Engineer(s)	Glen Westwell
Related Document(s)	KDB 971168 D01 v02r02 KDB 662911 D01 v02r01 ANSI C63.26-2015

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with and FCC CFR 47 Part 2: 2021, FCC CFR 47 Part 27: 2021. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

Glen Westwell



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27 is shown below.

Section	Specification Clause		Test Description	Result
	FCC CFR 47 Part 2	FCC CFR 47 Part 27		
2.1	2.1046	27.50	Maximum Peak Output Power and Peak to Average Ratio - Conducted	Pass
2.2	2.1049	27.53	Occupied Bandwidth	Pass
2.3	2.1051	27.53	Band Edge	Pass
2.4	2.1051	27.53	Transmitter Spurious Emissions	Pass
2.5	2.1055	--	Frequency Stability	Pass



1.3 TEST RATIONALE

The tests that have been selected are detailed in the customer Test Plan as defined in section 1.1 of this report. The Test Plan is based on the TÜV SÜD FCC Test Plan Rationale, available on request.



1.4 CONFIGURATION DESCRIPTION

Configuration A					
RAT	No. of Carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE	1	5 MHz	2112.5	2155	2197.5
		10 MHz	2115	2155	2195
		15 MHz	2117.5	2155	2192.5
		20 MHz	2120	2155	2190
NR	1	5 MHz	2112.5	2155	2197.5
		10 MHz	2115	2155	2195
		15 MHz	2117.5	2155	2192.5
		20 MHz	2120	2155	2190
		25 MHz	2122.5	2155	2187.5
		30 MHz	2125	2155	2185
		40 MHz	2130	2155	2180

Configuration B Contiguous Channel Allocations					
RAT	No. of Carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE	2	5+5 MHz	2112.5+2117.5	2122.5+2127.5	2192.5+2197.5
		20+20 MHz	2120+2140	2145+2165	2170+2190
NR	2	5+5 MHz	2112.5+2117.5	2122.5+2127.5	2192.5+2197.5
		40+40 MHz	2130+2170	2135+2175	2140+2180
NR+LTE	2	5+5 MHz	2112.5+2117.5	2122.5+2127.5	2192.5+2197.5

Configuration B Non-Contiguous Channel Allocations					
RAT	No. of Carriers	Carrier Bandwidth	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR+LTE	2	5+5 MHz	2112.5	--	2197.5



Configuration C Contiguous Channel Allocations					
RAT	No. of Carriers	Carrier BW	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR	6	5 MHz	2112.5+2117.5+2122.5+	2142.5+2147.5+2152.5+	2172.5+2177.5+2182.5+
			2127.5+2132.5+2137.5	2157.5+2162.5+2167.5	2187.5+2192.5+2197.5
		15 MHz	2117.5+2132.5+2147.5+	2117.5+2132.5+2147.5+	2117.5+2132.5+2147.5+
			2162.5+2177.5+2192.5	2162.5+2177.5+2192.5	2162.5+2177.5+2192.5
LTE	6	5 MHz	2112.5+2117.5+2122.5+	2142.5+2147.5+2152.5+	2172.5+2177.5+2182.5+
			2127.5+2132.5+2137.5	2157.5+2162.5+2167.5	2187.5+2192.5+2197.5
		15 MHz	2117.5+2132.5+2147.5+	2117.5+2132.5+2147.5+	2117.5+2132.5+2147.5+
			2162.5+2177.5+2192.5	2162.5+2177.5+2192.5	2162.5+2177.5+2192.5
NR+LTE	6	5 MHz	2112.5+2117.5+2122.5+	2142.5+2147.5+2152.5+	2172.5+2177.5+2182.5+
			2127.5+2132.5+2137.5	2157.5+2162.5+2167.5	2187.5+2192.5+2197.5

Configuration C Non-Contiguous Channel Allocations					
RAT	No. of Carriers	Carrier BW	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR+LTE	6	5 MHz	2112.5+2117.5+2122.5+	--	2187.5+2192.5+2197.5



1.5 DECLARATION OF BUILD STATUS

MAIN EUT	
MANUFACTURING DESCRIPTION	Radio Dot
MANUFACTURER	Ericsson
TYPE	Remote Radio Base Station
PART NUMBER	KRY 901 537/1 and KRY 901 537/2
SERIAL NUMBER	TD3W388627 for Dot 2266 B48B41B25B66 TD3W340089 for Dot 4455 B77DB25B66
HARDWARE VERSION	R1B for Dot 2266 B48B41B25B66 (used for B41 tests) R1A modified as R1B for Dot 4465 B77DB25B66 (used for B25 & B66 tests)
SOFTWARE VERSION	CXP 203 0045/26 - R15A701 for Dot 2266 B48B41B25B66 CXP 203 0045/26 - R14BX12 for Dot 4455 B77DB25B66
TRANSMITTER OPERATING RANGE	B41: 2496-2690MHz B25: 1930-1995MHz B66: 2110-2200MHz
RECEIVER OPERATING RANGE	B41: 2496-2690MHz B25: 1850-1915MHz B66: 1710-1780MHz
COUNTRY OF ORIGIN	China
INTERMEDIATE FREQUENCIES	None
EMISSION DESIGNATOR(S): (i.e. G1D, GXW)	B41 NR: 10M0F9W, 20M0F9W, 30M0F9W, 40M0F9W, 50M0F9W, 60M0F9W, 70M0F9W 80M0F9W, 90M0F9W, 100M0F9W B41 LTE: 5M00W7D, 10M0W7D, 15M0W7D, 20M0W7D B25 NR: 10M0F9W, 15M0F9W, 20M0F9W +NB1oT B25 NR: 5M00F9W, 25M0F9W, 30M0F9W, 40M0F9W B25 LTE: 5M00W7D, 10M0W7D, 15M0W7D, 20M0W7D +NB1oT B66 NR: 10M0F9W, 15M0F9W, 20M0F9W +NB1oT B66 NR: 5M00F9W, 25M0F9W, 30M0F9W, 40M0F9W B66 LTE: 5M00W7D, 10M0W7D, 15M0W7D, 20M0W7D +NB1oT
MODULATION TYPES: (i.e. GMSK, QPSK)	NR: QPSK, 16QAM, 64QAM, 256QAM LTE: QPSK, 16QAM, 64QAM, 256QAM
HIGHEST INTERNALLY GENERATED FREQUENCY	2.70 GHz
OUTPUT POWER (W or dBm)	B41: 2 x 0.4W (26dBm) (1 carrier limited to 24dBm) B25: 2 x 0.2W (23dBm) B66: 2 x 0.2W (23dBm)
Antenna gain (dBi)	B41: 4.4 dBi B25: 4.2 dBi B66: 4.7 dBi
FCC ID	TA8AKRY901537-1 & TA8AKRY901537-2



INDUSTRY CANADA ID	NA
TECHNICAL DESCRIPTION (a brief description of the intended use and operation)	Dot 2256 B48B41B25B66 (KRY 901 537/1) and Dot 2266 B48B41B25B66 (KRY 901 537/2) are Remote Radio Units forming part of the Ericsson Radio Base Station (RBS) equipment. The Dot provides radio access for mobile and fixed devices and is intended for the indoor environment. The radio operates over 6 Transmit ports in MRO (NR+LTE); Single, Multi-Carrier, and MIMO transmission with a maximum rated RF Output up to 0.4W per port over an operational temperature of 5°C to +40°C. The unit is designed to be ceiling or wall mounted. The 2256 and 2266 radios are identical except that Dot 2256 has internal antennas and Dot 2266 has external RF ports.

Signature 

Denis Lalonde

Date: 9 January 2023

Declaration of Build Status Serial Number: TD3W388627

No responsibility will be accepted by TÜV SÜD as to the accuracy of the information declared in this document by the manufacturer.



1.6 PRODUCT INFORMATION

1.6.1 Technical Description

The Equipment Under Test (EUT) Dot 4465 B77DB25B66 - KRY 901 523/2 is an Ericsson AB Radio Unit working in the public mobile service Band 66 which provides communication connections to Band 66 4G and 5G networks. This radio also provides network service with other frequency bands described in the FCC application.

The EUT is declared as operating from a nominal -48V DC supply.



The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

Equipment Under Test




1.7 TEST SETUP

Conducted Test Set Up

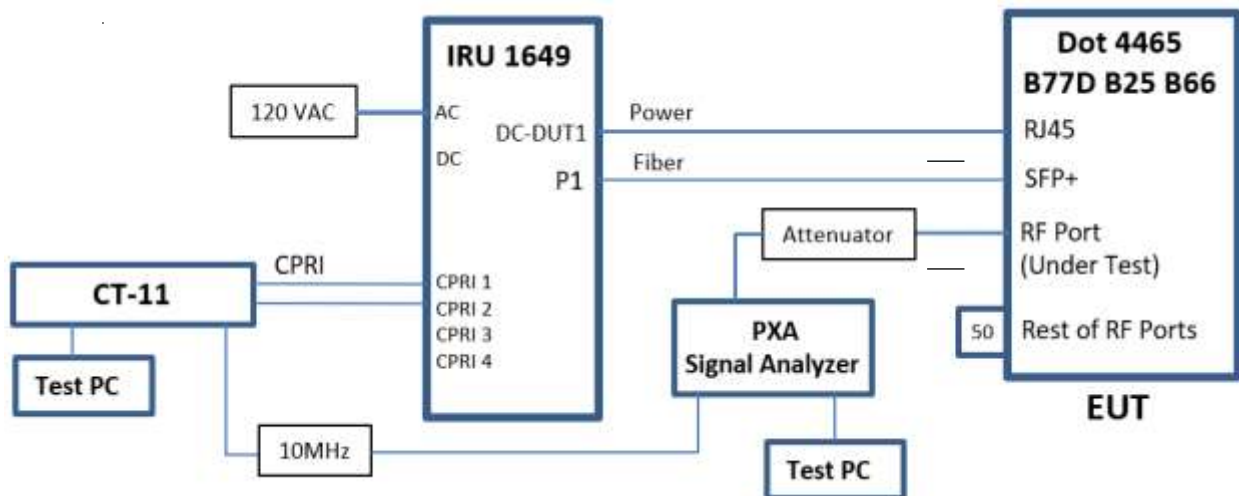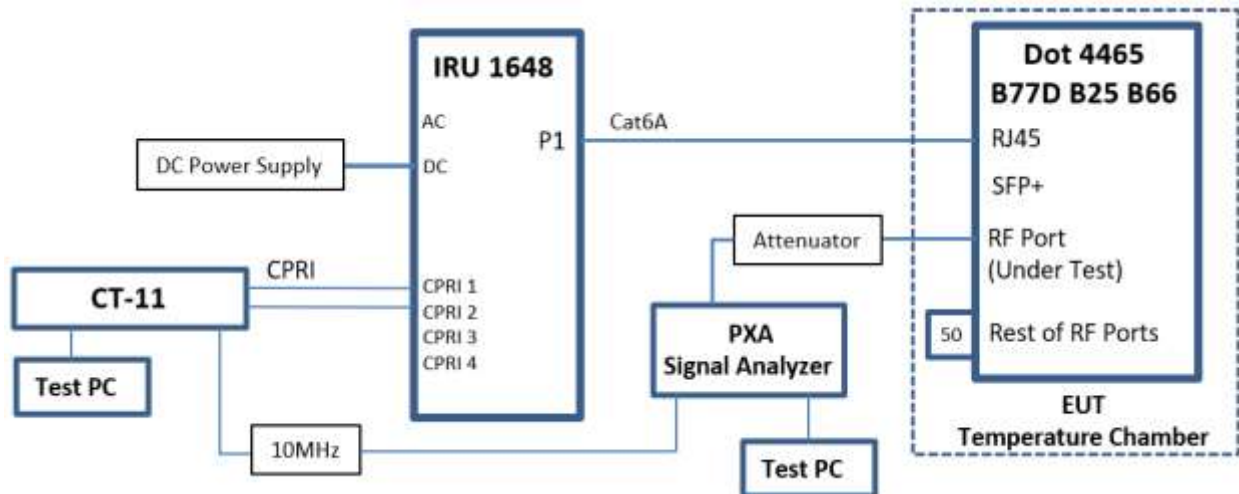



Conducted Test Set Up – Frequency Stability

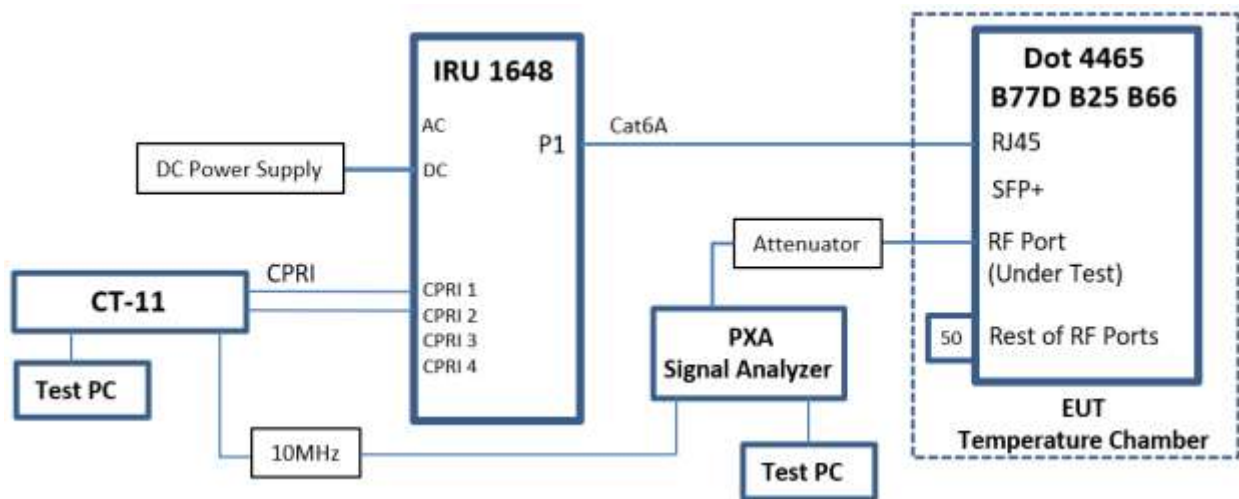

Dashed line indicates equipment inside the Temperature Chamber for testing



Test Conditions

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated as described in the Test Method for each Test.

The EUT was powered from a -48V DC supply unless otherwise stated.

FCC Measurement Facility Registration Number
CA4810 TUV SUD Ottawa, Canada

Under our A2LA Accreditation, TÜV SÜD Canada conducted the following tests Ericsson, Ottawa Laboratory.

Test Name	Name of Engineer(s)
Maximum Peak Output Power and Peak to Average Ratio - Conducted	Glen Westwell
Occupied Bandwidth	Glen Westwell
Band Edge	Glen Westwell
Transmitter Spurious Emissions	Glen Westwell
Frequency Stability	Glen Westwell

1.8 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.9 MODIFICATION RECORD

The R1A unit under test was modified to be identical to the R1B build of this product

1. The C62T3A8 component was changed
 - a. from a RJC 545 1110/4C, 0.4pF +/-0.1pF 0201 100V HQ C0/CAPACITOR
 - b. To a REG 724 5182/33PJ, 33nH 5% 0201/INDUCTOR
2. The C62T4A8 component was changed
 - a. from a RJC 545 1110/4C, 0.4pF +/-0.1pF 0201 100V HQ C0/CAPACITOR
 - b. To a REG 724 5182/33PJ, 33nH 5% 0201/INDUCTOR
3. Added RF Absorber Material (2/MPP 901 158/2) inside EMC cover

1.10 ADDITIONAL INFORMATION

1. This filing is for a Radio Certification for use in the USA under the following ID's:

FCC ID: TA8AKRY901537-1 & TA8AKRY901537-2

2. Transmitter performance was measured for top, mid & bottom channels for contiguous and non-contiguous (NC) operation, where applicable, across all antenna ports as presented in the



average power measurement tables. Typical performance is presented. All configuration data is on file and available upon request.

3. The Dot 2266 B48B41B25B66 product has identical B66 circuits as used in Dot 4465 B77DB25B66. For this reason, B66 tests performed on Dot 4465 B77DB25B66 are now used to demonstrate B66 FCC compliance on Dot 2266 B48B41B25B66.

The Dot 2256 B48B41B25B66 and Dot 2266 B48B41B25B66 radios are identical except that Dot 2256 has internal antennas and Dot 2266 has external RF ports.



SECTION 2

TEST DETAILS



2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.50
FCC CFR 47 Part 2, Clause 2.1046

2.1.2 Date of Test and Modification State

12, 13 and 15-October-2022 - Modification State 0

2.1.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.4 Environmental Conditions

Ambient Temperature	33.0 - 35.0°C
Relative Humidity	23.8 - 24.1%

2.1.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, clause 5.2.1 and summed in accordance with FCC KDB 662911 D01.



2.1.6 Test Results

Configuration A

Maximum Output Power 23.00 dBm / Port

Bottom Channels

Antenna Gain (dBi)	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power				
			PAR (dB)	Channel Position B			
				Average Power			
Antenna Port				dBm	EIRP (dBm)	dBm/MHz	EIRP dBm/MHz
4.70							
C	LTE: QPSK	5.0 MHz	8.30	23.87	28.57	17.88	22.58
D	LTE: QPSK	5.0 MHz	-	23.47	28.17	17.88	22.58
Total			-	26.68	31.38	20.89	25.59
C	LTE: QPSK	10.0 MHz	8.33	23.77	28.47	14.92	19.62
D	LTE: QPSK	10.0 MHz	-	23.38	28.08	14.92	19.62
Total			-	26.59	31.29	17.93	22.63
C	LTE: QPSK	15.0 MHz	8.31	23.75	28.45	13.91	18.61
D	LTE: QPSK	15.0 MHz	-	23.32	28.02	13.91	18.61
Total			-	26.55	31.25	16.92	21.62
C	LTE: QPSK	20.0 MHz	8.30	23.17	27.87	12.95	17.65
D	LTE: QPSK	20.0 MHz	-	22.79	27.49	12.95	17.65
Total			-	25.99	30.69	15.96	20.66
C	NR: QPSK	5.0 MHz	8.32	23.83	28.53	17.72	22.42
D	NR: QPSK	5.0 MHz	-	23.46	28.16	17.72	22.42
Total			-	26.66	31.36	20.73	25.43
C	NR: QPSK	10.0 MHz	8.32	23.05	27.75	14.67	19.37
D	NR: QPSK	10.0 MHz	-	22.74	27.44	14.67	19.37
Total			-	25.91	30.61	17.68	22.38
C	NR: QPSK	15.0 MHz	8.37	23.13	27.83	14.54	19.24
D	NR: QPSK	15.0 MHz	-	22.71	27.41	14.54	19.24
Total			-	25.94	30.64	17.55	22.25
C	NR: QPSK	20.0 MHz	8.40	23.11	27.81	14.43	19.13
D	NR: QPSK	20.0 MHz	-	22.74	27.44	14.43	19.13
Total			-	25.94	30.64	17.44	22.14
C	NR: QPSK	25.0 MHz	8.30	23.19	27.89	10.66	15.36
D	NR: QPSK	25.0 MHz	-	22.82	27.52	10.66	15.36
Total			-	26.02	30.72	13.67	18.37
C	NR: QPSK	30.0 MHz	8.29	23.25	27.95	9.59	14.29
D	NR: QPSK	30.0 MHz	-	22.83	27.53	9.59	14.29
Total			-	26.06	30.76	12.60	17.30
C	NR: QPSK	40.0 MHz	8.26	23.32	28.02	8.52	13.22
D	NR: QPSK	40.0 MHz	-	23.00	27.70	8.52	13.22
Total			-	26.17	30.87	11.53	16.23

Note: The antenna port designation C&D should read A&B. C=A, D=B.



Mid Channels

Antenna Gain (dBi)	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power					
			Antenna Port	PAR (dB)	Channel Position M			
					Average Power			
4.70				dBm	EIRP (dBm)	dBm/MHz	EIRP dBm/MHz	
C	LTE: QPSK	5.0 MHz	8.30	23.98	28.68	18.04	22.74	
D	LTE: QPSK	5.0 MHz	-	23.55	28.25	18.04	22.74	
Total			-	26.78	31.48	21.05	25.75	
C	LTE: QPSK	10.0 MHz	8.30	23.91	28.61	14.74	19.44	
D	LTE: QPSK	10.0 MHz	-	23.47	28.17	14.74	19.44	
Total			-	26.71	31.41	17.75	22.45	
C	LTE: QPSK	15.0 MHz	8.32	23.85	28.55	13.68	18.38	
D	LTE: QPSK	15.0 MHz	-	23.44	28.14	13.68	18.38	
Total			-	26.66	31.36	16.69	21.39	
C	LTE: QPSK	20.0 MHz	8.34	23.86	28.56	12.66	17.36	
D	LTE: QPSK	20.0 MHz	-	23.43	28.13	12.66	17.36	
Total			-	26.66	31.36	15.67	20.37	
C	NR: QPSK	5.0 MHz	8.34	23.96	28.66	17.58	22.28	
D	NR: QPSK	5.0 MHz	-	23.59	28.29	17.58	22.28	
Total			-	26.79	31.49	20.59	25.29	
C	NR: QPSK	10.0 MHz	8.35	23.38	28.08	14.85	19.55	
D	NR: QPSK	10.0 MHz	-	22.87	27.57	14.85	19.55	
Total			-	26.14	30.84	17.86	22.56	
C	NR: QPSK	15.0 MHz	8.42	23.38	28.08	14.16	18.86	
D	NR: QPSK	15.0 MHz	-	22.84	27.54	14.16	18.86	
Total			-	26.13	30.83	17.17	21.87	
C	NR: QPSK	20.0 MHz	8.41	23.39	28.09	14.54	19.24	
D	NR: QPSK	20.0 MHz	-	22.94	27.64	14.54	19.24	
Total			-	26.18	30.88	17.55	22.25	
C	NR: QPSK	25.0 MHz	8.30	23.44	28.14	10.71	15.41	
D	NR: QPSK	25.0 MHz	-	22.94	27.64	10.71	15.41	
Total			-	26.21	30.91	13.72	18.42	
C	NR: QPSK	30.0 MHz	8.38	23.46	28.16	9.73	14.43	
D	NR: QPSK	30.0 MHz	-	22.95	27.65	9.73	14.43	
Total			-	26.22	30.92	12.74	17.44	
C	NR: QPSK	40.0 MHz	8.31	23.42	28.12	8.65	13.35	
D	NR: QPSK	40.0 MHz	-	22.95	27.65	8.65	13.35	
Total			-	26.20	30.90	11.66	16.36	



Top Channels

Antenna Gain (dBi)	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power				
			PAR (dB)	Channel Position T			
				Average Power			
Antenna Port				dBm	EIRP (dBm)	dBm/MHz	EIRP dBm/MHz
4.70							
C	LTE: QPSK	5.0 MHz	8.26	23.65	28.35	17.90	22.60
D	LTE: QPSK	5.0 MHz	-	23.20	27.90	17.90	22.60
Total			-	26.44	31.14	20.91	25.61
C	LTE: QPSK	10.0 MHz	8.29	23.63	28.33	14.65	19.35
D	LTE: QPSK	10.0 MHz	-	23.12	27.82	14.65	19.35
Total			-	26.39	31.09	17.66	22.36
C	LTE: QPSK	15.0 MHz	8.31	23.60	28.30	13.46	18.16
D	LTE: QPSK	15.0 MHz	-	23.15	27.85	13.46	18.16
Total			-	26.39	31.09	16.47	21.17
C	LTE: QPSK	20.0 MHz	8.32	23.60	28.30	12.51	17.21
D	LTE: QPSK	20.0 MHz	-	22.54	27.24	12.51	17.21
Total			-	26.11	30.81	15.52	20.22
C	NR: QPSK	5.0 MHz	8.32	23.64	28.34	17.35	22.05
D	NR: QPSK	5.0 MHz	-	23.29	27.99	17.35	22.05
Total			-	26.48	31.18	20.36	25.06
C	NR: QPSK	10.0 MHz	8.35	23.07	27.77	14.61	19.31
D	NR: QPSK	10.0 MHz	-	22.56	27.26	14.61	19.31
Total			-	25.83	30.53	17.62	22.32
C	NR: QPSK	15.0 MHz	8.43	23.12	27.82	14.26	18.96
D	NR: QPSK	15.0 MHz	-	22.57	27.27	14.26	18.96
Total			-	25.86	30.56	17.27	21.97
C	NR: QPSK	20.0 MHz	8.42	23.08	27.78	13.90	18.60
D	NR: QPSK	20.0 MHz	-	22.60	27.30	13.90	18.60
Total			-	25.86	30.56	16.91	21.61
C	NR: QPSK	25.0 MHz	8.34	23.16	27.86	10.35	15.05
D	NR: QPSK	25.0 MHz	-	22.63	27.33	10.35	15.05
Total			-	25.91	30.61	13.36	18.06
C	NR: QPSK	30.0 MHz	8.32	23.19	27.89	9.67	14.37
D	NR: QPSK	30.0 MHz	-	22.66	27.36	9.67	14.37
Total			-	25.94	30.64	12.68	17.38
C	NR: QPSK	40.0 MHz	8.30	23.28	27.98	8.40	13.10
D	NR: QPSK	40.0 MHz	-	22.73	27.43	8.40	13.10
Total			-	26.02	30.72	11.41	16.11

Remarks


1. Transmitter performance has been presented for top, mid, bottom channels across all antenna ports as represented in the following tables.
2. Typical performance and measurement plot data has been presented for reference.
3. All contiguous and non-contiguous (NC) plot data is on file and available upon request.



Antenna Port A Carrier Power - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B




Antenna Port A Pk-Av Ratio - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

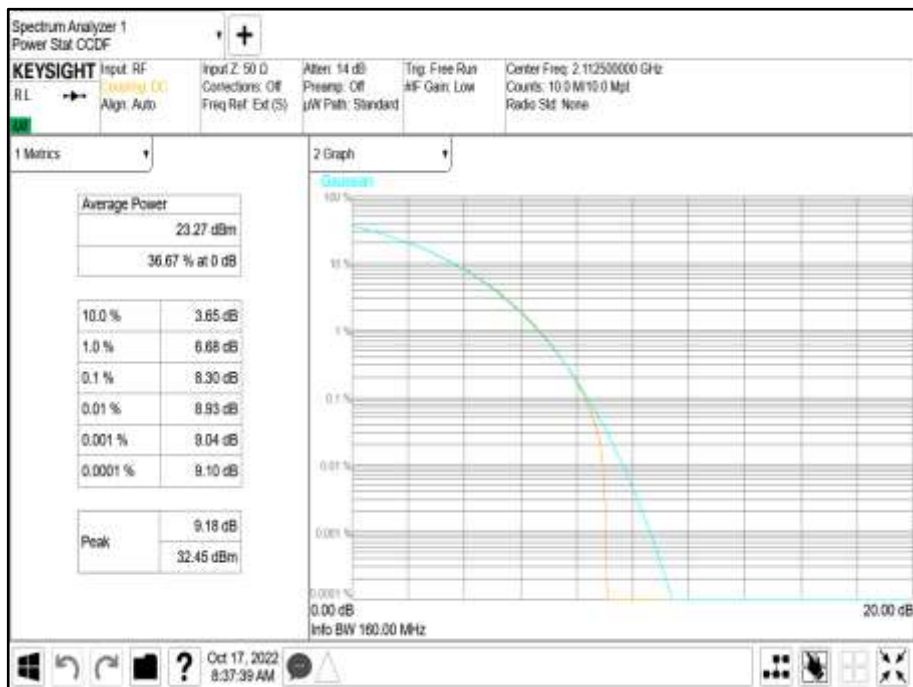



Antenna Port A PSD - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

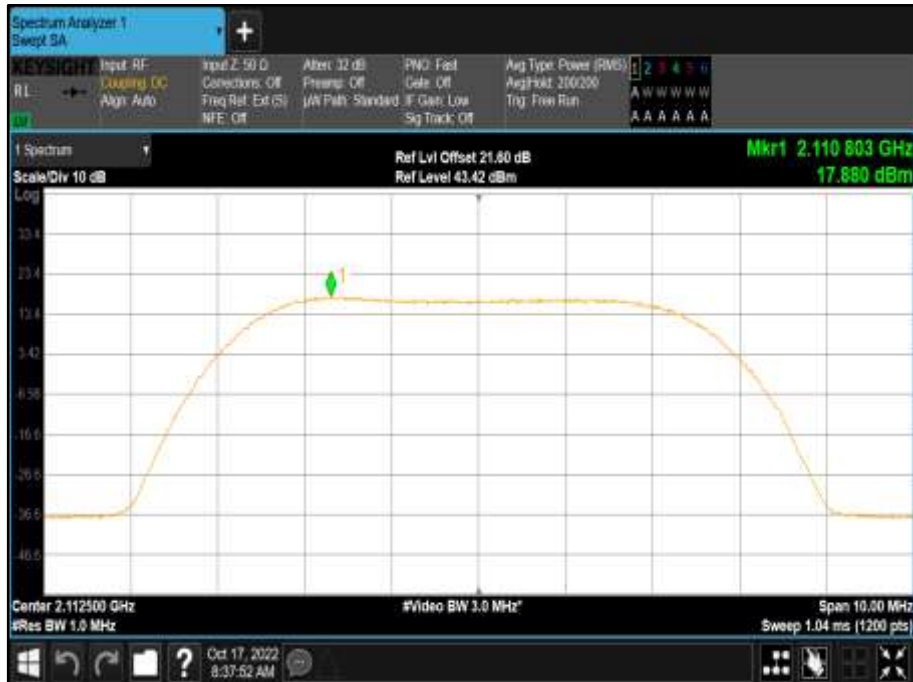

Antenna Port A Carrier Power - Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B





Antenna Port A Pk-Av Ratio - Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B



Antenna Port A PSD - Modulation LTE: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B






Antenna Port A Carrier Power - Modulation LTE: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B




Antenna Port A Pk-Av Ratio - Modulation LTE: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B

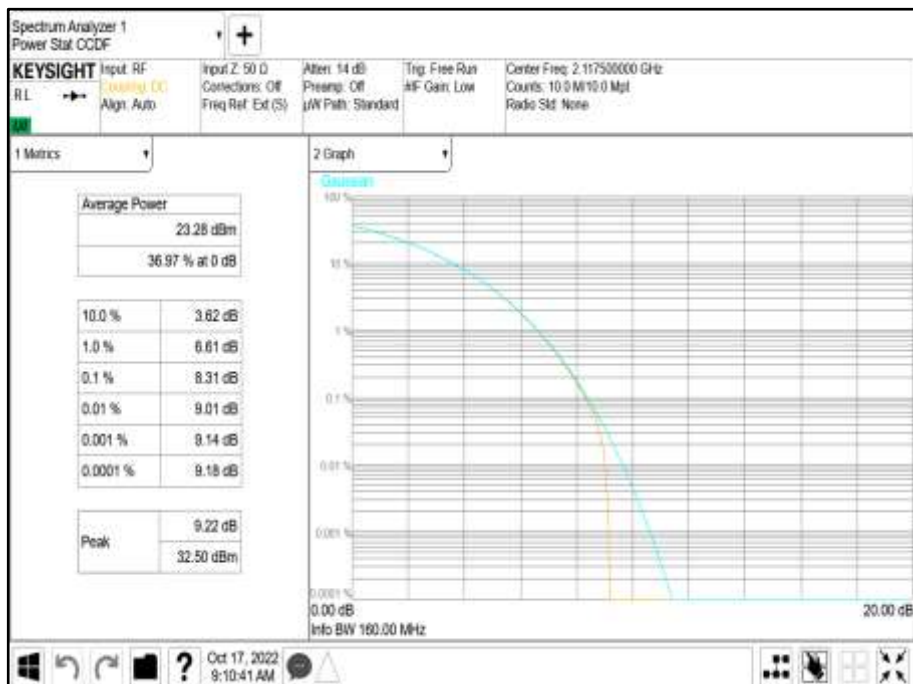



Antenna Port A PSD - Modulation LTE: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B

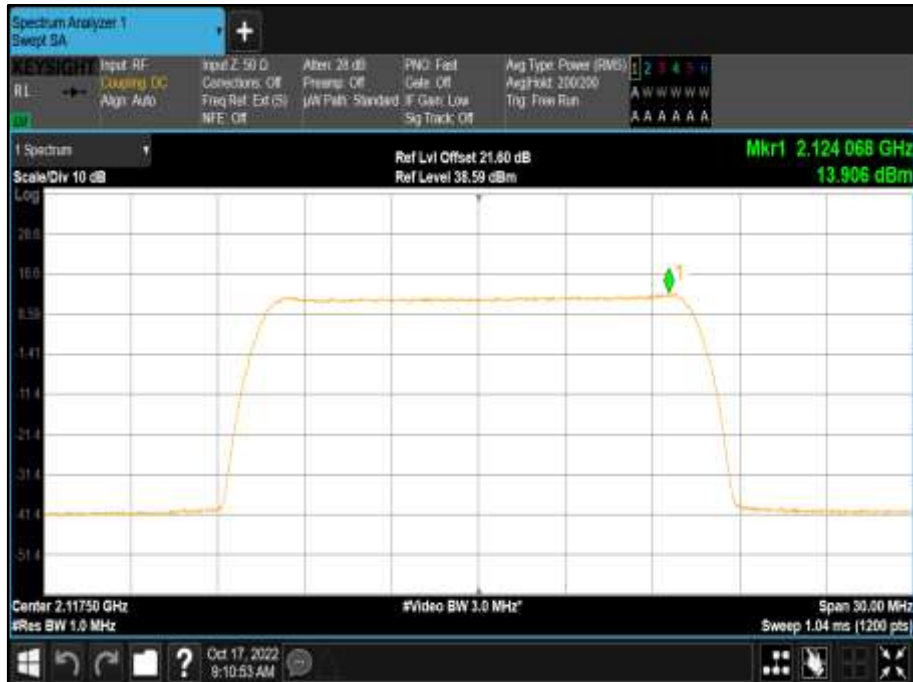


Antenna Port A Carrier Power - Modulation LTE: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B





Antenna Port A Pk-Av Ratio - Modulation LTE: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B

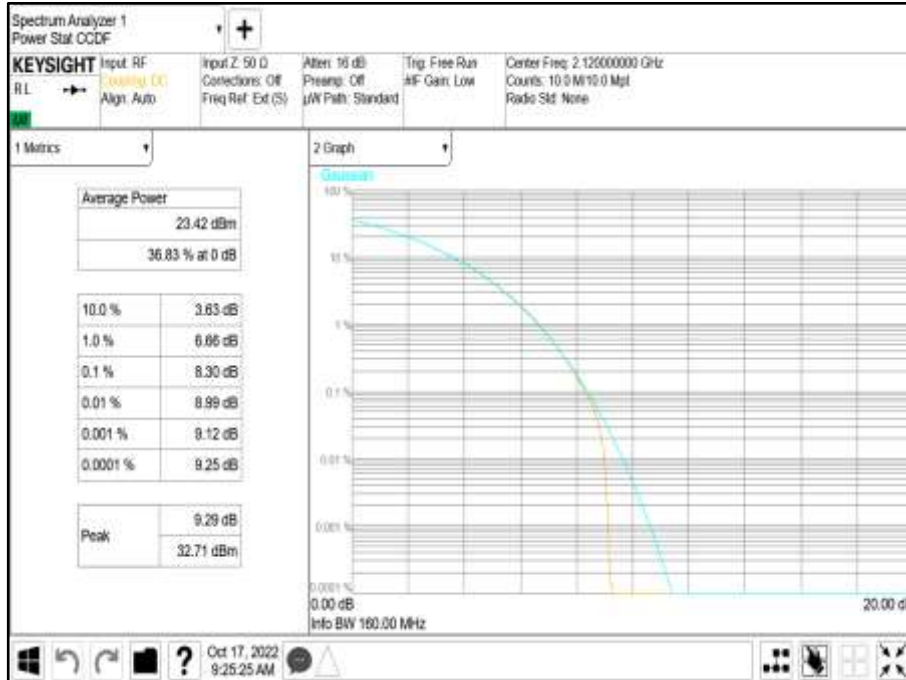


Antenna Port A PSD - Modulation LTE: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B






Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

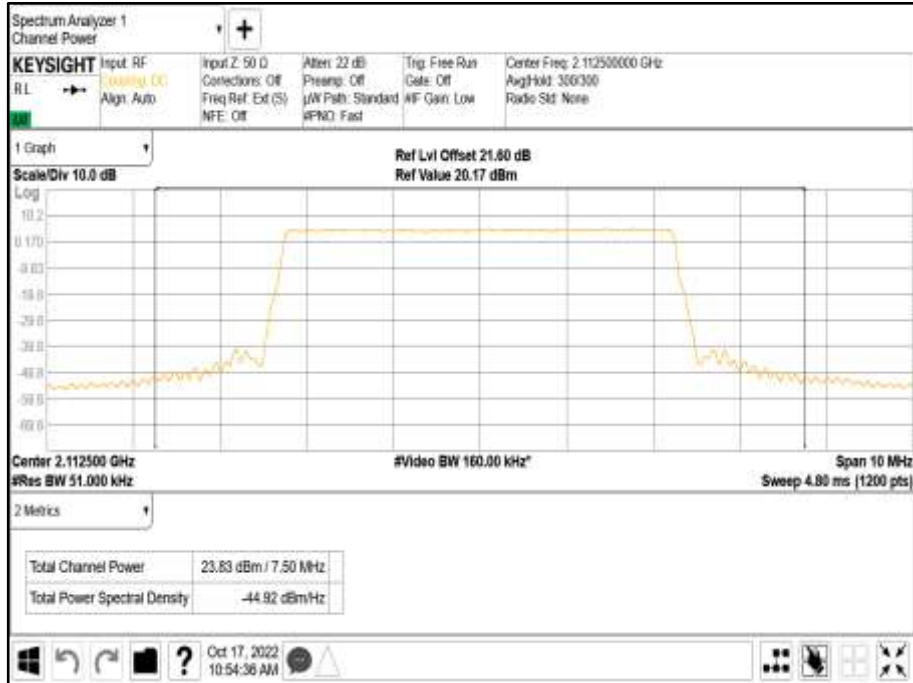


Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

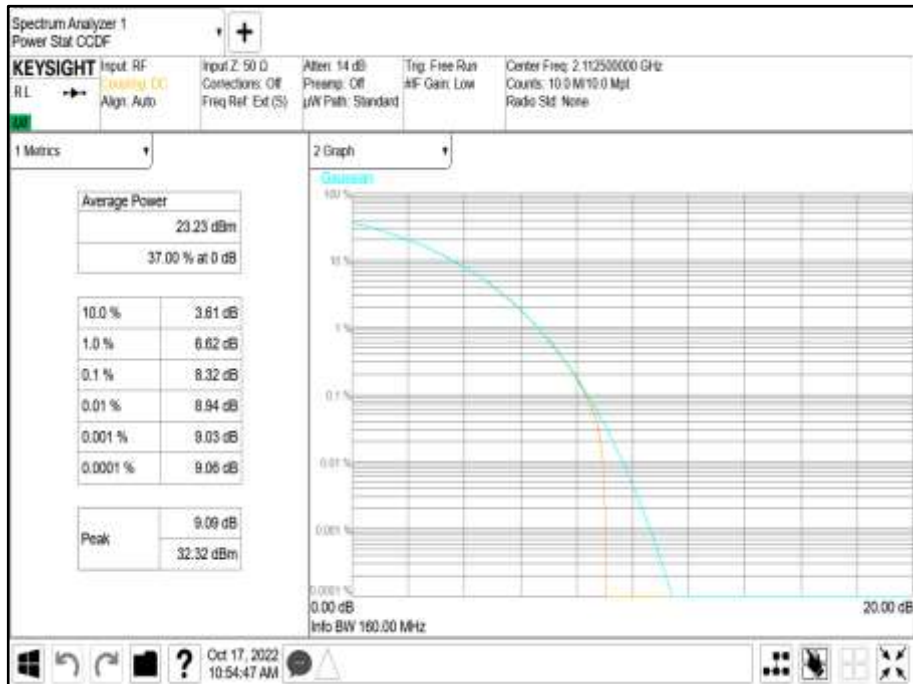



Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B

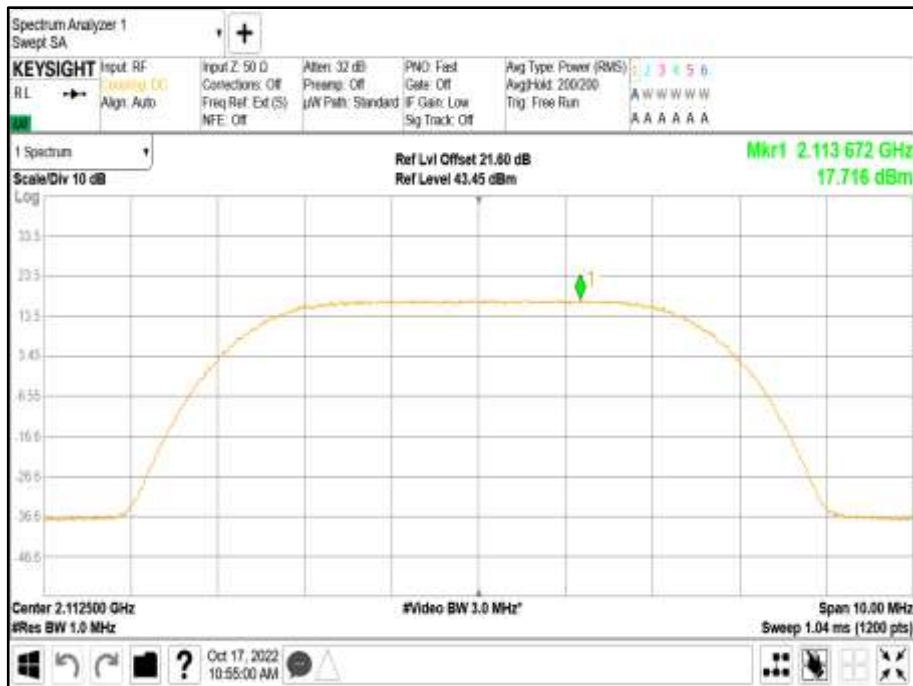

Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B






Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B



Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 10.0 MHz - Channel Position B

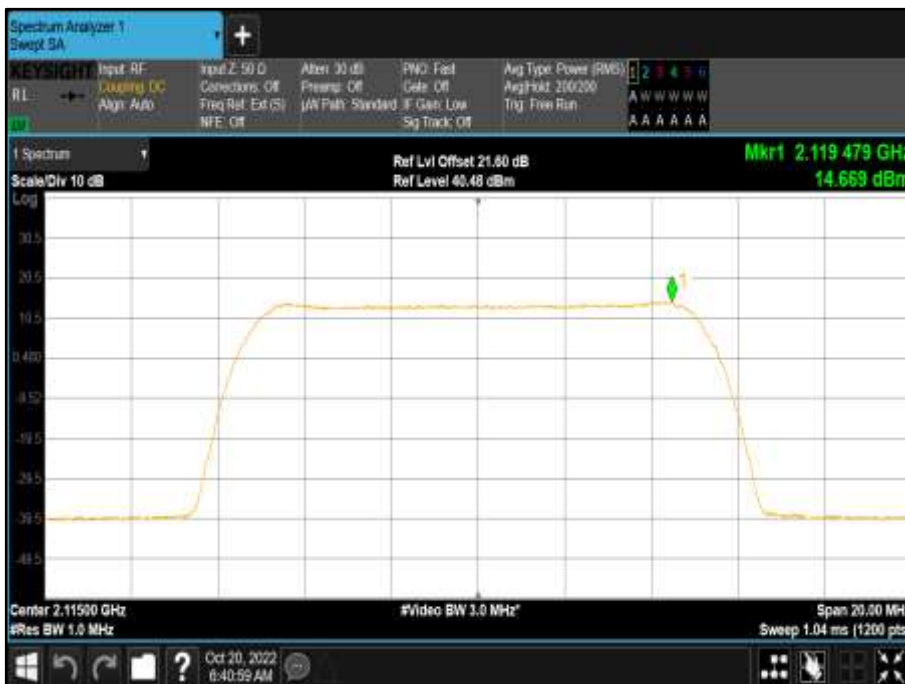




Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B




Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B

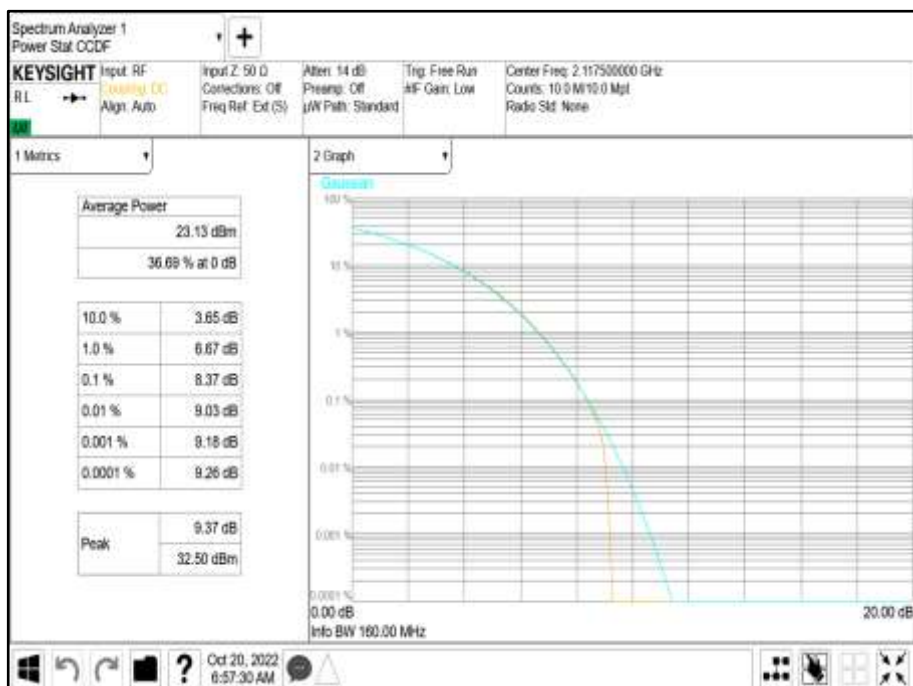



Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 15.0 MHz - Channel Position B

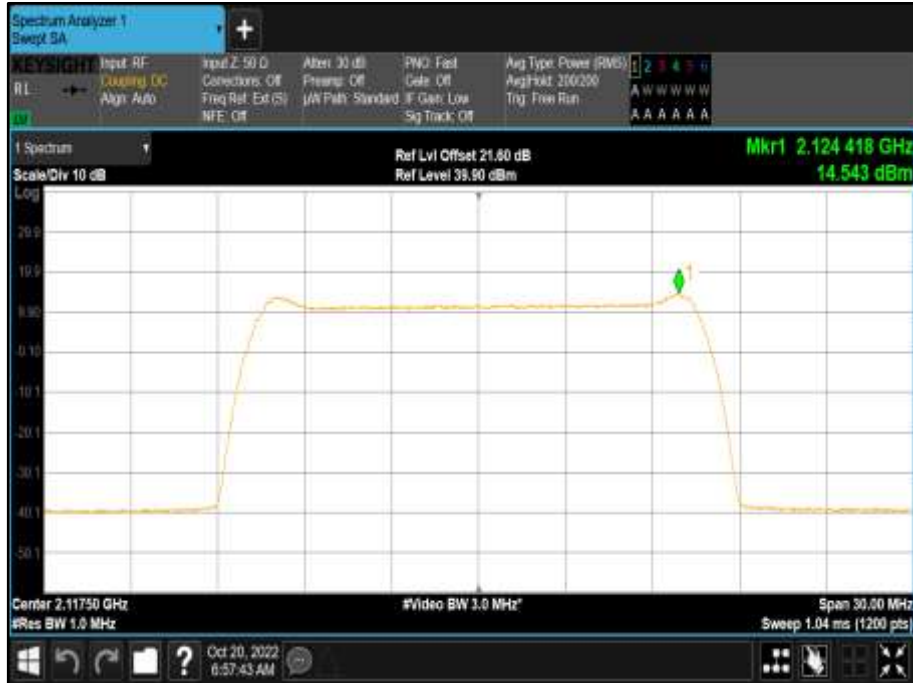


Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B






Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B

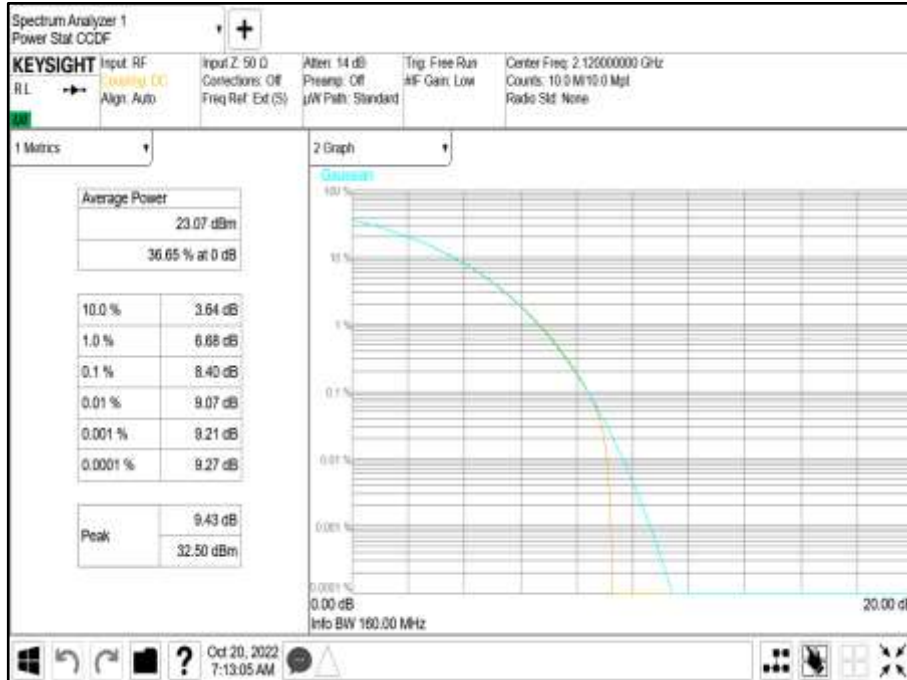

Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 20.0 MHz - Channel Position B

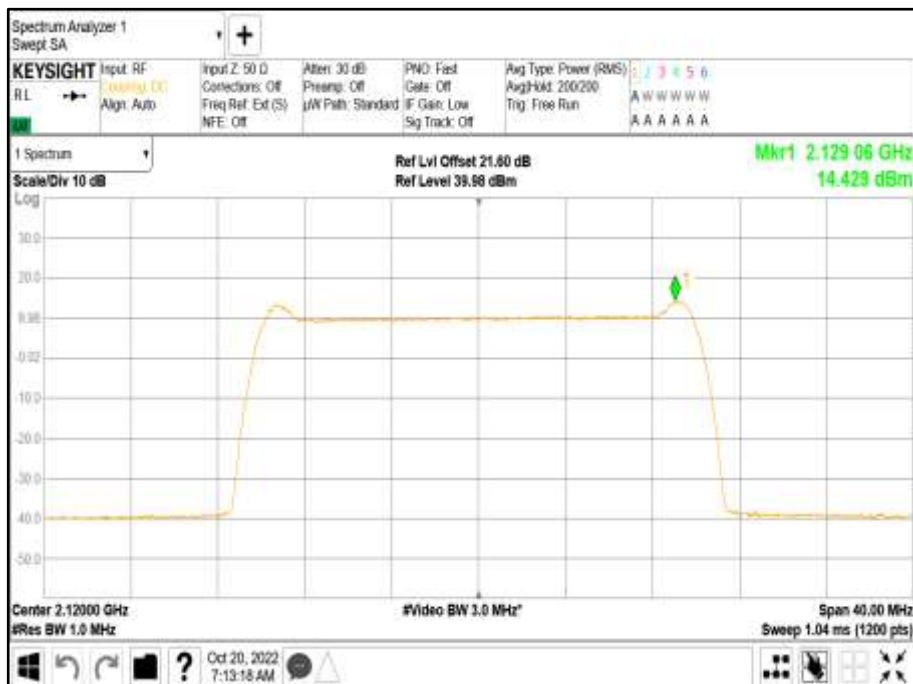




Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 25.0 MHz - Channel Position B



Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 25.0 MHz - Channel Position B

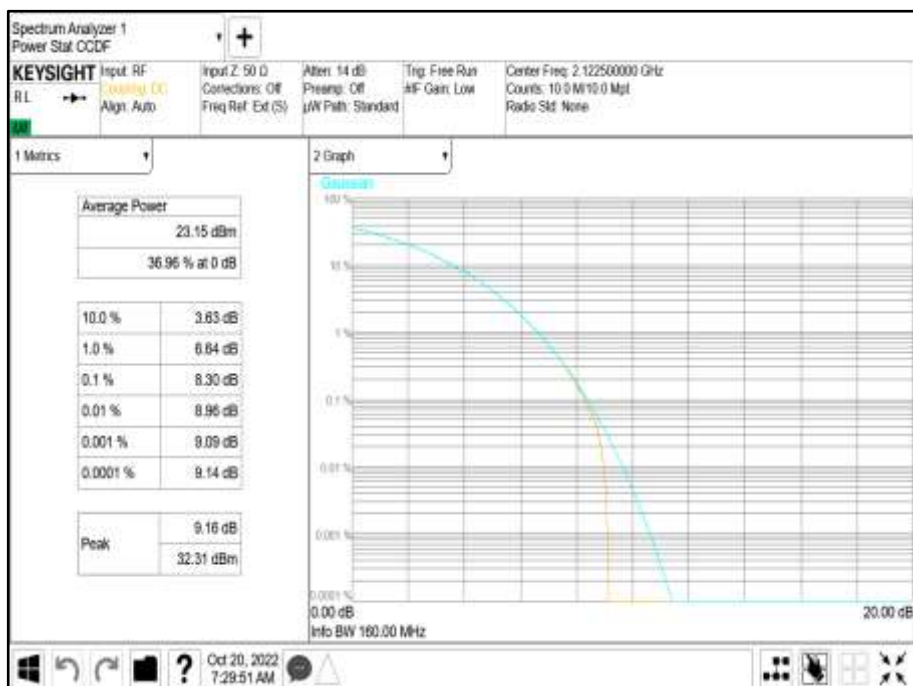




Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 25.0 MHz - Channel Position B



Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 30.0 MHz - Channel Position B

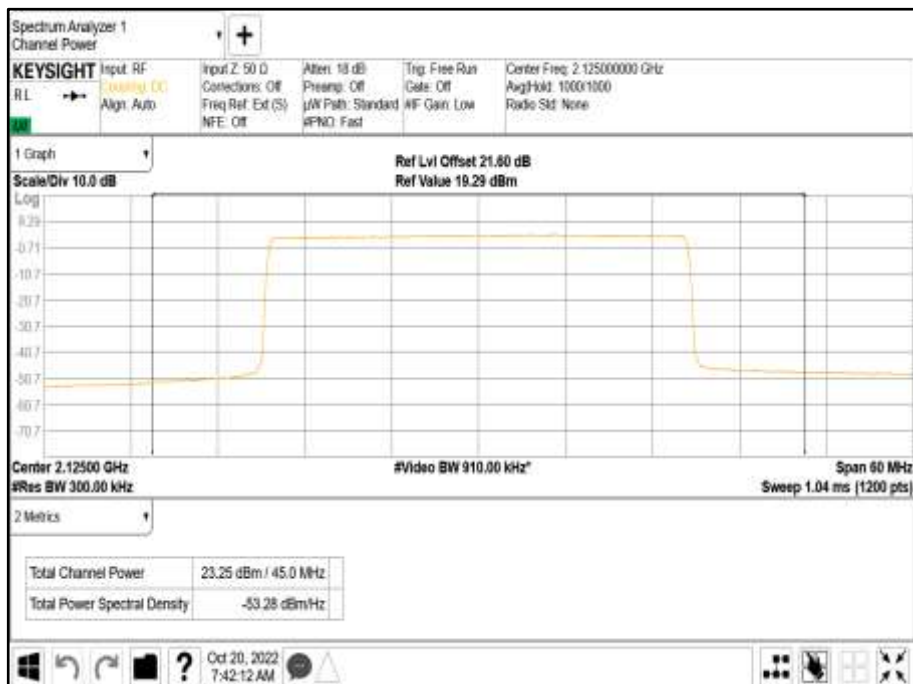



Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 30.0 MHz - Channel Position B



Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 30.0 MHz - Channel Position B






Antenna Port A Carrier Power - Modulation NR: QPSK - Carrier Bandwidth 40.0 MHz - Channel Position B



Antenna Port A Pk-Av Ratio - Modulation NR: QPSK - Carrier Bandwidth 40.0 MHz - Channel Position B

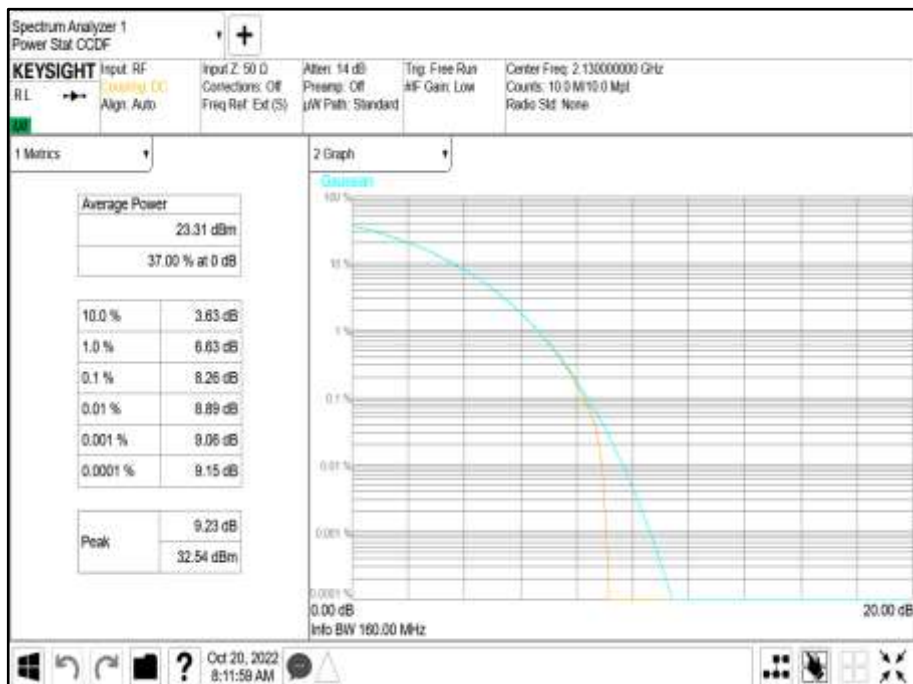



Antenna Port A PSD - Modulation NR: QPSK - Carrier Bandwidth 40.0 MHz - Channel Position B





Configuration B

Maximum Output Power 23.00 dBm / Port

Bottom Channels

Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power	
			Channel Position B	
			Average Power	
			dBm	EIRP (dBm)
A	LTE	5.0+5.0 MHz	23.81	28.11
B	LTE	5.0+5.0 MHz	23.41	27.71
Total			26.62	30.92
A	LTE	20.0+20.0 MHz	23.41	27.71
B	LTE	20.0+20.0 MHz	23.05	27.35
Total			26.24	30.54
A	NR	5.0+5.0 MHz	23.28	27.58
B	NR	5.0+5.0 MHz	22.87	27.17
Total			26.09	30.39
A	NR	40.0+40.0 MHz	23.26	27.56
B	NR	40.0+40.0 MHz	22.82	27.12
Total			26.06	30.36
A	NR + LTE	5.0+5.0 MHz	23.33	27.63
B	NR + LTE	5.0+5.0 MHz	22.90	27.20
Total			26.13	30.43
A	NR + LTE (NC)	5.0+5.0 MHz	23.38	27.68
B	NR + LTE (NC)	5.0+5.0 MHz	22.94	27.24
Total			26.18	30.48

Mid Channels

Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power	
			Channel Position M	
			Average Power	
			dBm	EIRP (dBm)
A	LTE	5.0+5.0 MHz	24.01	28.31
B	LTE	5.0+5.0 MHz	23.51	27.81
Total			26.78	31.08
A	LTE	20.0+20.0 MHz	23.54	27.84
B	LTE	20.0+20.0 MHz	22.97	27.27
Total			26.27	30.57
A	NR	5.0+5.0 MHz	23.49	27.79
B	NR	5.0+5.0 MHz	23.00	27.30
Total			26.26	30.56
A	NR	40.0+40.0 MHz	23.25	27.55
B	NR	40.0+40.0 MHz	22.77	27.07
Total			26.03	30.33
A	NR + LTE	5.0+5.0 MHz	23.54	27.84
B	NR + LTE	5.0+5.0 MHz	23.03	27.33
Total			26.30	30.60
A	NR + LTE (NC)	5.0+5.0 MHz	23.38	27.68
B	NR + LTE (NC)	5.0+5.0 MHz	22.94	27.24
Total			26.18	30.48



Top Channels

Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power	
			Channel Position T	
			Average Power	
			dBm	EIRP (dBm)
A	LTE	5.0+5.0 MHz	23.69	27.99
B	LTE	5.0+5.0 MHz	23.19	27.49
Total			26.46	30.76
A	LTE	20.0+20.0 MHz	23.37	27.67
B	LTE	20.0+20.0 MHz	22.77	27.07
Total			26.09	30.39
A	NR	5.0+5.0 MHz	23.22	27.52
B	NR	5.0+5.0 MHz	22.71	27.01
Total			25.98	30.28
A	NR	40.0+40.0 MHz	23.30	27.60
B	NR	40.0+40.0 MHz	22.76	27.06
Total			26.05	30.35
A	NR + LTE	5.0+5.0 MHz	23.24	27.54
B	NR + LTE	5.0+5.0 MHz	22.76	27.06
Total			26.02	30.32
A	NR + LTE (NC)	5.0+5.0 MHz	23.38	27.68
B	NR + LTE (NC)	5.0+5.0 MHz	22.94	27.24
Total			26.18	30.48

Remarks

1. Two carrier transmitter performance is presented for both contiguous and non-contiguous (NC) configurations.
2. The plot results represent typical radio performance across all channels.
3. The highest power transmitter configuration is presented.
4. Plot data performance for all transmitter ports and channels are on file and available on request.



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B




Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 20.0+20.0 MHz - Channel Position B





Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B

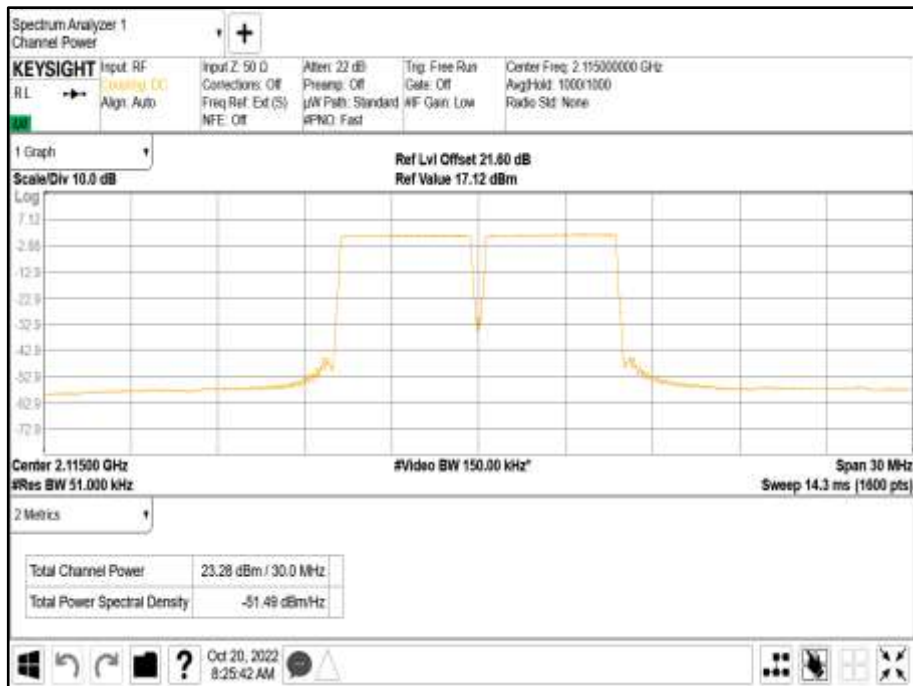

Antenna A - Modulation NR: QPSK - Carrier Bandwidth 40.0+40.0 MHz - Channel Position B






Antenna A - Modulation NR + LTE: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B



Antenna A - Modulation NR + LTE (NC): QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B

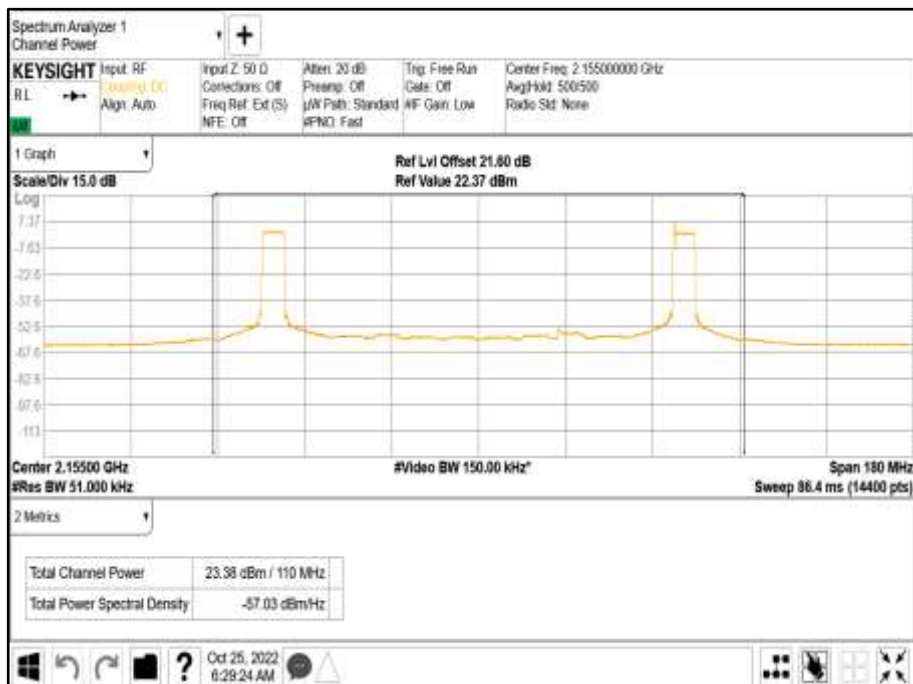



Configuration C

Maximum Output Power 23.00 dBm / Port

Bottom Channels

Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power	
			Channel Position B	
			Average Power	
			dBm	EIRP (dBm)
A	LTE	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.20	27.50
B	LTE	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.86	27.16
Total			26.04	30.34
A	LTE	15.0+15.0+15.0+15.0+15.0+15.0 MHz	23.21	27.51
B	LTE	15.0+15.0+15.0+15.0+15.0+15.0 MHz	22.78	27.08
Total			26.01	30.31
A	NR	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.21	27.51
B	NR	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.85	27.15
Total			26.04	30.34
A	NR	15.0+15.0+15.0+15.0+15.0+15.0 MHz	23.27	27.57
B	NR	15.0+15.0+15.0+15.0+15.0+15.0 MHz	22.81	27.11
Total			26.06	30.36
A	NR(3) + LTE(3)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.22	27.52
B	NR(3) + LTE(3)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.82	27.12
Total			26.03	30.33
A	NR(3) + LTE(3) (NC)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.34	27.64
B	NR(3) + LTE(3) (NC)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.92	27.22
Total			26.15	30.45

Mid Channels

Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power	
			Channel Position M	
			Average Power	
			dBm	EIRP (dBm)
A	LTE	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.41	27.71
B	LTE	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.91	27.21
Total			26.18	30.48
A	LTE	15.0+15.0+15.0+15.0+15.0+15.0 MHz	23.21	27.51
B	LTE	15.0+15.0+15.0+15.0+15.0+15.0 MHz	22.78	27.08
Total			26.01	30.31
A	NR	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.42	27.72
B	NR	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.99	27.29
Total			26.22	30.52
A	NR	15.0+15.0+15.0+15.0+15.0+15.0 MHz	23.27	27.57
B	NR	15.0+15.0+15.0+15.0+15.0+15.0 MHz	22.81	27.11
Total			26.06	30.36
A	NR(3) + LTE(3)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.44	27.74
B	NR(3) + LTE(3)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.96	27.26
Total			26.22	30.52
A	NR(3) + LTE(3) (NC)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.34	27.64
B	NR(3) + LTE(3) (NC)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.92	27.22
Total			26.15	30.45




Top Channels


Antenna	Modulation	Carrier Bandwidth	Peak to Average Ratio (PAR) / Output Power	
			Channel Position T	
			Average Power	
			dBm	EIRP (dBm)
A	LTE	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.32	27.62
B	LTE	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.81	27.11
Total			26.08	30.38
A	LTE	15.0+15.0+15.0+15.0+15.0+15.0 MHz	23.19	27.49
B	LTE	15.0+15.0+15.0+15.0+15.0+15.0 MHz	22.74	27.04
Total			25.98	30.28
A	NR	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.20	27.50
B	NR	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.65	26.95
Total			25.94	30.24
A	NR	15.0+15.0+15.0+15.0+15.0+15.0 MHz	23.27	27.57
B	NR	15.0+15.0+15.0+15.0+15.0+15.0 MHz	22.81	27.11
Total			26.06	30.36
A	NR(3) + LTE(3)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.13	27.43
B	NR(3) + LTE(3)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.60	26.90
Total			25.88	30.18
A	NR(3) + LTE(3) (NC)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	23.34	27.64
B	NR(3) + LTE(3) (NC)	5.0+5.0+5.0+5.0+5.0+5.0 MHz	22.92	27.22
Total			26.15	30.45



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B

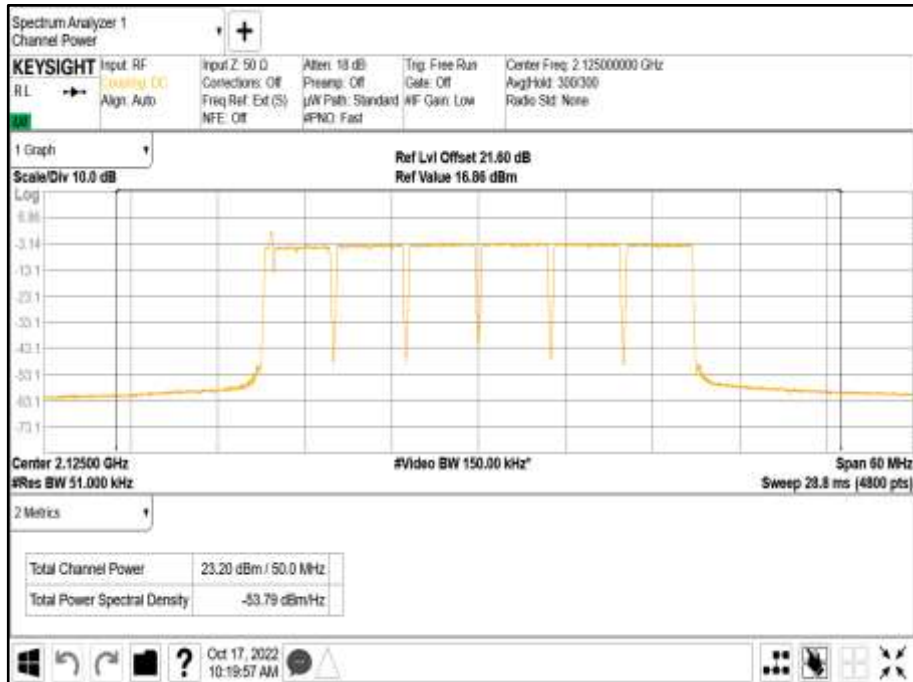

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 15.0+15.0+15.0+15.0+15.0+15.0 MHz - Channel Position B

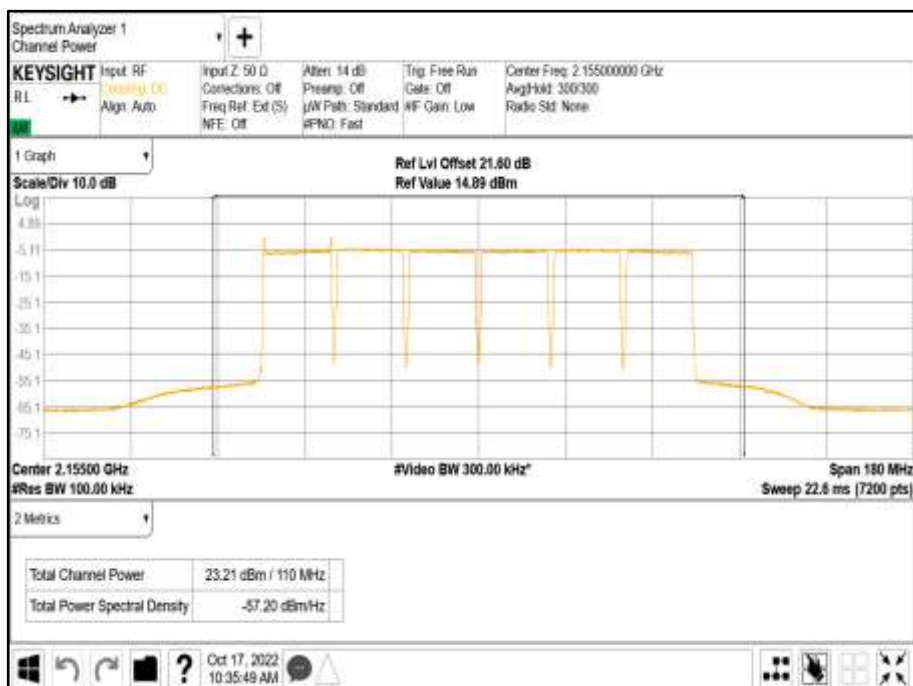




Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B



Antenna A - Modulation NR: QPSK - Carrier Bandwidth 15.0+15.0+15.0+15.0+15.0+15.0 MHz - Channel Position B

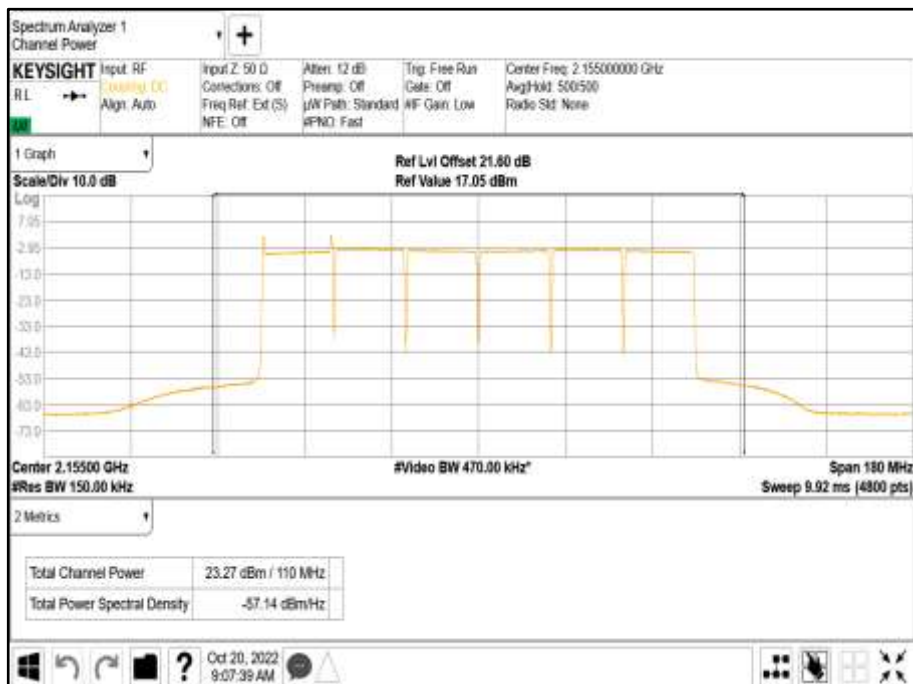



Antenna A - Modulation NR(3) + LTE(3): QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B



Antenna A - Modulation NR(3) + LTE(3) (NC): QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B





2.2 OCCUPIED BANDWIDTH

2.2.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.53
 FCC CFR 47 Part 2, Clause 2.1049

2.2.2 Date of Test and Modification State

12-October-2022 - Modification State 0

2.2.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.4 Environmental Conditions

Ambient Temperature 34.0°C
 Relative Humidity 24.1%

2.2.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 4.2 and 4.3. The Spectrum Analyser RBW was configured to be at least 1% of the channel bandwidth of the carrier to be measured.

Occupied bandwidth – power bandwidth (99 %) measurement procedure
 Subclause 5.4.4 of ANSI C63.26-2015 is applicable (wherein the recommendation is to use the 99 % power bandwidth function of a spectrum analyser).

2.2.6 Test Results

Configuration A

Maximum Output Power 23.00 dBm / Port


Antenna	Modulation	Carrier Bandwidth	Result (MHz)
			Channel Bandwidth
			99% Occupied Bandwidth
A	LTE: QPSK	LTE: 5.0 MHz	4.481
A	LTE: QPSK	LTE: 10.0 MHz	9.404
A	LTE: QPSK	LTE: 15.0 MHz	14.015
A	LTE: QPSK	LTE: 20.0 MHz	18.439
A	NR: QPSK	NR: 5.0 MHz	4.486
A	NR: QPSK	NR: 10.0 MHz	9.435
A	NR: QPSK	NR: 15.0 MHz	14.381
A	NR: QPSK	NR: 20.0 MHz	19.176
A	NR: QPSK	NR: 25.0 MHz	23.700
A	NR: QPSK	NR: 30.0 MHz	28.511
A	NR: QPSK	NR: 40.0 MHz	38.448

Remarks


Representative occupied bandwidth performance results presented. Plot data performance for all transmitter ports and channel positions are on file and available on request.



Antenna A - Modulation LTE: QPSK - LTE Carrier Bandwidth LTE: 5.0 MHz - Channel Position B

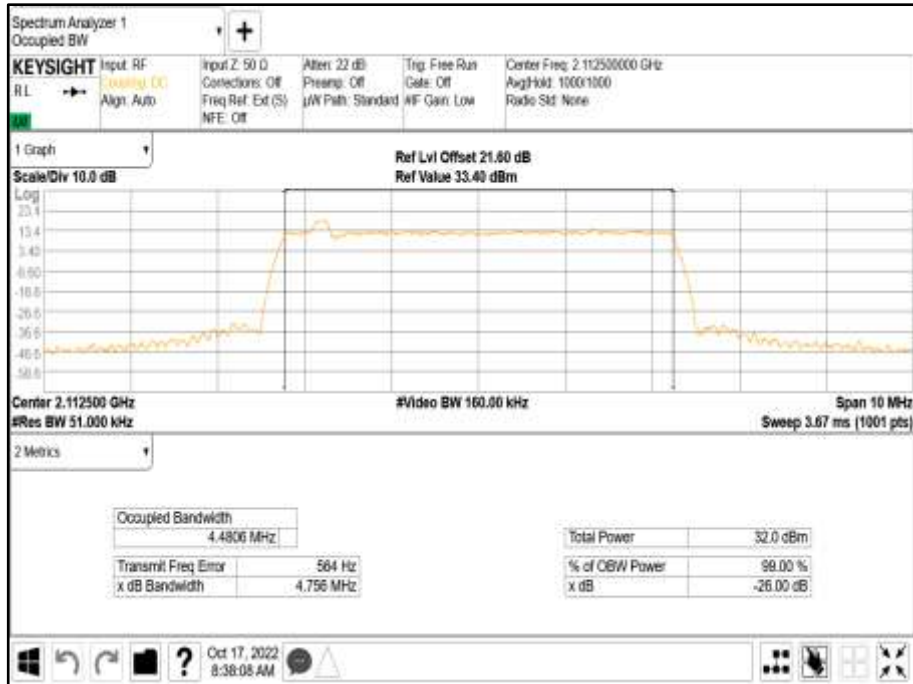


Antenna A - Modulation LTE: QPSK - LTE Carrier Bandwidth LTE: 10.0 MHz - Channel Position B

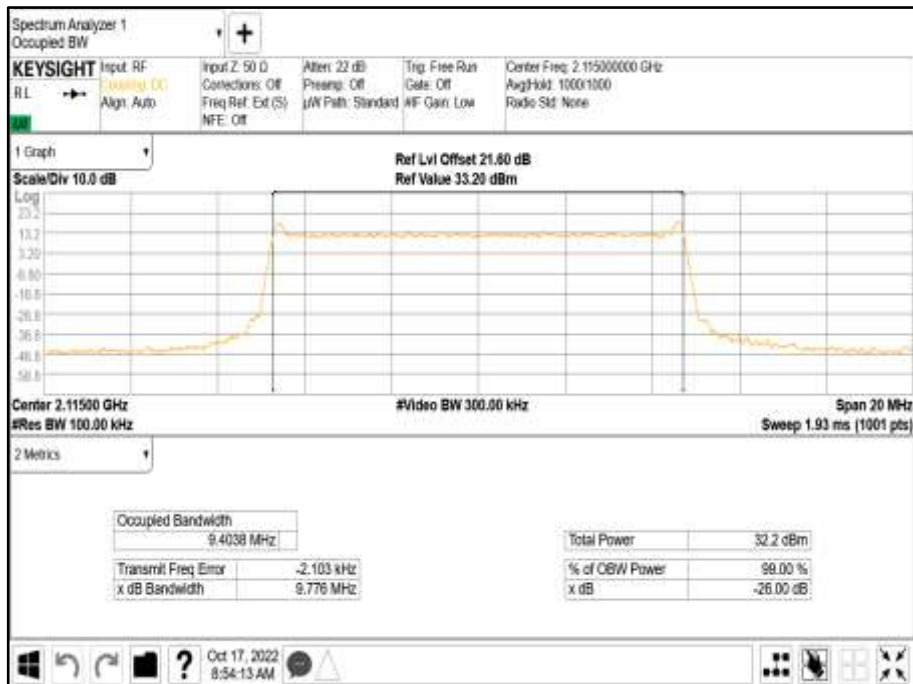




Antenna A - Modulation LTE: QPSK - LTE Carrier Bandwidth LTE: 15.0 MHz - Channel Position B

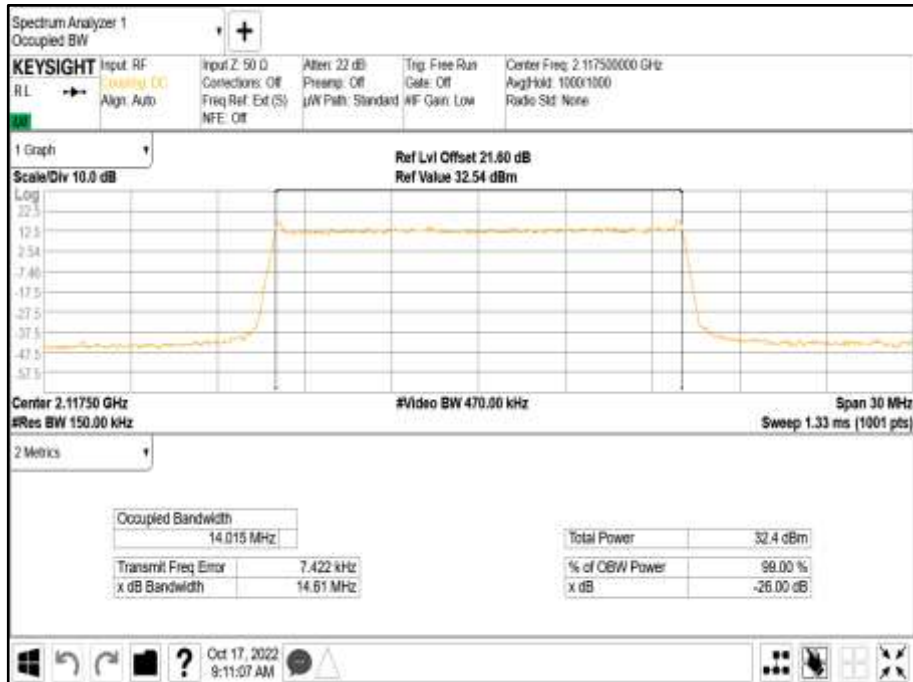


Antenna A - Modulation LTE: QPSK - LTE Carrier Bandwidth LTE: 20.0 MHz - Channel Position B

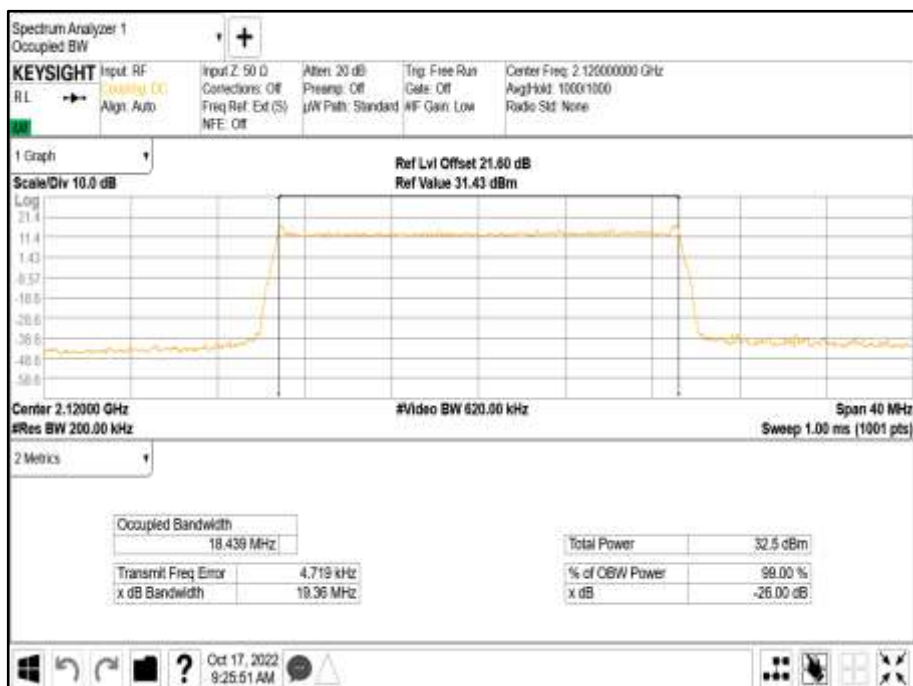




Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 5.0 MHz - Channel Position B

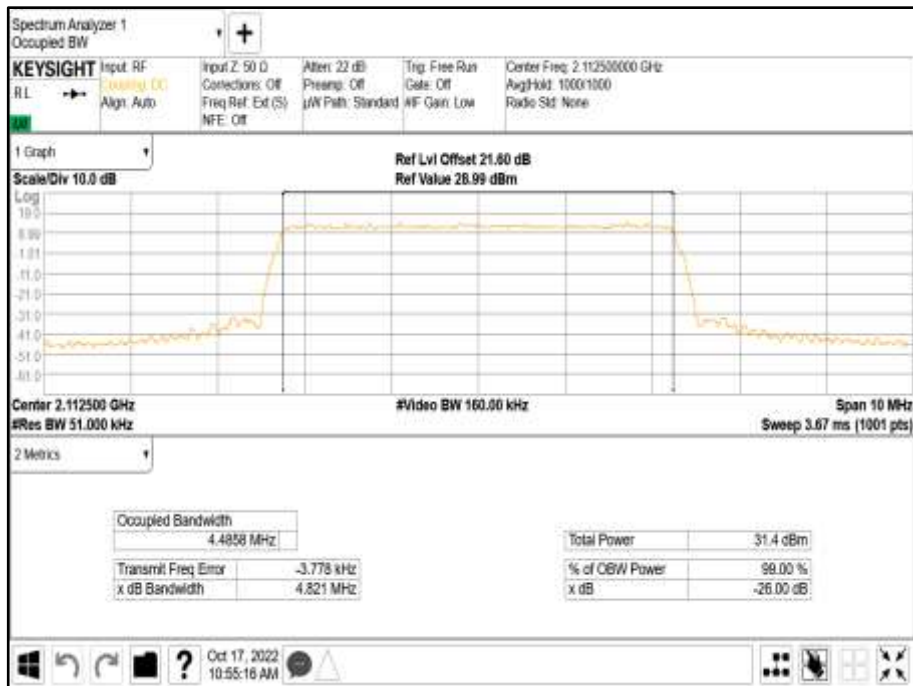


Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 10.0 MHz - Channel Position B

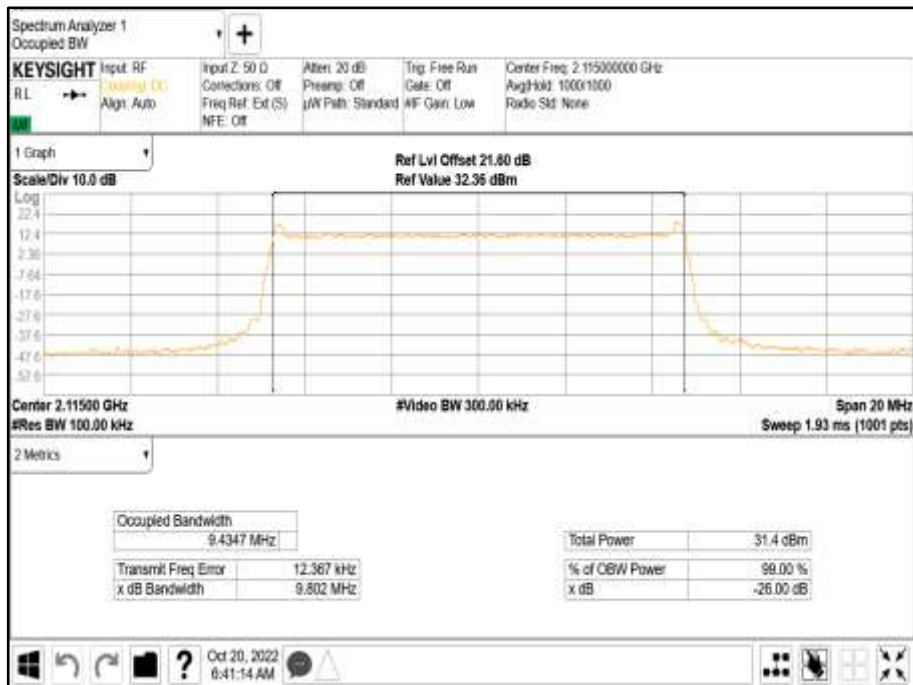




Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 15.0 MHz - Channel Position B

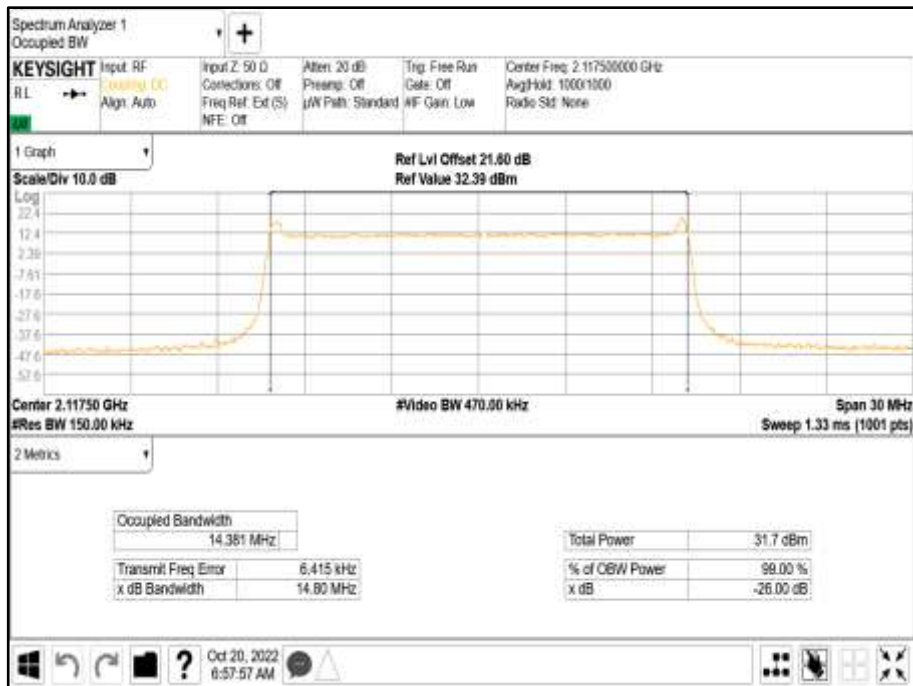


Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 20.0 MHz - Channel Position B

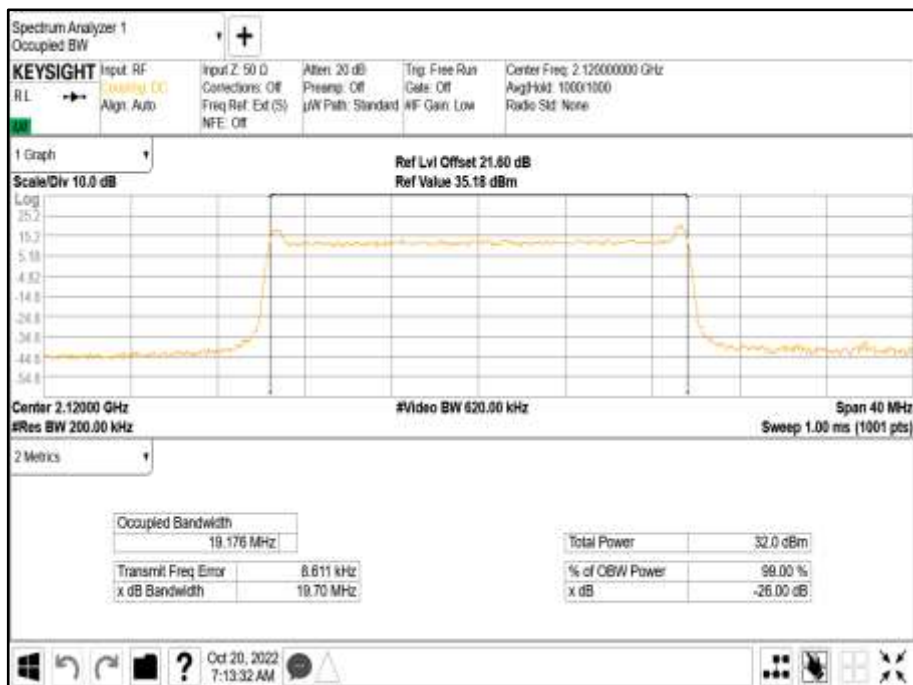




Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 25.0 MHz - Channel Position B

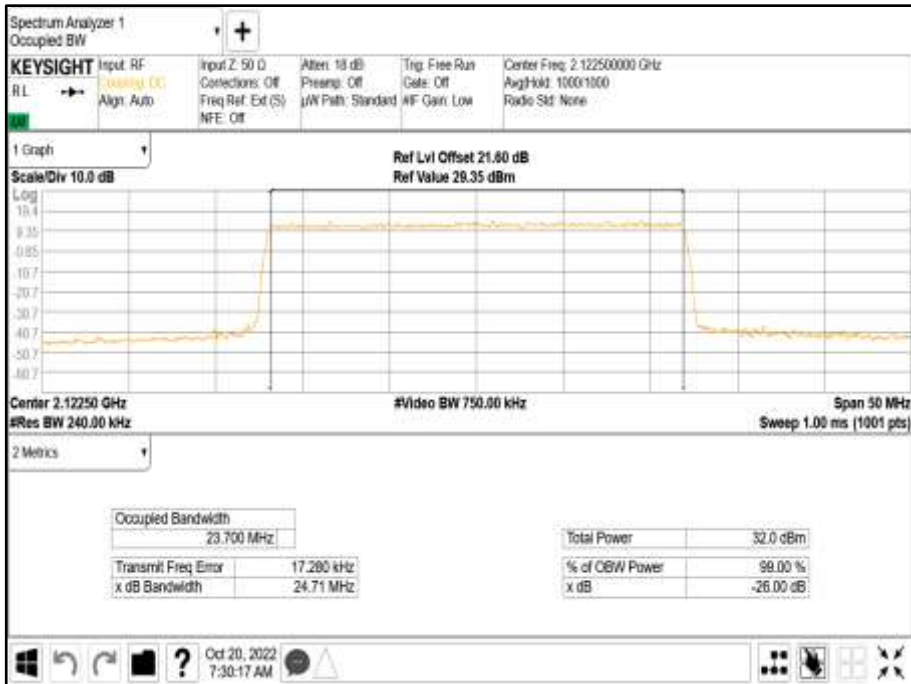


Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 30.0 MHz - Channel Position B

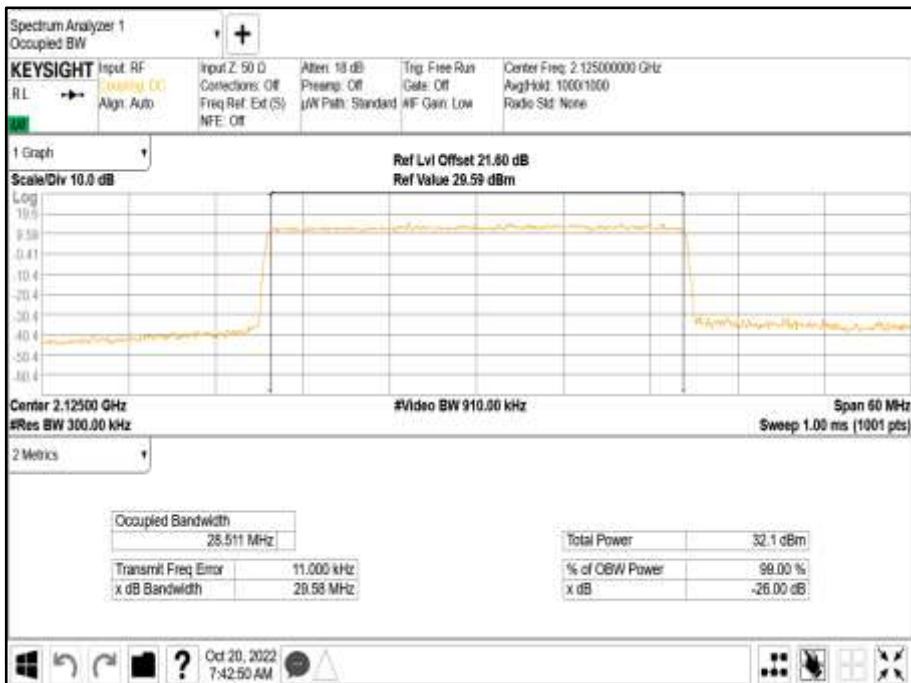



Antenna A - Modulation NR: QPSK - LTE Carrier Bandwidth NR: 40.0 MHz - Channel Position B

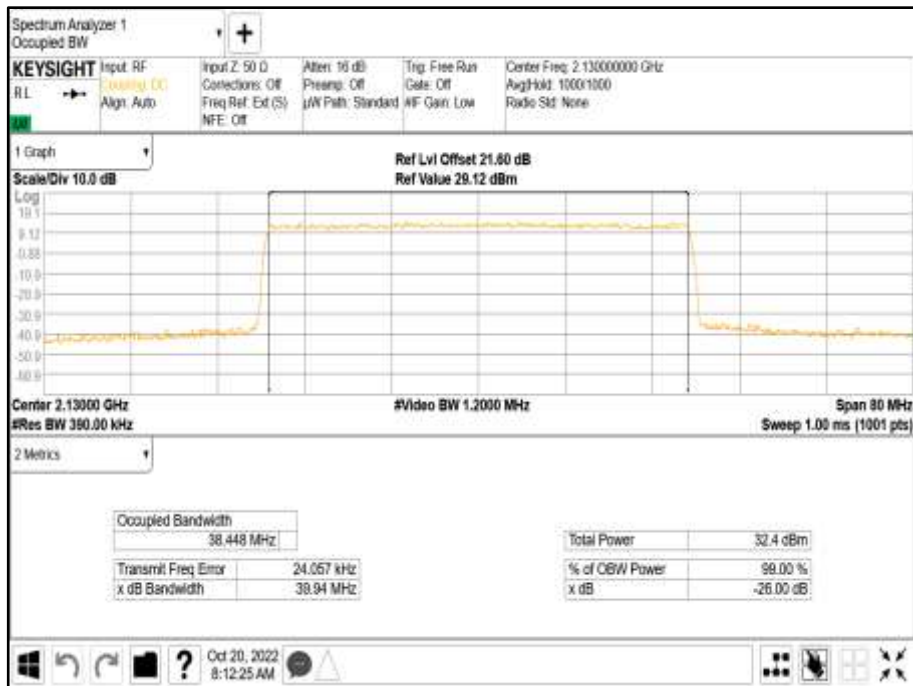



2.3 BAND EDGE

2.3.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.53
 FCC CFR 47 Part 2, Clause 2.1051

2.3.2 Date of Test and Modification State

13, 14 and 16-October-2022 - Modification State 0

2.3.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.4 Environmental Conditions

Ambient Temperature 33.0 - 34.0°C
 Relative Humidity 23.8 - 24.2%

2.3.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.0.

Band Edge measurements were used an Integration Bandwidth of at least 1% of the measured 26dB Bandwidth.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \text{Log}(N)$, where N is equal to the number of MIMO antenna ports.

For dual port, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$.

2.3.6 Test Results

Configuration A

Maximum Output Power 23.00 dBm / Port

Antenna	Modulation	Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	LTE: QPSK	LTE: 5.0 MHz	2,112.5	2,197.5
A	LTE: QPSK	LTE: 10.0 MHz	2,115.0	2,195.0
A	LTE: QPSK	LTE: 15.0 MHz	2,117.5	2,192.5
A	LTE: QPSK	LTE: 20.0 MHz	2,120.0	2,190.0
A	NR: QPSK	NR: 5.0 MHz	2,112.5	2,197.5
A	NR: QPSK	NR: 10.0 MHz	2,115.0	2,195.0
A	NR: QPSK	NR: 15.0 MHz	2,117.5	2,192.5
A	NR: QPSK	NR: 20.0 MHz	2,120.0	2,190.0
A	NR: QPSK	NR: 25.0 MHz	2,122.5	2,187.5
A	NR: QPSK	NR: 30.0 MHz	2,125.0	2,185.0
A	NR: QPSK	NR: 40.0 MHz	2,130.0	2,180.0




Remarks

1. Bandedge data was captured from the transmit port with maximum measured power.
2. Worst case bandedge data presented.

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 5.0 MHz - Channel Position B




Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 5.0 MHz - Channel Position T

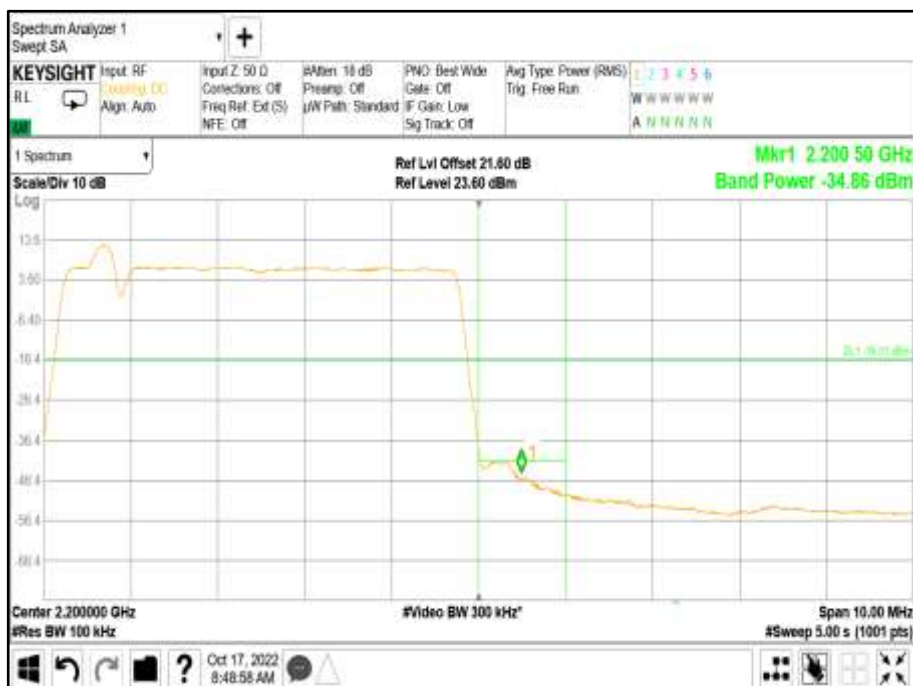





Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 10.0 MHz - Channel Position B

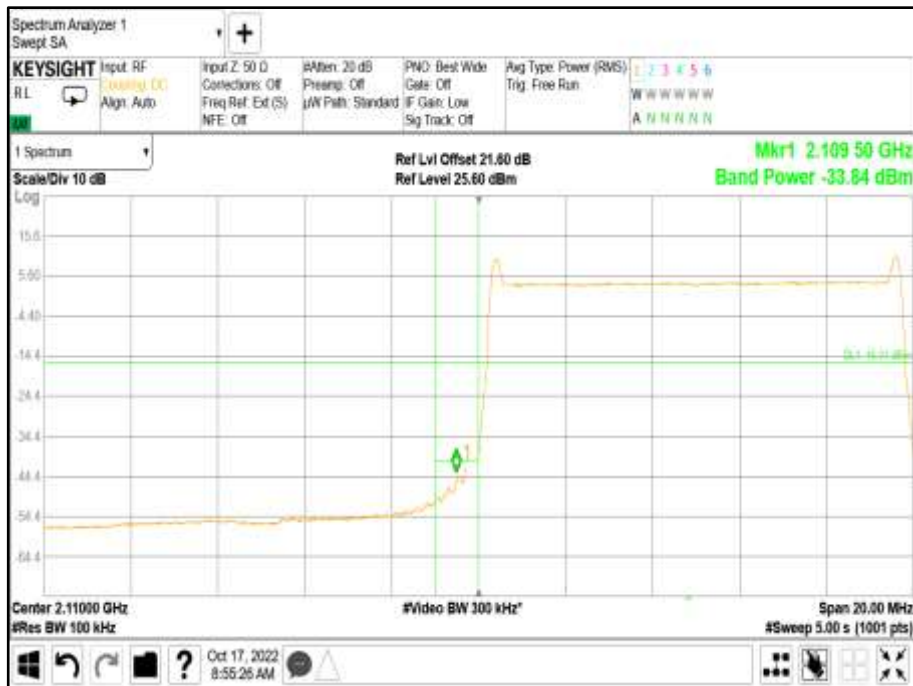


Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 10.0 MHz - Channel Position T

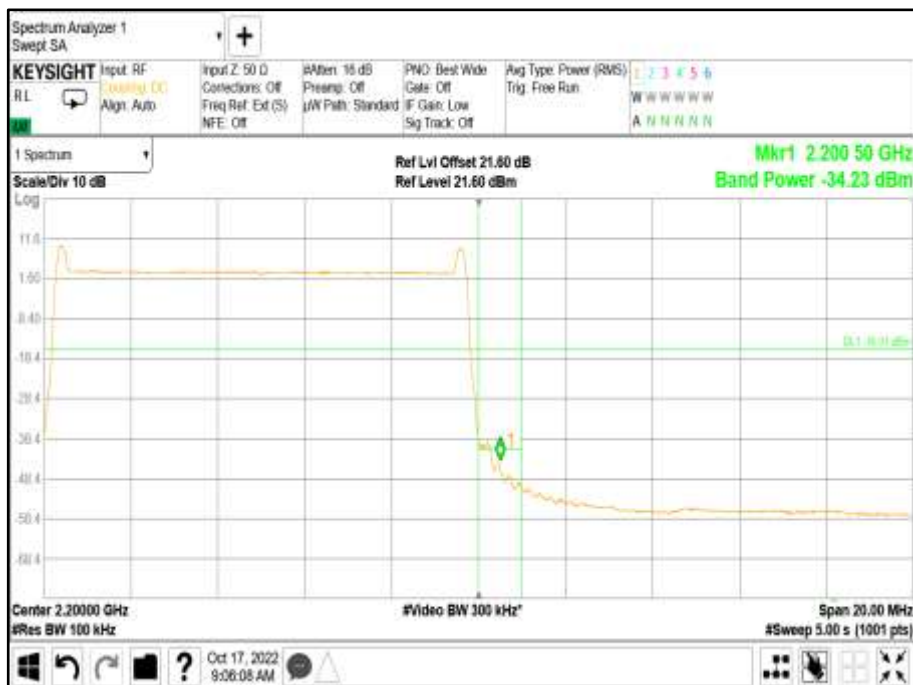


Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 15.0 MHz - Channel Position B

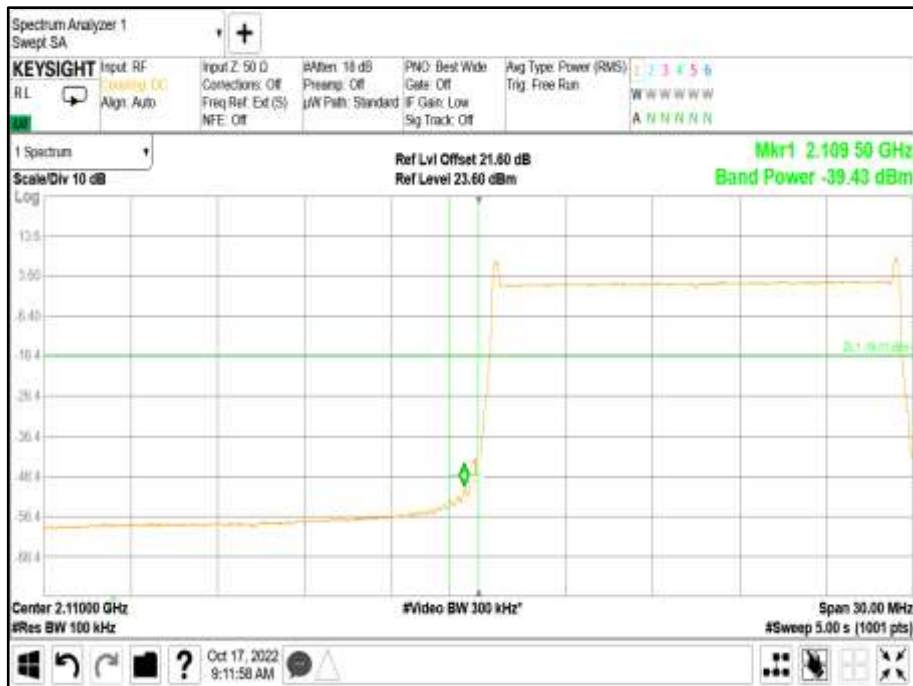

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 15.0 MHz - Channel Position T

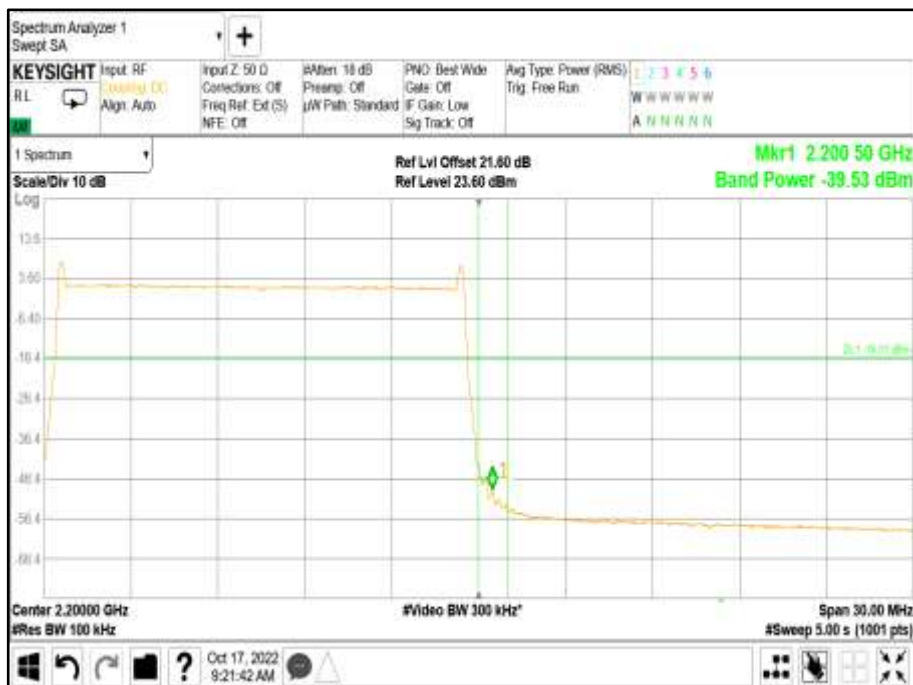


Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 20.0 MHz - Channel Position B

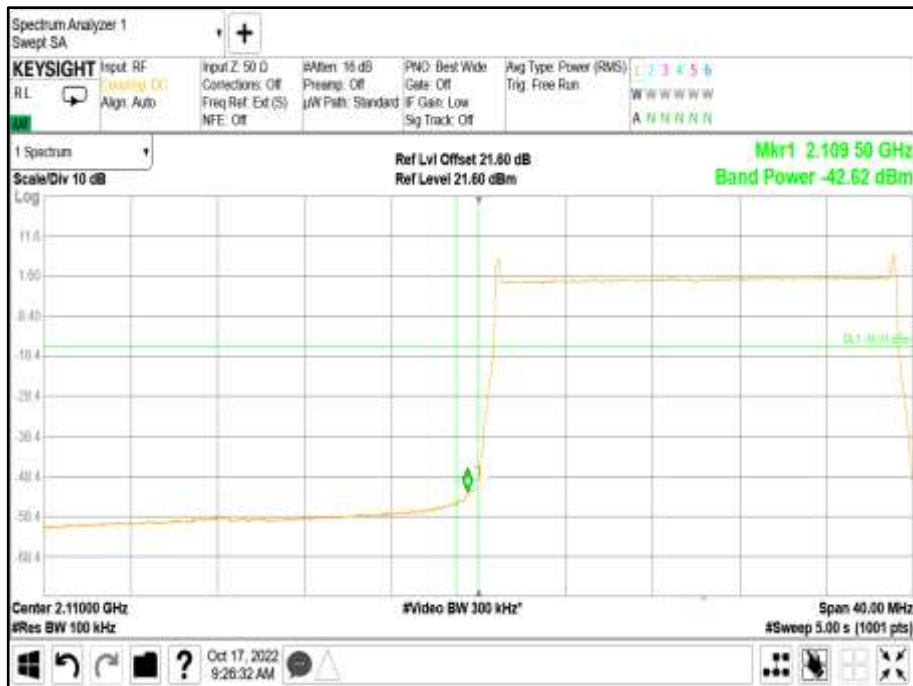


Antenna A - Modulation LTE: QPSK - Carrier Bandwidth LTE: 20.0 MHz - Channel Position T



Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 5.0 MHz - Channel Position B

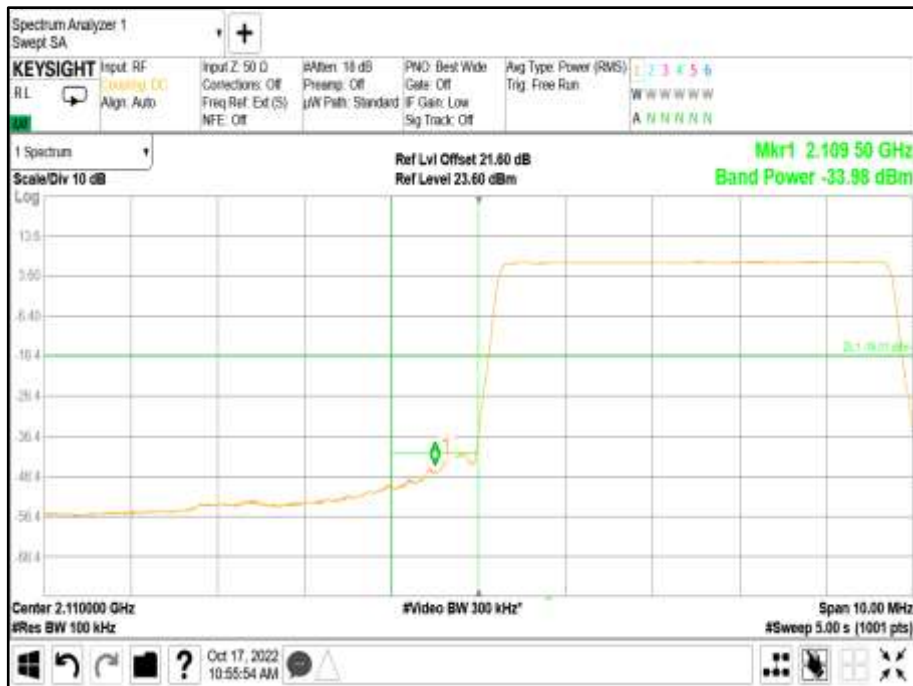


Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 5.0 MHz - Channel Position T

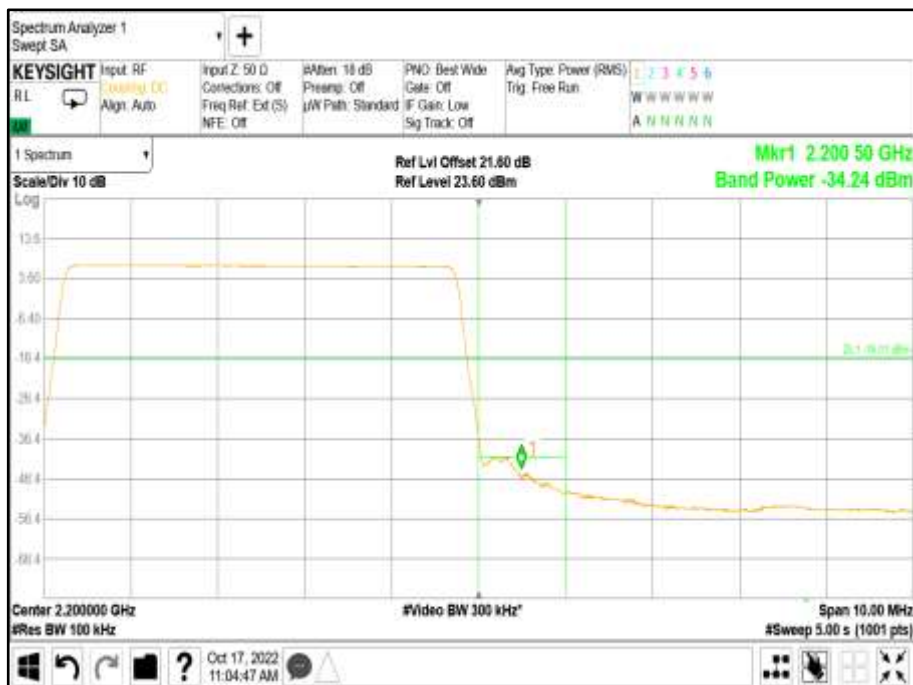



Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 10.0 MHz - Channel Position B

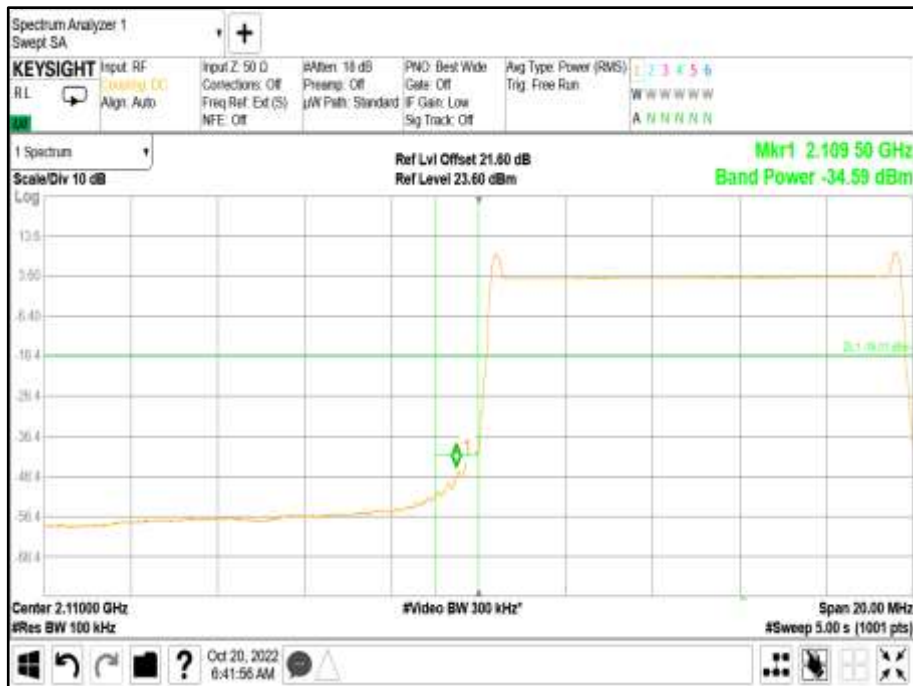


Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 10.0 MHz - Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 15.0 MHz - Channel Position B

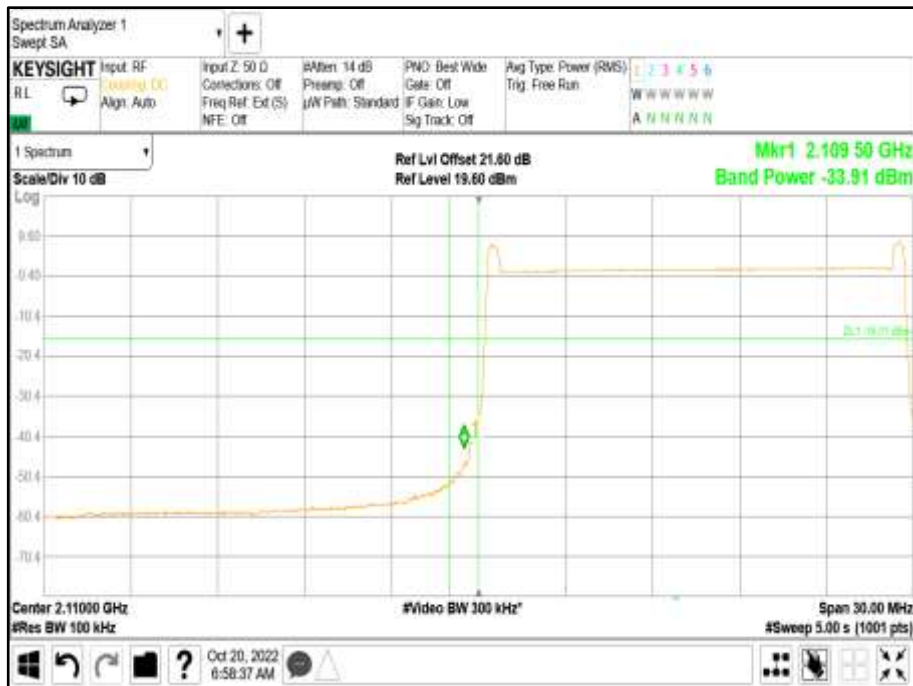

Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 15.0 MHz - Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 20.0 MHz - Channel Position B




Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 20.0 MHz - Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 25.0 MHz - Channel Position B

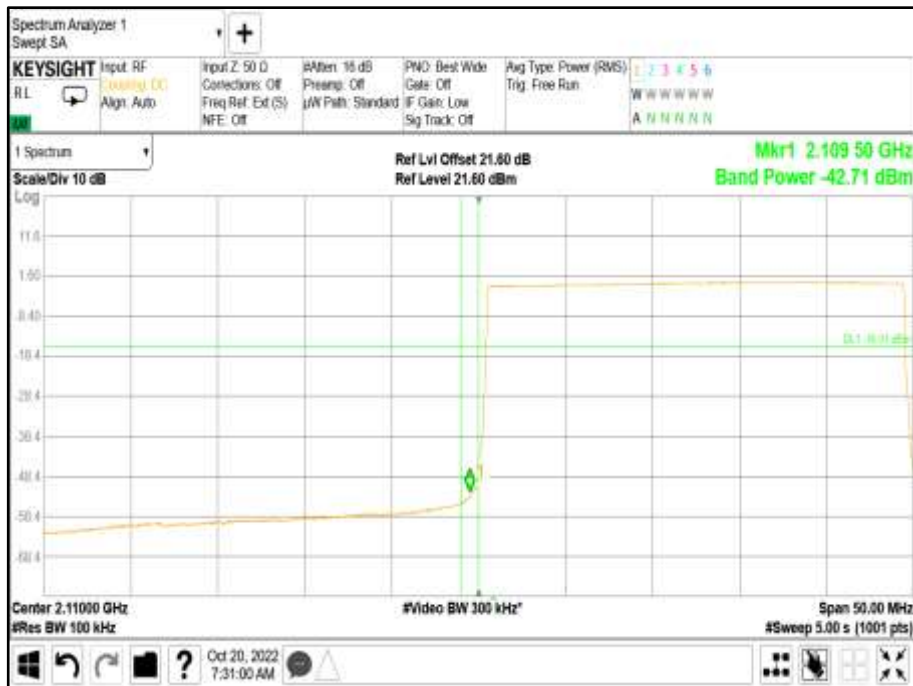


Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 25.0 MHz - Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 30.0 MHz - Channel Position B

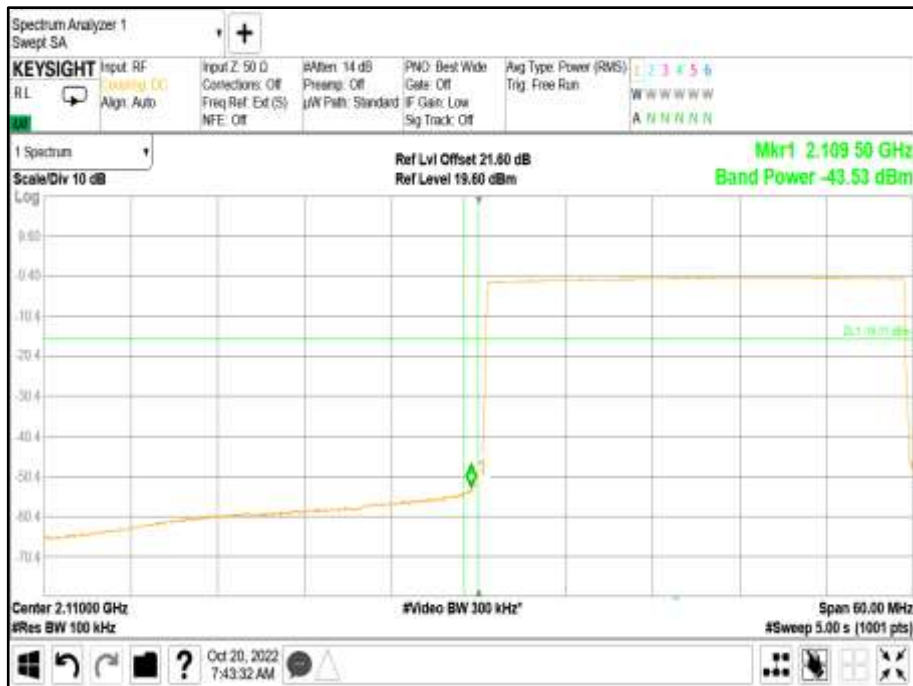


Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 30.0 MHz - Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 40.0 MHz - Channel Position B

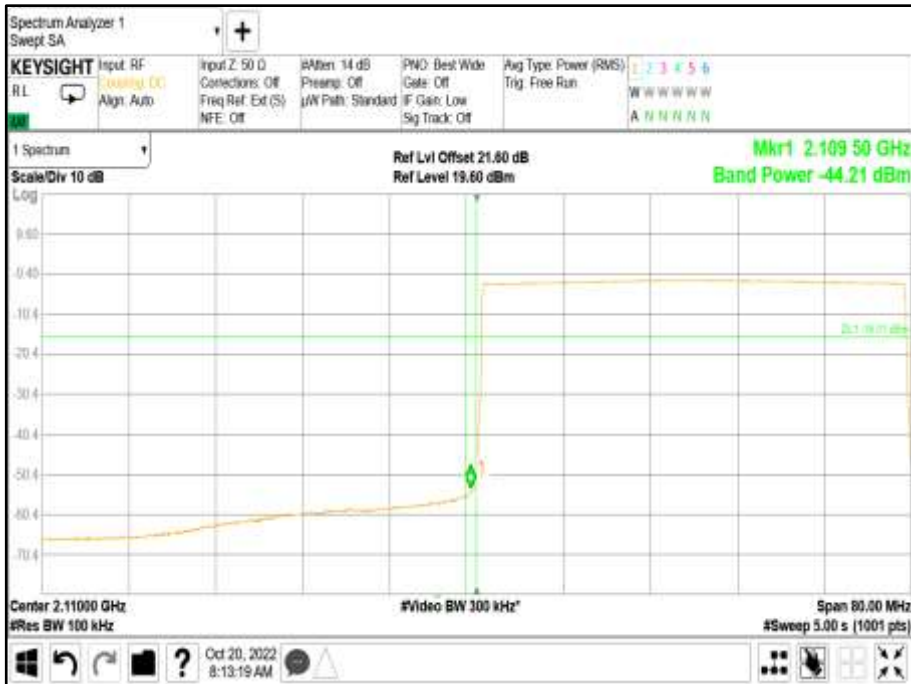

Antenna A - Modulation NR: QPSK - Carrier Bandwidth NR: 40.0 MHz - Channel Position T





Configuration B


Maximum Output Power 23.00 dBm / Port

Antenna	Modulation	Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	LTE: QPSK	5.0+5.0 MHz	2112.5+2117.5	2192.2+2197.5
A	LTE: QPSK	20.0+20.0 MHz	2120+2140	2170+2190
A	NR: QPSK	5.0+5.0 MHz	2112.5+2117.5	2192.2+2197.5
A	NR: QPSK	40.0+40.0 MHz	2130+2170	2140+2180
A	NR + LTE QPSK	5.0+5.0 MHz	2112.5+2117.5	2192.2+2197.5
A	NR + LTE (NC) QPSK	5.0+5.0 MHz	2,112.5	2,197.5

Remarks

Two carrier transmitter performance is presented. The plot results represent typical radio performance. Plot data performance for all transmitter ports and channels are on file and available on request.


Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B

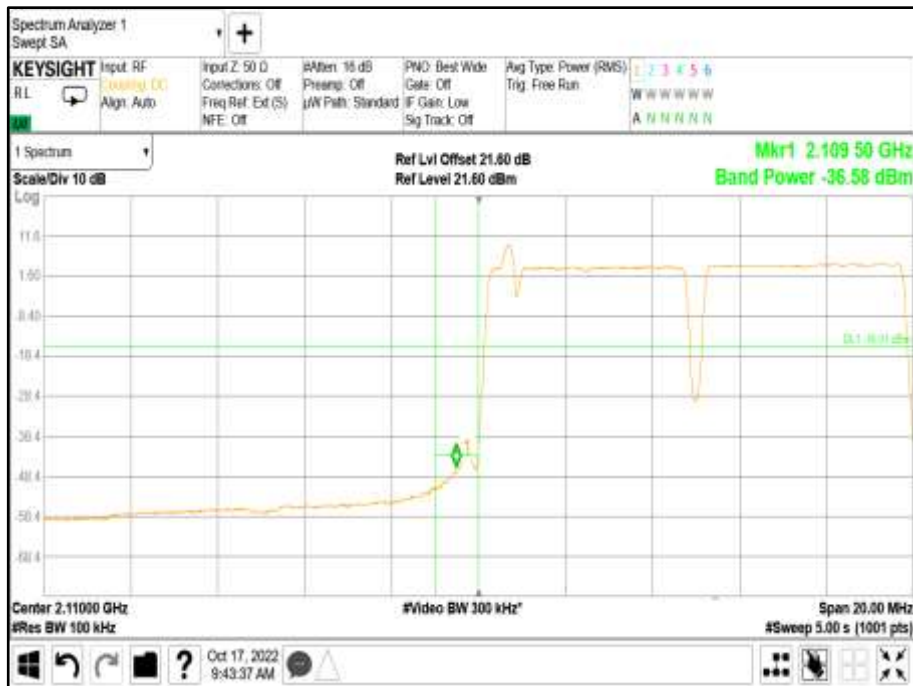

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position T



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 20.0+20.0 MHz - Channel Position B

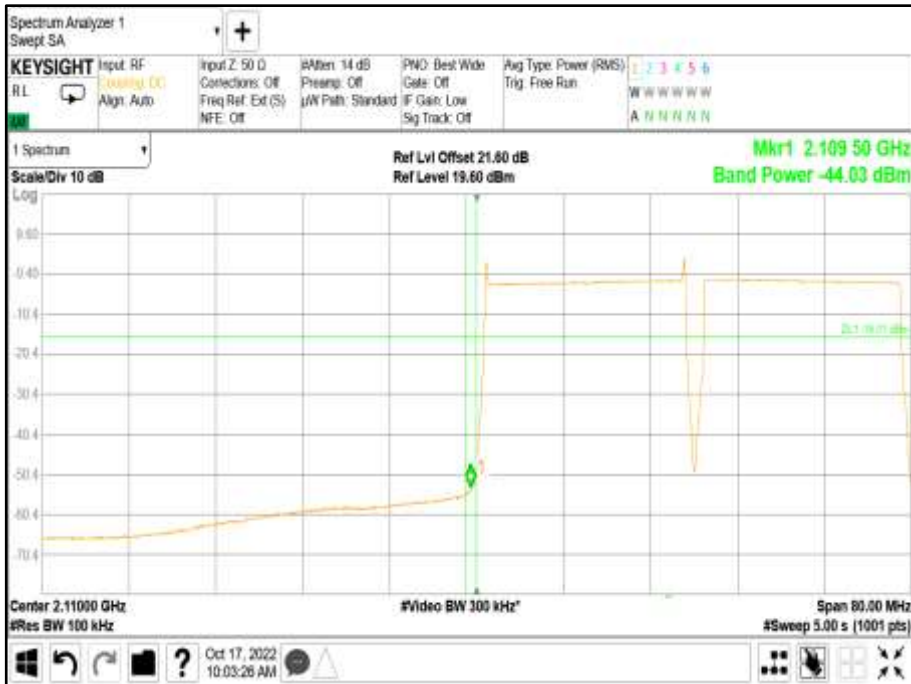


Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 20.0+20.0 MHz - Channel Position T






Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B

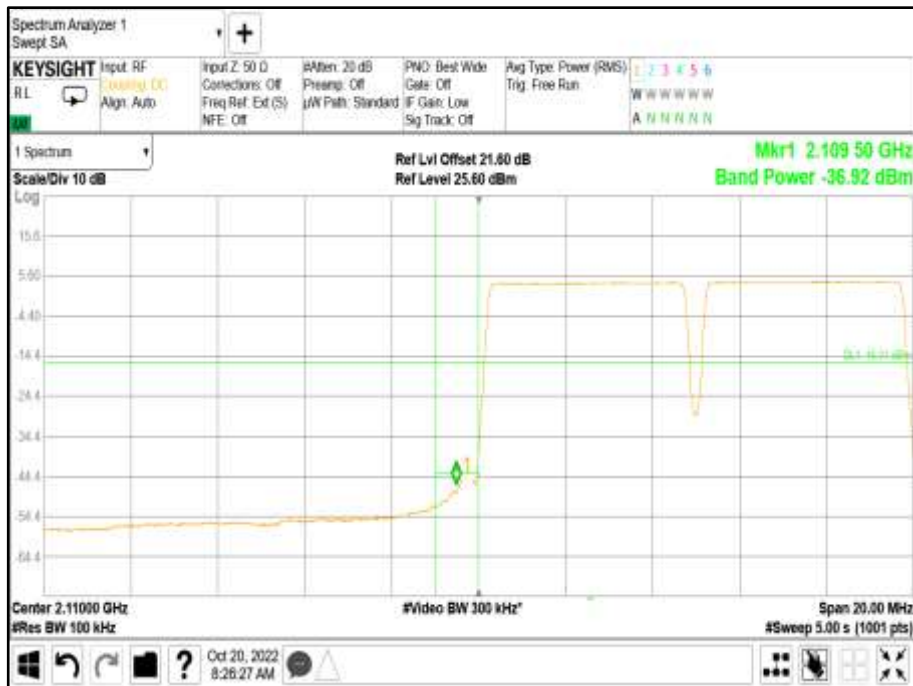

Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position T

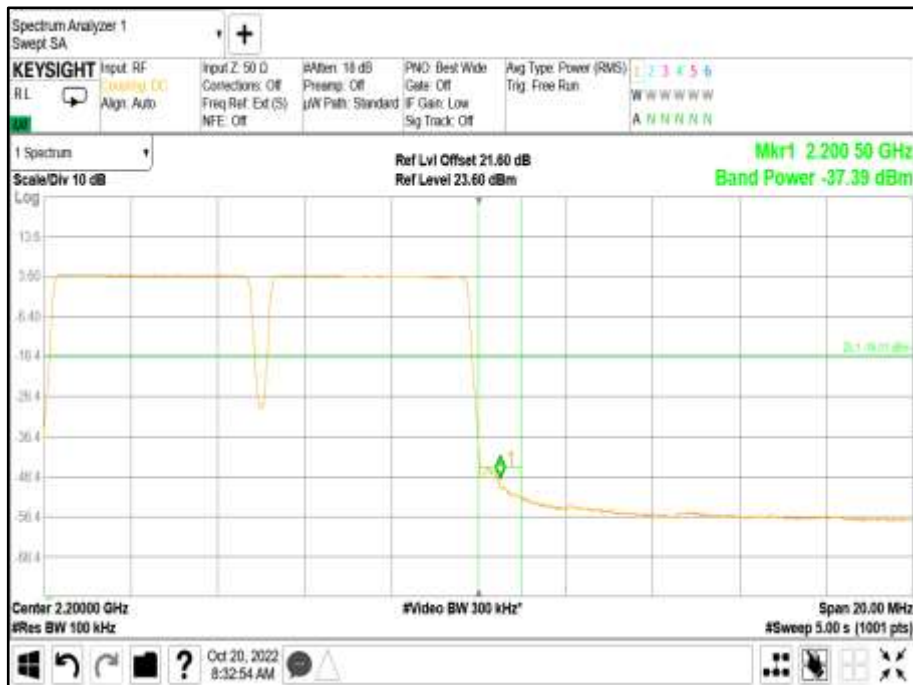



Antenna A - Modulation NR: QPSK - Carrier Bandwidth 40.0+40.0 MHz - Channel Position B




Antenna A - Modulation NR: QPSK - Carrier Bandwidth 40.0+40.0 MHz - Channel Position T






Antenna A - Modulation NR + LTE QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B

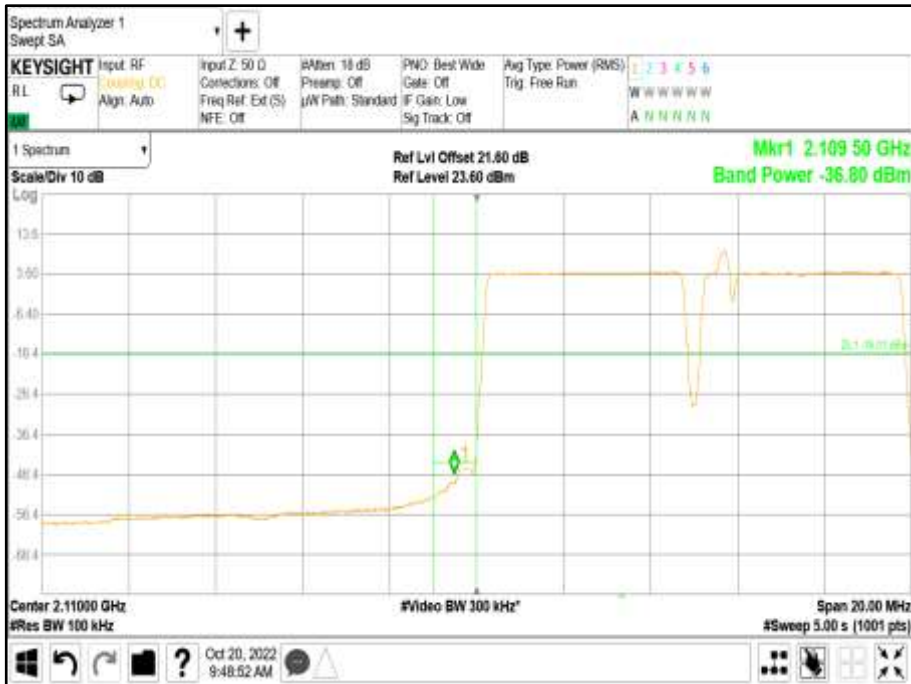


Antenna A - Modulation NR + LTE QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position T

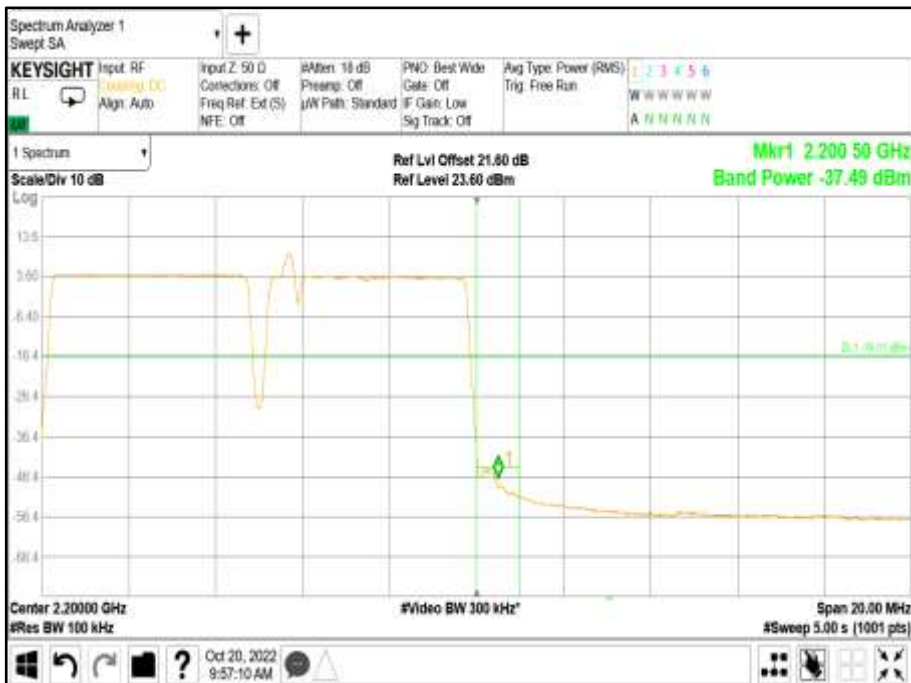




Antenna A - Modulation NR + LTE (NC) QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position B

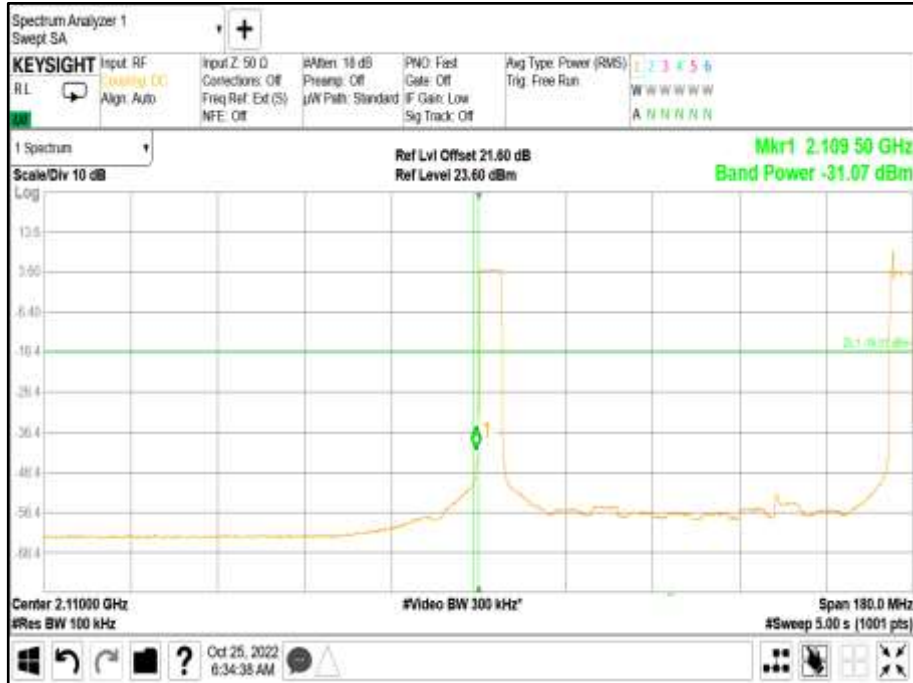

Antenna A - Modulation NR + LTE (NC) QPSK - Carrier Bandwidth 5.0+5.0 MHz - Channel Position T

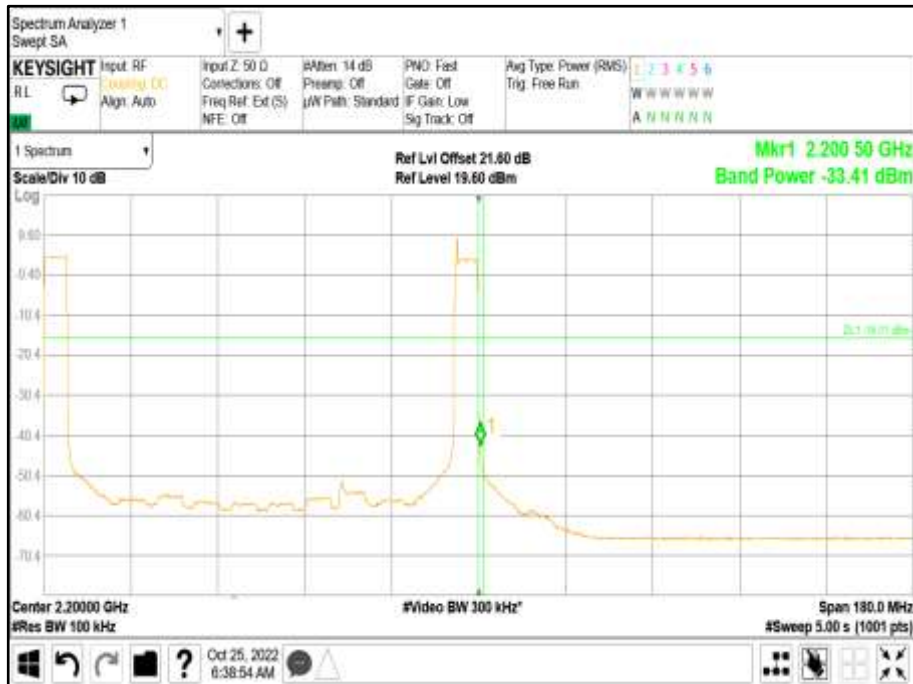



Configuration C

Maximum Output Power 23.00 dBm / Port

Antenna	Modulation	Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	LTE: QPSK	5.0+5.0+5.0+5.0+5.0+5.0 MHz	2112.5+2117.5+2122.5+2127.5+2132.5+2137.5	2172.5+2177.5+2182.5+2187.5+2192.5+2197.5
A	LTE: QPSK	15.0+15.0+15.0+15.0+15.0+15.0 MHz	2117.5+2132.5+2147.5+2162.5+2177.5+2192.5	2117.5+2132.5+2147.5+2162.5+2177.5+2192.5
A	NR: QPSK	5.0+5.0+5.0+5.0+5.0+5.0 MHz	2112.5+2117.5+2122.5+2127.5+2132.5+2137.5	2172.5+2177.5+2182.5+2187.5+2192.5+2197.5
A	NR: QPSK	15.0+15.0+15.0+15.0+15.0+15.0 MHz	2117.5+2132.5+2147.5+2162.5+2177.5+2192.5	2117.5+2132.5+2147.5+2162.5+2177.5+2192.5
A	NR(3) + LTE(3): QPSK	5.0+5.0+5.0+5.0+5.0+5.0 MHz	2112.5+2117.5+2122.5+2127.5+2132.5+2137.5	2172.5+2177.5+2182.5+2187.5+2192.5+2197.5
A	NR(3) + LTE(3) (NC): QPSK	5.0+5.0+5.0+5.0+5.0+5.0 MHz	2112.5+2117.5+2122.5+2187.5+2192.5+2197.5	2112.5+2117.5+2122.5+2187.5+2192.5+2197.5

Remarks

Six carrier transmitter performance is presented. The plot results represent typical radio performance. Plot data performance for all transmitter ports and channels are on file and available on request.



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position T





Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 15.0+15.0+15.0+15.0+15.0+15.0 MHz
- Channel Position B



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 15.0+15.0+15.0+15.0+15.0+15.0 MHz
- Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B



Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position T





Antenna A - Modulation NR: QPSK - Carrier Bandwidth 15.0+15.0+15.0+15.0+15.0+15.0 MHz - Channel Position B



Antenna A - Modulation NR: QPSK - Carrier Bandwidth 15.0+15.0+15.0+15.0+15.0+15.0 MHz - Channel Position T





Antenna A - Modulation NR(3) + LTE(3): QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B




Antenna A - Modulation NR(3) + LTE(3): QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position T






Antenna A - Modulation NR(3) + LTE(3) (NC): QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B

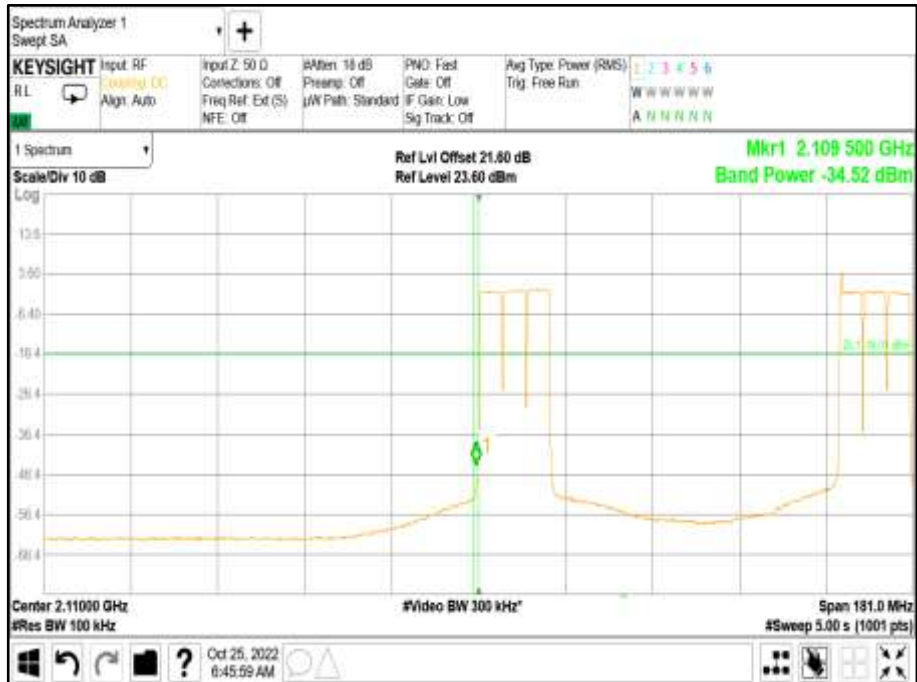

Antenna A - Modulation NR(3) + LTE(3) (NC): QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz - Channel Position T

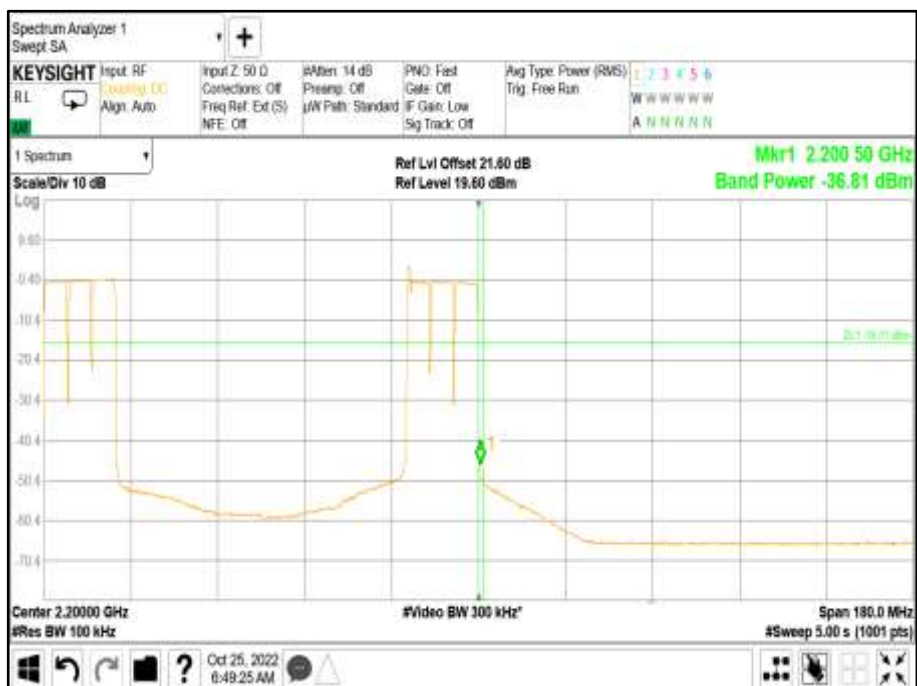

Limit	-16 dBm
-------	---------



2.4 TRANSMITTER SPURIOUS EMISSIONS

2.4.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.53
FCC CFR 47 Part 2, Clause 2.1051

2.4.2 Date of Test and Modification State

12, 14 and 16-October-2022 - Modification State 0

2.4.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.4 Environmental Conditions

Ambient Temperature	33.0 - 34.0°C
Relative Humidity	24.1 - 24.2%

2.4.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.1.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \text{Log}(N)$, where N is equal to the number of MIMO antenna ports.

For dual port, the limit was calculated as being $-13 \text{ dBm} - 10 * \text{Log}(2) = -16 \text{ dBm}$.

2.4.6 Test Results

Configuration A


Maximum Output Power 23.00 dBm / Port

Remarks


1. Transceiver spurious emissions have been searched for all channel bandwidths and antenna ports.
2. Representative worst-case spurious emissions performance has been presented for all modulations.
3. Plot data performance for all transmitter ports, channel bandwidths, and channel positions are on file and available on request.



Antenna Port A - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1 - Range 0.009 to 4000 MHz

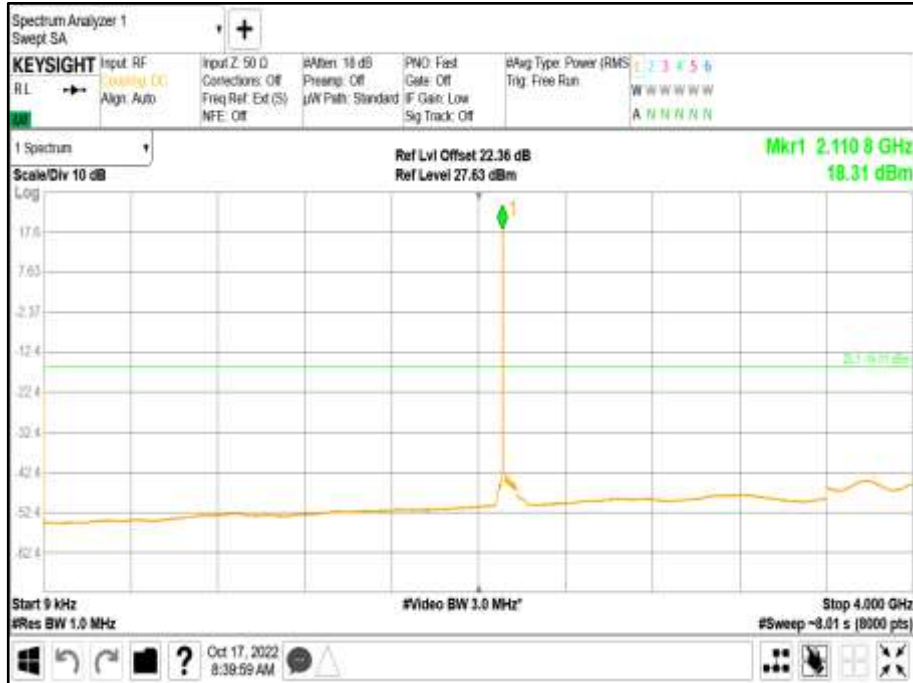

Antenna Port A - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2 - Range 4000 to 12000 MHz

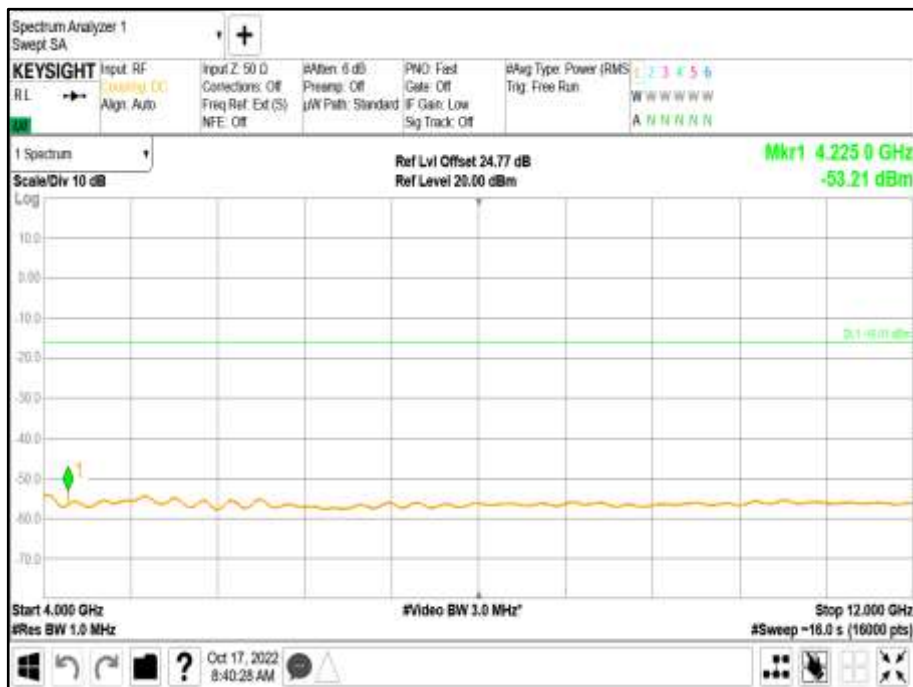



Antenna Port A - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 3 - Range 12000 to 22000 MHz




Antenna Port A - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1 - Range 0.009 to 4000 MHz





Antenna Port A - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2 - Range 4000 to 12000 MHz

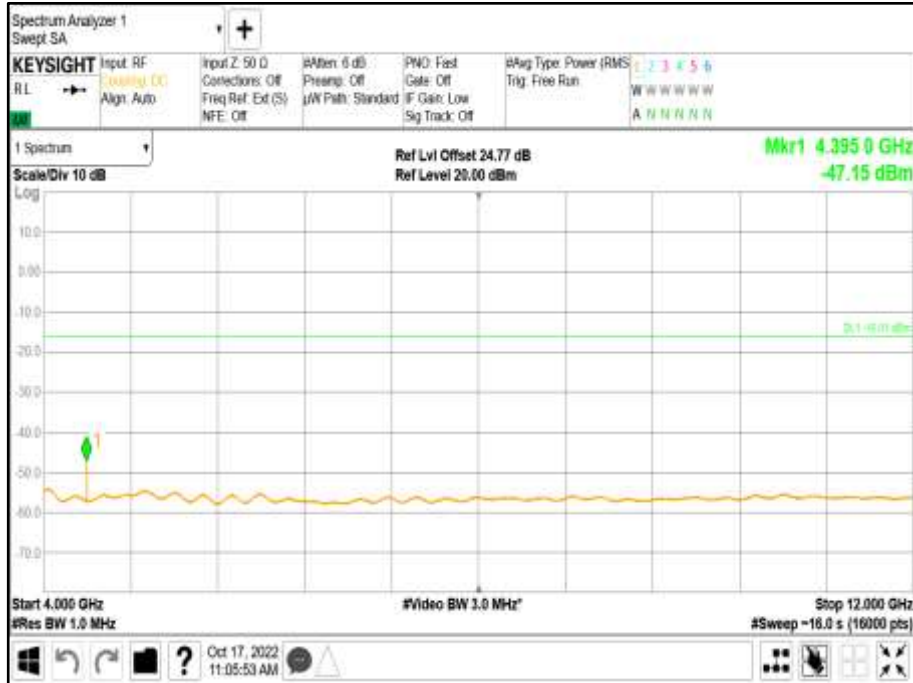

Antenna Port A - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 3 - Range 12000 to 22000 MHz







Configuration B

Maximum Output Power 23.00 dBm / Port

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position T - Band 1 - Range 0.009 to 4000 MHz

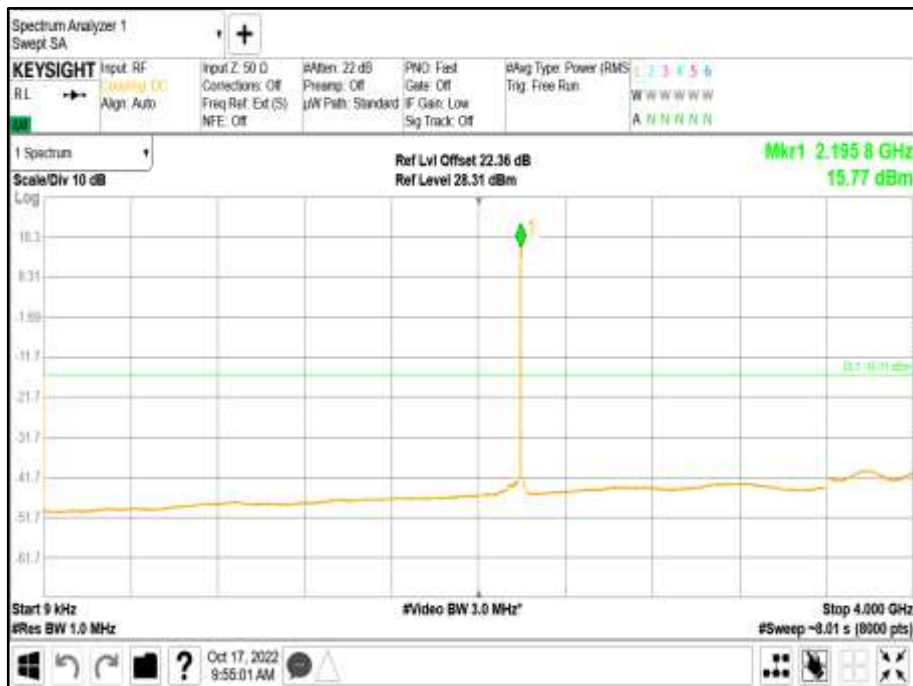

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position T - Band 2 - Range 4000 to 12000 MHz

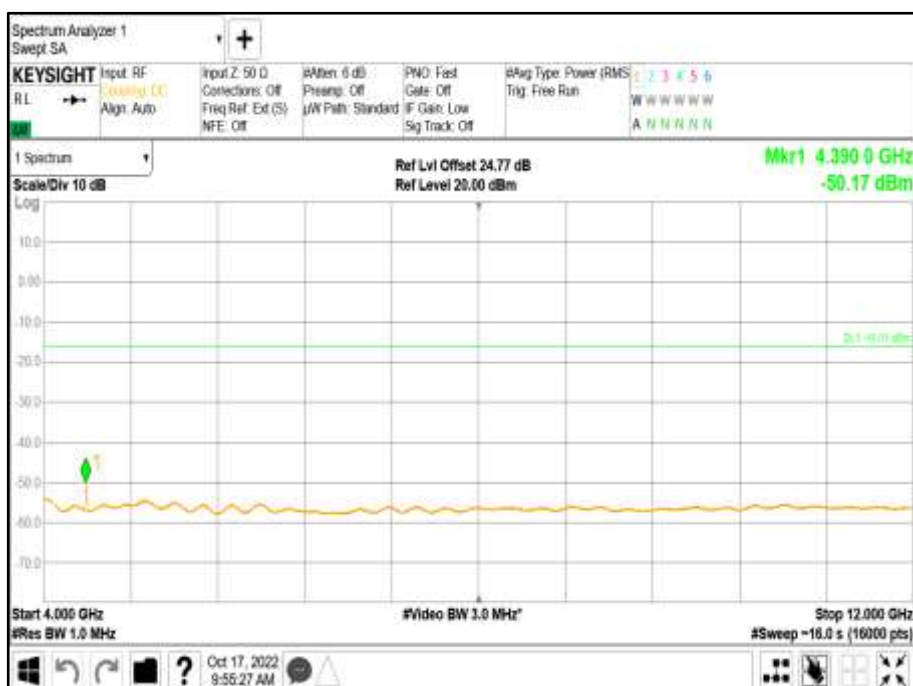



Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position T - Band 3
- Range 12000 to 22000 MHz




Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1
- Range 0.009 to 4000 MHz





Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2
- Range 4000 to 12000 MHz

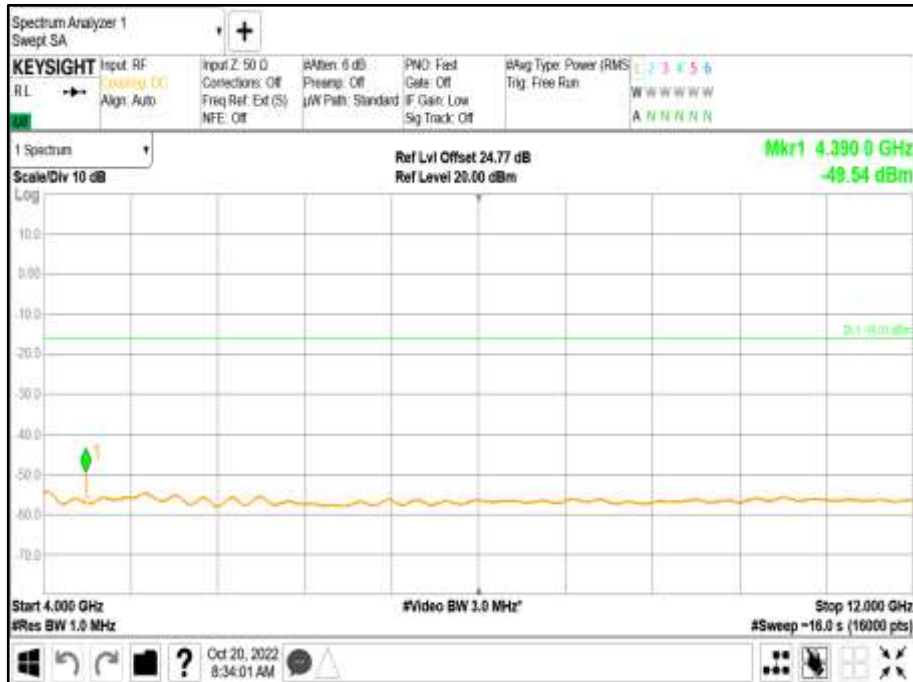

Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 3
- Range 12000 to 22000 MHz






Antenna A - Modulation NR + LTE (NC) QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 1 - Range 0.009 to 4000 MHz



Antenna A - Modulation NR + LTE (NC) QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 2 - Range 4000 to 12000 MHz

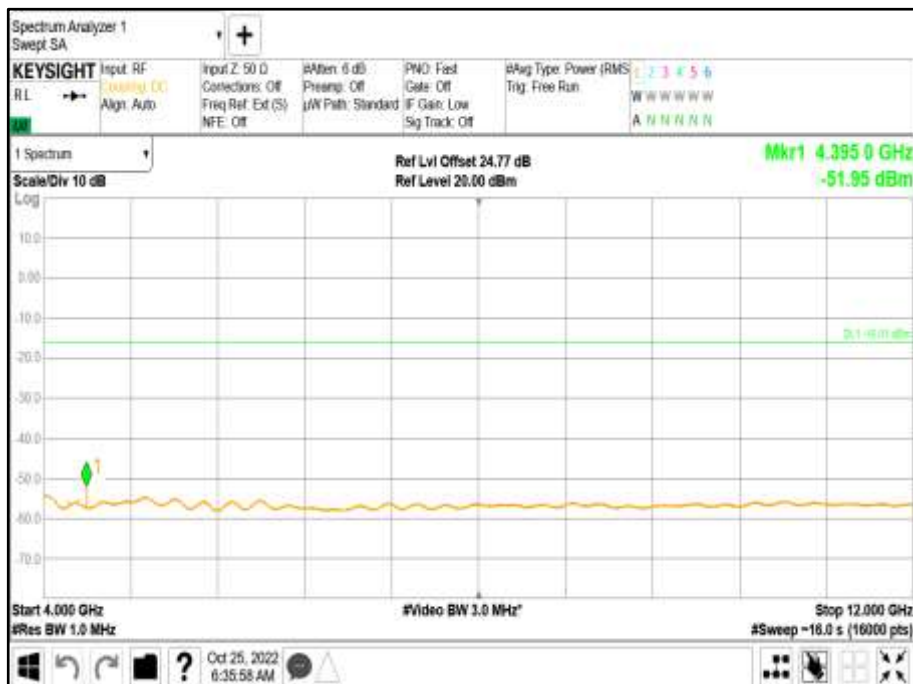



Antenna A - Modulation NR + LTE (NC) QPSK - Carrier Bandwidth 5.0 MHz - Channel Position B - Band 3 - Range 12000 to 22000 MHz



Configuration C


Maximum Output Power 23.00 dBm / Port

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B - Band 1 - Range 0.009 to 4000 MHz





Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B - Band 2 - Range 4000 to 12000 MHz

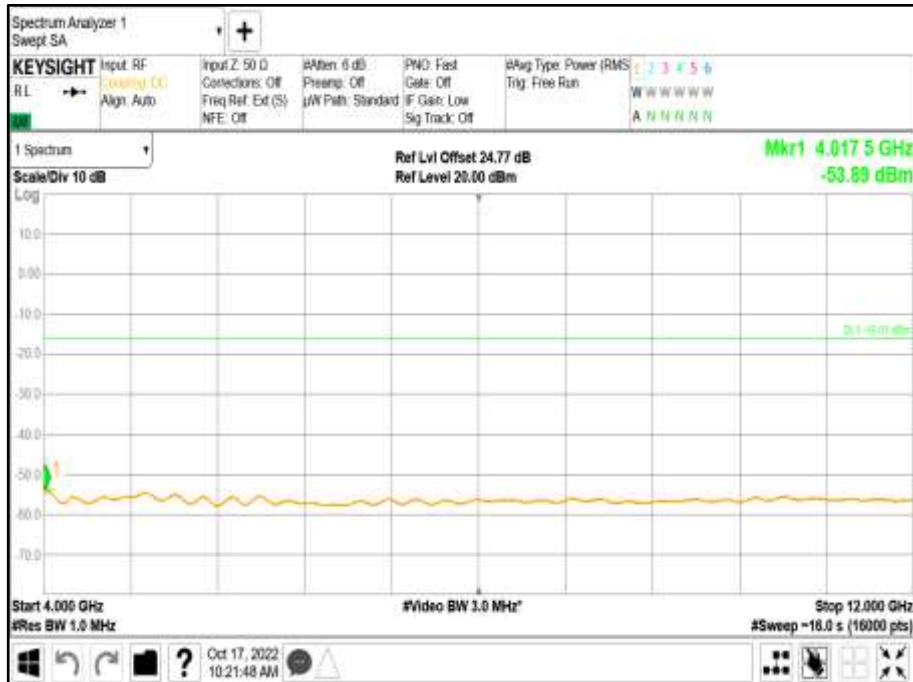

Antenna A - Modulation LTE: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B - Band 3 - Range 12000 to 22000 MHz






Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz -
Channel Position B - Band 1 - Range 0.009 to 4000 MHz



Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz -
Channel Position B - Band 2 - Range 4000 to 12000 MHz

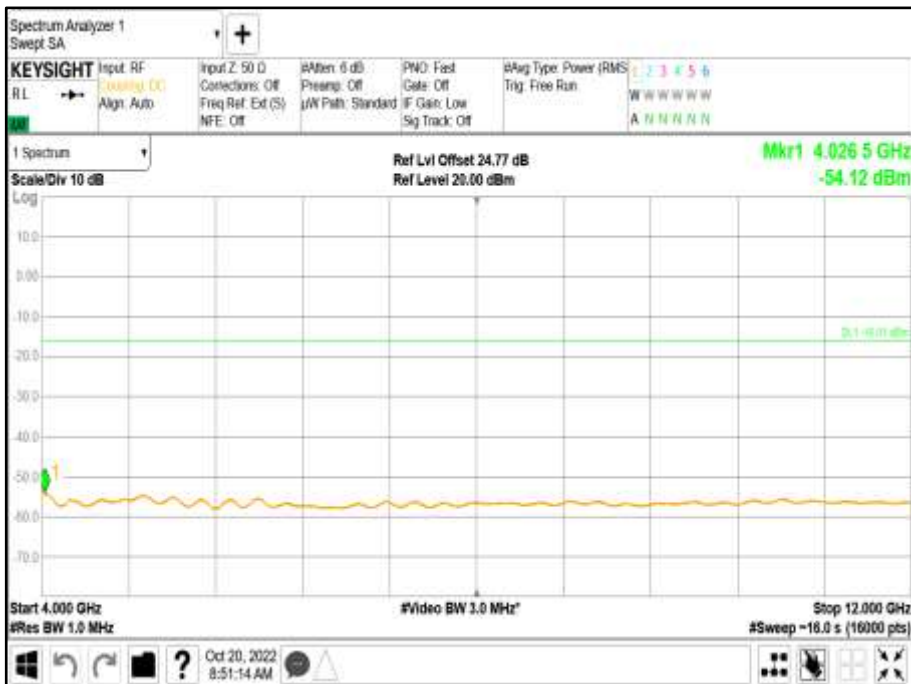



Antenna A - Modulation NR: QPSK - Carrier Bandwidth 5.0+5.0+5.0+5.0+5.0 MHz -
Channel Position B - Band 3 - Range 12000 to 22000 MHz






Antenna A - Modulation NR(3) + LTE(3) (NC): QPSK - Carrier Bandwidth
5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B - Band 1 - Range 0.009 to 4000 MHz



Antenna A - Modulation NR(3) + LTE(3) (NC): QPSK - Carrier Bandwidth
5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B - Band 2 - Range 4000 to 12000 MHz

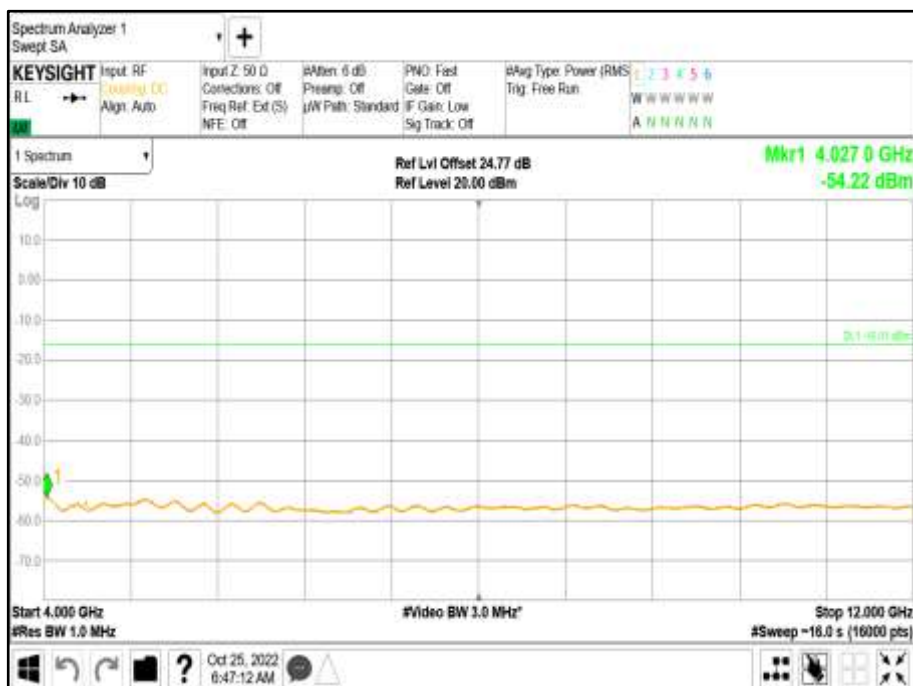



Antenna A - Modulation NR(3) + LTE(3) (NC): QPSK - Carrier Bandwidth
5.0+5.0+5.0+5.0+5.0+5.0 MHz - Channel Position B - Band 3 - Range 12000 to 22000 MHz



Limit	-16 dBm
-------	---------



2.5 FREQUENCY STABILITY

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1055

2.5.2 Date of Test and Modification State

6-October-2022 - Modification State 0

2.5.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.4 Environmental Conditions

Ambient Temperature 24.6°C
Relative Humidity 30.8%

2.5.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 9 and ANSI C63.26 Clause 5.6

2.5.6 Test Results

Configuration A

Temperature	Voltage	Frequency Error (Hz)
		Channel Position M (2 155 000 000 Hz)
-30°C	-48.0 V DC	Turns OFF
-20°C	-48.0 V DC	Turns OFF
-10°C	-48.0 V DC	2.7069
0°C	-48.0 V DC	-2.0884
+10°C	-48.0 V DC	1.3683
+20°C	-40.5 V DC	2.0096
+20°C	-48.0 V DC	1.653
+20°C	-57.5 V DC	2.6617
+30°C	-48.0 V DC	2.0218
+40°C	-48.0 V DC	-1.483
+50°C	-48.0 V DC	-2.0135

Remarks

Worst Case deviation at 2.7069 Hz = 0.001256 ppm



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Keysight	PXA N9030B	MY57144347	12	25-Mar-2023
Thermometer / Refrigeration	VWR	89094-746	210697579	24	13-Aug-2023
PSU	Xantrex	XKW60-50	E00109862	-	O/P Mon
Attenuator (20dB)	Mini-Circuits	BW-K10-2W44+	-	-	O/P Mon
Switching Control Unit	HP	11713A	3748A060876	-	O/P Mon
Climate Chamber	Burnsco	RTC-37P-3-3	-07-07	-	O/P Mon

O/P Mon – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU	
Conducted Maximum Peak Output Power	30 MHz to 20 GHz Amplitude	± 0.7 dB	
Conducted Emissions	30 MHz to 20 GHz Amplitude	± 2.1 dB	
Frequency Stability	30 MHz to 2 GHz	± 5.0 Hz	
Occupied Bandwidth	Up to 20 MHz Bandwidth	5 MHz Bandwidth	± 11547 Hz
		10 MHz Bandwidth	± 23094 Hz
		15 MHz Bandwidth	± 34641 Hz
		20 MHz Bandwidth	± 46188 Hz
Band Edge	30 MHz to 20 GHz Amplitude	±0.8 dB	
Radiated Spurious Emissions	30 MHz to 1 GHz	± 5.2 dB	
	1 GHz to 40GHz	± 6.3 dB	

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the results of the compliance measurement and does not take into account measurement instrumentation uncertainty as defined in ANSI C63.26:2015 Clause 1.3.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8



SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

© 2023 TÜV SÜD
TÜV SÜD
TUV SUD Canada, 1280 Teron Rd., Kanata On.

ANNEX A

MODULE LIST

Configuration A/B/C			
Product	Product No	R-State	Serial No
DOT 4465 B77DB25B66 (EUT)	KRY 901 523/2	R1A modified as R1B	TD3W340089
CT11	LPC 102 494/1	R2A	T01G495060
IRU 1648	KRC 161 842/1	R1D	TD3F105259
IRU 1649	KRC 161 842/2	R1E	TD3F109016
Software Version:	CXP 203 0045/26	Revision:	R14BX12