



Product Service

**Choose certainty.
Add value.**

Report On

FCC and Industry Canada Testing of the
Ericsson RRUS 11 B4 / KRC 161 254/2

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8BKRC161254-2
IC ID: 287AB-BS1612542

Document 75924767 Report 04 Issue 1

February 2014



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE


REPORT ON FCC and Industry Canada Testing of the
Ericsson RRUS 11 B4 / KRC 161 254/2

Document 75924767 Report 04 Issue 1

February 2014

PREPARED FOR Ericsson AB
Isafjordsgatan 10
SE-164 80
Stockholm
Sweden

PREPARED BY 
G Zhao
Test Engineer

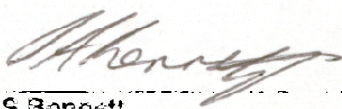
APPROVED BY 
S Bennett
Authorised Signatory

DATED 21 February 2014

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with FCC CFR 47: Part 27 and Industry Canada RSS-139. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);


G Zhao


X Zhang





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Declaration of Build Status 9
1.4	Product Information 10
1.5	Test Conditions 16
1.6	Deviations From the Standard 16
1.7	Modification Record 16
1.8	Alternative Test Site 16
2	TEST DETAILS 17
2.1	RF Output Power - Conducted 18
2.2	Peak – average ratio 24
2.3	Spurious Emissions at Antenna Terminals (± 1 MHz) 35
2.4	Radiated Spurious Emissions 43
2.5	Conducted Spurious Emissions 48
3	TEST EQUIPMENT USED 64
3.1	Test Equipment Used 65
3.2	Measurement Uncertainty 66
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 67
4.1	Accreditation, Disclaimers and Copyright 68



Product Service

SECTION 1

REPORT SUMMARY

FCC and Industry Canada Testing of the
Ericsson RRUS 11 B4 / KRC 161 254/2



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Ericsson RRUS 11 B4 / KRC 161 254/2 to the requirements of FCC CFR 47 Part 27 and Industry Canada RSS-139.

Testing was carried out in support of an application for Grant of RRUS 11 B4 / KRC 161 254/2 in WCDMA and LTE Multi Standard Radio mode.

Objective	To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Ericsson AB
Product Name	RRUS 11 B4
Product Number	KRC 161 254/2
IC Model Number	BS1612542
Serial Number(s)	CF81442849
WCDMA Software	CXP9021719 Rev R1CB18
LTE Software	CXP102051/16 Rev R32BD
PIS Software	CXP9017316/1 Rev R39UL
Hardware Version	R2B
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 27: 2012 Industry Canada RSS-139 Issue 2: 2009
Incoming Release Date	Declaration of Build Status 21 October 2013
Order Number Date	PTP 19 October 2013
Start of Test	06 November 2013
Finish of Test	12 December 2013
Name of Engineer(s)	G Zhao X Zhang
Related Document(s)	ANSI C63.4: 2009 FCC CFR 47 Part 2: 2012 Industry Canada RSS-GEN Issue 3: 2010 Industry Canada SRSP513 Issue 2: 2009



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results in accordance with FCC CFR 47 Part 27 and Industry Canada RSS-139, is shown below.

Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 27	RSS-139 and RSS-GEN					
	27.50 (d)	6.4	Effective Radiated Power	2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3)		N/A	No integral antenna.
				2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)		N/A	
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W)		N/A	
				2137.5 MHz (L5) + 2152.6 MHz (W) / 2140.0 MHz (L10) + 2152.6 MHz (W)		N/A	
2.1	2.1046, 27.50 (d)	6.4	RF Output Power - Conducted	2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4)		N/A	-
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2137.9 MHz (L3) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	
				2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3)	0	Pass	
				2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)	0	Pass	
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)	0	Pass	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)	0	Pass	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W)	0	Pass	
2137.5 MHz (L5) + 2152.6 MHz (W) / 2140.0 MHz (L10) + 2152.6 MHz (W)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2140.9 MHz (L3)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2139.9 MHz (L5)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2137.4 MHz (L10)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2137.9 MHz (L3) + 2140.9 MHz (L3)	0	Pass					
2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)	0	Pass					



Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-139 and RSS-GEN					
2.2	27.50 (i)	6.4	Peak – Average Ratio	2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3) 2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)	0	Pass	-
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)	0	Pass	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W) 2137.5 MHz (L5) + 2152.6 MHz (W) /2140.0 MHz (L10) + 2152.6 MHz (W)	0	Pass	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4) 2124.8 MHz (W) + 2129.8 MHz (W) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2129.8 MHz (W) + 2139.9 MHz (L5) 2124.8 MHz (W) + 2129.8 MHz (W) + 2137.4 MHz (L10)	0	Pass	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4) 2124.8 MHz (W) + 2129.8 MHz (W) + 2137.9 MHz (L3) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)	0	Pass	
				2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3) 2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)		N/A	
	2.1047 (d)	6.2	Modulation Characteristics	2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)		N/A	-
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W) 2137.5 MHz (L5) + 2152.6 MHz (W) /2140.0 MHz (L10) + 2152.6 MHz (W)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4) 2124.8 MHz (W) + 2129.8 MHz (W) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2129.8 MHz (W) + 2139.9 MHz (L5) 2124.8 MHz (W) + 2129.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4) 2124.8 MHz (W) + 2129.8 MHz (W) + 2137.9 MHz (L3) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	
				2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3) 2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)		N/A	
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3) 2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)		N/A	



Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-139 and RSS-GEN					
	2.1049, 27.53 (h)	RSS-Gen 4.6.1	Occupied Bandwidth	2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3)		N/A	-
				2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)		N/A	
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W)		N/A	
				2137.5 MHz (L5) + 2152.6 MHz (W) / 2140.0 MHz (L10) + 2152.6 MHz (W)		N/A	
2.3	2.1051, 27.53 (h)	6.5	Spurious Emissions at Antenna Terminals (±1MHz)	2112.4MHz (W) + 2115.7MHz (L1.4)	0	Pass	
				2149.3MHz (L1.4) + 2152.6MHz(W)	0	Pass	
2.4	2.1053, 27.53 (h)	6.5	Radiated Spurious Emissions	2112.4MHz (W) + 2129.3 MHz (L1.4)	0	Pass	-
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)	0	Pass	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)	0	Pass	
				2135.7 MHz (L1.4) + 2152.6 MHz (W)	0	Pass	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4)	0	Pass	
2.5	2.1051, 27.53 (h)	6.5	Conducted Spurious Emissions	2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2125.0 MHz (L10)	0	Pass	-
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)	0	Pass	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)	0	Pass	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2140.0 MHz (L10) + 2152.6 MHz (W)	0	Pass	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4)	0	Pass	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4)	0	Pass	



Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-139 and RSS-GEN					
	2.1055, 27.54	6.3	Frequency Stability Under Temperature Variations	2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3)		N/A	-
				2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)		N/A	
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W)		N/A	
				2137.5 MHz (L5) + 2152.6 MHz (W) /2140.0 MHz (L10) + 2152.6 MHz (W)		N/A	
	2.1055, 27.54	6.3	Frequency Stability Under Voltage Variations	2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4)		N/A	-
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2137.9 MHz (L3) + 2140.9 MHz (L3)		N/A	
	2.1055, 27.54	6.3	Frequency Stability Under Voltage Variations	2112.4MHz (W) + 2129.3 MHz (L1.4) / 2112.4 MHz (W) + 2128.5 MHz (L3)		N/A	-
				2112.4 MHz (W) + 2127.5 MHz (L5) / 2112.4 MHz (W) + 2125.0 MHz (L10)		N/A	
				2124.8 MHz (W) + 2141.7 MHz (L1.4) / 2124.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2139.9 MHz (L5) / 2124.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2135.7 MHz (L1.4) + 2152.6 MHz (W) / 2136.5 MHz (L3) + 2152.6 MHz (W)		N/A	
				2137.5 MHz (L5) + 2152.6 MHz (W) /2140.0 MHz (L10) + 2152.6 MHz (W)		N/A	
	2.1055, 27.54	6.3	Frequency Stability Under Voltage Variations	2124.8 MHz (W) + 2129.8 MHz (W) + 2141.7 MHz (L1.4)		N/A	-
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.9 MHz (L3)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2137.4 MHz (L10)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2140.3 MHz (L1.4) + 2141.7 MHz(L1.4)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2137.9 MHz (L3) + 2140.9 MHz (L3)		N/A	
	2.1055, 27.54	6.3	Frequency Stability Under Voltage Variations	2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	-
				2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	
				2124.8 MHz (W) + 2129.8 MHz (W) + 2134.9 MHz (L5) + 2139.9 MHz (L5)		N/A	

L1.4 denotes LTE network with 1.4MHz channel bandwidth.
 L3 denotes LTE network with 3MHz channel bandwidth.
 L5 denotes LTE network with 5MHz channel bandwidth.
 L10 denotes LTE network with 10MHz channel bandwidth.
 W denotes WCDMA network
 N/A – Not Applicable



1.3 DECLARATION OF BUILD STATUS

MAIN EUT	
MANUFACTURING DESCRIPTION	Remote Radio Equipment
MANUFACTURER	Ericsson AB
PRODUCT NUMBER	RRUS 11 B4
PART NUMBER	KRC 161 254/2
IC Model NUMBER	BS1612542
SERIAL NUMBER	CF81442849
HARDWARE VERSION	R2B
WCDMA SOFTWARE	CXP9021719 Rev R1CB18
LTE SOFTWARE	CXP102051/16 Rev R32BD
PIS SOFTWARE	CXP9017316/1 Rev R39UL
TRANSMITTER OPERATING RANGE	TX: 2110MHz - 2155MHz RX: 1710MHz - 1755MHz
MODULATIONS	WCDMA: QPSK, 16QAM, 64QAM LTE: QPSK, 16QAM, 64QAM
NUMBER OF CARRIERS	Maximum 4 carriers (2 WCDMA carriers and 2 LTE carriers)
ITU DESIGNATION OF EMISSION	WCDMA: 5M00F9W LTE: 1M40F9W, 3M00F9W, 5M00F9W, 10M0F9W
OUTPUT POWER (RMS) (W or dBm)	WCDMA/LTE Mix Carrier (x 2): 1WCDMA (1x 20W) + 1LTE (1x 20W) per port: 46dBm per port
	WCDMA/LTE Mix Carrier (x 3): 2WCDMA (2x15W) + 1LTE (1x 10W) per port: 46dBm per port
	WCDMA/LTE Mix Carrier (x 4): 2WCDMA (2x10W) + 2LTE (2x10W) per port: 46dBm per port
OUTPUT POWER TOLERANCE	± 2.0dB
INSTANTANEOUS BANDWIDTH	20MHz
CHANNEL BANDWIDTH	WCDMA: 4.2 MHz to 5MHz (configurable in steps of 100/200kHz) LTE: 1.4MHz, 3MHz, 5MHz and 10MHz according to 3GPP TS 36.141
ANTENNA	No dedicated antenna, handled during licensing
NUMBER OF ANTENNA PORTS	2 TX/RX ports
SUPPORTED CONFIGURATION	Multi-standard (LTE/WCDMA) configured for Mix Carrier. Both RF chains are identical.
FCC ID	TA8BKRC161254-2
IC ID	287AB-BS1612542
TECHNICAL DESCRIPTION (a brief description of the intended use and operation)	The equipment is the Radio Part of WCDMA, LTE Base Station.

Signature

Date

15 November 2013

D of B S Serial No

75924767/04

No responsibility will be accepted by TÜV SÜD Product Service as to the accuracy of the information declared in this document by the manufacturer.



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) RRUS 11 B4 / KRC 161 254/2 is an Ericsson Remote Radio Equipment working in the public mobile service 2100MHz band which provides communication connections to WCDMA and LTE network. The RRUS 11 B4 / KRC 161 254/2 operates from a -48V DC supply.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturers documentation.



Equipment Under Test



1.4.2 Test Configuration

Configuration 1: Remote Radio Equipment

The EUT was configured in accordance with FCC CFR 47 Part 27 and Industry Canada RSS-139.

The RRUS 11 B4 / KRC 161 254/2 supports MSR WCDMA/LTE access technology. WCDMA supports TM1 (QPSK), TM5 (16QAM) and TM6 (64QAM) defined in 3GPP TS 25.141, and LTE supports Test Models E-TM1.1 (QPSK), E-TM3.2 (16QAM) and E-TM3.1 (64QAM) defined in 3GPP TS 36.141 at 2100MHz.

The EUT includes two TX/RX ports and it can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration.

The Maximum Output Power was tested on both TX/RX output connector RF A and RF B, all other TX measurements were performed on the combined TX/RX output connector RF A of the EUT as the representative port.

The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

The settings below were found to be representative for all modes when several settings, with different modulations and number of carriers, were tested to find the worst case settings. After the measured results were compared, the following settings were used for all measurements unless otherwise noted:

- WCDMA/LTE Mix Carrier:

WCDMA:

Single Carrier: Test Model 1 (TM1): 64DPCHs at 30 ksps (SF=128)

Multi Carrier (1x2): Test Model 1 (TM1): 32 DPCHs at 30 ksps (SF=128)

Channel Bandwidth: 5MHz

Modulation: QPSK


LTE:

Test Model E-TM1.1 (QPSK) in channel bandwidth 1.4MHz and 10MHz

The EUT was powered by a -48V DC Power supply.



Test Setup, Conducted Measurement:

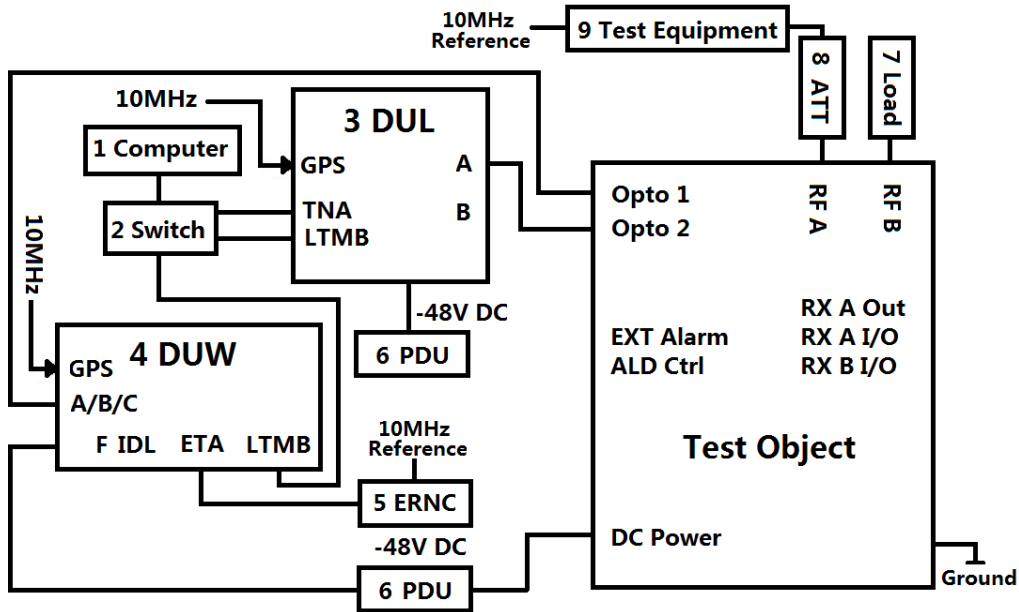


Product Name	Product Number	Version	Serial Number
RRUS 11 B4	KRC 161 254/2	R2B	CF81442849

No.	Auxiliary Equipment	Part Number / Model Type	Version	Serial Number
1	Computer	HP EliteBook 8460p	--	AP523464
	Work Station	Sun A70-XHZB1-9AG-2GDT	--	0826TFC1V9
2	Switch	TL-HP8MU	--	05300902892
	Switch	TL-SF1008+	--	11936826484
3	RBS 6601	BFL 901 009/1	--	--
	DUL 20 01	KDU 137 533/4	R1C	CB4H365213
	SUP 6601	1/BFL 901 009/1	R3B	BR81262578
4	RBS 6601	BFL 901 009/1	--	--
	DUW 30 01	KDU 127 161/3	R4F	TU8X960893
	SUP 6601	1/BFL 901 009/1	R3B	BR80908065
5	ERNC SIM	FAB 102 614	--	ETC/L167
6	Power Supply	DH1716-5D	--	2008040041
	Power Supply	DH1716-5D	--	2008040050
7	Load	TF100	--	09121648
8	40dB Attenuator	48-40-43-LIM	--	BR5020
9	Power Meter	Rohde & Schwarz NRP2	--	101593
	Power Sensor	Rohde & Schwarz NRP-Z51	--	102123
	Spectrum Analyzer	FSQ26	--	100253



Test Setup, Radiated Measurement:

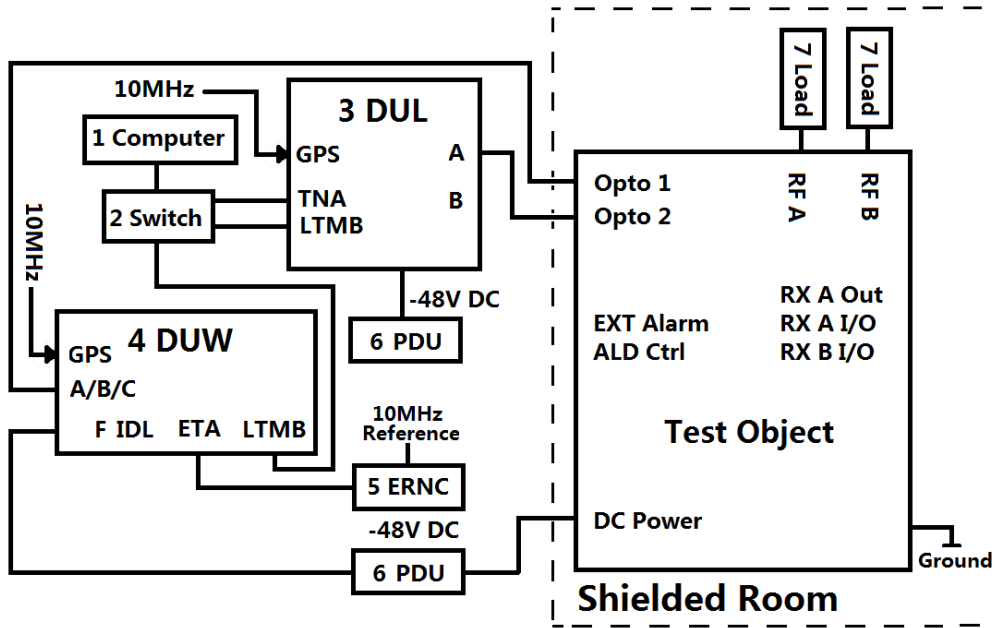

Product Name	Product Number	Version	Serial Number
RRUS 11 B4	KRC 161 254/2	R2B	CF81442849

No.	Auxiliary Equipment	Part Number / Model Type	Version	Serial Number
1	Computer	HP EliteBook 8460p	--	AP523464
	Work Station	Sun A70-XHZB1-9AG-2GDT	--	0826TFC1V9
2	Switch	TL-HP8MU	--	05300902892
	Switch	TL-SF1008+	--	11936826484
3	RBS 6601	BFL 901 009/1	--	--
	DUL 20 01	KDU 137 533/4	R1C	CB4H365213
	SUP 6601	1/BFL 901 009/1	R3B	BR81262578
4	RBS 6601	BFL 901 009/1	--	--
	DUW 30 01	KDU 127 161/3	R4F	TU8X960893
	SUP 6601	1/BFL 901 009/1	R3B	BR80908065
5	ERNC SIM	FAB 102 614	--	ETC/L167
6	Power Supply	DH1716-5D	--	2008040041
	Power Supply	DH1716-5D	--	2008040050
7	Load	TF100	--	09121648
	Load	TF100	--	09121605



1.4.3 Modes of Operation

Modes of operation of each EUT during testing were as follows:

L1.4 denotes LTE network with 1.4MHz channel bandwidth.
 L3 denotes LTE network with 3MHz channel bandwidth.
 L5 denotes LTE network with 5MHz channel bandwidth.
 L10 denotes LTE network with 10MHz channel bandwidth.
 W denotes WCDMA network

WCDMA/LTE MSR:

Mix Carrier(x2): 1W (20W) + 1L (20W)

Mode 1 - W&L1.4, W&L3, W&L5, W&L10

MSR	Channel No.	Frequencies (MHz)
W & L1.4	1537(W) & 2143(L)	2112.4+2129.3
W & L3	1537(W) & 2135(L)	2112.4+2128.5
W & L5	1537(W) & 2125(L)	2112.4+2127.5
W & L10	1537(W) & 2100(L)	2112.4+2125.0

Mode 2 - W&L1.4, W&L3, W&L5, W&L10

MSR	Channel No.	Frequencies (MHz)
W & L1.4	1599(W) & 2267(L)	2124.8+2141.7
W & L3	1599(W) & 2259(L)	2124.8+2140.9
W & L5	1599(W) & 2249(L)	2124.8+2139.9
W & L10	1599(W) & 2224(L)	2124.8+2137.4

Mode 3 - L1.4&W, L3&W, L5&W, L10&W

MSR	Channel No.	Frequencies (MHz)
L1.4 & W	2207(L) & 1738(W)	2135.7+2152.6
L3 & W	2215(L) & 1738(W)	2136.5+2152.6
L5 & W	2225(L) & 1738(W)	2137.5+2152.6
L10 & W	2250(L) & 1738(W)	2140.0+2152.6

Mode 4 - W&L1.4, W&L3, W&L5, W&L10

MSR	Channel No.	Frequencies (MHz)
W & L1.4	1537(W) & 2007 (L)	2112.4+2115.7
W & L3	1537(W) & 2015 (L)	2112.4+2116.5
W & L5	1537(W) & 2025 (L)	2112.4+2117.5
W & L10	1537(W) & 2050 (L)	2112.4+2120.0



Mode 5 - L1.4&W, L3&W, L5&W, L10&W

MSR	Channel No.	Frequencies (MHz)
L1.4 & W	2343(L) & 1738(W)	2149.3+2152.6
L3 & W	2335(L) & 1738(W)	2148.5+2152.6
L5 & W	2325(L) & 1738(W)	2147.5+2152.6
L10 & W	2300(L) & 1738(W)	2145.0+2152.6

Mix Carrier(x3): 2W (2x15W) + 1L (1x10W)

Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10

MSR	Channel No.	Frequencies (MHz)
W&W & L1.4	1599(W)&1624(W) & 2267(L)	2124.8+2129.8+2141.7
W&W & L3	1599(W)&1624(W) & 2259(L)	2124.8+2129.8+2140.9
W&W & L5	1599(W)&1624(W) & 2249(L)	2124.8+2129.8+2139.9
W&W & L10	1599(W)&1624(W) & 2224(L)	2124.8+2129.8+2137.4

Mix Carrier(x4): 2W (2x10W) + 2L (2x10W)

Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5

MSR	Channel No.	Frequencies (MHz)
W&W & L1.4&L1.4	1599(W)&1624(W) & 2253(L)&2267(L)	2124.8+2129.8+2140.3+2141.7
W&W & L3&L3	1599(W)&1624(W) & 2229(L)&2259(L)	2124.8+2129.8+2137.9+2140.9
W&W & L5&L5	1599(W)&1624(W) & 2199(L)&2249(L)	2124.8+2129.8+2134.9+2139.9

Information on the specific test modes utilised are detailed in the test procedure for each individual test.



Product Service

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or an open test area as appropriate.

The EUT was powered from a -48V DC supply.

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.7 MODIFICATION RECORD

Mod State 0 - No modifications were made to the EUT during testing.

1.8 ALTERNATIVE TEST SITE

Under our group UKAS Accreditation, TÜV SÜD Product Service conducted the following tests at Ericsson in Beijing, China:

- RF Output Power – Conducted
- Peak - Average Ratio
- Spurious Emissions at Antenna Terminals (± 1 MHz)
- Conducted Spurious Emissions

Only Radiated Spurious Emissions testing has been performed under the following site registrations:

FCC Accreditation 910917:

The State Radio Monitoring Centre, No.80 Beilishi Road Xicheng District Beijing, China.

Industry Canada Accreditation 7308A-1:

The State Radio Monitoring Centre, No.80 Beilishi Road Xicheng District Beijing, China.



Product Service

SECTION 2

TEST DETAILS

FCC and Industry Canada Testing of the
Ericsson RRUS 11 B4 / KRC 161 254/2



Product Service

2.1 RF OUTPUT POWER - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1046
 FCC CFR 47 Part 27, Clause 27.50 (d)
 Industry Canada RSS-139, Clause 6.4

2.1.2 Equipment Under Test

RRUS 11 B4 / KRC 161 254/2, S/N: CF81442849

2.1.3 Date of Test and Modification State

28, 29 November and 02 December 2013 – Modification State 0

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139.

Using a power meter and attenuator(s), the output power of the EUT was measured at the antenna terminal.

Since the EUT operates in MIMO mode, the EUT transmits on two antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at both TX antennas RF A and RF B were tested, and the total output power were then summed mathematically in linear power units.

The path loss was measured and entered to the power meter as a reference level offset to get the output power value directly.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 3 - L1.4&W, L3&W, L5&W, L10&W
 - Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10
 - Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5

2.1.6 Environmental Conditions

	28 November 2013	29 November 2013	02 December 2013
Ambient Temperature	23.5°C	23.0°C	23.0°C
Relative Humidity	38.0%	39.0%	45.0%



2.1.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139 for RF Output Power.

The test results are shown below

Antenna RF A and RF B

Mix Carrier(x2): 1W+1L

Declarative Maximum Output power:

W&L1.4: 45.40dBm per port

W&L3, W&L5, W&L10: 46.00dBm per port

Configuration 1 - Mode 1 - W&L1.4, W&L3, W&L5, W&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	2112.4+2129.3	44.92	31.05	44.99	31.55	47.97	62.60
W & L3	2112.4+2128.5	45.23	33.34	45.34	34.20	48.30	67.54
W & L5	2112.4+2127.5	45.33	34.12	45.40	34.67	48.38	68.79
W & L10	2112.4+2125.0	45.34	34.20	45.42	34.83	48.39	69.03

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	2112.4+2129.3	44.87	30.69	44.96	31.33	47.93	62.02
W & L3	2112.4+2128.5	45.20	33.11	45.27	33.65	48.25	66.76
W & L5	2112.4+2127.5	45.29	33.81	45.37	34.43	48.34	68.24
W & L10	2112.4+2125.0	45.33	34.12	45.37	34.43	48.36	68.55

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	2112.4+2129.3	44.77	29.99	44.82	30.34	47.81	60.33
W & L3	2112.4+2128.5	45.11	32.43	45.13	32.58	48.13	65.01
W & L5	2112.4+2127.5	45.18	32.96	45.24	33.42	48.22	66.38
W & L10	2112.4+2125.0	45.22	33.27	45.23	33.34	48.24	66.61



Configuration 1 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	2124.8+2141.7	45.24	33.42	45.21	33.19	48.24	66.61
W & L3	2124.8+2140.9	45.53	35.73	45.53	35.73	48.54	71.46
W & L5	2124.8+2139.9	45.63	36.56	45.63	36.56	48.64	73.12
W & L10	2124.8+2137.4	45.65	36.73	45.63	36.56	48.65	73.29

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	2124.8+2141.7	45.20	33.11	45.16	32.81	48.19	65.92
W & L3	2124.8+2140.9	45.50	35.48	45.49	35.40	48.51	70.88
W & L5	2124.8+2139.9	45.60	36.31	45.58	36.14	48.60	72.45
W & L10	2124.8+2137.4	45.59	36.22	45.61	36.39	48.61	72.61

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	2124.8+2141.7	45.05	31.99	45.10	32.36	48.09	64.35
W & L3	2124.8+2140.9	45.41	34.75	45.45	35.08	48.44	69.83
W & L5	2124.8+2139.9	45.53	35.73	45.55	35.89	48.55	71.62
W & L10	2124.8+2137.4	45.51	35.56	45.54	35.81	48.54	71.37

Configuration 1 - Mode 3 - L1.4&W, L3&W, L5&W, L10&W

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
L1.4 & W	2135.7+2152.6	45.14	32.66	45.17	32.89	48.17	65.55
L3 & W	2136.5+2152.6	45.46	35.16	45.51	35.56	48.50	70.72
L5 & W	2137.5+2152.6	45.57	36.06	45.58	36.14	48.59	72.20
L10 & W	2140.0+2152.6	45.58	36.14	45.60	36.31	48.60	72.45



LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
L1.4 & W	2135.7+2152.6	45.14	32.66	45.15	32.73	48.16	65.39
L3 & W	2136.5+2152.6	45.44	34.99	45.46	35.16	48.46	70.15
L5 & W	2137.5+2152.6	45.51	35.56	45.53	35.73	48.53	71.29
L10 & W	2140.0+2152.6	45.51	35.56	45.57	36.06	48.55	71.62

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
L1.4 & W	2135.7+2152.6	44.99	31.55	45.05	31.99	48.03	63.54
L3 & W	2136.5+2152.6	45.33	34.12	45.34	34.20	48.35	68.32
L5 & W	2137.5+2152.6	45.46	35.16	45.50	35.48	48.49	70.64
L10 & W	2140.0+2152.6	45.44	34.99	45.46	35.16	48.46	70.15

Mix Carrier(x3): 2W+1L

Declarative Maximum Output power:

W&W&L1.4: 44.80dBm per port

W&W&L3, W&W&L5, W&W&L10: 46.00dBm per port

Configuration 1 - Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4	2124.8+2129.8+2141.7	44.69	29.44	44.76	29.92	47.73	59.36
W&W & L3	2124.8+2129.8+2140.9	45.61	36.39	45.65	36.73	48.64	73.12
W&W & L5	2124.8+2129.8+2139.9	45.71	37.24	45.75	37.58	48.74	74.82
W&W & L10	2124.8+2129.8+2137.4	45.71	37.24	45.74	37.50	48.74	74.74

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4	2124.8+2129.8+2141.7	44.73	29.72	44.75	29.85	47.75	59.57
W&W & L3	2124.8+2129.8+2140.9	45.62	36.48	45.64	36.64	48.64	73.12
W&W & L5	2124.8+2129.8+2139.9	45.70	37.15	45.73	37.41	48.73	74.56
W&W & L10	2124.8+2129.8+2137.4	45.72	37.33	45.76	37.67	48.75	75.00



LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4	2124.8+2129.8+2141.7	44.55	28.51	44.62	28.97	47.60	57.48
W&W & L3	2124.8+2129.8+2140.9	45.46	35.16	45.51	35.56	48.50	70.72
W&W & L5	2124.8+2129.8+2139.9	45.59	36.22	45.63	36.56	48.62	72.78
W&W & L10	2124.8+2129.8+2137.4	45.58	36.14	45.60	36.31	48.60	72.45

Mix Carrier(x4): 2W+2L

Declarative Maximum Output power:

W&W&L1.4&L1.4: 45.00dBm per port
W&W&L3&L3, W&W&L5&L5: 46.00dBm per port

Configuration 1 - Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5, W&W&L10&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4&L1.4	2124.8+2129.8+2140.3+2141.7	44.78	30.06	44.82	30.34	47.81	60.40
W&W & L3&L3	2124.8+2129.8+2137.9+2140.9	45.51	35.56	45.54	35.81	48.54	71.37
W&W & L5&L5	2124.8+2129.8+2134.9+2139.9	45.64	36.64	45.61	36.39	48.64	73.03

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4&L1.4	2124.8+2129.8+2140.3+2141.7	44.80	30.20	44.82	30.34	47.82	60.54
W&W & L3&L3	2124.8+2129.8+2137.9+2140.9	45.50	35.48	45.53	35.73	48.53	71.21
W&W & L5&L5	2124.8+2129.8+2134.9+2139.9	45.57	36.06	45.61	36.39	48.60	72.45

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4&L1.4	2124.8+2129.8+2140.3+2141.7	44.70	29.51	44.69	29.44	47.70	58.95
W&W & L3&L3	2124.8+2129.8+2137.9+2140.9	45.41	34.75	45.41	34.75	48.42	69.50
W&W & L5&L5	2124.8+2129.8+2134.9+2139.9	45.54	35.81	45.51	35.56	48.54	71.37



Product Service

Note *:

Two transmitters output power were summed up according to FCC KDB662911 D01 Multiple Transmitter Output v02r01 for MIMO mode.

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are the required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limit	$\leq 1640\text{W/MHz}$ or $\leq +62.1\text{dBm/MHz}$
-------	---

Remarks

The EUT does not exceed 1640W/MHz or 62.1dBm/MHz at the measured frequencies.



Product Service

2.2 PEAK – AVERAGE RATIO

2.2.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.50 (i)
Industry Canada RSS-139, Clause 6.4

2.2.2 Equipment Under Test

RRUS 11 B4 / KRC 161 254/2, S/N: CF81442849

2.2.3 Date of Test and Modification State

28, 29 November and 02 December 2013 – Modification State 0

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 27 and Industry Canada RSS-139.

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

The measurements were performed on the combined output connector RF A. Limited complementary measurement were done at the output connector RF B to verify identical performance for both transmitter chains in MIMO mode.

The EUT was tested at its maximum power level, modulation with WCDMA using QPSK and LTE using QPSK as the representative. The path loss measured and entered as a reference level offset.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 3 - L1.4&W, L3&W, L5&W, L10&W
 - Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10
 - Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5

2.2.6 Environmental Conditions

	28 November 2013	29 November 2013	02 December 2013
Ambient Temperature	23.5°C	23.0°C	23.0°C
Relative Humidity	38.0%	39.0%	45.0%



2.2.7 Test Results


For the period of test the EUT met the requirements of FCC CFR 47 Part 27 and Industry Canada RSS-139 for Peak – Average Ratio.

The test results are shown below.

LTE (E-TM1.1) & WCDMA (QPSK)

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 1 - W&L1.4

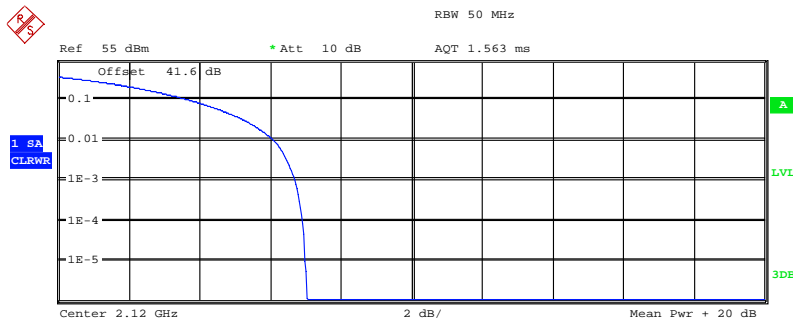

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 37.9MHz


Trace 1
 Mean 44.93 dBm
 Peak 51.98 dBm
 Crest 7.04 dB

10 %	3.72 dB
1 %	6.09 dB
.1 %	6.70 dB
.01 %	6.92 dB

Date: 28.NOV.2013 12:34:13




Configuration 1 - Mode 1 - W&L3

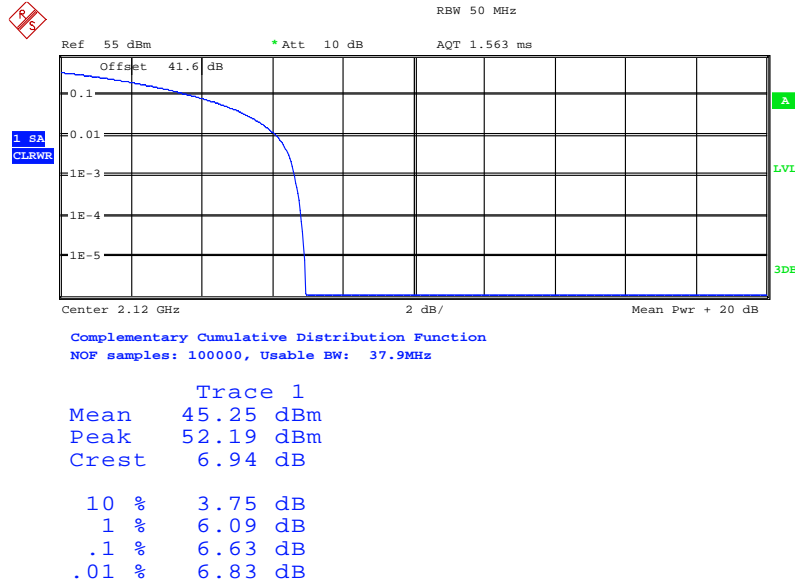

Date: 28.NOV.2013 12:59:15


Configuration 1 - Mode 1 - W&L5

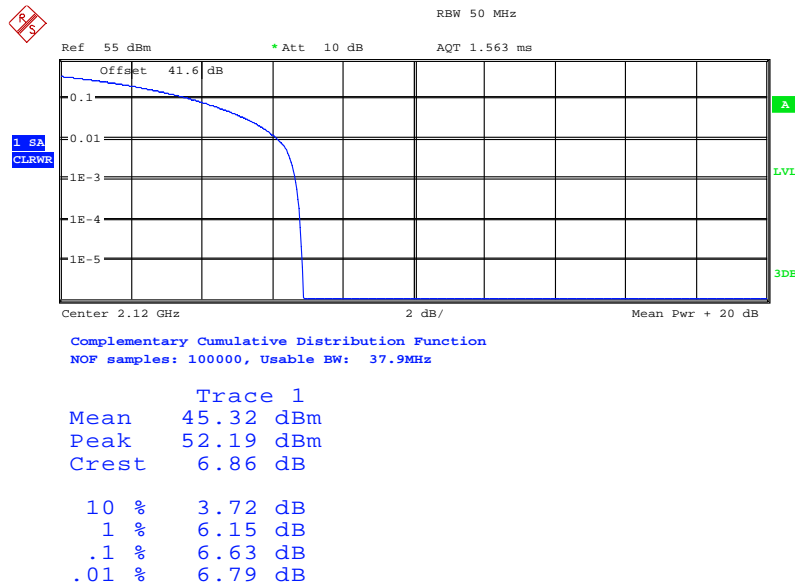

Date: 28.NOV.2013 13:14:39




Configuration 1 - Mode 1 - W&L10

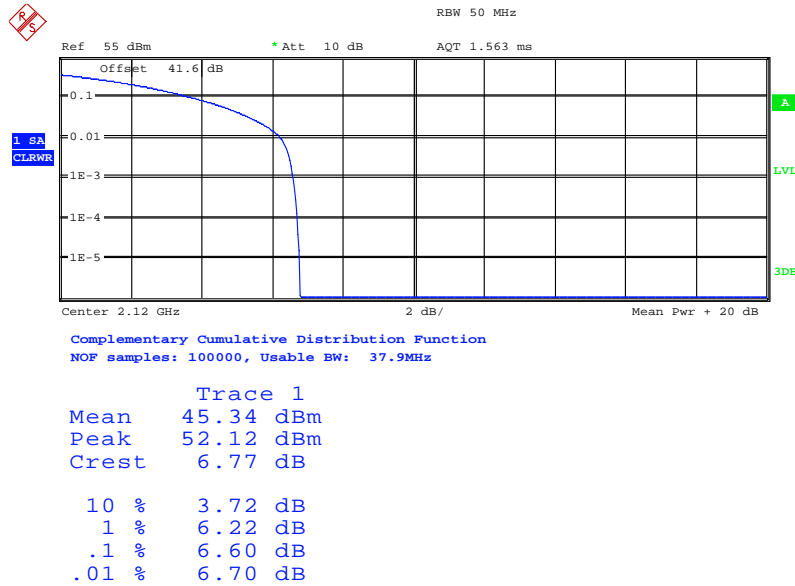

Date: 28.NOV.2013 13:31:55


Configuration 1 - Mode 2 - W&L1.4

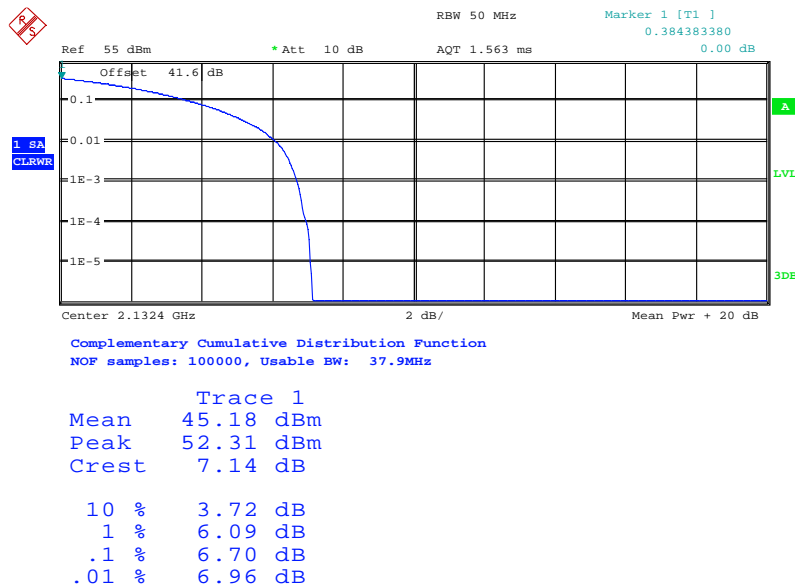

Date: 28.NOV.2013 08:59:41




Configuration 1 - Mode 2 - W&L3

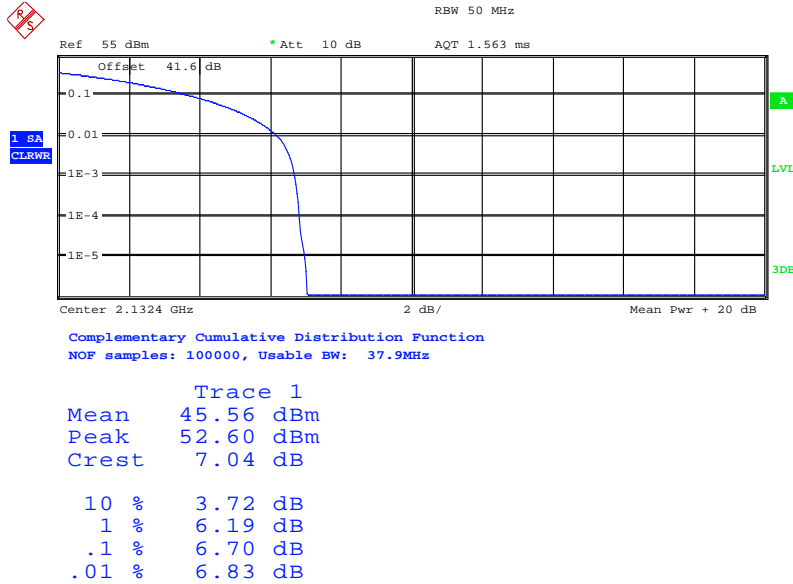

Date: 28.NOV.2013 09:22:49


Configuration 1 - Mode 2 - W&L5

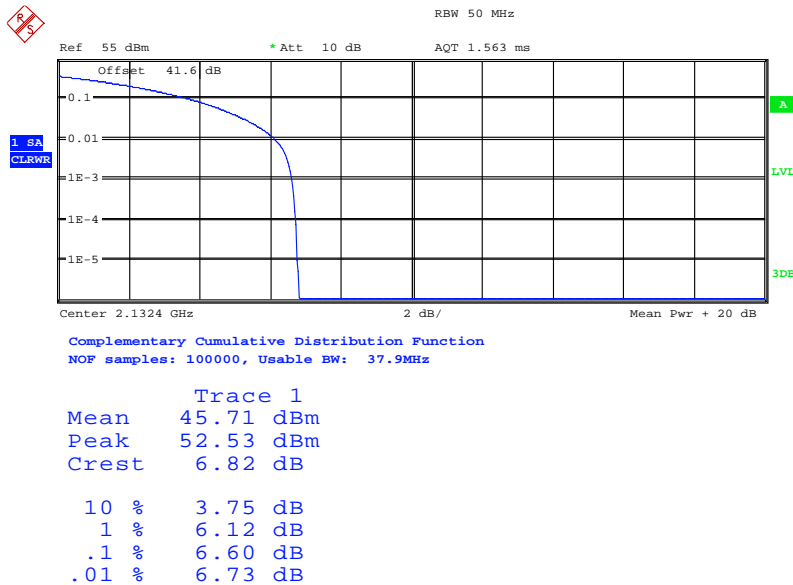

Date: 28.NOV.2013 09:51:27




Configuration 1 - Mode 2 - W&L10

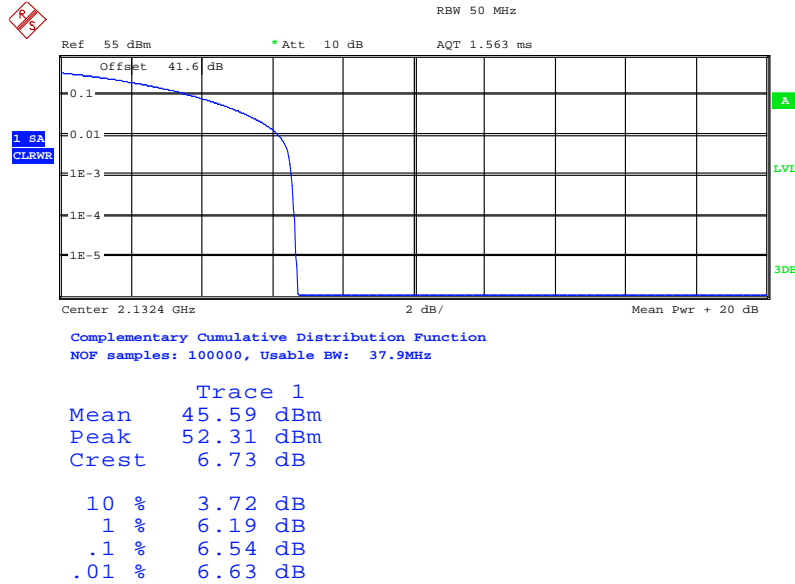

Date: 28.NOV.2013 09:33:05


Configuration 1 - Mode 3 - L1.4&W

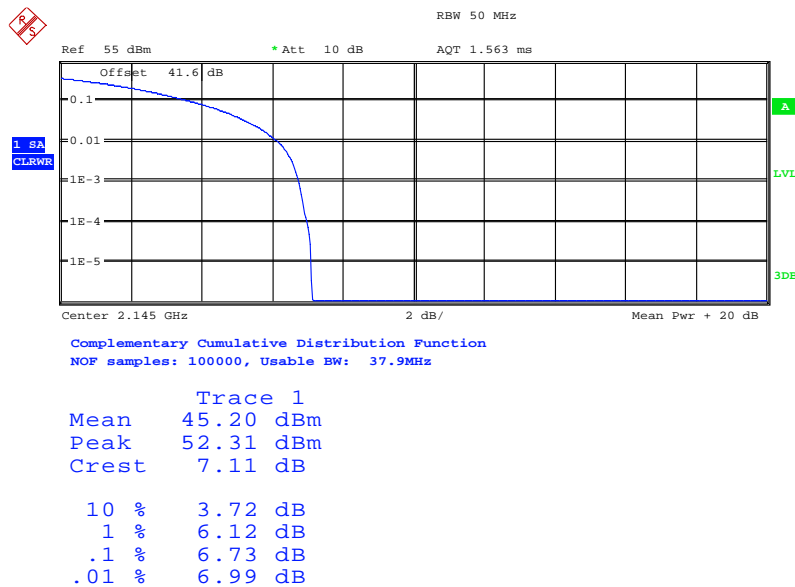

Date: 28.NOV.2013 14:41:14




Configuration 1 - Mode 3 - L3&W

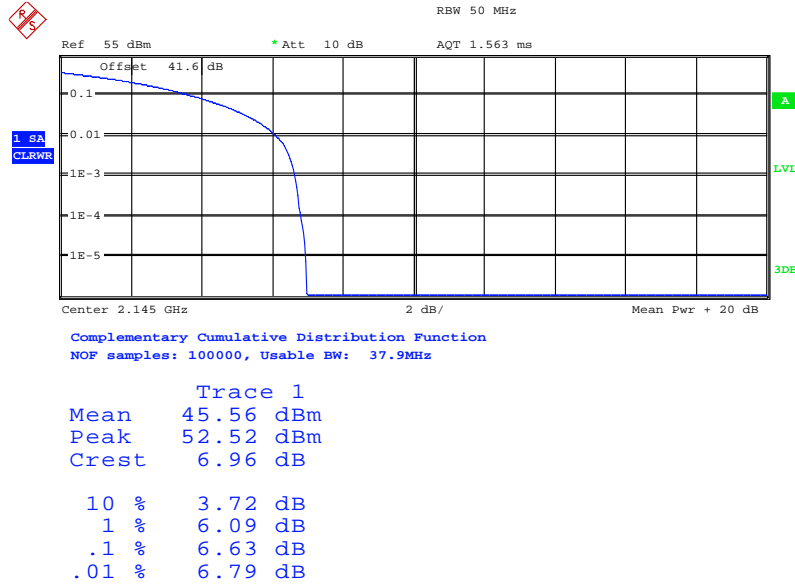

Date: 28.NOV.2013 14:52:26


Configuration 1 - Mode 3 - L5&W

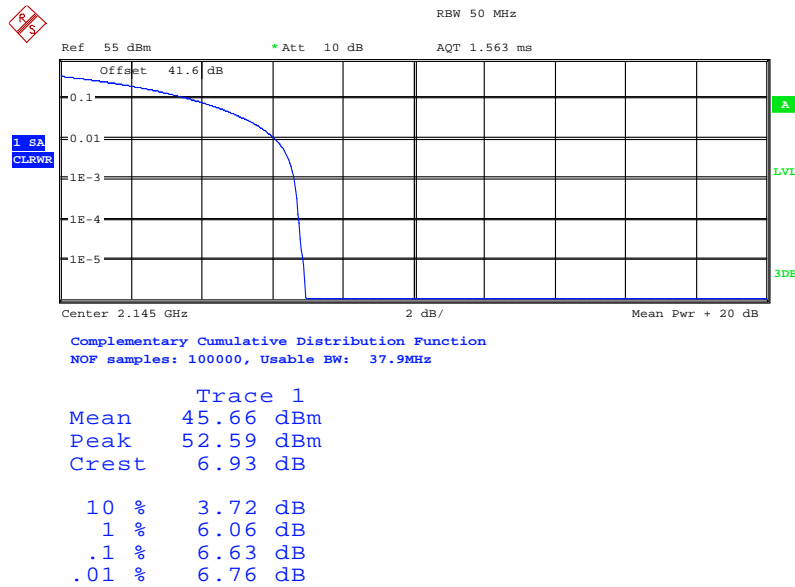

Date: 28.NOV.2013 15:00:56




Configuration 1 - Mode 3 - L10&W

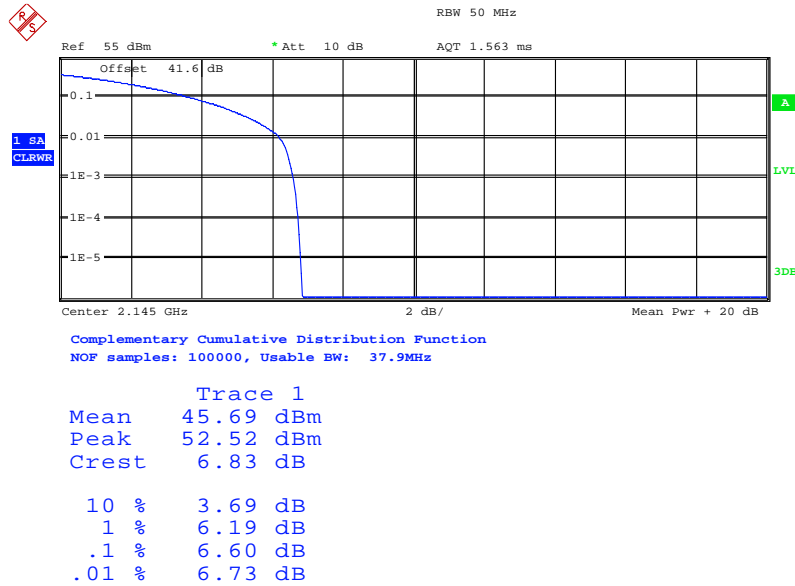

Date: 28.NOV.2013 15:02:10

Mix Carrier(x3): 2W+1L

Configuration 1 - Mode 6 - W&W&L1.4

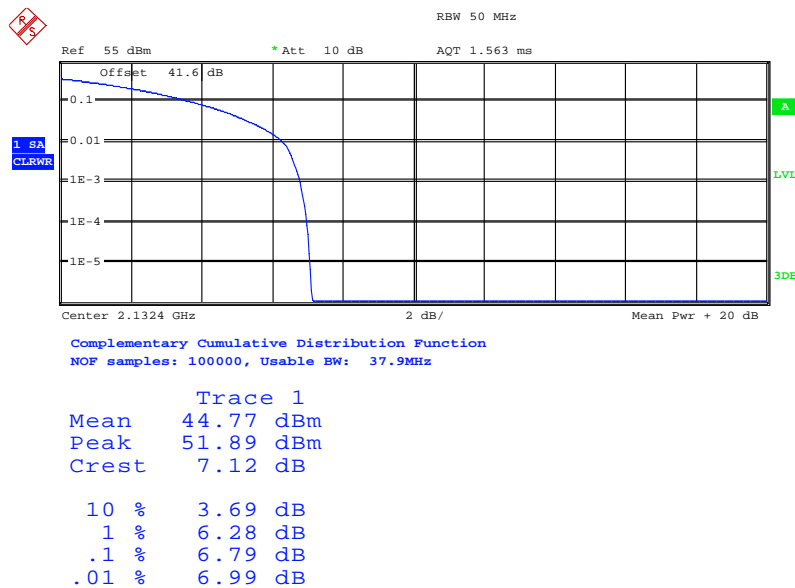


Date: 29.NOV.2013 11:56:33




Product Service

Configuration 1 - Mode 6 - W&W&L3

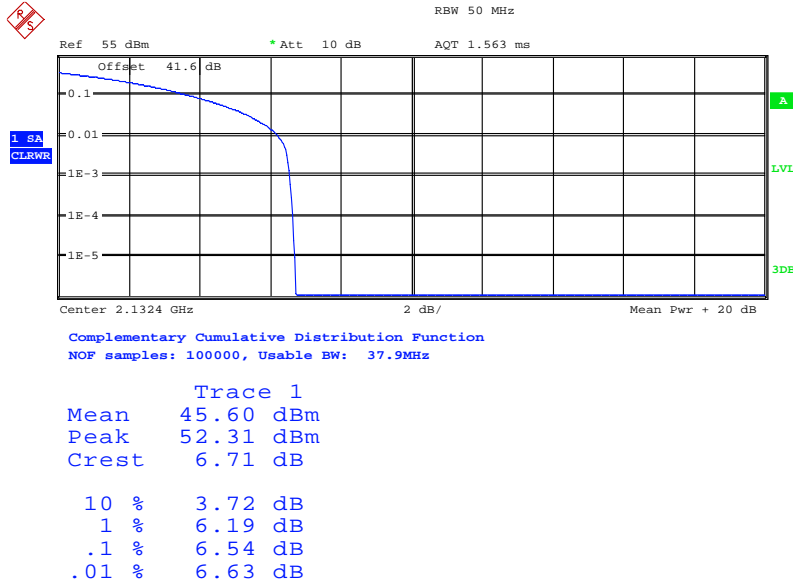

Date: 29.NOV.2013 12:40:14


Configuration 1 - Mode 6 - W&W&L5

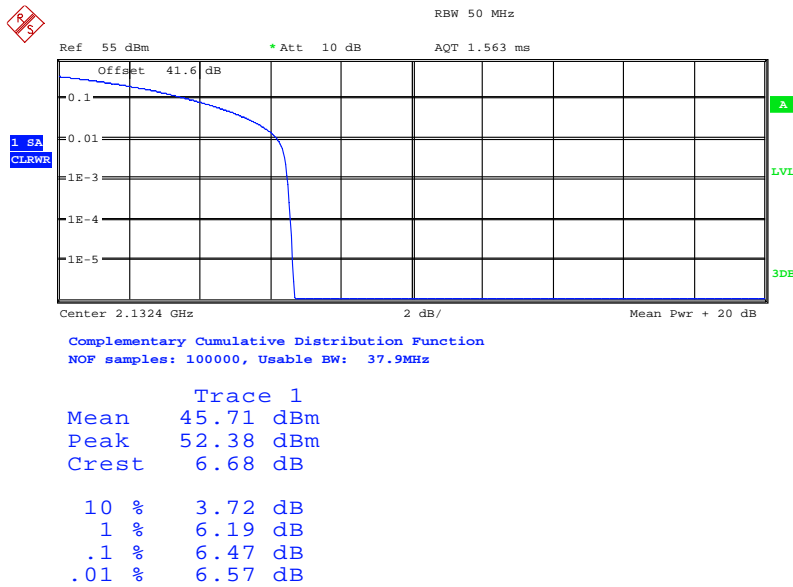

Date: 29.NOV.2013 12:38:48




Configuration 1 - Mode 6 - W&W&L10

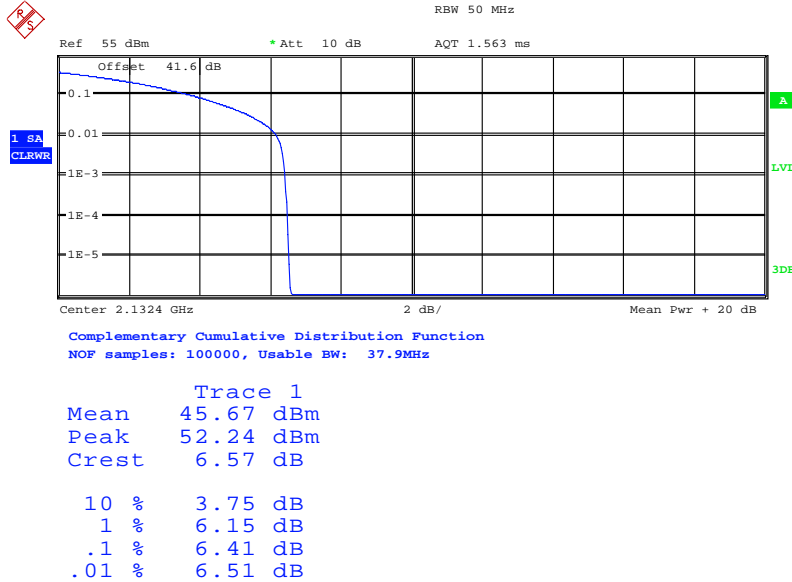

Date: 29.NOV.2013 12:05:53

Mix Carrier(x4): 2W+2L

Configuration 1 - Mode 7 – W&W&L1.4&L1.4

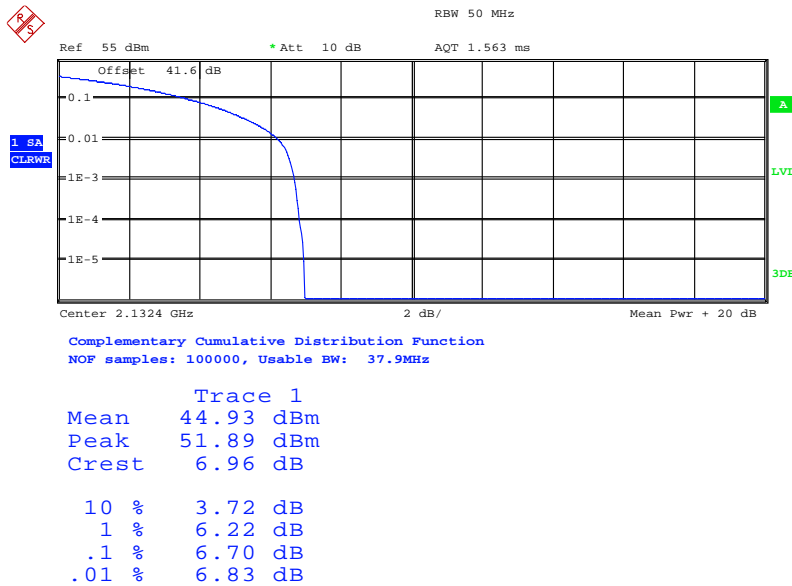


Date: 2.DEC.2013 11:19:53




Product Service

Configuration 1 - Mode 7 - W&W&L3&L3

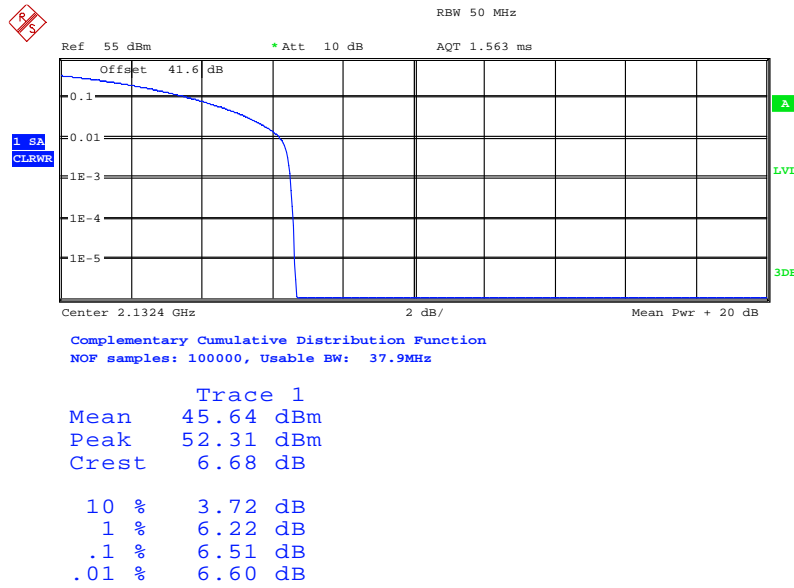

Date: 2.DEC.2013 11:31:10

Configuration 1 - Mode 7 - W&W&L5&L5

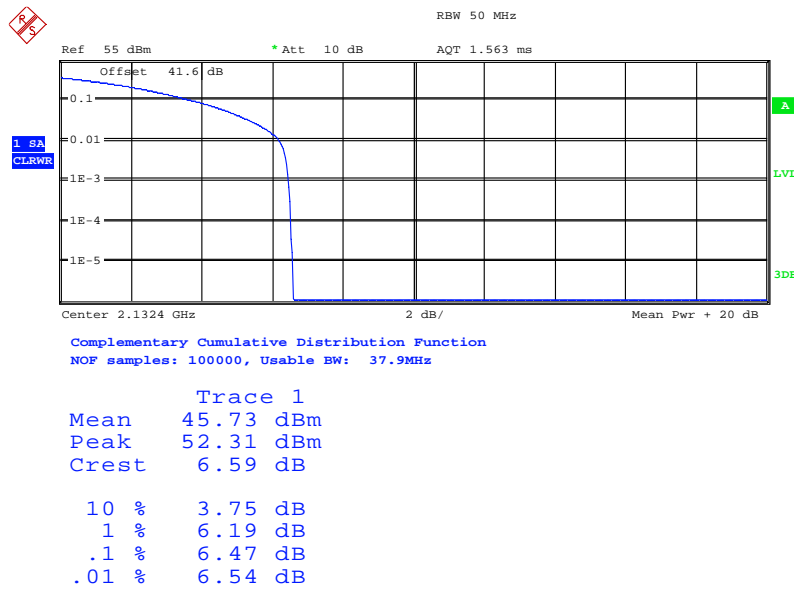

Date: 2.DEC.2013 11:33:21

Limit	13dB
-------	------

Remarks

The Peak – Average ratio does not exceed 13dB at the measured frequencies.



2.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (± 1 MHz)

2.3.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 27, Clause 27.53 (h)
Industry Canada RSS-139, Clause 6.5

2.3.2 Equipment Under Test

RRUS 11 B4 / KRC 161 254/2, S/N: CF81442849

2.3.3 Date of Test and Modification State

28 and 29 November 2013 – Modification State 0

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139.

In accordance with 27.53(h)(1), at least 1% of the emission bandwidth should be used for the frequencies offset up to 1MHz away from the block edge. For WCDMA/LTE mix carrier 1W+1L, with WCDMA signal at the edge, which is selected as the worst case, 50kHz resolution bandwidth (5MHz nominal Bandwidth setting) and the limit with -13dBm were used. According to the FCC rules, a RBW of 1MHz for measurements of emissions > 1MHz away from the band edges. A resolution bandwidth of 100kHz was used for the measurements of emissions > 1MHz away from the band edges. To compensate for the reduced measurement bandwidth, at the frequency range > 1MHz away from the band edges, the limit was adjusted from -13dBm to -23dBm. Spectrum analyser detector was set as RMS.

The limit was adjusted with a correction of -3dB [10Log(2)] by using the Measure and Add 10Log(N) dB technique according to FCC KDB662911 D01 Multiple Transmitter Output v02r01 accounting for simultaneous transmission from antenna ports RF A and RF B.

The measurements were performed on the combined output connector RF A. Limited complementary measurement were done at the output connector RF B to verify identical performance for both transmitter chains.

The EUT was tested at its maximum power level. The path loss measured and entered as a reference level offset.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 4 - W&L1.4
- Mode 5 - L1.4&W



Product Service

2.3.6 Environmental Conditions

	28 November 2013	29 November 2013
Ambient Temperature	23.5°C	23.0°C
Relative Humidity	38.0%	39.0%

2.3.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139 for Spurious Emissions Antenna Terminals (± 1 MHz).

Below are the Frequencies the EUT was tested against along with the tested channels.

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 4 - W&L1.4 and 5 - L1.4&W

Band Edge Frequency	Edge Test with WCDMA Channel No./Frequencies	RBW / VBW (kHz)	Limit (dB)
Bottom 2110MHz	Channel: 1537(W)&2007(L) Frequency: 2112.4MHz(W)+ 2115.7MHz(L1.4)	50 / 500	-16.0
Top 2155MHz	Channel: 1738(W)&2343(L) Frequency: 2152.6 MHz(W)+ 2149.3MHz(L1.4)	50 / 500	-16.0

The channels shown in the table above are the minimum and maximum channels that can be used in the authorised frequency ranges to maintain compliance. Channels used outside of those stated and power levels used beyond those stated in the table exceed the specification limits, thus they cannot be used.

The channels outside of those shown in the table above were not tested at lower power levels to determine a level at which compliance would be achieved. Therefore, to maintain compliance, only the channels shown in the table above shall be used.




The test results are shown below


Mix Carrier(x2): 1W+1L

LTE (E-TM1.1) & WCDMA (QPSK)

Configuration 1 - Mode 4 - W&L1.4

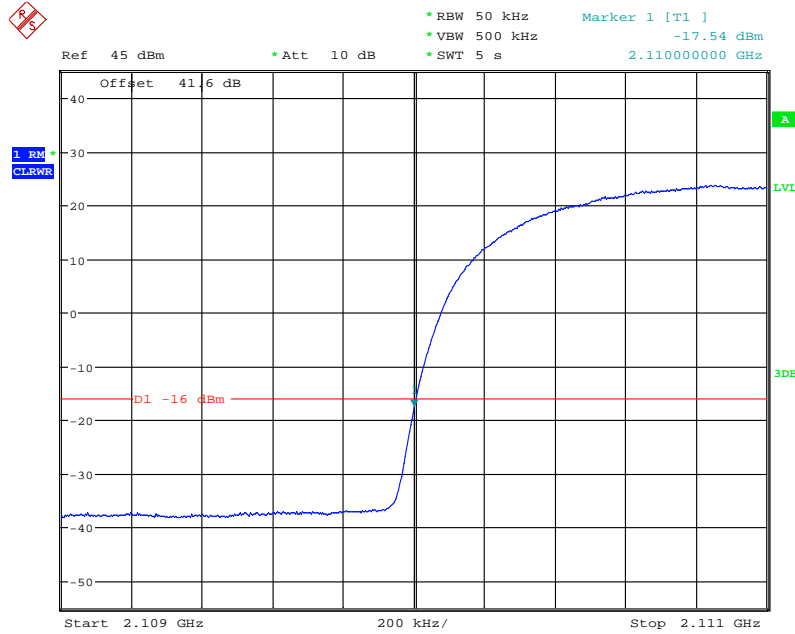


Date: 28.NOV.2013 12:48:11

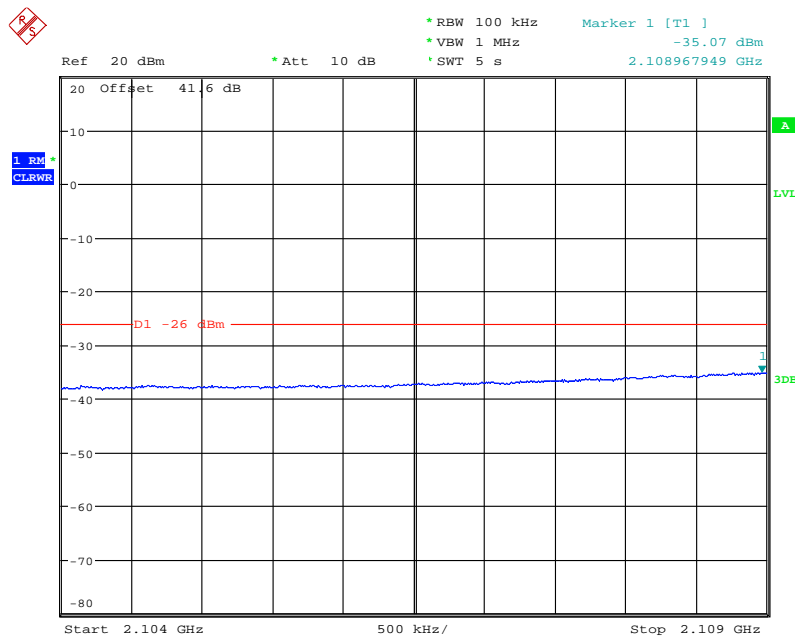


Date: 28.NOV.2013 12:53:54



Configuration 1 - Mode 5 - L1.4&W

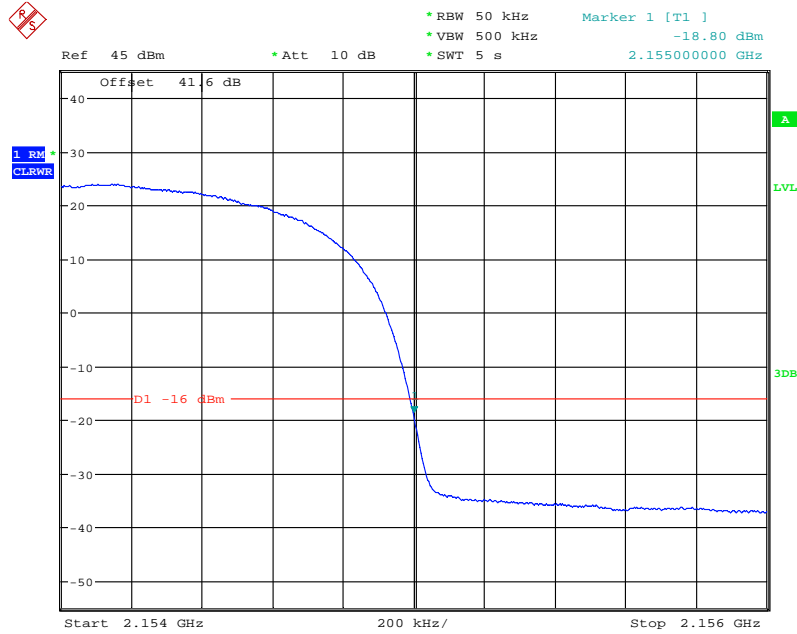

Date: 28.NOV.2013 14:39:34

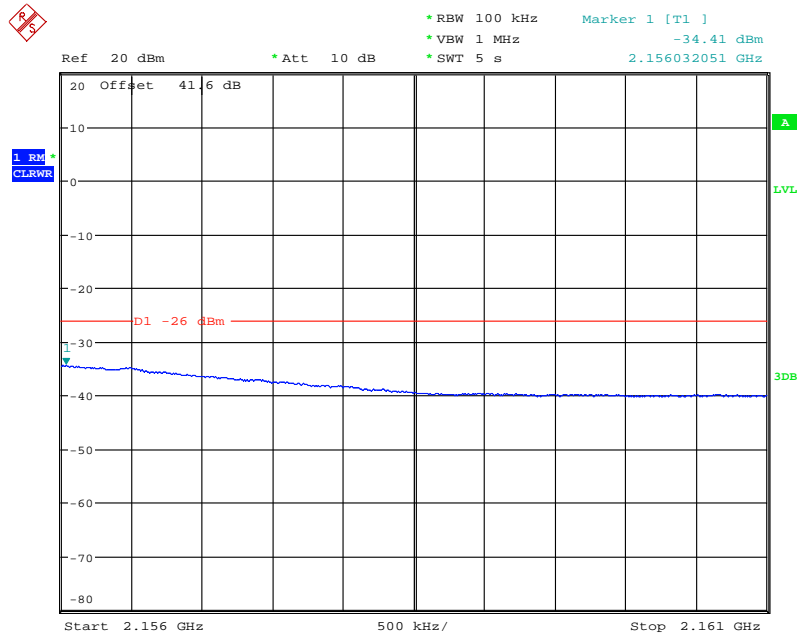


Date: 28.NOV.2013 14:40:34




Product Service

LTE (E-TM3.2) & WCDMA (16QAM)

Configuration 1 - Mode 4 - W&L1.4

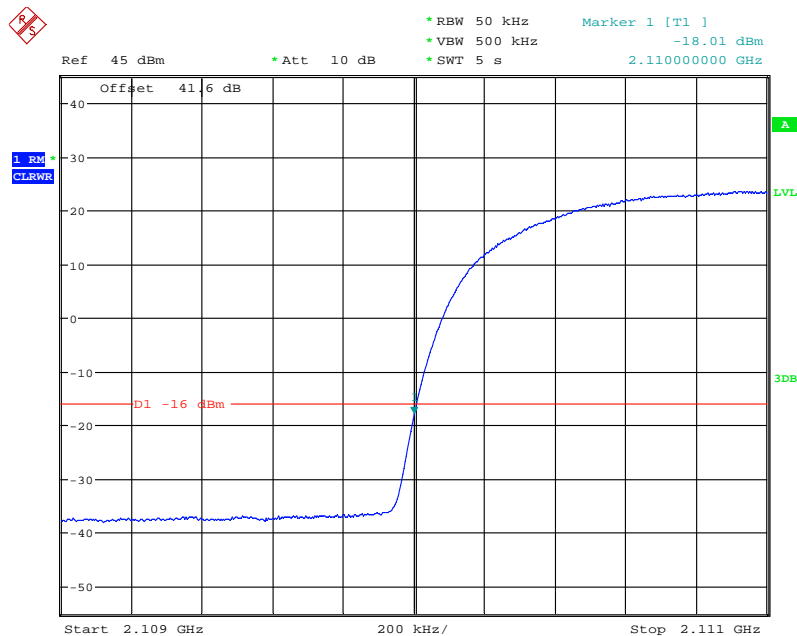


Date: 28.NOV.2013 13:59:09

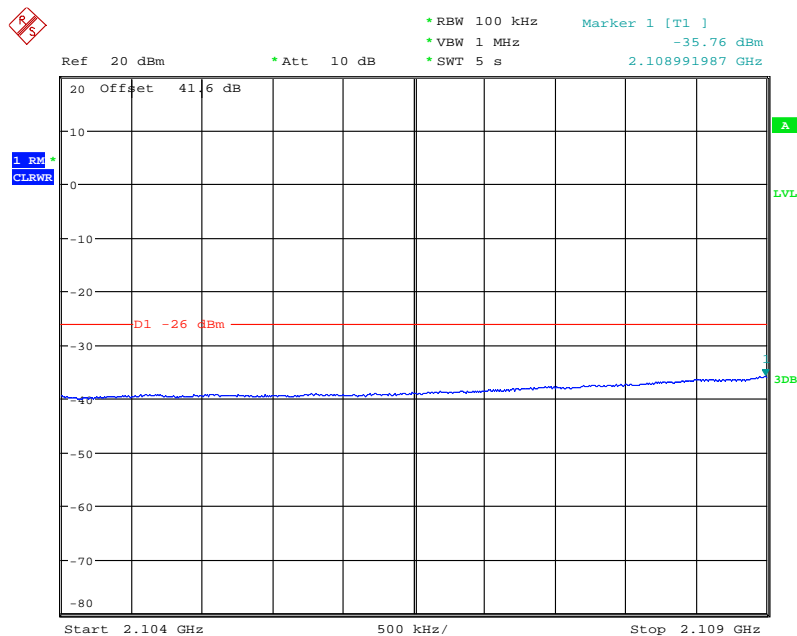


Date: 28.NOV.2013 14:03:10



Configuration 1 - Mode 5 – L1.4&W

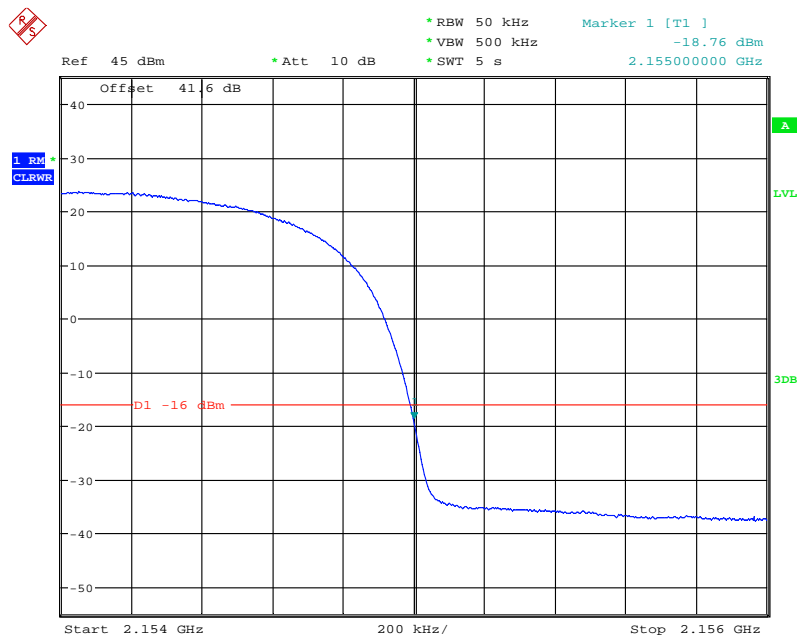

Date: 29.NOV.2013 09:46:11

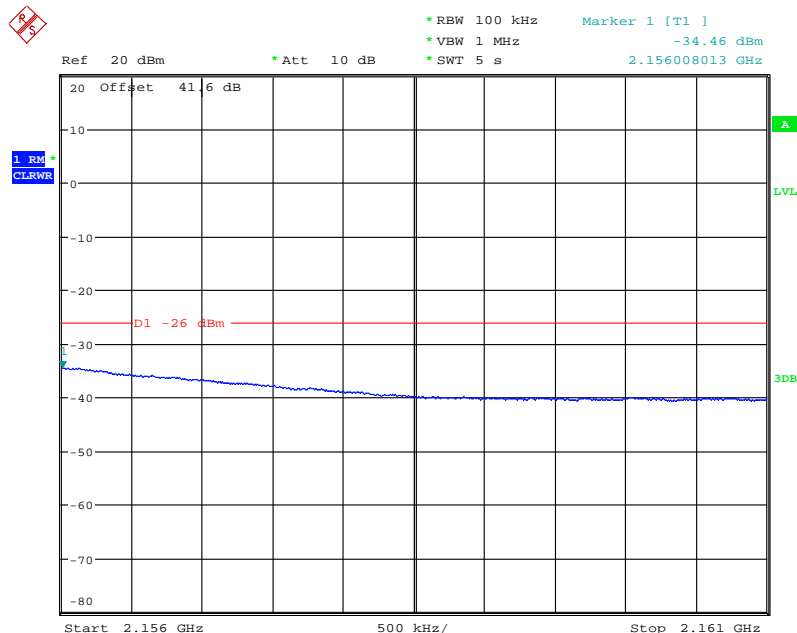


Date: 29.NOV.2013 09:43:48




Product Service

LTE (E-TM3.1) & WCDMA (64QAM)

Configuration 1 - Mode 4 - W&L1.4

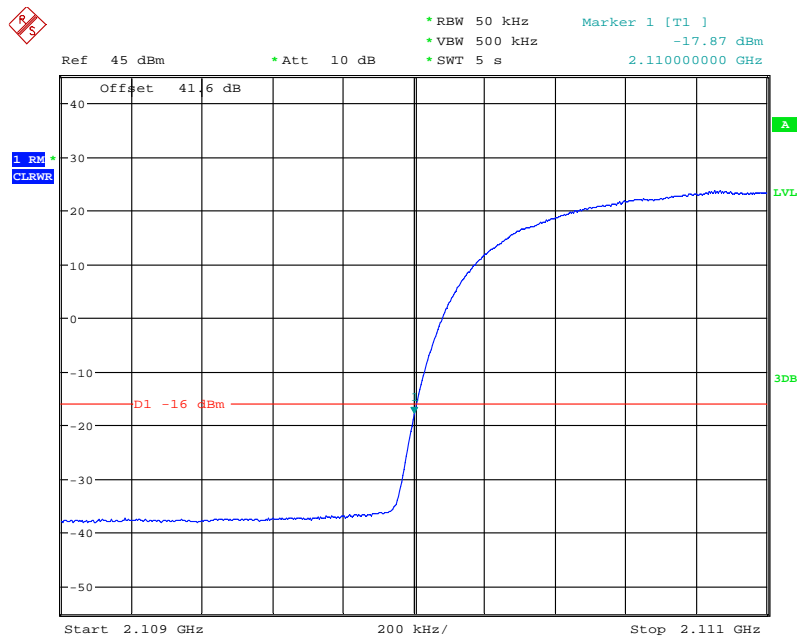


Date: 28.NOV.2013 14:31:35

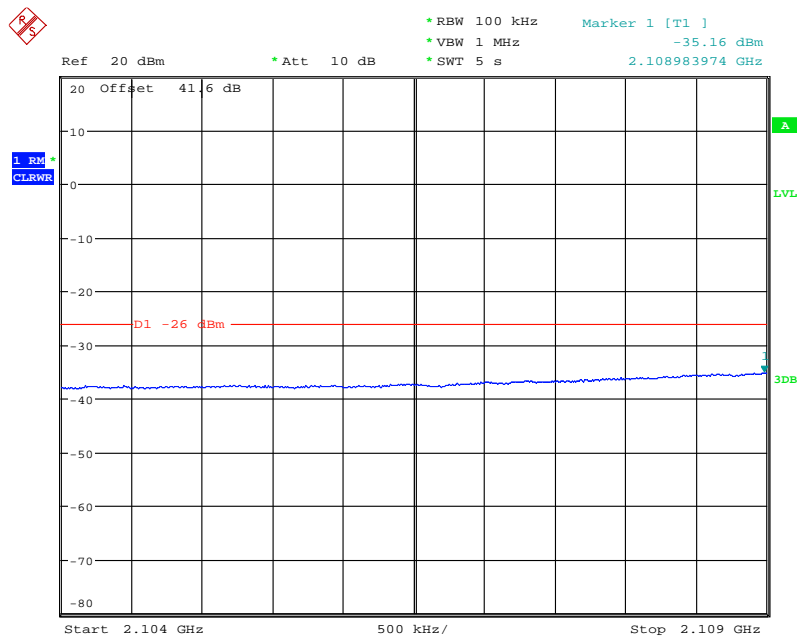


Date: 28.NOV.2013 14:30:28



Configuration 1 - Mode 5 – L1.4&W

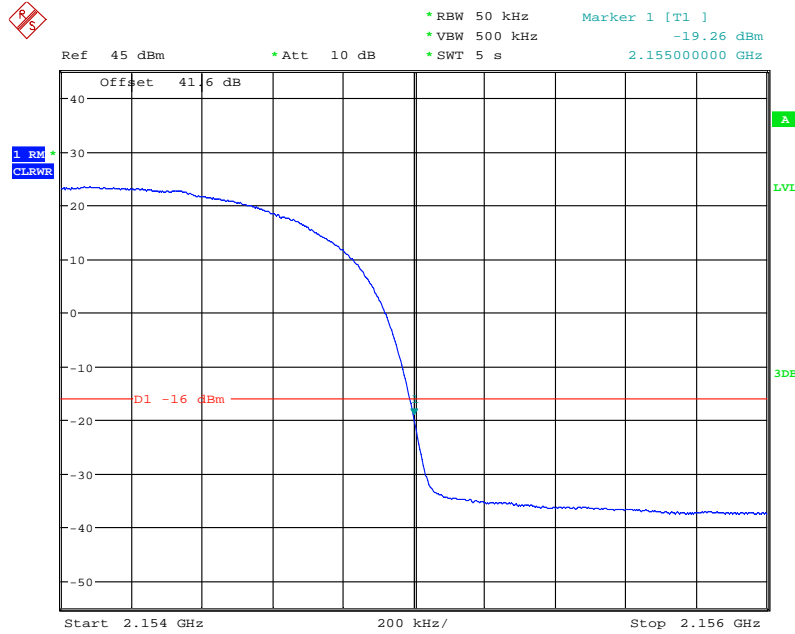

Date: 29.NOV.2013 09:51:51

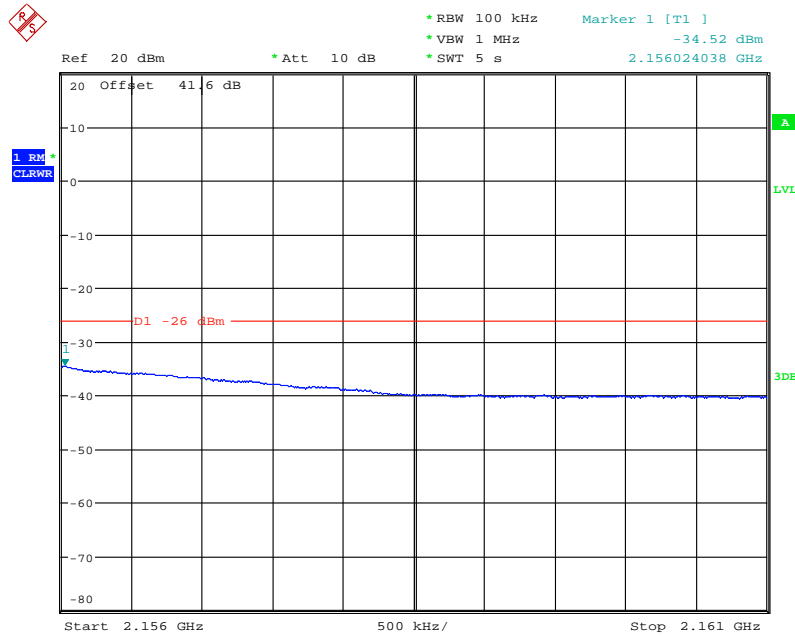

Date: 29.NOV.2013 09:52:51

Limit

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10\log P \text{ dB} + 10\log(NANT)$.



2.4 RADIATED SPURIOUS EMISSIONS

2.4.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1053
FCC CFR 47 Part 27, Clause 27.53 (h)
Industry Canada RSS-139, Clause 6.5

2.4.2 Equipment Under Test

RRUS 11 B4 / KRC 161 254/2, S/N: CF81442849

2.4.3 Date of Test and Modification State

03 and 04 December 2013 – Modification State 0

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the measurement antenna in both horizontal and vertical polarisations.

Emissions identified within the range 30MHz – 25GHz were then formally measured using a Peak detector as the worst case.

In the frequency Range 30MHz – 25GHz, the measurement was performed with a resolution bandwidth of 1MHz as the worst case.

The measurements were performed at a 3m distance unless otherwise stated.

The limits for Spurious Emissions have been calculated, as shown below using the following formula:

Field Strength of Carrier - $(43 + 10\text{Log}(P))$ dB

Where:

Field Strength is measured in dB μ V/m

P is measured Transmitter Power in Watts



Determination of Spurious Emission Limit

As the EUT does not have an integral antenna, the field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipole as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where G_i is the antenna gain of ideal half-wave dipole,
 P_o is the power out of the transceiver in W,
 d is the measurement distance in meters.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 57.48)^{0.5} / 3 = 17.73 \text{ V/m} = 144.97 \text{ dB}\mu\text{V/m}$$

As per 27.53 (h) the spurious emission must be attenuated by $43 + 10 \log (P_o)$ dB this gives:

$$43 + 10 \log(57.48) = 60.60 \text{ dB}$$

Therefore the limit at 3m measurement distance is:

$$144.97 - 60.60 = 84.4 \text{ dB}\mu\text{V/m}$$

This limit has been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1 - Mode 1 - W&L1.4
 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 3 - L1.4&W
 - Mode 6 - W&W&L1.4
 - Mode 7 - W&W&L1.4&L1.4

2.4.6 Environmental Conditions

	03 December 2013	04 December 2013
Ambient Temperature	23.5°C	23.5°C
Relative Humidity	46.0%	43.0%



2.4.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 & Part 27 and Industry Canada RSS-139 for Radiated Spurious Emissions.

The test results are shown below

Note: Only the worst case results plots have been included as all of the emissions are greater than 20dB below the limit. A set of plots have been included to show the measurement system noise floor.

LTE (E-TM1.1) & WCDMA (QPSK)

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 2 - W&L1.4

No emissions were detected within 20dB of the limit.

Configuration 1 - Mode 2 - W&L3

No emissions were detected within 20dB of the limit.

Configuration 1 - Mode 2 - W&L5

No emissions were detected within 20dB of the limit.

Configuration 1 - Mode 2 - W&L10

No emissions were detected within 20dB of the limit.

LTE (E-TM3.2) & WCDMA (16QAM)

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 2 - W&L1.4

No emissions were detected within 20dB of the limit.

LTE (E-TM3.1) & WCDMA (64QAM)

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 1 - W&L1.4

No emissions were detected within 20dB of the limit.


Configuration 1 - Mode 2 - W&L1.4

No emissions were detected within 20dB of the limit.




Configuration 1 - Mode 3 - W&L1.4

30MHz - 3GHz

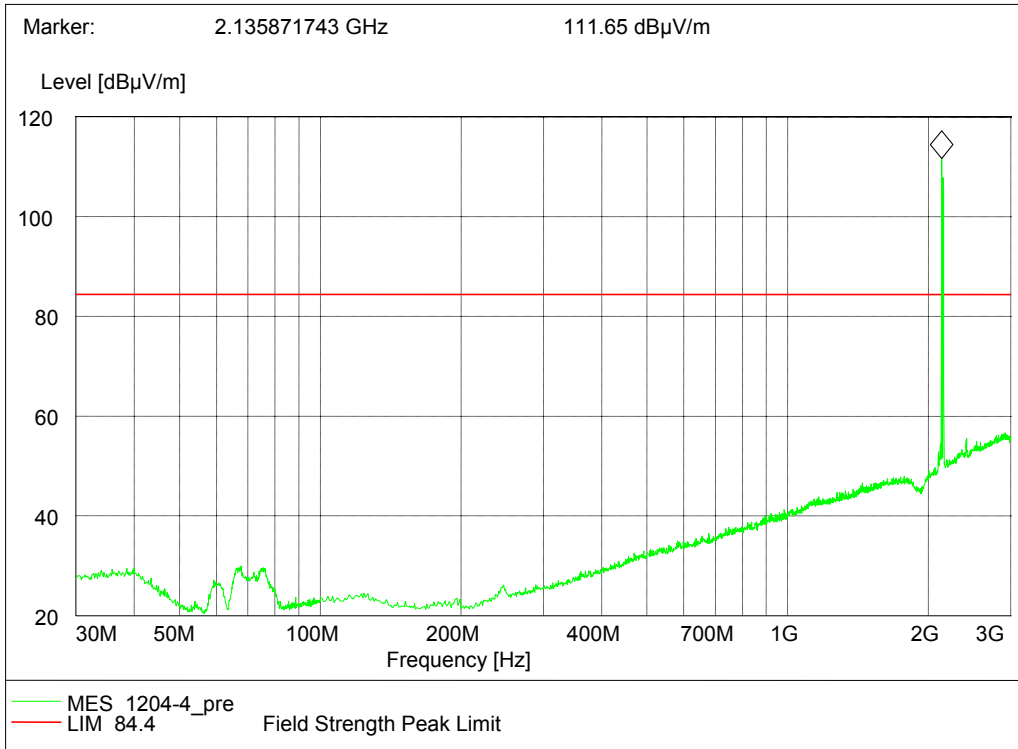


Note: The emission beyond the limit is the operating frequency.

3GHz - 18GHz

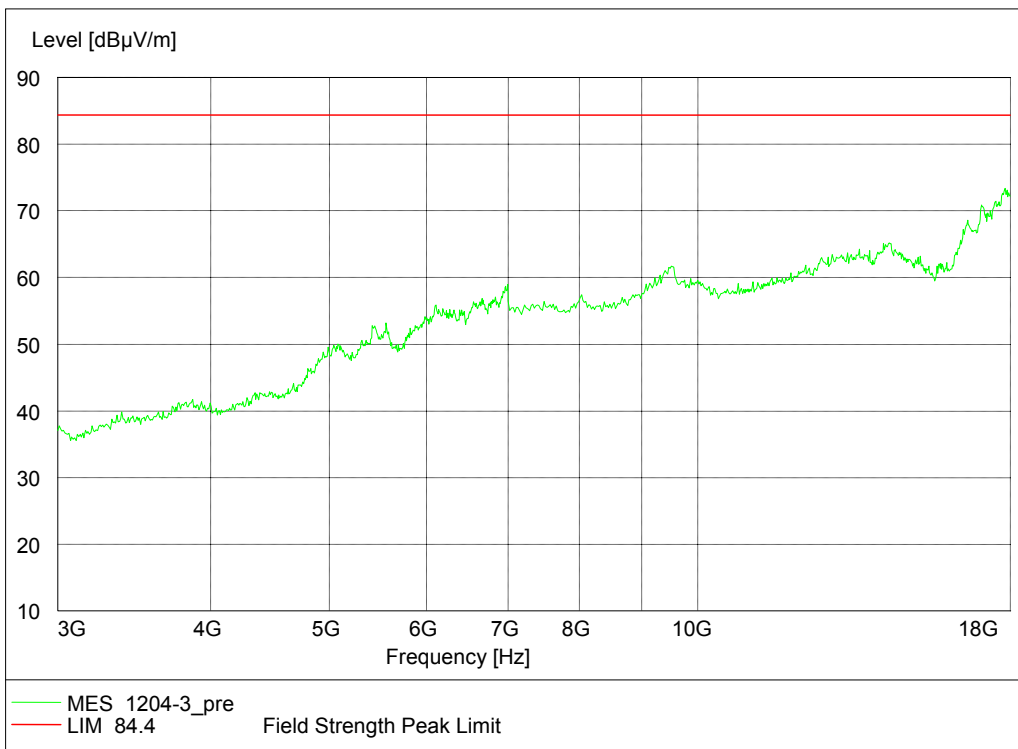



18GHz - 25GHz

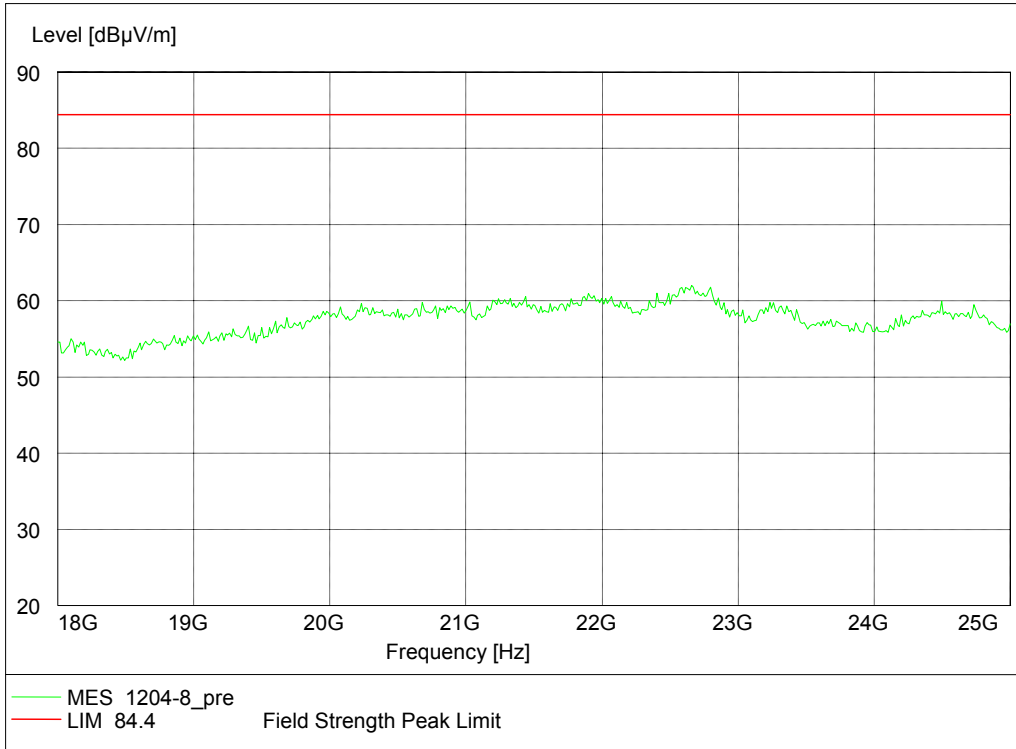

LTE (E-TM1.1) & WCDMA (QPSK)

Mix Carrier(x3): 2W+1L

Configuration 1 - Mode 6 - W&W&L1.4

No emissions were detected within 20dB of the limit.

LTE (E-TM1.1) & WCDMA (QPSK)

Mix Carrier(x4): 2W+2L

Configuration 1 - Mode 7 - W&W&L1.4&L1.4

No emissions were detected within 20dB of the limit.

Limit	-13dBm or 84.4dBµV/m
-------	----------------------

Remarks

The EUT does not exceed -13dBm or 84.4dBµV/m at the measured frequencies.



Product Service

2.5 CONDUCTED SPURIOUS EMISSIONS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 27, Clause 27.53 (h)
Industry Canada RSS-139, Clause 6.5

2.5.2 Equipment Under Test

RRUS 11 B4 / KRC 161 254/2, S/N: CF81442849

2.5.3 Date of Test and Modification State

28, 29 November and 02 December 2013 – Modification State 0

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139.

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using an attenuator and the frequency spectrum investigated from 9kHz to 22GHz. The EUT was set to transmit on maximum power. The resolution was set to 1MHz for 9kHz to 22GHz thus meeting the requirements of FCC CFR 47 Part 27, Clause 27.53 (h) and Industry Canada RSS-139, Clause 6.5. The spectrum analyser detector was set to peak and trace was kept on Max Hold.

The limit was adjusted with a correction of $-3\text{dB} [10\text{Log}(2)]$ by using the Measure and Add $10\text{Log}(N)$ dB technique according to FCC KDB662911 D01 Multiple Transmitter Output v02r01 accounting for simultaneous transmission from antenna ports RF A and RF B. The limit was adjusted from -13dBm to -16dBm .

The maximum path loss across the measurement band was used as the reference level offset to ensure worst case.

Measurements were made up to the 10th harmonics of the highest carrier frequency at least.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1 - Mode 1 - W&L1.4, W&L10
- Mode 2 - W&L1.4, W&L3, W&L5, W&L10
- Mode 3 - L1.4&W, L10&W
- Mode 6 - W&W&L1.4
- Mode 7 - W&W&L1.4&L1.4



Product Service

2.5.6 Environmental Conditions

	28 November 2013	29 November 2013	02 December 2013
Ambient Temperature	23.5°C	23.0°C	23.0°C
Relative Humidity	38.0%	39.0%	45.0%


2.5.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and Part 27 and Industry Canada RSS-139 for Conducted Spurious Emissions.

The test results are shown below

Remark:

The emissions at 9kHz on the plots was not generated by the test object. A complementary measurement with a smaller span showed that it was related to the LO feedthrough.

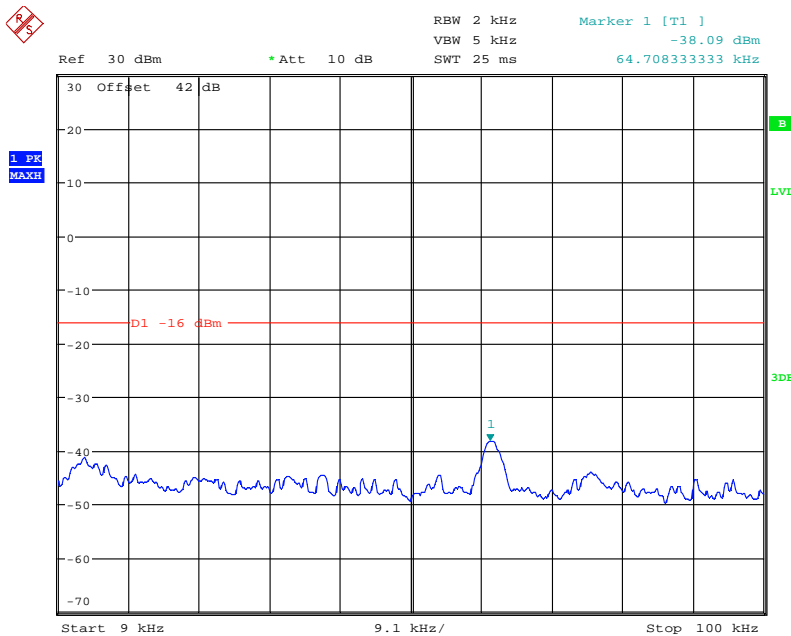




LTE (E-TM1.1) & WCDMA (QPSK)

Mix Carrier(x2): 1W+1L


Configuration 1 - Mode 1 - W&L1.4

9kHz to 3GHz

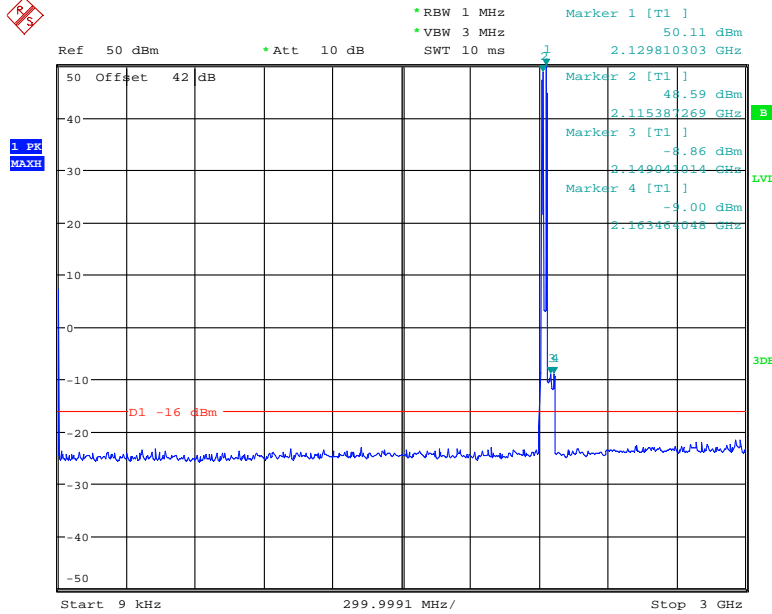

Date: 28.NOV.2013 12:37:41

Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot below.

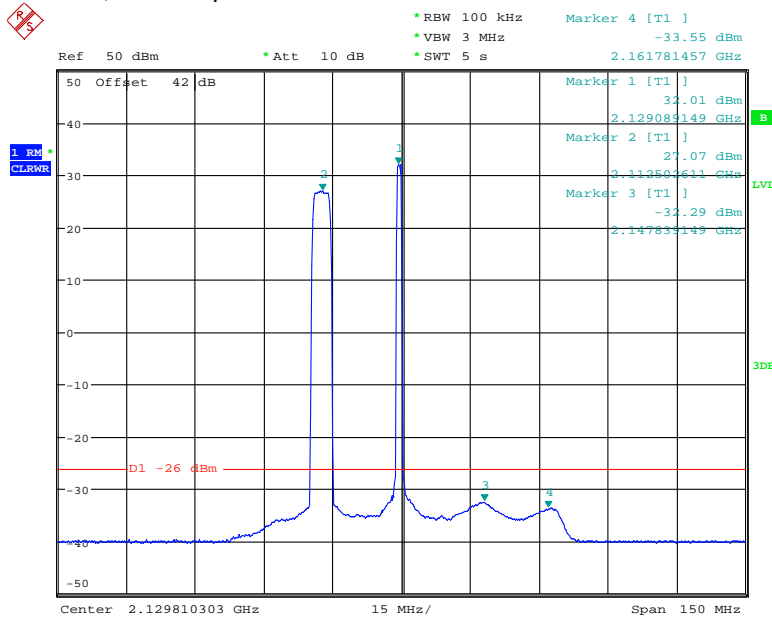


Date: 28.NOV.2013 12:40:19

Note: The limit has been tightened by 10dB to account for the reduction in measurement bandwidth.




3GHz to 22GHz

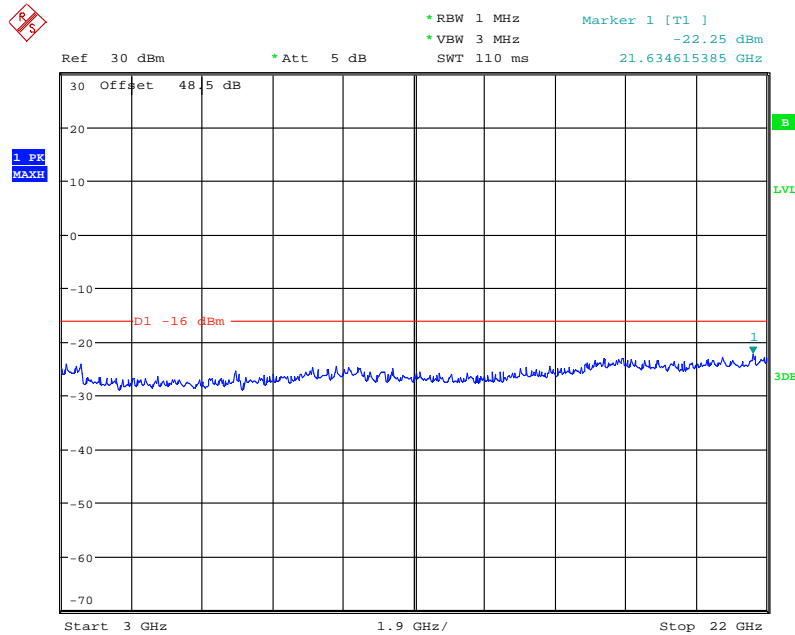

Date: 28.NOV.2013 12:42:37


Configuration 1 - Mode 1 - W&L10

9kHz to 3GHz

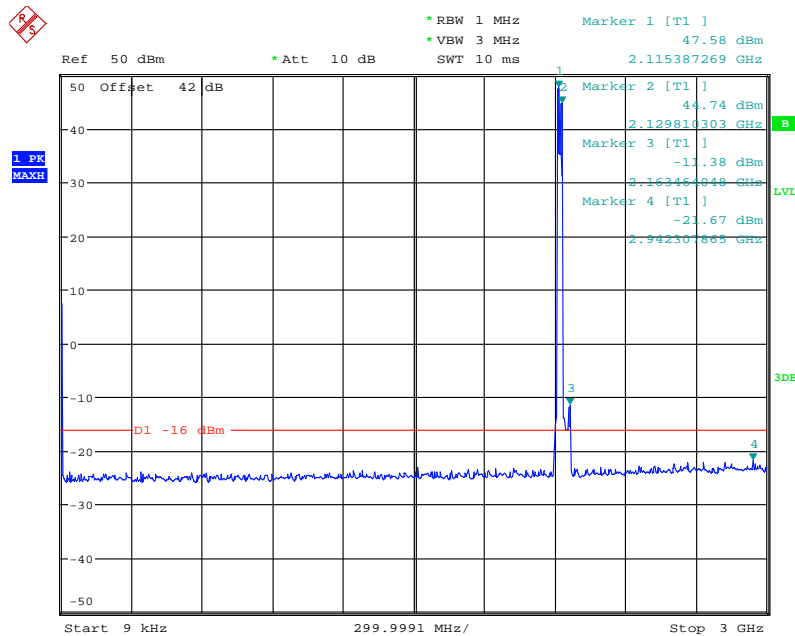

Date: 28.NOV.2013 13:29:31


Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot on page 52 of 68.

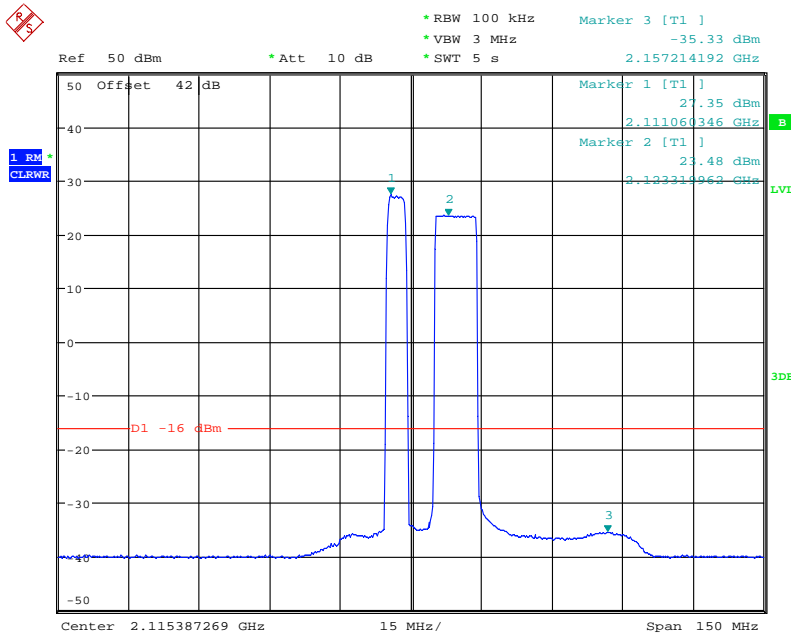

Date: 28.NOV.2013 13:31:13

Note: The limit should be tightened by 10dB to account for the reduction in measurement bandwidth, so the results of unwanted emissions should be compared to a limit of -26dBm.

3GHz to 22GHz

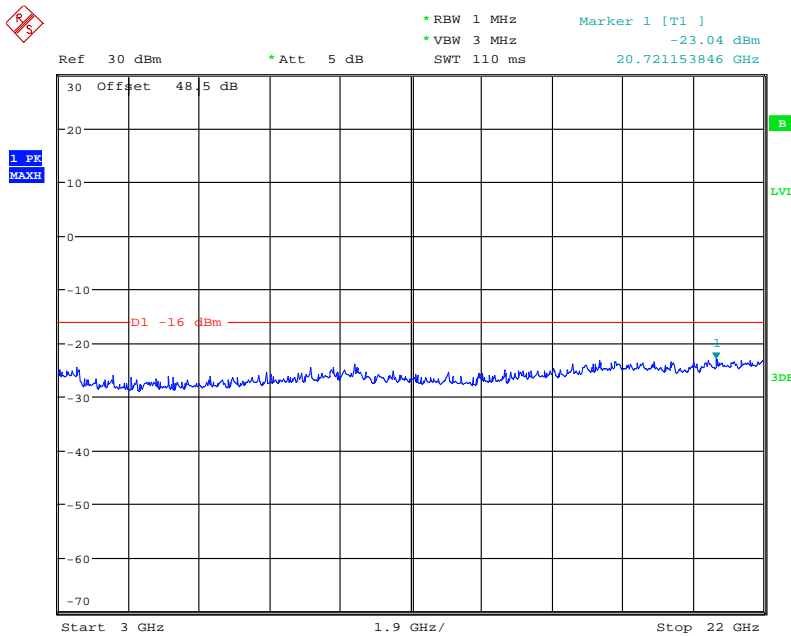


Date: 28.NOV.2013 13:25:02




Configuration 1 - Mode 2 - W&L1.4

9kHz to 3GHz

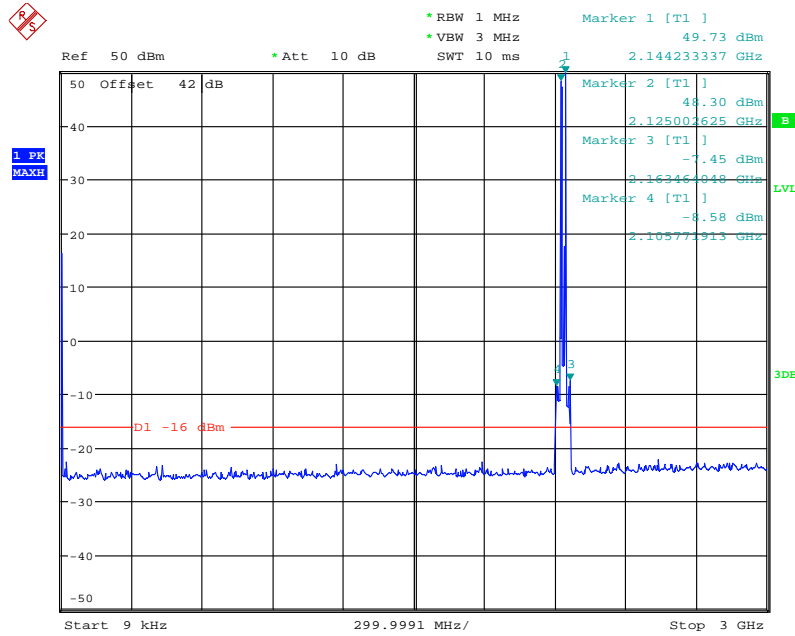

Date: 28.NOV.2013 09:05:21

Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot below.

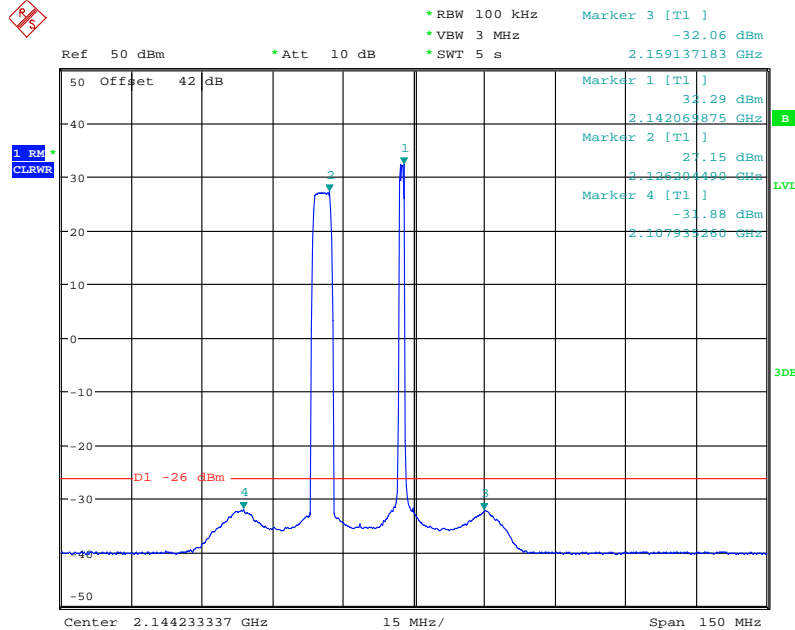


Date: 28.NOV.2013 09:09:28

Note: The limit has been tightened by 10dB to account for the reduction in measurement bandwidth.




3GHz to 22GHz

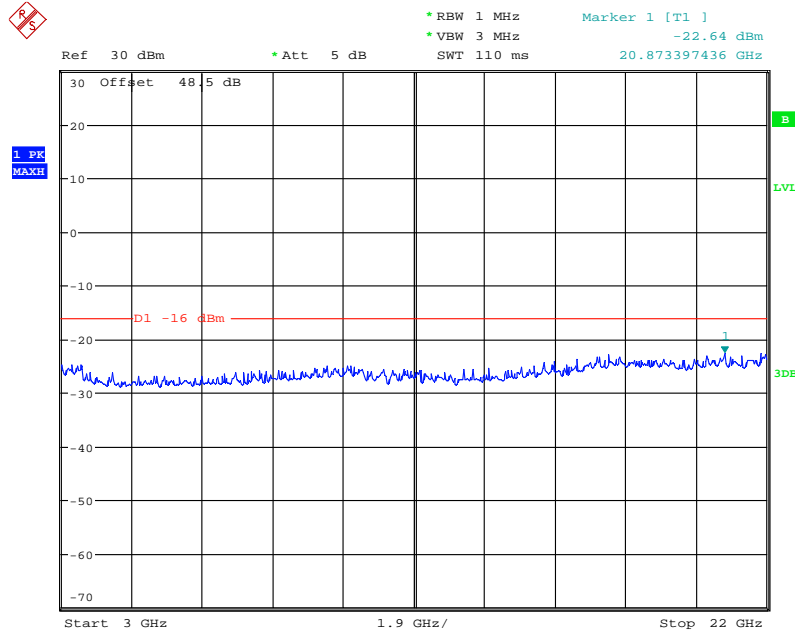

Date: 28.NOV.2013 09:11:13


Configuration 1 - Mode 2 - W&L3

9kHz to 3GHz

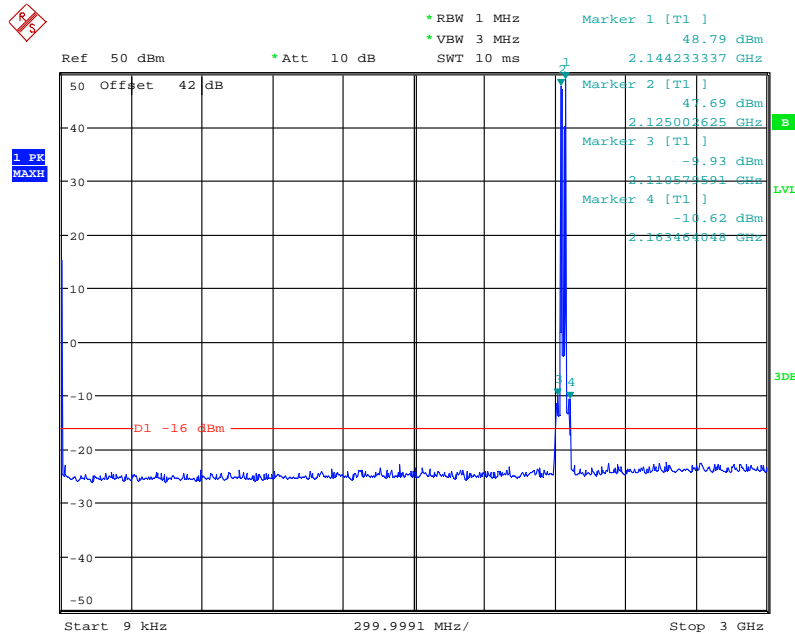

Date: 28.NOV.2013 09:20:08


Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot on page 55 of 68.

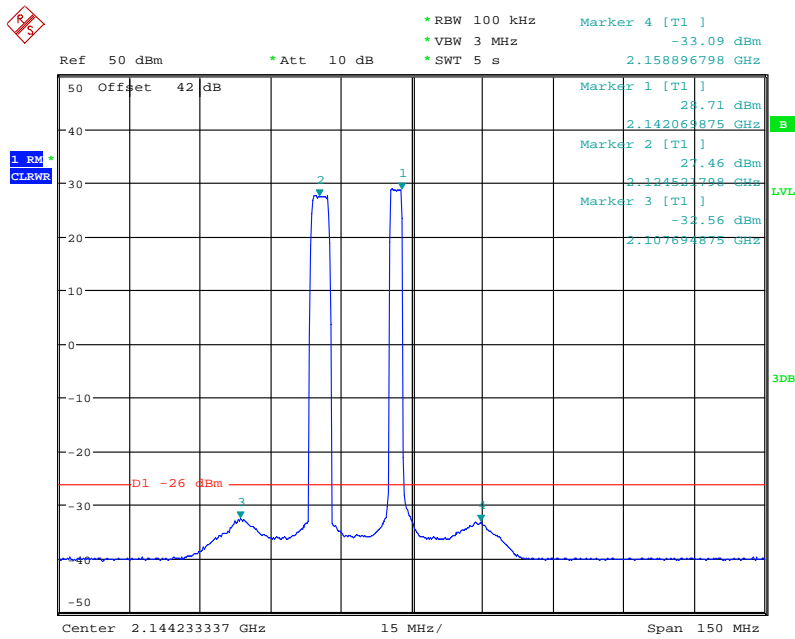

Date: 28.NOV.2013 09:21:57

Note: The limit has been tightened by 10dB to account for the reduction in measurement bandwidth.

3GHz to 22GHz

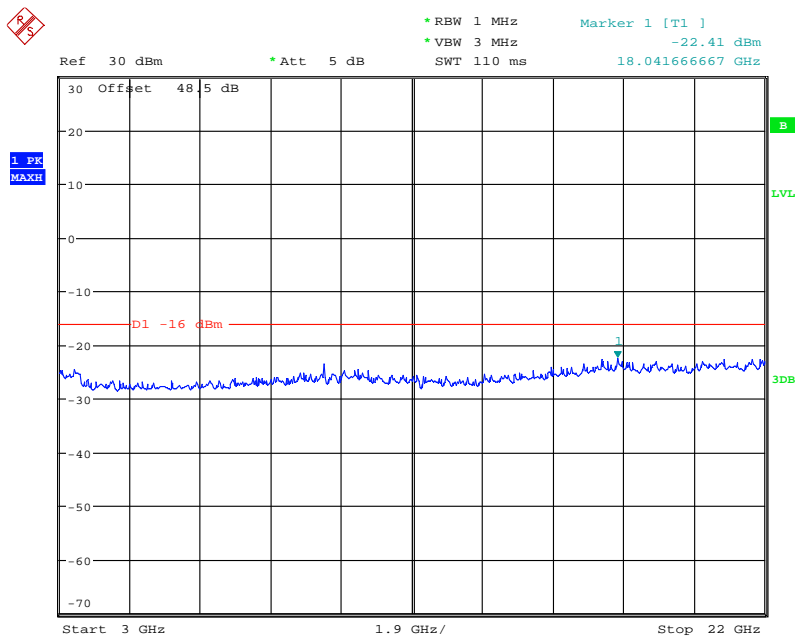


Date: 28.NOV.2013 09:18:04



Configuration 1 - Mode 2 - W&L5


9kHz to 3GHz

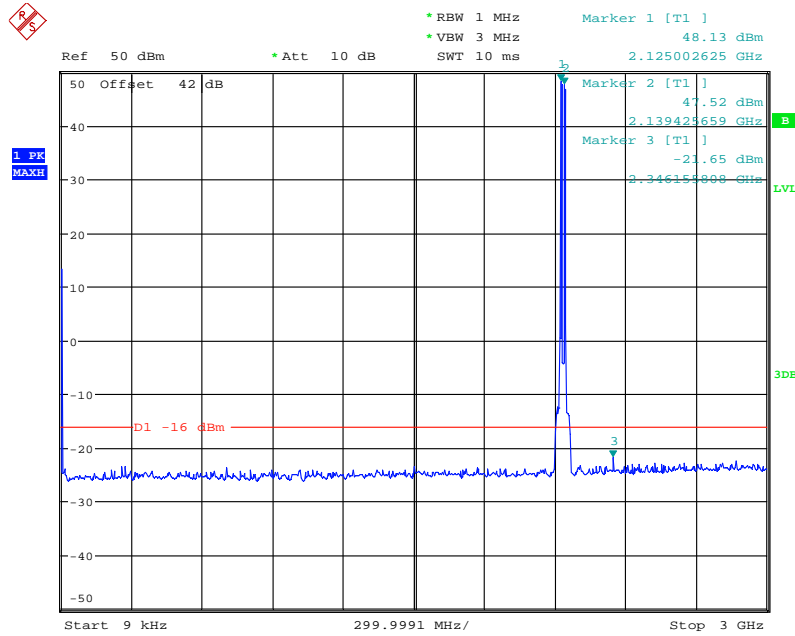

Date: 28.NOV.2013 09:49:15

Note: The emissions beyond the limit are the operating frequencies.

3GHz to 22GHz

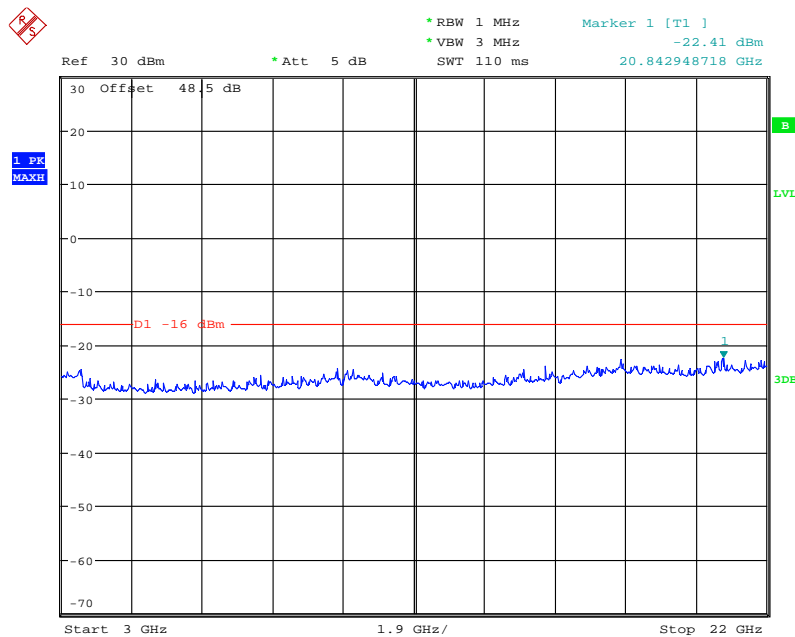


Date: 28.NOV.2013 09:46:21



Product Service

Configuration 1 - Mode 2 - W&L10


9kHz to 3GHz

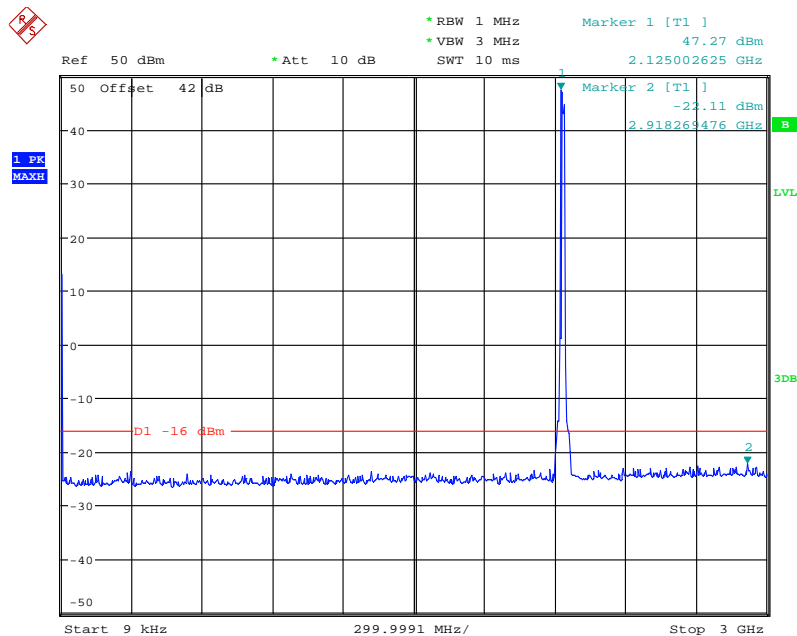

Date: 28.NOV.2013 09:39:11

Note: The emissions beyond the limit are the operating frequencies.

3GHz to 22GHz

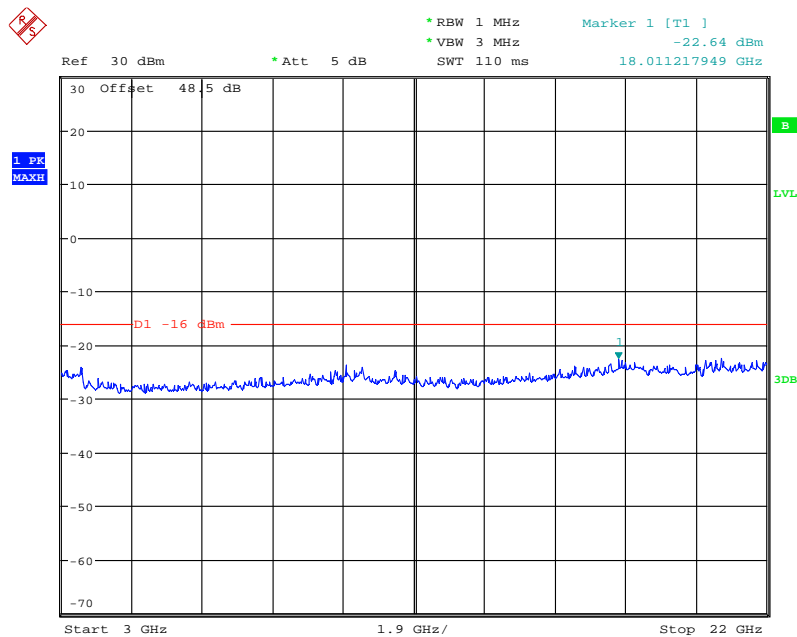


Date: 28.NOV.2013 09:41:17




Configuration 1 - Mode 3 - L1.4&W

9kHz to 3GHz

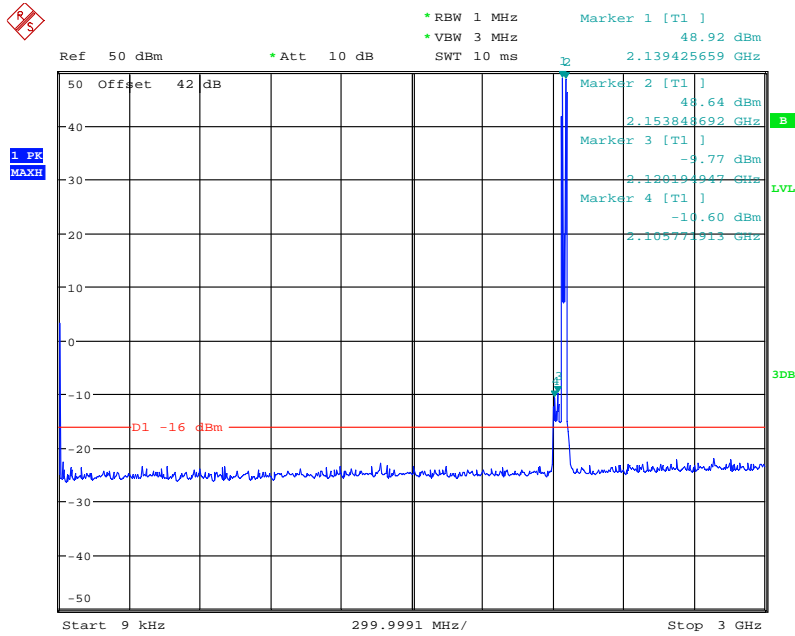

Date: 28.NOV.2013 14:44:00

Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot below.

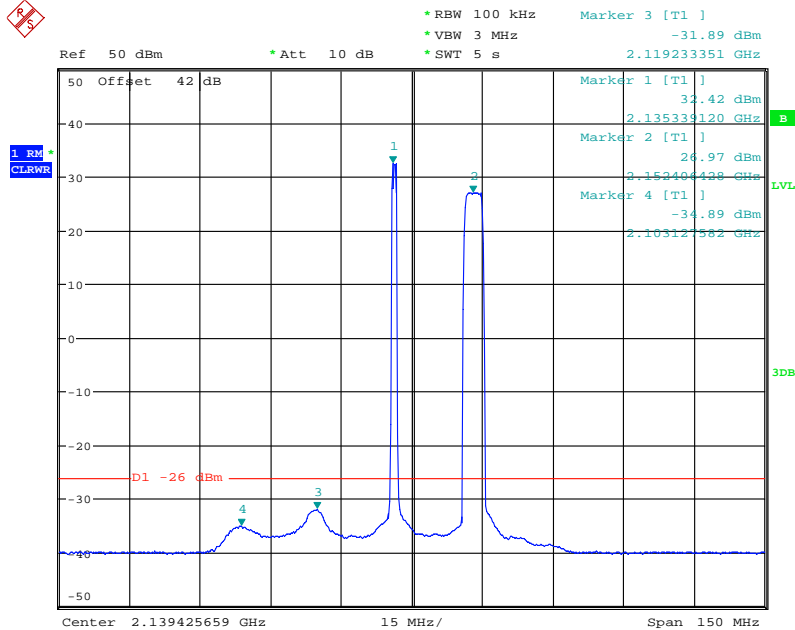


Date: 28.NOV.2013 14:45:07

Note: The limit has been tightened by 10dB to account for the reduction in measurement bandwidth.




3GHz to 22GHz

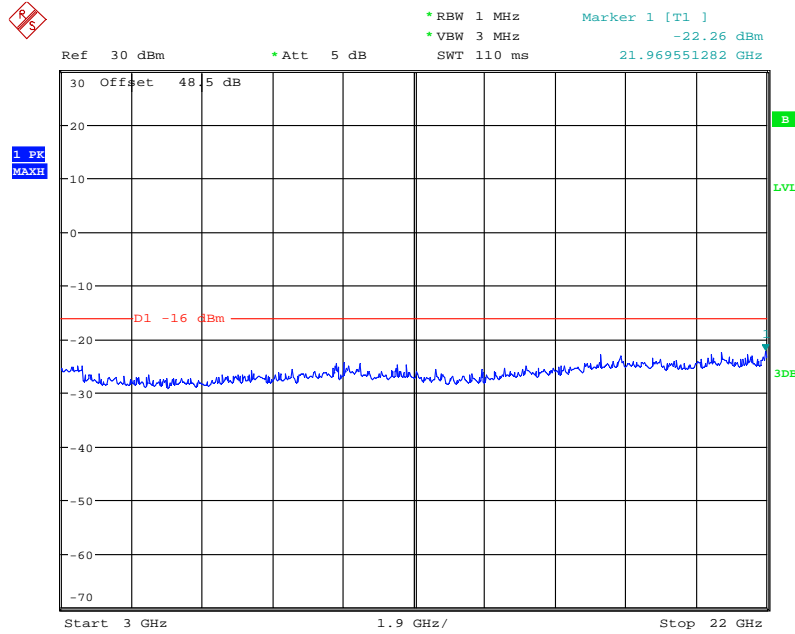

Date: 28.NOV.2013 14:47:22

Configuration 1 - Mode 3 - L10&W

9kHz to 3GHz

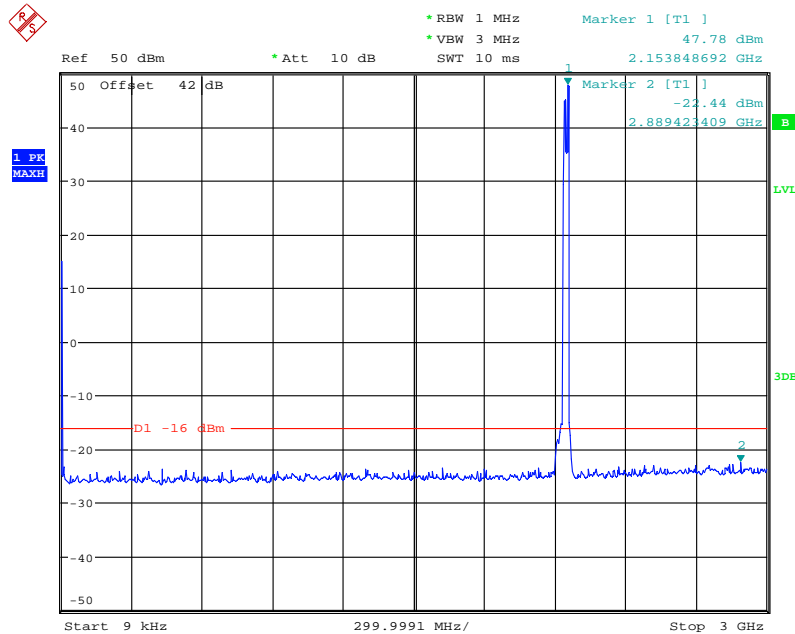


Date: 29.NOV.2013 08:53:10

Note: The emissions beyond the limit are the operating frequencies.



3GHz to 22GHz

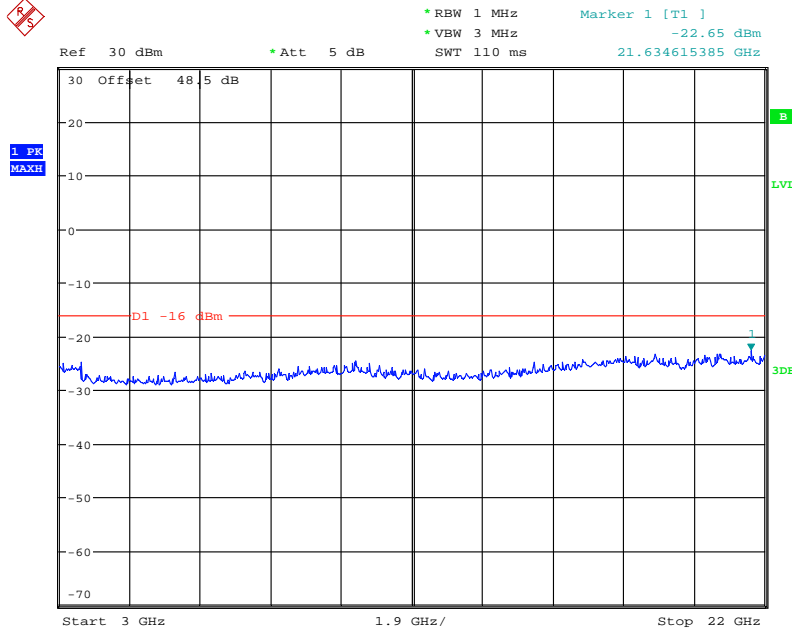


Date: 29.NOV.2013 08:51:55

Mix Carrier(x3): 2W+1L


Configuration 1 - Mode 6 - W&W&L1.4

9kHz to 3GHz

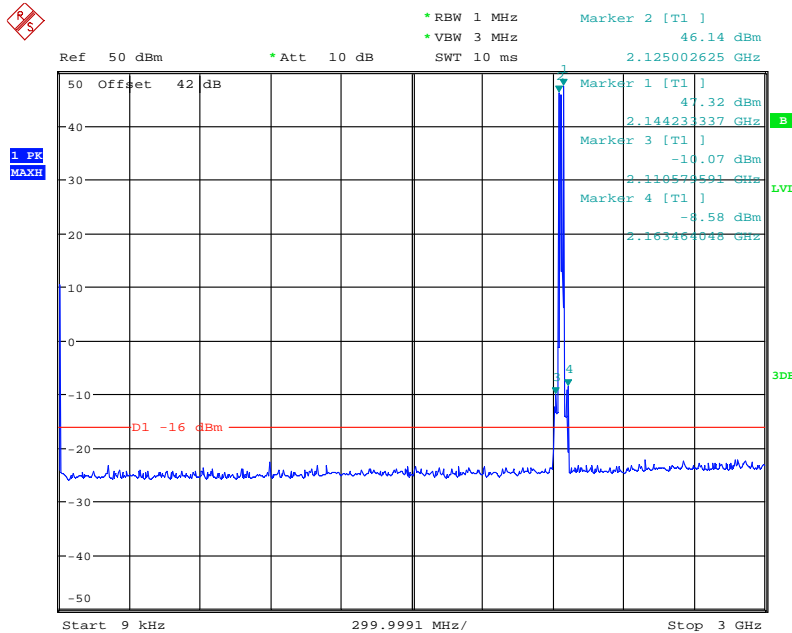

Date: 29.NOV.2013 12:50:33


Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot on page 61 of 68.

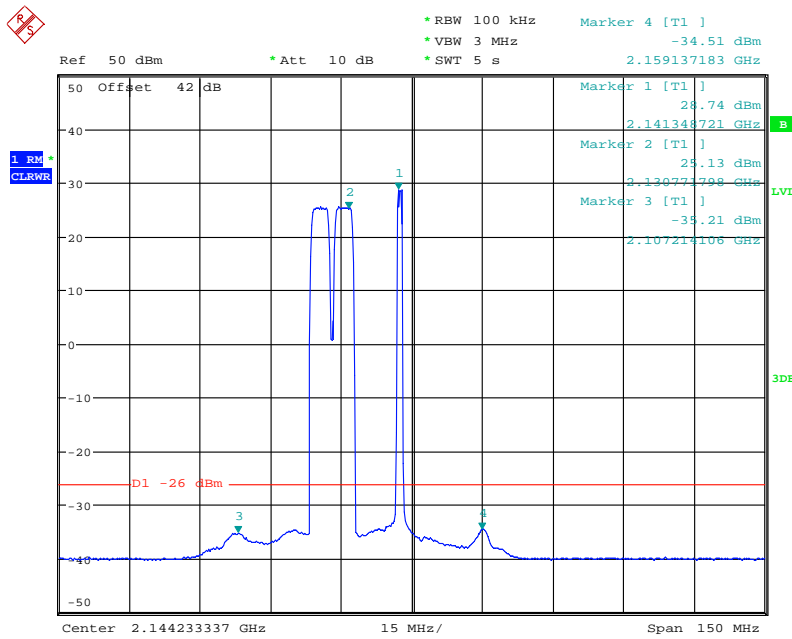

Date: 29.NOV.2013 12:54:30

Note: The limit has been tightened by 10dB to account for the reduction in measurement bandwidth.

3GHz to 22GHz

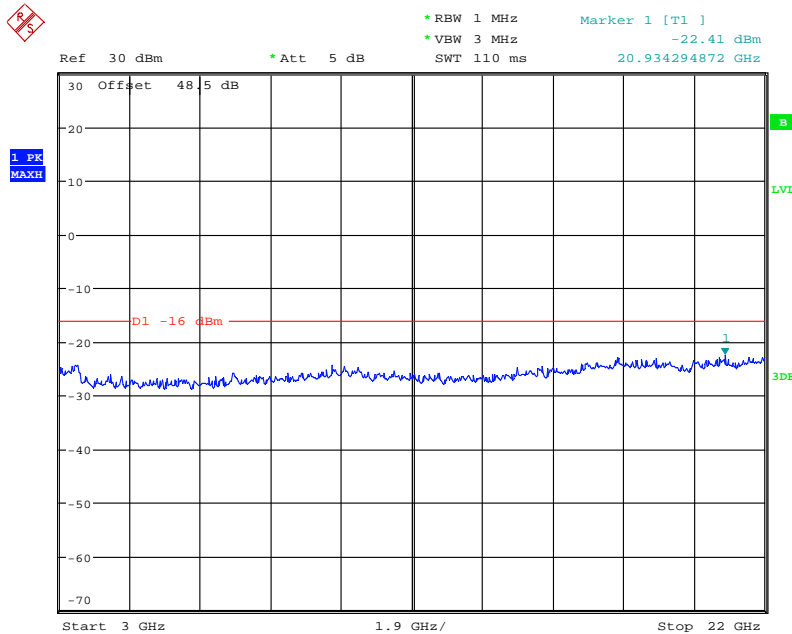


Date: 29.NOV.2013 11:52:50



Mix Carrier(x4): 2W+2L


Configuration 1 - Mode 7 - W&W&L1.4&L1.4

9kHz to 3GHz

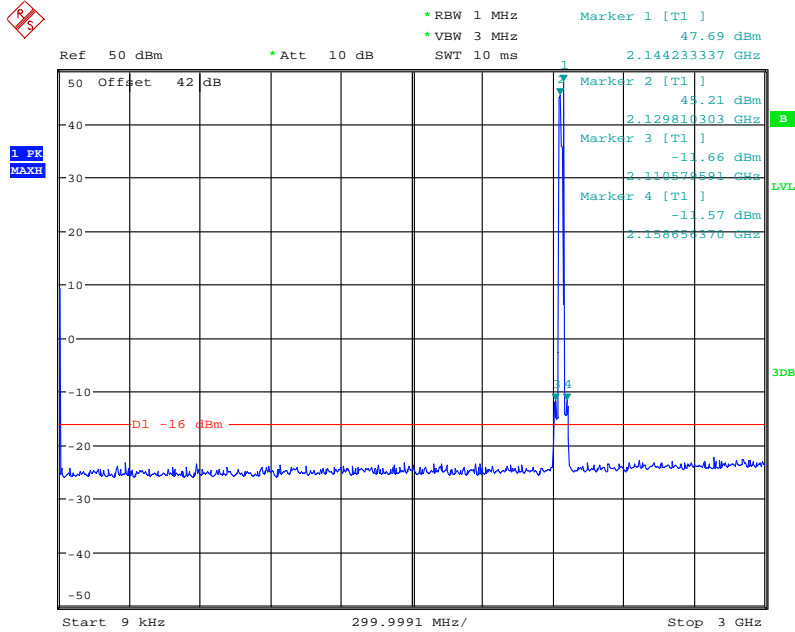

Date: 2.DEC.2013 11:23:04

Note: The emissions above the limit are measured in a smaller bandwidth and using a RMS detector, see the plot below.

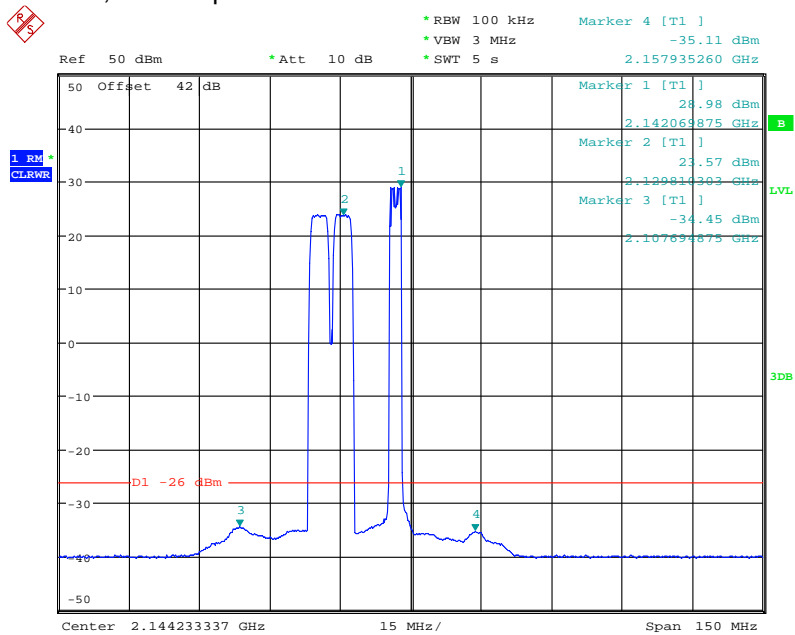


Date: 2.DEC.2013 11:24:02

Note: The limit has been tightened by 10dB to account for the reduction in measurement bandwidth.



3GHz to 22GHz

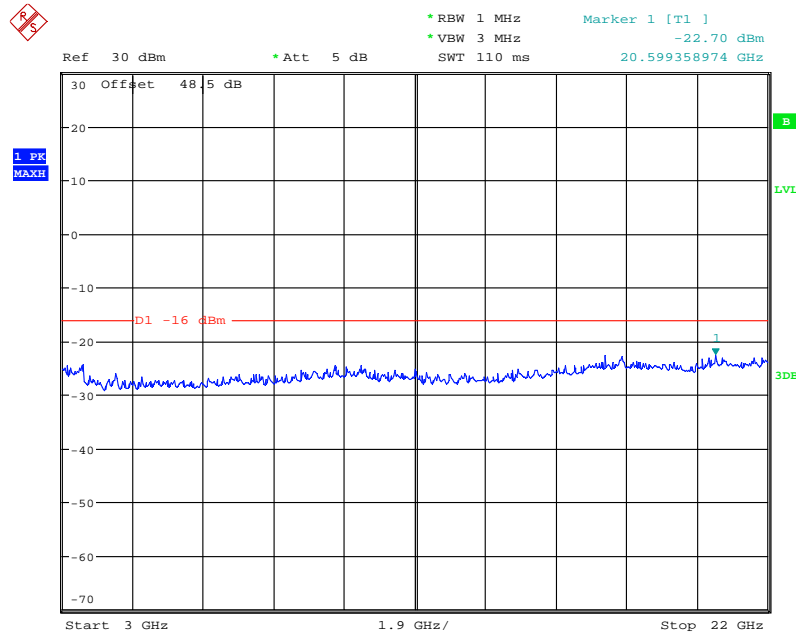

Date: 2.DEC.2013 11:25:21

Limit

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10\log P \text{ dB} + 10\log(NANT)$.

Remarks

The EUT does not exceed -16dBm at the frequency range of 9kHz to 22GHz.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	Serial No.	Calibration Period (months)	Calibration Due
Section 2.1, 2.2, 2.3, 2.5 – Maximum Conducted Output Power, Peak – Average Ratio, Spurious Emissions at Antenna Terminals (± 1MHz) and Conducted Spurious Emissions.					
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	04-Aug-2014
Power Meter	Rohde & Schwarz	NRP2	101593	12	04-Aug-2014
Power Sensor	Rohde & Schwarz	NRP-Z51	102123	12	04-Aug-2014
Network Analyzer	Agilent	8720D	US36140166	12	26-Sep-2014
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Pass Filter	K&L	ULK 904 098/2	16	-	O/P MON
Load	Shanghai Huaxiang	TF100	09121648	-	O/P MON
Power Supply	Dahua	DH1716-5D	2008040041	-	O/P MON
Power Supply	Dahua	DH1716-5D	2008040050	-	O/P MON
Digital Multi-meter	FLUKE	179	91820401	12	13-Dec-2013
Thermo-hygrometer	AZ Instruments	8705	9151665	12	16-Dec-2013
Section 2.4 – Radiated Spurious Emissions					
Load	Shanghai Huaxiang	TF100	09121648	-	O/P MON
Load	Shanghai Huaxiang	TF100	09121605	-	O/P MON
EMI Receiver	Rohde & Schwarz	ESI 40	100015	12	19-Aug-2014
Ultra log test antenna	Rohde & Schwarz	HL562	100167	12	19-Aug-2014
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF 906	100029	12	19-Aug-2014
Pyramidal Horn Antenna	EMCO	3160-09	-	-	-
Antenna master	Frankonia	MA 260	-	12	19-Aug-2014
Relay Switch Unit	Rohde & Schwarz	331.1601.31	338965002	-	TU
Semi Anechoic Chamber	Frankonia	23.18m×16.88 m×9.60m	-	12	19-Aug-2014
Power Supply	Dahua	DH1716-5D	2008040041	-	O/P MON
Power Supply	Dahua	DH1716-5D	2008040050	-	O/P MON
Digital Multimeter	FLUKE	179	91820401	12	13-Dec-2013
Thermo-hygrometer	AZ Instruments	8705	9151665	12	16-Dec-2013

O/P MON Output monitored with calibration equipment
 TU Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Conducted RF Output Power	30MHz to 10GHz Amplitude	0.5dB*
Conducted Emissions	30MHz to 40GHz Amplitude	3.0dB*
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Worst case error for both Time and Frequency measurement 12 parts in 10 ⁶		

* In accordance with CISPR 16-4



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2014 TÜV SÜD Product Service