



# **Specific Absorption Rate (SAR) Test Report**

for

**C-motech Co., Ltd**

on the

**USB Dongle**

Report No. : FA822811-01  
Trade Name : C-motech  
Model Name : CGU-628A  
FCC ID : TAR-CGU628A  
Date of Testing : Mar. 07~08, 2008  
Date of Report : Mar. 12, 2008  
Date of Review : Mar. 12, 2008

- The test results refer exclusively to the presented test model / sample only.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- Report Version: Rev. 01

**SPORTON International Inc.**

**No.52, Hwa-Ya 1<sup>st</sup> RD., Hwa Ya Technology Park, Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.**



## Table of Contents

<b>1. Statement of Compliance .....</b>	<b>1</b>
<b>2. Administration Data .....</b>	<b>2</b>
2.1 Testing Laboratory .....	2
2.2 Detail of Applicant .....	2
2.3 Detail of Manufacturer .....	2
2.4 Application Details .....	2
<b>3. General Information .....</b>	<b>3</b>
3.1 Description of Device Under Test (DUT) .....	3
3.2 Product Photos .....	4
3.3 Applied Standards .....	5
3.4 Device Category and SAR Limits .....	6
3.5 Test Conditions: .....	6
3.6.1 Ambient Condition .....	6
3.6.2 Test Configuration .....	6
<b>4. Specific Absorption Rate (SAR) .....</b>	<b>7</b>
4.1 Introduction .....	7
4.2 SAR Definition .....	7
<b>5. SAR Measurement Setup .....</b>	<b>8</b>
5.1 DASY4 E-Field Probe System .....	9
5.1.1 ET3DV6 E-Field Probe Specification .....	10
5.1.2 ET3DV6 E-Field Probe Calibration .....	10
5.2 DATA Acquisition Electronics (DAE) .....	11
5.3 Robot .....	11
5.4 Measurement Server .....	11
5.5 SAM Twin Phantom .....	12
5.6 Device Holder for SAM Twin Phantom .....	13
5.7 Data Storage and Evaluation .....	14
5.7.1 Data Storage .....	14
5.7.2 Data Evaluation .....	14
5.8 Test Equipment List .....	16
<b>6. Tissue Simulating Liquids .....</b>	<b>17</b>
<b>7. Uncertainty Assessment .....</b>	<b>19</b>
<b>8. SAR Measurement Evaluation .....</b>	<b>21</b>
8.1 Purpose of System Performance check .....	21
8.2 System Setup .....	21
8.3 Validation Results .....	23
<b>9. Description for DUT Testing Position .....</b>	<b>24</b>
<b>10. Measurement Procedures .....</b>	<b>25</b>
10.1 Spatial Peak SAR Evaluation .....	25
10.2 Scan Procedures .....	26
10.3 SAR Averaged Methods .....	26
<b>11. SAR Test Results .....</b>	<b>27</b>
11.1 DELL D400 Notebook Bottom with 0cm Gap .....	27
11.2 DELL D500 Notebook Bottom with 0cm Gap .....	29
11.3 DELL M2300 Notebook Bottom with 0cm Gap .....	29
<b>12. References .....</b>	<b>30</b>
<b>Appendix A - System Performance Check Data</b>	
<b>Appendix B - SAR Measurement Data</b>	
<b>Appendix C - Calibration Data</b>	
<b>Appendix D - Product Photos</b>	
<b>Appendix E - Setup Photos</b>	




## 1. Statement of Compliance

The Specific Absorption Rate (SAR) maximum results found during testing for the the **C-motech Co., Ltd USB Dongle C-motech CGU-628A** are as follows (with expanded uncertainty 21.9%):

GSM850 Body SAR (W/kg)	PCS1900 Body SAR (W/Kg)	WCDMA Band V Body SAR (W/kg)	WCDMA Band II Body SAR (W/kg)
<b>0.957</b>	<b>1.53</b>	<b>1.26</b>	<b>1.51</b>

They are in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C (Edition 01-01).

Approved by

  
\_\_\_\_\_  
Roy Wu  
Manager



## **2. Administration Data**

### **2.1 Testing Laboratory**

**Company Name :** Sporton International Inc.  
**Department :** Antenna Design/SAR  
**Address :** No.52, Hwa-Ya 1<sup>st</sup> RD., Hwa Ya Technology Park, Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
**Telephone Number :** 886-3-327-3456  
**Fax Number :** 886-3-328-4978

### **2.2 Detail of Applicant**

**Company Name :** C-motech Co., Ltd  
**Address :** 8,9F Yongsan Bldg. 14-14 Yido-Dong, Youngdungpo-Gu, Seoul, 150-871, Korea  
**Telephone Number :** 82-2-368-9868  
**Contact Person :** Seam Kim / Manager / khkim@cmotech.com

### **2.3 Detail of Manufacturer**

**Company Name :** C-motech Co., Ltd  
**Address :** 8,9F Yongsan Bldg. 14-14 Yido-Dong, Youngdungpo-Gu, Seoul, 150-871, Korea

### **2.4 Application Details**

**Date of reception of application:** Mar. 03, 2008  
**Start of test :** Mar. 07, 2008  
**End of test :** Mar. 08, 2008



### 3. General Information

#### 3.1 Description of Device Under Test (DUT)

Product Feature & Specification		
<b>DUT Type :</b>	USB Dongle	
<b>Trade Name :</b>	C-motech	
<b>Model Name :</b>	CGU-628A	
<b>FCC ID :</b>	TAR-CGU628A	
<b>Tx Frequency :</b>	GSM850 : 824 MHz ~ 849 MHz PCS1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz	
<b>Rx Frequency :</b>	GSM850 : 869 MHz ~ 894 MHz PCS1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz	
<b>Channel Spacing</b>	200 KHz	
<b>Maximum Output Power to Antenna :</b>	GSM850 : 32.19 dBm (GPRS8) / 29.62 dBm (GPRS10) / 27.09 dBm (GPRS12) 26.74 dBm (EDGE8) / 24.23 dBm (EDGE 10) / 22.00 dBm (EDGE12) PCS1900 : 28.39 dBm (GPRS8) / 26.40 dBm (GPRS10) / 23.85 dBm (GPRS12) 25.03 dBm (EDGE8) / 22.53 dBm (EDGE 10) / 20.18 dBm (EDGE 12) WCDMA : 22.13 dBm(12.2kbps) / 22.14 dBm(64kbps) / 22.19 dBm(144kbps) Band V 22.08 dBm(384kbps) / 21.72 dBm (12.2kbps+HSDPA) WCDMA : 21.20 dBm(12.2kbps) / 21.39 dBm(64kbps) / 21.34 dBm(144kbps) Band II 21.42 dBm(384kbps) / 21.15 dBm (12.2kbps+HSDPA)	
<b>Type of Antenna Connector :</b>	N/A	
<b>Antenna Type :</b>	Fixed Internal	
<b>HW Version :</b>	4.1	
<b>SW Version :</b>	R2.0.4	
<b>Power Rating (DC/AC , Voltage and Current of RF element or PA) :</b>	DC 5V / 650mA	
<b>GPRS / EGPRS Multislot class :</b>	12	
<b>Type of Modulation :</b>	GSM / GPRS : GMSK EDGE : 8PSK WCDMA / HSDPA : QPSK	
<b>DUT Stage :</b>	Production Unit	
<b>Application Type :</b>	Certification	



### **3.2 Product Photos**

Please refer to Appendix D



### **3.3 Applied Standards**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this USB Dongle is in accordance with the following standards:

47 CFR Part 2 ( 2.1093),

IEEE C95.1-1999,

IEEE C95.3-2002,

IEEE P1528-2003, and

OET Bulletin 65 Supplement C (Edition 01-01)

Preliminary Guidance for Reviewing Applications for Certification of 3G Device. May 2006.

SAR Measurement Procedures for 3G Devices. June 2006.



### **3.4 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### **3.5 Test Conditions:**

#### ***3.6.1 Ambient Condition***

Item	MSL_850	MSL_850	MSL_1900	MSL_1900
Date	Mar. 07, 2008	Mar. 08, 2008	Mar. 08, 2008	Mar. 08, 2008
Ambient Temperature (°C)	20-24			
Tissue simulating liquid temperature (°C)	21.3°C	21.4°C	21.5°C	21.5°C
Humidity (%)	<60 %			

#### ***3.6.2 Test Configuration***

The DUT was set from the emulator to radiate maximum output power during all tests.

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT.

Measurements were performed on the lowest, middle, and highest channel for each testing position. However, measurements were performed only on the middle channel if the SAR is below 3 dB of limit.

For body SAR testing, EUT is in GPRS/EDGE or WCDMA/HSDPA link mode. In GPRS/EDGE link mode, its crest factor is 2, because EUT is GPRS/EDGE class 12 device. In WCDMA/HSDPA link mode, its crest factor is 1.



## 4. Specific Absorption Rate (SAR)

### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density.

). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

*SAR is expressed in units of Watts per kilogram (W/kg)*

SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = C \frac{\delta T}{\delta t}$$

, where  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration,

or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and  $E$  is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement Setup

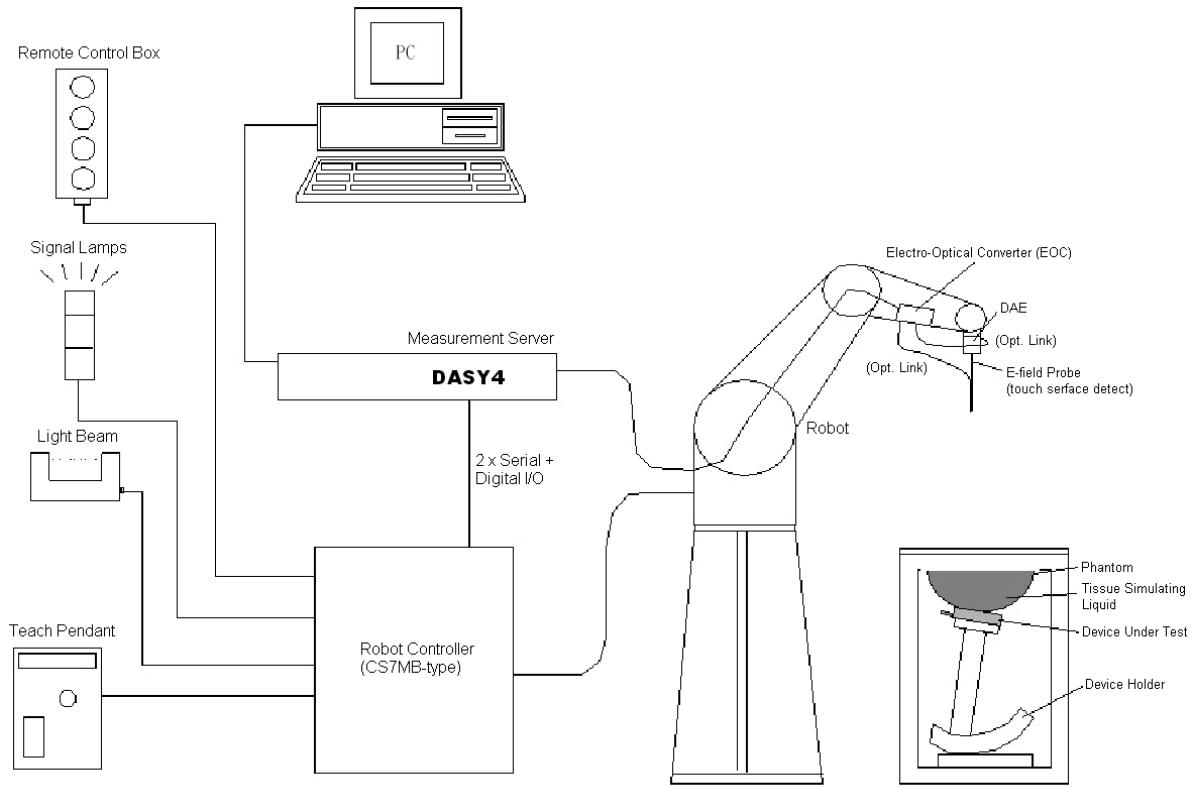


Fig. 5.1 DASY4 System



The DASY4 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 software
- Remove control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

### **5.1 DASY4 E-Field Probe System**

The SAR measurement is conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### 5.1.1 ET3DV6 E-Field Probe Specification

<ET3DV6>

**Construction**

Symmetrical design with triangular core  
Built-in optical fiber for surface detection system  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents)

**Frequency**

10 MHz to 3 GHz

**Directivity**

± 0.2 dB in brain tissue (rotation around probe axis)  
± 0.4 dB in brain tissue (rotation perpendicular to probe axis)

**Dynamic Range**

5  $\mu$  W/g to 100mW/g; Linearity: ±0.2dB

**Surface Detection**

± 0.2 mm repeatability in air and clear liquids on reflecting surface

**Dimensions**

Overall length: 330mm

Tip length: 16mm

Body diameter: 12mm

Tip diameter: 6.8mm

Distance from probe tip to dipole centers:  
2.7mm

**Application**

General dosimetry up to 3GHz

Compliance tests for mobile phones and

Wireless LAN

Fast automatic scanning in arbitrary phantoms



**Fig. 5.2 Probe Setup on Robot**

### 5.1.2 ET3DV6 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data are as below:

➤ ET3DV6 sn1787

Sensitivity	X axis : 1.63 $\mu$ V		Y axis : 1.66 $\mu$ V		Z axis : 2.08 $\mu$ V	
Diode compression point	X axis : 92 mV		Y axis : 96 mV		Z axis : 91 mV	
Conversion factor (Head / Body)	Frequency (MHz)	X axis		Y axis		Z axis
	800~1000	6.58 / 6.10		6.58 / 6.10		6.58 / 6.10
	1710~1910	5.16 / 4.68		5.16 / 4.68		5.16 / 4.68
Boundary effect (Head / Body)	Frequency (MHz)	Alpha		Depth		
	800~1000	0.32 / 0.36		2.42 / 2.52		
	1710~1910	0.50 / 0.61		2.61 / 2.56		

NOTE: The probe parameters have been calibrated by the SPEAG.



### **5.2 DATA Acquisition Electronics (DAE)**

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

### **5.3 Robot**

The DASY4 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY4 system, the CS7MB robot controller version from Stäubli is used. The RX robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

### **5.4 Measurement Server**

The DASY4 measurement server is based on a PC/104 CPU board with  
166 MHz CPU  
32 MB chipset and  
64 MB RAM.

Communication with  
the DAE4 electronic box  
the 16-bit AD-converter system for optical detection and digital I/O interface.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

### **5.5 SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:


- Left head
- Right head
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

\*Water-sugar based liquid

\*Glycol based liquids

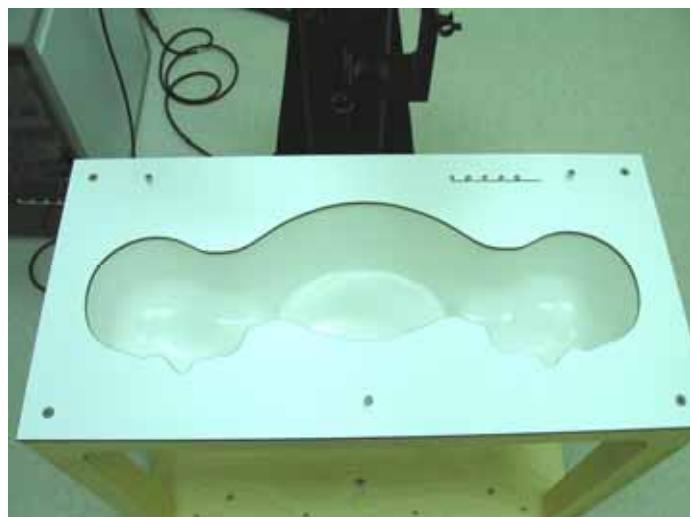

**Fig. 5.3 Top View of Twin Phantom**



**Fig. 5.4 Bottom View of Twin Phantom**

### **5.6 Device Holder for SAM Twin Phantom**

The SAR in the Phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5 mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . An accurate device position is therefore crucial for accurate and repeatable measurement. The position in which the devices must be measured, are defined by the standards.

The DASY4 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY4 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Fig. 5.5 Device Holder**



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-less media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm $i$ , a $_{i0}$ , a $_{i1}$ , a $_{i2}$
	- Conversion factor	ConvF $i$
	- Diode compression point	dcp $i$
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.



The formula for each channel can be given as :

$$Vi = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with   
 $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 $U_i$  = input signal of channel  $i$  ( $i = x, y, z$ )  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field probes : } E_i = \sqrt{\frac{V_i}{Norm_i ConvF}}$$

$$\text{H-field probes : } H_i = \sqrt{V_i} \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with   
 $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 $Norm_i$  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )  
 $\mu$  V/(V/m)<sup>2</sup> for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel  $i$  in V/m  
 $H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with   
 $SAR$  = local specific absorption rate in mW/g  
 $E_{tot}$  = total field strength in V/m  
= conductivity in [mho/m] or [Siemens/m]  
= equivalent tissue density in g/cm<sup>3</sup>

\* Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with   
 $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m  
 $H_{tot}$  = total magnetic field strength in A/m



## 5.8 Test Equipment List

Manufacture	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1787	Aug. 28, 2007	Aug. 28, 2008
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 15, 2006	Mar. 15, 2008
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2006	Mar. 21, 2008
SPEAG	Data Acquisition Electronics	DAE4	778	Sep. 17, 2007	Sep. 17, 2008
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	Robot	Staubli RX90BL	F03/5W15A1/A/01	NCR	NCR
SPEAG	Software	DASY4 V4.7 Build 55	N/A	NCR	NCR
SPEAG	Software	SEMCAD V1.8 Build 176	N/A	NCR	NCR
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071B	MY42403579	Mar. 29, 2007	Mar. 29, 2008
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Dec. 22, 2006	Dec. 22, 2008
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
Agilent	Power Amplifier	8449B	3008A01917	NCR	NCR
Agilent	Power Meter	E4416A	GB41292344	Feb. 21, 2008	Feb. 20, 2009
Agilent	Power Sensor	E9327A	US40441548	Feb. 21, 2008	Feb. 20, 2009

Table 5.1 Test Equipment List



## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY4, the phantom must be filled with around 25 liters of homogeneous tissue simulating liquid. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15.2cm.

The following ingredients for tissue simulating liquid are used:

- **Water:** deionized water (pure H<sub>2</sub>O), resistivity 16M - as basis for the liquid
- **Sugar:** refined sugar in crystals, as available in food shops – to reduce relative permittivity
- **Salt:** pure NaCl – to increase conductivity
- **Cellulose:** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C), CAS#54290-to increase viscosity and to keep sugar in solution.
- **Preservative:** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS#55965-84-9- to prevent the spread of bacteria and molds.
- **DGMBE:** Deithlenglycol-monobutyl ether (DGMBE), Fluka Chemie GmbH, CAS#112-34-5 – to reduce relative permittivity.

Table 6.1 gives the recipes for one liter of body tissue simulating liquid for frequency band 850MHZ and 1900 MHz.

Ingredient	MSL-850	MSL-1900
<b>Water</b>	631.68 g	716.56 g
<b>Cellulose</b>	0 g	0 g
<b>Salt</b>	11.72 g	4.0 g
<b>Preventol D-7</b>	1.2 g	0 g
<b>Sugar</b>	600.0 g	0 g
<b>DGMBE</b>	0 g	300.67 g
<b>Total amount</b>	1 liter (1.3 kg)	1 liter (1.0 kg)
<b>Dielectric Parameters at 22°</b>	f=835 MHz $\epsilon_r = 55.2 \pm 5\%$ , $\sigma = 0.97 \pm 5\% \text{ S/m}$	f= 1900 MHz $\epsilon_r = 53.3 \pm 5\%$ , $\sigma = 1.52 \pm 5\% \text{ S/m}$

Table 6.1 Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



Table 6.2 shows the measuring results for muscle simulating liquid.

Band	Frequency (MHz)	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )	Measurement Date
GSM850 (824 ~ 849 MHz)	824.2	56.3	0.960	Mar. 07, 2008
	836.4	56.3	0.967	
	848.8	56.1	0.981	
PCS1900 (1850 ~ 1910 MHz)	1850.2	51.6	1.47	Mar. 08, 2008
	1880.0	51.5	1.50	
	1909.8	51.4	1.53	
WCDMA Band V (824 ~ 849 MHz)	824.2	56.3	0.962	Mar. 08, 2008
	836.4	56.3	0.972	
	848.8	56.2	0.980	
WCDMA Band II (1850 ~ 1910 MHz)	1850.2	51.6	1.47	Mar. 08, 2008
	1880.0	51.5	1.50	
	1909.8	51.4	1.53	

Table 6.2 Measuring Results for Simulating Liquid

The measuring data are consistent with  $\epsilon_r = 55.2 \pm 5\%$  and  $\sigma = 0.97 \pm 5\%$  for body GSM850 band and WCDMA Band V, and  $\epsilon_r = 53.3 \pm 5\%$  and  $\sigma = 1.52 \pm 5\%$  for body PCS1900 band and WCDMA Band II.



## 7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacturer's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-shape
Multiplying factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/ 3	1/ 6	1/ 2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) is the coverage factor

**Table 7.1 Multiplying Factors for Various Distributions**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY4 uncertainty Budget is showed in Table 7.2.



Error Description	Uncertainty Value $\pm$ %	Probability Distribution	Divisor	Ci (1g)	Standard Unc. (1g)	vi or Veff
<b>Measurement Equipment</b>						
Probe Calibration	$\pm 5.9$ %	Normal	1	1	$\pm 5.9$ %	$\infty$
Axial Isotropy	$\pm 4.7$ %	Rectangular	$\sqrt{3}$	0.7	$\pm 1.9$ %	$\infty$
Hemispherical Isotropy	$\pm 9.6$ %	Rectangular	$\sqrt{3}$	0.7	$\pm 3.9$ %	$\infty$
Boundary Effects	$\pm 1.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 0.6$ %	$\infty$
Linearity	$\pm 4.7$ %	Rectangular	$\sqrt{3}$	1	$\pm 2.7$ %	$\infty$
System Detection Limits	$\pm 1.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 0.6$ %	$\infty$
Readout Electronics	$\pm 0.3$ %	Normal	1	1	$\pm 0.3$ %	$\infty$
Response Time	$\pm 0.8$ %	Rectangular	$\sqrt{3}$	1	$\pm 0.5$ %	$\infty$
Integration Time	$\pm 2.6$ %	Rectangular	$\sqrt{3}$	1	$\pm 1.5$ %	$\infty$
RF Ambient Noise	$\pm 3.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 1.7$ %	$\infty$
RF Ambient Reflections	$\pm 3.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 1.7$ %	$\infty$
Probe Positioner	$\pm 0.4$ %	Rectangular	$\sqrt{3}$	1	$\pm 0.2$ %	$\infty$
Probe Positioning	$\pm 2.9$ %	Rectangular	$\sqrt{3}$	1	$\pm 1.7$ %	$\infty$
Max. SAR Eval.	$\pm 1.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 0.6$ %	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$ %	Normal	1	1	$\pm 2.9$	145
Device Holder	$\pm 3.6$ %	Normal	1	1	$\pm 3.6$	5
Power Drift	$\pm 5.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Setup</b>						
Phantom Uncertainty	$\pm 4.0$ %	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid Conductivity (target)	$\pm 5.0$ %	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid Conductivity (meas.)	$\pm 2.5$ %	Normal	1	0.64	$\pm 1.6$	$\infty$
Liquid Permittivity (target)	$\pm 5.0$ %	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid Permittivity (meas.)	$\pm 2.5$ %	Normal	1	0.6	$\pm 1.5$	$\infty$
<b>Combined Standard Uncertainty</b>						
Coverage Factor for 95 %		<b>K=2</b>				
Expanded uncertainty (Coverage factor = 2)					$\pm 21.9$	

Table 7.2 Uncertainty Budget of DASY4

## 8. SAR Measurement Evaluation

Each DASY4 system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY4 software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

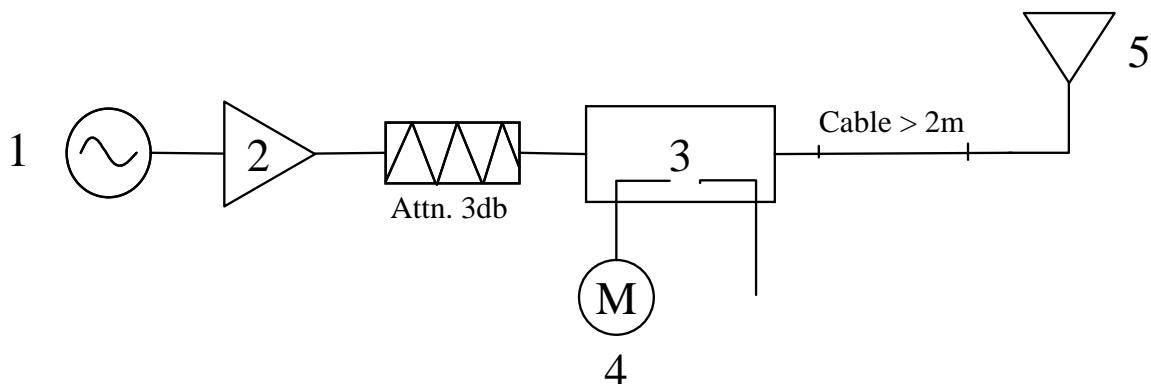


Fig. 8.1 System Evaluation Setup



1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. 835 MHz or 1900 MHz Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.



Fig 8.2 Dipole Setup



### 8.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power.

Band	SAR	Target (W/kg)	Measurement data (W/kg)	Variation	Measurement Date
GSM850 (835MHz)	SAR (1g)	9.91	9.61	-3.0 %	Mar. 07, 2008
	SAR (10g)	6.55	6.36	-2.9 %	
PCS1900 (1900MHz)	SAR (1g)	41.1	39.9	-2.9 %	Mar. 08, 2008
	SAR (10g)	21.8	21.2	-2.8 %	
WCDMA Band V (835MHz)	SAR (1g)	9.91	9.67	-2.4 %	Mar. 08, 2008
	SAR (10g)	6.55	6.40	-2.3 %	
WCDMA Band II (1900MHz)	SAR (1g)	41.1	39.9	-2.9 %	Mar. 08, 2008
	SAR (10g)	21.8	21.2	-2.8 %	

**Table 8.1 Target and Measurement Data Comparison**

The table above indicates the system performance check can meet the variation criterion.



## **9. Description for DUT Testing Position**

This DUT was tested in 3 different positions in connection with 3 notebooks individually as follows:

1) DUT in connection with DELL D400:

“DELL D400 Notebook Bottom with 0cm Gap with Horizontal USB Port”, “DELL D400 Notebook Bottom with 0cm Gap with Horizontal USB Port and 90-degrees-Rotation of EUT”, and “DELL D400 Notebook Bottom with 0cm Gap with Vertical USB Port”.

2) DUT in connection with DELL D500:

“DELL D500 Notebook Bottom with 0cm Gap with Horizontal USB Port”, and “DELL D500 Notebook Bottom with 0cm Gap with Vertical USB Port”.

3) DUT in connection with DELL M2300:

“DELL M2300 Notebook Bottom with 0cm Gap with Horizontal USB Port”, and “DELL M2300 Notebook Bottom with 0cm Gap with Vertical USB Port”.

Remark: Please refer to Appendix E for the test setup photos.



## **10. Measurement Procedures**

The measurement procedures are as follows:

- Linking DUT with base station emulator CMU200 in middle channel
- Setting CMU200 to allow DUT to radiate maximum output power
- Measuring output power through RF cable and power meter
- Placing the DUT in the positions described in the last section
- Setting scan area, grid size and other setting on the DASY4 software
- Taking data for the middle channel on each testing position
- Finding out the largest SAR result on these testing positions of each band
- Measuring output power and SAR results for the low and high channels in this worst case testing position

According to the IEEE P1528 draft standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

### **10.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528-2003 standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

Base on the Draft: SCC-34, SC-2, WG-2-Computational Dosimetry, IEEE P1528/D1.2 (Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose , the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- generation of a high-resolution mesh within the measured volume
- interpolation of all measured values from the measurement grid to the high-resolution grid
- extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- calculation of the averaged SAR within masses of 1g and 10g

## **10.2 Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 1 g.

## **10.3 SAR Averaged Methods**

In DASY4, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



## 11. SAR Test Results

### 11.1 DELL D400 Notebook Bottom with 0cm Gap

USB Port State	EUT State	Band	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Result
Horizontal	Normal	GSM850 (GPRS8)	128 (Low)	824.2	GMSK	32.02	-	-	-	-
			189 (Mid)	836.4	GMSK	32.14	-0.001	0.42	1.6	Pass
			251 (High)	848.8	GMSK	32.19	-	-	-	-
		GSM850 (GPRS10)	128 (Low)	824.2	GMSK	29.46	-	-	-	-
			189 (Mid)	836.4	GMSK	29.58	-0.153	0.473	1.6	Pass
			251 (High)	848.8	GMSK	29.62	-	-	-	-
		GSM850 (GPRS12)	128 (Low)	824.2	GMSK	26.97	-	-	-	-
			189 (Mid)	836.4	GMSK	27.06	-0.19	0.631	1.6	Pass
			251 (High)	848.8	GMSK	27.09	-	-	-	-
		GSM850 (EDGE8)	128 (Low)	824.2	8PSK	26.60	-	-	-	-
			189 (Mid)	836.4	8PSK	26.71	0.044	0.116	1.6	Pass
			251 (High)	848.8	8PSK	26.74	-	-	-	-
		GSM850 (EDGE10)	128 (Low)	824.2	8PSK	24.08	-	-	-	-
			189 (Mid)	836.4	8PSK	24.20	-0.14	0.133	1.6	Pass
			251 (High)	848.8	8PSK	24.23	-	-	-	-
		GSM850 (EDGE12)	128 (Low)	824.2	8PSK	21.80	-	-	-	-
			189 (Mid)	836.4	8PSK	21.90	-0.188	0.17	1.6	Pass
			251 (High)	848.8	8PSK	22.00	-	-	-	-
Horizontal	Rotate 90°	GSM850 (GPRS12)	189 (Mid)	836.4	GMSK	27.06	0.159	0.013	1.6	Pass
Vertical	Normal	GSM850 (GPRS12)	189 (Mid)	836.4	GMSK	27.06	0.13	0.553	1.6	Pass
Horizontal	Normal	PCS1900 (GPRS12)	661 (Mid)	1880.0	GMSK	23.76	-0.154	0.902	1.6	Pass
Horizontal	Rotate 90°	PCS1900 (GPRS12)	661 (Mid)	1880.0	GMSK	23.76	-0.12	0.086	1.6	Pass
Vertical	Normal	PCS1900 (GPRS8)	512 (Low)	1850.2	GMSK	28.23	-	-	-	-
			661 (Mid)	1880.0	GMSK	28.33	0.152	1.1	1.6	Pass
			810 (High)	1909.8	GMSK	28.39	-	-	-	-
		PCS1900 (GPRS10)	512 (Low)	1850.2	GMSK	26.18	-	-	-	-
			661 (Mid)	1880.0	GMSK	26.30	0.142	1.35	1.6	Pass
			810 (High)	1909.8	GMSK	26.40	-	-	-	-
		PCS1900 (GPRS12)	512 (Low)	1850.2	GMSK	23.66	-0.083	1.26	1.6	Pass
			661 (Mid)	1880.0	GMSK	23.76	-0.128	1.51	1.6	Pass
			810 (High)	1909.8	GMSK	23.85	-0.138	1.53	1.6	Pass
		PCS1900 (EDGE8)	512 (Low)	1850.2	8PSK	24.85	-	-	-	-
			661 (Mid)	1880.0	8PSK	24.94	0.112	0.513	1.6	Pass
			810 (High)	1909.8	8PSK	25.03	-	-	-	-
		PCS1900 (EDGE10)	512 (Low)	1850.2	8PSK	22.32	-	-	-	-
			661 (Mid)	1880.0	8PSK	22.43	0.043	0.551	1.6	Pass
			810 (High)	1909.8	8PSK	22.53	-	-	-	-
		PCS1900 (EDGE12)	512 (Low)	1850.2	8PSK	19.84	-	-	-	-
			661 (Mid)	1880.0	8PSK	19.94	-0.095	0.543	1.6	Pass
			810 (High)	1909.8	8PSK	20.18	-	-	-	-



USB Port State	EUT State	Band	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Result
Horizontal	Normal	WCDMA Band V (RMC 12.2K)	4132 (Low)	826.4	GMSK	22.13	-	-	-	-
			4182 (Mid)	836.4	GMSK	21.95	-0.193	0.674	1.6	Pass
			4233 (High)	846.6	GMSK	22.12	-	-	-	-
		WCDMA Band V (RMC 64K)	4132 (Low)	826.4	QPSK	21.90	-	-	-	-
			4182 (Mid)	836.4	QPSK	21.82	-0.103	0.612	1.6	Pass
			4233 (High)	846.6	QPSK	22.14	-	-	-	-
		WCDMA Band V (RMC 144K)	4132 (Low)	826.4	QPSK	22.19	-	-	-	-
			4182 (Mid)	836.4	QPSK	21.84	-0.129	0.564	1.6	Pass
			4233 (High)	846.6	QPSK	22.10	-	-	-	-
		WCDMA Band V (RMC 384K)	4132 (Low)	826.4	QPSK	22.08	-	-	-	-
			4182 (Mid)	836.4	QPSK	21.85	-0.024	0.545	1.6	Pass
			4233 (High)	846.6	QPSK	21.71	-	-	-	-
		WCDMA Band V (RMC 12.2K + HSDPA)	4132 (Low)	826.4	QPSK	21.55	-	-	-	-
			4182 (Mid)	836.4	QPSK	21.38	-0.065	0.51	1.6	Pass
			4233 (High)	846.6	QPSK	21.72	-	-	-	-
Horizontal	Rotate 90°	WCDMA Band V (RMC 12.2K)	4182 (Mid)	836.4	GMSK	21.95	0.127	0.016	1.6	Pass
Vertical	Normal	WCDMA Band V (RMC 12.2K)	4182 (Mid)	836.4	GMSK	21.95	-0.199	0.551	1.6	Pass
Horizontal	Normal	WCDMA Band II (RMC 12.2K)	9400 (Mid)	1880.0	GMSK	21.03	-0.185	0.765	1.6	Pass
Horizontal	Rotate 90°	WCDMA Band II (RMC 12.2K)	9400 (Mid)	1880.0	GMSK	21.03	-0.03	0.063	1.6	Pass
Vertical	Normal	WCDMA Band II (RMC 12.2K)	9262 (Low)	1852.4	GMSK	21.20	-	-	-	-
			9400 (Mid)	1880.0	GMSK	21.03	0.007	1.41	1.6	Pass
			9538 (High)	1907.6	GMSK	21.06	-	-	-	-
		WCDMA Band II (RMC 64K)	9262 (Low)	1852.4	QPSK	21.39	-	-	-	-
			9400 (Mid)	1880.0	QPSK	21.04	0.125	1.41	1.6	Pass
			9538 (High)	1907.6	QPSK	21.05	-	-	-	-
		WCDMA Band II (RMC 144K)	<b>9262 (Low)</b>	<b>1852.4</b>	<b>QPSK</b>	<b>21.34</b>	<b>0.169</b>	<b>1.51</b>	<b>1.6</b>	<b>Pass</b>
			9400 (Mid)	1880.0	QPSK	21.06	0.114	1.42	1.6	Pass
			9538 (High)	1907.6	QPSK	21.08	0.061	1.28	1.6	Pass
		WCDMA Band II (RMC 384K)	9262 (Low)	1852.4	QPSK	21.42	-	-	-	-
			9400 (Mid)	1880.0	QPSK	21.14	0.137	1.39	1.6	Pass
			9538 (High)	1907.6	QPSK	21.14	-	-	-	-
		WCDMA Band II (RMC 12.2K + HSDPA)	9262 (Low)	1852.4	QPSK	21.15	-	-	-	-
			9400 (Mid)	1880.0	QPSK	20.90	0.033	1.17	1.6	Pass
			9538 (High)	1907.6	QPSK	20.78	-	-	-	-

**11.2 DELL D500 Notebook Bottom with 0cm Gap**

USB Port State	EUT State	Band	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Result	
Horizontal	Normal	GSM850 (GPRS12)	128 (Low)	824.2	GMSK	26.97	-0.032	0.957	1.6	Pass	
			189 (Mid)	836.4	GMSK	27.06	-0.133	0.931	1.6	Pass	
			251 (High)	848.8	GMSK	27.09	-0.185	0.788	1.6	Pass	
Vertical		PCS1900 (GPRS12)	512 (Low)	1850.2	GMSK	23.66	-	-	-	-	
			661 (Mid)	1880.0	GMSK	23.76	0.152	0.483	1.6	Pass	
			810 (High)	1909.8	GMSK	23.85	-	-	-	-	
Horizontal		WCDMA Band V (RMC 12.2K)	4132 (Low)	826.4	GMSK	22.13	-0.171	1.23	1.6	Pass	
			4182 (Mid)	836.4	GMSK	21.95	0.068	1.26	1.6	Pass	
			4233 (High)	846.6	GMSK	22.12	0.017	1.1	1.6	Pass	
Vertical		WCDMA Band II (RMC 12.2K)	9262 (Low)	1852.4	GMSK	21.20	-	-	-	-	
			9400 (Mid)	1880.0	GMSK	21.03	0.146	0.493	1.6	Pass	
			9538 (High)	1907.6	GMSK	21.06	-	-	-	-	

**11.3 DELL M2300 Notebook Bottom with 0cm Gap**

USB Port State	EUT State	Band	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Result	
Horizontal	Normal	GSM850 (GPRS12)	128 (Low)	824.2	GMSK	26.97	-	-	-	-	
			189 (Mid)	836.4	GMSK	27.06	-0.185	0.442	1.6	Pass	
			251 (High)	848.8	GMSK	27.09	-	-	-	-	
Vertical		PCS1900 (GPRS12)	512 (Low)	1850.2	GMSK	23.66	-	-	-	-	
			661 (Mid)	1880.0	GMSK	23.76	-0.153	0.471	1.6	Pass	
			810 (High)	1909.8	GMSK	23.85	-	-	-	-	
Horizontal		WCDMA Band V (RMC 12.2K)	4132 (Low)	826.4	GMSK	22.13	-	-	-	-	
			4182 (Mid)	836.4	GMSK	21.95	0.102	0.389	1.6	Pass	
			4233 (High)	846.6	GMSK	22.12	-	-	-	-	
Vertical		WCDMA Band II (RMC 12.2K)	9262 (Low)	1852.4	GMSK	21.20	-	-	-	-	
			9400 (Mid)	1880.0	GMSK	21.03	-0.073	0.536	1.6	Pass	
			9538 (High)	1907.6	GMSK	21.06	-	-	-	-	

Remark: Test Engineer : Eric Huang. and Jason Wang



## **12. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] IEEE Std. P1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, April 21, 2003
- [3] Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), “Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to RF Emissions”, June 2001
- [4] IEEE Std. C95.3-2002, “IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields-RF and Microwave”, 2002
- [5] IEEE Std. C95.1-1999, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, 1999
- [6] Robert J. Renka, “Multivariate Interpolation Of Large Sets Of Scattered Data”, University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148
- [7] DASY4 System Handbook



## Appendix A - System Performance Check Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

### System Check\_Body\_835MHz

#### DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.965$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Pin=100mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.1 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.636 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

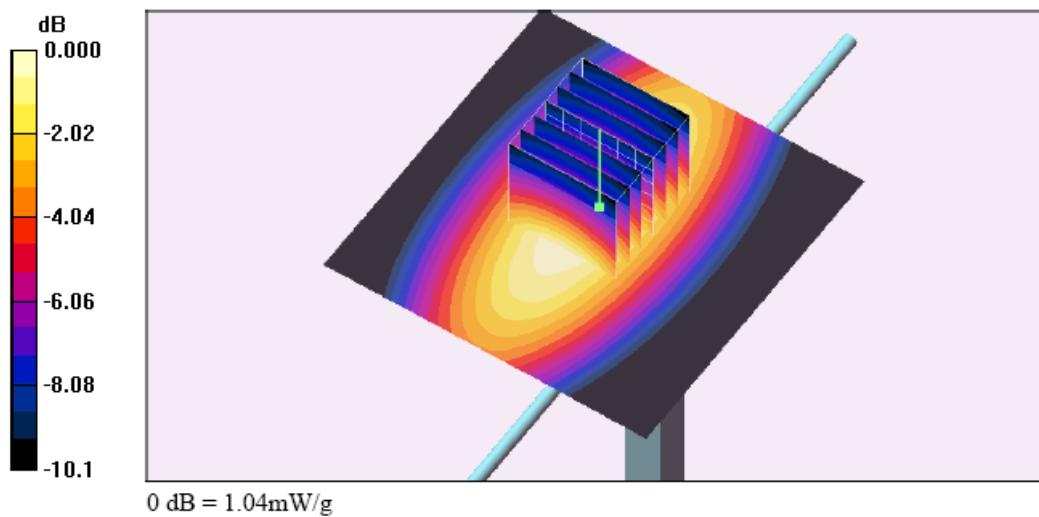



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**System Check\_Body\_835MHz****DUT: Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.971$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Pin=100mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.1 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.640 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

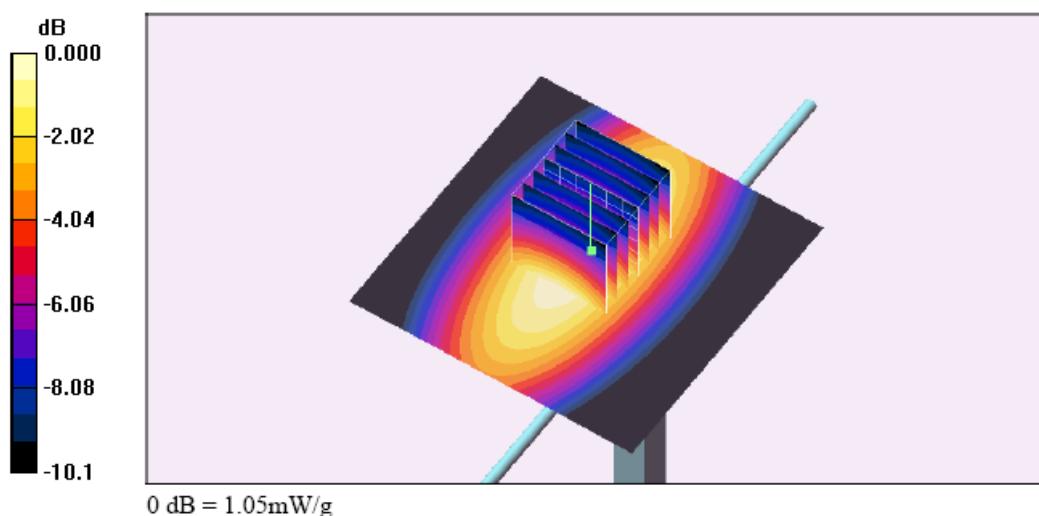



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**System Check\_Body\_1900MHz****DUT: Dipole 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.68 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.4 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 6.71 W/kg

SAR(1 g) = 3.99 mW/g; SAR(10 g) = 2.12 mW/g

Maximum value of SAR (measured) = 4.55 mW/g

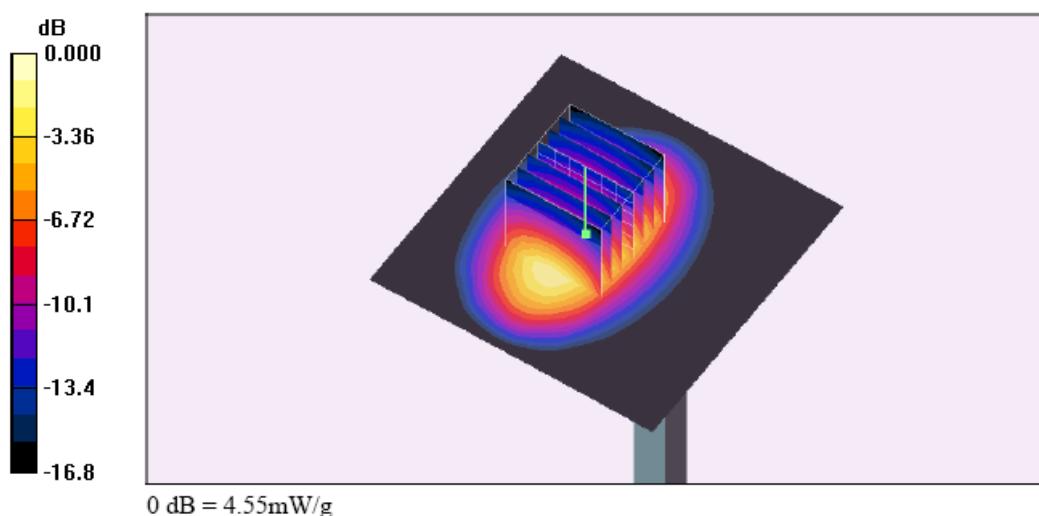



## Appendix B - SAR Measurement Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

### Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_GPRS8\_D400\_Horizontal USB

**DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.487 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.472 mW/g

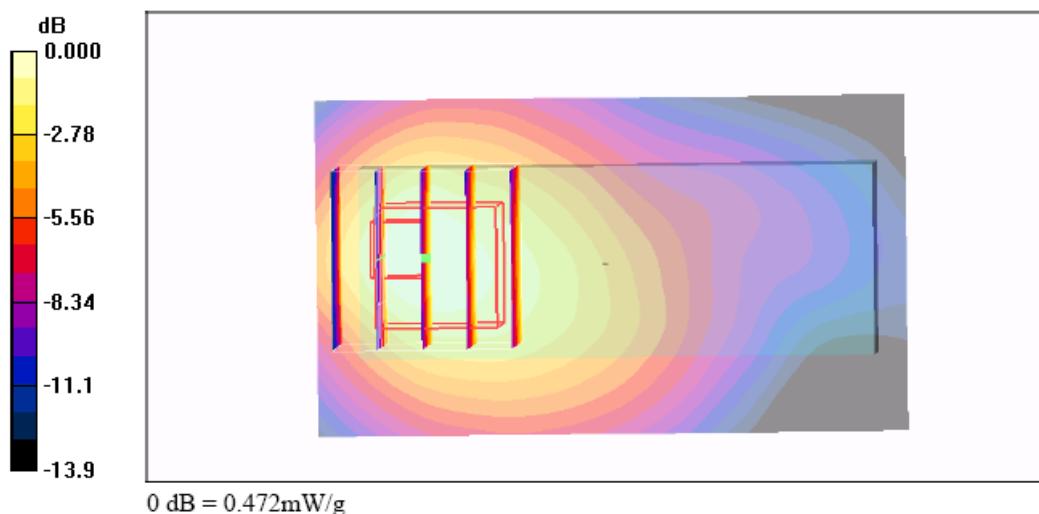



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_GPRS10\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.3 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.591 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

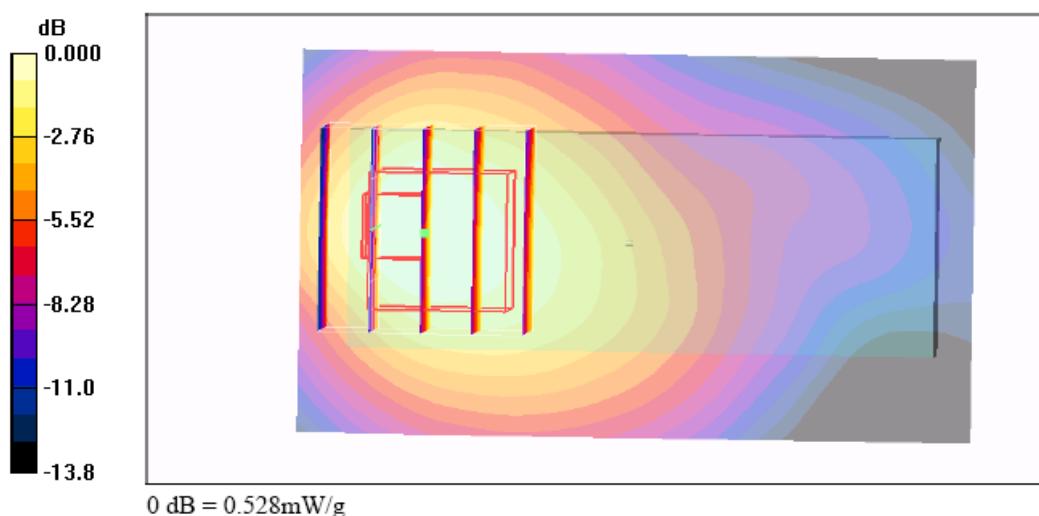



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_GPRS12\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.780 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.695 mW/g

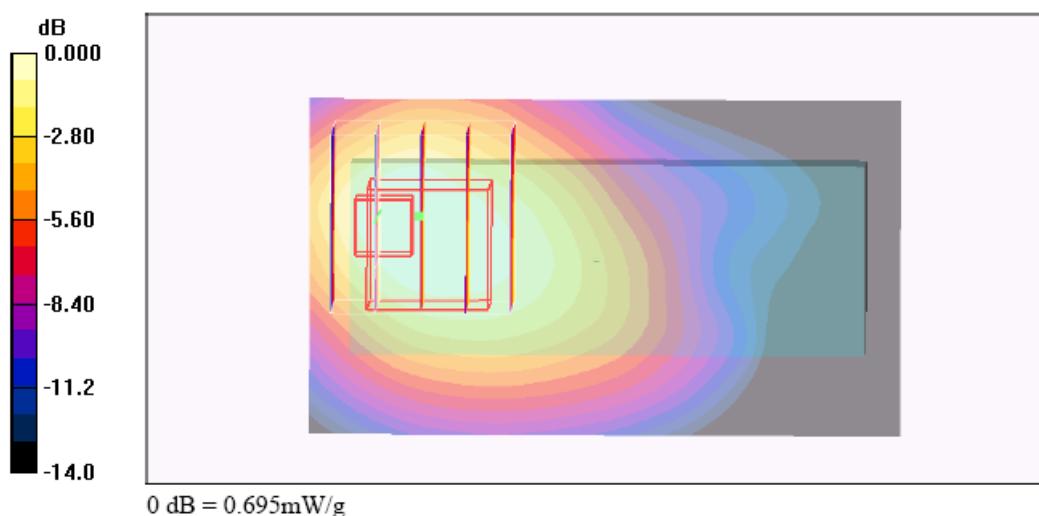



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_EDGE8\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.119 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.60 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.127 mW/g

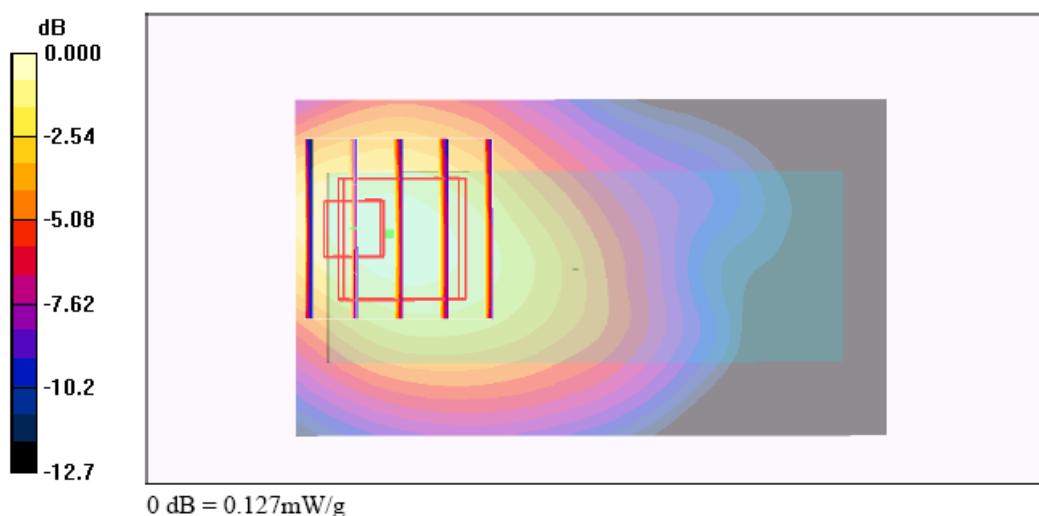



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_EDGE10\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.150 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.27 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.149 mW/g

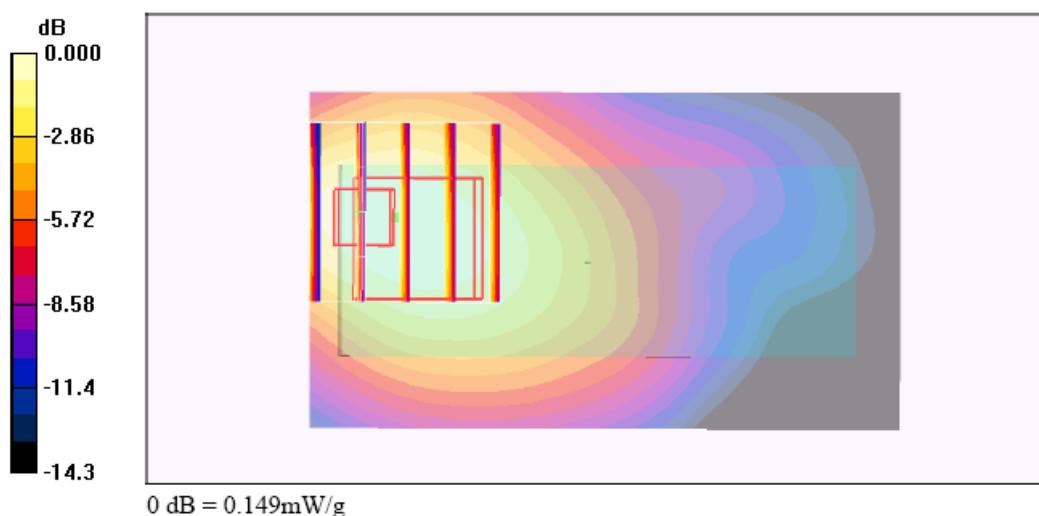



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_EDGE12\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.236 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.24 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.184 mW/g

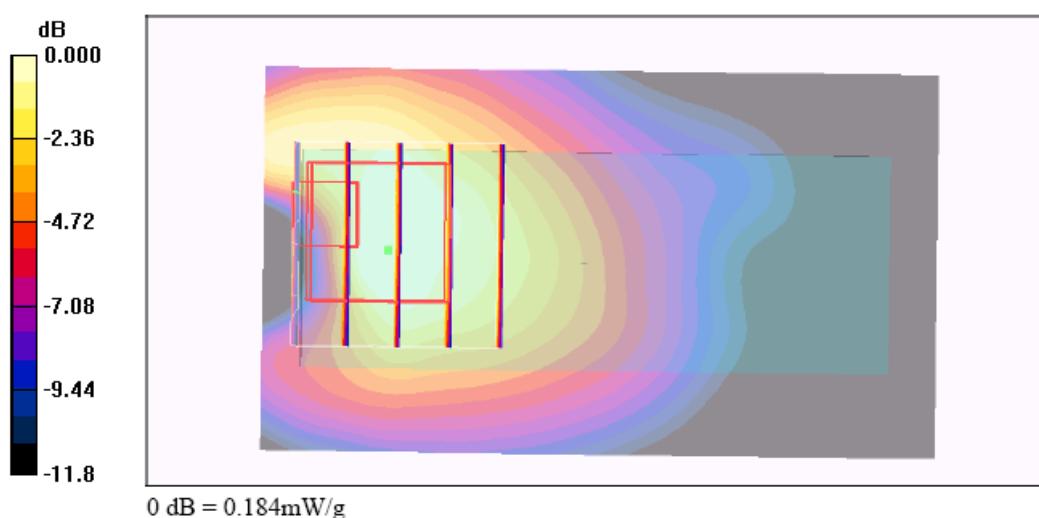



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch128\_NB Bottom with 0cm Gap\_GPRS12\_D500\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2

Medium: MSL\_850 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.96$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch128/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.870 mW/g


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.957 mW/g; SAR(10 g) = 0.496 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

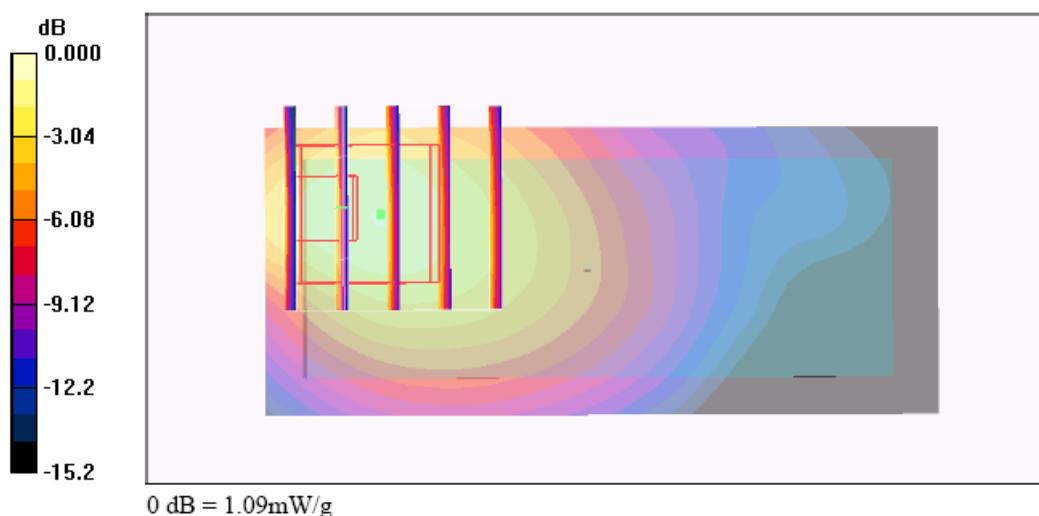



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_GPRS12\_M2300\_Horizontal USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.517 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.482 mW/g

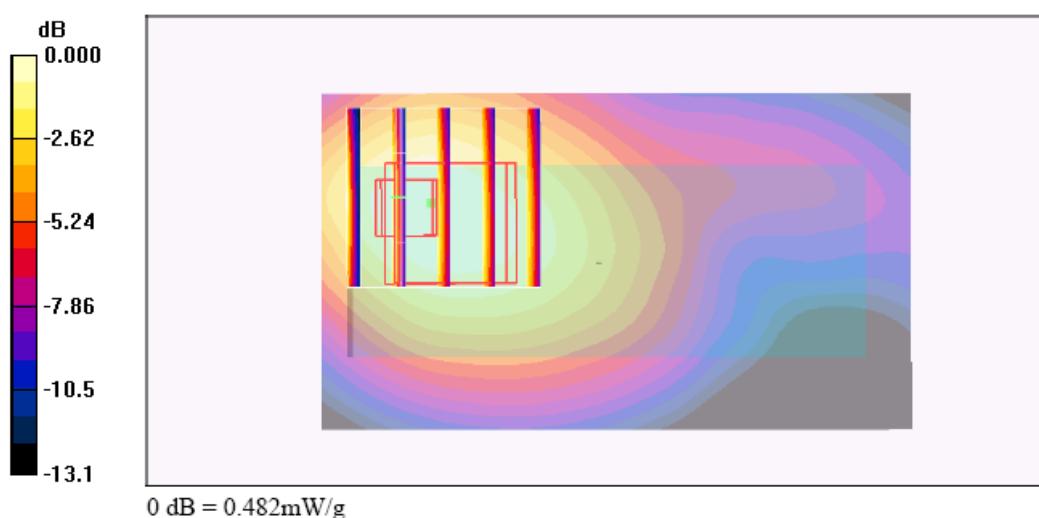



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_GPRS12\_D400\_Horizontal USB\_Rotate 90****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (41x31x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.011 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.28 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.034 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00723 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.28 V/m; Power Drift = 0.159 dB


Peak SAR (extrapolated) = 0.018 W/kg

SAR(1 g) = 0.00976 mW/g; SAR(10 g) = 0.00624 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.011 mW/g

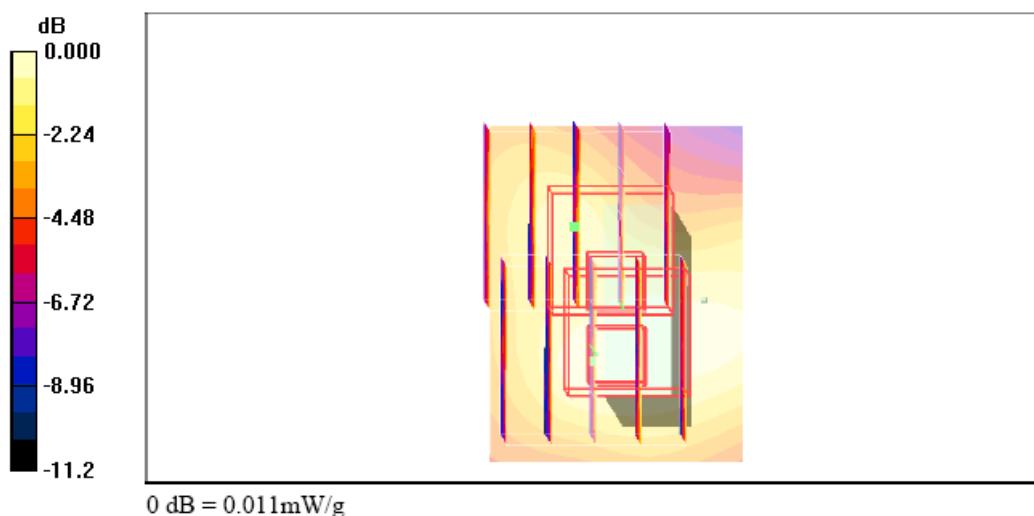



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/7

**Body\_GSM850 Ch189\_NB Bottom with 0cm Gap\_GPRS12\_D400\_Vertical USB****DUT: 822811-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch189/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.606 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.599 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.561 mW/g

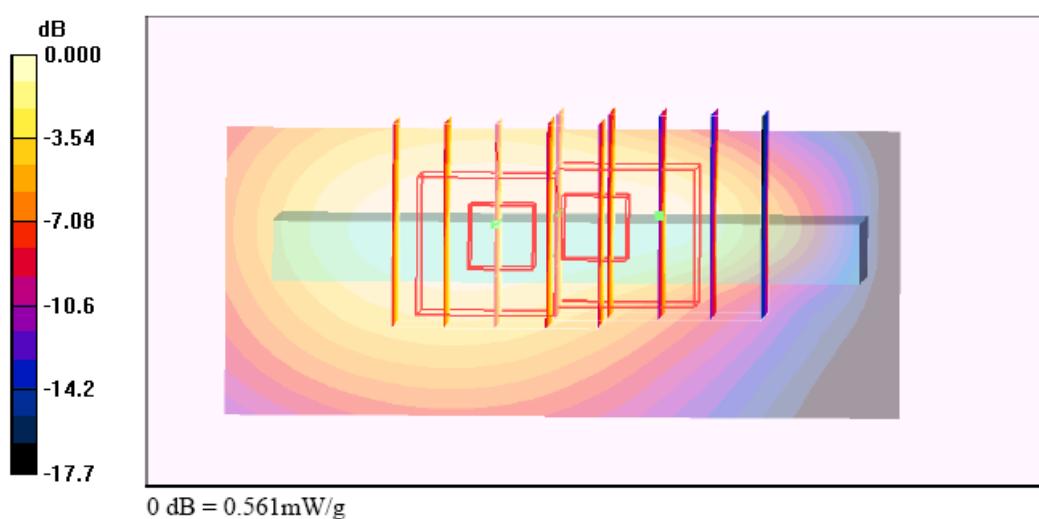



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_GPRS12\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.587 mW/g

Maximum value of SAR (measured) = 0.960 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.665 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.713 mW/g

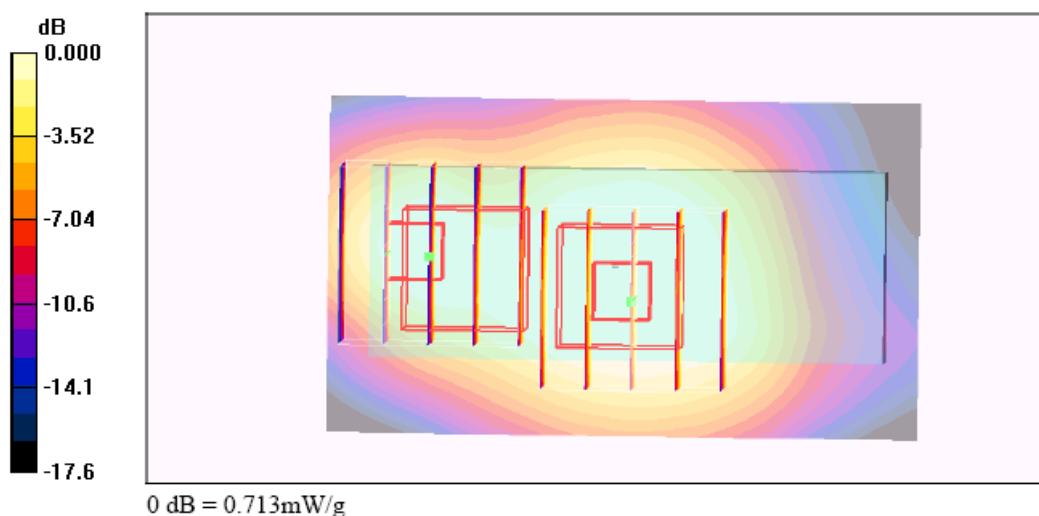



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_GPRS12\_D400\_Horizontal USB\_Rotate 90****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.091 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.61 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

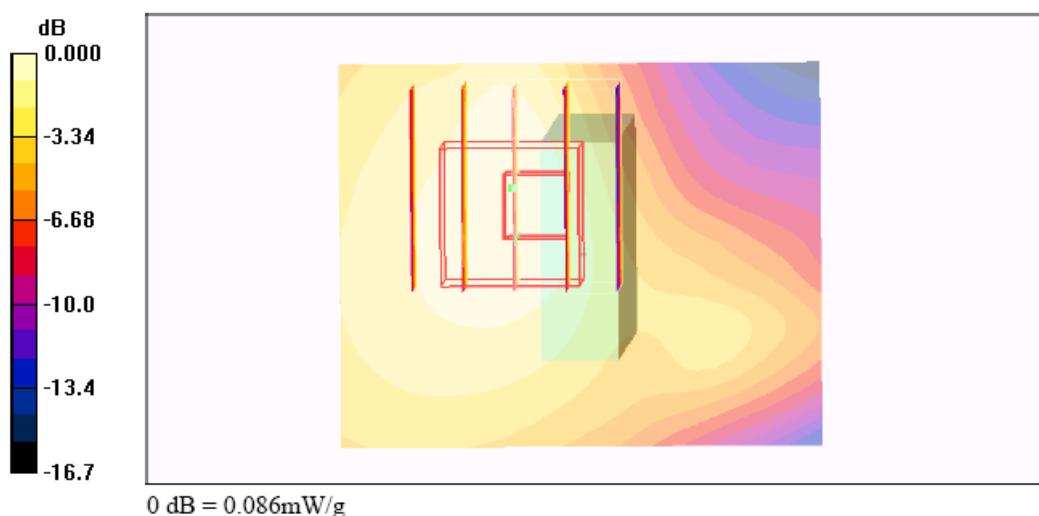



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_GPRS8\_D400\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.28 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.9 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.554 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

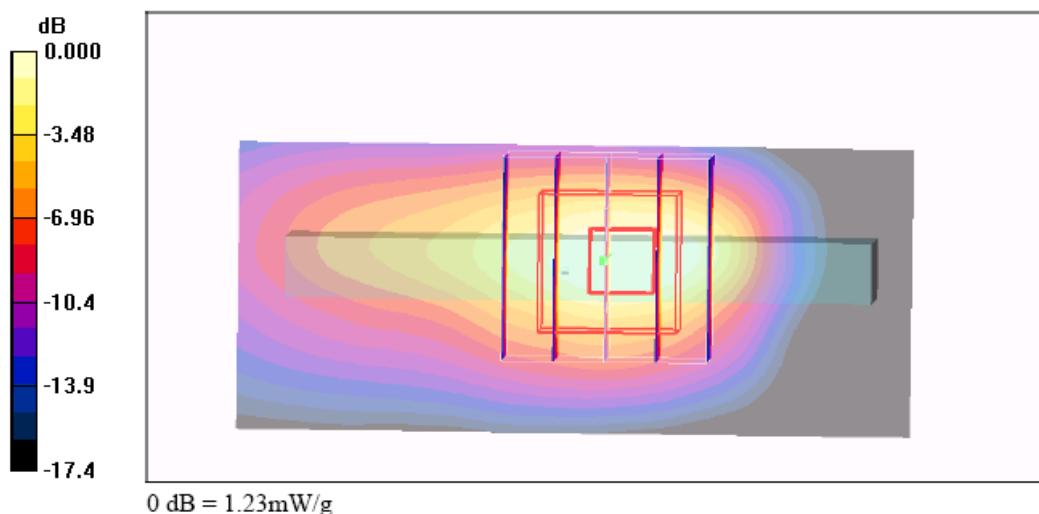



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_GPRS10\_D400\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.55 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.0 V/m; Power Drift = 0.142 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 1.35 mW/g; SAR(10 g) = 0.682 mW/g

Maximum value of SAR (measured) = 1.54 mW/g

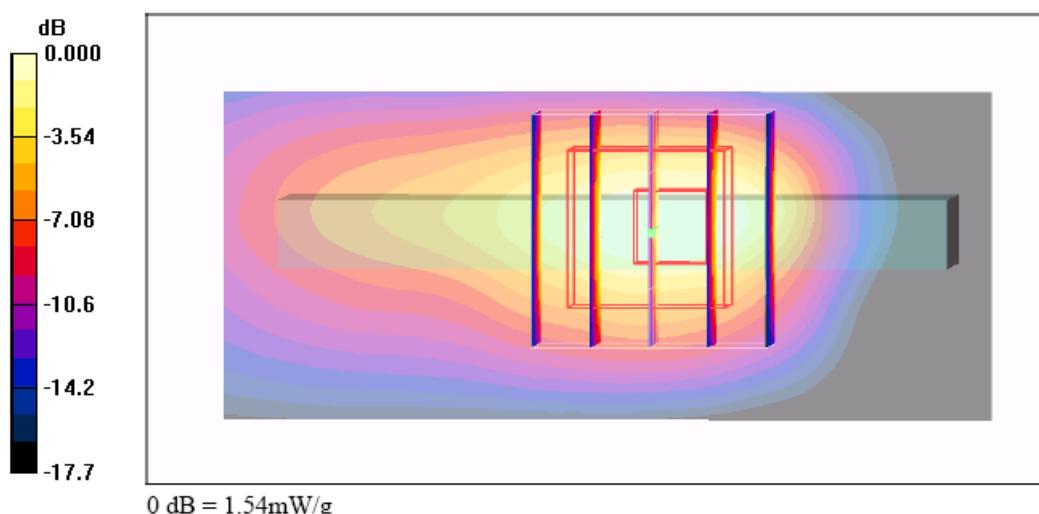



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch810\_NB Bottom with 0cm Gap\_GPRS12\_D400\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL\_1900 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch810/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.92 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.1 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 0.735 mW/g

Maximum value of SAR (measured) = 1.72 mW/g

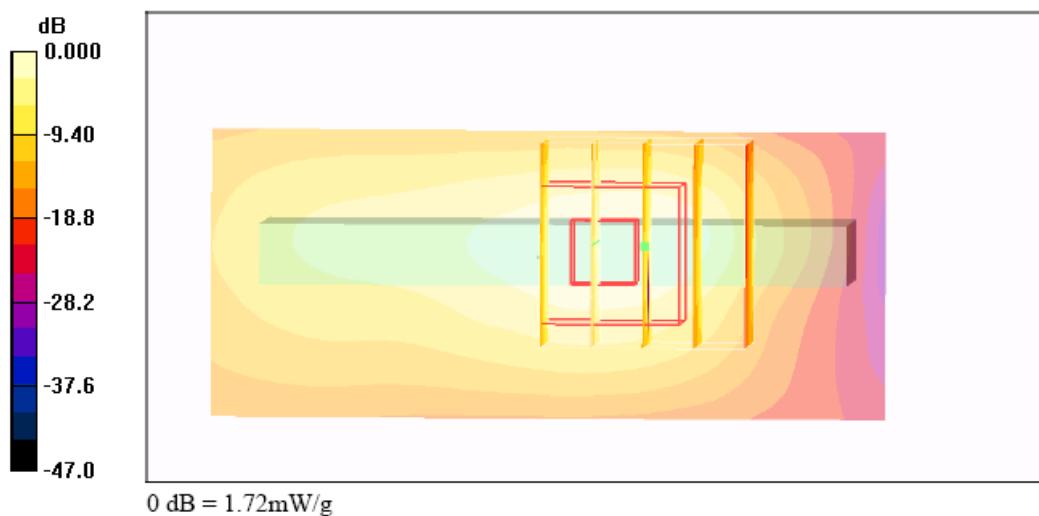



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_EDGE8\_D400\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.599 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.3 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.935 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.580 mW/g

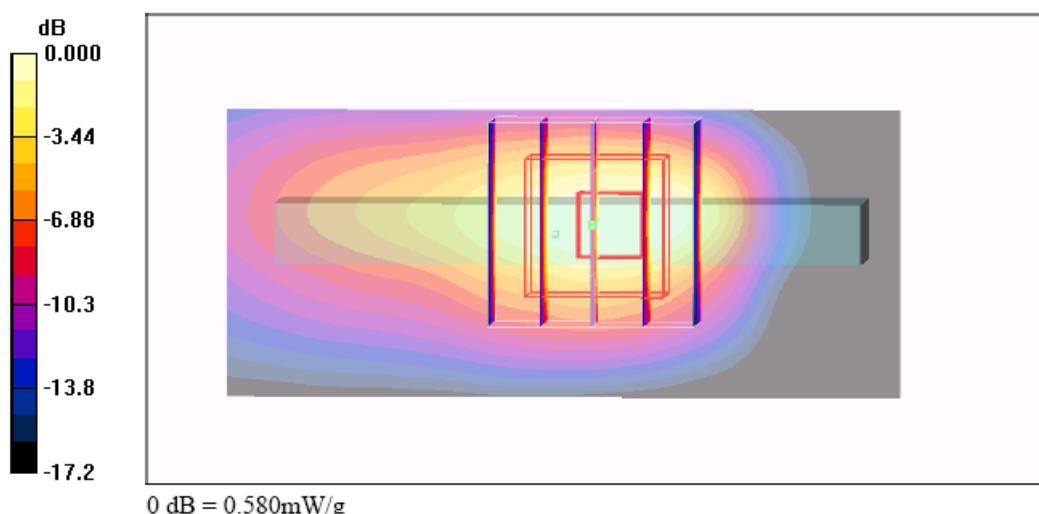



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_EDGE10\_D400\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.650 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.630 mW/g

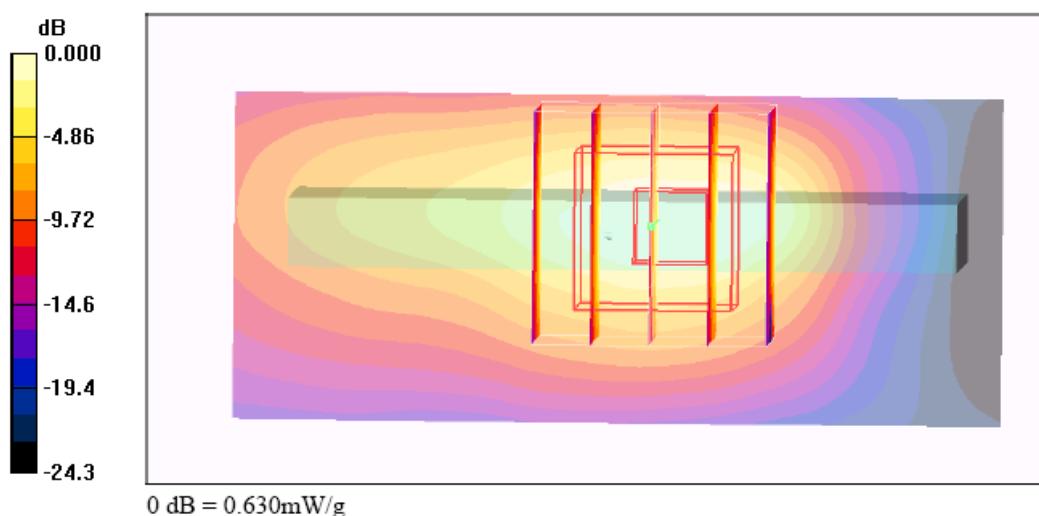



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_EDGE12\_D400\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.746 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.266 mW/g

Maximum value of SAR (measured) = 0.689 mW/g

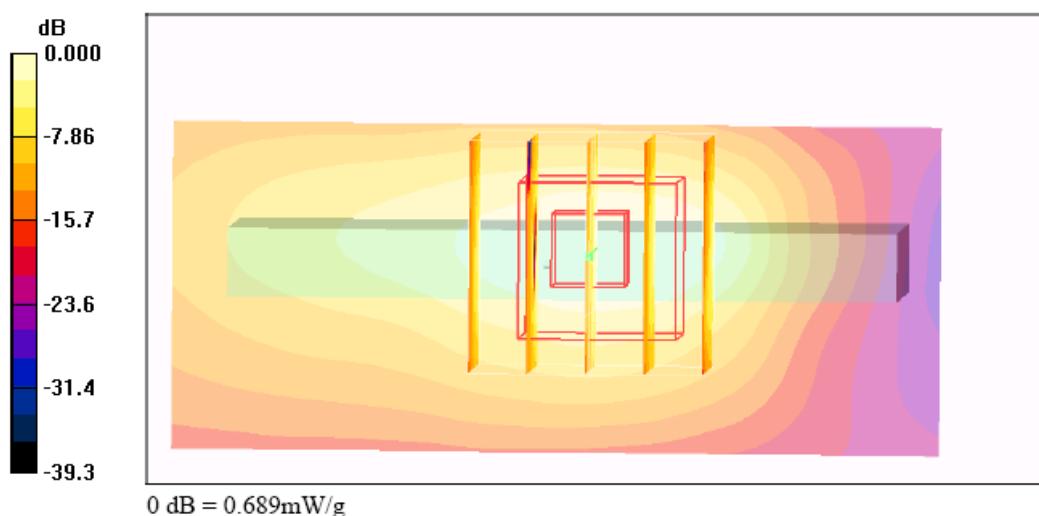



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_GPRS12\_D500\_Vertical USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.600 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

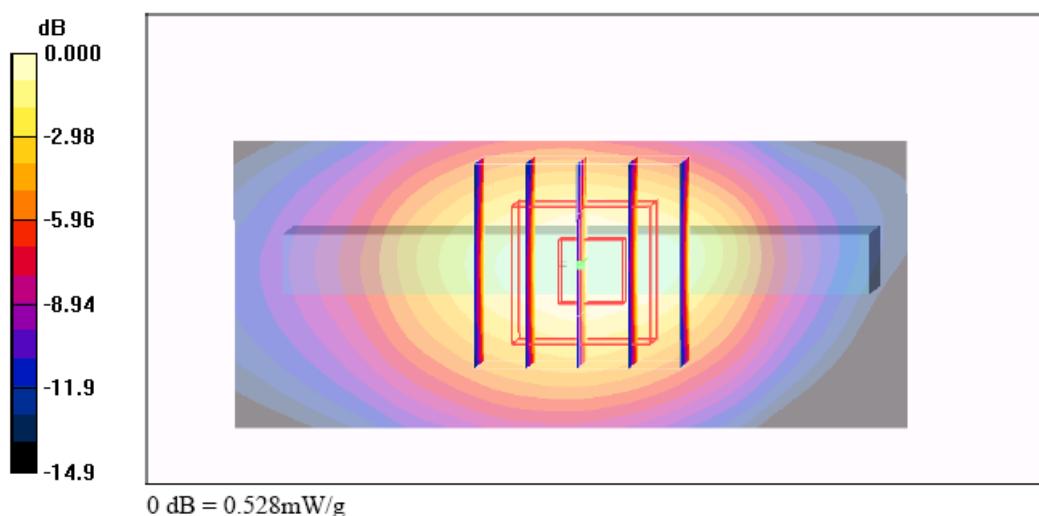



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_PCS Ch661\_NB Bottom with 0cm Gap\_GPRS12\_M2300\_Virtual USB****DUT: 822811-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch661/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.596 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.7 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

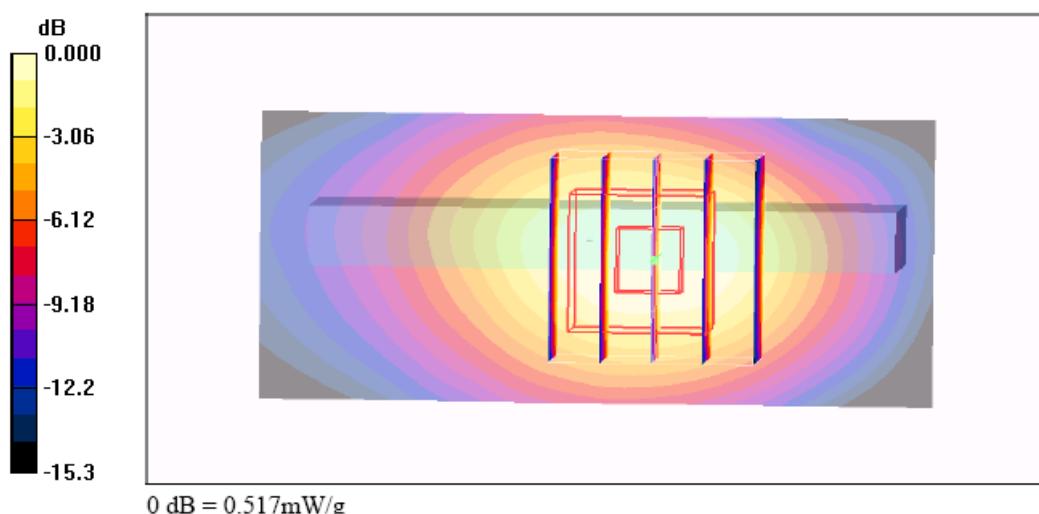



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC12.2K\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.713 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.399 mW/g

Maximum value of SAR (measured) = 0.761 mW/g

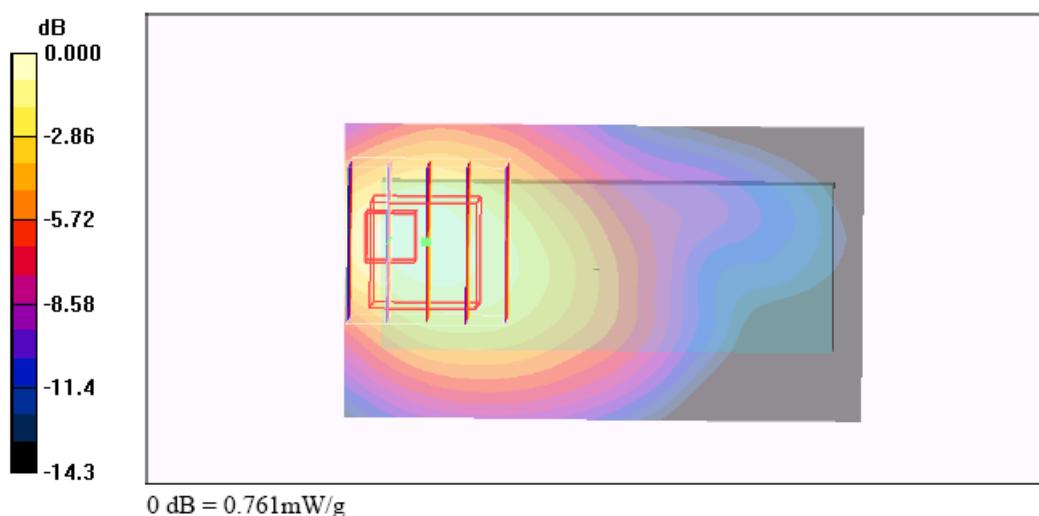



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC64K\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.665 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.612 mW/g; SAR(10 g) = 0.369 mW/g

Maximum value of SAR (measured) = 0.705 mW/g

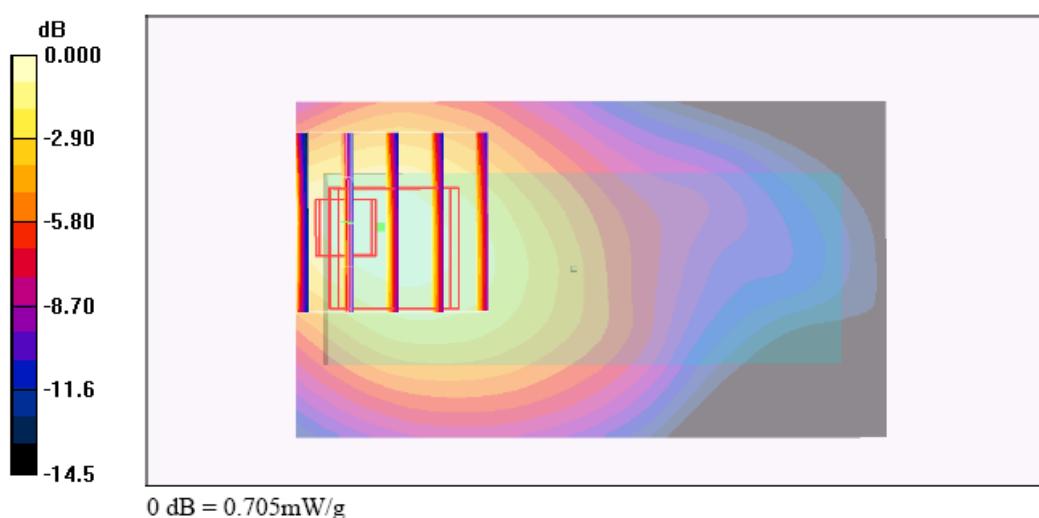



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC144K\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.570 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.342 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

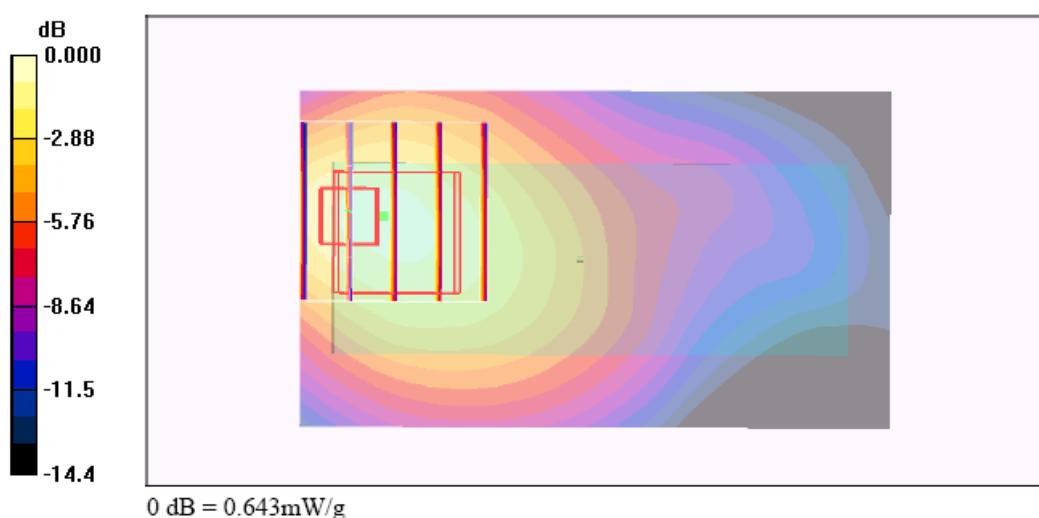



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC384K\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.545 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 0.610 mW/g

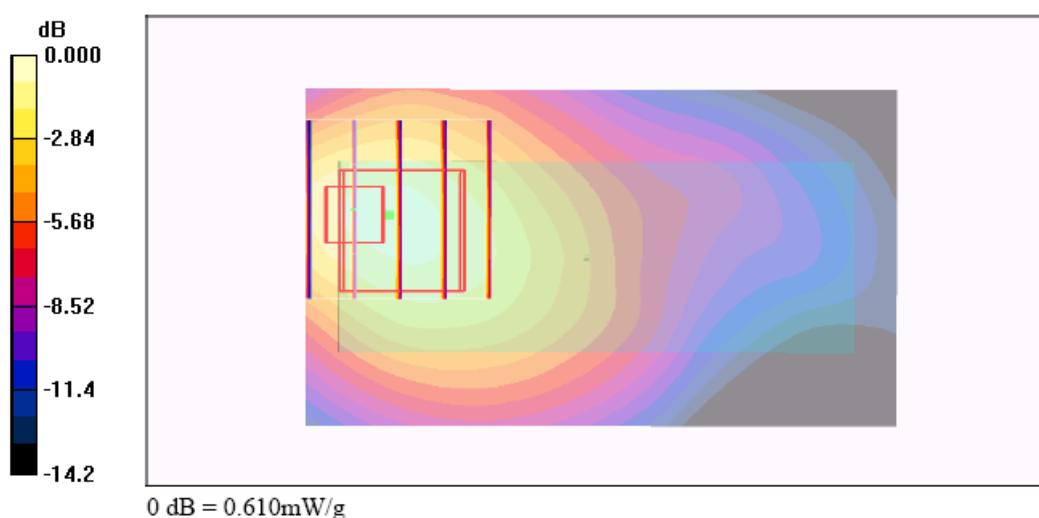



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC12.2K+HSDPA\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.537 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

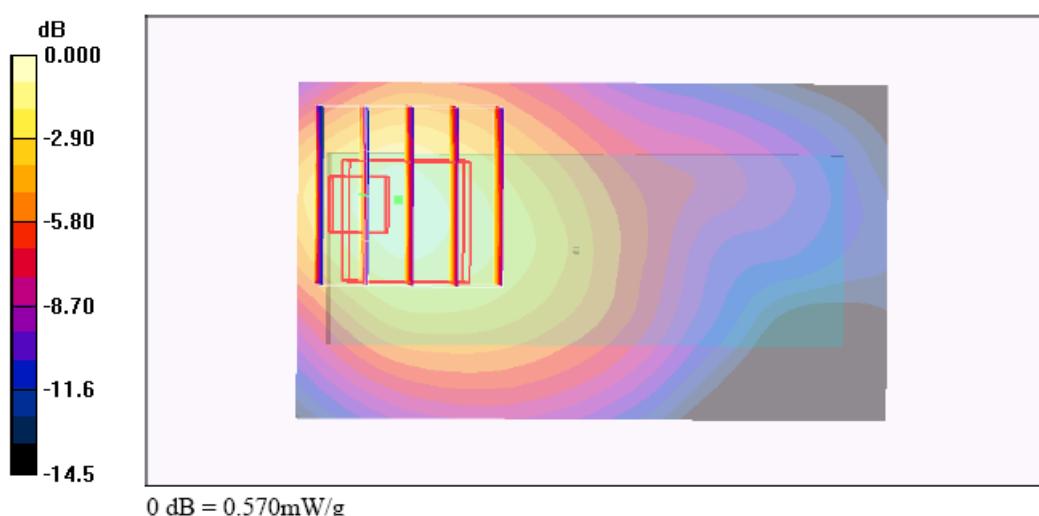



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC12.2K\_D400\_Horizontal USB\_Rotate 90****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x31x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.017 mW/g

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.58 V/m; Power Drift = 1.27 dB

Peak SAR (extrapolated) = 0.034 W/kg

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00941 mW/g

Maximum value of SAR (measured) = 0.018 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.58 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00899 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

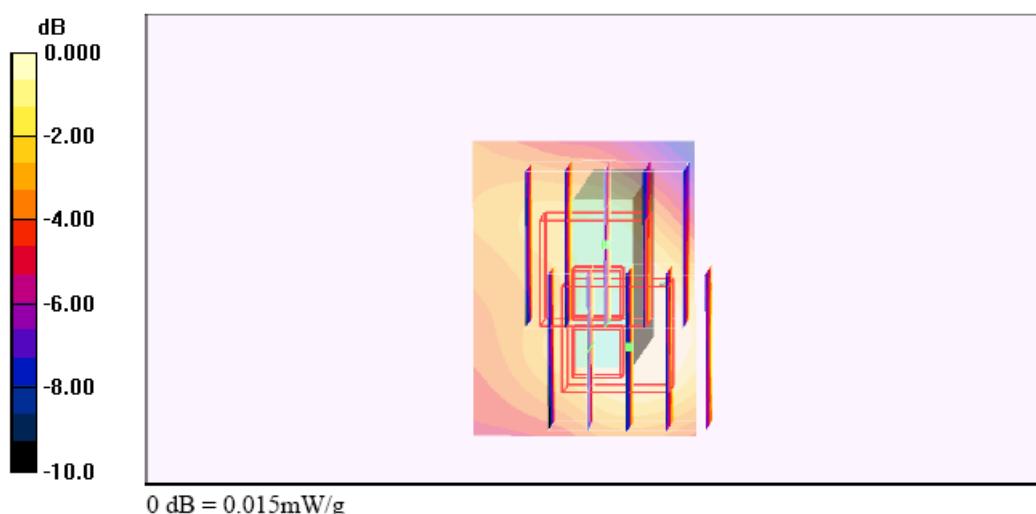



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC12.2K\_D400\_Vertical USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.557 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.199 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.596 mW/g

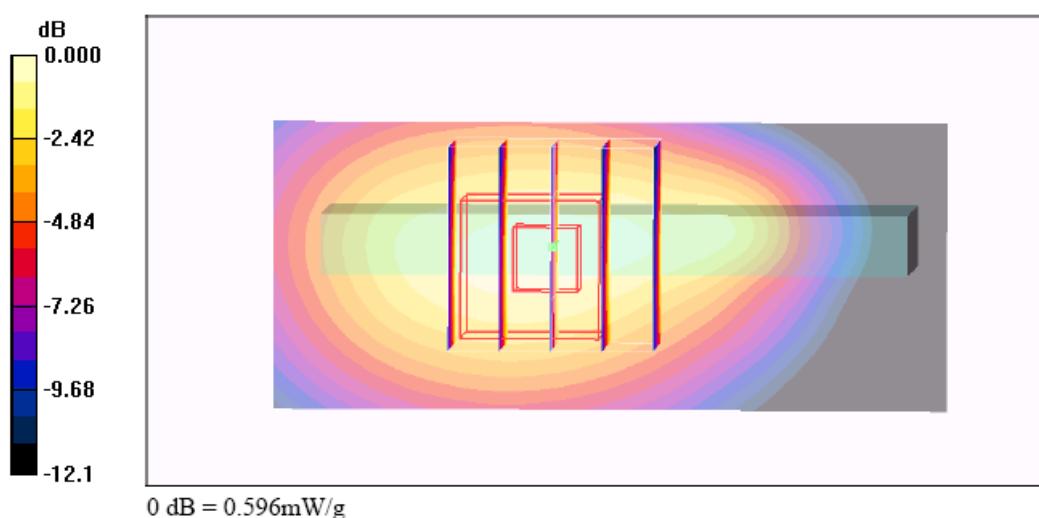



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC12.2K\_D500\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.641 mW/g

Maximum value of SAR (measured) = 1.52 mW/g

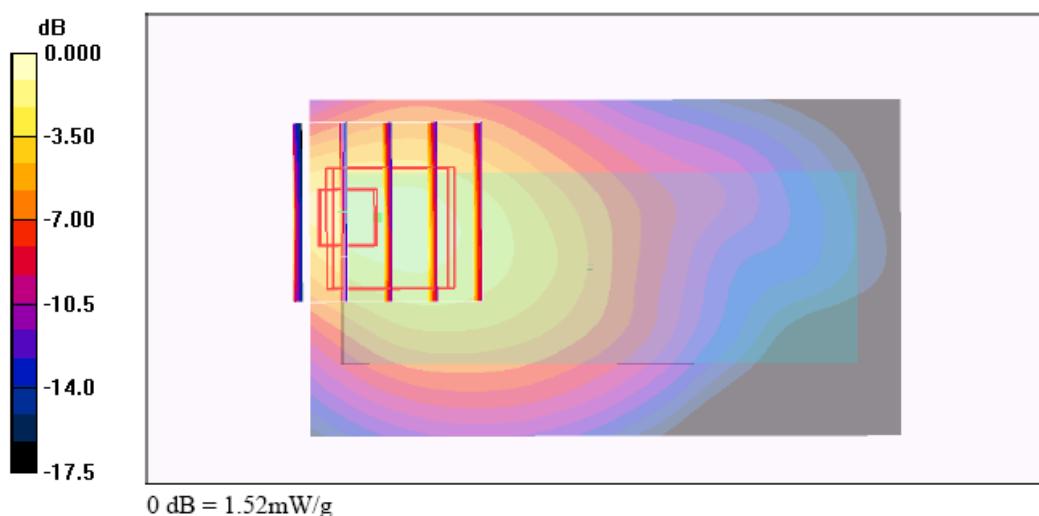



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch4182\_NB Bottom with 0cm Gap\_RMC12.2K\_M2300\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch4182/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.441 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

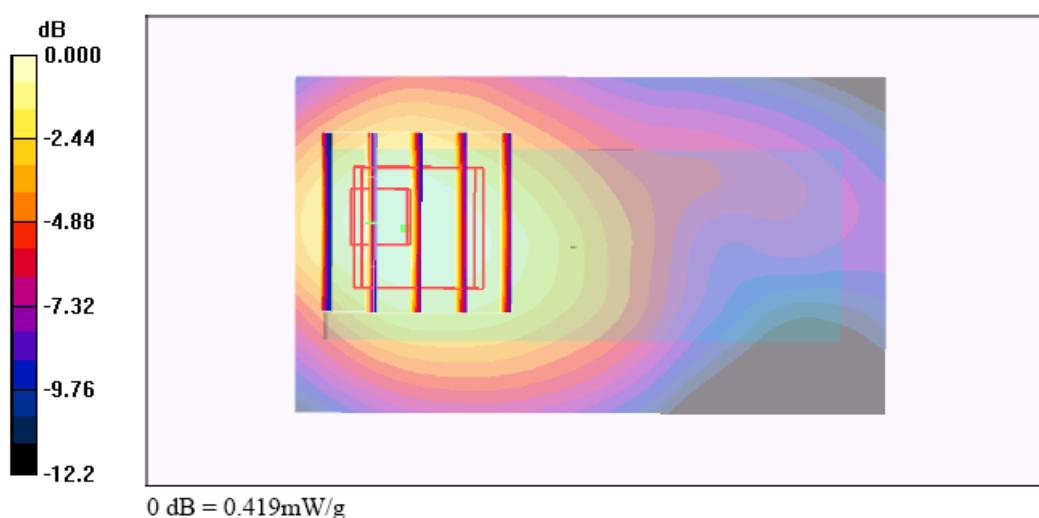



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch9400\_NB Bottom with 0cm Gap\_RMC12.2K\_D400\_Horizontal USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.933 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 0.806 mW/g

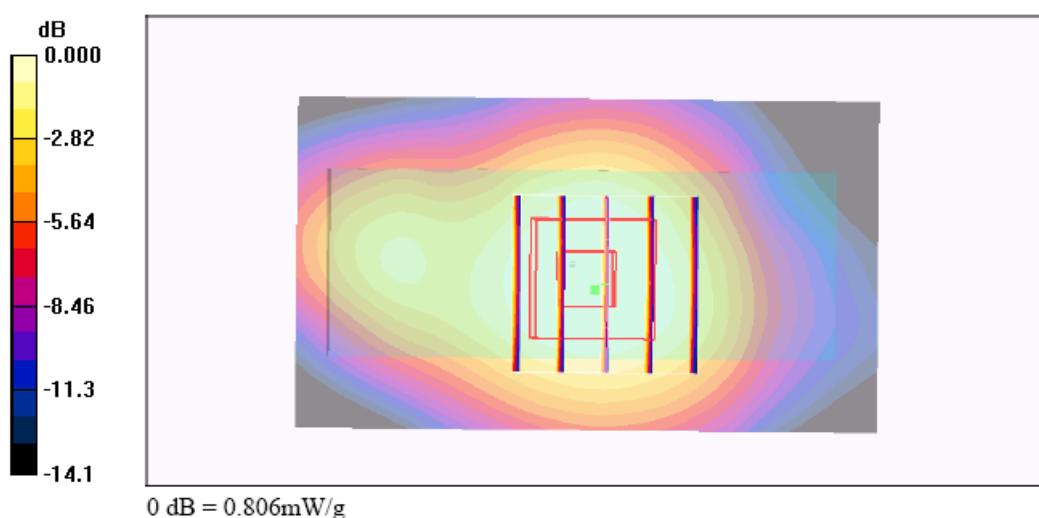



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch9400\_NB Bottom with 0cm Gap\_RMC12.2K\_D400\_Horizontal USB\_Rotate 90****DUT: 822811-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch9400/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.077 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.35 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

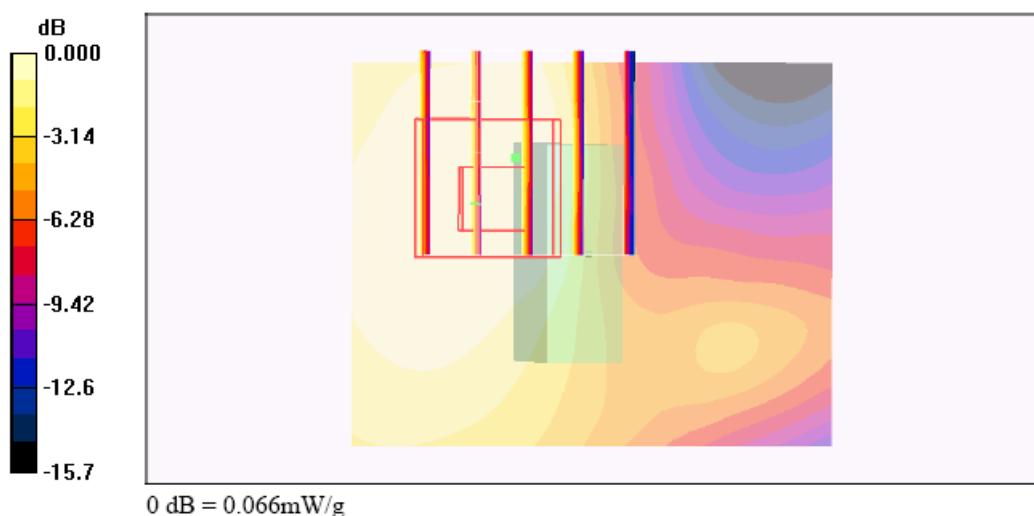



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch9400\_NB Bottom with 0cm Gap\_RMC12.2K\_D400\_Vertical USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch9400/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.62 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.2 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.754 mW/g

Maximum value of SAR (measured) = 1.57 mW/g

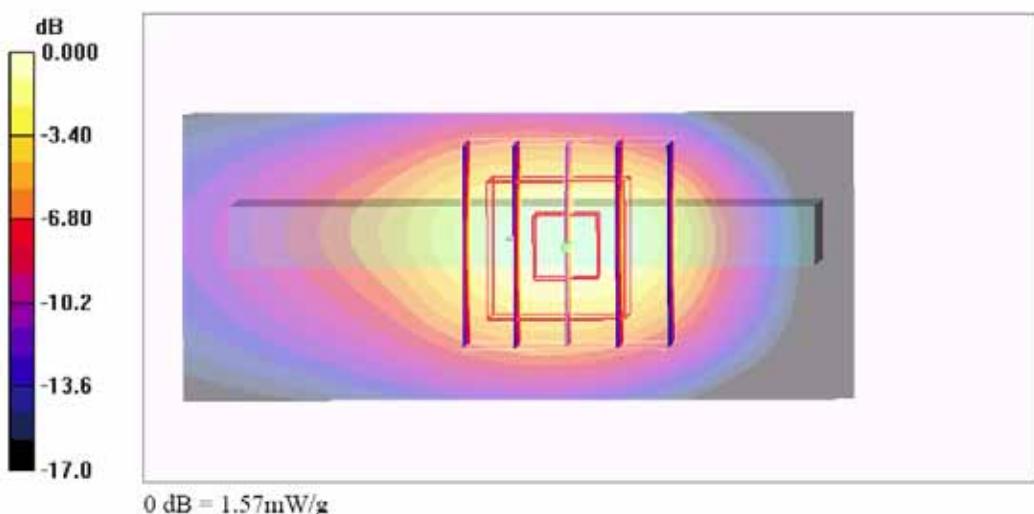



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch9400\_NB Bottom with 0cm Gap\_RMC64K\_D400\_Vertical USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch9400/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.64 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.9 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.759 mW/g

Maximum value of SAR (measured) = 1.57 mW/g

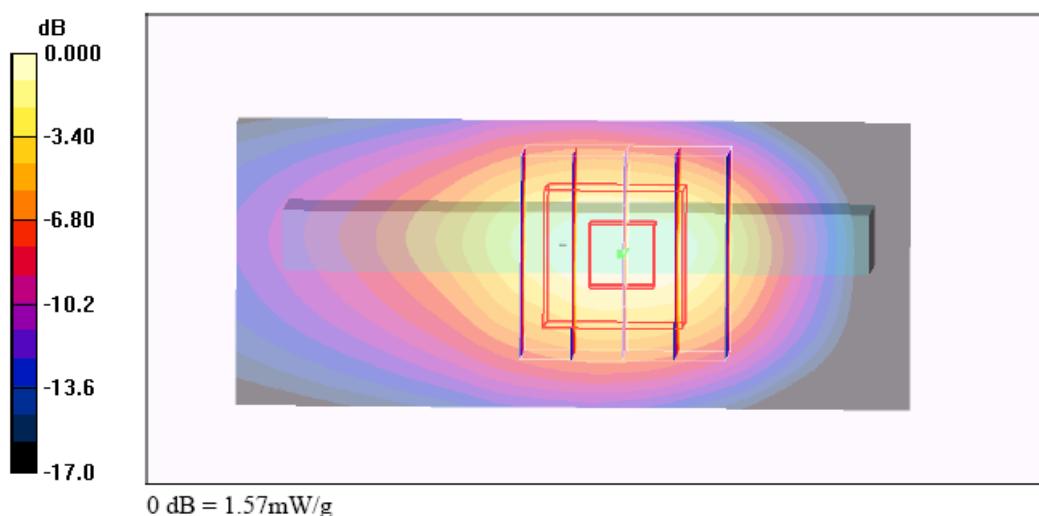



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch9262\_NB Bottom with 0cm Gap\_RMC144K\_D400\_Vertical USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.5 °C

## DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch9262/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.73 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.5 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 1.51 mW/g; SAR(10 g) = 0.822 mW/g

Maximum value of SAR (measured) = 1.68 mW/g

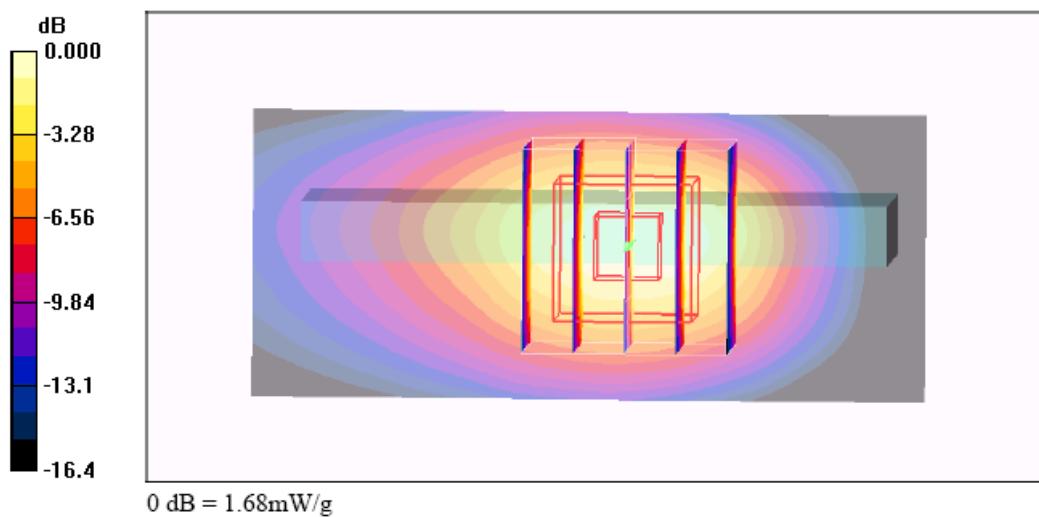



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2008/3/8

**Body\_WCDMA Ch9400\_NB Bottom with 0cm Gap\_RMC384K\_D400\_Vertical USB****DUT: 822811-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Ch9400/Area Scan (31x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.62 mW/g

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.0 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.752 mW/g

Maximum value of SAR (measured) = 1.54 mW/g

