

# SAR Evaluation Report

**FCC ID : TARCMU-300**

**Project Reference No. : NK08R021**

**Product Type : DBDM(CDMA & Wi-max) USB Modem**

**Brand Name : C-motech**

**Model : CMU-300**

**Tested According to : IEEE Standard C95.1 / OET Bulletin 65 Supplement C**

**Tested Period : January. 24. 2008 to January. 31. 2008**

Tested by Minchul Shin  date : February. 05. 2008

Verified by Seonteag.Jin  date : February. 05. 2008

*This test results are only related to the item tested.*

*This test report is only limited to the client company and the product.*

*This report must not be used by the client to claim product endorsement by any agency of the U.S. Government.*

Lab Address : Nemko Korea Co., Ltd

300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, Korea

Phone : 82-31-322-2333      Fax : 82-31-322-2332

**Contents of This Report**

<b>1. General Information</b>	<b>4</b>
1.1 Applicant	4
1.2 Manufacturer	4
1.3 Description of Device	4
<b>2. General Test Condition</b>	<b>5</b>
2.1 Location	5
2.2 Operating Environment	5
2.3 Support Equipment	5
2.4 Test Frequency	5
2.5 Position Information	5
<b>3. Description of Test Equipment</b>	<b>6~9</b>
<b>4. Measurement Procedure</b>	<b>9~10</b>
4.1 Head/Body Simulating Mixture Characterization	11
4.2 Tissue Dielectric Parameters for Head and Body Phantoms	12
4.3 FCC Limits for Specific Absorption Rate (SAR)	13
<b>5. Definition of Reference Points</b>	<b>14~15</b>
<b>6. Test Configuration Positions</b>	<b>16~18</b>
<b>7. Measurement Uncertainty</b>	<b>19</b>
<b>8. System Verification</b>	<b>20</b>
8.1 Tissue Verification	20
8.2 Test System Validation	21
8.3 Measurement Result of Test Data (Cellular Validation)	22
8.4 Measurement Result of Test Data (PCS Validation)	23
<b>9. SAR Measurement Procedures for 3G Devices</b>	<b>24~27</b>
<b>10. SAR Measurement Results</b>	<b>28</b>

11. SAR Data Summary (Cellular)	29~58
12. SAR Data Summary (PCS)	59~88
13. SAR Test Equipment	89
14. References	90
<b>Appendix A: SAR Definition</b>	<b>91</b>
<b>Appendix B: Probe Calibration</b>	<b>92~100</b>
<b>Appendix C: Dipole Calibration</b>	<b>101~112</b>
<b>Appendix D: Photographs of EUT</b>	<b>113~115</b>
<b>Appendix E: Test Position of EUT</b>	<b>116~118</b>

## 1. General Information

### 1.1 Applicant

Company Name: C-motech. Co.,Ltd  
Company Address: 8,9F BLD. Yongsan Bldg. Yido-dog, Youngdungpo-gu, Seoul Korea (150-871)  
Phone/Fax: Phone: +82-2-369-9881 / +82-2-785-5740  
Contact Name: Gil-Sung Bhan

### 1.2 Manufacturer

Company Name: C-motech. Co.,Ltd  
Company Address: 8,9F BLD. Yongsan Bldg. Yido-dog, Youngdungpo-gu, Seoul Korea (150-871)  
Phone/Fax: Phone: +82-2-369-9881 / +82-2-785-5740  
Contact Name: Gil-Sung Bhan

### 1.3 Description of Device

Category: DBDM(CDMA & Wi-max) USB Modem  
Model Name: CMU-300  
Brand Name: C-motech  
Serial Number: 00000001  
Frequency of Operation CDMA835 : Tx : 824MHz ~ 849MHz, Rx : 869MHz ~ 894MHz  
PCS :Tx : 1850MHz ~ 1910MHz, Rx : 1930MHz ~ 1990MHz  
Power Output (Radiated Power) Cellular : ERP 0.340 W (25.32 dBm)  
US PCS : EIRP 0.603 W (27.80 dBm)  
Type of Oscillation PLL Synthesizer & VCTCXO (19.2MHz)  
Modulation Method OQPSK, QPSK  
Channel Spacing 1.23MHz  
Modulation Code Division Multiple Access (CDMA)  
Operating Condition -20°C ~ +55°C , 85% at 50°C  
Power Supply +5.0Vdc from USB slot  
Antenna Type Internal monopole antenna  
Dimensions 33 mm x 93mm x 12.5 mm  
Weight Approx. 43.8g  
Remarks: -

## 2. General Test Condition

### 2.1 Location

Nemko Korea

300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, Korea

Phone : 82-31-322-2333 , Fax : 82-31-322-2332

### 2.2 Operating Environment

Parameters	Recording during test	Accepted deviation
Ambient temperature	21 ± 2	25 ~ 55
Relative humidity	35 ± 15%	20 ~ 75%

### 2.3 Support Equipment

Equipment	Manufacturer	Model Name	Serial Number
Laptop	SONY	PCG-6C7P	J000RJJB
Laptop	ASUS	F3J	6BN0AS148062
Laptop	SAMSUNG	SENS X10 SE	184C93DY400118T

### 2.4 Test Frequency

Cellular		US PCS	
Test Channel	Test Frequency (MHz)	Test Channel	Test Frequency (MHz)
1013	824.70	25	1851.25
363	835.89	600	1880.00
777	848.31	1175	1908.75

### 2.5 Position Information

**Bottom Position** : Laptop - Bottom side facing phantom, EUT

**Side Position** : Laptop - side edge facing phantom, EUT


According to the user manual, this device is used with 90 degree angle between USB connector and USB dongle(EUT). And it is used in the laptops with the Horizontal slot only.  
All testing were measured with 90 degree angle and Horizontal slot only.

### 3. Description of Test Equipment

#### 3.1 SAR Measurement Setup

##### Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. Which is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, measurement server, DELL computer, nearfield probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

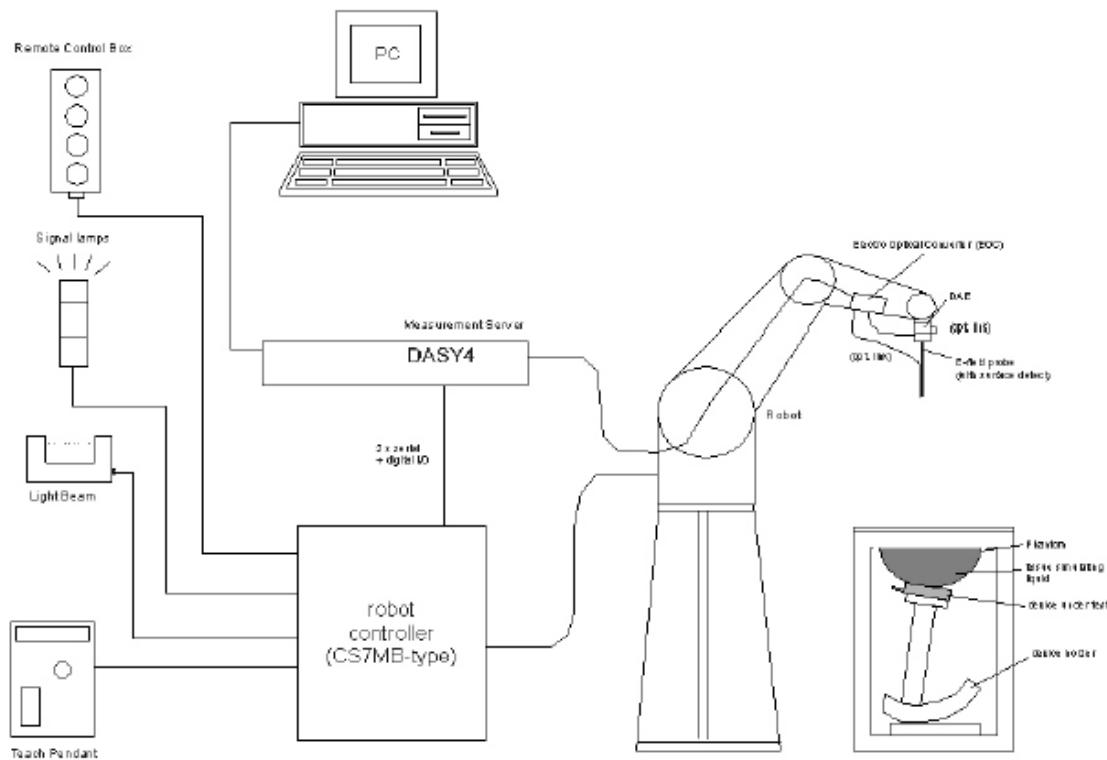

**Figure 3.1 SAR Measurement System Setup**

##### System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control is used to drive the robot motors. The PC consists of the DELL computer with Windows XP system and SAR Measurement Software DASY4, LCD monitor, mouse and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A Data Acquisition Electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. This is connected to the Electro-Optical Coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server.

## System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with autozeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

### 3.2 E-field Probe

The SAR measurement were conducted with the dosimetric probe ES3DV3, designed in the classical triangular configuration (see Fig.3.3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates.

The probe is equipped with an optical multi-fiber line ending at the front of the probe tip (see Fig.3.4). It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface.


Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a System maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero.

The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.3.2).

The approach is stopped at reaching the maximum.



**Figure3.2 DAE System**



**Figure 3.3 Triangular Probe Configuration**



**Figure 3.4 Probe Thick-Film Technique**

### Probe Specifications

Construction :	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic DGBE)
Calibration :	Basic Broad Band Calibration In air from 10 MHz to 3.0 GHz In brain and body simulating tissue at Frequencies of HSL835, HSL1900 MHz, Calibration certificates please find attached.
Frequency :	10 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in HSL (rotation normal to probe axis)
Dynamic Range	5 $\mu$ W/g to > 100mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330mm (Tip : 20mm) Tip diameter: 4.0mm (Body : 12mm) Distance from probe tip to dipole centers: 2.0mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms
Optical Surface Detection	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces

### 3.3 SAM Phantom

The SAM Twin Phantom V4.0C is constructed of a fiberglass shell Integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.5)



**Figure 3.5 SAM Twin Phantom**

## Phantom Specification

**Construction :** The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

**Shell Thickness :**  $2 \pm 0.2$  mm

**Filling Volume :** Approx. 25 liters

**Dimensions :** Height: 830 mm; Length: 1000 mm; Width: 500 mm

### 3.4 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (see Fig. 3.6) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening.

The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations .

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



**Figure 3.6Device Holder**

## 4. Measurement Procedure

EUT at the maximum power level is placed by a non metallic device holder in the above described positions at a shell phantom of a human being.

The distribution of the electric field strength  $E$  is measured in the tissue simulating liquid within the shell phantom.

For this miniaturized field probes with high sensitivity and low field disturbance are used.

Afterwards the corresponding SAR values are calculated with the known electrical conductivity and the mass density  $\rho$  of the tissue in the SEMCAD software.

The software is able to determine the averaged SAR values (averaging region 1g or 10g) for compliance testing.

The measurements are done by two scans: first a coarse scan determines the region of the maximum SAR, afterwards the averaged SAR is measured in a second scan within the sharp of a cube. The measurement times takes about 20 minutes.

The following steps are used for each test position:

**STEP 1**

Establish a call with the maximum output power with a base station simulator.

The connection between the mobile phone and the base station simulator is established via air interface.

**STEP 2**

Measurement of the local E-Field value at a fixed location (P1).

This value serves as a reference value for calculating a possible power drift.

**STEP 3**

Measurement of the SAR distribution with a grid spacing of 15mm  $\times$  15mm and a constant distance to the inner surface of the phantom.

Since the sensors cannot directly measure at the inner surface of the phantom.

Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With this values the area of the maximum SAR is calculated by a interpolation scheme (combination of a least-square fitted function and a weighted average method). Additional peaks within 3dB of the maximum SAR are searched.

**STEP 4**

Around this points, a cube of 30mm  $\times$  30mm  $\times$  30mm is assessed by measuring 5  $\times$  5  $\times$  5 points.

With these data, the peak spatial-average SAR value can be calculated with the SEMCAD software.

**STEP 5**

The used extrapolation and interpolation routines are all based on the modified Quadratic Shepard's method [DASY4].

**STEP 6**

Repetition of the E-Field measurement at the fixed location(P1) and repetition of the whole procedure if the two results differ by more than  $\pm 0.22$ dB.

#### 4.1 Head / Body Simulating Mixture Characterization

The brain mixture consists of a viscous gel using hydroxethyl-cellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to make sure air Bubbles are not trapped during the mixing process.

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

#### Typical Composition of Ingredients for Liquid Tissue Phantoms

#### 4.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table.

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho$  = 1000 kg/m<sup>3</sup>)

#### 4.3 FCC Limits for Specific Absorption Rate (SAR)

##### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

##### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE 1: See Section 1 for discussion of exposure categories.

NOTE 2: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

NOTE 3: At frequencies above 6.0 GHz, SAR limits are not applicable and MPE limits for power density should be applied at 5 cm or more from the transmitting device.

Note 4: The time averaging criteria for field strength and power density do not apply to general population SAR limit of 47 CFR §2.1093.


## 5. Definition of Reference Points

### 5.1 EAR Reference Point

Figure 5.1 shows the front, back and side views of SAM. The point "M" is the reference point for the center of mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15 mm posterior to the entrance to ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.2.




**Figure 5.1 Front, back and side view of SAM**

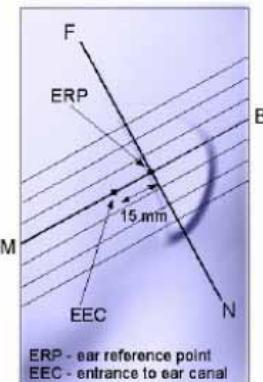

**Figure 5.2 Close up side view**

The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) perpendicular to the reference plane and passing through the RE(or LE) is called the Reference Pivoting Line (see Figure 5.3).

Line B-M is perpendicular to the N-F line. Both N-F and B-M Lines should be marked on the external phantom shell to Facilitate handset positioning. Posterior to the N-F line, the thickness of the phantom shell with the shape of an ear is a flat surface 6 mm thick at the ERPs.

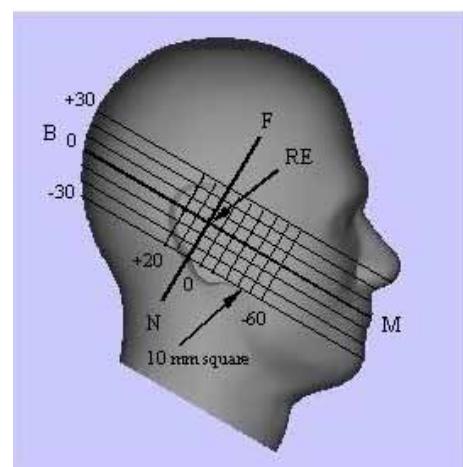


**Figure 5.3 Side view of the phantom showing relevant markings**

## 5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 5.4).

The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its tip and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

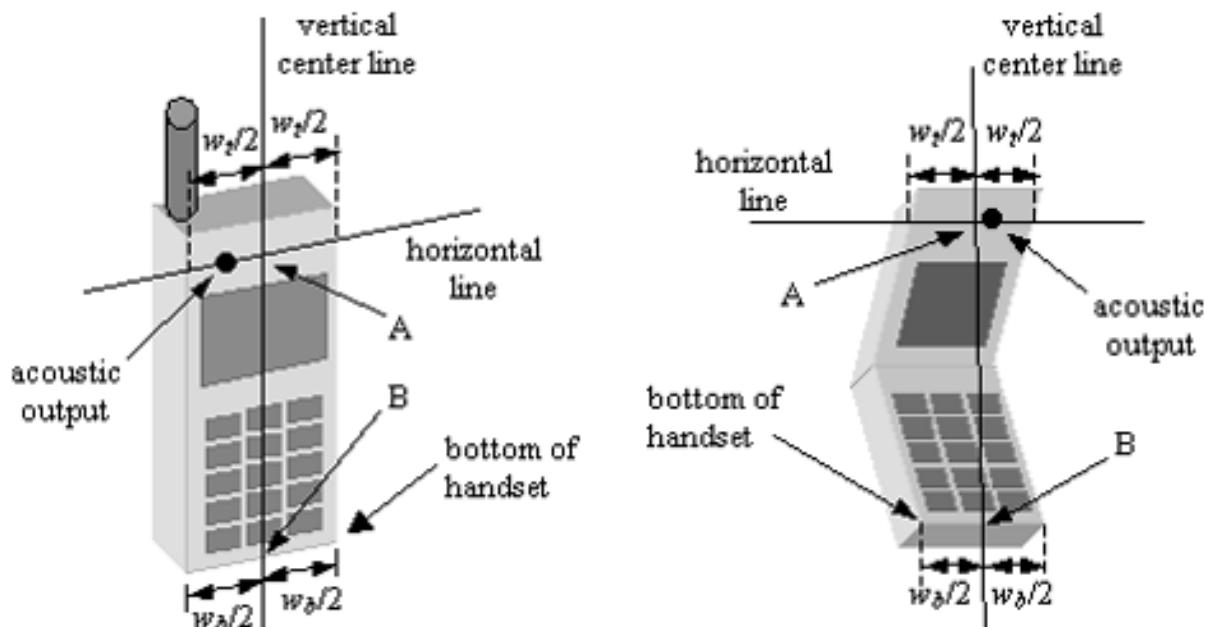


**Figure 5.4 Handset vertical and horizontal reference lines**

## 6. Test Configuration Positions

### 6.1 Cheek/Touch Position

#### Step 1

The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

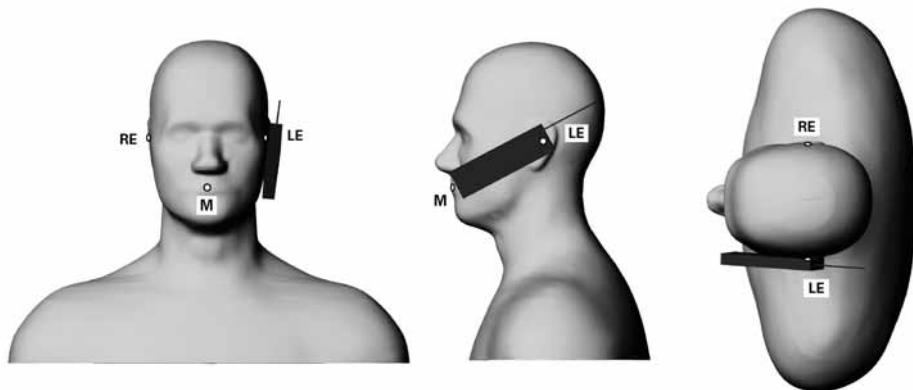

**Figure 6.1 Front, Side and Top View of Cheek/Touch Position**

#### Step 2

The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.

#### Step 3

While maintaining the handset in this plane, the handset was rotated around the LE-RE line Until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).

#### Step 4

Rotate the handset around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.

#### Step 5


While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear cheek.(See Figure 5.2)

## 6.2 EAR/Tilt 15° Position

With the test device aligned in the “Cheek/Touch Position”:

### Step 1

Repeat steps 1 to 5 of 5.2 to place the device in the “Cheek/Touch Position”

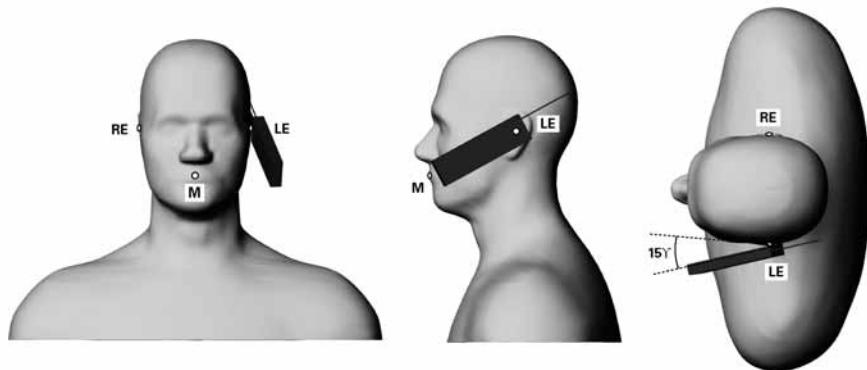

**Figure 6.2 Front, side and Top View of Ear/Tilt 15° Position**

### Step 2

While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.

### Step 3

The phone was then rotated around the horizontal line by 15 degree.

### Step 4

While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head.

(In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced.

The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head. (See Figure 6.2)

## 6.3 Body-worn and Other Configurations

### 6.3.1 Phantom Requirements

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

### 6.3.2 Test Position

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration. Devices with a headset output shall be tested with a connected headset. Since the Supplement C to OET Bulletin 65 was mainly issued for mobile phones it is only a guideline and therefore some requirements are not usable or practical for devices other than mobile phones.

### 6.3.3 Test to be Performed

For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do. For multiple accessories that do not contain metallic components, the device may be tested only with that accessory which provides the closest spacing to the body.

For multiple accessories that contain metallic components, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component, only the accessory that provides the closest spacing to the body must be tested.

If the manufacturer provides none body accessories, a separation distance of 1.5 cm between the back of the device and the flat phantom is recommended. Other separation distances may be used, but they shall not exceed 2.5cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

For devices with retractable antenna, the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at the middle channel for each test configuration is at least 3.0dB lower than the SAR limit, testing at the high and low channel is optional.

**7. Measurement Uncertainty**
**DASY4 Uncertainty Budget**  
 According to IEEE 1528 [1]

Error Description	Uncertainty value	Prob. Dist.	Div.	$(c_i)$ 1g	$(c_i)$ 10g	Std. Unc. (1g)	Std. Unc. (10g)	$(v_i)$ $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±5.9%	N	1	1	1	±5.9%	±5.9%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±10.8%	±10.6%	330
Expanded STD Uncertainty						±21.6%	±21.1%	

## 8. System Verification

### 8.1 Tissue Verification

For the measurement of the following parameters the HP 85070E dielectric probe kit is used, representing the open-ended slim form probe measurement procedure. The measured values should be within  $\pm 5\%$  of the recommended values given by the IEEE Standard C95.1 / OET Bulletin 65 Supplement C.

**Table 8.1 Measured Tissue Parameters**

	CDMA 835MHz Body		PCS Body	
Date	January 24, 2008		January 28, 2008	
Liquid Temperature( $^{\circ}$ C)	22.0 $^{\circ}$ C		21.5 $^{\circ}$ C	
	Recommended Value	Measured Value	Recommended Value	Measured Value
Dielectric Constant ( $\epsilon$ )	55.2 $\pm$ 2.76	<b>56.3</b>	53.3 $\pm$ 2.660	<b>53.0</b>
Conductivity( $\sigma$ )	0.97 $\pm$ 0.048	<b>1.00</b>	1.52 $\pm$ 0.076	<b>1.53</b>

## 8.2 Test System Validation


The simplified performance check was realized using the dipole validation kits.

The input power of the dipole antennas were 250mW and they were placed under the flat Part of the SAM phantoms.

The target and measured results are listed in the table 8.2

**Table 8.2 System Validation Results**

Tissue	Date	Liquid Temperature (°C)	Targeted SAR (mW/g)	Measured SAR (mW/g)	Deviation (%)
			1g	1g	1g
835MHz Body	January 24, 2008	22.2 °C	2.375	<b>2.52</b>	<b>6.11</b>
1900MHz Body	January 28, 2008	21.5 °C	9.925	<b>10.2</b>	<b>6.65</b>

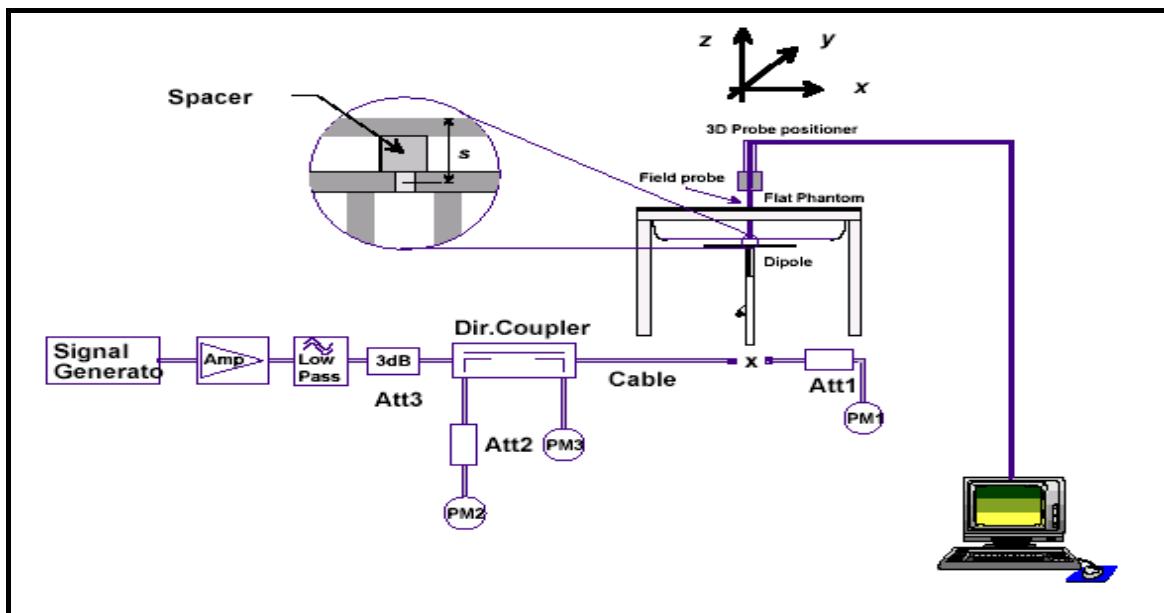

**Dipole Validation Test Setup**

### 8.3 Measurement Result of Test Data (Cellular Validation)

Date/Time: 2008-01-24 3:22:29

Test Laboratory: Nemko Korea File Name: [TARCMU-300 CDMA Validation.da4](#)**DUT: Dipole 835 MHz Type: D835V2 Serial: D835V2 - SN:4d016 Applicant Name: C-motech Co.,Ltd**

Communication System: CW Frequency: 835 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### CMU-300 CDMA Validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.71 mW/g


**CMU-300 CDMA Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.0 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 3.63 W/kg

**SAR(1 g) = 2.52 mW/g**

Maximum value of SAR (measured) = 2.72 mW/g

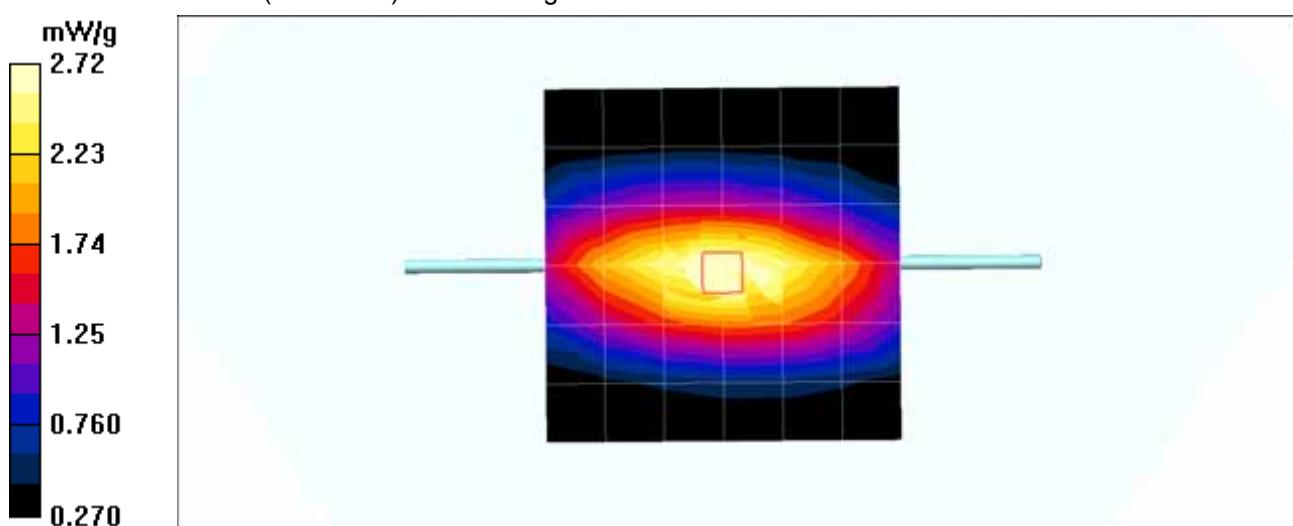

#### 8.4 Measurement Result of Test Data (PCS Validation)

Date/Time: 2008-01-28 9:01:42

Test Laboratory: Nemko Korea File Name: [TARCMU-300 PCS Validation.da4](#)**DUT: Dipole 1900 MHz Type: D1900V2 Serial: D1900V2 - SN:5d059 Program Name: C-motech Co.,Ltd**

Communication System: CW Frequency: 1900 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1900.05$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### CMU-300 CDMA Validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.4 mW/g


**CMU-300 CDMA Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.7 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 10.2 mW/g**

Maximum value of SAR (measured) = 11.5 mW/g

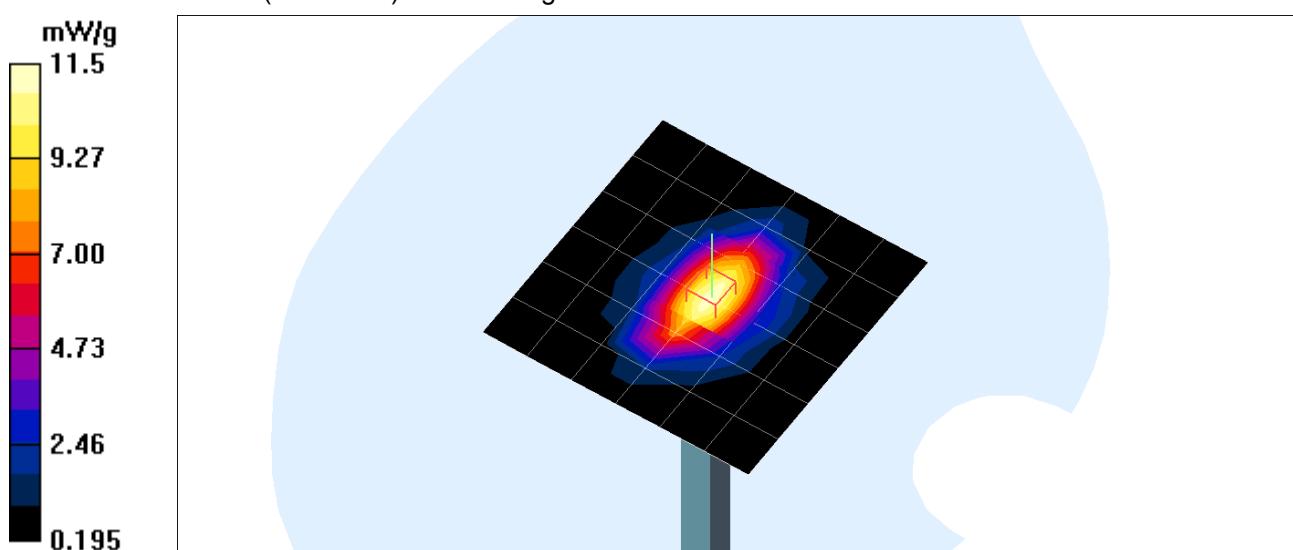

## 9. SAR Measurement Procedures for 3G Devices

### 9.1 Procedures Used To Establish Test Signal

The CDMA & Wi-max USB Modem was placed into simulated call mode using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR.

### 9.2 Device Test Condition

The CDMA & Wi-max USB Modem was operated by laptop. So each SAR measurement was taken with a laptop. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated.

### 9.3 SAR measurement Conditions for CDMA2000

The following procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", October 2007

#### 9.3.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices" May 2006. Maximum Output Power is verified on the High, Middle, Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E.

SO55 tests were measured with power control bits in " ALL Up" condition.

1. If the mobile station supports Reverse TCH RC1 and Forward TCH RC 1, set-up a call using Fundamental Channel Test Mode 1 (RC 1/1) with 9600bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 9-1 parameters were applied.
3. If the mobile station supports the RC3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC3, RC4, RC5, set-up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600bps fundamental channel and 9600bps SCH0 data rate.
4. Under RC3 C.S0011 Table 4.4.5.2-2, Table 9-2 was applied.
5. FCHs were configured at full rate for maximum SAR with "ALL-Up" power control bits.

**Table 9-1 Test Parameters for Maximum RF Output Power for RC 1**

Parameter	Units	Value
$\frac{I_{or}}{E_c}$	dBm/1.23 MHz	-104
$\frac{Pilot}{I_{or}}$	dB	-7
$\frac{Traffic}{I_{or}}$	dB	-7.4

**Table 9-2 Test Parameters for Maximum RF Output Power for RC 3**

Parameter	Units	Value
$\bar{I}_{or}$	dBm/1.23 MHz	-86
$\frac{\text{Pilot } E_c}{\bar{I}_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{\bar{I}_{or}}$	dB	-7.4

### 9.3.2 Head SAR Measurements

SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the maximum average output of each channel is less than 1/4dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

### 9.3.3 Body SAR Measurements

SAR for body exposure configurations is measured in RC3 with the DUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled. SAR for multiple code channels (FCH + SCHn) is not required when the maximum average output of each RF channel is less than 1/4dB higher than that measured with FCH only. Otherwise, SAR is measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps, using the exposure configuration that results in the highest SAR with FCH only for that channel. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR in RC1 is not required when the maximum average output of each channel is less than 1/4dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

### 9.3.4 Handset with EV-DO

For handsets with Ev-Do capabilities, when the maximum average output of each channel in Rev. 0 is less than 1/4 dB higher than that measured in RC3 (1x RTT), body SAR for Ev-Do is not required. Otherwise, SAR for Rev. 0 is measured on the maximum output channel, at 153.6 kbps using the body exposure configuration that results in the highest SAR for that channel in RC3. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than 1/4dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel for Rev. A using a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots should be configured in the downlink for both Rev. 0 and Rev. A.

## 9.4 SAR measurement Conditions for 1x Ev-Do Data Devices

The following procedures apply to Access Terminals (AT) operating under CDMA 2000 High Rate packet Data, Rev. 0 and Rev. A, 1x Ev-Do protocols. SAR for body exposure conditions are typically required devices with Ev-Do capabilities, including handsets and data modems operating in various electronic devices. When VOIP is available for Ev-Do devices to operate in configurations next to the ear, head exposure conditions are applicable. The default test configuration is to measure SAR with an established radio link between the AT and a communication test set according to 3GPP2 Test Application Protocols (TAP), FTAP/RTAP for Rev. 0 and FETAP/RETAP for Rev. A. The code channel power levels, RF channel output power (All Bits Up) and other operating parameters should be actively monitored and controlled by the communication test set during the SAR measurement. The use of FTM should be avoided. Maximum output power is verified according to procedures defined in 3GPP2 C.S0033 and TIA-866, and SAR must be measured according to these maximum output conditions.

### 9.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to procedures in section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rev. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A. For Rev. A, maximum output power for both Subtype 0/1 and Subtype 2 Physical Layer configurations should be measured. The device operating configurations under TAP/ETAP should be documented in the test report; including power control, code channel and RF channel output power levels. The measurement results should be tabulated in the SAR report with any measurement difficulties and equipment limitations clearly identified.

#### 9.4.2 SAR Measurements

SAR is measured using FTAP/RTAP and FETAP/RETAP respectively for Rev. 0 and Rev. A devices. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations. Both FTAP and FETAP are configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. AT power control should be in "All Bits Up" conditions for TAP/ETAP.

Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. SAR for Subtype 2 Physical layer configurations is not required for Rev. A when the maximum average output of each RF channels is less than that measured in Subtype 0/1 Physical layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configuration that results in the highest SAR for that RF channels in Rev. 0. Head SAR is required for Ev-Do devices that support operations next to the ear; for example, with VOIP, using Subtype 2 Physical Layer configurations according to the required handset configurations.

#### 9.4.3 1x RTT Support

For Ev-Do devices that also support 1x RTT voice and/or data operations, SAR is not required for 1x RTT when the maximum average output of each channel is less than 1/4dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0. Otherwise, the 'Body SAR Measurements' procedures in the 'CDMA 2000 1x Handsets' section should be applied.

**Maximum Power Output Table for CMU-300**

Band	Channel	EVDO (Rev.0)		EVDO (Rev.A)		SO2	SO2	SO55	SO55	TDSO SO32
		FTAP (dBm)	RTAP (dBm)	FTAP (dBm)	RTAP (dBm)	RC1 (dBm)	RC3 (dBm)	RC1 (dBm)	RC3 (dBm)	RC3 (dBm)
Cellular	1013	23.72	23.26	23.70	23.28	23.87	23.82	23.89	23.88	23.89
	363	23.94	23.29	23.91	23.26	24.26	24.23	24.29	24.25	24.28
	777	23.87	23.47	23.88	23.43	24.26	24.27	24.28	24.29	24.27
PCS	25	22.75	23.02	22.74	22.97	23.89	23.86	24.00	23.98	23.95
	600	22.93	22.91	22.94	22.88	23.75	23.70	23.79	23.71	23.70
	1175	22.64	22.65	22.67	22.60	23.23	23.24	23.22	23.25	23.13

## 10. SAR Measurement Results

### Procedures Used To Establish Test Signal

The device was placed into continuous transmit mode using a base station simulator. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR

#### ◆ Maximum SAR (Cellular)

Laptop	CH	Frequency (MHz)	Position	SAR Limit (W/kg)	Measured SAR (W/kg)	Result
ASUS F3J	363	835.89	Side	1.6	<u>0.453</u>	Passed

#### ◆ Maximum SAR (PCS)

Laptop	CH	Frequency (MHz)	Position	SAR Limit (W/kg)	Measured SAR (W/kg)	Result
SONY PCG-6C7P	600	1880.00	Side	1.6	<u>0.684</u>	Passed

## 11. SAR Data Summary (Cellular)

### 11.1 Laptop 1 [ SONY PCG-6C7P ]

Date of Test : January 26.2008  
 Mixture Type: 835MHz Body  
 Tissue Depth: 15.0 Cm

Mode	Application	Frequency		Power drift (dB)	Test Position	1g SAR (W/kg)
		CH	Freq. (MHz)			
CDMA	CDMA2000 (1x RTT)	1013	824.70	<b>0.191</b>	Bottom	<b>0.057</b>
		363	835.89	<b>0.067</b>	Bottom	<b>0.236</b>
		777	848.31	<b>-0.111</b>	Bottom	<b>0.085</b>
	EV-DO	363	835.89	<b>0.192</b>	Bottom	<b>0.220</b>
	CDMA2000 (1x RTT)	1013	824.70	<b>0.196</b>	Side	<b>0.041</b>
		363	835.89	<b>0.042</b>	Side	<b>0.148</b>
		777	848.31	<b>0.071</b>	Side	<b>0.048</b>
	EV-DO	363	835.89	<b>-0.103</b>	Side	<b>0.143</b>

#### Notes:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. SAR Measurement System DASY4
4. Phantom Configuration Left Head      Flat Phantom      Right Head
5. SAR Configuration Head      Body      Hand
6. Test Signal Call Mode Manu. Test Codes      Base Station Simulator

Date/Time: 2008-01-26 4:35:59

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH1013.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 824.7 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH1013/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.057 mW/g

**SONY PCG-6C7P Bottom Touch Position CH1013/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.70 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 0.084 W/kg

**SAR(1 g) = 0.057 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.061 mW/g

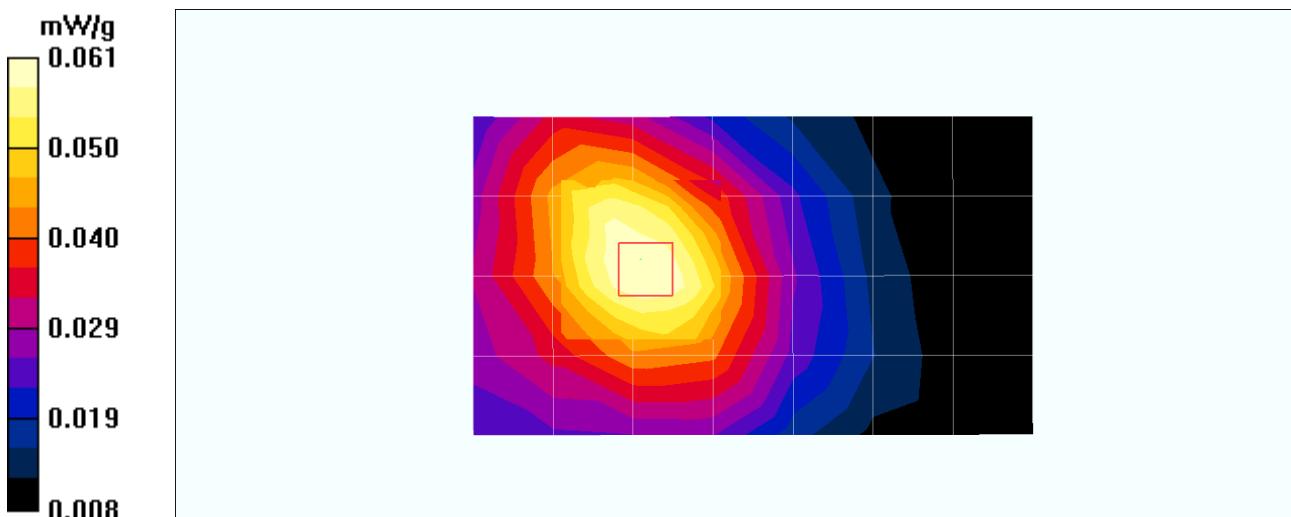

Date/Time: 2008-01-26 4:20:06

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH363/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 mW/g

**SONY PCG-6C7P Bottom Touch Position CH363/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.360 W/kg

**SAR(1 g) = 0.236 mW/g**

Maximum value of SAR (measured) = 0.261 mW/g

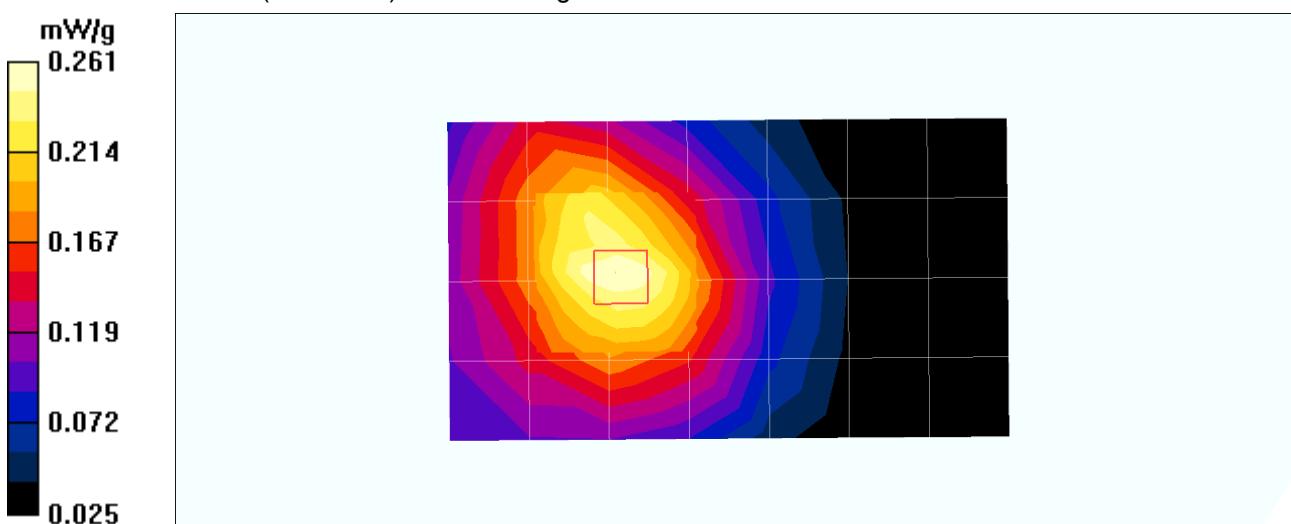

Date/Time: 2008-01-26 4:52:10

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH777.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 848.31 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 848.35$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH777/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.094 mW/g

**SONY PCG-6C7P Bottom Touch Position CH777/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.30 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.085 mW/g**

Maximum value of SAR (measured) = 0.092 mW/g

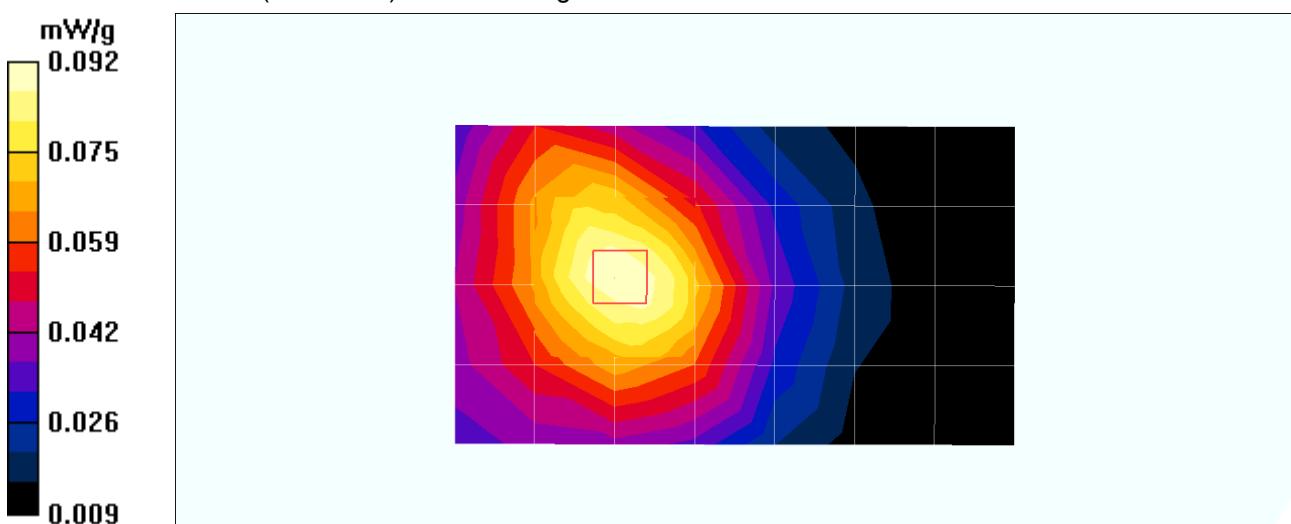

Date/Time: 2008-01-26 3:50:57

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH363-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH363-EVDO/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 mW/g


**SONY PCG-6C7P Bottom Touch Position CH363-EVDO/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 0.317 W/kg

**SAR(1 g) = 0.220 mW/g**

Maximum value of SAR (measured) = 0.236 mW/g

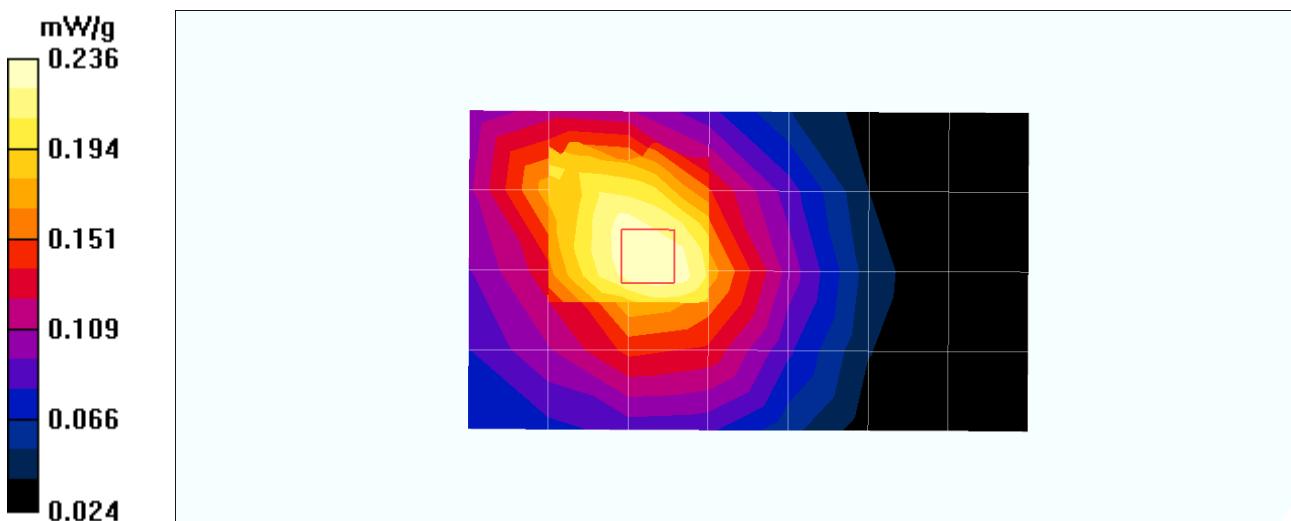

Date/Time: 2008-01-26 4:20:06

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH363/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 mW/g

**SONY PCG-6C7P Bottom Touch Position CH363/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.360 W/kg

**SAR(1 g) = 0.236 mW/g**

Maximum value of SAR (measured) = 0.261 mW/g

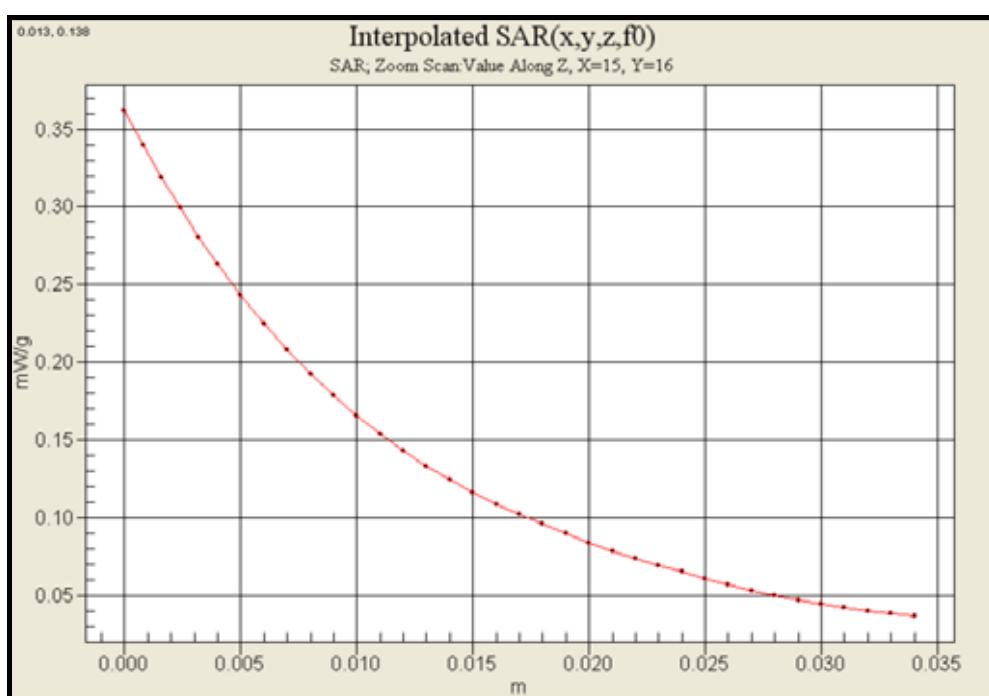

Date/Time: 2008-01-26 7:20:38

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH1013.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 824.7 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH1013/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.046 mW/g

**SONY PCG-6C7P Side Position CH1013/Zoom Scan (7x7x7)/Cube 0:** Measurement

grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.76 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 0.053 W/kg

**SAR(1 g) = 0.041 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.043 mW/g

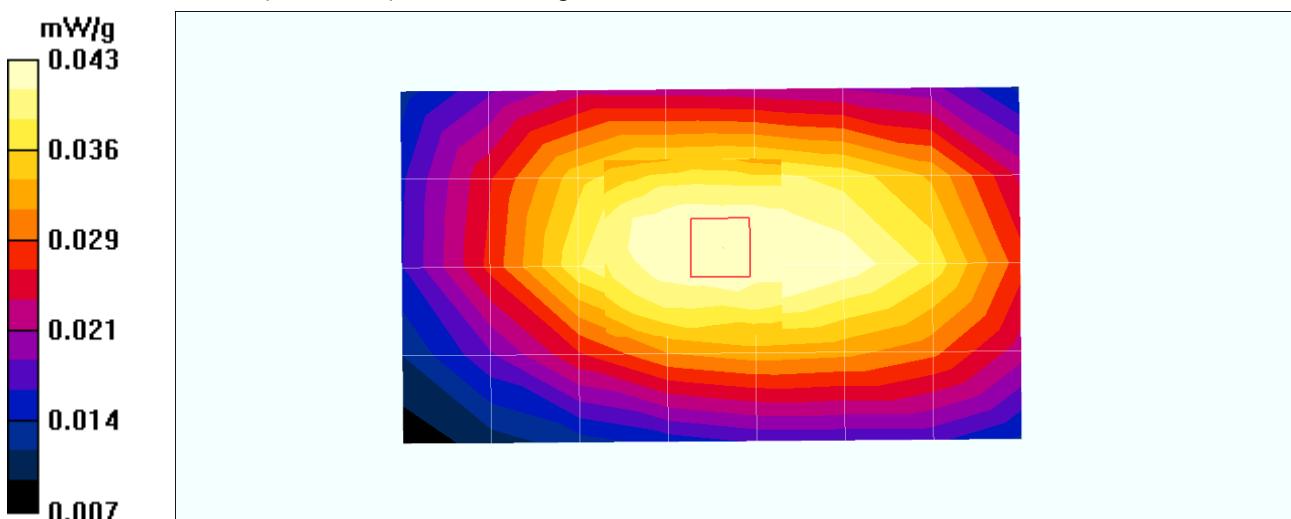

Date/Time: 2008-01-26 6:04:25

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH363/Area Scan (5x8x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.154 mW/g

**SONY PCG-6C7P Side Position CH363/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.148 mW/g**

Maximum value of SAR (measured) = 0.157 mW/g

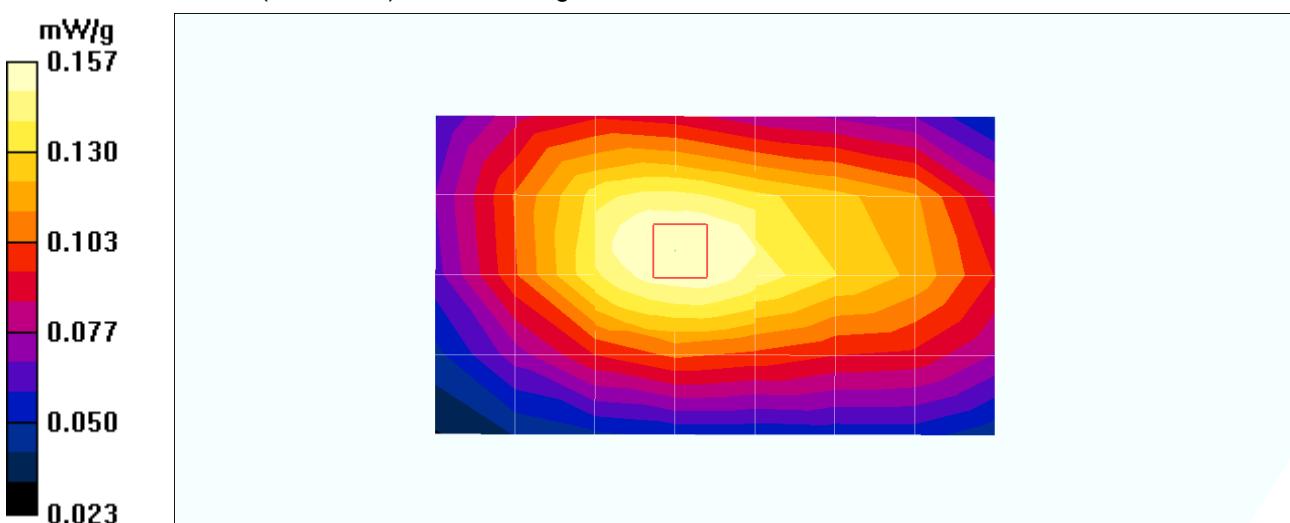

Date/Time: 2008-01-26 7:46:39

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH777.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 848.31 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 848.35$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH777/Area Scan (5x8x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.050 mW/g

**SONY PCG-6C7P Side Position CH777/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.03 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.063 W/kg

**SAR(1 g) = 0.048 mW/g**

Maximum value of SAR (measured) = 0.051 mW/g

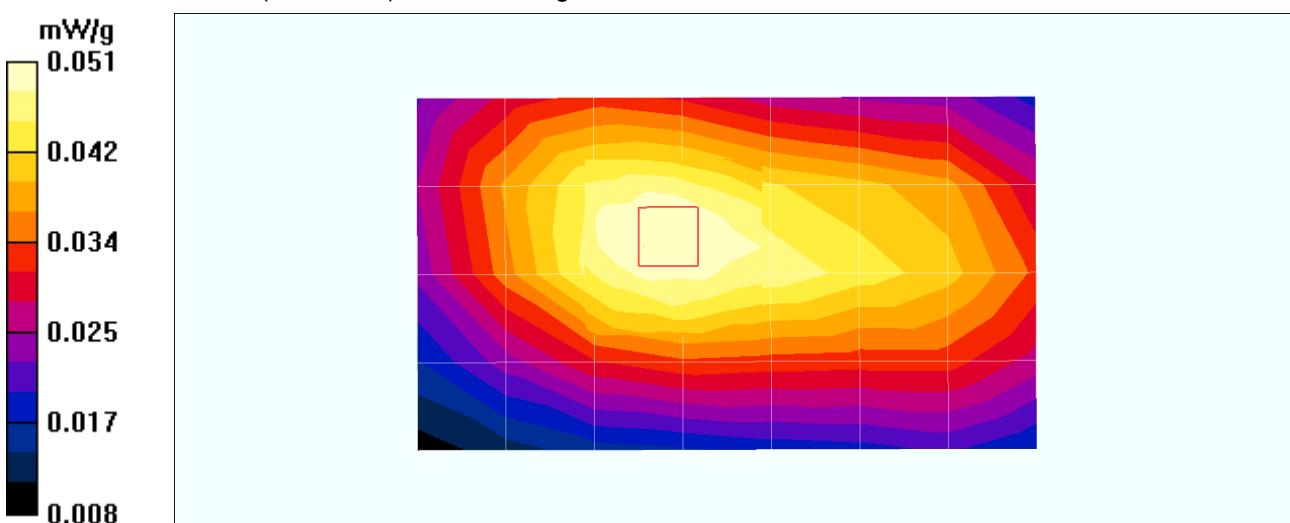

Date/Time: 2008-01-26 8:10:58

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH363-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH363-EVDO/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 mW/g

**SONY PCG-6C7P Side Position CH363-EVDO/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.184 W/kg

**SAR(1 g) = 0.143 mW/g**

Maximum value of SAR (measured) = 0.151 mW/g

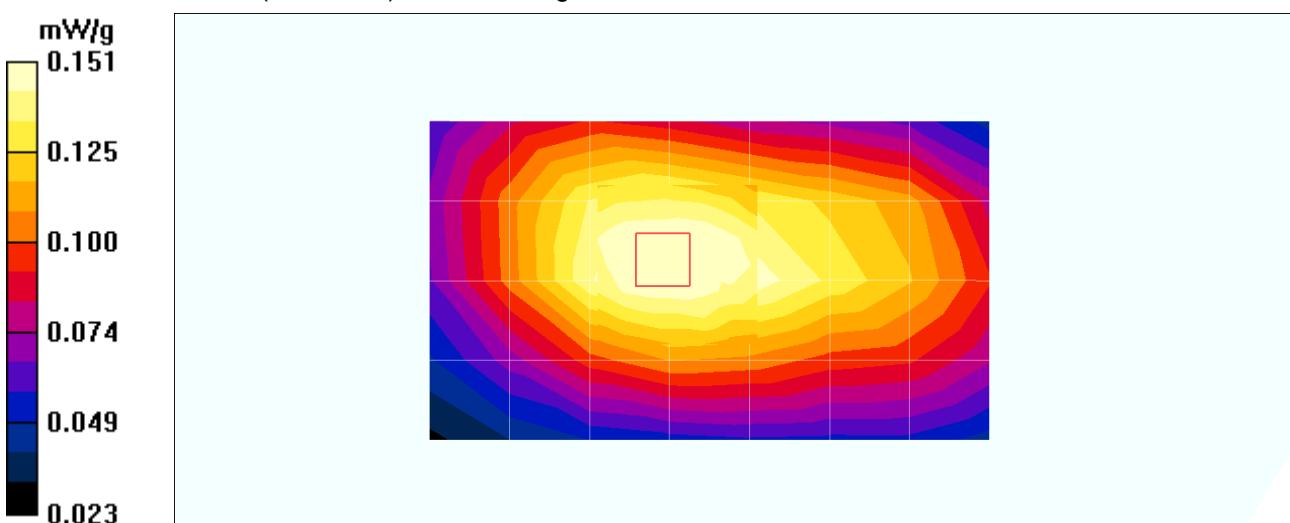

**11.2 Laptop 2 [ ASUS F3J ]**

Date of Test : January 26.2008 ~ January 27.2008

Mixture Type: 835MHz Body

Tissue Depth: 15.0 Cm

Mode	Application	Frequency		Power drift (dB)	Test Position	1g SAR (W/kg)
		CH	Freq. (MHz)			
CDMA	CDMA2000 (1x RTT)	1013	824.70	<b>-0.148</b>	Bottom	<b>0.040</b>
		363	835.89	<b>0.103</b>	Bottom	<b>0.159</b>
		777	848.31	<b>0.193</b>	Bottom	<b>0.047</b>
	EV-DO	363	835.89	<b>-0.052</b>	Bottom	<b>0.076</b>
	CDMA2000 (1x RTT)	1013	824.70	<b>0.152</b>	Side	<b>0.097</b>
		363	835.89	<b>0.185</b>	Side	<b>0.453</b>
		777	848.31	<b>0.086</b>	Side	<b>0.168</b>
	EV-DO	363	835.89	<b>0.131</b>	Side	<b>0.246</b>

**Notes:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.

2. All modes of operation were investigated, and worst-case results are reported.

3. SAR Measurement System DASY4

4. Phantom Configuration Left Head      Flat Phantom      Right Head

5. SAR Configuration Head      Body      Hand

6. Test Signal Call Mode Manu. Test Codes      Base Station Simulator

Date/Time: 2008-01-26 1:01:10

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH1013.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 824.7 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH1013/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.041 mW/g

**ASUS F3J Bottom Touch Position CH1013/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.45 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 0.059 W/kg

**SAR(1 g) = 0.040 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.042 mW/g

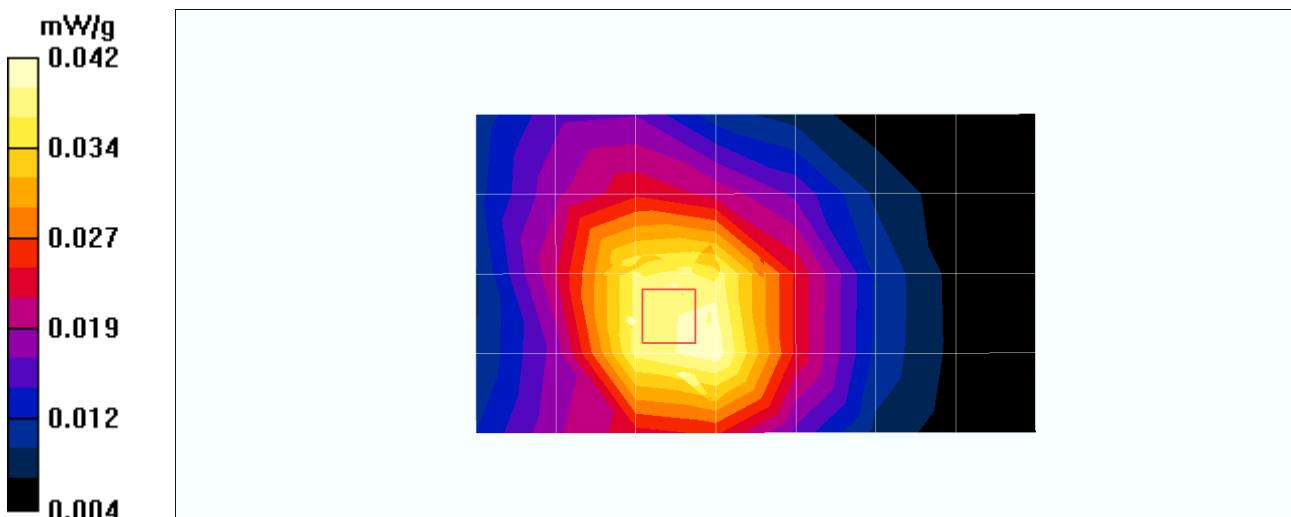

Date/Time: 2008-01-26 11:16:38

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH363/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.142 mW/g

**ASUS F3J Bottom Touch Position CH363/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.239 W/kg

**SAR(1 g) = 0.159 mW/g**

Maximum value of SAR (measured) = 0.173 mW/g

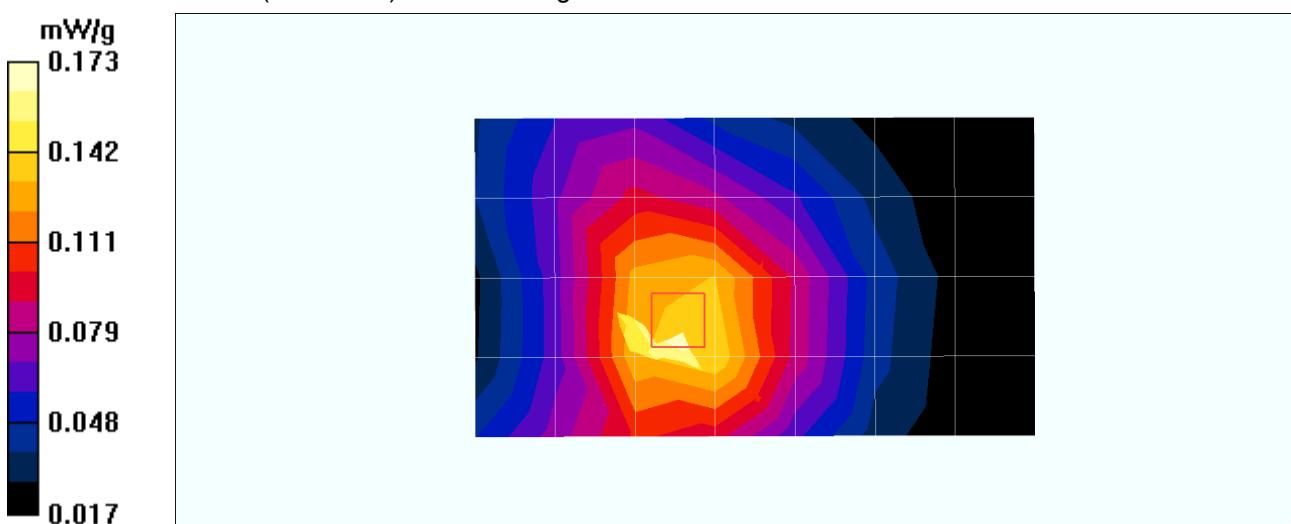

Date/Time: 2008-01-26 1:36:43

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH777.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 848.31 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 848.35$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH777/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.055 mW/g

**ASUS F3J Bottom Touch Position CH777/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.069 W/kg

**SAR(1 g) = 0.047 mW/g**

Maximum value of SAR (measured) = 0.051 mW/g

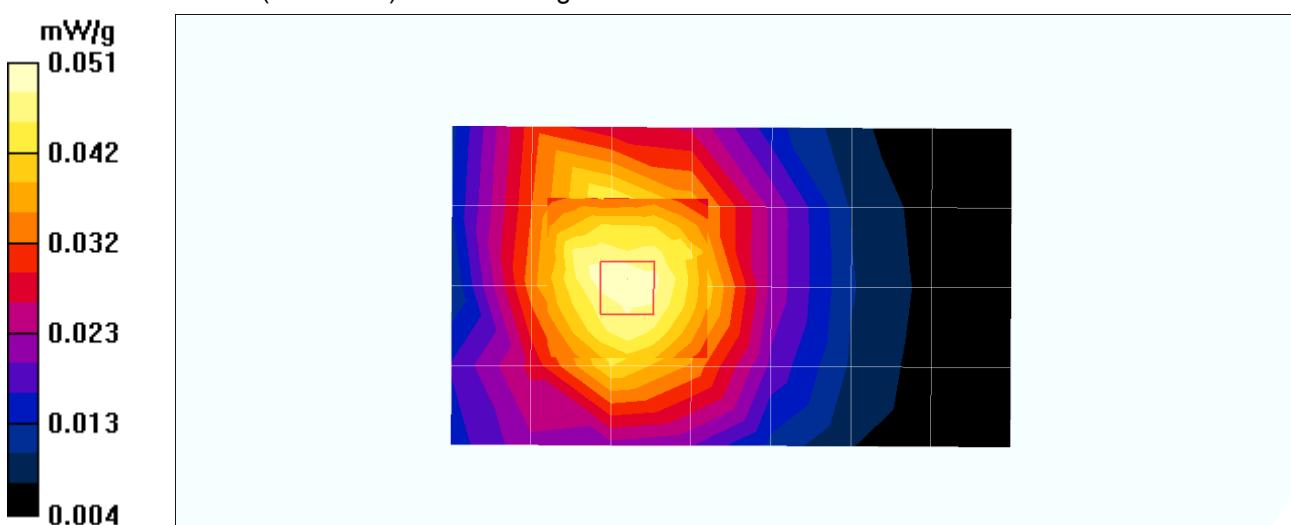

Date/Time: 2008-01-26 2:57:53

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH363-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH363-EVDO/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.078 mW/g

**ASUS F3J Bottom Touch Position CH363-EVDO/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.01 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.112 W/kg

**SAR(1 g) = 0.076 mW/g**

Maximum value of SAR (measured) = 0.083 mW/g

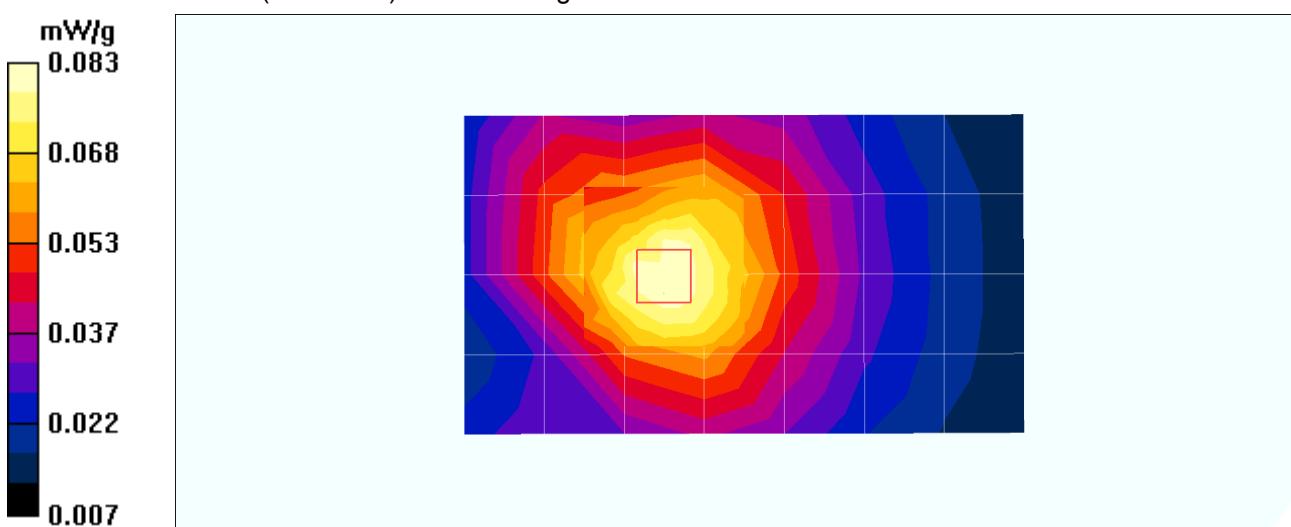

Date/Time: 2008-01-27 10:22:33

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH1013.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 824.7 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH1013/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm**Info:** Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.098 mW/g

**ASUS F3J Side Position CH1013/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.41 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 0.129 W/kg

**SAR(1 g) = 0.097 mW/g****Info:** Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.103 mW/g

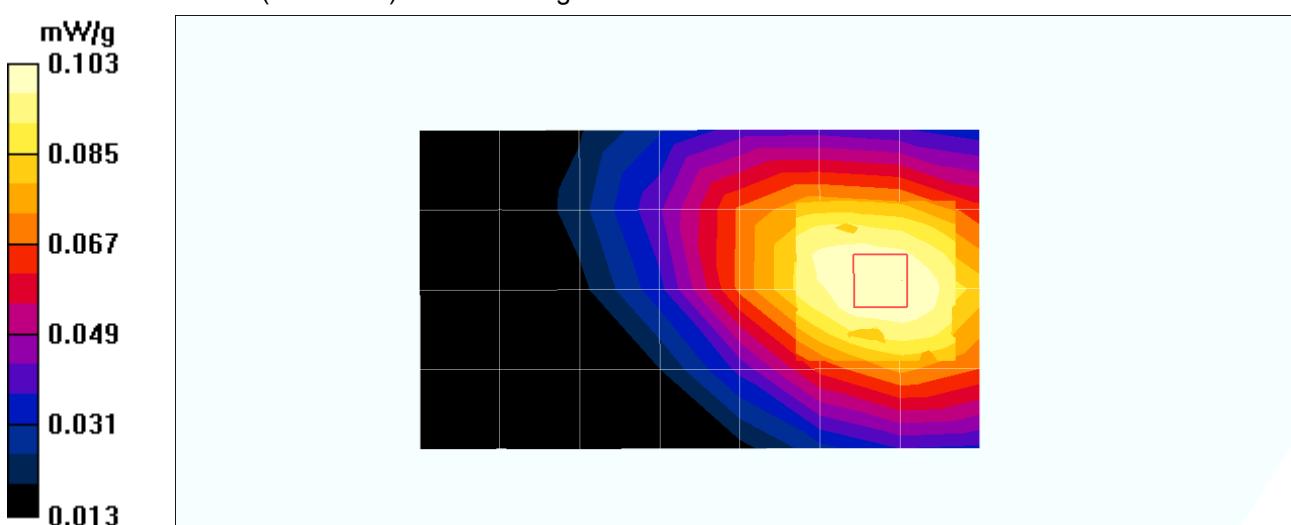

Date/Time: 2008-01-27 12:29:27

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH363/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.479 mW/g

**ASUS F3J Side Position CH363/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.185 dB

Peak SAR (extrapolated) = 0.580 W/kg

**SAR(1 g) = 0.453 mW/g**

Maximum value of SAR (measured) = 0.478 mW/g

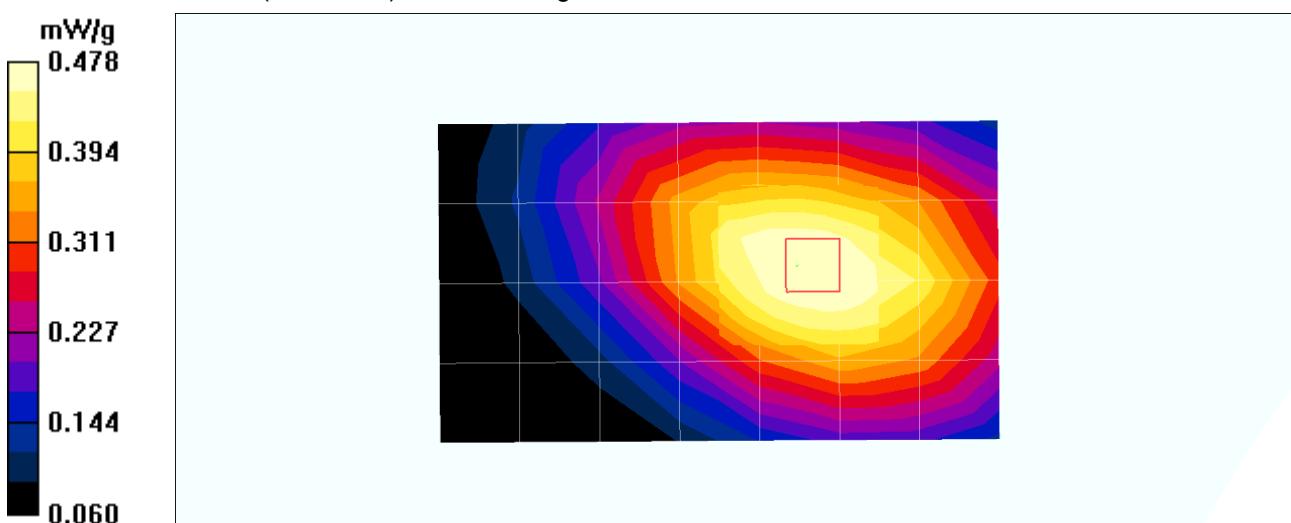

Date/Time: 2008-01-27 10:58:06

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH777.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 848.31 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 848.35$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH777/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.174 mW/g

**ASUS F3J Side Position CH777/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 7.58 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.168 mW/g**

Maximum value of SAR (measured) = 0.179 mW/g

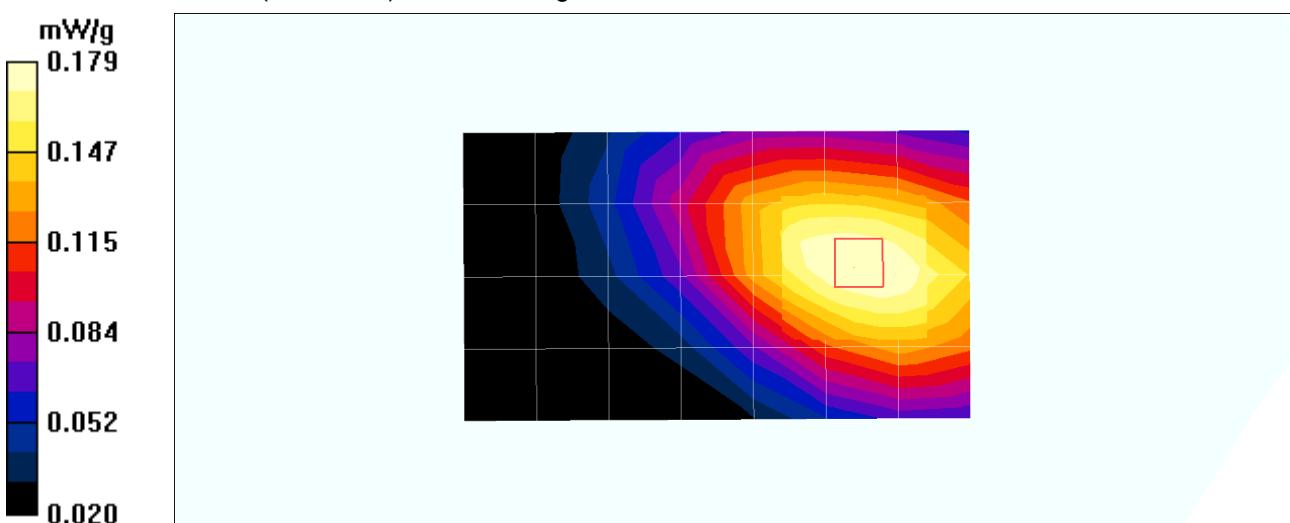

Date/Time: 2008-01-27 11:42:35

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH363-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH363-EVDO/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 mW/g


**ASUS F3J Side Position CH363-EVDO/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.78 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.323 W/kg

**SAR(1 g) = 0.246 mW/g**

Maximum value of SAR (measured) = 0.264 mW/g

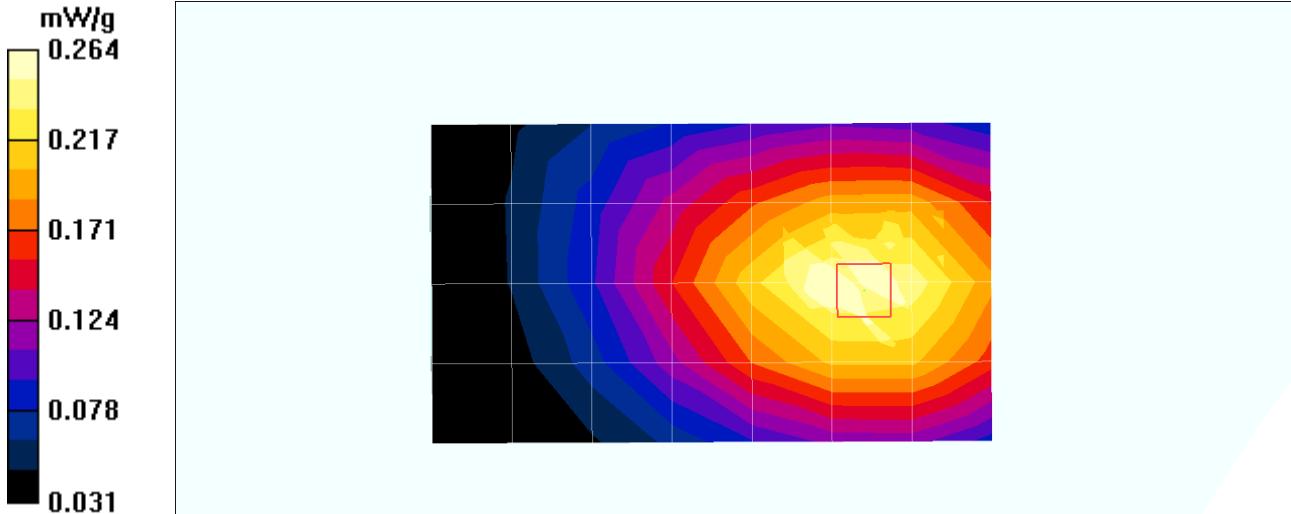

Date/Time: 2008-01-27 12:29:27

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH363/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.479 mW/g

**ASUS F3J Side Position CH363/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.185 dB

Peak SAR (extrapolated) = 0.580 W/kg

**SAR(1 g) = 0.453 mW/g**

Maximum value of SAR (measured) = 0.478 mW/g

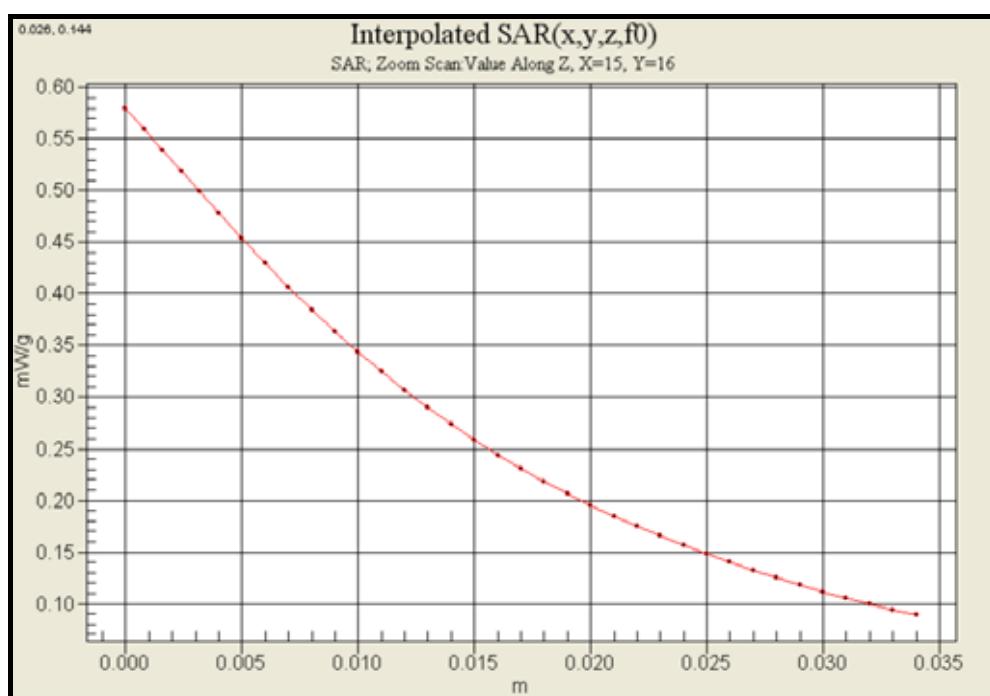

**11.3 Laptop 3 [ SAMSUNG SENS X10 SE ]**

Date of Test : January 26.2008 ~ January 27.2008

Mixture Type: 835MHz Body

Tissue Depth: 15.0 Cm

Mode	Application	Frequency		Power drift (dB)	Test Position	1g SAR (W/kg)
		CH	Freq. (MHz)			
CDMA	CDMA2000 (1x RTT)	1013	824.70	<b>-0.004</b>	Bottom	<b>0.082</b>
		363	835.89	<b>0.111</b>	Bottom	<b>0.255</b>
		777	848.31	<b>-0.157</b>	Bottom	<b>0.113</b>
	EV-DO	363	835.89	<b>0.004</b>	Bottom	<b>0.235</b>
	CDMA2000 (1x RTT)	1013	824.70	<b>-0.070</b>	Side	<b>0.086</b>
		363	835.89	<b>0.104</b>	Side	<b>0.324</b>
		777	848.31	<b>0.055</b>	Side	<b>0.106</b>
	EV-DO	363	835.89	<b>0.100</b>	Side	<b>0.321</b>

**Notes:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.

2. All modes of operation were investigated, and worst-case results are reported.

3. SAR Measurement System DASY4

4. Phantom Configuration Left Head      Flat Phantom      Right Head

5. SAR Configuration Head      Body      Hand

6. Test Signal Call Mode Manu. Test Codes      Base Station Simulator

Date/Time: 2008-01-26 9:32:51

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH1013.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 824.7 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH1013/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.088 mW/g

**SAMSUNG SENS X10 SE Bottom Touch Position CH1013/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.03 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.128 W/kg

**SAR(1 g) = 0.082 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.089 mW/g

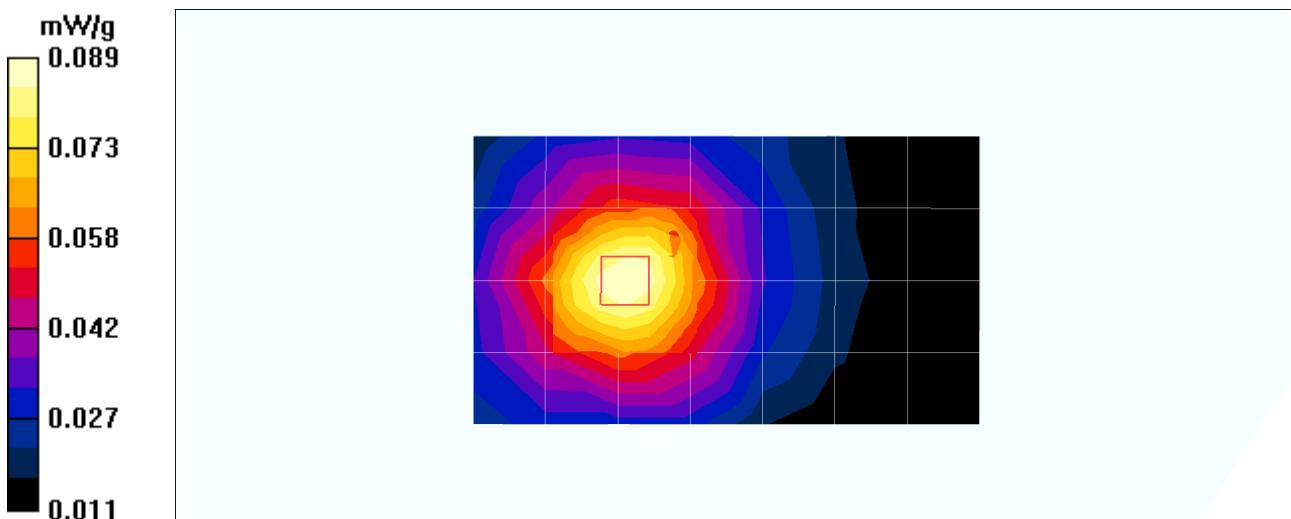

Date/Time: 2008-01-26 9:51:17

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH363/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.276 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH363/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.414 W/kg

**SAR(1 g) = 0.255 mW/g**

Maximum value of SAR (measured) = 0.274 mW/g

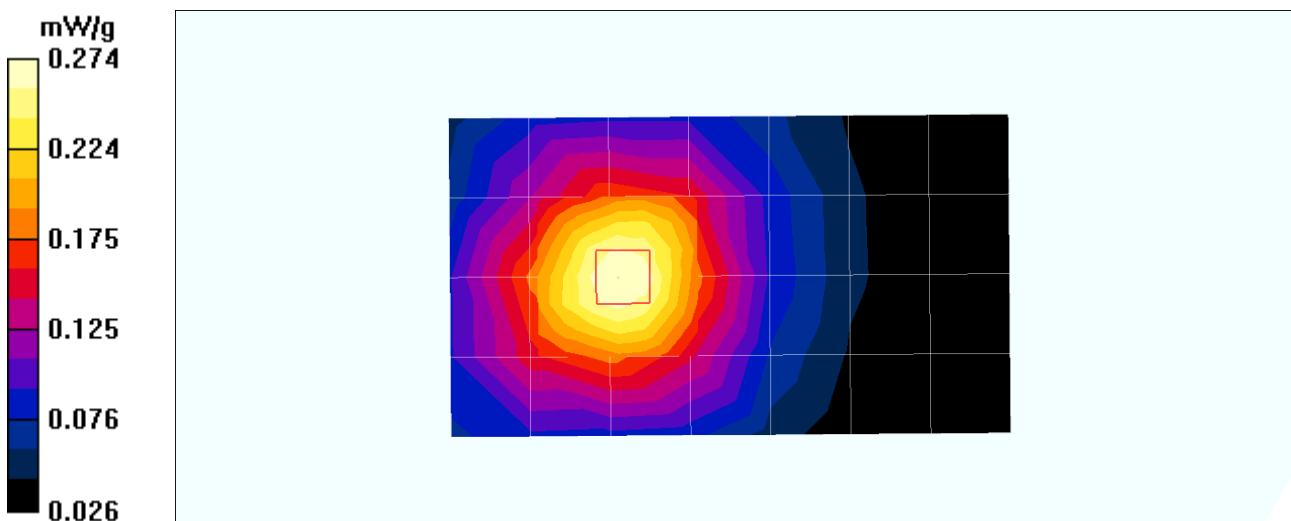

Date/Time: 2008-01-26 10:23:21

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH777.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 848.31 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 848.35$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH777/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH777/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.98 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.182 W/kg

**SAR(1 g) = 0.113 mW/g**

Maximum value of SAR (measured) = 0.122 mW/g

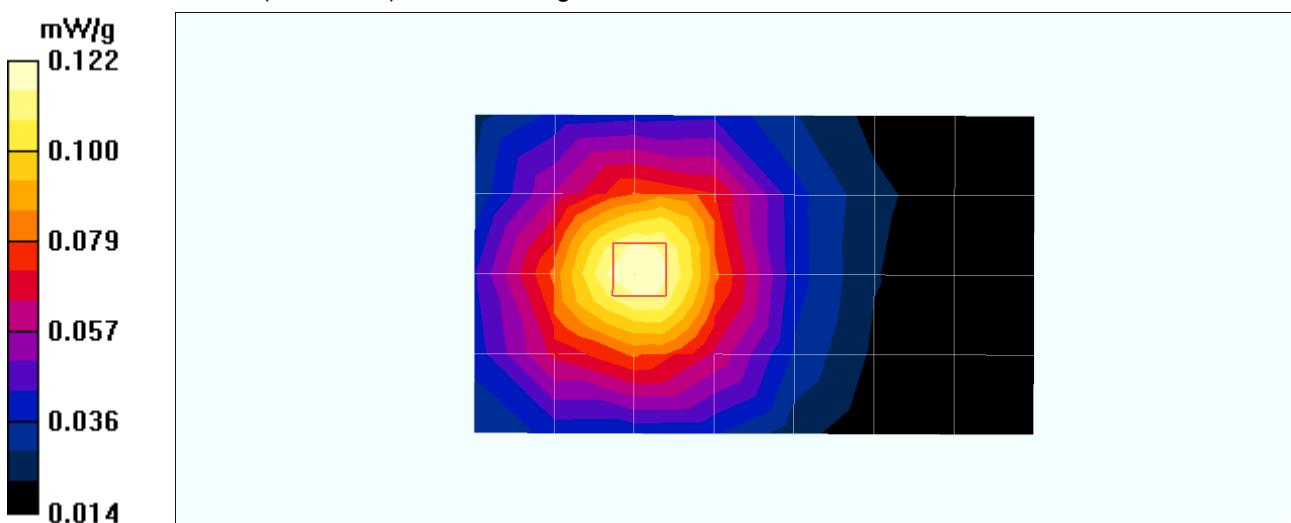

Date/Time: 2008-01-26 3:18:01

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH363-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH363-EVDO/Area Scan****(5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH363-EVDO/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.390 W/kg

**SAR(1 g) = 0.235 mW/g**

Maximum value of SAR (measured) = 0.257 mW/g

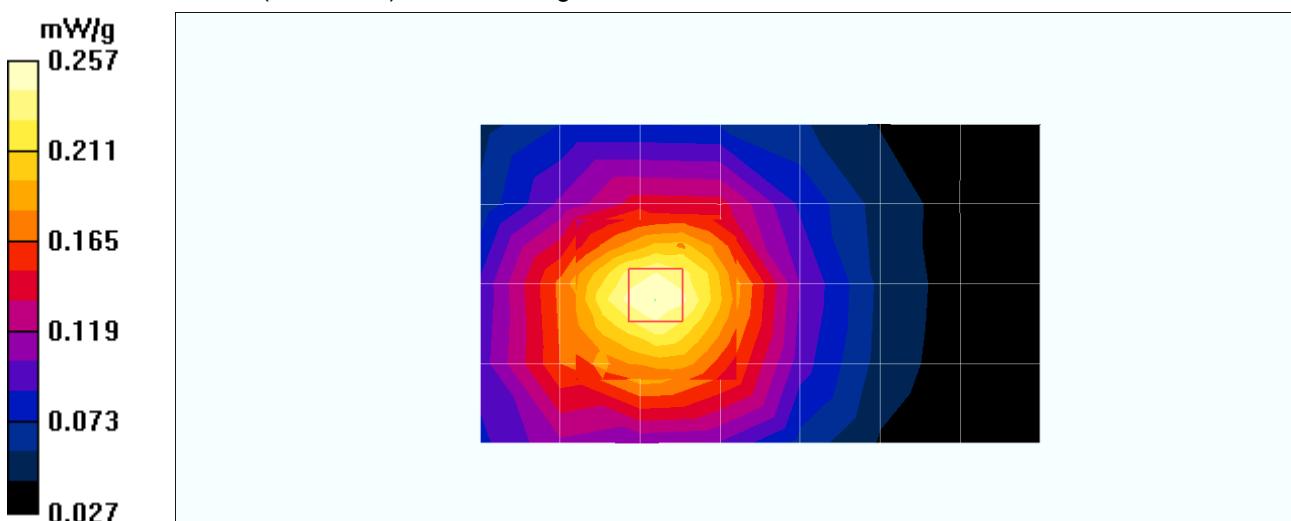

Date/Time: 2008-01-27 1:39:42

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH1013.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 824.7 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 0.991$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH1013/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.091 mW/g

**SAMSUNG SENS X10 SE Side Position CH1013/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.75 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.114 W/kg

**SAR(1 g) = 0.086 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

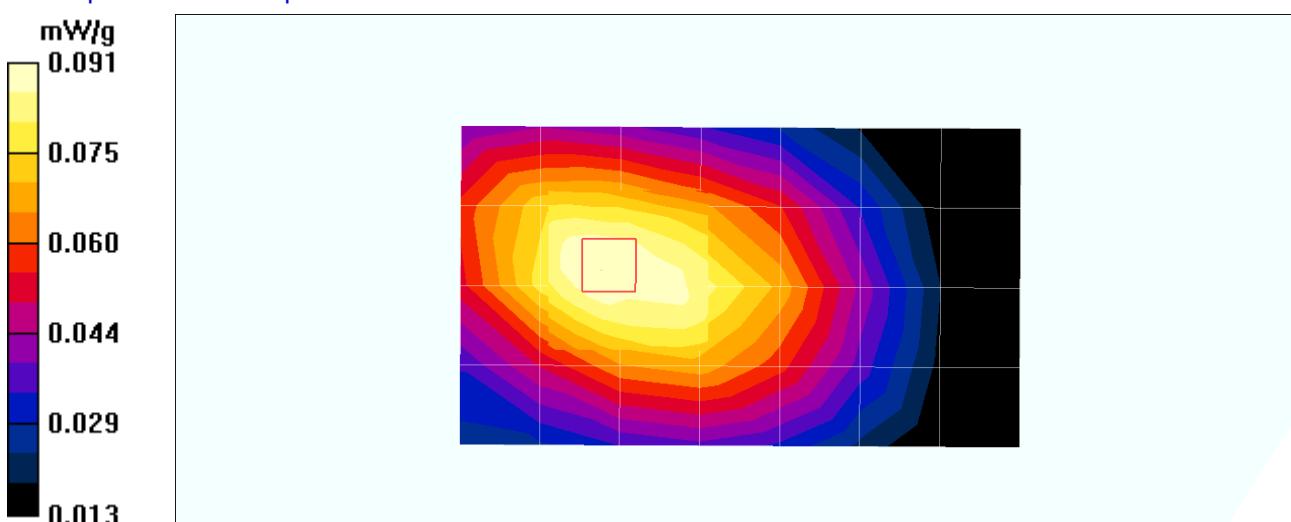

Date/Time: 2008-01-27 1:22:19

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH363/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.348 mW/g

**SAMSUNG SENS X10 SE Side Position CH363/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.324 mW/g**

Maximum value of SAR (measured) = 0.346 mW/g

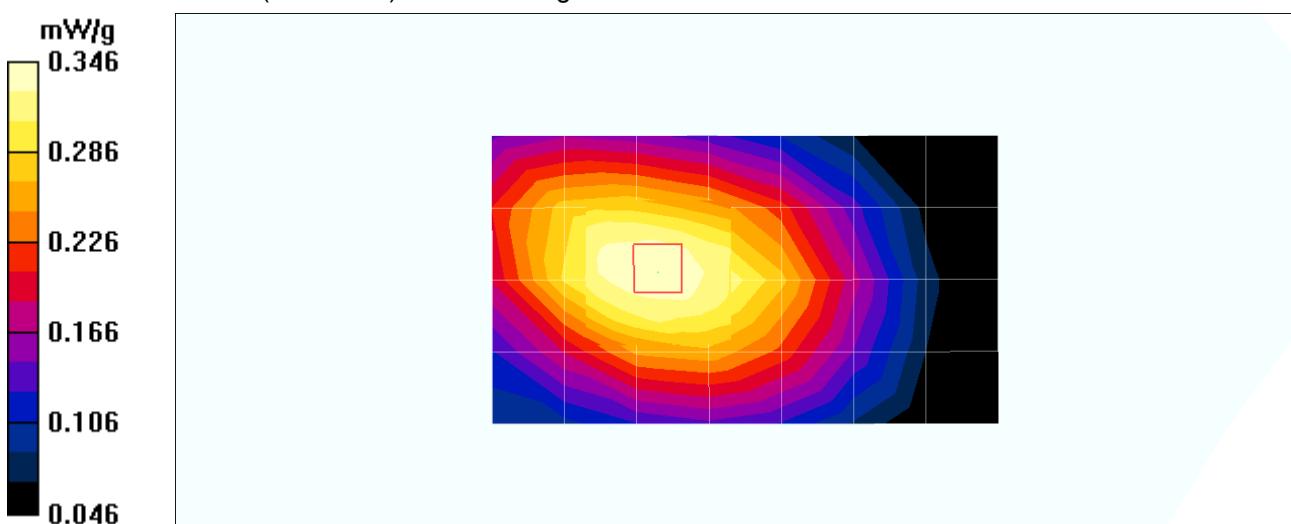

Date/Time: 2008-01-27 1:56:27

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH777.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 848.31 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 848.35$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH777/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.113 mW/g


**SAMSUNG SENS X10 SE Side Position CH777/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.106 mW/g

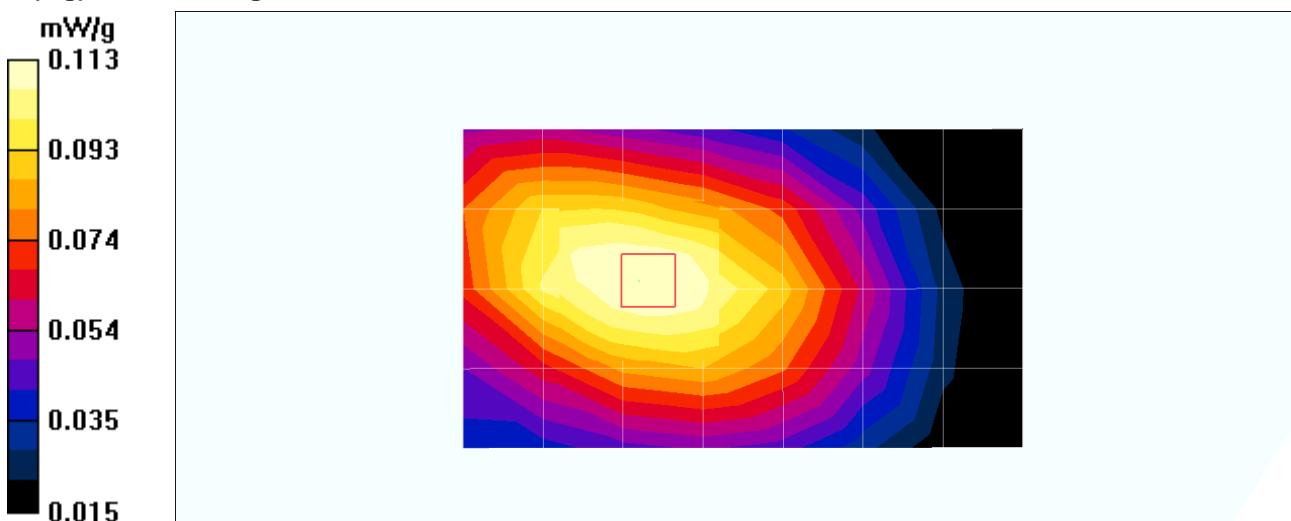

Date/Time: 2008-01-27 5:44:27

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH363-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH363-EVDO/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.339 mW/g


**SAMSUNG SENS X10 SE Side Position CH363-EVDO/Zoom Scan (7x7x7)/Cube****0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.428 W/kg

**SAR(1 g) = 0.321 mW/g**

Maximum value of SAR (measured) = 0.340 mW/g

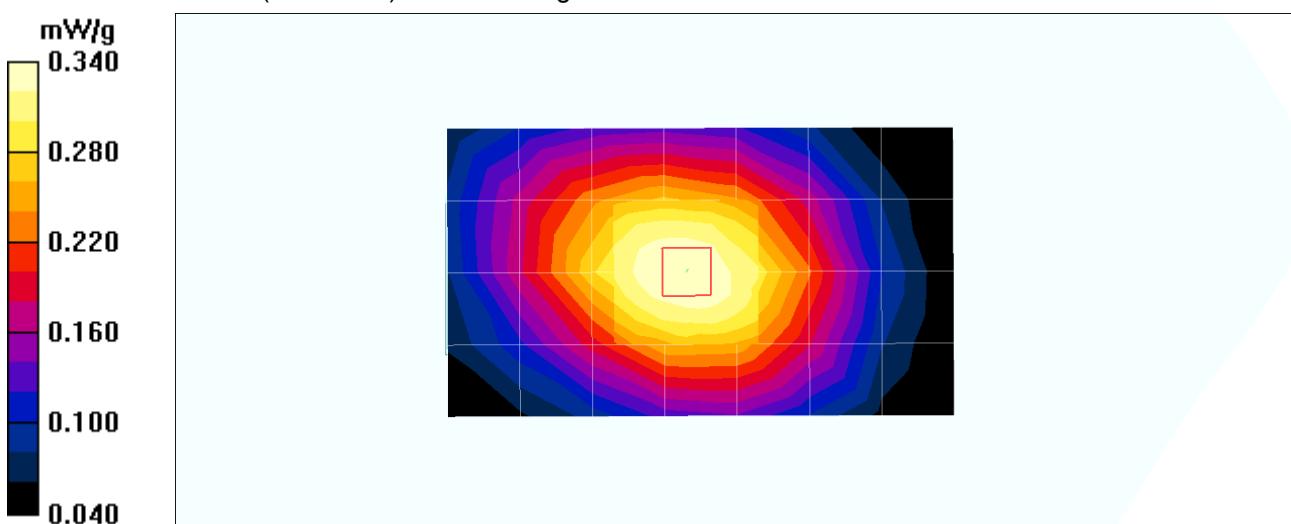

Date/Time: 2008-01-27 1:22:19

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH363.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: CDMA Frequency: 835.89 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 835.9$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(5.62, 5.62, 5.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH363/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.348 mW/g

**SAMSUNG SENS X10 SE Side Position CH363/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.324 mW/g**

Maximum value of SAR (measured) = 0.346 mW/g

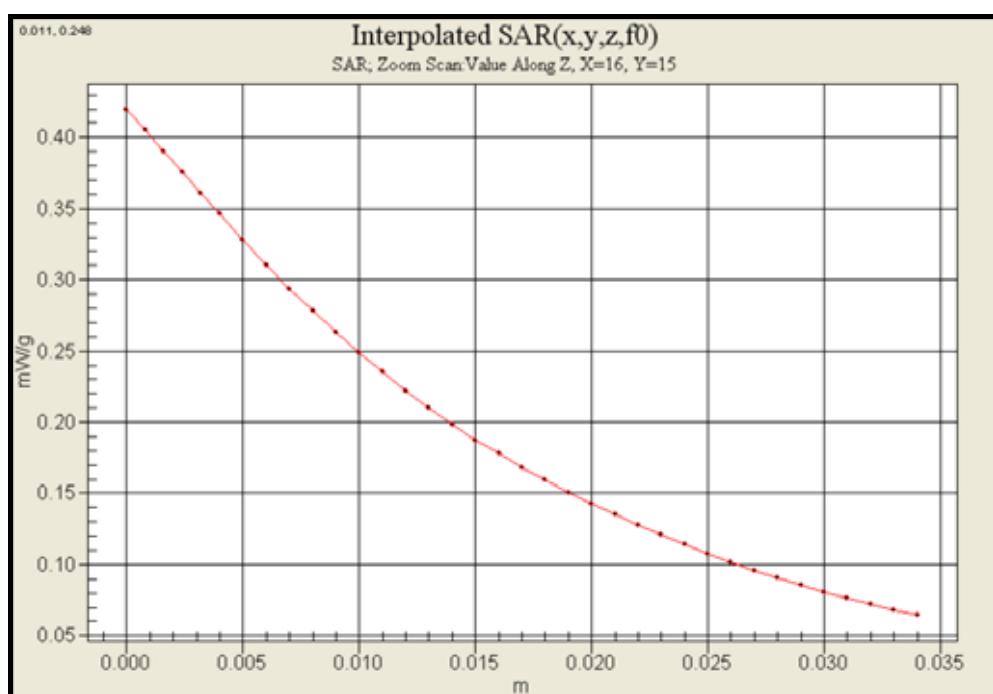

## 12. SAR Data Summary ( PCS )

### 12.1 Laptop 1 [SONY PCG-6C7P ]

Date of Test : January 29.2008  
 Mixture Type: 1900MHz Body  
 Tissue Depth: 15.1 Cm

Mode	Application	Frequency		Power drift (dB)	Test Position	1g SAR (W/kg)
		CH	Freq. (MHz)			
CDMA	CDMA2000 (1x RTT)	25	1851.25	-0.054	Bottom	0.207
		600	1880.00	-0.139	Bottom	0.313
		1172	1908.75	0.116	Bottom	0.250
	EV-DO	600	1880.00	-0.060	Bottom	0.251
	CDMA2000 (1x RTT)	25	1851.25	-0.101	Side	0.315
		600	1880.00	0.072	Side	0.684
		1172	1908.75	-0.170	Side	0.506
	EV-DO	600	1880.00	-0.046	Side	0.515

#### Notes:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. SAR Measurement System DASY4
4. Phantom Configuration Left Head Flat Phantom Right Head
5. SAR Configuration Head Body Hand
6. Test Signal Call Mode Manu. Test Codes Base Station Simulator

Date/Time: 2008-01-29 7:00:55

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH25.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1851.25 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1851.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH25/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.222 mW/g

**SONY PCG-6C7P Bottom Touch Position CH25/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.76 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.344 W/kg

**SAR(1 g) = 0.207 mW/g**

Maximum value of SAR (measured) = 0.226 mW/g

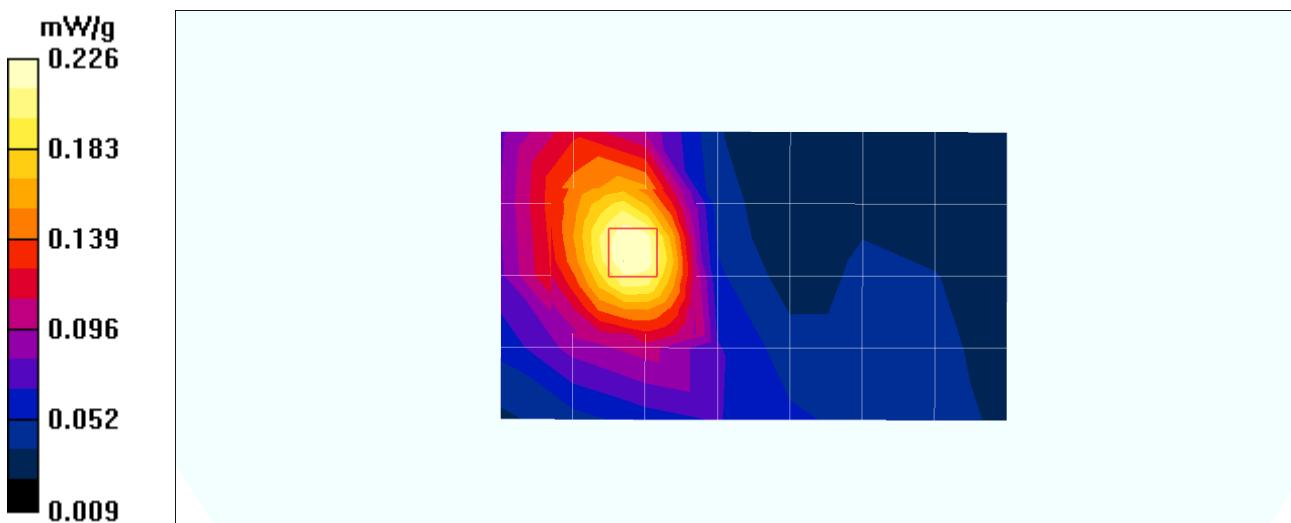

Date/Time: 2008-01-29 6:39:11

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH600/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.320 mW/g

**SONY PCG-6C7P Bottom Touch Position CH600/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.91 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.505 W/kg

**SAR(1 g) = 0.313 mW/g**

Maximum value of SAR (measured) = 0.349 mW/g

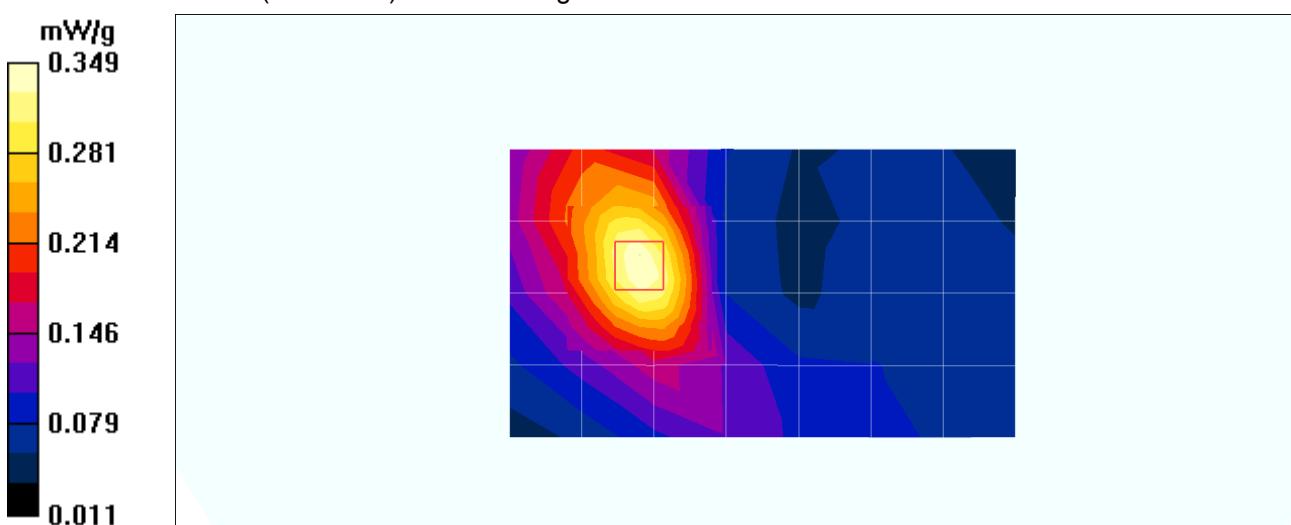

Date/Time: 2008-01-29 7:34:39

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH1175.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1908.75 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1908.8$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH1175/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 mW/g

**SONY PCG-6C7P Bottom Touch Position CH1175/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.42 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.405 W/kg

**SAR(1 g) = 0.250 mW/g**

Maximum value of SAR (measured) = 0.277 mW/g

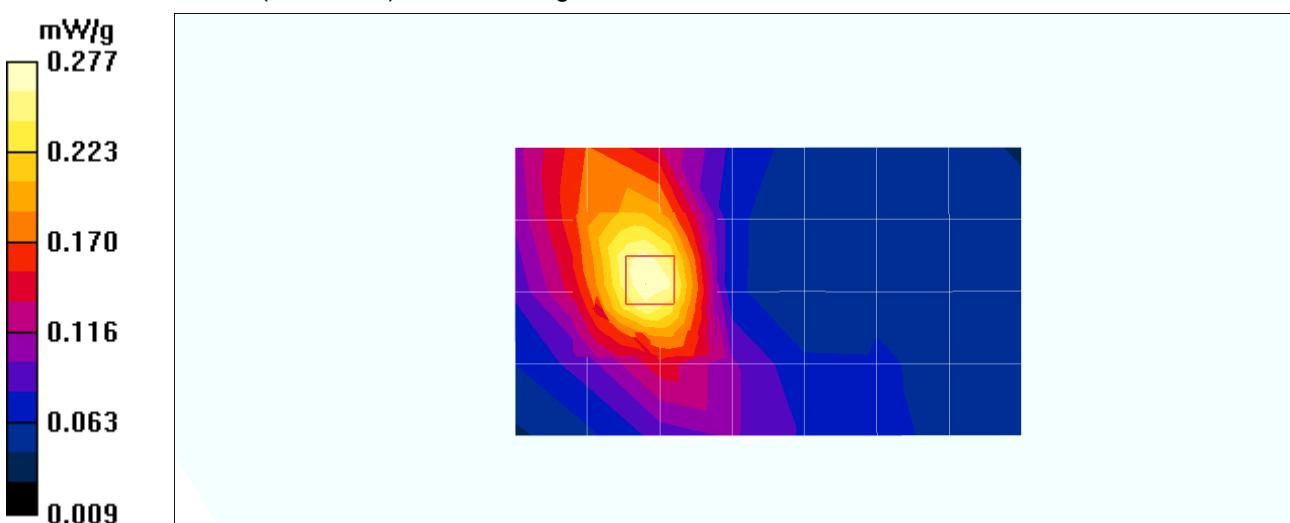

Date/Time: 2008-01-29 7:56:35

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Bottom Touch Position CH600-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Bottom Touch Position CH600-EVDO/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 mW/g


**SONY PCG-6C7P Bottom Touch Position CH600-EVDO/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.18 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.427 W/kg

**SAR(1 g) = 0.251 mW/g**

Maximum value of SAR (measured) = 0.274 mW/g

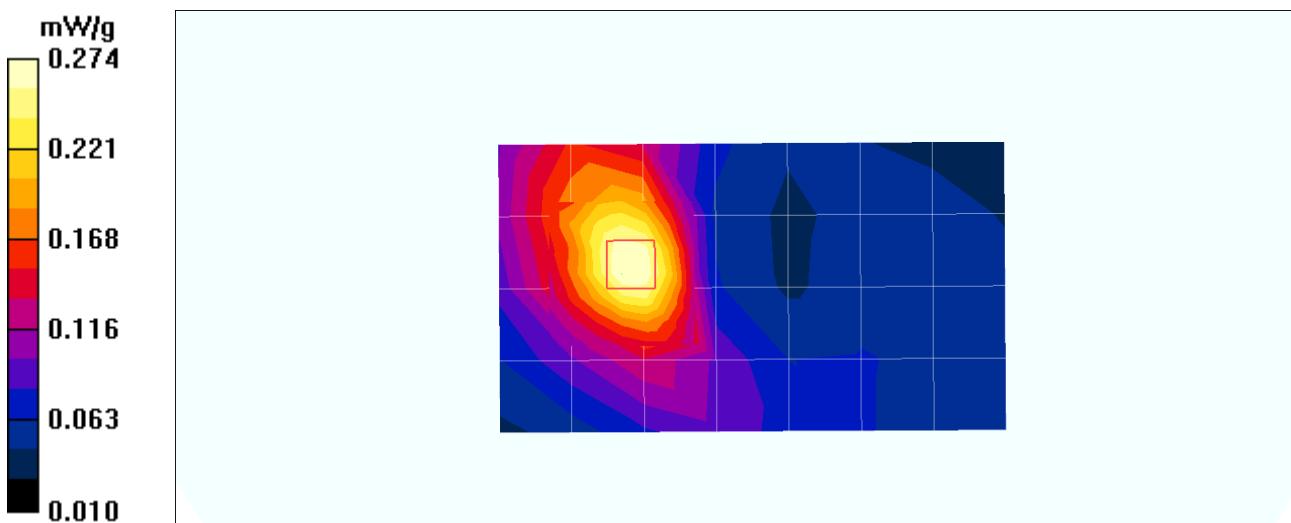

Date/Time: 2008-01-29 4:02:14

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH25.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1851.25 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1851.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH25/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.322 mW/g


**SONY PCG-6C7P Side Position CH25/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.53 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.477 W/kg

**SAR(1 g) = 0.315 mW/g**

Maximum value of SAR (measured) = 0.340 mW/g

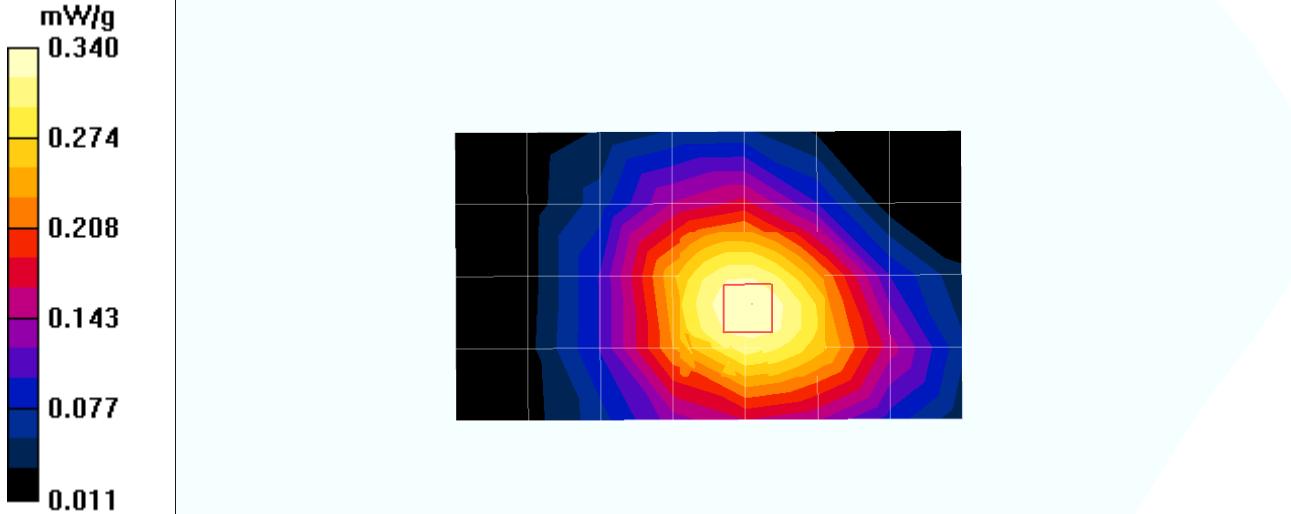

Date/Time: 2008-01-29 3:46:43

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH600/Area Scan (5x8x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.709 mW/g

**SONY PCG-6C7P Side Position CH600/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.684 mW/g**

Maximum value of SAR (measured) = 0.736 mW/g

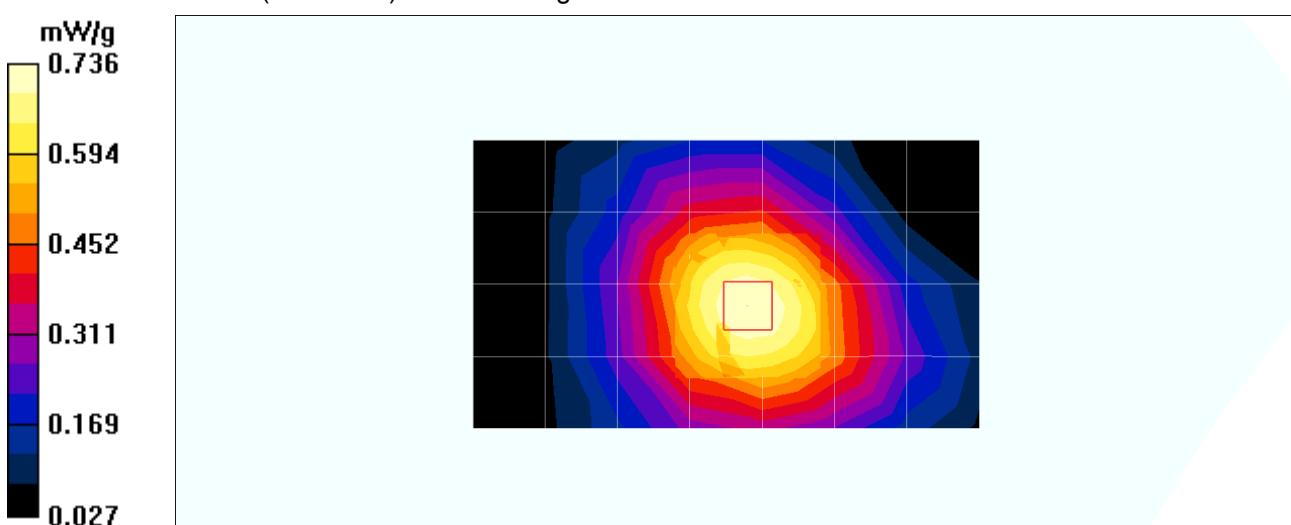

Date/Time: 2008-01-29 4:19:10

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH1175.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1908.75 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1908.8$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH1175/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.544 mW/g

**SONY PCG-6C7P Side Position CH1175/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.775 W/kg

**SAR(1 g) = 0.506 mW/g**

Maximum value of SAR (measured) = 0.551 mW/g

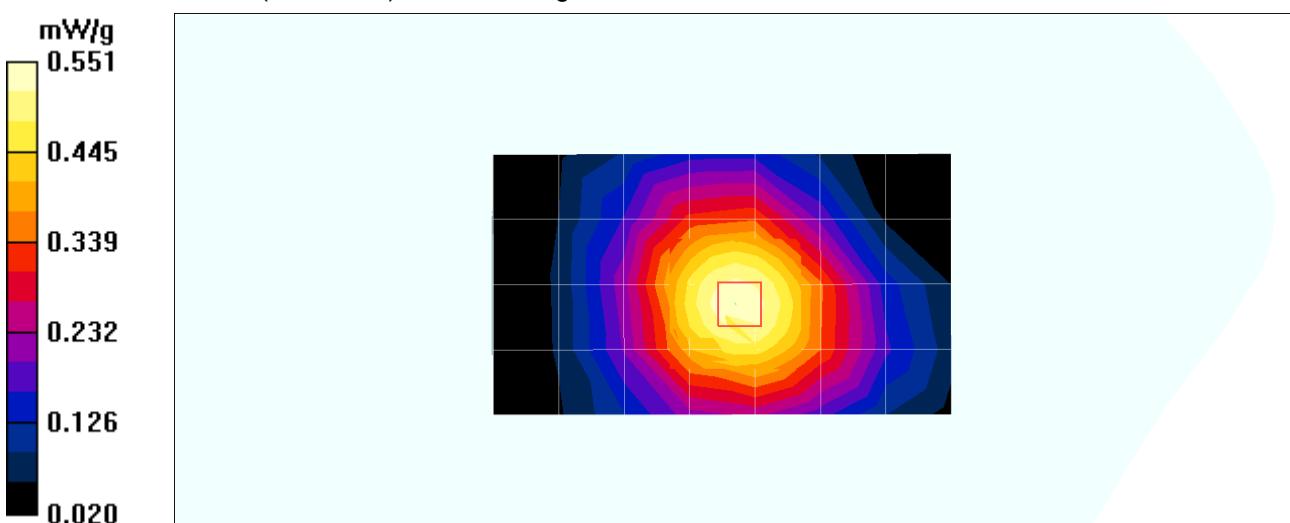

Date/Time: 2008-01-29 4:40:47

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH600-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH600-EVDO/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.536 mW/g

**SONY PCG-6C7P Side Position CH600-EVDO/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.777 W/kg

**SAR(1 g) = 0.515 mW/g**

Maximum value of SAR (measured) = 0.555 mW/g

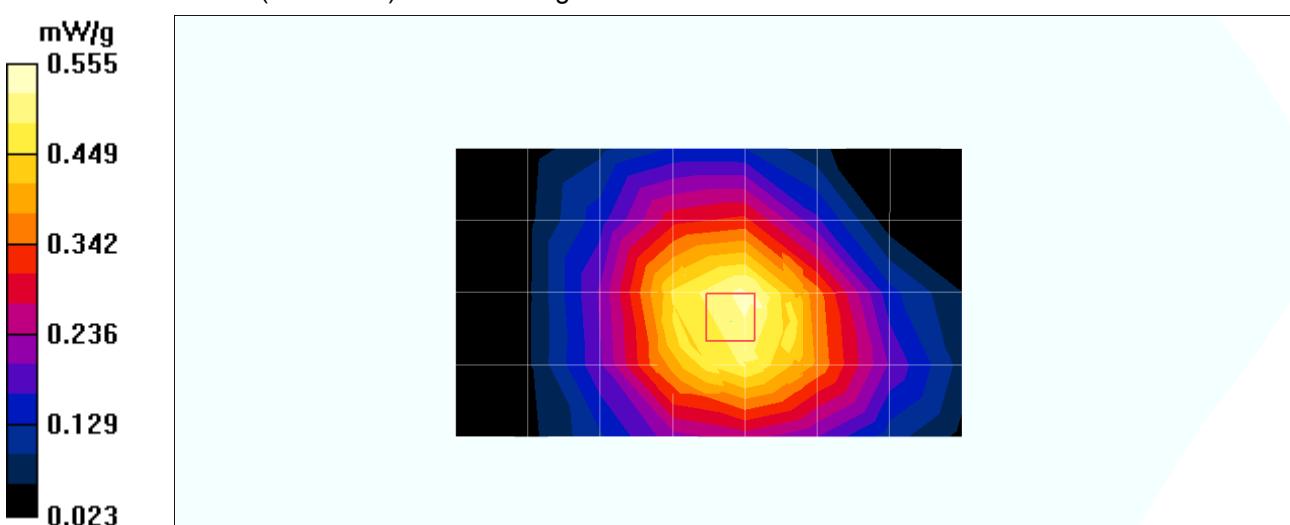

Date/Time: 2008-01-29 3:46:43

Test Laboratory: Nemko Korea File Name: [SONY PCG-6C7P Side Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SONY PCG-6C7P Side Position CH600/Area Scan (5x8x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.709 mW/g

**SONY PCG-6C7P Side Position CH600/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.684 mW/g**

Maximum value of SAR (measured) = 0.736 mW/g

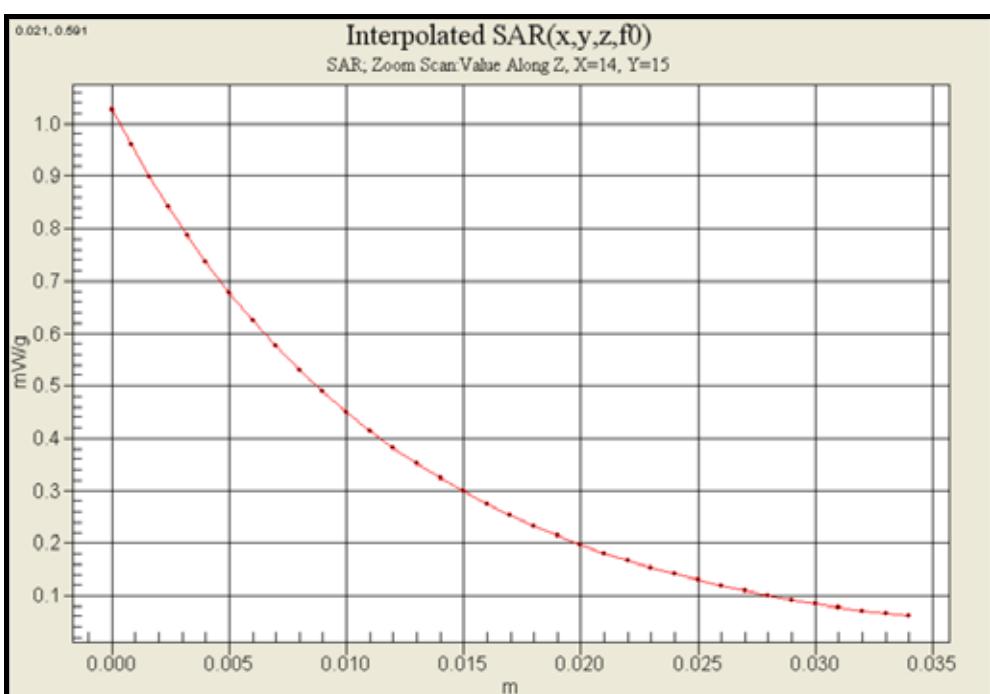

**12.2 Laptop 2 [ ASUS F3J ]**

Date of Test : January 29.2008  
 Mixture Type: 1900MHz Body  
 Tissue Depth: 15.1 Cm

Mode	Application	Frequency		Power drift (dB)	Test Position	1g SAR (W/kg)
		CH	Freq. (MHz)			
CDMA	CDMA2000 (1x RTT)	25	1851.25	-0.111	Bottom	0.255
		600	1880.00	-0.022	Bottom	0.321
		1172	1908.75	0.190	Bottom	0.281
	EV-DO	600	1880.00	-0.152	Bottom	0.135
	CDMA2000 (1x RTT)	25	1851.25	-0.132	Side	0.283
		600	1880.00	-0.134	Side	0.561
		1172	1908.75	-0.185	Side	0.428
	EV-DO	600	1880.00	0.019	Side	0.427

**Notes:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. SAR Measurement System DASY4
4. Phantom Configuration Left Head      Flat Phantom      Right Head
5. SAR Configuration Head      Body      Hand
6. Test Signal Call Mode Manu. Test Codes      Base Station Simulator

Date/Time: 2008-01-29 9:13:10

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH25.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1851.25 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1851.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH25/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.244 mW/g

**ASUS F3J Bottom Touch Position CH25/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.390 W/kg

**SAR(1 g) = 0.255 mW/g**

Maximum value of SAR (measured) = 0.277 mW/g

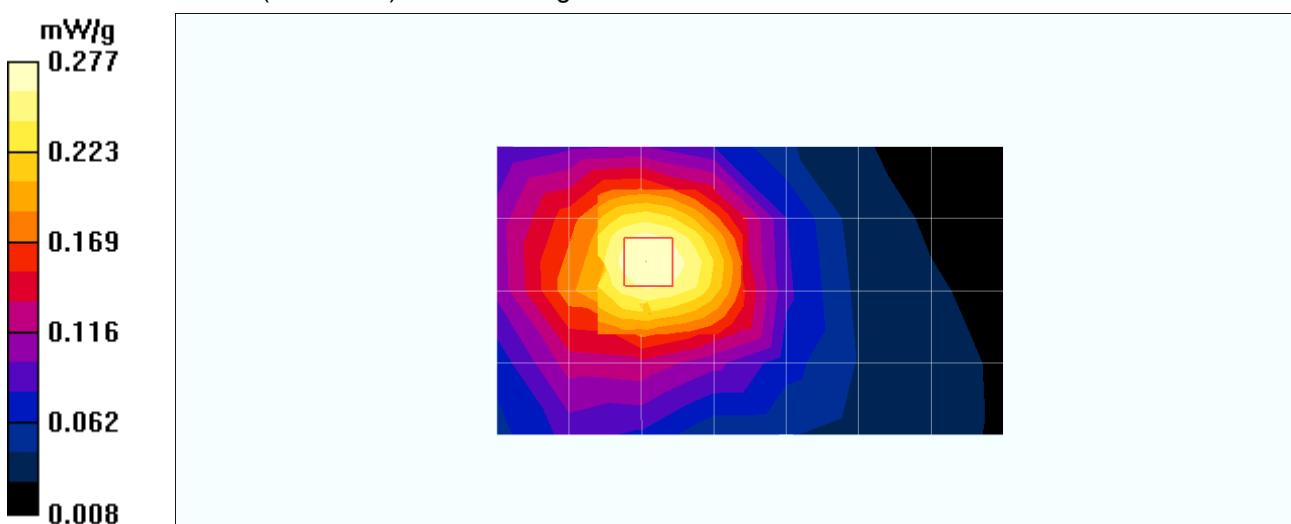

Date/Time: 2008-01-29 8:56:47

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH600/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.333 mW/g

**ASUS F3J Bottom Touch Position CH600/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.515 W/kg

**SAR(1 g) = 0.321 mW/g**

Maximum value of SAR (measured) = 0.348 mW/g

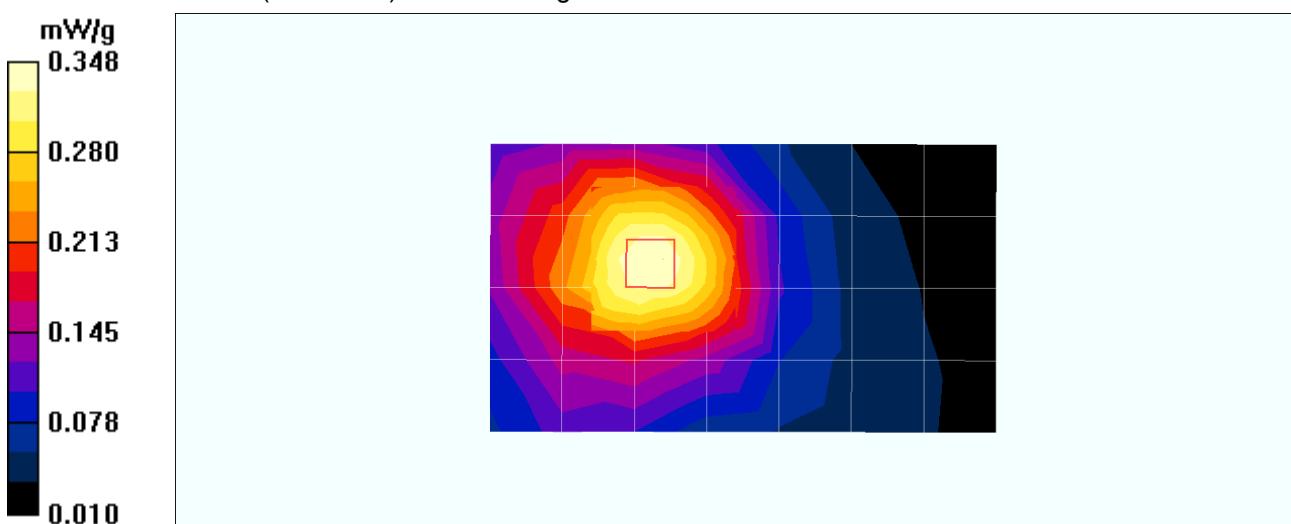

Date/Time: 2008-01-29 9:33:10

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH1175.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1908.75 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1908.8$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH1175/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.270 mW/g

**ASUS F3J Bottom Touch Position CH1175/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.99 V/m; Power Drift = 0.190 dB

Peak SAR (extrapolated) = 0.452 W/kg

**SAR(1 g) = 0.281 mW/g**

Maximum value of SAR (measured) = 0.308 mW/g

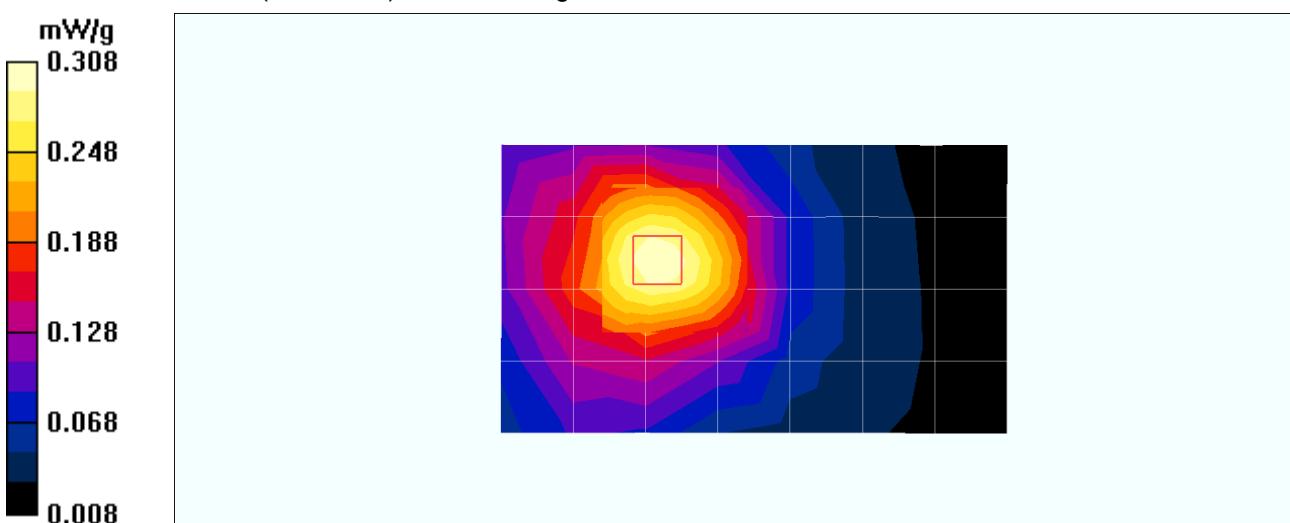

Date/Time: 2008-01-29 8:34:16

Test Laboratory: Nemko Korea File Name: [ASUS F3J Bottom Touch Position CH600-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Bottom Touch Position CH600-EVDO/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 mW/g

**ASUS F3J Bottom Touch Position CH600-EVDO/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.92 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.210 W/kg

**SAR(1 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.146 mW/g

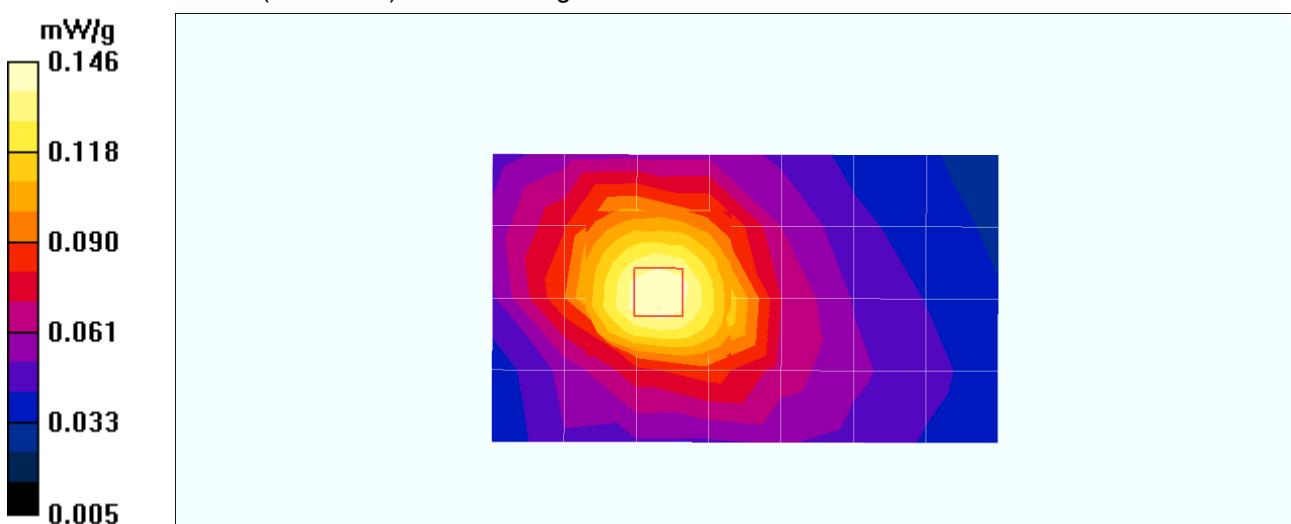

Date/Time: 2008-01-29 2:07:24

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH25.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1851.25 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1851.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH25/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.285 mW/g

**ASUS F3J Side Position CH25/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 8.93 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 0.428 W/kg

**SAR(1 g) = 0.283 mW/g**

Maximum value of SAR (measured) = 0.305 mW/g

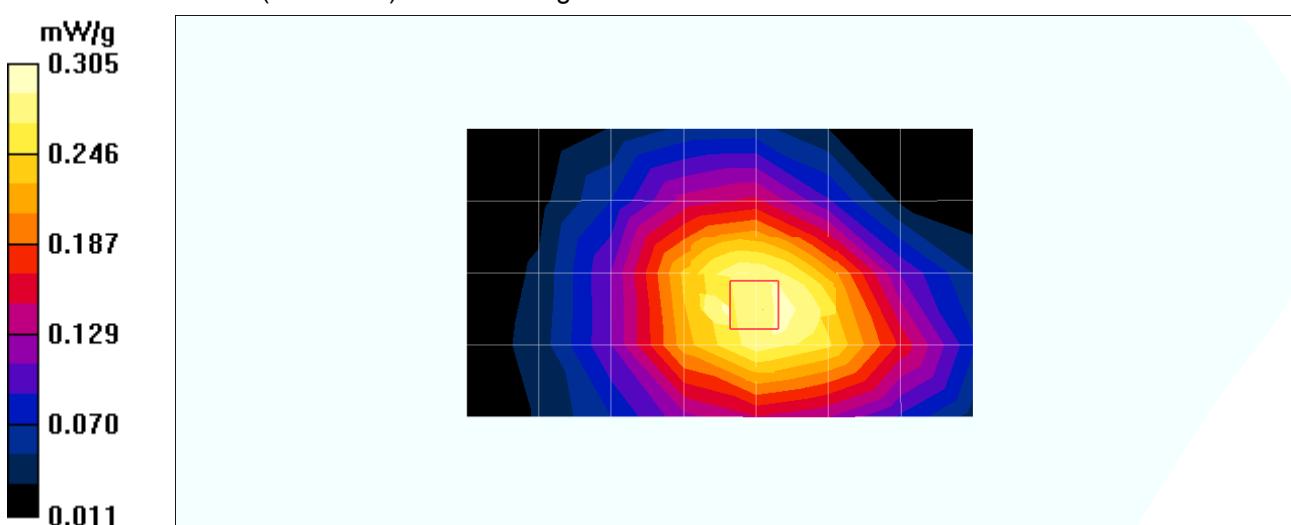

Date/Time: 2008-01-29 1:46:17

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH600/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.587 mW/g

**ASUS F3J Side Position CH600/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.836 W/kg

**SAR(1 g) = 0.561 mW/g**

Maximum value of SAR (measured) = 0.601 mW/g

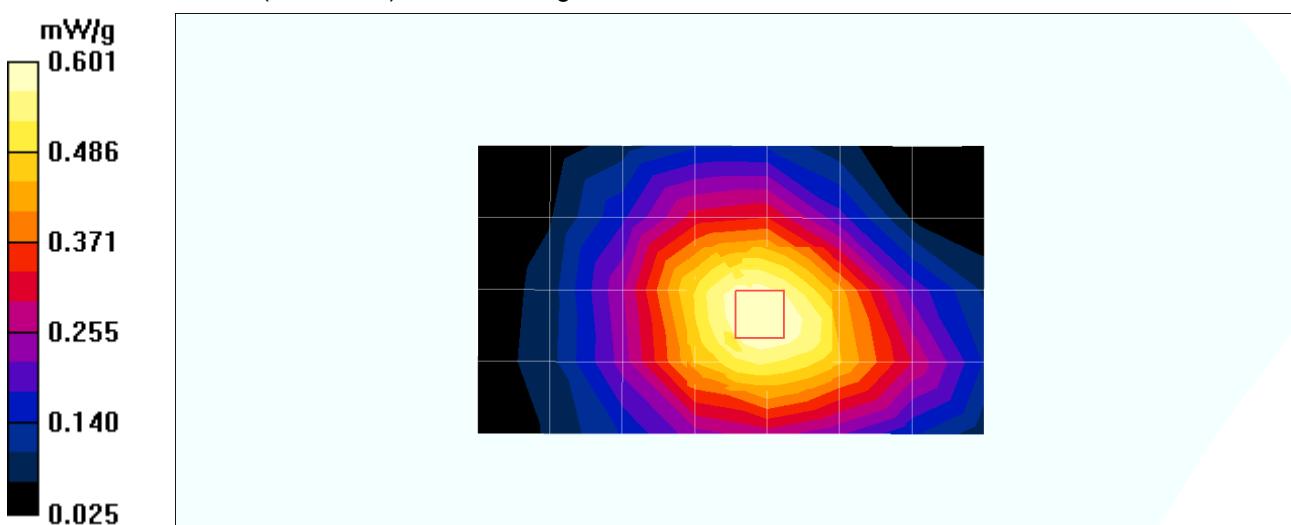

Date/Time: 2008-01-29 2:41:49

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH1175.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1908.75 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1908.8$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH1175/Area Scan (5x8x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.446 mW/g

**ASUS F3J Side Position CH1175/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.654 W/kg

**SAR(1 g) = 0.428 mW/g**

Maximum value of SAR (measured) = 0.465 mW/g

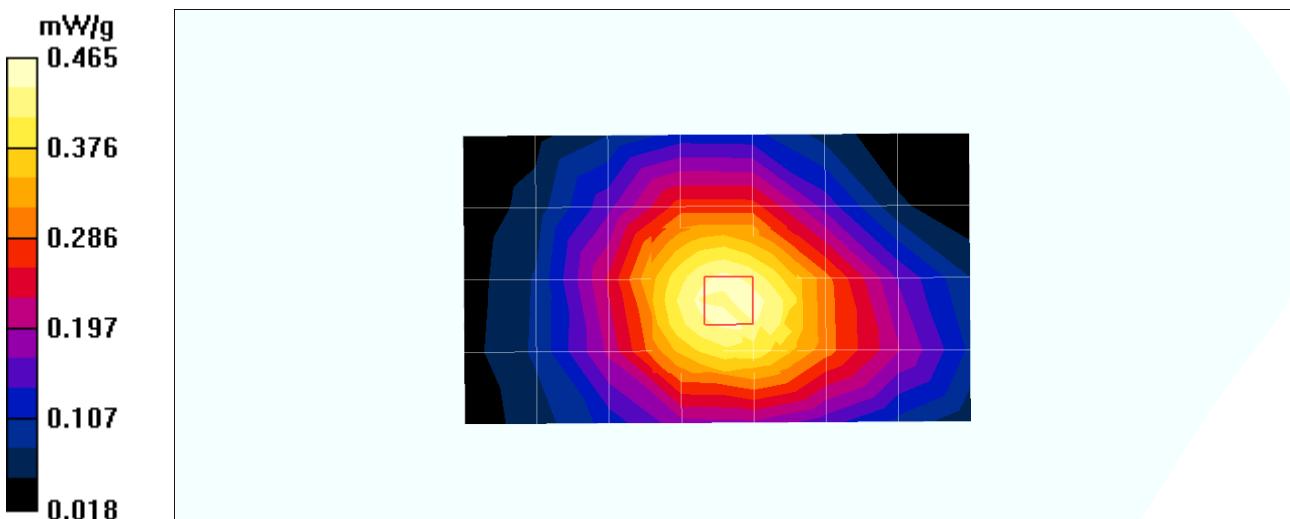

Date/Time: 2008-01-29 1:00:56

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH600-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH600-EVDO/Area Scan (5x8x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.439 mW/g

**ASUS F3J Side Position CH600-EVDO/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.637 W/kg

**SAR(1 g) = 0.427 mW/g**

Maximum value of SAR (measured) = 0.459 mW/g

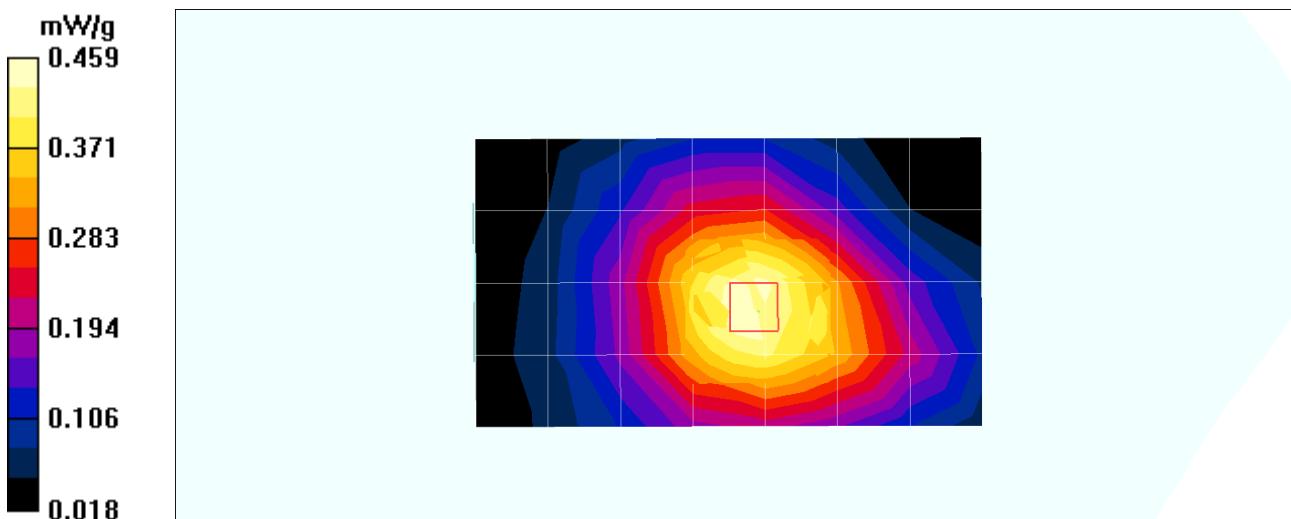

Date/Time: 2008-01-29 1:46:17

Test Laboratory: Nemko Korea File Name: [ASUS F3J Side Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**ASUS F3J Side Position CH600/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.587 mW/g

**ASUS F3J Side Position CH600/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.836 W/kg

**SAR(1 g) = 0.561 mW/g**

Maximum value of SAR (measured) = 0.601 mW/g

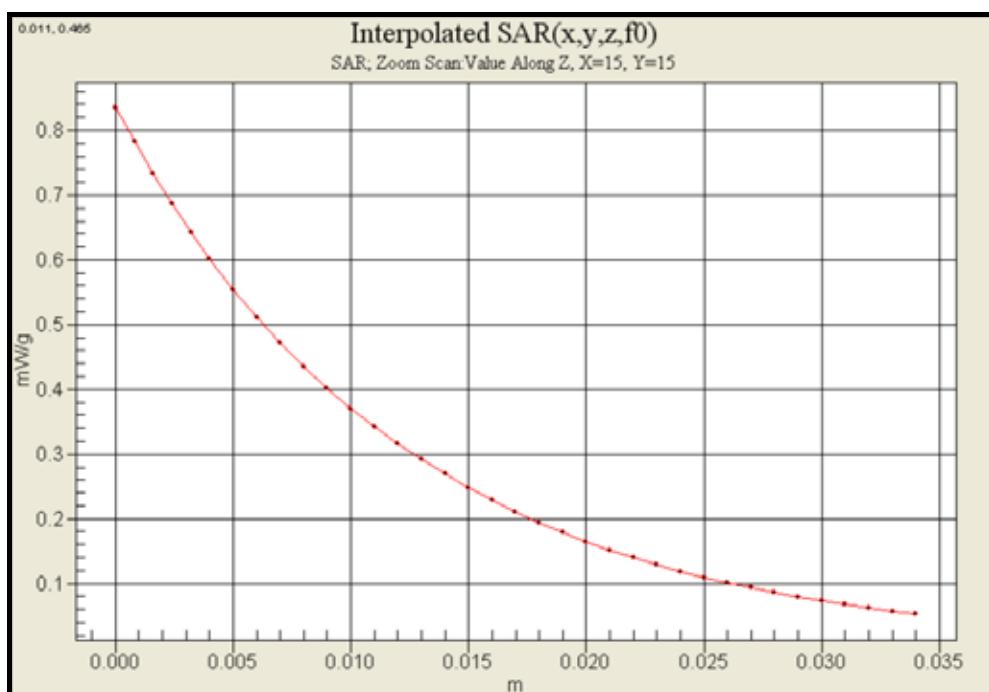

**12.3 Laptop 3 [ SAMSUNG SENS X10 SE ]**

Date of Test : January 29.2008 ~ January 30.2008

Mixture Type: 1900MHz Body

Tissue Depth: 15.1 Cm

Mode	Application	Frequency		Power drift (dB)	Test Position	1g SAR (W/kg)
		CH	Freq. (MHz)			
CDMA	CDMA2000 (1x RTT)	25	1851.25	<b>-0.138</b>	Bottom	<b>0.391</b>
		600	1880.00	<b>-0.069</b>	Bottom	<b>0.485</b>
		1172	1908.75	<b>0.120</b>	Bottom	<b>0.371</b>
	EV-DO	600	1880.00	<b>-0.072</b>	Bottom	<b>0.396</b>
	CDMA2000 (1x RTT)	25	1851.25	<b>-0.026</b>	Side	<b>0.213</b>
		600	1880.00	<b>-0.050</b>	Side	<b>0.430</b>
		1172	1908.75	<b>0.138</b>	Side	<b>0.342</b>
	EV-DO	600	1880.00	<b>-0.018</b>	Side	<b>0.326</b>

**Notes:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.

2. All modes of operation were investigated, and worst-case results are reported.

3. SAR Measurement System

DASY4

4. Phantom Configuration

Left Head

Flat Phantom

Right Head

5. SAR Configuration

Head

Body

Hand

6. Test Signal Call Mode

Manu. Test Codes

Base Station Simulator

Date/Time: 2008-01-30 11:55:36

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH25.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1851.25 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1851.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH25/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.469 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH25/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.97 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.658 W/kg

**SAR(1 g) = 0.391 mW/g**

Maximum value of SAR (measured) = 0.436 mW/g

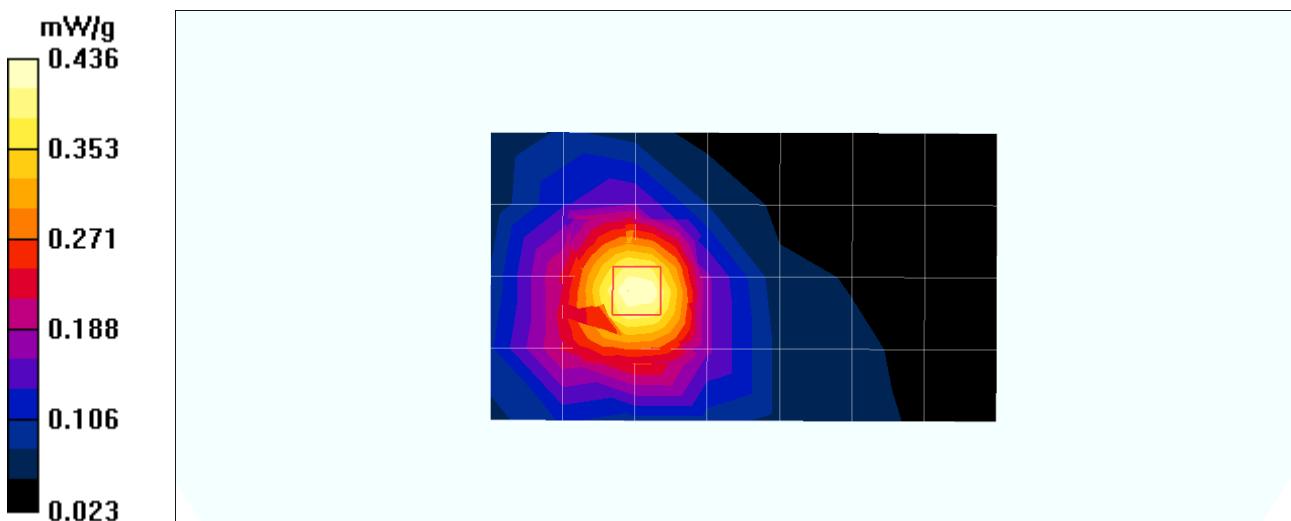

Date/Time: 2008-01-30 11:28:09

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH600/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH600/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.81 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.485 mW/g**

Maximum value of SAR (measured) = 0.546 mW/g

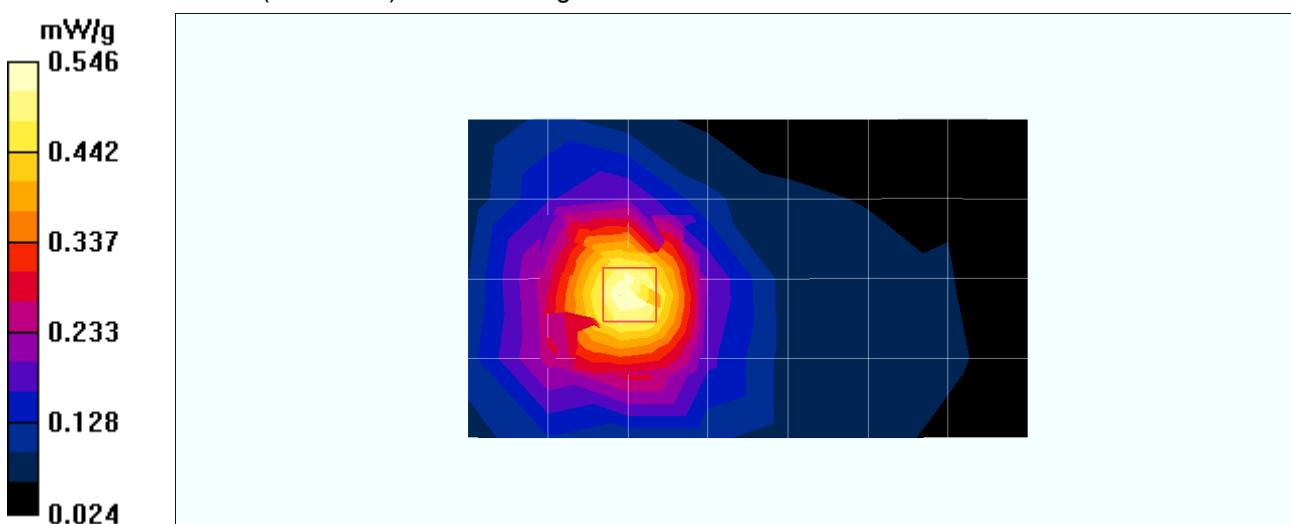

Date/Time: 2008-01-30 12:14:06

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH1175.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1908.75 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1908.8$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH1175/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH1175/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.95 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.631 W/kg

**SAR(1 g) = 0.371 mW/g**

Maximum value of SAR (measured) = 0.416 mW/g

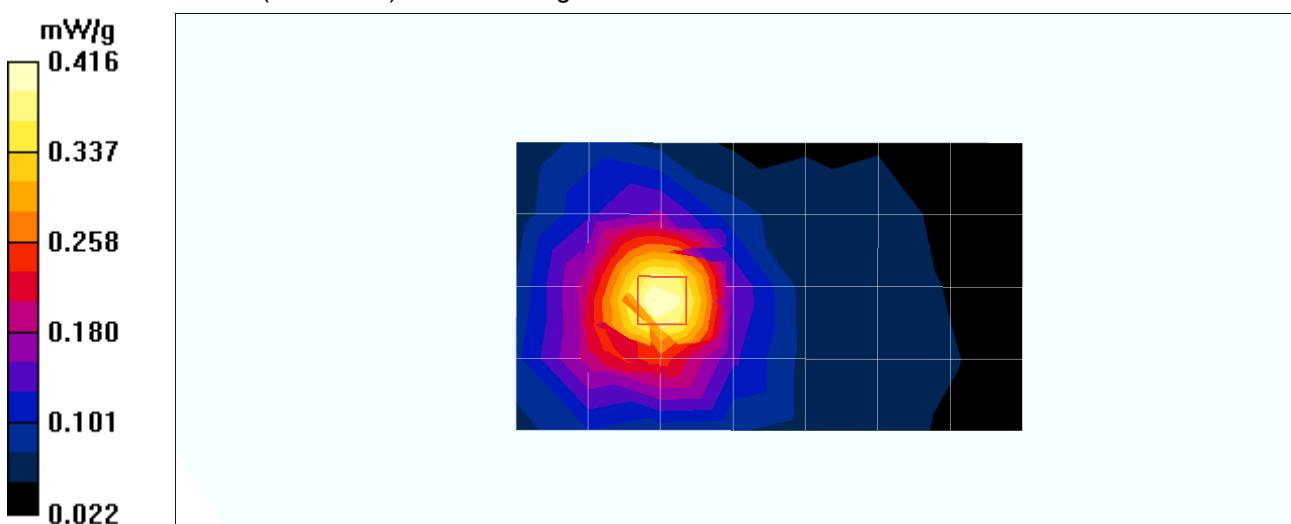

Date/Time: 2008-01-30 12:40:44

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH600-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH600-EVDO/Area Scan****(5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.465 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH600-EVDO/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.12 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.684 W/kg

**SAR(1 g) = 0.396 mW/g**

Maximum value of SAR (measured) = 0.441 mW/g

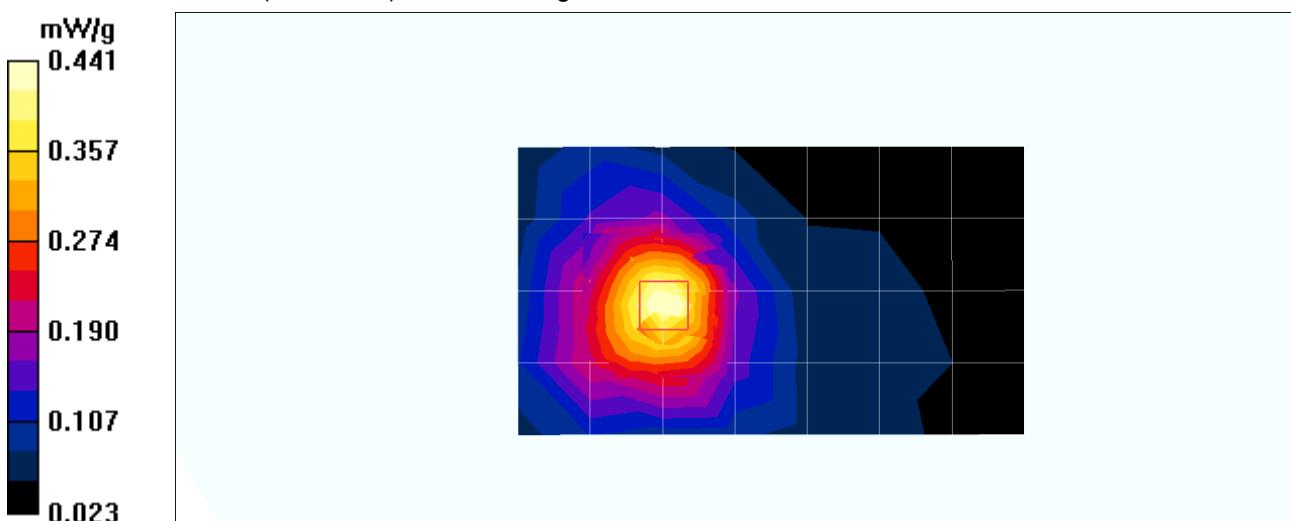

Date/Time: 2008-01-30 11:28:09

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Bottom Touch Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Bottom Touch Position CH600/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 mW/g


**SAMSUNG SENS X10 SE Bottom Touch Position CH600/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.81 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.485 mW/g**

Maximum value of SAR (measured) = 0.546 mW/g

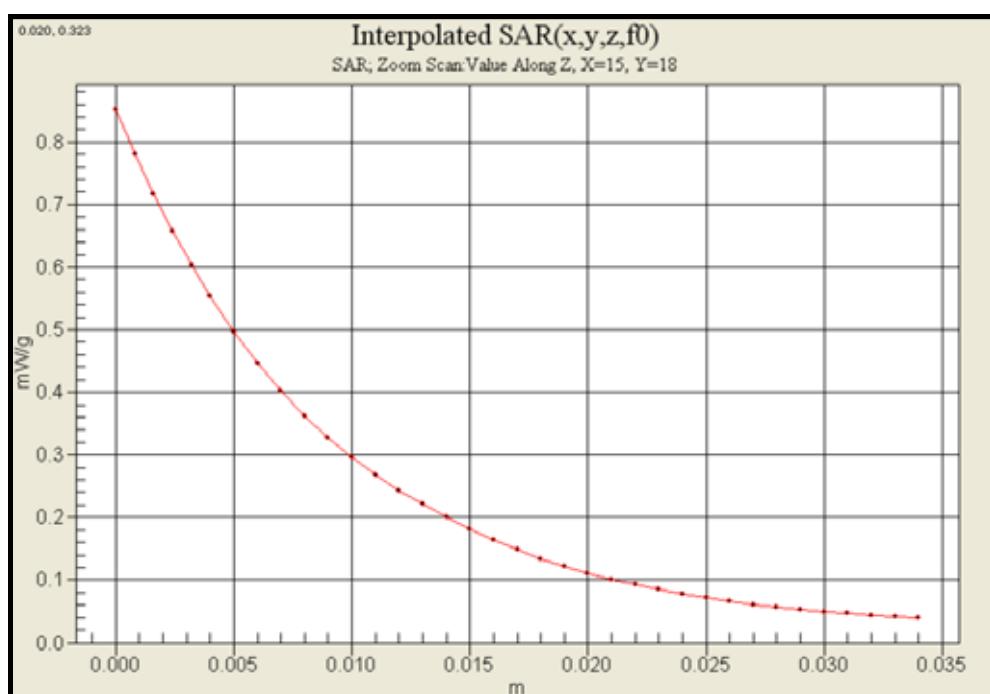

Date/Time: 2008-01-29 10:20:00

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH25.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1851.25 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1851.4$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH25/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.214 mW/g

**SAMSUNG SENS X10 SE Side Position CH25/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.304 W/kg

**SAR(1 g) = 0.213 mW/g**

Maximum value of SAR (measured) = 0.227 mW/g

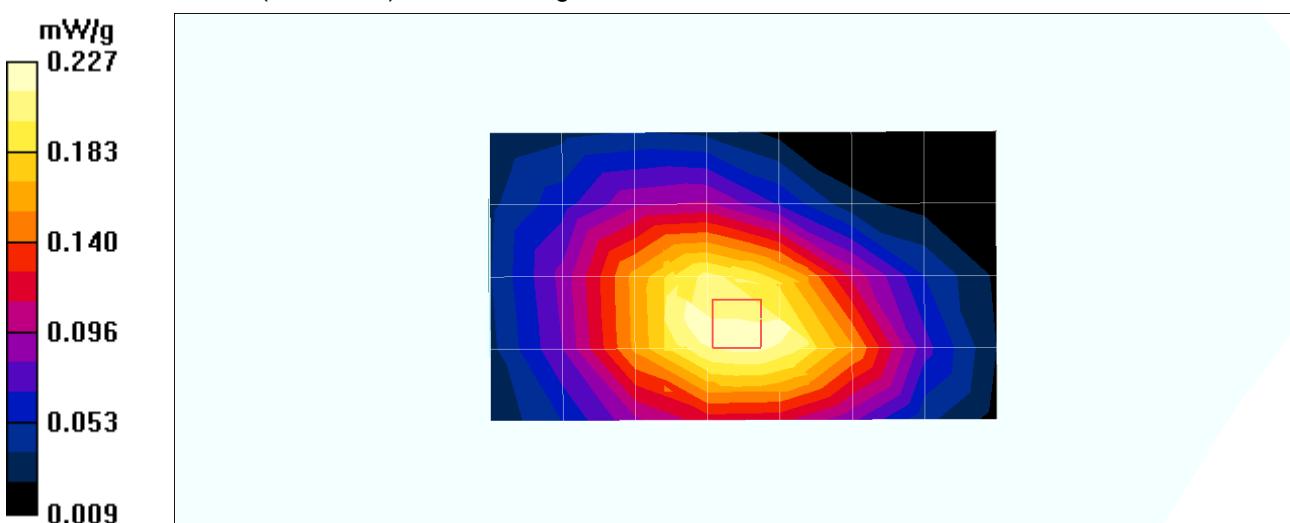

Date/Time: 2008-01-29 10:01:53

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH600.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH600/Area Scan (5x8x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.431 mW/g

**SAMSUNG SENS X10 SE Side Position CH600/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.622 W/kg

**SAR(1 g) = 0.430 mW/g**

Maximum value of SAR (measured) = 0.459 mW/g

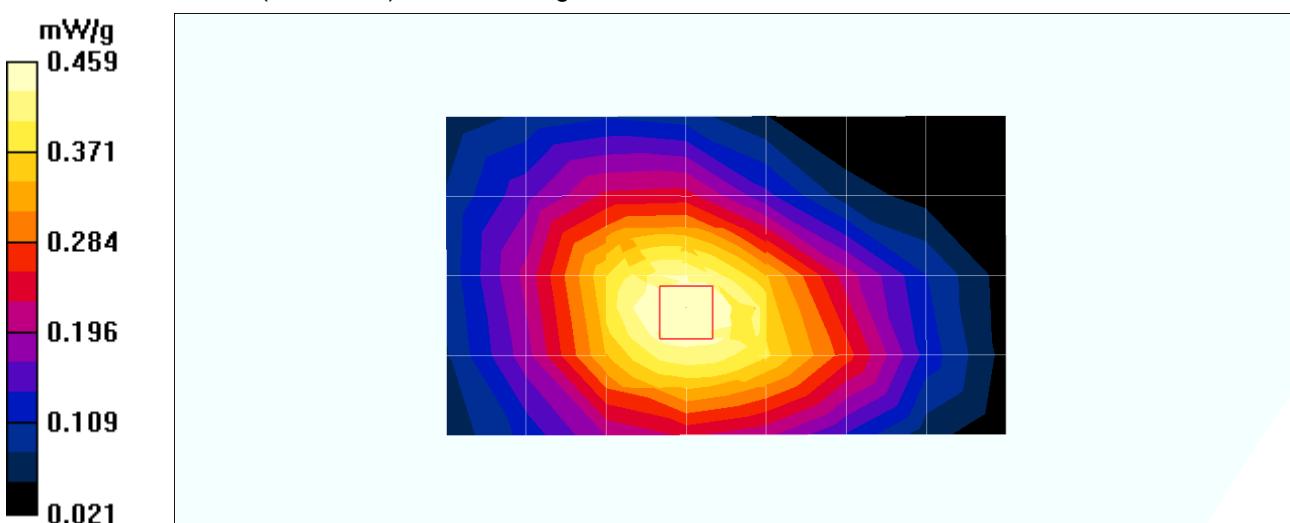

Date/Time: 2008-01-29 10:59:49

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH1175.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1908.75 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1908.8$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH1175/Area Scan (5x8x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.342 mW/g

**SAMSUNG SENS X10 SE Side Position CH1175/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.138 dB

Peak SAR (extrapolated) = 0.508 W/kg

**SAR(1 g) = 0.342 mW/g**

Maximum value of SAR (measured) = 0.368 mW/g

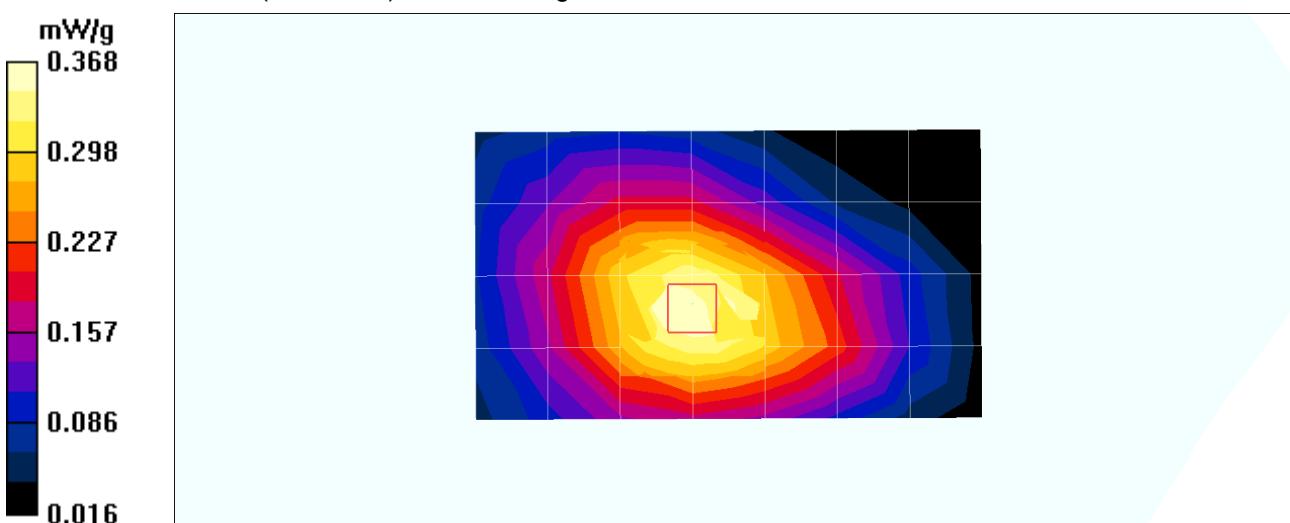

Date/Time: 2008-01-29 11:31:35

Test Laboratory: Nemko Korea File Name: [SAMSUNG SENS X10 SE Side Position CH600-EVDO.da4](#)**DUT: CMU-300 Type: USB Modem Serial: 00000001 Applicant Name: C-motech Co., Ltd**

Communication System: PCS Frequency: 1880 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used:  $f = 1880.1$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

Probe: ES3DV3 - SN3068; ConvF(4.62, 4.62, 4.62); Calibrated: 2007-03-20

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2007-04-04

Phantom: SAM Phantom; Type: SAM; Serial: TP-1358

Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**SAMSUNG SENS X10 SE Side Position CH600-EVDO/Area Scan (5x8x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.334 mW/g


**SAMSUNG SENS X10 SE Side Position CH600-EVDO/Zoom Scan (7x7x7)/Cube****0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.481 W/kg

**SAR(1 g) = 0.326 mW/g**

Maximum value of SAR (measured) = 0.345 mW/g

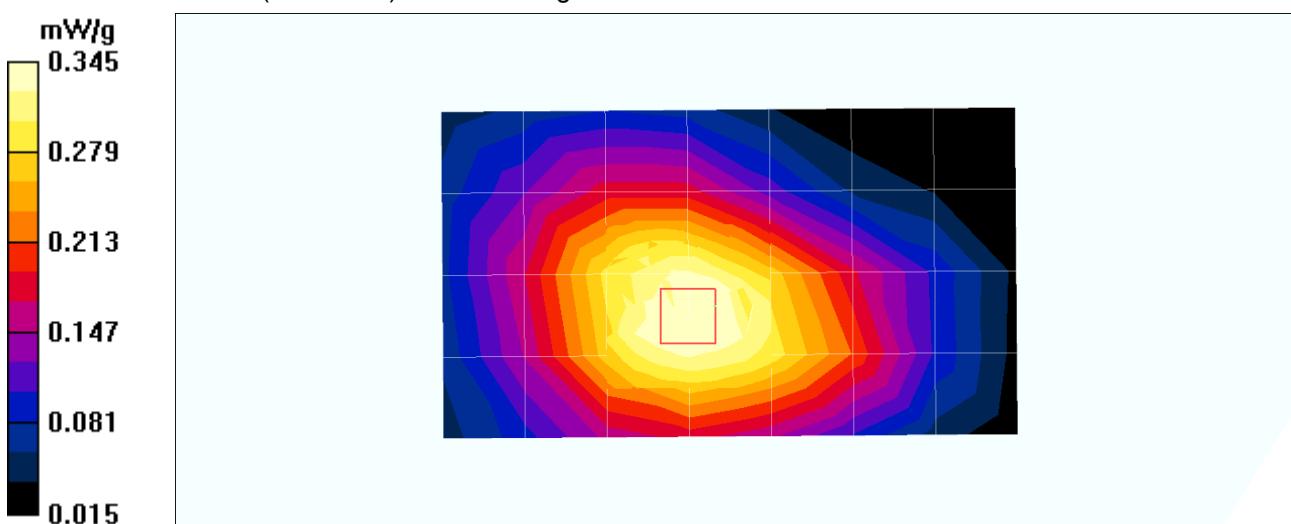

### 13. SAR Test Equipment

**Table 12.1 Test Equipment Calibration**

Description	Model	Serial No.	Calibration Date	Calibration Interval
Staubli Robot Unit	RX60L	F05/51E1A1/A/01	N/A	N/A
Data Acquisition Electronics	DAE4	672	April.04. 2007	1 year
E-Field Probe	ES3DV3	3068	March.20. 2007	1 year
Electro-Optical Converter	EOC3	398	N/A	N/A
SAM Twin Phantom V4.0C	TP-1358	SM 00 T02 DA	N/A	N/A
Validation Dipole Antenna	D835V2	4d016	November.21.2006	2 year
Validation Dipole Antenna	D1900V2	5d059	April.29. 2006	2 year
VSA Series Transmitter Tester	E4406A	US39480757	August.07.2007	1 year
PSA Series Spectrum Analyzer	E4440A	MY44022567	December.04.2007	1 year
Wireless Communications Test Set	8960 Series 10	GB43193659	June.18. 2007	1 year
Dielectric Probe Kit	85070E	MY44300121	N/A	N/A
Network Analyzer	8753ES	US39171172	Mar.06. 2007	1 year
Power Amplifier	5303075	509/0743	November.05.2007	1 year
Power Meter	437B	2912U01687	December.04.2007	1 year
Power Sensor	8481A	3318A83210	August.08.2007	1 year
Power Meter	NRVS	835360/002	December.04.2007	1 year
Power Sensor	NRV-Z32	836019/028	December.04.2007	1 year
Series Signal Generator	E4436B	US39260598	December.05.2007	1 year

Note:

*The E-field probe was calibrated by SPEAG, by waveguide technique procedure. Dipole Validation measurement is performed by Nemkokorea Lab. before each test. The brain simulating material is calibrated by Nemkokorea using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.*

## 14. References

- [1] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [2] EN 50361:2001, "Basic standard fields from mobile phones (200MHz – 3 GHz)", July 2001
- [3] IEC 62209 - 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz
- [4] IEC 62209 - 2, Draft Version 0.9, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body - Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation and Procedures Part 2: Procedure to determine the Specific Absorption Rate (SAR) for ... including accessories and multiple transmitters", December 2004
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", Edition 01-01
- [6] ANSI-PC63.19-2001, Draft 3.6, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids", April 2005

## Appendix A

### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy ( $dU$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. A.1) .

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dV} \right)$$

**Figure A.1 SAR Mathematical Equation**

**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{E^2}{\rho}$$

**Where :**

- $\epsilon$  = conductivity of the tissue-simulant material (S/m)
- $\rho$  = mass density of the tissue-simulant material (kg/m<sup>3</sup>)
- $E$  = Total RMS electric field strength (V/m)

**Note:**

The primary factors that control rate or energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

## Appendix B : Probe Calibration

<p><b>Calibration Laboratory of</b>  <b>Schmid &amp; Partner</b>  <b>Engineering AG</b>  <b>Zeughausstrasse 43, 8004 Zurich, Switzerland</b></p>			<b>S</b> Schweizerischer Kalibrierdienst <b>C</b> Service suisse d'étalonnage <b>S</b> Servizio svizzero di taratura <b>S</b> Swiss Calibration Service																																				
<small>Accredited by the Swiss Federal Office of Metrology and Accreditation          The Swiss Accreditation Service is one of the signatories to the EA          Multilateral Agreement for the recognition of calibration certificates</small>																																							
<b>Client</b> <b>Nemko (Dymstec)</b>	<b>Accreditation No.: SCS 108</b> <b>Certificate No: ES3-3068_Mar07</b>																																						
<b>CALIBRATION CERTIFICATE</b>																																							
<b>Object</b>	<b>ES3DV3 - SN:3068</b>																																						
<b>Calibration procedure(s)</b>	<b>QA CAL-01.v5</b> Calibration procedure for dosimetric E-field probes																																						
<b>Calibration date:</b>	<b>March 20, 2007</b>																																						
<b>Condition of the calibrated item</b>	<b>In Tolerance</b>																																						
<small>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).          The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</small>																																							
<small>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</small>																																							
<small>Calibration Equipment used (M&amp;TE critical for calibration)</small>																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Primary Standards</th> <th style="width: 20%;">ID #</th> <th style="width: 20%;">Cal Date (Calibrated by, Certificate No.)</th> <th style="width: 20%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>5-Apr-06 (METAS, No. 251-00557)</td> <td>Apr-07</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>5-Apr-06 (METAS, No. 251-00557)</td> <td>Apr-07</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498087</td> <td>5-Apr-06 (METAS, No. 251-00557)</td> <td>Apr-07</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>10-Aug-06 (METAS, No. 217-00592)</td> <td>Aug-07</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>4-Apr-06 (METAS, No. 251-00558)</td> <td>Apr-07</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>10-Aug-06 (METAS, No. 217-00593)</td> <td>Aug-07</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>4-Jan-07 (SPEAG, No. ES3-3013_Jan07)</td> <td>Jan-08</td> </tr> <tr> <td>DAE4</td> <td>SN: 654</td> <td>21-Jun-06 (SPEAG, No. DAE4-654_Jun06)</td> <td>Jun-07</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07	Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07	Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07	Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07	Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07	Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07	Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08	DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																				
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07																																				
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07																																				
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07																																				
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07																																				
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07																																				
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07																																				
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08																																				
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Secondary Standards</th> <th style="width: 20%;">ID #</th> <th style="width: 20%;">Check Date (in house)</th> <th style="width: 20%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Nov-05)</td> <td>In house check: Nov-07</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (SPEAG, in house check Oct-06)</td> <td>In house check: Oct-07</td> </tr> </tbody> </table>				Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07	Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07																								
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																				
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07																																				
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07																																				
<b>Calibrated by:</b>	Name Katja Pokovic	Function Technical Manager																																					
<b>Approved by:</b>	Fin Bornholt	R&D Director																																					
<small>Issued: March 21, 2007</small>																																							
<small>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</small>																																							
<small>Certificate No: ES3-3068_Mar07</small>		<small>Page 1 of 9</small>																																					

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>*: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). *NORM<sub>x,y,z</sub>* are only intermediate values, i.e., the uncertainties of *NORM<sub>x,y,z</sub>* does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConF*).
- NORM(f)x,y,z = NORM<sub>x,y,z</sub> \* frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConF*.
- DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM<sub>x,y,z</sub> \* ConF* whereby the uncertainty corresponds to that given for *ConF*. A frequency dependent *ConF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



ES3DV3 SN:3068

March 20, 2007

# Probe ES3DV3

SN:3068

Manufactured:	December 14, 2004
Last calibrated:	April 11, 2005
Recalibrated:	March 20, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ES3-3068\_Mar07

Page 3 of 9

ES3DV3 SN:3068

March 20, 2007

**DASY - Parameters of Probe: ES3DV3 SN:3068****Sensitivity in Free Space<sup>A</sup>**

NormX	$1.32 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	$1.18 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	$1.18 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$

**Diode Compression<sup>B</sup>**

DCP X	93 mV
DCP Y	94 mV
DCP Z	96 mV

**Sensitivity in Tissue Simulating Liquid (Conversion Factors)**

Please see Page 8.

**Boundary Effect**

TSL      900 MHz      Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	3.0 mm	4.0 mm
SAR <sub>be</sub> [%] Without Correction Algorithm	5.8	2.5
SAR <sub>be</sub> [%] With Correction Algorithm	0.0	0.2

TSL      1810 MHz      Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance	3.0 mm	4.0 mm
SAR <sub>be</sub> [%] Without Correction Algorithm	7.9	4.7
SAR <sub>be</sub> [%] With Correction Algorithm	0.1	0.3

**Sensor Offset**Probe Tip to Sensor Center: **2.0 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).<sup>B</sup> Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3068

March 20, 2007

### Frequency Response of E-Field



(TEM-Cell:ifi110 EXX, Waveguide: R22)

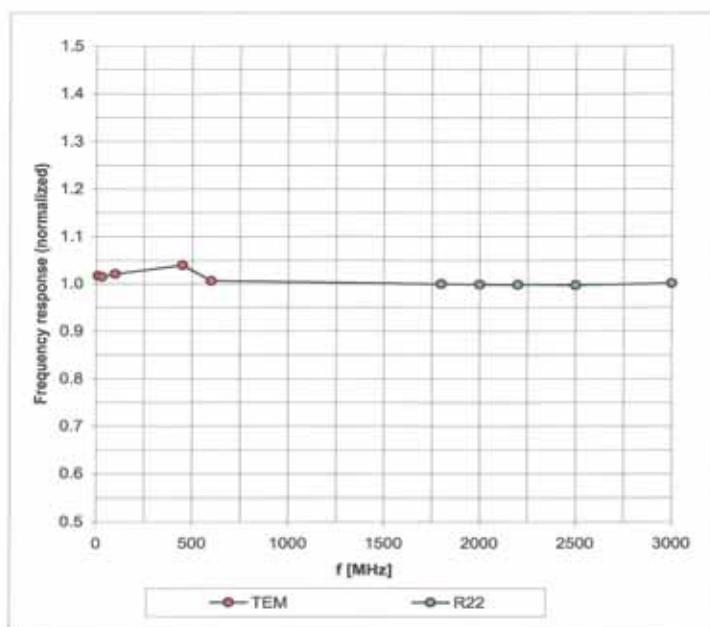

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )


ES3DV3 SN:3068

March 20, 2007

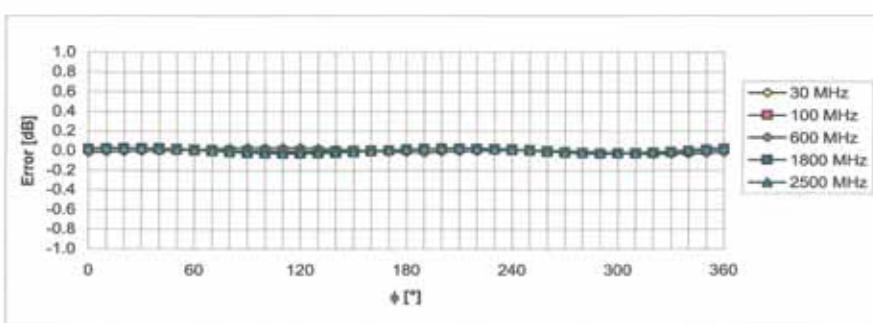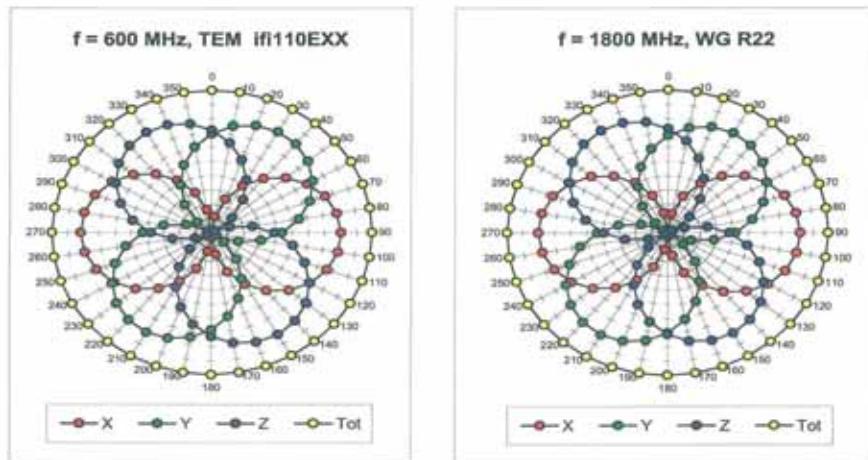**Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$** Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

ES3DV3 SN:3068

March 20, 2007

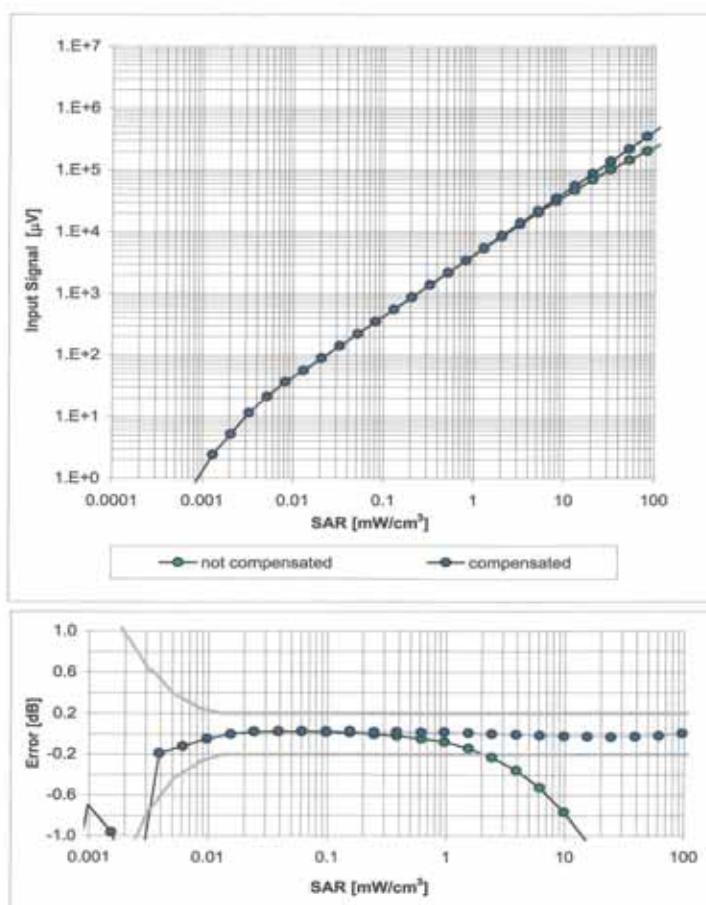
**Dynamic Range f(SAR<sub>head</sub>)**  
(Waveguide R22, f = 1800 MHz)Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

Certificate No: ES3-3068\_Mar07

Page 7 of 9

**ES3DV3 SN:3068**
**March 20, 2007**

### Conversion Factor Assessment

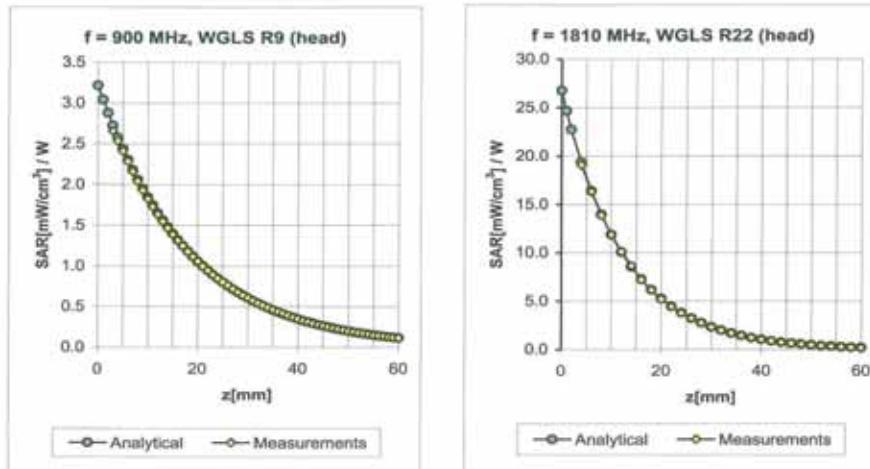


$f$ [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
900	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	0.92	1.27	5.73	$\pm 11.0\%$ (k=2)
1810	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.86	1.26	4.89	$\pm 11.0\%$ (k=2)
2450	$\pm 50 / \pm 100$	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	0.76	1.35	4.34	$\pm 11.8\%$ (k=2)
900	$\pm 50 / \pm 100$	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	0.80	1.30	5.62	$\pm 11.0\%$ (k=2)
1900	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.70	1.46	4.62	$\pm 11.0\%$ (k=2)
2450	$\pm 50 / \pm 100$	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	0.80	1.20	4.06	$\pm 11.8\%$ (k=2)

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3068

March 20, 2007

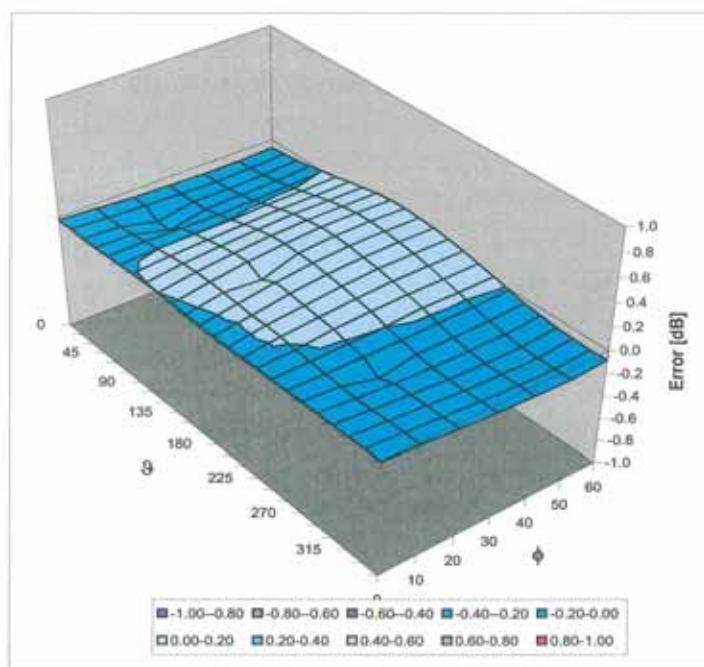**Deviation from Isotropy in HSL**Error ( $\phi, \theta$ ),  $f = 900$  MHzUncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

Certificate No: ES3-3068\_Mar07

Page 9 of 9

**Appendix C : Dipole Calibrations**

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client

**Modmen (Dymstec)**

Certificate No: **D835V2-4d016\_Nov06**

**CALIBRATION CERTIFICATE**

Object	<b>D835V2 - SN: 4d016</b>		
Calibration procedure(s)	<b>QA.CAL-05_v6</b> Calibration procedure for dipole validation kits		
Calibration date:	<b>November 21, 2006</b>		
Condition of the calibrated item	<b>In Tolerance</b>		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	US37292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6 (HF)	SN 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000875	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
Calibrated by:	Name <b>Mike Mell</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	<b>Katja Popovic</b>	Technical Manager	
Issued: November 22, 2006			
<p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>			

Certificate No: D835V2-4d016\_Nov06

Page 1 of 6

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY4	V4.7
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V4.9	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	835 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	41.5	0.90 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	42.1 ± 6 %	0.90 mho/m ± 6 %
<b>Head TSL temperature during test</b>	(22.0 ± 0.2) °C	---	---

**SAR result with Head TSL**

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	<b>Condition</b>	
SAR measured	250 mW input power	2.29 mW / g
SAR normalized	normalized to 1W	9.16 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>9.23 mW / g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	<b>Condition</b>	
SAR measured	250 mW input power	1.50 mW / g
SAR normalized	normalized to 1W	6.00 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>6.04 mW / g ± 16.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	54.7 $\Omega$ - 2.0 $j\Omega$
Return Loss	- 26.2 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.390 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	April 22, 2004

**DASY4 Validation Report for Head TSL**

Date/Time: 21.11.2006 17:00:59

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d016**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.9$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

## DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.09, 6.09, 6.09); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 54.8 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 2.29 mW/g; SAR(10 g) = 1.5 mW/g**

Maximum value of SAR (measured) = 2.47 mW/g

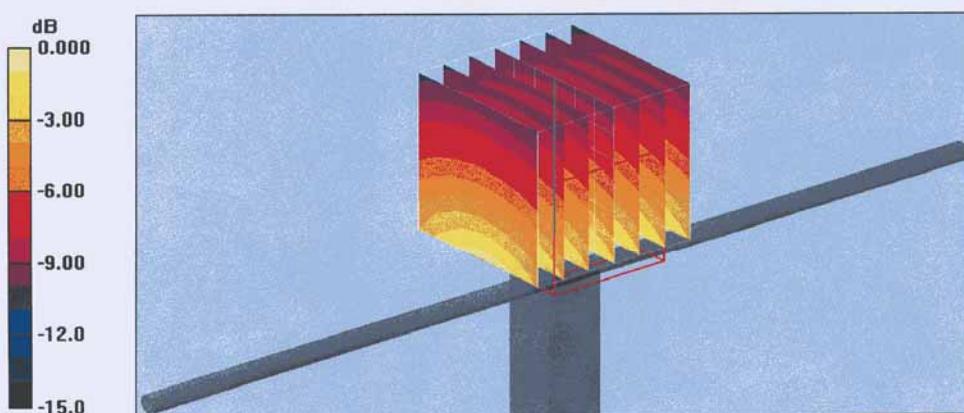

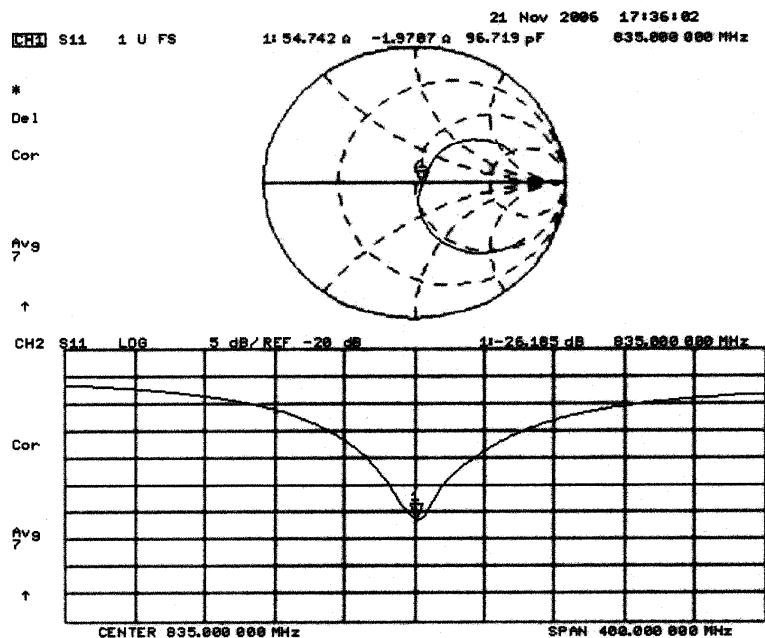**Impedance Measurement Plot for Head TSL**

Certificate No: D835V2-4d016\_Nov06

Page 6 of 6

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nemko (Dymstec)**

Certificate No: **D1900V2-5d059\_Jul06**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d059**

Calibration procedure(s) **QA CAL-05.v6**  
 Calibration procedure for dipole validation kits

Calibration date: **July 17, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference 10 dB Attenuator	SN: 5047.2 (10r)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference Probe ET3DV6	SN: 1507	28-Oct-05 (SPEAG, No. ET3-1507_Oct05)	Oct-06
DAE4	SN: 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

Calibrated by:	Name	Function	Signature
	Marcel Fehr	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: July 18, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY4	V4.7
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	39.3 ± 6 %	1.44 mho/m ± 6 %
<b>Head TSL temperature during test</b>	(22.9 ± 0.2) °C	---	---

**SAR result with Head TSL**

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	9.56 mW / g
SAR normalized	normalized to 1W	38.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	37.4 mW / g ± 17.0 % (k=2)

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	5.04 mW / g
SAR normalized	normalized to 1W	20.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	19.9 mW / g ± 16.5 % (k=2)

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	54.5 $\Omega$ + 3.0 $j\Omega$
Return Loss	- 25.7 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	March 19, 2004

**DASY4 Validation Report for Head TSL**

Date/Time: 17.07.2006 15:58:20

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d059**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.74, 4.74, 4.74); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 92.9 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.56 mW/g; SAR(10 g) = 5.04 mW/g

Maximum value of SAR (measured) = 10.8 mW/g

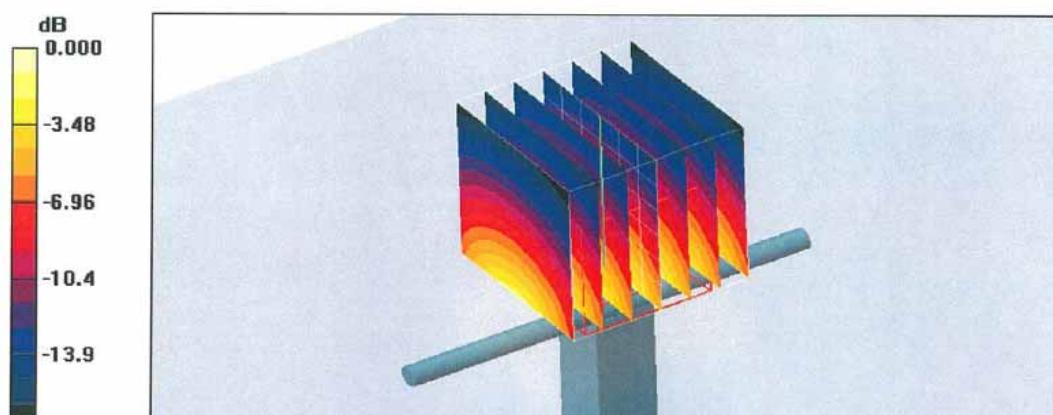

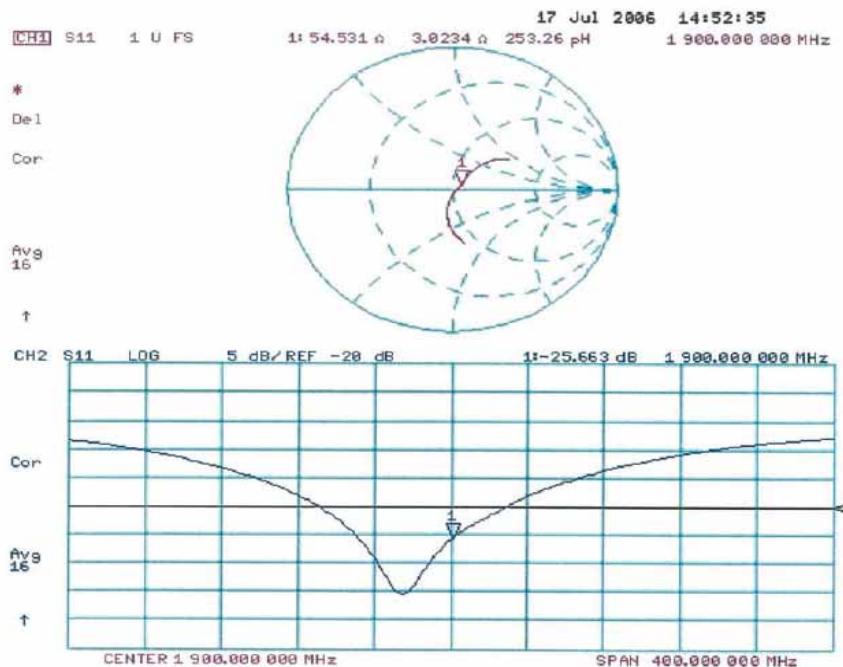**Impedance Measurement Plot for Head TSL**

## Appendix E : Test Position of EUT

### SONY PCG-6C7P Bottom Position



### SONY PCG-6C7P Side Position



**ASUS F3J Bottom Position**



**ASUS F3J Side Position**



**SAMSUNG SENS X10 SE Bottom Position**



**SAMSUNG SENS X10 SE Side Position**

