



1/F., Building No. 1 Building, Agriculture Machinery Materials Co.
Wushan Road, Shipai, Tianhe District, Guangzhou, China
Telephone: +86 (0) 20 3848 1001 Fax: +86 (0) 20 3848 1006
Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION
Registration number: 282399

Report No.: GLEMO050702137RFF(I)
Page : 1 of 11
FCC ID : TB7DXTOYS51927

TEST REPORT

Application No. : GLEMO050702137RF
Applicant : SHANTOU CHENGHAI DONGXIN PLASTIC TOYS CO., LTD.
FCC ID : TB7DXTOYS51927
Fundamental Frequency : 27.145MHz
Equipment under Test (EUT):
Name : Toy – R/C Cyclone Stunt (27.145MHz)
Item No.: #1603105
Customer PO No.: DSM5681
Standards : FCC PART 15, SUBPART C : 2004
Section 15.227
Date of Receipt : 26 July 2005
Date of Test : 26 July to 9 August 2005
Date of Issue : 11 August 2005

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kent Hsu
Laboratory Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf
This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.
This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.
All test results in this report can be traceable to National or International Standards.

2 Test Summary


Test	Test Requirement	Standard Paragraph	Result
Radiated Emission (30MHz to 1000MHz)	FCC PART 15 :2004	Section 15.227	PASS ①
Occupied Bandwidth	FCC PART 15 :2004	Section 15.215	PASS

Remark:

①The EUT passed Radiated Emission test after the modification as shown as the below:

- Added three capacitors as below:

C101: 30PF, C102: 0.01 μ F, C103: 82PF.

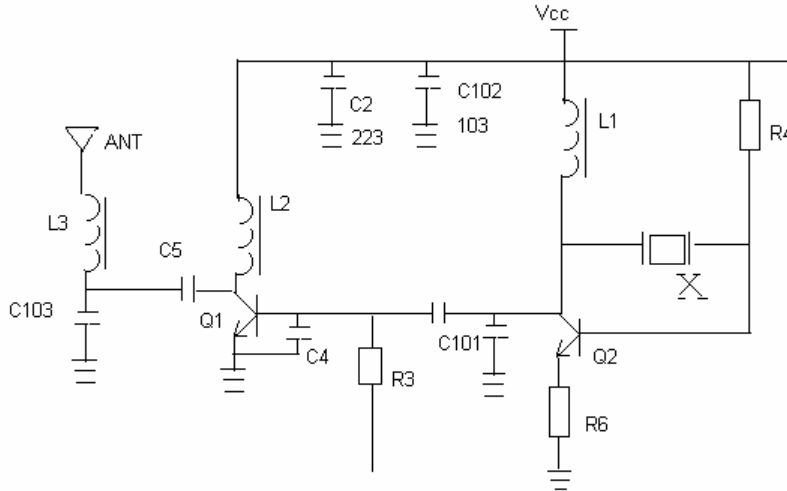



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 DETAILS OF E.U.T.	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 TEST LOCATION	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER	4
4.6 TEST FACILITY.....	5
5 TEST RESULTS	6
5.1 TEST INSTRUMENTS	6
5.2 E.U.T. OPERATION	6
5.3 TEST PROCEDURE & MEASUREMENT DATA.....	6
5.3.1 <i>Radiated Emissions</i>	6
5.3.2 <i>Occupied Bandwidth</i>	10-11



4 General Information

4.1 Client Information

Applicant: SHANTOU CHENGHAI DONGXIN PLASTIC TOYS CO., LTD.
Address of Applicant: Crossing, Fengxin San Rd. Laiwu Rd. Chenghai District, Shantou, Guangdong, China.

4.2 Details of E.U.T.

Product Name: Toy – R/C Cyclone Stunt (27.145MHz)
Item No.: #1603105
Power Supply: 9V DC (1 x '6F22' Battery) for the Tx
Power Cord: N/A-

4.3 Description of Support Units

The EUT was tested as an independent unit: a 27MHz radio transmitter.

4.4 Test Location

All tests were performed at:
SGS-CSTC Standards Technical Services Ltd., Guangzhou EMC Laboratory, 1/F, Building No. 1, Agriculture Machinery Materials Company Warehouse Ltd., Wushan Road Shipai, Tianhe District, Guangzhou, China. P.C. 510630.
Tel: +86 20 3848 1001
Fax: +86 20 3848 1006

4.5 Other Information Requested by the Customer

None.



4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0. Effective through December 31, 2005.
- **ACA**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **VCCI**
The 3m Semi-anechoic chamber and Shielded Room (11.5m x 4m x 4m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1599 and C-1706 respectively.
Date of Registration: June 01, 2005. Valid until February 22, 2008
- **SGS UK (Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAL – LAB Code: L0141**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.
- **FCC – Registration No.: 282399**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP's accreditation, SGS-CSTC is an authorised test laboratory for the DoC process.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5169.



5 Test Results

5.1 Test Instruments

RE in Chamber						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi- Anechoic Chamber	Frankonia	N/A	N/A	31-01-2005	30-01-2006
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	20-09-2004	20-09-2005
3	EMI Test Software	Audix	E3	N/A	N/A	N/A
4	Coaxial cable	SGS	N/A	N/A	05-12-2003	04-12-2005
5	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	17-01-2005	16-01-2006
6	Horn Antenna	Rohde & Schwarz	HF906	100095	10-05-2005	09-05-2006
7	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	29-10-2004	28-10-2005
8	0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A06252	31-06-2005	30-06-2006
9	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	26-01-2004	25-01-2006
10	Active Loop Antenna	EMCO	6502	00042963	14-Jan-2005	14-Jan-2006

5.2 E.U.T. Operation

Input voltage: 9V DC (1 x '6F22' Battery)

Operating Environment:

Temperature: 25.0 °C

Humidity: 50 % RH

Atmospheric Pressure: 1013 mbar

EUT Operation:

Test the EUT in transmitting mode.

5.3 Test Procedure & Measurement Data

5.3.1 Radiated Emissions

Test Requirement: FCC Part15 C Section 15.227

Test Method: ANSI C63.4

Test Date: 27 July 2005 (Initial Test);
9 August 2005 (Test after modification)

Measurement Distance: 3m (Semi-Anechoic Chamber)

Requirements: Carrier frequency will not exceed 80dBuV/m AT 3m.

Out of band emissions shall not exceed:

40.0 dBµV/m between 30MHz & 88MHz

43.5 dBµV/m between 88MHz & 216MHz

46.0 dBµV/m between 216MHz & 960MHz

54.0 dBµV/m above 960MHz

Detector: Peak Scan (120kHz resolution bandwidth)



Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 1000MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities.

The following measurements were performed on the EUT on 9 August 2005:
Test the EUT in transmitting mode.

Intentional emission

Test Frequency (MHz)	Peak (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
27.145	76.7	67.0	100.0	23.3	33.0


Test Frequency (MHz)	Average (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
27.145	72.5	63.7	80.0	7.5	16.3



Other emissions

Vertical:


Data: 261 File: C:\e3\RE\Test Data\MODIFY\MODIFY.EMI (261) Date: 08-09-2005 Time: 20:50:58

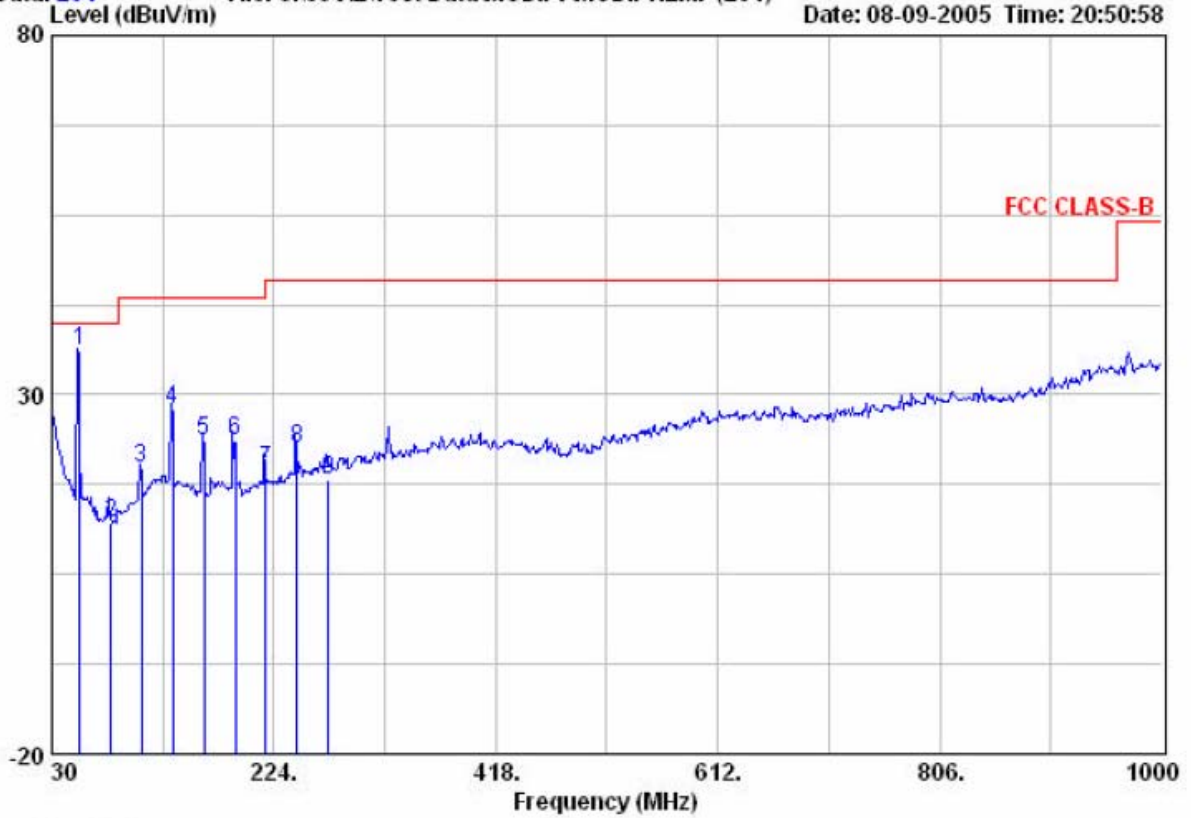

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB/m	dB
1 Max	54.290	36.10	40.00	-3.90	49.08	11.83	25.21
2	81.435	12.17	40.00	-27.83	28.89	7.70	25.12
3	108.580	19.89	43.50	-23.61	32.53	11.67	25.10
4	135.725	27.95	43.50	-15.55	38.80	13.27	25.10
5	162.870	23.69	43.50	-19.81	36.54	10.93	24.88
6	190.015	23.61	43.50	-19.89	35.46	11.60	24.70
7	217.160	19.38	46.00	-26.62	31.12	11.41	24.53
8	244.305	22.40	46.00	-23.60	33.03	12.31	24.42
9	271.450	18.24	46.00	-27.76	27.66	13.38	24.40



Horizontal:

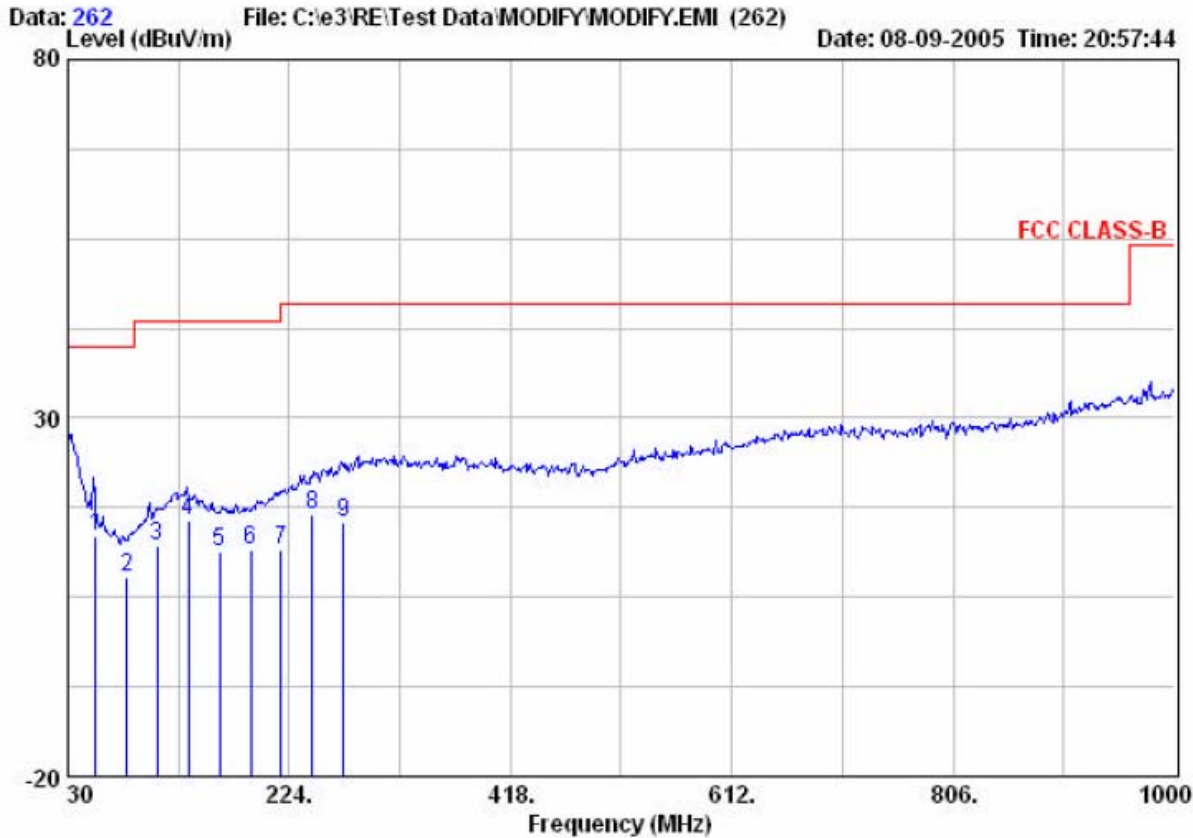

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB/m	dB
1 Max	54.290	13.54	40.00	-26.46	26.09	12.26	0.40 25.21
2	81.435	7.74	40.00	-32.26	23.32	8.83	0.70 25.12
3	108.580	12.12	43.50	-31.38	23.90	12.53	0.79 25.10
4	135.725	15.61	43.50	-27.89	25.95	13.80	0.97 25.10
5	162.870	11.36	43.50	-32.14	23.42	11.72	1.10 24.88
6	190.015	11.57	43.50	-31.93	23.32	11.70	1.25 24.70
7	217.160	11.49	46.00	-34.51	21.46	13.19	1.37 24.53
8	244.305	16.43	46.00	-29.57	24.43	14.94	1.48 24.42
9	271.450	15.49	46.00	-30.51	21.94	16.36	1.59 24.40

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

Test Results: The unit does meet the FCC Part 15 C Section 15.227 requirements.



5.3.2 Occupied Bandwidth


Test Requirement: FCC Part 15 C Section 15.215 (C)
Test Method: ANSI C63.4
Operation within the band 26.960 – 27.280 MHz
Test Date: 10 August 2005
Requirements: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.
Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10 dB per division. The horizontal scale is set to 32KHz per division.

The graph as below, represents the emissions take for this device.

The results: The unit does meet the FCC Part 15 C Section 15.215 requirements.



*RBW 10 kHz Marker 1 [T1]
VBW 30 kHz -40.89 dBm
SWT 5 ms 27.144960000 MHz

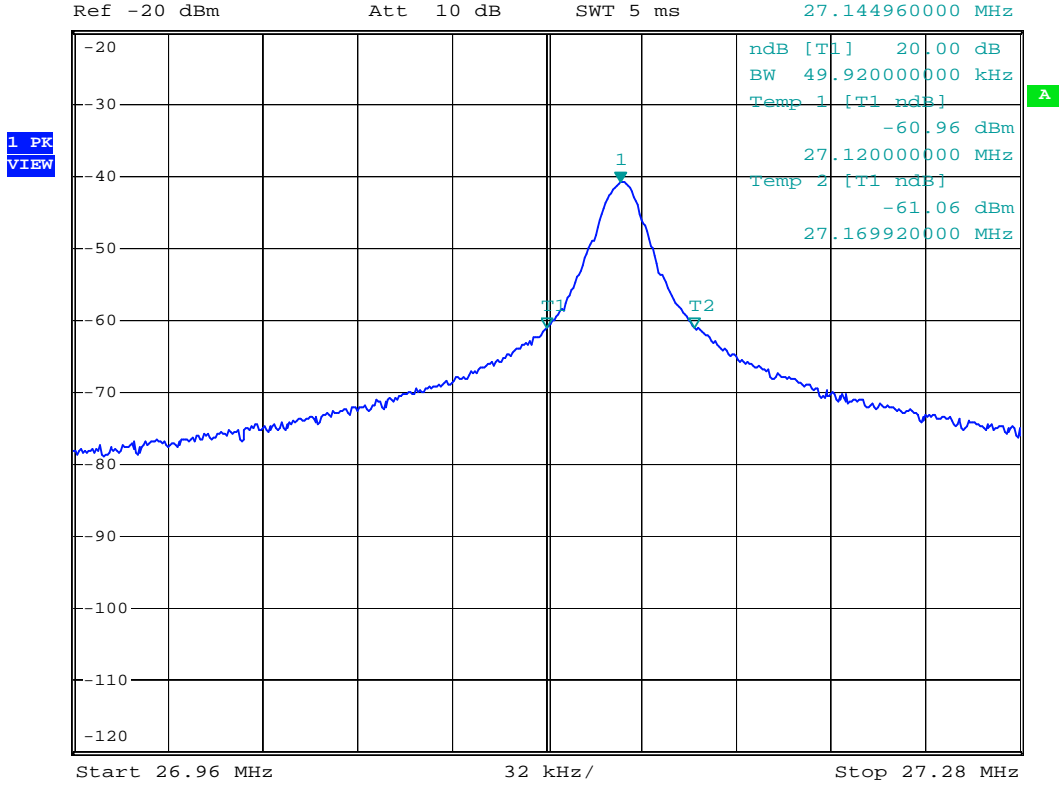

Date: 10.AUG.2005 10:23:52

The results: The unit does meet the FCC Part 15 C Section 15.235 requirements.