



No.198 Kezhu Road, Science Town Economic & Technology  
Development District Guangzhou, China 510663 Telephone:

Telephone: +86 (0) 20 82155555

Fax: +86 (0) 20 82075059

Email: [sgs\\_internet\\_operations@sgs.com](mailto:sgs_internet_operations@sgs.com)

FEDERAL COMMUNICATIONS COMMISSION

Registration number: 282399

Report No.: GLEMR060801122RFI

Page : 1 of 9

FCC ID : TB7DXTOYS74749

## TEST REPORT

**Application No.** : GLEMR060801122RF  
**Applicant** : SHANTOU CHENGHAI DONGXIN PLASTIC TOYS CO., LTD.  
**FCC ID** : TB7DXTOYS74749  
**Fundamental Frequency** : 49.860MHz  
**Equipment under Test (EUT):**  
Name : TOY-RC STUNT TRUCK W/MUSIC (49.860MHz)  
Model : #7847 (Customer PO Number : DSM7847)  
**Standards** : FCC PART 15, SUBPART C : 2004  
Section 15.235  
**Date of Receipt** : 23 August 2006  
**Date of Test** : 29 to 30 August 2006  
**Date of Issue** : 01 September 2006

<b>Test Result :</b>	<b>PASS *</b>
----------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jerry Chen  
Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf  
This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

All test results in this report can be traceable to National or International Standards.

Member of the SGS Group (SGS SA)



## 2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Radiated Emission (30MHz to 1000MHz)	FCC PART 15 :2006	Section 15.235	PASS
Occupied Bandwidth	FCC PART 15 :2006	Section 15.235	PASS

Remark:

The tests were applied to Transmitter part.



### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 CLIENT INFORMATION .....	4
4.2 DETAILS OF E.U.T. ....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	4
4.4 TEST LOCATION.....	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	4
4.6 TEST FACILITY.....	5
<b>5 TEST RESULTS</b> .....	<b>6</b>
5.1 TEST INSTRUMENTS.....	6
5.2 E.U.T. OPERATION.....	7
5.3 TEST PROCEDURE & MEASUREMENT DATA.....	7
5.3.1 <i>Radiated Emissions</i> .....	7
5.3.2 <i>Occupied Bandwidth</i> .....	9



## **4 General Information**

### **4.1 Client Information**

Applicant: SHANTOU CHENGHAI DONGXIN PLASTIC TOYS CO., LTD.  
Address of Applicant: Crossing Fengxin San Rd.,Laiwu Rd.,Chenghai District, Shantou, Guangdong China

### **4.2 Details of E.U.T.**

Product Name: TOY-RC STUNT TRUCK W/MUSIC (49.860MHz)  
Model: #7847 (Customer PO Number : DSM7847)  
Power Supply: DC 9V (1 x '6F22' Size Battery) for Tx;  
DC 10V (Valve Regulated Lead Acid Battery) for Rx.  
Power Cord: N/A-

### **4.3 Description of Support Units**

The EUT was tested as an independent unit: a 49MHz radio transmitter.

### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

### **4.5 Other Information Requested by the Customer**

None.



#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**  
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0. Effective through December 31, 2006.
- **ACA**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **VCCI**  
The 3m Semi-anechoic chamber and Shielded Room (11.5m x 4m x 4m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1599 and C-1706 respectively.  
Date of Registration: June 01, 2005. Valid until February 22, 2008
- **SGS UK (Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**  
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAL – LAB Code: L0141**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing Laboratories.
- **FCC – Registration No.: 282399**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP's accreditation, SGS-CSTC is an authorised test laboratory for the DoC process.
- **Industry Canada (IC)**  
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5169.



## 5 Test Results

### 5.1 Test Instruments

RE in Chamber/OATS						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0525	Impact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	06-03-2006	06-03-2007
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	05-12-2005	05-12-2006
N/A	EMI Test Software	Audix	E3	N/A	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	04-12-2005	04-12-2006
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	31-10-2005	31-10-2006
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	31-07-2006	31-07-2007
EMC0517	Horn Antenna	Rohde & Schwarz	HF906	100095	29-07-2006	29-07-2007
EMC0040	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	05-12-2005	05-12-2006
EMC0520	0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A06252	06-03-2006	06-03-2007
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	06-03-2006	06-03-2007
EMC0523	Active Loop Antenna	EMCO	6502	00042963	14-01-2006	14-01-2007
EMC0529	10m Open Site	ZhongYu	N/A	N/A	26-12-2005	26-12-2006



## **5.2 E.U.T. Operation**

Input voltage: DC 9V (1 x '6F22' Size Battery)

Operating Environment:

Temperature: 26.0 °C

Humidity: 58 % RH

Atmospheric Pressure: 1011 mbar

EUT Operation:

Test the EUT in transmitting mode.

## **5.3 Test Procedure & Measurement Data**

### **5.3.1 Radiated Emissions**

Test Requirement: FCC Part15 C Section 15.235

Test Method: ANSI C63.4 section 8 & 13

Test Date: 29 August 2006

Measurement Distance: 3m (Semi-Anechoic Chamber and OATS)

Requirements: Carrier frequency will not exceed 80dBuV/m at 3m.

Out of band emissions shall not exceed:

40.0 dB $\mu$ V/m between 30MHz & 88MHz

43.5 dB $\mu$ V/m between 88MHz & 216MHz

46.0 dB $\mu$ V/m between 216MHz & 960MHz

54.0 dB $\mu$ V/m above 960MHz

Detector: Peak Scan (120kHz resolution bandwidth)



Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 1000MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities.

The following measurements were performed on the EUT on 29 August 2006:  
Test the EUT in transmitting mode.

Intentional emission

Test Frequency (MHz)	Peak (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
49.860	58.0	60.9	100.0	42.0	39.1

Test Frequency (MHz)	Average (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
49.860	51.4	56.6	80.0	28.6	23.4

Other emissions

Test Frequency (MHz)	Quasi-Peak (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
99.720	25.0	19.9	43.5	18.5	23.6
149.580	17.5	19.1	43.5	26.0	24.4
199.440	15.5	13.7	43.5	28.0	29.8
249.300	38.8	26.5	46.0	7.2	19.5
299.160	19.2	14.1	46.0	26.8	31.9
349.020	13.3	19.5	46.0	32.7	26.5

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector

function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

**Test Results: The unit does meet the FCC Part 15 C Section 15.235 requirements.**






### 5.3.2 Occupied Bandwidth

Test Requirement: FCC Part15 C Section 15.235  
 Test Method: ANSI C63.4 section 13 & FCC Part 2.1049  
 Operation within the band 49.82 – 49.90 MHz  
 Test Date: 30 August 2006  
 Requirements: The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Section 15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in Section 15.209.

Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 20KHz per division.

The graph as below, represents the emissions take for this device.

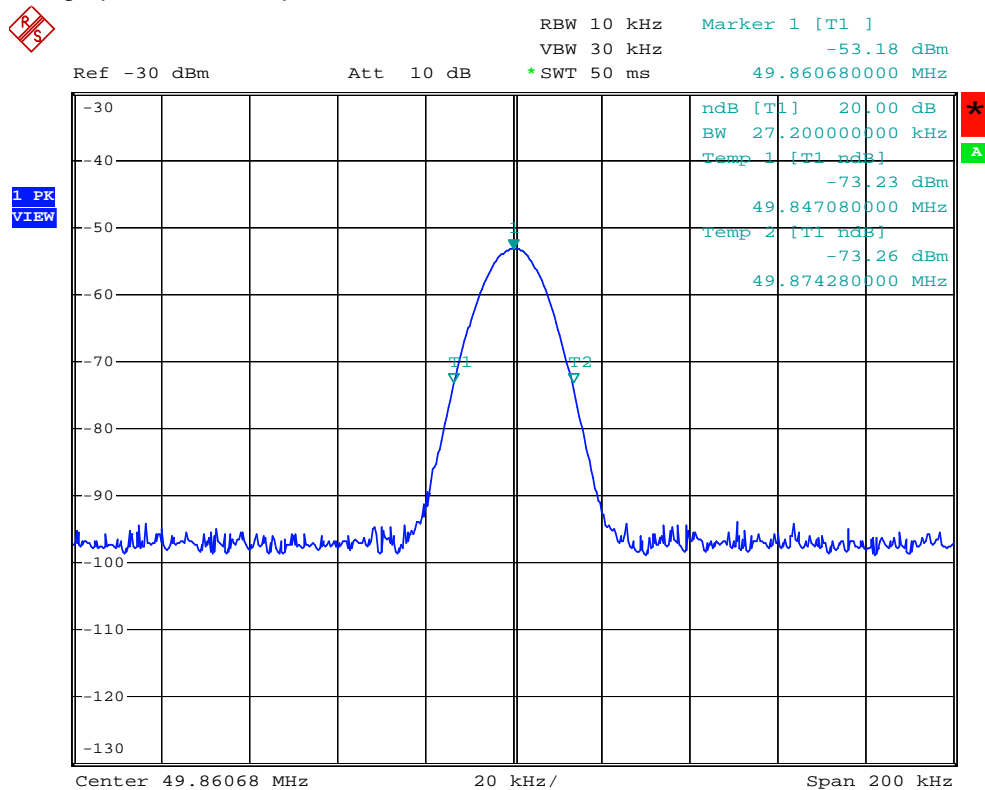

Date: 30.AUG.2006 10:48:09

**The results: The unit does meet the FCC Part 15 C Section 15.235 requirements.**