



FCC PART 15.407
 ISEDC RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Roku, Inc.

150 Winchester Circle,
 Los Gatos, CA 95032, USA

FCC ID: TC2-R1018
IC: 5959A-R1018

Report Type: Original Report	Model: 3810X
Prepared By: Frank Wang Test Engineer	<i>Frank Wang</i>
Report Number: R1706262-407	
Report Date: 2017-08-08	
Reviewed By: Jin Yang RF Engineer	<i>Jin Yang</i>
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" Rev. 20

TABLE OF CONTENTS

1	GENERAL DESCRIPTION.....	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	OBJECTIVE.....	5
1.3	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.4	TEST METHODOLOGY.....	5
1.5	MEASUREMENT UNCERTAINTY.....	6
1.6	TEST FACILITY REGISTRATIONS.....	6
1.7	TEST FACILITY ACCREDITATIONS.....	6
2	EUT TEST CONFIGURATION.....	9
2.1	JUSTIFICATION.....	9
2.2	EUT EXERCISE SOFTWARE.....	9
2.3	DUTY CYCLE CORRECTION FACTOR.....	10
2.4	EQUIPMENT MODIFICATIONS.....	15
2.5	LOCAL SUPPORT EQUIPMENT.....	15
2.6	SUPPORT EQUIPMENT.....	15
2.7	INTERFACE PORTS AND CABLING.....	15
3	SUMMARY OF TEST RESULTS.....	16
4	FCC §2.1091, §15.407(F) & ISEDC RSS-102 - RF EXPOSURE.....	17
4.1	APPLICABLE STANDARD.....	17
4.2	MPE PREDICTION.....	18
4.3	MPE RESULTS.....	18
4.4	RF EXPOSURE EVALUATION EXEMPTION FOR ISEDC.....	18
5	FCC §15.203 & ISEDC RSS-GEN §8.3 - ANTENNA REQUIREMENTS.....	19
5.1	APPLICABLE STANDARDS.....	19
5.2	ANTENNA LIST.....	19
6	FCC §15.207 & ISEDC RSS-GEN §8.8 - AC POWER LINE CONDUCTED EMISSIONS.....	20
6.1	APPLICABLE STANDARDS.....	20
6.2	TEST SETUP.....	20
6.3	TEST PROCEDURE.....	20
6.4	TEST SETUP BLOCK DIAGRAM.....	21
6.5	CORRECTED AMPLITUDE AND MARGIN CALCULATION.....	21
6.6	TEST EQUIPMENT LIST AND DETAILS.....	22
6.7	TEST ENVIRONMENTAL CONDITIONS.....	22
6.8	SUMMARY OF TEST RESULTS.....	22
6.9	CONDUCTED EMISSIONS TEST PLOTS AND DATA.....	23
7	FCC §15.209, §15.407(B) & ISEDC RSS-247 §6.2 - SPURIOUS RADIATED EMISSIONS.....	25
7.1	APPLICABLE STANDARD.....	25
7.2	TEST SETUP.....	27
7.3	TEST PROCEDURE.....	27
7.4	CORRECTED AMPLITUDE AND MARGIN CALCULATION.....	27
7.5	TEST EQUIPMENT LIST AND DETAILS.....	28
7.6	TEST ENVIRONMENTAL CONDITIONS.....	28
7.7	SUMMARY OF TEST RESULTS.....	28
7.8	RADIATED EMISSIONS TEST RESULT DATA.....	29
8	FCC §15.407(E) & ISEDC RSS-247 §6.2 - 6 DB, 26 DB, AND 99% OCCUPIED BANDWIDTH.....	36

8.1	APPLICABLE STANDARDS	36
8.2	MEASUREMENT PROCEDURE	36
8.3	TEST EQUIPMENT LIST AND DETAILS	36
8.4	TEST ENVIRONMENTAL CONDITIONS	36
8.5	TEST RESULTS	36
9	FCC §407(A) & ISEDC RSS-247 §6.2 - OUTPUT POWER.....	84
9.1	APPLICABLE STANDARDS	84
9.2	MEASUREMENT PROCEDURE	84
9.3	TEST EQUIPMENT LIST AND DETAILS	85
9.4	TEST ENVIRONMENTAL CONDITIONS	85
9.5	TEST RESULTS	86
10	FCC §15.407(A) & ISEDC RSS-247 §6.2 - POWER SPECTRAL DENSITY	89
10.1	APPLICABLE STANDARDS	89
10.2	MEASUREMENT PROCEDURE	89
10.3	TEST EQUIPMENT LIST AND DETAILS	90
10.4	TEST ENVIRONMENTAL CONDITIONS	90
10.5	TEST RESULTS	91
11	FCC §15.407(B) & ISEDC RSS-247 §6.2 - BAND EDGE.....	114
11.1	APPLICABLE STANDARDS	114
11.2	MEASUREMENT PROCEDURE	115
11.3	TEST EQUIPMENT LIST AND DETAILS	115
11.4	TEST ENVIRONMENTAL CONDITIONS	115
11.5	TEST RESULTS	115
12	ANNEX A (INFORMATIVE) - A2LA ELECTRICAL TESTING CERTIFICATE	126

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1706262-407	Original Report	2017-08-08

1 General Description

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Roku, Inc.*, and their product model: *3810X*, FCC ID: TC2-R1018, IC: 5959A-R1018 or the “EUT” as referred to in this report.

1.2 Objective

This report is prepared on behalf of *Roku, Inc* in accordance with FCC CFR47 §15.407 and ISEDC RSS-247 Issue 2, February2017.

The objective is to determine compliance with FCC Part 15.407 and ISEDC RSS-247 rules for Output Power, Antenna Requirements, AC Line Conducted Emissions, Emission Bandwidth, Power spectral density, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment DTS with FCC ID: TC2-R1018, IC: 5959A-R1018 Report: R1706262-247
FCC Part 15, Subpart E, Equipment NII with FCC ID: TC2-RCB14, IC: 5959A-RCB14 Report: R1706263-407
FCC Part 15, Subpart C, Equipment DTS with FCC ID: TC2-RCB14, IC: 5959A-RCB14 report: R1706263-247

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz, and FCC KDB 789033 D02 General UNII Test Procedure New Rules v01r04.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices,

Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2 All Scope 2-Licensed Personal Mobile Radio Services;
 - 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
 - 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
 - 5 All Scope 5-Licensed Fixed Microwave Radio Services
 - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes and Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)

- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - IC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2004/108/EC US-EU EMC and Telecom MRA CAB
 - o Radio and Teleterminal Equipment (RandTTE) Directive 1995/5/EC US -EU EMC and Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

2 EUT Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test firmware used was Putty provided by *Roku, Inc.*, the software is comply with the standard requirements being tested against.

Please refer to the following power setting table.

Modulation	Channel	Frequency (MHz)	Power Setting
802.11a mode	36	5180	63
	40	5200	63
	48	5240	63
	149	5745	63
	157	5785	63
	165	5825	63
802.11n20 mode	36	5180	63
	40	5200	63
	48	5240	63
	149	5745	63
	157	5785	63
	165	5825	63
802.11ac20 mode	36	5180	63
	40	5200	63
	48	5240	63
	149	5745	63
	157	5785	63
	165	5825	63

*Data rates tested:
 802.11a mode: 6Mbps
 802.11n HT20: MCS0
 802.11ac VHT20: MCS0

2.3 Duty Cycle Correction Factor

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04 section B:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x , and maximum-power transmission duration, T , are required for each tested mode of operation.


Radio Mode	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11a	100	0
802.11n20	100	0
802.11ac20	100	0

Note: Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$


Please refer to the following plots.

Ant 0


802.11a mode

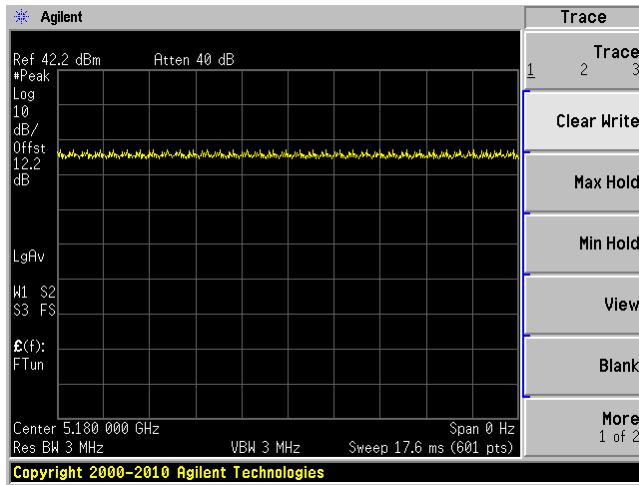


802.11n20 mode

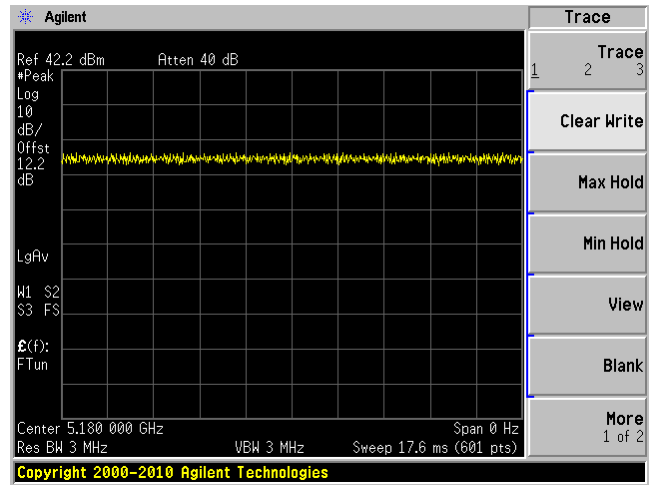


802.11n20 mode MIMO

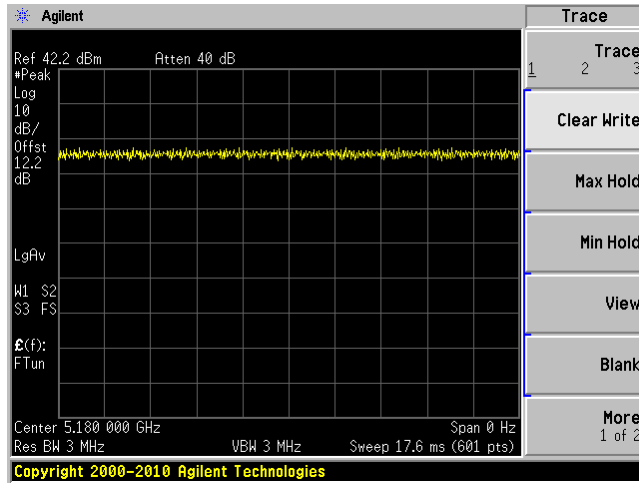

802.11ac20 mode

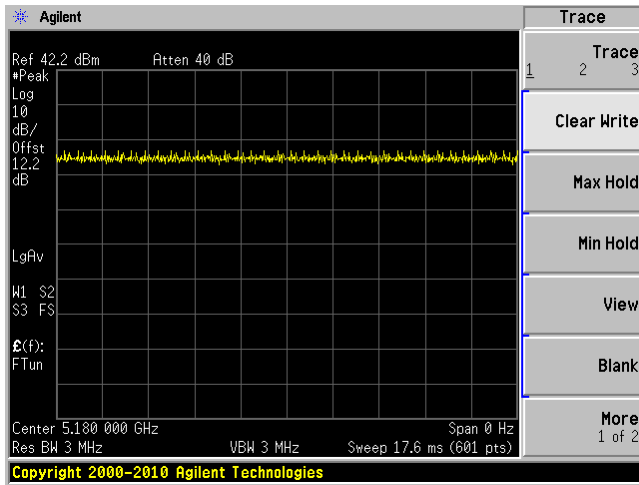


802.11ac20 mode MIMO

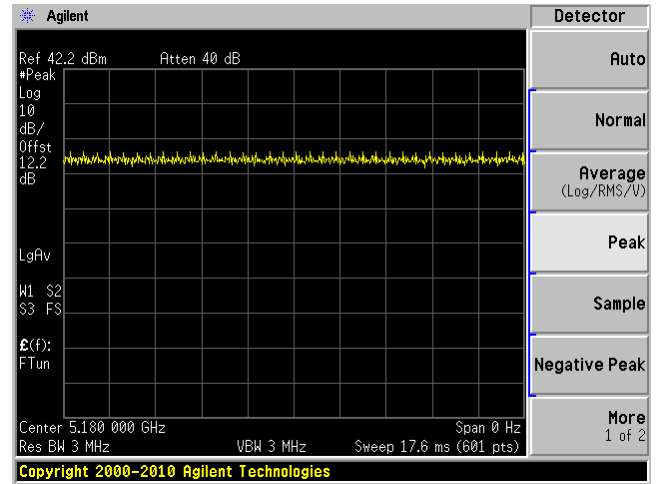


Ant 1


802.11a mode

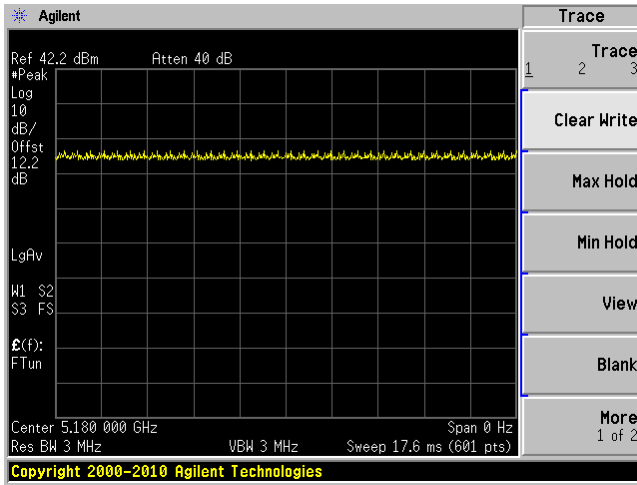

802.11n20 mode


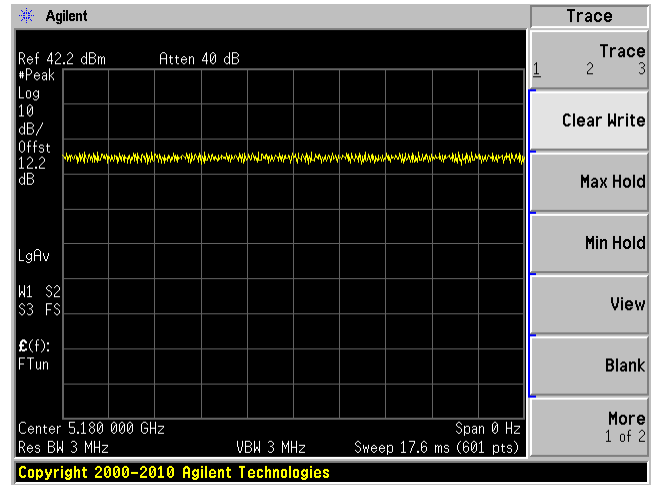


802.11n20 mode MIMO

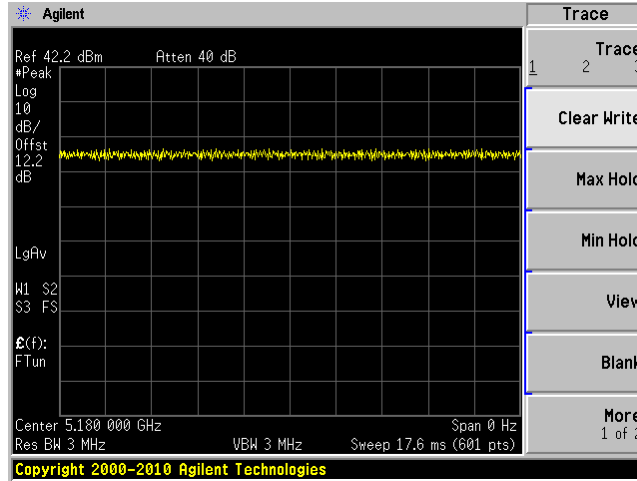

802.11ac20 mode

802.11ac20 mode MIMO

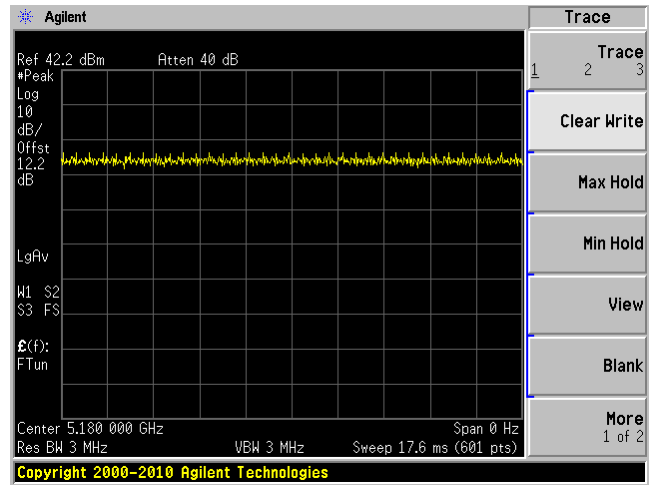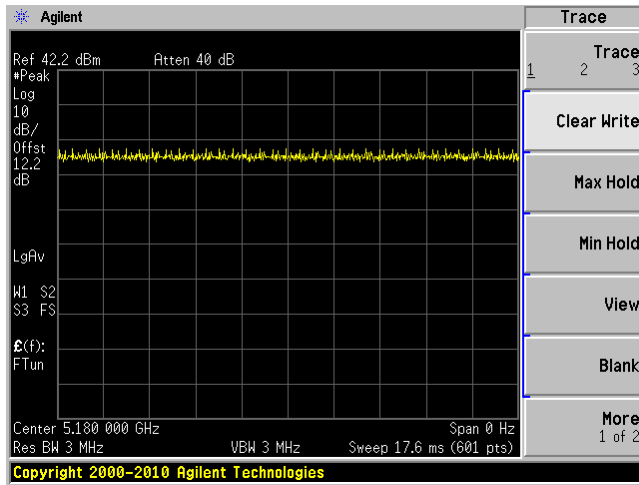

2.4 Equipment Modifications

No equipment modifications were made to EUT.

2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E6410

2.6 Support Equipment

Manufacturer	Description	Model
Roku	Debug Board	Unknown

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB 2.0 A-Male to B-Male	2 m	Laptop	EUT
RF Cable	< 1 m	EUT	PSA
Roku Switching (DC) Adapter	< 2 m	EUT	Power Outlet

3 Summary of Test Results

FCC and ISEDC Rules	Description of Test	Result
FCC §2.1091, §15.407(f), ISEDC RSS-102	RF Exposure	Compliant
FCC §15.203 ISEDC RSS-Gen §8.3	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Power Line Conducted Emissions	Compliant
FCC §2.1053, §15.205, §15.209, 15.407(b) ISEDC RSS-247 §6.2	Spurious Radiated Emissions	Compliant
FCC §15.407(e) ISEDC RSS-Gen §6.2	Emission Bandwidth	Compliant
FCC §407(a) ISEDC RSS-247 §6.2	Output Power	Compliant
FCC §2.1051, §15.407(b) ISEDC RSS-247 §6.2	Band Edges	Compliant
FCC §15.407(a) ISEDC RSS-247 §6.2	Power Spectral Density	Compliant

4 FCC §2.1091, §15.407(f) & ISEDC RSS-102 - RF Exposure

4.1 Applicable Standard

According to FCC §15.407(f) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

According to IC RSS-102 Issue 5:

2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

W52 Band:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>18.27</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>67.14</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>5180</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>0.7</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.17</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0156</u>
<u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0156 mW/cm². Limit is 1.0 mW/cm².

W58 Band:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>19.22</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>83.56</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>5745</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.8</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.91</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0318</u>
<u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0318 mW/cm². Limit is 1.0 mW/cm².

4.4 RF exposure evaluation exemption for ISEDC

W52: 18.27 + 0.7 dBi = 18.97 dBm < 1.31 × 10⁻² f^{0.6834} = 4.53 W = 36.56 dBm

W58: 19.22 + 2.8 dBi = 22.02 dBm < 1.31 × 10⁻² f^{0.6834} = 4.86 W = 36.86 dBm

Therefore the RF exposure is not required.

5 FCC §15.203 & ISEDC RSS-Gen §8.3 - Antenna Requirements

5.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the license-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

License-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotopically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the license-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of license-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. ⁹ When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

5.2 Antenna List

The antennas used by the EUT are permanent attached antennas.

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Wi-Fi	2400-2500	-0.6
Wi-Fi	5150-5250	0.7
Wi-Fi	5725-5850	2.8

6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Power Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS GEN §8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 limits and and ISEDC RSS GEN §8.8.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.


6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.4 Test Setup Block Diagram

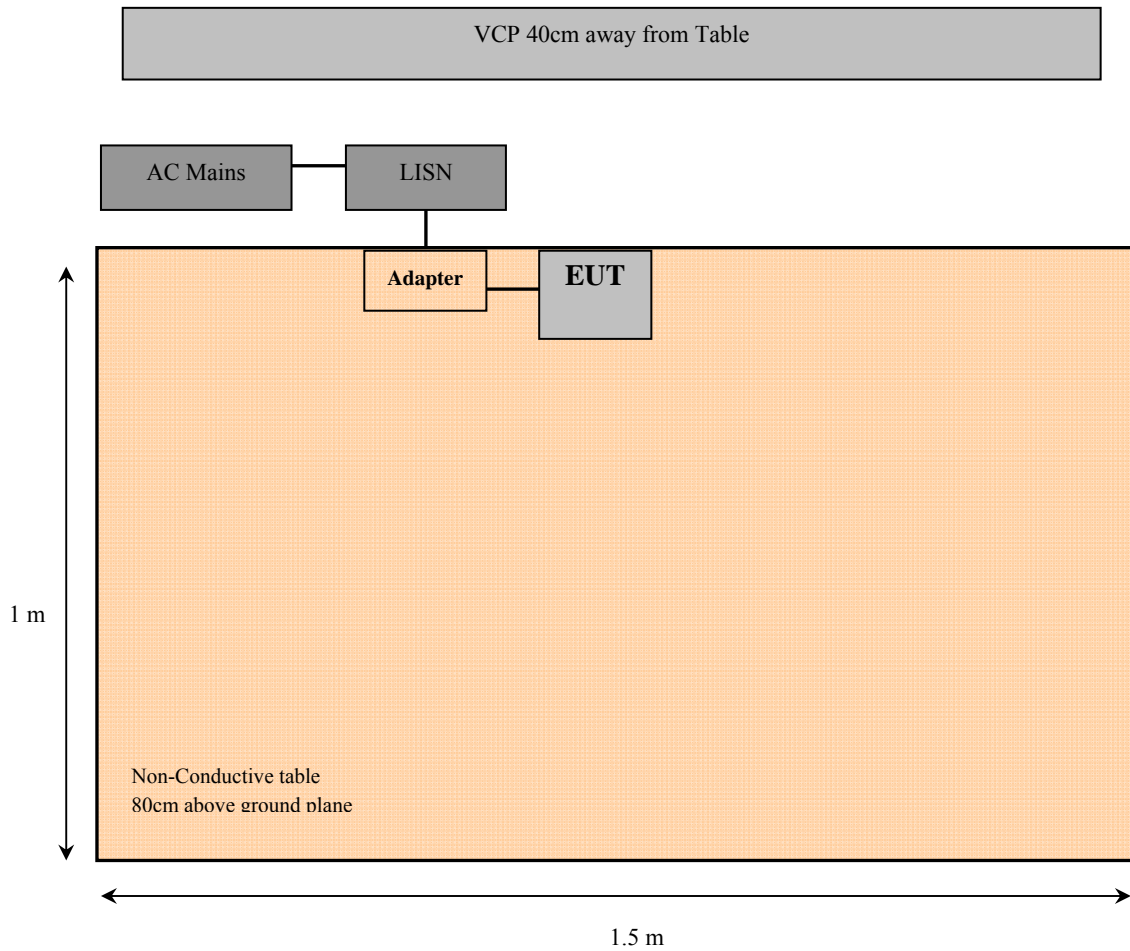

6.5 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + CL + Atten$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2017-07-25	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2017-01-12	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2017-03-13	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2017-04-24	1 year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.7 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	101.31 kPa

The testing was performed by Troy Pandhumsoporn on 2017-08-02 at test site.


6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Part 15 and RSS-Gen standards'conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-7.41	0.445703	Line	0.15-0.5

6.9 Conducted Emissions Test Plots and Data

120 V, 60 Hz – Line

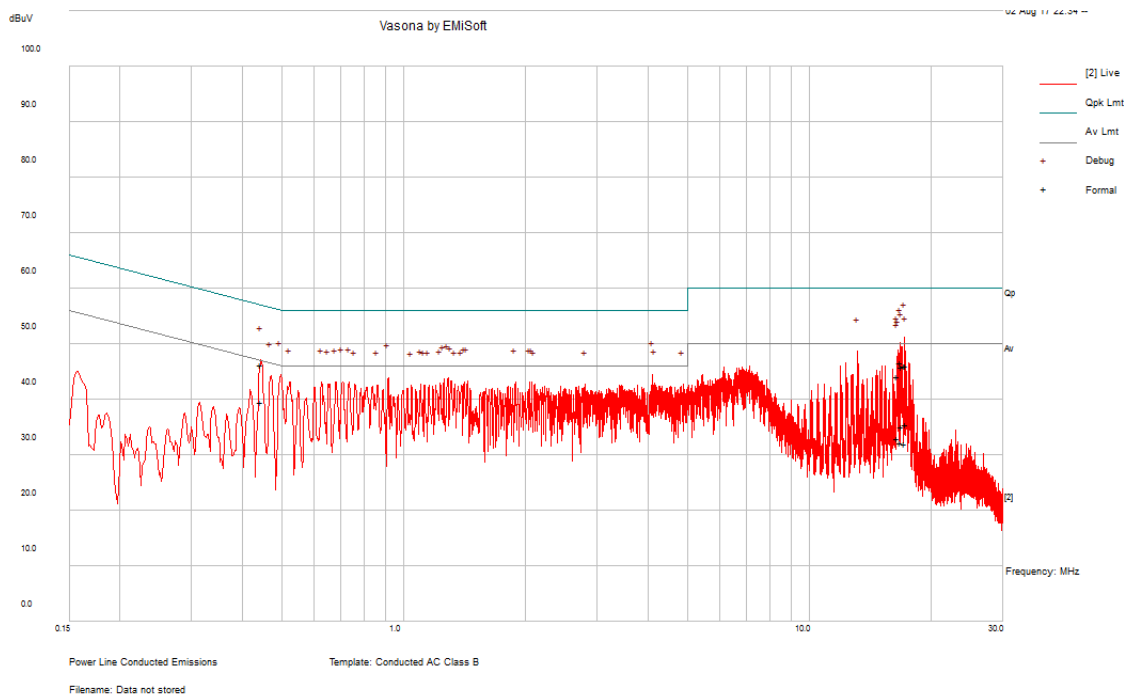


Note: testing was prefomed at worst case.

Frequency (MHz)	Corrected Amplitude (dBµV)	Conductor (Line/Neutral)	Limit (dBµV)	Margin (dB)	Detector (QP/Ave.)
17.14413	46.02	Line	60	-13.98	QP
16.76975	46.72	Line	60	-13.28	QP
0.445703	46.21	Line	56.95	-10.75	QP
16.87339	45.85	Line	60	-14.15	QP
16.5008	44.17	Line	60	-15.83	QP
17.24976	46.07	Line	60	-13.93	QP

Frequency (MHz)	Corrected Amplitude (dBµV)	Conductor (Line/Neutral)	Limit (dBµV)	Margin (dB)	Detector (QP/Ave.)
17.14413	32.13	Line	50	-17.87	Ave.
16.76975	32.29	Line	50	-17.71	Ave.
0.445703	39.55	Line	46.95	-7.41	Ave.
16.87339	35.2	Line	50	-14.8	Ave.
16.5008	32.98	Line	50	-17.02	Ave.
17.24976	35.54	Line	50	-14.46	Ave.

120 V, 60 Hz – Neutral

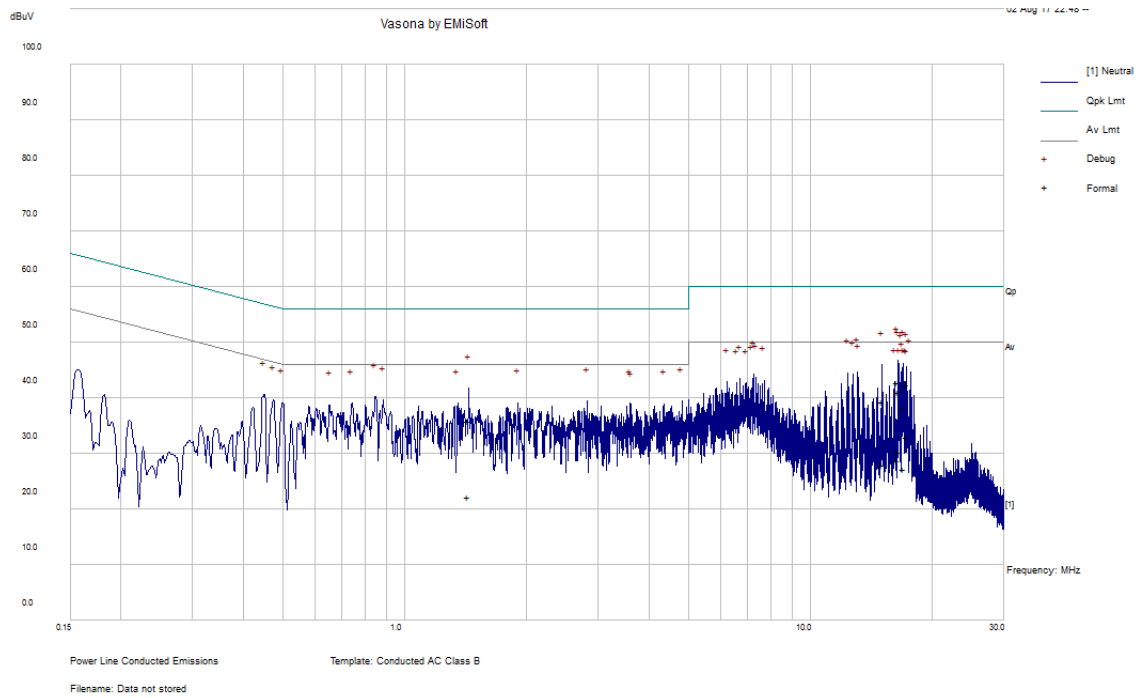

Frequency (MHz)	Corrected Amplitude (dBµV)	Conductor (Line/Neutral)	Limit (dBµV)	Margin (dB)	Detector (QP/Ave.)
16.39889	42.86	Neutral	60	-17.14	QP
16.50328	41.16	Neutral	60	-18.84	QP
16.95618	38.23	Neutral	60	-21.77	QP
15.00072	39.45	Neutral	60	-20.55	QP
1.430727	35.82	Neutral	56	-20.18	QP
17.25411	42.43	Neutral	60	-17.57	QP

Frequency (MHz)	Corrected Amplitude (dBµV)	Conductor (Line/Neutral)	Limit (dBµV)	Margin (dB)	Detector (QP/Ave.)
16.39889	28.83	Neutral	50	-21.17	Ave.
16.50328	30.35	Neutral	50	-19.65	Ave.
16.95618	27.16	Neutral	50	-22.84	Ave.
15.00072	27.94	Neutral	50	-22.06	Ave.
1.430727	22.26	Neutral	46	-23.74	Ave.
17.25411	32.96	Neutral	50	-17.04	Ave.

7 FCC §15.209, §15.407(b) & ISEDC RSS-247 §6.2 - Spurious Radiated Emissions

7.1 Applicable Standard

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209: The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 Note 1	3
88 - 216	150 Note 1	3
216 - 960	200 Note 1	3
Above 960	500	3

Note 1: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC Part 15.407 (b)

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

As per ISEDC RSS-247 §6.2

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250- 5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:

1. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
2. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled "for indoor use only."

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p. For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15.407 and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter or 1.5 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100ms
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit for Class A. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2015-07-11	25 months
EMCO	Antenna, Horn	3115	9511-4627	2016-01-28	2 years
Agilent	Pre-Amplifier	8447D	2944A06639	2017-06-15	1 year
IW	AOBOR Hi frequency Co AX Cable	DC 1531	KPS- 1501A3960KPS	2016-08-05	1 year
-	SMA cable	-	C0002	Each time ¹	N/A
-	N-Type Cable	-	C00012	Each time ¹	N/A
-	N-Type Cable	-	C00014	Each time ¹	N/A
Agilent	Pre-Amplifier	8449B	3147A00400	2017-06-15	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
A.R.A.	Antenna, Horn	DRG-118/A	1132	2015-09-21	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cables and attenuators included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

7.6 Test Environmental Conditions

Temperature:	22-24 °C
Relative Humidity:	40-41 %
ATM Pressure:	103.1-104.1 kPa

The testing was performed by Frank Wang and Troy Pandhumsoporn on 2017-07-26 to 2017-08-03 at 5m chamber 3.


7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.407 and RSS-247 standards' radiated emissions limits, and had the worst margin of:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, Channel
-0.18	11490	Horizontal	a mode, low channel 5745MHz

7.8 Radiated Emissions Test Result Data

1) 30 MHz – 1 GHz Worst Case

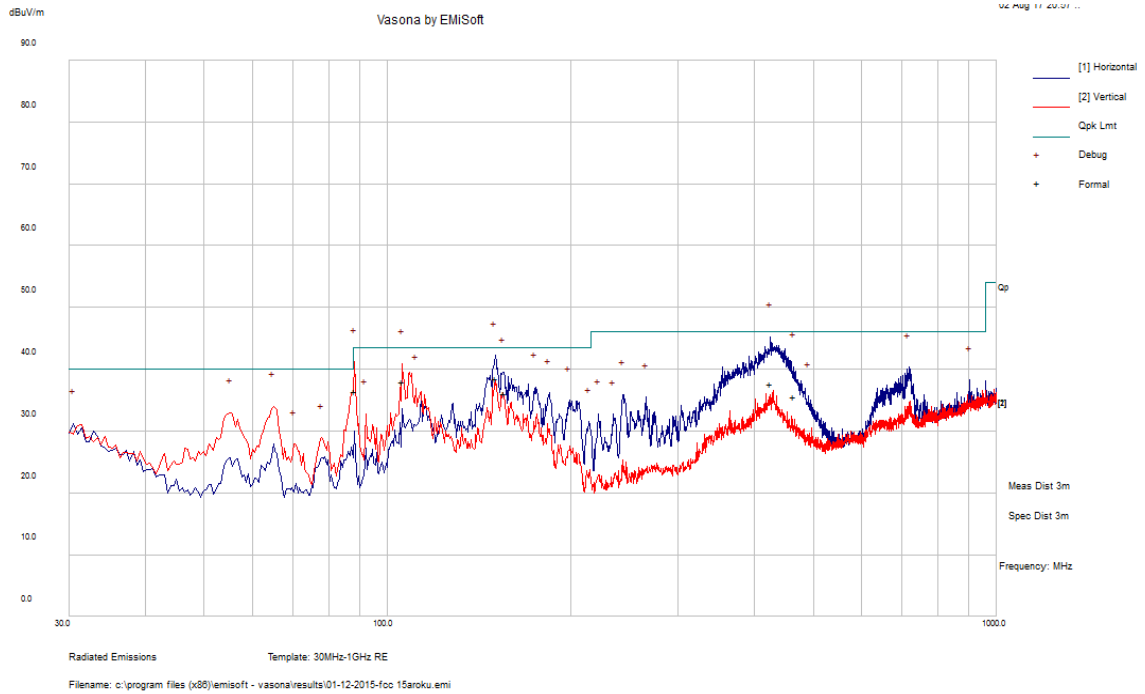

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comments (PK/QP/Ave.)
425.4218	37.65	289	H	43	46	-8.35	QP
150.322	38.54	184	H	137	43.5	-4.96	QP
88.44275	36.39	120	V	329	43.5	-7.11	QP
105.766	38.03	105	V	273	43.5	-5.47	QP
155.3755	36.18	235	H	124	43.5	-7.32	QP
463.9105	35.57	203	H	359	46	-10.43	QP

Note 1: Only six emissions were present because all of the other emissions were 20 dB below the limit.

2) 1-40 GHz

After the pre-scan, the worst case for each mode has been selected for the formal tested as below,

5150 - 5250 MHz

802.11a mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5180 MHz											
5180	68.45	140	118	H	33.61	6.88	0.00	108.94	-	-	PK
5180	58.60	140	118	H	33.61	6.88	0.00	99.09	-	-	AV
5180	61.06	245	287	V	33.61	6.88	0.00	101.55	-	-	PK
5180	50.55	245	287	V	33.61	6.88	0.00	91.04	-	-	AV
5150	66.83	140	100	H	33.61	6.45	38.54	68.35	74.00	-5.65	PK
5150	49.46	140	100	H	33.61	6.45	38.54	50.98	54.00	-3.02	AV
5150	59.89	246	100	V	33.61	6.45	38.54	61.41	74.00	-12.59	PK
5150	42.48	246	100	V	33.61	6.45	38.54	44.00	54.00	-10.00	AV
10360	49.84	235	100	H	38.25	14.04	38.33	63.80	68.20	-4.40	PK
10360	37.27	235	100	H	38.25	14.04	38.33	51.23	54.00	-2.77	AV
15540	38.20	0	100	H	39.41	14.47	36.99	55.09	68.20	-13.11	PK
15540	23.82	0	100	H	39.41	14.47	36.99	40.71	54.00	-13.29	AV
Middle Channel 5200 MHz											
5200	68.15	333	100	H	33.61	6.88	0.00	108.64	-	-	PK
5200	57.00	333	100	H	33.61	6.88	0.00	97.49	-	-	AV
5200	62.17	270	255	V	33.61	6.88	0.00	102.66	-	-	PK
5200	50.25	270	255	V	33.61	6.88	0.00	90.74	-	-	AV
10400	50.19	0	300	H	38.25	14.24	38.21	64.47	68.20	-3.73	PK
10400	36.18	0	300	H	38.25	14.24	38.21	50.46	54.00	-3.54	AV
15600	39.48	0	100	H	39.41	14.87	36.99	56.77	68.20	-11.43	PK
15600	25.46	0	100	H	39.41	14.87	36.99	42.75	54.00	-11.25	AV
High Channel 5240 MHz											
5240	66.68	320	148	H	33.61	7.35	0.00	107.64	-	-	PK
5240	56.12	320	148	H	33.61	7.35	0.00	97.08	-	-	AV
5240	59.78	109	148	V	33.61	7.35	0.00	100.74	-	-	PK
5240	48.50	109	148	V	33.61	7.35	0.00	89.46	-	-	AV
10480	49.73	353	100	H	38.33	14.24	38.21	64.09	68.20	-4.11	PK
10480	34.22	353	100	H	38.33	14.24	38.21	48.58	54.00	-5.42	AV
15720	40.27	0	100	H	38.91	14.87	38.99	55.06	68.20	-13.14	PK
15720	26.35	0	100	H	38.91	14.87	38.99	41.14	54.00	-12.86	AV

802.11 n20 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5180 MHz											
5180	67.36	236	100	H	33.61	6.88	0.00	107.85	-	-	PK
5180	56.38	236	100	H	33.61	6.88	0.00	96.87	-	-	AV
5180	63.92	243	300	V	33.61	6.88	0.00	104.41	-	-	PK
5180	53.96	243	300	V	33.61	6.88	0.00	94.45	-	-	AV
5150	59.00	157	276	H	33.61	6.45	38.54	60.52	74.00	-13.48	PK
5150	39.85	157	276	H	33.61	6.45	38.54	41.37	54.00	-12.63	AV
5150	56.78	244	300	V	33.61	6.45	38.54	58.30	74.00	-15.70	PK
5150	39.34	244	300	V	33.61	6.45	38.54	40.86	54.00	-13.14	AV
10360	46.66	0	123	H	38.25	14.04	38.33	60.62	68.20	-7.58	PK
10360	30.67	0	123	H	38.25	14.04	38.33	44.63	54.00	-9.37	AV
15540	40.56	0	100	H	39.41	14.47	36.99	57.45	68.20	-10.75	PK
15540	24.07	0	100	H	39.41	14.47	36.99	40.96	54.00	-13.04	AV
Middle Channel 5200 MHz											
5200	67.57	244	100	H	33.61	6.88	0.00	108.06	-	-	PK
5200	56.58	244	100	H	33.61	6.88	0.00	97.07	-	-	AV
5200	64.11	275	282	V	33.61	6.88	0.00	104.60	-	-	PK
5200	53.96	275	282	V	33.61	6.88	0.00	94.45	-	-	AV
10400	46.86	0	300	H	38.25	14.24	38.21	61.14	68.20	-7.06	PK
10400	31.13	0	300	H	38.25	14.24	38.21	45.41	54.00	-8.59	AV
15600	40.04	0	100	H	39.41	14.87	36.99	57.33	68.20	-10.87	PK
15600	24.85	0	100	H	39.41	14.87	36.99	42.14	54.00	-11.86	AV
High Channel 5240 MHz											
5240	66.69	319	100	H	33.61	7.35	0.00	107.65	-	-	PK
5240	56.21	319	100	H	33.61	7.35	0.00	97.17	-	-	AV
5240	63.23	274	105	V	33.61	7.35	0.00	104.19	-	-	PK
5240	52.06	274	105	V	33.61	7.35	0.00	93.02	-	-	AV
10480	46.68	0	100	H	38.33	14.24	38.21	61.04	68.20	-7.16	PK
10480	30.23	0	100	H	38.33	14.24	38.21	44.59	54.00	-9.41	AV
15720	39.56	0	100	H	38.91	14.87	38.99	54.35	68.20	-13.85	PK
15720	24.50	0	100	H	38.91	14.87	38.99	39.29	54.00	-14.71	AV

802.11ac20 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5180 MHz											
5180	68.03	240	100	H	33.61	6.88	0.00	108.52	-	-	PK
5180	57.81	240	100	H	33.61	6.88	0.00	98.30	-	-	AV
5180	62.85	287	100	V	33.61	6.88	0.00	103.34	-	-	PK
5180	47.54	287	100	V	33.61	6.88	0.00	88.03	-	-	AV
5150	58.73	331	300	H	33.61	6.45	38.54	60.25	74.00	-13.75	PK
5150	42.45	331	300	H	33.61	6.45	38.54	43.97	54.00	-10.03	AV
5150	53.00	100	247	V	33.61	6.45	38.54	54.52	74.00	-19.48	PK
5150	35.59	100	247	V	33.61	6.45	38.54	37.11	54.00	-16.89	AV
10360	45.51	0	100	H	38.25	14.04	38.33	59.47	68.20	-8.73	PK
10360	30.34	0	100	H	38.25	14.04	38.33	44.30	54.00	-9.70	AV
15540	41.50	0	100	H	39.41	14.47	36.99	58.39	68.20	-9.81	PK
15540	25.01	0	100	H	39.41	14.47	36.99	41.90	54.00	-12.10	AV
Middle Channel 5200 MHz											
5200	67.42	234	186	H	33.61	6.88	0.00	107.91	-	-	PK
5200	56.32	234	186	H	33.61	6.88	0.00	96.81	-	-	AV
5200	61.40	124	269	V	33.61	6.88	0.00	101.89	-	-	PK
5200	51.02	124	269	V	33.61	6.88	0.00	91.51	-	-	AV
10400	45.79	0	100	H	38.25	14.24	38.21	60.07	68.20	-8.13	PK
10400	30.50	0	100	H	38.25	14.24	38.21	44.78	54.00	-9.22	AV
15600	40.22	0	100	H	39.41	14.87	36.99	57.51	68.20	-10.69	PK
15600	24.86	0	100	H	39.41	14.87	36.99	42.15	54.00	-11.85	AV
High Channel 5240 MHz											
5240	66.28	320	100	H	33.61	7.35	0.00	107.24	-	-	PK
5240	55.33	320	100	H	33.61	7.35	0.00	96.29	-	-	AV
5240	62.81	276	100	V	33.61	7.35	0.00	103.77	-	-	PK
5240	49.51	276	100	V	33.61	7.35	0.00	90.47	-	-	AV
10480	46.25	0	100	H	38.33	14.24	38.21	60.61	68.20	-7.59	PK
10480	30.80	0	100	H	38.33	14.24	38.21	45.16	54.00	-8.84	AV
15720	40.19	0	100	H	38.91	14.87	38.99	54.98	68.20	-13.22	PK
15720	27.89	0	100	H	38.91	14.87	38.99	42.68	54.00	-11.32	AV

5725 - 5850 MHz

802.11a mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5745 MHz											
5745	67.75	17	100	H	33.89	8.87	0.00	110.51	-	-	PK
5745	58.11	17	100	H	33.89	8.87	0.00	100.87	-	-	AV
5745	61.89	323	100	V	33.89	8.87	0.00	104.65	-	-	PK
5745	51.72	323	100	V	33.89	8.87	0.00	94.48	-	-	AV
5700	49.70	16	105	H	33.89	8.87	36.16	56.30	68.20	-11.90	PK
5700	45.08	322	295	V	33.89	8.87	36.16	51.68	68.20	-16.52	PK
5720	65.10	16	105	H	33.89	8.87	36.16	71.70	105.20	-33.50	PK
5720	59.03	322	295	V	33.89	8.87	36.16	65.63	105.20	-39.57	PK
5725	76.07	16	105	H	33.89	8.87	36.16	82.67	110.80	-28.13	PK
5725	69.96	322	295	V	33.89	8.87	36.16	76.56	110.80	-34.24	PK
11490	49.95	355	100	H	38.96	17.14	37.80	68.25	74.00	-5.75	PK
11490	35.52	355	100	H	38.96	17.14	37.80	53.82	54.00	-0.18	AV
Middle Channel 5785 MHz											
5785	66.96	33	100	H	33.86	8.88	0.00	109.70	-	-	PK
5785	56.25	33	100	H	33.86	8.88	0.00	98.99	-	-	AV
5785	62.59	328	268	V	33.86	8.88	0.00	105.33	-	-	PK
5785	52.93	328	268	V	33.86	8.88	0.00	95.67	-	-	AV
11570	47.32	0	100	H	39.10	16.99	37.80	65.61	74.00	-8.39	PK
11570	32.04	0	100	H	39.10	16.99	37.80	50.33	54.00	-3.67	AV
High Channel 5825 MHz											
5825	67.84	34	100	H	33.86	8.88	0.00	110.58	-	-	PK
5825	57.54	34	100	H	33.86	8.88	0.00	100.28	-	-	AV
5825	64.84	76	297	V	33.86	8.88	0.00	107.58	-	-	PK
5825	55.17	76	297	V	33.86	8.88	0.00	97.91	-	-	AV
5850	67.02	34	100	H	34.22	10.24	38.33	73.15	110.80	-37.65	PK
5850	59.60	335	263	V	34.22	10.24	38.33	65.73	110.80	-45.07	PK
5855	65.38	34	100	H	34.22	10.24	38.33	71.51	105.20	-33.69	PK
5855	59.47	335	263	V	34.22	10.24	38.33	65.60	105.20	-39.60	PK
5875	53.55	34	100	H	34.22	10.24	38.33	59.68	68.20	-8.52	PK
5875	47.60	335	263	V	34.22	10.24	38.33	53.73	68.20	-14.47	PK
11650	45.75	0	100	H	39.33	16.06	37.80	63.34	74.00	-10.66	PK
11650	30.94	0	100	H	39.33	16.06	37.80	48.53	54.00	-5.47	AV

802.11n20 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5745 MHz											
5745	63.48	61	100	H	33.89	8.87	0.00	106.24	-	-	PK
5745	54.87	61	100	H	33.89	8.87	0.00	97.63	-	-	AV
5745	59.25	259	125	V	33.89	8.87	0.00	102.01	-	-	PK
5745	51.60	259	125	V	33.89	8.87	0.00	94.36	-	-	AV
5700	43.98	123	277	H	33.89	8.87	36.16	50.58	68.20	-17.62	PK
5700	43.86	64	253	V	33.89	8.87	36.16	50.46	68.20	-17.74	PK
5720	54.78	123	277	H	33.89	8.87	36.16	61.38	105.20	-43.82	PK
5720	55.37	64	253	V	33.89	8.87	36.16	61.97	105.20	-43.23	PK
5725	71.69	123	277	H	33.89	8.87	36.16	78.29	110.80	-32.51	PK
5725	70.87	64	253	V	33.89	8.87	36.16	77.47	110.80	-33.33	PK
11490	48.91	347	112	H	38.96	17.14	37.80	67.21	74.00	-6.79	PK
11490	35.09	347	112	H	38.96	17.14	37.80	53.39	54.00	-0.61	AV
Middle Channel 5785 MHz											
5785	55.54	16	148	H	33.86	8.88	0.00	98.28	-	-	PK
5785	47.11	16	148	H	33.86	8.88	0.00	89.85	-	-	AV
5785	49.37	151	100	V	33.86	8.88	0.00	92.11	-	-	PK
5785	40.78	151	100	V	33.86	8.88	0.00	83.52	-	-	AV
11570	45.25	0	100	H	39.10	16.99	37.80	63.54	74.00	-10.46	PK
11570	32.52	0	100	H	39.10	16.99	37.80	50.81	54.00	-3.19	AV
High Channel 5825 MHz											
5825	64.24	134	300	H	33.86	8.88	0.00	106.98	-	-	PK
5825	55.58	134	300	H	33.86	8.88	0.00	98.32	-	-	AV
5825	61.88	84	244	V	33.86	8.88	0.00	104.62	-	-	PK
5825	52.86	84	244	V	33.86	8.88	0.00	95.60	-	-	AV
5850	63.20	29	251	H	34.22	10.24	38.33	69.33	110.80	-41.47	PK
5850	57.07	326	244	V	34.22	10.24	38.33	63.20	110.80	-47.60	PK
5855	54.72	29	251	H	34.22	10.24	38.33	60.85	105.20	-44.35	PK
5855	49.10	326	244	V	34.22	10.24	38.33	55.23	105.20	-49.97	PK
5875	45.19	29	251	H	34.22	10.24	38.33	51.32	68.20	-16.88	PK
5875	44.19	326	244	V	34.22	10.24	38.33	50.32	68.20	-17.88	PK
11650	51.56	155	221	H	39.33	16.06	37.80	69.15	74.00	-4.85	PK
11650	35.05	155	221	H	39.33	16.06	37.80	52.64	54.00	-1.36	AV

802.11ac20 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5745 MHz											
5745	63.99	55	100	H	33.89	8.87	0.00	106.75	-	-	PK
5745	53.16	55	100	H	33.89	8.87	0.00	95.92	-	-	AV
5745	57.96	262	100	V	33.89	8.87	0.00	100.72	-	-	PK
5745	47.11	262	100	V	33.89	8.87	0.00	89.87	-	-	AV
5700	45.39	14	100	H	33.89	8.87	36.16	51.99	68.20	-16.21	PK
5700	44.12	51	250	V	33.89	8.87	36.16	50.72	68.20	-17.48	PK
5720	72.49	14	100	H	33.89	8.87	36.16	79.09	105.20	-26.11	PK
5720	68.53	51	250	V	33.89	8.87	36.16	75.13	105.20	-30.07	PK
5725	75.48	14	100	H	33.89	8.87	36.16	82.08	110.80	-28.72	PK
5725	70.80	51	250	V	33.89	8.87	36.16	77.40	110.80	-33.40	PK
11490	42.69	0	100	H	38.96	17.14	37.80	60.99	74.00	-13.01	PK
11490	26.72	0	100	H	38.96	17.14	37.80	45.02	54.00	-8.98	AV
Middle Channel 5785 MHz											
5785	64.43	41	100	H	33.86	8.88	0.00	107.17	-	-	PK
5785	52.77	41	100	H	33.86	8.88	0.00	95.51	-	-	AV
5785	59.69	287	263	V	33.86	8.88	0.00	102.43	-	-	PK
5785	48.78	287	263	V	33.86	8.88	0.00	91.52	-	-	AV
11570	43.72	0	100	H	39.10	16.99	37.80	62.01	74.00	-11.99	PK
11570	28.71	0	100	H	39.10	16.99	37.80	47.00	54.00	-7.00	AV
High Channel 5825 MHz											
5825	65.62	225	111	H	33.86	8.88	0.00	108.36	-	-	PK
5825	55.67	225	111	H	33.86	8.88	0.00	98.41	-	-	AV
5825	59.96	103	284	V	33.86	8.88	0.00	102.70	-	-	PK
5825	49.41	103	284	V	33.86	8.88	0.00	92.15	-	-	AV
5850	62.60	110	311	H	34.22	10.24	38.33	68.73	110.80	-42.07	PK
5850	58.63	103	284	V	34.22	10.24	38.33	64.76	110.80	-46.04	PK
5855	52.18	110	311	H	34.22	10.24	38.33	58.31	105.20	-46.89	PK
5855	48.22	103	284	V	34.22	10.24	38.33	54.35	105.20	-50.85	PK
5875	44.84	110	311	H	34.22	10.24	38.33	50.97	68.20	-17.23	PK
5875	44.17	103	284	V	34.22	10.24	38.33	50.30	68.20	-17.90	PK
11650	42.22	0	100	H	39.33	16.06	37.80	59.81	74.00	-14.19	PK
11650	28.17	0	100	H	39.33	16.06	37.80	45.76	54.00	-8.24	AV

Note 1: The worst-case modulations were used to show compliance.

Note 2: The emission over 12GHz is the noise floor.

8 FCC §15.407(e) & ISEDC RSS-247 §6.2 - 6 dB, 26 dB, and 99% Occupied Bandwidth

8.1 Applicable Standards

As per FCC §15.407(e) and ISEDC RSS-247 6.2.4(1): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 or 26 dB from the reference level. Record the frequency difference as the minimum emission or emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2017-06-08	26 months
-	10dB attenuator	-	-	Each time ¹	N/A
-	RF cable	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	22-24 °C
Relative Humidity:	40-41 %
ATM Pressure:	103.1-104.1 kPa

The testing was performed by Frank Wang and Troy Pandhumsoporn on 2017-07-26 to 2017-07-28, 2017-08-03 at RF site.

8.5 Test Results

Please refer to the following tables and plots.

5150 - 5250 MHz


Antenna Port	Channel	Frequency (MHz)	99% OBW (kHz)	26 dB OBW (kHz)
802.11 a mode				
0	36	5180	20500.4	44423
	40	5200	19813.5	43557
	48	5240	18495.2	42884
1	36	5180	16573.4	35096
	40	5200	16584.5	34038
	48	5240	16565.2	36730
802.11n20 mode				
0	36	5180	19564.5	47307
	40	5200	20280.0	47019
	48	5240	19013.8	45288
0 MIMO	36	5180	17735.9	45288
	40	5200	17793.5	45000
	48	5240	17767.5	45000
1	36	5180	17755.9	33269
	40	5200	17680.7	33942
	48	5240	17718.7	31538
1 MIMO	36	5180	17581.7	34807
	40	5200	17587.7	26827
	48	5240	17557.1	31346
802.11ac20 mode				
0	36	5180	19884.3	46538
	40	5200	19197.5	43750
	48	5240	19192.4	44519
0 MIMO	36	5180	17733.0	41346
	40	5200	17745.8	41153
	48	5240	17771.9	41057
1	36	5180	17652.2	36538
	40	5200	17665.6	34423
	48	5240	17653.1	37115
1 MIMO	36	5180	17609.0	29807
	40	5200	17601.6	28557
	48	5240	17575.9	33557

5725 - 5850 MHz


Antenna Port	Channel	Frequency (MHz)	99% OBW (kHz)	6 dB OBW (kHz)
802.11 a mode				
0	149	5745	21878.9	16464
	157	5785	22377.0	16513
	165	5825	22075.6	16530
1	149	5745	16724.9	16461
	157	5785	16798.5	16483
	165	5825	16801.0	16532
802.11n20 mode				
0	149	5745	22585.1	17701
	157	5785	22014.3	17758
	165	5825	23247.5	17733
0 MIMO	149	5745	21694.2	17745
	157	5785	20061.1	17742
	165	5825	20094.1	17761
1	149	5745	17774.2	17678
	157	5785	17770.0	17696
	165	5825	17807.0	17687
1 MIMO	149	5745	17839.7	17677
	157	5785	17745.8	17638
	165	5825	17731.7	17665
802.11ac20 mode				
0	149	5745	22139.4	17765
	157	5785	21933.1	17782
	165	5825	22118.5	17694
1 MIMO	149	5745	19157.1	17688
	157	5785	19606.9	17731
	165	5825	21115.2	17742
0	149	5745	17807.6	17692
	157	5785	17765.4	17668
	165	5825	17820.3	17684
1 MIMO	149	5745	17689.1	17664
	157	5785	17724.9	17657
	165	5825	17754.9	17673

99% Emission Bandwidth
5150 – 5250 MHz, Ant 0
802.11a mode


5180 MHz

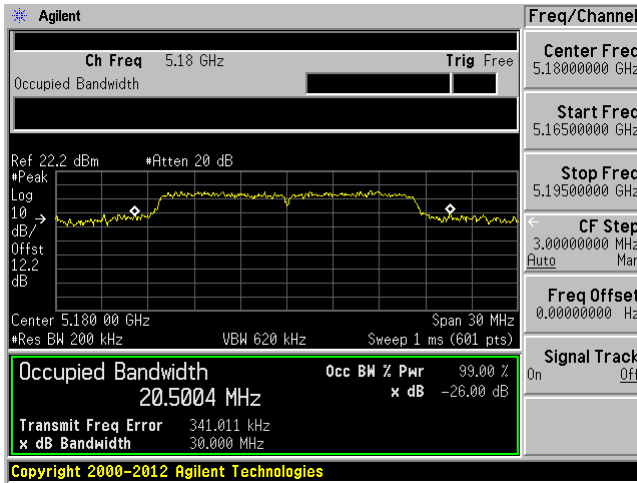

5200 MHz

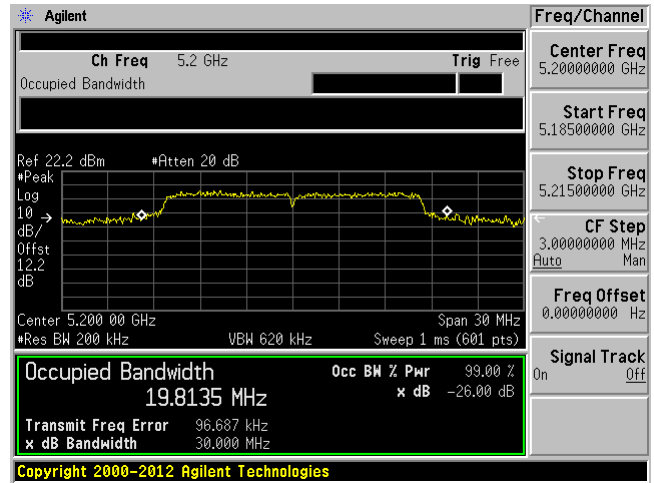

5240 MHz


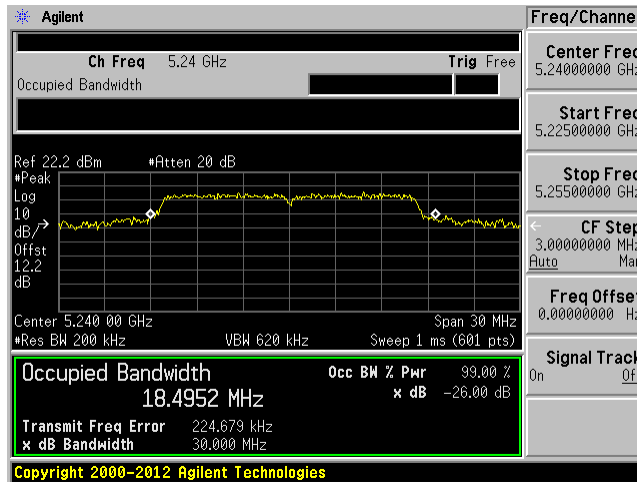


5150 – 5250 MHz, Ant 1


802.11a mode

5180 MHz

5200 MHz

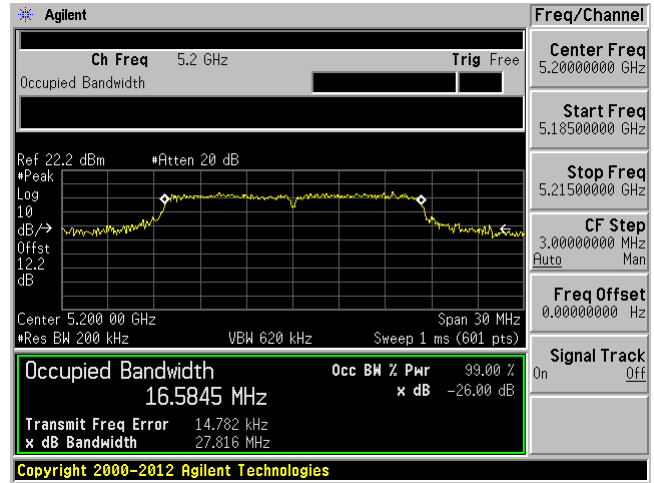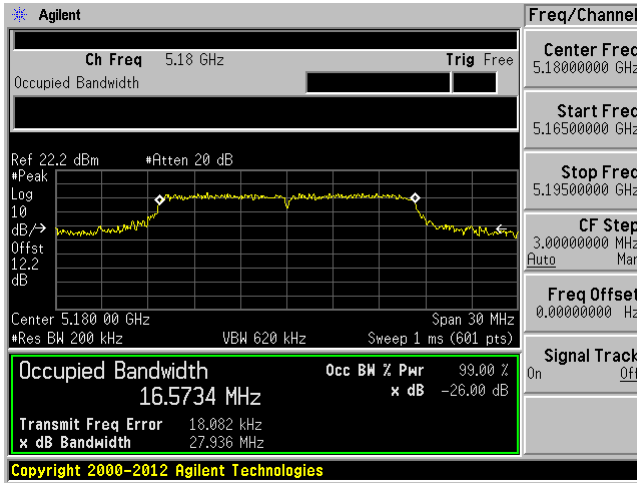

5240 MHz


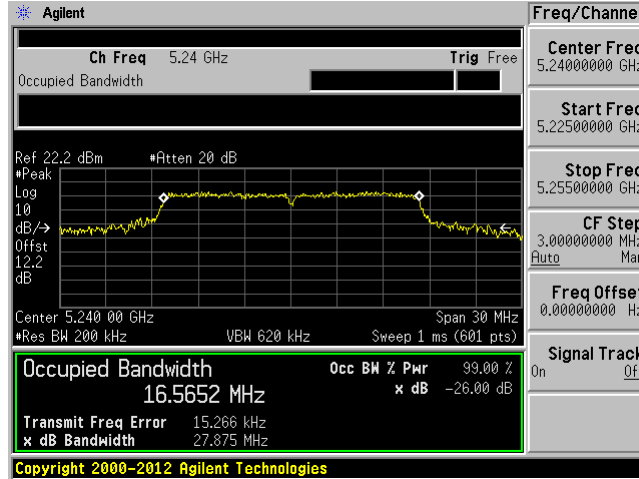


5150 – 5250 MHz, Ant 0


802.11n20 mode

5180 MHz

5200 MHz

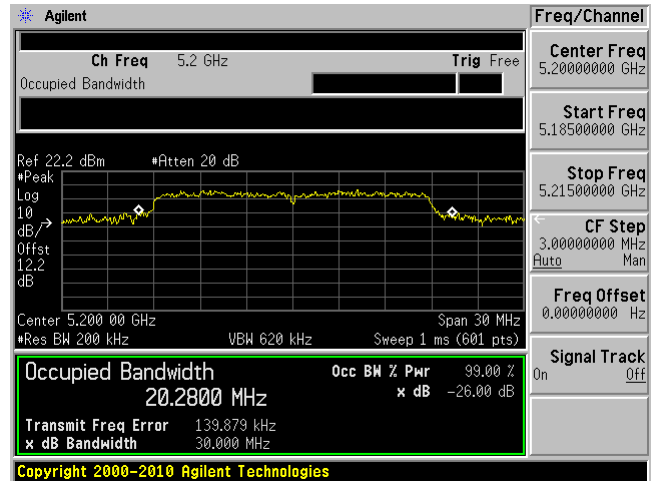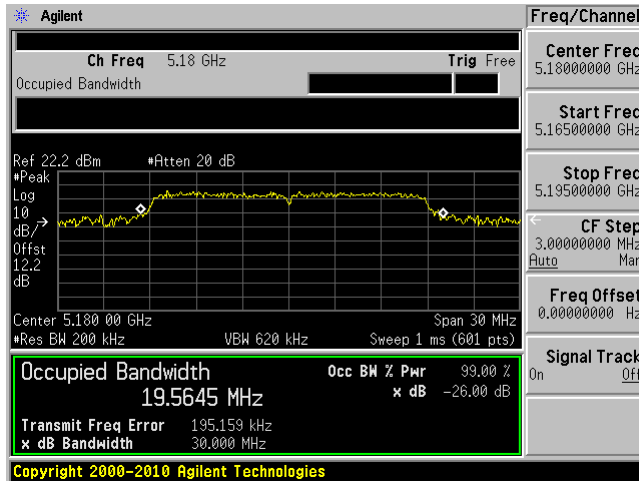

5240 MHz


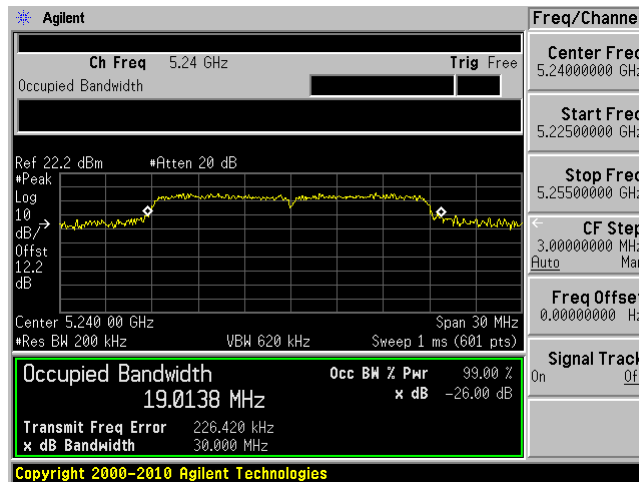


5150 – 5250 MHz, Ant 0 MIMO


802.11n20 mode

5180 MHz

5200 MHz

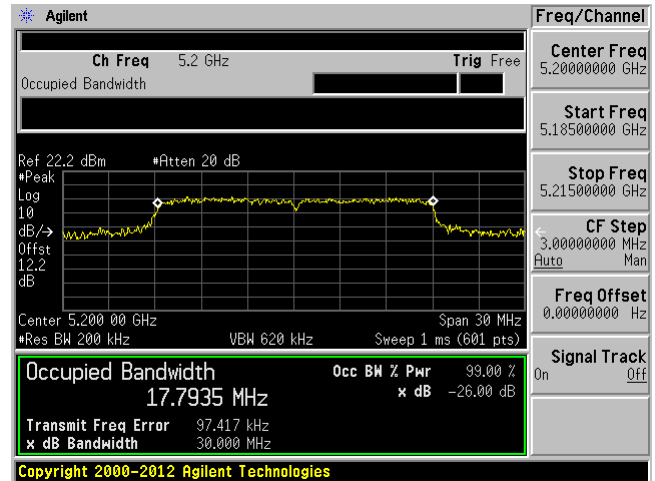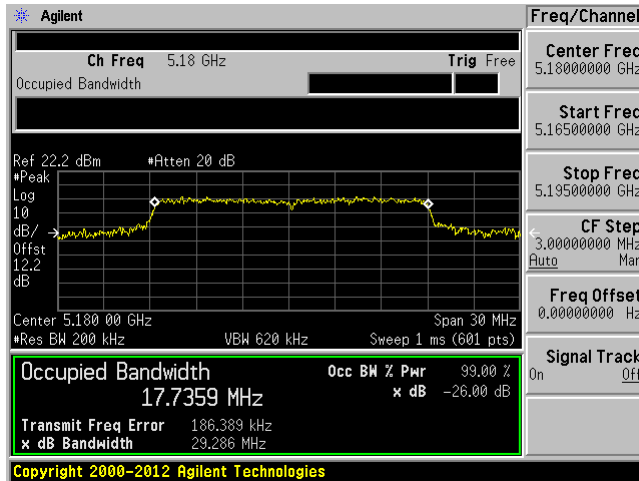

5240 MHz


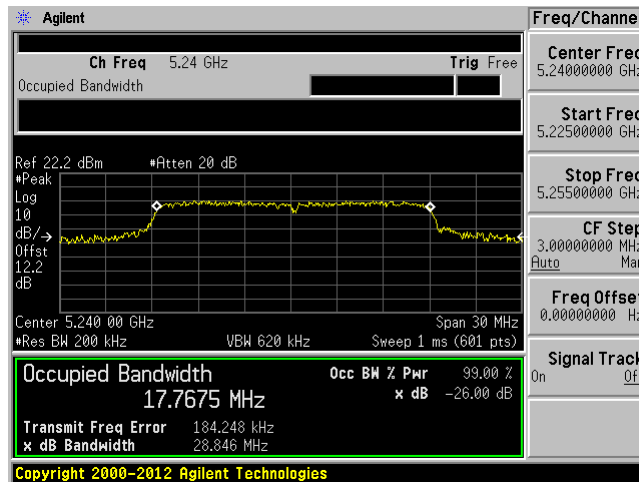


5150 – 5250 MHz, Ant 1


802.11n20 mode

5180 MHz

5200 MHz

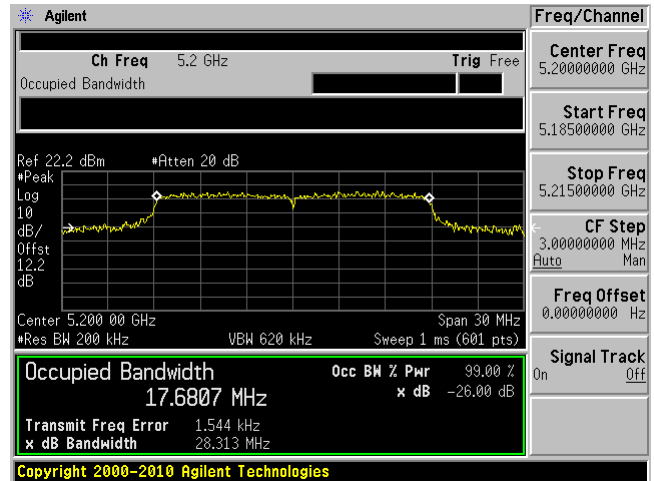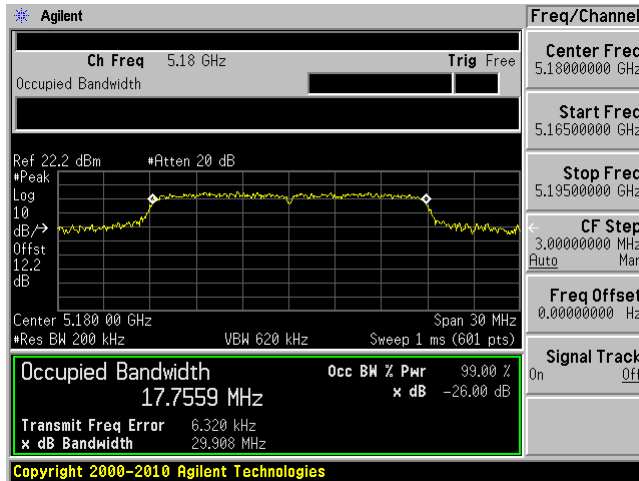

5240 MHz


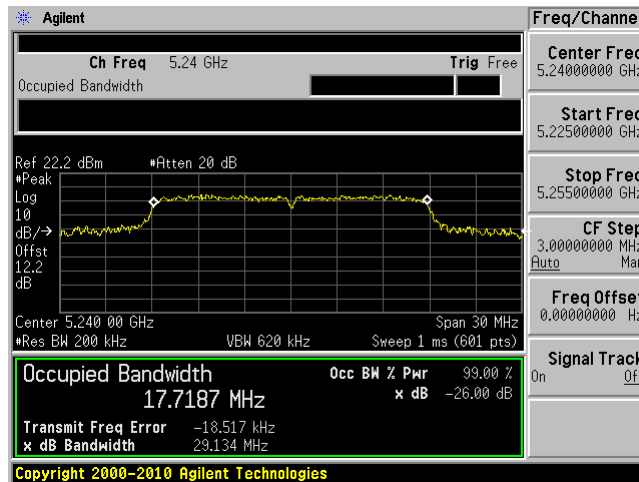


5150 – 5250 MHz, Ant 1 MIMO


802.11n20 mode

5180 MHz

5200 MHz

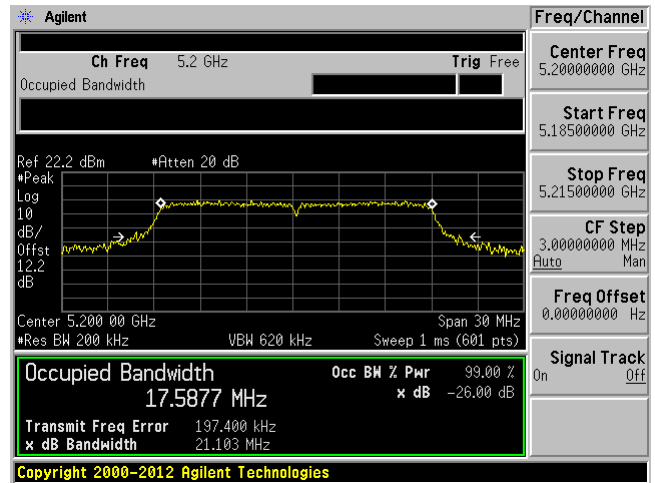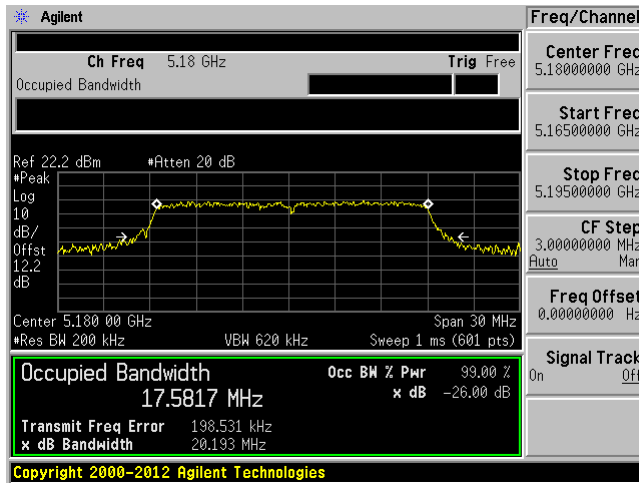

5240 MHz


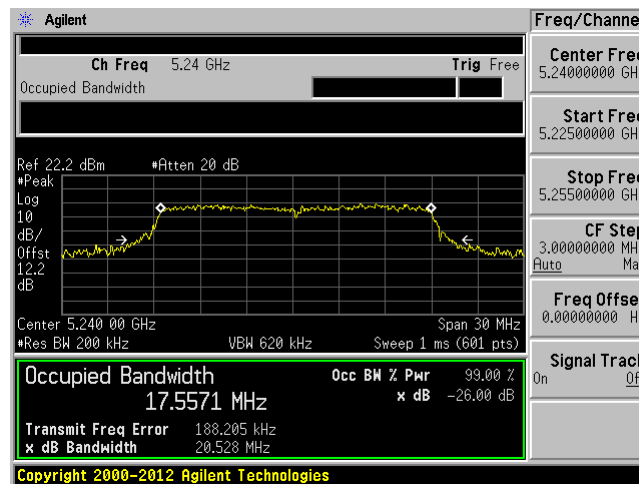


5150 – 5250 MHz, Ant 0


802.11ac20 mode

5180 MHz

5200 MHz

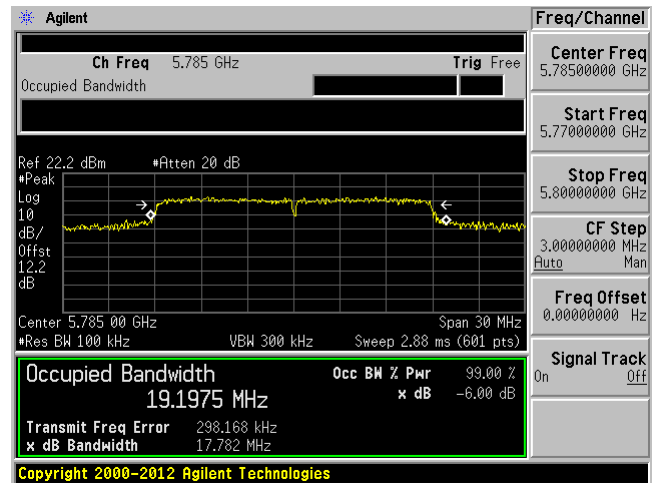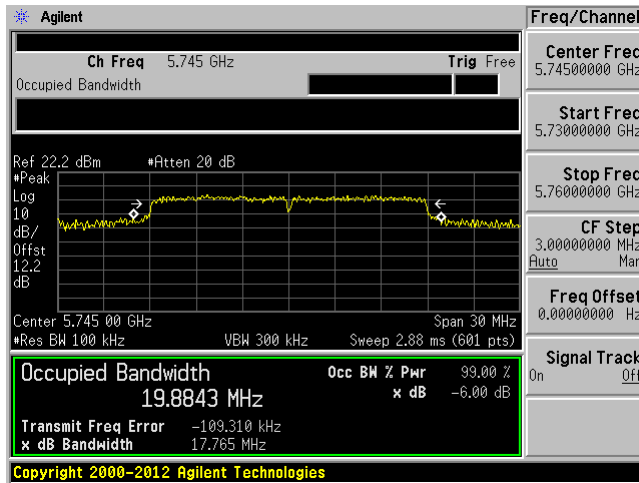

5240 MHz


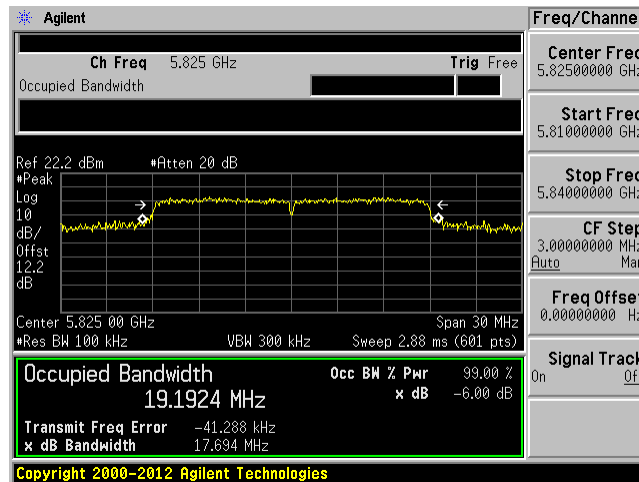


5150 – 5250 MHz, Ant 0 MIMO


802.11ac20 mode

5180 MHz

5200 MHz

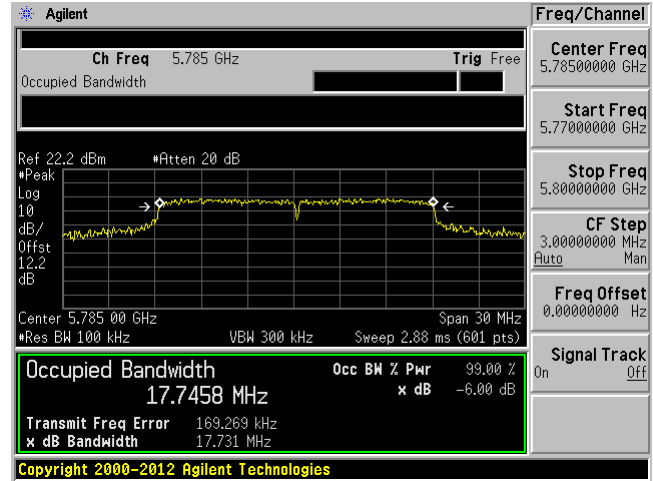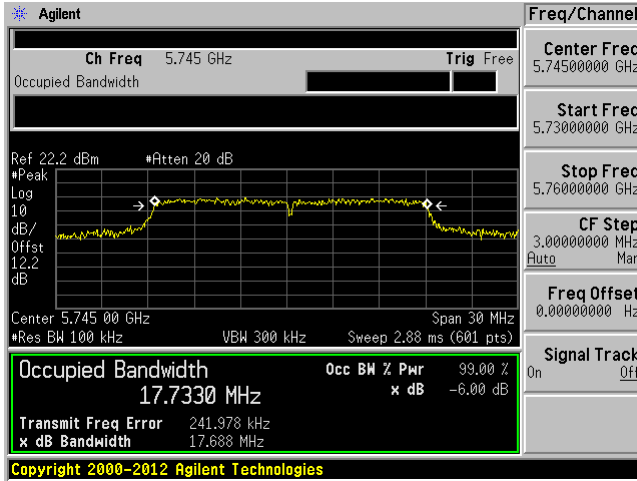

5240 MHz


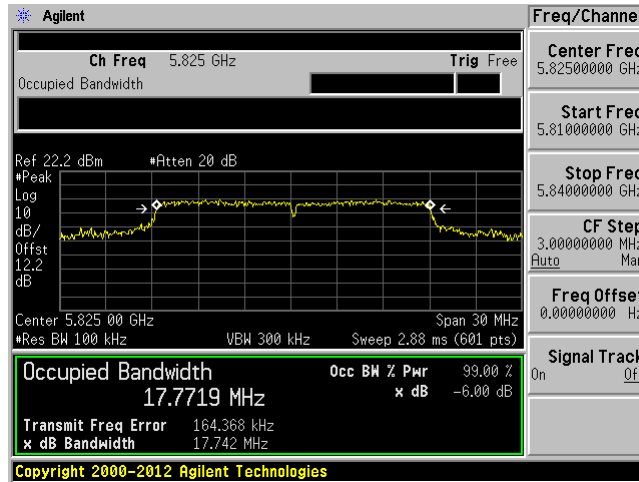


5150 – 5250 MHz, Ant 1


802.11ac20 mode

5180 MHz

5200 MHz

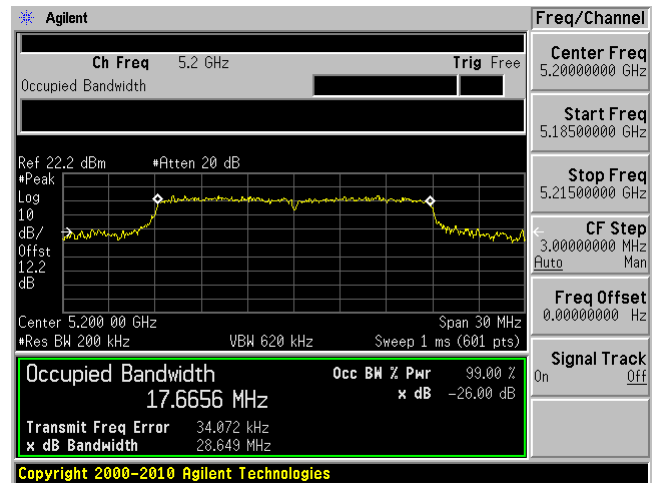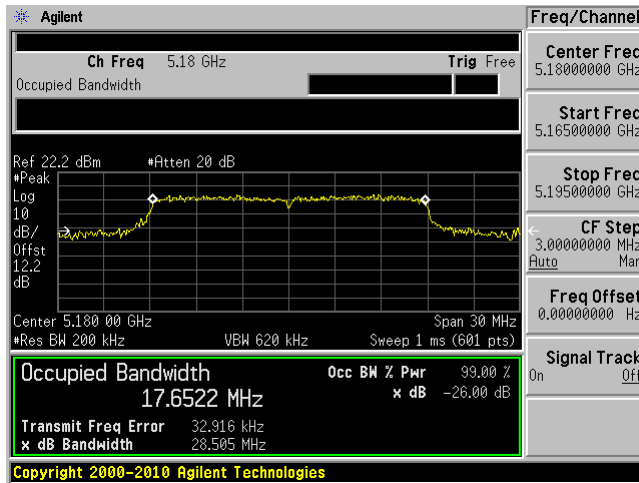

5240 MHz


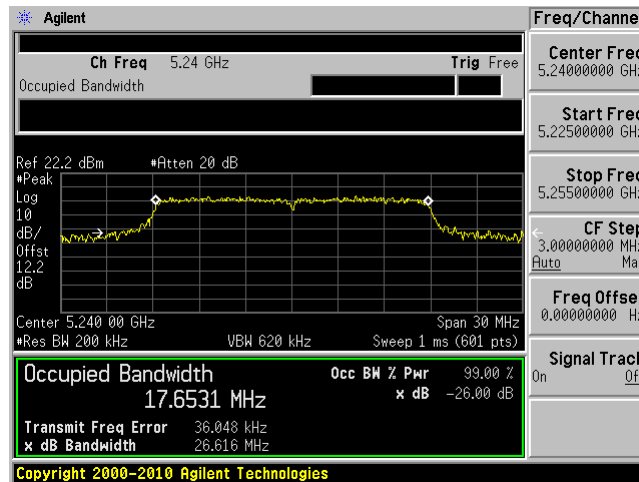


5150 – 5250 MHz, Ant 1 MIMO


802.11ac20 mode

5180 MHz

5200 MHz

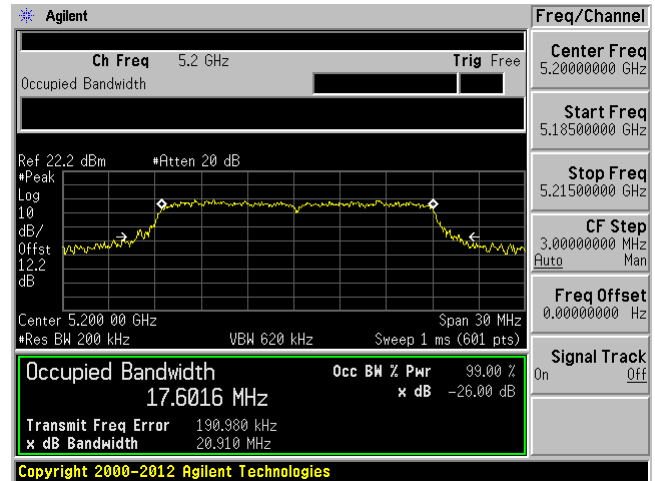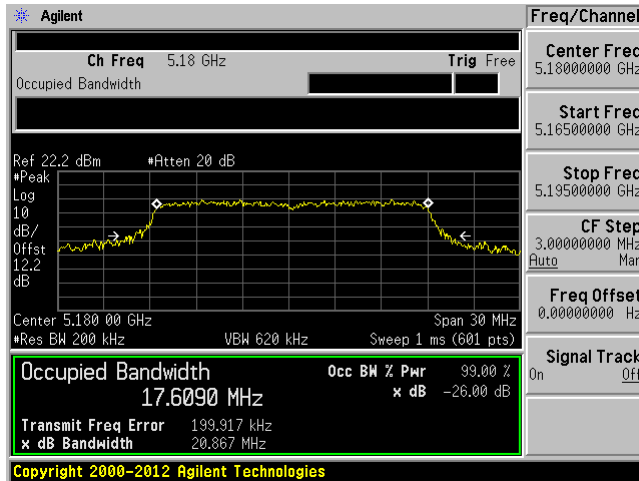


5240 MHz

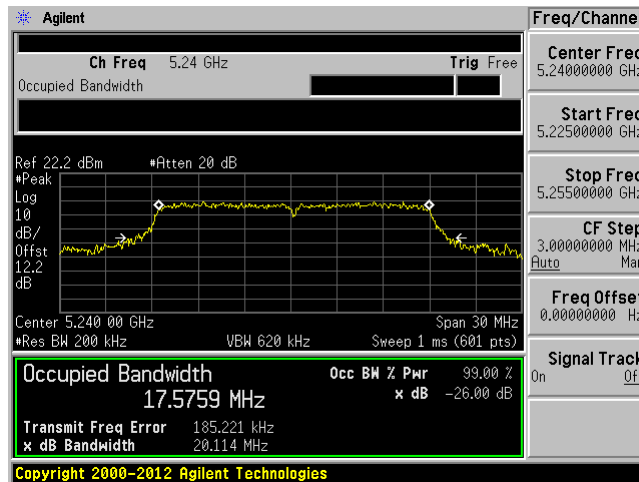

26 dB Bandwidth


5150 – 5250 MHz, Ant 0
802.11a mode

5180 MHz

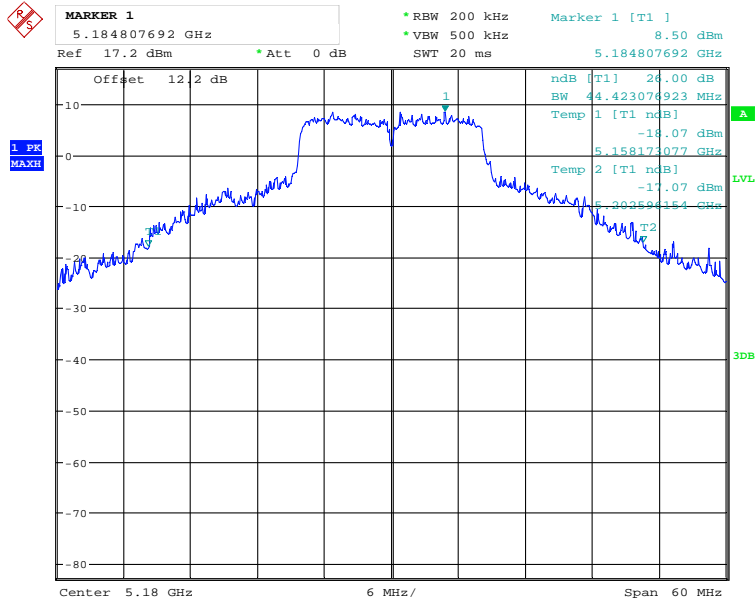


Date: 4.AUG.2017 19:51:23

5200 MHz

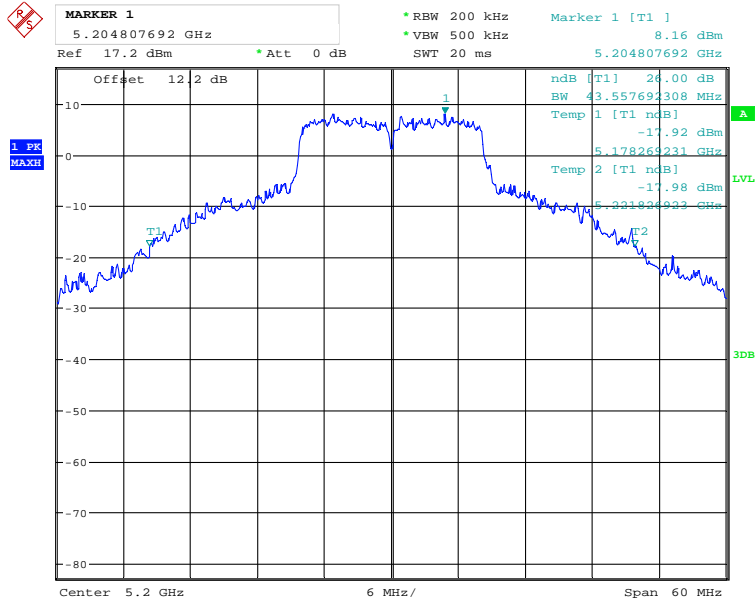

Date: 4.AUG.2017 19:52:02


5240 MHz

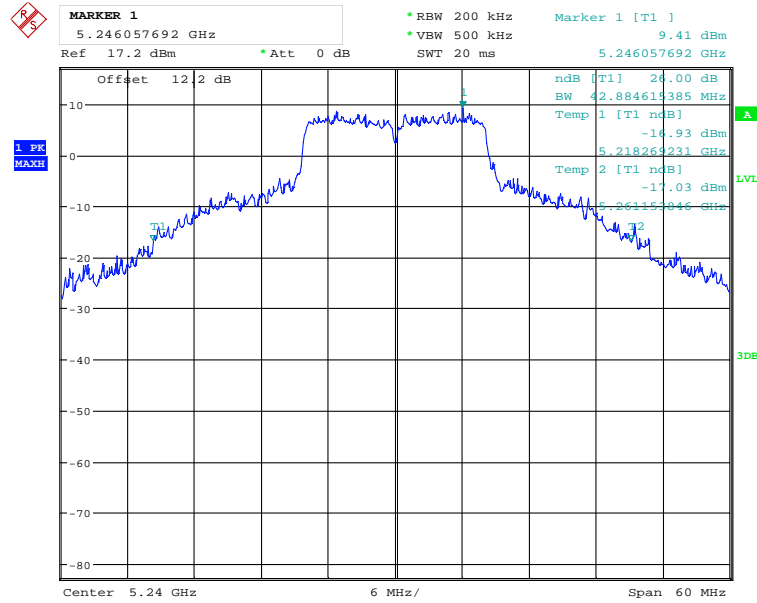

Date: 4.AUG.2017 19:52:29


5150 – 5250 MHz, Ant 1 802.11a mode

5180 MHz

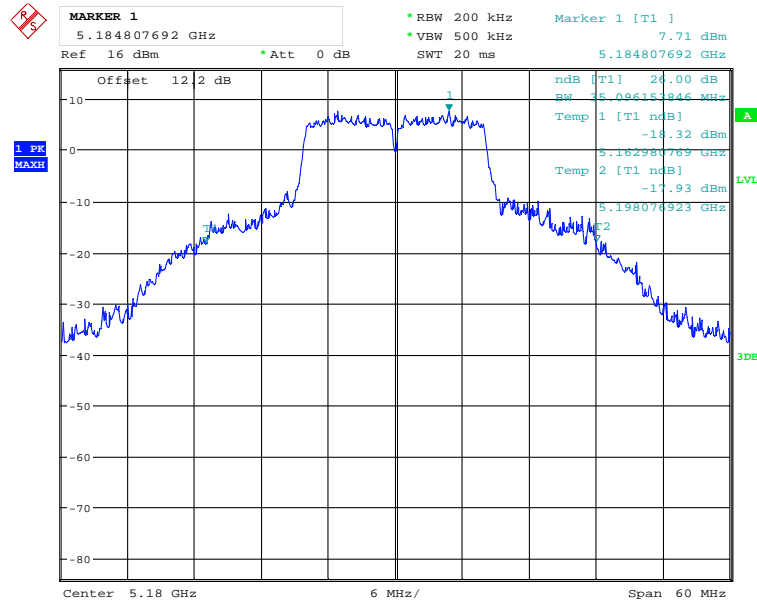


Date: 4.AUG.2017 19:30:44

5200 MHz

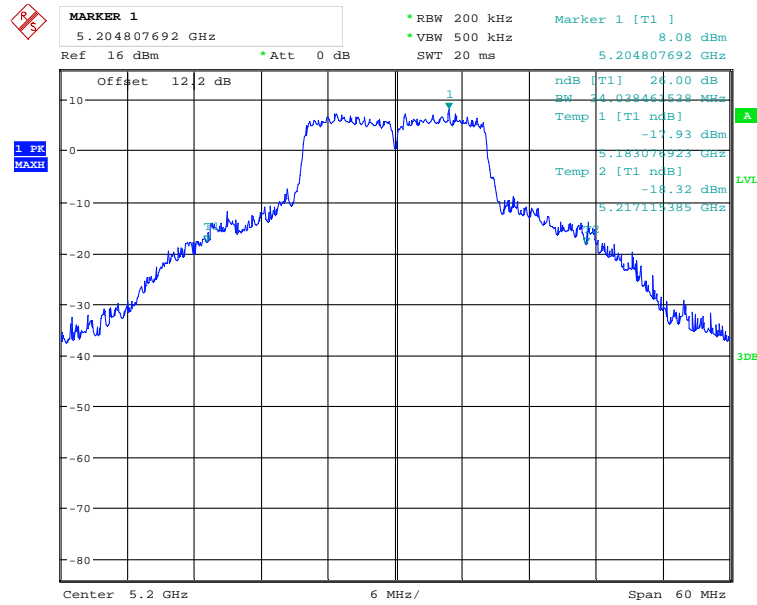

Date: 4.AUG.2017 19:31:25


5240 MHz

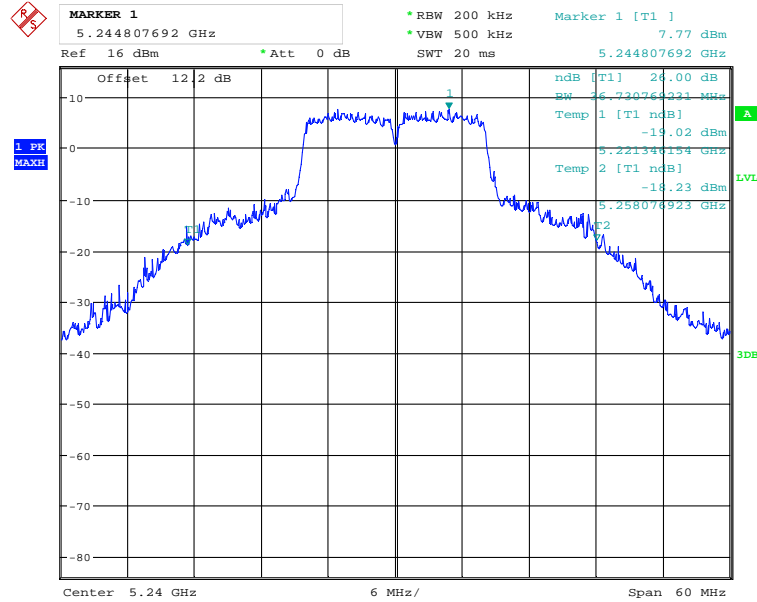

Date: 4.AUG.2017 19:31:58


5150 – 5250 MHz, Ant 0 802.11n20 mode

5180 MHz

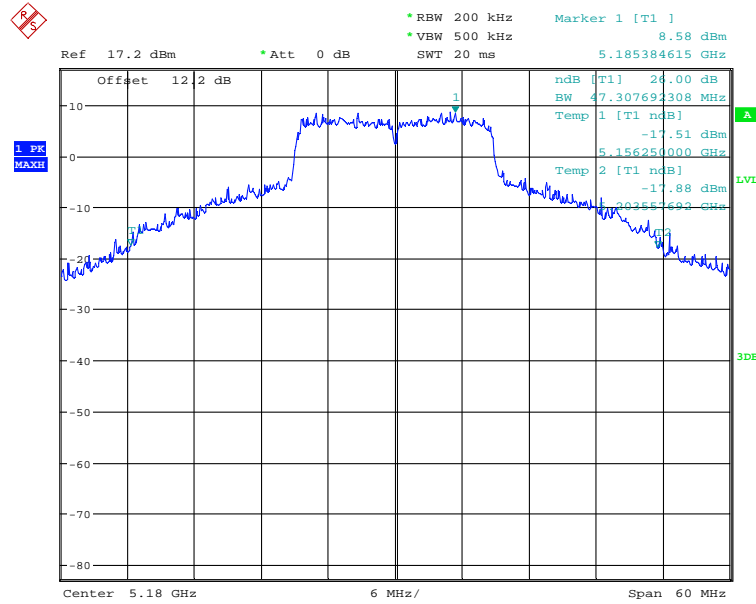


Date: 4.AUG.2017 19:46:23

5200 MHz

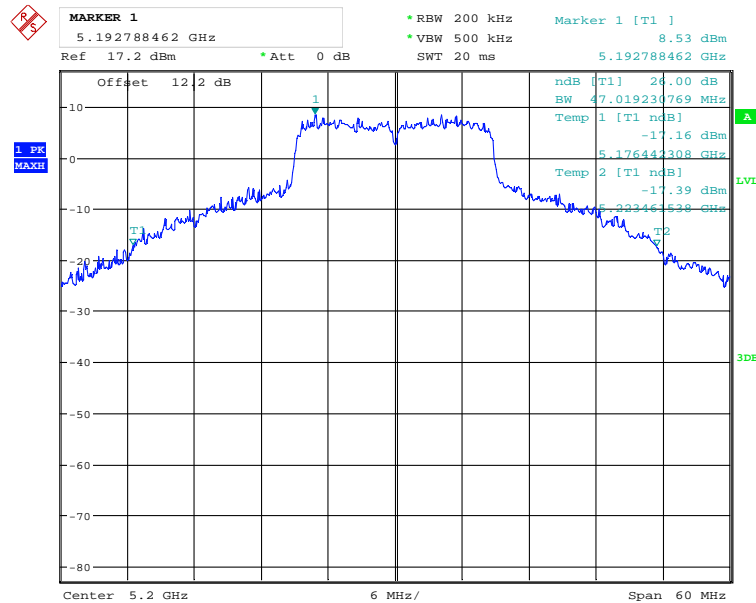

Date: 4.AUG.2017 19:47:02


5240 MHz

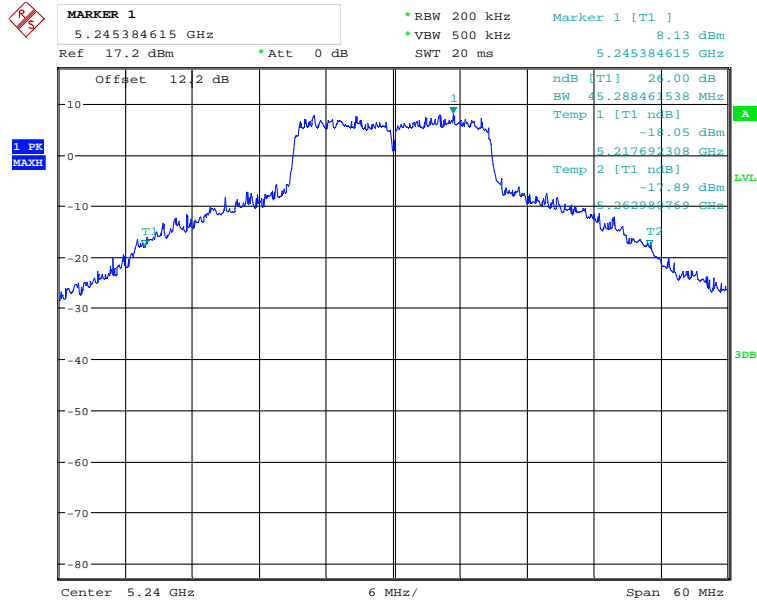

Date: 4.AUG.2017 19:47:57


5150 – 5250 MHz, Ant 0 MIMO 802.11n20 mode

5180 MHz

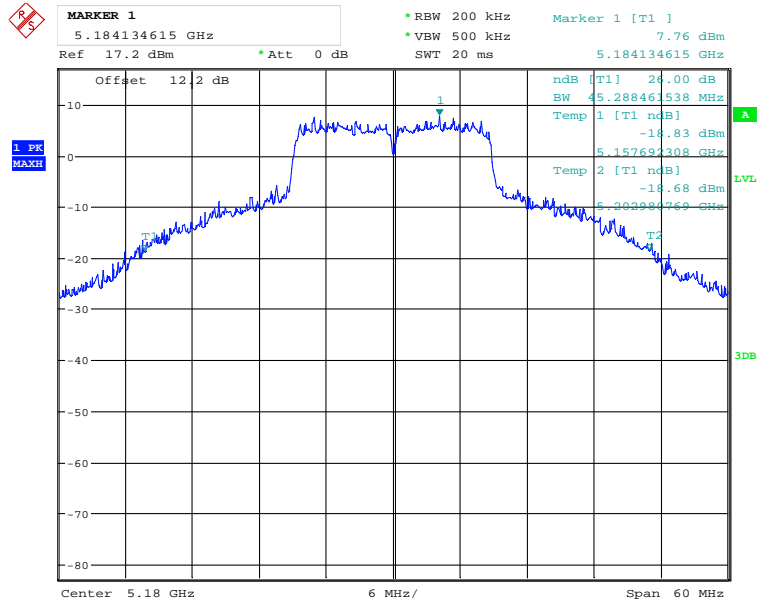


Date: 4.AUG.2017 19:50:20

5200 MHz

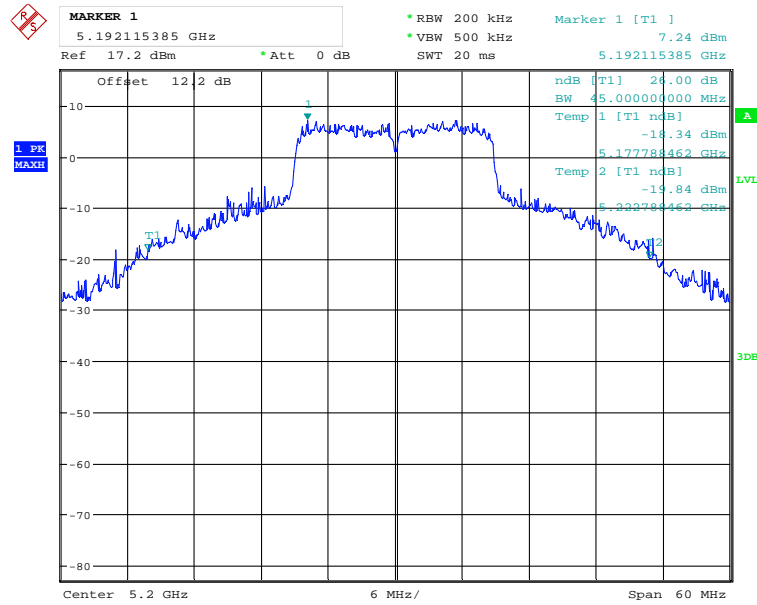

Date: 4.AUG.2017 19:49:49


5240 MHz

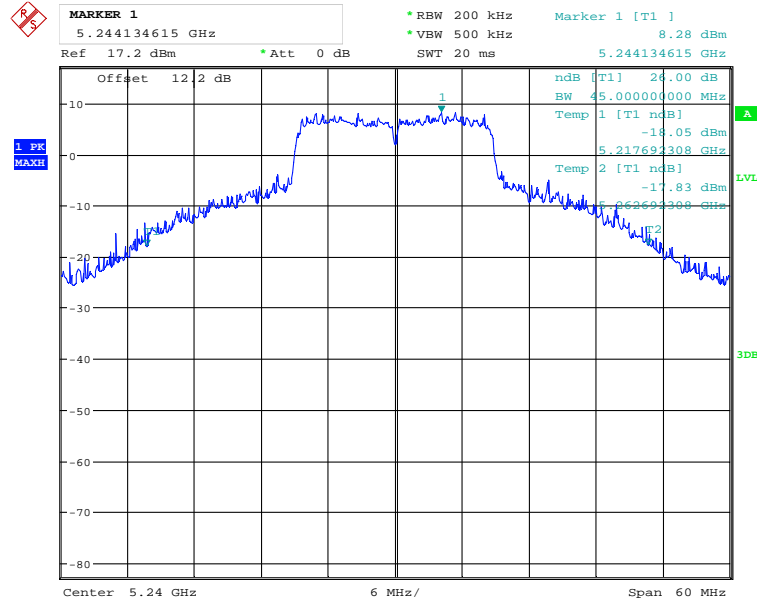

Date: 4.AUG.2017 19:49:02


5150 – 5250 MHz, Ant 1 802.11n20 mode

5180 MHz

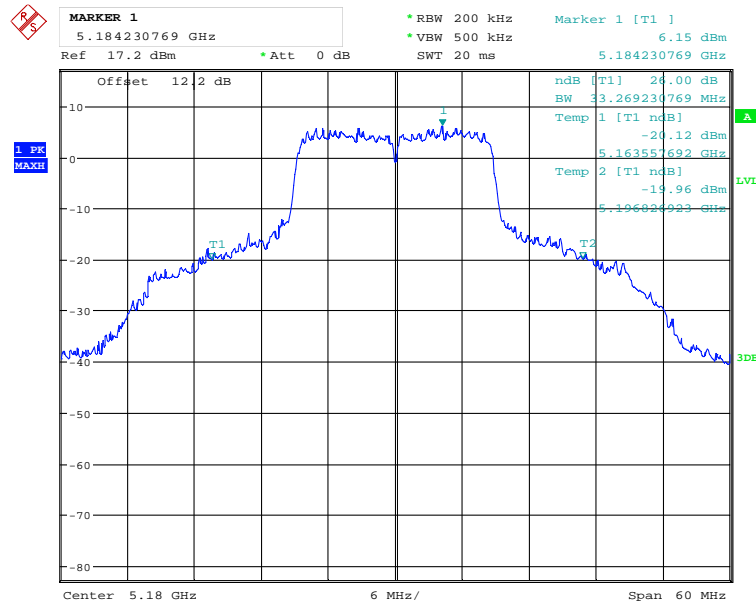


Date: 4.AUG.2017 19:36:19

5200 MHz

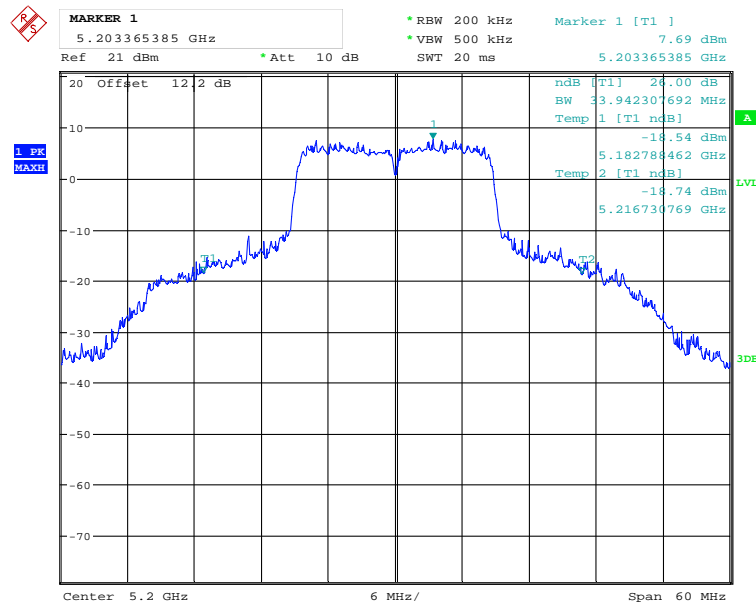

Date: 4.AUG.2017 19:35:01


5240 MHz

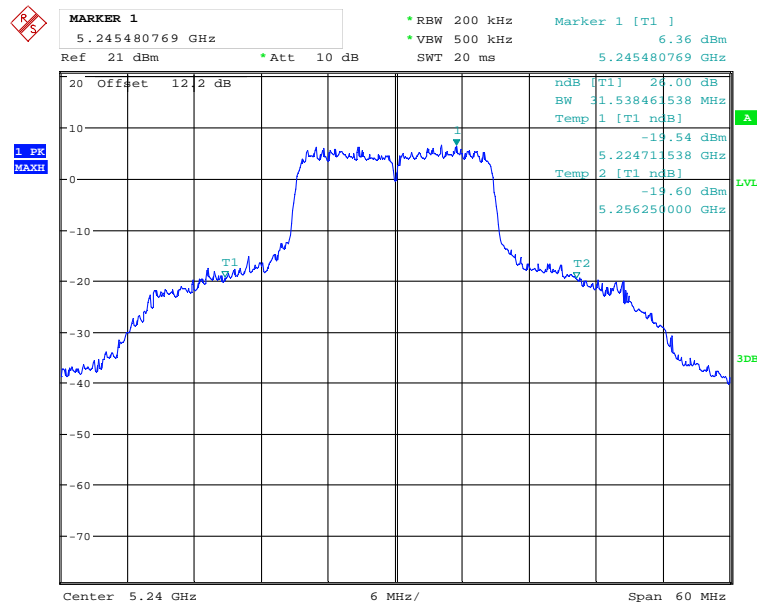

Date: 4.AUG.2017 19:34:14


5150 – 5250 MHz, Ant 1 MIMO 802.11n20 mode

5180 MHz

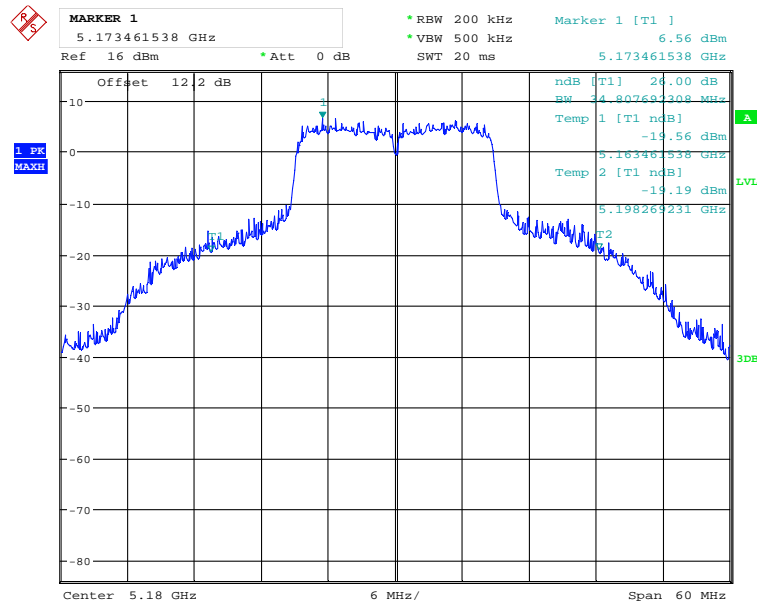


Date: 4.AUG.2017 19:29:18

5200 MHz

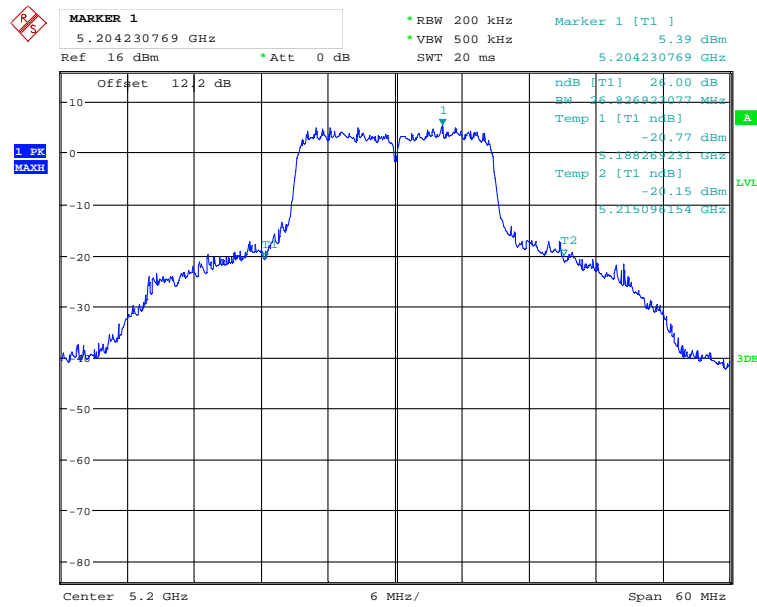

Date: 4.AUG.2017 19:28:43


5240 MHz

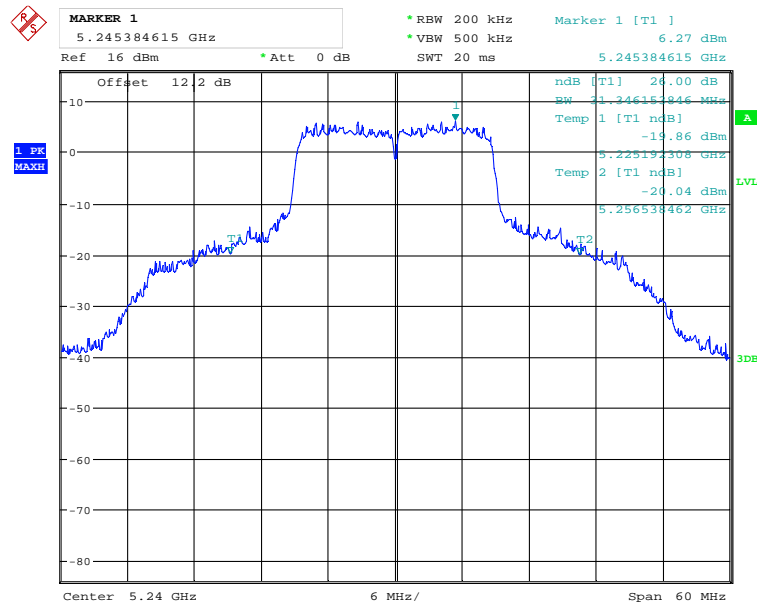

Date: 4.AUG.2017 19:27:34


5150 – 5250 MHz, Ant 0 802.11ac20 mode

5180 MHz

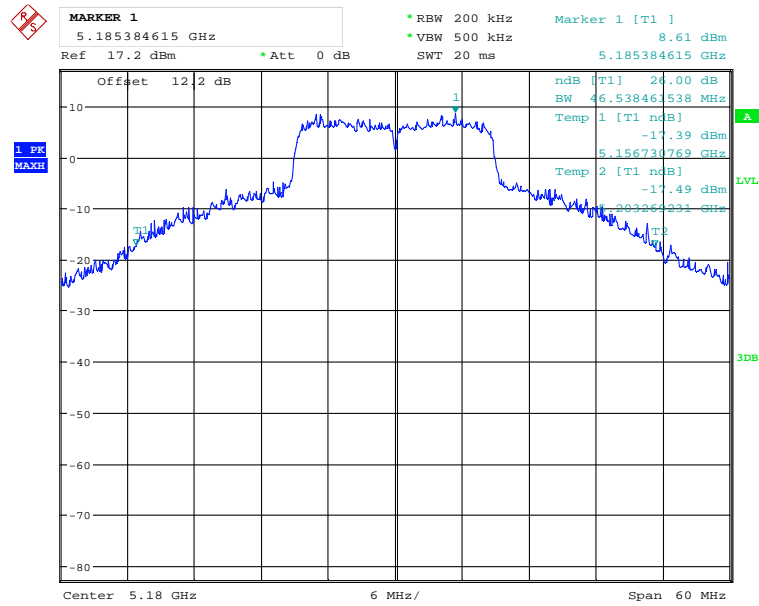


Date: 4.AUG.2017 19:45:21

5200 MHz

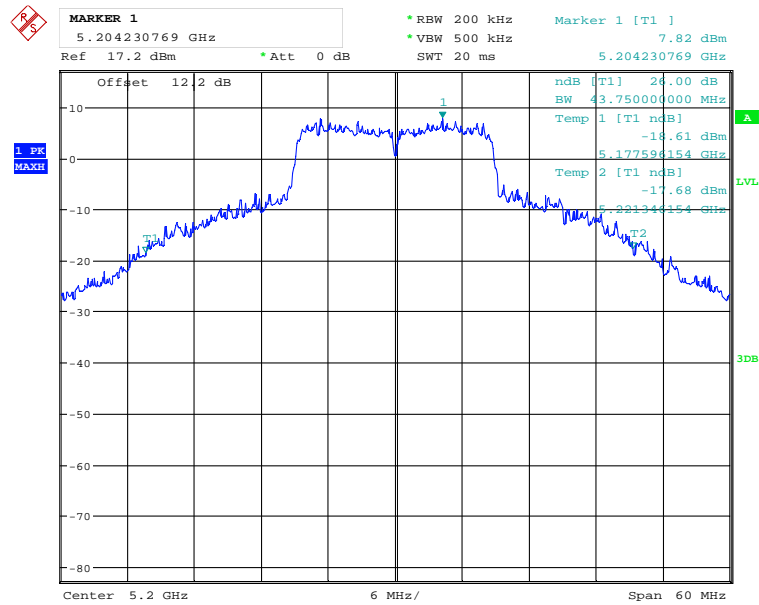

Date: 4.AUG.2017 19:44:52


5240 MHz

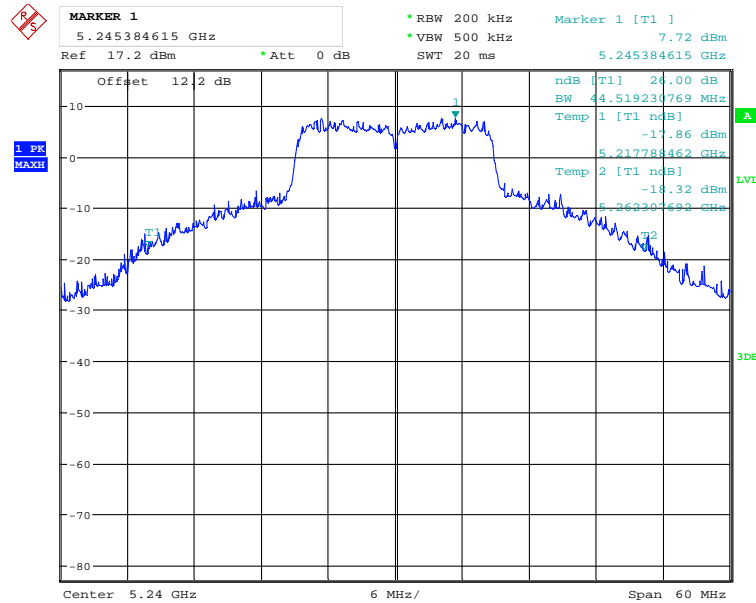

Date: 4.AUG.2017 19:43:42


5150 – 5250 MHz, Ant 0 MIMO 802.11ac20 mode

5180 MHz

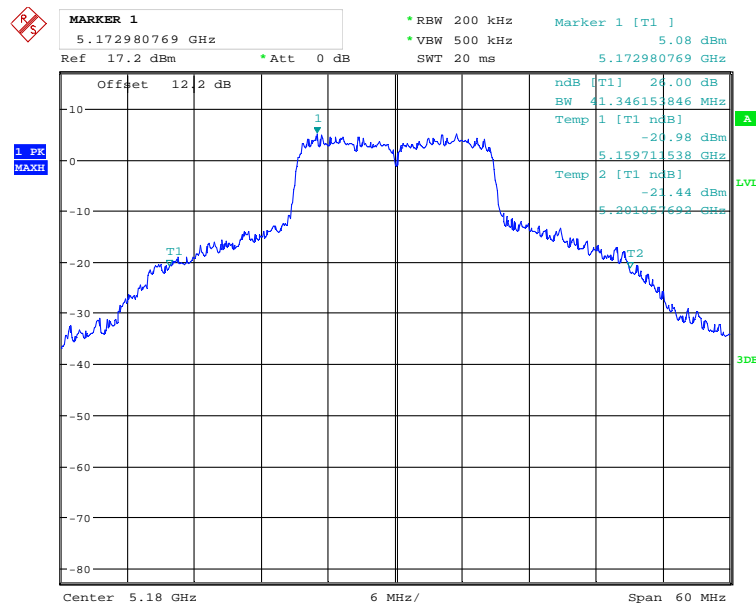


Date: 4.AUG.2017 19:40:48

5200 MHz

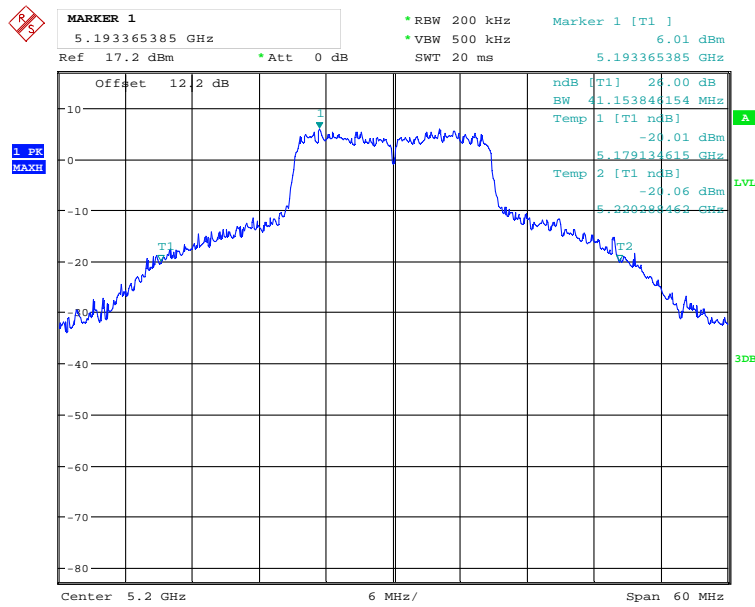

Date: 4.AUG.2017 19:42:10


5240 MHz

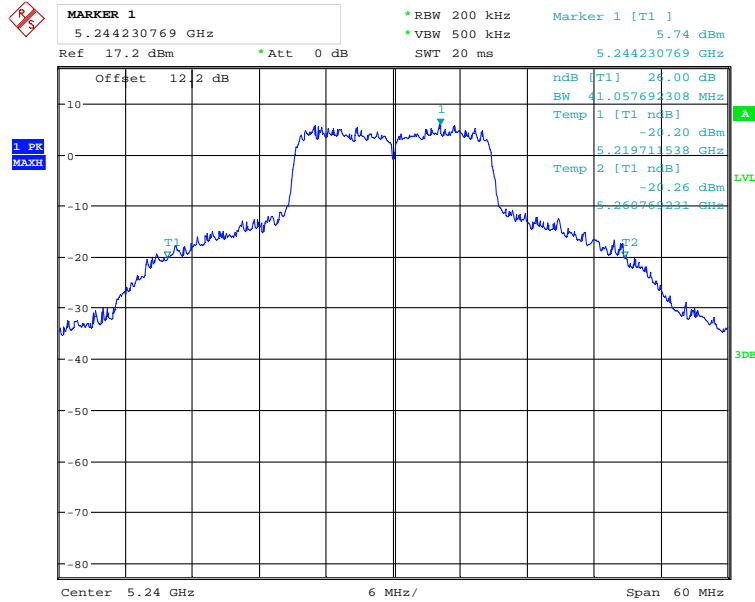

Date: 4.AUG.2017 19:42:53


5150 – 5250 MHz, Ant 1 802.11ac20 mode

5180 MHz

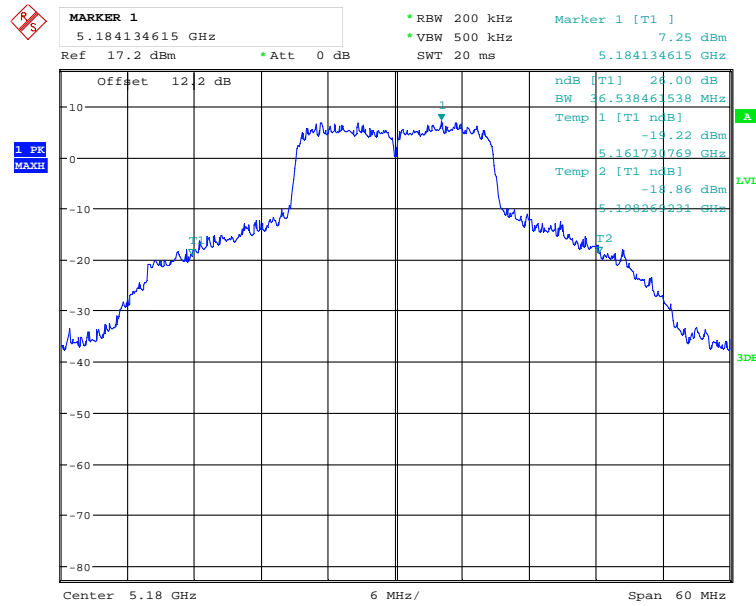


Date: 4.AUG.2017 19:37:09

5200 MHz

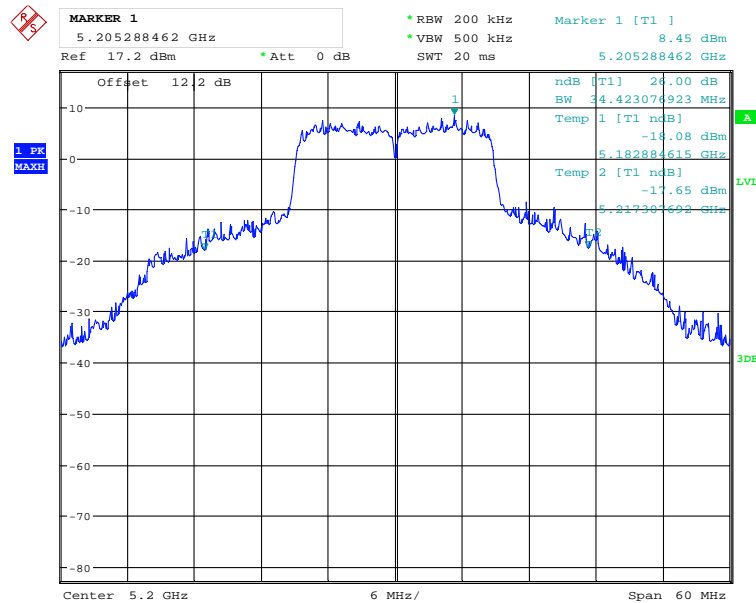

Date: 4.AUG.2017 19:37:45


5240 MHz

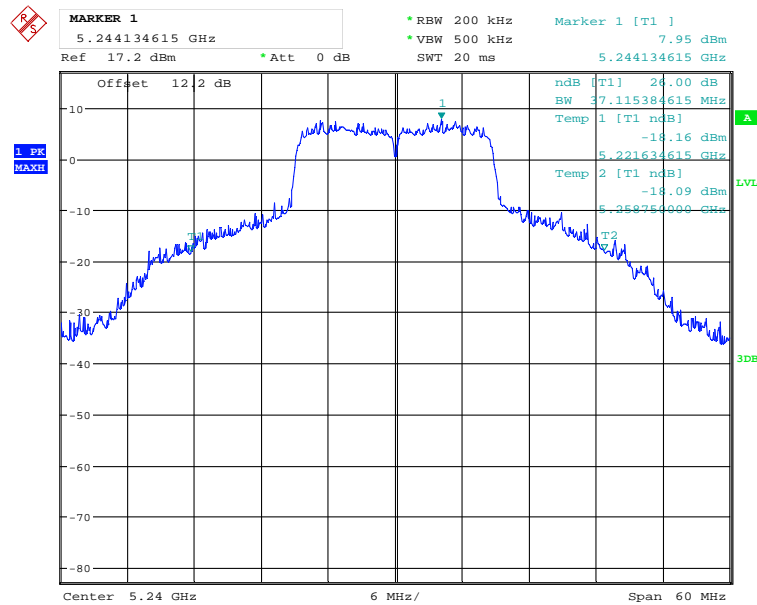

Date: 4.AUG.2017 19:38:17


5150 – 5250 MHz, Ant 1 MIMO 802.11ac20 mode

5180 MHz

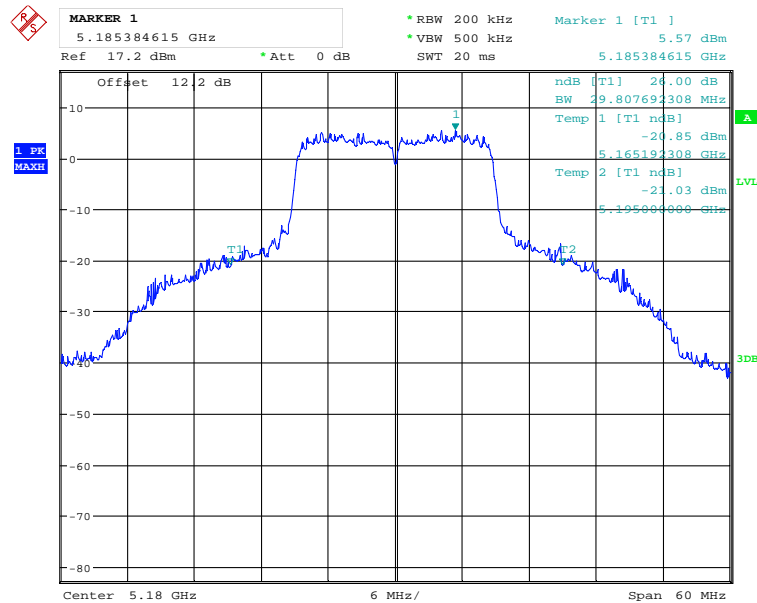


Date: 4.AUG.2017 19:40:17

5200 MHz

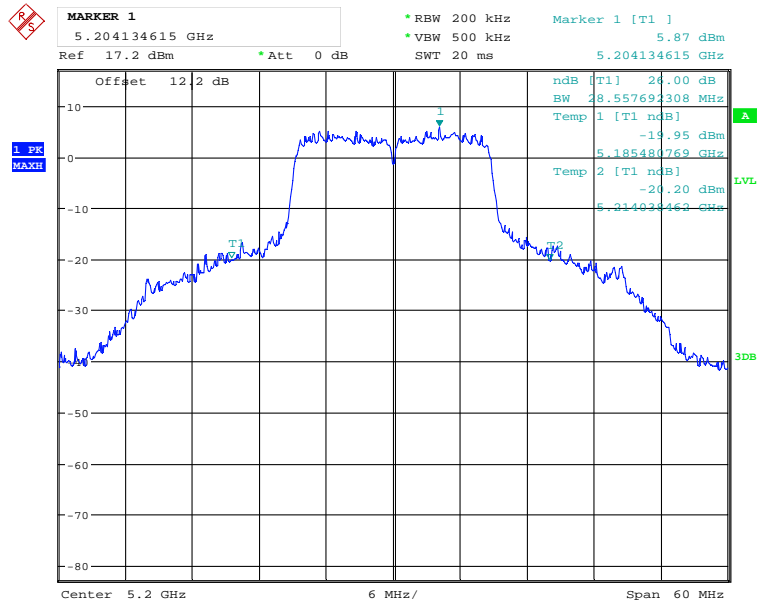

Date: 4.AUG.2017 19:39:42

5240 MHz

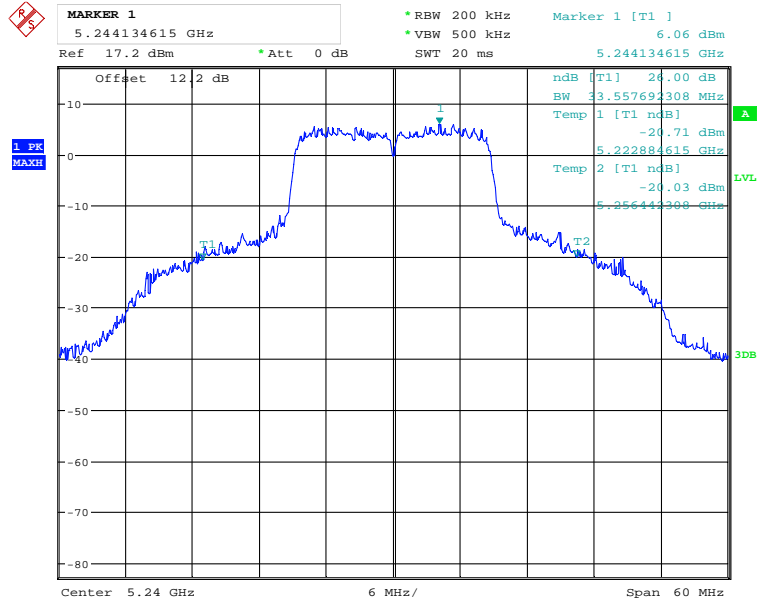

Date: 4.AUG.2017 19:39:02



6 dB Emission Bandwidth

5725 – 5850 MHz, Ant 0


802.11a mode

5745 MHz

5785 MHz

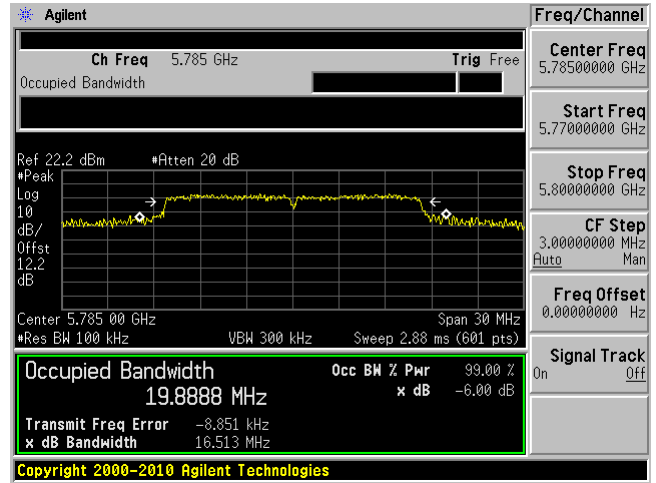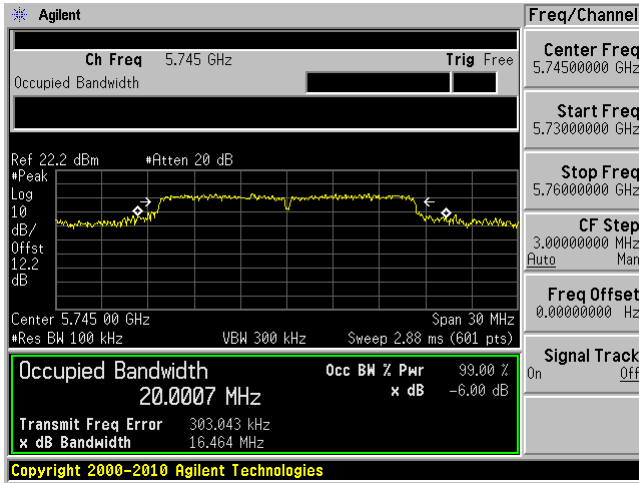

5825 MHz


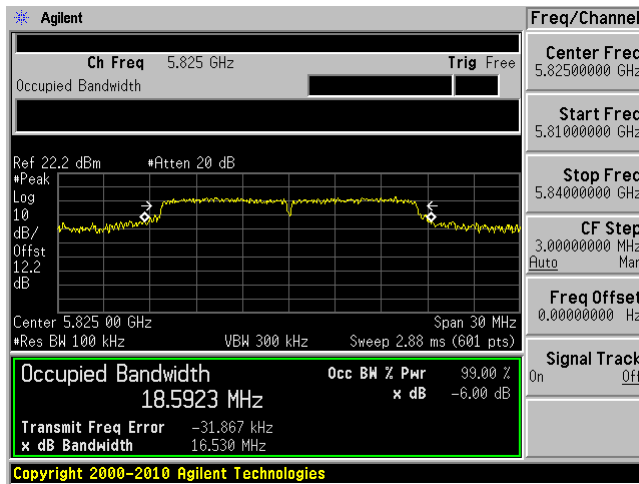


5725 – 5850 MHz, Ant 1


802.11a mode

5745 MHz

5785 MHz

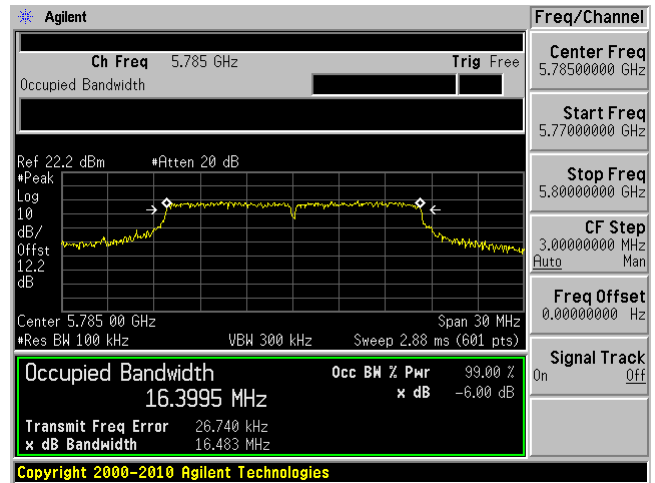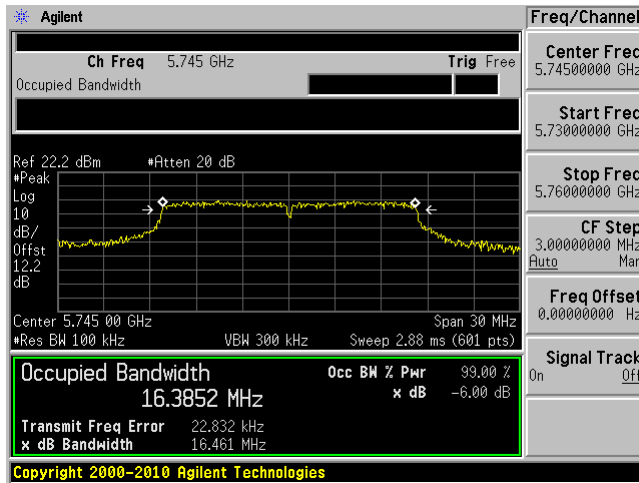

5825 MHz


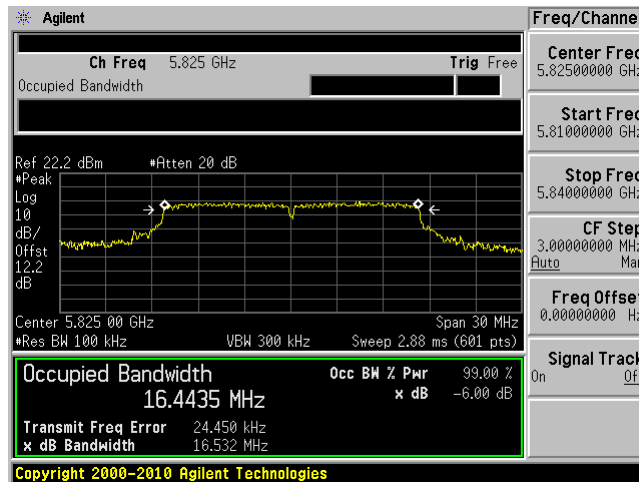


5725 – 5850 MHz, Ant 0


802.11n20 mode

5745 MHz

5785 MHz

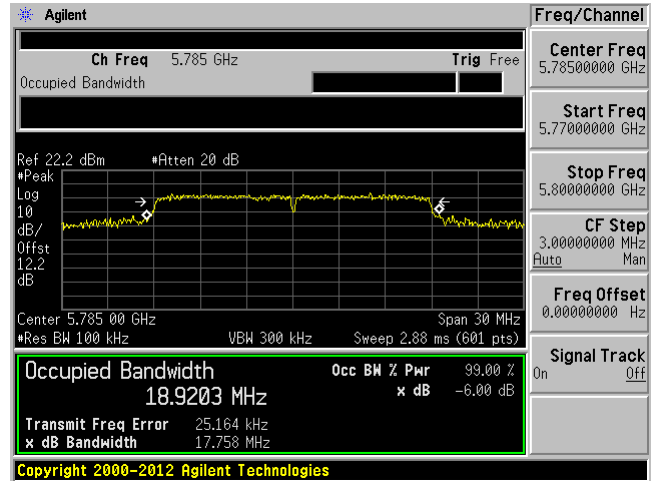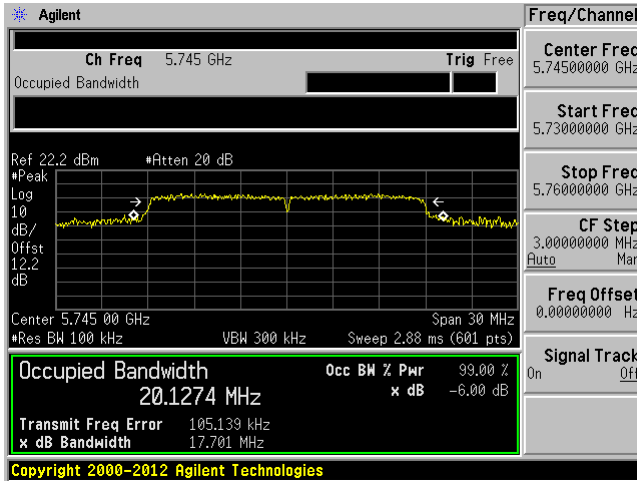

5825 MHz


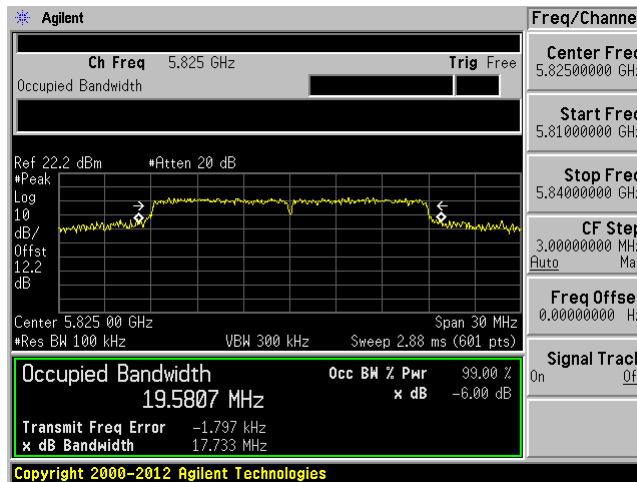


5725 – 5850 MHz, Ant 0 MIMO


802.11n20 mode

5745 MHz

5785 MHz

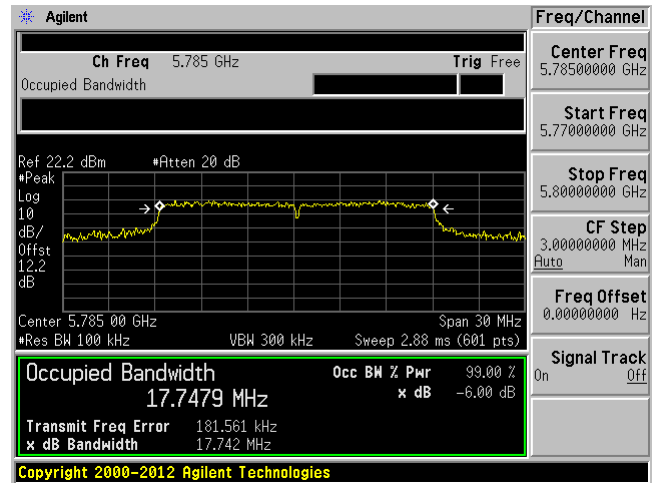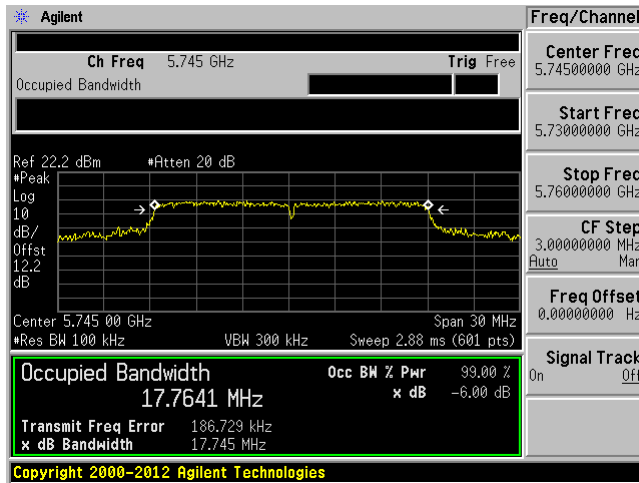

5825 MHz


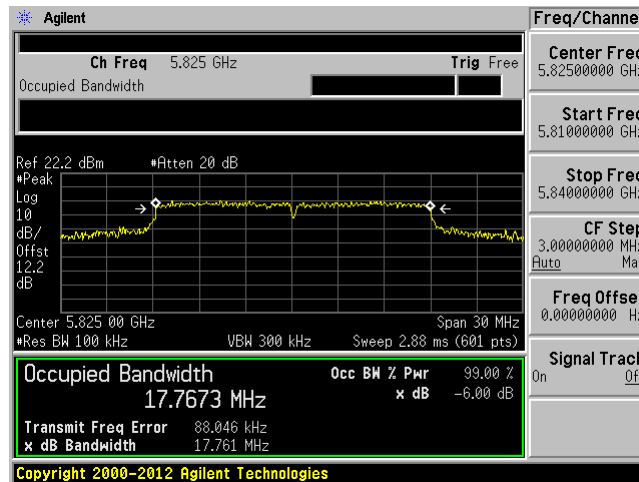


5725 – 5850 MHz, Ant 1


802.11n20 mode

5745 MHz

5785 MHz

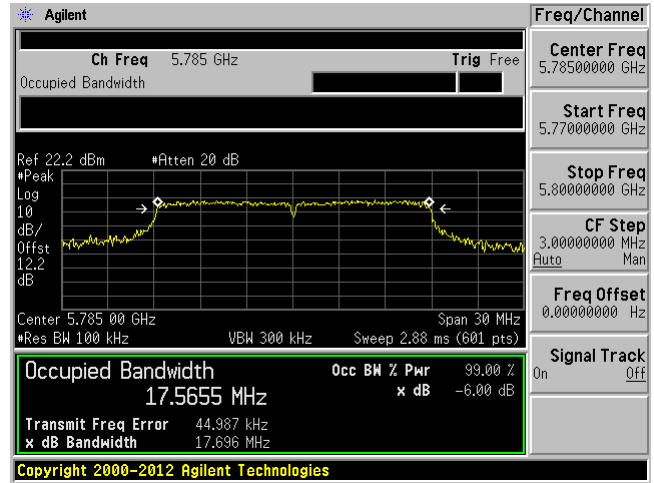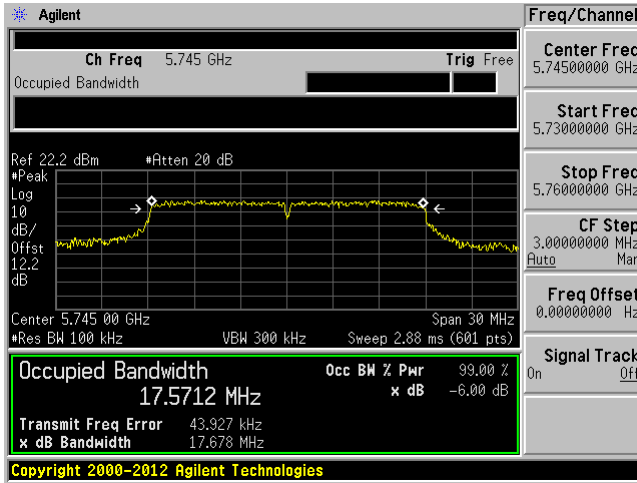

5825 MHz


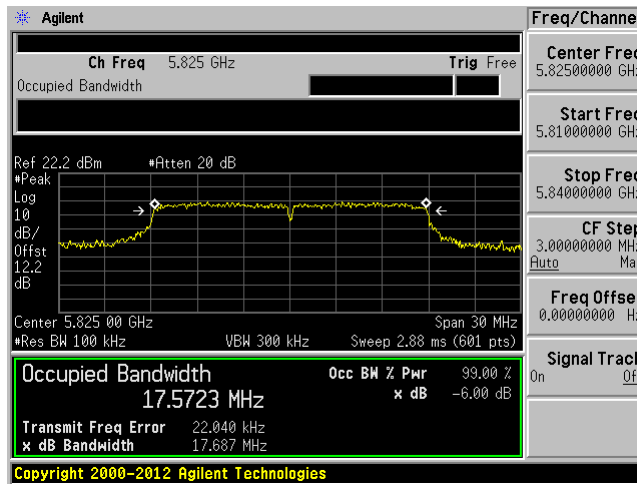


5725 – 5850 MHz, Ant 1 MIMO


802.11n20 mode

5745 MHz

5785 MHz

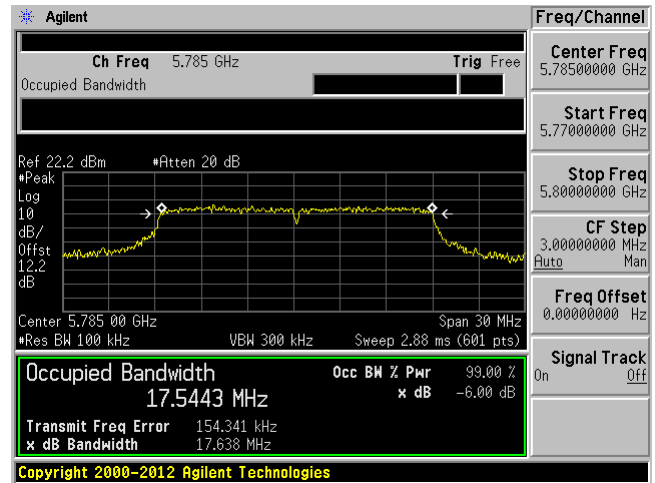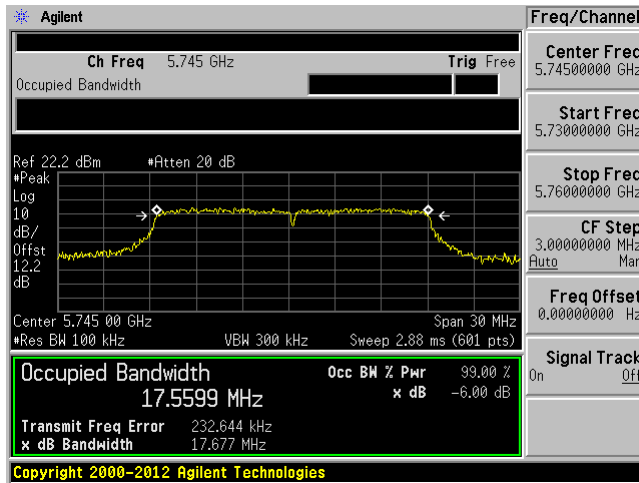

5825 MHz


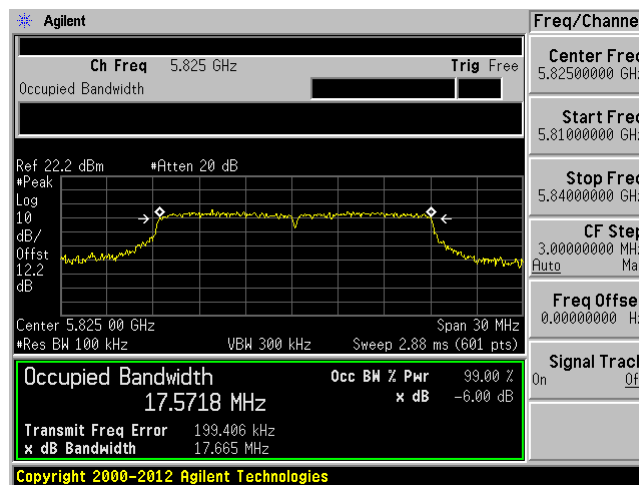


5725 – 5850 MHz, Ant 0


802.11ac20 mode

5745 MHz

5785 MHz

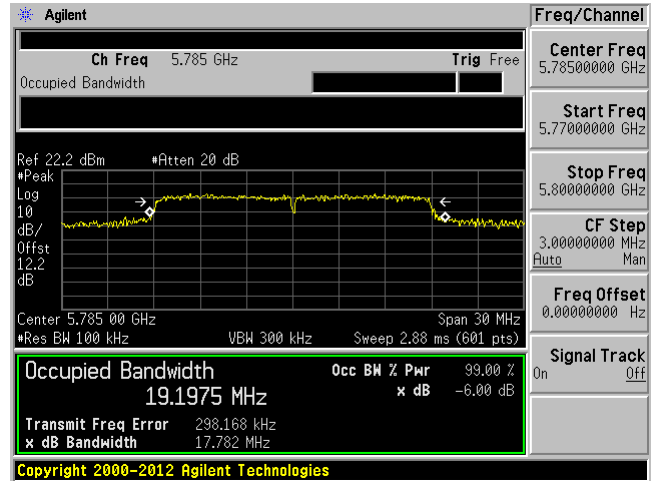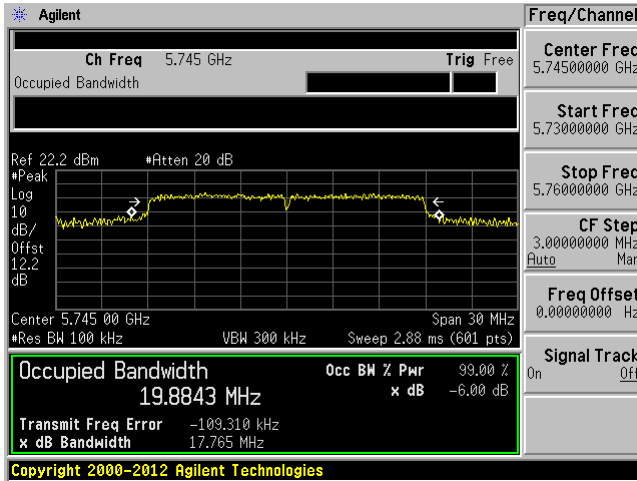

5825 MHz


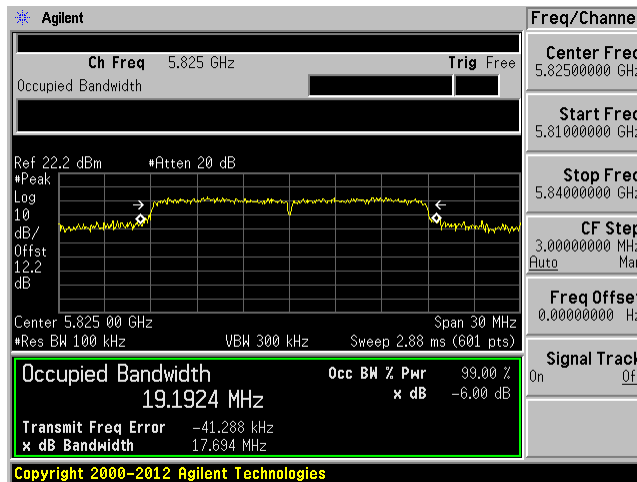


5725 – 5850 MHz, Ant 0 MIMO


802.11ac20 mode

5745 MHz

5785 MHz

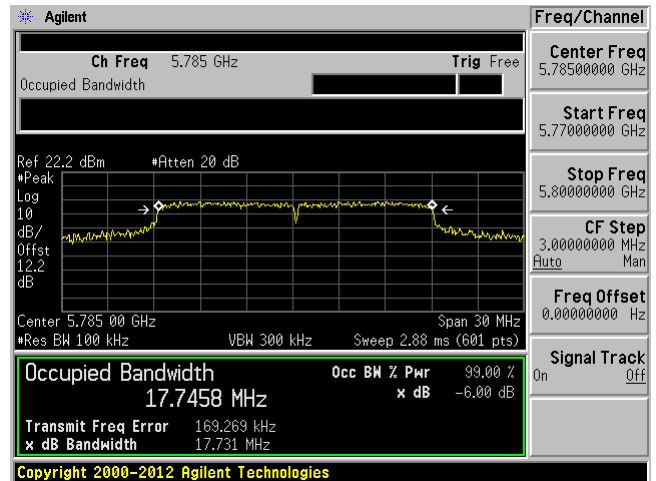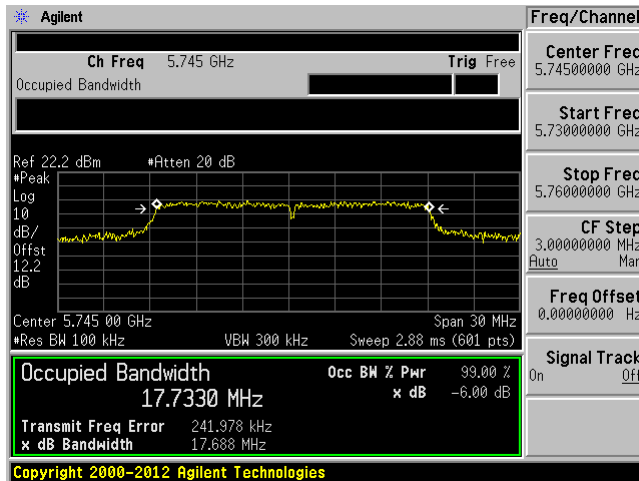

5825 MHz


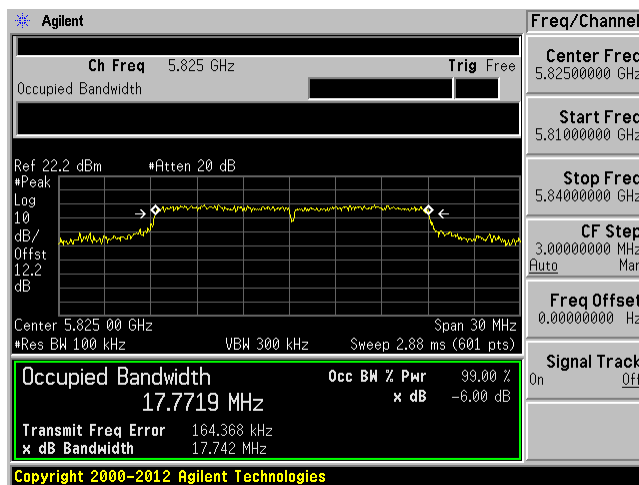


5725 – 5850 MHz, Ant 1


802.11ac20 mode

5745 MHz

5785 MHz

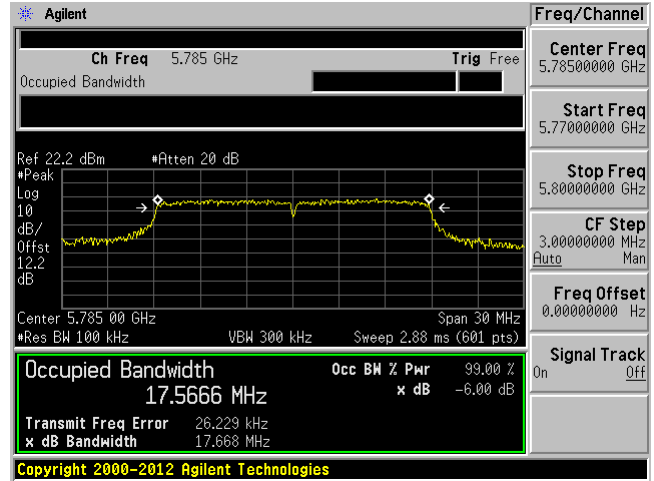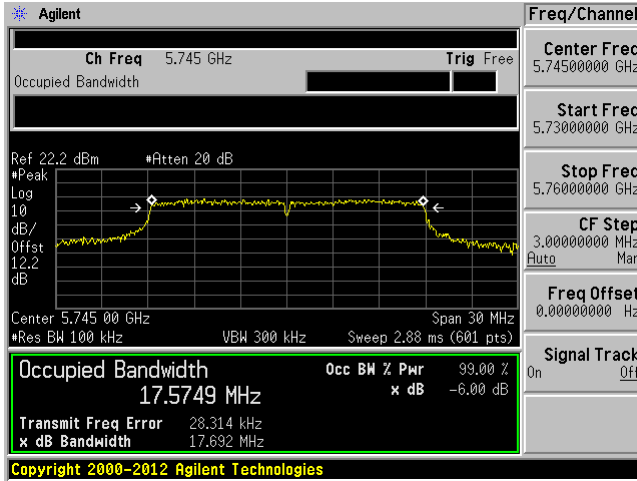

5825 MHz


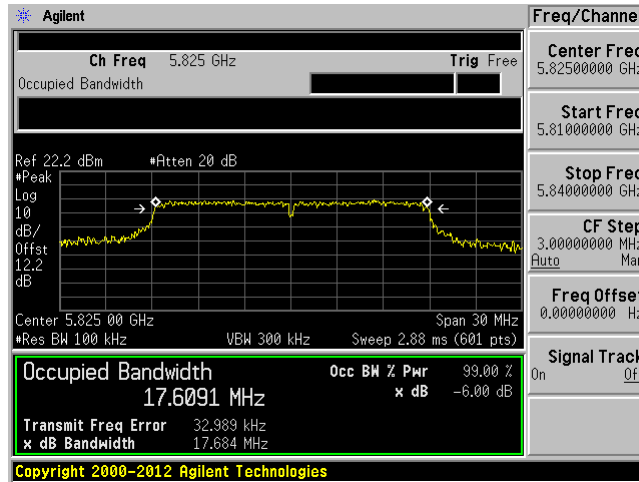


5725 – 5850 MHz, Ant 1 MIMO


802.11ac20 mode

5745 MHz

5785 MHz

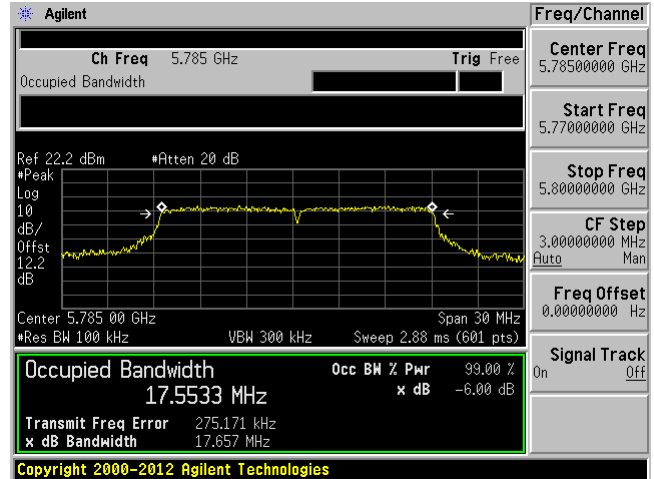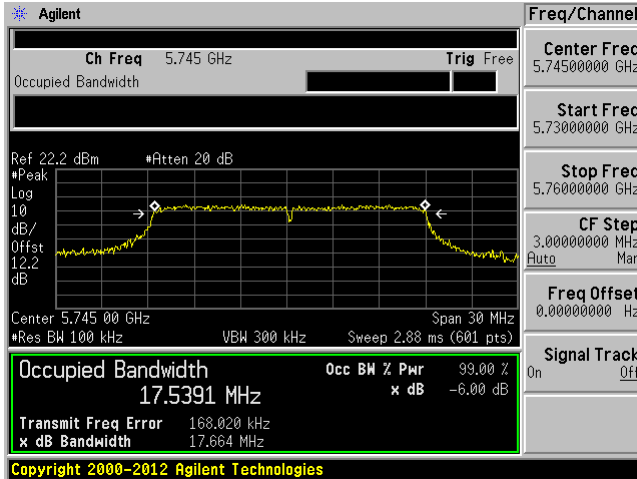

5825 MHz

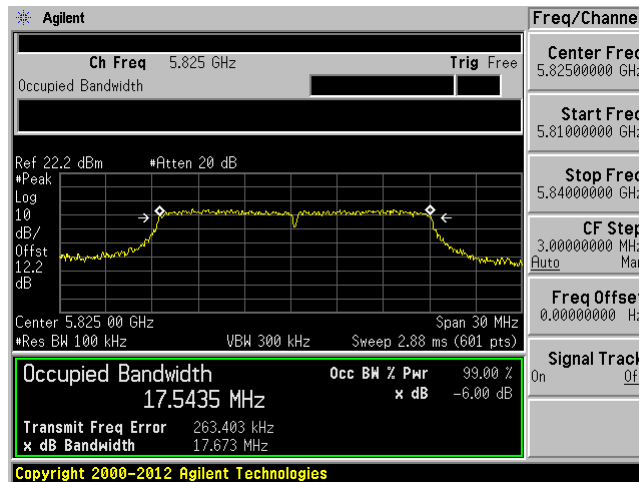



99% Emission Bandwidth (ISED)

5725 – 5850 MHz, Ant 0


802.11a mode

5745 MHz

5785 MHz

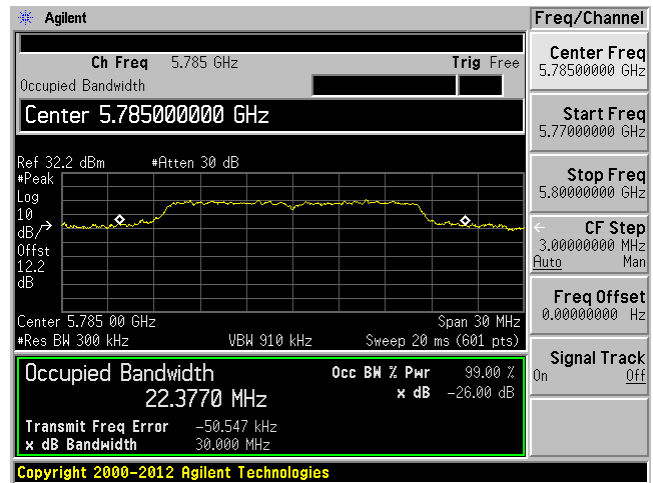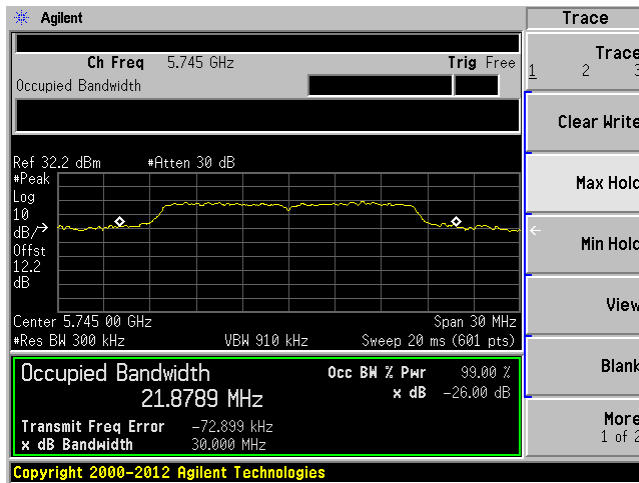

5825 MHz


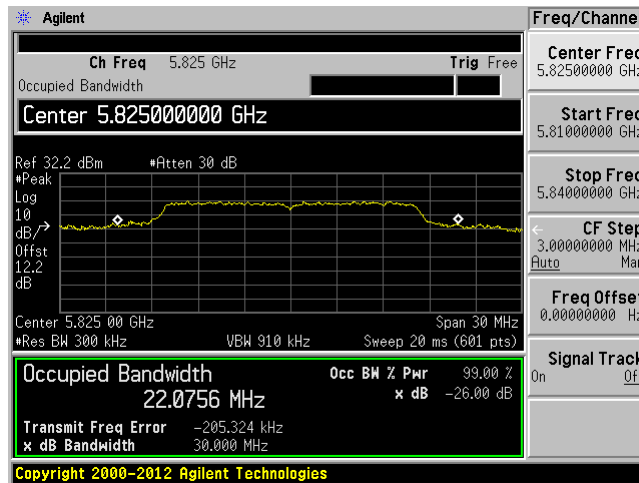


5725 – 5850 MHz, Ant 1


802.11a mode

5745 MHz

5785 MHz

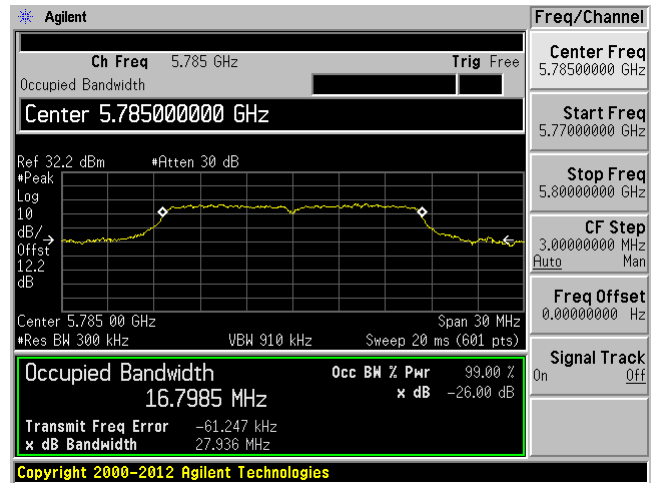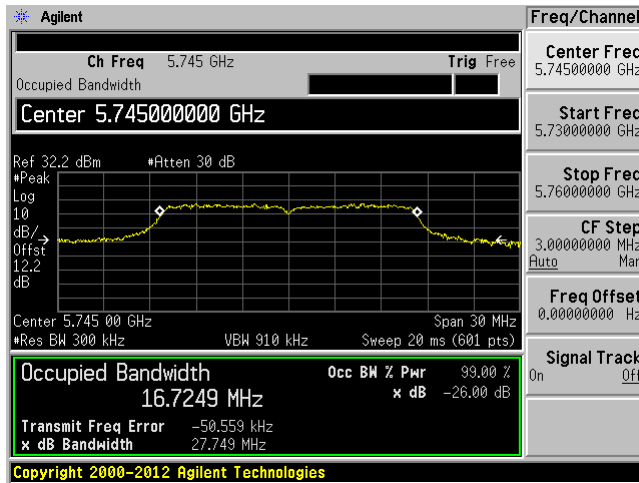

5825 MHz


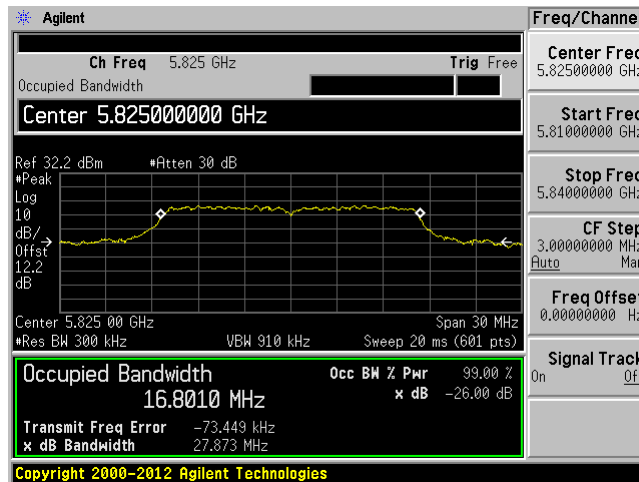


5725 – 5850 MHz, Ant 0


802.11n20 mode

5745 MHz

5785 MHz

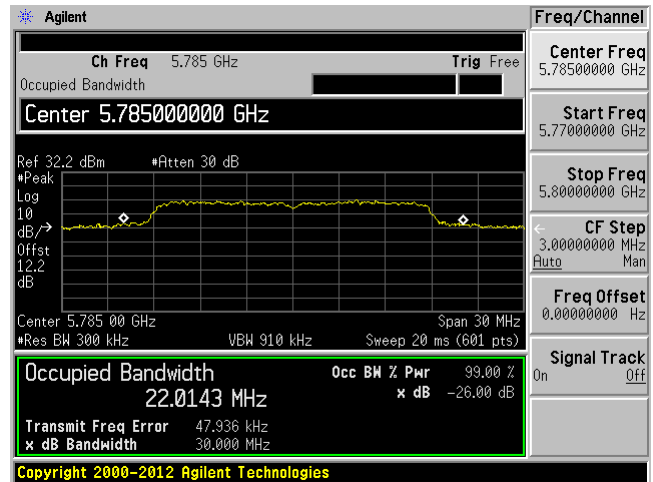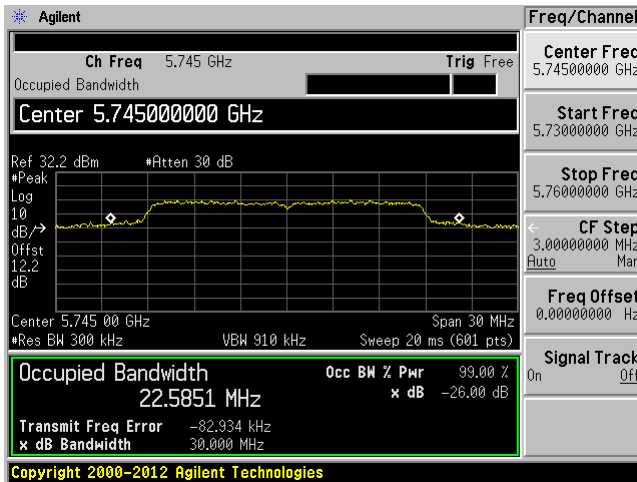

5825 MHz


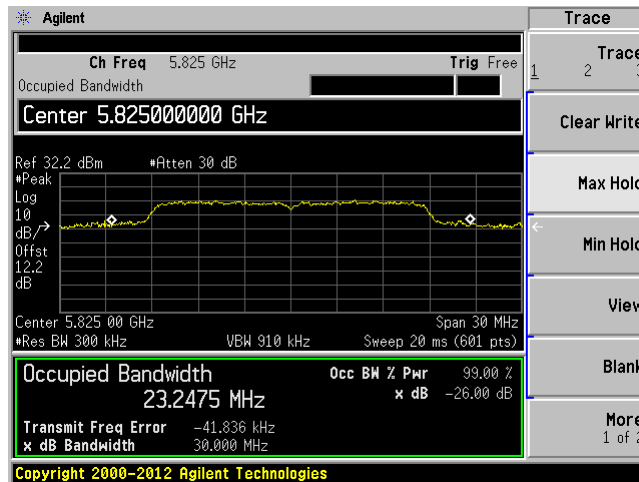


5725 – 5850 MHz, Ant 0 MIMO


802.11n20 mode

5745 MHz

5785 MHz

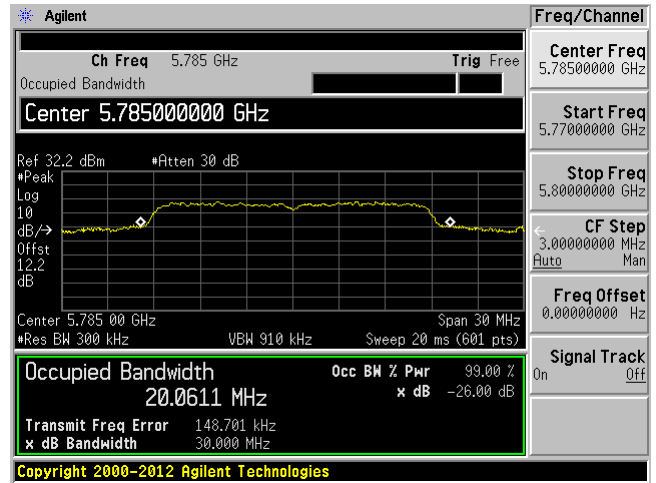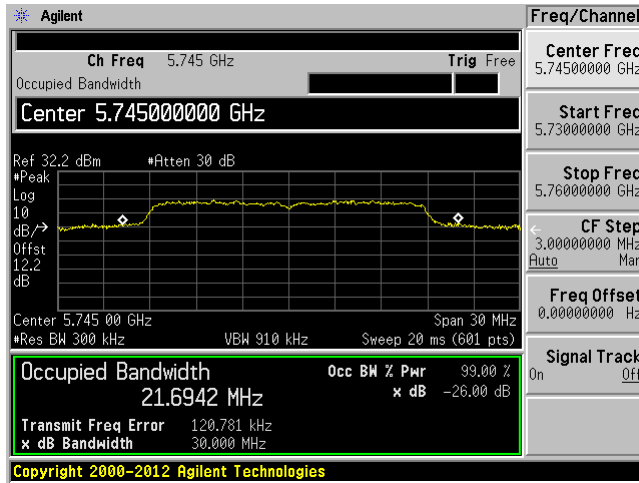

5825 MHz


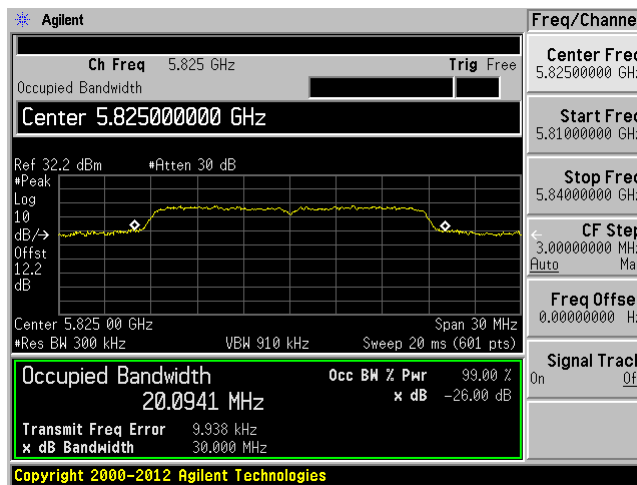


5725 – 5850 MHz, Ant 1


802.11n20 mode

5745 MHz

5785 MHz

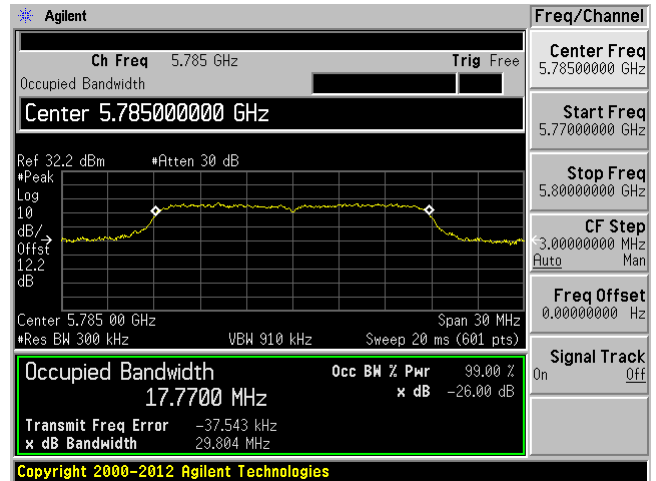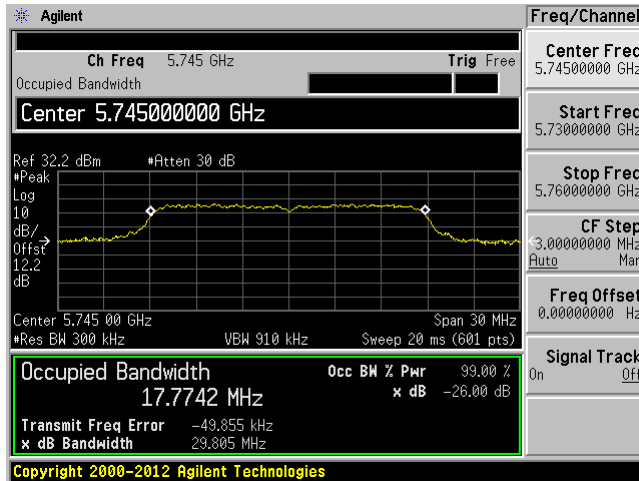

5825 MHz


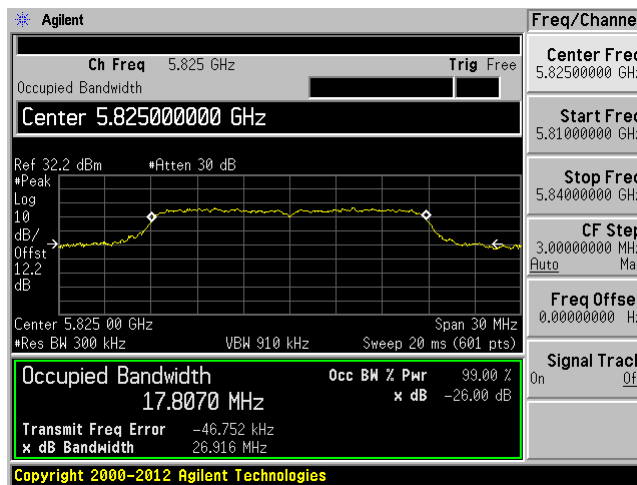


5725 – 5850 MHz, Ant 1 MIMO


802.11n20 mode

5745 MHz

5785 MHz

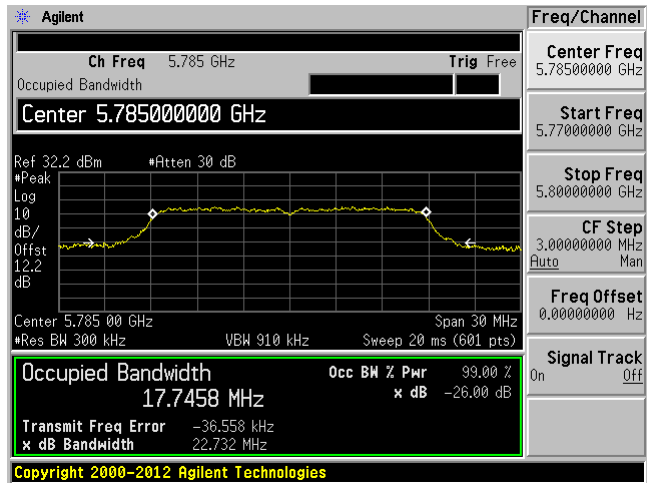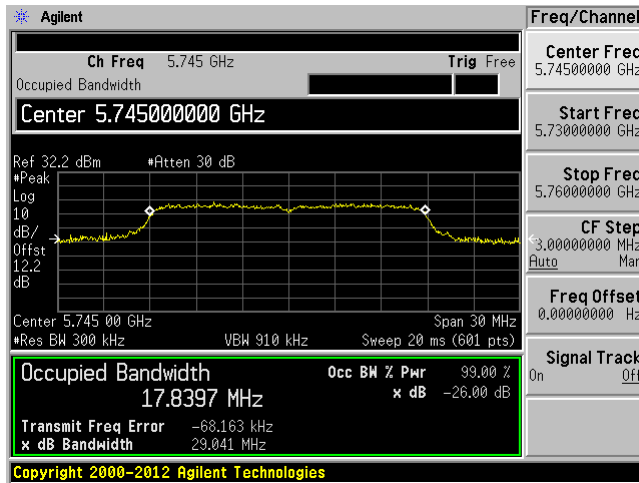

5825 MHz


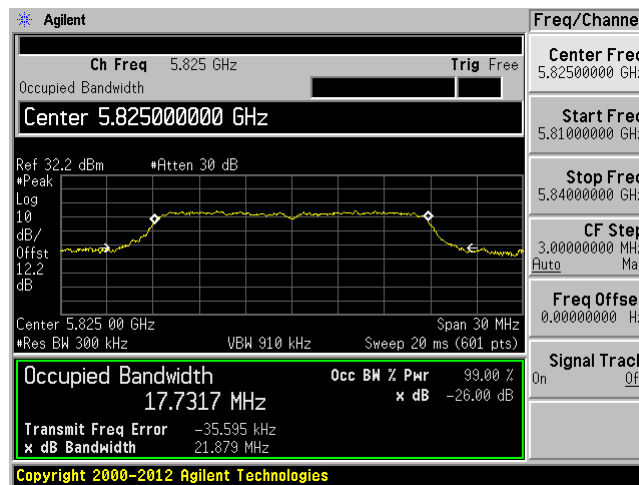


5725 – 5850 MHz, Ant 0


802.11ac20 mode

5745 MHz

5785 MHz

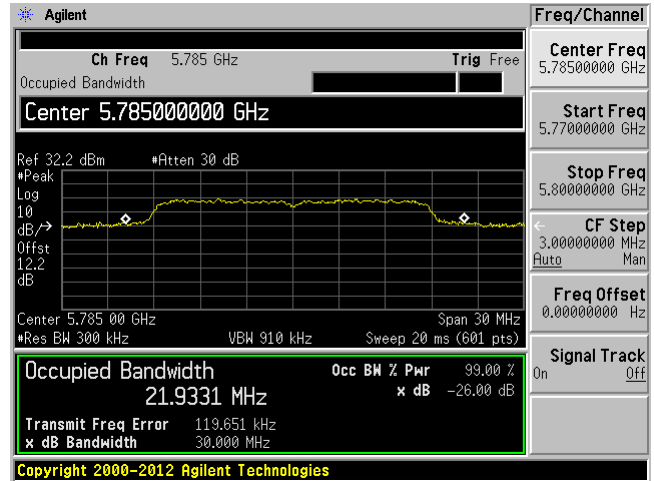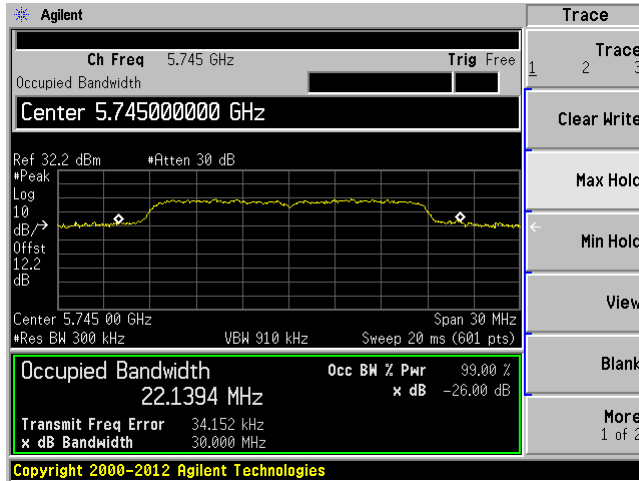

5825 MHz


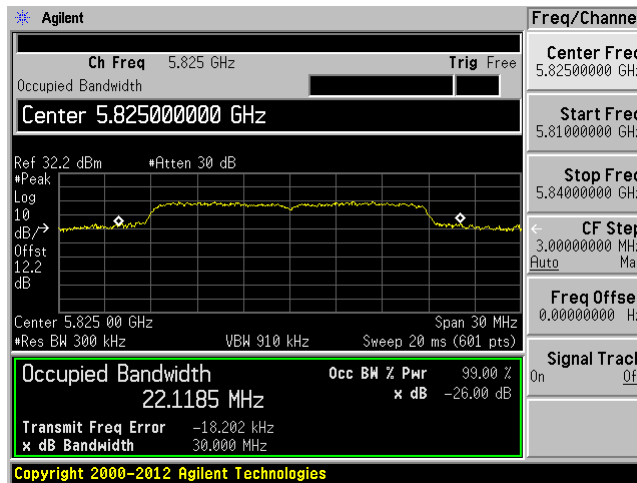


5725 – 5850 MHz, Ant 0 MIMO


802.11ac20 mode

5745 MHz

5785 MHz

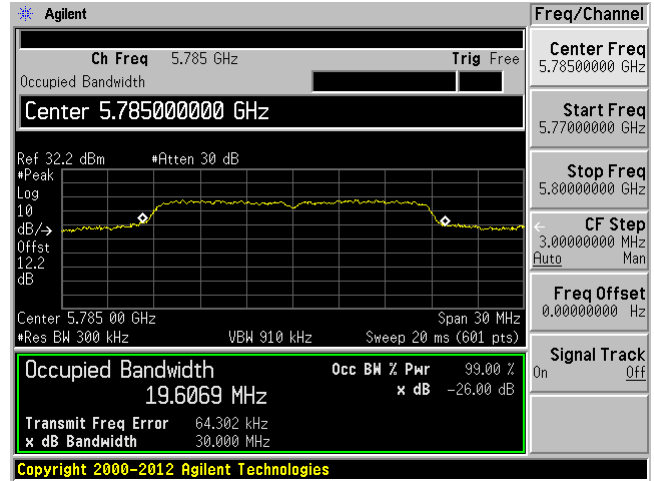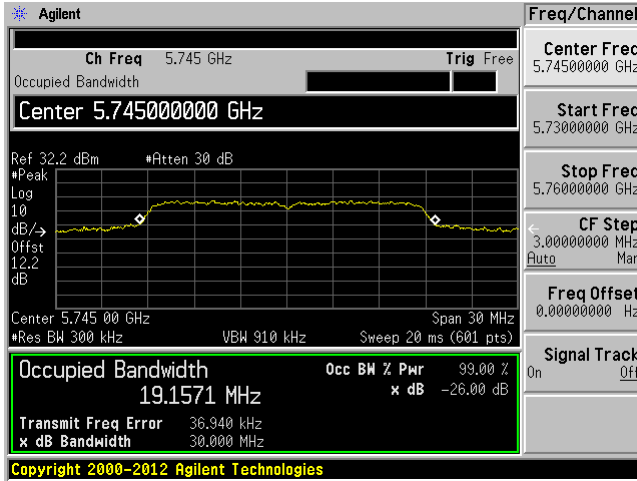

5825 MHz


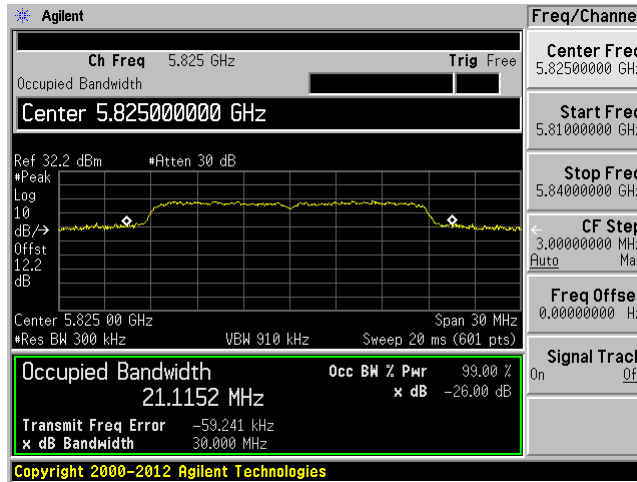


5725 – 5850 MHz, Ant 1


802.11ac20 mode

5745 MHz

5785 MHz

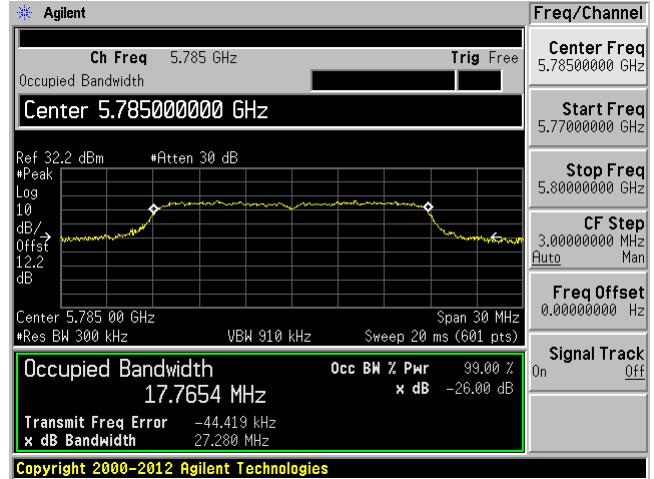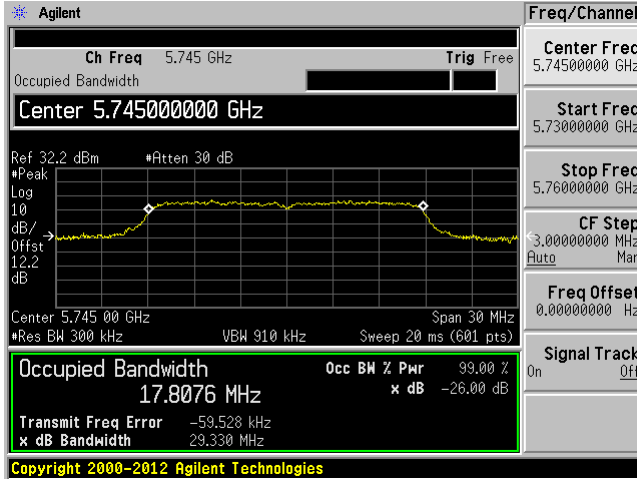

5825 MHz


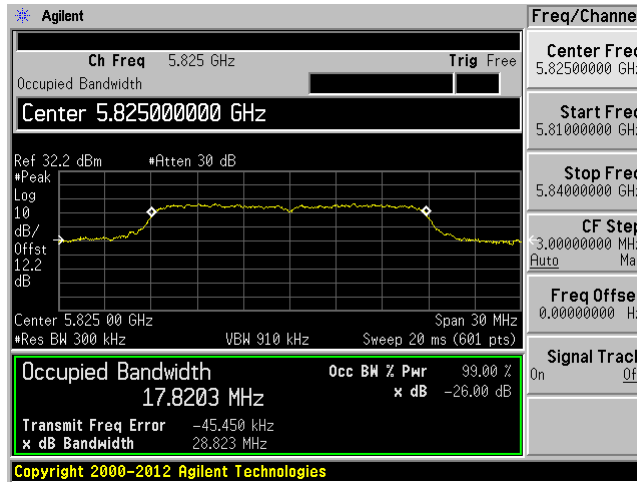


5725 – 5850 MHz, Ant 1 MIMO


802.11ac20 mode

5745 MHz

5785 MHz

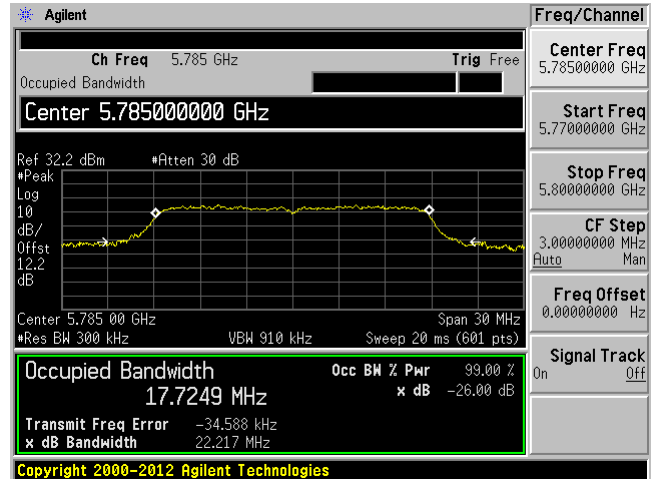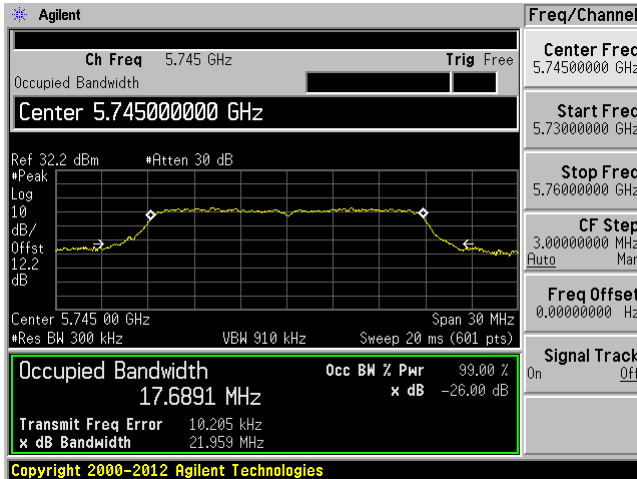

5825 MHz

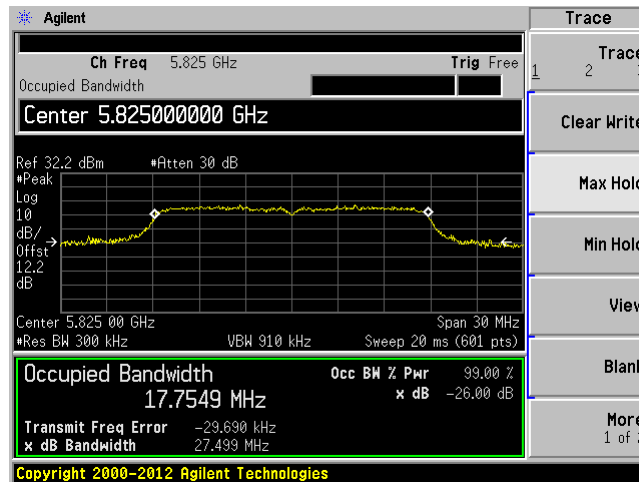

9 FCC §407(a) & ISEDC RSS-247 §6.2 - Output Power

9.1 Applicable Standards

According to FCC §15.407(a):

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to ISEDC RSS-247 §6.2.1 for frequency band 5150-5250 MHz:

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

According to ISEDC RSS-247 §6.2.4 for frequency band 5725-5850 MHz:

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

9.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a power meter.

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
ETS- Lingerin	Power Sensor	7002-006	160097	2016-12-05	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Frank Wang on 2017-07-31 to 2017-08-02 in RF site.

9.5 Test Results

5150 - 5250 MHz

FCC Results

Frequency (MHz)	Mode	TX Paths	Ant Port-0 (dBm)	Ant Port-1 (dBm)	Total Conducted Power (dBm)	FCC Limit (dBm)
5180	802.11a	1	18.27	-	18.27	24
	802.11a	1	-	16.63	16.63	24
	802.11n20	1	18.1	-	18.10	24
	802.11n20	1	-	17.3	17.30	24
	802.11n20	2	14.8	12.85	16.94	24
	802.11ac20	1	17.22	-	17.22	24
	802.11ac20	1	-	16.45	16.45	24
	802.11ac20	2	15.02	12.76	17.05	24
5200	802.11a	1	17.98	-	17.98	24
	802.11a	1	-	16.56	16.56	24
	802.11n20	1	17.84	-	17.84	24
	802.11n20	1	-	17.61	17.61	24
	802.11n20	2	14.52	12.9	16.80	24
	802.11ac20	1	17.82	-	17.82	24
	802.11ac20	1	-	16.31	16.31	24
	802.11ac20	2	14.86	12.85	16.98	24
5240	802.11a	1	17.38	-	17.38	24
	802.11a	1	-	15.78	15.78	24
	802.11n20	1	18.7	-	18.70	24
	802.11n20	1	-	17.46	17.46	24
	802.11n20	2	14.9	12.3	16.80	24
	802.11ac20	1	17.9	-	17.90	24
	802.11ac20	1	-	15.8	15.80	24
	802.11ac20	2	14.55	12.51	16.66	24

ISED Results

Frequency (MHz)	Mode	TX Paths	Ant Port-0 (dBm)	Ant Port-1 (dBm)	Total Conducted Power (dBm)	Antenna Gain (dBi)	Total e.i.r.p Power (dBm)	ISED Limit (dBm)
5180	802.11a	1	18.27	-	18.27	0.7	18.97	22.19
	802.11a	1	-	16.63	16.63	0.7	17.33	22.19
	802.11n20	1	18.1	-	18.10	0.7	18.80	22.19
	802.11n20	1	-	17.3	17.30	0.7	18.00	22.19
	802.11n20	2	14.8	12.85	16.94	0.7	17.64	22.19
	802.11ac20	1	17.22	-	17.22	0.7	17.92	22.19
	802.11ac20	1	-	16.45	16.45	0.7	17.15	22.19
	802.11ac20	2	15.02	12.76	17.05	0.7	17.75	22.19
5200	802.11a	1	17.98	-	17.98	0.7	18.68	22.19
	802.11a	1	-	16.56	16.56	0.7	17.26	22.19
	802.11n20	1	17.84	-	17.84	0.7	18.54	22.19
	802.11n20	1	-	17.61	17.61	0.7	18.31	22.19
	802.11n20	2	14.52	12.9	16.80	0.7	17.50	22.19
	802.11ac20	1	17.82	-	17.82	0.7	18.52	22.19
	802.11ac20	1	-	16.31	16.31	0.7	17.01	22.19
	802.11ac20	2	14.86	12.85	16.98	0.7	17.68	22.19
5240	802.11a	1	17.38	-	17.38	0.7	18.08	22.19
	802.11a	1	-	15.78	15.78	0.7	16.48	22.19
	802.11n20	1	18.7	-	18.70	0.7	19.40	22.19
	802.11n20	1	-	17.46	17.46	0.7	18.16	22.19
	802.11n20	2	14.9	12.3	16.80	0.7	17.50	22.19
	802.11ac20	1	17.9	-	17.90	0.7	18.60	22.19
	802.11ac20	1	-	15.8	15.80	0.7	16.50	22.19
	802.11ac20	2	14.55	12.51	16.66	0.7	17.36	22.19

Note: Because the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The lowest maximum e.i.r.p limit for the EUT is 22.19 dBm when 99% emission bandwidth is 16.5734 MHz. The lowest maximum e.i.r.p limit is used in the table.

5725 - 5850 MHz

Frequency (MHz)	Mode	TX Paths	Ant Port-0 (dBm)	Ant Port-1 (dBm)	Total Conducted Power (dBm)	FCC/ ISED Limit (dBm)
5745	802.11a	1	19.22	-	19.22	30
	802.11a	1	-	15.18	15.18	30
	802.11n20	1	18.17	-	18.17	30
	802.11n20	1	-	14.1	14.10	30
	802.11n20	2	16.66	11.38	17.79	30
	802.11ac20	1	18.52	-	18.52	30
	802.11ac20	1	-	14.56	14.56	30
	802.11ac20	2	15.85	11.48	17.20	30
5785	802.11a	1	18.93	-	18.93	30
	802.11a	1	-	15.45	15.45	30
	802.11n20	1	18.05	-	18.05	30
	802.11n20	1	-	14.7	14.70	30
	802.11n20	2	16.1	11.32	17.35	30
	802.11ac20	1	18	-	18.00	30
	802.11ac20	1	-	14.07	14.07	30
	802.11ac20	2	15.91	10.44	16.99	30
5825	802.11a	1	18.67	-	18.67	30
	802.11a	1	-	15.5	15.50	30
	802.11n20	1	17.96	-	17.96	30
	802.11n20	1	-	14.75	14.75	30
	802.11n20	2	15.96	12.36	17.53	30
	802.11ac20	1	17.9	-	17.90	30
	802.11ac20	1	-	14.07	14.07	30
	802.11ac20	2	15.13	11.06	16.57	30

10 FCC §15.407(a) & ISEDC RSS-247 §6.2 - Power Spectral Density

10.1 Applicable Standards

According to FCC §15.407(a):

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to ISEDC RSS-247 §6.2.1 for frequency band 5150-5250 MHz:

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

According to ISEDC RSS-247 §6.2.4 for frequency band 5725-5850 MHz:

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

10.2 Measurement Procedure

- (i) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the 26 dB EBW of the signal using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges. If the spectrum analyzer does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW of the spectrum.

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions

Temperature:	22-24 °C
Relative Humidity:	40-41 %
ATM Pressure:	103.1-104.1 kPa

The testing was performed by Frank Wang on 2017-07-31 to 2017-08-02 in RF site.

10.5 Test Results**5150 – 5250 MHz****FCC Results:**

Frequency (MHz)	Mode	TX Paths	PSD Ant-0 (dBm/MHz)	PSD Ant-1 (dBm/MHz)	Total PSD (dBm/MHz)	FCC Limit (dBm/MHz)
5180	802.11a	1	7.972	-	7.97	11
	802.11a	1	-	6.129	6.13	11
	802.11n20	1	7.977	-	7.98	11
	802.11n20	1	-	7.761	7.76	11
	802.11n20	2	3.763	2.359	6.13	11
	802.11ac20	1	7.99	-	7.99	11
	802.11ac20	1	-	6.169	6.17	11
	802.11ac20	2	4.188	2.163	6.30	11
5200	802.11a	1	7.824	-	7.82	11
	802.11a	1	-	6.195	6.20	11
	802.11n20	1	8.568	-	8.57	11
	802.11n20	1	-	7.527	7.53	11
	802.11n20	2	4.086	2.194	6.25	11
	802.11ac20	1	7.866	-	7.87	11
	802.11ac20	1	-	6.153	6.15	11
	802.11ac20	2	4.097	1.621	6.04	11
5240	802.11a	1	7.221	-	7.22	11
	802.11a	1	-	5.848	5.85	11
	802.11n20	1	7.96	-	7.96	11
	802.11n20	1	-	7.287	7.29	11
	802.11n20	2	3.085	1.863	5.53	11
	802.11ac20	1	6.851	-	6.85	11
	802.11ac20	1	-	5.874	5.87	11
	802.11ac20	2	3.992	1.878	6.07	11

ISED Results:

Frequency (MHz)	Mode	TX Paths	PSD Ant-0 (dBm/MHz)	PSD Ant-1 (dBm/MHz)	Total PSD (dBm/MHz)	Antenna Gain (dBi)	Total e.i.r.p PSD (dBm/MHz)	ISED Limit (dBm/MHz)
5180	802.11a	1	7.972	-	7.97	0.7	8.67	10
	802.11a	1	-	6.129	6.13	0.7	6.83	10
	802.11n20	1	7.977	-	7.98	0.7	8.68	10
	802.11n20	1	-	7.761	7.76	0.7	8.46	10
	802.11n20	2	3.763	2.359	6.13	0.7	6.83	10
	802.11ac20	1	7.99	-	7.99	0.7	8.69	10
	802.11ac20	1	-	6.169	6.17	0.7	6.87	10
5200	802.11a	1	7.824	-	7.82	0.7	8.52	10
	802.11a	1	-	6.195	6.20	0.7	6.90	10
	802.11n20	1	8.568	-	8.57	0.7	9.27	10
	802.11n20	1	-	7.527	7.53	0.7	8.23	10
	802.11n20	2	4.086	2.194	6.25	0.7	6.95	10
	802.11ac20	1	7.866	-	7.87	0.7	8.57	10
	802.11ac20	1	-	6.153	6.15	0.7	6.85	10
5240	802.11ac20	2	4.097	1.621	6.04	0.7	6.74	10
	802.11a	1	7.221	-	7.22	0.7	7.92	10
	802.11a	1	-	5.848	5.85	0.7	6.55	10
	802.11n20	1	7.96	-	7.96	0.7	8.66	10
	802.11n20	1	-	7.287	7.29	0.7	7.99	10
	802.11n20	2	3.085	1.863	5.53	0.7	6.23	10
	802.11ac20	1	6.851	-	6.85	0.7	7.55	10
	802.11ac20	1	-	5.874	5.87	0.7	6.57	10
802.11ac20	2	3.992	1.878	6.07	0.7	6.77	10	

5725 - 5850 MHz

Frequency (MHz)	Mode	TX Paths	PSD Ant-0 (dBm/100kHz)	PSD Ant-1 (dBm/100kHz)	Total PSD (dBm/100kHz)	Correct PSD (dBm/500 kHz)	FCC/ ISED Limit (dBm/500 kHz)
5745	802.11a	1	-0.999	-	-0.999	5.991	30
	802.11a	1	-	-4.440	-4.440	2.550	30
	802.11n20	1	-0.710	-	-0.710	6.280	30
	802.11n20	1	-	-5.105	-5.105	1.885	30
	802.11n20	2	-4.576	-9.359	-3.330	3.660	30
	802.11ac20	1	-0.627	-	-0.627	6.363	30
	802.11ac20	1	-	-5.387	-5.387	1.603	30
5785	802.11a	1	-0.897	-	-0.897	6.093	30
	802.11a	1	-	-4.382	-4.382	2.608	30
	802.11n20	1	-0.885	-	-0.885	6.105	30
	802.11n20	1	-	-4.993	-4.993	1.997	30
	802.11n20	2	-4.564	-8.515	-3.095	3.895	30
	802.11ac20	1	-1.094	-	-1.094	5.896	30
	802.11ac20	1	-	-5.228	-5.228	1.762	30
5825	802.11a	1	-1.327	-	-1.327	5.663	30
	802.11a	1	-	-4.505	-4.505	2.485	30
	802.11n20	1	-1.542	-	-1.542	5.448	30
	802.11n20	1	-	-4.550	-4.550	2.440	30
	802.11n20	2	-4.376	-9.397	-3.188	3.802	30
	802.11ac20	1	-1.357	-	-1.357	5.633	30
	802.11ac20	1	-	-4.859	-4.859	2.131	30
	802.11ac20	2	-4.722	-9.541	-3.485	3.505	30

Note: For the 5725-5850 MHz band, the Corrected PSD (dBm/500 kHz) is equal to:

$$\text{Correct PSD (dBm/500 kHz)} = \text{PSD (dBm/100 kHz)} + 10 \cdot \log(500 \text{ kHz}/100 \text{ kHz})$$



Please refer to the following plots.

5150 – 5250 MHz


802.11a mode Ant 0

5180 MHz

5200 MHz

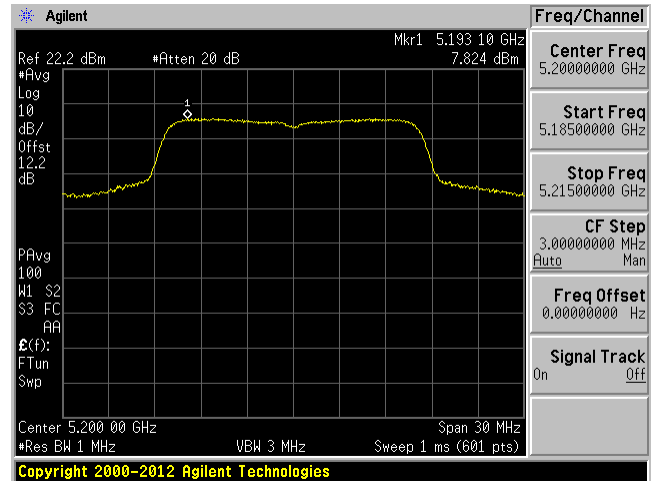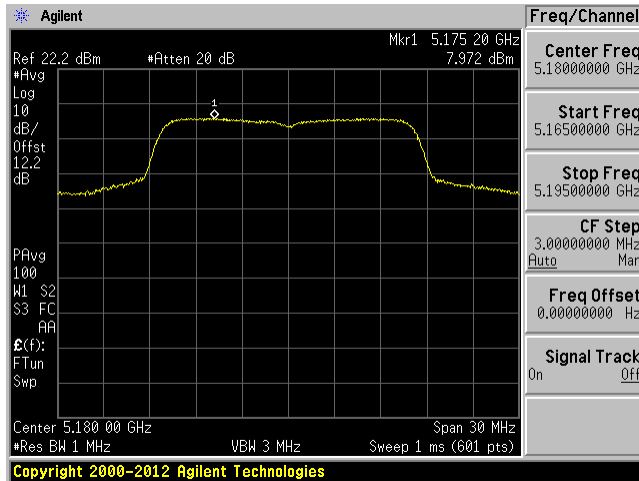


5240 MHz

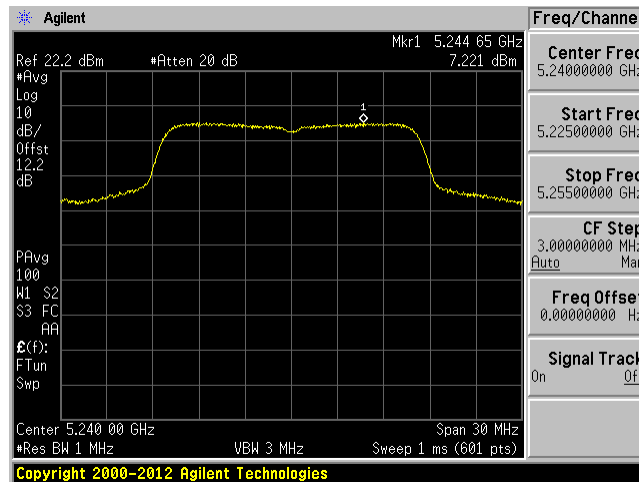


802.11a mode Ant 1


5180 MHz

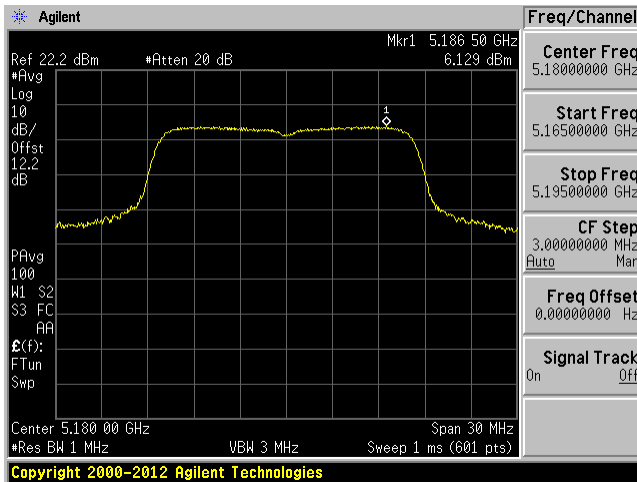

5200 MHz

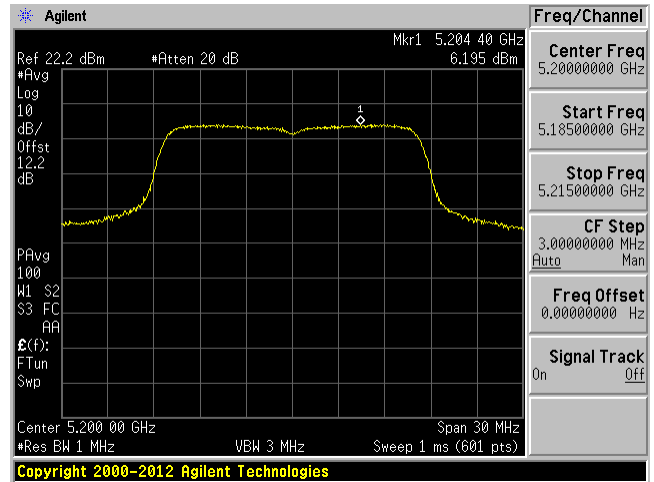



5240 MHz

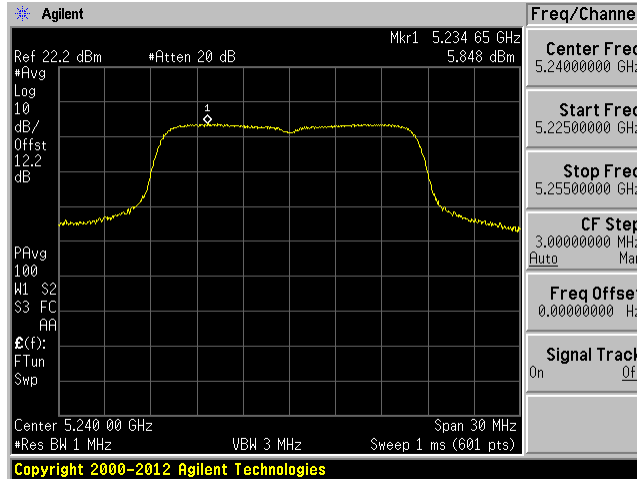


802.11n20 mode Ant 0

5180 MHz

5200 MHz

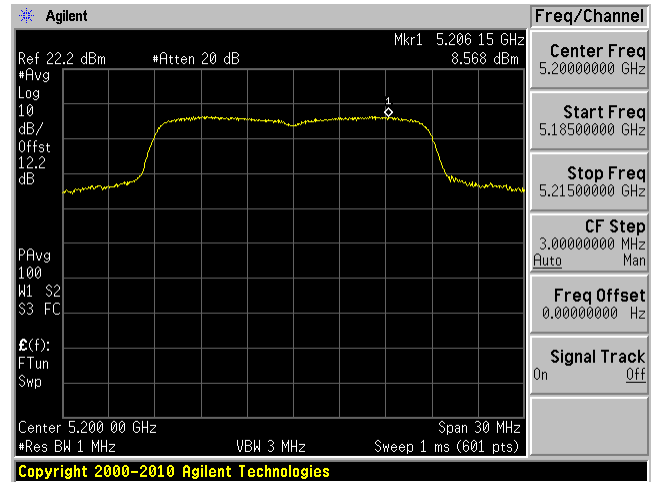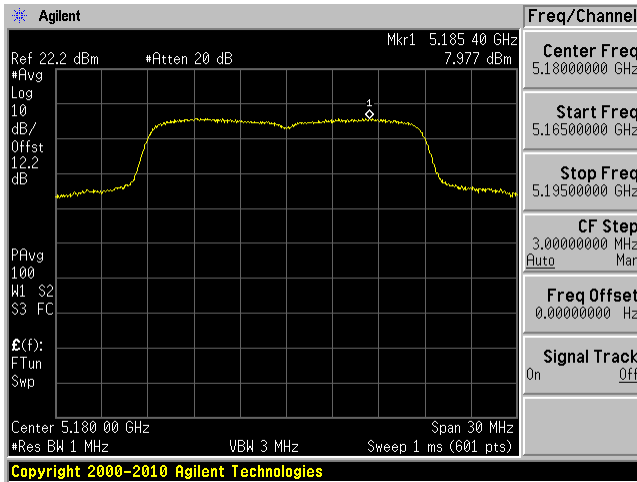


5240 MHz

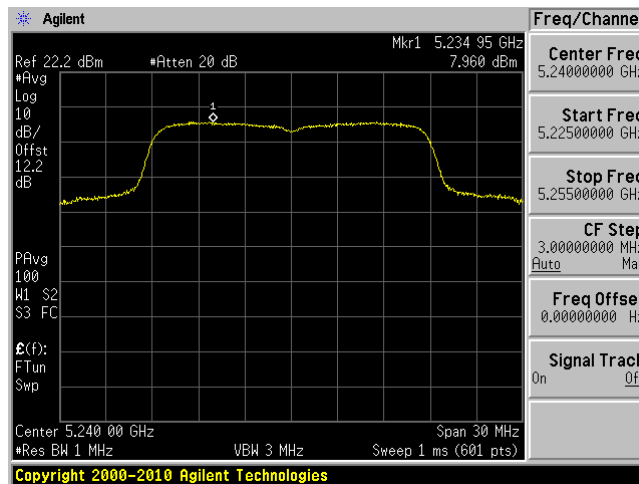


802.11n20 mode Ant 1


5180 MHz

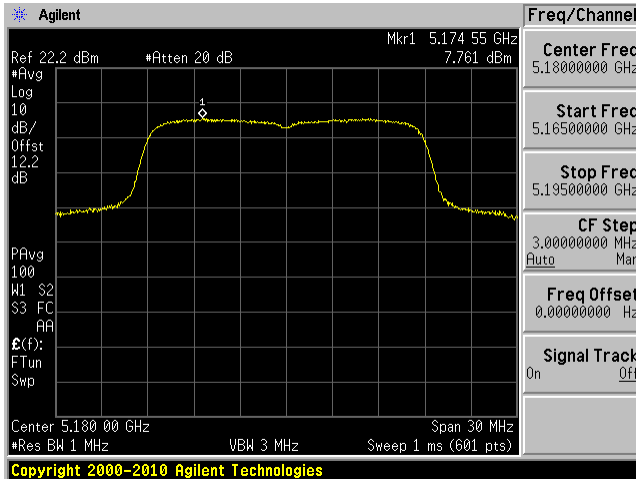

5200 MHz

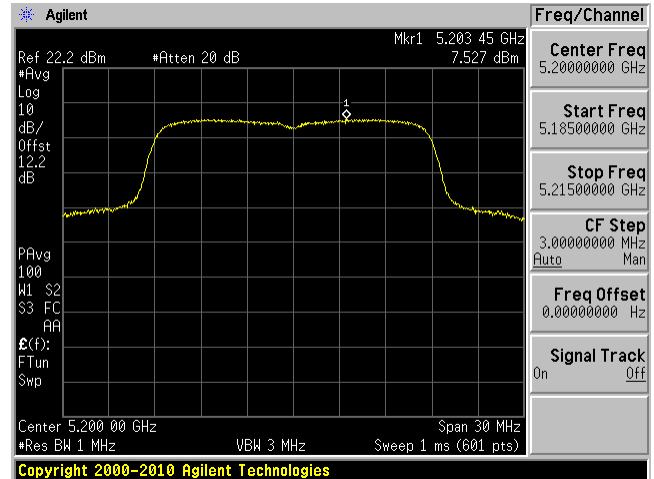



5240 MHz

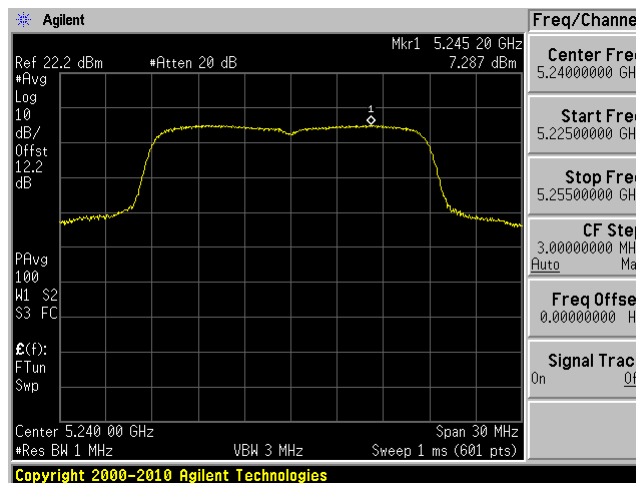


802.11n20 mode MIMO Ant 0

5180 MHz

5200 MHz

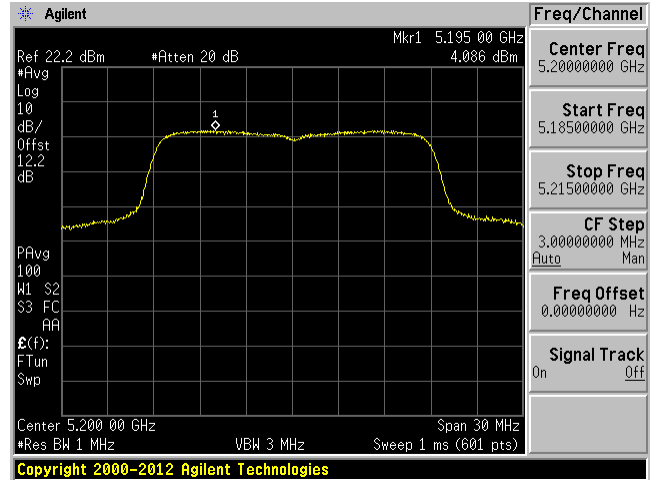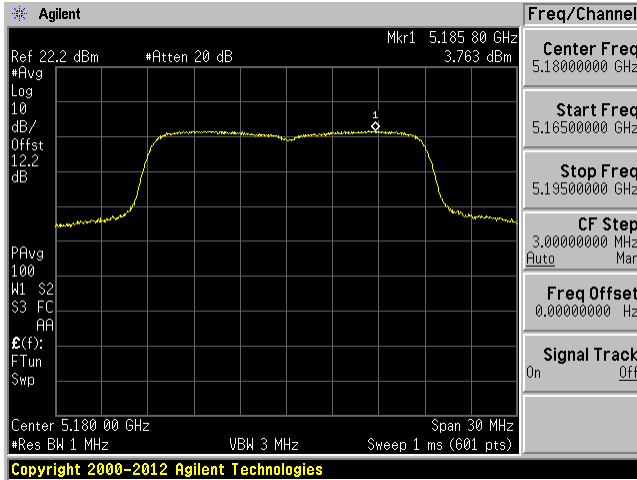


5240 MHz

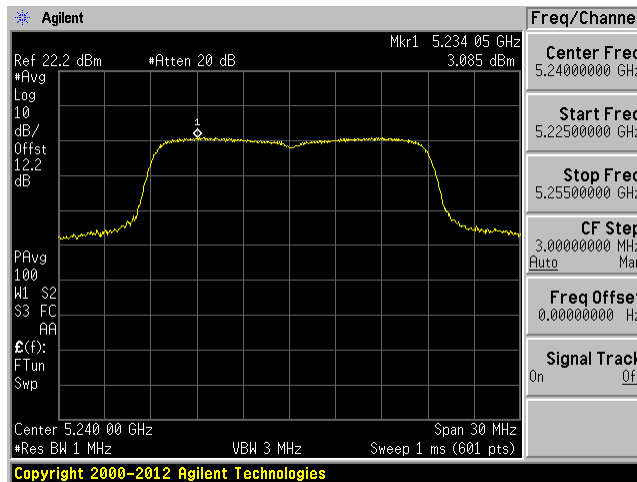


802.11n20 mode MIMO Ant 1


5180 MHz

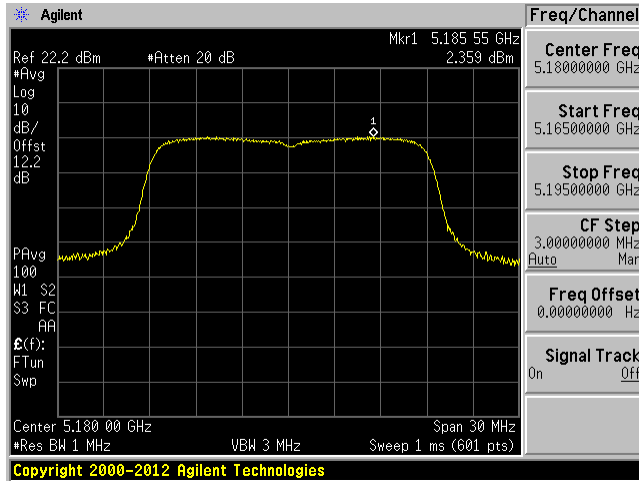

5200 MHz

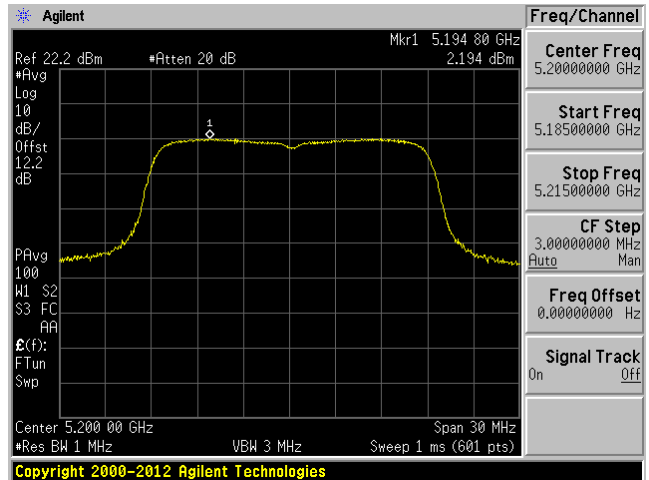


5240 MHz

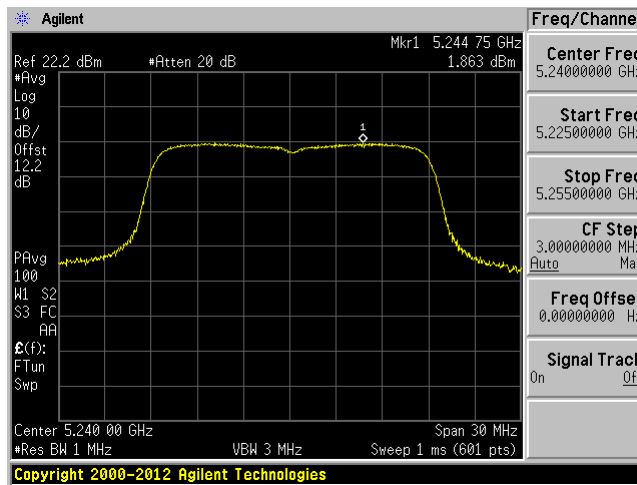


802.11ac20 mode Ant 0


5180 MHz

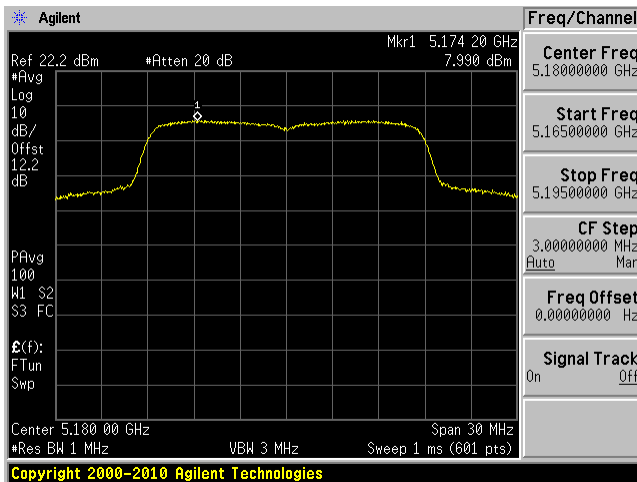

5200 MHz

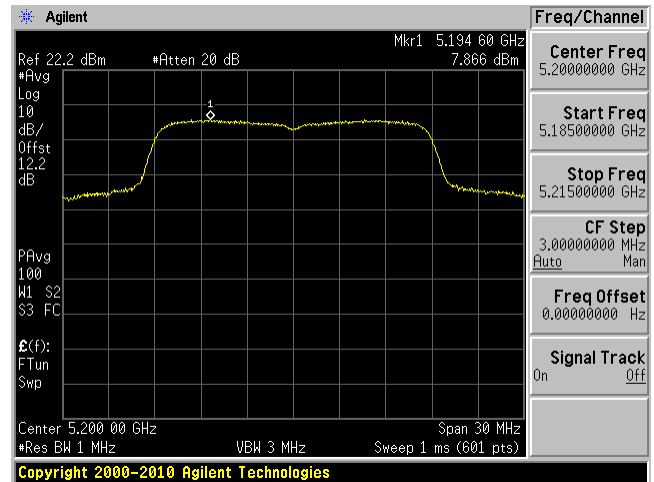


5240 MHz

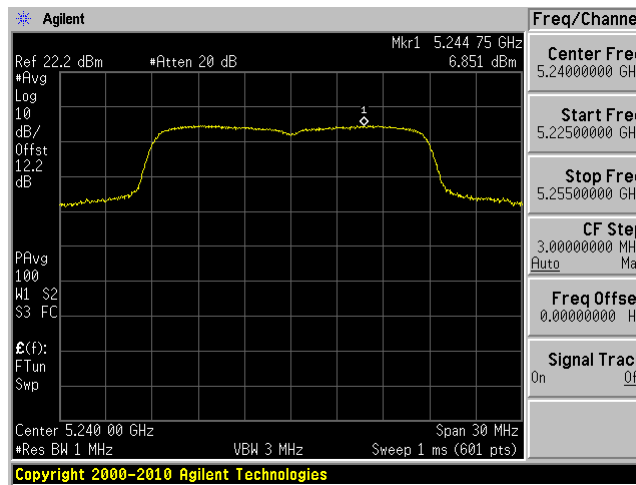


802.11ac20 mode Ant 1


5180 MHz

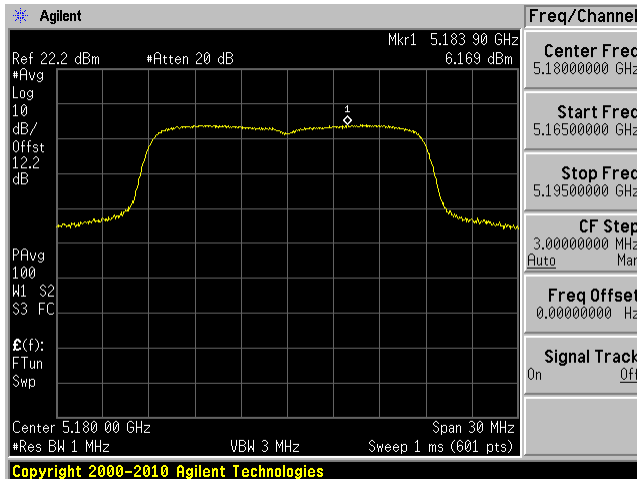

5200 MHz

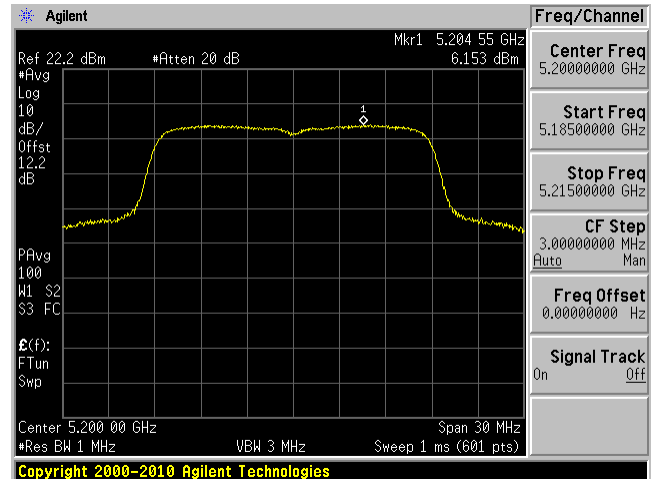



5240 MHz

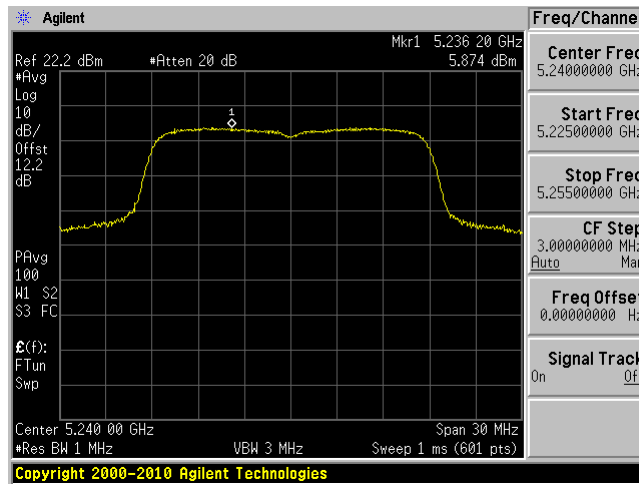


802.11ac20 mode MIMO Ant 0

5180 MHz

5200 MHz

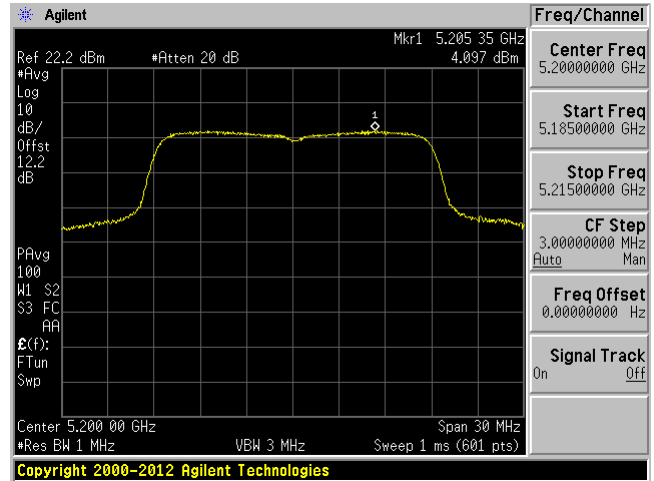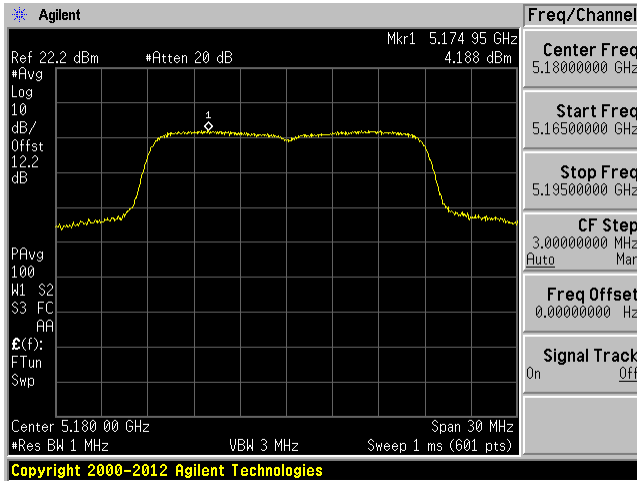



5240 MHz

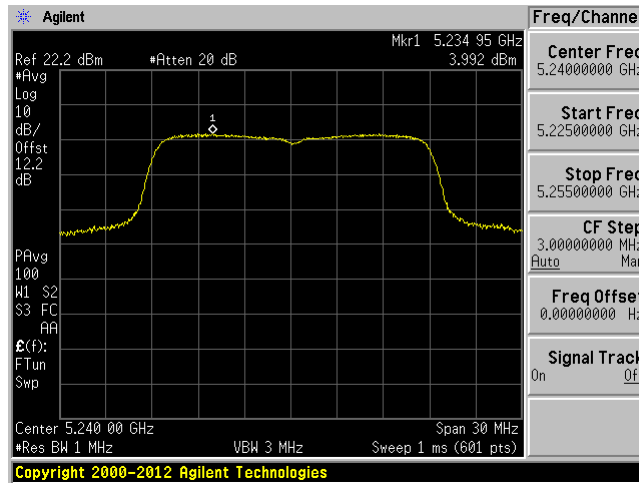


802.11ac20 mode MIMO Ant 1

5180 MHz

5200 MHz

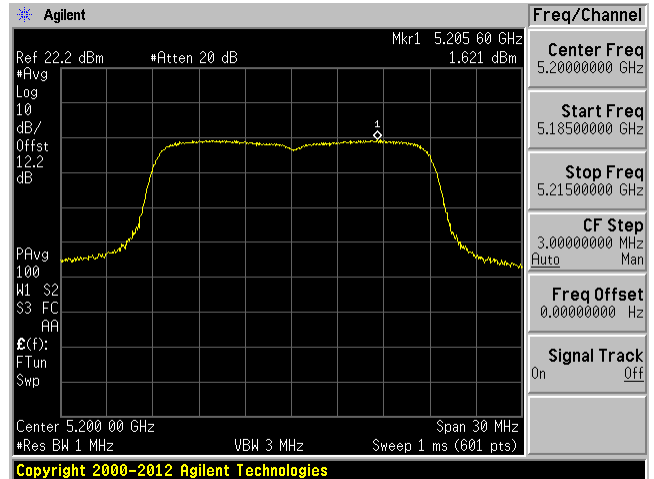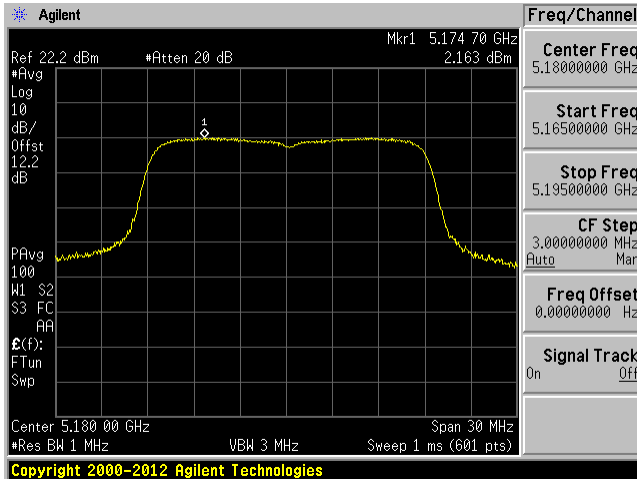

5240 MHz


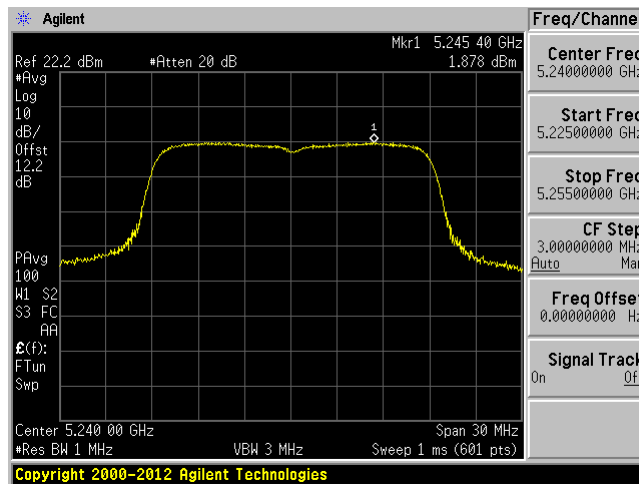


5725 – 5850 MHz


802.11a mode Ant 0

5745 MHz

5785 MHz

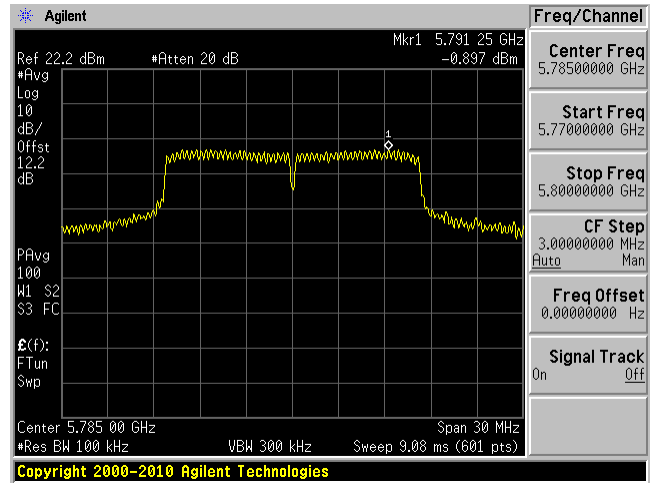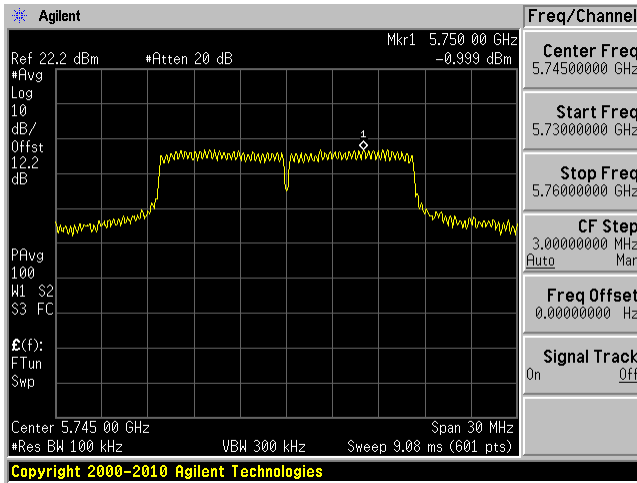


5825 MHz

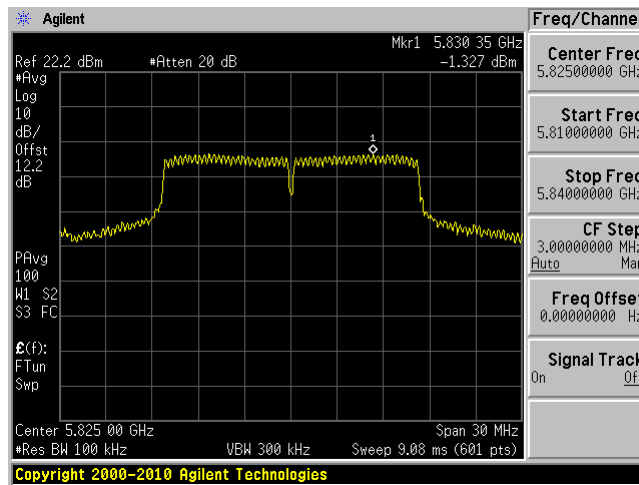


802.11a mode Ant 1


5745 MHz

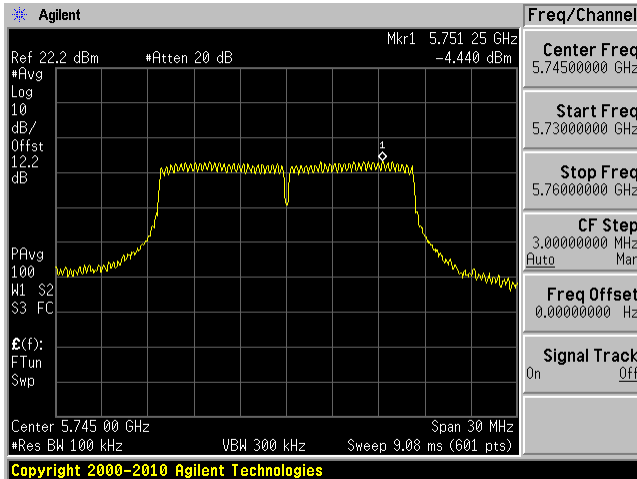

5785 MHz

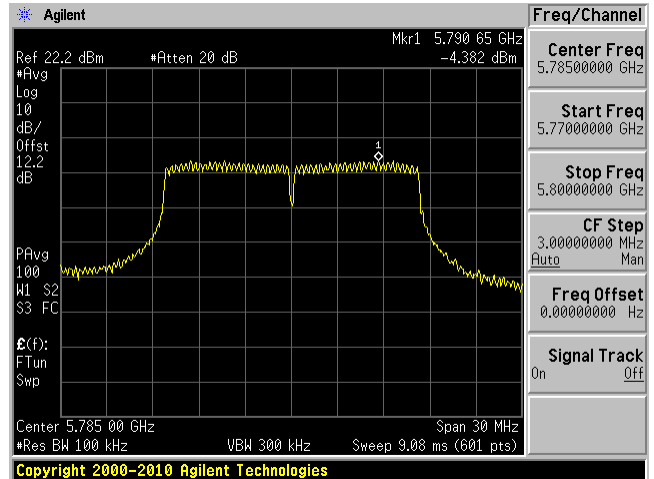


5825 MHz

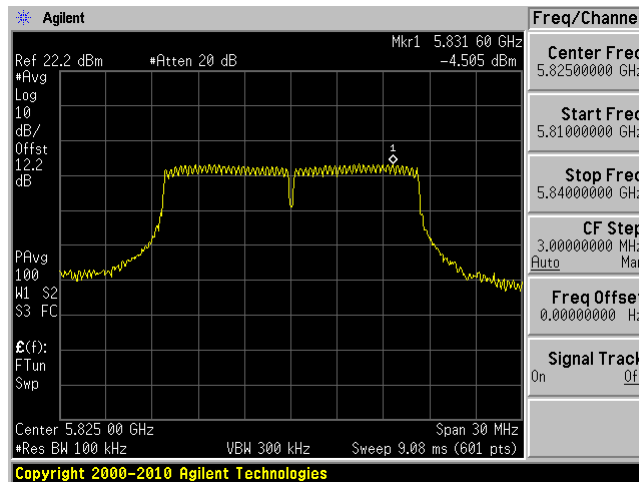


802.11n20 mode Ant 0


5745 MHz

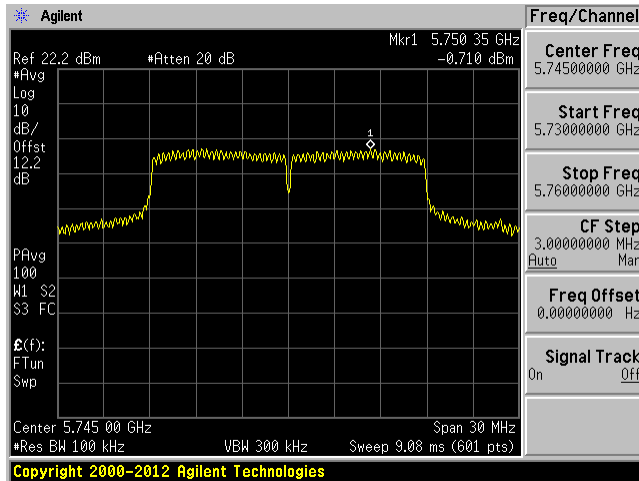

5785 MHz

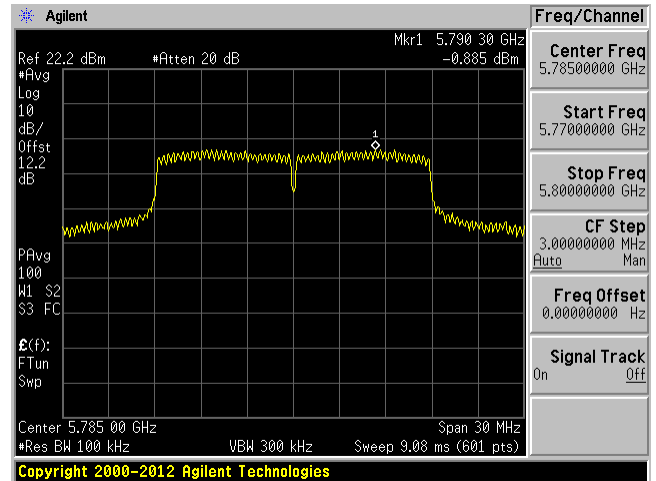


5825 MHz

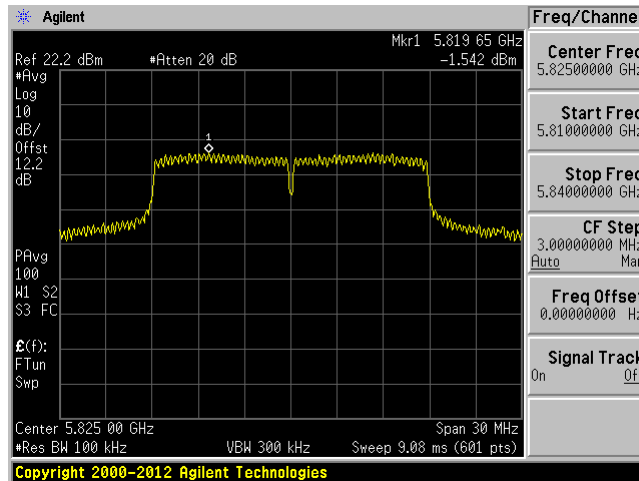


802.11n20 mode Ant 1


5745 MHz

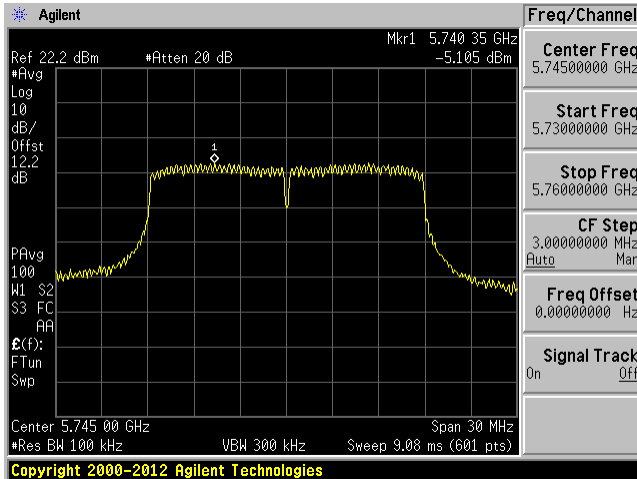

5785 MHz

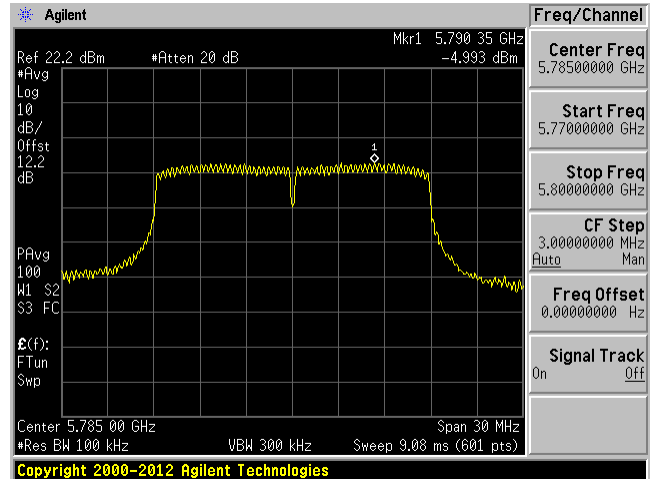


5825 MHz

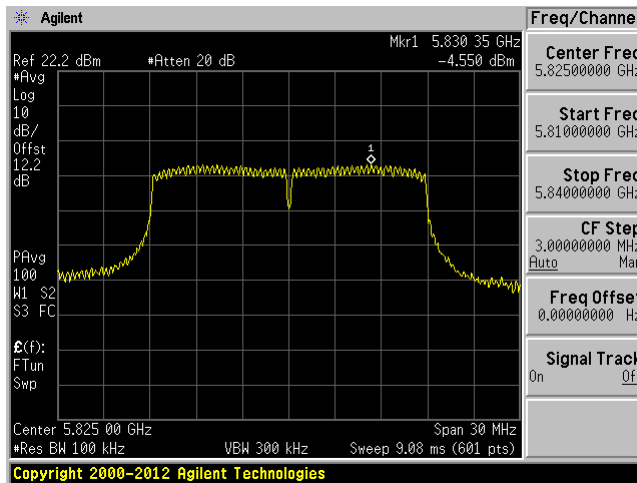


802.11n20 mode MIMO Ant 0


5745 MHz

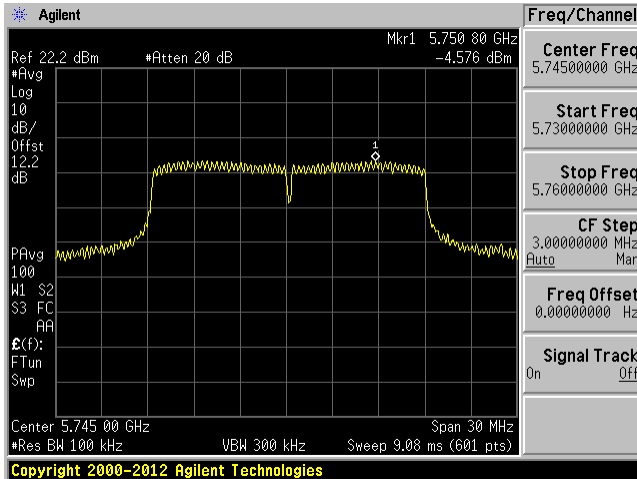

5785 MHz

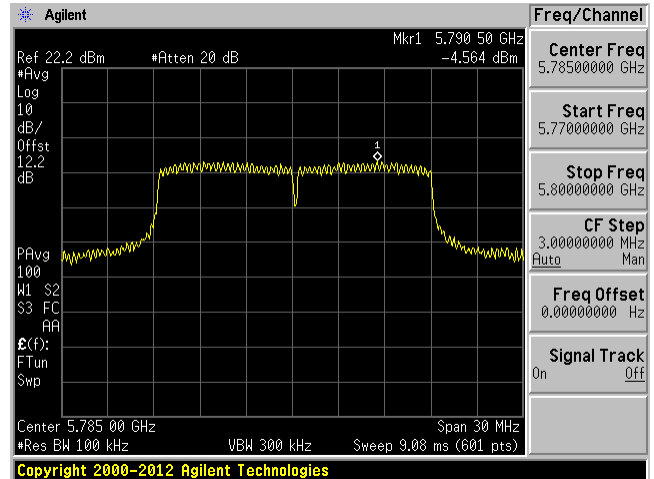



5825 MHz

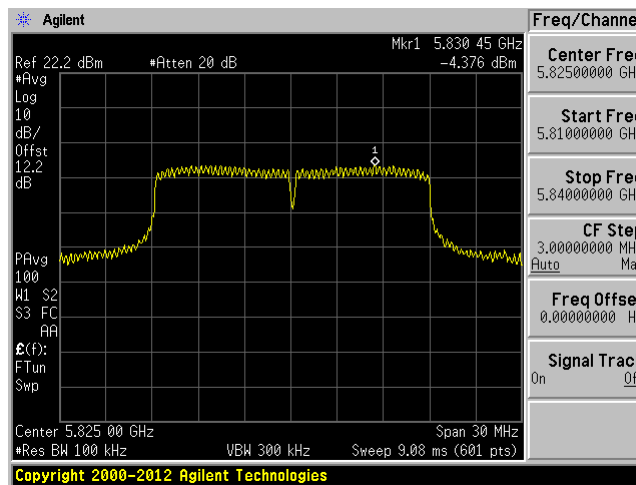


802.11n20 mode MIMO Ant 1

5745 MHz

5785 MHz

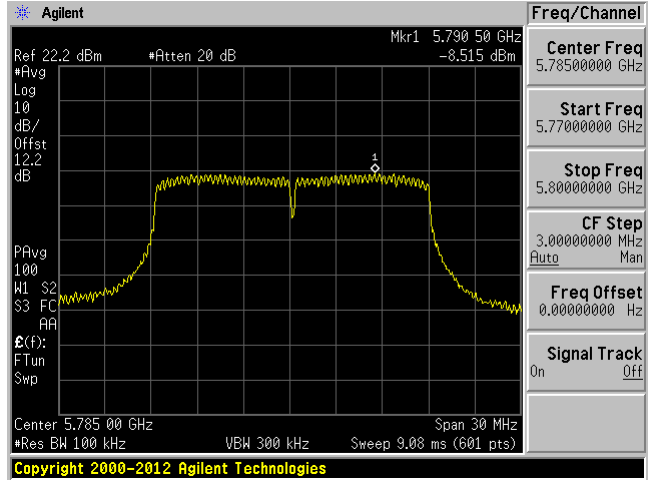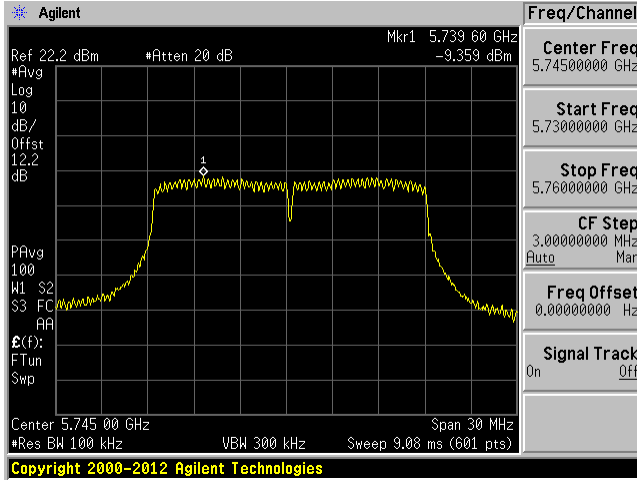



5825 MHz

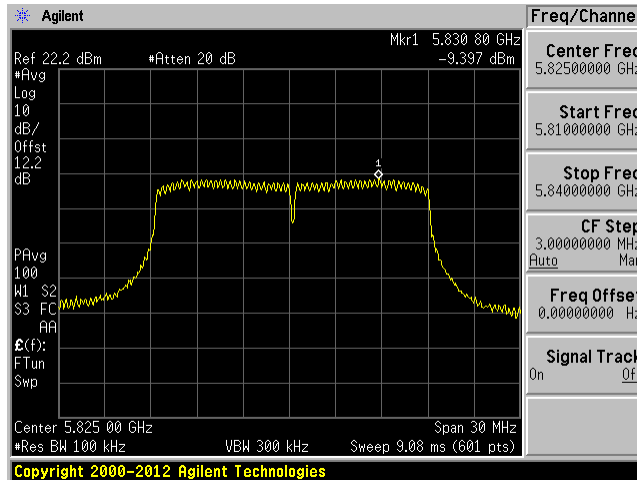


802.11ac20 mode Ant 0

5745 MHz

5785 MHz

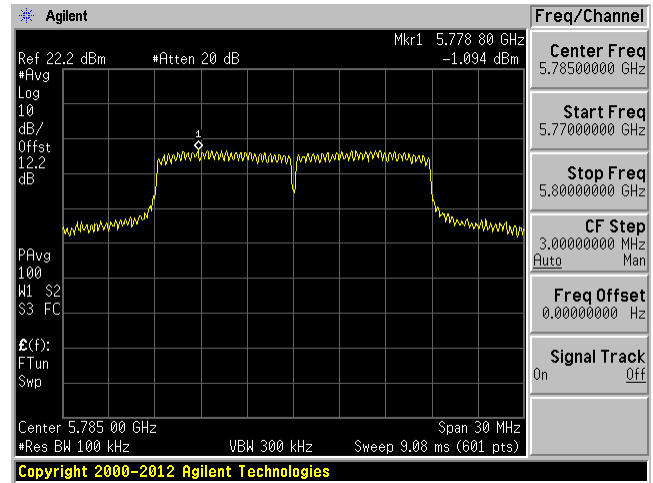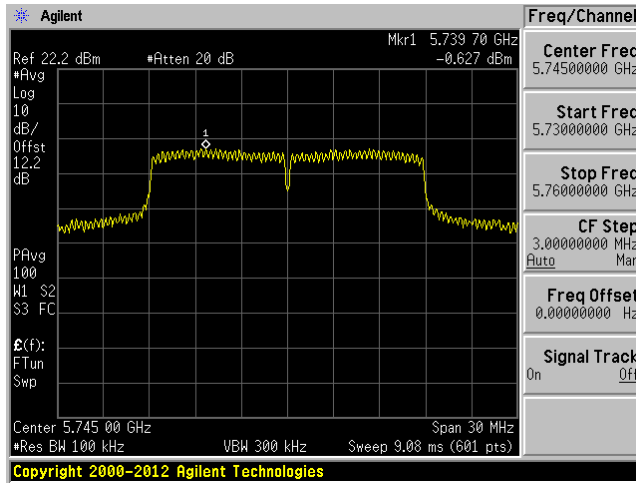



5825 MHz

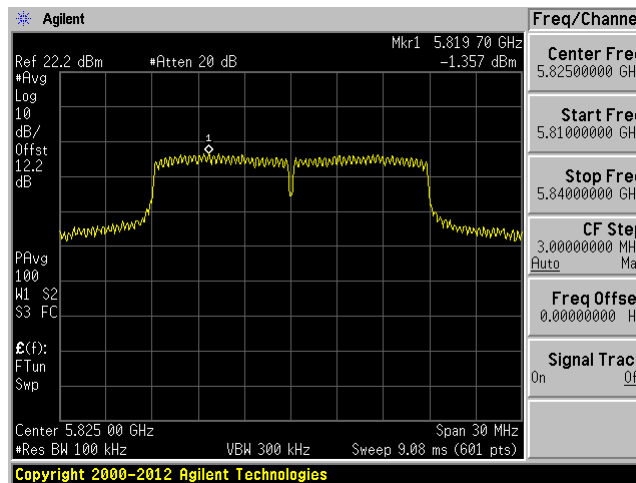


802.11ac20 mode Ant 1

5745 MHz

5785 MHz

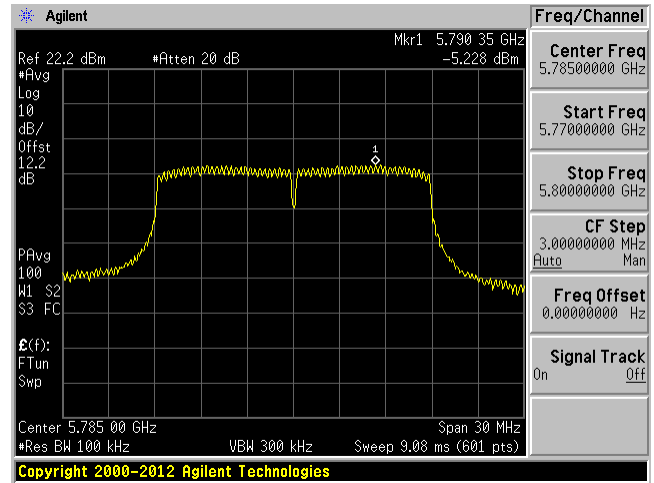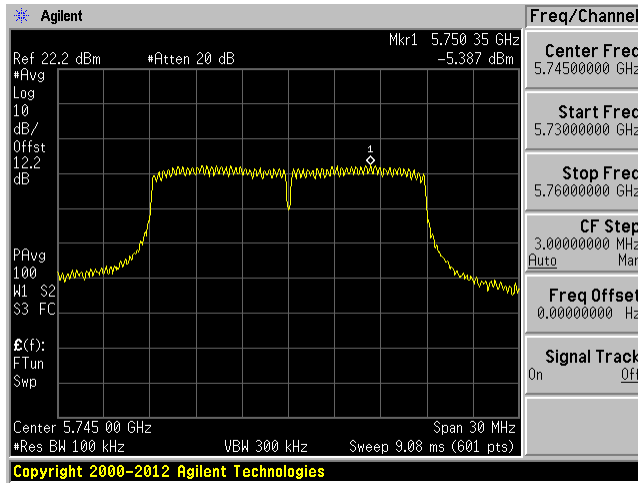



5825 MHz

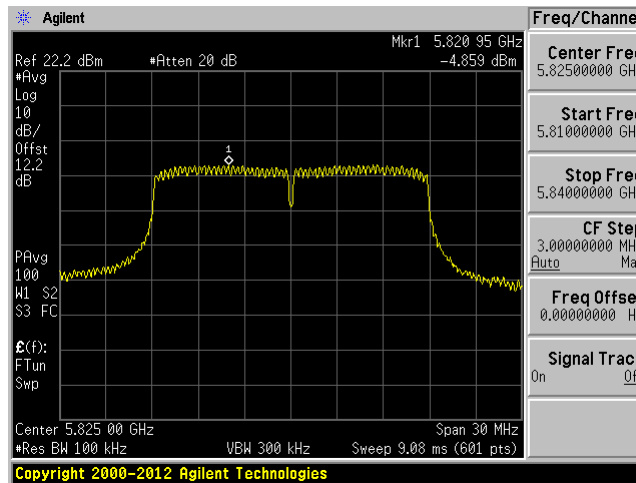


802.11ac20 mode MIMO Ant 0

5745 MHz

5785 MHz

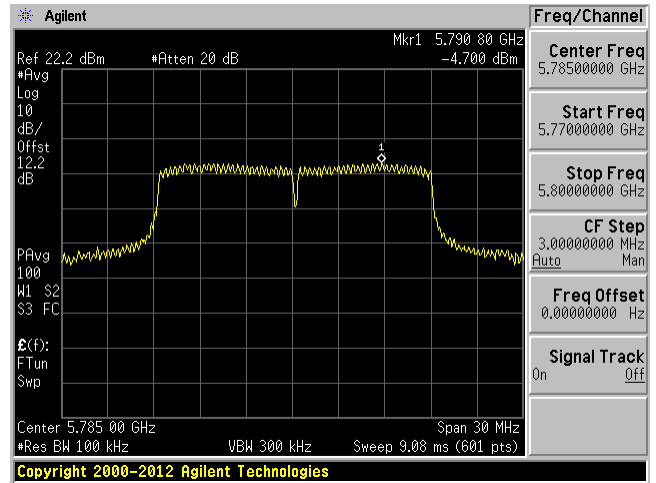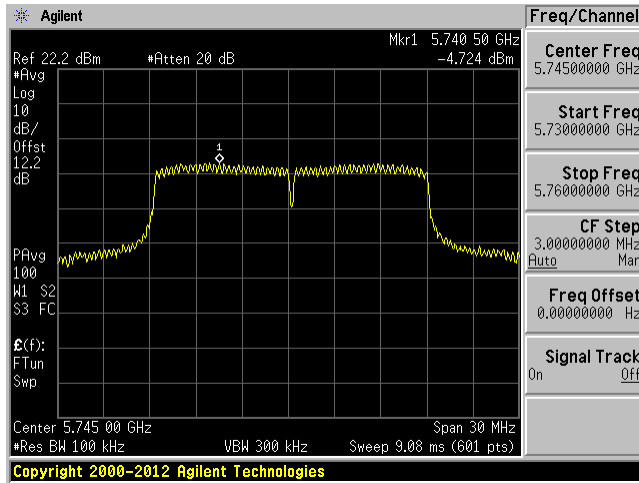


5825 MHz

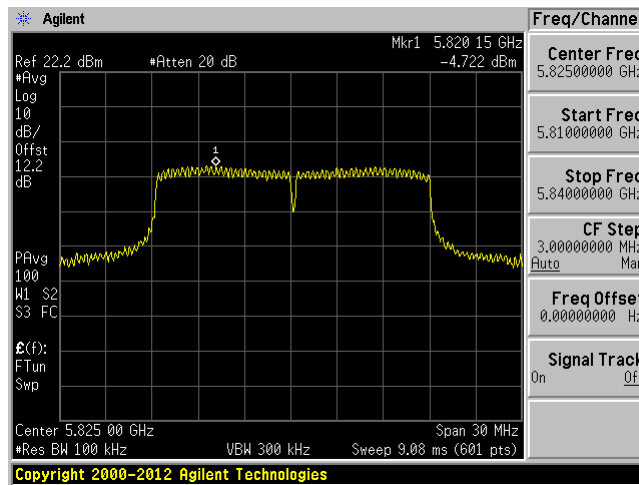


802.11ac20 mode MIMO Ant 1


5745 MHz

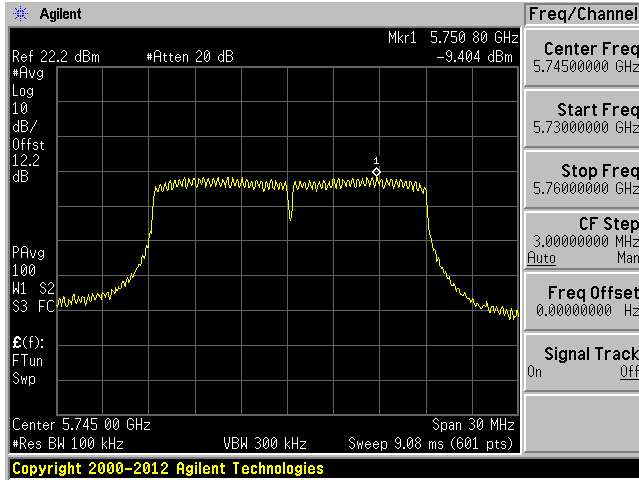

5785 MHz

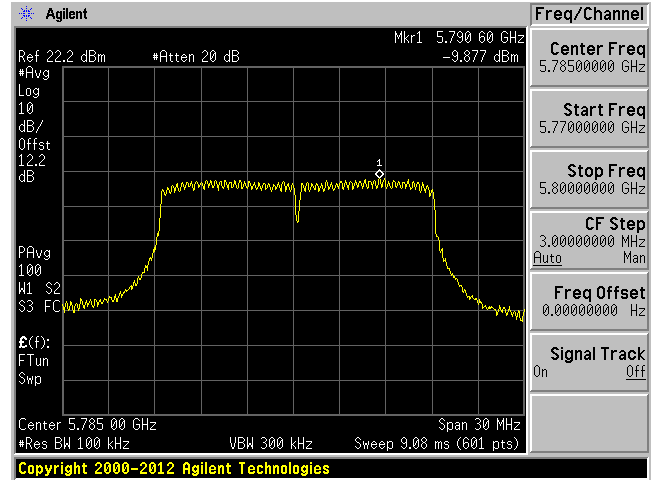

5825 MHz

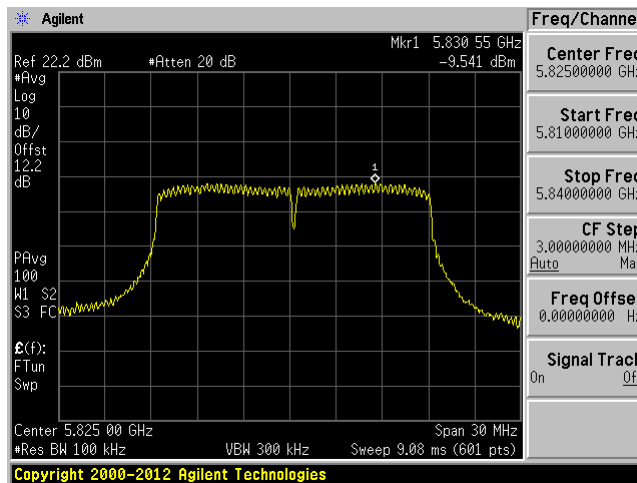

11 FCC §15.407(b) & ISEDC RSS-247 §6.2 - Band Edge

11.1 Applicable Standards

According to FCC §15.407(b):

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

The provisions of §15.205 apply to intentional radiators operating under this section.

According to ISEDC RSS-247 §6.2.1 for devices operating in the frequency band 5150-5250 MHz:

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz.

According to ISEDC RSS-247 §6.2.4 for devices operating in the frequency band 5725-5850 MHz:

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

11.2 Measurement Procedure

Add a correction factor (antenna gain+ Attenuator loss+cable loss) to the offset of the spectrum analyzer.
Integration Method

1. For peak emissions measurements, follow the procedures described in section H)5), “Procedures for Peak Unwanted Emissions Measurements above 1000 MHz”, except for the following changes:
 - Set RBW = 100 kHz
 - Set VBW = 3RBW
 - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured. CAUTION: You must ensure that the spectrum analyzer or EMI receiver is set for peak-detection and max-hold for this measurement.
2. For average emissions measurements, follow the procedures described in section H)6), “Procedures for Average Unwanted Emissions Measurements above 1000 MHz”, except for the following changes:
 - Set RBW = 100 kHz
 - Set VBW = 3RBW
 - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions

Temperature:	22-24° C
Relative Humidity:	40-41 %
ATM Pressure:	103.1-104.1 kPa

The testing was performed by Frank Wang on 2017-07-31 to 2017-08-02 in RF site.

11.5 Test Results



Please refer to the following plots

5150 - 5250 MHz

802.11a mode Ant 0

Low Channel 5180MHz



High Channel 5240 MHz

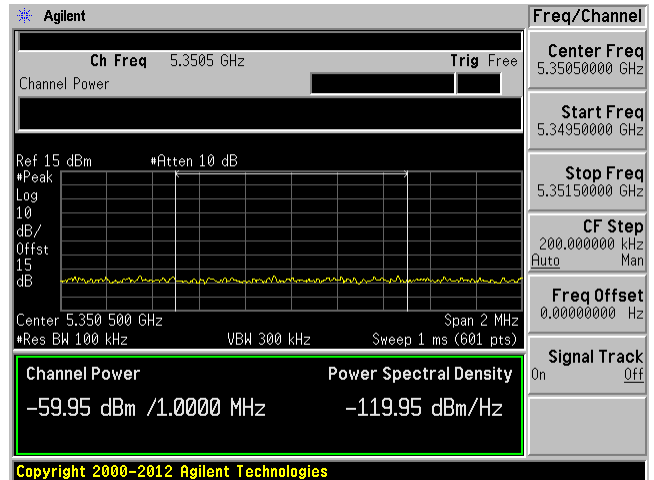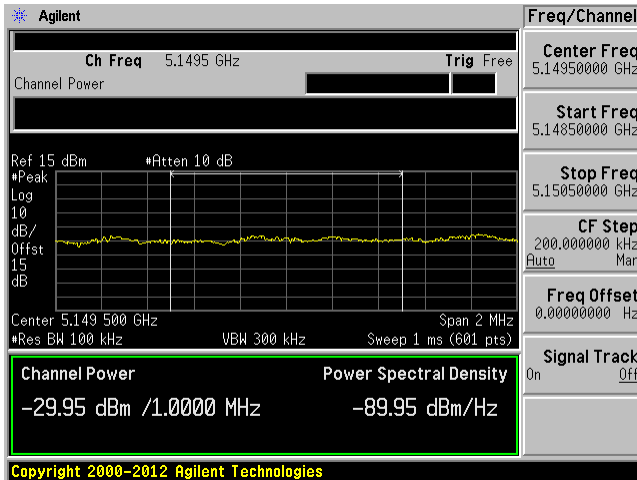

802.11a mode Ant 1

Low Channel 5180MHz



High Channel 5240 MHz

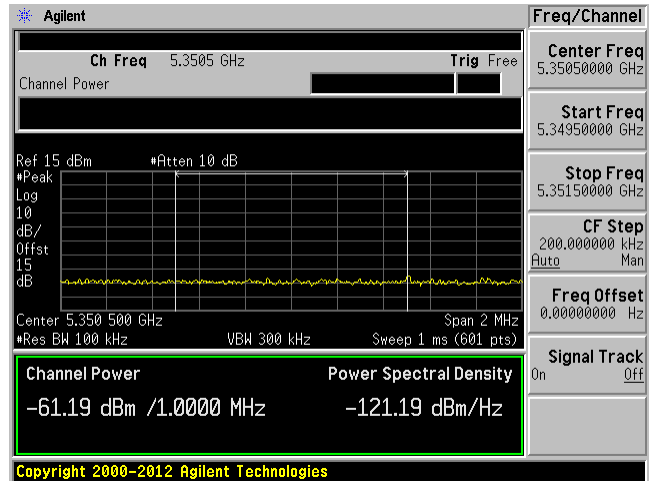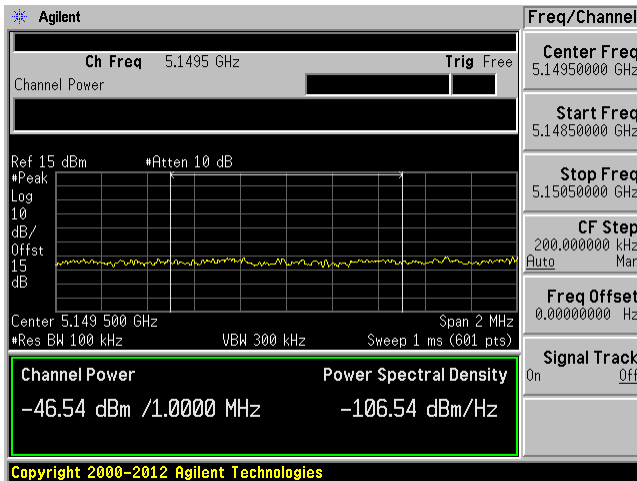

802.11n20 mode Ant 0

Low Channel 5180MHz



High Channel 5240 MHz

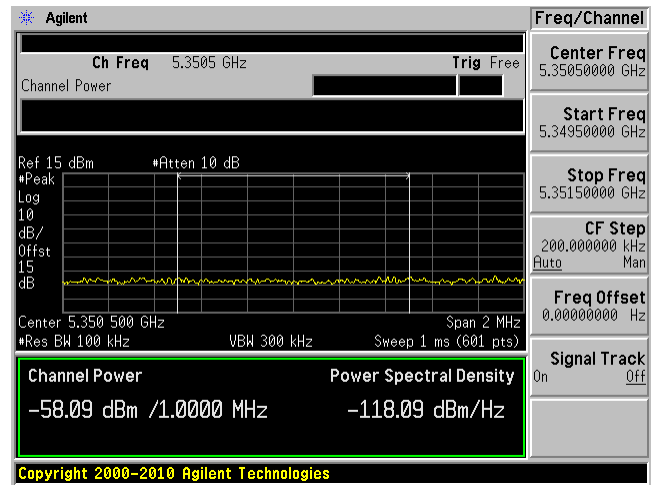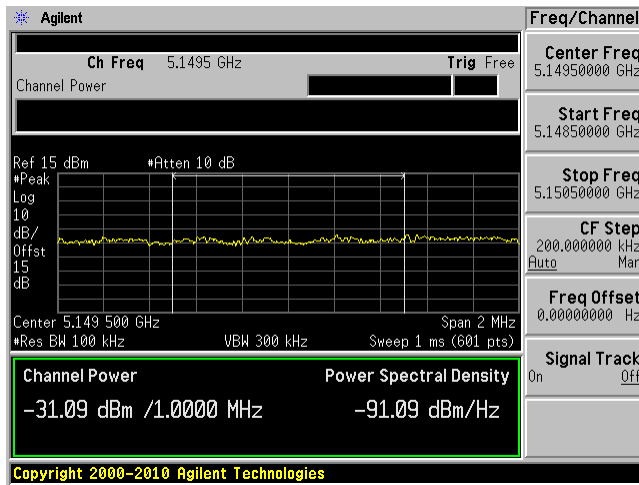

802.11n20 mode Ant 1

Low Channel 5180MHz



High Channel 5240 MHz

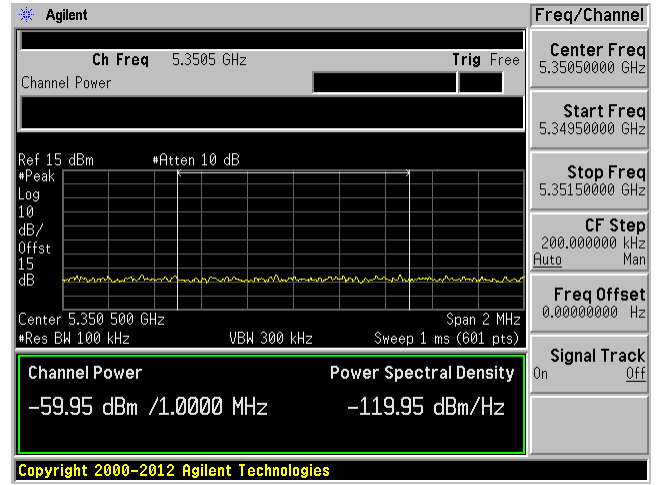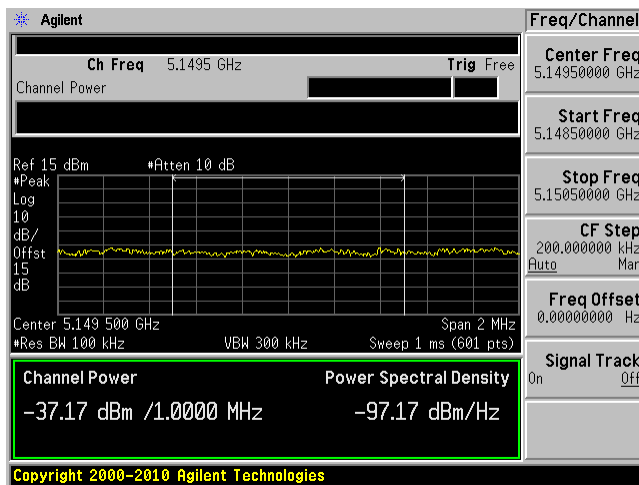

802.11n20 mode MIMO Ant 0

Low Channel 5180MHz



High Channel 5240 MHz

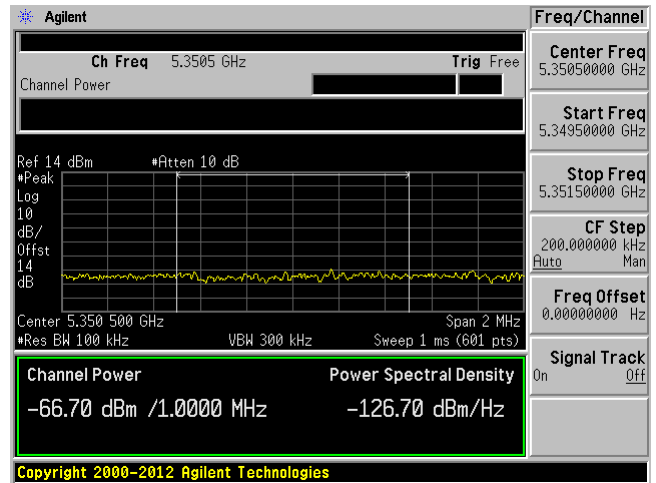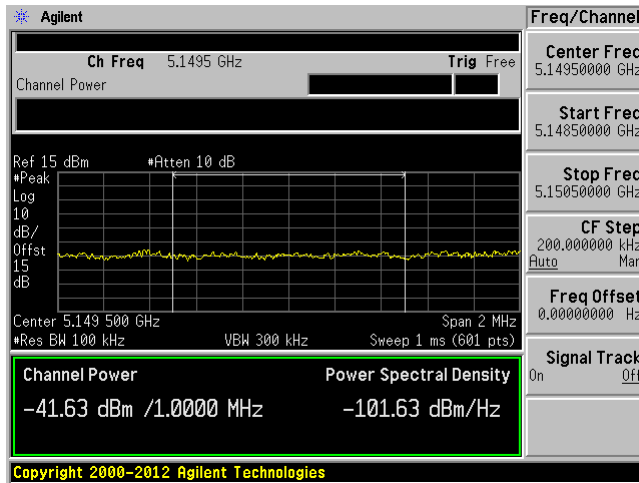

802.11n20 mode MIMO Ant 1

Low Channel 5180MHz



High Channel 5240 MHz

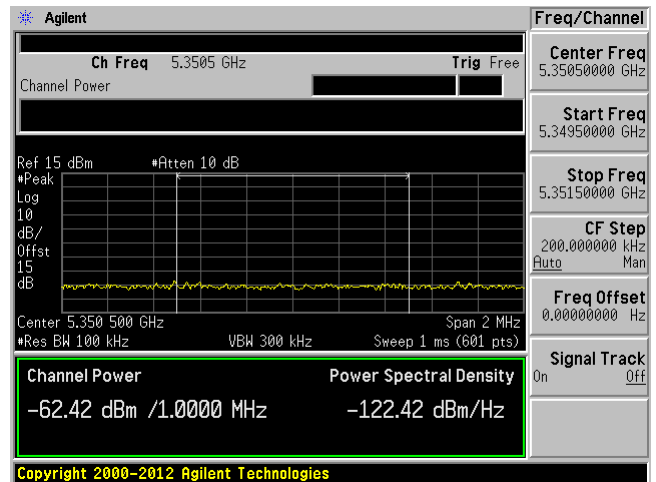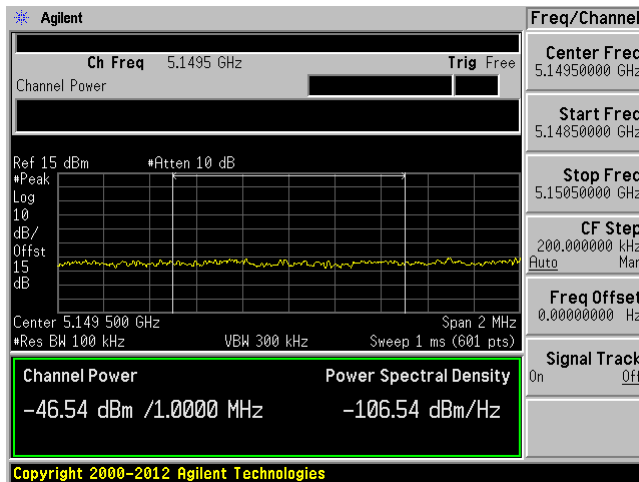

802.11ac20 mode Ant 0

Low Channel 5180MHz



High Channel 5240 MHz

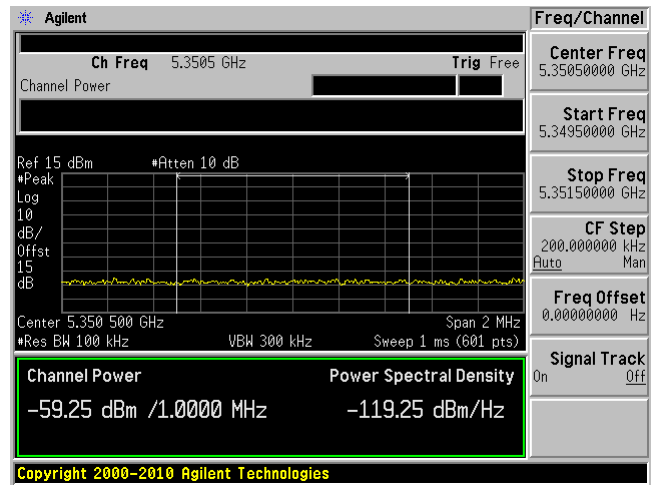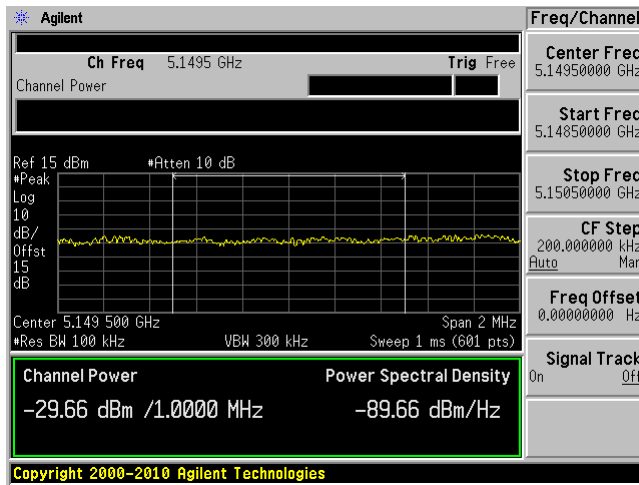

802.11ac20 mode Ant 1


Low Channel 5180MHz

High Channel 5240 MHz

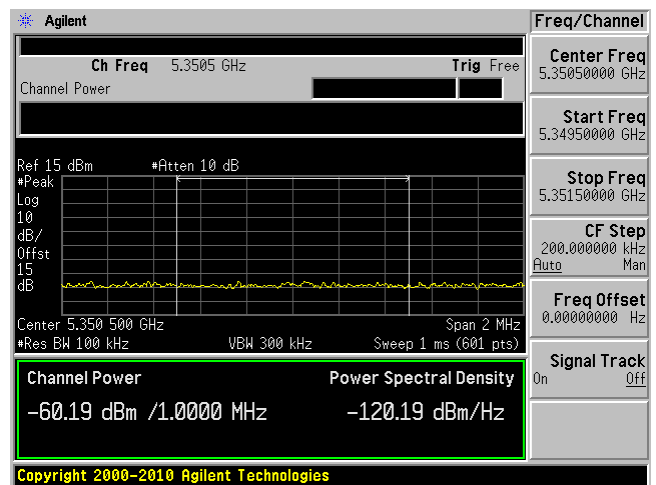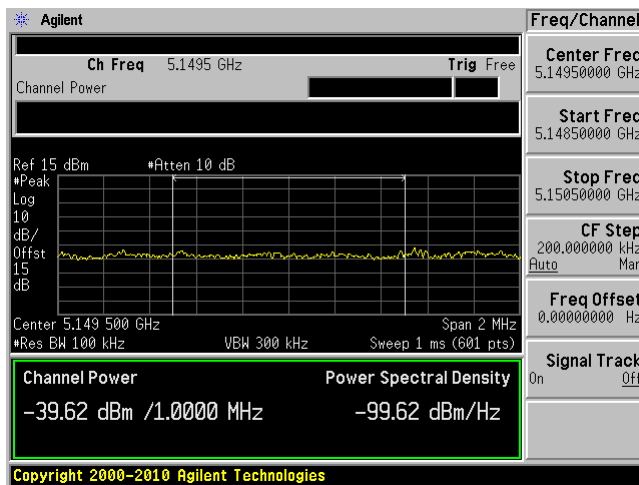


802.11ac20 mode MIMO Ant 0

Low Channel 5180MHz

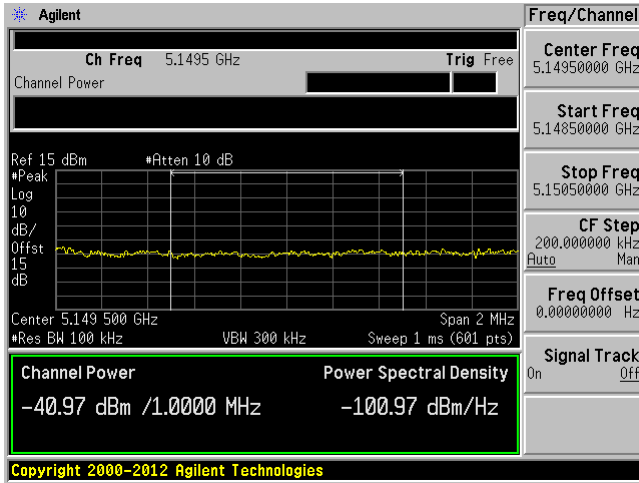


High Channel 5240 MHz

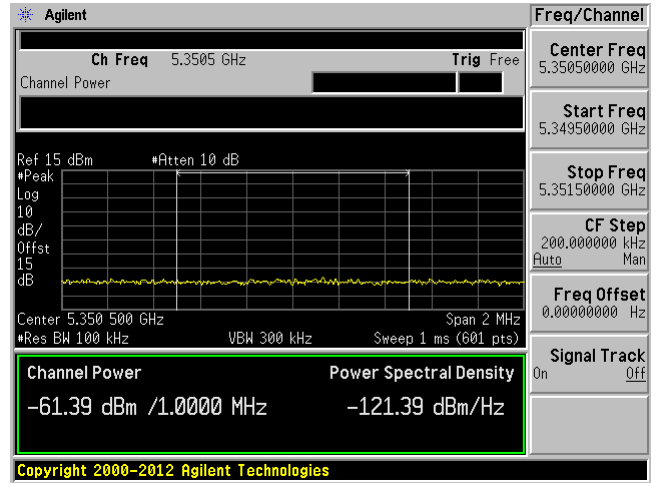


802.11ac20 mode MIMO Ant 1

Low Channel 5180MHz

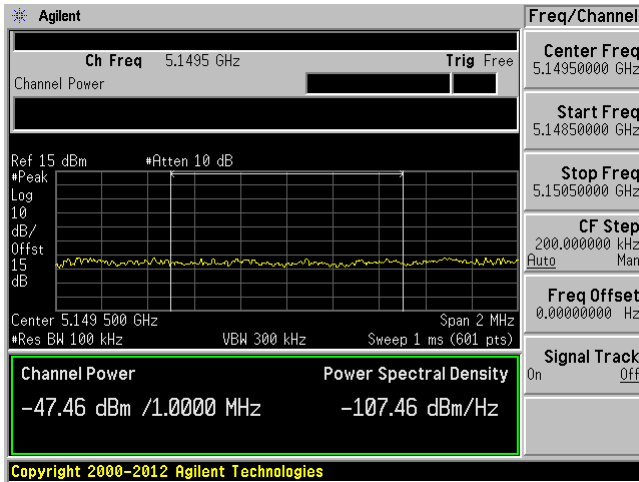

High Channel 5240 MHz

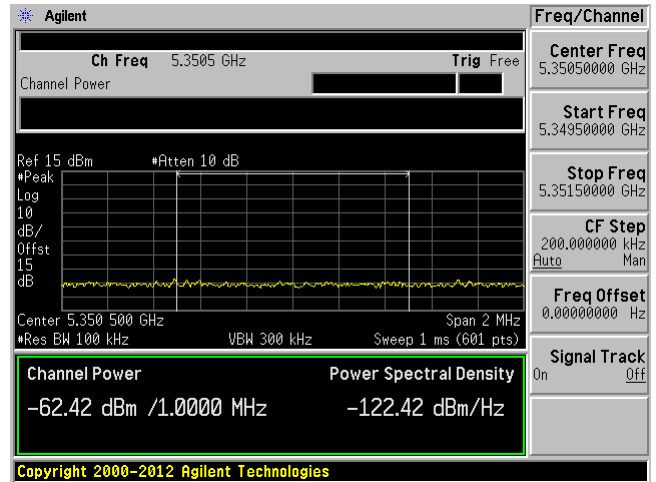



5725 – 5850 MHz

Emission Mask

802.11a mode Ant 0

5745 MHz



5825 MHz

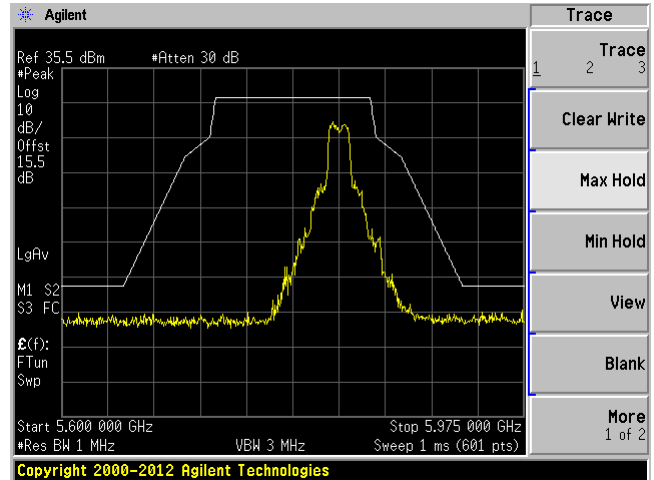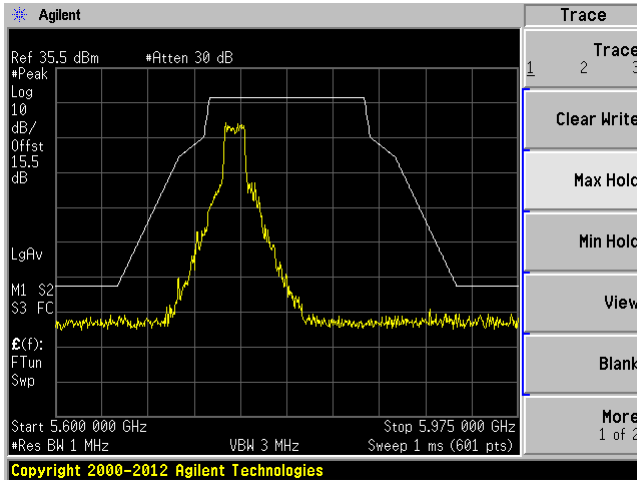

802.11a mode Ant 1


5745 MHz

5825 MHz

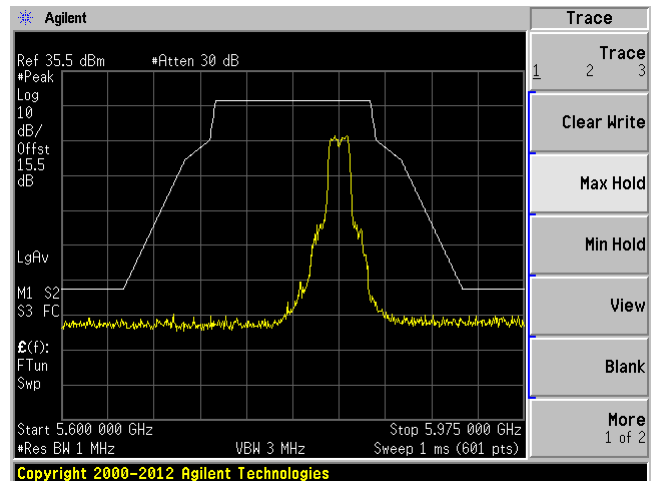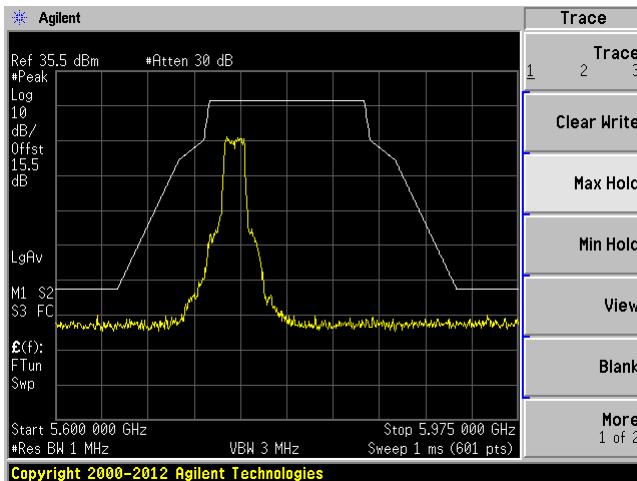


802.11n20 mode Ant 0

5745 MHz

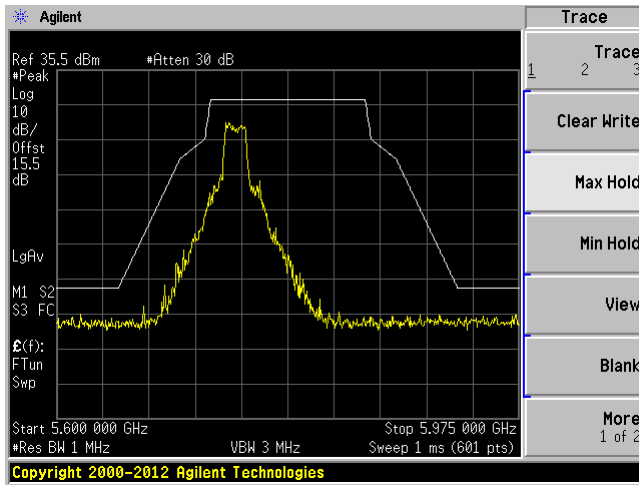


5825 MHz

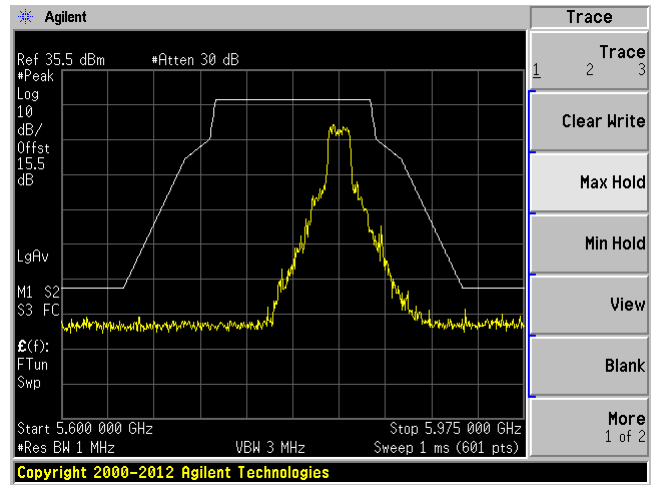


802.11n20 mode Ant 1

5745 MHz

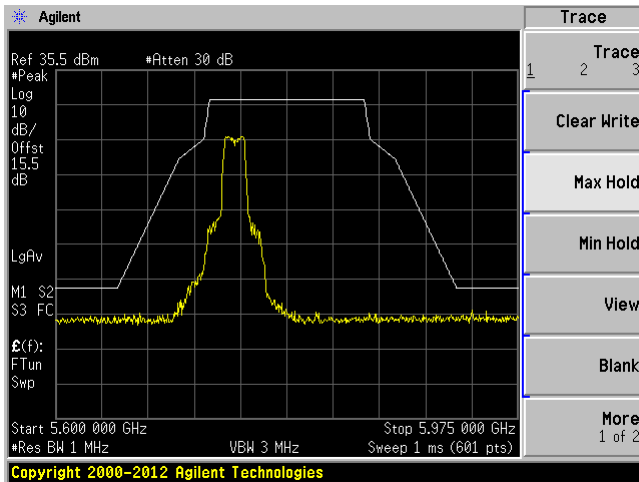


5825 MHz

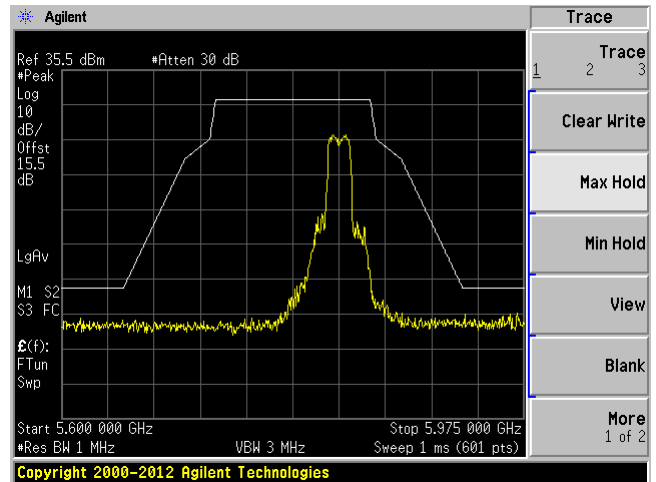


802.11n20 mode MIMO Ant 0

5745 MHz

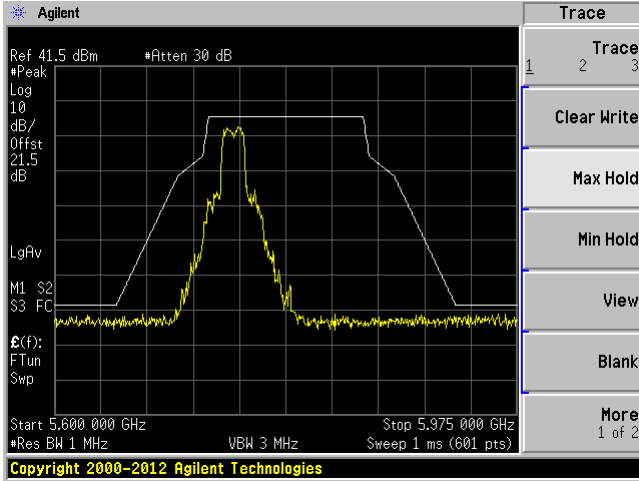


5825 MHz

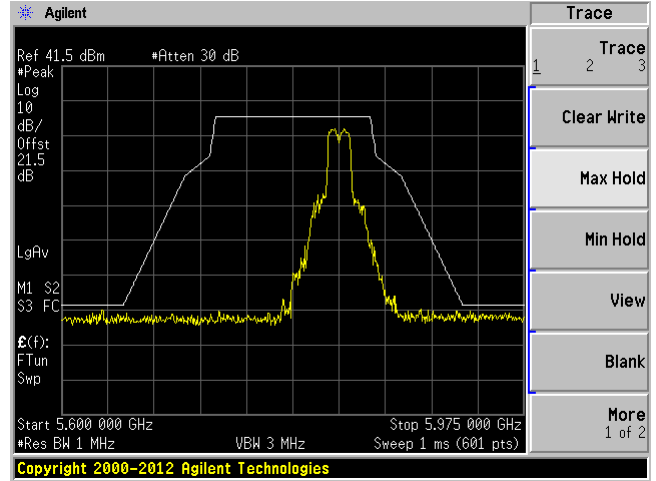


802.11n20 mode MIMO Ant 1

5745 MHz

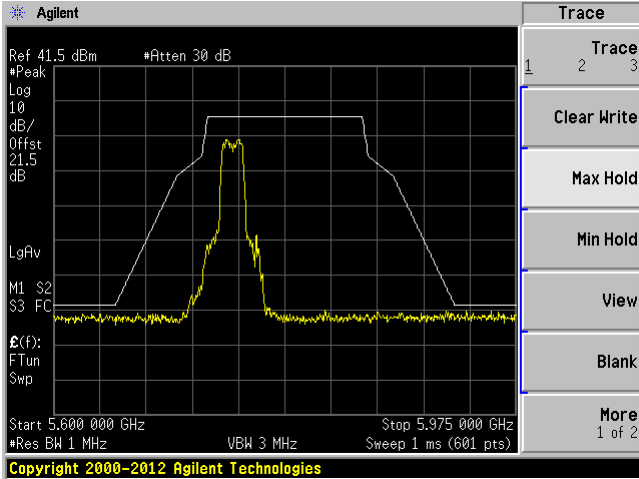


5825 MHz

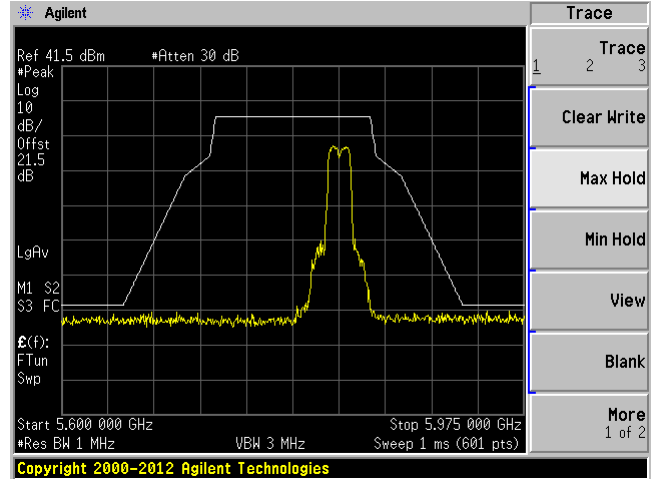


802.11ac20 mode Ant 0

5745 MHz

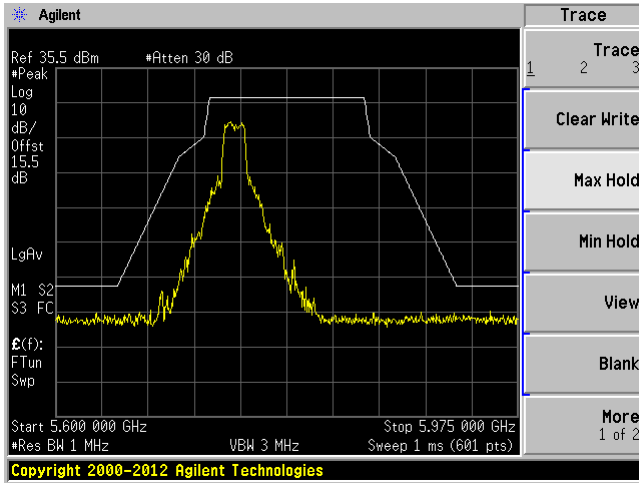


5825 MHz

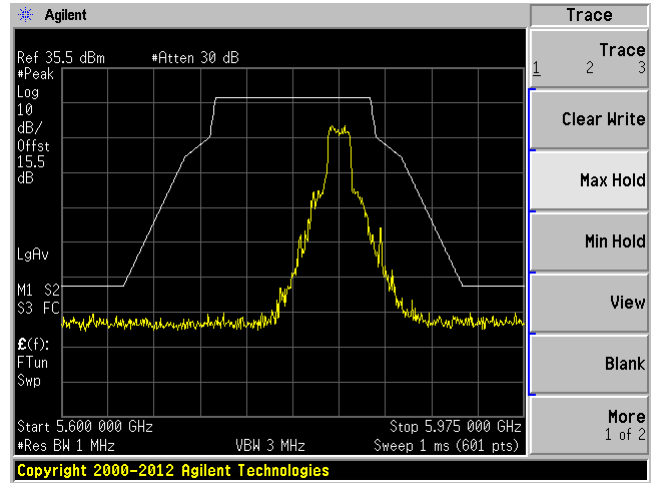


802.11ac20 mode Ant 1

5745 MHz

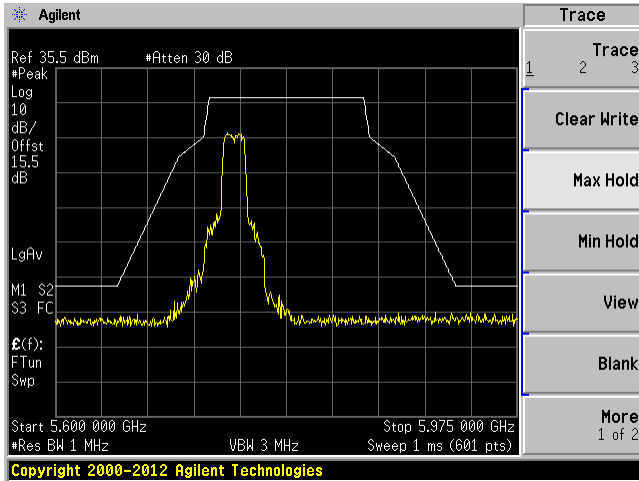



5825 MHz

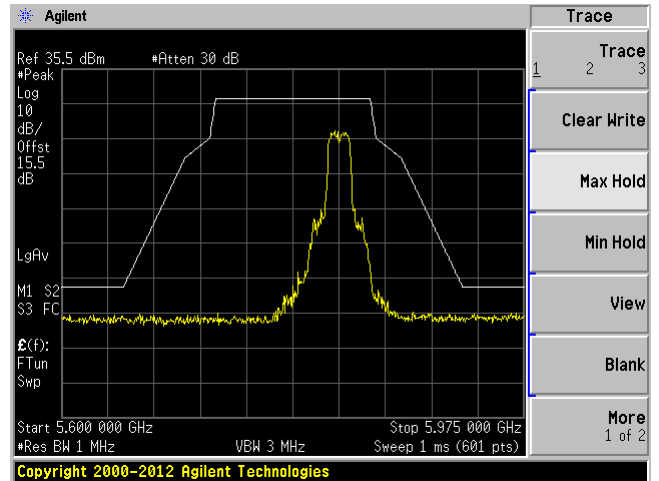

802.11ac20 mode MIMO Ant 0

5745 MHz



5825 MHz

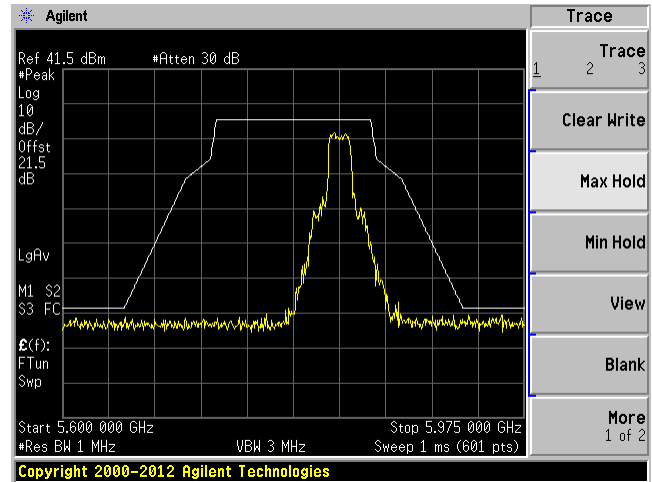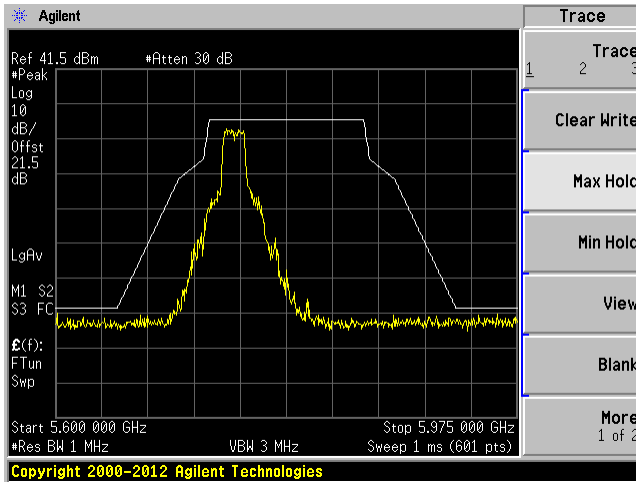

802.11ac20 mode MIMO Ant 1

5745 MHz

5825 MHz

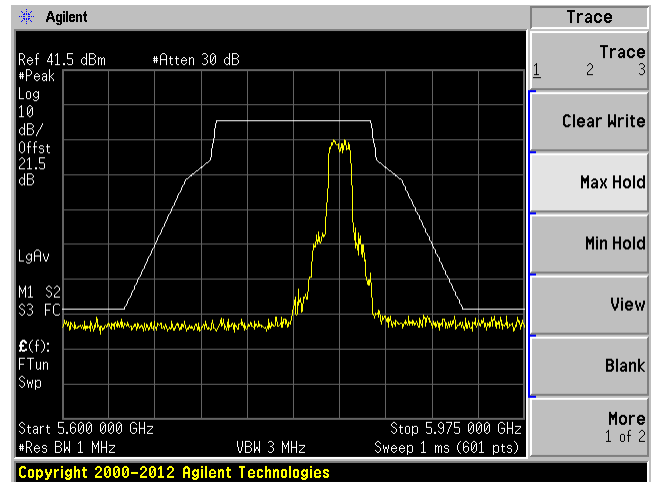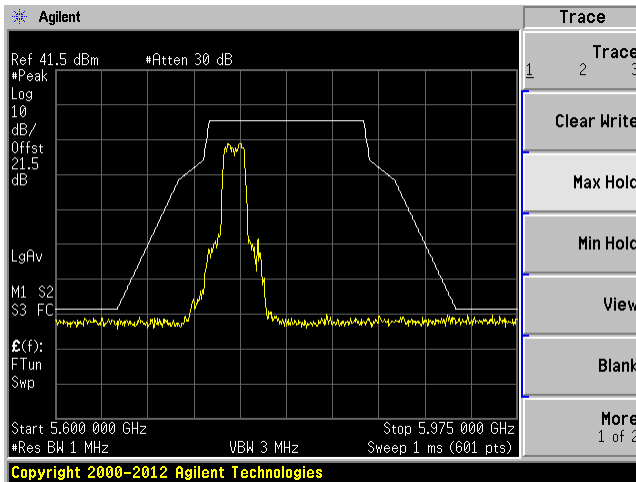

Note: The result is e.i.r.p and the antenna gain has been considered in the offset during the testing.

12 Annex A (Informative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets the requirements of A2LA R222 - *Specific Requirements - EPA ENERGY STAR Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 30th day of August 2016.

Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2018

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

--- END OF REPORT ---