





FCC PART 15, SUBPART C TEST REPORT

For

Roku Inc.

150 Winchester Circle,
Los Gatos, CA 95032, USA

FCC ID: TC2-R1024

Report Type: Original Report	Model: 3920X, 3921X
Prepared By: Vincent Licata Test Engineer	
Report Number: R1807121-247	
Report Date: 2018-09-19	
Reviewed By: Xiao Lin Test Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" en-0

TABLE OF CONTENTS

1	General Description.....	5
1.1	Product Description for Equipment Under Test (EUT)	5
1.2	Objective.....	5
1.3	Related Submittal(s)/Grant(s).....	5
1.4	Test Methodology	5
1.5	Measurement Uncertainty	5
1.6	Test Facility Registrations	6
1.7	Test Facility Accreditations	6
2	System Test Configuration.....	9
2.1	Justification.....	9
2.2	EUT Exercise Software.....	9
2.3	Duty Cycle Correction Factor	10
2.4	Equipment Modifications.....	12
2.5	Local Support Equipment	12
2.6	Support Equipment	12
2.7	Interface Ports and Cabling.....	12
3	Summary of Test Results	13
4	FCC §15.203 - Antenna Requirements	14
4.1	Applicable Standards	14
4.2	Antenna Description	14
5	FCC §2.1091, §15.247(i) - RF Exposure.....	15
5.1	Applicable Standards	15
5.2	MPE Prediction.....	15
5.3	MPE Results	15
6	FCC §15.207 - AC Line Conducted Emissions.....	16
6.1	Applicable Standards	16
6.2	Test Setup	16
6.3	Test Procedure	16
6.4	Corrected Amplitude and Margin Calculation	17
6.5	Test Equipment List and Details.....	17
6.6	Test Environmental Conditions	17
6.7	Summary of Test Results.....	18
6.8	Conducted Emissions Test Plots and Data.....	19
7	FCC §15.209, §15.247(d) - Spurious Radiated Emissions	21
7.1	Applicable Standards	21
7.2	Test Setup	22
7.3	Test Procedure	22
7.4	Corrected Amplitude and Margin Calculation	23
7.5	Test Equipment List and Details.....	23
7.6	Test Environmental Conditions	24
7.7	Summary of Test Results.....	24
7.8	Spurious Emissions Test Results	25
8	FCC §15.247(a) (2) - Emission Bandwidth	31
8.1	Applicable Standards	31
8.2	Measurement Procedure.....	31
8.3	Test Equipment List and Details.....	31
8.4	Test Environmental Conditions	31
8.5	Test Results.....	32
9	FCC §15.247(b) (3) - Output Power Measurement.....	33
9.1	Applicable Standards	33

9.2 Measurement Procedure..... 33

9.3 Test Equipment List and Details..... 33

9.4 Test Environmental Conditions 33

9.5 Test Results..... 34

10 FCC §15.247(d) – 100 kHz Bandwidth of Band Edges..... 35

10.1 Applicable Standards 35

10.2 Measurement Procedure..... 35

10.3 Test Equipment List and Details..... 35

10.4 Test Environmental Conditions 35

10.5 Test Results..... 35

11 FCC §15.247(e) – Power Spectral Density..... 36

11.1 Applicable Standards 36

11.2 Measurement Procedure..... 36

11.3 Test Equipment List and Details..... 36

11.4 Test Environmental Conditions 36

11.5 Test Results..... 37

12 FCC §15.247(d) - Spurious Emissions at Antenna Terminals 38

12.1 Applicable Standards 38

12.2 Test Procedure..... 38

12.3 Test Equipment List and Details 38

12.4 Test Environmental Conditions..... 38

12.5 Test Results 39

13 Annex A (Normative) – Occupied Bandwidth..... 40

14 Annex B (Normative) – Spurious Emission at Antenna Port..... 58

15 Annex C (Normative) – Power Spectral Density..... 76

16 Annex D (Normative) – Band Edge..... 85

17 Annex E (Informative) - ISO/IEC 17025 Certificate and Scope of Accreditation 91

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1807121-247	Original Report	2018-09-19

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Roku Inc.*, and their product model: 3920X and 3921X, FCC ID: TC2-R1024 or the “EUT” as referred to in this report.

1.2 Objective

This report is prepared on behalf of *Roku Inc.*, in accordance with Part 2, Subpart J, and Part 15, and C of the Federal Communication Commission’s rules.

The objective is to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

None

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2

2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;

- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test firmware used was Tera Term, provided by *Roku Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
802.11b	2412	51
	2437	62
	2462	52
802.11g	2412	50
	2437	60
	2462	49
802.11n20	2412	49
	2437	60
	2462	49

Data Rates Tested:

802.11b mode: 1Mbps

802.11g mode: 6Mbps

802.11n HT20 mode: MCS0

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v04 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).


Radio Mode	Total On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	100	100	100	0.000
802.11g	100	100	100	0.000
802.11n20	100	100	100	0.000

Duty Cycle = On Time (ms)/ Period (ms)


Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plots.


ANT 1 802.11b mode

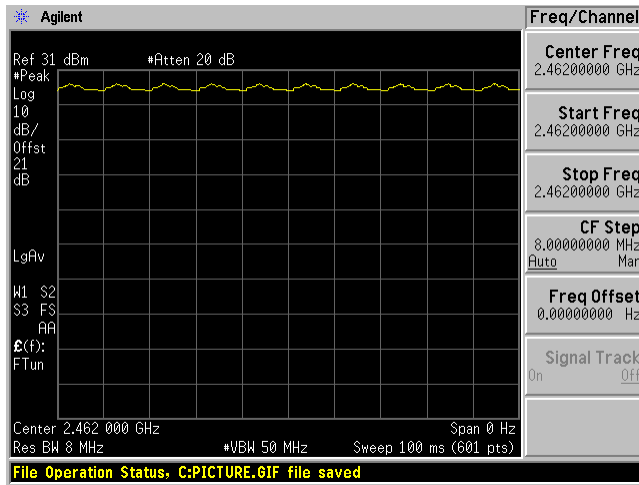


ANT 2 802.11b mode

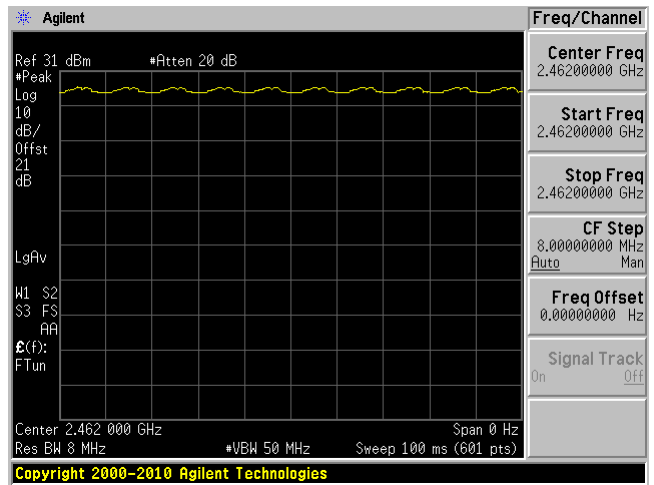


ANT 1 802.11g mode

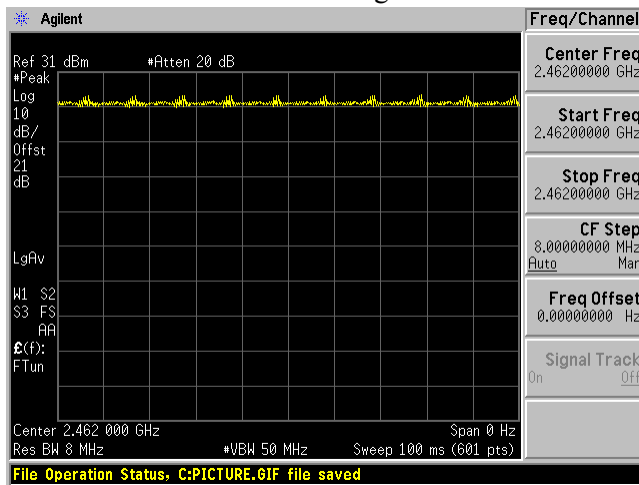


ANT 2 802.11g mode

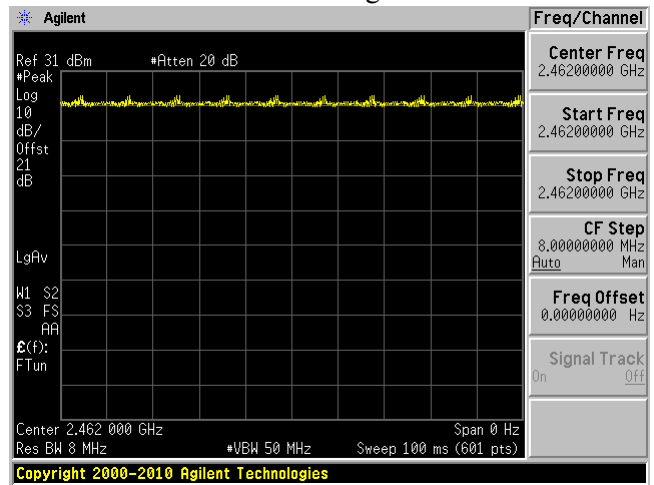

ANT 1 802.11n20 mode

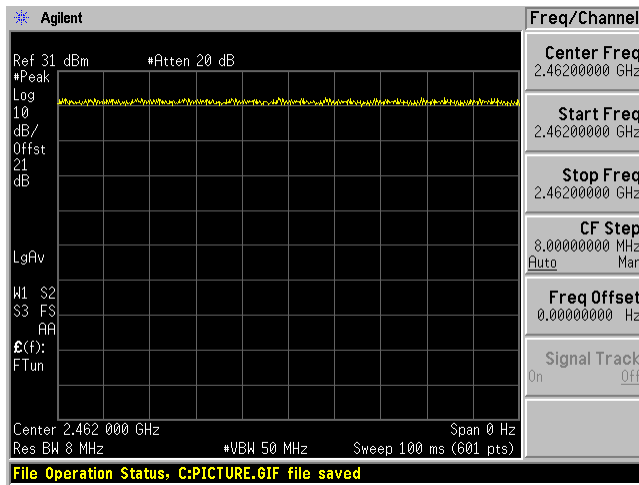

ANT 2 802.11n20 mode

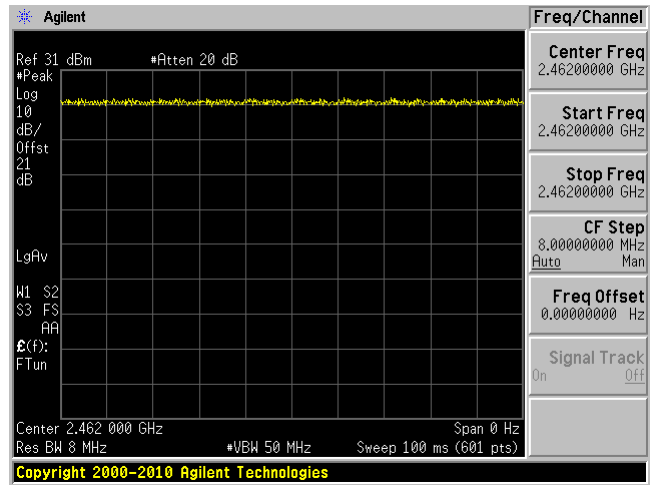

2.4 Equipment Modifications

No equipment modifications are made to the EUT

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude E6410	3CKRAQ1

2.6 Support Equipment

Manufacturer	Description	Model
Roku	Debug Board	Unknown

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB 2.0 A-Male to B-Male	2 m	Laptop	EUT
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

Results reported relate only to the product tested.

FCC Rules	Description of Test	Results
§15.203	Antenna Requirement	Compliant
§15.207	AC Line Conducted Emissions	Compliant
§2.1091, §15.247(i)	RF Exposure	Compliant
§2.1051, §15.247 (d)	Spurious Emissions at Antenna Port	Compliant
§2.1053, §15.205, §15.209, §15.247 (d)	Radiated Spurious Emissions	Compliant
§15.247(a)(2)	6 dB and 99% Emission Bandwidth	Compliant
§15.247(b)(3)	Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

4 FCC §15.203 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Description

Antenna usage	Band of Operation (MHz)	Maximum Antenna Gain (dBi)
Wi-Fi	2400-2500	2.8

5 FCC §2.1091, §15.247(i) - RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

Maximum output power at antenna input terminal (dBm): 21.89

Maximum output power at antenna input terminal (mW): 154.5254

Prediction distance (cm): 20

Prediction frequency (MHz): 2437

Maximum Antenna Gain, typical (dBi): 2.8

Maximum Antenna Gain (numeric): 1.9055

Power density of prediction frequency at 20.0 cm (mW/cm²): 0.058577

FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²): 1.0

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.058577 mW/cm². Limit is 1.0 mW/cm².

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100337	2017-07-15	2 years
Rohde & Schwarz	Impulse Limiter	ESH3-Z2	101964	2017-07-24	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150203	2018-02-28	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160130	2018-04-05	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R
Rohde & Schwarz	Receiver, EMI Test	ESCI 1166.5950.03	100338	2018-07-05	2 years

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) “A2LA Policy on Metrological Traceability”.

6.6 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	101.3 kPa

The testing was performed by Vincent Licata on 2018-07-17 in 5 meter chamber 3.

6.7 Summary of Test Results


According to the recorded data in following table, the EUT complied with the FCC 15C standard's conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-15.55	0.613245	Line	0.15-30

6.8 Conducted Emissions Test Plots and Data

2.4 GHz Wi-Fi, b mode (2437 MHz)


120 V, 60 Hz – Line

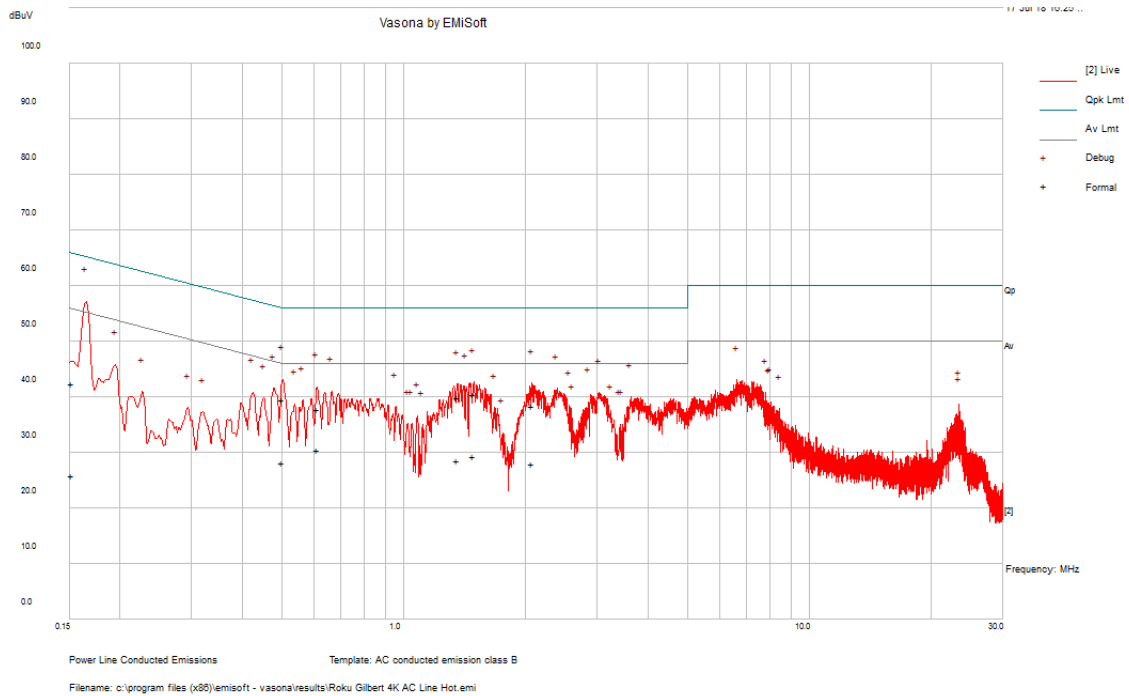

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.152036	42.51	Line	65.89	-23.38	QP
0.500672	39.52	Line	56	-16.48	QP
1.485325	40.44	Line	56	-15.56	QP
2.073697	38.44	Line	56	-17.56	QP
1.357854	39.97	Line	56	-16.03	QP
0.613245	37.85	Line	56	-18.15	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.152036	25.98	Line	55.89	-29.91	Ave.
0.500672	28.17	Line	46	-17.83	Ave.
1.485325	29.36	Line	46	-16.64	Ave.
2.073697	27.93	Line	46	-18.07	Ave.
1.357854	28.63	Line	46	-17.37	Ave.
0.613245	30.45	Line	46	-15.55	Ave.

120 V, 60 Hz – Neutral

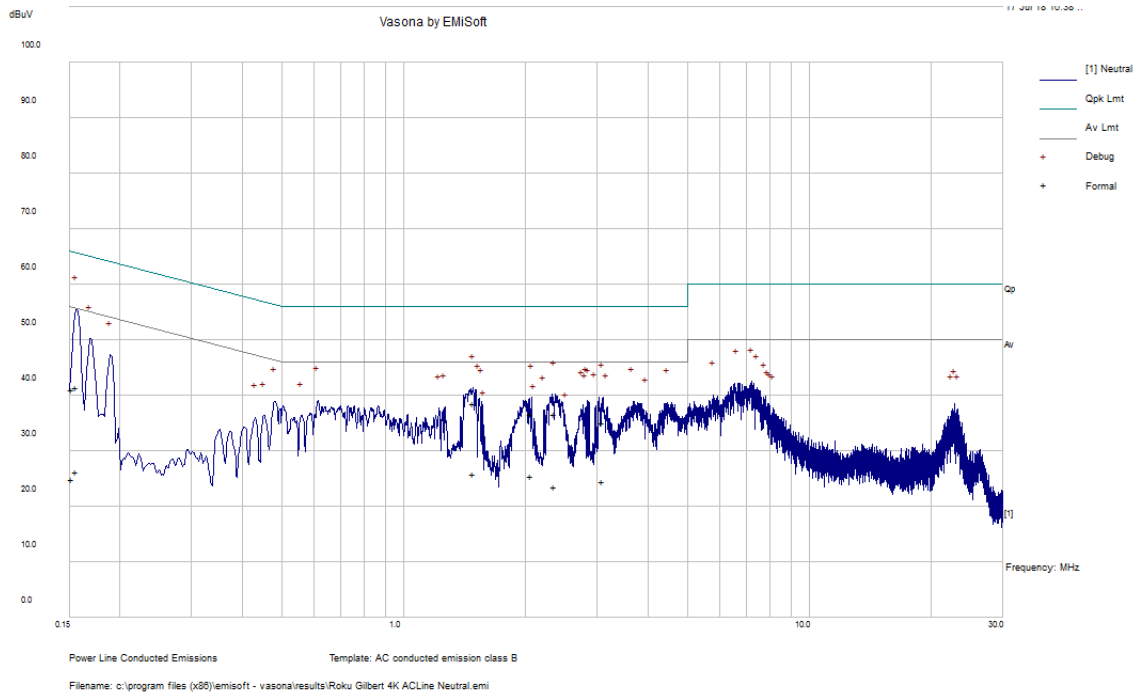

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.156065	41.5	Neutral	65.67	-24.17	QP
1.481421	38.63	Neutral	56	-17.37	QP
0.152491	41.13	Neutral	65.86	-24.73	QP
2.358206	36.73	Neutral	56	-19.27	QP
3.086085	35.07	Neutral	56	-20.93	QP
2.064794	36.71	Neutral	56	-19.29	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.156065	26.36	Neutral	55.67	-29.31	Ave.
1.481421	25.83	Neutral	46	-20.17	Ave.
0.152491	24.91	Neutral	55.86	-30.95	Ave.
2.358206	23.6	Neutral	46	-22.4	Ave.
3.086085	24.55	Neutral	46	-21.45	Ave.
2.064794	25.55	Neutral	46	-20.45	Ave.

7 FCC §15.209, §15.247(d) - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

The EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For radiated testing the EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

(1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100 ms

(2) Average: RBW = 1MHz / VBW = 1 / T / Sweep = Auto

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + AF + CL + \text{Atten} - G_a$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100337	2017-07-15	2 years
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2018-05-08	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
Wisewave	Antenna, Horn	ARH-4223-02	10555-02	2017-12-15	2 years
Agilent	Amplifier, Pre	8447D	2944A10187	2018-04-02	1 year
IW	AOBOR Hi frequency Co AX Cable	DC 1531	KPS- 1501A3960K PS	2017-08-05	1 year
-	SMA cable	-	C00011	Each time ¹	N/A
-	N-Type Cable	-	C00012	Each time ¹	N/A
-	N-Type Cable	-	C00014	Each time ¹	N/A
HP	Pre-Amplifier	8449B	3147A00400	2018-02-02	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) “A2LA Policy on Metrological Traceability”.

7.6 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Vincent Licata from 2018-07-17 in 5m chamber 3.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C standard's radiated emissions limits, and had the worst margin of:


Mode: Transmitting		
Margin (dB)	Frequency (MHz)	Mode, channel
-0.43	2390	n20 mode, Low channel

Please refer to the following table and plots for specific test result details

7.8 Spurious Emissions Test Results

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

2.4 GHz Wi-Fi, b mode (2437 MHz)

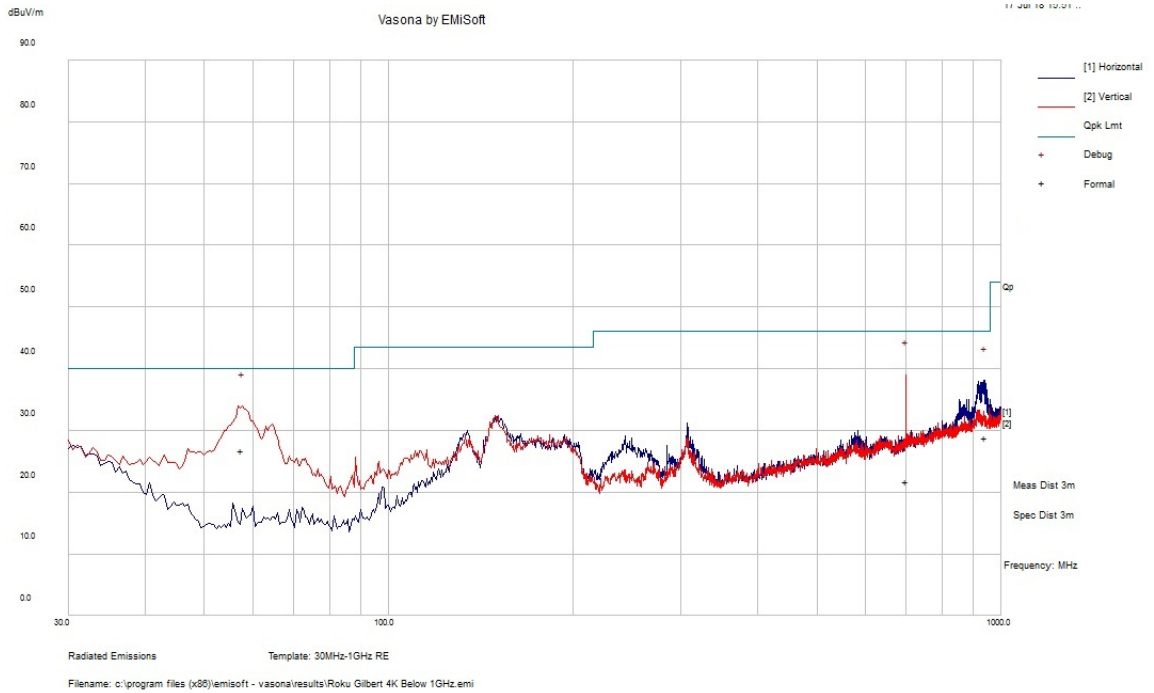

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
57.5735	26.83	148	V	228	40	-13.17	QP
698.7935	21.76	104	V	273	46	-24.24	QP
940.0498	28.84	110	H	225	46	-17.16	QP

Note: Only 3 Emissions were tested in formal scan because all other emissions were 20 dB below the limit.

2) 1–26.5 GHz Measured at 3 meters

802.11b mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	79.46	299	125	H	28.93	5.76	0	114.15	-	-	PK
2412	76.51	299	125	H	28.93	5.76	0	111.20	-	-	AV
2412	71.46	209	100	V	28.93	5.76	0	106.15	-	-	PK
2412	68.50	209	100	V	28.93	5.76	0	103.19	-	-	AV
2390	57.85	299	125	H	28.93	6.489	32.207	61.07	74.00	-12.94	PK
2390	48.97	299	125	H	28.93	6.489	32.207	52.19	54.00	-1.82	AV
2390	53.62	209	100	V	28.93	6.489	32.207	56.84	74.00	-17.17	PK
2390	40.95	209	100	V	28.93	6.489	32.207	44.17	54.00	-9.83	AV
4824	47.71	298	100	H	32.56	9.36	32.993	56.64	74.00	-17.36	PK
4824	40.09	298	100	H	32.56	9.36	32.993	49.02	54.00	-4.98	AV
7236	44.84	0	100	H	36.88	12.01	33.248	60.48	74.00	-13.52	PK
7236	33.67	0	100	H	36.88	12.01	33.248	49.31	54.00	-4.69	AV
Middle Channel 2437 MHz											
2437	82.91	296	135	H	28.93	5.76	0	117.60	-	-	PK
2437	79.97	296	135	H	28.93	5.76	0	114.66	-	-	AV
2437	74.83	205	100	V	28.93	5.76	0	109.52	-	-	PK
2437	71.79	205	100	V	28.93	5.76	0	106.48	-	-	AV
2390	56.42	296	135	H	28.93	6.489	32.207	59.64	74.00	-14.37	PK
2390	48.44	296	135	H	28.93	6.489	32.207	51.66	54.00	-2.35	AV
2483.5	56.23	296	135	H	29.18	6.61	32.207	59.81	74.00	-14.19	PK
2483.5	47.82	296	135	H	29.18	6.61	32.207	51.40	54.00	-2.60	AV
4874	49.46	0	100	H	32.53	9.46	32.993	58.45	74.00	-15.55	PK
4874	42.85	0	100	H	32.53	9.46	32.993	51.84	54.00	-2.16	AV
7311	46.46	130	149	H	36.99	11.97	33.248	62.17	74.00	-11.83	PK
7311	34.35	130	149	H	36.99	11.97	33.248	50.06	54.00	-3.94	AV
High Channel 2462 MHz											
2462	79.20	303	127	H	29.19	5.86	0	114.25	-	-	PK
2462	76.29	303	127	H	29.19	5.86	0	111.34	-	-	AV
2462	77.04	275	254	V	29.19	5.86	0	112.09	-	-	PK
2462	74.19	275	254	V	29.19	5.86	0	109.24	-	-	AV
2483.5	57.86	303	127	H	29.18	6.61	32.207	61.44	74.00	-12.56	PK
2483.5	49.78	303	127	H	29.18	6.61	32.207	53.36	54.00	-0.64	AV
2483.5	55.63	275	254	V	29.18	6.61	32.207	59.21	74.00	-14.79	PK
2483.5	47.97	275	254	V	29.18	6.61	32.207	51.55	54.00	-2.45	AV
4924	47.02	101	100	H	32.70	9.42	32.993	56.14	74.00	-17.86	PK
4924	37.76	101	100	H	32.70	9.42	32.993	46.88	54.00	-7.12	AV
7386	44.93	0	100	H	37.10	12.01	33.248	60.79	74.00	-13.21	PK
7386	33.82	0	100	H	37.10	12.01	33.248	49.68	54.00	-4.32	AV

802.11g mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	75.04	296	206	H	28.93	5.76	0	109.73	-	-	PK
2412	67.65	296	206	H	28.93	5.76	0	102.34	-	-	AV
2412	72.23	282	290	V	28.93	5.76	0	106.92	-	-	PK
2412	64.90	282	290	V	28.93	5.76	0	99.59	-	-	AV
2390	66.27	296	206	H	28.93	6.489	32.207	69.49	74.00	-4.51	PK
2390	50.19	296	206	H	28.93	6.489	32.207	53.41	54.00	-0.60	AV
2390	63.27	282	290	V	28.93	6.489	32.207	66.49	74.00	-7.51	PK
2390	46.61	282	290	V	28.93	6.489	32.207	49.83	54.00	-4.17	AV
4824	45.16	0	100	H	32.56	9.36	32.993	54.09	74.00	-19.91	PK
4824	32.81	0	100	H	32.56	9.36	32.993	41.74	54.00	-12.26	AV
7236	45.76	0	100	H	36.88	12.01	33.248	61.40	74.00	-12.60	PK
7236	33.81	0	100	H	36.88	12.01	33.248	49.45	54.00	-4.55	AV
Middle Channel 2437 MHz											
2437	76.27	294	202	H	28.93	5.76	0	110.96	-	-	PK
2437	68.47	294	202	H	28.93	5.76	0	103.16	-	-	AV
2437	73.13	280	277	V	28.93	5.76	0	107.82	-	-	PK
2437	65.29	280	277	V	28.93	5.76	0	99.98	-	-	AV
2390	55.50	294	202	H	28.93	6.489	32.207	58.72	74.00	-15.29	PK
2390	44.06	294	202	H	28.93	6.489	32.207	47.28	54.00	-6.73	AV
2483.5	57.09	294	202	H	29.18	6.61	32.207	60.67	74.00	-13.33	PK
2483.5	45.13	294	202	H	29.18	6.61	32.207	48.71	54.00	-5.29	AV
4874	45.12	0	100	H	32.53	9.46	32.993	54.11	74.00	-19.89	PK
4874	33.22	0	100	H	32.53	9.46	32.993	42.21	54.00	-11.79	AV
7311	45.05	0	100	H	36.99	11.97	33.248	60.76	74.00	-13.24	PK
7311	32.93	0	100	H	36.99	11.97	33.248	48.64	54.00	-5.36	AV
High Channel 2462 MHz											
2462	75.36	303	153	H	29.19	5.86	0	110.41	-	-	PK
2462	67.81	303	153	H	29.19	5.86	0	102.86	-	-	AV
2462	72.52	273	253	V	29.19	5.86	0	107.57	-	-	PK
2462	65.05	273	253	V	29.19	5.86	0	100.10	-	-	AV
2483.5	65.15	303	153	H	29.18	6.61	32.207	68.73	74.00	-5.27	PK
2483.5	49.09	303	153	H	29.18	6.61	32.207	52.67	54.00	-1.33	AV
2483.5	62.57	273	253	V	29.18	6.61	32.207	66.15	74.00	-7.85	PK
2483.5	47.44	273	253	V	29.18	6.61	32.207	51.02	54.00	-2.98	AV
4924	45.01	0	100	H	32.70	9.42	32.993	54.13	74.00	-19.87	PK
4924	32.89	0	100	H	32.70	9.42	32.993	42.01	54.00	-11.99	AV
7386	44.79	0	100	H	37.10	12.01	33.248	60.65	74.00	-13.35	PK
7386	33.84	0	100	H	37.10	12.01	33.248	49.70	54.00	-4.30	AV


802.11n20 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	75.28	295	205	H	28.93	5.76	0	109.97	-	-	PK
2412	67.40	295	205	H	28.93	5.76	0	102.09	-	-	AV
2412	71.17	254	300	V	28.93	5.76	0	105.86	-	-	PK
2412	63.19	254	300	V	28.93	5.76	0	97.88	-	-	AV
2390	70.26	295	205	H	28.93	6.489	32.207	73.48	74.00	-0.52	PK
2390	50.35	295	205	H	28.93	6.489	32.207	53.57	54.00	-0.43	AV
2390	69.35	254	300	V	28.93	6.489	32.207	72.57	74.00	-1.44	PK
2390	49.44	254	300	V	28.93	6.489	32.207	52.66	54.00	-1.35	AV
4824	44.83	0	100	H	32.56	9.36	32.993	53.76	74.00	-20.24	PK
4824	33.64	0	100	H	32.56	9.36	32.993	42.57	54.00	-11.43	AV
7236	45.42	0	100	H	36.88	12.01	33.248	61.06	74.00	-12.94	PK
7236	33.65	0	100	H	36.88	12.01	33.248	49.29	54.00	-4.71	AV
Middle Channel 2437 MHz											
2437	79.85	294	201	H	28.93	5.76	0	114.54	-	-	PK
2437	71.88	294	201	H	28.93	5.76	0	106.57	-	-	AV
2437	77.46	279	280	V	28.93	5.76	0	112.15	-	-	PK
2437	69.65	279	280	V	28.93	5.76	0	104.34	-	-	AV
2390	67.67	294	201	H	28.93	6.489	32.207	70.89	74.00	-3.11	PK
2390	48.03	294	201	H	28.93	6.489	32.207	51.25	54.00	-2.76	AV
2483.5	67.14	294	201	H	29.18	6.61	32.207	70.72	74.00	-3.28	PK
2483.5	46.63	294	201	H	29.18	6.61	32.207	50.21	54.00	-3.79	AV
4874	45.85	0	100	H	32.53	9.46	32.993	54.84	74.00	-19.16	PK
4874	33.32	0	100	H	32.53	9.46	32.993	42.31	54.00	-11.69	AV
7311	44.87	0	100	H	36.99	11.97	33.248	60.58	74.00	-13.42	PK
7311	33.18	0	100	H	36.99	11.97	33.248	48.89	54.00	-5.11	AV
High Channel 2462 MHz											
2462	74.91	351	272	H	29.19	5.86	0	109.96	-	-	PK
2462	66.92	351	272	H	29.19	5.86	0	101.97	-	-	AV
2462	72.58	273	287	V	29.19	5.86	0	107.63	-	-	PK
2462	64.45	273	287	V	29.19	5.86	0	99.50	-	-	AV
2483.5	69.20	351	272	H	29.18	6.61	32.207	72.78	74.00	-1.22	PK
2483.5	49.80	351	272	H	29.18	6.61	32.207	53.38	54.00	-0.62	AV
2483.5	67.77	273	287	V	29.18	6.61	32.207	71.35	74.00	-2.65	PK
2483.5	48.23	273	287	V	29.18	6.61	32.207	51.81	54.00	-2.19	AV
4924	45.05	0	100	H	32.70	9.42	32.993	54.17	74.00	-19.83	PK
4924	32.99	0	100	H	32.70	9.42	32.993	42.11	54.00	-11.89	AV
7386	44.53	0	100	H	37.10	12.01	33.248	60.39	74.00	-13.61	PK
7386	33.03	0	100	H	37.10	12.01	33.248	48.89	54.00	-5.11	AV

Fundamental


1-10 GHz

2.4 GHz Wi-Fi, b mode (2437 MHz)

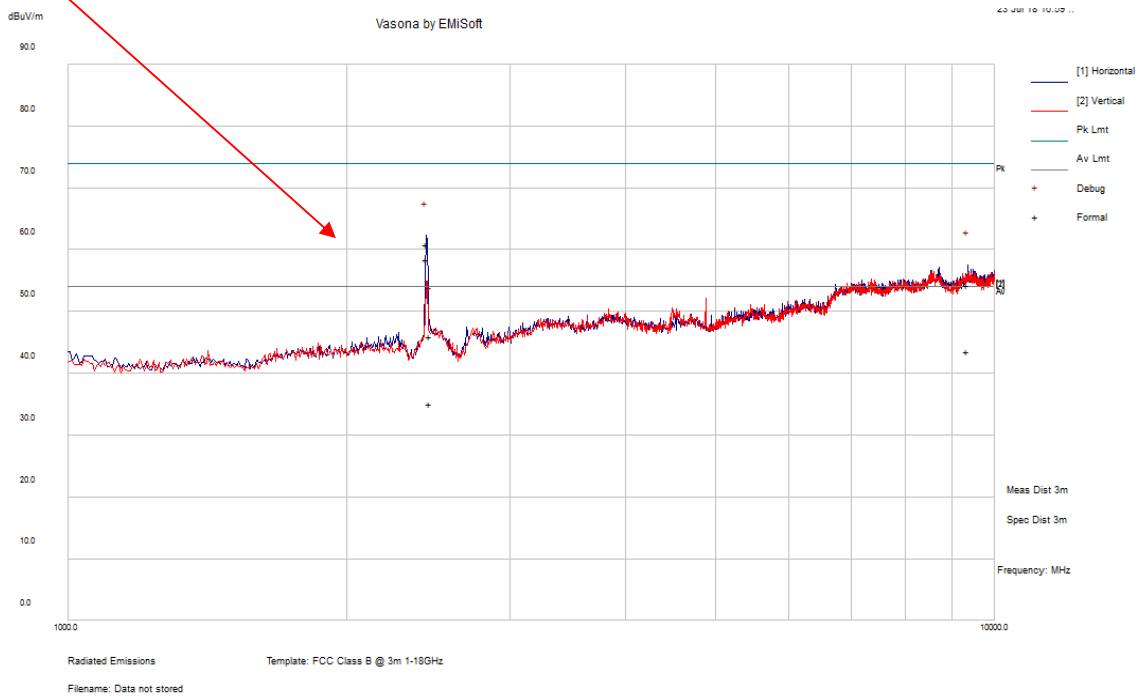


10-18 GHz

2.4 GHz Wi-Fi, b mode (2437 MHz)

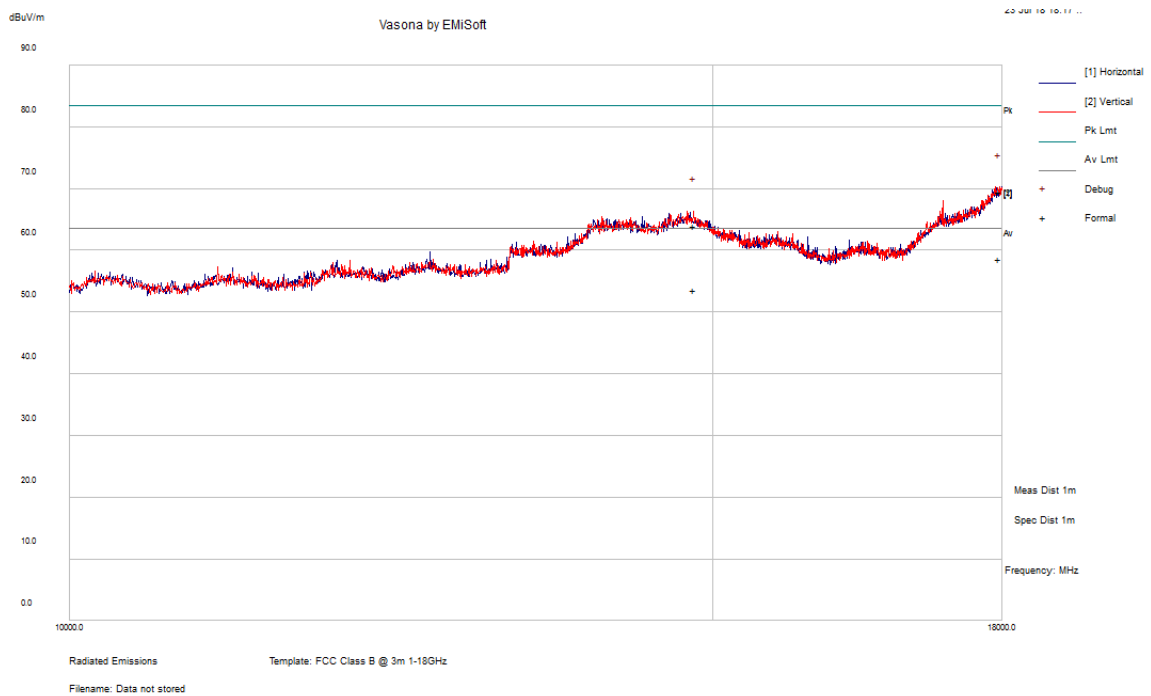

18-26.5 GHz

2.4 GHz Wi-Fi, b mode (2437 MHz)

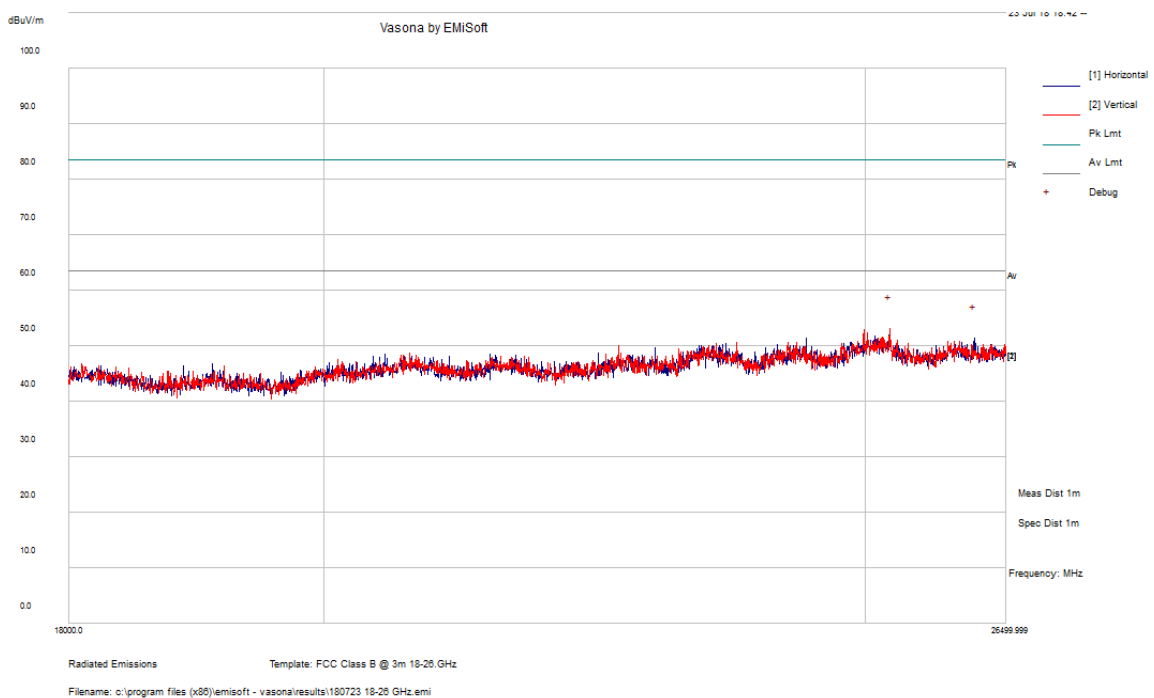

8 FCC §15.247(a) (2) - Emission Bandwidth

8.1 Applicable Standards

According to ECFR §15.247(a) (2), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

8.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2018-05-08	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2018-07-12 in RF site.

8.5 Test Results

ANT 1 99% and 6 dB Bandwidth

Channel	Frequency (MHz)	99% OBW (MHz)	6 dB OBW (MHz)	6 dB OBW limit (MHz)
802.11b mode				
Low	2412	13.38	9.09	≥ 0.5
Middle	2437	13.97	9.10	≥ 0.5
High	2462	13.77	9.09	≥ 0.5
802.11g mode				
Low	2412	16.59	16.59	≥ 0.5
Middle	2437	16.64	16.59	≥ 0.5
High	2462	16.65	16.58	≥ 0.5
802.11n20 mode				
Low	2412	17.69	17.77	≥ 0.5
Middle	2437	17.75	17.76	≥ 0.5
High	2462	17.76	17.76	≥ 0.5

ANT 2 99% and 6 dB Bandwidth

Channel	Frequency (MHz)	99% OBW (MHz)	6 dB OBW (MHz)	6 dB OBW limit (MHz)
802.11b mode				
Low	2412	13.23	9.07	≥ 0.5
Middle	2437	13.97	9.09	≥ 0.5
High	2462	13.72	9.09	≥ 0.5
802.11g mode				
Low	2412	16.59	16.60	≥ 0.5
Middle	2437	16.63	16.60	≥ 0.5
High	2462	16.64	16.58	≥ 0.5
802.11n20 mode				
Low	2412	17.69	17.81	≥ 0.5
Middle	2437	17.74	17.75	≥ 0.5
High	2462	17.75	17.76	≥ 0.5

Please refer to Annex A for plots.

9 FCC §15.247(b) (3) - Output Power Measurement

9.1 Applicable Standards

According to ECFR §15.247(b) (3) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power.

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
ETS- Lindgren	Power Sensor	7002-006	160097	2016-12-05	2 years
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2018-07-17 in RF site.

9.5 Test Results

ANT 1 Output Power 2.4 GHz Wi-Fi

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
802.11b mode			
Low	2412	19.64	30
Middle	2437	21.83	30
High	2462	19.82	30
802.11g mode			
Low	2412	15.19	30
Middle	2437	16.85	30
High	2462	14.43	30
802.11n20 mode			
Low	2412	14.64	30
Middle	2437	16.63	30
High	2462	14.91	30

ANT 2 Output Power 2.4 GHz Wi-Fi

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
802.11b mode			
Low	2412	19.72	30
Middle	2437	21.89	30
High	2462	19.90	30
802.11g mode			
Low	2412	15.16	30
Middle	2437	16.44	30
High	2462	14.30	30
802.11n20 mode			
Low	2412	14.52	30
Middle	2437	16.35	30
High	2462	14.77	30

10 FCC §15.247(d) – 100 kHz Bandwidth of Band Edges

10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2018-05-08	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

10.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2018-07-12 in RF site.

10.5 Test Results

Compliant

Please refer to Annex D for plots of results.

11 FCC §15.247(e) – Power Spectral Density

11.1 Applicable Standards

According to ECFR §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2018-05-08	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BA CL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) “A2LA Policy on Metrological Traceability”.

11.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2018-07-12 in RF site.

11.5 Test Results**ANT 1 PSD 2.4 GHz Wi-Fi**

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)
802.11b mode			
Low	2412	-11.76	8
Middle	2437	-7.98	8
High	2462	-8.44	8
802.11g mode			
Low	2412	-14.40	8
Middle	2437	-12.57	8
High	2462	-12.31	8
802.11n20 mode			
Low	2412	-13.80	8
Middle	2437	-12.44	8
High	2462	-12.08	8

ANT 2 PSD 2.4 GHz Wi-Fi

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)
802.11b mode			
Low	2412	-9.87	8
Middle	2437	-8.11	8
High	2462	-8.73	8
802.11g mode			
Low	2412	-14.30	8
Middle	2437	-13.07	8
High	2462	-12.42	8
802.11n20 mode			
Low	2412	-14.41	8
Middle	2437	-11.96	8
High	2462	-11.72	8

Please refer to Annex C for plots.

12 FCC §15.247(d) - Spurious Emissions at Antenna Terminals

12.1 Applicable Standards

For ECFR §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

12.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2018-05-08	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

12.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2018-07-12 in RF site.


12.5 Test Results

Compliant


Please refer to Annex B for plots.

13 Annex A (Normative) – Occupied Bandwidth


ANT 1 B Mode 2412 MHz Low Channel 6 dB OBW

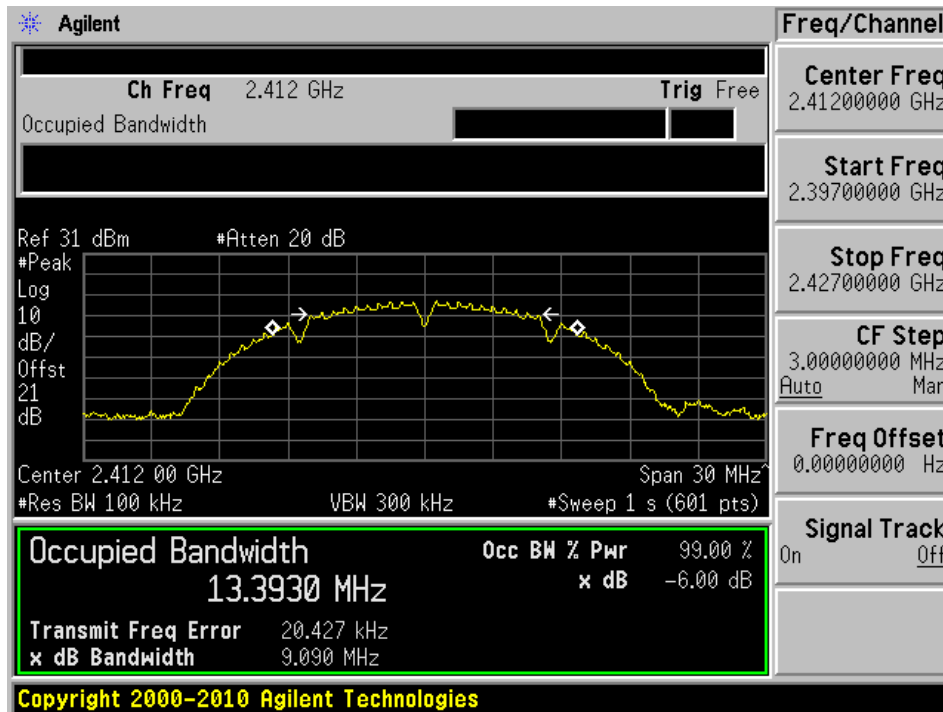


ANT 1 B Mode 2412 MHz Low Channel 99% OBW

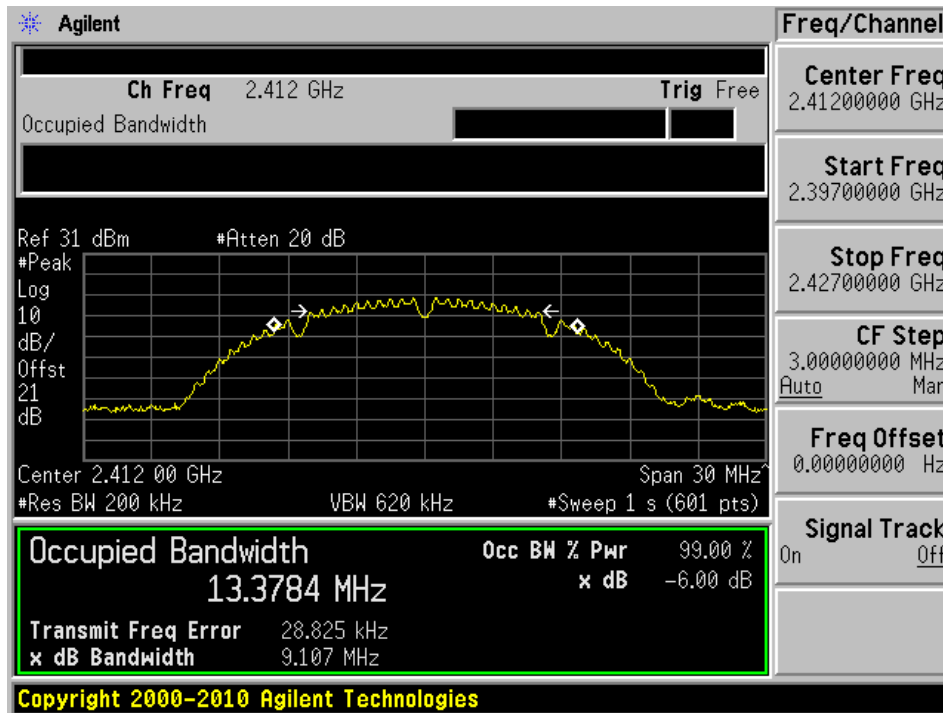


ANT 1 B Mode 2437 MHz Mid Channel 6 dB OBW

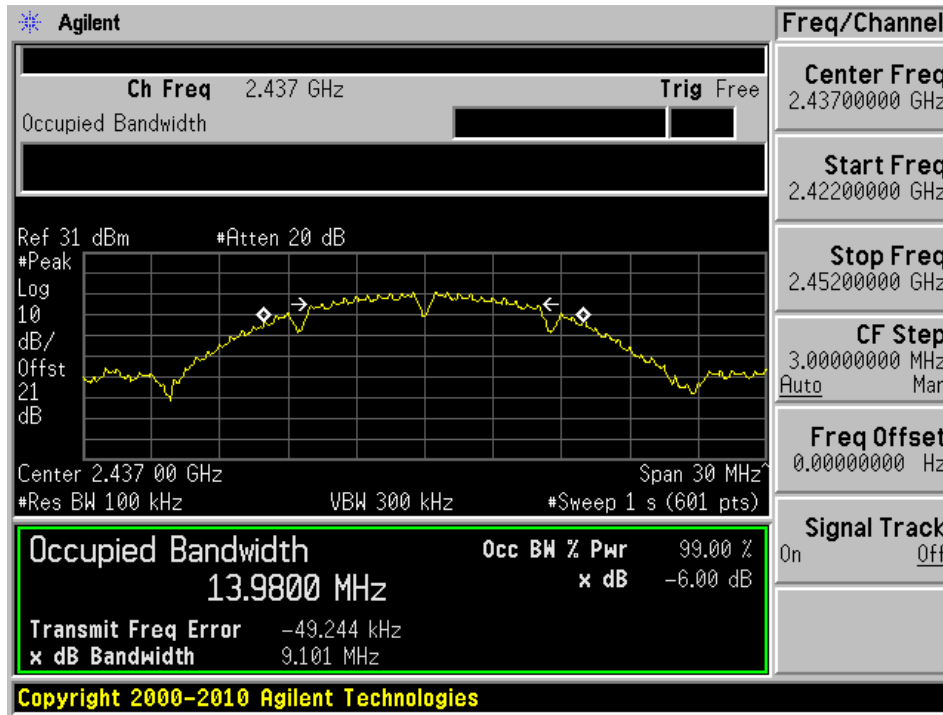


ANT 1 B Mode 2437 MHz Mid Channel 99% OBW

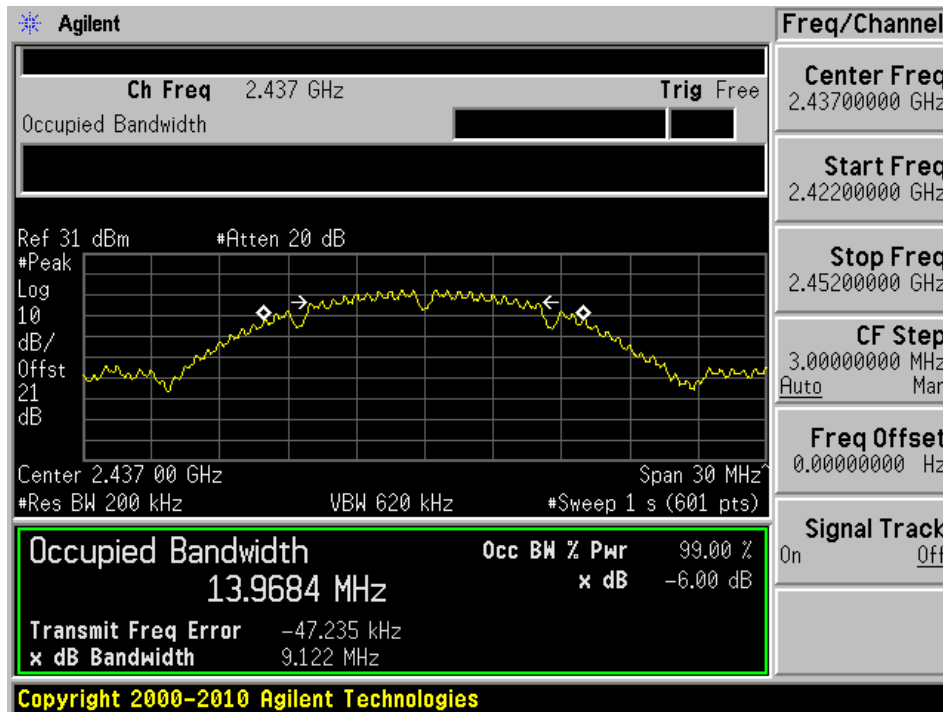


ANT 1 B Mode 2462 MHz High Channel 6 dB OBW

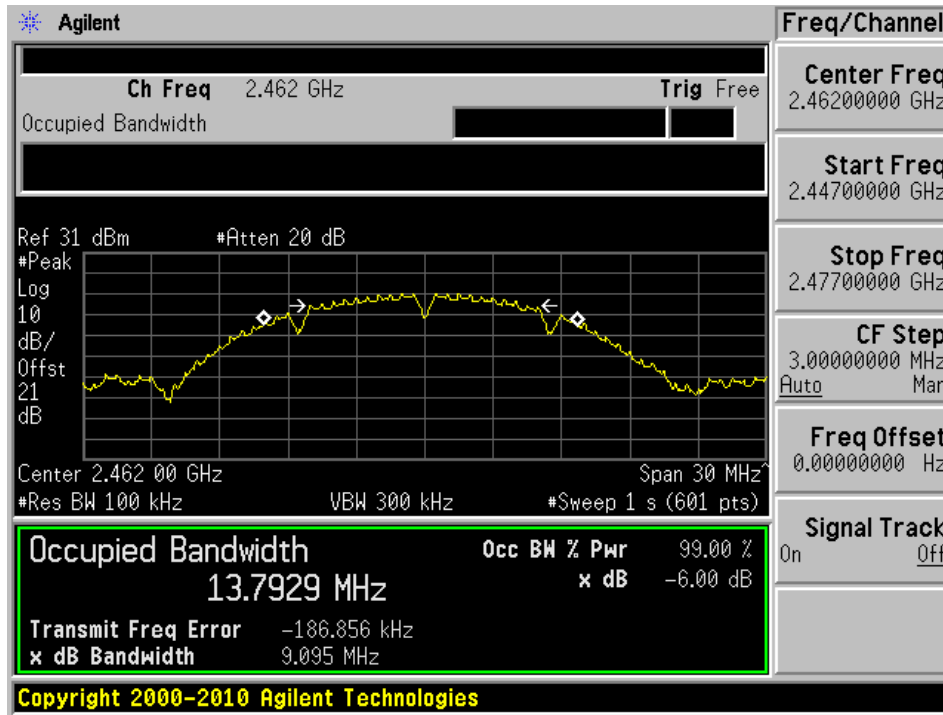


ANT 1 B Mode 2462 MHz High Channel 99% OBW

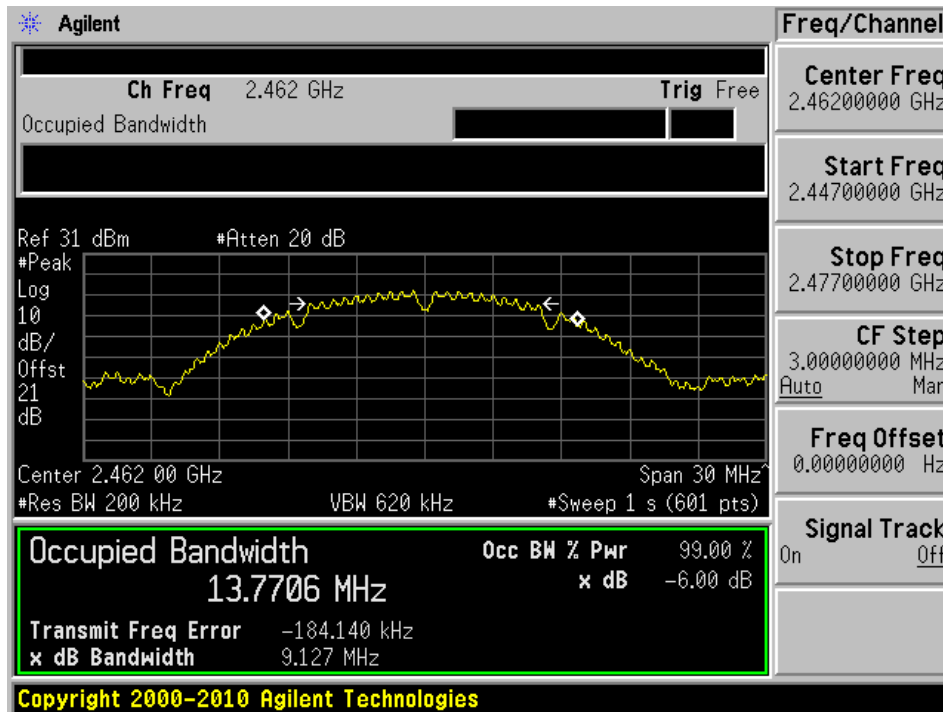


ANT 1 G Mode 2412 MHz Low Channel 6 dB OBW

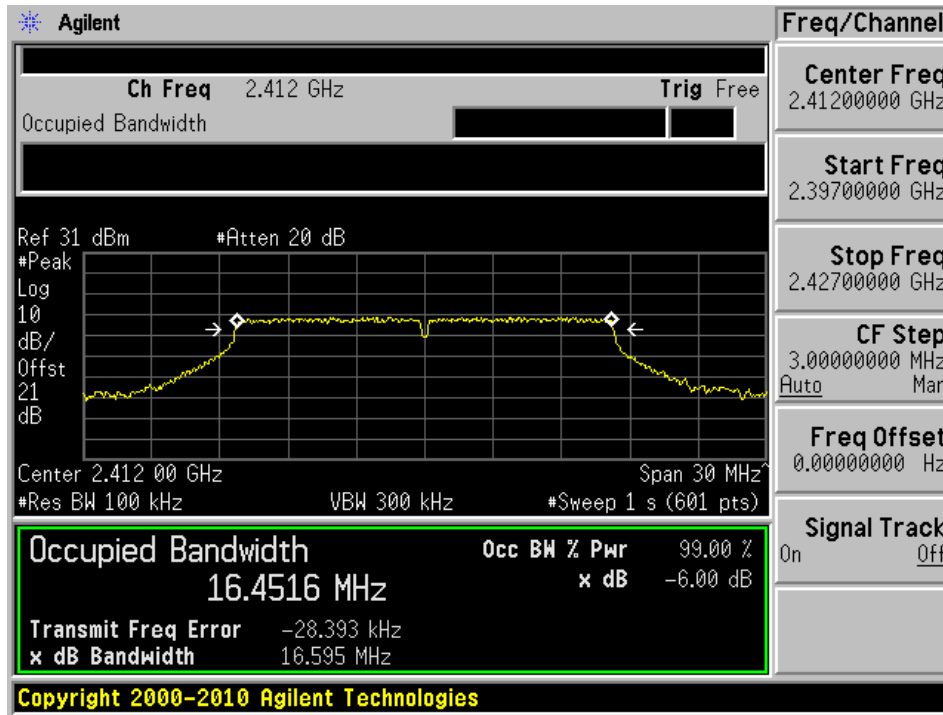


ANT 1 G Mode 2412 MHz Low Channel 99% OBW

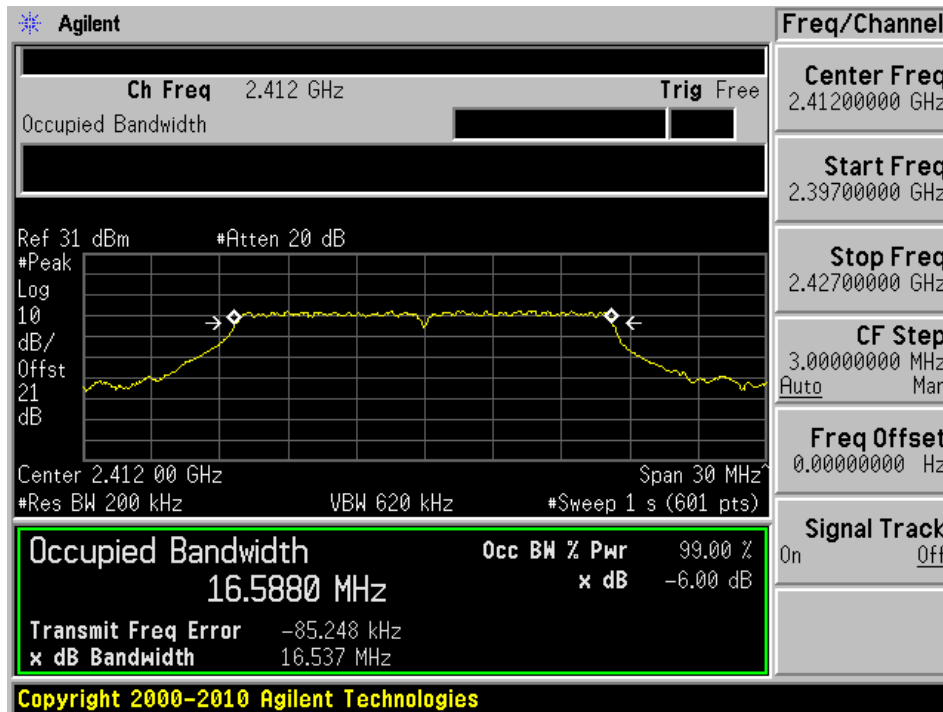


ANT 1 G Mode 2437 MHz Mid Channel 6 dB OBW

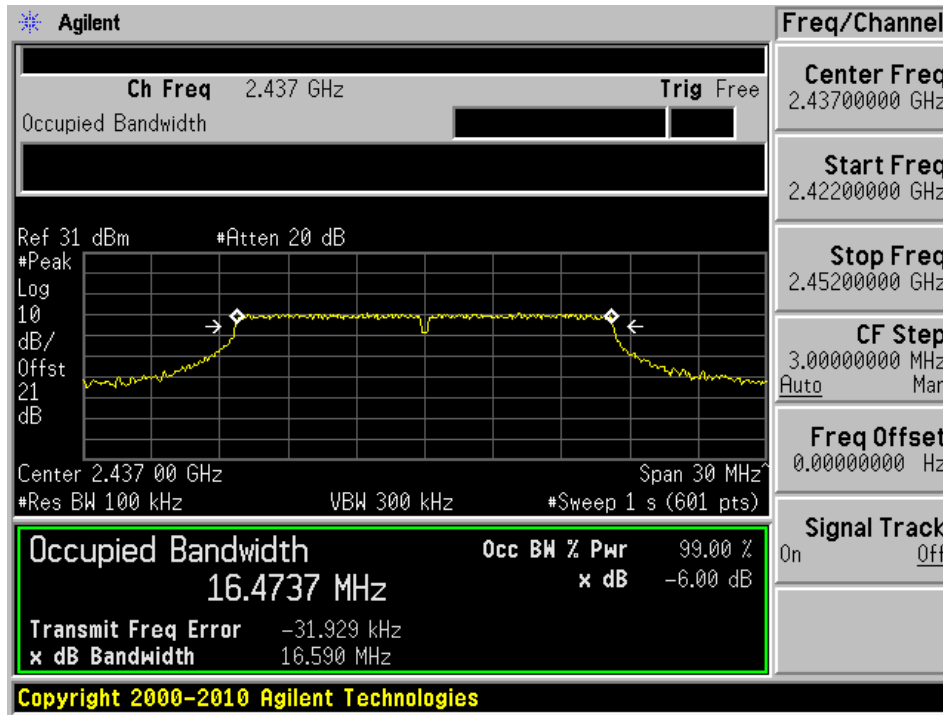


ANT 1 G Mode 2437 MHz Mid Channel 99% OBW

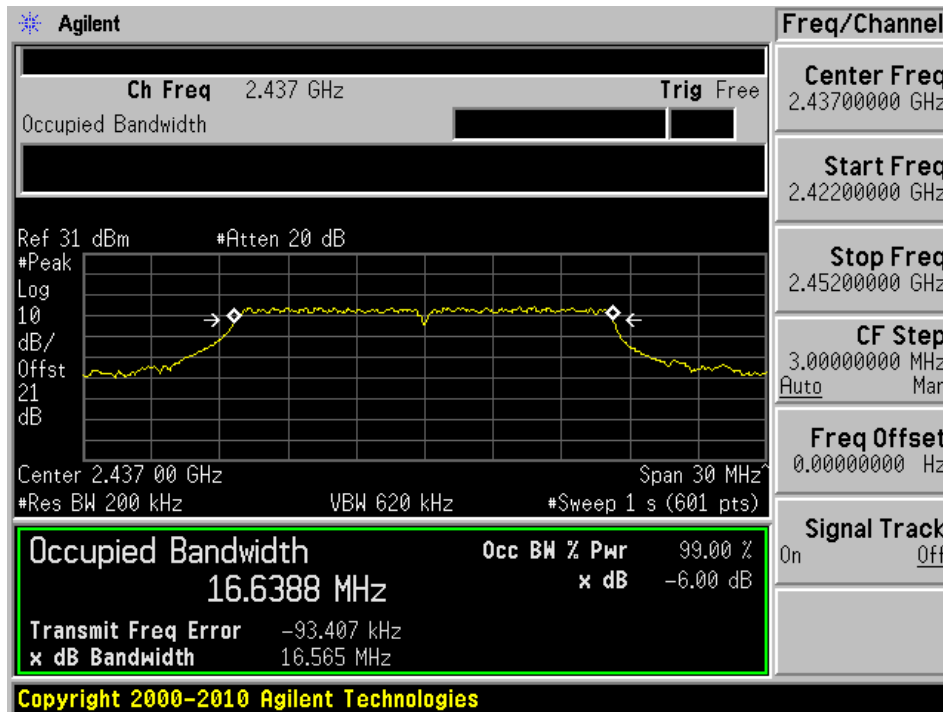


ANT 1 G Mode 2462 MHz High Channel 6 dB OBW

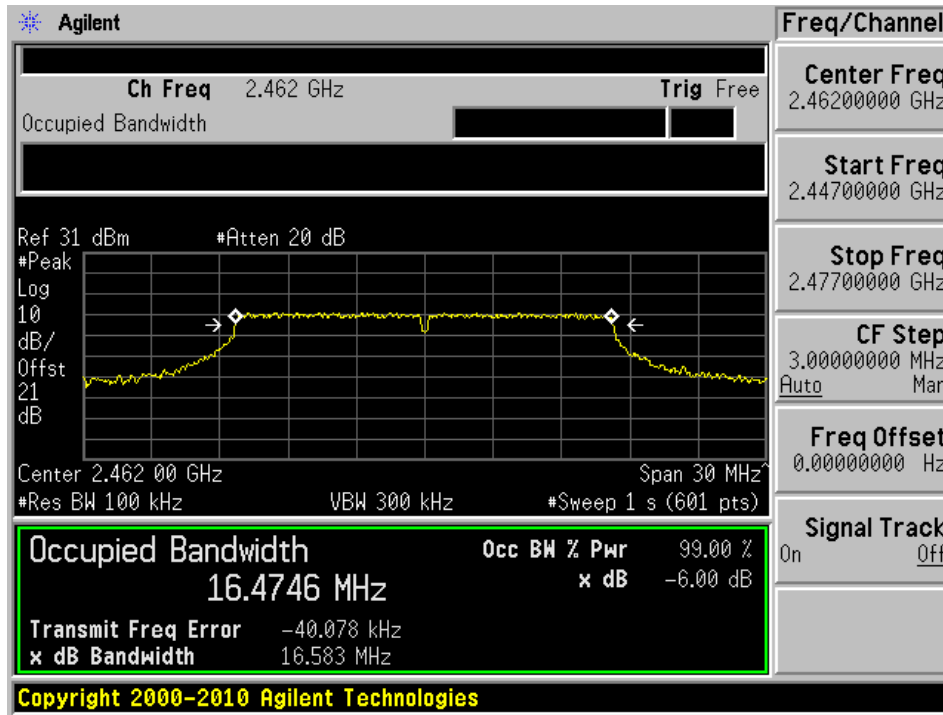


ANT 1 G Mode 2462 MHz High Channel 99% OBW

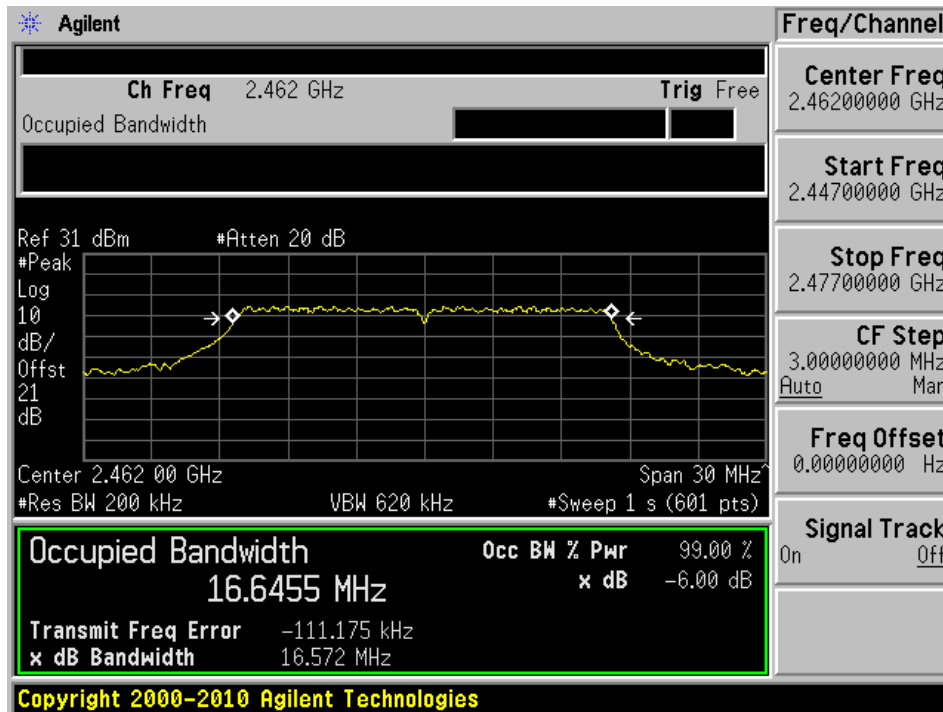


ANT 1 HT20 Mode 2412 MHz Low Channel 6 dB OBW

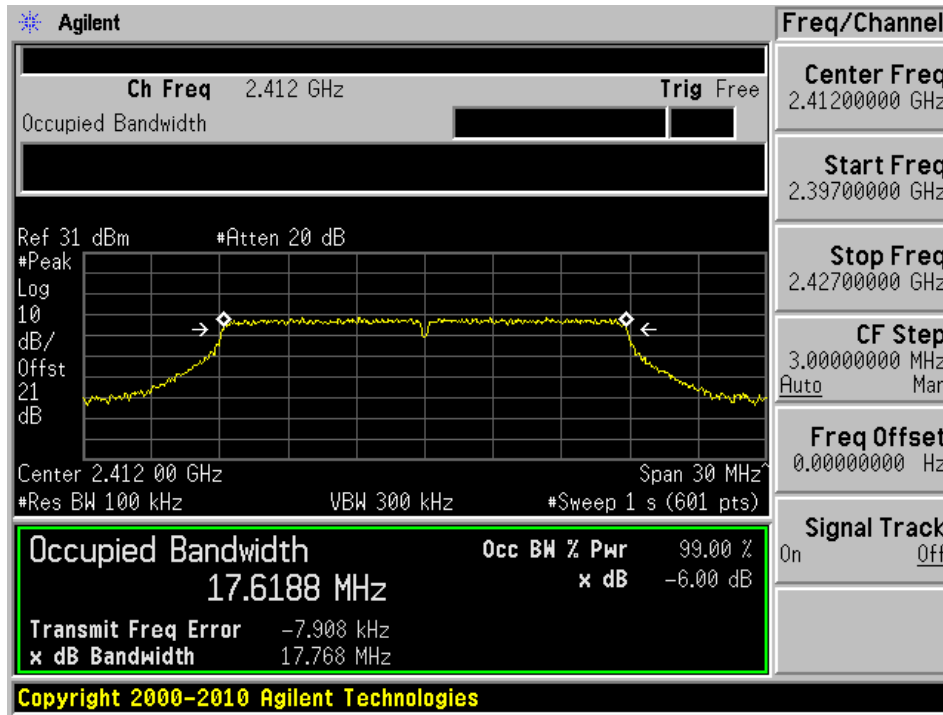


ANT 1 HT20 Mode 2412 MHz Low Channel 99% OBW

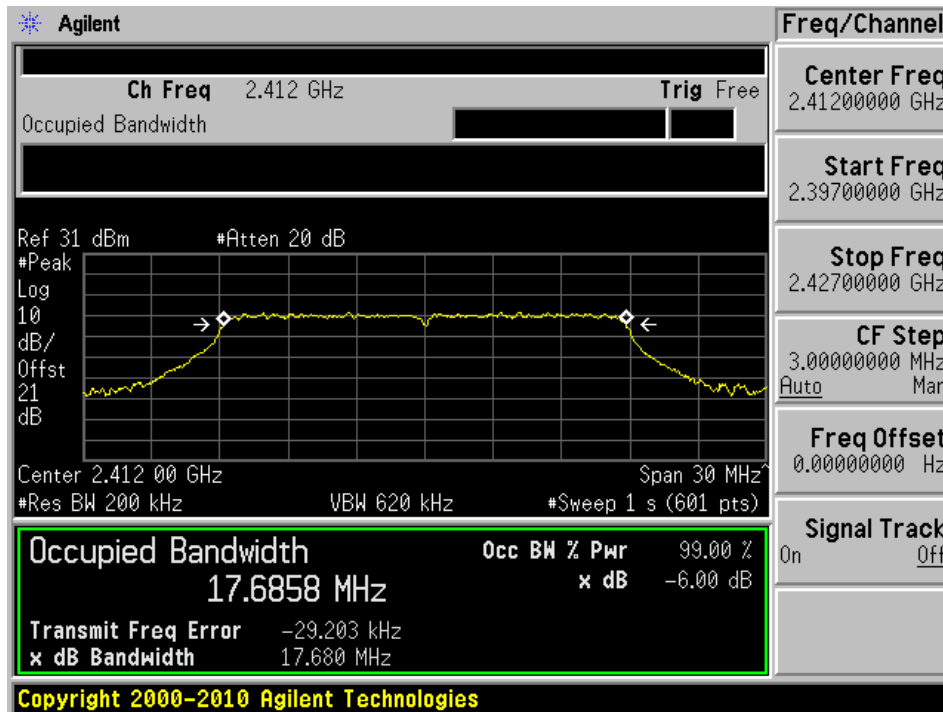


ANT 1 HT20 Mode 2437 MHz Mid Channel 6 dB OBW

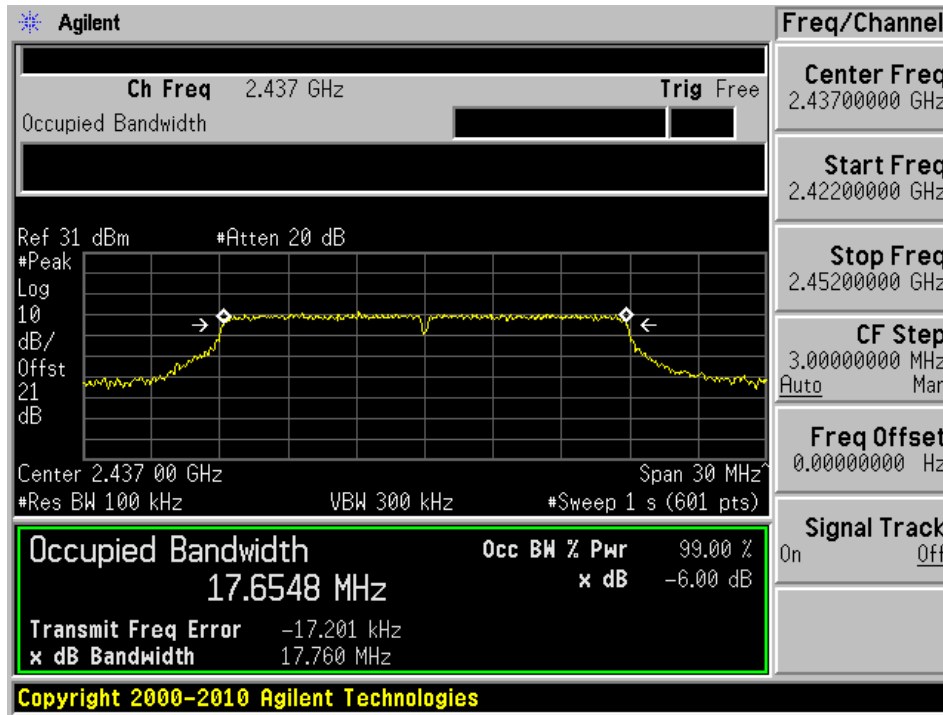


ANT 1 HT20 Mode 2437 MHz Mid Channel 99% OBW

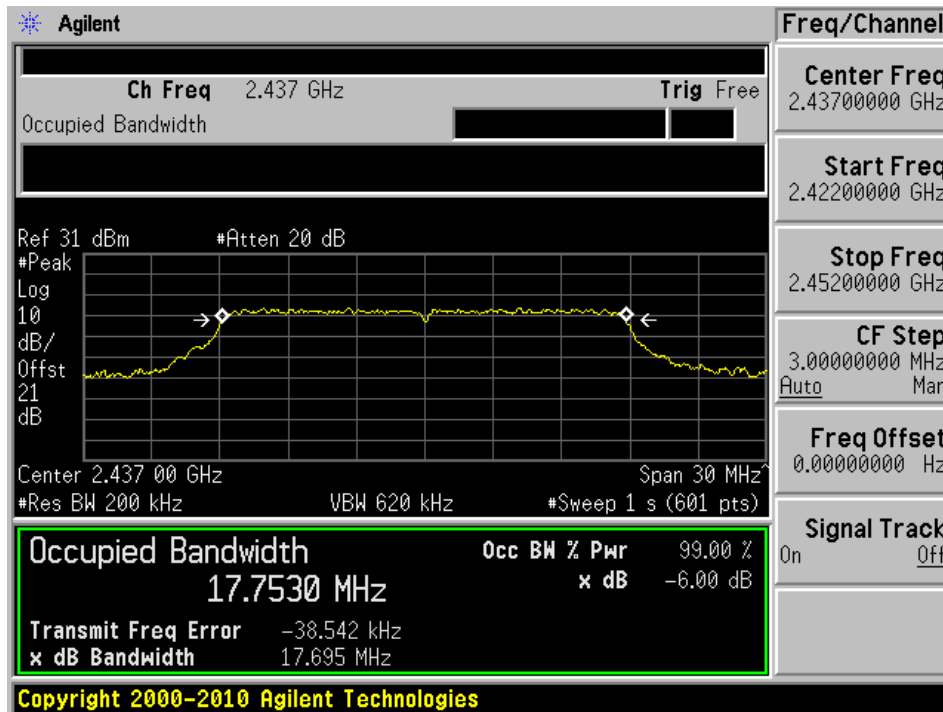


ANT 1 HT20 Mode 2462 MHz High Channel 6 dB OBW

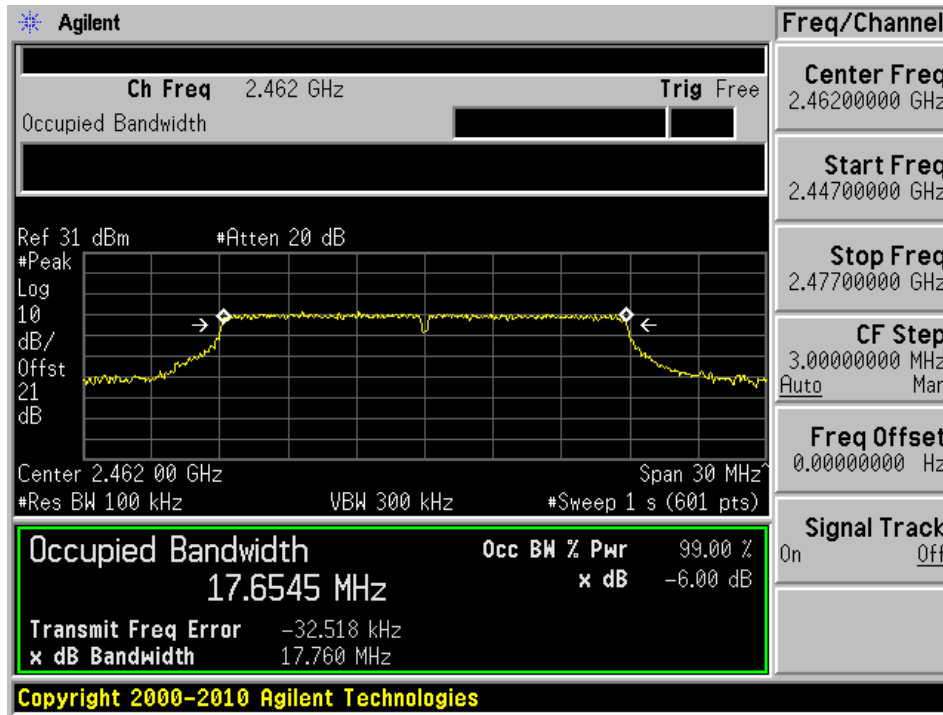


ANT 1 HT20 Mode 2462 MHz High Channel 99% OBW

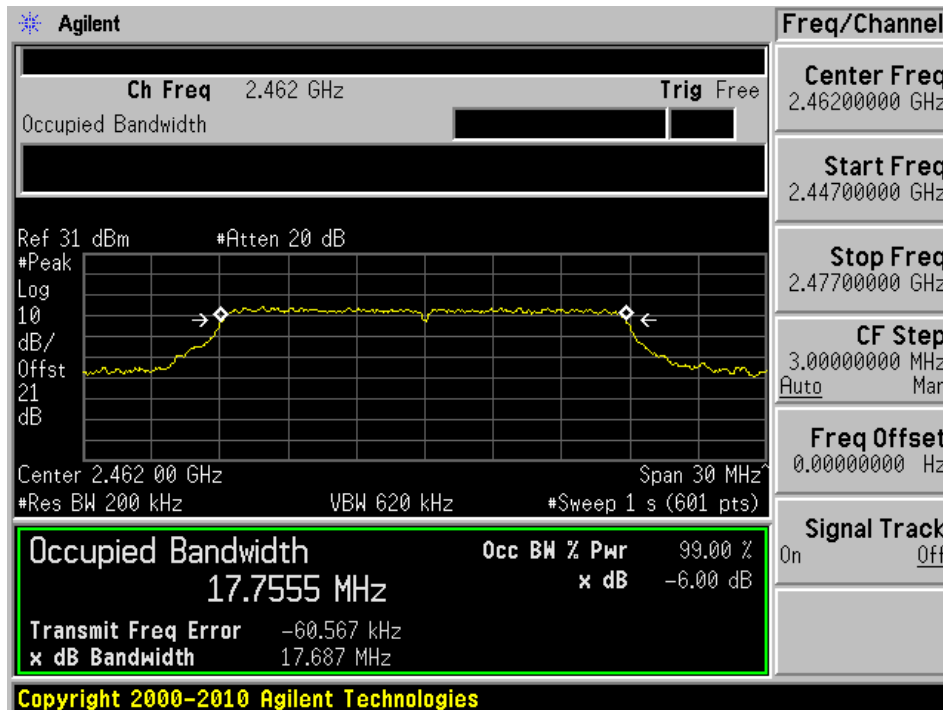


ANT 2 B Mode 2412 MHz Low Channel 6 dB OBW

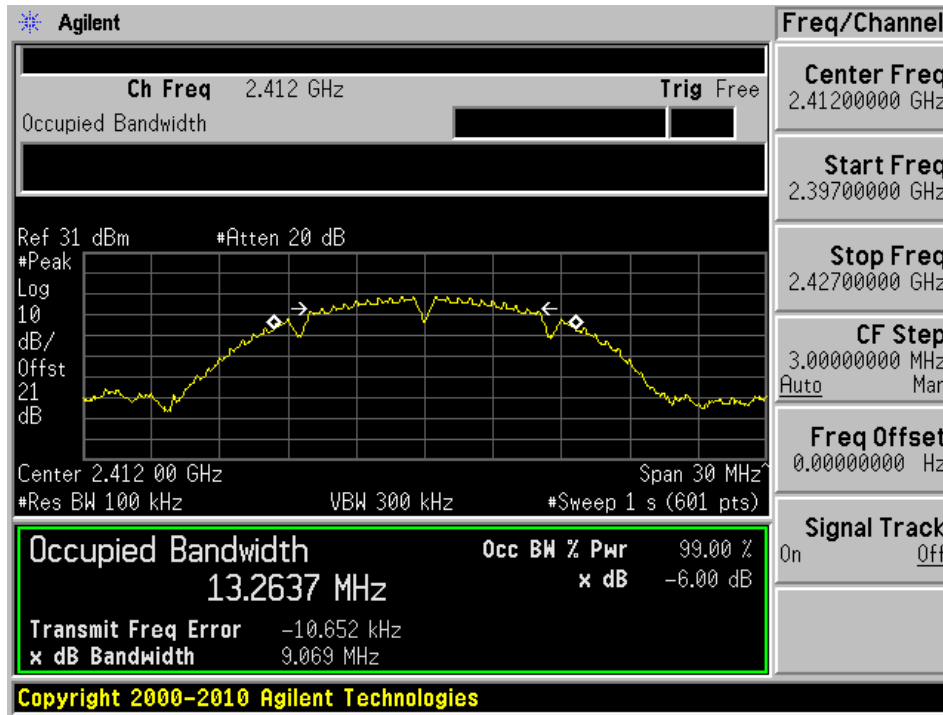


ANT 2 B Mode 2412 MHz Low Channel 99% OBW

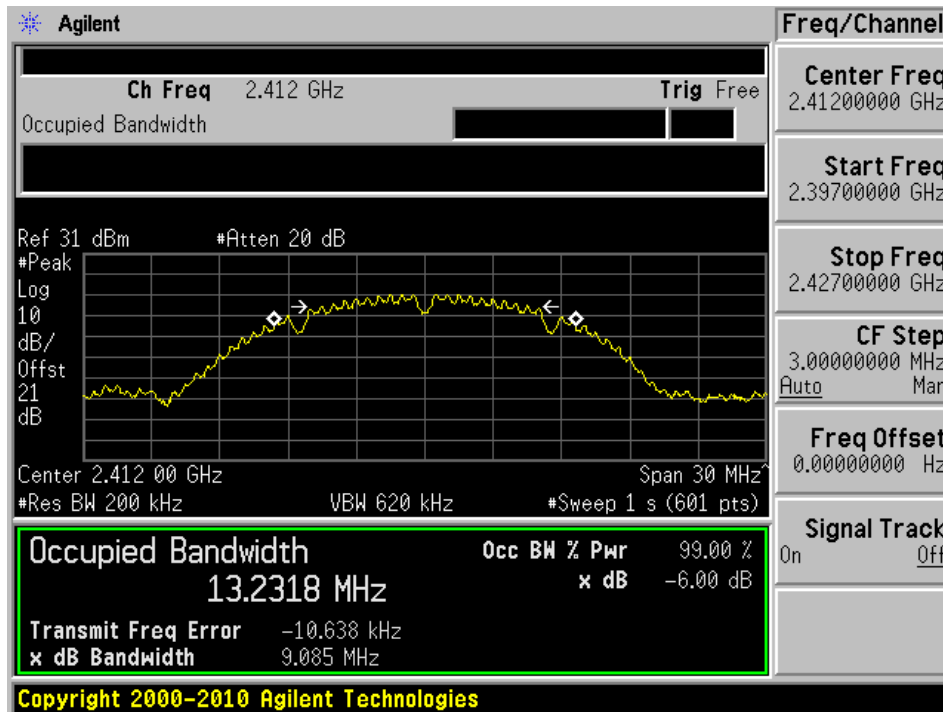


ANT 2 B Mode 2437 MHz Mid Channel 6 dB OBW

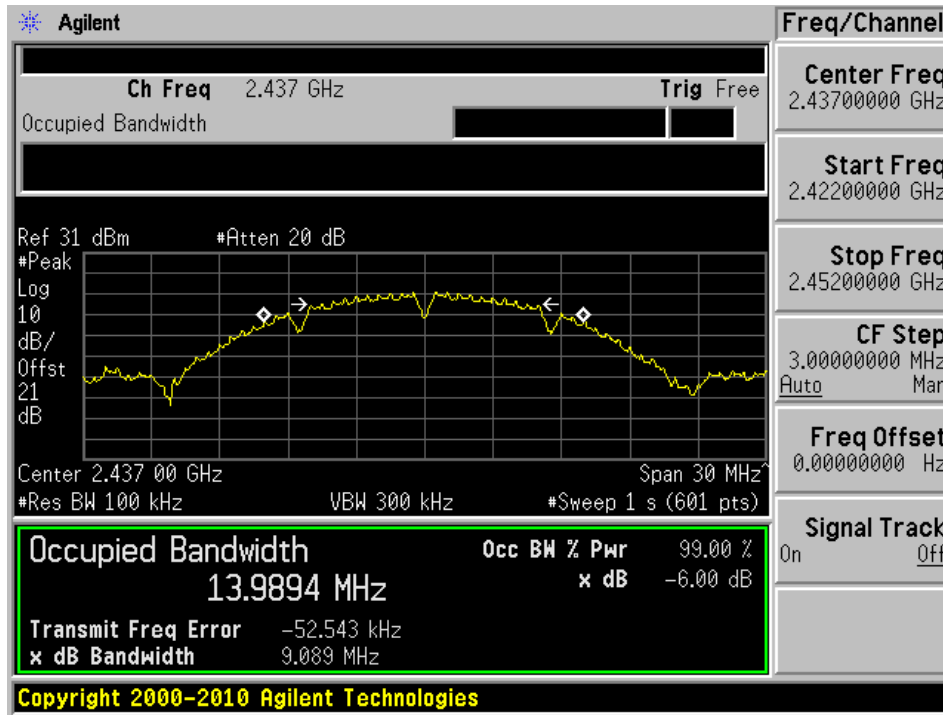


ANT 2 B Mode 2437 MHz Mid Channel 99% OBW

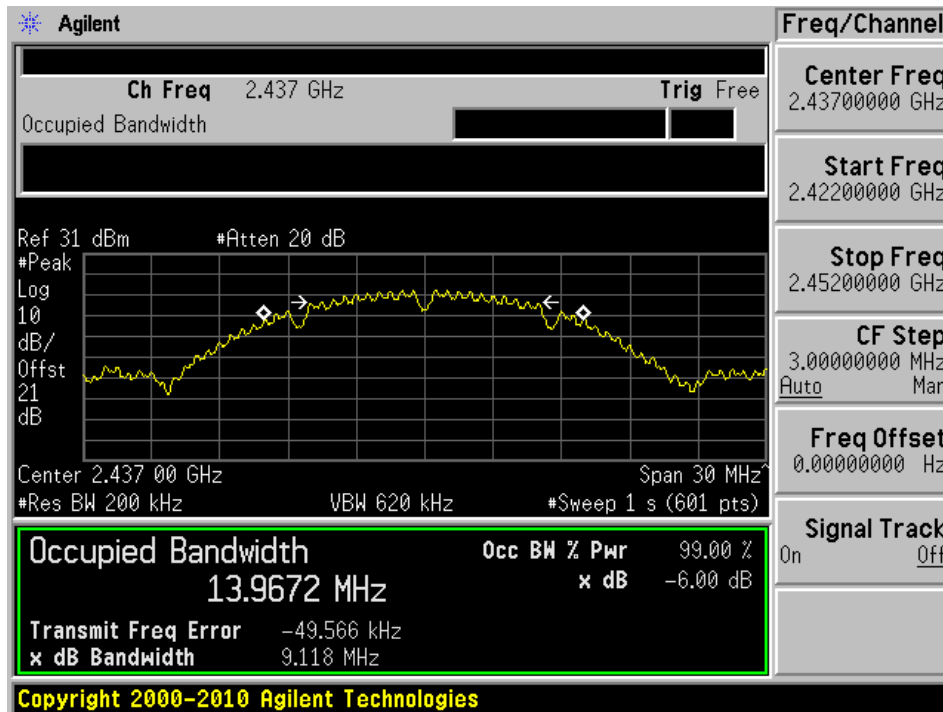


ANT 2 B Mode 2462 MHz High Channel 6 dB OBW

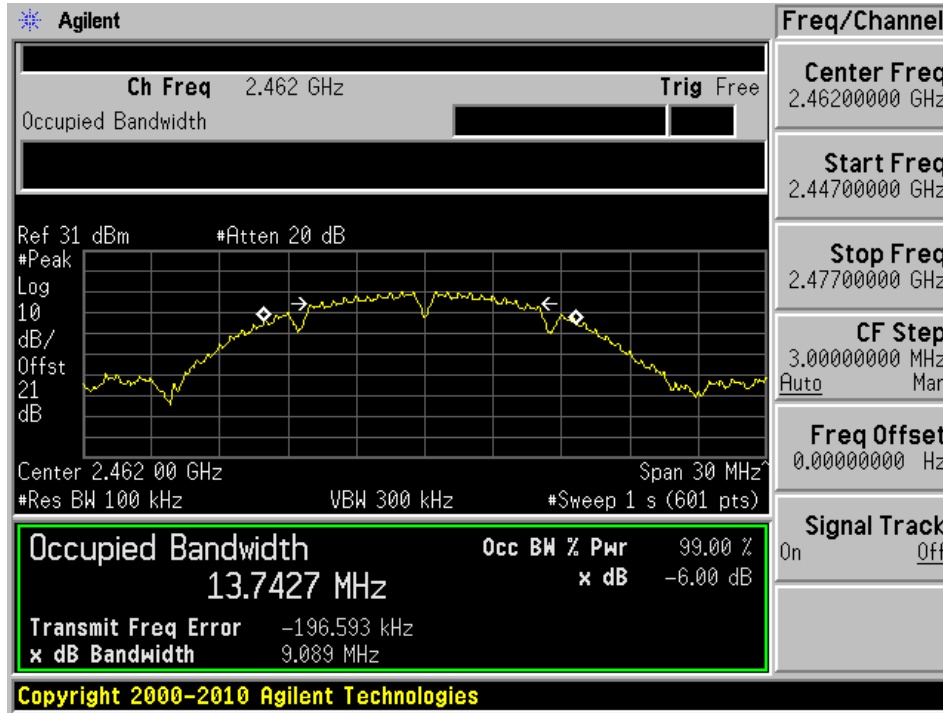


ANT 2 B Mode 2462 MHz High Channel 99% OBW

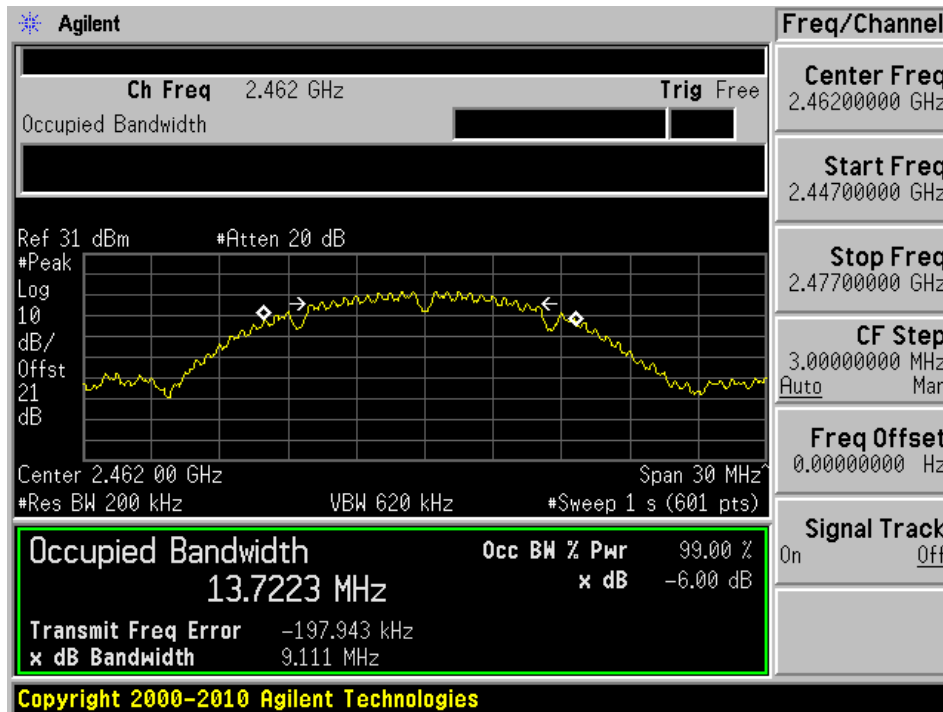


ANT 2 G Mode 2412 MHz Low Channel 6 dB OBW

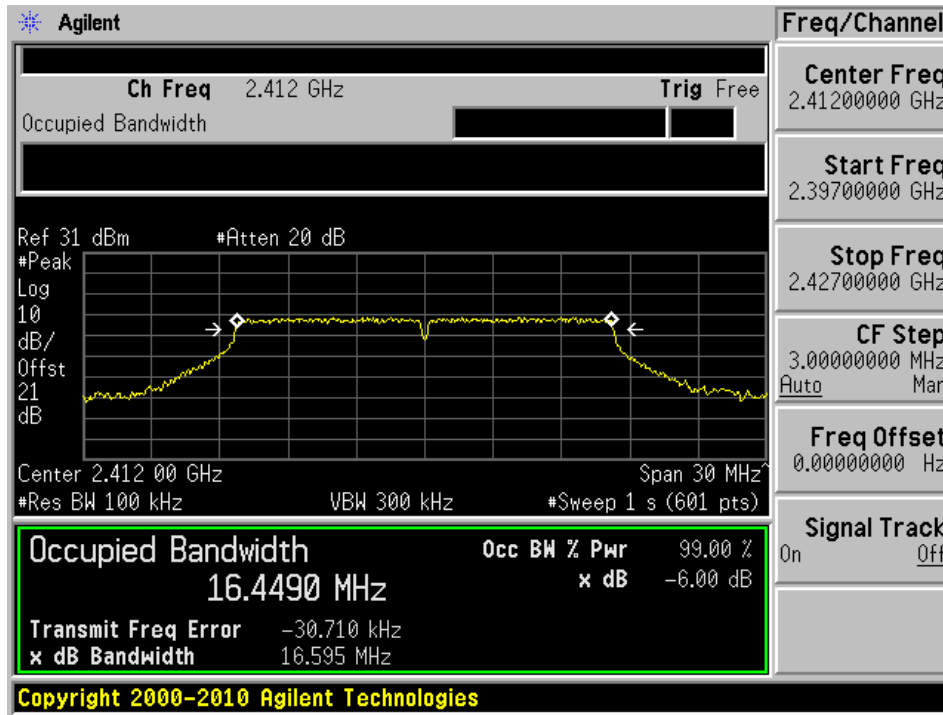


ANT 2 G Mode 2412 MHz Low Channel 99% OBW

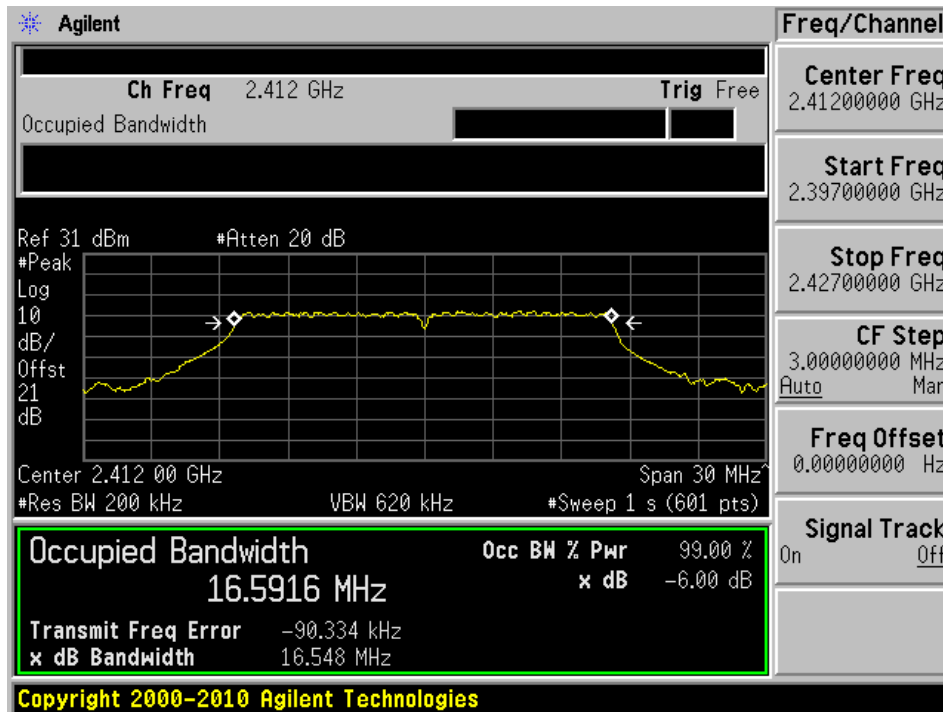


ANT 2 G Mode 2437 MHz Mid Channel 6 dB OBW

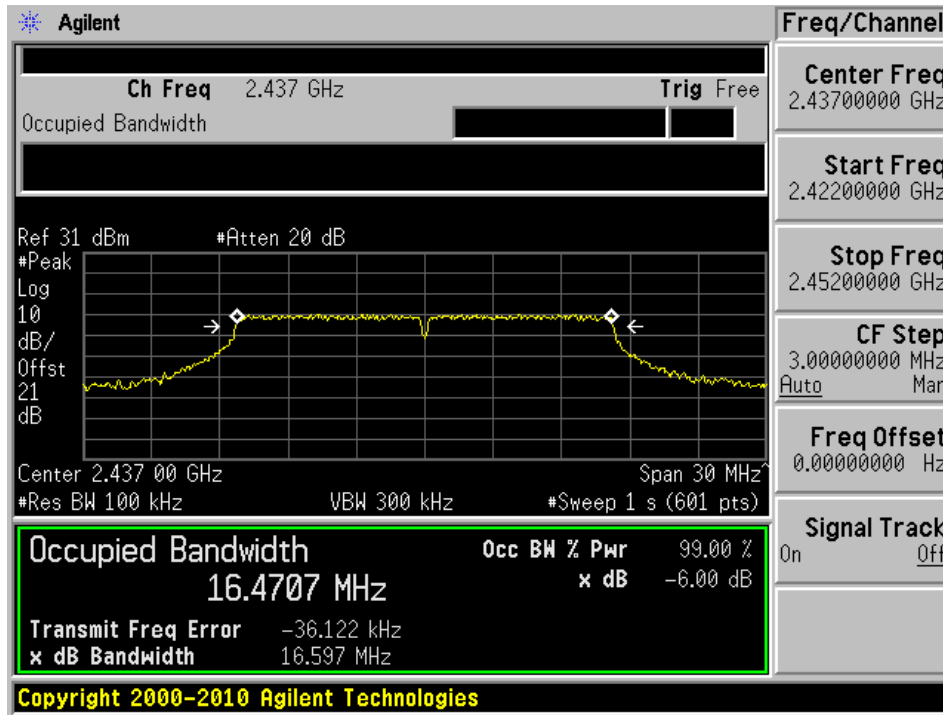


ANT 2 G Mode 2437 MHz Mid Channel 99% OBW

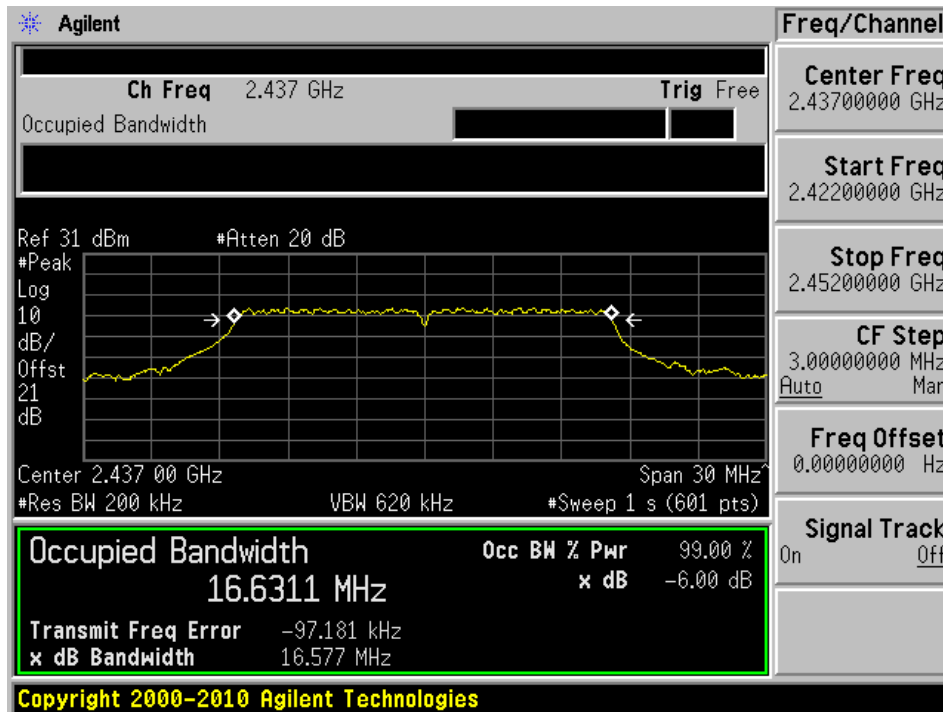


ANT 2 G Mode 2462 MHz High Channel 6 dB OBW

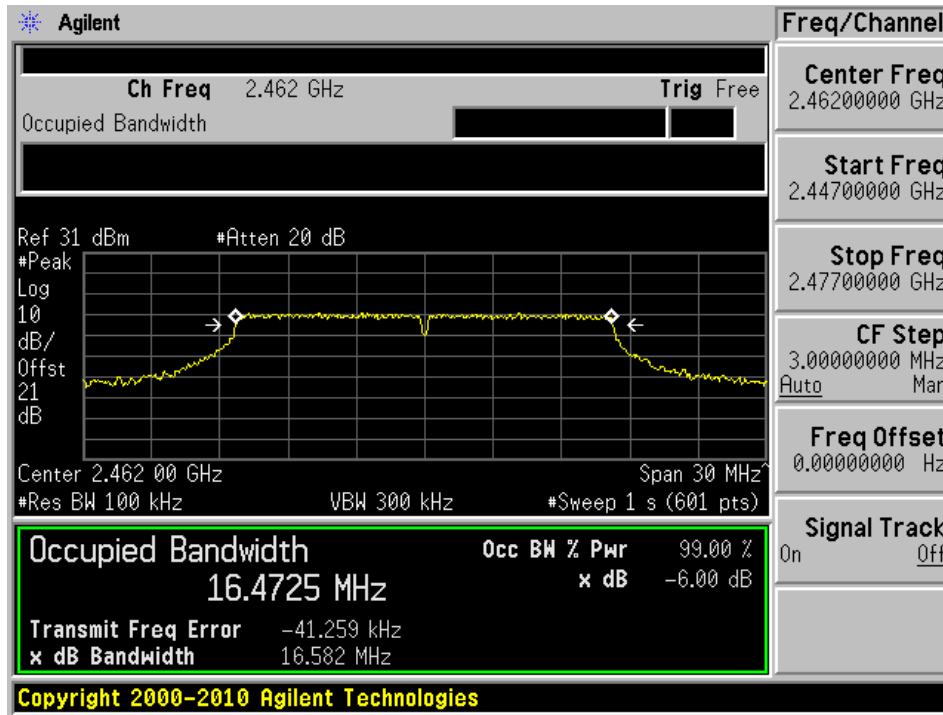


ANT 2 G Mode 2462 MHz High Channel 99% OBW

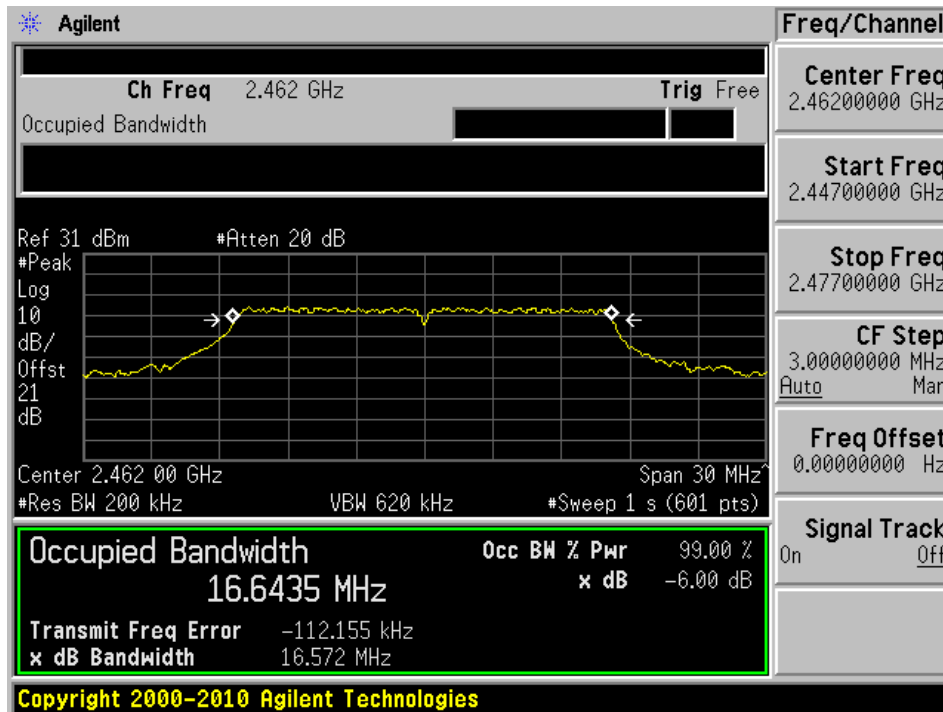


ANT 2 HT20 Mode 2412 MHz Low Channel 6 dB OBW

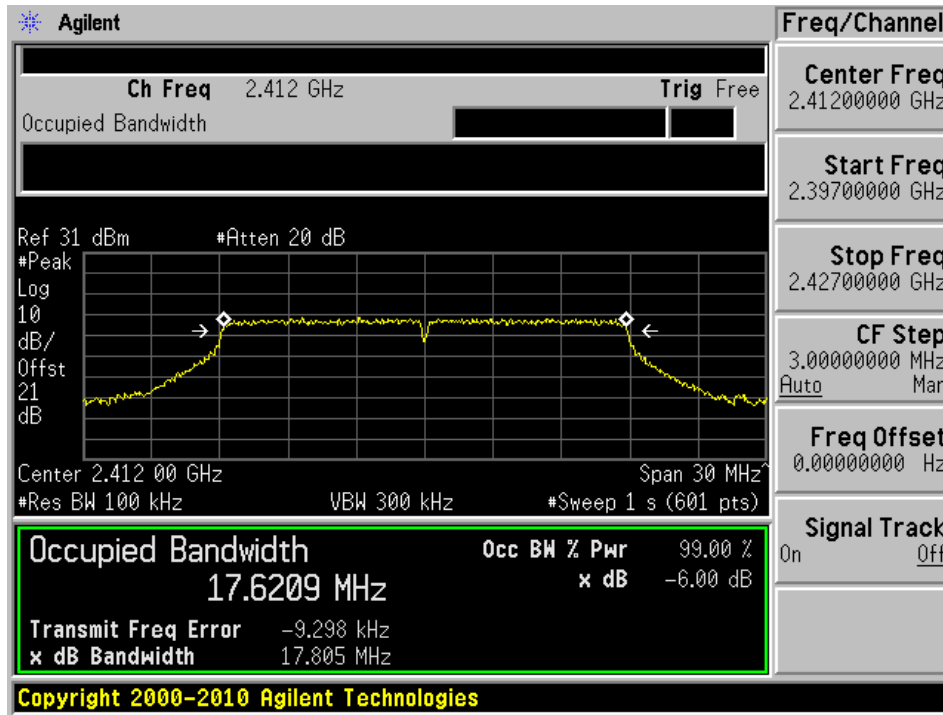


ANT 2 HT20 Mode 2412 MHz Low Channel 99% OBW

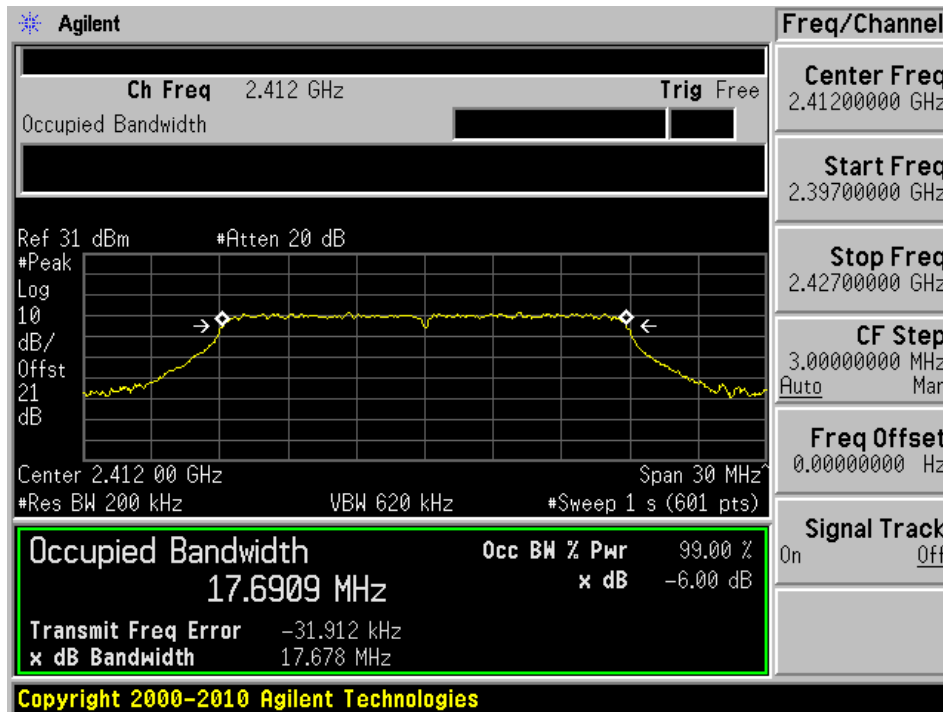


ANT 2 HT20 Mode 2437 MHz Mid Channel 6 dB OBW

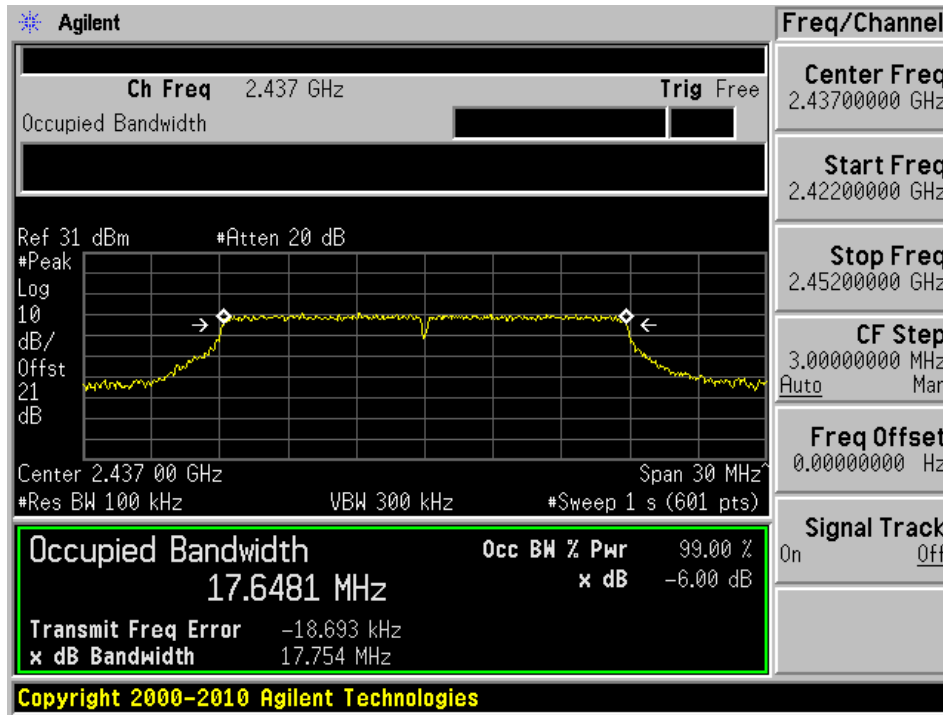


ANT 2 HT20 Mode 2437 MHz Mid Channel 99% OBW

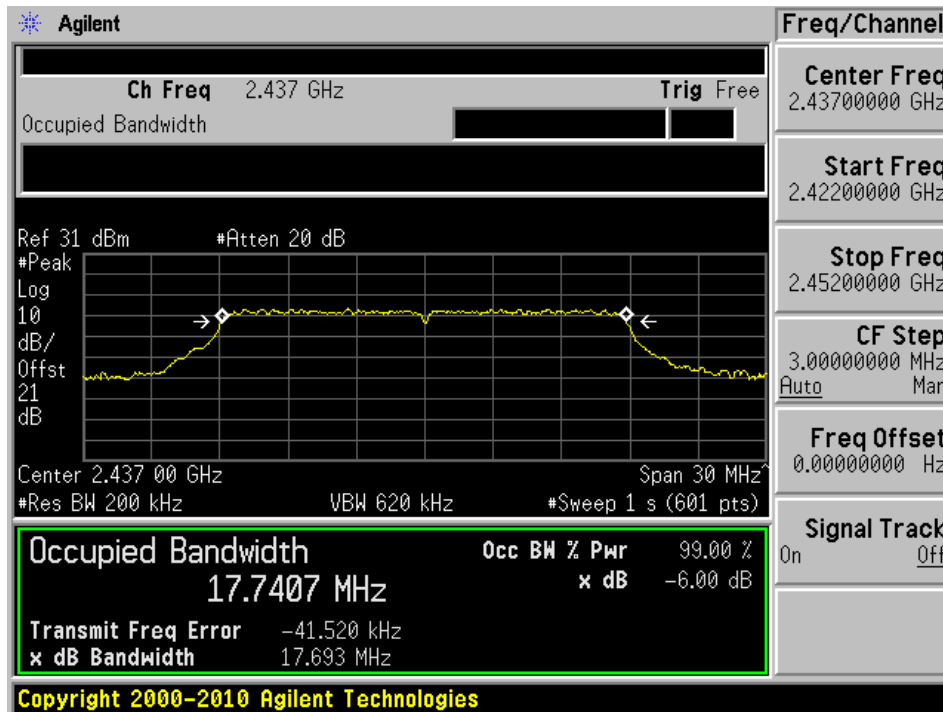

ANT 2 HT20 Mode 2462 MHz High Channel 6 dB OBW

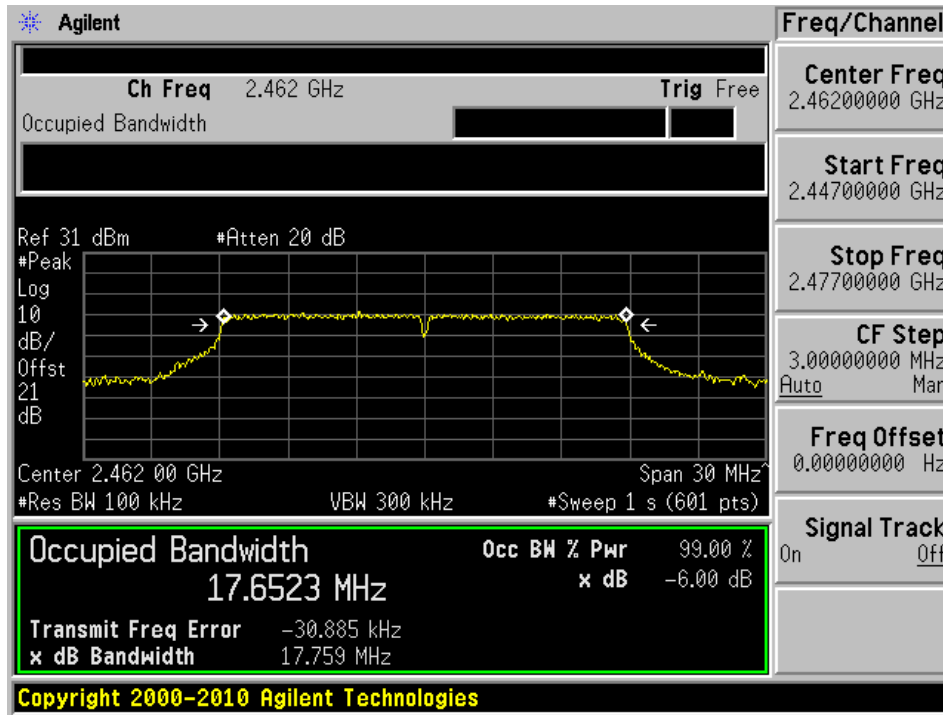


ANT 2 HT20 Mode 2462 MHz High Channel 99% OBW

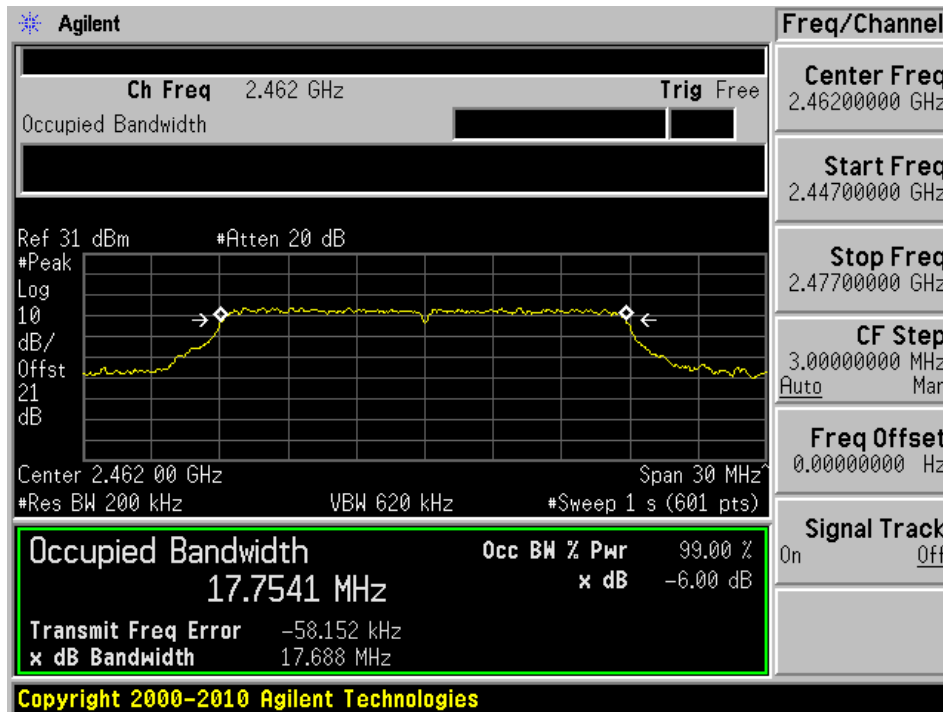


14 Annex B (Normative) – Spurious Emission at Antenna Port


ANT 1 B Mode 2412 MHz Low Channel Spurious Emission_1

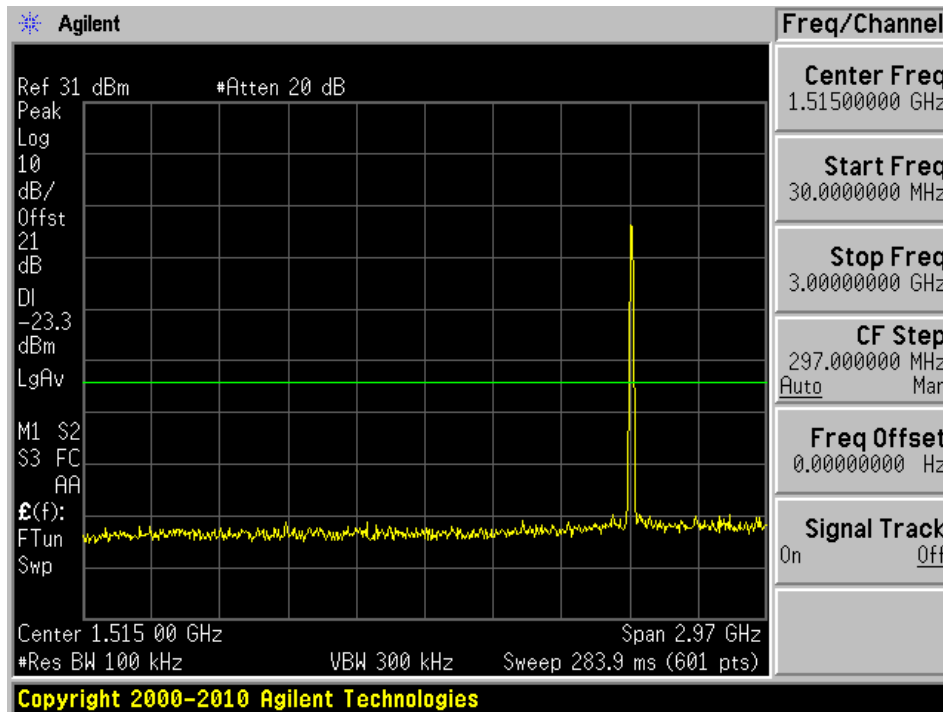


ANT 1 B Mode 2412 MHz Low Channel Spurious Emission_2

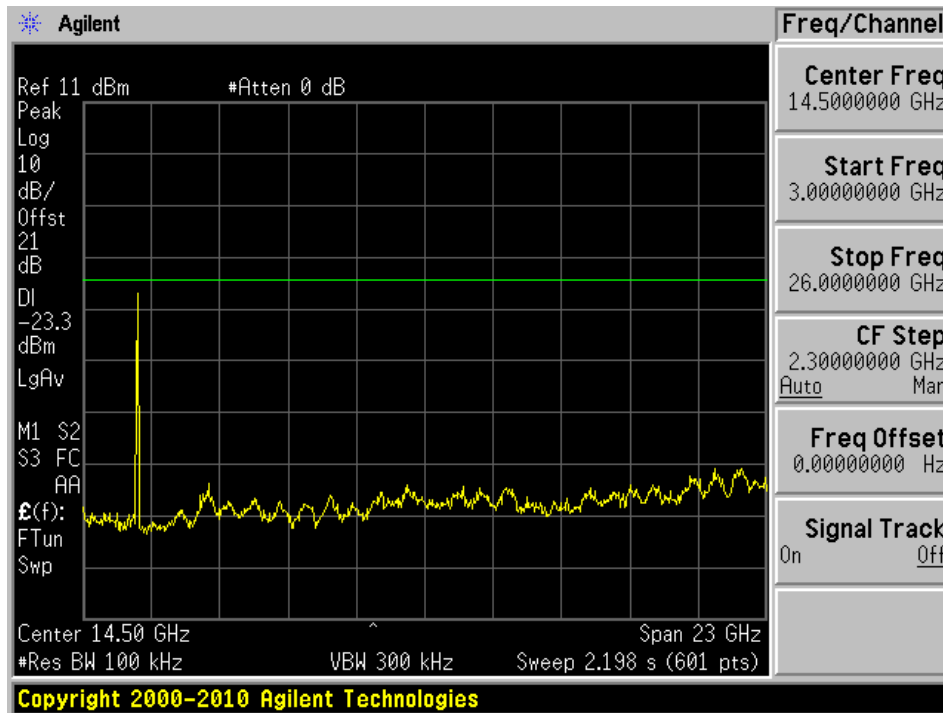


ANT 1 B Mode 2437 MHz Mid Channel Spurious Emission_1

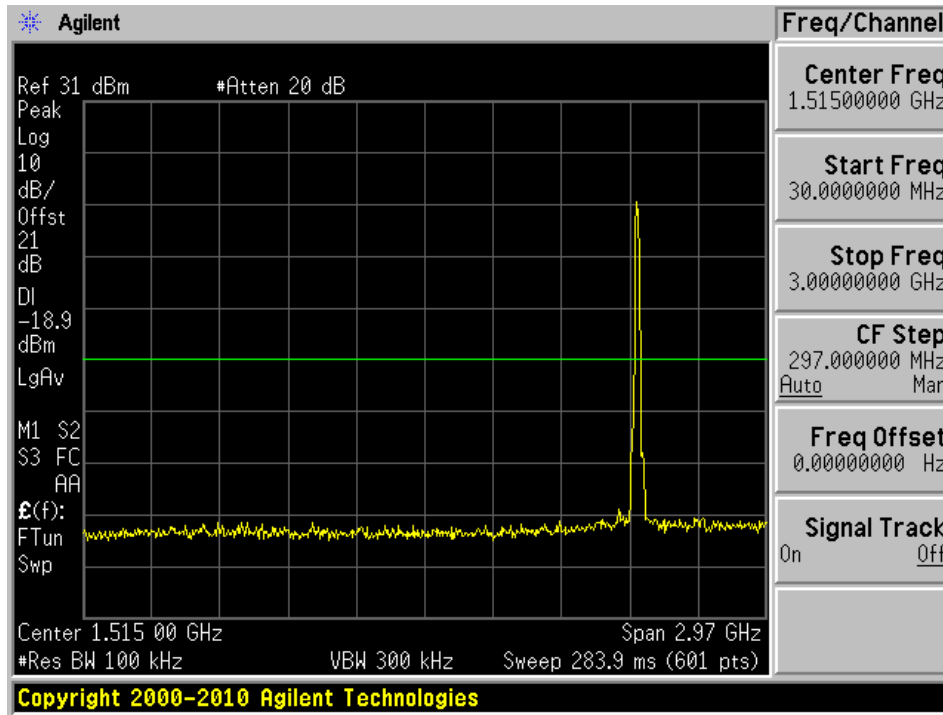


ANT 1 B Mode 2437 MHz Mid Channel Spurious Emission_2

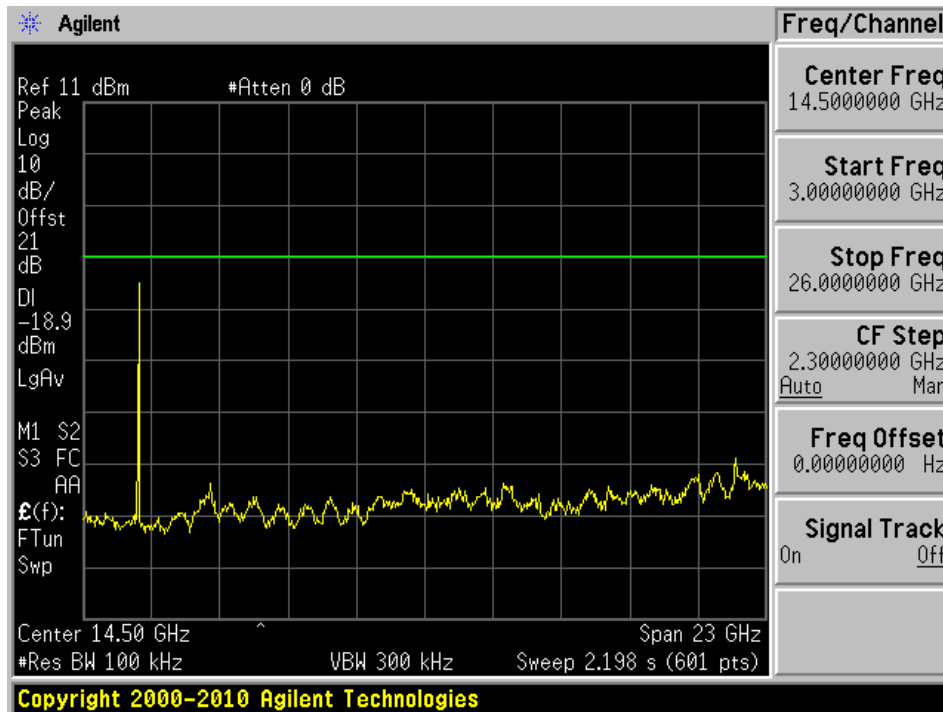


ANT 1 B Mode 2462 MHz High Channel Spurious Emission_1

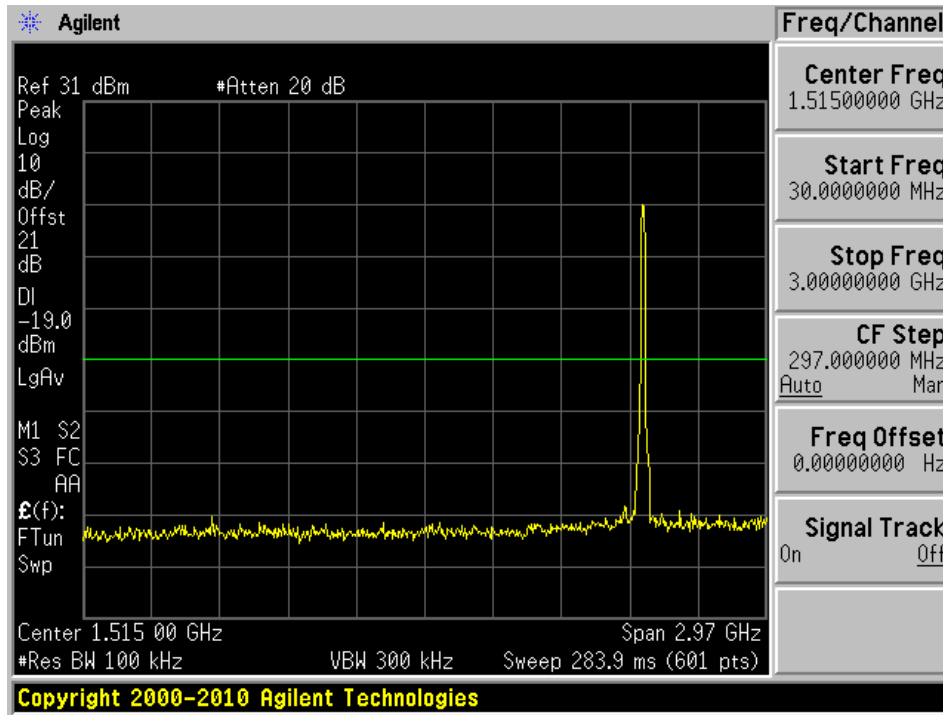


ANT 1 B Mode 2462 MHz High Channel Spurious Emission_2

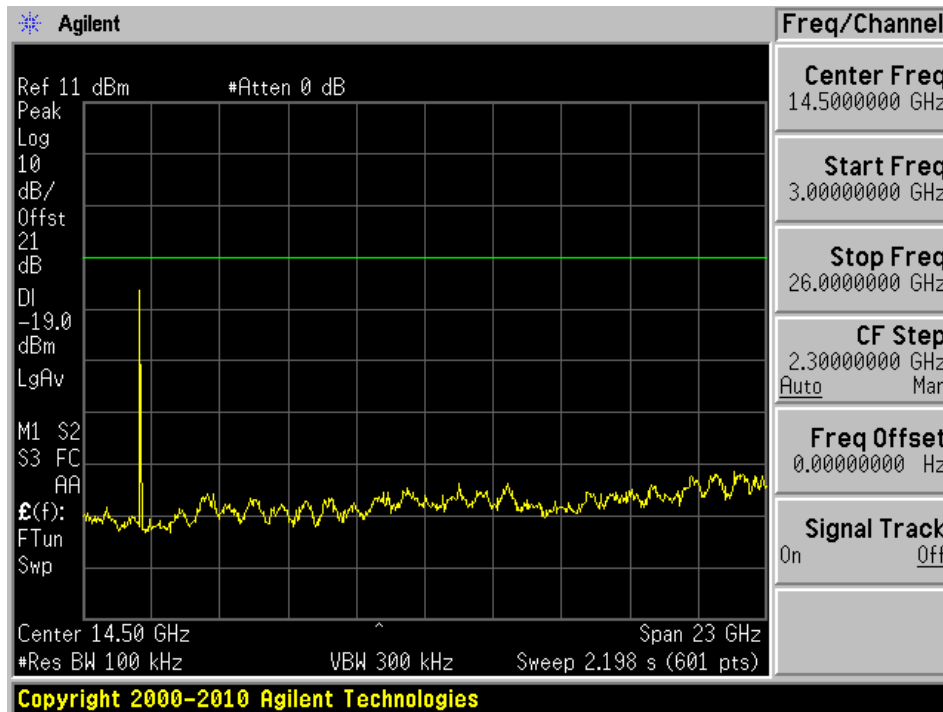


ANT 1 G Mode 2412 MHz Low Channel Spurious Emission_1

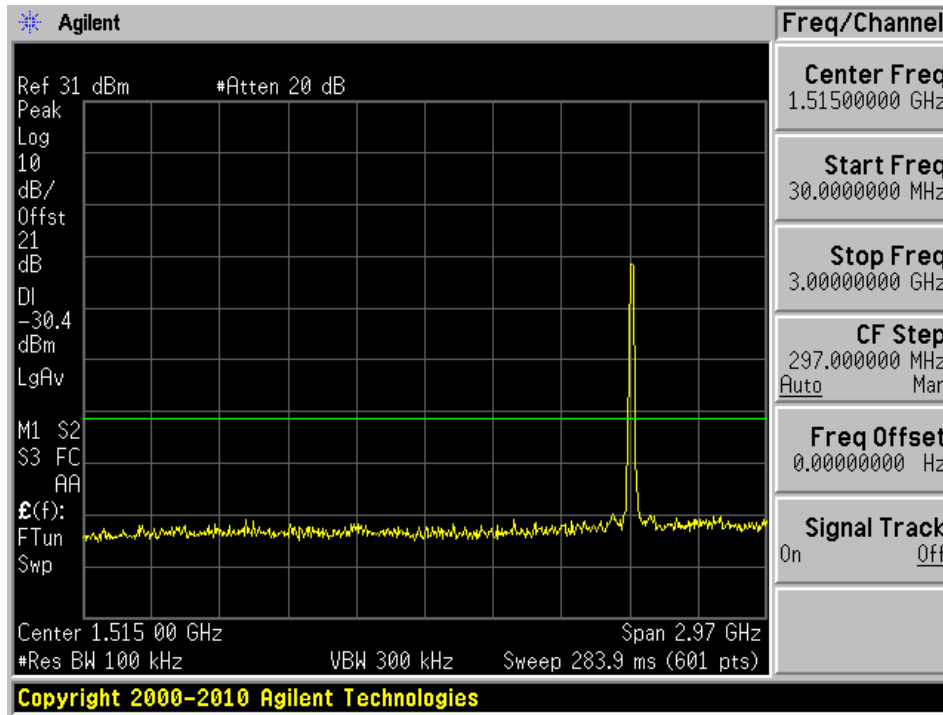


ANT 1 G Mode 2412 MHz Low Channel Spurious Emission_2

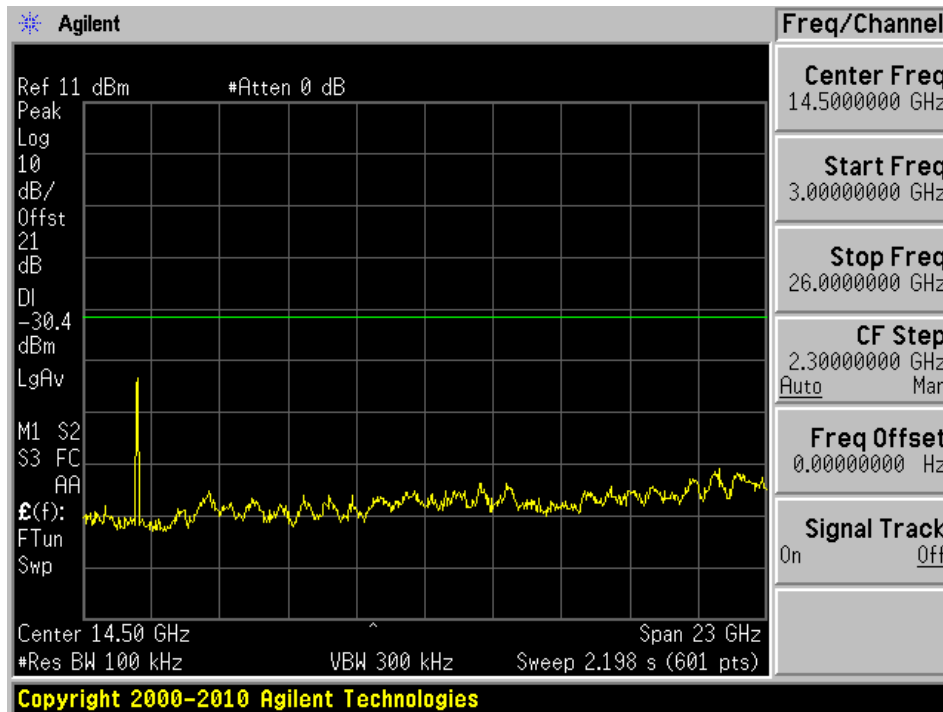


ANT 1 G Mode 2437 MHz Mid Channel Spurious Emission_1

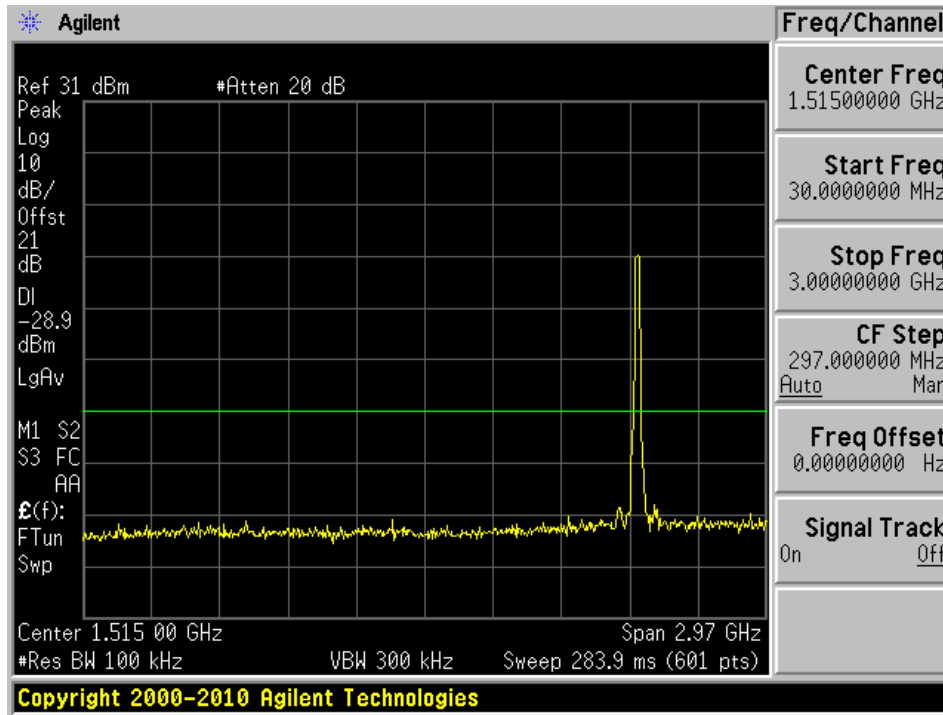


ANT 1 G Mode 2437 MHz Mid Channel Spurious Emission_2

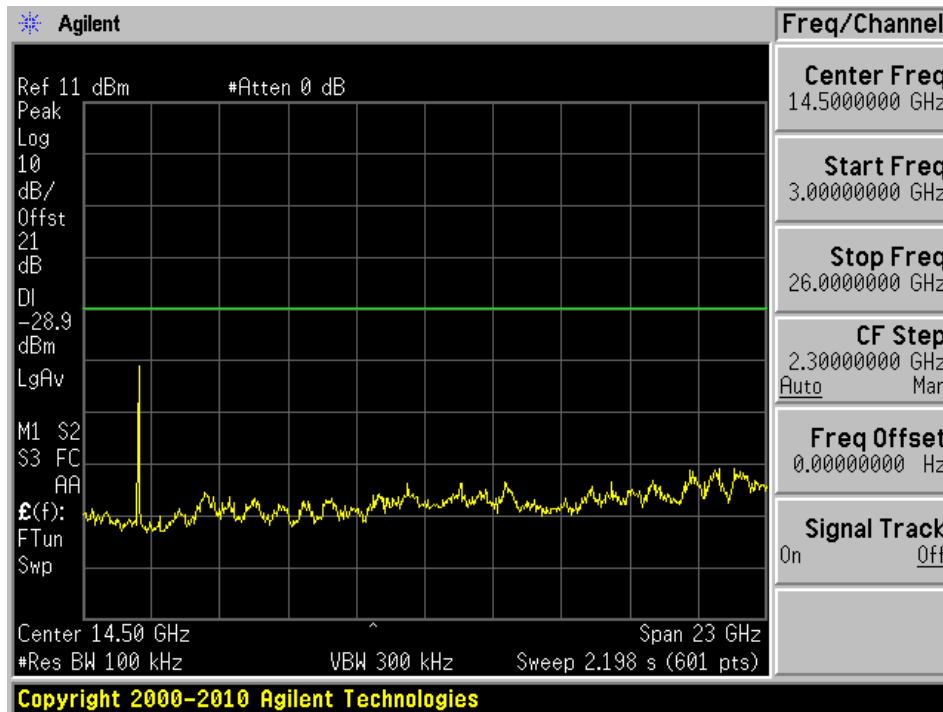


ANT 1 G Mode 2462 MHz High Channel Spurious Emission_1

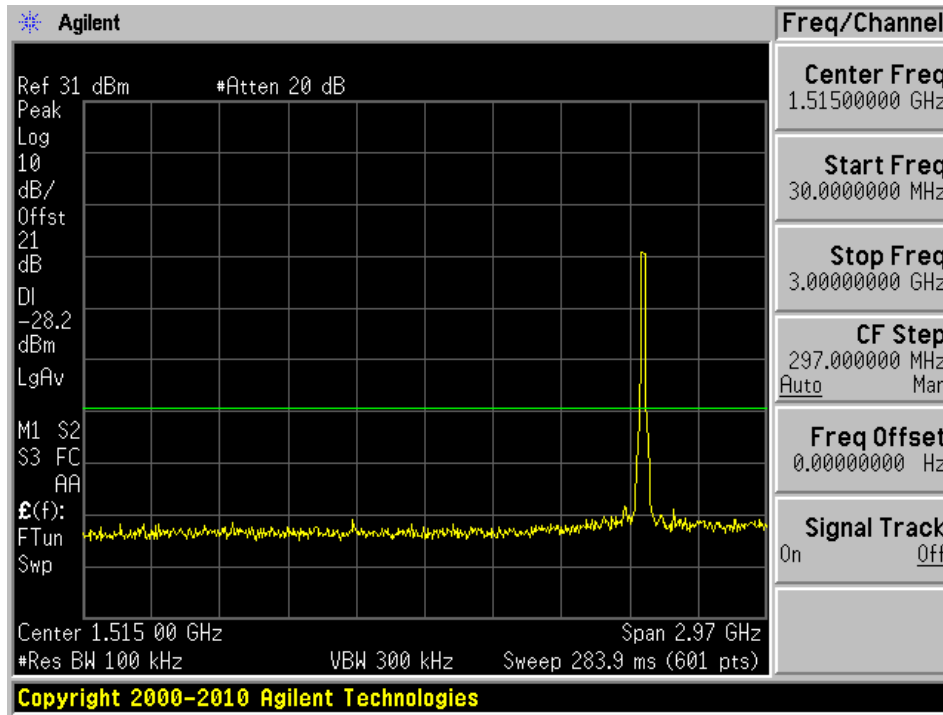


ANT 1 G Mode 2462 MHz High Channel Spurious Emission_2

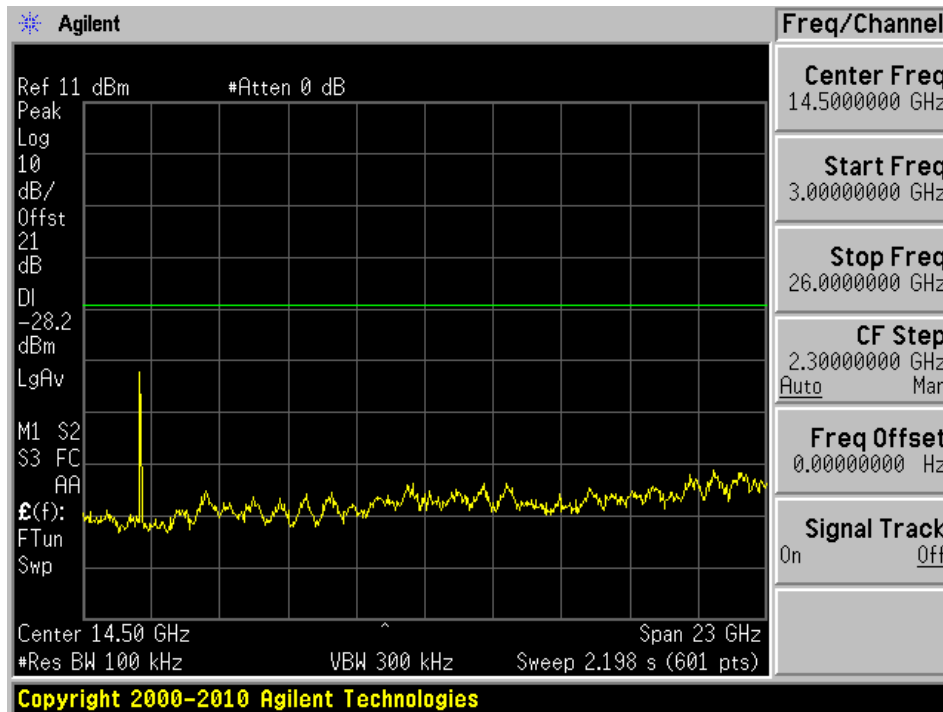


ANT 1 HT20 Mode 2412 MHz Low Channel Spurious Emission_1

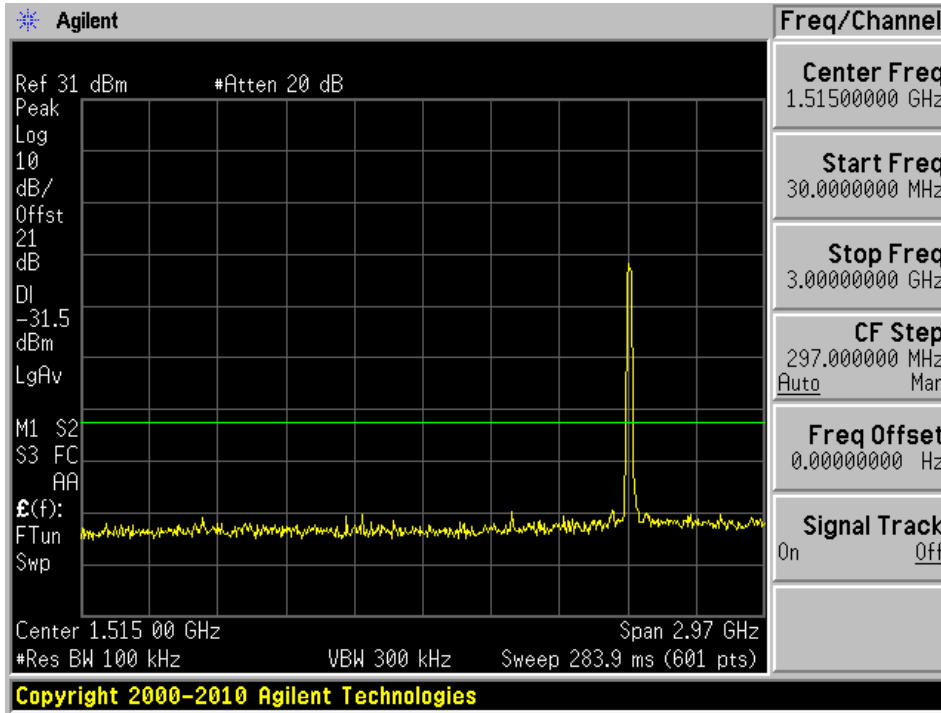


ANT 1 HT20 Mode 2412 MHz Low Channel Spurious Emission_2

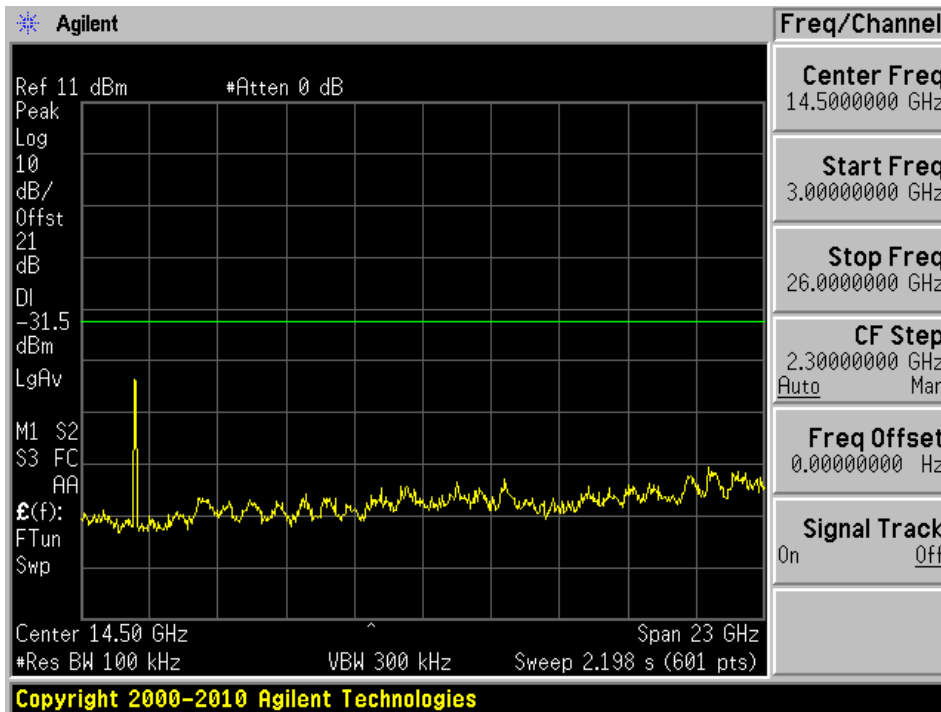


ANT 1 HT20 Mode 2437 MHz Mid Channel Spurious Emission_1

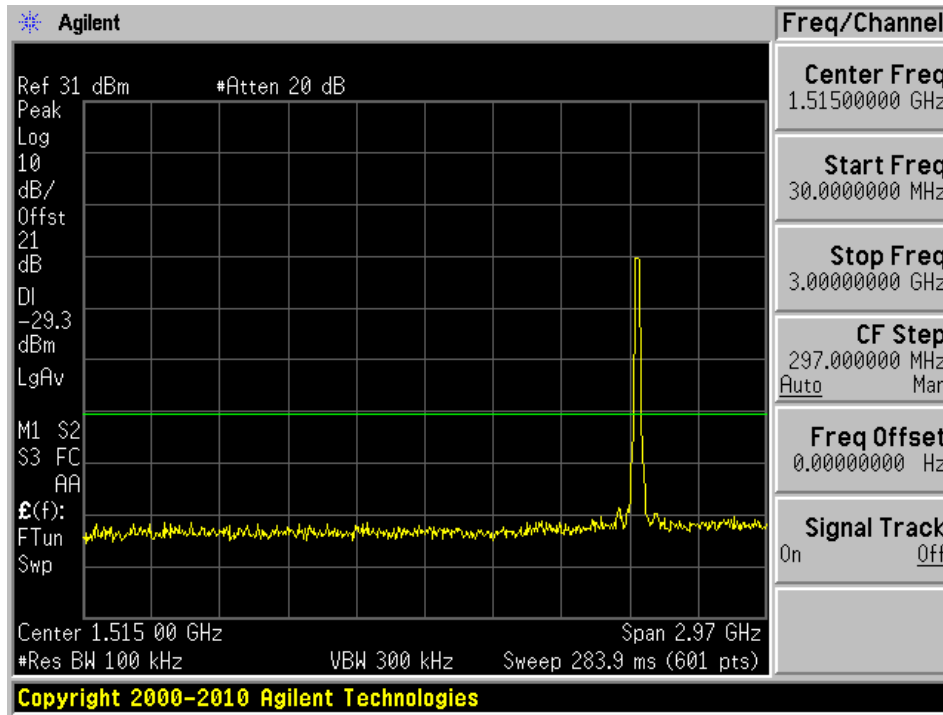


ANT 1 HT20 Mode 2437 MHz Mid Channel Spurious Emission_2

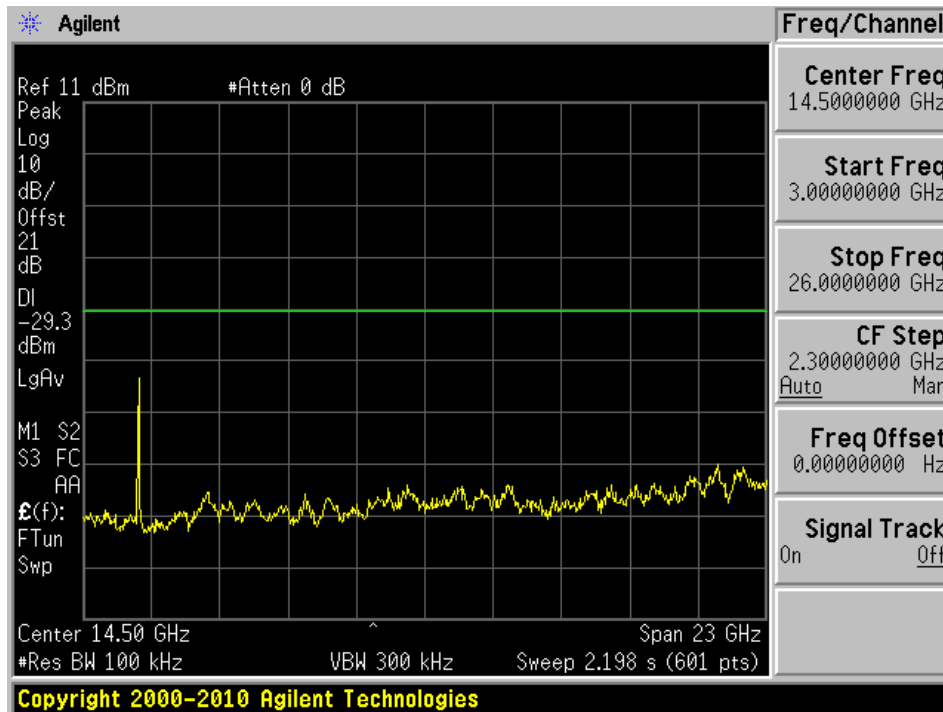


ANT 1 HT20 Mode 2462 MHz High Channel Spurious Emission_1

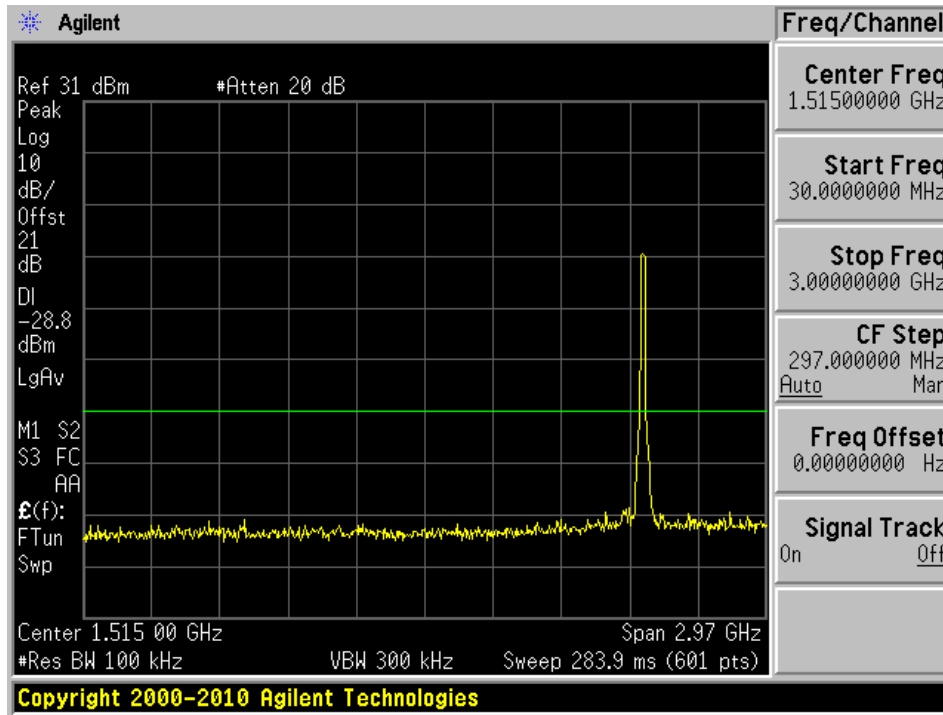


ANT 1 HT20 Mode 2462 MHz High Channel Spurious Emission_2

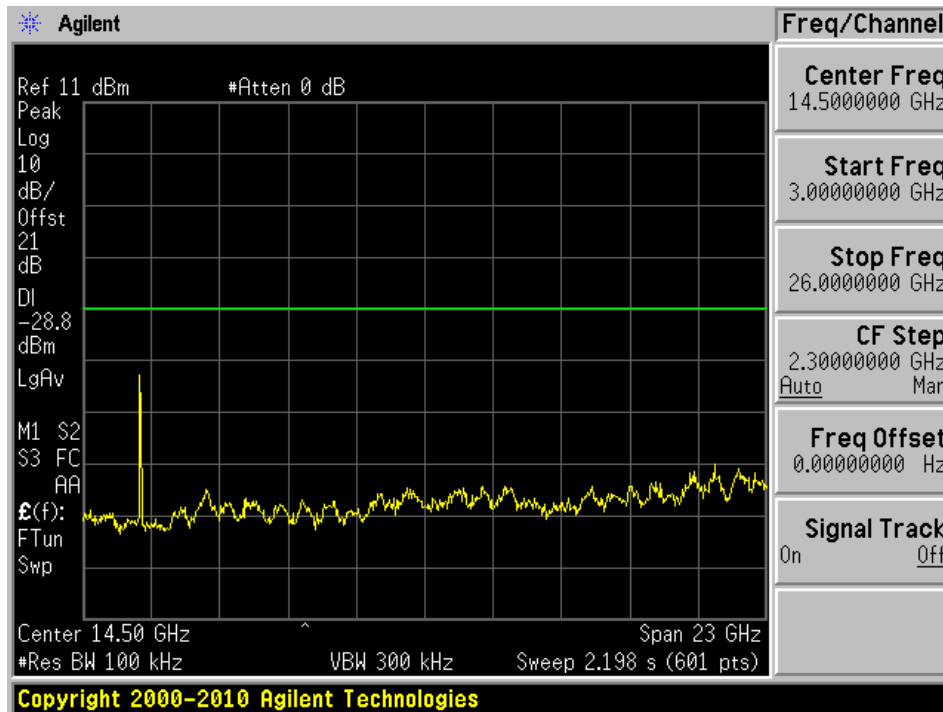


ANT 2 B Mode 2412 MHz Low Channel Spurious Emission_1

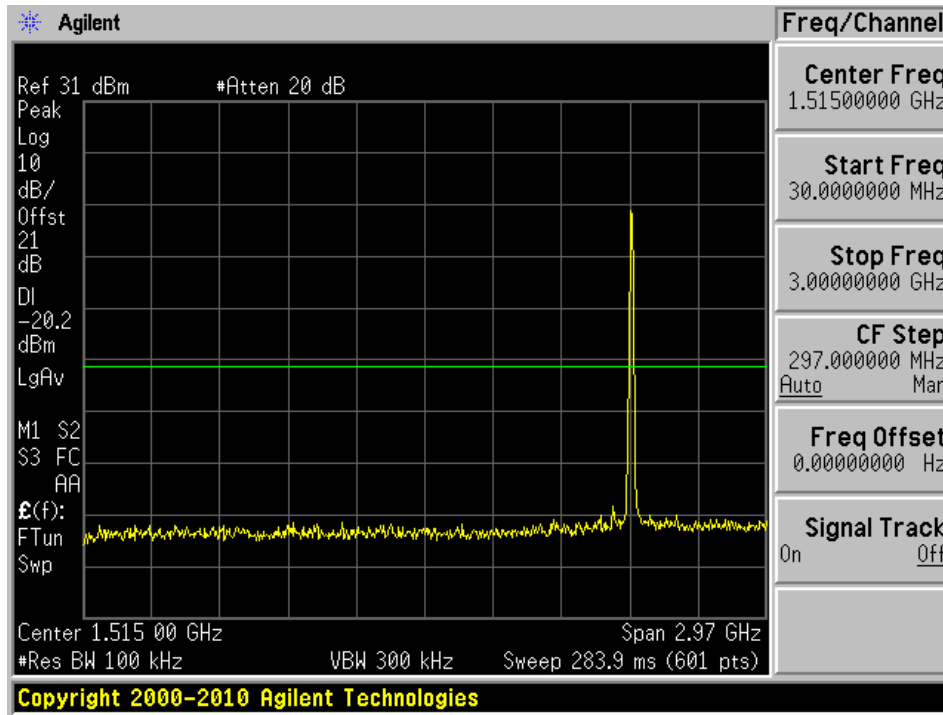


ANT 2 B Mode 2412 MHz Low Channel Spurious Emission_2

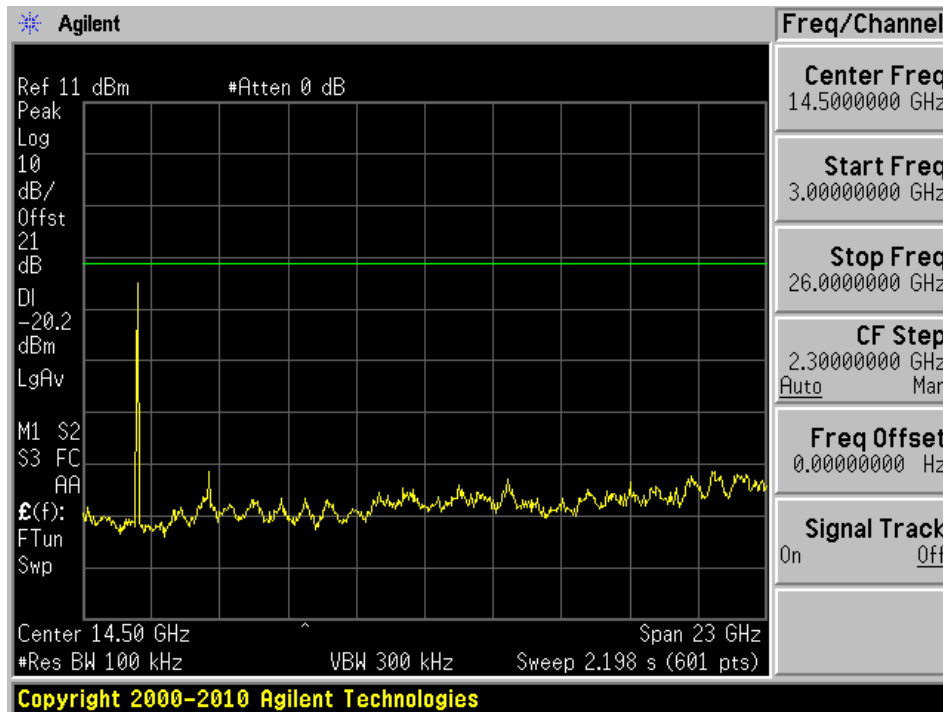


ANT 2 B Mode 2437 MHz Mid Channel Spurious Emission_1

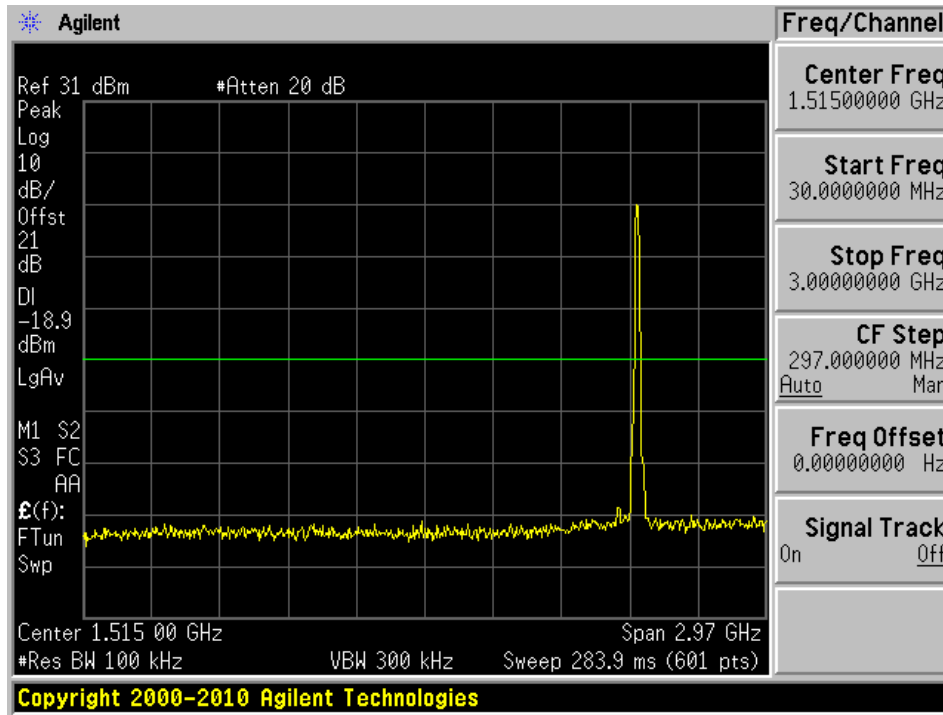


ANT 2 B Mode 2437 MHz Mid Channel Spurious Emission_2

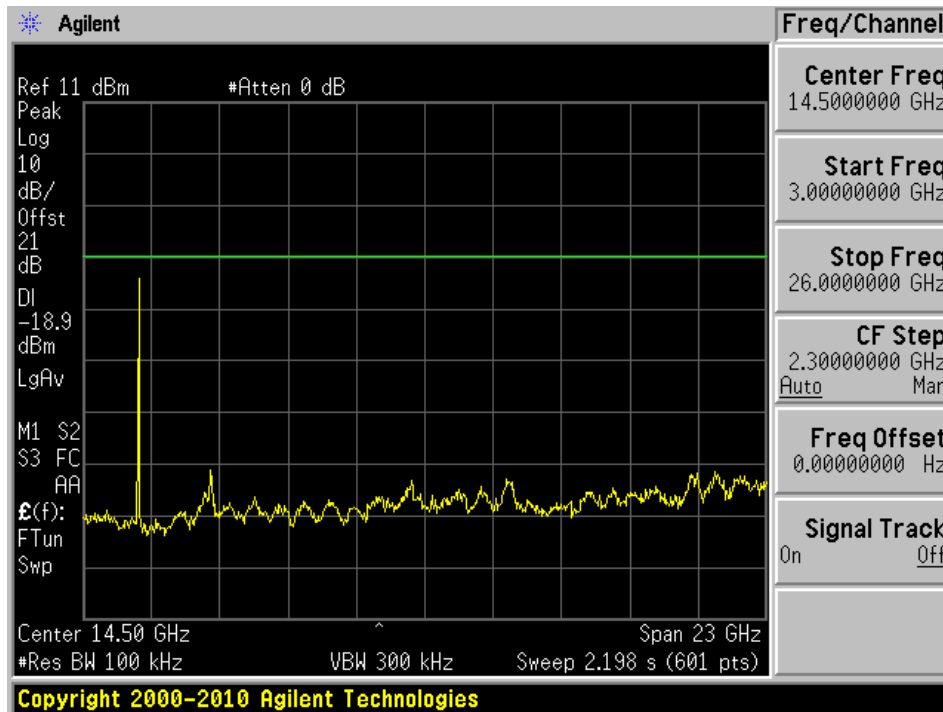


ANT 2 B Mode 2462 MHz High Channel Spurious Emission_1

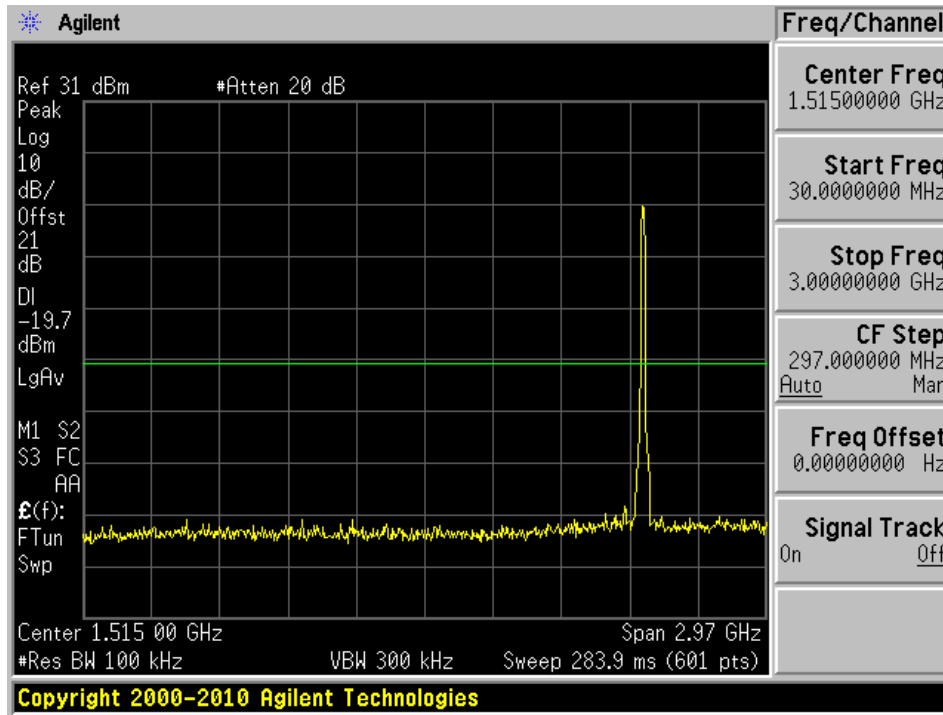


ANT 2 B Mode 2462 MHz High Channel Spurious Emission_2

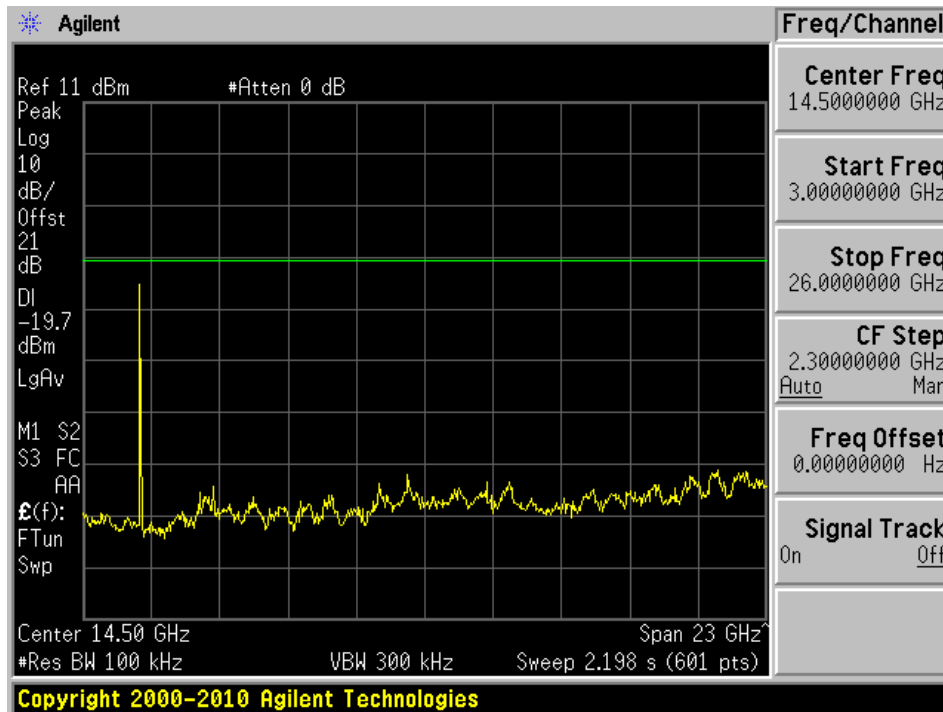


ANT 2 G Mode 2412 MHz Low Channel Spurious Emission_1

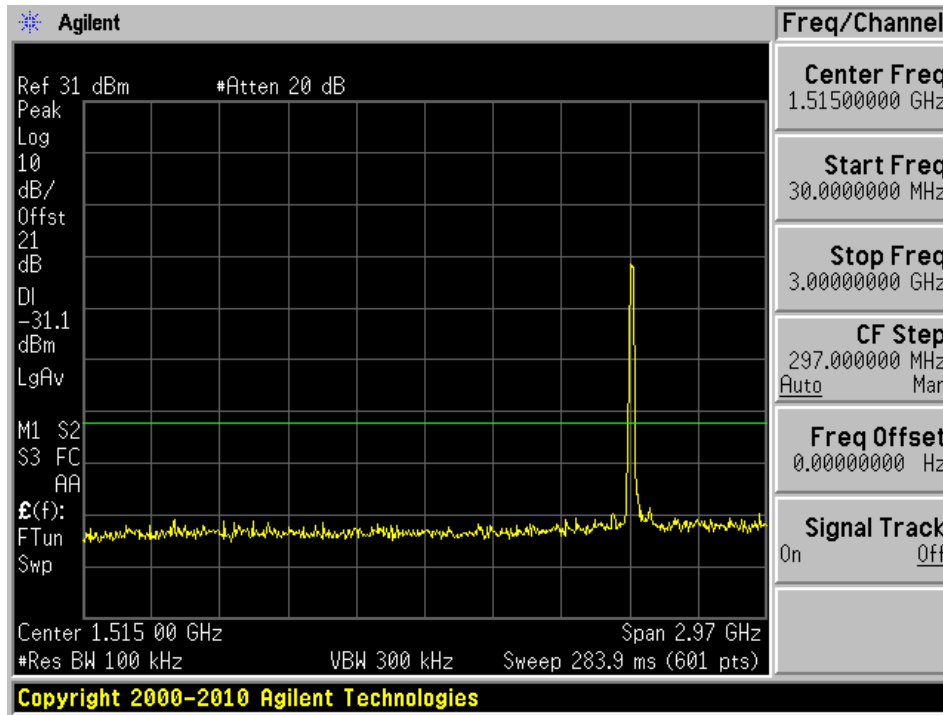


ANT 2 G Mode 2412 MHz Low Channel Spurious Emission_2

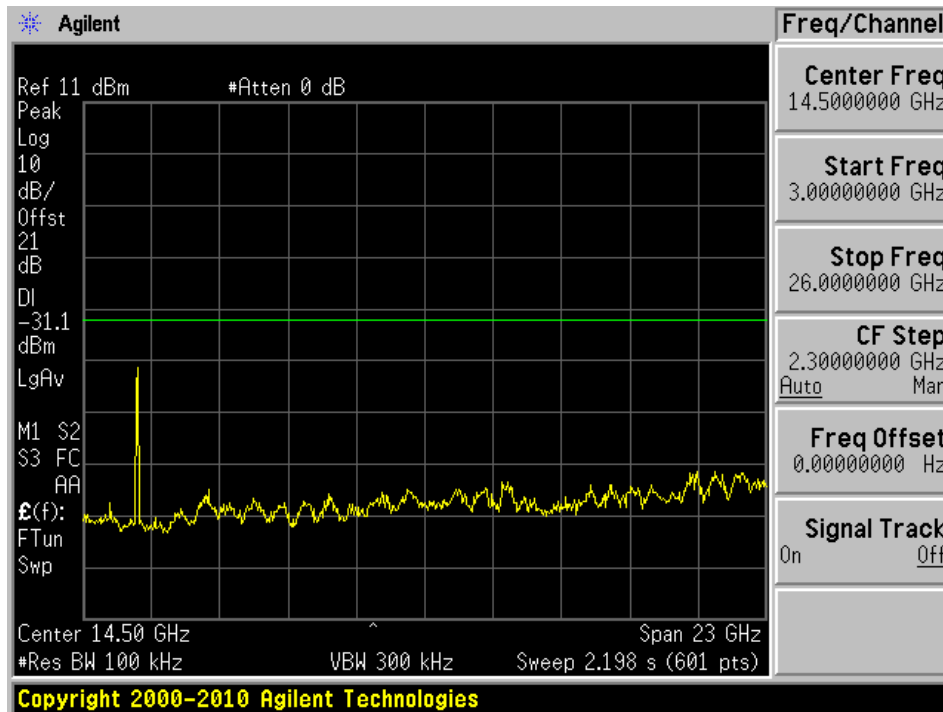


ANT 2 G Mode 2437 MHz Mid Channel Spurious Emission_1

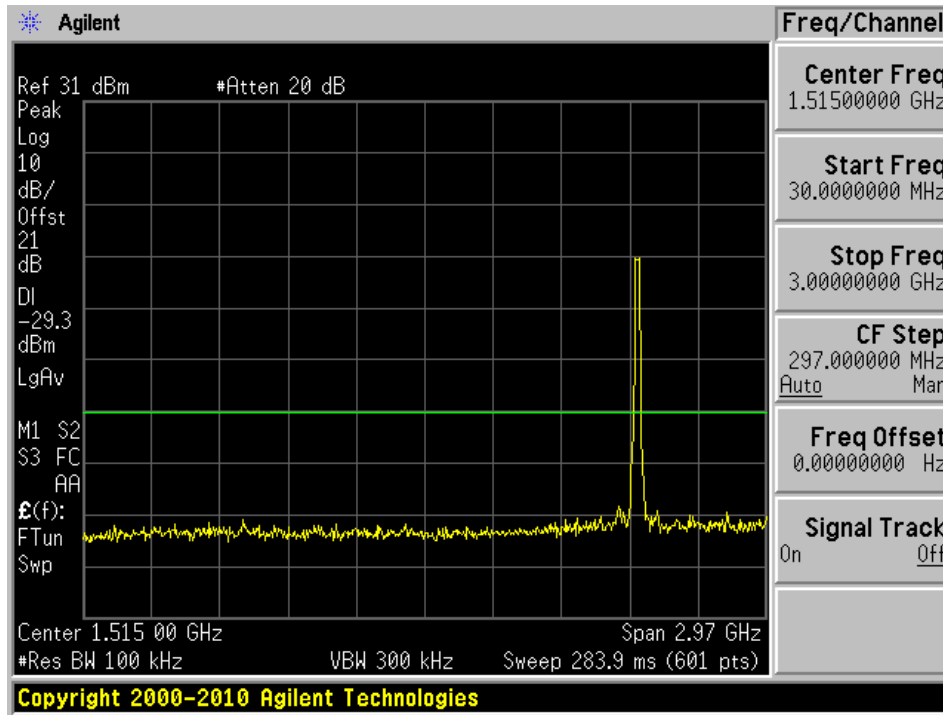


ANT 2 G Mode 2437 MHz Mid Channel Spurious Emission_2

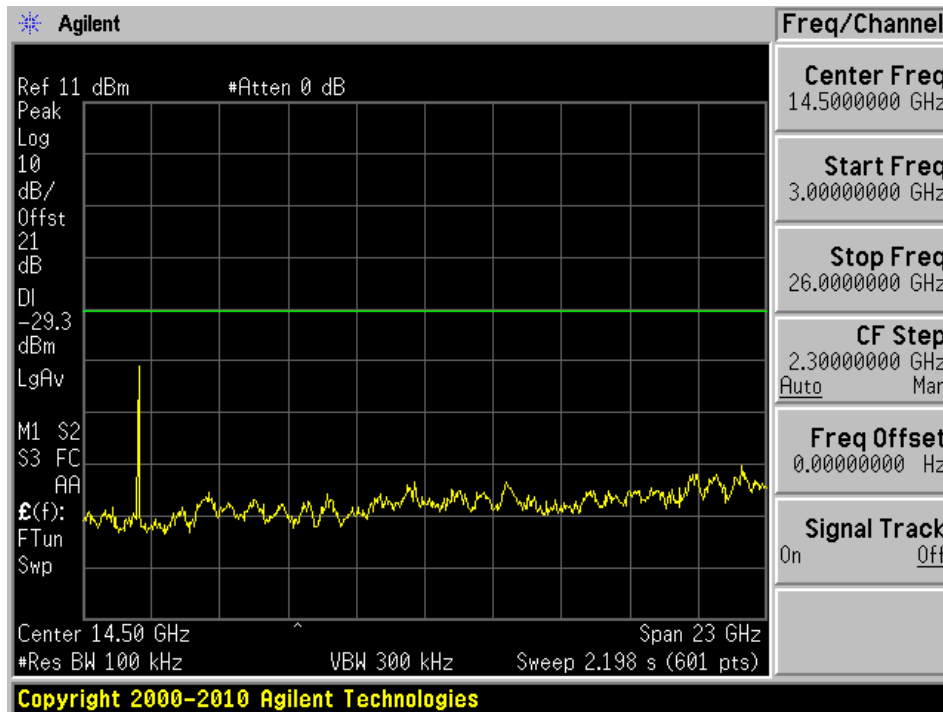


ANT 2 G Mode 2462 MHz High Channel Spurious Emission_1

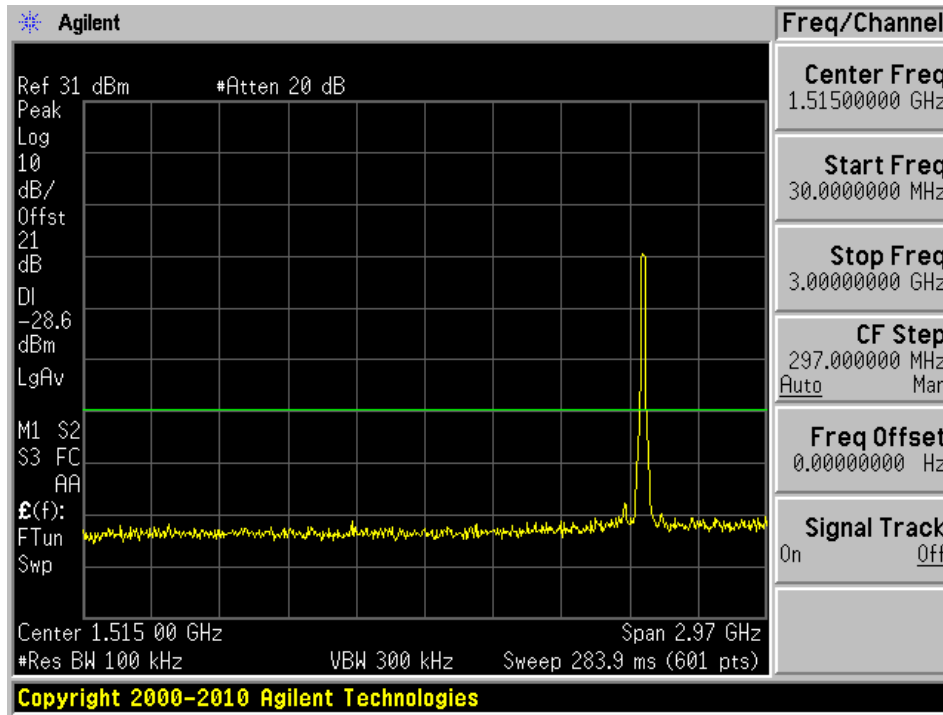


ANT 2 G Mode 2462 MHz High Channel Spurious Emission_2

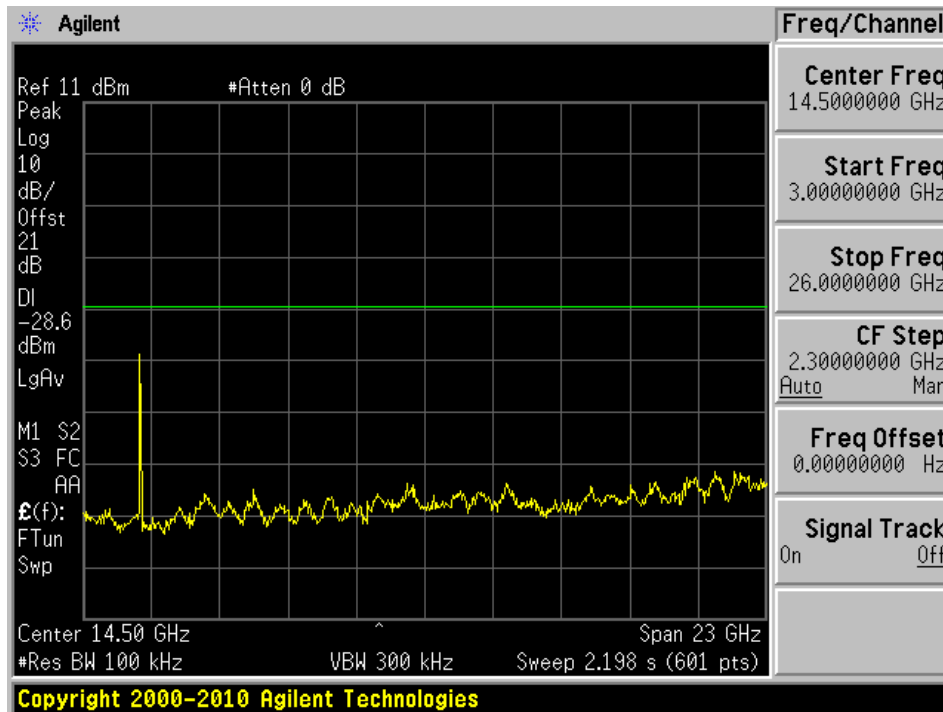


ANT 2 HT20 Mode 2412 MHz Low Channel Spurious Emission_1

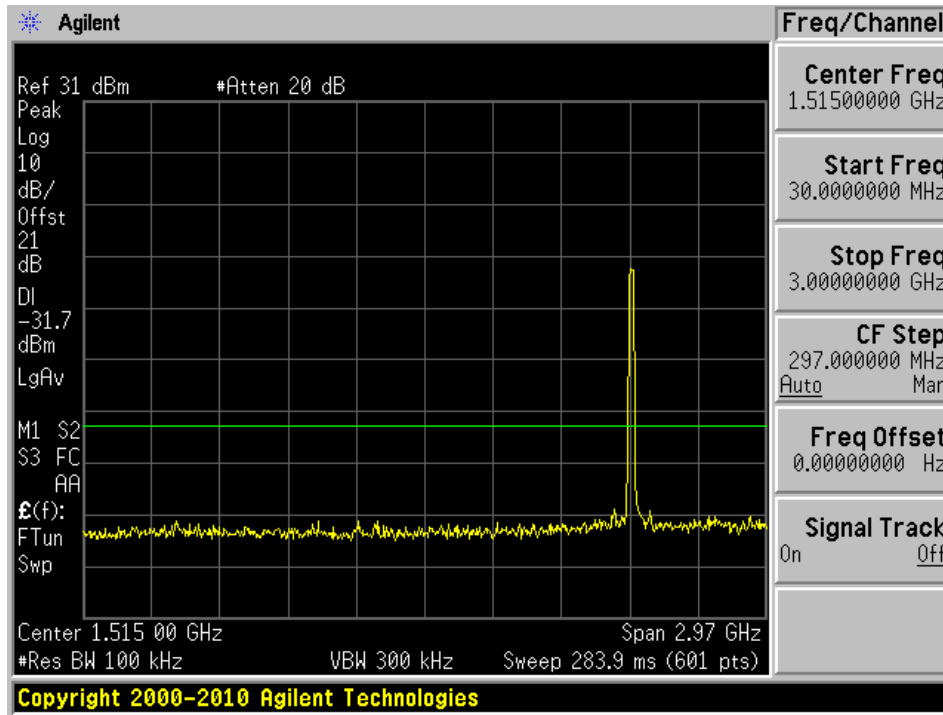


ANT 2 HT20 Mode 2412 MHz Low Channel Spurious Emission_2

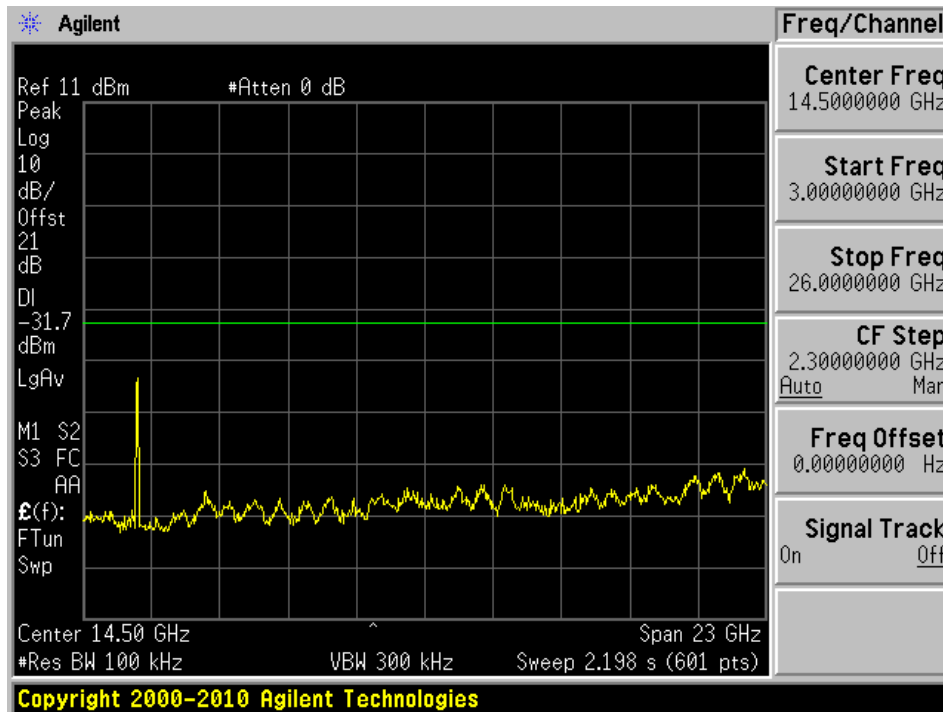


ANT 2 HT20 Mode 2437 MHz Mid Channel Spurious Emission_1

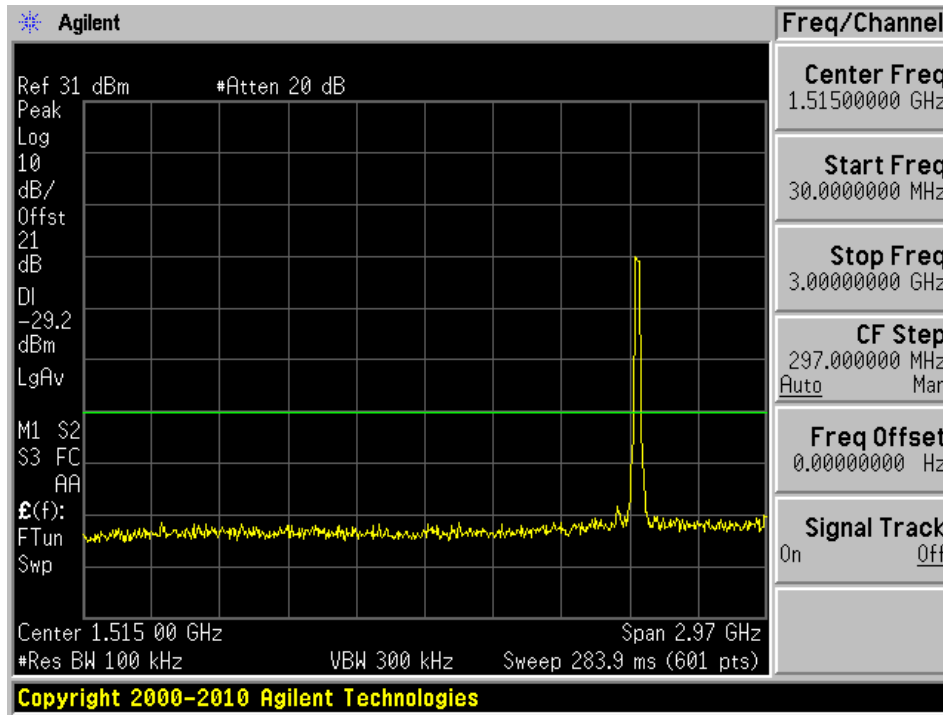


ANT 2 HT20 Mode 2437 MHz Mid Channel Spurious Emission_2

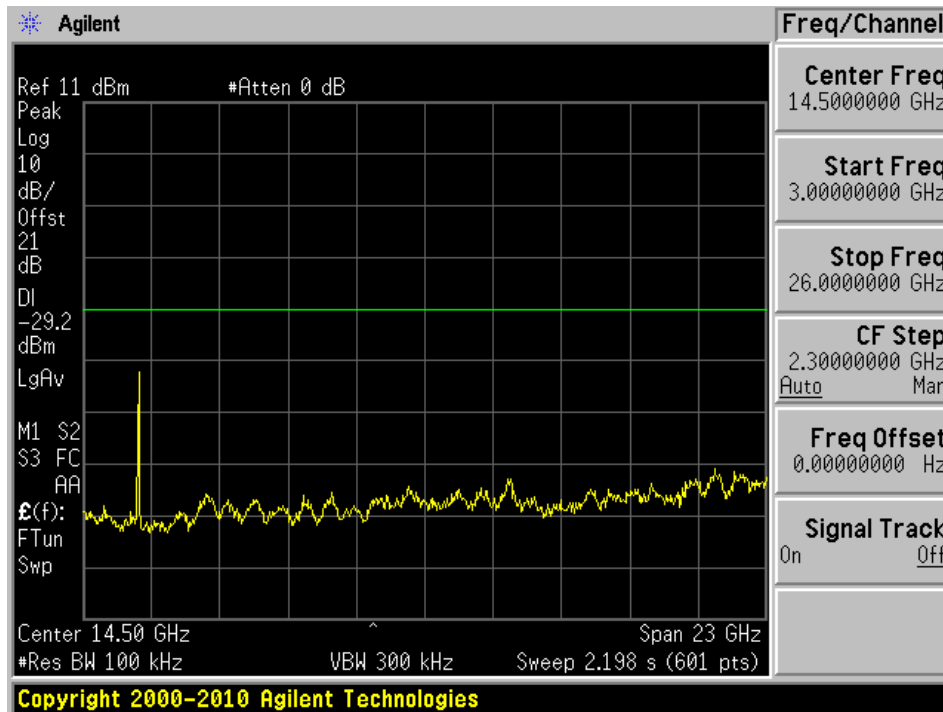

ANT 2 HT20 Mode 2462 MHz High Channel Spurious Emission_1

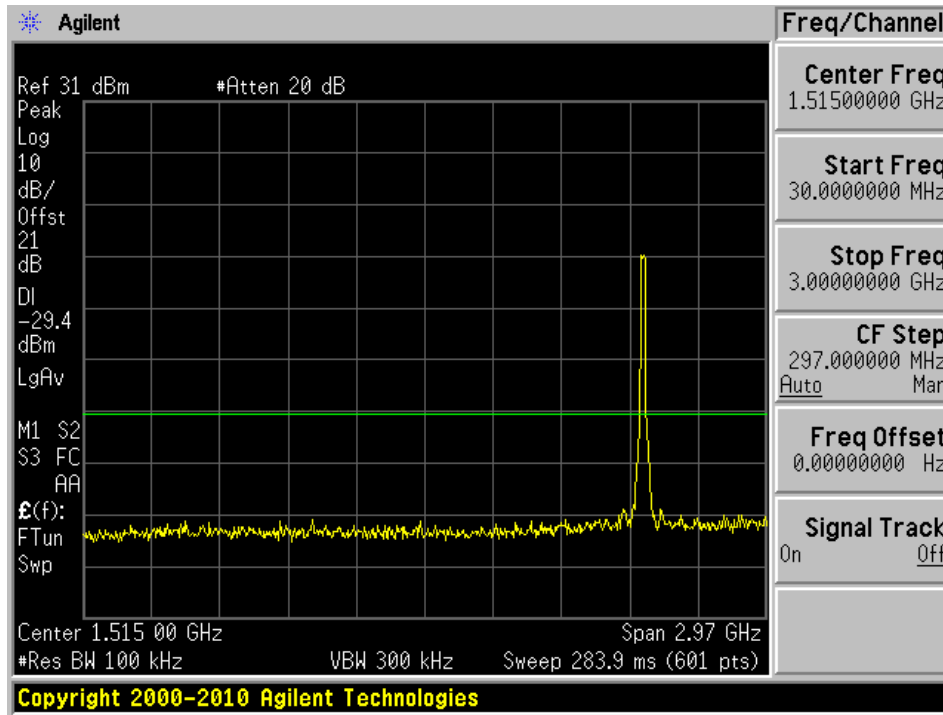


ANT 2 HT20 Mode 2462 MHz High Channel Spurious Emission_2

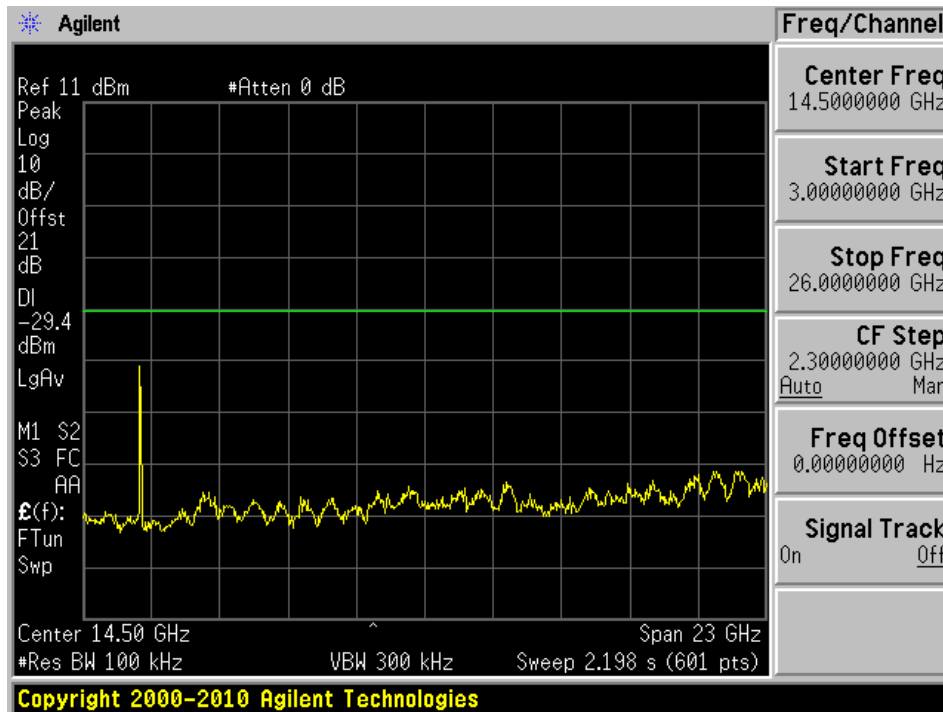


15 Annex C (Normative) – Power Spectral Density


ANT 1 B Mode 2412 MHz Low Channel PSD

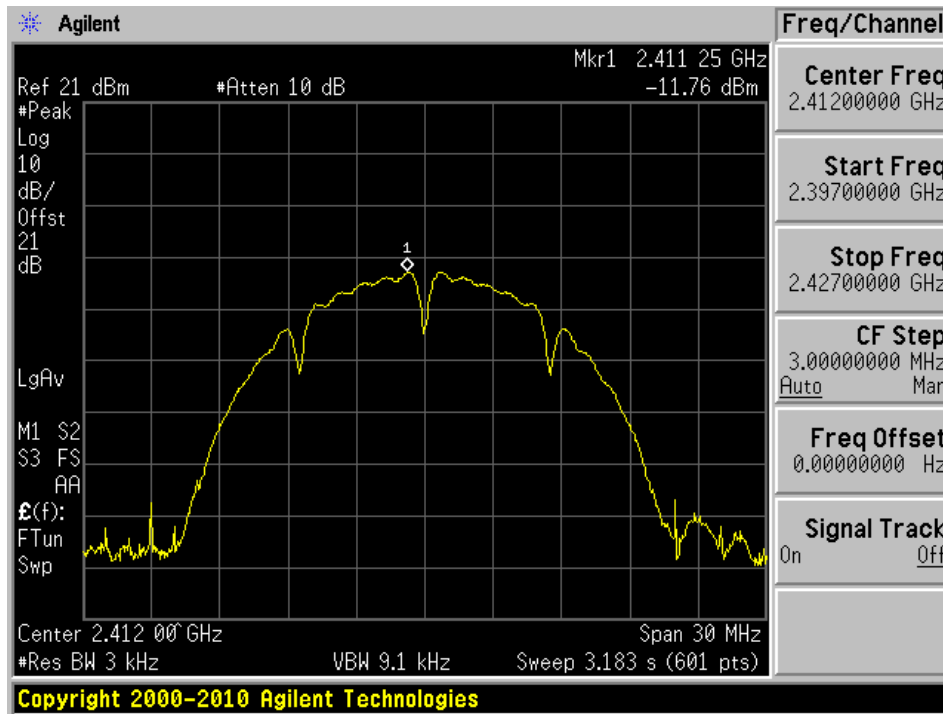


ANT 1 B Mode 2437 MHz Mid Channel PSD

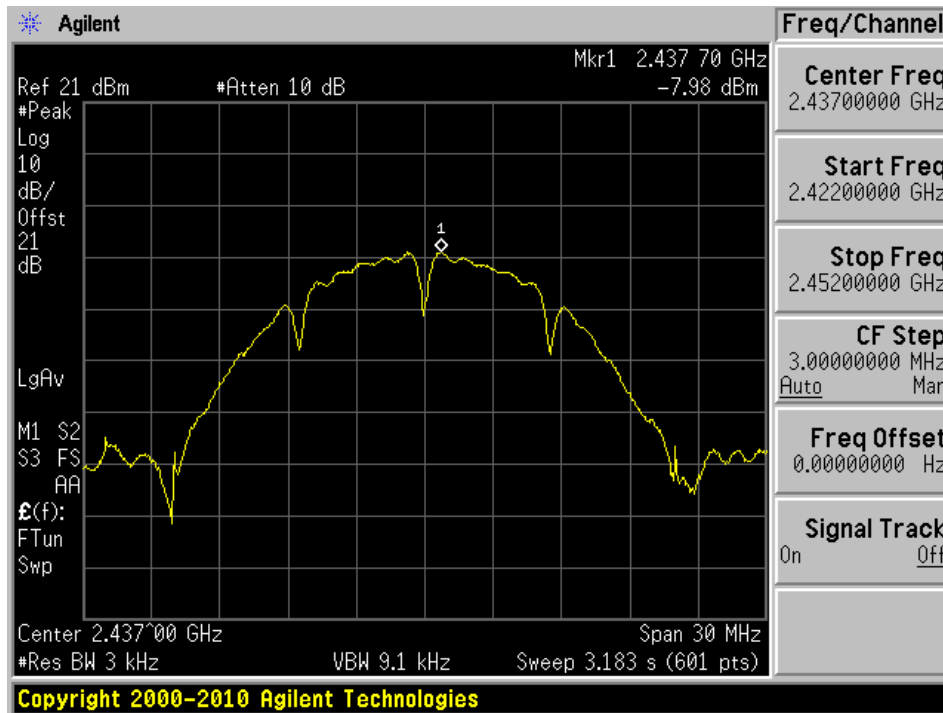


ANT 1 B Mode 2462 MHz High Channel PSD

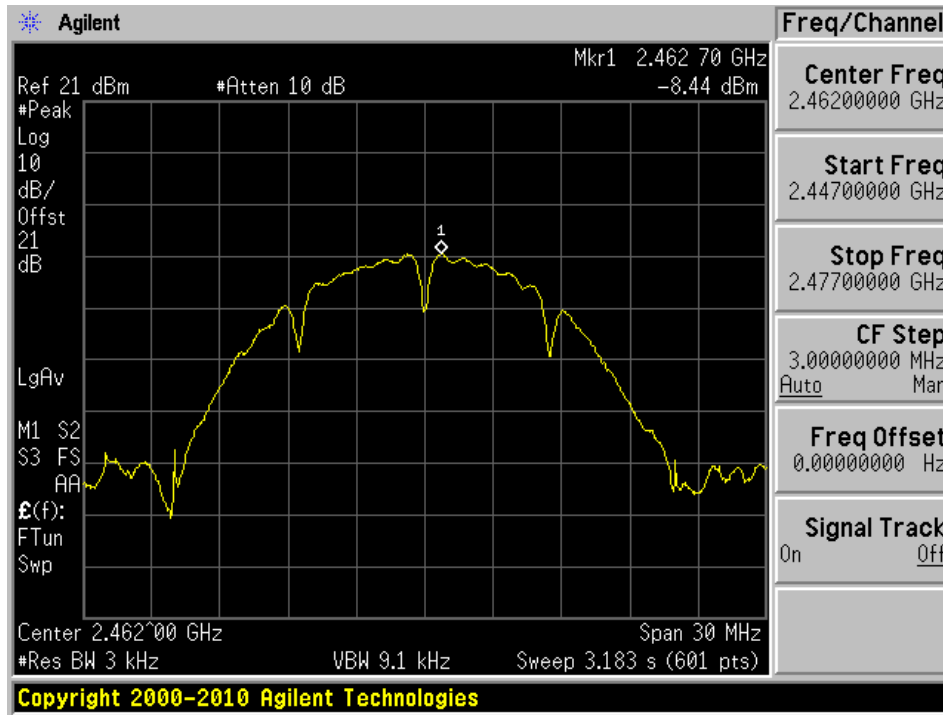


ANT 1 G Mode 2412 MHz Low Channel PSD

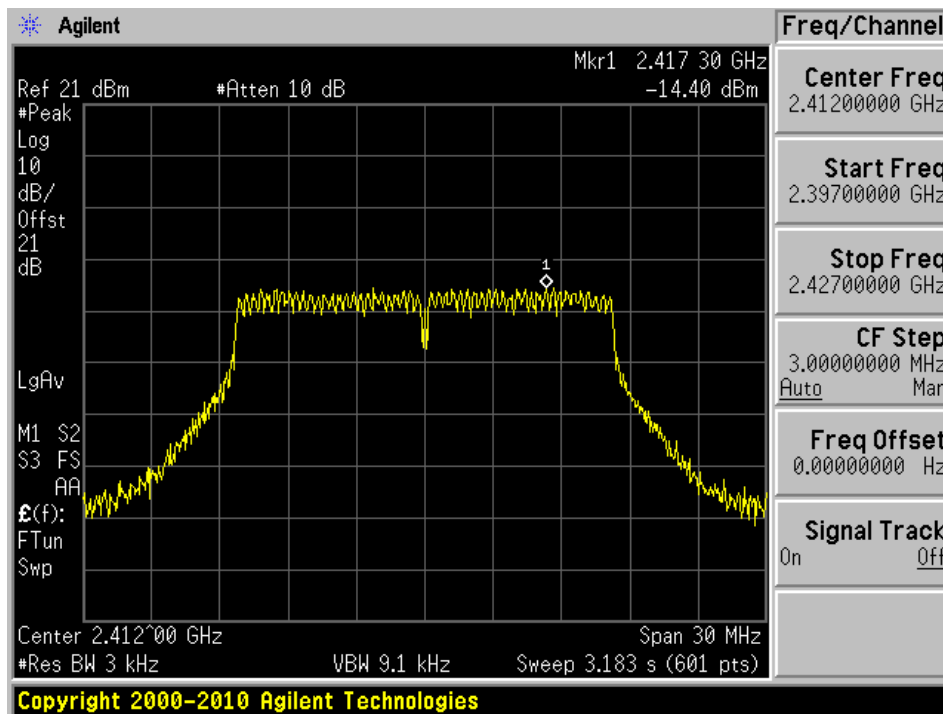


ANT 1 G Mode 2437 MHz Mid Channel PSD

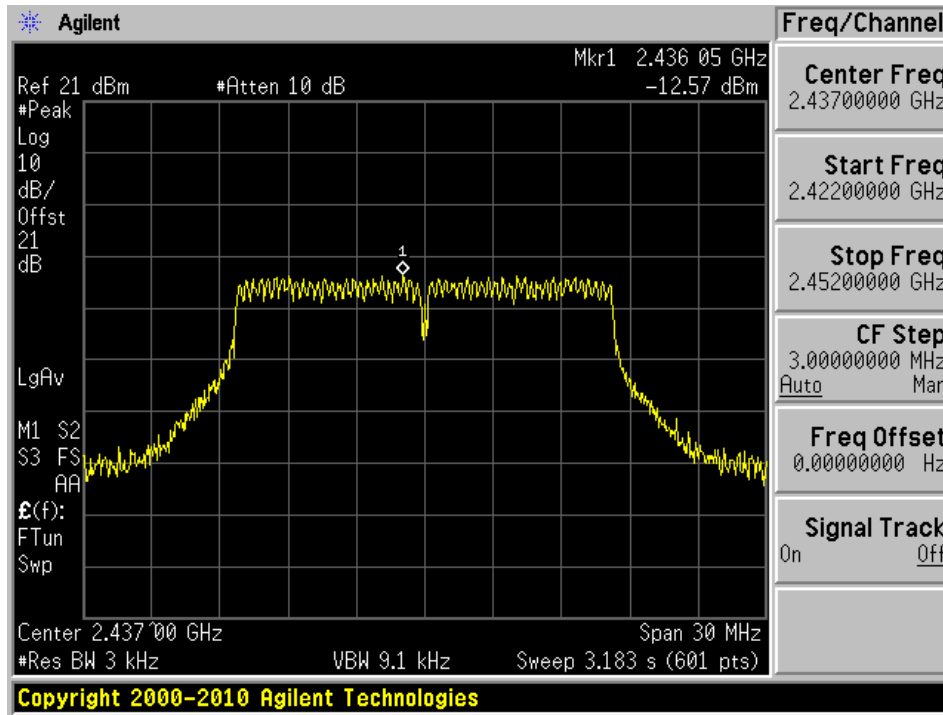


ANT 1 G Mode 2462 MHz High Channel PSD

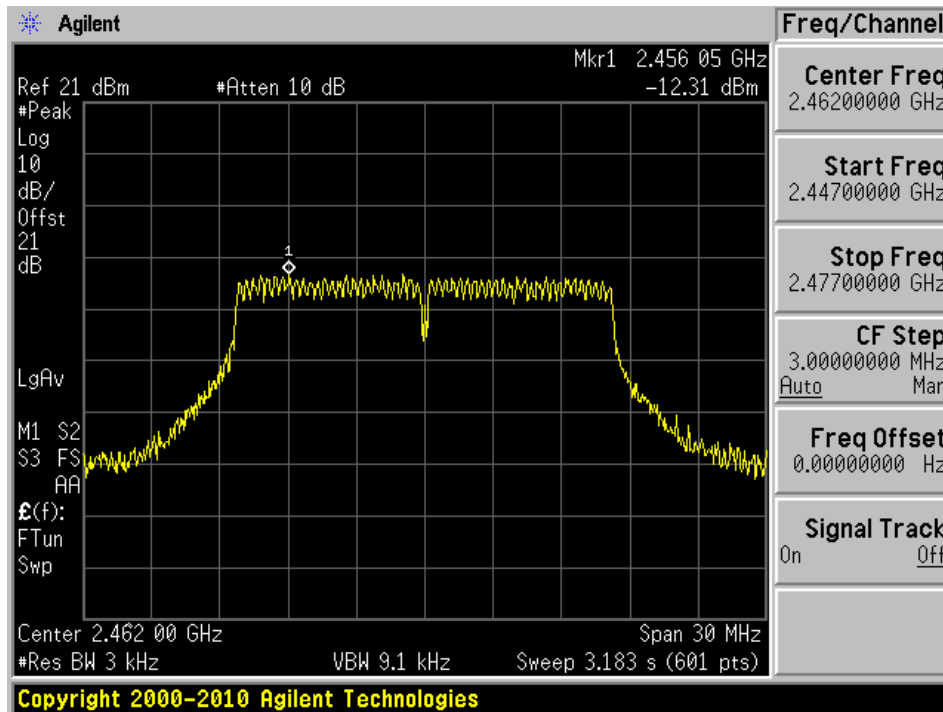


ANT 1 HT20 Mode 2412 MHz Low Channel PSD

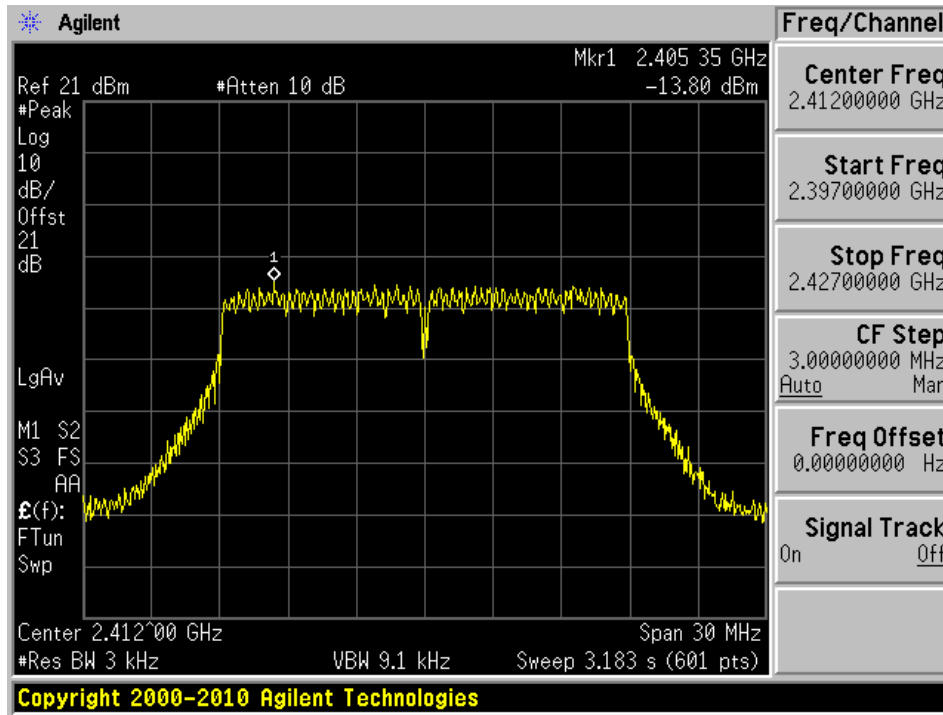


ANT 1 HT20 Mode 2437 MHz Mid Channel PSD

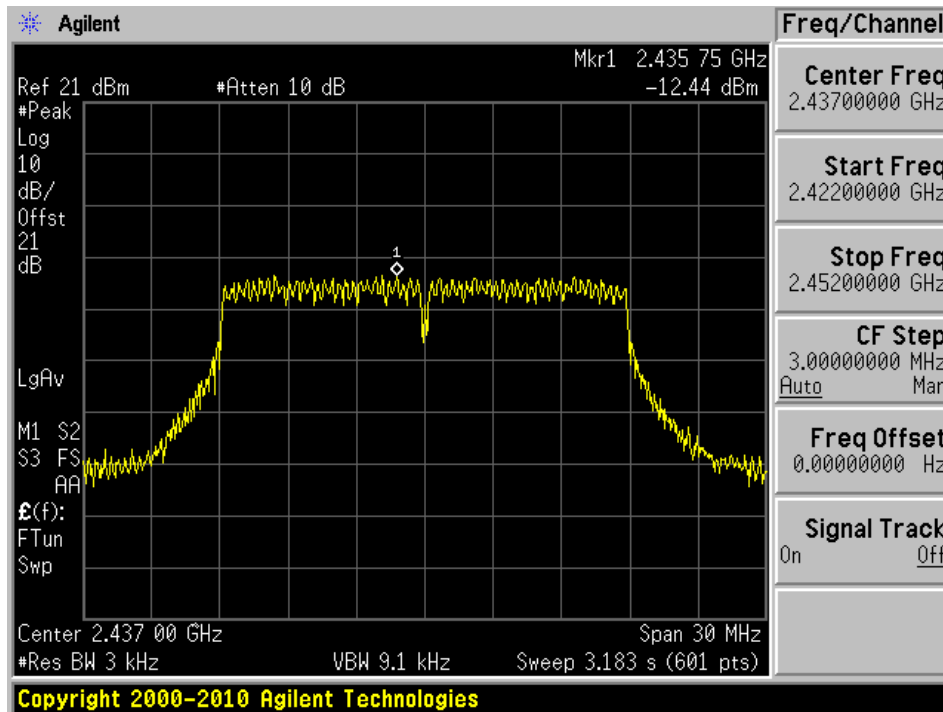


ANT 1 HT20 Mode 2462 MHz High Channel PSD

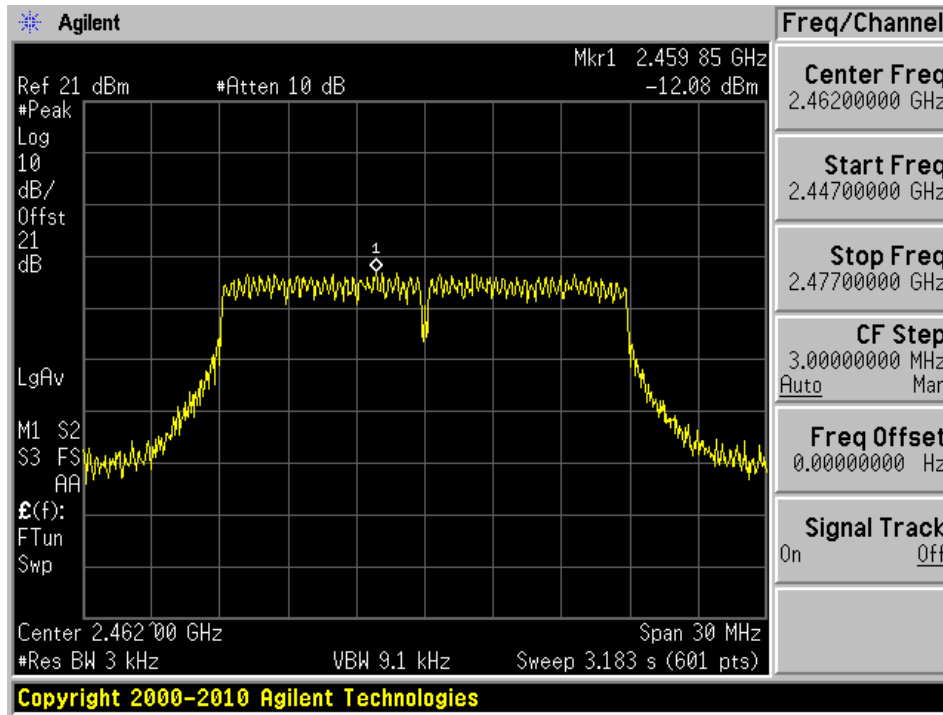


ANT 2 B Mode 2412 MHz Low Channel PSD

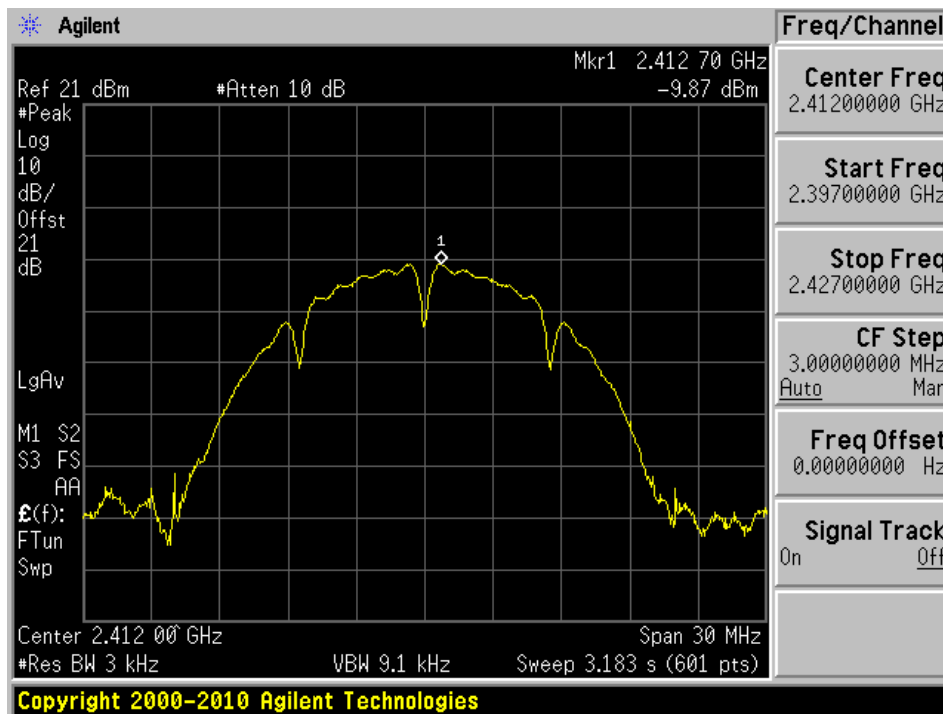


ANT 2 B Mode 2437 MHz Mid Channel PSD

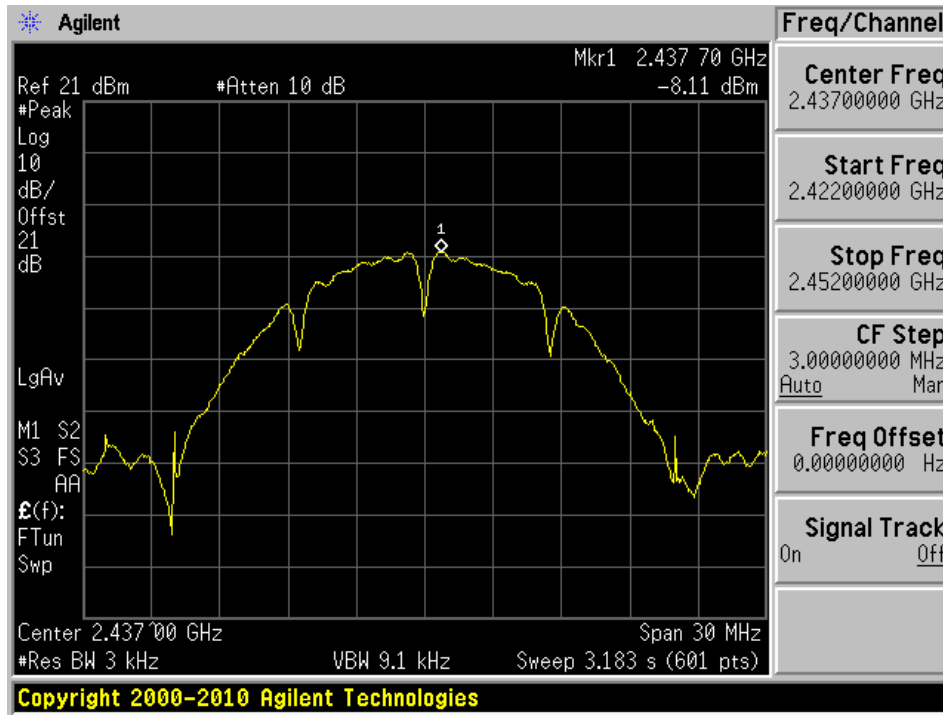


ANT 2 B Mode 2462 MHz High Channel PSD

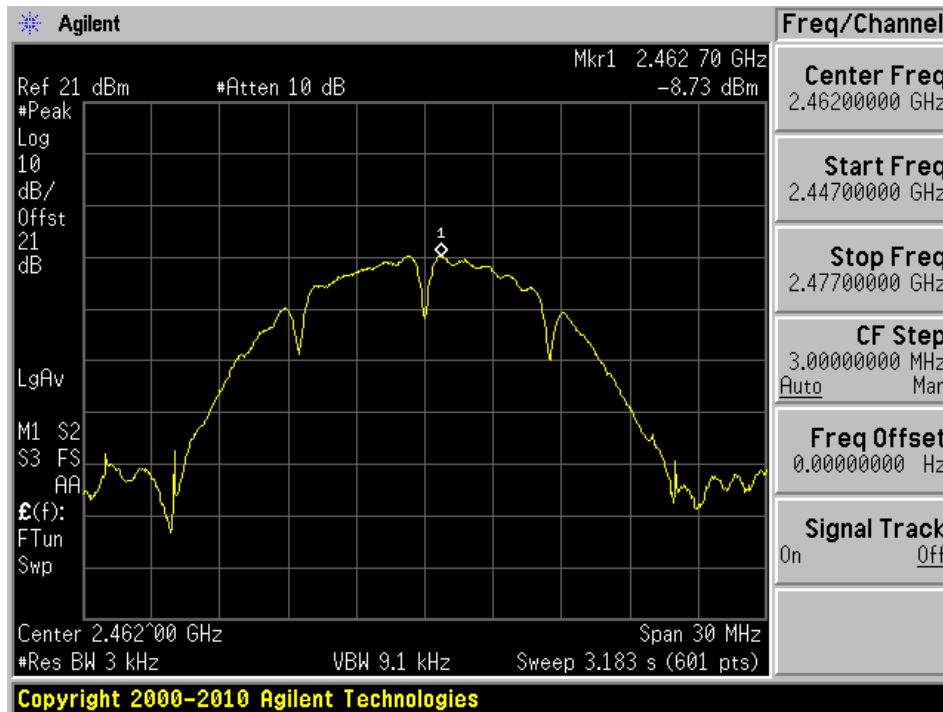


ANT 2 G Mode 2412 MHz Low Channel PSD

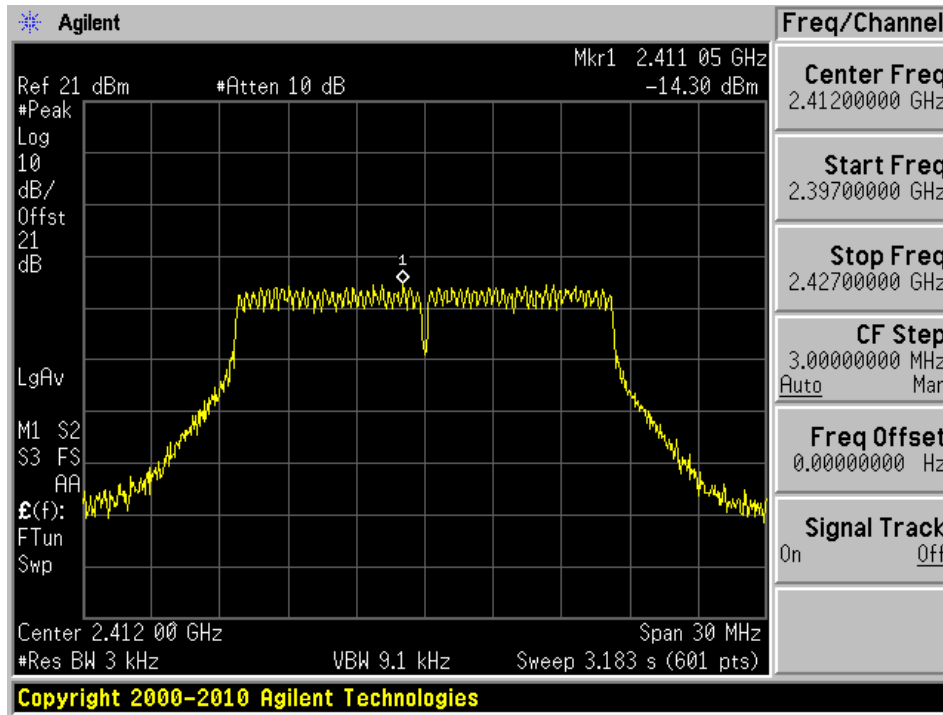


ANT 2 G Mode 2437 MHz Mid Channel PSD

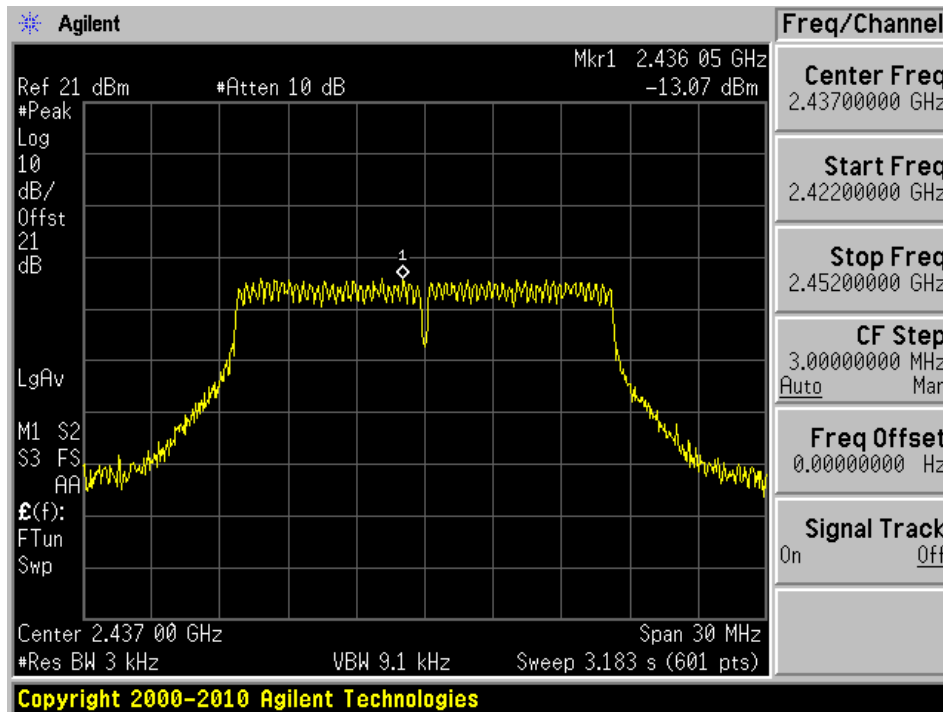


ANT 2 G Mode 2462 MHz High Channel PSD

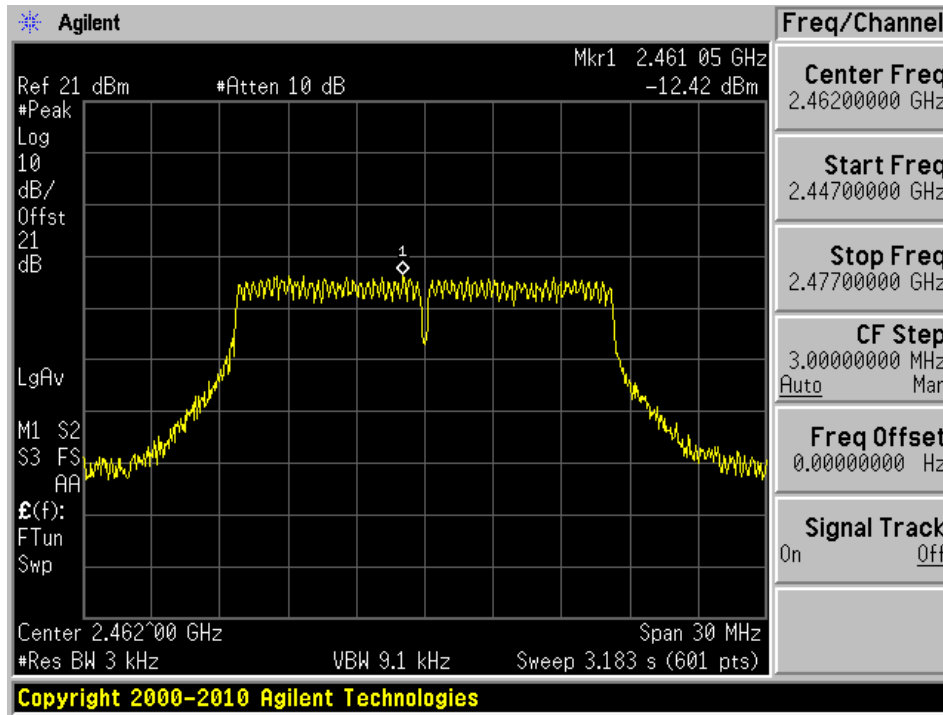


ANT 2 HT20 Mode 2412 MHz Low Channel PSD

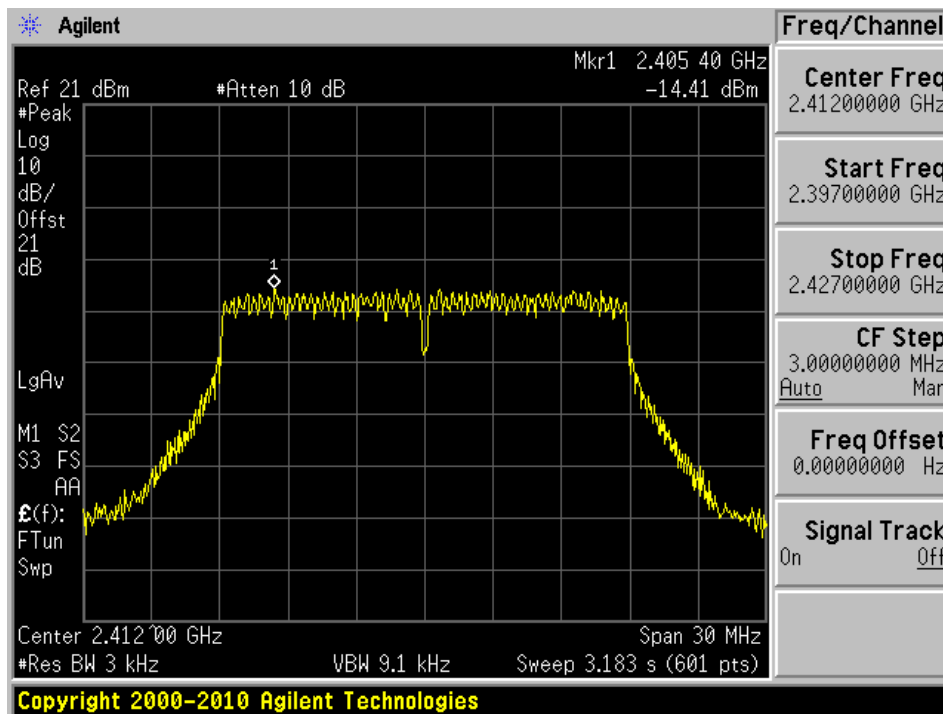

ANT 2 HT20 Mode 2437 MHz Mid Channel PSD

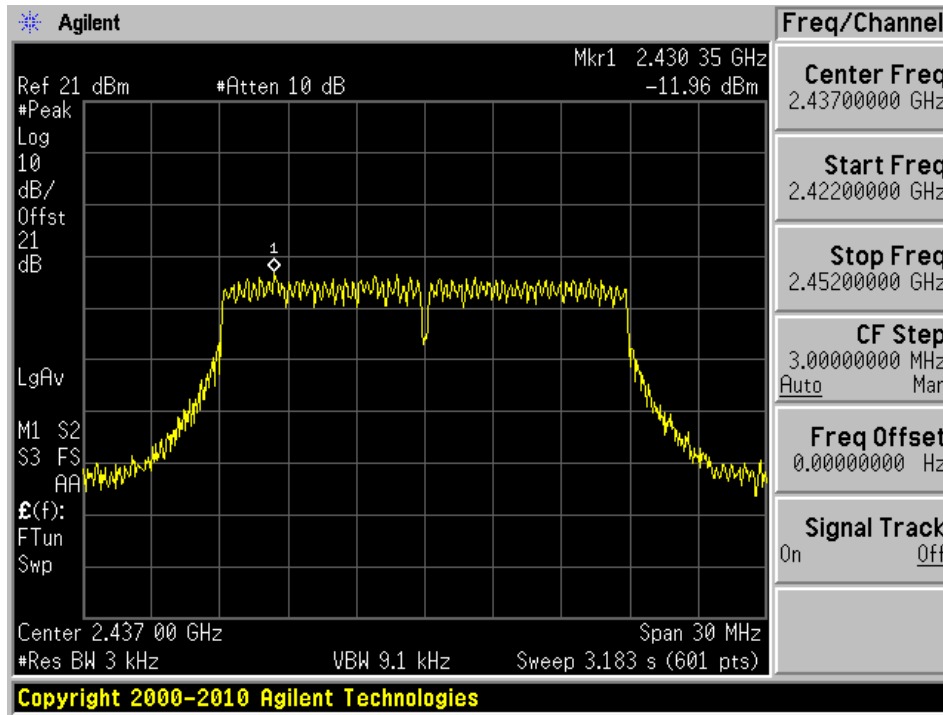


ANT 2 HT20 Mode 2462 MHz High Channel PSD

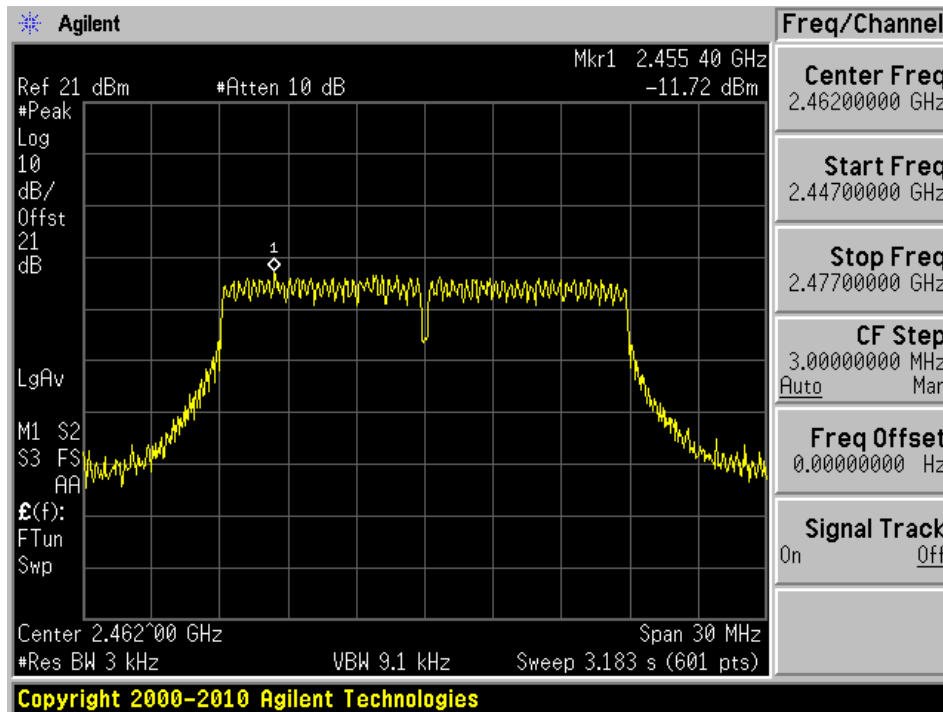


16 Annex D (Normative) – Band Edge


ANT 1 B Mode 2412 MHz Low Channel Band Edge

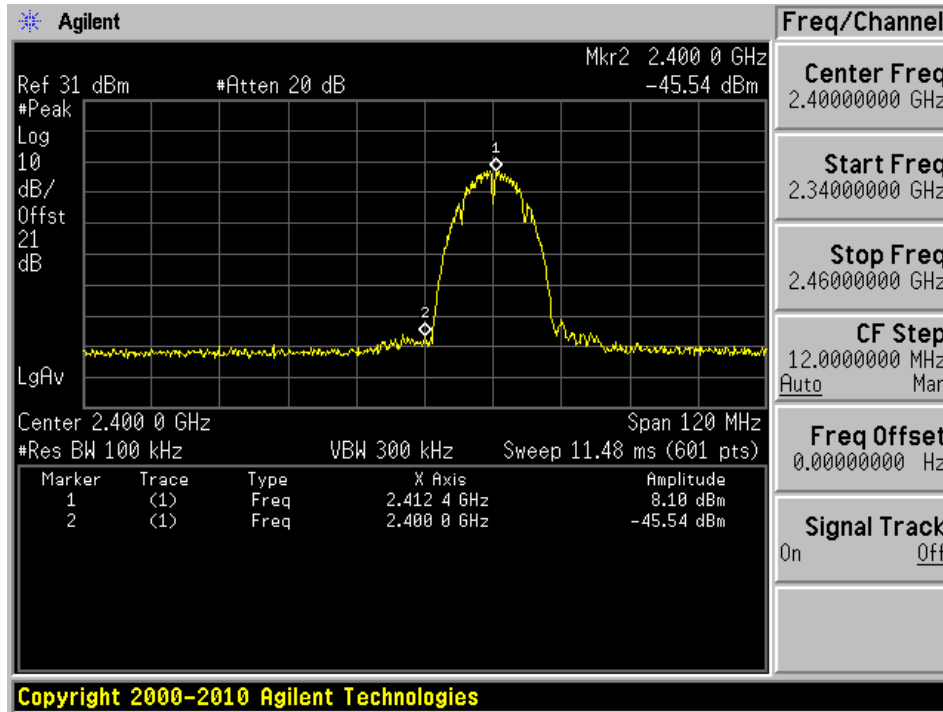


ANT 1 B Mode 2462 MHz High Channel Band Edge

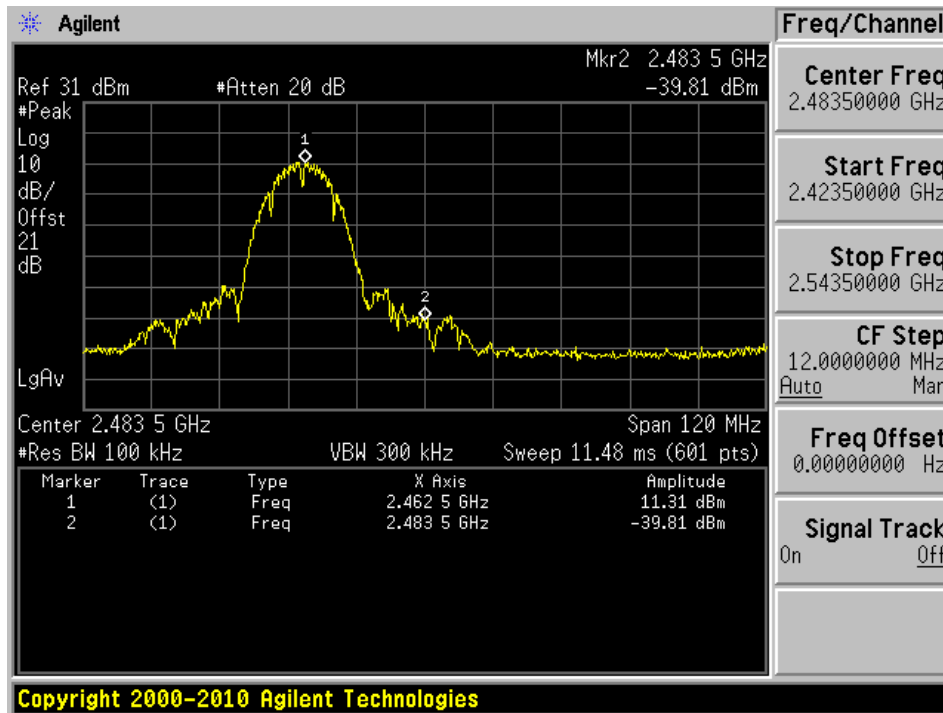


ANT 1 G Mode 2412 MHz Low Channel Band Edge

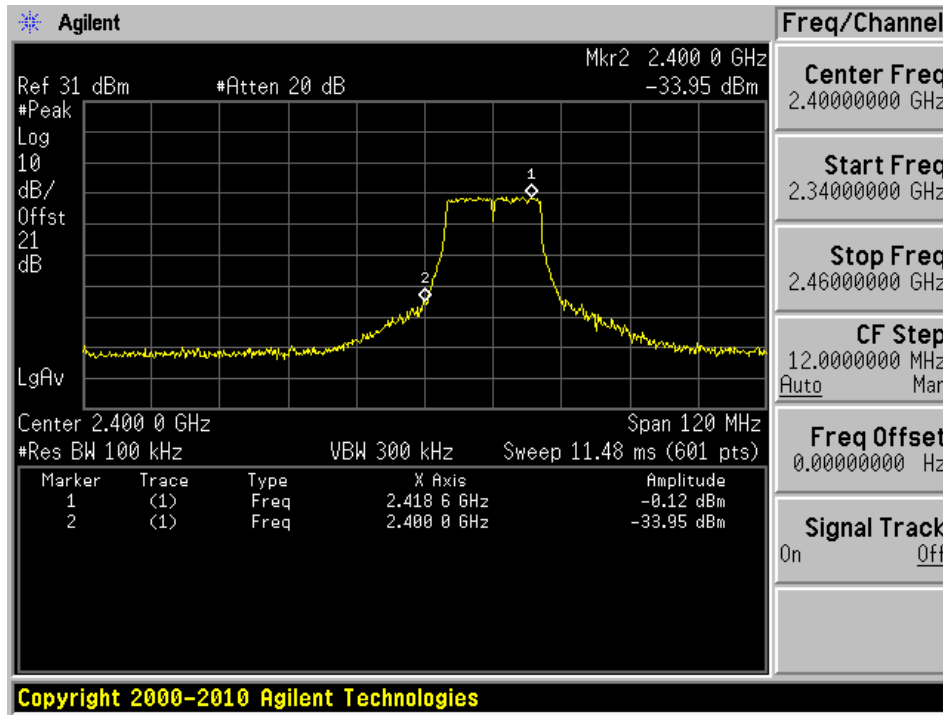


ANT 1 G Mode 2462 MHz High Channel Band Edge

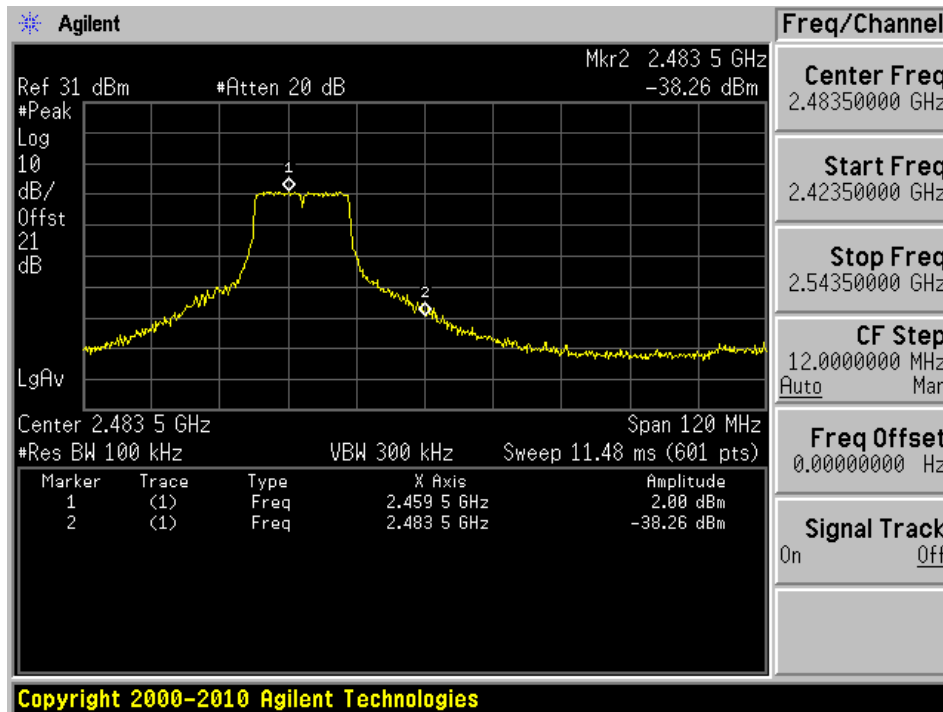


ANT 1 HT20 Mode 2412 MHz Low Channel Band Edge

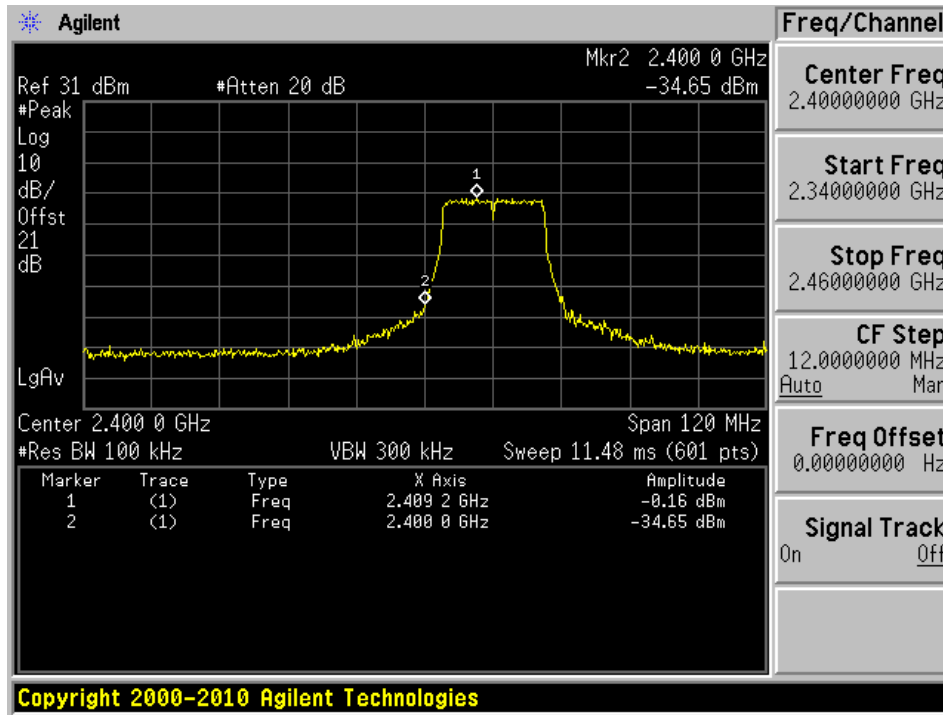


ANT 1 HT20 Mode 2462 MHz High Channel Band Edge

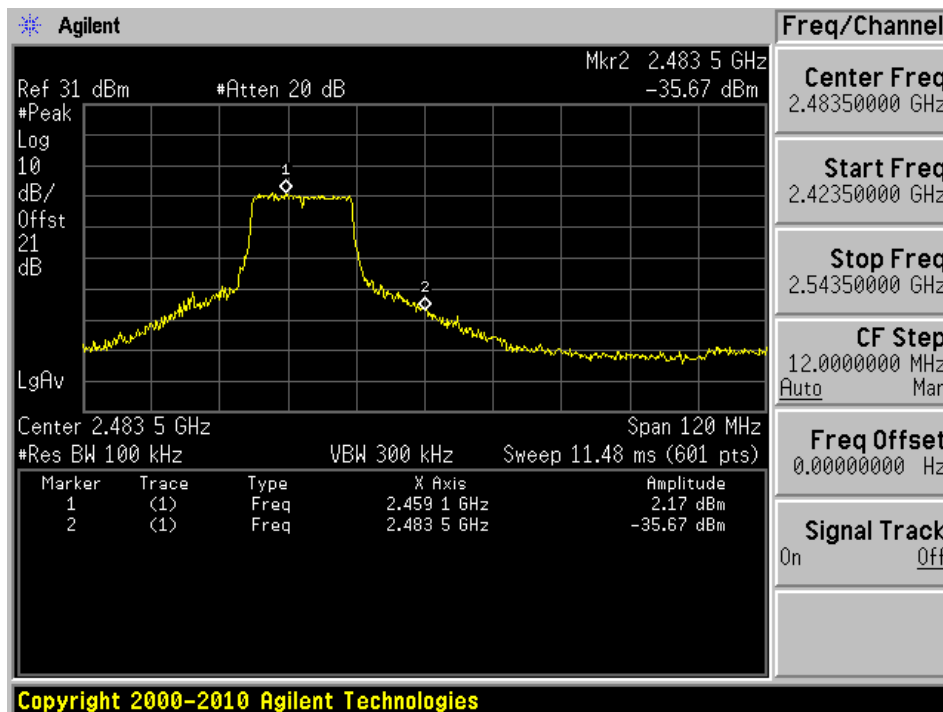


ANT 2 B Mode 2412 MHz Low Channel Band Edge

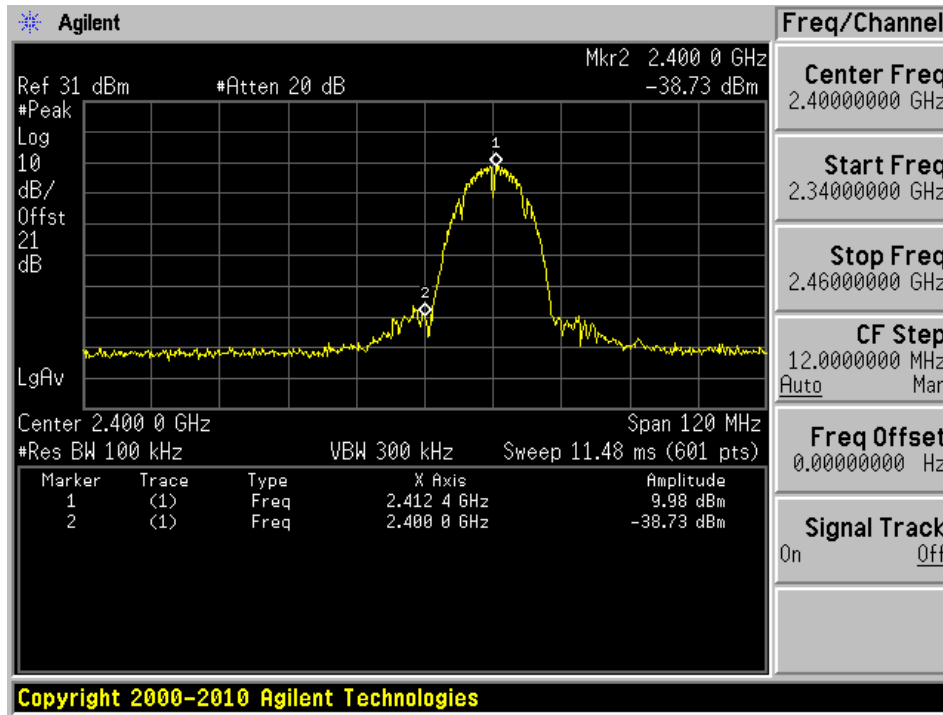


ANT 2 B Mode 2462 MHz High Channel Band Edge

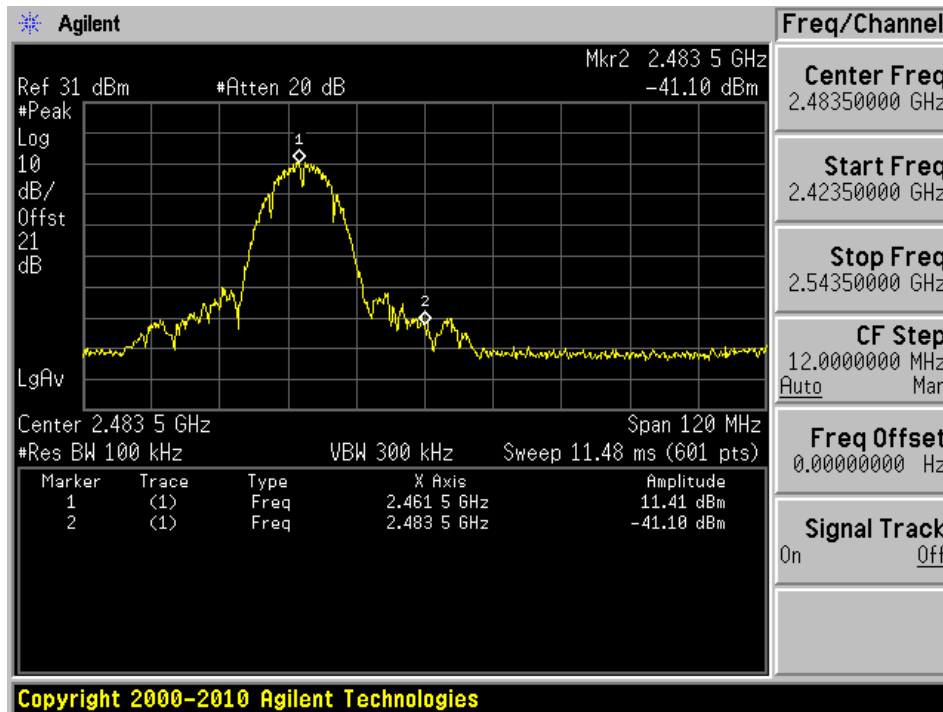


ANT 2 G Mode 2412 MHz Low Channel Band Edge

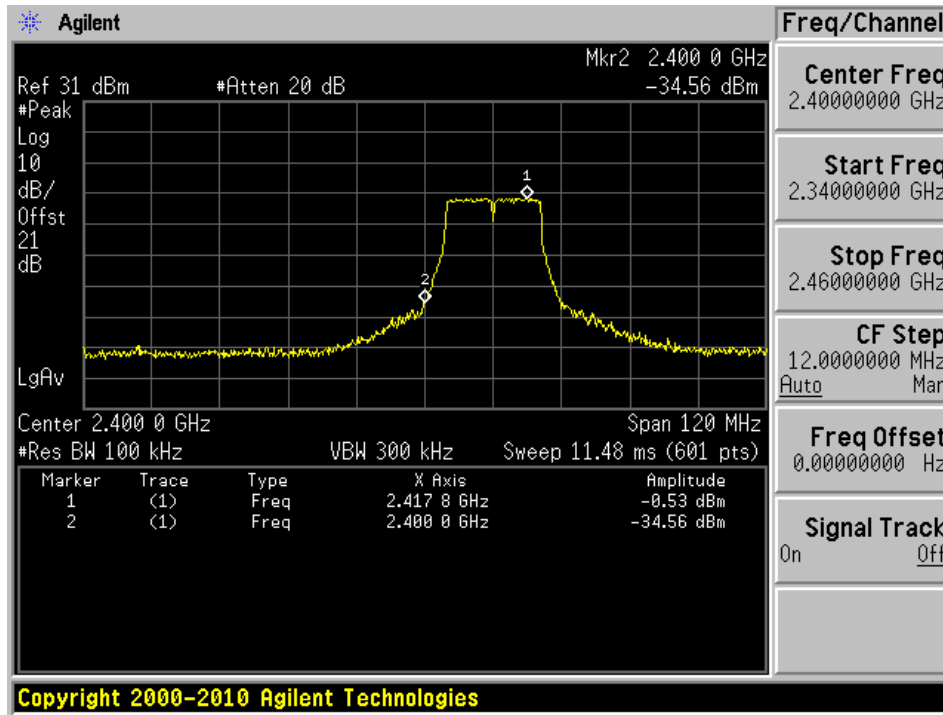


ANT 2 G Mode 2462 MHz High Channel Band Edge

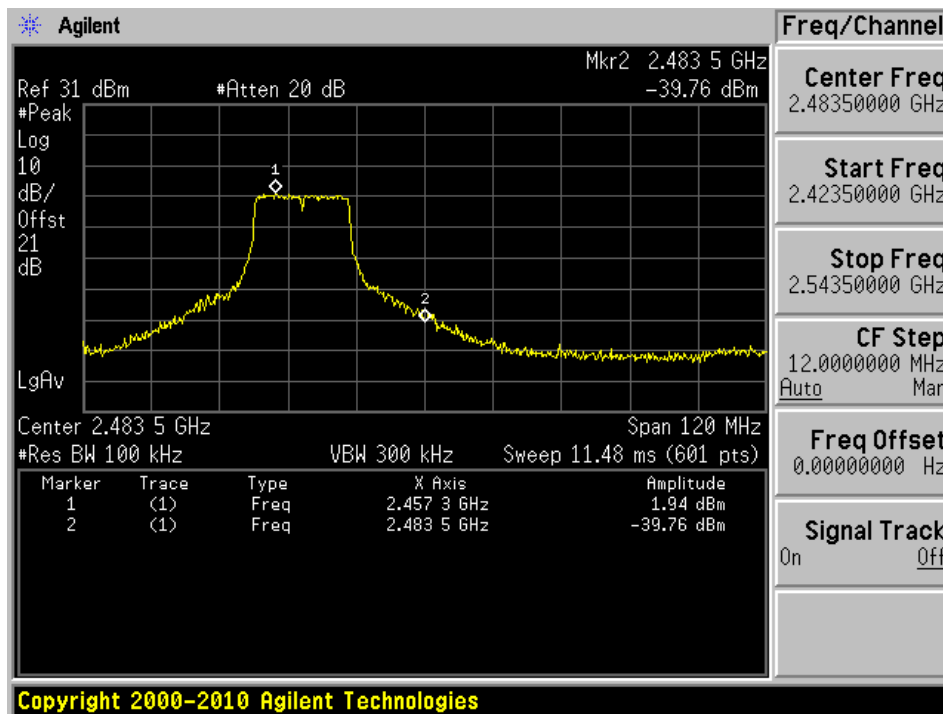

ANT 2 HT20 Mode 2412 MHz Low Channel Band Edge

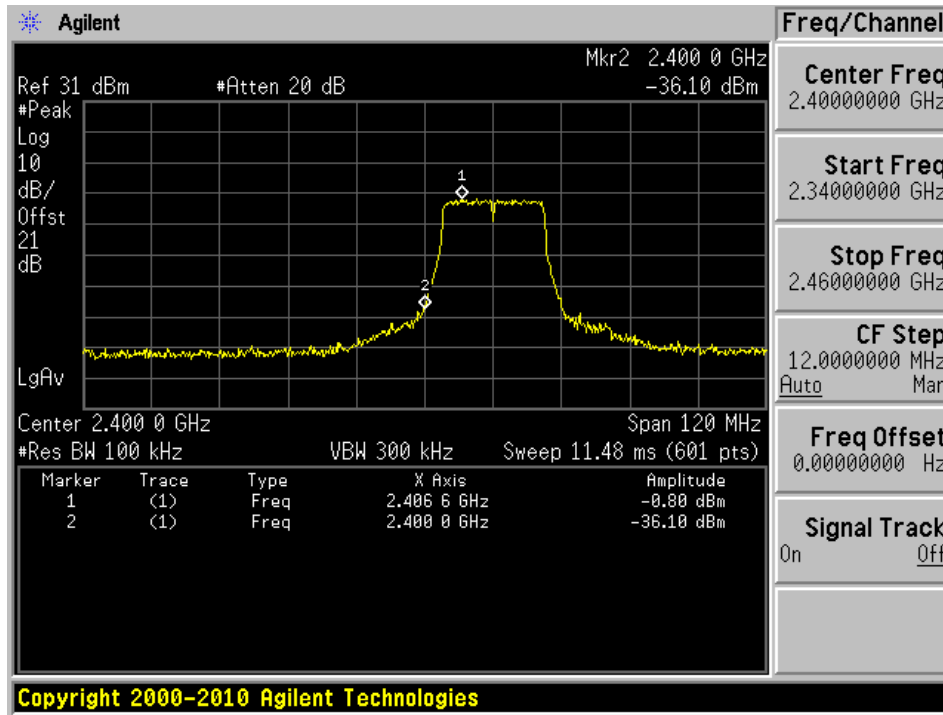

ANT 2 HT20 Mode 2462 MHz High Channel Band Edge

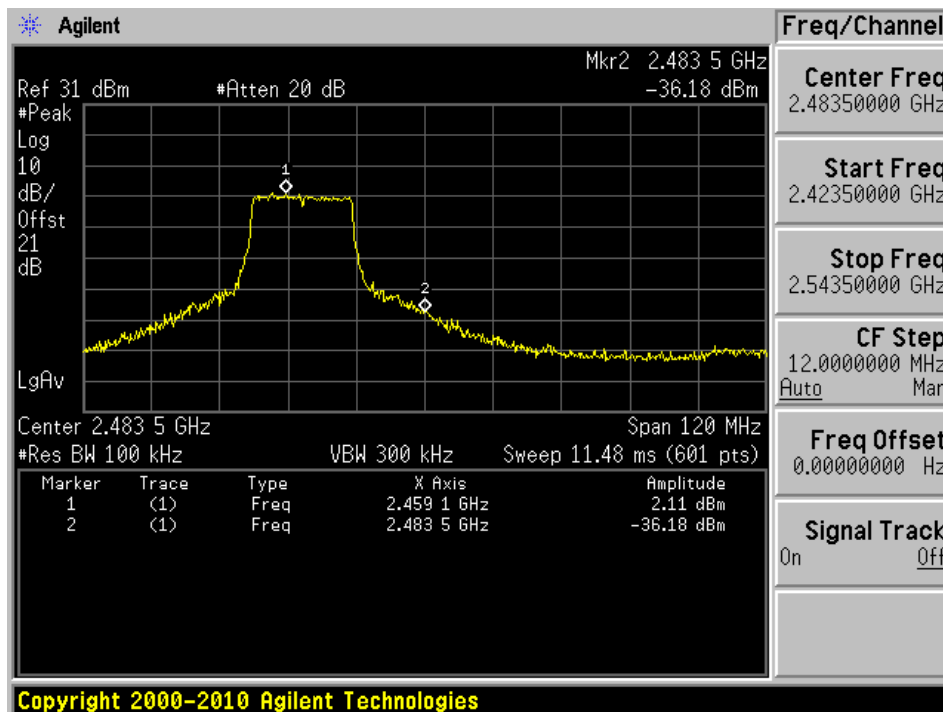

17 Annex E (Informative) - ISO/IEC 17025 Certificate and Scope of Accreditation



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA


for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the Electrical field. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 30th day of August 2016.



President and CEO
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2018
Revised November 14, 2016

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

----- END OF REPORT -----