

FCC Test Report

Report No.: FCC_RF_SL20081901-ROK-003_5G Rev_1.0

FCC ID: TC2-R1039

Test Model (host): RC-MC1

Series Model: N/A

Received Date: 09/18/2020

Test Date: 09/21/2020-10/07/2020

Issued Date: 10/27/2020

Applicant: Roku, Inc.

Address: 1155 Coleman Ave, San Jose, CA 95110

Manufacturer: Roku, Inc.

Address: 1155 Coleman Ave, San Jose, CA 95110

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035, USA

FCC Test Site Reg No.: 540430



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Operation Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	10
3.3.1 Duty Cycle of Test Signal	11
3.4 General Description of Applied Standard	12
4 Test Types and Results	13
4.1 Antenna Requirement	13
4.2 Radiated Emission and Bandedge Measurement	14
4.2.1 Limits of Radiated Emission Measurement	14
4.2.2 Test Instruments	15
4.2.3 Test Procedure	15
4.2.4 Deviation from Test Standard	16
4.2.5 Test Setup	17
4.2.6 EUT Operating Condition	18
4.2.7 Test Results	19
4.3 Conducted Emission Measurement	35
4.3.1 Limits of Conducted Emission Measurement	35
4.3.2 Test Instruments	35
4.3.3 Test Procedure	36
4.3.4 Deviation from Test Standard	36
4.3.5 Test Setup	36
4.3.6 EUT Operating Condition	36
4.3.7 Test Results	37
4.4 Transmit Power Measurement	39
4.4.1 Limits of Transmit Power Measurement	39
4.4.2 Test Setup	40
4.4.3 Test Instruments	40
4.4.4 Test Procedure	40
4.4.5 Deviation from Test Standard	41
4.4.6 EUT Operating Condition	41
4.4.7 Test Results	42
4.5 26dB Bandwidth & 6dB Bandwidth Measurement	43
4.5.1 Limits of 6 dB Bandwidth Measurement	43
4.5.2 Test Setup	43
4.5.3 Test Instruments	43
4.5.4 Test Procedure	43
4.5.5 Test Results	44
4.6 Peak Power Spectral Density Measurement	51
4.6.1 Limits of Peak Power Spectral Density Measurement	51
4.6.2 Test Setup	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	52
4.7 Frequency Stability Measurement	65

4.7.1	Limits of Frequency Stability Measurement	65
4.7.2	Test Setup.....	65
4.7.3	Test Instruments	65
4.7.4	Test Procedure	65
4.7.5	Deviation from Test Standard	65
4.7.6	EUT Operating Condition	65
4.7.7	Test Results	66
5	Pictures of Test Arrangements.....	67
	Appendix – Information on the Testing Laboratories	68

Release Control Record

Issue No.	Description	Date Issued
FCC_RF_SL20081901-ROK-003_5G	Original release	10/08/2020
FCC_RF_SL20081901-ROK-003_5G Rev_1.0	Update per review	10/27/2020

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Item	Result	Remarks
15.203	Antenna Requirement	Pass	The EUT uses a chip antenna to permanently attach to the device.
15.407 (b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit.
15.407 (b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit.
15.407 (a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
-	Occupied Bandwidth	Pass	Meet the requirement of limit.
15.407 (e)	6 dB Emission Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 only)
15.407 (a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.

Note: N/A: EUT worked with battery.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.64dB
	6GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	4.91dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Remote Control
Brand	Roku, Inc.
Test Model (host)	RC-MC1
Identification No. of EUT	N/A
Series Model	N/A
Model Difference	N/A
Status of EUT	Engineering Sample
Power Supply Rating	battery 3.8V
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11a: up to 54Mbps 802.11n: up to 450Mbps
Operating Frequency	5150 ~ 5250MHz, 5745~5825MHz
Number of Channel	5150~5250MHz: 802.11a, 802.11n (HT20): 4 5745~5825MHz: 802.11a, 802.11n (HT20): 5
Antenna Type	Chip Antenna 5150~5250MHz:2.9 dBi 5745~5825MHz:3.9 dBi
Antenna Connector	N/A

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Operation Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

Power setting is as below:

802.11a			802.11n		
Channel	Power Setting		Channel	Power Setting	
	Chain 0	Chain 1		Chain 0	Chain 1
36	89	89	36	90	90
40	89	89	40	89	89
48	88	88	48	89	89
149	81	81	149	82	82
157	81	81	157	82	82
165	84	84	165	85	85

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Powered by adapter
B	-	√	√	-	Powered by POE

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
-	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
-	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5320	36 to 64	62	OFDM	BPSK	6
-	802.11a	5745-5825	149 to 165	149	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5320	36 to 64	62	OFDM	BPSK	6
-	802.11a	5745-5825	149 to 165	149	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
-	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
-	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Deon Dai
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Deon Dai
PLC	25deg. C, 68%RH	120Vac, 60Hz	Deon Dai
APCM	21deg. C, 60%RH	120Vac, 60Hz	Deon Dai

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Dell	Latitude 3550	N/A	N/A	Provide by Lab
B.	Switch adapter	Roku	ADS-6RA-06	0505EPCU-L	N/A	Provide by Customer
C.						
D.						
E.						
F.						
G.						

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB	1	0.8m	No	0	Connect from EUT to Laptop
2.						
3.						


3.3.1 Duty Cycle of Test Signal

MODULATION TYPE: BPSK

If Duty cycle of test signal is < 98 %, duty factor is required.

802.11a: Duty cycle = 100%

802.11n (HT20): Duty cycle = 100%

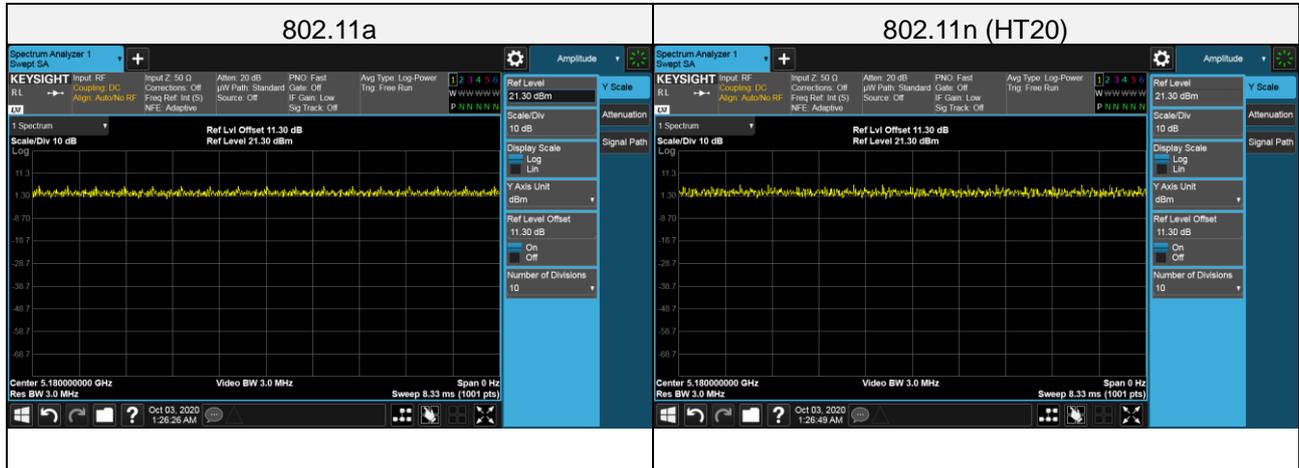

3.4 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR FCC Part 15, Subpart E (Section 15.407)

789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Antenna Requirement

Spec	Requirement	Applicable
15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <ul style="list-style-type: none"> a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device. 	<input checked="" type="checkbox"/>
Remark	The EUT uses a chip antenna to permanently attach to the device.	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

4.2 Radiated Emission and Bandedge Measurement

4.2.1 Limits of Radiated Emission Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	<input checked="" type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
*1 beyond 75 MHz or more above of the band edge.		*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140597	06/05/2020	06/05/2021
Biconilog Antenna Sunol	JB6	A111717	09/04/2020	09/04/2021
Pre-Amplifier RF Bay, Inc.	LPA-6-30	11170601	04/27/2020	04/27/2021
Horn Antenna ETS-Lindgren	3117	218554	11/22/2019	11/22/2020
Pre-Amplifier RF-Lambda	RAMP00M50GA	17032300048	06/18/2020	06/18/2021

4.2.3 Test Procedure

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle \geq 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

For Band edge Measurement

789033 D02 General U-NII Test Procedures New Rules v02r01, II.F. Method SA-1


1. For average emissions measurements, follow the procedures described in section II.G.6., "Procedures for Average Unwanted Emissions Measurements above 1000 MHz", except for the following changes:
2. Set RBW=100 kHz
3. Set VBW=300 kHz
4. Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.

4.2.4 Deviation from Test Standard


No deviation.

4.2.5 Test Setup


For Radiated emission below 30MHz

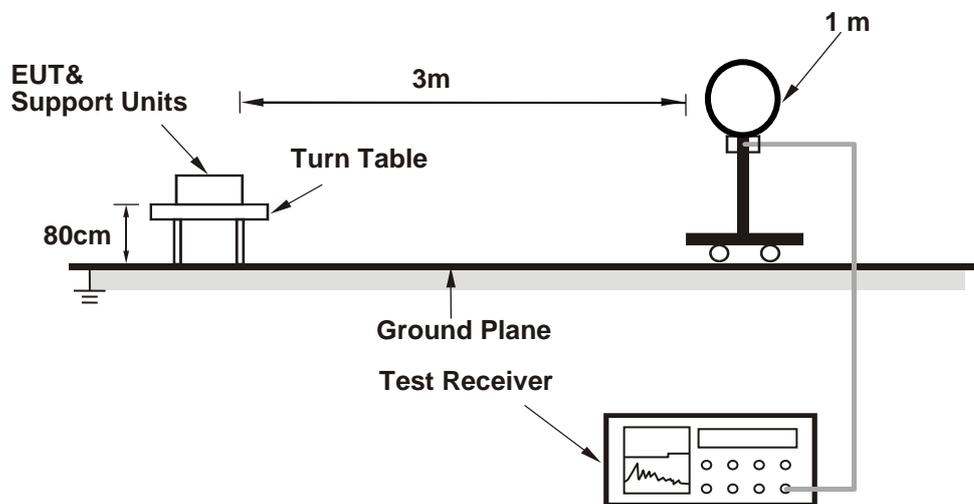

For Radiated emission 30MHz to 1GHz

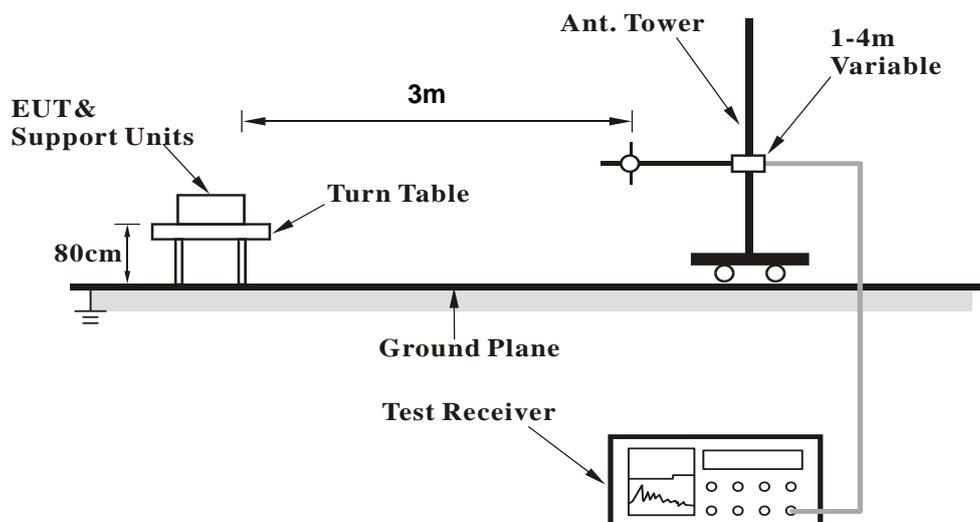

For Radiated emission above 1GHz

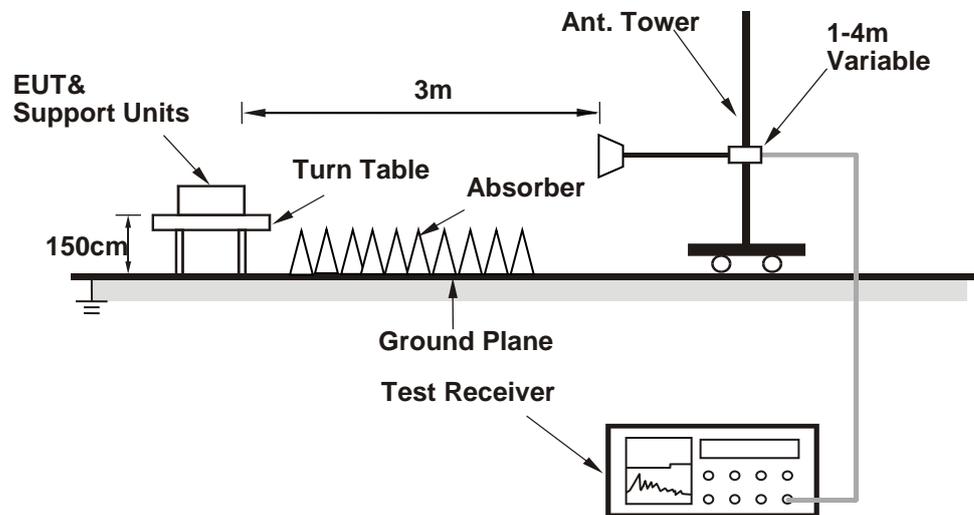

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

- Placed the EUT on the testing table.
- Prepared notebooks to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a USB cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

4.2.7 Test Results

Below 1GHz Worst-Case Data:


CHANNEL	802.11n Channel 40	DETECTOR FUNCTION	Quasi Peak
FREQUENCY RANGE	30MHz – 1GHz		

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m

No.	Frequency (MHz)	Polarization (H/V)	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	Limit\QP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	30.3	V	2.8	25.3	28.1	40	-11.9	104	286	Pass
2	30.221	H	2.7	26.7	29.4	40	-10.6	399	0.1	Pass
3	35.114	H	2.5	23.3	25.8	40	-14.2	256	261	Pass
4	91.759	V	15.3	14.6	29.9	43.5	-13.6	100	122	Pass
5	105.73	V	15.1	17.9	33	43.5	-10.5	100	70	Pass
6	410.098	H	3.2	22.9	26.1	46	-19.9	100	109	Pass

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Cable Loss (dB) + AF (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Preamplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

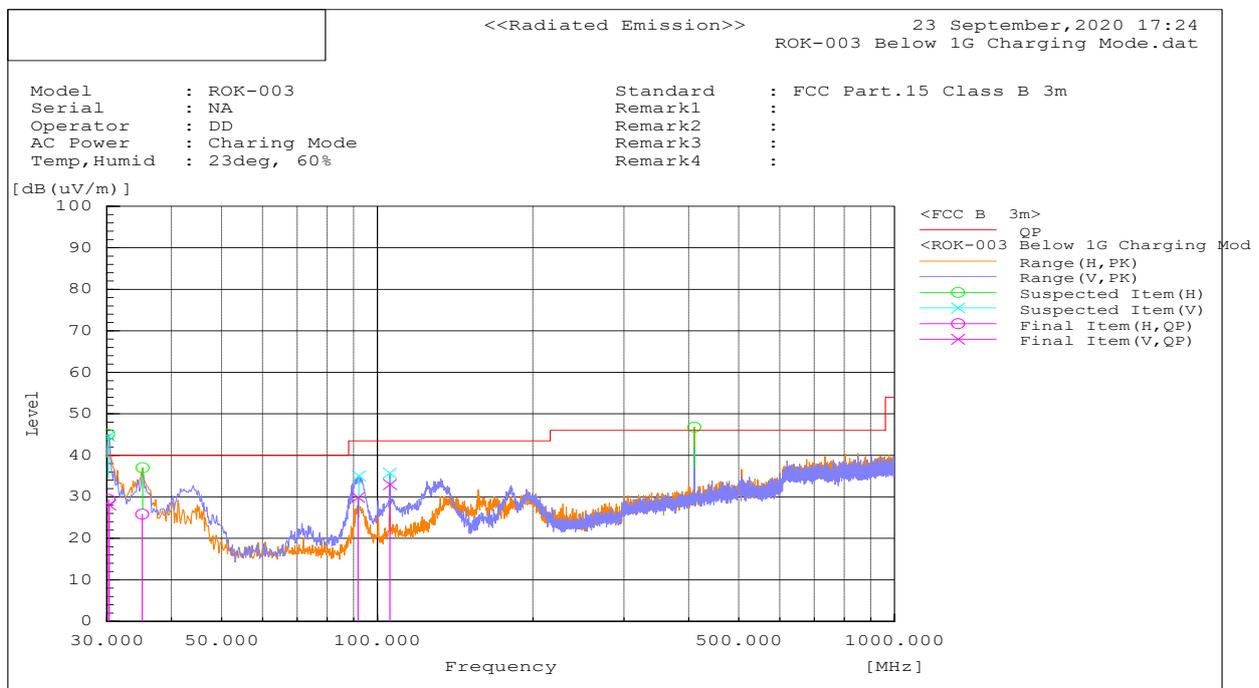

Above 1GHz Test Data:

1GHz-40GHz – 802.11a – 5180MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1526.729	V	38.8	56.9	-10.8	28	46.1	54	74	-26	-27.9	344	89.9	Pass
2	4808.003	H	35	48.7	-1.9	33.1	46.8	54	74	-20.9	-27.2	267	8.4	Pass
3	10360.03	H	26	39.2	8.4	34.4	47.6	54	74	-19.6	-26.4	100	41.8	Pass

1GHz-40GHz – 802.11a – 5200MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	2851.891	H	36	49.1	-5.1	30.9	44	54	74	-23.1	-30	287	0	Pass
2	2987.763	V	37.1	52.1	-5.2	31.9	46.9	54	74	-22.1	-27.1	102	86	Pass
3	10399.71	V	25.3	38.5	8.5	33.8	47	54	74	-20.2	-27	100	267.8	Pass

1GHz-40GHz – 802.11a – 5240MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1662.327	V	37.8	56.3	-9.3	28.5	47	54	74	-25.5	-27	129	359.9	Pass
2	7001.579	H	29.5	43.2	2.5	32	45.7	54	74	-22	-28.3	129	70	Pass
3	10478.27	H	24.5	37.9	8.7	33.2	46.6	54	74	-20.8	-27.4	180	104	Pass

1GHz-40GHz – 802.11n – 5180MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1526.101	V	39.5	57.1	-10.8	28.7	46.3	54	74	-25.3	-27.7	272	0	Pass
2	8140.367	H	27.8	41	5.3	33.1	46.4	54	74	-20.9	-27.6	151	24.1	Pass
3	10358.46	H	25.5	38.9	8.4	33.9	47.3	54	74	-20.1	-26.7	137	93.8	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) –Preamplifier Gain (dB)
3. Margin = Level (dBuV/m) - Limit value (dBuV/m)

1GHz-40GHz – 802.11n – 5200MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1629.797	H	38	51.7	-9.8	28.2	41.9	54	74	-25.8	-32.1	108	282	Pass
2	4807.26	H	34.9	48.8	-1.9	33	46.9	54	74	-21	-27.1	208	306.3	Pass
3	10399.43	V	25.3	38.4	8.5	33.8	46.9	54	74	-20.2	-27.1	115	337.6	Pass

1GHz-40GHz – 802.11n – 5240MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1661.606	V	37.7	54.8	-9.3	28.4	45.5	54	74	-25.6	-28.5	351	359.9	Pass
2	2987.986	V	37.4	53.2	-5.2	32.2	48	54	74	-21.8	-26	100	99.4	Pass
3	10479.22	H	25.2	39.1	8.7	33.9	47.8	54	74	-20.1	-26.2	100	244.2	Pass

1GHz-40GHz – 802.11a – 5745MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1594.833	V	40.4	64.9	-10.3	30.1	54.6	54	74	-23.9	-19.4	100	255.6	Pass
2	4842.457	H	31.2	44.4	-2	29.2	42.4	54	74	-24.8	-31.6	255	43.4	Pass
3	11489.72	H	25.5	38.3	9	34.5	47.3	54	74	-19.5	-26.7	189	329.9	Pass

1GHz-40GHz – 802.11a – 5785MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	3004.967	V	36.9	49.9	-5.2	31.7	44.7	54	74	-22.3	-29.3	100	358.8	Pass
2	7392.553	H	28.5	42.1	2.9	31.4	45	54	74	-22.6	-29	102	27.9	Pass
3	11568.879	V	25	38.4	9.2	34.2	47.6	54	74	-19.8	-26.4	108	197.2	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) –Preamplifier Gain (dB)
3. Margin = Level (dBuV/m) - Limit value (dBuV/m)

1GHz-40GHz – 802.11a – 5825MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1595.632	H	39.8	63.8	-10.3	29.5	53.5	54	74	-24.5	-20.5	187	217.5	Pass
2	11649.613	V	24.6	38.5	9.4	34	47.9	54	74	-20	-26.1	180	303.3	Pass
3	13596.86	H	23.5	37.1	10.6	34.1	47.7	54	74	-19.9	-26.3	100	353	Pass

1GHz-40GHz – 802.11n – 5745MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1287.271	V	41	54.6	-9.7	31.3	44.9	54	74	-22.7	-29.1	172	269.9	Pass
2	8226.096	H	28.1	41.2	5.2	33.3	46.4	54	74	-20.7	-27.6	108	352.5	Pass
3	11490.043	H	25.7	38.9	9	34.7	47.9	54	74	-19.3	-26.1	122	109.1	Pass

1GHz-40GHz – 802.11n – 5785MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	2241.914	H	37.8	51.5	-6.5	31.3	45	54	74	-22.7	-29	148	223.6	Pass
2	11569.35	V	24.7	38.5	9.2	33.9	47.7	54	74	-20.1	-26.3	144	279.1	Pass
3	17149.92	H	20.9	35.6	19.9	40.8	55.5	54	74	-13.2	-18.5	100	107.1	Pass


1GHz-40GHz – 802.11n – 5825MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	3685.829	V	36.3	49.6	-3.7	32.6	45.9	54	74	-21.4	-28.1	384	133.4	Pass
2	11649.176	H	25.3	39	9.4	34.7	48.4	54	74	-19.3	-25.6	102	176.2	Pass
3	13596.55	H	22.6	36.5	10.6	33.2	47.1	54	74	-20.8	-26.9	160	303.3	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) –Preamplifier Gain (dB)
3. Margin = Level (dBuV/m) - Limit value (dBuV/m)

RESTRICTED BAND Test Plots
802.11a – 5180MHz

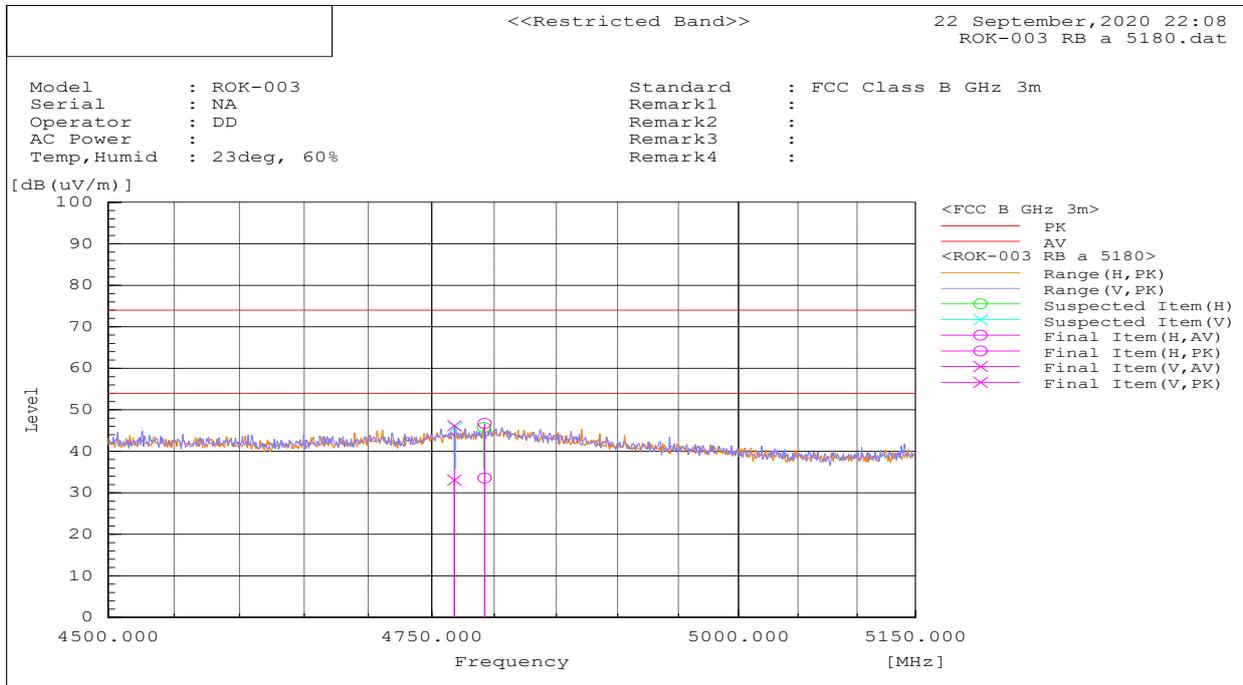


Antenna Polarity & Test Distance: Vertical and Horizontal at 3m

No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	4768.06	V	35.2	48.3	-2.1	33.1	46.2	54	74	-20.9	-27.8	129	270.3	Pass
2	4792.26	H	35.4	48.6	-1.9	33.5	46.7	54	74	-20.5	-27.3	258	233.2	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) –Preamplifier Gain (dB)
3. Margin = Level (dBuV/m) - Limit value (dBuV/m)

RESTRICTED BAND
802.11n – 5180MHz

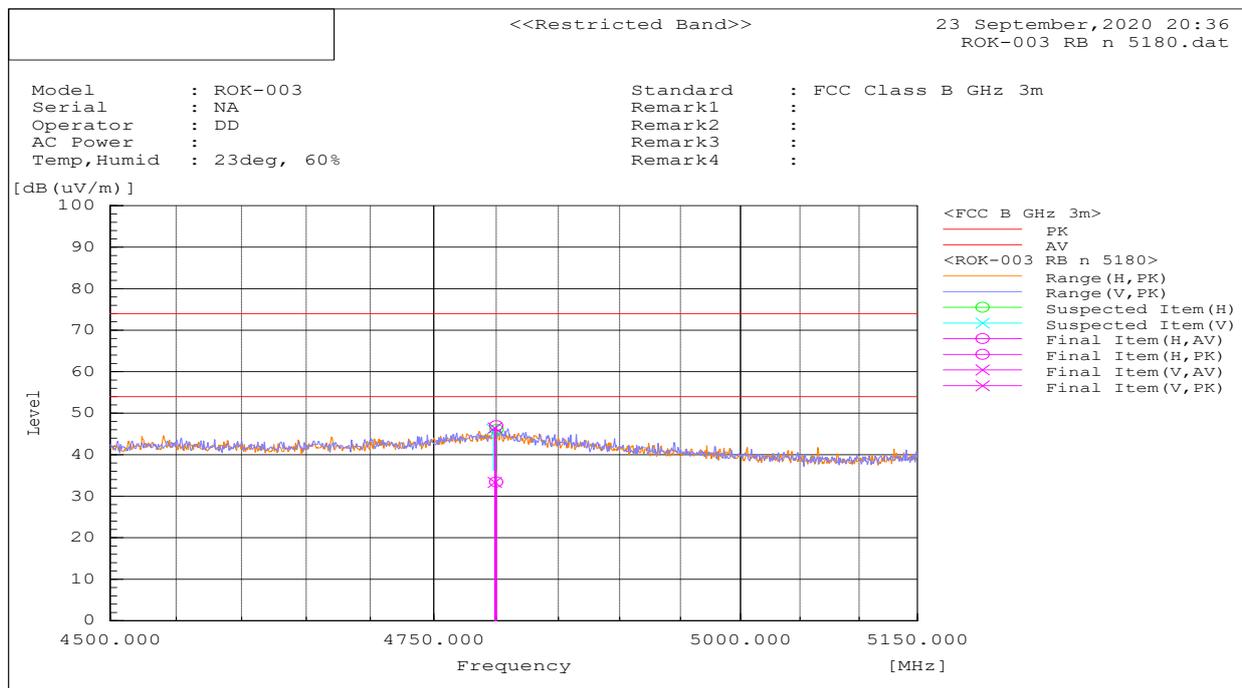


Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	4798.861	V	35.3	48.4	-1.9	33.4	46.5	54	74	-20.6	-27.5	379	247.3	Pass
2	4799.911	H	35.3	48.9	-1.9	33.4	47	54	74	-20.6	-27	172	43.7	Pass


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) –Preamplifier Gain (dB)
3. Margin = Level (dBuV/m) - Limit value (dBuV/m)


Band Edge Test Plots for U-NII-1 Band:
Chain 0

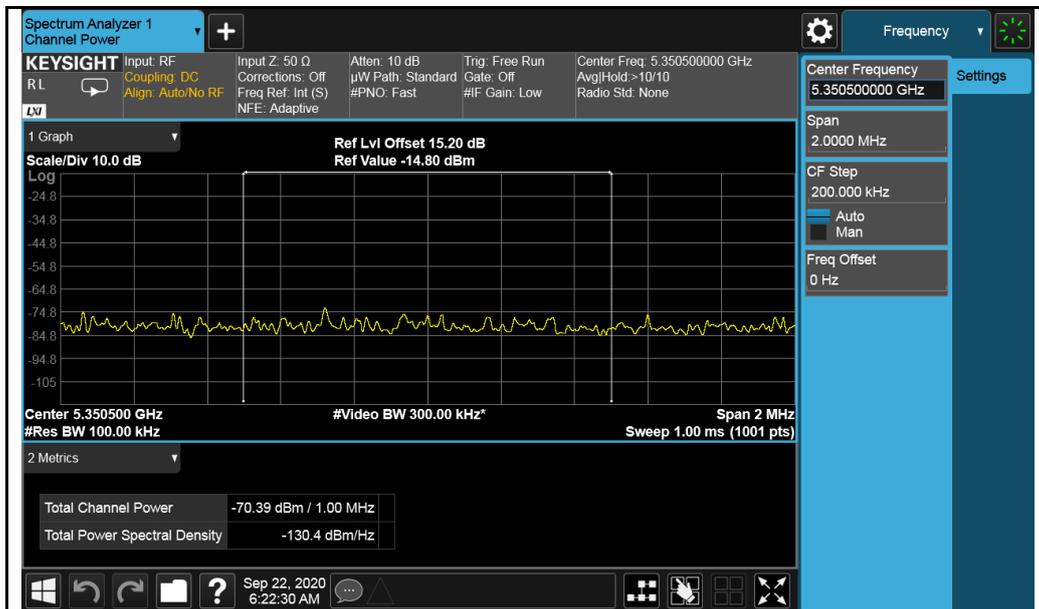


802.11a-5180MHz

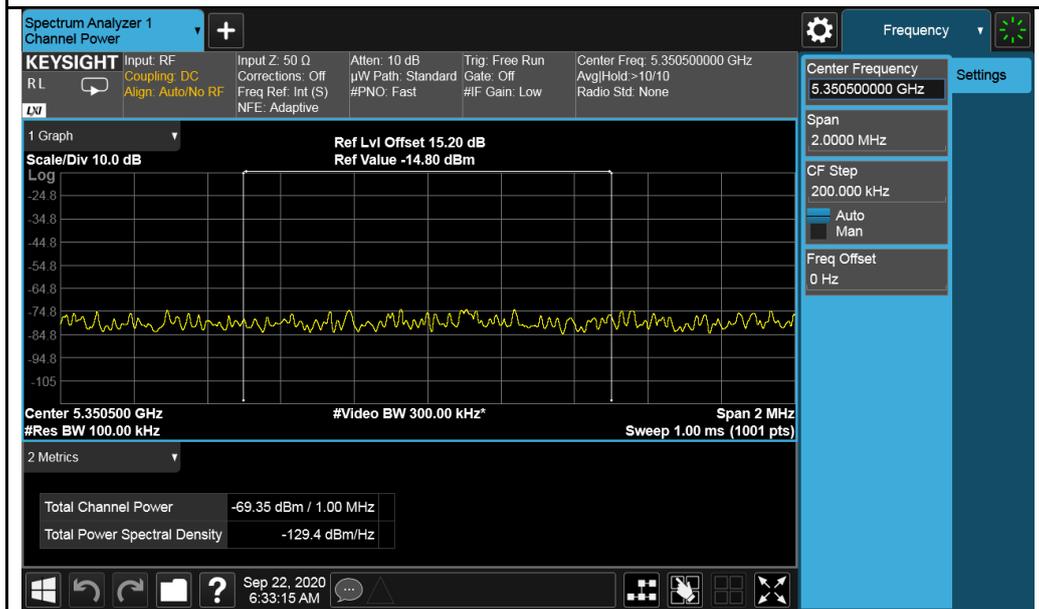

802.11a-5240MHz

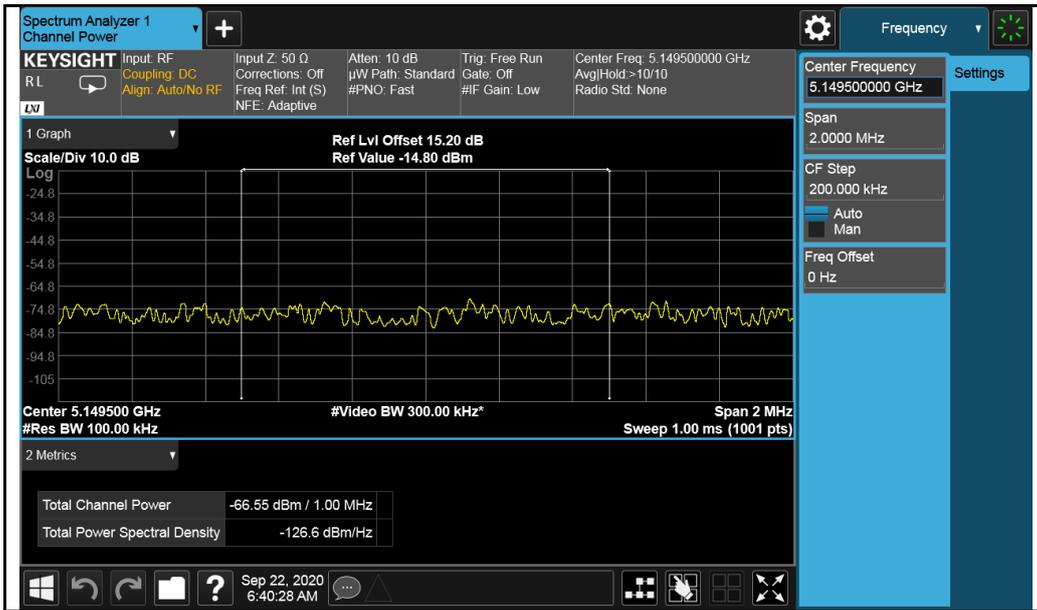

802.11n-5180MHz

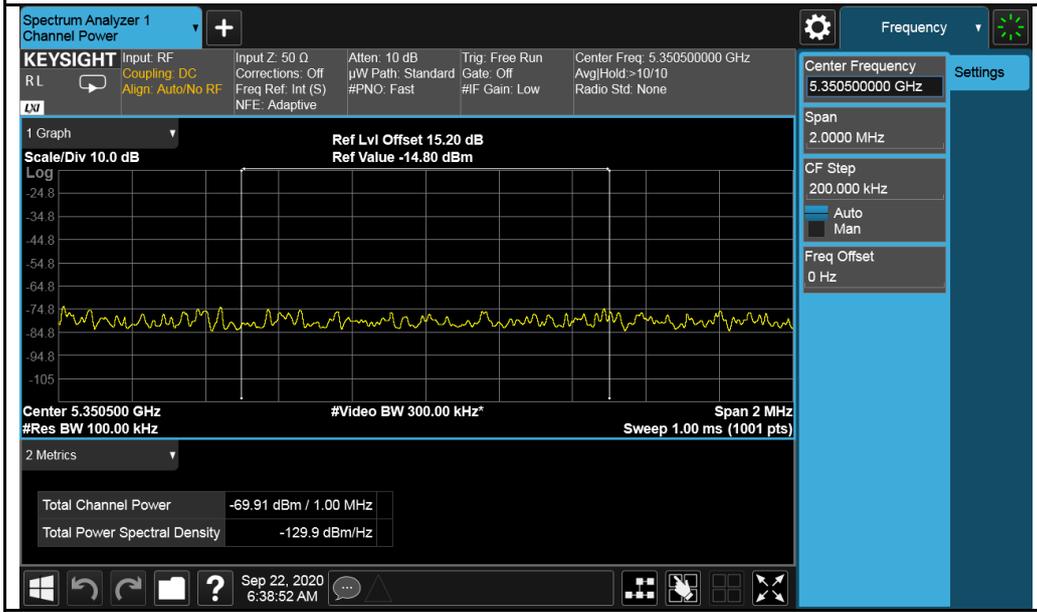


802.11n-5240MHz


Chain 1




802.11a-5180MHz

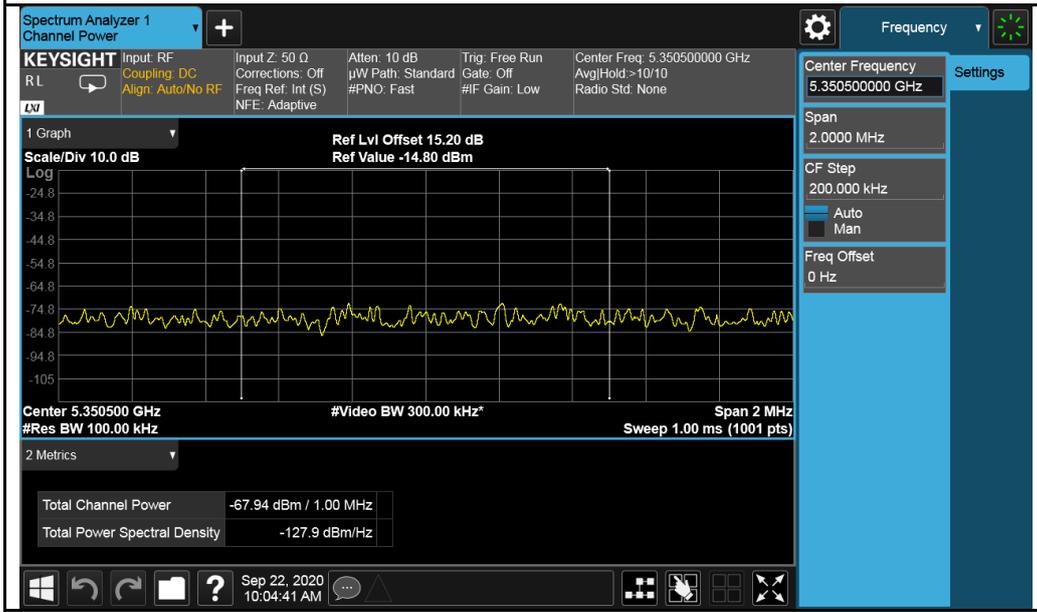

802.11a-5240MHz

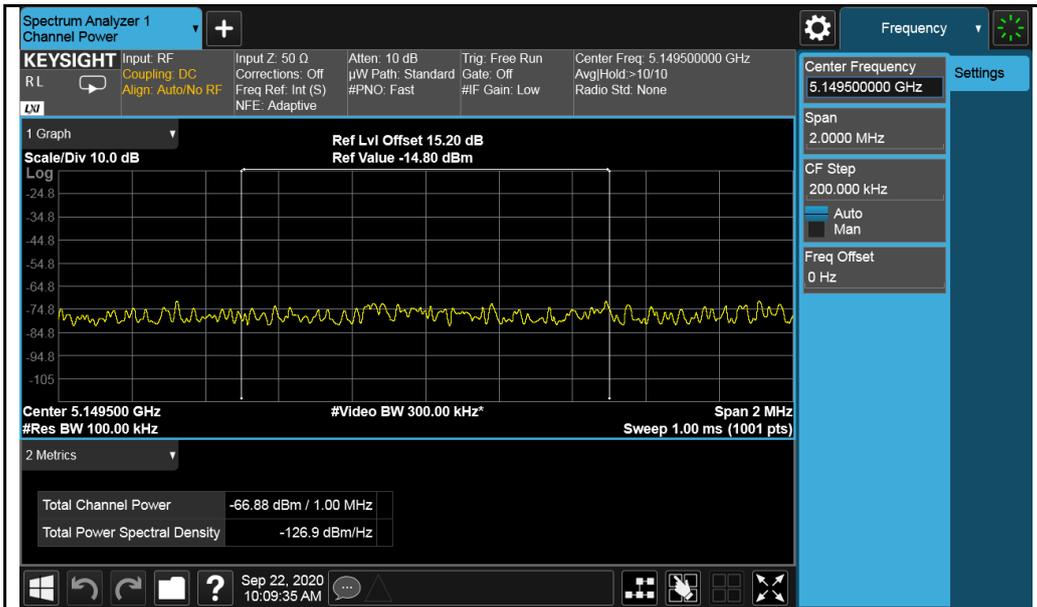


802.11n-5180MHz

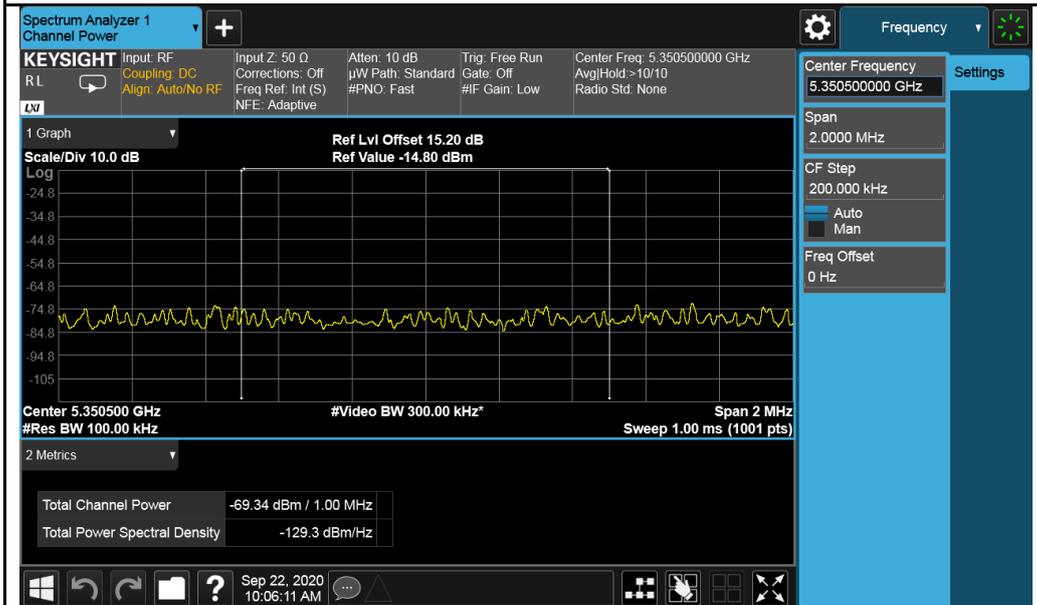


802.11n-5240MHz


Test Plots for U-NII-3 Band:
Chain 0

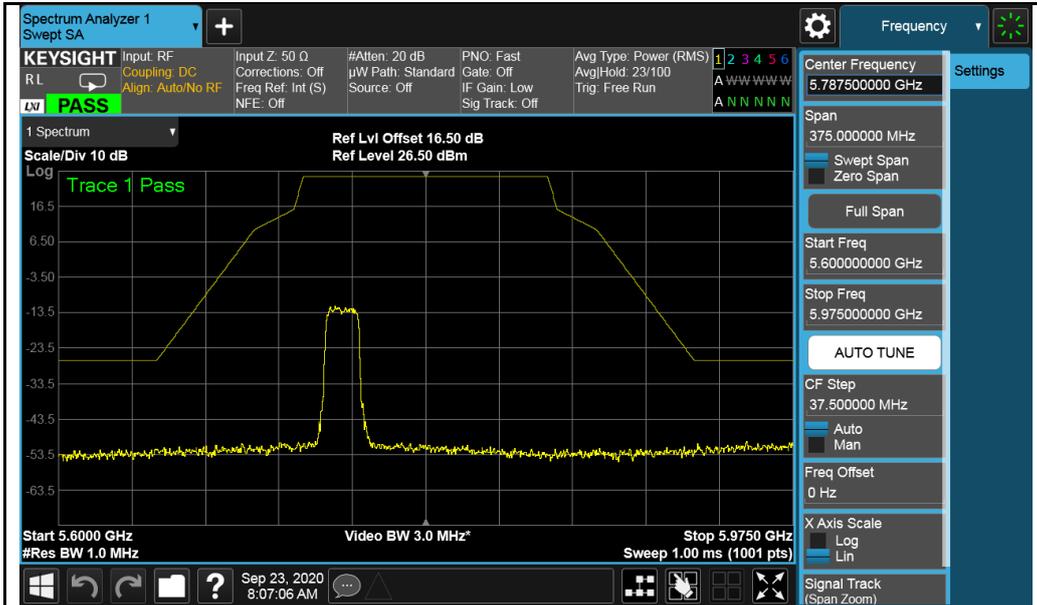


802.11a-5745MHz

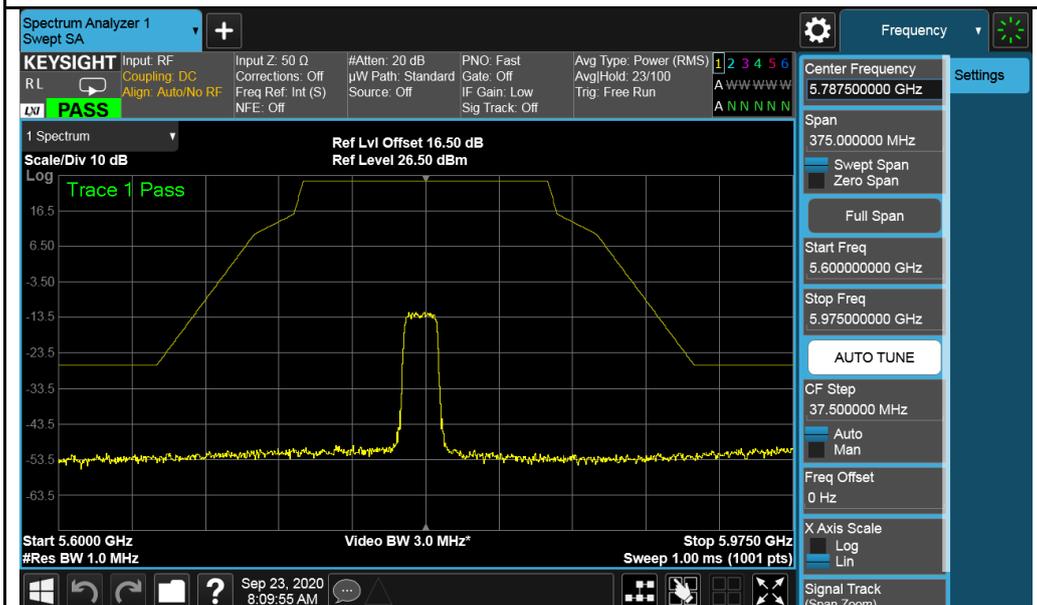


802.11a-5785MHz

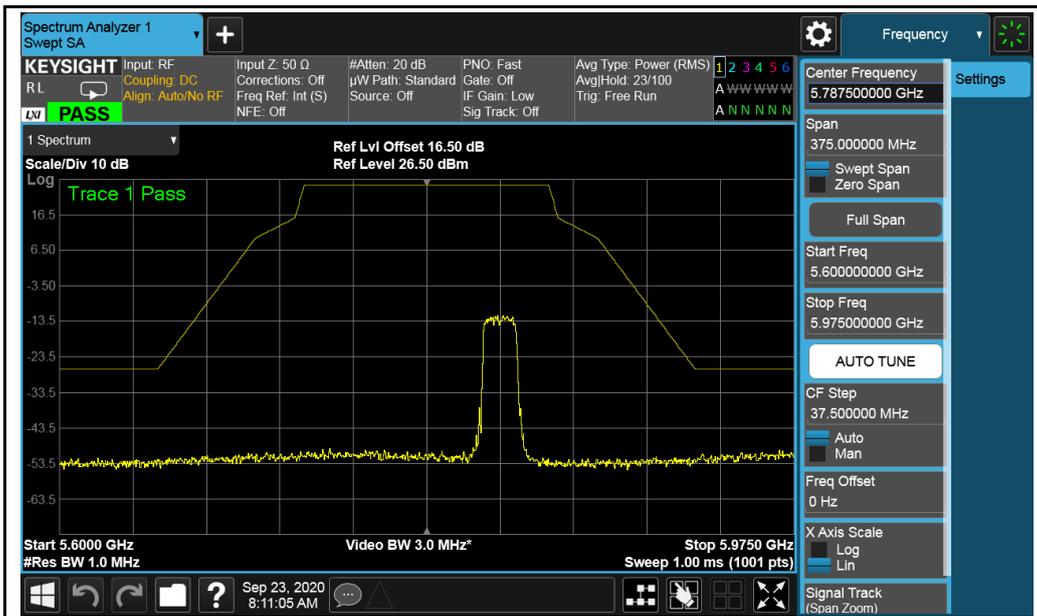


802.11a-5825MHz

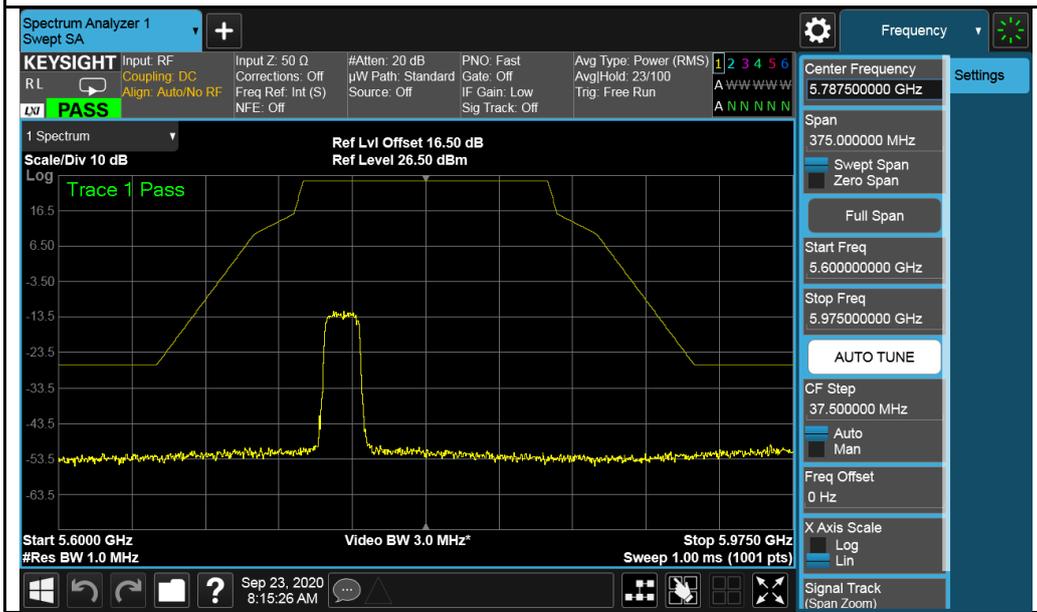

802.11n-5745MHz

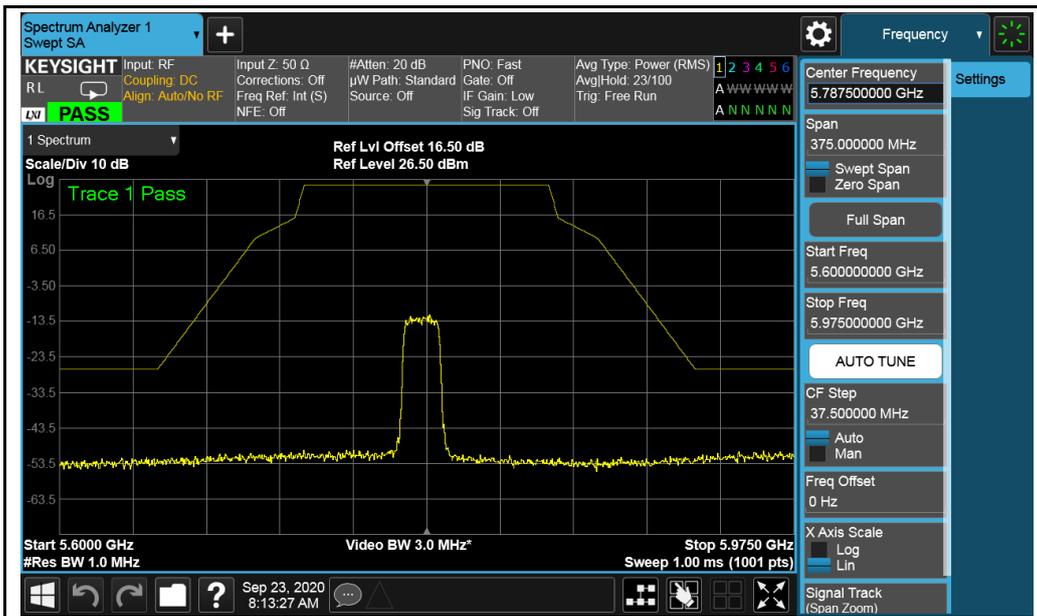


802.11n-5785MHz

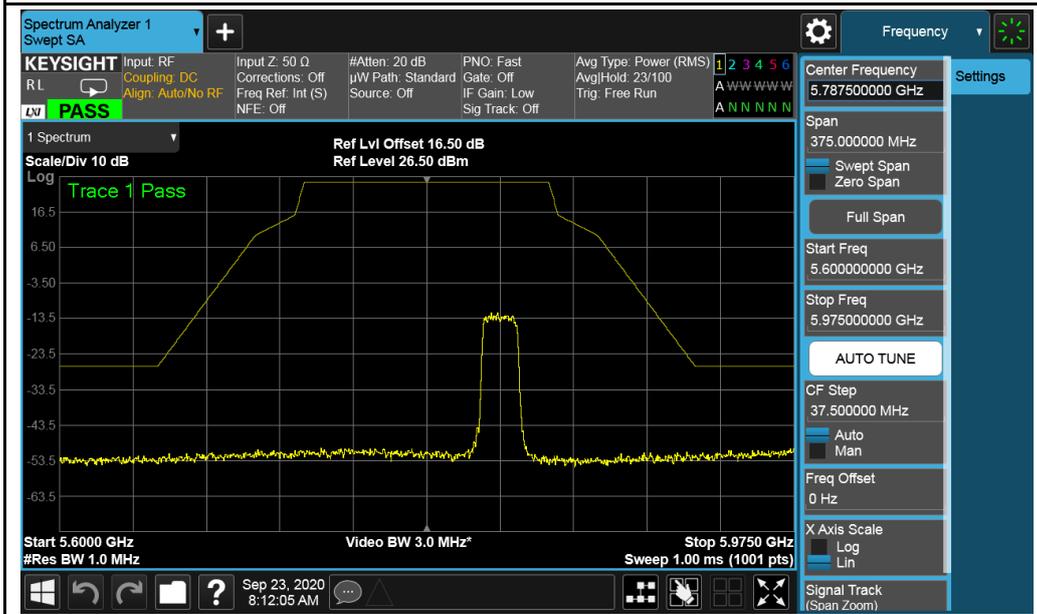


802.11n-5825MHz


Chain 1

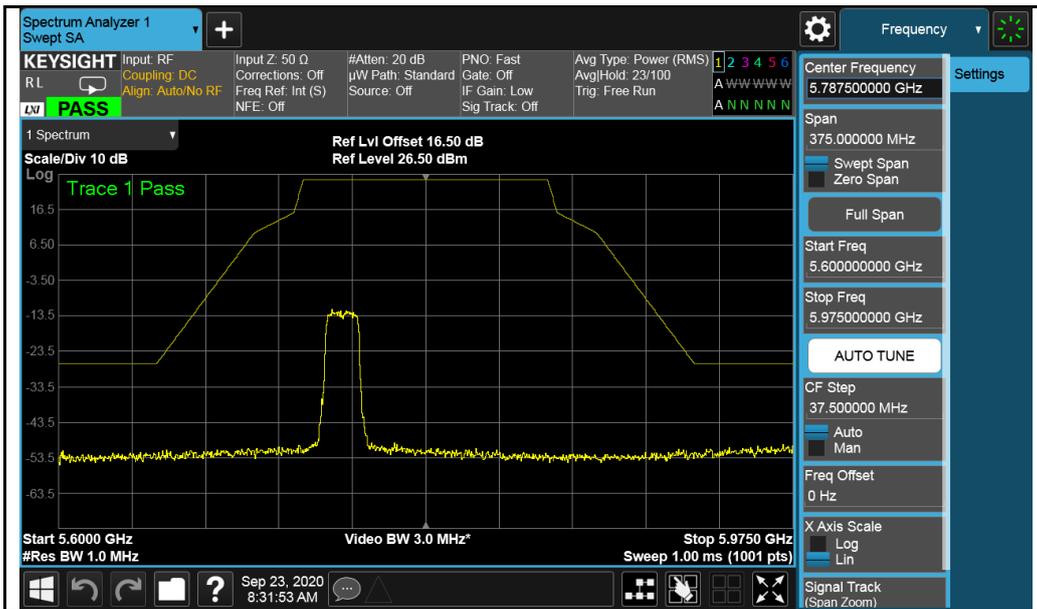


802.11a-5745MHz

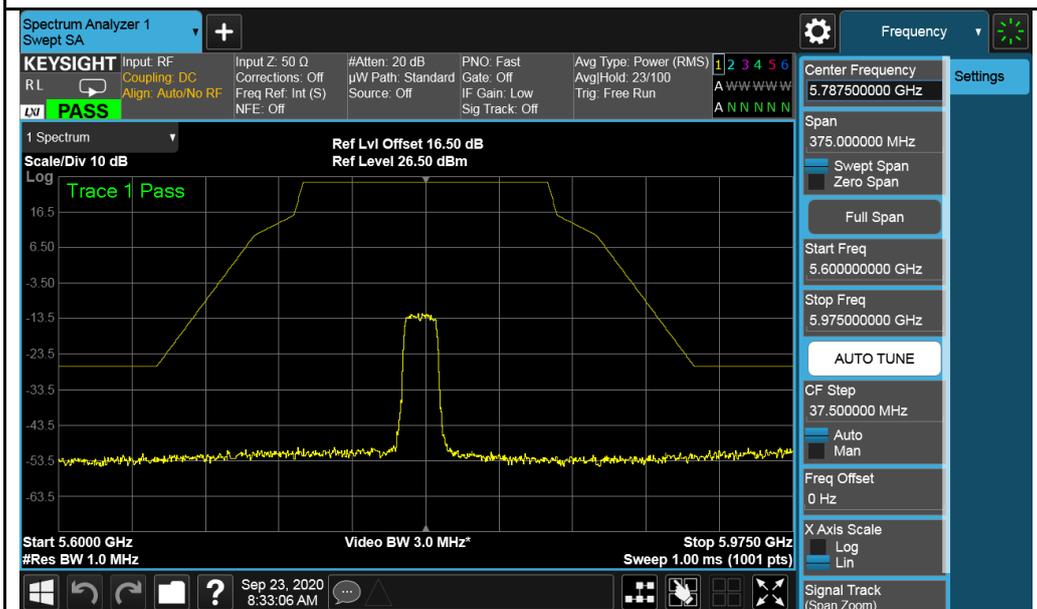


802.11a-5785MHz

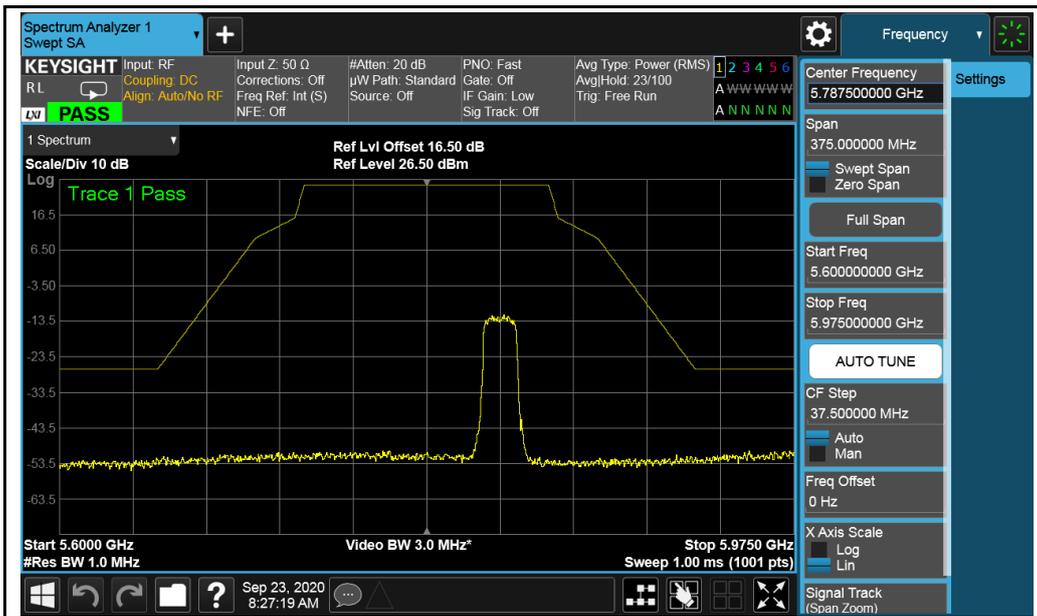


802.11a-5825MHz

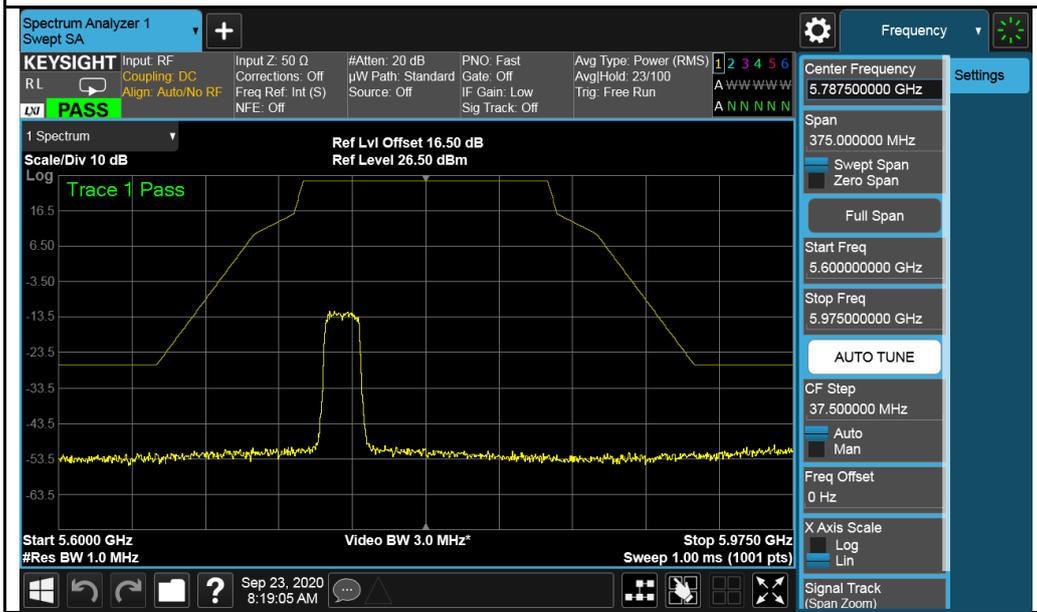

802.11n-5745MHz

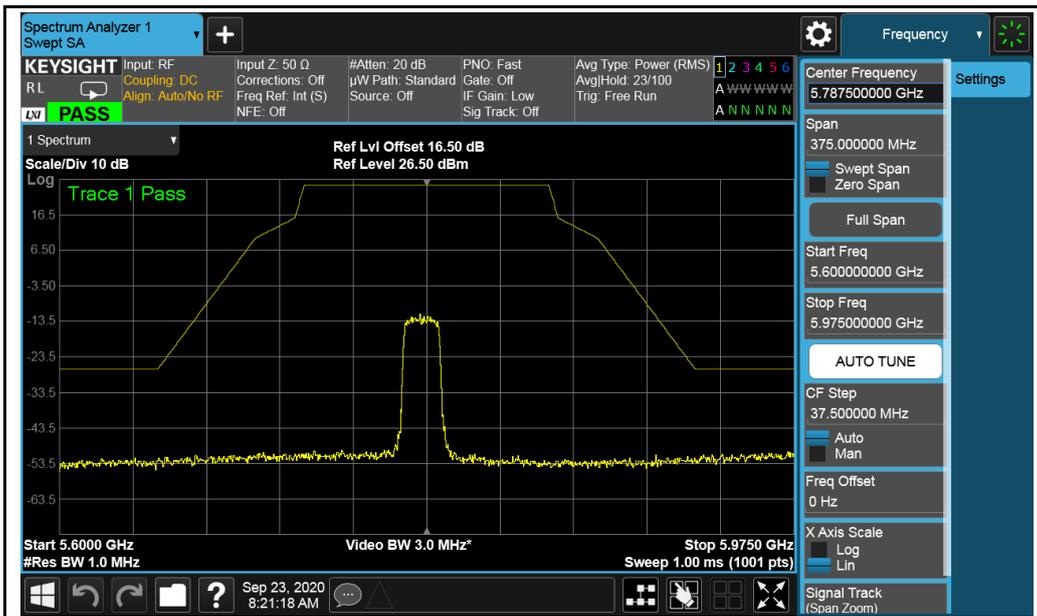

802.11n-5785MHz

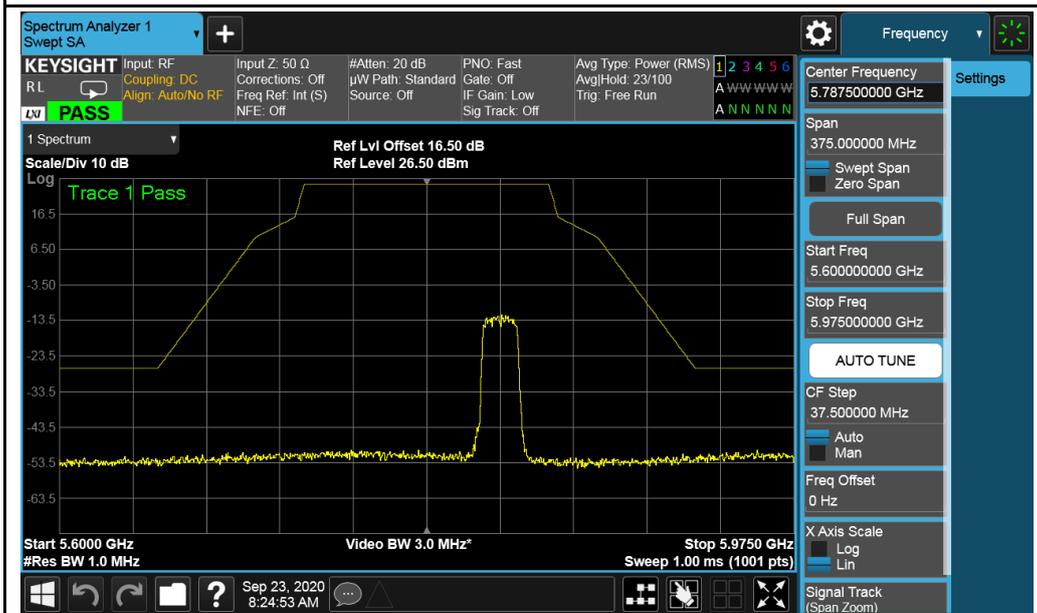

802.11n-5825MHz

4.3 Conducted Emission Measurement

4.3.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.3.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
EMI Test Receiver Rohde & Schwarz	ESIB 40	100179	11/1/2019	11/1/2020
Transient Limiter Electro-Metrics	EM-7600-5	106	12/31/2019	12/31/2020
LISN ETS-Lindgren	3816/2NM	214372	1/14/2020	1/14/2021

4.3.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.3.4 Deviation from Test Standard

No deviation.

4.3.5 Test Setup

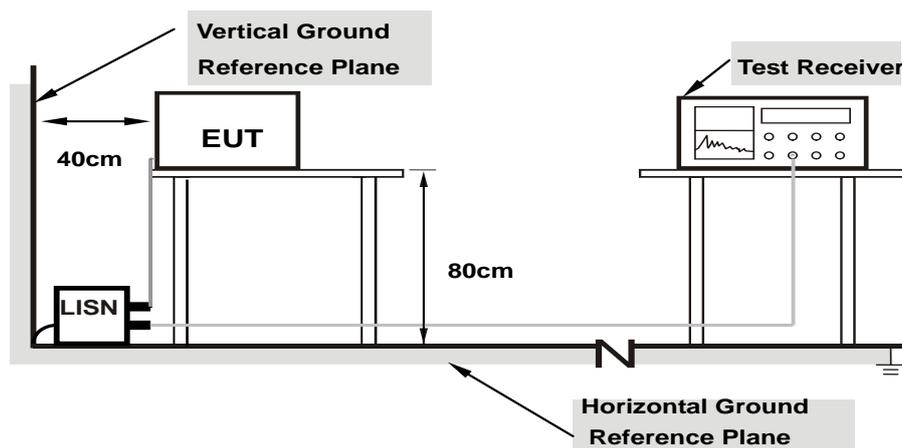

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.3.6 EUT Operating Condition

Same as 4.1.6.


4.3.7 Test Results

Frequency Range	0.15-30 MHz	Phase	{Line}
Input Power	120 Vac, 60 Hz	Environmental Conditions	{22 °C, 55% RH}
Tested by	Deon Dai	Test Date	09/23/2020
Test Mode	TX		

No	Frequency (MHz)	Reading Value (dBuV)	Cable Loss (dB)	Insertion Loss (dB)	Emission Level Corrected (dBuV)	Measurement Type	Line/ Neutral	Limit (dBuV)	Margin (dB)	Pass/ Fail
1	0.471812	23.6	9.45	0.04	33.09	Quasi Peak	Live	56.48	-23.39	Pass
2	0.448726	24.05	9.45	0.04	33.53	Quasi Peak	Live	56.9	-23.36	Pass
3	0.367888	25.65	9.44	0.04	35.13	Quasi Peak	Live	58.55	-23.42	Pass
4	0.383784	25.26	9.44	0.04	34.74	Quasi Peak	Live	58.2	-23.46	Pass
5	0.359002	25.82	9.44	0.04	35.3	Quasi Peak	Live	58.75	-23.45	Pass
6	0.406858	24.85	9.45	0.04	34.33	Quasi Peak	Live	57.71	-23.38	Pass
7	0.471812	7.12	9.45	0.04	16.6	Average	Live	46.48	-29.88	Pass
8	0.448726	3.39	9.45	0.04	12.88	Average	Live	46.9	-34.02	Pass
9	0.367888	2.06	9.44	0.04	11.54	Average	Live	48.55	-37.01	Pass
10	0.383784	1.69	9.44	0.04	11.17	Average	Live	48.2	-37.03	Pass
11	0.359002	2.75	9.44	0.04	12.23	Average	Live	48.75	-36.52	Pass
12	0.406858	2.41	9.45	0.04	11.89	Average	Live	47.71	-35.82	Pass

Remarks:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission level – Limit value
3. Correction factor = Insertion loss + Cable loss
4. Emission Level = Correction Factor + Reading Value

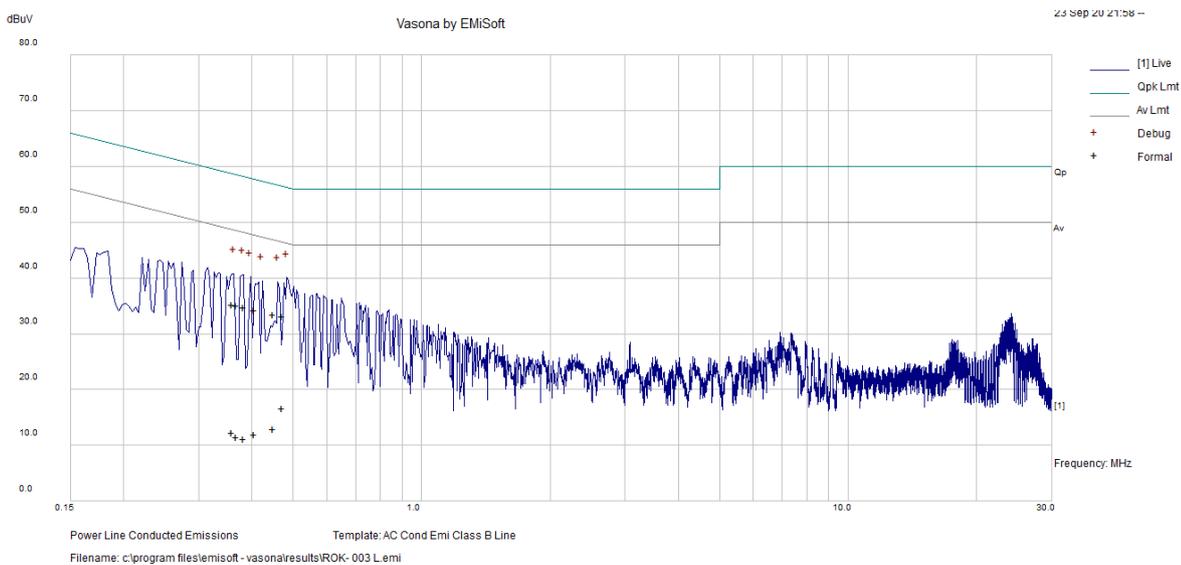


Frequency Range	0.15-30 MHz	Phase	{Neutral}
Input Power	120 Vac, 60 Hz	Environmental Conditions	{22 °C, 55% RH}
Tested by	Deon Dai	Test Date	09/23/2020
Test Mode	TX		

No	Frequency (MHz)	Reading Value (dBuV)	Cable Loss (dB)	Insertion Loss (dB)	Emission Level Corrected (dBuV)	Measurement Type	Line/ Neutral	Limit (dBuV)	Margin (dB)	Pass/ Fail
1	0.479471	27.54	9.45	0.03	37.02	Quasi Peak	Neutral	56.35	-19.33	Pass
2	0.427455	24.59	9.45	0.03	34.06	Quasi Peak	Neutral	57.3	-23.24	Pass
3	0.462108	24.37	9.45	0.03	33.85	Quasi Peak	Neutral	56.65	-22.81	Pass
4	0.417139	24.78	9.45	0.03	34.25	Quasi Peak	Neutral	57.5	-23.25	Pass
5	0.343383	26.24	9.44	0.03	35.71	Quasi Peak	Neutral	59.12	-23.41	Pass
6	0.303607	27.1	9.44	0.03	36.56	Quasi Peak	Neutral	60.14	-23.58	Pass
7	0.479471	20.94	9.45	0.03	30.42	Average	Neutral	46.35	-15.93	Pass
8	0.427455	10.58	9.45	0.03	20.06	Average	Neutral	47.3	-27.24	Pass
9	0.462108	14.88	9.45	0.03	24.36	Average	Neutral	46.65	-22.3	Pass
10	0.417139	14.01	9.45	0.03	23.49	Average	Neutral	47.5	-24.02	Pass
11	0.343383	9.27	9.44	0.03	18.74	Average	Neutral	49.12	-30.38	Pass
12	0.303607	8.09	9.44	0.03	17.56	Average	Neutral	50.14	-32.58	Pass

Remarks:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission level – Limit value
3. Correction factor = Insertion loss + Cable loss
4. Emission Level = Correction Factor + Reading Value

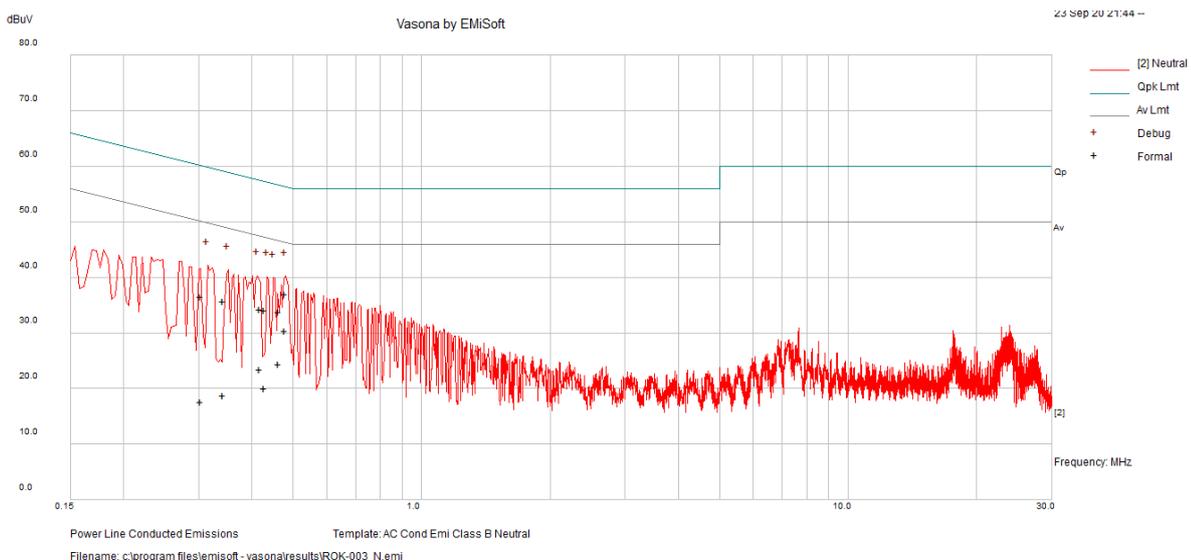

4.4 Transmit Power Measurement

4.4.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup FOR POWER OUTPUT MEASUREMENT


◆ Power Meter Measurement



◆ Spectrum Measurement



FOR 26dB OCCUPIED BANDWIDTH

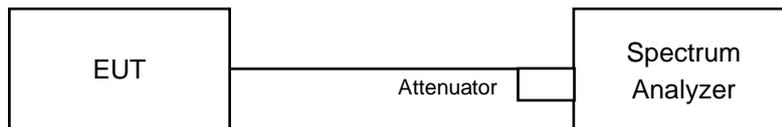

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW ≥ 3 MHz
- 5) Number of points in sweep ≥ 2 Span / RBW.
- 6) Sweep time ≤ (number of points in sweep) * T
- 7) Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- 8) Detector = RMS.
- 9) Trace mode = max hold.
- 10) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

◆ Power Meter Measurement

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

◆ Spectrum Measurement

Follow FCC KDB 789033 UNII test procedure:

Method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Set trigger to free run (duty cycle ≥ 98 percent)
7. Detector = RMS.
8. Trace average at least 100 traces in power averaging mode
9. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

Follow FCC KDB 789033 UNII test procedure:

Method SA-2

1. Set span to encompass the emission bandwidth (EBW) of the signal.
2. Set RBW = 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging mode
8. Compute power by integrating the spectrum across the 26 dB EBW of the signal.
9. Duty factor need added to measured value (duty cycle < 98 percent).

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW $>$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 Test Results

Output Power measurement result for UNII-1 Band

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)		Limit (dBm)	Result
				Chain 0	Chain 1		
Output Power	802.11a	5180	Low	6.76	6.58	24	Pass
		5200	Mid	6.66	6.73	24	Pass
		5240	High	6.83	7.08	24	Pass
	802.11n-HT20	5180	Low	6.98	6.63	24	Pass
		5200	Mid	6.77	6.90	24	Pass
		5240	High	6.90	7.09	24	Pass

Output Power measurement result for UNII-3 Band


Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)		Limit (dBm)	Result
				Chain 0	Chain 1		
Output Power	802.11a	5745	Low	4.80	5.05	30	Pass
		5785	Mid	4.24	4.40	30	Pass
		5825	High	5.29	5.31	30	Pass
	802.11n-HT20	5745	Low	4.88	5.02	30	Pass
		5785	Mid	4.38	4.44	30	Pass
		5825	High	5.44	5.47	30	Pass

4.5 26dB Bandwidth & 6dB Bandwidth Measurement

4.5.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.5.2 Test Setup

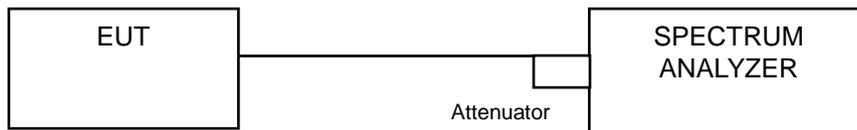

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)

- Allow the trace to stabilize.
- Use the spectrum analyzer built-in measurement function to determine the 26dB BW.
Set RBW = around 1% of emission bandwidth
Set VBW > RBW
Detector = Peak
Trace mode = max hold
- Capture the plot.
- Repeat above steps for different test channel and other modulation type.

6 dB Minimum emission bandwidth measurement procedure

- Allow the trace to stabilize.
- Use the spectrum analyzer built-in measurement function to determine the 6dB BW.
Set RBW = 100 KHz
Set VBW $\geq 3 \times$ RBW
Detector = Peak
Trace mode = max hold
Sweep = auto couple
- Capture the plot.
- Repeat above steps for different test channel and other modulation type.

4.5.5 Test Results


26dB Bandwidth measurement result for UNII-1 Band

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5180	Low	20.15
		5200	Mid	20.26
		5240	High	20.27
	802.11n-HT20	5180	Low	21.47
		5200	Mid	21.23
		5240	High	20.73


6dB Bandwidth measurement result for UNII-3 Band

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	802.11a	5745	Low	16.38	0.5	Pass
		5785	Mid	16.48	0.5	Pass
		5825	High	16.52	0.5	Pass
	802.11n-HT20	5745	Low	17.62	0.5	Pass
		5785	Mid	17.67	0.5	Pass
		5825	High	17.62	0.5	Pass


Occupied Bandwidth Test Plots UNII-1 Band

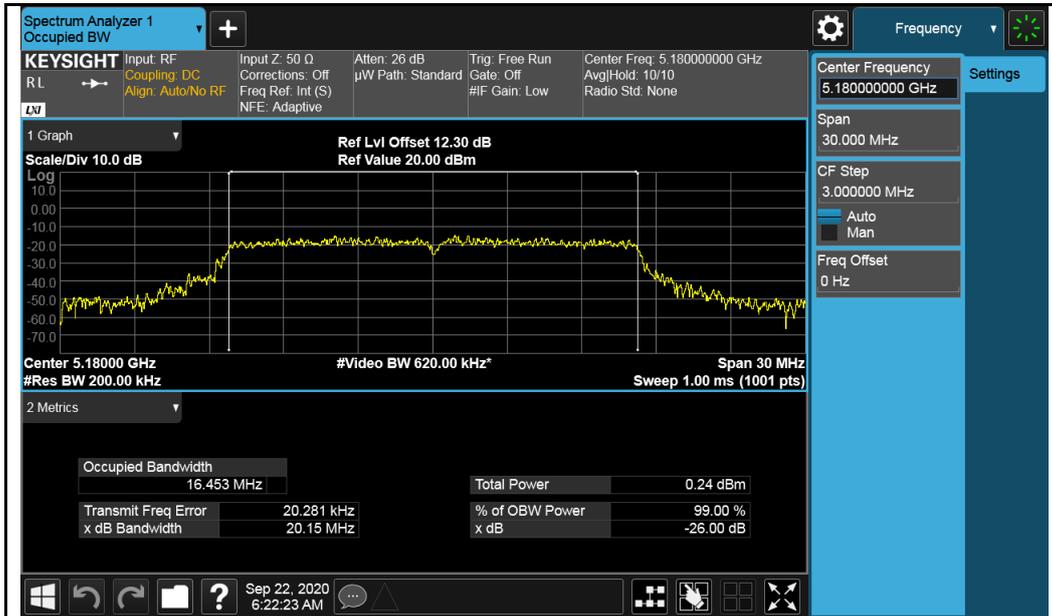


802.11a-5180MHz

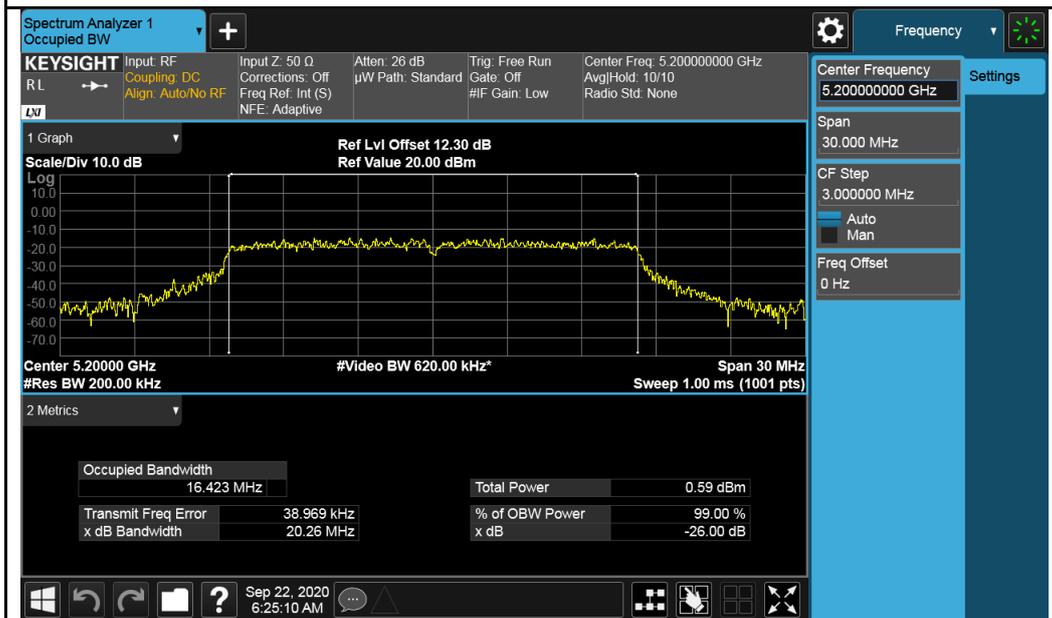


802.11a-5200MHz

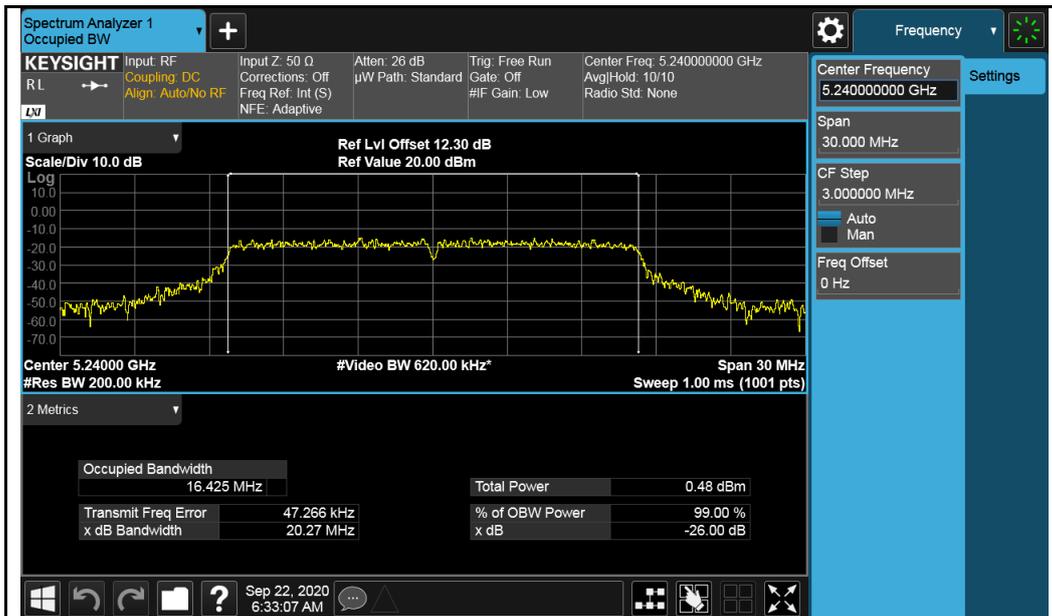


802.11a-5240MHz

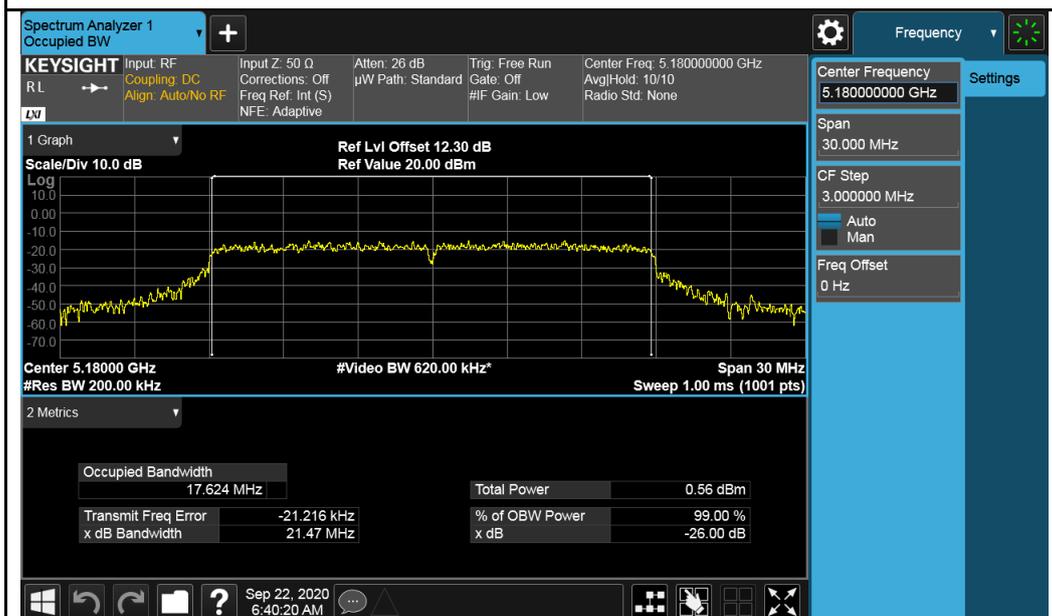

802.11n-HT20-5180MHz

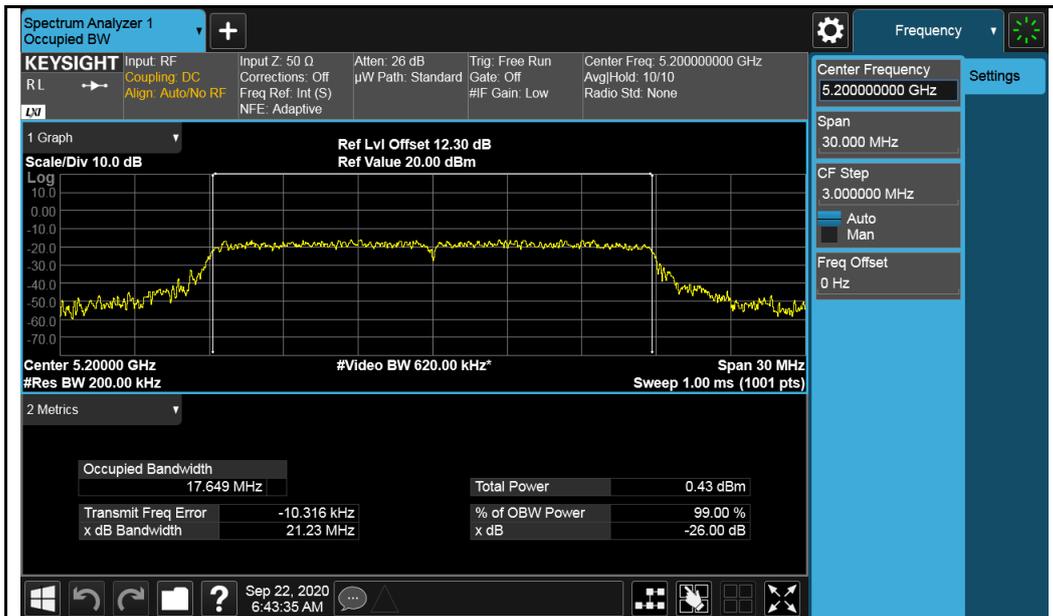


802.11n-HT20-5200MHz

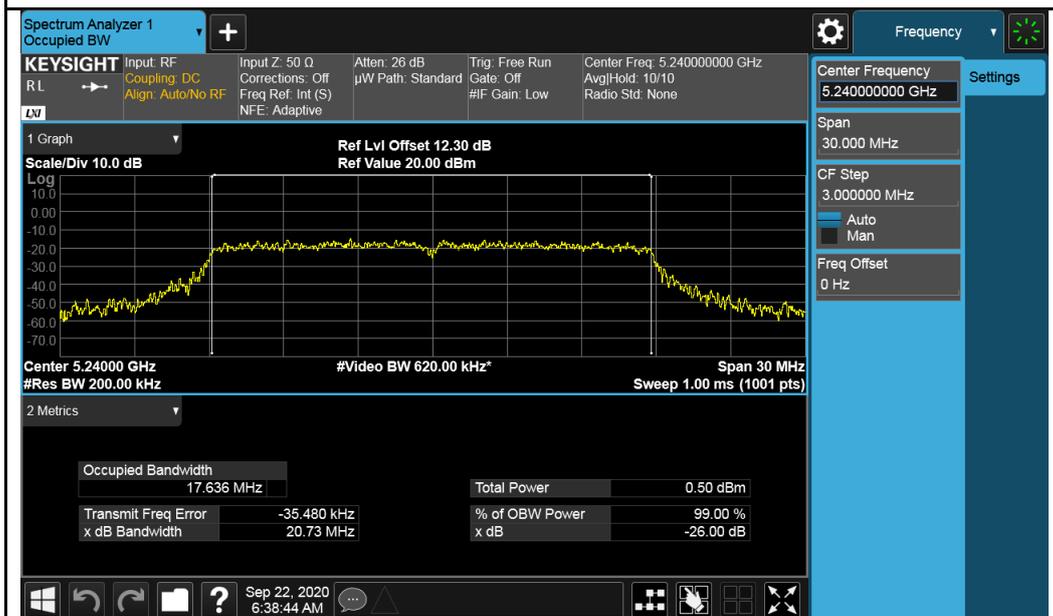


802.11n-HT20-5240MHz


6dB Bandwidth Test Plots
U-NII-3 Band:

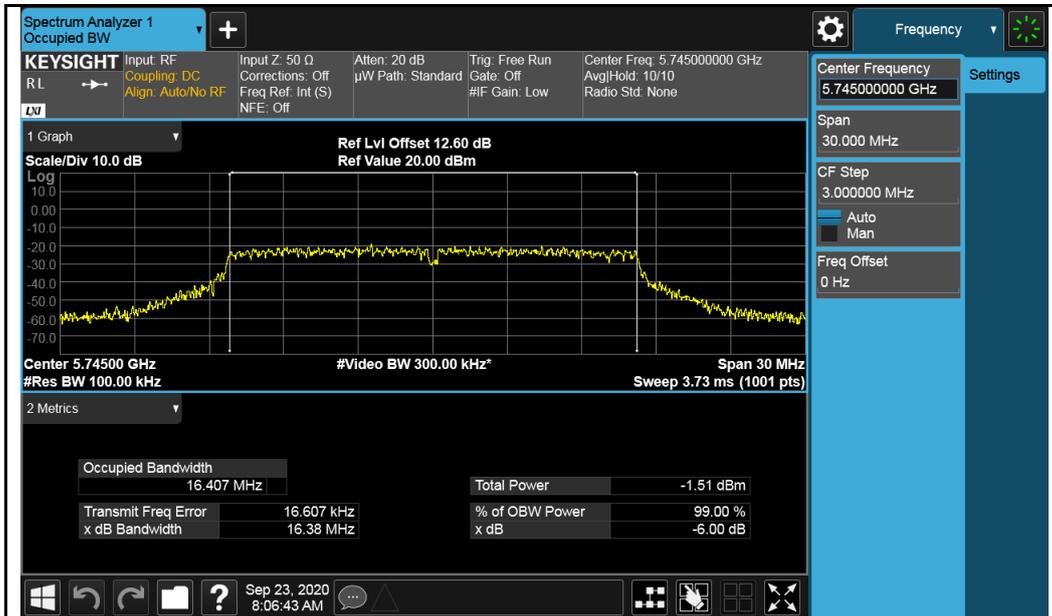


802.11a-5745MHz

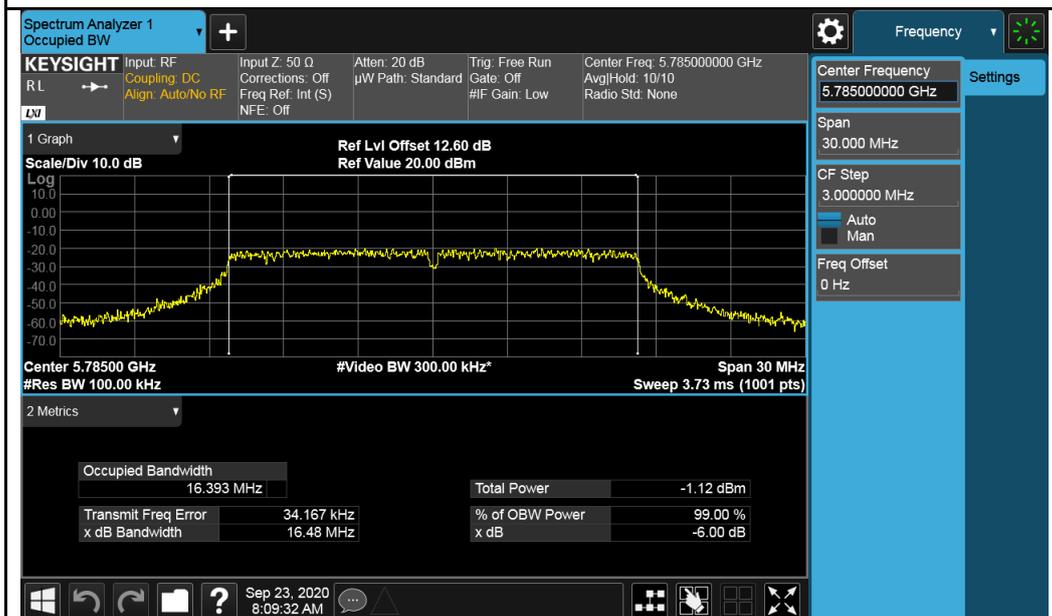


802.11a-5785MHz

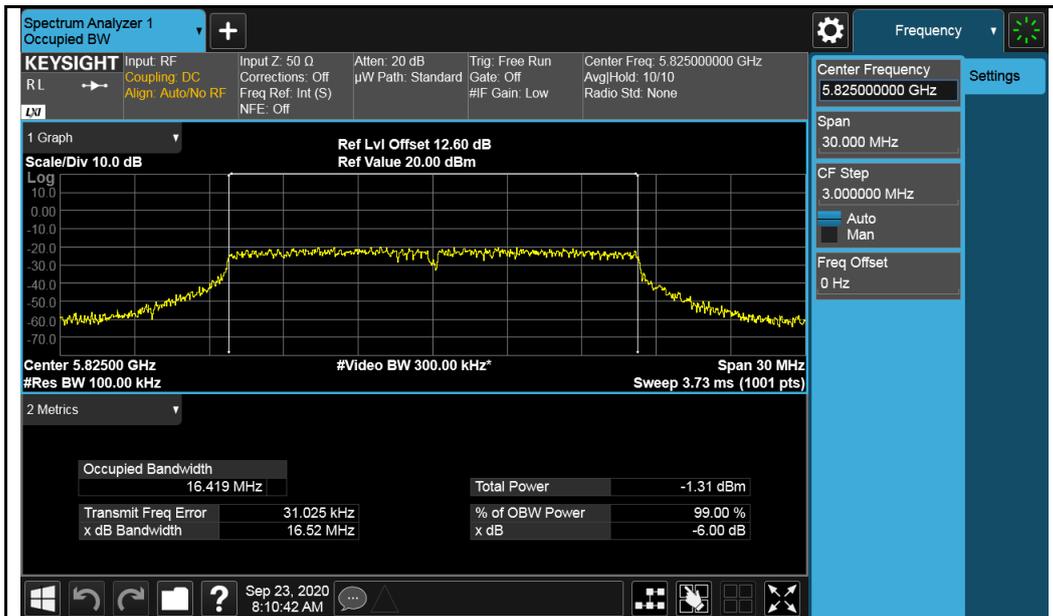


802.11a-5825MHz

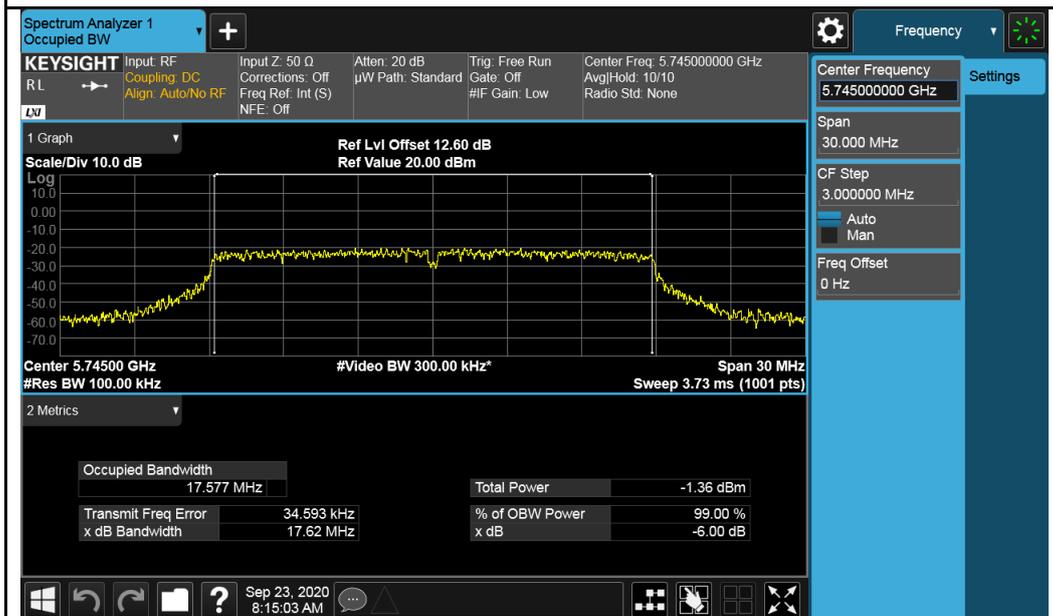

802.11n-HT20-5745MHz

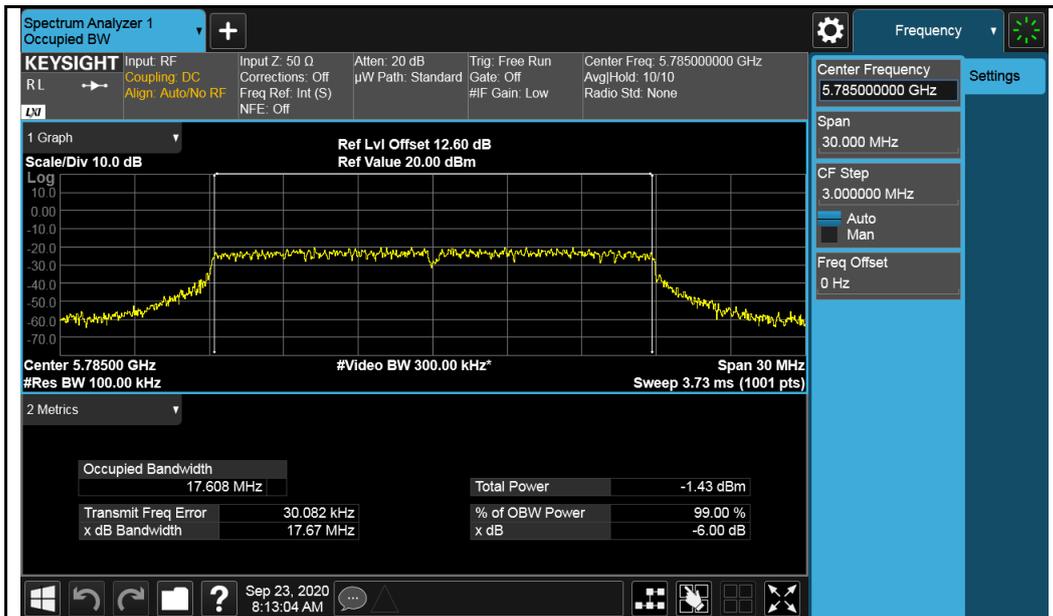

802.11n-HT20-5785MHz

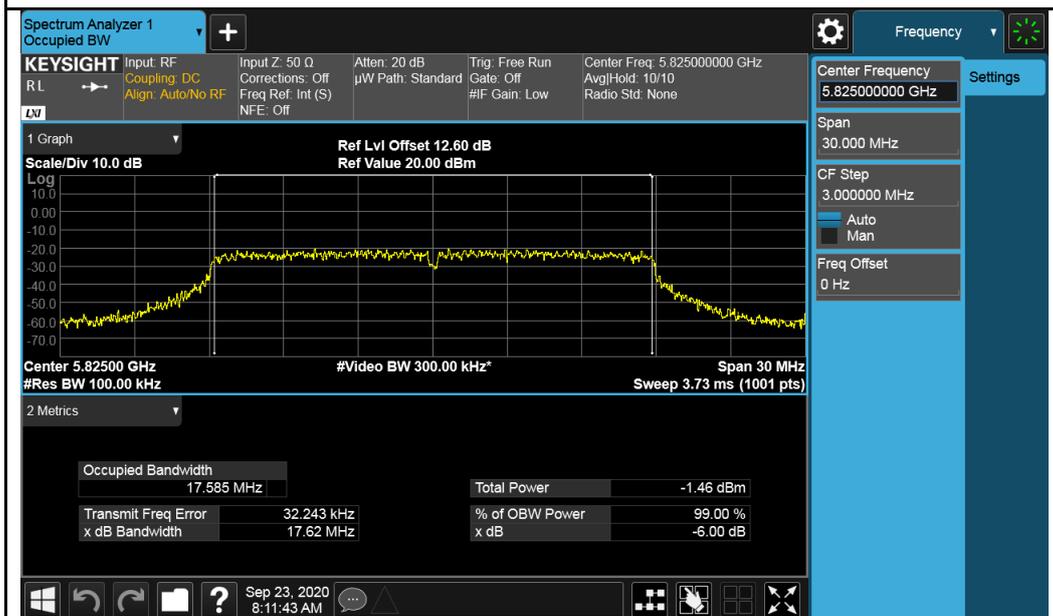

802.11n-HT20-5825MHz

4.6 Peak Power Spectral Density Measurement

4.6.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{ kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6.

4.6.7 Test Results


PSD measurement result for UNII-1 Band

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)		Limit (dBm/MHz)	Result
				Chain 0	Chain 1		
Output Power	802.11a	5180	Low	-5.14	-5.02	11	Pass
		5200	Mid	-5.07	-5.17	11	Pass
		5240	High	-4.72	-4.77	11	Pass
	802.11n-HT20	5180	Low	-4.86	-5.30	11	Pass
		5200	Mid	-5.13	-5.17	11	Pass
		5240	High	-5.18	-4.90	11	Pass


PSD measurement result for UNII-3 Band

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/100kHz)		Correction factor (dB)	Correction PSD (dBm/500kHz)		Limit (dBm/500kHz)	Result
				Chain 0	Chain 1		Chain 0	Chain 1		
Output Power	802.11a	5745	Low	-14.51	-14.67	6.99	-7.52	-7.68	30	Pass
		5785	Mid	-15.23	-15.03	6.99	-8.24	-8.04	30	Pass
		5825	High	-14.16	-14.16	6.99	-7.17	-7.17	30	Pass
	802.11n-HT20	5745	Low	-15.04	-14.89	6.99	-8.05	-7.90	30	Pass
		5785	Mid	-14.86	-15.27	6.99	-7.87	-8.28	30	Pass
		5825	High	-13.99	-13.62	6.99	-7.00	-6.63	30	Pass
Note	BW correction factor = $10\log(500\text{kHz}/\text{RBW})$, RBW was set to 100kHz during test.									


Test Plot for UNII-1 Band:
Chain 0

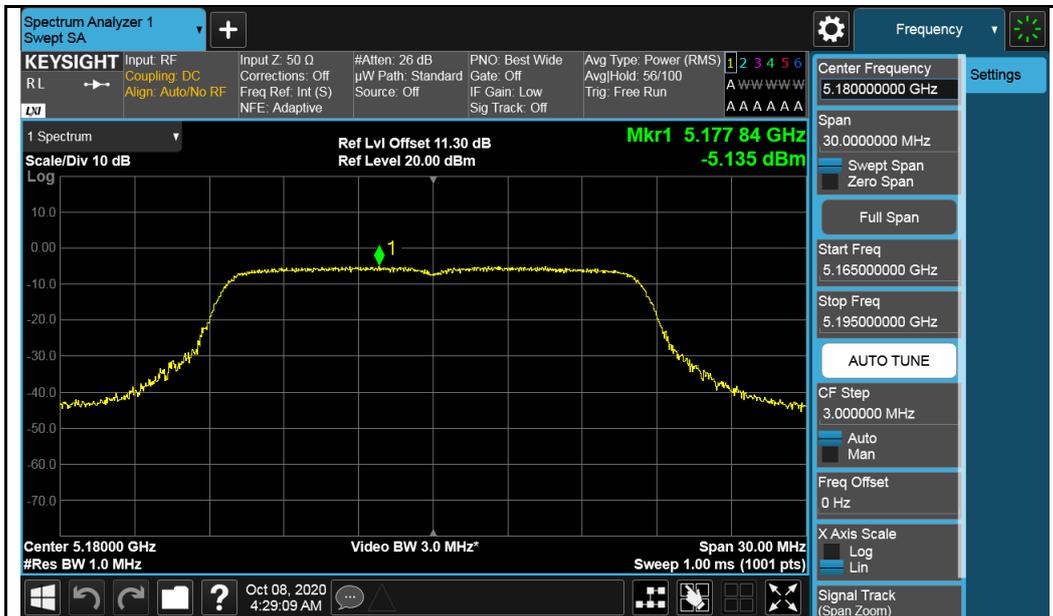


802.11a-5180MHz

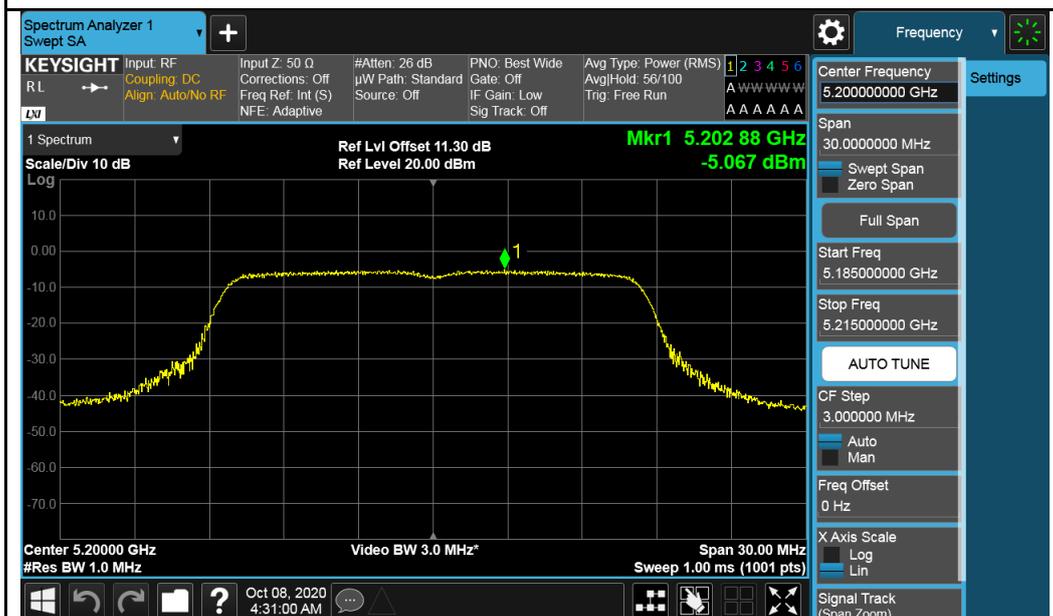


802.11a-5200MHz

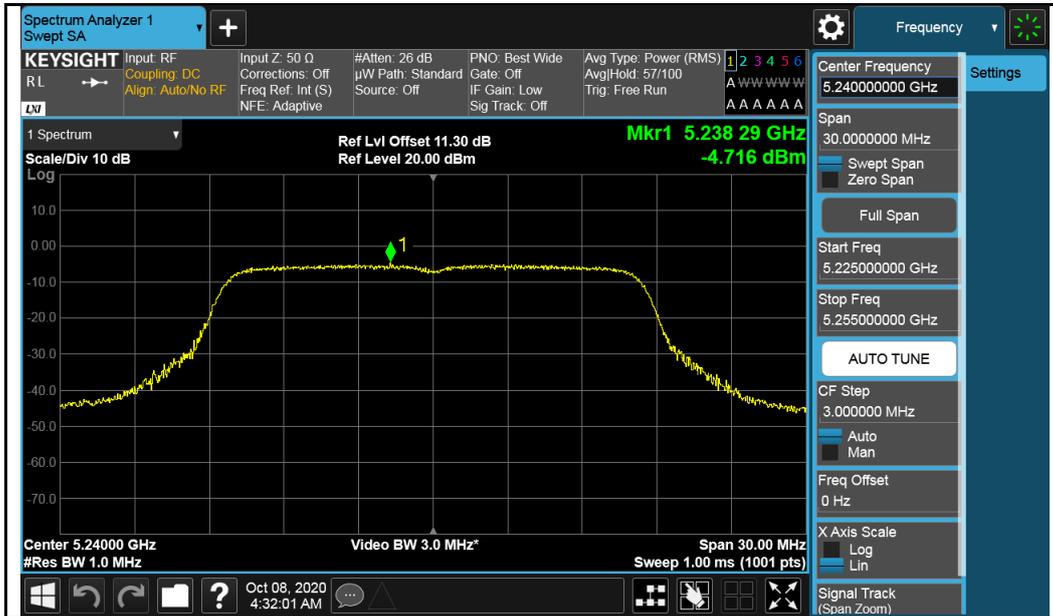

802.11a-5240MHz

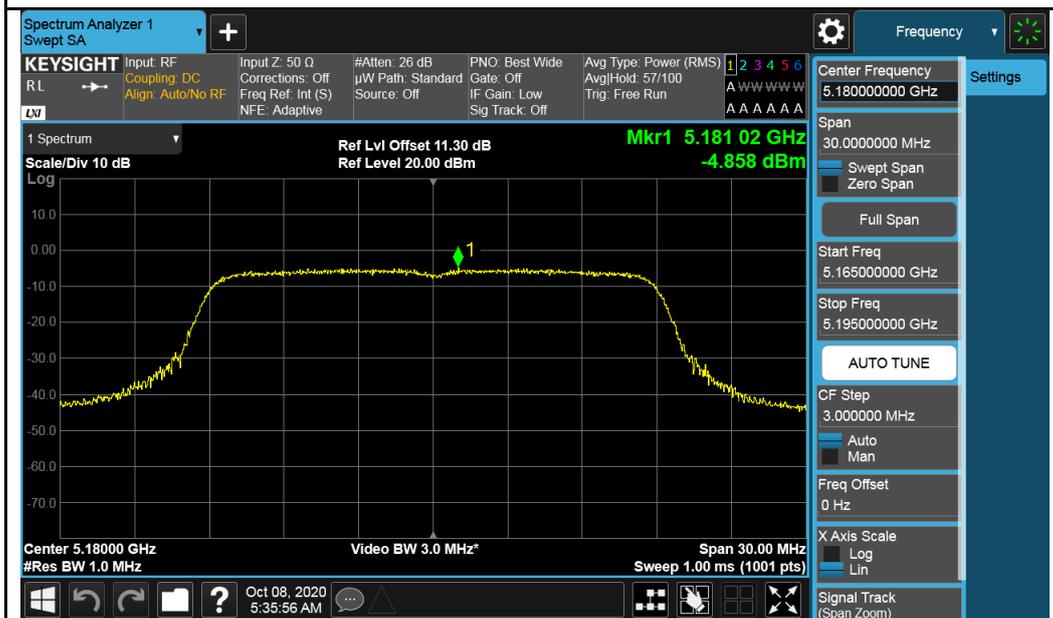

802.11n-HT20-5180MHz

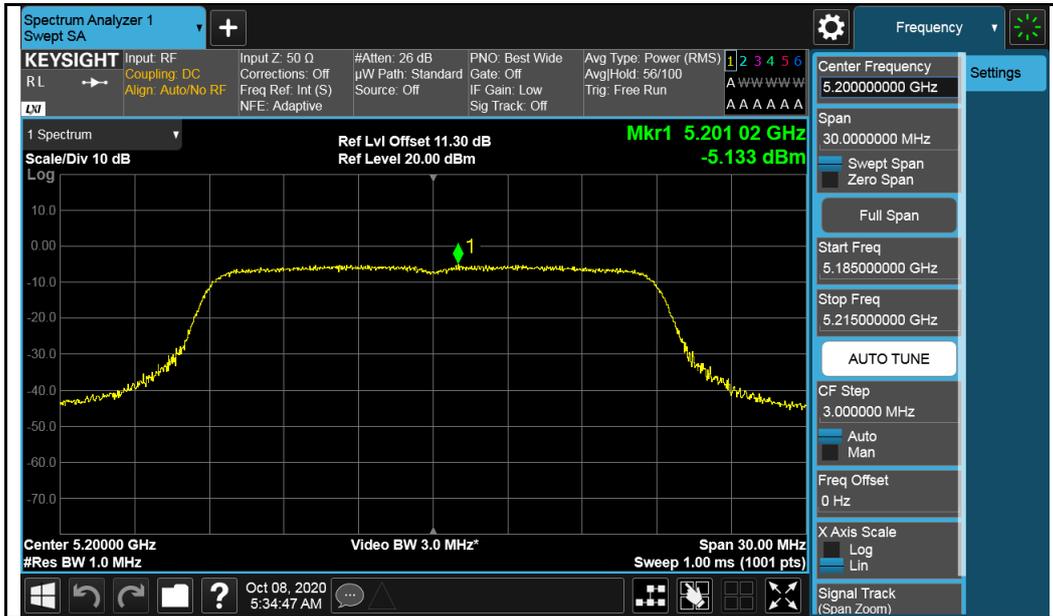


802.11n-HT20-5200MHz




802.11n-HT20-5240MHz


Chain 1

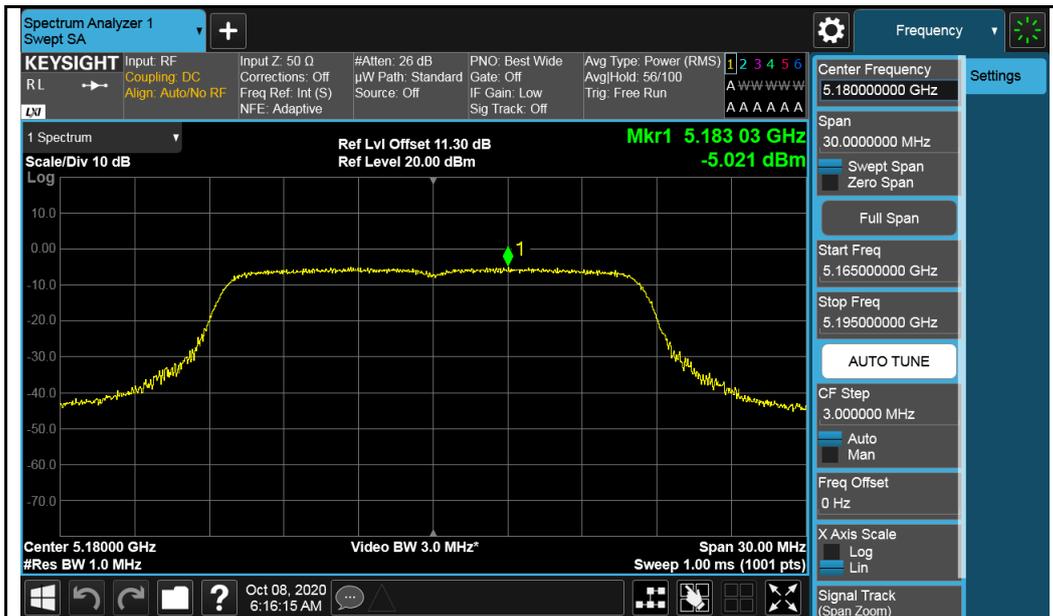

802.11a-5180MHz

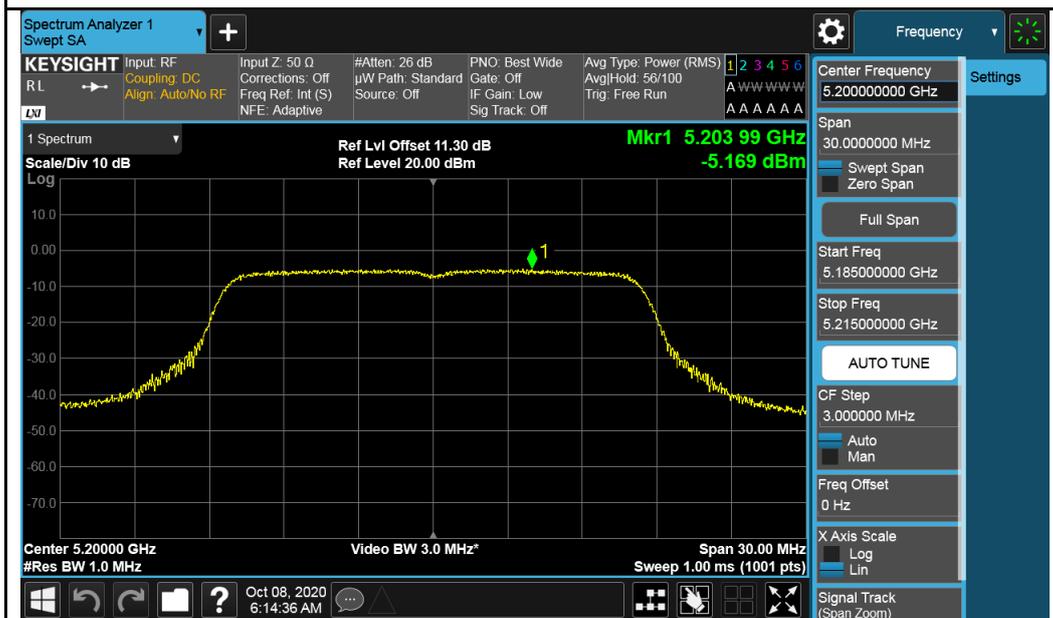


802.11a-5200MHz

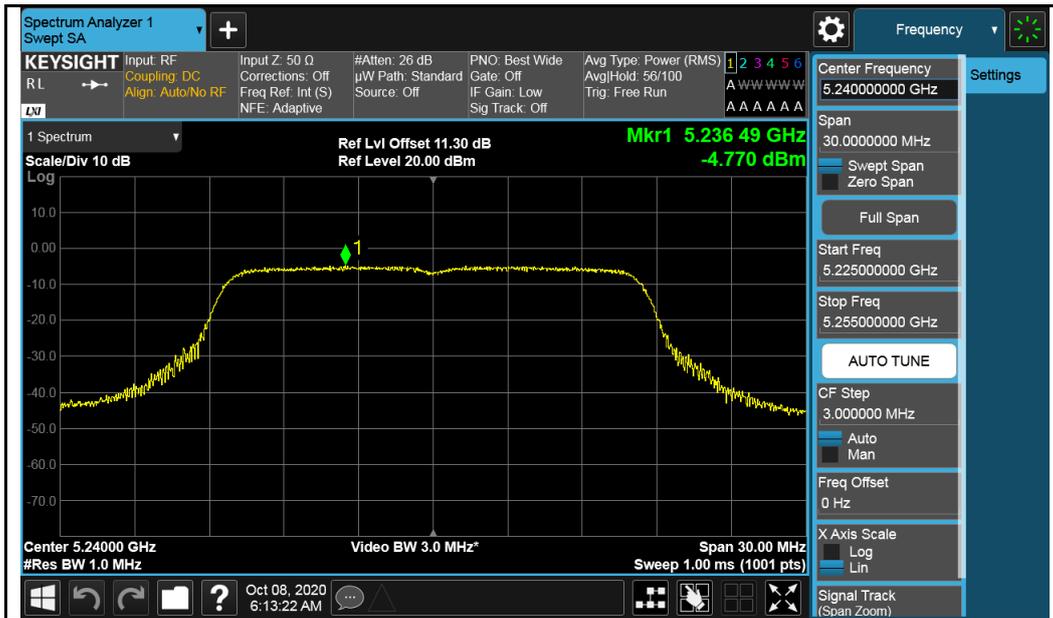


802.11a-5240MHz



802.11n-HT20-5180MHz

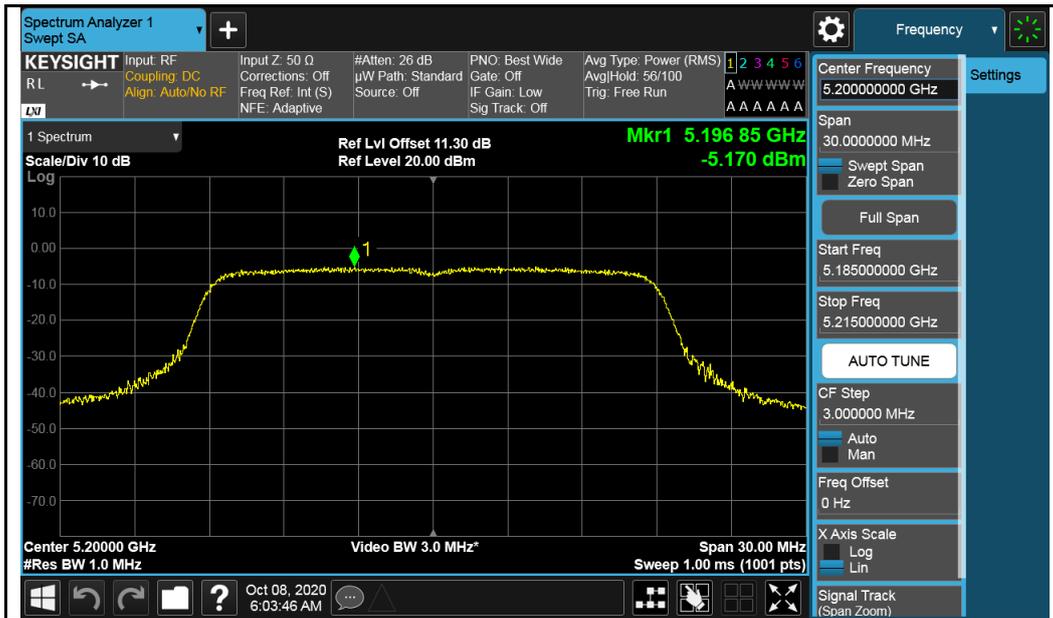


802.11n-HT20-5200MHz

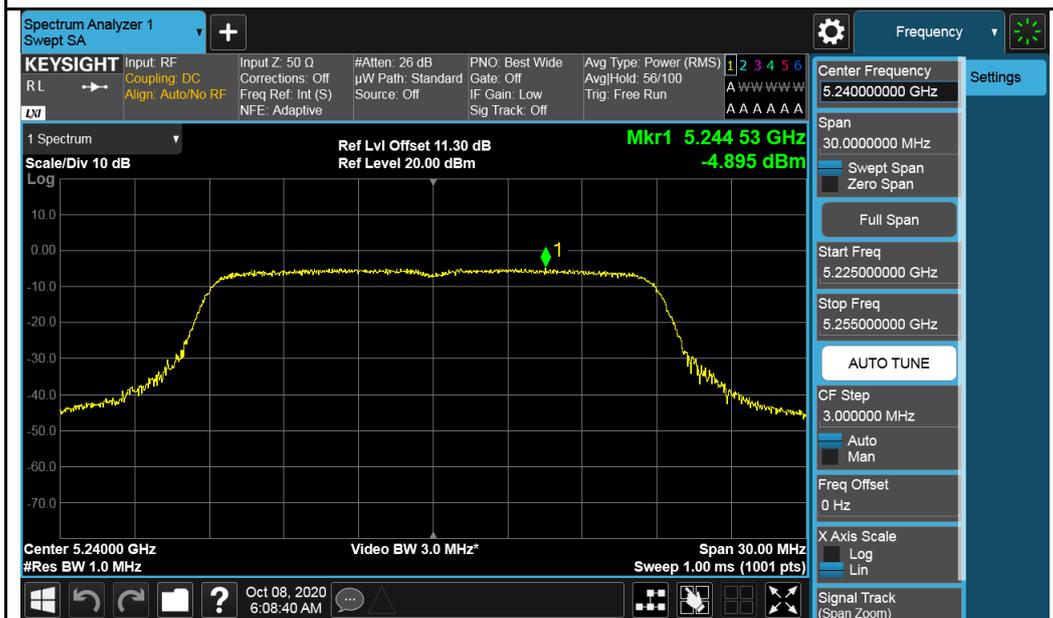


802.11n-HT20-5240MHz


Test Plot for UNII-3 Band:
Chain 0

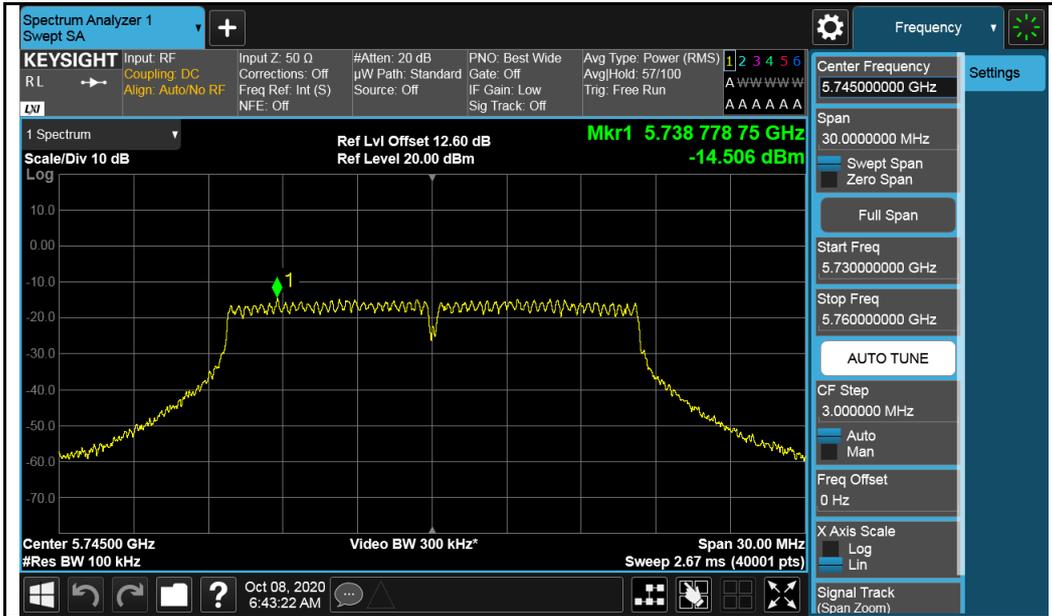


802.11a-5745MHz

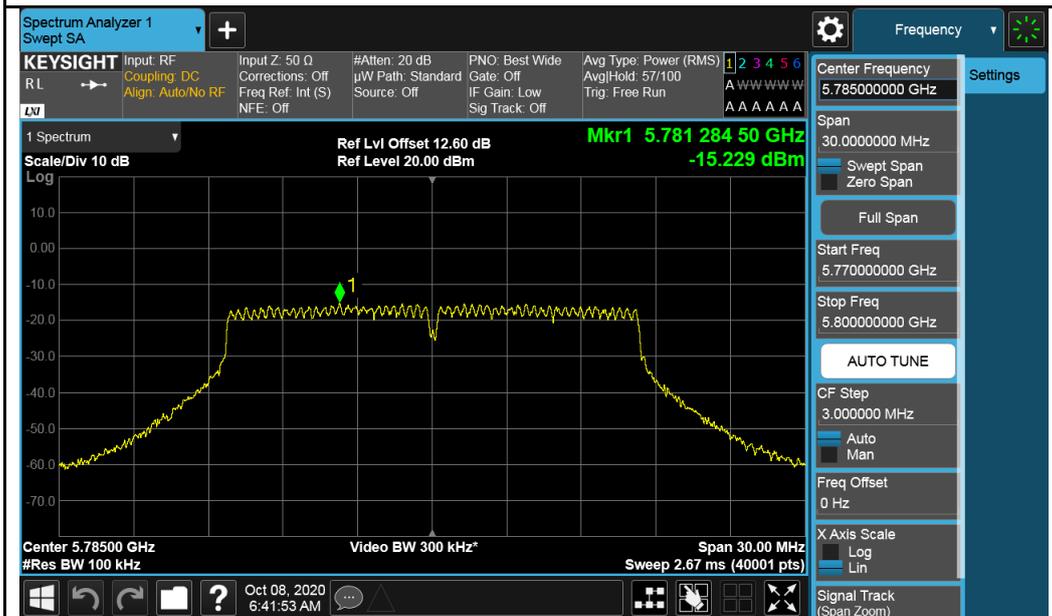


802.11a-5785MHz

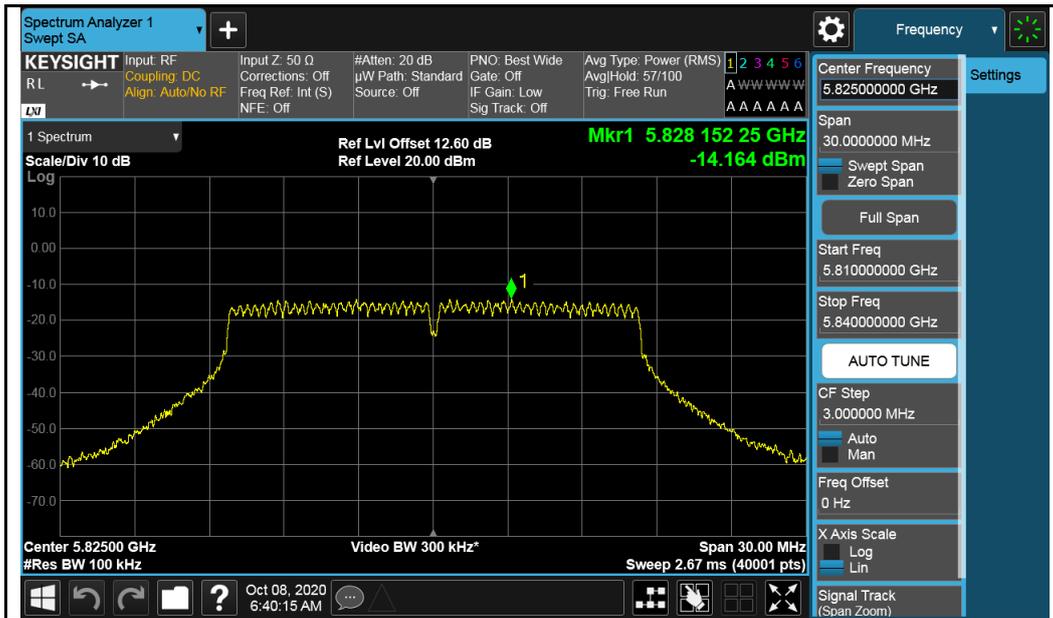


802.11a-5825MHz

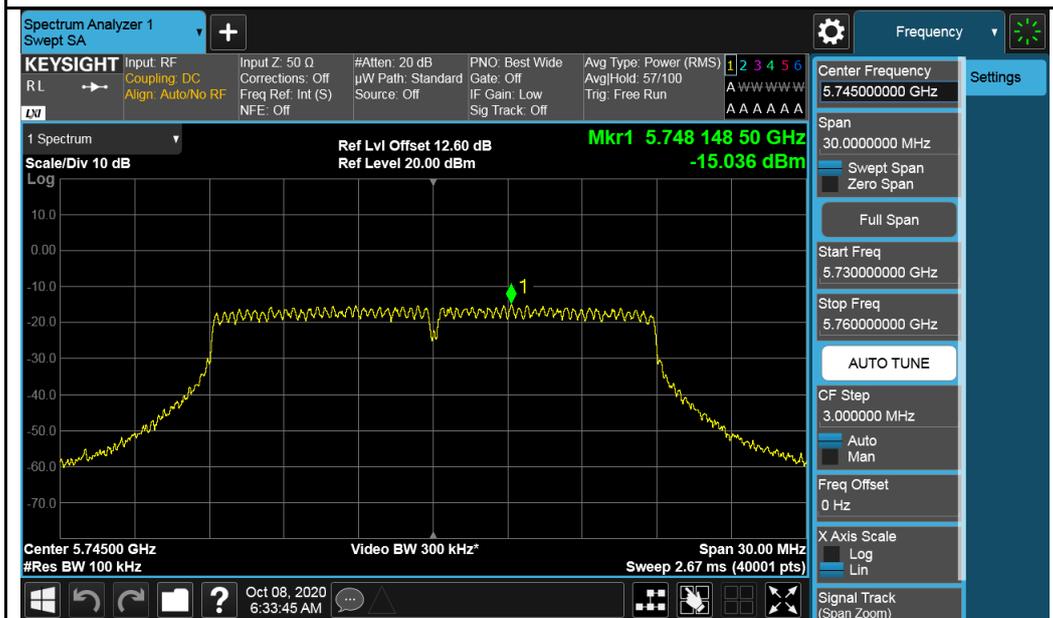

802.11n-HT20-5745MHz

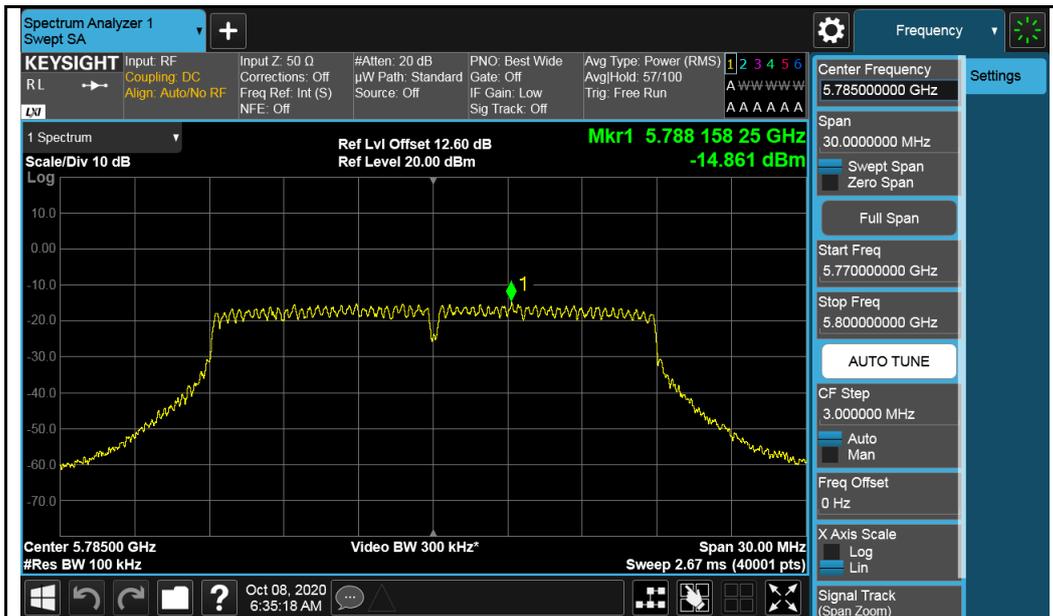


802.11n-HT20-5785MHz

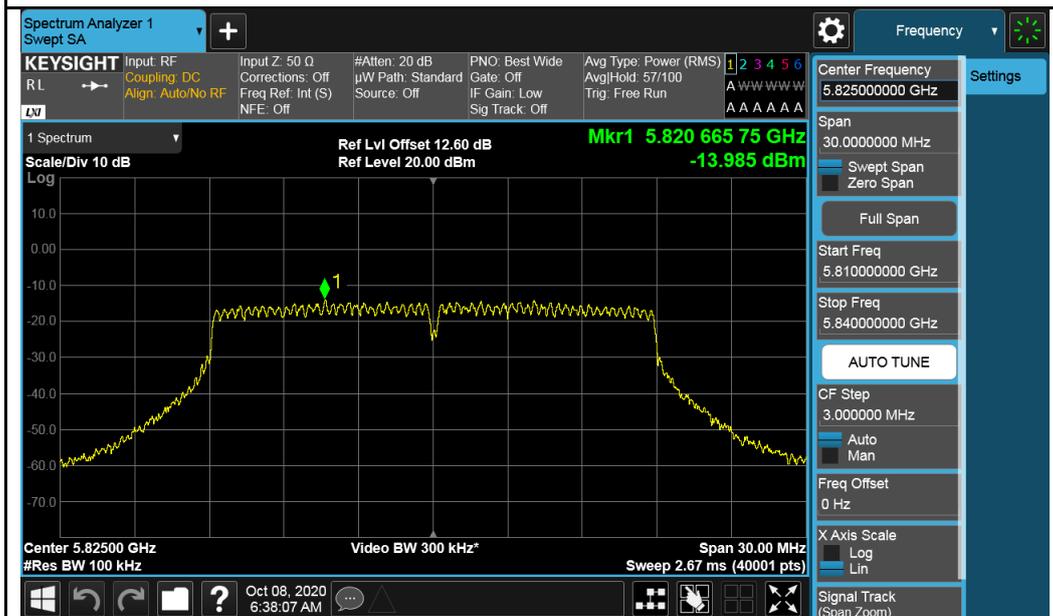


802.11n-HT20-5825MHz


Chain 1

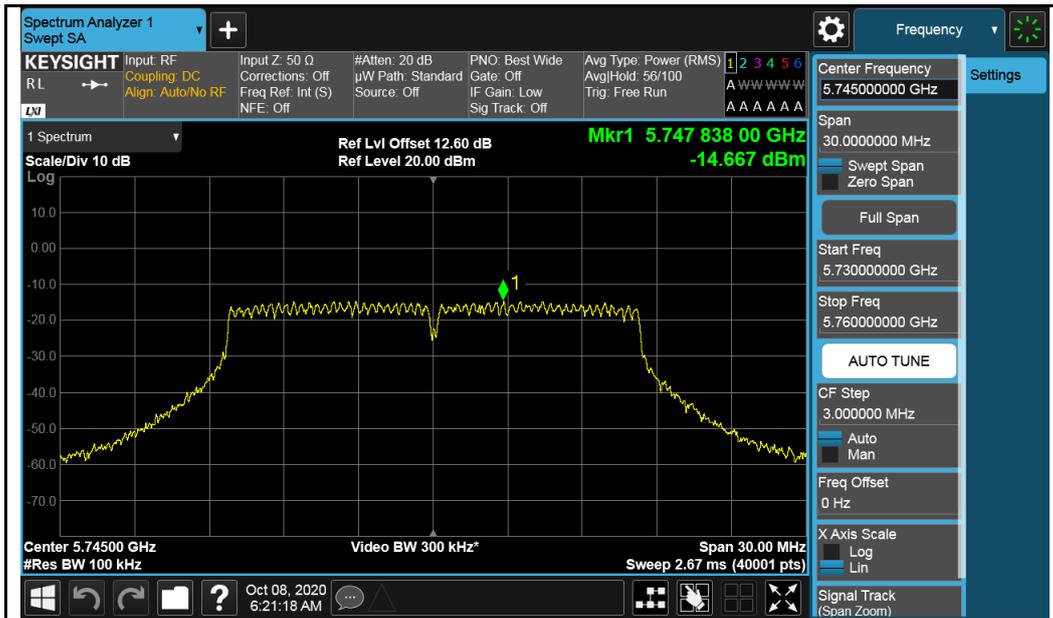


802.11a-5745MHz

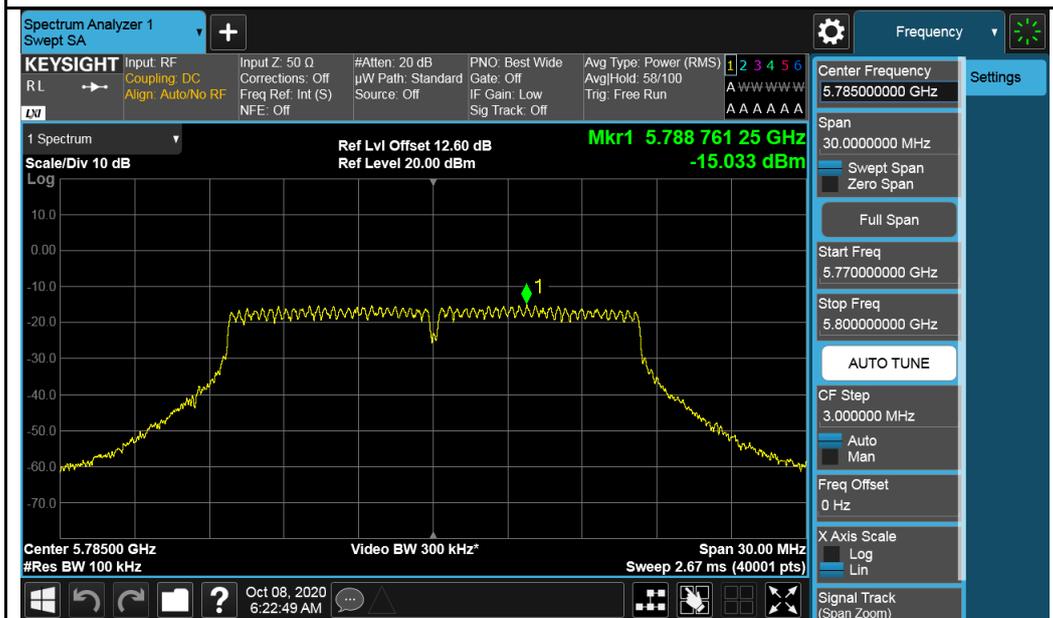


802.11a-5785MHz

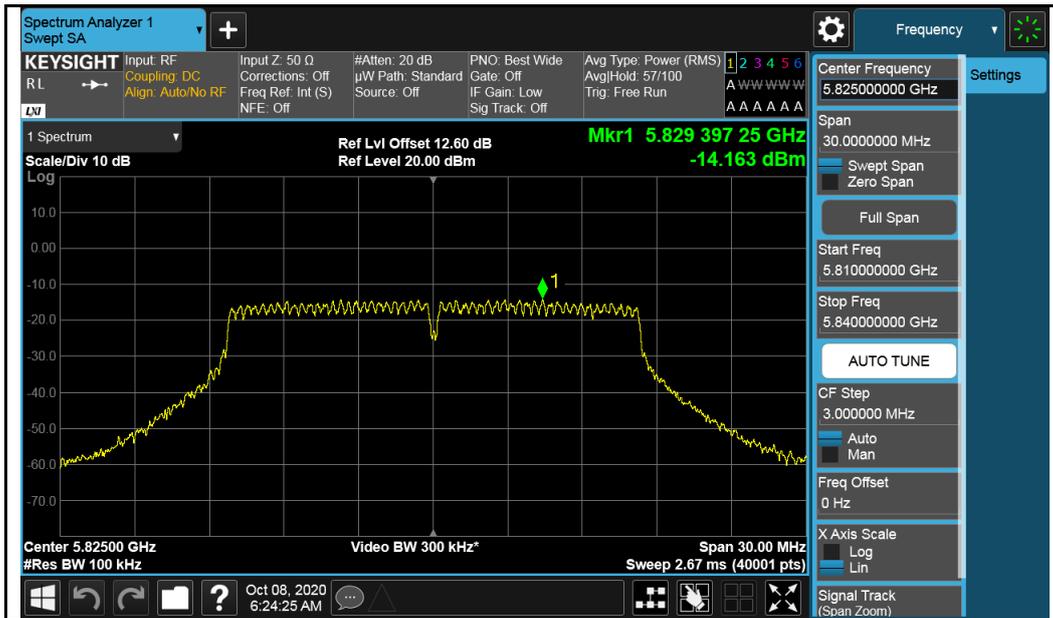

802.11a-5825MHz

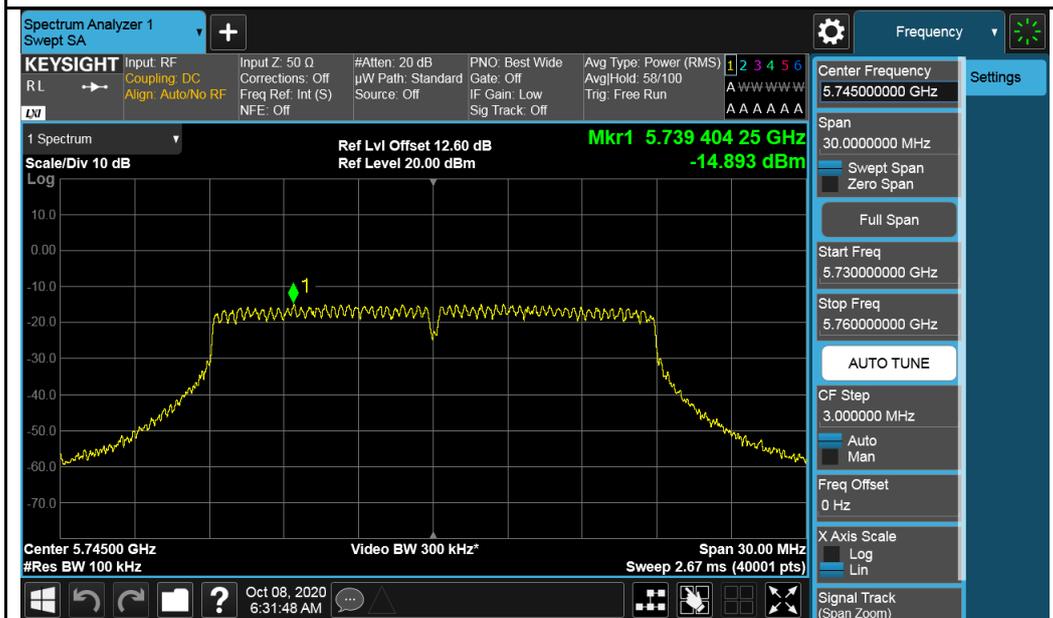

802.11n-HT20-5745MHz

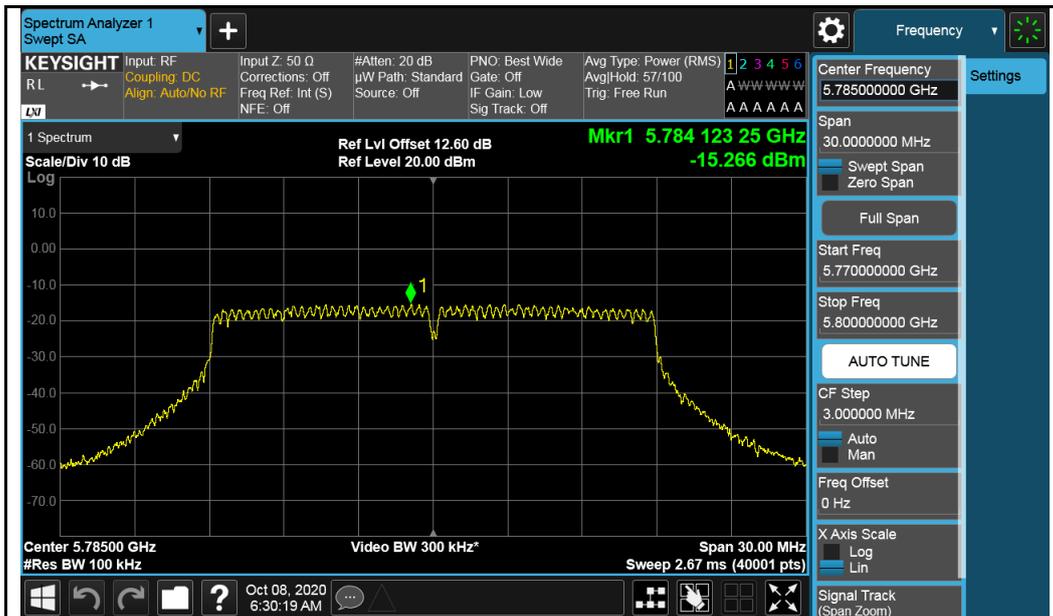

802.11n-HT20-5785MHz




802.11n-HT20-5825MHz

4.7 Frequency Stability Measurement

4.7.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation.

4.7.2 Test Setup

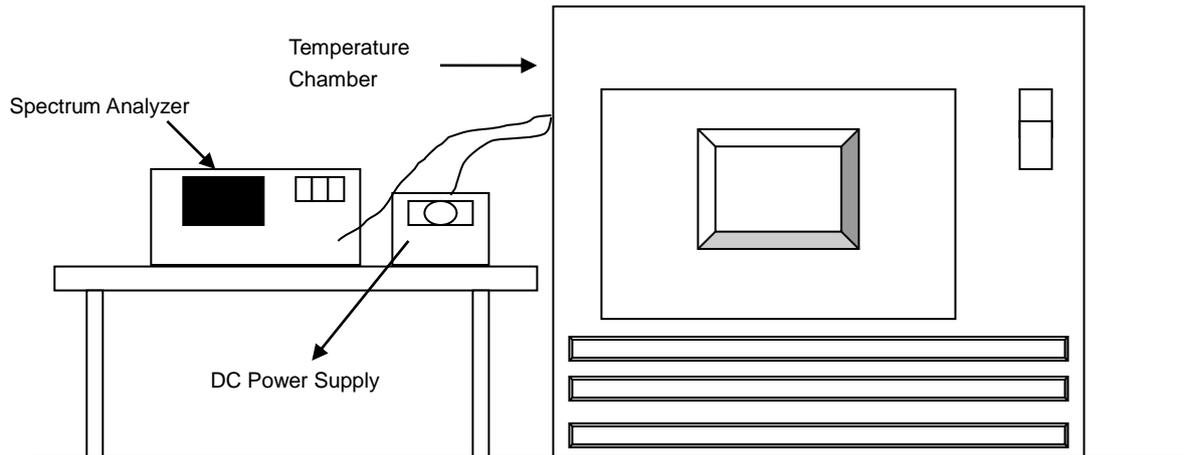

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed..
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.7.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	3.8	5179.9806	Pass	5180.0022	Pass	5179.9824	Pass	5179.9945	Pass
40	3.8	5180.0034	Pass	5179.9914	Pass	5180.0034	Pass	5180.0023	Pass
30	3.8	5180.0054	Pass	5180.0023	Pass	5180.0026	Pass	5180.0042	Pass
20	3.8	5179.9839	Pass	5179.9815	Pass	5180.0045	Pass	5180.0031	Pass
10	3.8	5179.9835	Pass	5179.9823	Pass	5179.9855	Pass	5179.9932	Pass
0	3.8	5179.9986	Pass	5179.9912	Pass	5179.9921	Pass	5179.9916	Pass
-10	3.8	5179.994	Pass	5179.9967	Pass	5180.0033	Pass	5179.9923	Pass
-20	3.8	5179.9973	Pass	5179.9955	Pass	5180.0046	Pass	5179.9882	Pass
-30	3.8	5179.9899	Pass	5179.9942	Pass	5180.0033	Pass	5179.988	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	4.4	5180.0041	Pass	5179.989	Pass	5180.0042	Pass	5179.9934	Pass
	3.8	5179.9875	Pass	5179.9934	Pass	5179.9923	Pass	5180.0037	Pass
	3.2	5179.9842	Pass	5180.0036	Pass	5179.9951	Pass	5179.9945	Pass

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab

775 Montague Expressway, Milpitas, CA 95035

Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab

1293 Anvilwood Avenue, Sunnyvale, CA

94089

Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab

1 Distribution Center Cir #1, Littleton, MA 01460

Tel: +1 978 486 8880

Email: sales.eaw@us.bureauveritas.com

Web Site: www.cps.bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---