

RF Test Report

Report No.: FCC_IC_RF_SL21042901-ROK-001_2.4G Rev_2.0

FCC ID: TC2-R1041

IC: 5959A-R1038

Test Model: RC-FA1

Series Model: RC-FA5

Received Date: 05/03/2021

Test Date: 05/06/2021-07/30/2021

Issued Date: 07/30/2021

Applicant: Roku, Inc.

Address: 1155 Coleman Ave., San Jose, CA 95110 USA

Manufacturer: Roku, Inc.

Address: 1155 Coleman Ave., San Jose, CA 95110 USA

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035

Test Location (1): 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /
Designation Number:** 540430

ISED# / CAB identifier: 4842D



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	10
3.3.1 Duty Cycle of Test Signal	11
3.4 General Description of Applied Standards	12
4 Test Types and Results.....	13
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Conditions	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement.....	45
4.2.1 Limits of Conducted Emission Measurement.....	45
4.2.2 Test Instruments	45
4.2.3 Test Procedures.....	46
4.2.4 Deviation from Test Standard.....	46
4.2.5 Test Setup.....	46
4.2.6 EUT Operating Conditions	46
4.2.7 Test Results	47
4.3 6dB Bandwidth & 99% Bandwidth Measurement.....	48
4.3.1 Limits of 6dB Bandwidth Measurement.....	48
4.3.2 Test Setup.....	48
4.3.3 Test Instruments	48
4.3.4 Test Procedure.....	48
4.3.5 Deviation from Test Standard.....	48
4.3.6 EUT Operating Conditions	48
4.3.7 Test Result.....	49
4.4 Conducted Output Power Measurement.....	60
4.4.1 Limits of Conducted Output Power Measurement.....	60
4.4.2 Test Setup.....	60
4.4.3 Test Instruments	60
4.4.4 Test Procedures.....	60
4.4.5 Deviation from Test Standard.....	60
4.4.6 EUT Operating Conditions	60
4.4.7 Test Results	61
4.5 Power Spectral Density Measurement.....	67
4.5.1 Limits of Power Spectral Density Measurement.....	67
4.5.2 Test Setup.....	67
4.5.3 Test Instruments	67
4.5.4 Test Procedure.....	67
4.5.5 Deviation from Test Standard.....	67
4.5.6 EUT Operating Condition.....	67

4.5.7 Test Results	68
4.6 Conducted Out of Band Emission Measurement	74
4.6.1 Limits of Conducted Out of Band Emission Measurement	74
4.6.2 Test Setup	74
4.6.3 Test Instruments	74
4.6.4 Test Procedure.....	74
4.6.5 Deviation from Test Standard.....	74
4.6.6 EUT Operating Condition	74
4.6.7 Test Results	75
5 Pictures of Test Arrangements.....	78
Appendix – Information on the Testing Laboratories	79

Release Control Record

Issue No.	Description	Date Issued
FCC_IC_RF_SL21042901-ROK-001_2.4G	Original Release	06/08/2021
FCC_IC_RF_SL21042901-ROK-001_2.4G Rev_1.0	Minor update per client review	06/18/2021
FCC_IC_RF_SL21042901-ROK-001_2.4G Rev_2.0	Update all test item	07/30/2021

1 Certificate of Conformity

Product: WiFi Remote Control

Brand: Roku, Inc.

Test Model: RC-FA1

Series Model: RC-FA5

Sample Status: Engineering Sample

Applicant: Roku, Inc.

Test Date: 05/06/2021-07/30/2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
RSS 247 Issue 2, February 2017
ANSI C63.10: 2013
RSS Gen Issue 5, March 2019
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services, Inc., Milpitas Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Deon
Prepared by : _____, **Date:** 07/05/2021
Deon Dai / Test Engineer

Gary Chou
Approved by : _____, **Date:** 07/30/2021
Gary Chou / Engineer Reviewer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
RSS 247 Issue2, RSS Gen Issue5			
Standard	Test Item	Result	Remarks
15.207 RSS Gen 8.8	AC Power Conducted Emission	N/A	N/A
15.205 &15.209 & 15.247(d) RSS 247 5.5	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2) RSS 247 5.2 RSS Gen 6.7	6dB bandwidth & 99% bandwidth	PASS	Meet the requirement of limit.
15.247(b) RSS 247 5.4.d	Conducted power	PASS	Meet the requirement of limit.
15.247(e) RSS 247 5.2.b	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	The EUT uses a chip antenna and permanently attached to the device.

Note: N/A: EUT worked with battery.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.64dB
	6GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	4.91dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WiFi Remote Control
Brand	Roku, Inc.
Test Model	RC-FA1
Identification No. of EUT	N/A
Series Model	RC-FA5
Status of EUT	Engineering Sample
Power Supply Rating	3Vdc powered by batteries
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 1Mbps 802.11g: up to 6Mbps 802.11n: up to 6.5Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20)
Antenna Type	PCB Trace Antenna
Antenna Gain (dBi)	1.5
Antenna Connector	N/A

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. Model RC-FA5 is electrically identical to tested model RC-FA1. The only difference between the models are minor external cosmetic appearances which does not affect any Electromagnetic Compatibility or RF characteristics of the device.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Power setting is as below:

802.11b		802.11g	
Channel	Power Setting	Channel	Power Setting
1	60	1	60
6	60	6	60
11	60	11	60
802.11n			
Channel	Power Setting		
1	60		
6	60		
11	60		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
NOTE: "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	3Vdc	Deon Dai
RE<1G	25deg. C, 65%RH	3Vdc	Deon Dai
PLC	25deg. C, 68%RH	3Vdc	Deon Dai
APCM	21deg. C, 60%RH	3Vdc	Deon Dai

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Dell	Latitude 3550	N/A	N/A	N/A
B.						
C.						
D.						
E.						
F.						
G.						

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB	1	0.8m	No	0	Connect from EUT to Laptop
2.						
3.						

3.3.1 Duty Cycle of Test Signal


Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

Duty cycle of test signal is $< 98\%$, duty factor is required.

802.11b: Duty cycle = 100%

802.11g: Duty cycle = 100%

802.11n: Duty cycle = 100%

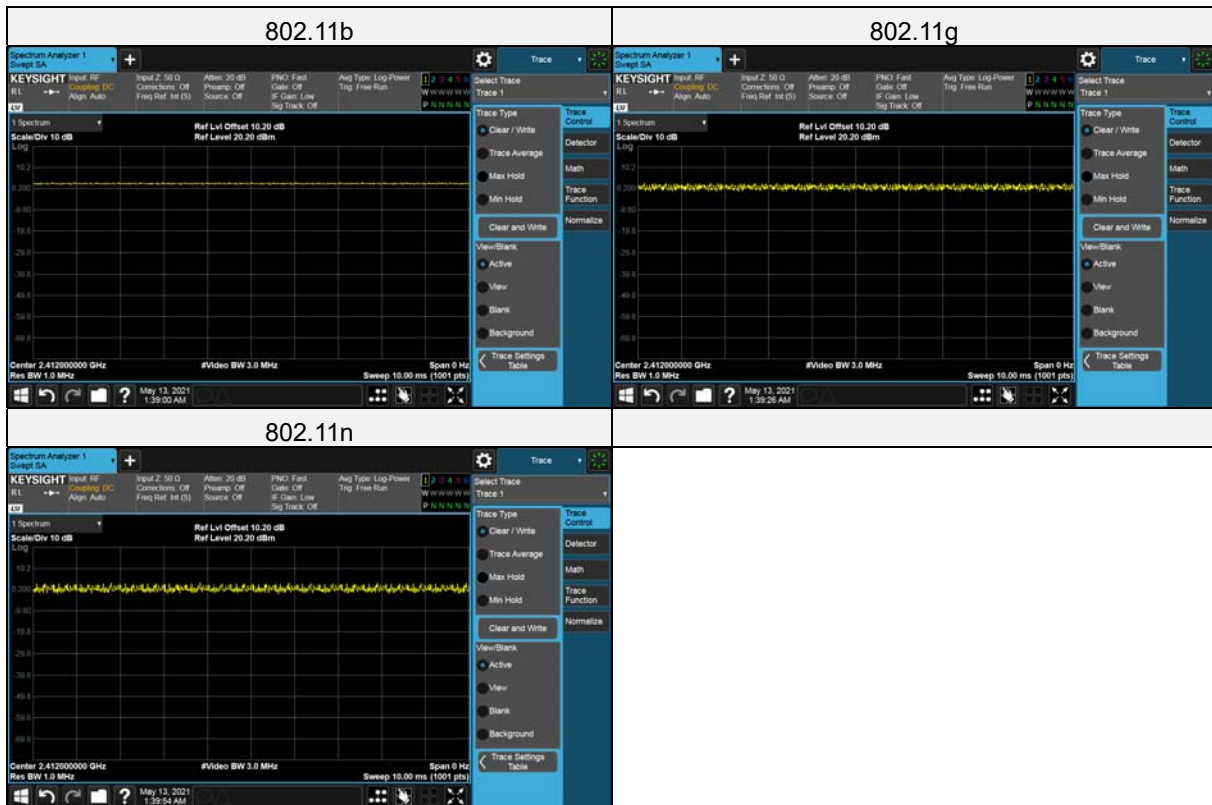

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR FCC Part 15, Subpart C (Section 15.247)

RSS 247 Issue2, February 2017

ANSI C63.10: 2013

RSS Gen Issue5, March 2019

558074 D01 15.247 Meas Guidance v05r02

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
EMI Receiver (Rohde and Schwarz)	ESW44	1328.4100K-1016 62-MH	10/23/2020	10/23/2021
Biconilog Antenna (Sunol)	JB6	A111717	9/4/2020	9/4/2021
Horn Antenn (ETS-Lindgren)	3117	218554	07/24/2020	7/24/2021
Pre-Amplifier (RF-Lambda)	RAMP00M50GA	18040300055	10/1/2020	10/1/2021
Hon Antenna DRG	SAS-574	579	08/05/2020	08/05//2022
PXA Signal Analyzer (Keysight)	N9030B	MY57140100	07/22/2020	07/22/2022
SMA Fixed Attenuator (50ohms, 2w, 30dB, DC-6GHz)	VAT-03W2+	n/a	07/21/2020	07/21/2022
FSB Antenna Cable, 0.5m (Microwave Town)	FSB360PK-KMKM- 00.50M	201906110002	10/1/2020	10/1/2021
FSB Antenna Cable, 4m (Microwave Town)	FSB360PK-KMKM- 400M	21030447-002	10/1/2020	10/1/2021
10m Semi-Anechoic Chambe (ETS-Lindgren)	S2010BL8X8	1462	07/21/2020	07/21/2022
Notch Filters MICRO-TRONICS	BRM50702	G242	07/21/2020	07/21/2022
Loop Antenna	N/A	00049120	11/25/2020	11/25/2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

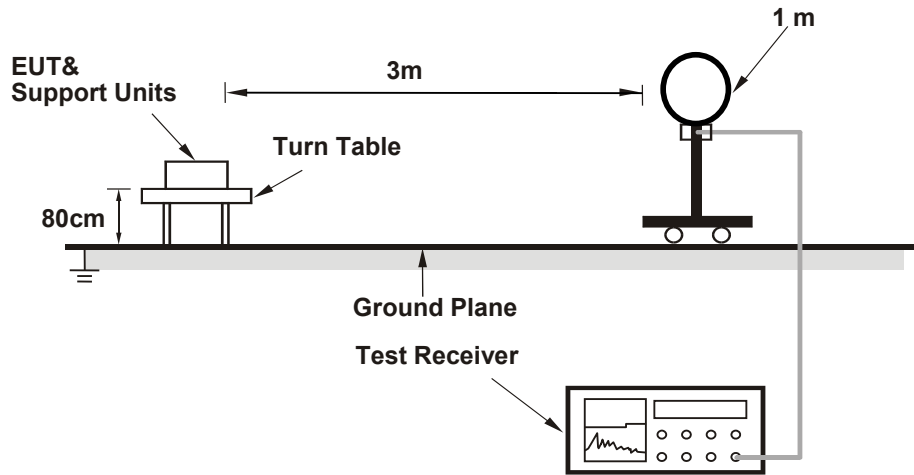

For Radiated emission 30MHz to 1GHz

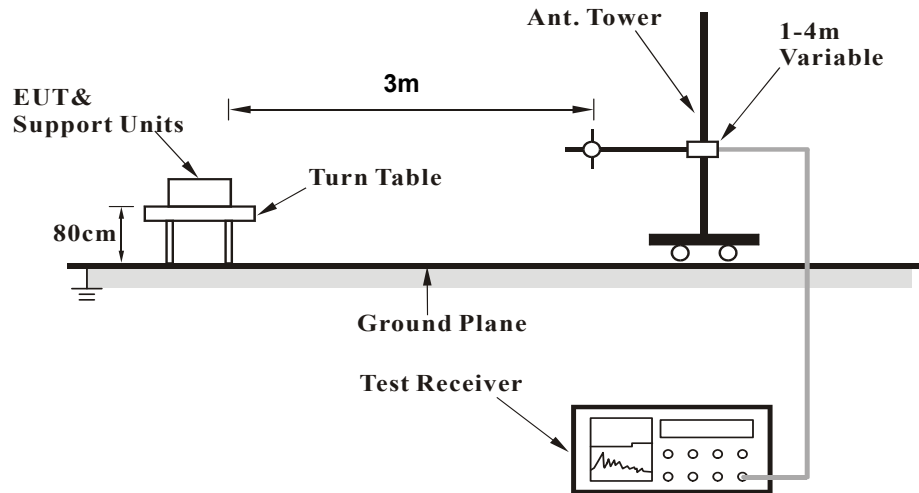

For Radiated emission above 1GHz

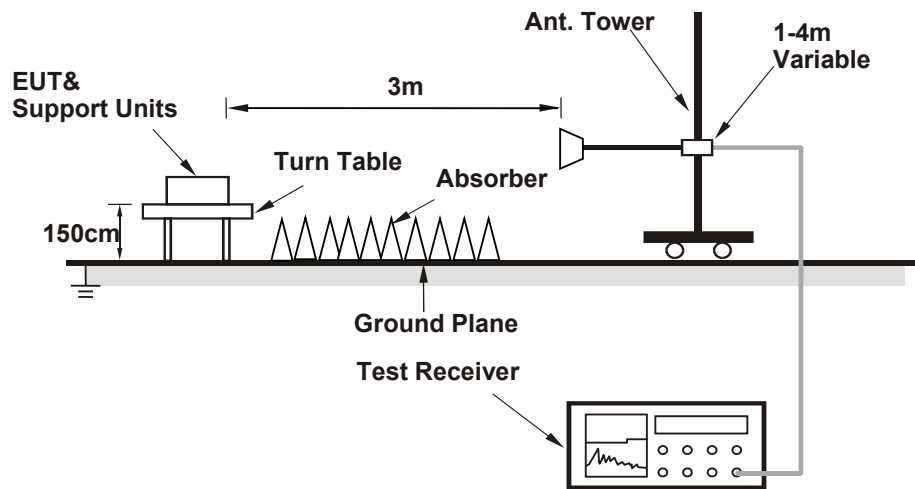

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Notebook Computer which is placed on remote site.
- b. Controlling software has been activated to set the EUT on specific status.

4.1.7 Test Results


BELOW 30MHz WORST-CASE DATA:

CHANNEL	802.11B Channel 6	DETECTOR FUNCTION	Quasi Peak
FREQUENCY RANGE	9KHz-30MHz		

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m										
No.	Frequency (MHz)	Degree (0/90)	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	LimitQP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	0.544	0	18.8	17.7	36.5	72.9	-36.4	100	2.7	Pass
2	0.634	0	18.2	16.5	34.7	71.6	-36.9	100	232.4	Pass
3	0.726	0	31.3	15.5	46.8	70.4	-23.6	100	197.2	Pass
4	0.819	0	24.5	14.5	39	69.3	-30.3	100	20.3	Pass
5	0.908	0	15.7	13.6	29.3	68.4	-39.1	100	321.2	Pass
6	1.09	0	15.7	12.3	28	66.9	-38.9	100	333.6	Pass

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Preamplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

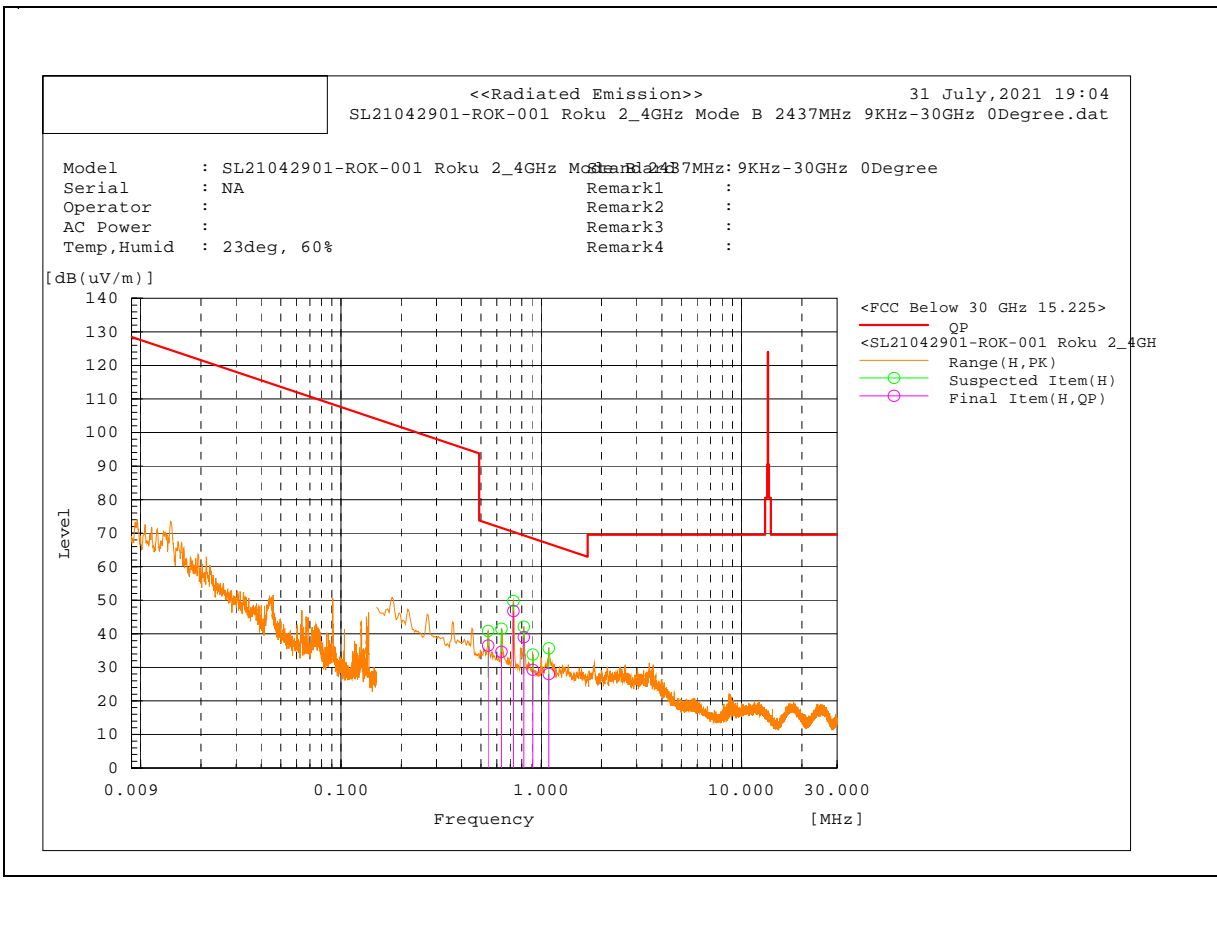


CHANNEL	802.11B Channel 6	DETECTOR FUNCTION	Quasi Peak
FREQUENCY RANGE	9KHz-30MHz		

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m										
No.	Frequency (MHz)	Degree (0/90)	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	LimitQP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	0.544	90	19	17.7	36.7	72.9	-36.2	100	83.3	Pass
2	0.637	90	22.4	16.5	38.9	71.5	-32.6	100	121.4	Pass
3	0.726	90	31.7	15.5	47.2	70.4	-23.2	100	222.6	Pass
4	0.819	90	25.1	14.5	39.6	69.3	-29.7	100	41.9	Pass
5	0.908	90	16.6	13.6	30.2	68.4	-38.2	100	339.5	Pass
6	1.571	90	11.9	9.6	21.5	63.7	-42.2	100	348.7	Pass

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

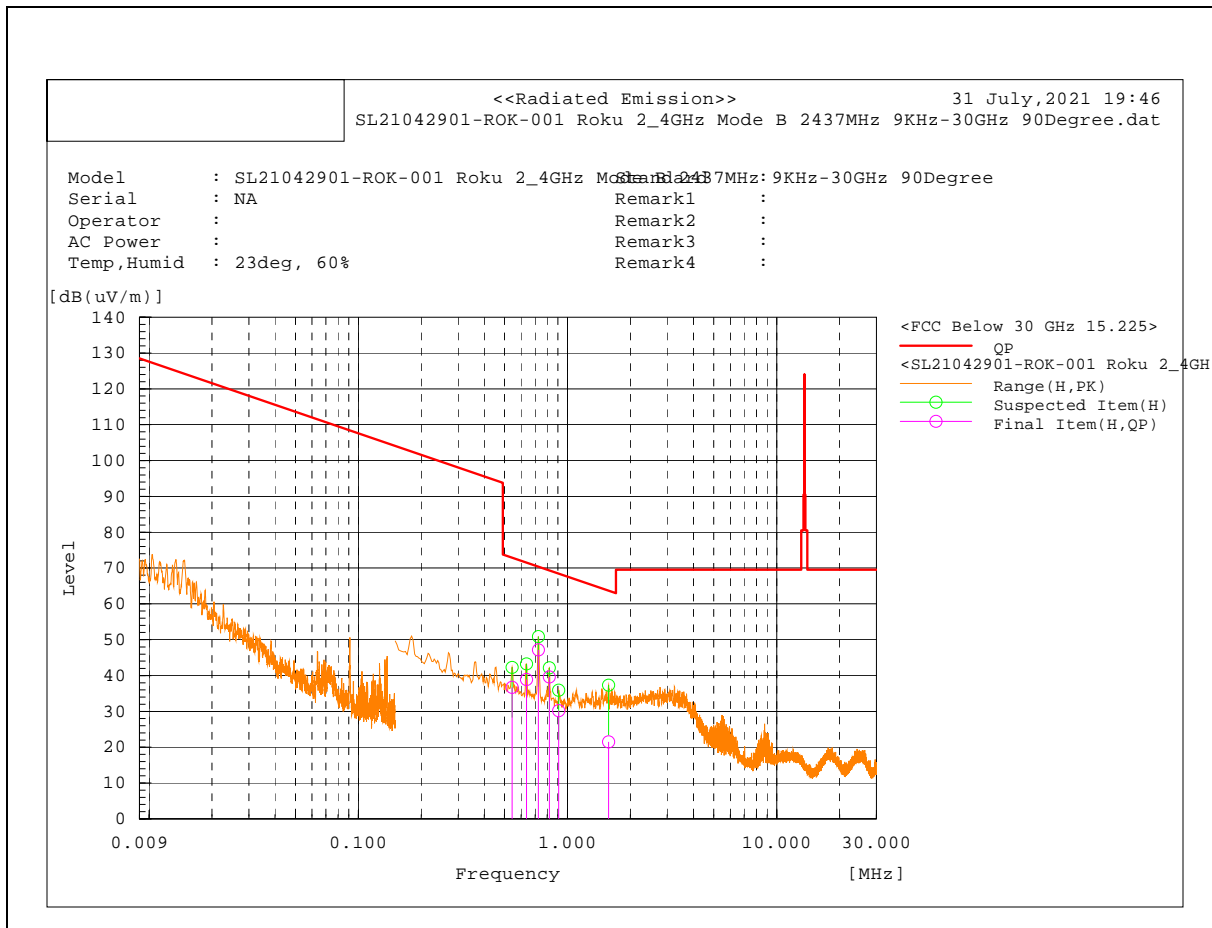


BELOW 1GHz WORST-CASE DATA:

CHANNEL	802.11n Channel 6	DETECTOR FUNCTION	Quasi Peak
FREQUENCY RANGE	30MHz – 1GHz		

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m										
No.	Frequency (MHz)	Polarization (H/V)	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	LimitQP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	78.006	H	18.2	13.2	31.4	40	-8.6	110	23.4	Pass
2	98.485	H	11.8	15.5	27.3	43.5	-16.2	100	332	Pass
3	143.987	H	14.7	18.9	33.6	43.5	-9.9	101	245	Pass
4	165.958	H	13.2	18.6	31.8	43.5	-11.7	101	293	Pass
5	200.002	H	19.3	19.2	38.5	43.5	-5	137	0	Pass
6	344.976	V	21	21.3	42.3	46	-3.7	100	29.4	Pass

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

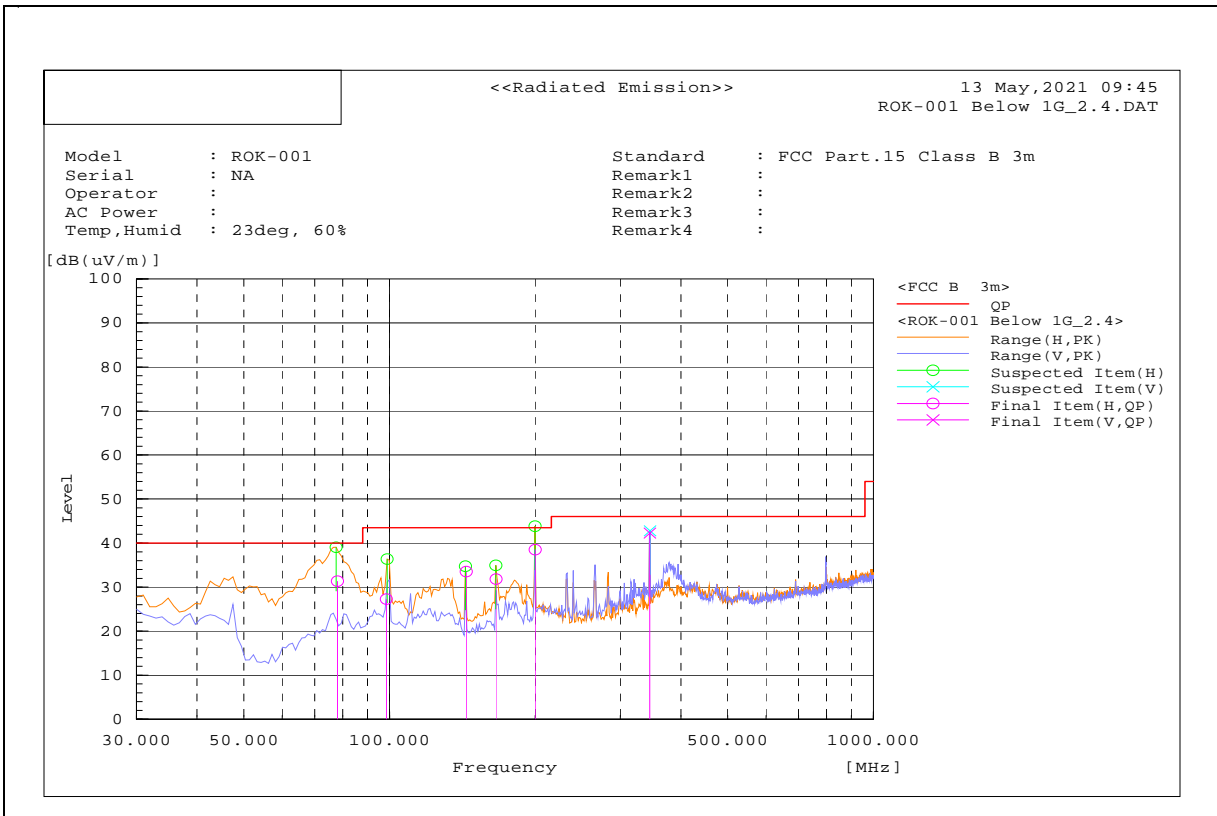


Above 1GHz Test Data:

Above 1GHz-25GHz – 802.11b – 2412 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1368.186	V	43.3	57.8	-16.4	26.9	41.4	54	74	-27.1	-32.6	174.2	242.2	Pass
2	1543.693	H	43	58.2	-17.1	25.9	41.1	54	74	-28.1	-32.9	153.6	356	Pass
3	1665.438	V	42.2	55	-15.5	26.7	39.5	54	74	-27.3	-34.5	121.7	113.4	Pass
4	4823.909	H	39.5	49.6	-6	33.5	43.6	54	74	-20.5	-30.4	100.4	229	Pass
5	5233.734	V	38.6	48.4	-5.5	33.1	42.9	-	-	-	-	100.9	12	-
6	9648.084	H	38.2	44.5	4.2	42.4	48.7	-	-	-	-	200	245.3	-
7	24838.214	V	21.6	32.9	17.7	39.3	50.6	-	-	-	-	162	45	-
8	24836.99	H	22.5	32.5	17.7	40.2	50.2	-	-	-	-	359	194.5	-

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

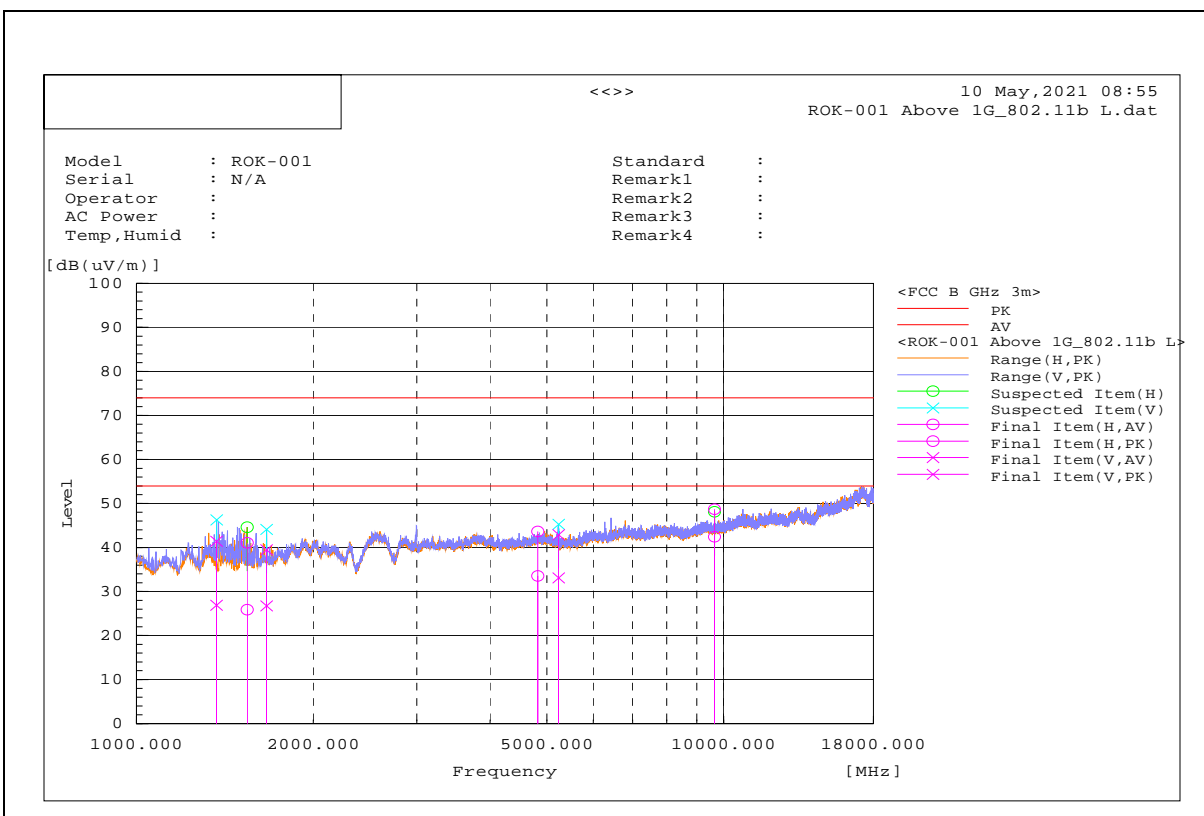


<<Radiated Emission>>

23 July, 2021 09:58

ROKU 2 4GHz TX 1M LOW 18GHz-25GHz.dat

Model : ROKU 2.4GHz TX 1M LOW 18GHz-25GHzStandard : FCC Class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

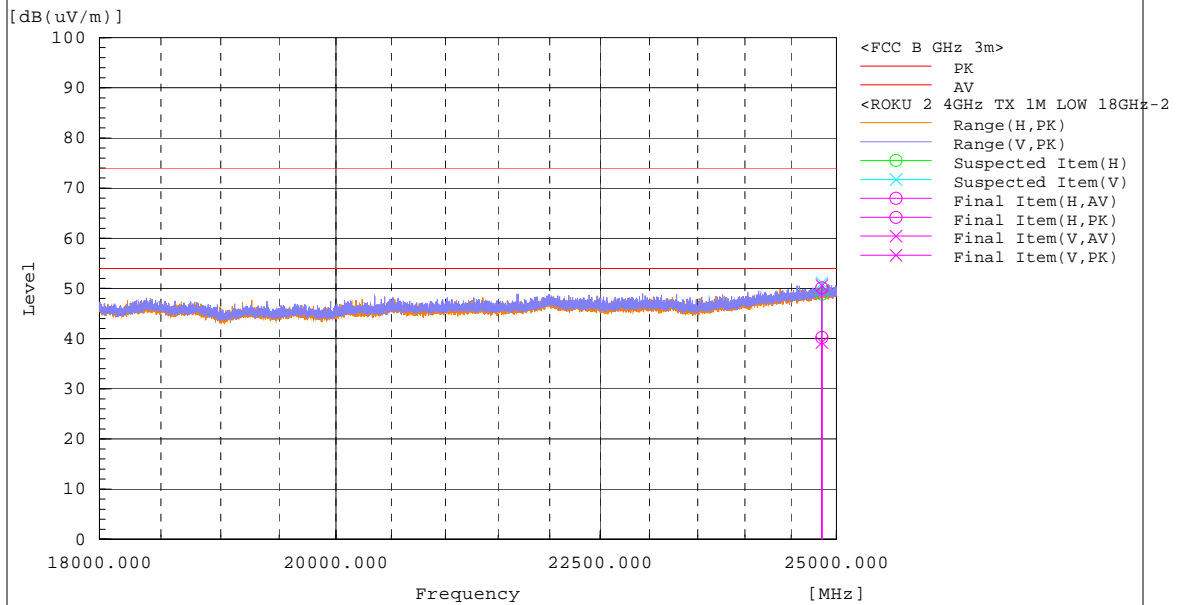


Above 1GHz-25GHz – 802.11b – 2437 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK dB(uV/m)	Limit AV dB(uV/m)	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1323.329	V	45.1	56.6	-16.3	28.8	40.3	54	74	-25.2	-33.7	214.2	0	Pass
2	1519.675	H	42.3	57.7	-17.2	25.1	40.5	54	74	-28.9	-33.5	111.6	0	Pass
3	1591.915	H	41	55.3	-16.6	24.4	38.7	54	74	-29.6	-35.3	128.6	54.4	Pass
4	4873.947	V	39.9	50.1	-6	33.9	44.1	54	74	-20.1	-29.9	143.7	6.7	Pass
5	5226.173	V	38	51.1	-5.5	32.5	45.6	-	-	-	-	217	280	-
6	9748.06	H	39.1	45	4.4	43.5	49.4	-	-	-	-	107.6	124	-
7	24909.852	V	20.5	32.9	17.8	38.3	50.7	-	-	-	-	276	263.1	-
8	24910.21	H	21.9	33.5	17.8	39.7	51.3	-	-	-	-	389	174.3	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

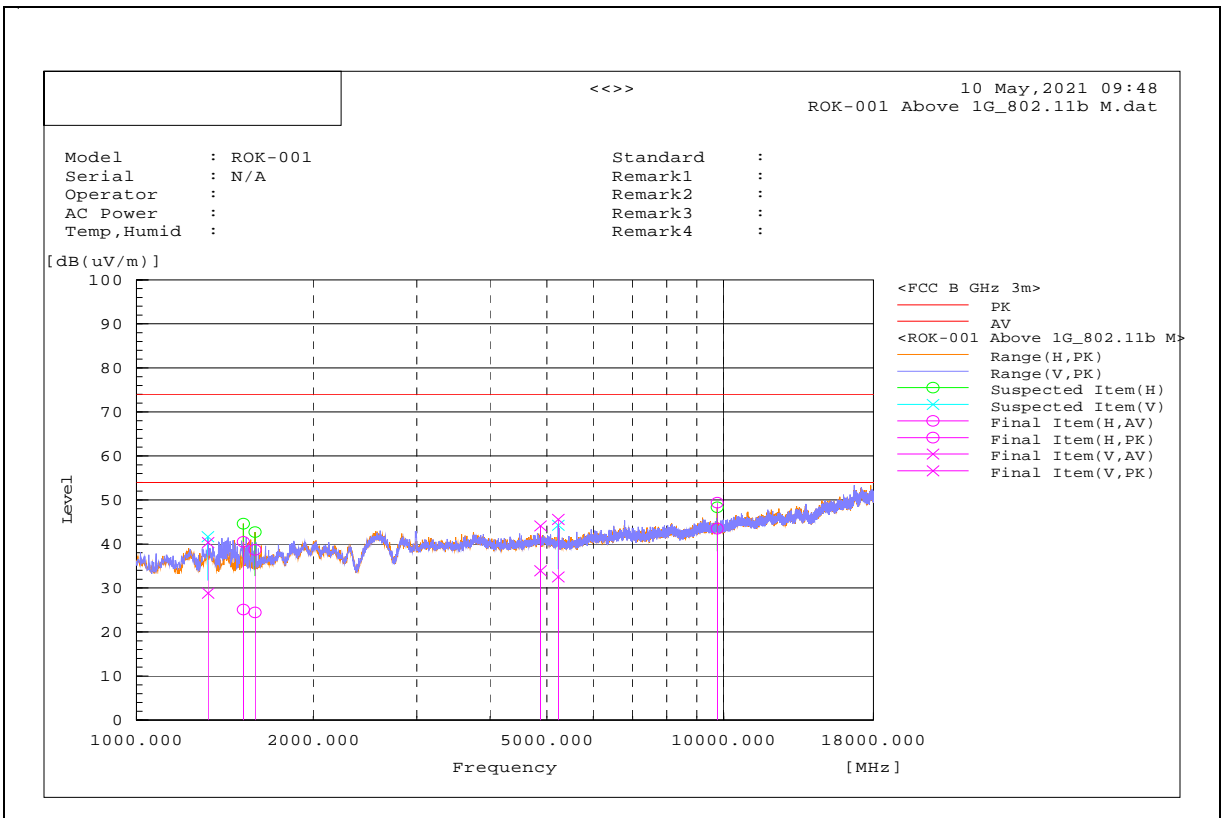

<<Radiated Emission>> 23 July, 2021 10:32
 SL21042901-ROK-001 Roku 2 4GHz TX 1M MID 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX Standard 18GHz-25GHz Class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

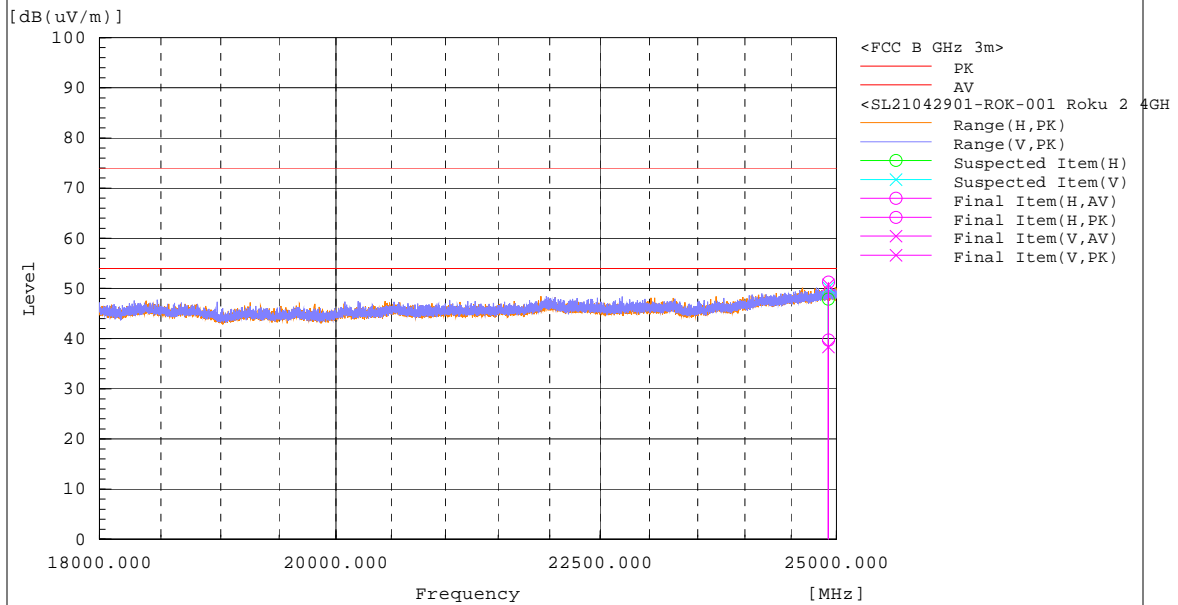


Above 1GHz-25GHz – 802.11b – 2462 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1450.414	V	42.7	63.2	-17.1	25.6	46.1	54	74	-28.4	-27.9	102	186.4	Pass
2	1594.212	H	41.8	59	-16.6	25.2	42.4	54	74	-28.8	-31.6	187.9	40.8	Pass
3	2830.936	H	41.3	53.4	-10.5	30.8	42.9	54	74	-23.2	-31.1	215.5	205.2	Pass
4	4923.972	H	37.8	48.9	-5.9	31.9	43	54	74	-22.1	-31	153.3	22.5	Pass
5	5247.287	V	36	48.5	-5.4	30.6	43.1	-	-	-	-	153.6	248.4	-
6	16757.74	H	25.5	36.8	15.4	40.9	52.2	-	-	-	-	144.3	271.4	-
7	24762.97	V	21.4	32.6	17.7	39.1	50.3	-	-	-	-	329	17.6	-
8	24764.062	H	20.8	32.7	17.7	38.5	50.4	-	-	-	-	132	326.6	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

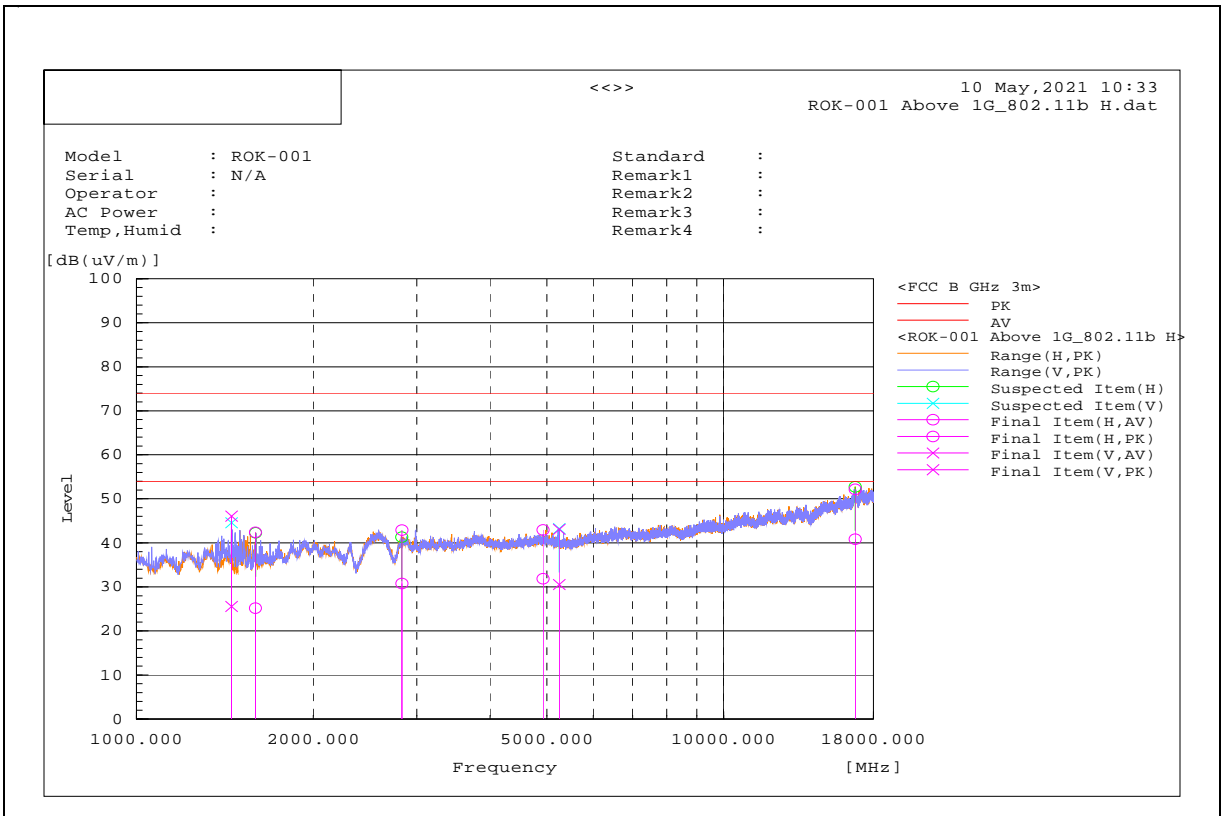

<<Radiated Emission>> 23 July, 2021 11:06
 SL21042901-ROK-001 Roku 2 4GHz TX 1M HIGH 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX 1M HIGH 18GHz-25GHz Class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

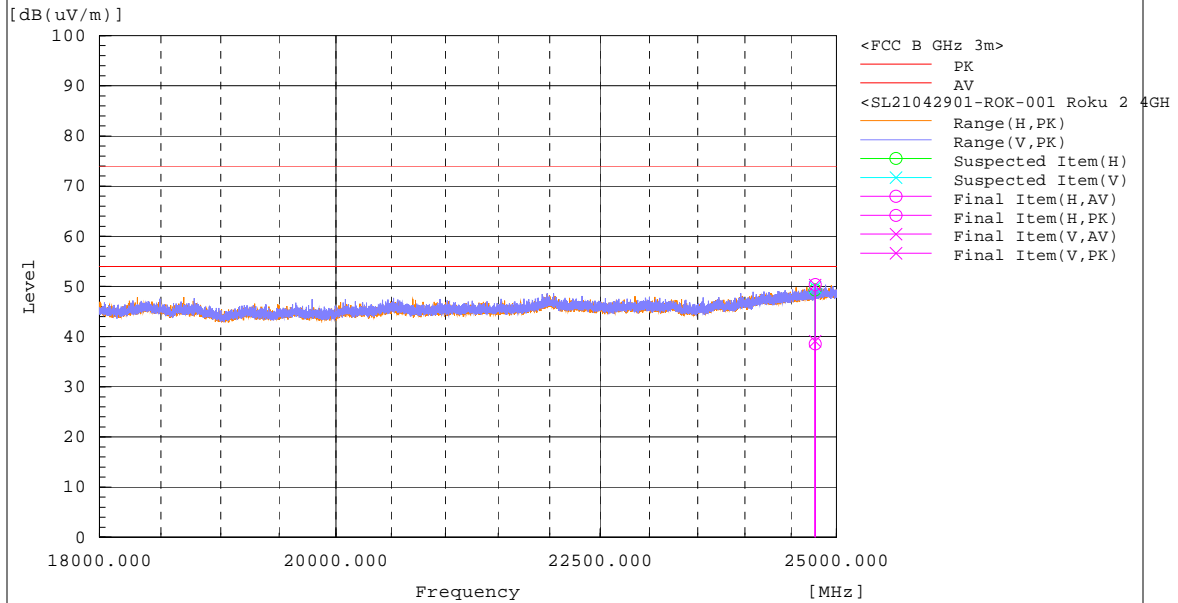


Above 1GHz-25GHz – 802.11g – 2412 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1327.427	V	46.6	63.6	-13.5	33.1	50.1	54	74	-20.9	-23.9	111.4	127.9	Pass
2	1529.989	H	44	55.1	-14.6	29.4	40.5	54	74	-24.6	-33.5	129	0	Pass
3	1593.387	V	43.1	60.4	-14	29.1	46.4	54	74	-24.9	-27.6	282.6	107.7	Pass
4	1923.73	H	42.9	54.5	-10	32.9	44.5	54	74	-21.1	-29.5	239.5	221.5	Pass
5	4824.584	V	38	48.9	-5.9	32.1	43	54	74	-21.9	-31	391.9	218.4	Pass
6	9647.974	V	29.6	41.2	2.8	32.4	44	-	-	-	-	239.4	139.7	-
7	24969.516	V	21.1	33.6	17.9	39	51.5	-	-	-	-	147	178.5	-
8	24971.25	H	21.8	32.7	17.9	39.7	50.6	-	-	-	-	298	209.7	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

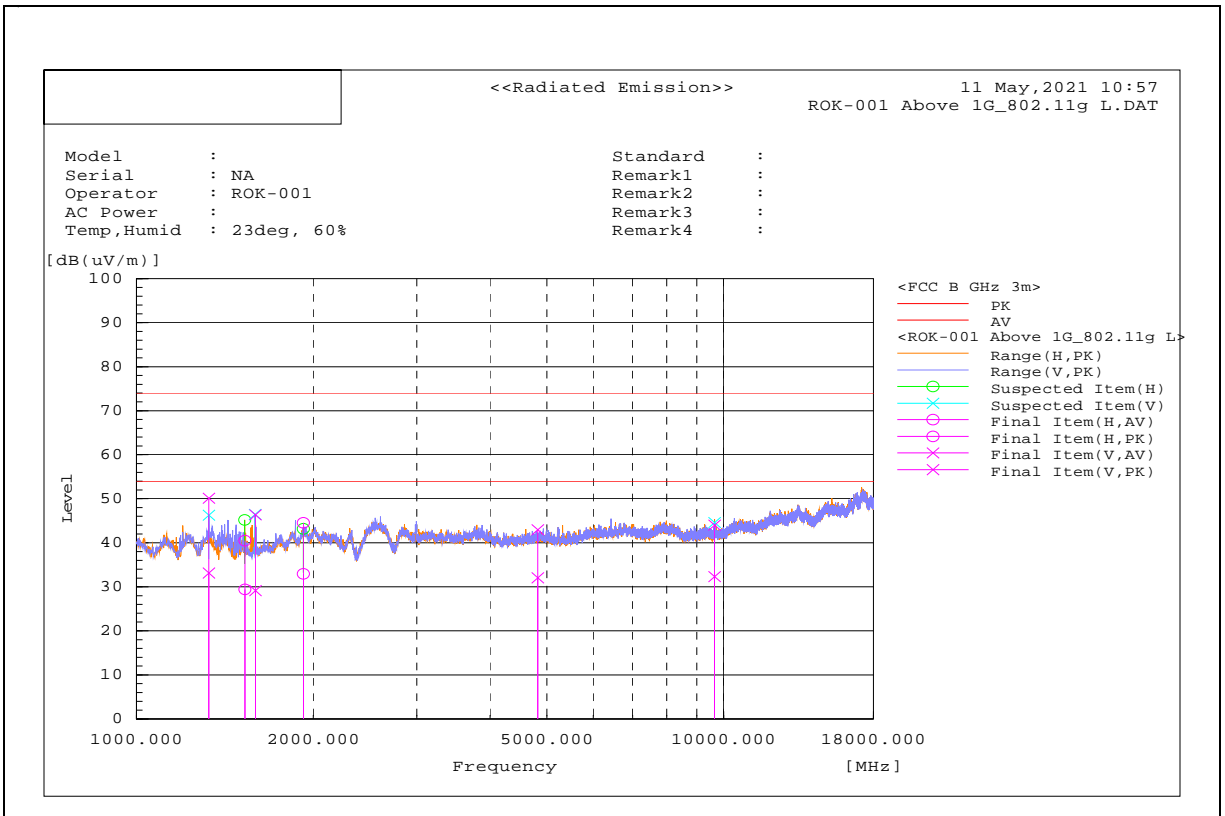


<<Radiated Emission>> 23 July, 2021 11:43
 SL21042901-ROK-001 Roku 2 4GHz TX 6M LOW 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX 6M LOW 18GHz-25GHz class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

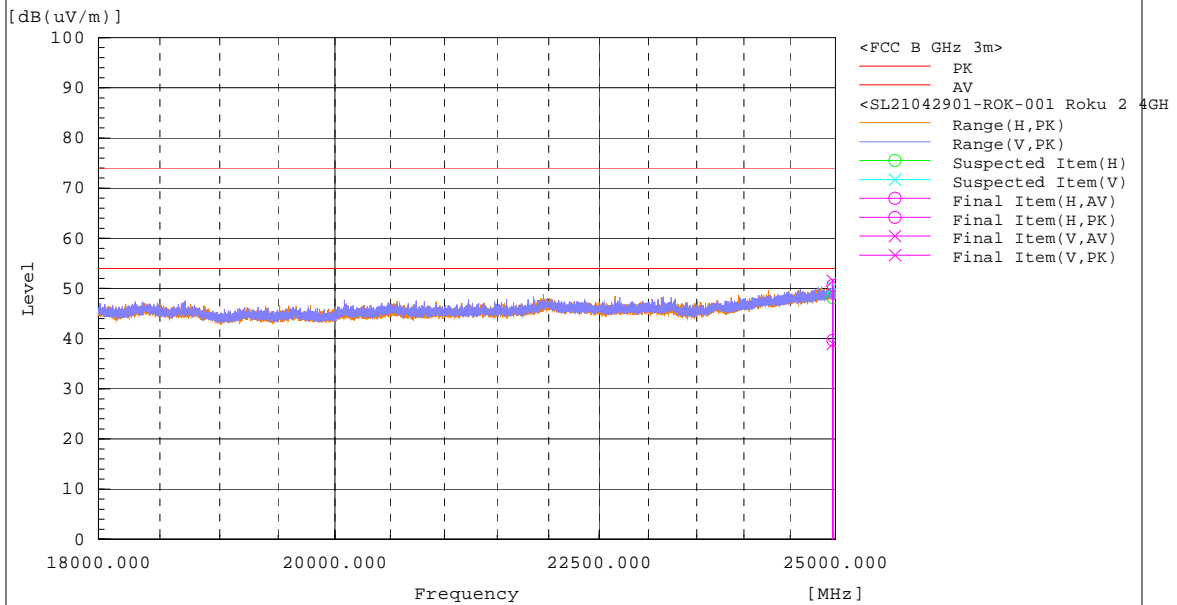

<<Radiated Emission>> 23 July, 2021 12:30
 SL21042901-ROK-001 Roku 2 4GHz TX 6M MID 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX 6M MID 18GHz-25GHz class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

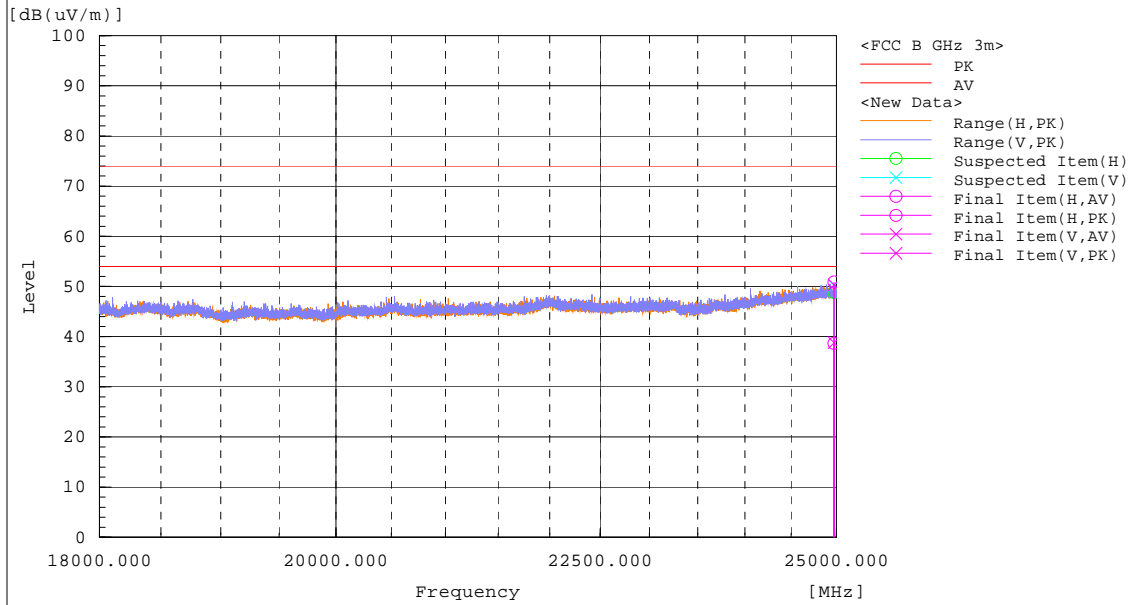


Above 1GHz-25GHz – 802.11g – 2462 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1435.927	V	44.5	61.8	-17	27.5	44.8	54	74	-26.5	-29.2	164	167.1	Pass
2	1513.322	H	43	55.3	-17.2	25.8	38.1	54	74	-28.2	-35.9	128.5	54.4	Pass
3	1598.337	V	43.2	60.9	-16.5	26.7	44.4	54	74	-27.3	-29.6	107.4	248.4	Pass
4	4924.259	V	37	48.8	-5.9	31.1	42.9	54	74	-22.9	-31.1	173.6	233.6	Pass
5	5224.411	V	37	48.2	-5.5	31.5	42.7	-	-	-	-	104.3	342.8	-
6	7385.694	V	31.9	43.6	-0.3	31.6	43.3	54	74	-22.4	-30.7	100.1	123.3	Pass
7	24859.14	H	21.5	33	17.7	39.2	50.7	-	-	-	-	382	276.8	-
8	24860.752	V	21.7	33.2	17.7	39.4	50.9	-	-	-	-	110	0	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

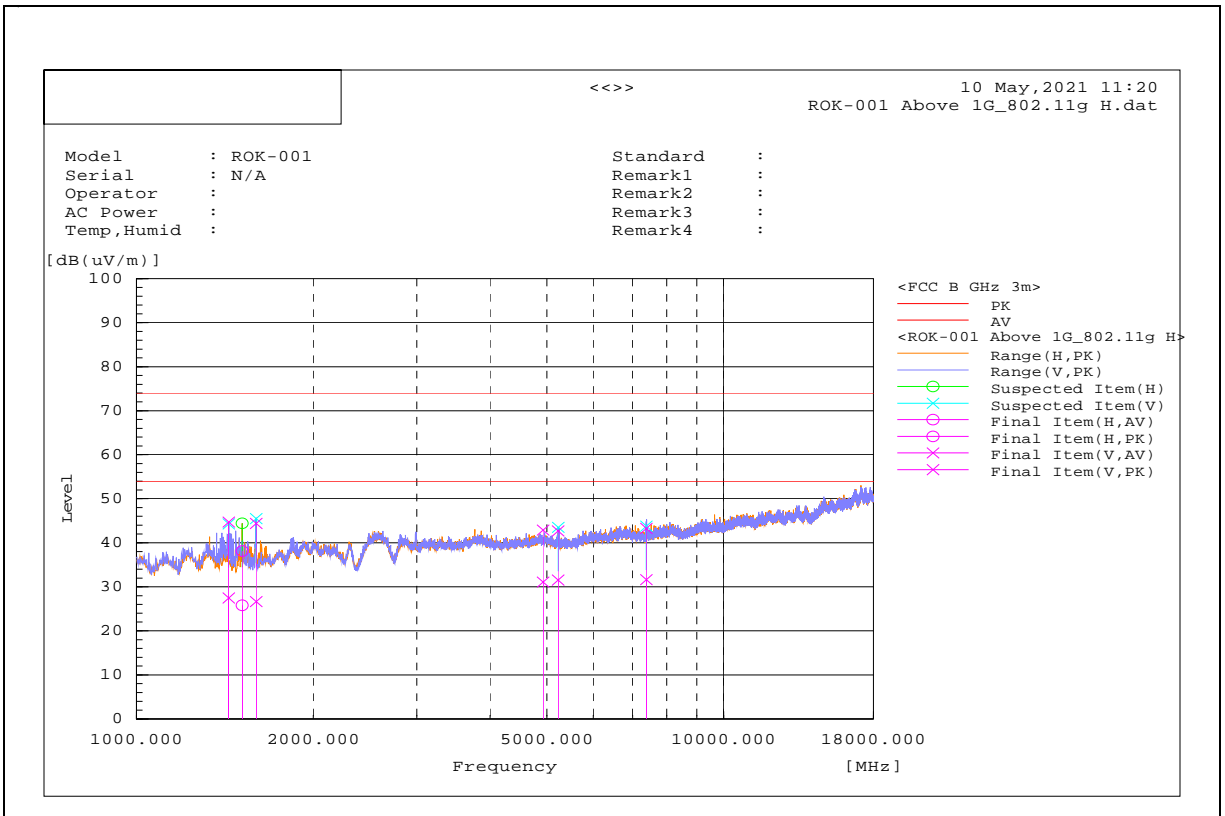

<<Radiated Emission>> 23 July, 2021 13:10
 SL21042901-ROK-001 Roku 2 4GHz TX 6M HIGH 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX 6M HIGH 18GHz-25GHz Class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

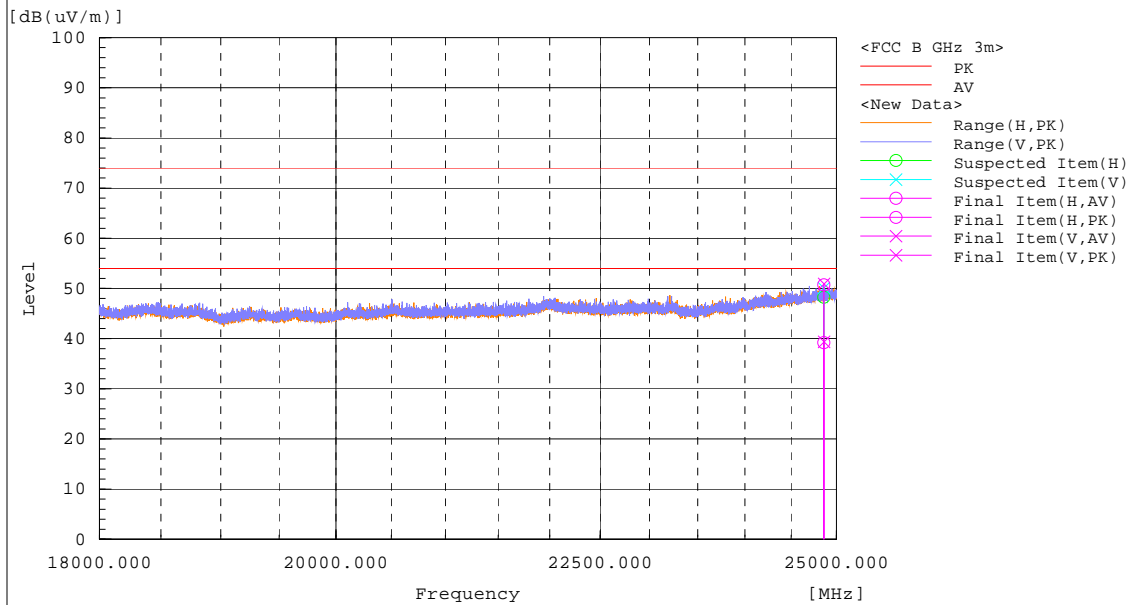


Above 1GHz-25GHz – 802.11n – 2412 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1200.049	H	51.3	59.2	-13.8	37.5	45.4	54	74	-16.5	-28.6	102	247.7	Pass
2	1430.173	V	43.8	56	-14.2	29.6	41.8	54	74	-24.4	-32.2	249.9	281.9	Pass
3	1595.63	V	43.4	63.3	-14	29.4	49.3	54	74	-24.6	-24.7	111.7	0	Pass
4	4824.214	H	37.2	49	-5.9	31.3	43.1	54	74	-22.7	-30.9	239.6	4.1	Pass
5	4945.216	H	38.1	48.9	-5.8	32.3	43.1	54	74	-21.7	-30.9	399.3	274.2	Pass
6	9648.013	H	38.3	44.7	2.8	41.1	47.5	-	-	-	-	107.9	311.3	-
7	24799.6	V	21	32.4	17.7	38.7	50.1	-	-	-	-	207	127.7	-
8	24798.924	H	21.5	32.4	17.7	39.2	50.1	-	-	-	-	352	321.7	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

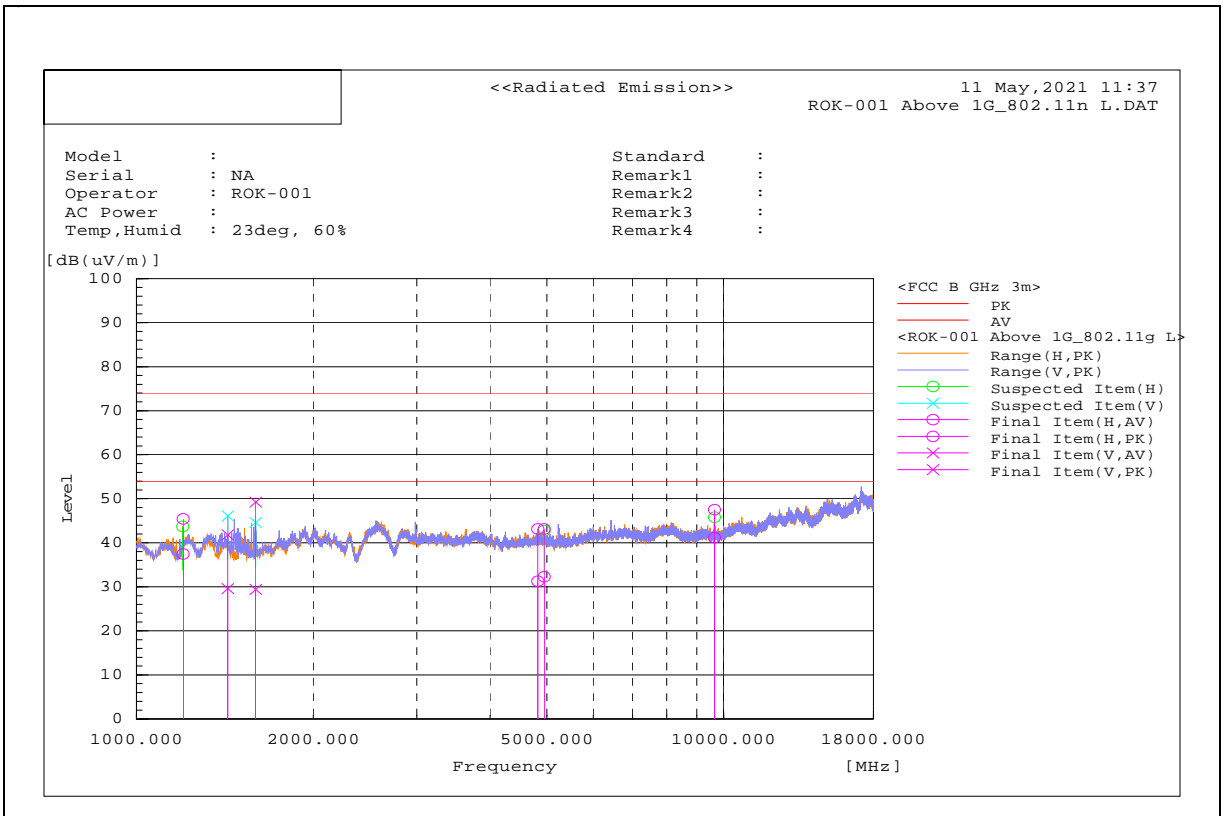

<<Radiated Emission>> 23 July, 2021 13:43
 SL21042901-ROK-001 Roku 2 4GHz TX OM HIGH 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX OM HIGH 18GHz-25GHz class B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

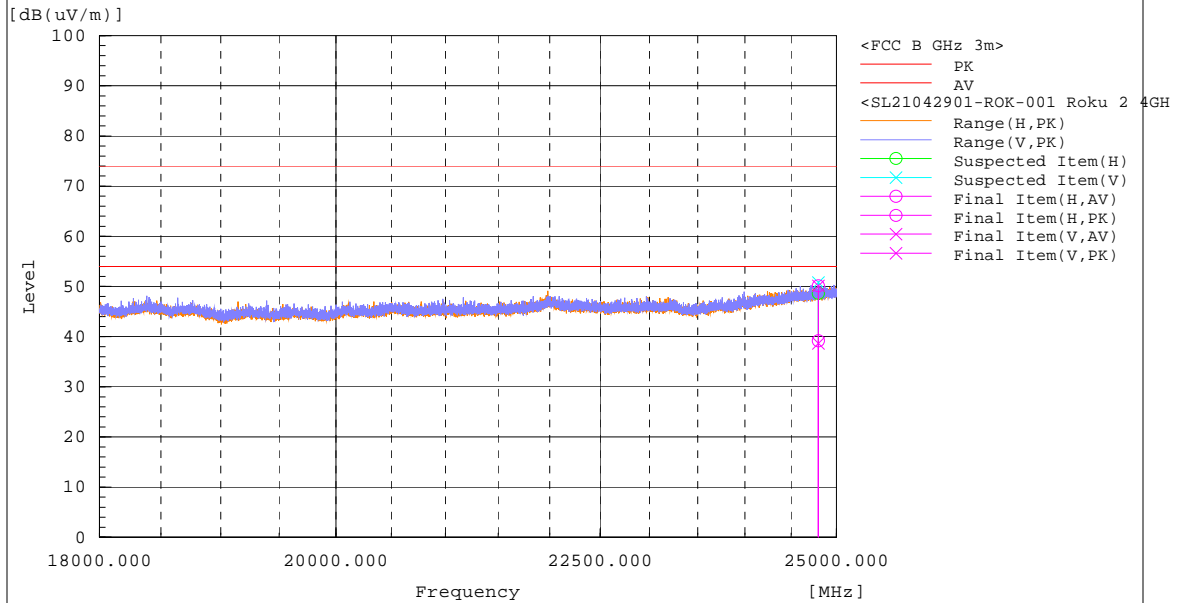


Above 1GHz-25GHz – 802.11n – 2437 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1417.629	V	43.4	56.4	-14.1	29.3	42.3	54	74	-24.7	-31.7	272.8	146.2	Pass
2	1592.728	H	43	58.1	-14	29	44.1	54	74	-25	-29.9	229.1	40.7	Pass
3	1865.116	V	41.6	53.4	-10.7	30.9	42.7	-	-	-	-	144.1	344.5	-
4	4872.524	V	37.3	48.9	-5.9	31.4	43	54	74	-22.6	-31	101.9	186.2	Pass
5	9748.07	H	38.3	45	3	41.3	48	-	-	-	-	100.5	314.4	-
6	17144.89	V	26.4	37.4	14.8	41.2	52.2	-	-	-	-	240.1	281.1	-
7	24573.614	V	21.4	32.8	17.5	38.9	50.3	-	-	-	-	110	151.5	-
8	24573.416	H	20.5	32.2	17.5	38	49.7	-	-	-	-	359	111.5	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

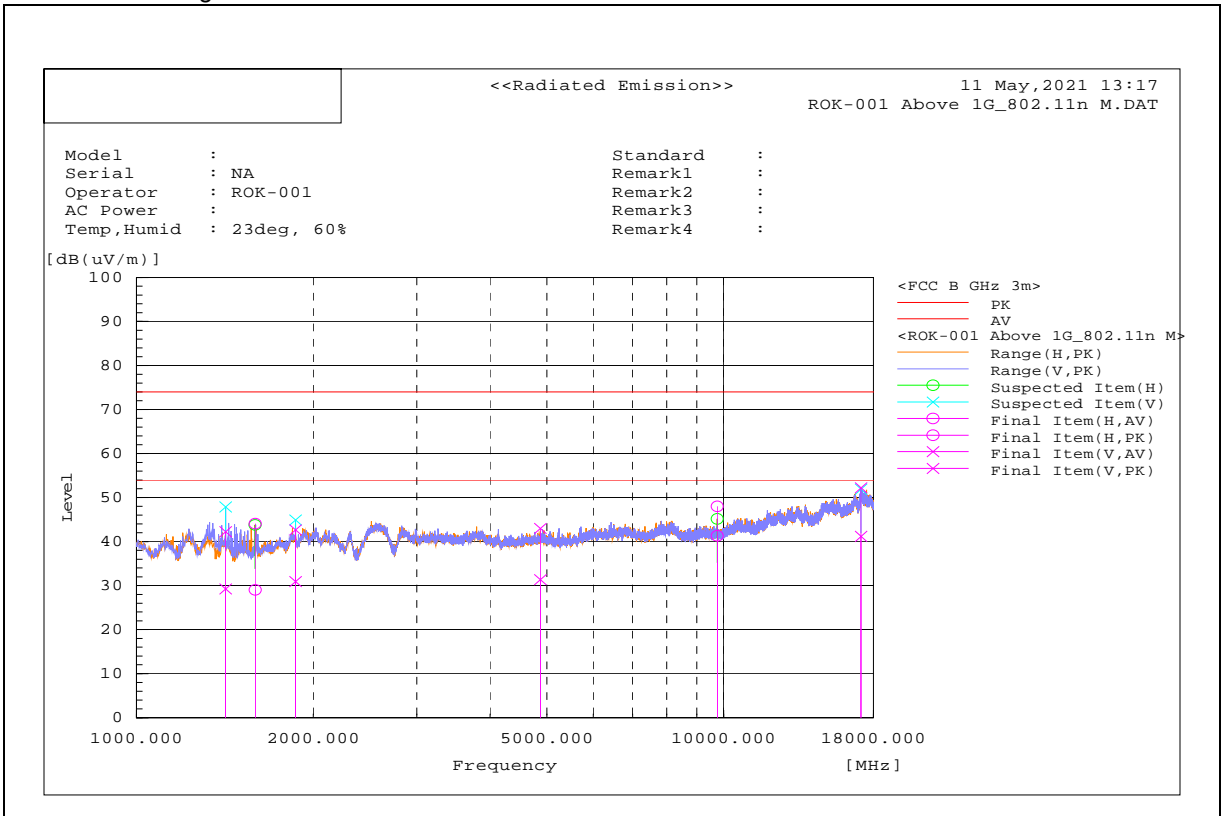

<<Radiated Emission>> 23 July, 2021 14:16
 SL21042901-ROK-001 Roku 2 4GHz TX MCSO MID 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX MCSO MID 18GHz-25GHz B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

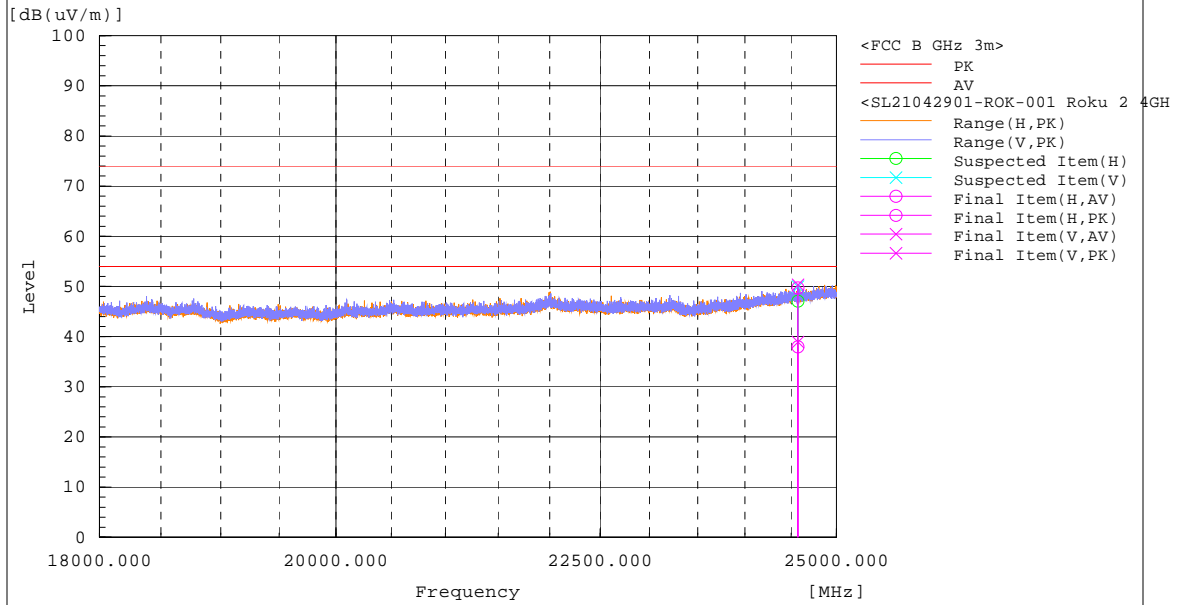


Above 1GHz-25GHz – 802.11n – 2462 MHz

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m														
No	Frequency (MHz)	Polarization (H/V)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	1237.79	V	44.4	56	-13.6	30.8	42.4	54	74	-23.2	-31.6	388.7	221	Pass
2	1432.141	V	43.7	56.1	-14.2	29.5	41.9	-	-	-	-	217.1	268.5	-
3	1554.605	H	43	55.9	-14.4	28.6	41.5	54	74	-25.4	-32.5	100.4	78.4	Pass
4	4923.25	H	36.6	49.1	-5.8	30.8	43.3	54	74	-23.2	-30.7	261.6	3.8	Pass
5	5693.253	V	36.1	47.4	-3.9	32.2	43.5	-	-	-	-	196	168.2	-
6	14938.57	H	27.1	39.2	10.5	37.6	49.7	-	-	-	-	282.1	358.3	-
7	24824.046	H	21.3	32.9	17.7	39	50.6	-	-	-	-	238	212.9	-
8	24823.634	V	21.5	32.8	17.7	39.2	50.5	-	-	-	-	337	2.7	-


REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Pre-amplifier Gain (dB).
3. Margin value = Emission level – Limit value.

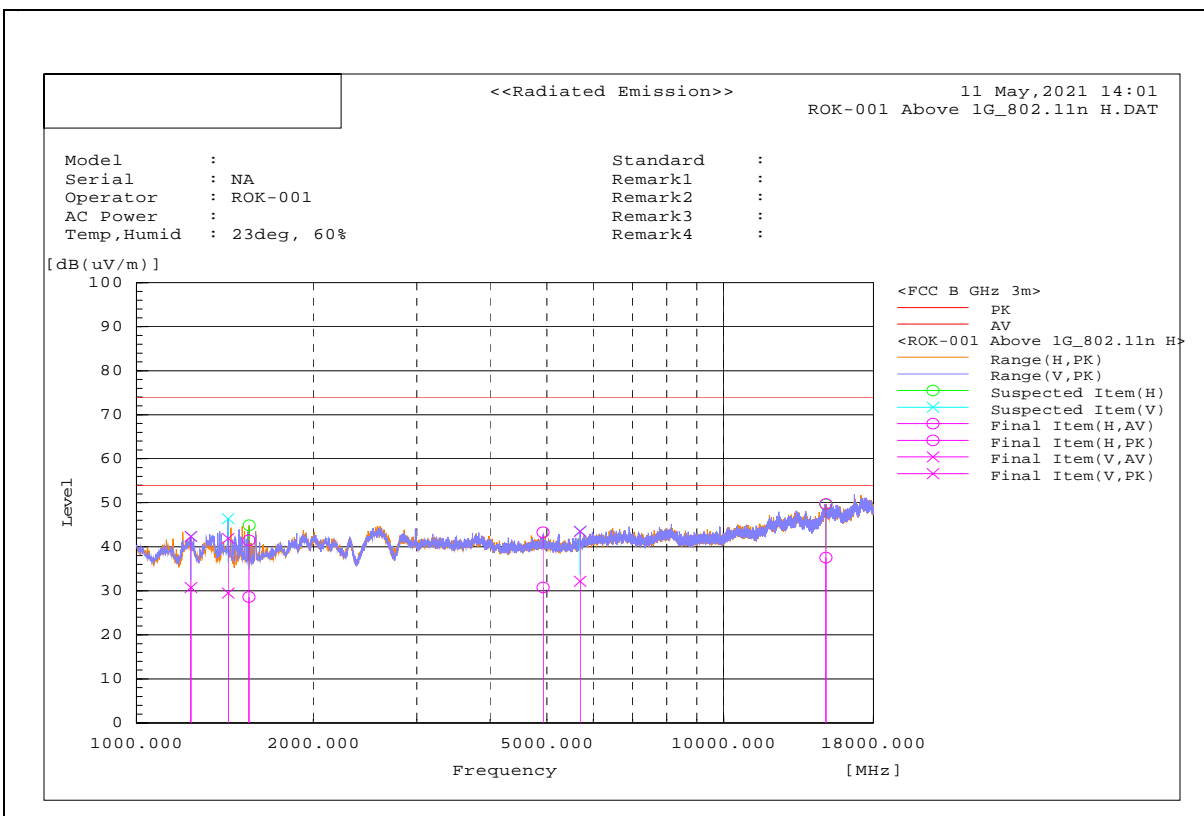

<<Radiated Emission>> 23 July, 2021 14:48
 SL21042901-ROK-001 Roku 2 4GHz TX MCSO HIGH 18GHz-25GHz.dat

Model : SL21042901-ROK-001 Roku 2 4GHz TX MCSO HIGH 18GHz-25GHz B GHz 3m
 Serial : Remark1 :
 Operator : Remark2 :
 AC Power : Remark3 :
 Temp, Humid : Remark4 :

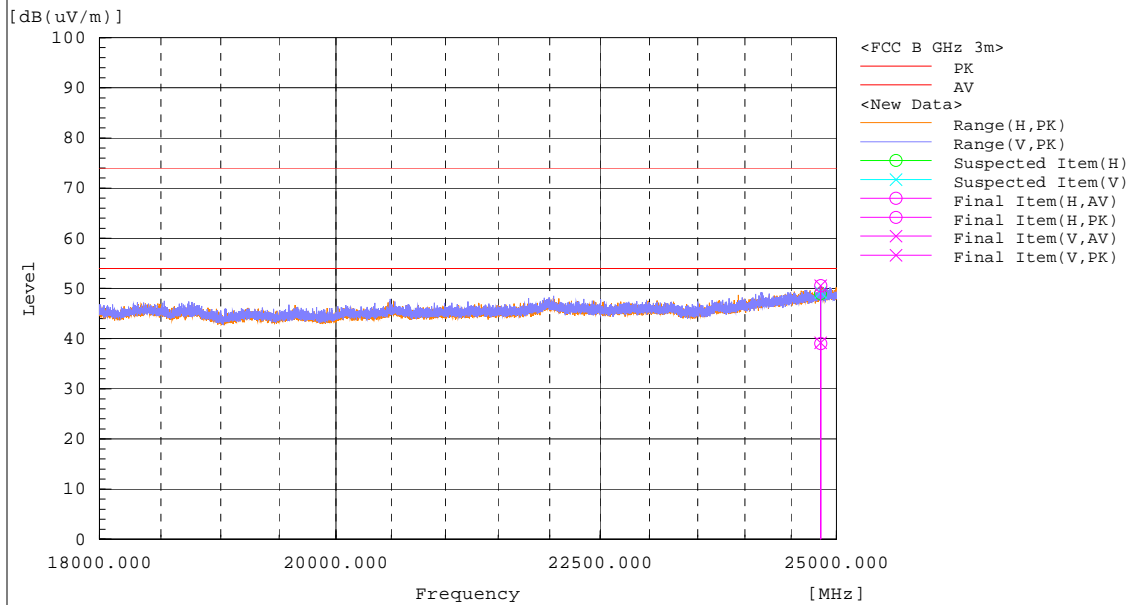

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
EMI Test Receiver ROHDE & SCHWARZ	ESIB 40	100179	08/28/2020	08/28/2021
Transient Limiter ELECTRO-METRICS	EM-7600-5	106	12/31/2019	12/31/2021
LISN EMCO	3816/2NM	214372	03/10/2021	03/10/2022

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

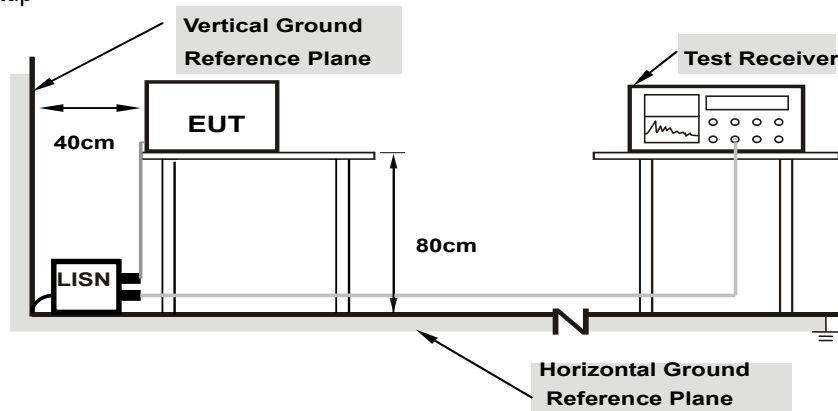

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


N/A (Work with battery).

4.3 6dB Bandwidth & 99% Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

99% Bandwidth Measurement

Refer to ANSI C63.10 section 6.9.3

-6dB Bandwidth Measurement

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
802.11b	1	2412	10.03	0.5	PASS
	6	2437	10.05	0.5	PASS
	11	2462	10.05	0.5	PASS
802.11g	1	2412	16.50	0.5	PASS
	6	2437	16.48	0.5	PASS
	11	2462	16.44	0.5	PASS
802.11n-HT20	1	2412	17.63	0.5	PASS
	6	2437	17.62	0.5	PASS
	11	2462	17.63	0.5	PASS

Mode	Channel	Frequency (MHz)	99% Bandwidth (MHz)
802.11b	1	2412	14.705
	6	2437	14.703
	11	2462	14.694
802.11g	1	2412	17.314
	6	2437	17.294
	11	2462	17.291
802.11n-HT20	1	2412	18.136
	6	2437	18.153
	11	2462	18.133


Test Plots:
99% Occupied Bandwidth




802.11b-2412MHz



802.11b-2437MHz

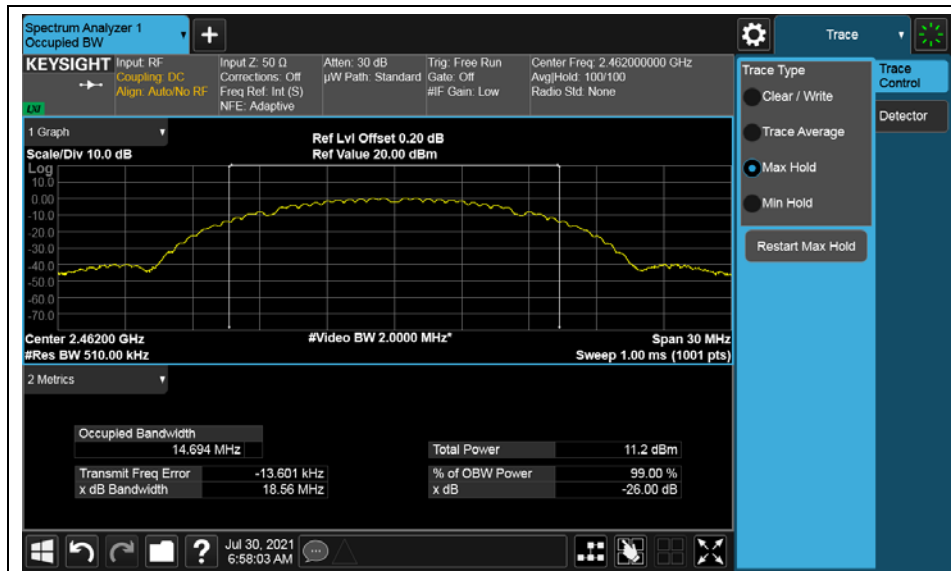


802.11b-2462MHz

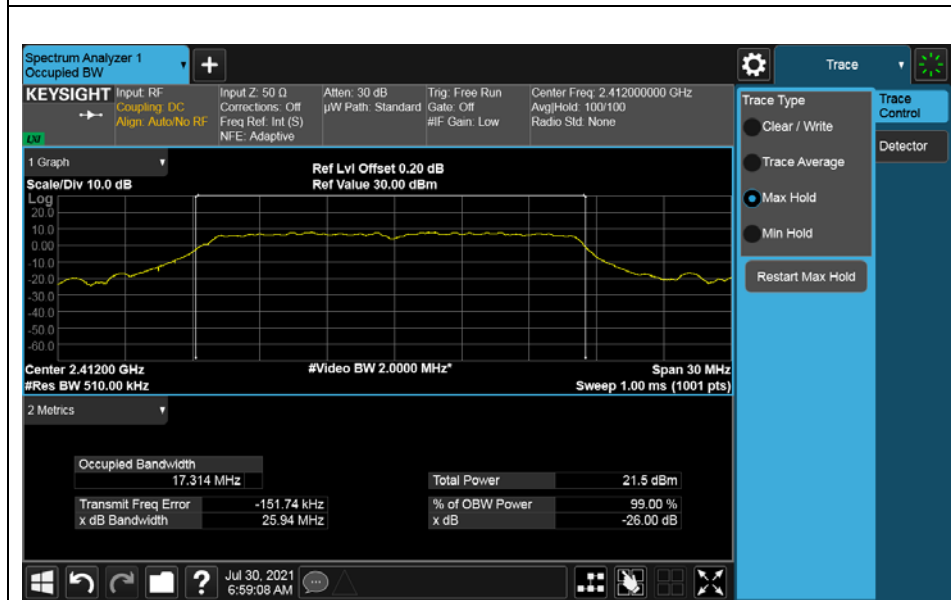

802.11g-2412MHz



802.11g-2437MHz

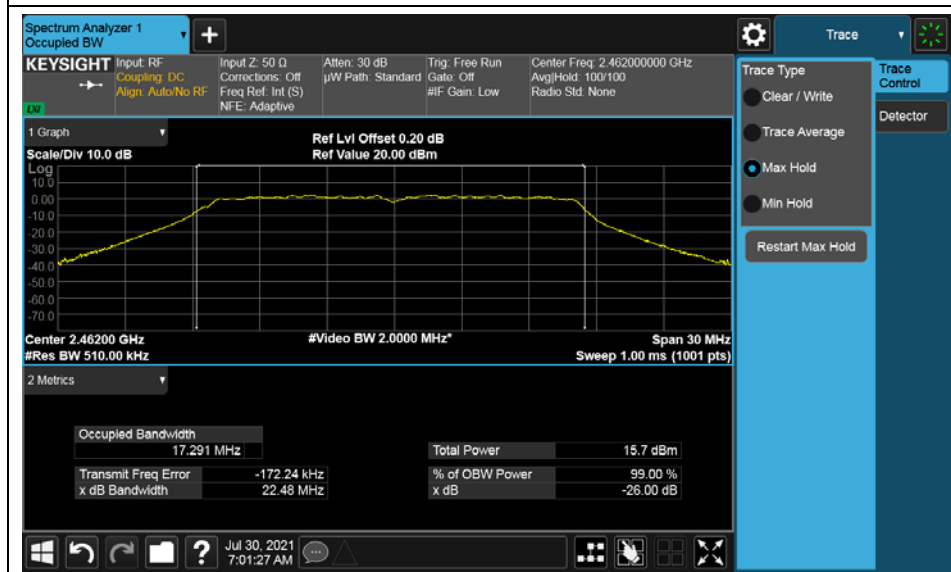

802.11g-2462MHz




802.11n-HT20-2412MHz




802.11n-HT20-2437MHz



-6 db Occupied Bandwidth

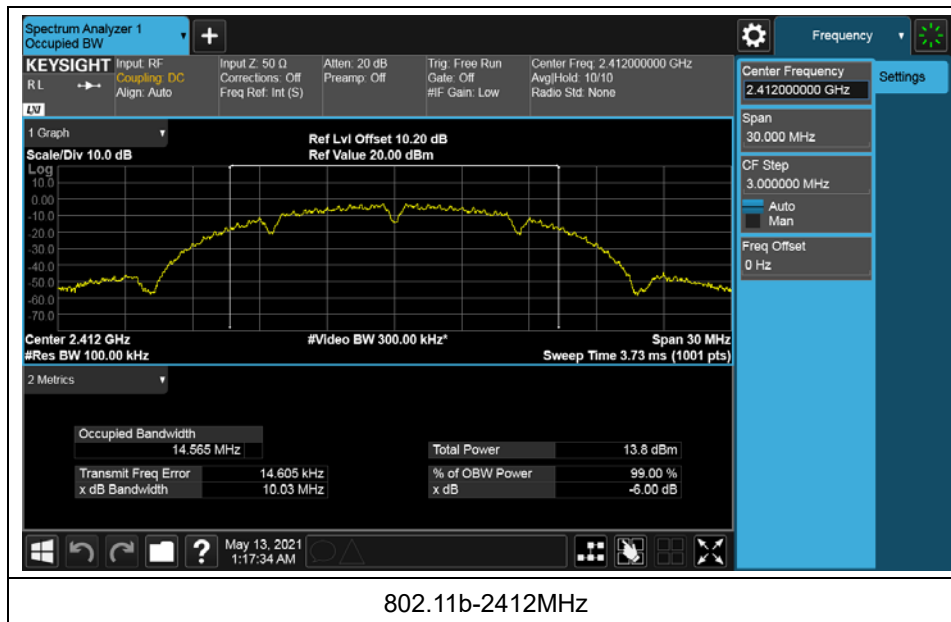

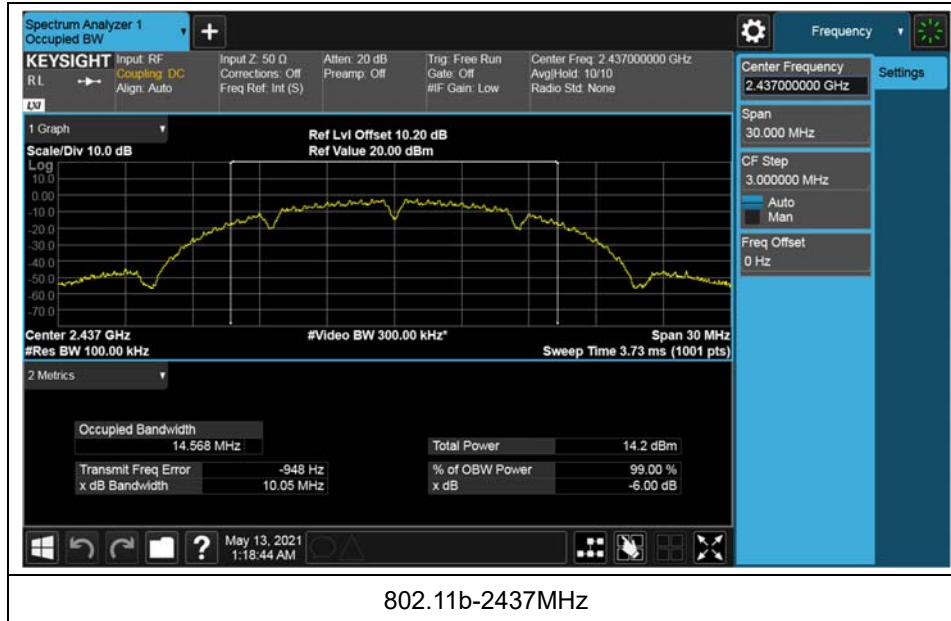



802.11b-2462MHz



802.11g-2412MHz




802.11g-2437MHz



802.11g-2462MHz



802.11n-HT20-2412MHz

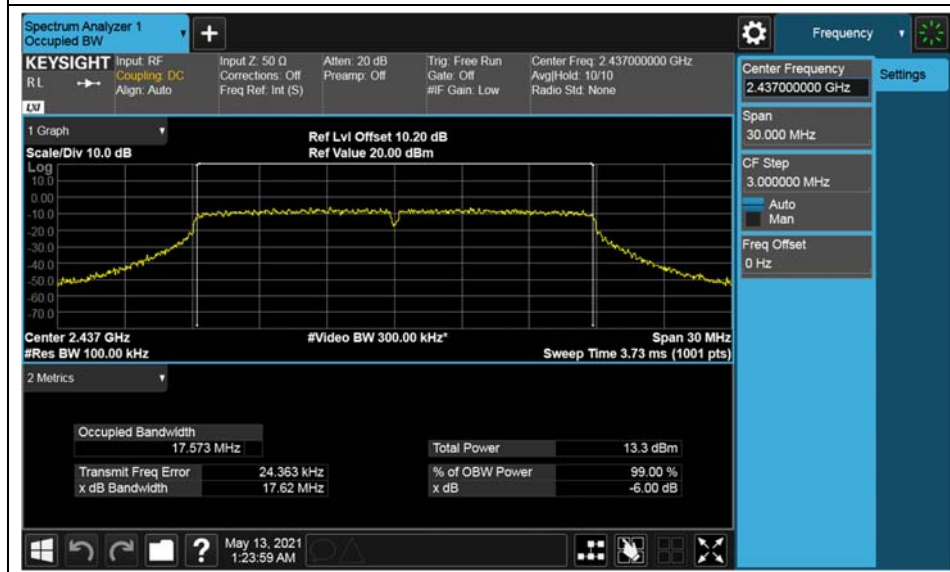

802.11n-HT20-2437MHz




4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- a. Set span to at least 1.5 times the OBW.
- b. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c. Set VBW $\geq 3 \times$ RBW.
- d. Number of points in sweep $\geq 2 \times$ span / RBW
- e. Sweep time = auto.
- f. Detector = RMS (i.e., power averaging), or sample detector mode.
- g. If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h. Trace average at least 100 traces in power averaging (i.e., RMS) mode.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	8.16	30	Pass
6	2437	8.55	30	Pass
11	2462	8.76	30	Pass

802.11g

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	8.8	30	Pass
6	2437	9.09	30	Pass
11	2462	9.16	30	Pass

802.11n-HT20

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	8.61	30	Pass
6	2437	8.81	30	Pass
11	2462	8.86	30	Pass

Test Plots:



802.11b-2412MHz



802.11b-2437MHz



802.11b-2462MHz



802.11g-2412MHz



802.11g-2437MHz




802.11g-2462MHz



802.11n-HT20-2412MHz



802.11n-HT20-2437MHz

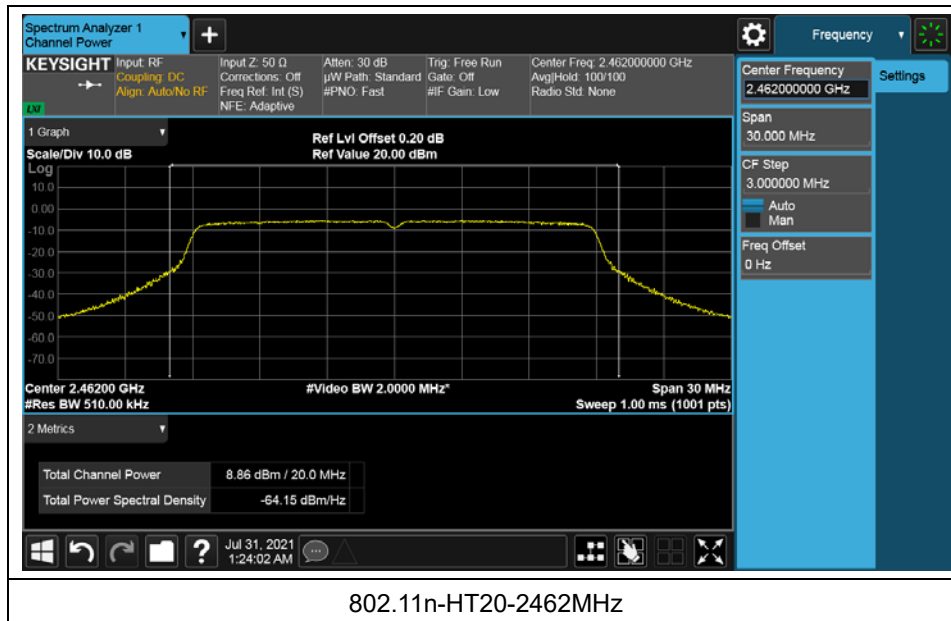


4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to at least 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = Sample.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
1	2402	-23.32	8	Pass
6	2440	-22.78	8	Pass
11	2480	-22.85	8	Pass


802.11g

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
1	2402	-22.64	8	Pass
6	2440	-22.64	8	Pass
11	2480	-22.39	8	Pass

802.11n-HT20

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
1	2402	-21.99	8	Pass
6	2440	-22.30	8	Pass
11	2480	-21.90	8	Pass

Test Plots:

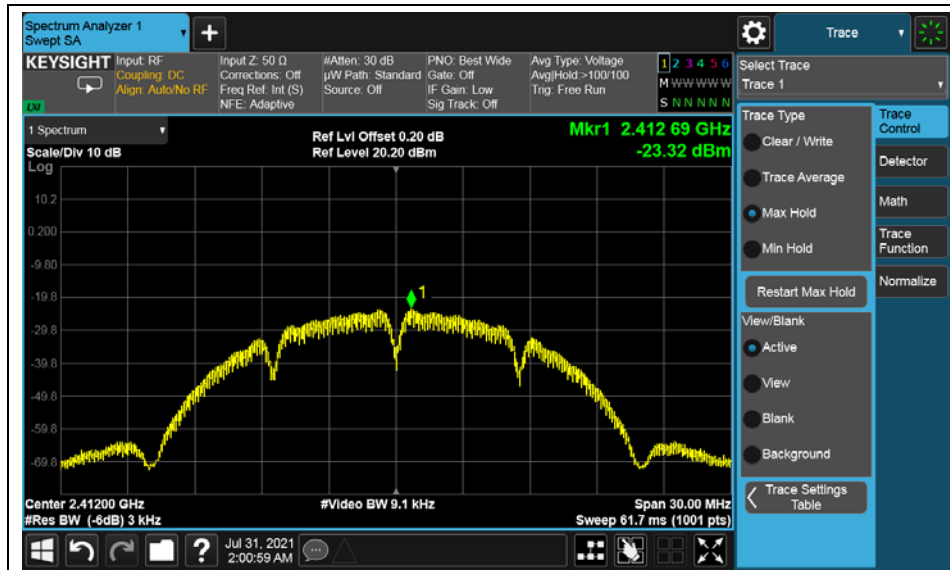


802.11b-2412MHz




802.11b-2437MHz




802.11b-2462MHz

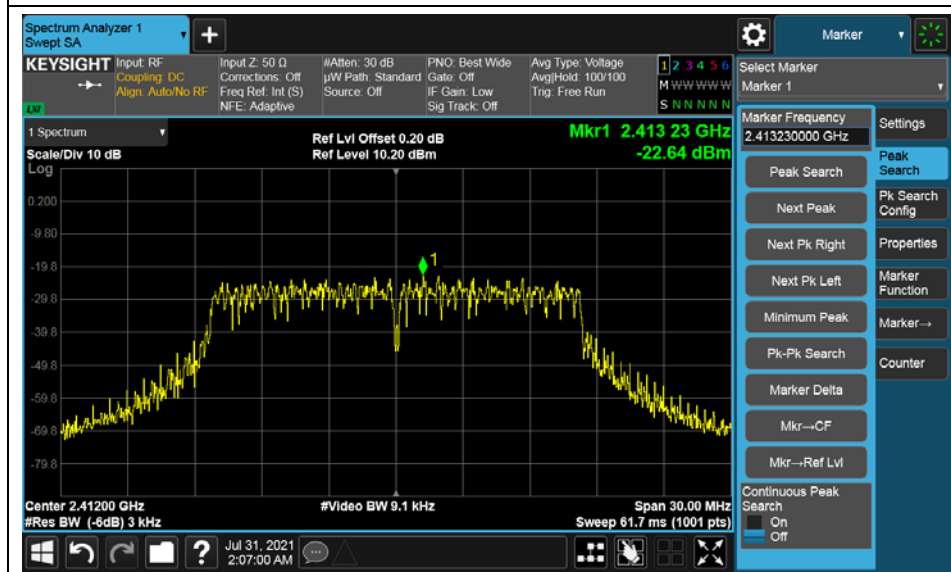


802.11g-2412MHz

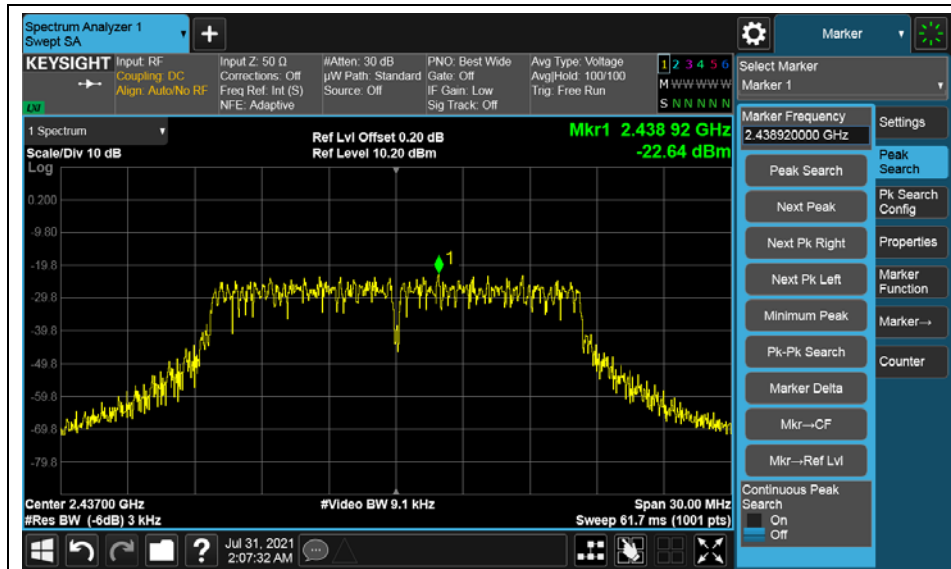


802.11g-2437MHz

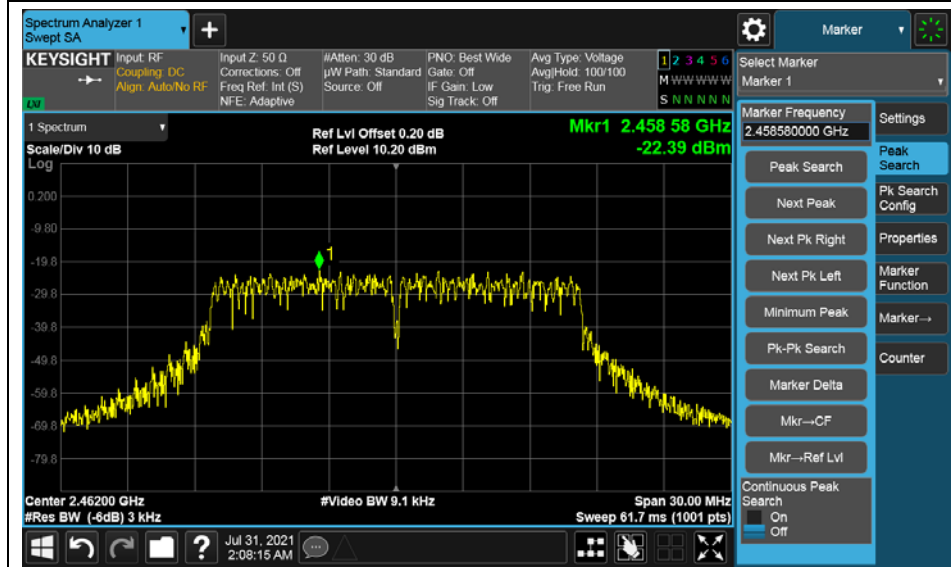


802.11g-2462MHz

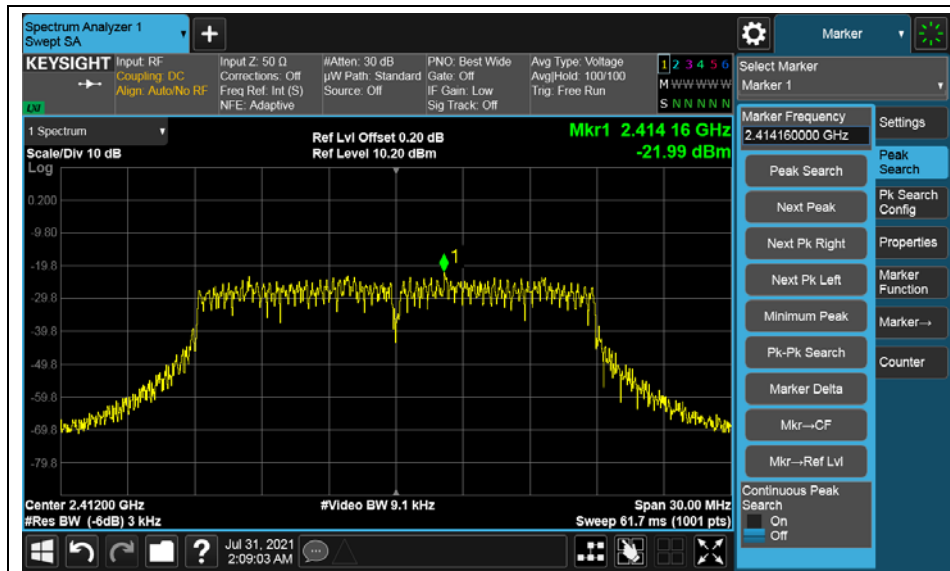

802.11n-HT20-2412MHz

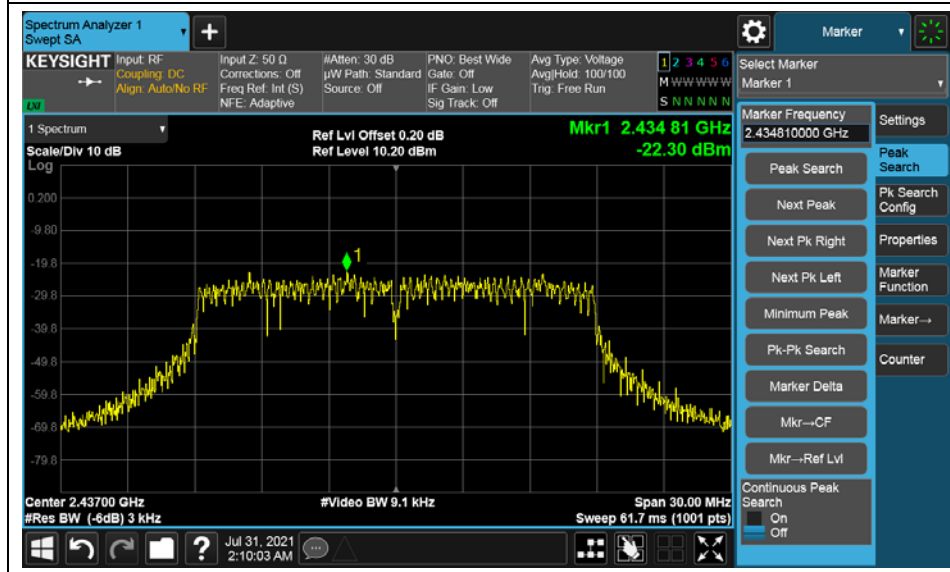

802.11n-HT20-2437MHz

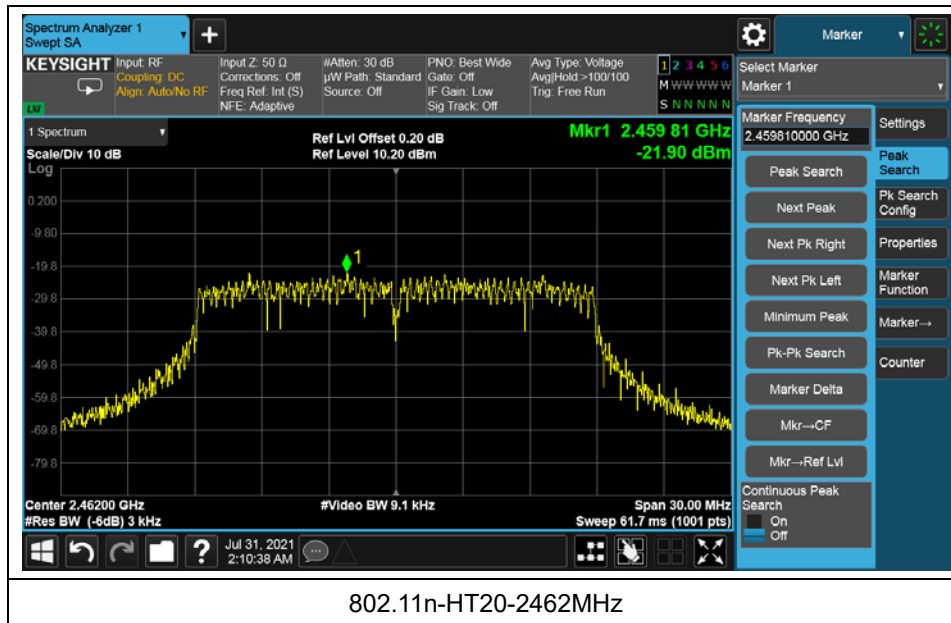


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard


No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


B Mode

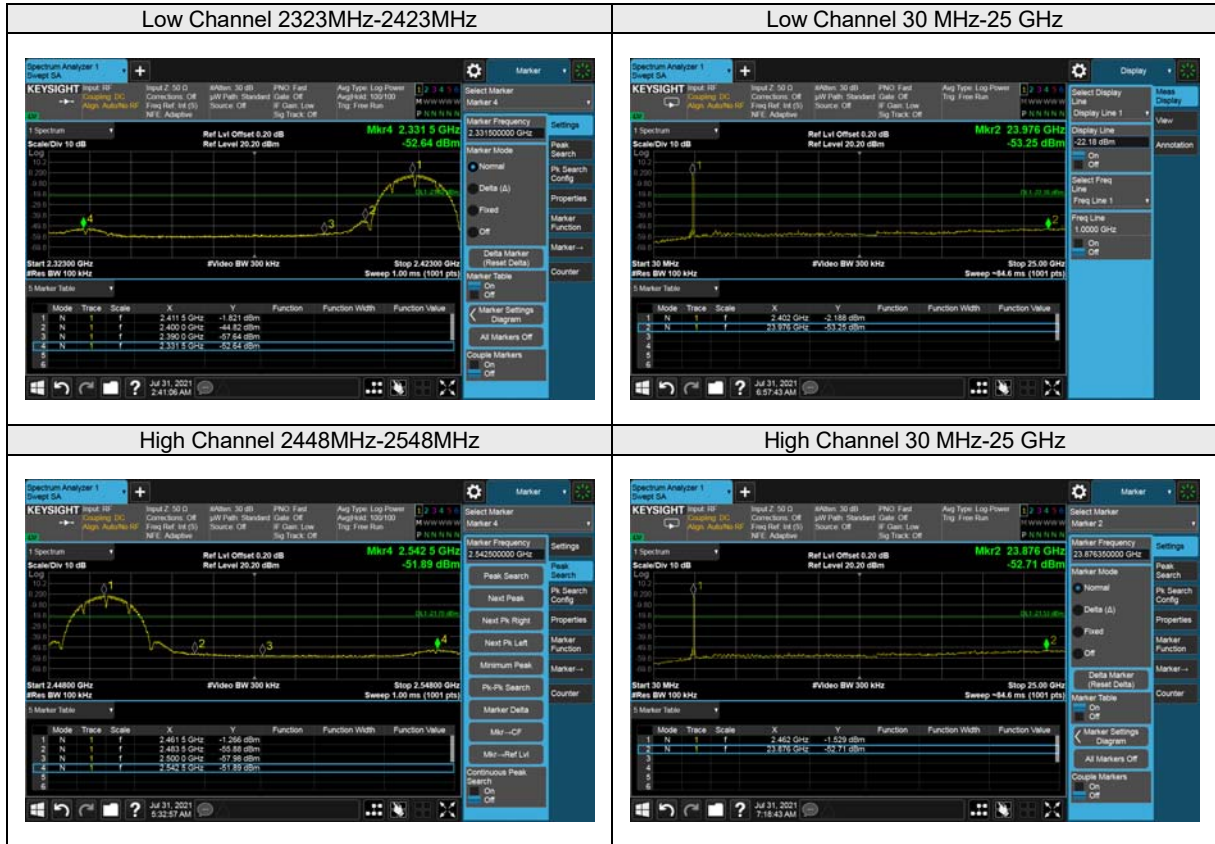

G Mode

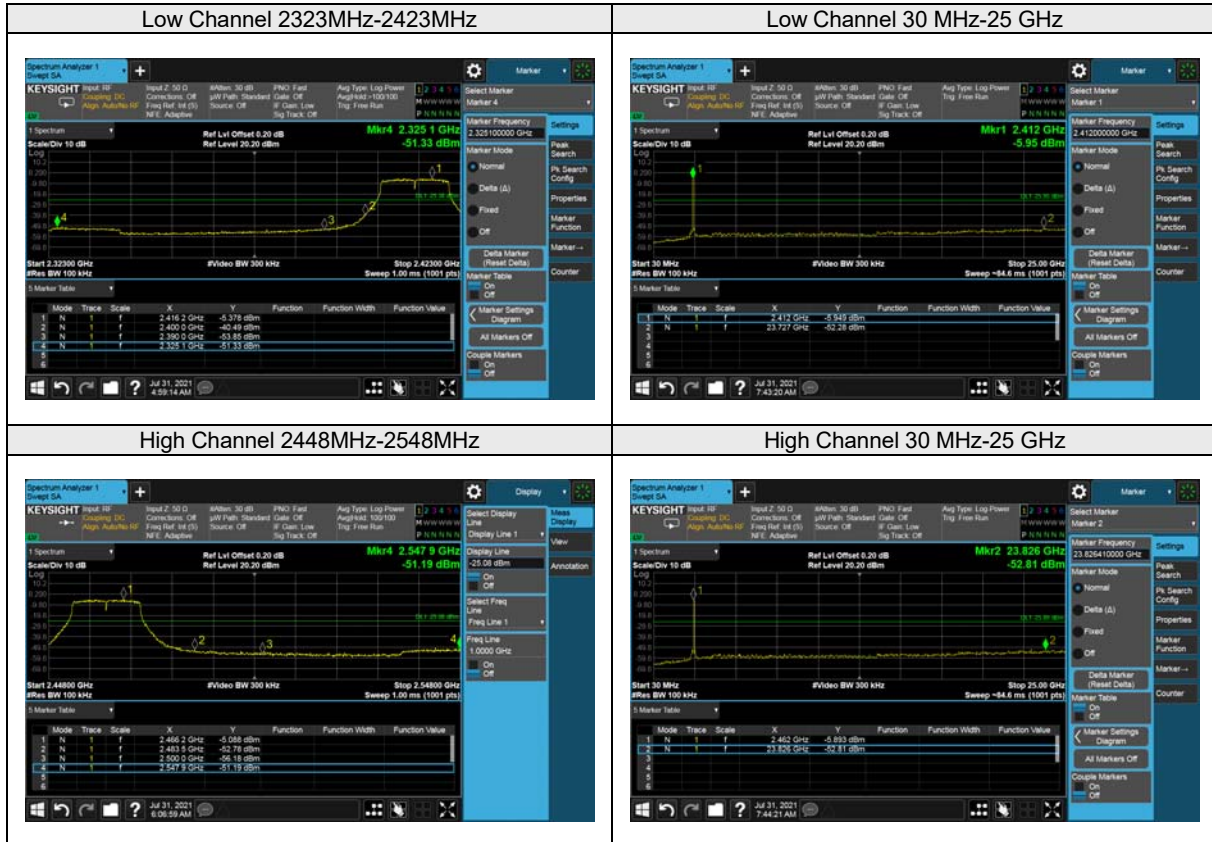

N HT20 Mode

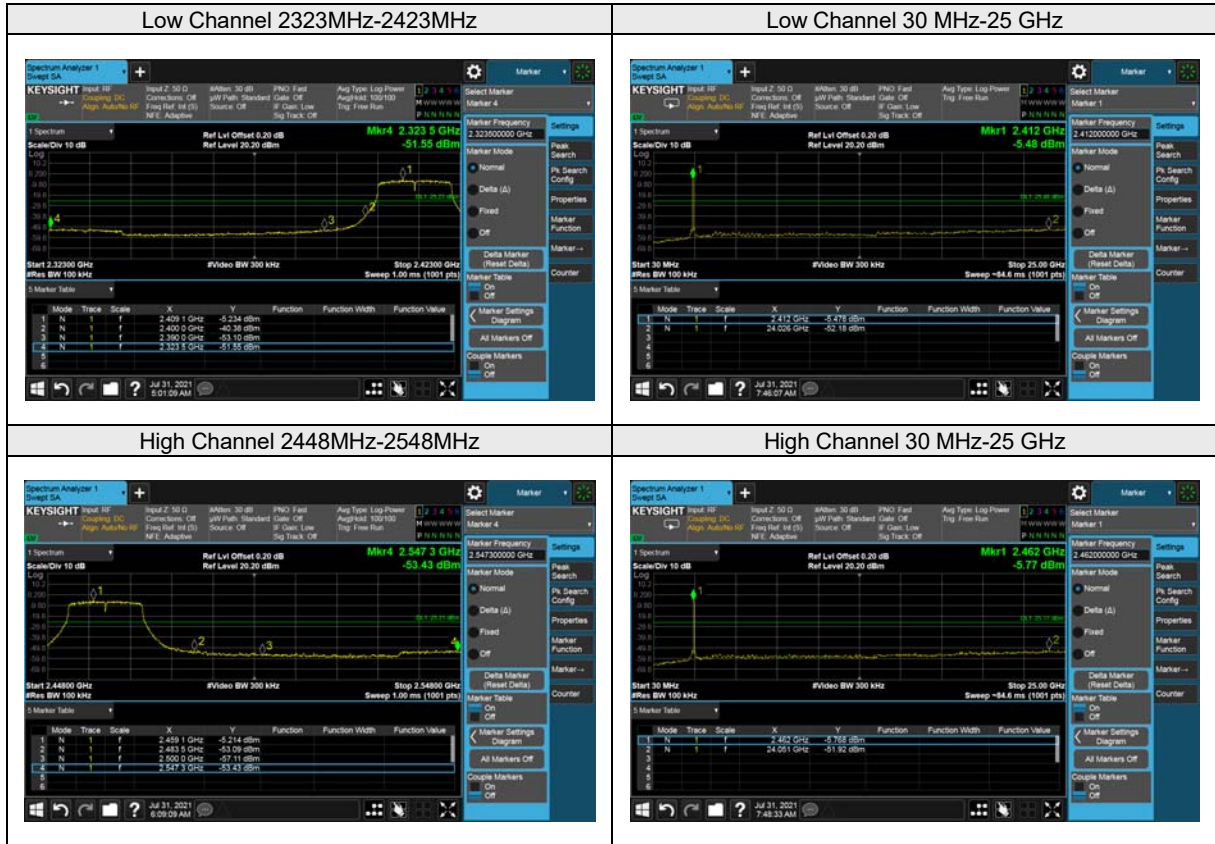

5 Pictures of Test Arrangements

Please see setup photo file.



Appendix – Information on the Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab

775 Montague Expressway, Milpitas, CA 95035

Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab

1293 Anvilwood Avenue, Sunnyvale, CA

94089

Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab

1 Distribution Center Cir #1, Littleton, MA 01460

Tel: +1 978 486 8880

Email: sales.eaw@us.bureauveritas.com

Web Site: www.cps.bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---